


Channel 78

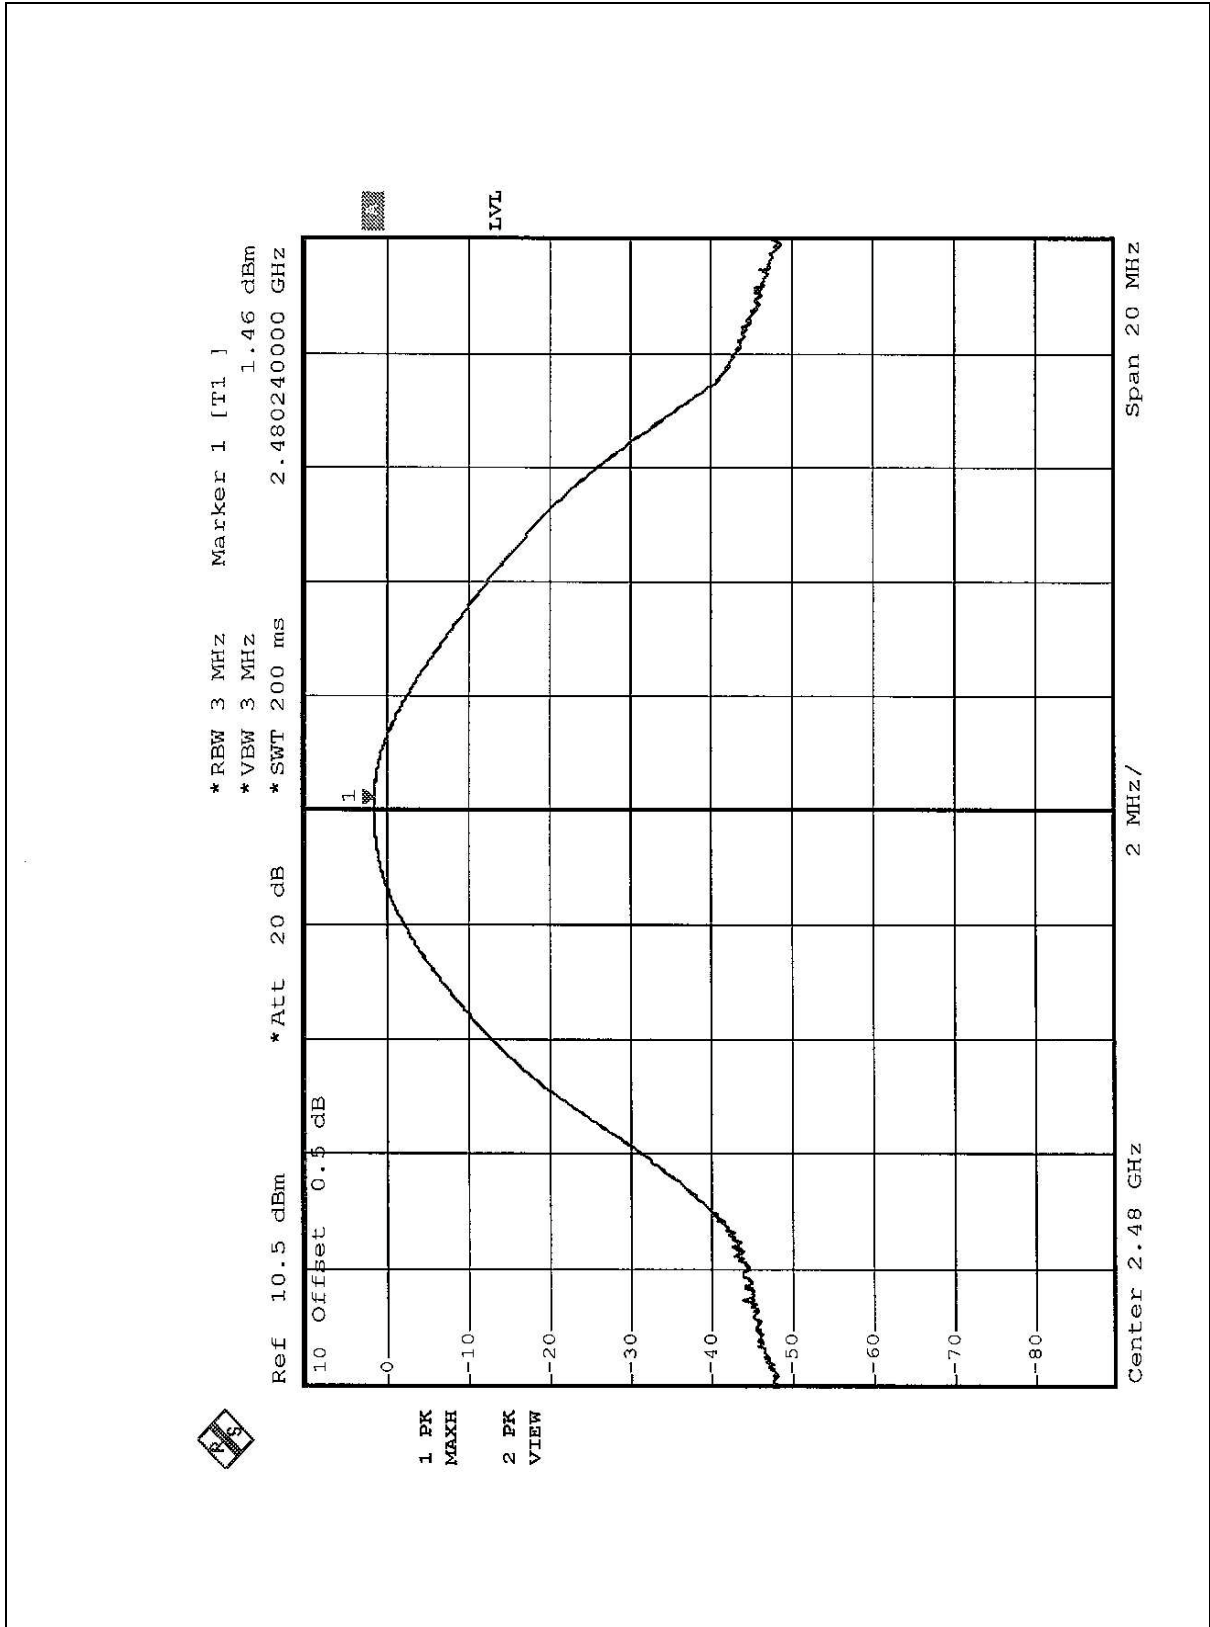

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	Jun. 10, 2004
* HP Preamplifier	8447D	2944A08485	May 01, 2004
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
HP Preamplifier	8449B	3008A01292	Aug. 13, 2004
ROHDE & SCHWARZ TEST RECEIVER	ESI7	838496/016	Feb. 23, 2004
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 13, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* CHASE BILOG Antenna	CBL6112A	2221	July 26, 2004
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Jun. 30, 2004
* EMCO Horn Antenna	3115	9312-4192	Mar. 23, 2004
* EMCO Turn Table	1060	1115	NA
* CHANCE Tower	CM-AT40	CM-A010	NA
* Software	ADT_Radiate d_V5.14	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Jan. 05, 2004
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jan. 05, 2004

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.
5. The VCCI Site Registration No. is R-1039.



4.7.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

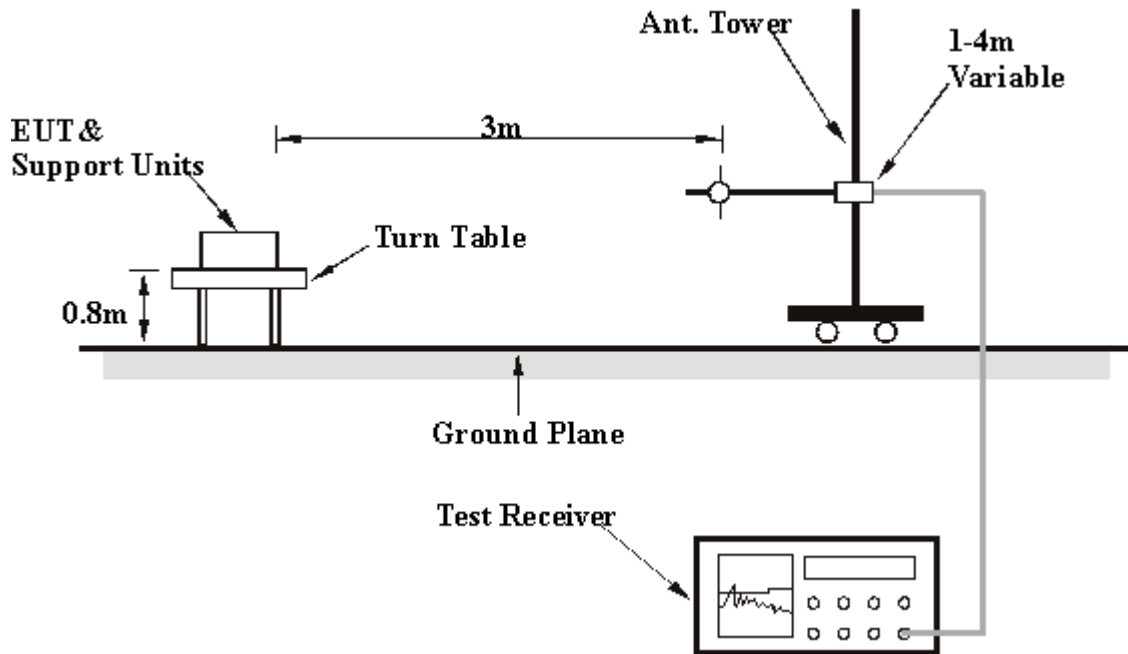

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.7.6 TEST RESULTS

Digital Portion:

EUT	X-Micro Bluetooth USB Dongle Class2	MODEL	XBT-DG1G
MODE	Channel 78	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	35 deg. C, 60%RH, 991 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	84.00	26.0 QP	40.00	-14.00	1.52H	152	16.65	7.63	1.71	0.00	-9.35
2	144.00	32.8 QP	43.50	-10.70	1.75H	184	19.62	10.58	2.60	0.00	-13.18
3	205.00	33.5 QP	43.50	-10.00	1.63H	204	20.61	9.25	3.64	0.00	-12.90
4	210.00	34.5 QP	43.50	-9.00	1.63H	278	21.25	9.54	3.71	0.00	-13.26
5	216.00	31.5 QP	43.50	-12.00	1.63H	135	17.72	9.97	3.81	0.00	-13.79
6	232.00	30.8 QP	46.00	-15.20	1.76H	2	15.94	10.84	4.02	0.00	-14.86
7	240.00	31.8 QP	46.00	-14.20	1.81H	233	16.23	11.41	4.16	0.00	-15.57
8	272.00	28.8 QP	46.00	-17.20	1.14H	275	11.61	12.53	4.66	0.00	-17.19
9	360.00	32.0 QP	46.00	-14.00	1.49H	126	11.65	14.58	5.77	0.00	-20.35
10	460.00	28.6 QP	46.00	-17.40	1.62H	184	4.96	16.53	7.11	0.00	-23.65
11	525.00	32.9 QP	46.00	-13.10	1.65H	274	7.52	17.59	7.79	0.00	-25.39
12	590.00	35.0 QP	46.00	-11.00	1.37H	1	8.10	18.48	8.42	0.00	-26.91

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	180.00	30.0 QP	43.50	-13.50	1.19V	287	17.67	8.91	3.42	0.00	-12.33
2	240.00	27.5 QP	46.00	-18.50	1.40V	111	11.93	11.41	4.16	0.00	-15.57
3	272.00	28.0 QP	46.00	-18.00	1.30V	146	10.81	12.53	4.66	0.00	-17.19
4	336.00	29.3 QP	46.00	-16.70	1.36V	240	9.93	13.92	5.45	0.00	-19.38
5	360.00	38.4 QP	46.00	-7.60	1.56V	206	18.05	14.58	5.77	0.00	-20.36
6	460.00	32.5 QP	46.00	-13.50	1.52V	103	8.86	16.53	7.11	0.00	-23.65
7	525.00	33.8 QP	46.00	-12.20	1.25V	63	8.42	17.59	7.79	0.00	-25.38

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

4.7.7 TEST RESULTS

RF Portion :

EUT	X-Micro Bluetooth USB Dongle Class2	MODEL	XBT-DG1G
MODE	Channel 0	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	35 deg. C, 60%RH, 991 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	*2402.00	90.0 PK			1.33H	287	57.25	27.65	5.10	0.00	-32.75
2	*2402.00	60.0 AV			1.33H	287	27.25	27.65	5.10	0.00	-32.75
3	4804.00	54.4 PK	74.00	-19.60	1.22H	243	50.30	31.50	7.23	34.63	-4.10
4	4804.00	24.4 AV	54.00	-29.60	1.22H	243	20.30	31.50	7.23	34.63	-4.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	*2402.00	57.1 AV			1.24V	87	24.35	27.65	5.10	0.00	-32.75
2	*2402.00	87.1 PK			1.24V	87	54.35	27.65	5.10	0.00	-32.75
3	4802.00	26.5 AV	54.00	-27.50	1.51V	250	22.37	31.50	7.27	34.64	-4.13
4	4802.00	56.5 PK	74.00	-17.50	1.51V	250	52.37	31.50	7.27	34.64	-4.13

NOTE:

- Emission level = Raw value - Correction Factor
- Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
- Margin value = Emission level - Limit value
- " * " : Fundamental frequency
- The other emission levels were very low against the limit.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625*5 per 247 ms per channel.
Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30\text{dB}$
- Average value = peak reading $-20\log(\text{duty cycle})$

EUT	X-Micro Bluetooth USB Dongle Class2	MODEL	XBT-DG1G
MODE	Channel 39	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	35 deg. C, 60%RH, 991 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	*2441.00	87.9 PK			1.37H	283	55.00	27.82	5.08	0.00	-32.90
2	*2441.00	57.9 AV			1.37H	283	25.00	27.82	5.08	0.00	-32.90
3	4882.00	55.4 PK	74.00	-18.60	1.04H	243	51.26	31.56	7.21	34.63	-4.14
4	4882.00	25.4 AV	54.00	-28.60	1.37H	283	21.26	31.56	7.21	34.63	-4.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	*2441.00	79.6 PK			1.51V	346	46.70	27.82	5.08	0.00	-32.90
2	*2441.00	49.6 AV			1.51V	346	16.70	27.82	5.08	0.00	-32.90
3	4882.00	53.7 PK	74.00	-20.30	1.57V	223	49.50	31.59	7.24	34.63	-4.20
4	4882.00	23.7 AV	54.00	-30.30	1.57V	223	19.50	31.59	7.24	34.63	-4.20

NOTE:

- Emission level = Raw value - Correction Factor
- Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
- Margin value = Emission level - Limit value
- " * " : Fundamental frequency
- The other emission levels were very low against the limit.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625*5 per 247 ms per channel.
Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30\text{dB}$
- Average value = peak reading $-20\log(\text{duty cycle})$

EUT	X-Micro Bluetooth USB Dongle Class2	MODEL	XBT-DG1G
MODE	Channel 78	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	35 deg. C, 60%RH, 991 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	*2480.00	87.0 PK			1.34H	98	54.00	27.95	5.05	0.00	-33.00
2	*2480.00	57.0 AV			1.34H	98	24.00	27.95	5.05	0.00	-33.00
3	4960.00	26.4 AV	54.00	-27.60	1.17H	161	22.00	31.72	7.26	34.58	-4.40
4	4960.00	56.4 PK	74.00	-17.60	1.17H	161	52.00	31.72	7.26	34.58	-4.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (DBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	*2480.00	84.6 PK			1.48V	2	51.60	27.96	5.05	0.00	-33.00
2	*2480.00	54.6 AV			1.48V	2	21.60	27.96	5.05	0.00	-33.00
3	4960.00	23.0 AV	54.00	-31.00	1.28V	275	18.67	31.72	7.26	34.65	-4.33
4	4960.00	53.0 PK	74.00	-21.00	1.28V	275	48.67	31.72	7.26	34.65	-4.33

NOTE:

- Emission level = Raw value - Correction Factor
- Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
- Margin value = Emission level - Limit value
- " * " : Fundamental frequency
- The other emission levels were very low against the limit.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625*5 per 247 ms per channel.
Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30\text{dB}$
- Average value = peak reading $-20\log(\text{duty cycle})$

4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RB).

4.8.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTES:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation


4.8.5 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE: The band edge emission plot on the following 2 pages shows 43.66dB / 57.25dB delta between carrier maximum power and local maximum emission in restrict band (2.4844GHz / 2.3860GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.7.7 is 57.00dBuV/m, so the maximum field strength in restrict band is $57.00 - 43.66 = 13.34$ dBuV/m which is under 54 dBuV/m limit.

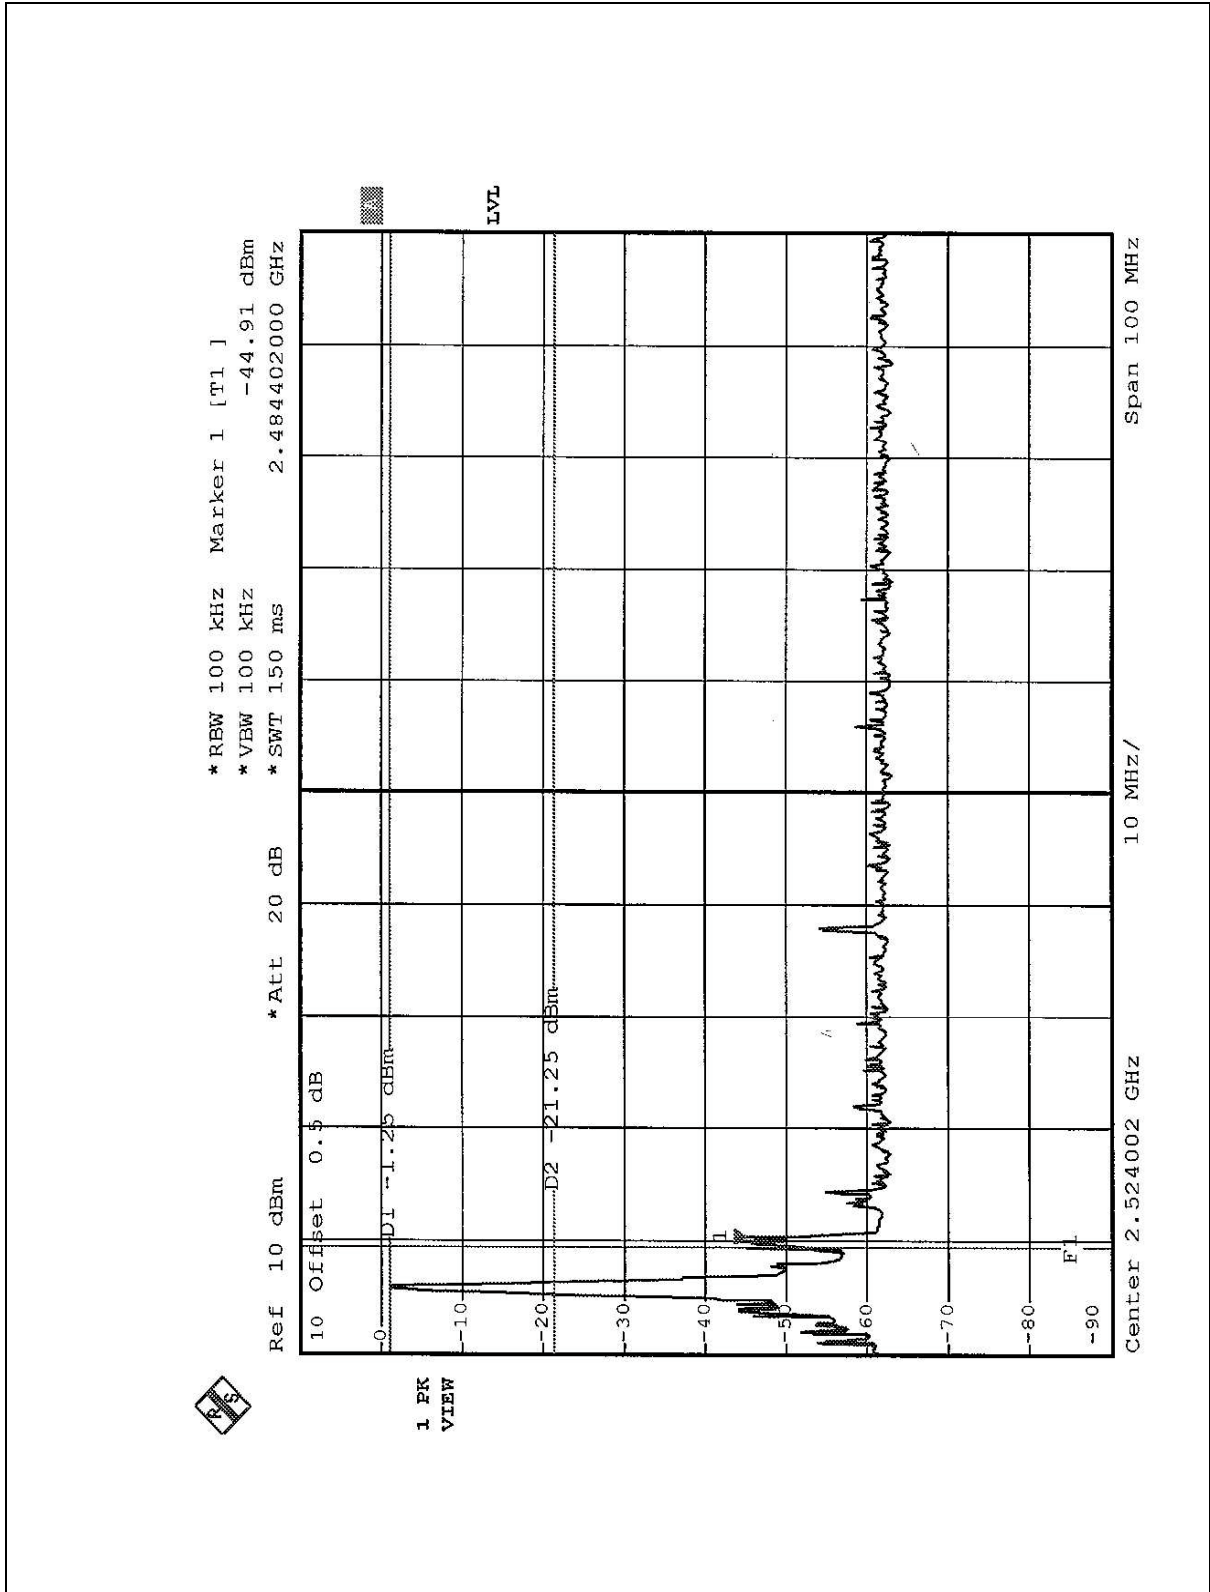

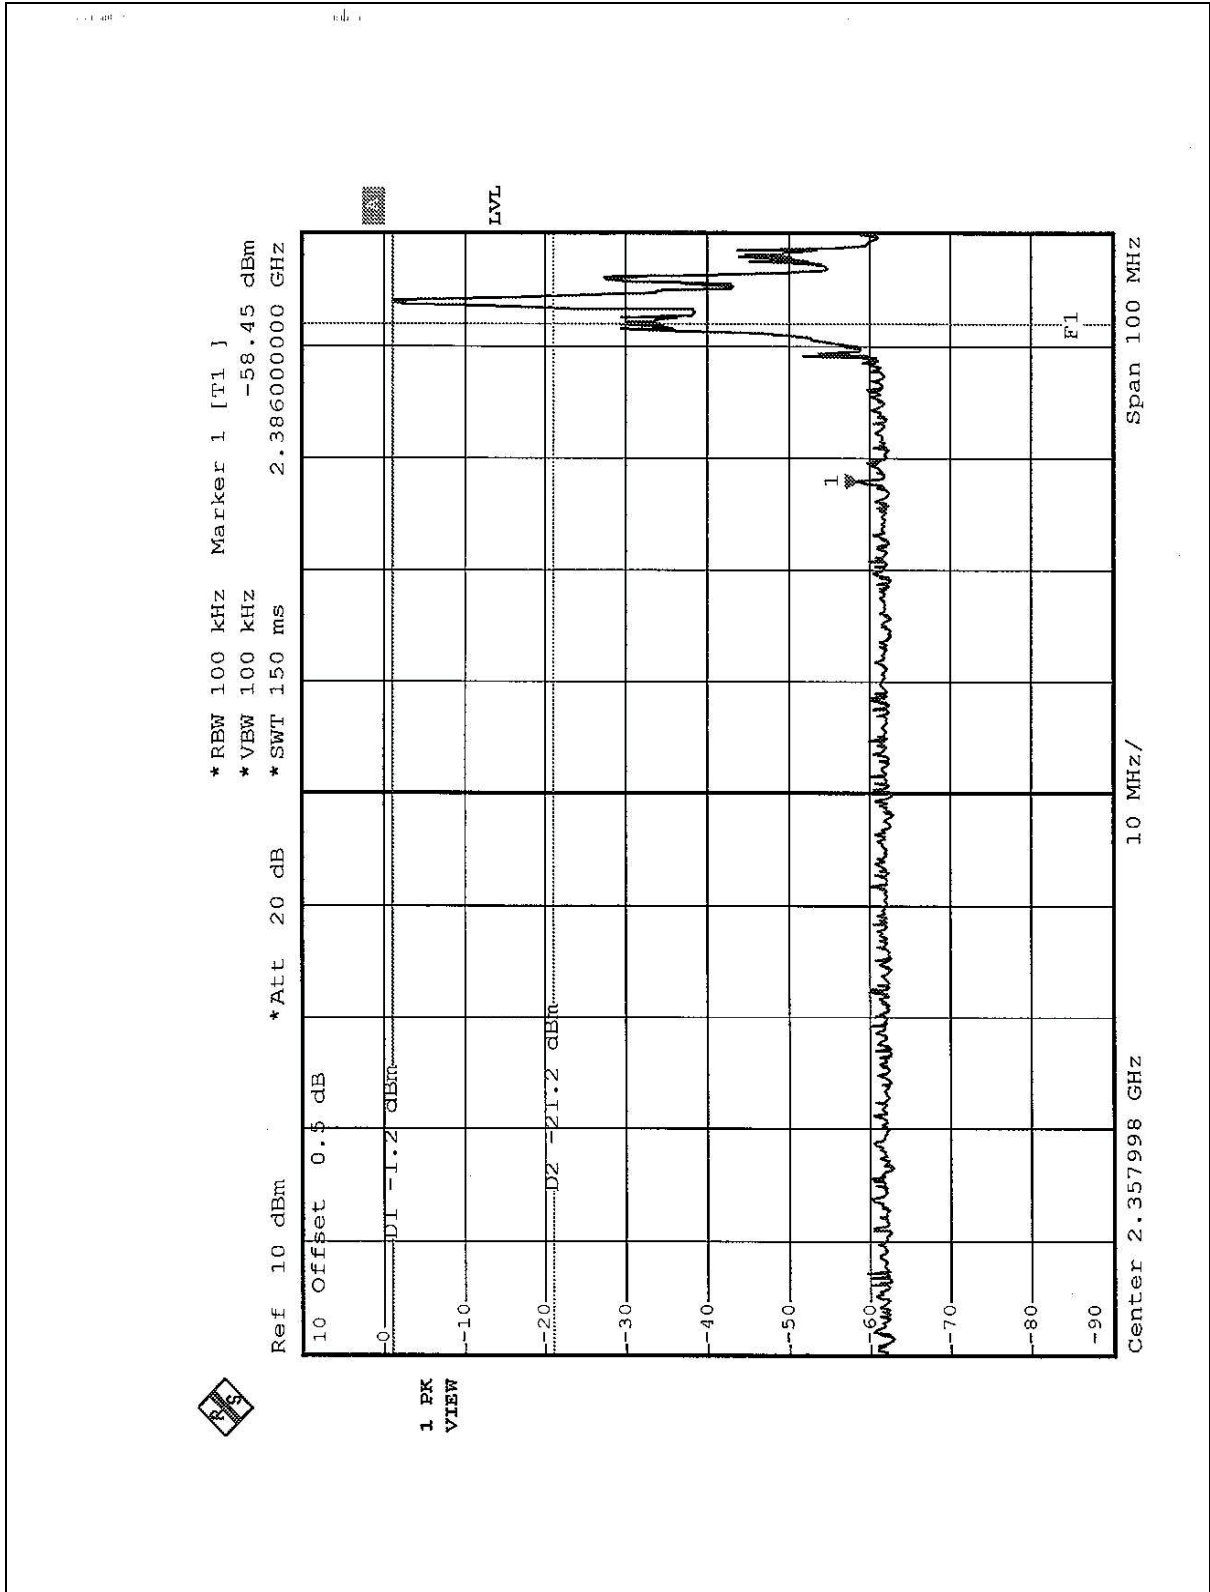



4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


4.9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Patch Antenna. There is no antenna connector. The maximum Gain of this antenna is only 1dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST

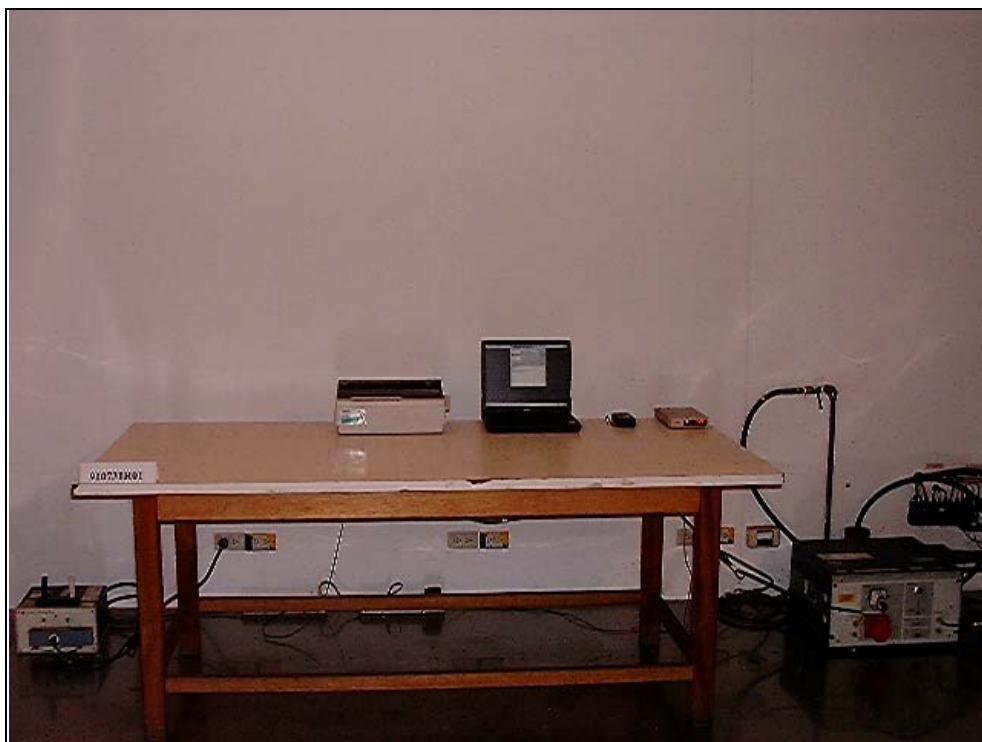

RADIATED EMISSION TEST

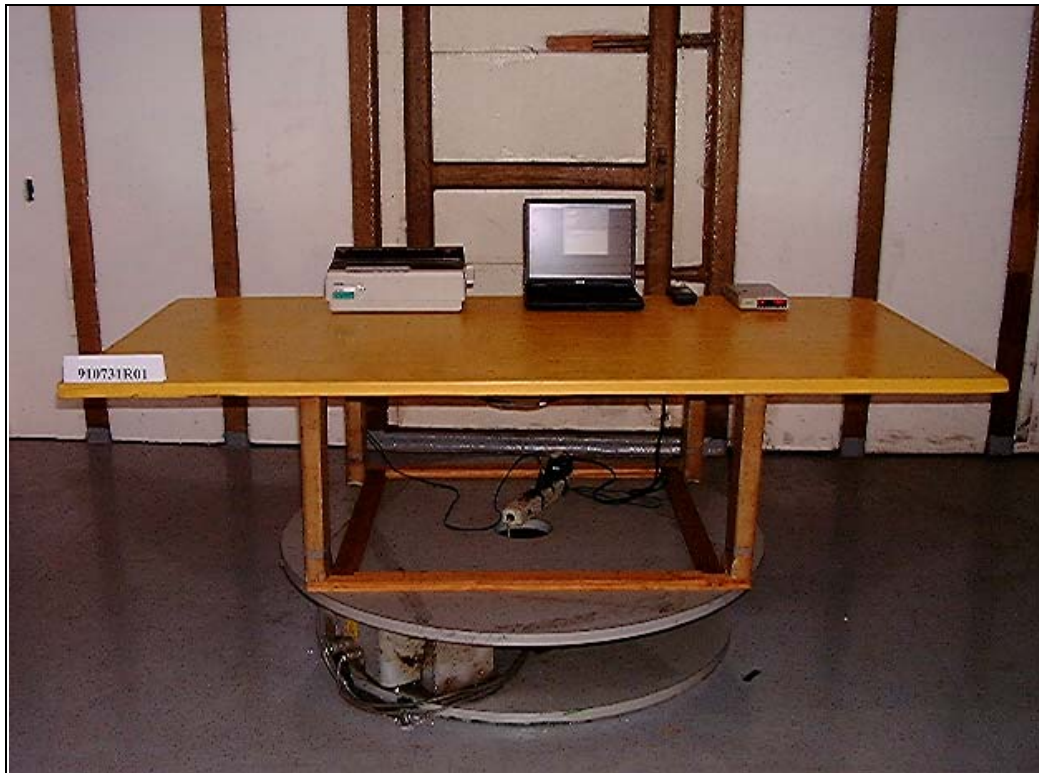



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC Lab:
Tel: 886-35-935343
Fax: 886-35-935342

Lin Kou Safety Lab:
Tel: 886-2-26093195
Fax: 886-2-26093184

Lin Kou RF&Telecom Lab
Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.