

Tested By:Hong, Report No.:05199381

Scan Settings (1 Range)

Frequencies -----				Receiver Settings -----			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms AUTO	LN OFF	60dB


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
21	9k	30M	EW0698

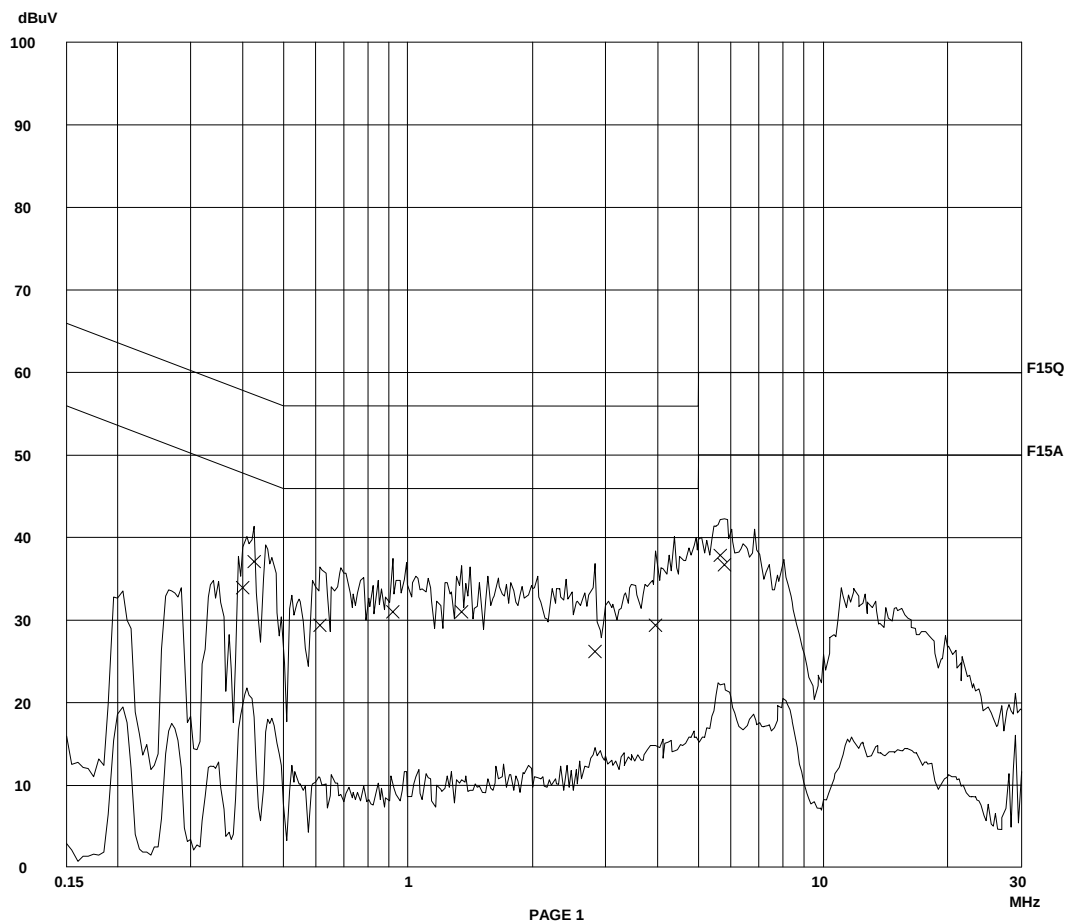

Report No.: 05199381
 AC adaptor model: DSA-5P-05 FEU 060035
 Talk (2 Handsets) Mode

Tested By: Hong, Report No.: 05199381

Scan Settings (1 Range)

----- Frequencies -----			Receiver Settings -----					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.40000	33.9	57.8
0.42500	37.0	57.4
0.61500	29.3	56.0
0.92000	30.9	56.0
1.34500	30.9	56.0
2.82500	26.2	56.0
3.96000	29.3	56.0
5.66000	37.8	60.0
5.80000	36.6	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

no Results

* limit