

FCC Test Report (BT-EDR)

Report No.: RF190628E01-2

FCC ID: RAS-MT7663

Test Model: MT7663

Received Date: June 28, 2019

Test Date: Sep. 05 to 10, 2019

Issued Date: Dec. 31, 2019

Applicant: MediaTek Inc.

Address: No.1, Duxing 1st Rd., East District, Hsinchu City 300, Taiwan (R.O.C.)

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location : E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT (BT-EDR)	7
Chain 0	8
Chain 1	8
Chain 0	8
Chain 1	8
Chain 0	8
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standards.....	15
4 Test Types and Results	16
4.1 Radiated Emission and Bandedge Measurement	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement	16
4.1.2 Test Instruments	17
4.1.3 Test Procedures.....	18
4.1.4 Deviation from Test Standard	19
4.1.5 Test Setup.....	19
4.1.6 EUT Operating Conditions.....	20
4.1.7 Test Results (Mode 1).....	21
4.1.8 Test Results (Mode 2).....	29
4.2 Conducted Emission Measurement.....	37
4.2.1 Limits of Conducted Emission Measurement	37
4.2.2 Test Instruments	37
4.2.3 Test Procedures.....	38
4.2.4 Deviation From Test Standard	38
4.2.5 Test Setup.....	38
4.2.6 EUT Operating Condition	38
4.2.7 Test Results	39
4.3 Number of Hopping Frequency Used	41
4.3.1 Limits of Hopping Frequency Used Measurement	41
4.3.2 Test Setup.....	41
4.3.3 Test Instruments	41
4.3.4 Test Procedure	41
4.3.5 Deviation from Test Standard	41
4.3.6 Test Results	42
4.4 Dwell Time on Each Channel.....	43
4.4.1 Limits of Dwell Time on Each Channel Measurement.....	43
4.4.2 Test Setup.....	43
4.4.3 Test Instruments	43
4.4.4 Test Procedures.....	43
4.4.5 Deviation from Test Standard	43
4.4.6 Test Results	44

4.5 Channel Bandwidth.....	48
4.5.1 Limits of Channel Bandwidth Measurement.....	48
4.5.2 Test Setup.....	48
4.5.3 Test Instruments	48
4.5.4 Test Procedure	48
4.5.5 Deviation from Test Standard	48
4.5.6 EUT Operating Condition	48
4.5.7 Test Results	49
4.6 Hopping Channel Separation.....	50
4.6.1 Limits of Hopping Channel Separation Measurement.....	50
4.6.2 Test Setup.....	50
4.6.3 Test Instruments	50
4.6.4 Test Procedure	50
4.6.5 Deviation from Test Standard	50
4.6.6 Test Results	51
4.7 Maximum Output Power	52
4.7.1 Limits of Maximum Output Power Measurement	52
4.7.2 Test Setup.....	52
4.7.3 Test Instruments	52
4.7.4 Test Procedure	52
4.7.5 Deviation from Test Standard	52
4.7.6 EUT Operating Condition	52
4.7.7 Test Results	53
4.8 Conducted Out of Band Emission Measurement	54
4.8.1 Limits of Conducted Out of Band Emission Measurement.....	54
4.8.2 Test Instruments	54
4.8.3 Test Procedure	54
4.8.4 Deviation from Test Standard	54
4.8.5 EUT Operating Condition	54
4.8.6 Test Results	54
5 Pictures of Test Arrangements.....	57
Appendix – Information of the Testing Laboratories	58

Release Control Record

Issue No.	Description	Date Issued
RF190628E01-2	Original release.	Dec. 31, 2019

1 Certificate of Conformity

Product: 2TX 11ac + BLE Combo Card

Brand: MTK

Test Model: MT7663

Sample Status: ENGINEERING SAMPLE

Applicant: MediaTek Inc.

Test Date: Sep. 05 to 10, 2019

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Joyce Kuo , **Date:** Dec. 31, 2019
Joyce Kuo / Specialist

Approved by : Clark Lin , **Date:** Dec. 31, 2019
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -16.14dB at 0.20469MHz.
15.247(a)(1)(iii)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
15.205 & 209 & 15.247(d)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -3.8dB at 33.61MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF), R-SMA not a standard connector.

NOTE:

- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.8 dB
Conducted Emissions	-	3.1 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.0 dB
	30MHz ~ 1GHz	5.1 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.1 dB
	6GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.2 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (BT-EDR)

Product	2TX 11ac + BLE Combo Card
Brand	MTK
Test Model	MT7663
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 3.3V from host equipment
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology	FHSS
Transfer Rate	Up to 3Mbps
Operating Frequency	2402MHz ~ 2480MHz
Number of Channel	79
Output Power	12.912mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. There are WLAN, BT technology used for the EUT.
2. The EUT has two interfaces. The main difference is interface, but RF is the same. Please refer to the following table:

Interface	Difference
PCIe	PCIe and SDIO interface signal switch by IC bonding on the same pin, Most of the layout including RF, PMU, and the control signal is the same.
SDIO	

From the above Interface, the worst case was found in PCIe interface. Therefore only the test data of the modes were recorded in this report.

3. Simultaneously transmission condition.

Condition	Technology	
1	WLAN 2.4GHz	Bluetooth
2	WLAN 5GHz	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The antennas provided to the EUT, please refer to the following table:

Antenna Set	RF Chain No.	Brand	Model	Ant. Net Gain (dBi)	Frequency range (GHz)	Antenna Type	Connector Type	Cable Length
1	Chain 0	LYNwave	ALA110-222050-300011	3.5	2.4~2.4835	PIFA	i-pex(MHF)	55mm
				5	5.15~5.85			
	Chain 1	LYNwave	ALA110-222050-300011	3.5	2.4~2.4835	PIFA	i-pex(MHF)	55mm
				5	5.15~5.85			
2	Chain 0	Cortec	AN2450-4902BRS	2.42	2.4~2.4835	Dipole	R-SMA	150mm
				3.87	5.15~5.85			
	Chain 1	Cortec	AN2450-4902BRS	2.42	2.4~2.4835	Dipole	R-SMA	150mm
				3.87	5.15~5.85			
3	Chain 0	PSA	RFMTA340718EMLB301	2.92	2.4~2.4835	PIFA	i-pex(MHF)	199.4mm
				4.94	5.15~5.85			
	Chain 1	PSA	RFMTA340718EMLB301	2.92	2.4~2.4835	PIFA	i-pex(MHF)	199.4mm
				4.94	5.15~5.85			

Note: The Max. gain was selected for Radiated Emission Measurement test.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

79 channels are provided for BT-EDR mode:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
1	√	√	√	√	PIFA antenna
2	√	√	-	-	Dipole antenna

Where **RE $\geq$ 1G:** Radiated Emission above 1GHz & Bandedge Measurement

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: The EUT's antenna (PIFA) had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane (below 1GHz) & Z-plane (above 1GHz)**.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0	FHSS	8DPSK	3DH5

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0	FHSS	8DPSK	3DH5

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	3DH5


Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	Input Power (system)	TESTED BY
RE $\geq$ 1G	22deg. C, 68%RH	120Vac, 60Hz	Tank Wu Nelson Teng
RE<1G	22deg. C, 66%RH	120Vac, 60Hz	Ryan Du
PLC	24deg. C, 75%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal

GFSK : Duty cycle = 2.878 ms/3.753 ms = 0.767 , Duty factor = $10 * \log(1/\text{Duty cycle}) = 1.15$

8DPSK : Duty cycle = 2.867 ms/3.752 ms = 0.764 , Duty factor = $10 * \log(1/\text{Duty cycle}) = 1.17$

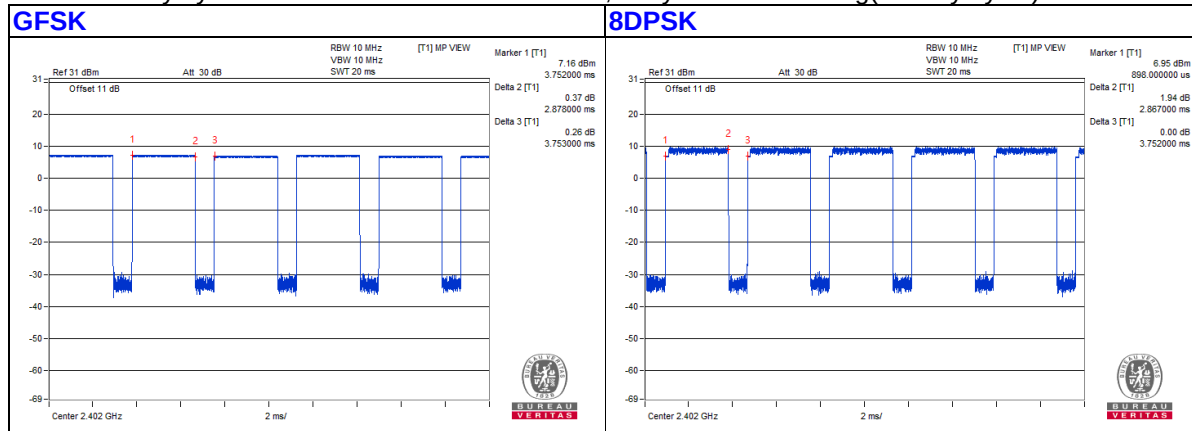

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	GM1SKV1	FCC DoC	Provided by Lab
B.	Test Tool	MTK	NA	NA	NA	Supplied by client
C.	Adapter	DELL	DA90PM111	NA	NA	Provided by Lab
D.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab (For Conduction)

Note:


1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.8	No	1	Provided by Lab
2.	AC Cable	1	0.9	No	0	Provided by Lab


Note: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

For Conducted Emissions test:

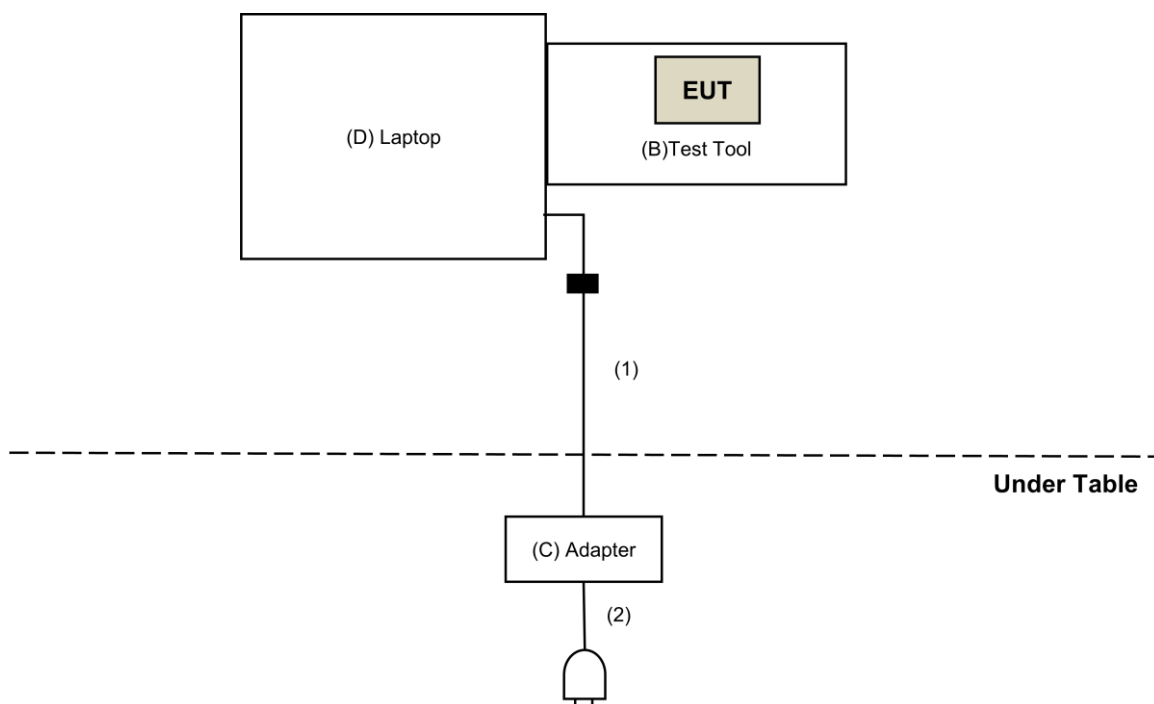

For other test:

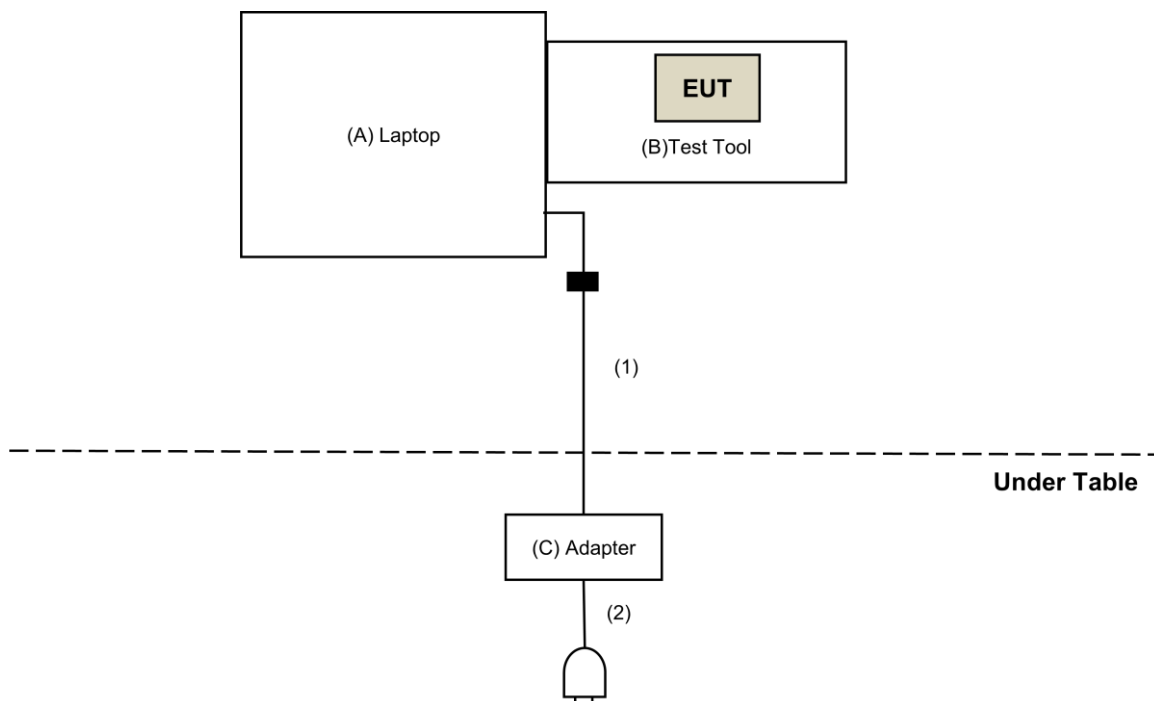

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010156	July 17, 2019	July 16, 2020
Pre-Amplifier EMCI	EMC001340	980142	May 30, 2019	May 29, 2020
Loop Antenna Electro-Metrics	EM-6879	264	Jan. 22, 2019	Jan. 21, 2020
RF Cable	NA	LOOPCAB-001	Jan. 14, 2019	Jan. 13, 2020
RF Cable	NA	LOOPCAB-002	Jan. 14, 2019	Jan. 13, 2020
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	Apr. 30, 2019	Apr. 29, 2020
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 22, 2018	Nov. 21, 2019
RF Cable	8D	966-3-1	Mar. 18, 2019	Mar. 17, 2020
RF Cable	8D	966-3-2	Mar. 18, 2019	Mar. 17, 2020
RF Cable	8D	966-3-3	Mar. 18, 2019	Mar. 17, 2020
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Sep. 27, 2018	Sep. 26, 2019
Horn Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 25, 2018	Nov. 24, 2019
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC104-SM-SM-1200	160922	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC104-SM-SM-2000	180601	June 10, 2019	June 09, 2020
RF Cable	EMC104-SM-SM-6000	180602	June 10, 2019	June 09, 2020
Spectrum Analyzer Keysight	N9030A	MY54490679	July 17, 2019	July 16, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 28, 2019	Jan. 27, 2020
Horn Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 25, 2018	Nov. 24, 2019
RF Cable	EMC102-KM-KM-1200	160924	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC102-KM-KM-1200	160925	Jan. 28, 2019	Jan. 27, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Spectrum Analyzer R&S	FSV40	100964	June 04, 2019	June 03, 2020
Power meter Anritsu	ML2495A	1014008	May 13, 2019	May 12, 2020
Power sensor Anritsu	MA2411B	0917122	May 13, 2019	May 12, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: Sep. 05 to 10, 2019

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

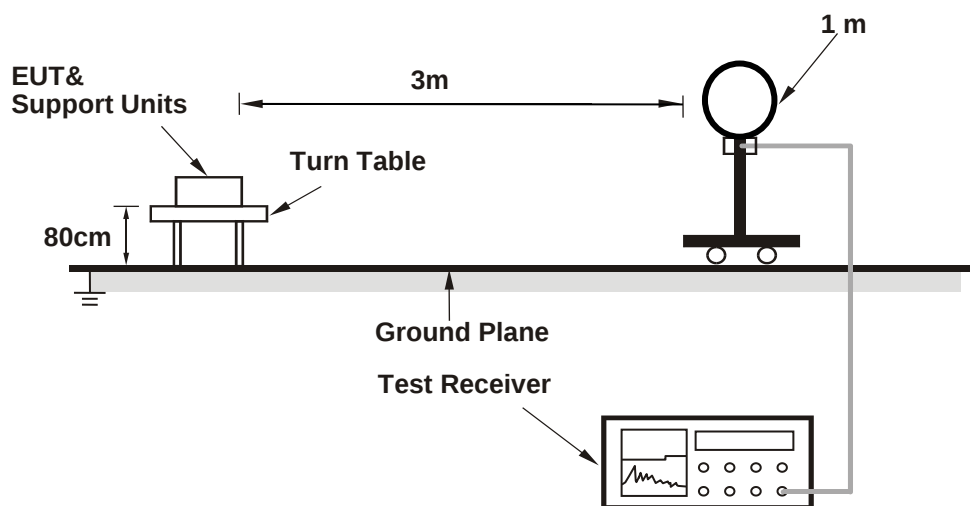

For Radiated emission 30MHz to 1GHz

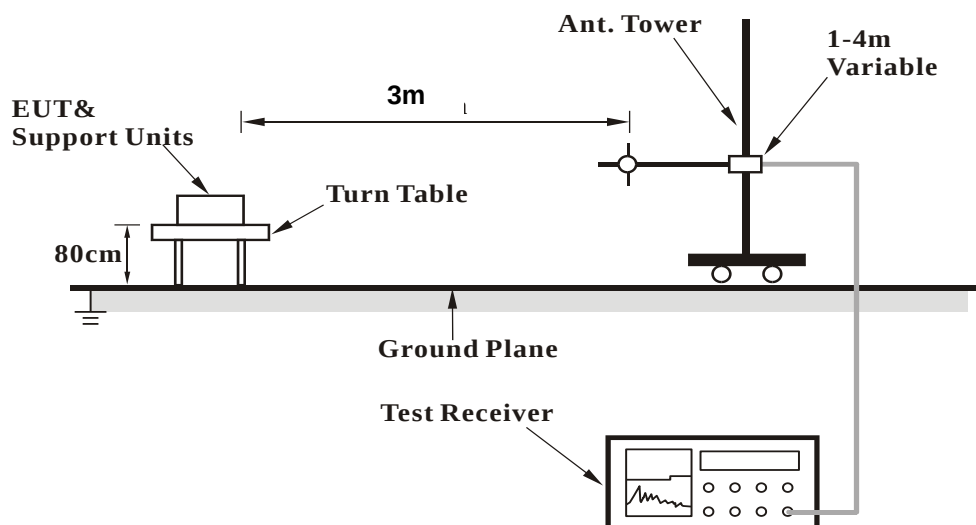

For Radiated emission above 1GHz

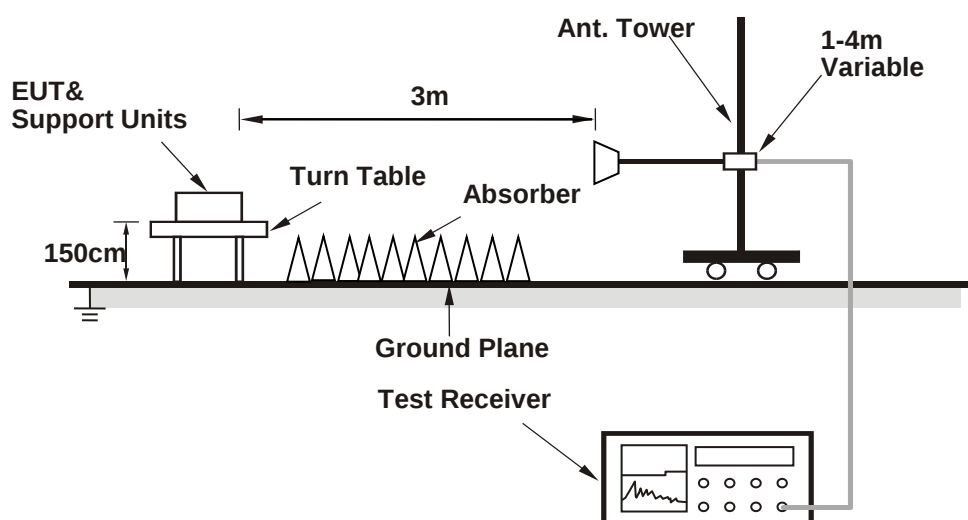

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop Computer which is placed on the testing table.
- Controlling software (WCN Combo Tool) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results (Mode 1)

Above 1GHz Data:

BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.7 PK	74.0	-15.3	1.01 H	18	60.7	-2.0
2	2390.00	46.5 AV	54.0	-7.5	1.01 H	18	48.5	-2.0
3	*2402.00	104.1 PK			1.01 H	18	106.1	-2.0
4	*2402.00	102.6 AV			1.01 H	18	104.6	-2.0
5	4804.00	39.6 PK	74.0	-34.4	1.42 H	97	37.3	2.3
6	4804.00	30.7 AV	54.0	-23.3	1.42 H	97	28.4	2.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.9 PK	74.0	-16.1	1.03 V	90	59.9	-2.0
2	2390.00	46.1 AV	54.0	-7.9	1.03 V	90	48.1	-2.0
3	*2402.00	100.9 PK			1.03 V	90	102.9	-2.0
4	*2402.00	99.4 AV			1.03 V	90	101.4	-2.0
5	4804.00	39.3 PK	74.0	-34.7	1.71 V	223	37.0	2.3
6	4804.00	30.2 AV	54.0	-23.8	1.71 V	223	27.9	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	103.1 PK			1.17 H	20	105.2	-2.1
2	*2441.00	102.1 AV			1.17 H	20	104.2	-2.1
3	4882.00	47.3 PK	74.0	-26.7	1.53 H	92	45.0	2.3
4	4882.00	37.1 AV	54.0	-16.9	1.53 H	92	34.8	2.3
5	7323.00	47.2 PK	74.0	-26.8	1.55 H	103	39.0	8.2
6	7323.00	36.8 AV	54.0	-17.2	1.55 H	103	28.6	8.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	100.7 PK			1.00 V	97	102.8	-2.1
2	*2441.00	99.6 AV			1.00 V	97	101.7	-2.1
3	4882.00	46.3 PK	74.0	-27.7	1.65 V	211	44.0	2.3
4	4882.00	35.7 AV	54.0	-18.3	1.65 V	211	33.4	2.3
5	7323.00	46.9 PK	74.0	-27.1	1.62 V	214	38.7	8.2
6	7323.00	36.2 AV	54.0	-17.8	1.62 V	214	28.0	8.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	104.1 PK			1.13 H	27	106.3	-2.2
2	*2480.00	102.8 AV			1.13 H	27	105.0	-2.2
3	2483.50	57.7 PK	74.0	-16.3	1.13 H	27	59.9	-2.2
4	2483.50	46.2 AV	54.0	-7.8	1.13 H	27	48.4	-2.2
5	4960.00	40.0 PK	74.0	-34.0	1.40 H	104	37.5	2.5
6	4960.00	30.9 AV	54.0	-23.1	1.40 H	104	28.4	2.5
7	7440.00	47.5 PK	74.0	-26.5	1.55 H	117	39.1	8.4
8	7440.00	37.2 AV	54.0	-16.8	1.55 H	117	28.8	8.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	100.8 PK			1.03 V	86	103.0	-2.2
2	*2480.00	99.5 AV			1.03 V	86	101.7	-2.2
3	2483.50	57.5 PK	74.0	-16.5	1.03 V	86	59.7	-2.2
4	2483.50	46.2 AV	54.0	-7.8	1.03 V	86	48.4	-2.2
5	4960.00	39.7 PK	74.0	-34.3	1.72 V	0	37.2	2.5
6	4960.00	30.4 AV	54.0	-23.6	1.72 V	0	27.9	2.5
7	7440.00	47.2 PK	74.0	-26.8	1.57 V	198	38.8	8.4
8	7440.00	36.2 AV	54.0	-17.8	1.57 V	198	27.8	8.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

BT_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.7 PK	74.0	-16.3	1.20 H	22	59.7	-2.0
2	2390.00	46.2 AV	54.0	-7.8	1.20 H	22	48.2	-2.0
3	*2402.00	105.9 PK			1.20 H	22	107.9	-2.0
4	*2402.00	102.4 AV			1.20 H	22	104.4	-2.0
5	4804.00	40.7 PK	74.0	-33.3	1.35 H	113	38.4	2.3
6	4804.00	31.4 AV	54.0	-22.6	1.35 H	113	29.1	2.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.4 PK	74.0	-16.6	1.00 V	105	59.4	-2.0
2	2390.00	46.1 AV	54.0	-7.9	1.00 V	105	48.1	-2.0
3	*2402.00	103.5 PK			1.00 V	105	105.5	-2.0
4	*2402.00	99.8 AV			1.00 V	105	101.8	-2.0
5	4804.00	40.4 PK	74.0	-33.6	1.75 V	9	38.1	2.3
6	4804.00	30.8 AV	54.0	-23.2	1.75 V	9	28.5	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	106.1 PK			1.20 H	27	108.2	-2.1
2	*2441.00	102.4 AV			1.20 H	27	104.5	-2.1
3	4882.00	46.3 PK	74.0	-27.7	1.49 H	101	44.0	2.3
4	4882.00	36.4 AV	54.0	-17.6	1.49 H	101	34.1	2.3
5	7323.00	47.4 PK	74.0	-26.6	1.52 H	115	39.2	8.2
6	7323.00	36.8 AV	54.0	-17.2	1.52 H	115	28.6	8.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	103.1 PK			1.01 V	86	105.2	-2.1
2	*2441.00	99.5 AV			1.01 V	86	101.6	-2.1
3	4882.00	40.9 PK	74.0	-33.1	1.68 V	0	38.6	2.3
4	4882.00	31.7 AV	54.0	-22.3	1.68 V	0	29.4	2.3
5	7323.00	47.1 PK	74.0	-26.9	1.52 V	184	38.9	8.2
6	7323.00	36.2 AV	54.0	-17.8	1.52 V	184	28.0	8.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	105.7 PK			1.16 H	30	107.9	-2.2
2	*2480.00	102.5 AV			1.16 H	30	104.7	-2.2
3	2483.50	58.1 PK	74.0	-15.9	1.16 H	30	60.3	-2.2
4	2483.50	46.3 AV	54.0	-7.7	1.16 H	30	48.5	-2.2
5	4960.00	45.7 PK	74.0	-28.3	1.52 H	105	43.2	2.5
6	4960.00	36.0 AV	54.0	-18.0	1.52 H	105	33.5	2.5
7	7440.00	47.3 PK	74.0	-26.7	1.54 H	100	38.9	8.4
8	7440.00	36.6 AV	54.0	-17.4	1.54 H	100	28.2	8.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	102.6 PK			1.01 V	85	104.8	-2.2
2	*2480.00	99.1 AV			1.01 V	85	101.3	-2.2
3	2483.50	57.9 PK	74.0	-16.1	1.01 V	85	60.1	-2.2
4	2483.50	46.1 AV	54.0	-7.9	1.01 V	85	48.3	-2.2
5	4960.00	41.0 PK	74.0	-33.0	1.66 V	0	38.5	2.5
6	4960.00	31.9 AV	54.0	-22.1	1.66 V	0	29.4	2.5
7	7440.00	46.7 PK	74.0	-27.3	1.57 V	183	38.3	8.4
8	7440.00	35.9 AV	54.0	-18.1	1.57 V	183	27.5	8.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Below 1GHz Data:


BT_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.04	34.8 QP	40.0	-5.2	1.00 H	42	44.3	-9.5
2	199.89	36.3 QP	43.5	-7.2	1.00 H	155	46.4	-10.1
3	432.26	37.3 QP	46.0	-8.7	1.00 H	277	40.5	-3.2
4	498.10	39.1 QP	46.0	-6.9	1.00 H	22	40.6	-1.5
5	719.98	39.0 QP	46.0	-7.0	1.50 H	77	36.7	2.3
6	896.19	42.1 QP	46.0	-3.9	1.00 H	192	36.4	5.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

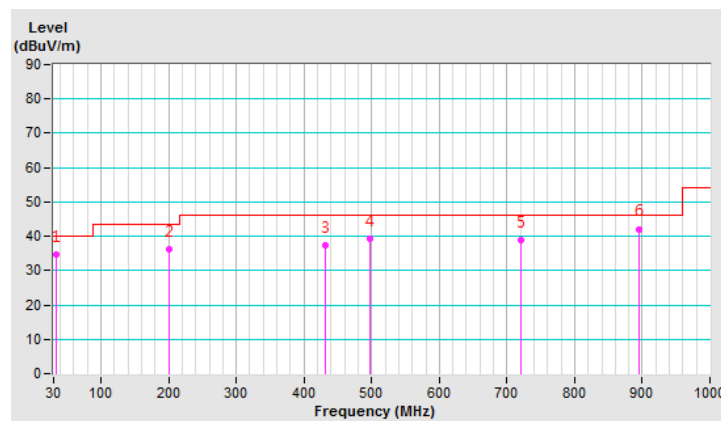


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.21	36.1 QP	40.0	-3.9	1.00 V	94	45.6	-9.5
2	166.10	32.8 QP	43.5	-10.7	1.00 V	291	41.2	-8.4
3	232.19	31.2 QP	46.0	-14.8	1.50 V	129	40.4	-9.2
4	498.02	36.5 QP	46.0	-9.5	1.00 V	349	38.0	-1.5
5	663.77	37.2 QP	46.0	-8.8	1.00 V	106	35.4	1.8
6	698.30	37.5 QP	46.0	-8.5	1.00 V	199	35.1	2.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

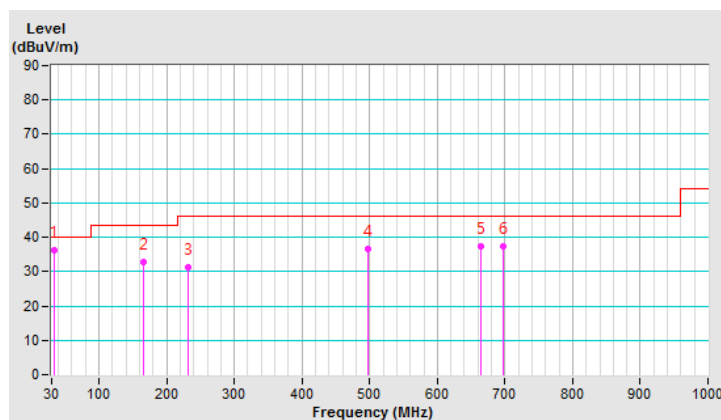

4.1.8 Test Results (Mode 2)

Above 1GHz Data:

BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.7 PK	74.0	-17.3	1.07 H	76	58.7	-2.0
2	2390.00	44.6 AV	54.0	-9.4	1.07 H	76	46.6	-2.0
3	*2402.00	100.2 PK			1.07 H	76	102.2	-2.0
4	*2402.00	98.6 AV			1.07 H	76	100.6	-2.0
5	4804.00	39.6 PK	74.0	-34.4	1.70 H	229	37.3	2.3
6	4804.00	30.7 AV	54.0	-23.3	1.70 H	229	28.4	2.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.1 PK	74.0	-16.9	1.06 V	28	59.1	-2.0
2	2390.00	45.0 AV	54.0	-9.0	1.06 V	28	47.0	-2.0
3	*2402.00	103.2 PK			1.06 V	28	105.2	-2.0
4	*2402.00	101.4 AV			1.06 V	28	103.4	-2.0
5	4804.00	39.5 PK	74.0	-34.5	1.40 V	84	37.2	2.3
6	4804.00	30.8 AV	54.0	-23.2	1.40 V	84	28.5	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	100.4 PK			1.10 H	69	102.5	-2.1
2	*2441.00	98.5 AV			1.10 H	69	100.6	-2.1
3	4882.00	39.7 PK	74.0	-34.3	1.47 H	105	37.4	2.3
4	4882.00	30.7 AV	54.0	-23.3	1.47 H	105	28.4	2.3
5	7323.00	47.5 PK	74.0	-26.5	1.50 H	112	39.3	8.2
6	7323.00	37.4 AV	54.0	-16.6	1.50 H	112	29.2	8.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	103.6 PK			1.02 V	17	105.7	-2.1
2	*2441.00	101.8 AV			1.02 V	17	103.9	-2.1
3	4882.00	40.2 PK	74.0	-33.8	1.67 V	12	37.9	2.3
4	4882.00	30.6 AV	54.0	-23.4	1.67 V	12	28.3	2.3
5	7323.00	47.4 PK	74.0	-26.6	1.55 V	221	39.2	8.2
6	7323.00	36.3 AV	54.0	-17.7	1.55 V	221	28.1	8.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	100.1 PK			1.04 H	72	102.3	-2.2
2	*2480.00	98.3 AV			1.04 H	72	100.5	-2.2
3	2483.50	56.2 PK	74.0	-17.8	1.04 H	72	58.4	-2.2
4	2483.50	44.7 AV	54.0	-9.3	1.04 H	72	46.9	-2.2
5	4960.00	40.0 PK	74.0	-34.0	1.42 H	118	37.5	2.5
6	4960.00	30.9 AV	54.0	-23.1	1.42 H	118	28.4	2.5
7	7440.00	47.6 PK	74.0	-26.4	1.53 H	105	39.2	8.4
8	7440.00	37.3 AV	54.0	-16.7	1.53 H	105	28.9	8.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	103.0 PK			1.11 V	39	105.2	-2.2
2	*2480.00	101.5 AV			1.11 V	39	103.7	-2.2
3	2483.50	57.1 PK	74.0	-16.9	1.11 V	39	59.3	-2.2
4	2483.50	45.4 AV	54.0	-8.6	1.11 V	39	47.6	-2.2
5	4960.00	39.6 PK	74.0	-34.4	1.68 V	2	37.1	2.5
6	4960.00	30.3 AV	54.0	-23.7	1.68 V	2	27.8	2.5
7	7440.00	47.3 PK	74.0	-26.7	1.58 V	207	38.9	8.4
8	7440.00	36.3 AV	54.0	-17.7	1.58 V	207	27.9	8.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

BT_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.1 PK	74.0	-17.9	1.03 H	89	58.1	-2.0
2	2390.00	44.2 AV	54.0	-9.8	1.03 H	89	46.2	-2.0
3	*2402.00	100.6 PK			1.03 H	89	102.6	-2.0
4	*2402.00	98.9 AV			1.03 H	89	100.9	-2.0
5	4804.00	40.0 PK	74.0	-34.0	1.68 H	218	37.7	2.3
6	4804.00	30.9 AV	54.0	-23.1	1.68 H	218	28.6	2.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.2 PK	74.0	-16.8	1.04 V	39	59.2	-2.0
2	2390.00	45.0 AV	54.0	-9.0	1.04 V	39	47.0	-2.0
3	*2402.00	103.3 PK			1.04 V	39	105.3	-2.0
4	*2402.00	101.7 AV			1.04 V	39	103.7	-2.0
5	4804.00	39.1 PK	74.0	-34.9	1.45 V	76	36.8	2.3
6	4804.00	30.4 AV	54.0	-23.6	1.45 V	76	28.1	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	100.5 PK			1.12 H	74	102.6	-2.1
2	*2441.00	98.9 AV			1.12 H	74	101.0	-2.1
3	4882.00	40.7 PK	74.0	-33.3	1.40 H	124	38.4	2.3
4	4882.00	31.4 AV	54.0	-22.6	1.40 H	124	29.1	2.3
5	7323.00	47.0 PK	74.0	-27.0	1.50 H	109	38.8	8.2
6	7323.00	37.2 AV	54.0	-16.8	1.50 H	109	29.0	8.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	102.8 PK			1.05 V	35	104.9	-2.1
2	*2441.00	101.9 AV			1.05 V	35	104.0	-2.1
3	4882.00	38.9 PK	74.0	-35.1	1.63 V	22	36.6	2.3
4	4882.00	29.9 AV	54.0	-24.1	1.63 V	22	27.6	2.3
5	7323.00	47.7 PK	74.0	-26.3	1.51 V	202	39.5	8.2
6	7323.00	36.5 AV	54.0	-17.5	1.51 V	202	28.3	8.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	100.1 PK			1.01 H	66	102.3	-2.2
2	*2480.00	98.1 AV			1.01 H	66	100.3	-2.2
3	2483.50	56.3 PK	74.0	-17.7	1.01 H	66	58.5	-2.2
4	2483.50	44.5 AV	54.0	-9.5	1.01 H	66	46.7	-2.2
5	4960.00	40.5 PK	74.0	-33.5	1.42 H	132	38.0	2.5
6	4960.00	31.3 AV	54.0	-22.7	1.42 H	132	28.8	2.5
7	7440.00	46.9 PK	74.0	-27.1	1.54 H	96	38.5	8.4
8	7440.00	36.8 AV	54.0	-17.2	1.54 H	96	28.4	8.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	102.9 PK			1.04 V	47	105.1	-2.2
2	*2480.00	101.6 AV			1.04 V	47	103.8	-2.2
3	2483.50	56.8 PK	74.0	-17.2	1.04 V	47	59.0	-2.2
4	2483.50	45.2 AV	54.0	-8.8	1.04 V	47	47.4	-2.2
5	4960.00	39.1 PK	74.0	-34.9	1.68 V	7	36.6	2.5
6	4960.00	30.0 AV	54.0	-24.0	1.68 V	7	27.5	2.5
7	7440.00	47.3 PK	74.0	-26.7	1.55 V	203	38.9	8.4
8	7440.00	36.2 AV	54.0	-17.8	1.55 V	203	27.8	8.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Below 1GHz Data:


BT_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	32.88	34.3 QP	40.0	-5.7	1.00 H	43	43.8	-9.5
2	200.09	36.5 QP	43.5	-7.0	1.50 H	119	46.6	-10.1
3	432.64	38.1 QP	46.0	-7.9	2.00 H	76	41.3	-3.2
4	498.28	39.1 QP	46.0	-6.9	1.50 H	46	40.6	-1.5
5	720.13	39.9 QP	46.0	-6.1	1.50 H	61	37.5	2.4
6	896.55	41.8 QP	46.0	-4.2	1.50 H	60	36.1	5.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

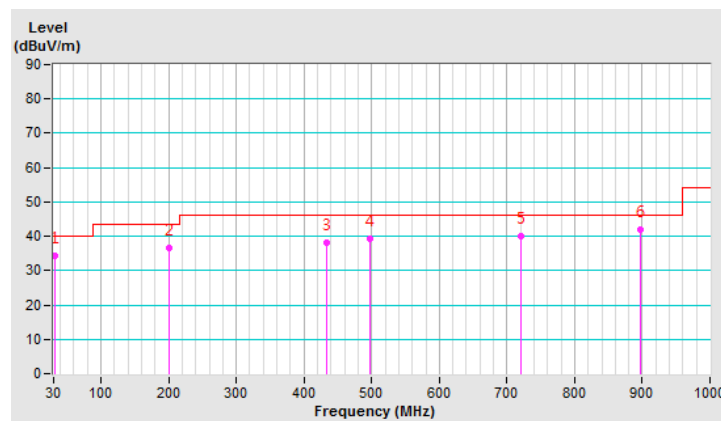


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.61	36.2 QP	40.0	-3.8	1.50 V	146	45.6	-9.4
2	164.96	33.8 QP	43.5	-9.7	1.00 V	255	42.3	-8.5
3	231.46	31.9 QP	46.0	-14.1	1.50 V	262	41.2	-9.3
4	498.74	36.3 QP	46.0	-9.7	1.50 V	185	37.8	-1.5
5	662.87	37.5 QP	46.0	-8.5	1.00 V	194	35.7	1.8
6	698.39	37.9 QP	46.0	-8.1	1.50 V	143	35.5	2.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

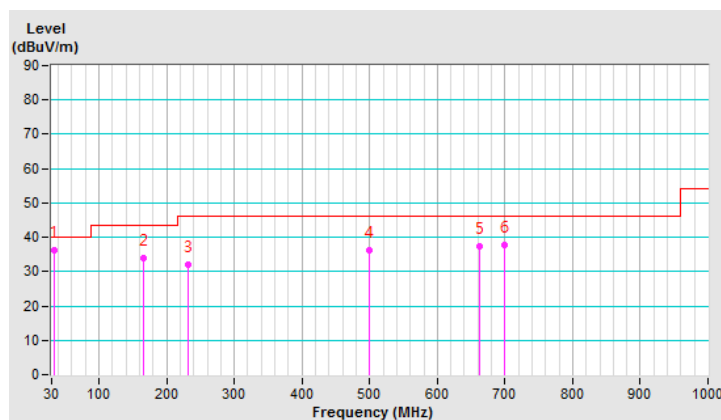

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2018	Oct. 23, 2019
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 22, 2018	Oct. 21, 2019
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 17, 2019	Mar. 16, 2020
50 ohms Terminator	N/A	3	Oct. 22, 2018	Oct. 21, 2019
RF Cable	5D-FB	COCCAB-001	Sep. 28, 2018	Sep. 27, 2019
Fixed attenuator EMCI	STI02-2200-10	003	Mar. 14, 2019	Mar. 13, 2020
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: Sep. 10, 2019

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation From Test Standard

No deviation.

4.2.5 Test Setup

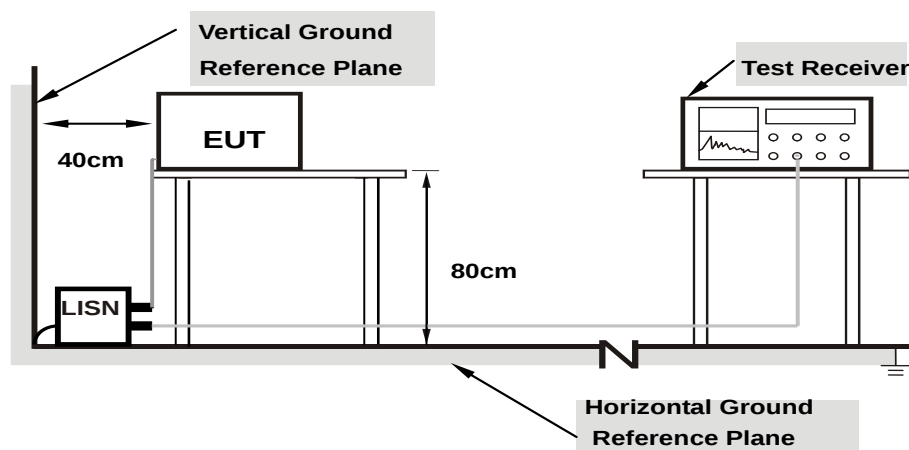

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBUV)		Emission Level (dBUV)		Limit (dBUV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.95	37.75	17.76	47.70	27.71	65.58	55.58	-17.88	-27.87
2	0.20859	9.96	34.97	19.56	44.93	29.52	63.26	53.26	-18.33	-23.74
3	0.29453	9.96	26.17	7.76	36.13	17.72	60.40	50.40	-24.27	-32.68
4	0.90000	10.00	22.34	9.64	32.34	19.64	56.00	46.00	-23.66	-26.36
5	3.35547	10.14	21.54	14.32	31.68	24.46	56.00	46.00	-24.32	-21.54
6	7.61328	10.36	18.41	12.15	28.77	22.51	60.00	50.00	-31.23	-27.49

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

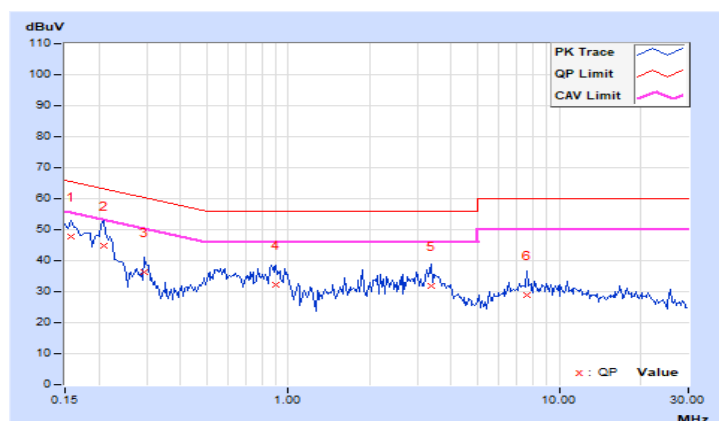


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.93	35.44	16.55	45.37	26.48	65.58	55.58	-20.21	-29.10
2	0.20469	9.94	37.34	19.21	47.28	29.15	63.42	53.42	-16.14	-24.27
3	0.29844	9.94	25.05	7.86	34.99	17.80	60.29	50.29	-25.30	-32.49
4	0.86094	9.98	20.70	7.23	30.68	17.21	56.00	46.00	-25.32	-28.79
5	2.86719	10.07	22.59	15.07	32.66	25.14	56.00	46.00	-23.34	-20.86
6	6.86328	10.24	17.59	11.55	27.83	21.79	60.00	50.00	-32.17	-28.21

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

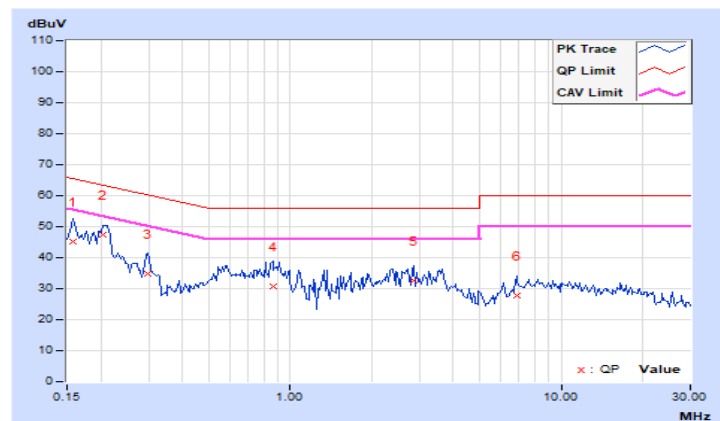


4.3 Number of Hopping Frequency Used

4.3.1 Limits of Hopping Frequency Used Measurement

At least 15 channels frequencies, and should be equally spaced.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 Test Results

There are 79 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.




4.4 Dwell Time on Each Channel

4.4.1 Limits of Dwell Time on Each Channel Measurement

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

4.4.5 Deviation from Test Standard

No deviation.


4.4.6 Test Results

GFSK


Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	51 (times / 5 sec) * 6.32 = 322.32 times	0.43	138.6	400
DH3	57 (times / 5 sec) * 6.32 = 170.64 times	1.725	294.35	400
DH5	15 (times / 5 sec) * 6.32 = 94.8 times	2.991	283.55	400

NOTE: Test plots of the transmitting time slot are shown on next page.


DH1

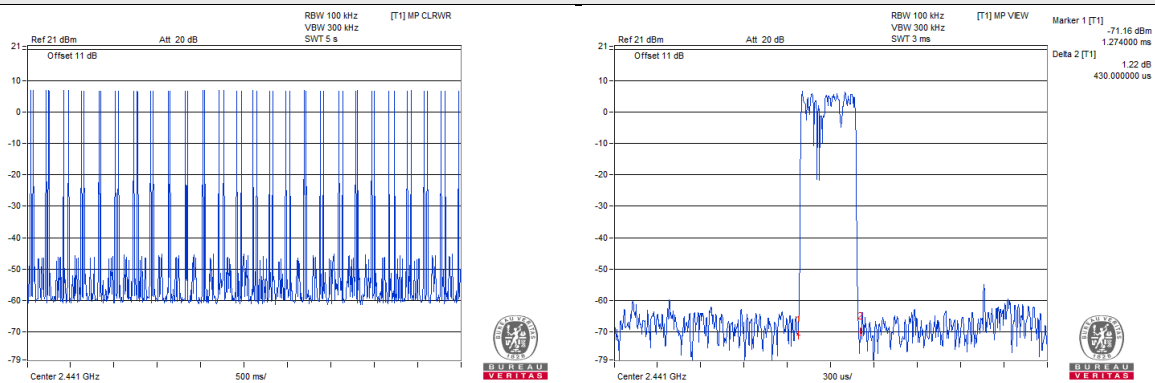

DH3

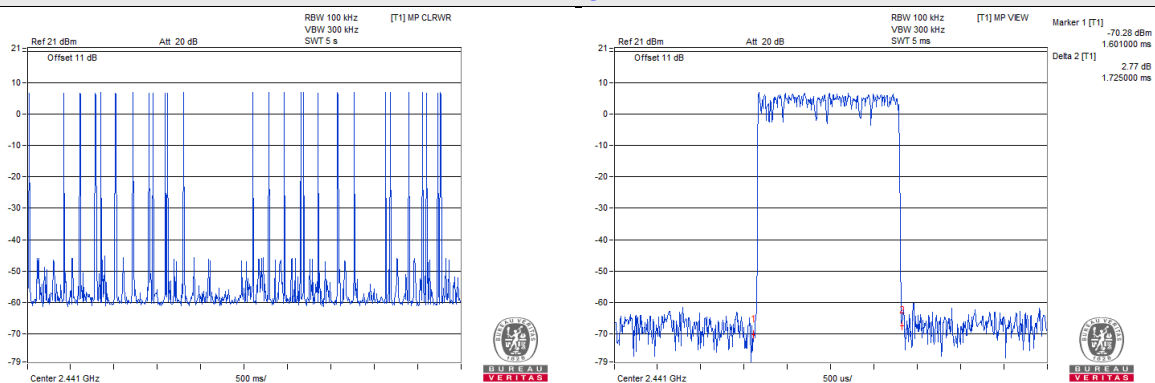

DH5


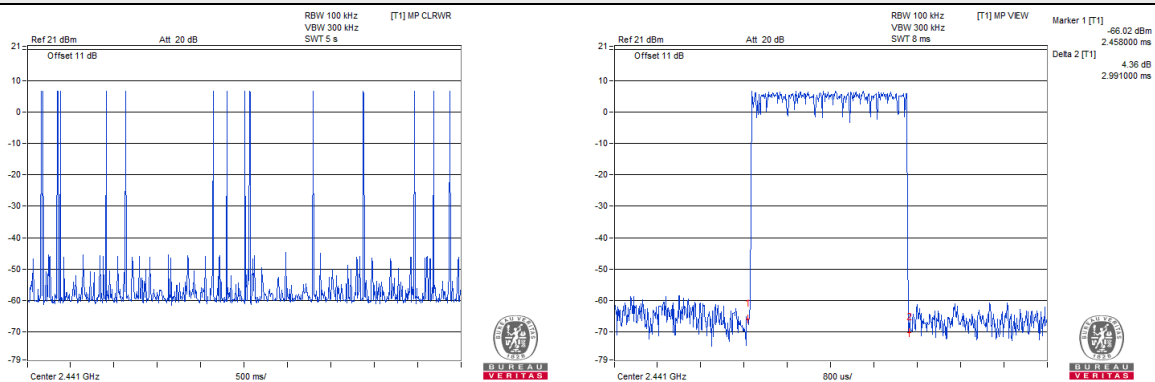


8DPSK

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
3DH1	50 (times / 5 sec) * 6.32 = 316 times	0.434	137.14	400
3DH3	26 (times / 5 sec) * 6.32 = 164.32 times	1.681	276.22	400
3DH5	16 (times / 5 sec) * 6.32 = 101.12 times	2.991	302.45	400

NOTE: Test plots of the transmitting time slot are shown on next page.



3DH1

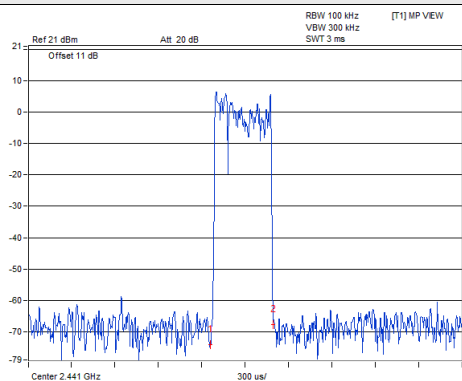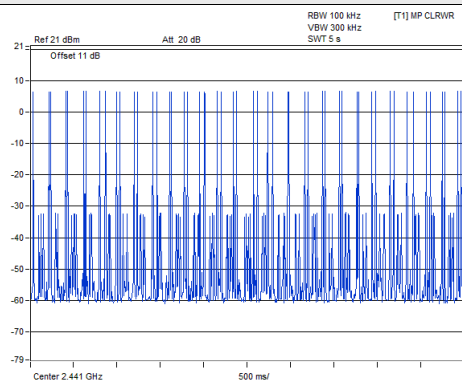

Marker 1 [T1] -74.18 dBm
1.257000 ms
Delta 2 [T1] 8.55 dB
434.000000 us





3DH3

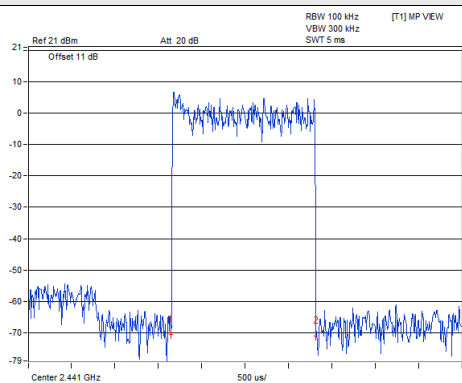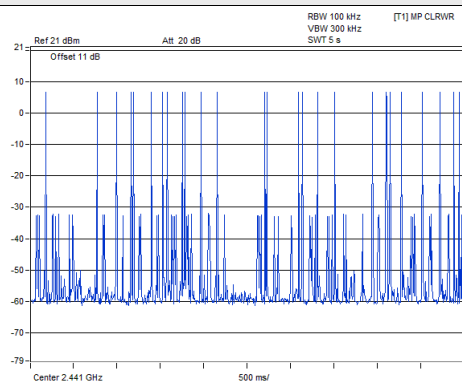

Marker 1 [T1] -70.47 dBm
1.638000 ms
Delta 2 [T1] 0.64 dB
1.661000 ms



3DH5

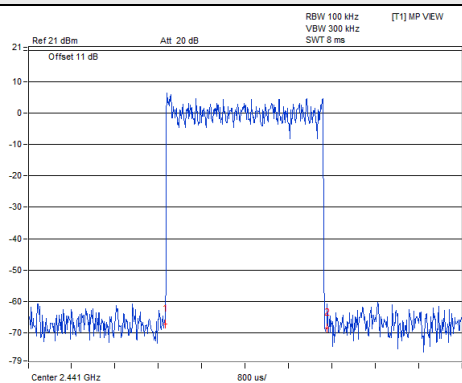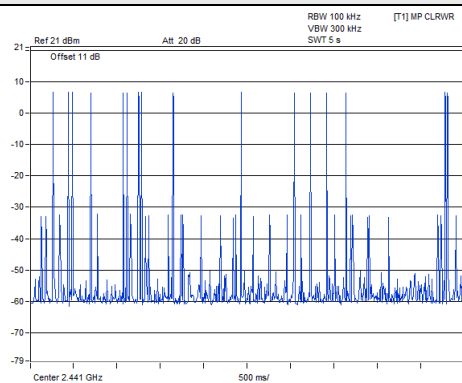

Marker 1 [T1] -67.22 dBm
2.516000 ms
Delta 2 [T1] 1.30 dB
2.991000 ms




4.5 Channel Bandwidth

4.5.1 Limits of Channel Bandwidth Measurement

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

4.5.5 Deviation from Test Standard


No deviation.

4.5.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.5.7 Test Results

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	0.86	1.30
39	2441	0.86	1.30
78	2480	0.87	1.30

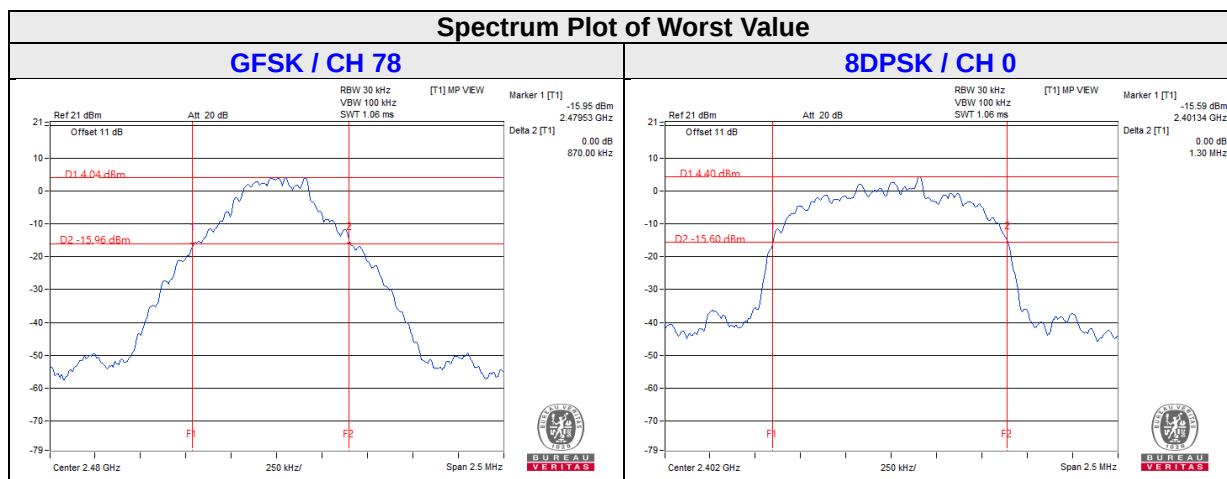


4.6 Hopping Channel Separation

4.6.1 Limits of Hopping Channel Separation Measurement

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

Measurement Procedure REF

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.


4.6.5 Deviation from Test Standard

No deviation.

4.6.6 Test Results

Channel	Frequency (MHz)	Adjacent Channel Separation (MHz)		20dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK	GFSK	8DPSK	
0	2402	1.00	1.00	0.86	1.30	0.58	0.87	Pass
39	2441	1.00	1.00	0.86	1.30	0.58	0.87	Pass
78	2480	1.00	1.00	0.87	1.30	0.58	0.87	Pass

NOTE: The minimum limit is two-third 20dB bandwidth.

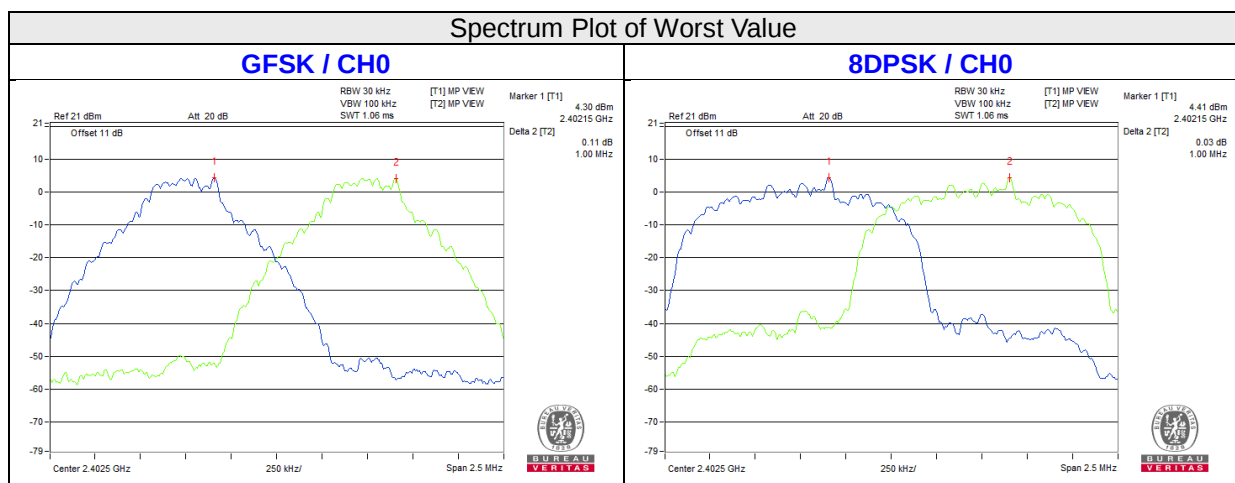


4.7 Maximum Output Power

4.7.1 Limits of Maximum Output Power Measurement

The Maximum Output Power Measurement is 125mW.

4.7.2 Test Setup

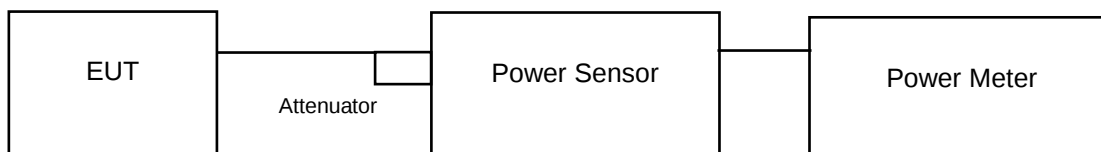

4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

FOR PEAK POWER

Channel	Frequency (MHZ)	GFSK		8DPSK		Power Limit (mW)	Pass / Fail
		Output Power (mW)	Output Power (dBm)	Output Power (mW)	Output Power (dBm)		
0	2402	7.194	8.57	12.912	11.11	125	Pass
39	2441	6.501	8.13	11.722	10.69	125	Pass
78	2480	6.699	8.26	12.618	11.01	125	Pass

FOR AVERAGE POWER

Channel	Frequency (MHZ)	GFSK		8DPSK	
		Average Power (mW)	Average Power (dBm)	Average Power (mW)	Average Power (dBm)
0	2402	6.637	8.22	6.561	8.17
39	2441	6.039	7.81	6.095	7.85
78	2480	6.18	7.91	6.237	7.95

4.8 Conducted Out of Band Emission Measurement

4.8.1 Limits of Conducted Out of Band Emission Measurement

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.8.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.8.3 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 Deviation from Test Standard

No deviation.

4.8.5 EUT Operating Condition


The software provided by client enabled the EUT to transmit and receive data at lowest and highest channel frequencies individually.

4.8.6 Test Results


The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

GFSK


Hopping disabled Low Channel

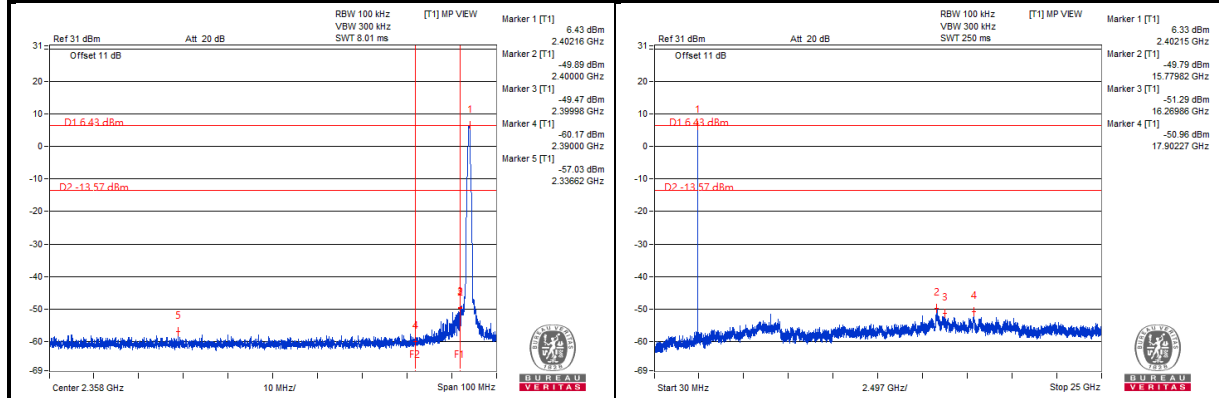


Hopping disabled High Channel

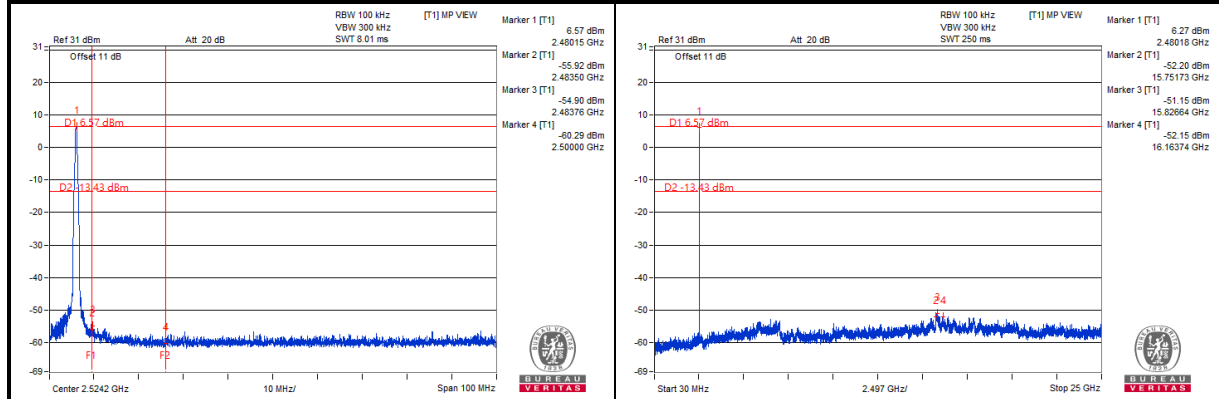

Hopping enabled Low Channel

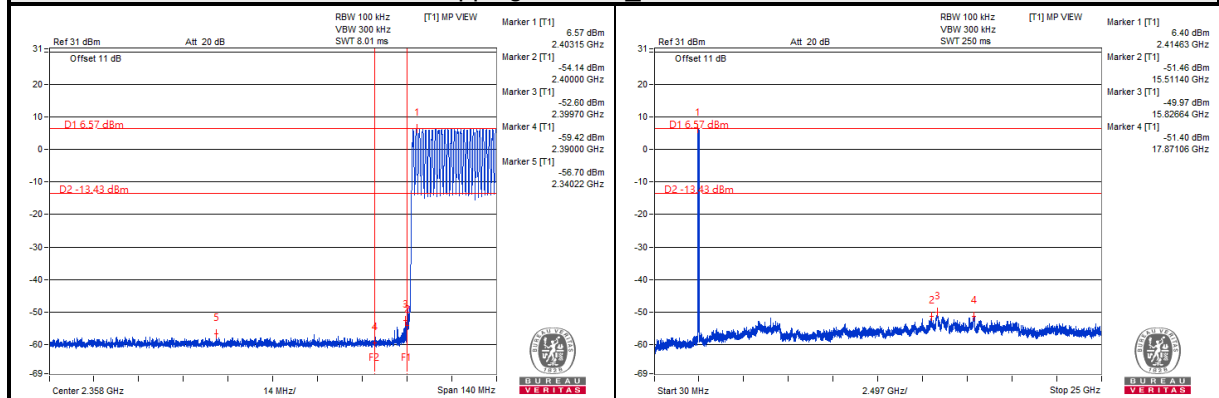


Hopping enabled High Channel

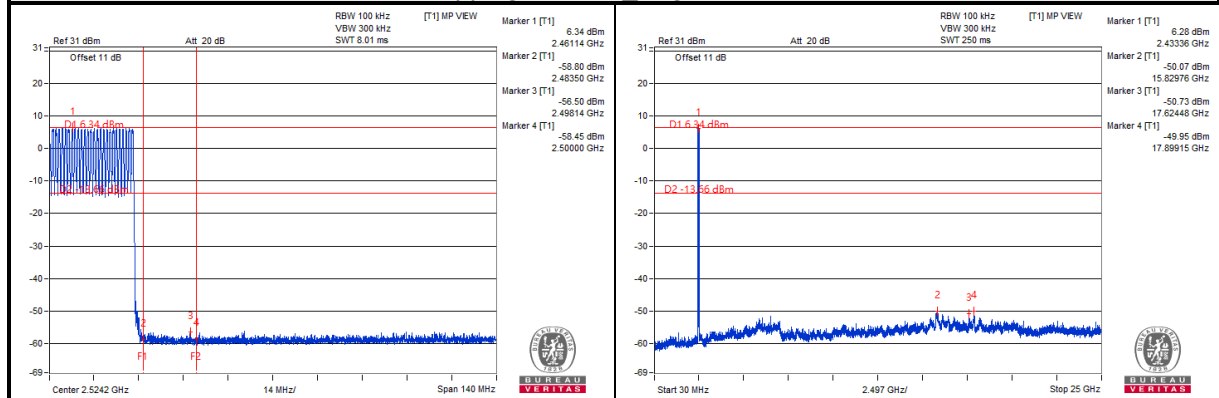


8DPSK


Hopping disabled Low Channel

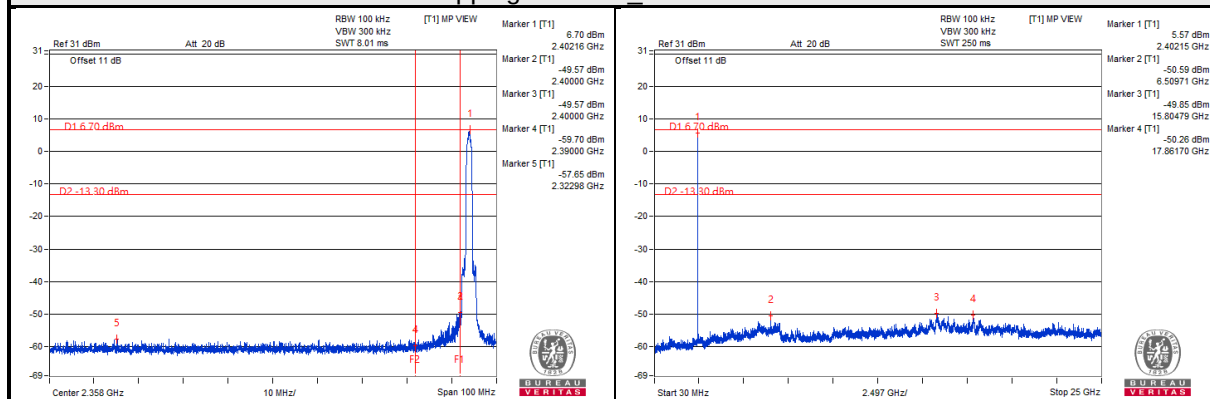


Hopping disabled High Channel

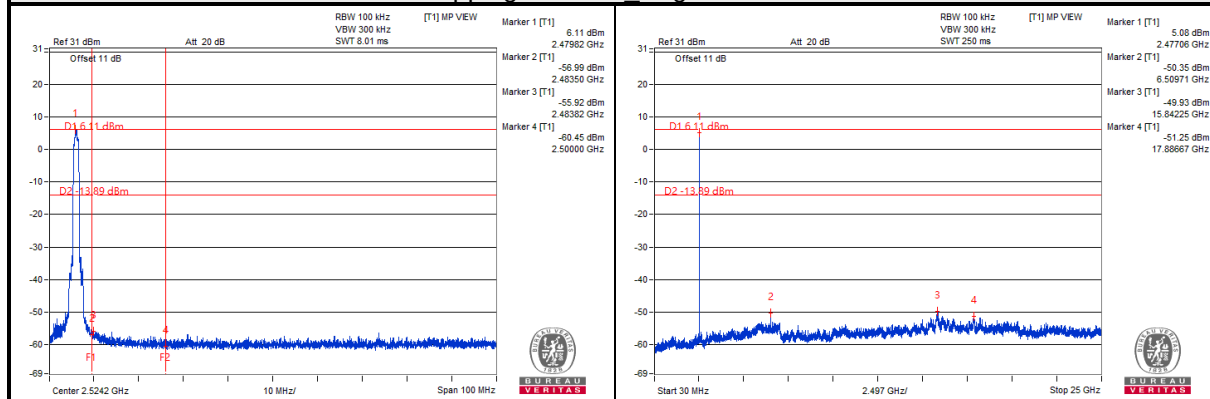

Hopping enabled Low Channel

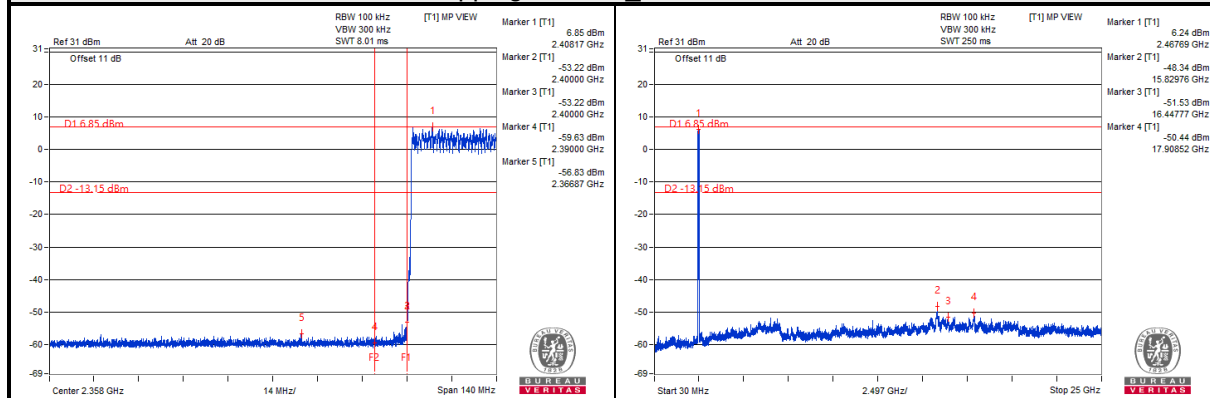

Hopping enabled High Channel

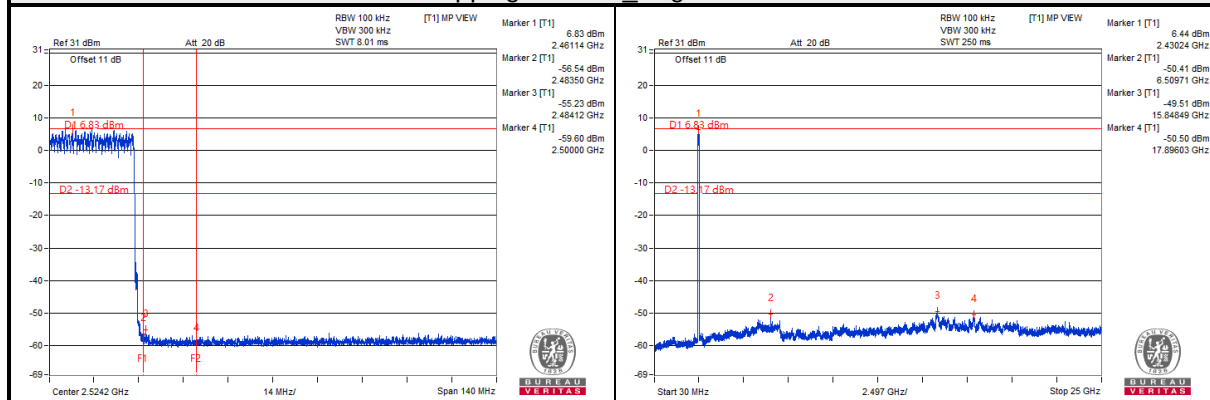

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---