


THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2024 INVENTEC CORPORATION.

LEGEND


PART NO	REV	VARIATION
6060B3809202	A01	As Shown

NOTE:

- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS: ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC
(IF NOT SPECIFIED).
- (4) MATERIAL:
 - A: 1. 面材 (Code): Lexan 8010 polycarbonate film (PC G11)
 2. 表面處理 (Code): 霧油
 3. 膠性: 平膠+網格膠
or equivalent material. (the material spec as same as Q-Form spec)
 - B. ADHESIVE: 3M-SP7533
 - C. THICKNESS: 0.125mm
 - D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: 底色: Black ; 圖文: Pantone 424C
- (6) THERMAL TRANSFER RIBBON: N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code : CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE "MANUFACTURE YEAR"
AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL. (內文有製造年份時需定義年份轉換規則)

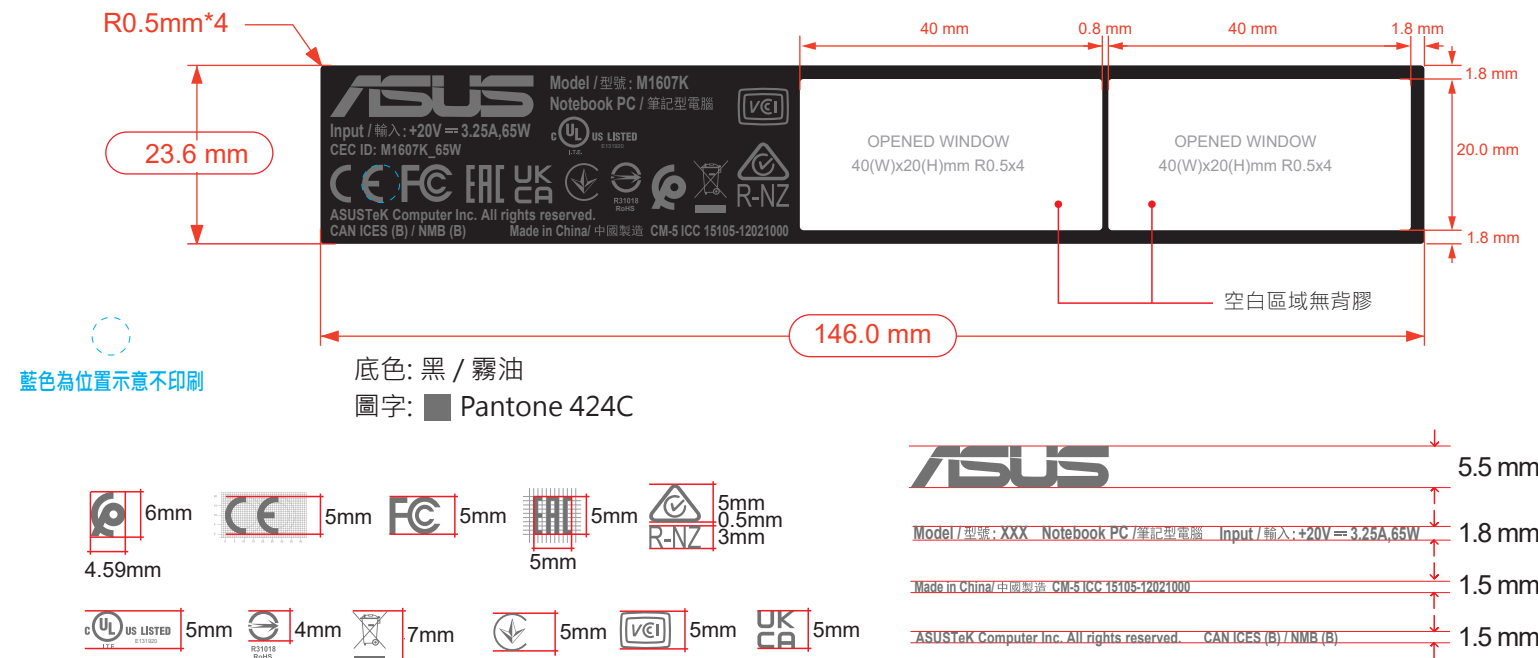


出標樣式/佈膠示意圖

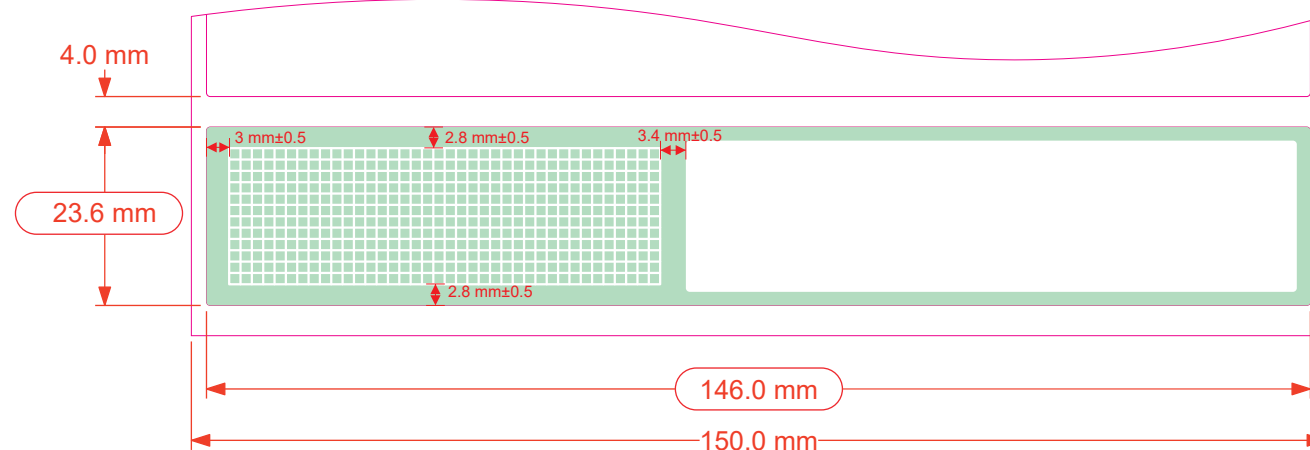

Output direction

REVISION HISTORY			
DESIGNER	CHANGE NO.	DOC REV	DATE dd/mm/yyyy
-	INITIAL	A	

卷芯要有以下資訊



IEC料號 ← 6060BXXXXXXXXX
ASUS料號 ← XXXXX-XXXXXXXXXX

離型紙後請印刷以下資訊



Barcode內容
同下方顯示文字

ASUS PN Vendor code(數字)

★注意：ASUS PN和Vendor code用英文半型“-”分開

	公差
材 料	Dimension
Label長寬	±0.2mm
Label面材+膠材	±0.02mm

測試規範

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible.
	300cycles				2. The substrate or Undercoating is not visible

勾通		Label Criteria				
	Paste Location	Glue Type	Paste method	Peel off method	Test Criteria	Remark
	Carton	一般膠	食指推平	No	1. 不脫落 2. 不翹起 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個 <5mm 直徑	環測結束需靜置12hr
V		一般膠	食指推平	No	1. 不脫落 2. 不翹起 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個 <5mm 直徑	環測結束需靜置12hr
	Cover	R 膠	食指推平	任一角以90°C (慢慢撕下)	1. 不脫落 2. 不可殘膠 (輕微可用3M廢拭布擦拭後無殘膠) 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個 <5mm 直徑 4. 如呈浮貼狀態可再貼回則為接受 5. 呈捲、曲、皺 狀態則不予接受	

MODEL M1607KA				InventecCORPORATION CONFIDENTIAL					
DESIGNER Una Chien		D:20		TITLE M1607K RATING LABEL (WO/3C+JP) V1.0 65W(M1607KA) BLK					
		M:09							
		Y:24							
MANAGER Jane Lee		D:20		DOCUMENT NUMBER					
		M:09							
		Y:24							
 THIRD AHGLE PROJECTION		DO NOT SCALE DRAWING		SIZE	CODE	NUMBER	REV	VER	
				B	PS	6060-B38092-2-AI	A	0	
				SCALE: 1:1		UNIT:mm		SHEET:1OF1	
LINEAR		X	X.X	X.XX		FILE NAME			
mm						M1607K-I-rating_WO3CJP_15105-12021000_6060B3809202			
INCH									