



RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3833.29	44.93 PK	74	-29.07	-58.62	-57.93	4.92	-50.33
2	3833.29	37.54 AV	54	-16.46	-65.29	-66.05	4.92	-57.72
3	7268.5	43.47 PK	74	-30.53	-59.76	-59.69	4.92	-51.79
4	7268.5	37.09 AV	54	-16.91	-65.64	-66.62	4.92	-58.17
5	21175.6	43.81 PK	74	-30.19	-59.6	-59.17	4.92	-51.45
6	21175.6	38.34 AV	54	-15.66	-64.31	-65.47	4.92	-56.92
7	22289.1	45.66 PK	74	-28.34	-59.23	-56.31	4.92	-49.6
8	22289.1	39.8 AV	54	-14.2	-63.04	-63.78	4.92	-55.46
9	38840.89	39.4 PK	74	-34.6	-63.63	-63.95	4.92	-55.86
10	38840.89	33.33 AV	54	-20.67	-70.29	-69.47	4.92	-61.93

Note: Margin value = Emission Level - Limit value

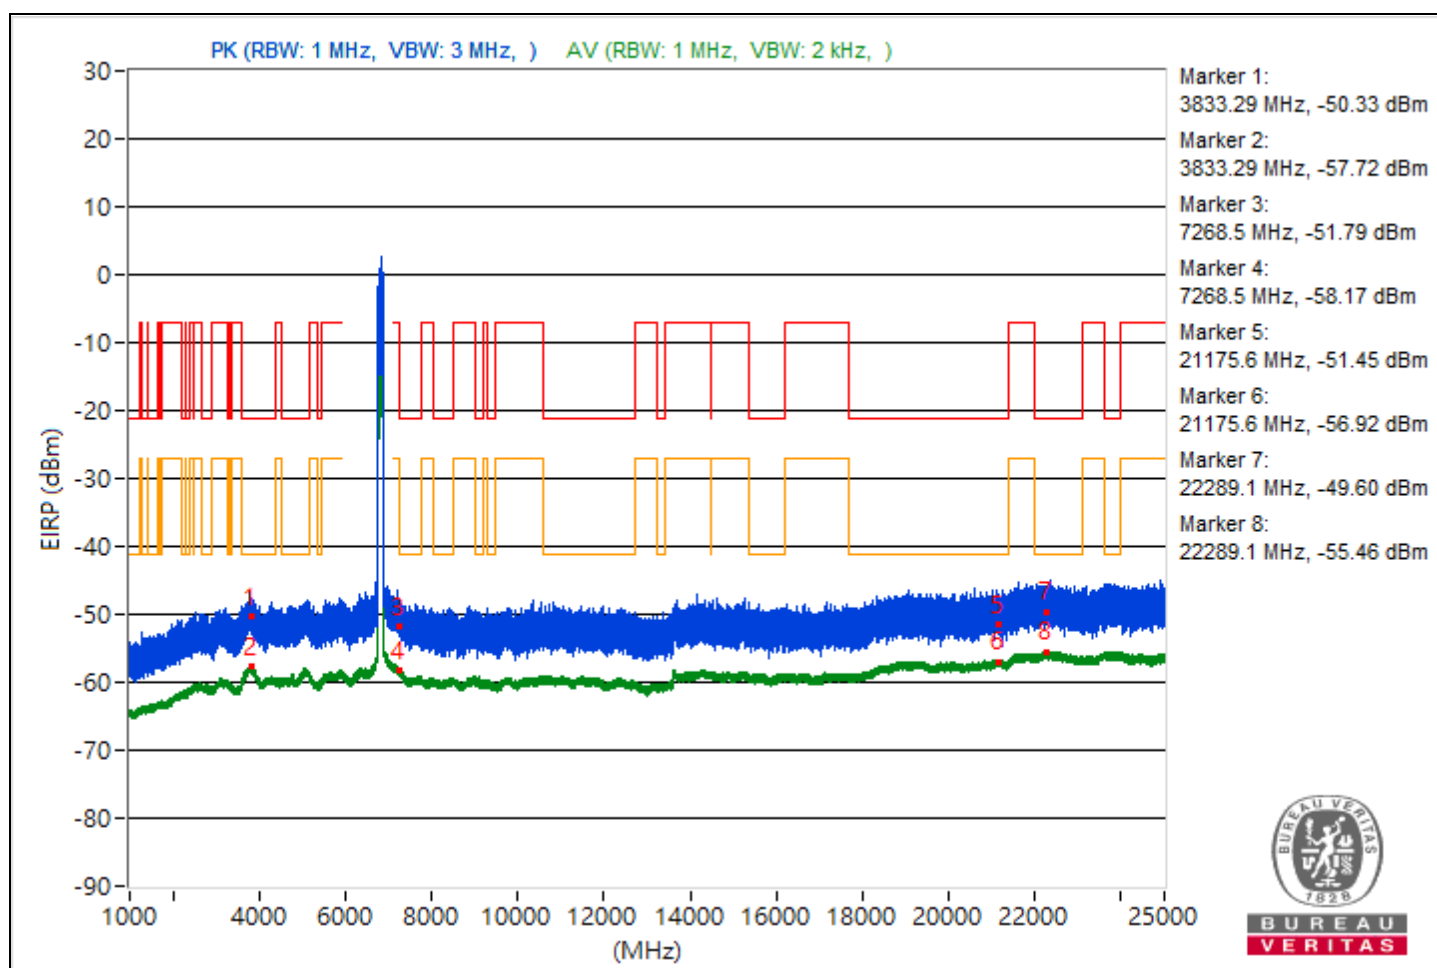


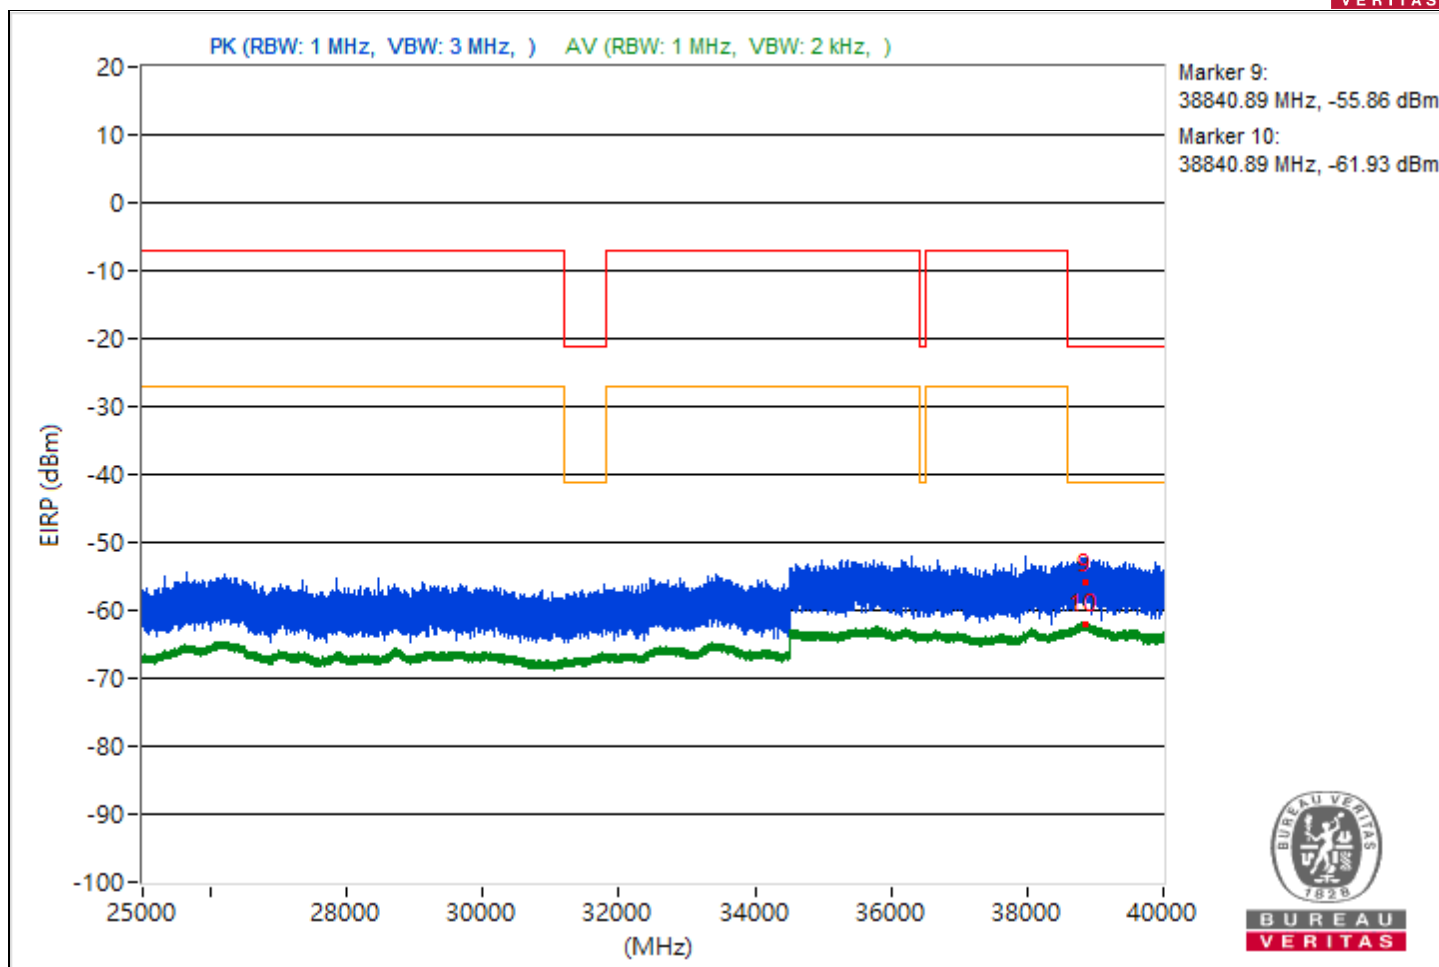


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3815.4	43.8 PK	74	-30.2	-58.75	-60.14	4.92	-51.46
2	3815.4	37.56 AV	54	-16.44	-65.49	-65.79	4.92	-57.7
3	7254.11	44.51 PK	74	-29.49	-57.33	-60.65	4.92	-50.75
4	7254.11	37.01 AV	54	-16.99	-65.9	-66.49	4.92	-58.25
5	21181.9	44.53 PK	74	-29.47	-59.86	-57.73	4.92	-50.73
6	21181.9	38.55 AV	54	-15.45	-65.1	-64.23	4.92	-56.71
7	23630.4	45.29 PK	74	-28.71	-58.18	-57.64	4.92	-49.97
8	23630.4	39.92 AV	54	-14.08	-62.96	-63.6	4.92	-55.34
9	38880.36	38.79 PK	74	-35.21	-65.27	-63.68	4.92	-56.47
10	38880.36	33.3 AV	54	-20.7	-69.3	-70.57	4.92	-61.96

Note: Margin value = Emission Level - Limit value

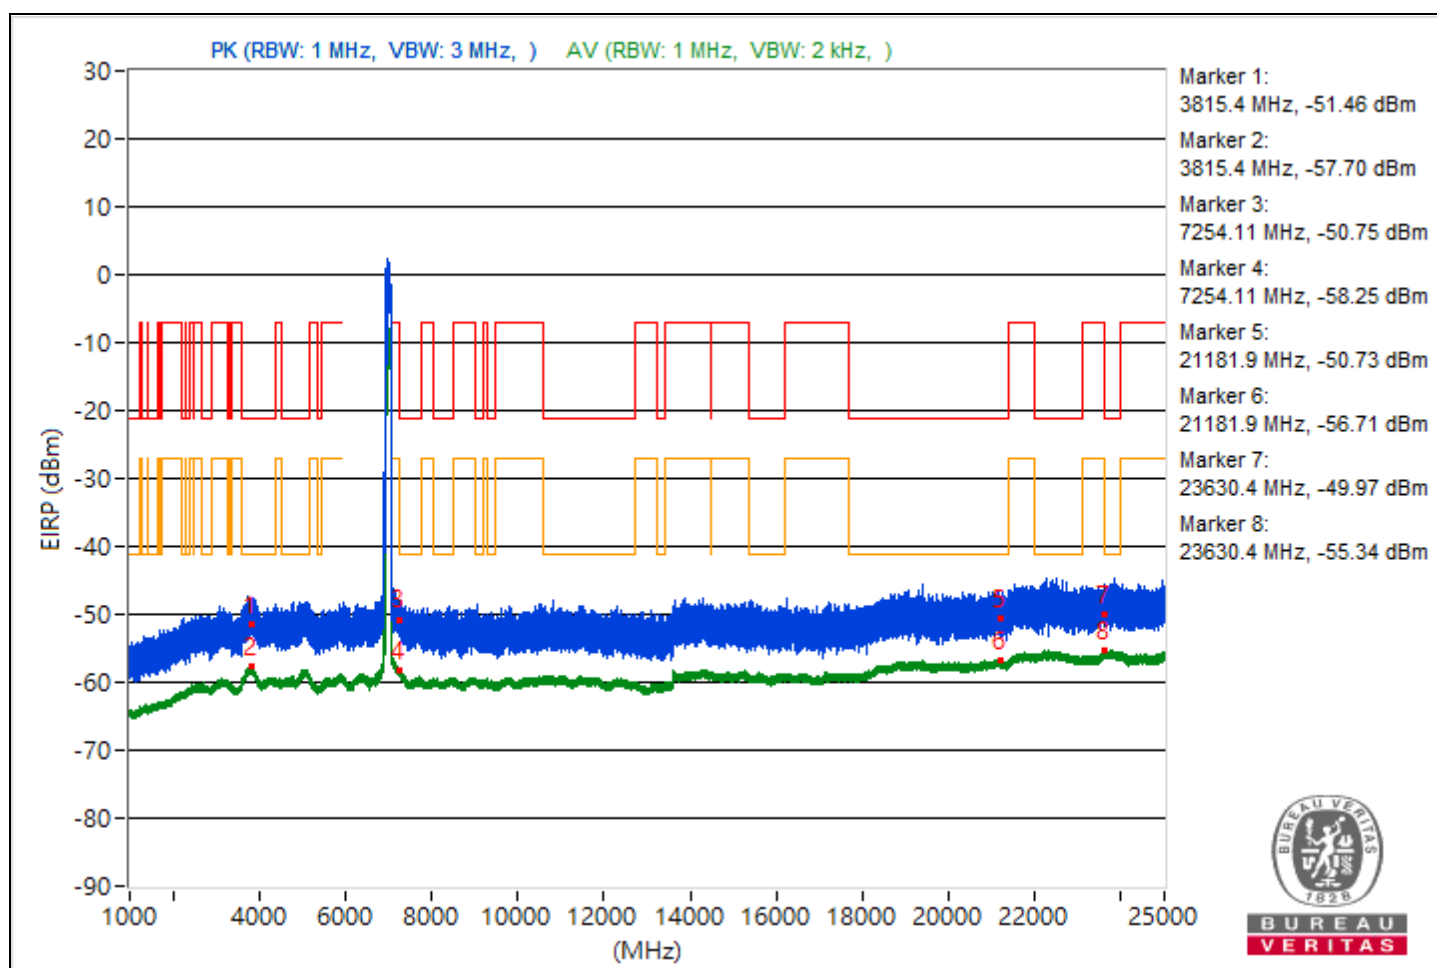

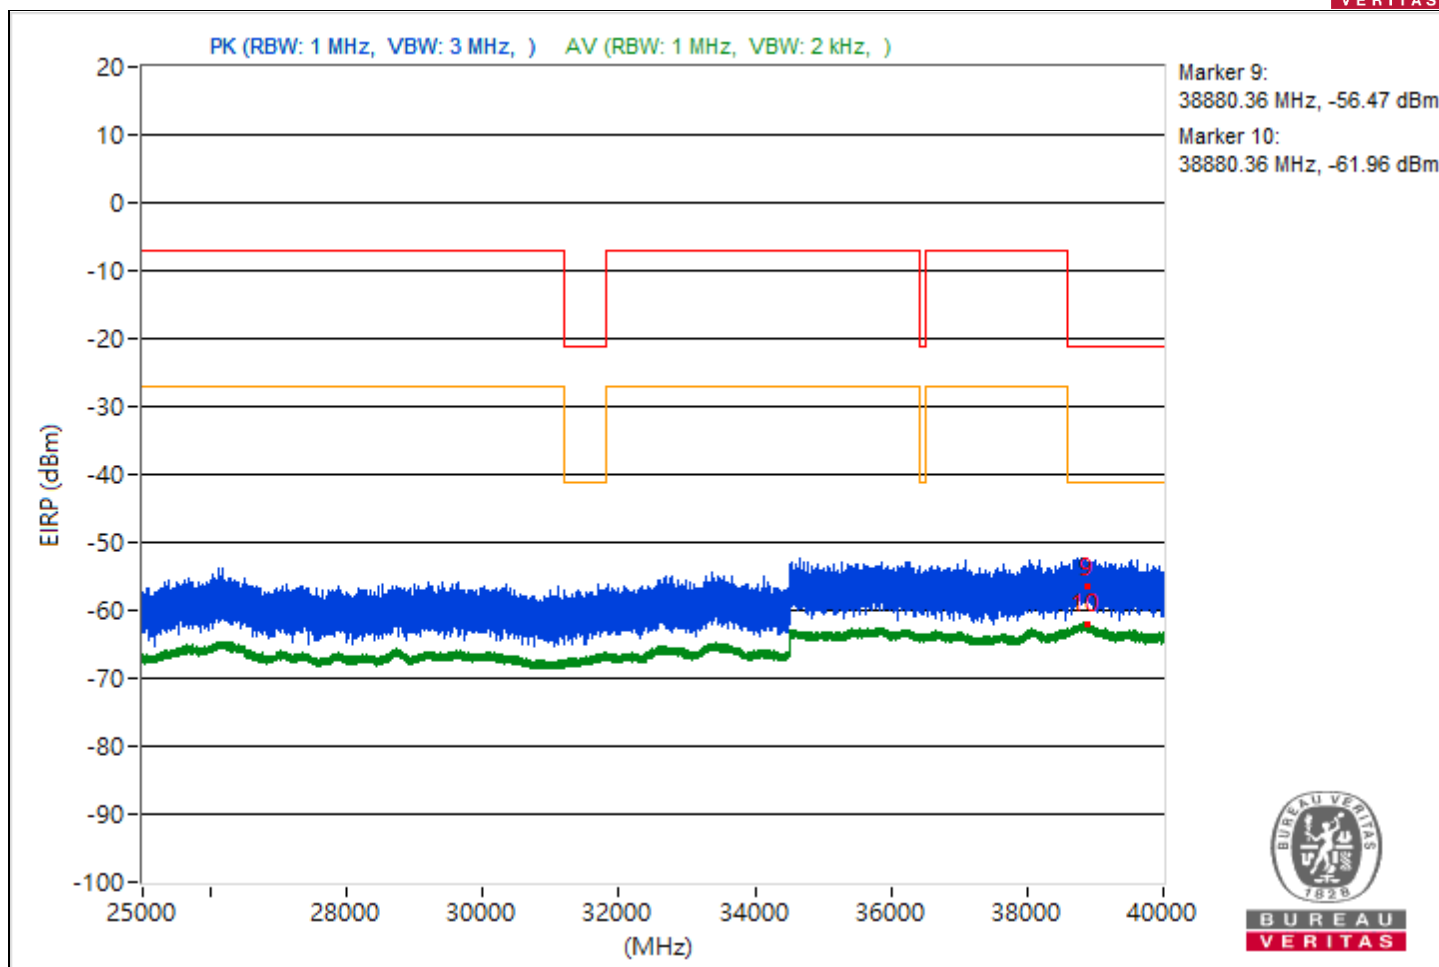

2T


Conducted Band Edges

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5956.2	97.85 PK			-8.76	-7.68	7.77	2.59
2	*5956.2	89.26 AV			-16.4	-17.19	7.77	-6
3	#5916.77	67.24 PK	88.26	-21.02	-38.43	-39.19	7.77	-28.02
4	#5916.77	58.64 AV	68.26	-9.62	-47.62	-47.18	7.77	-36.62

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

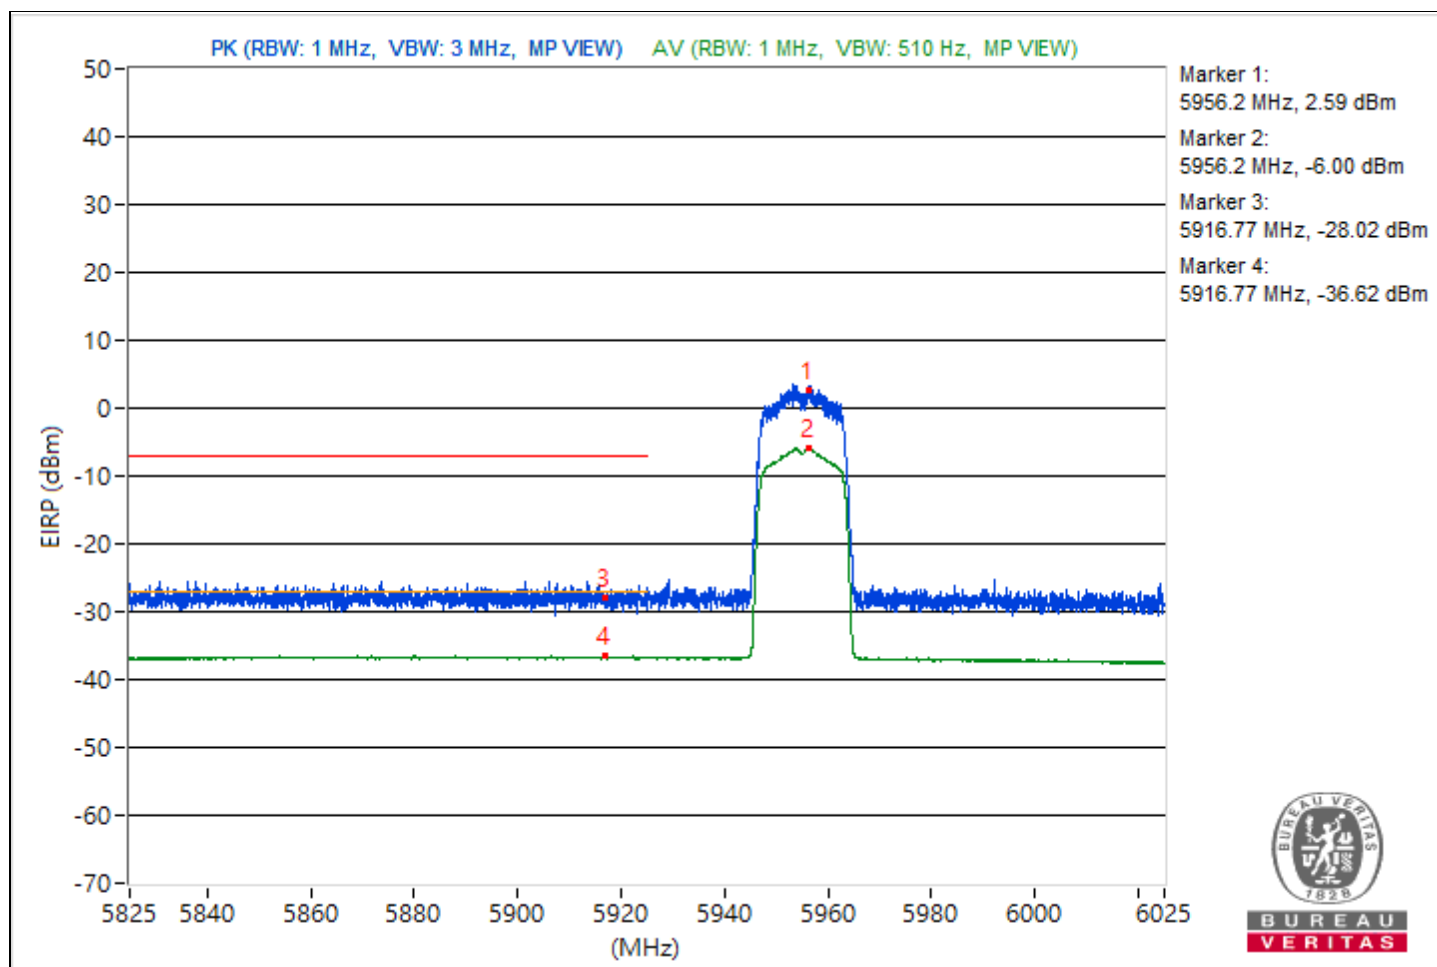


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7116.1	98.68 PK			-7.36	-6.12	7.1	3.42
2	*7116.1	91.06 AV			-14.28	-14.33	7.1	-4.2
3	#7125	67.54 PK	88.26	-20.72	-36.49	-39.79	7.1	-27.72
4	#7125	51.91 AV	68.26	-16.35	-53.49	-53.43	7.1	-43.35

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

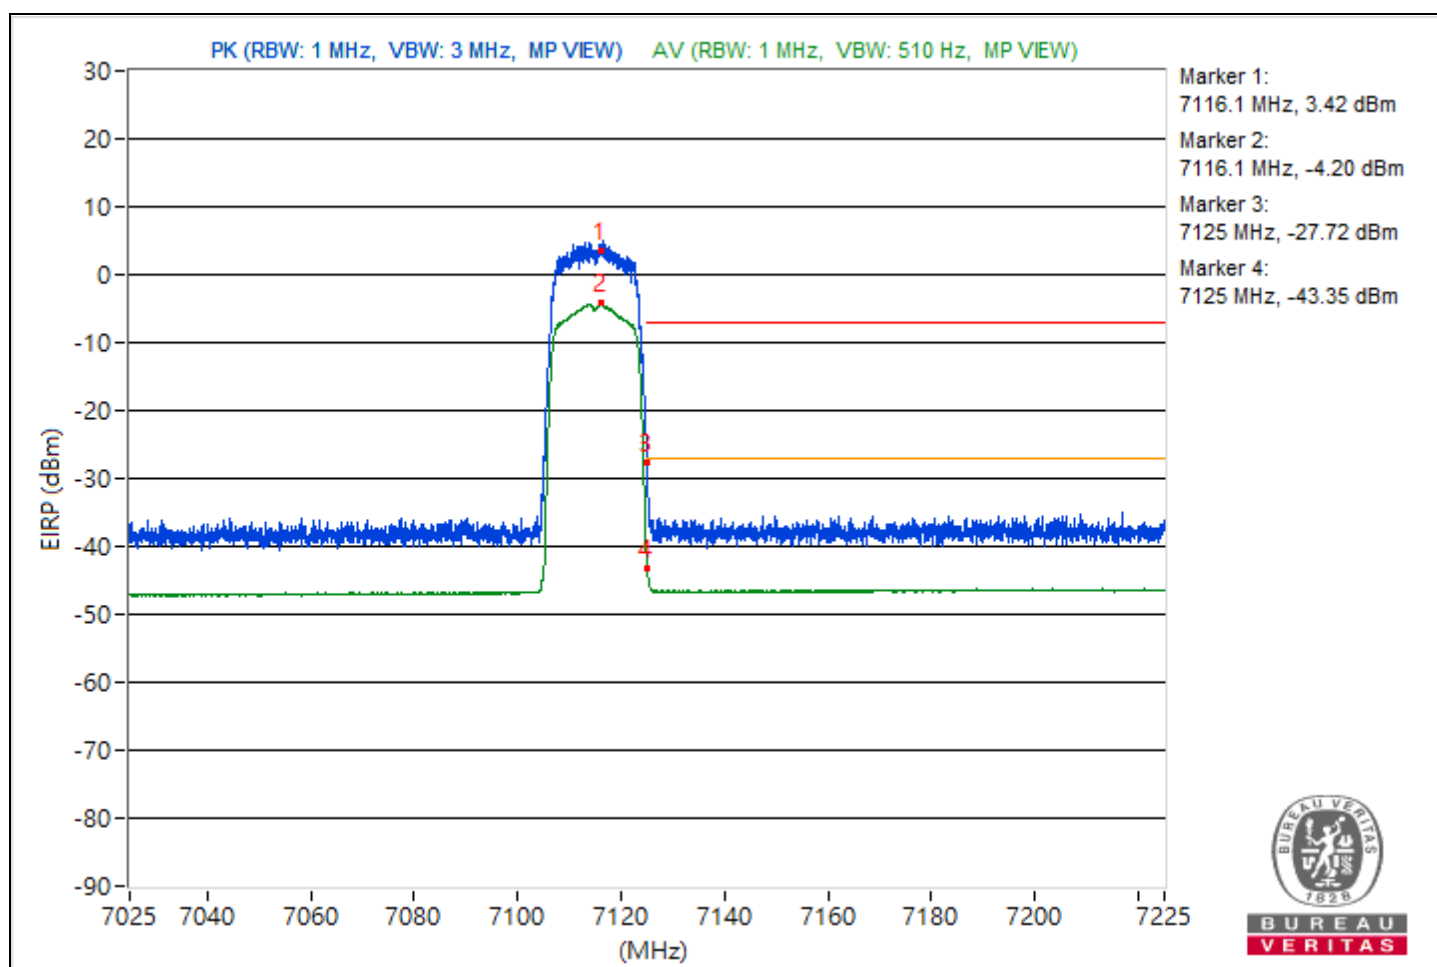


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5954.05	96.73 PK			-6.64	-5.98	4.76	1.47
2	*5954.05	89.18 AV			-13.74	-13.97	4.76	-6.08
3	#5864.25	64.52 PK	88.26	-23.74	-39.45	-37.73	4.76	-30.74
4	#5864.25	55.67 AV	68.26	-12.59	-47.44	-47.27	4.76	-39.59

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

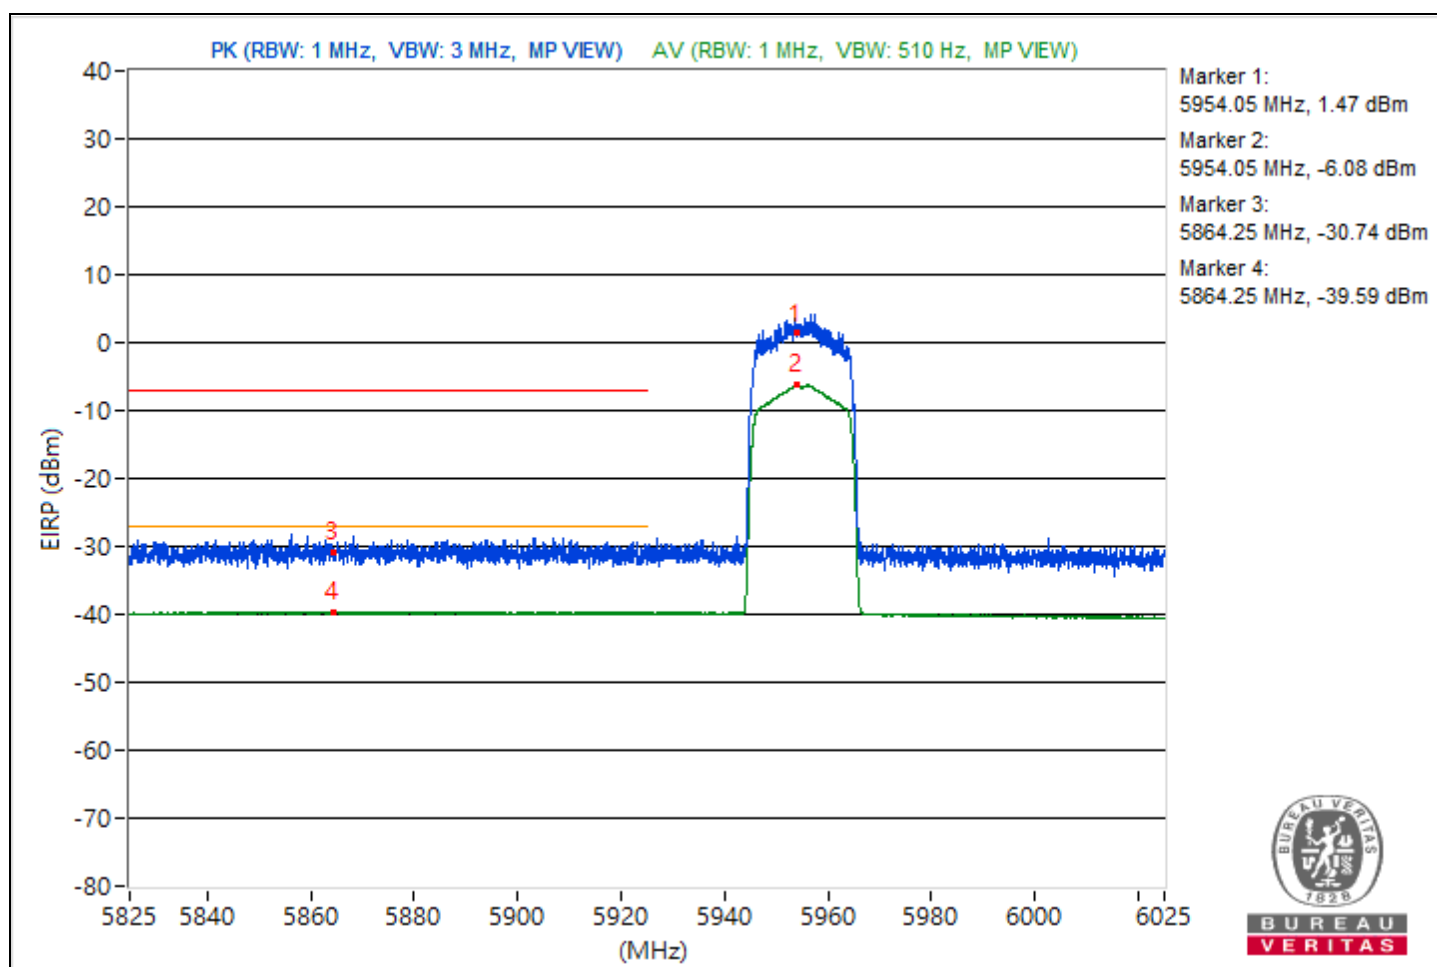

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Chun		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7114.52	96.6 PK			-5.36	-6.21	4.09	1.34
2	*7114.52	88.51 AV			-13.88	-13.82	4.09	-6.75
3	#7125	87.37 PK	88.26	-0.89	-16.17	-14.07	4.09	-7.89
4	!#7125	79.65 AV	68.26	11.39	-22.78	-22.64	4.09	-15.61

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.
 4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Integration method)

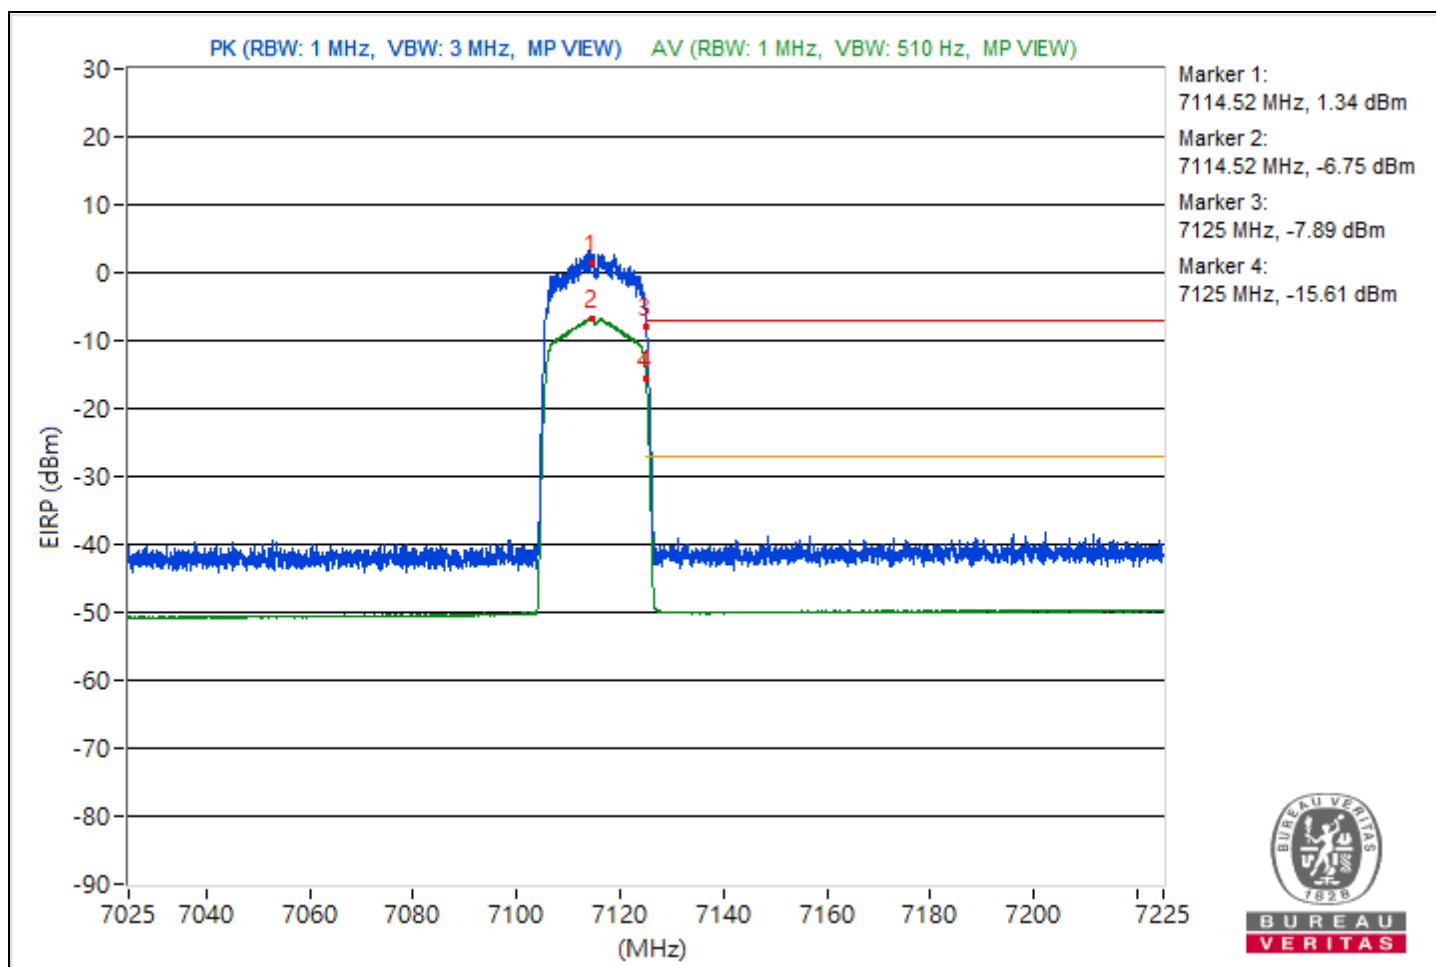



Integration method

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	Katina Lu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7125	42.62 AV	68.2	-25.58	-59.75	-59.74	4.09	-52.64

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

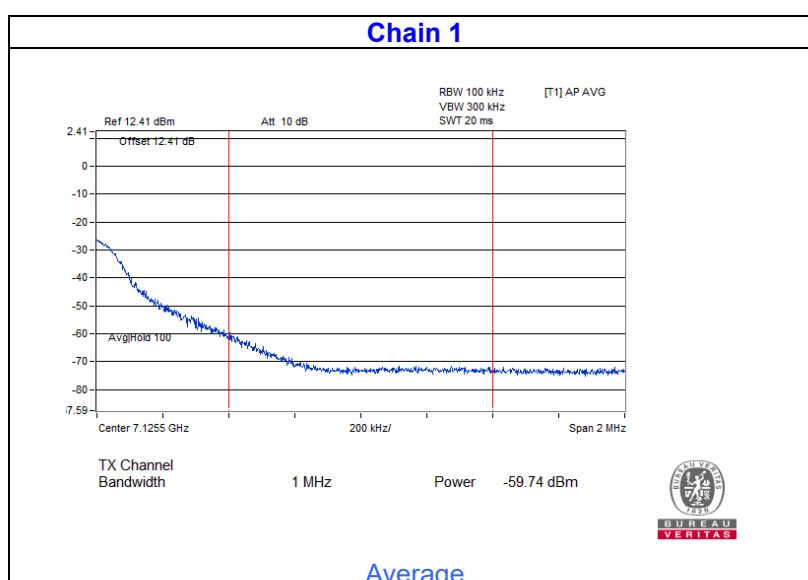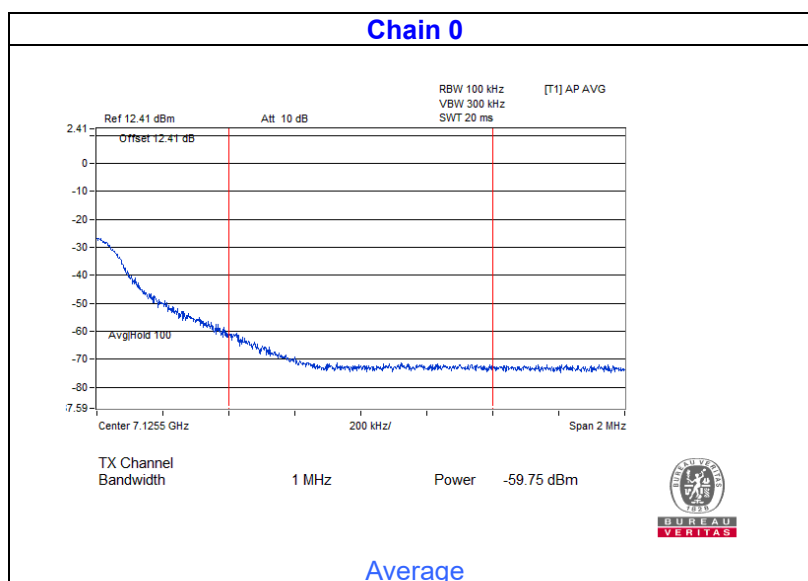


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5963.57	96.87 PK			-6.86	-5.56	4.76	1.61
2	*5963.57	89.47 AV			-13.72	-13.41	4.76	-5.79
3	#5871.23	62.92 PK	88.26	-25.34	-39.86	-40.38	4.76	-32.34
4	#5871.23	55.63 AV	68.26	-12.63	-47.58	-47.22	4.76	-39.63

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

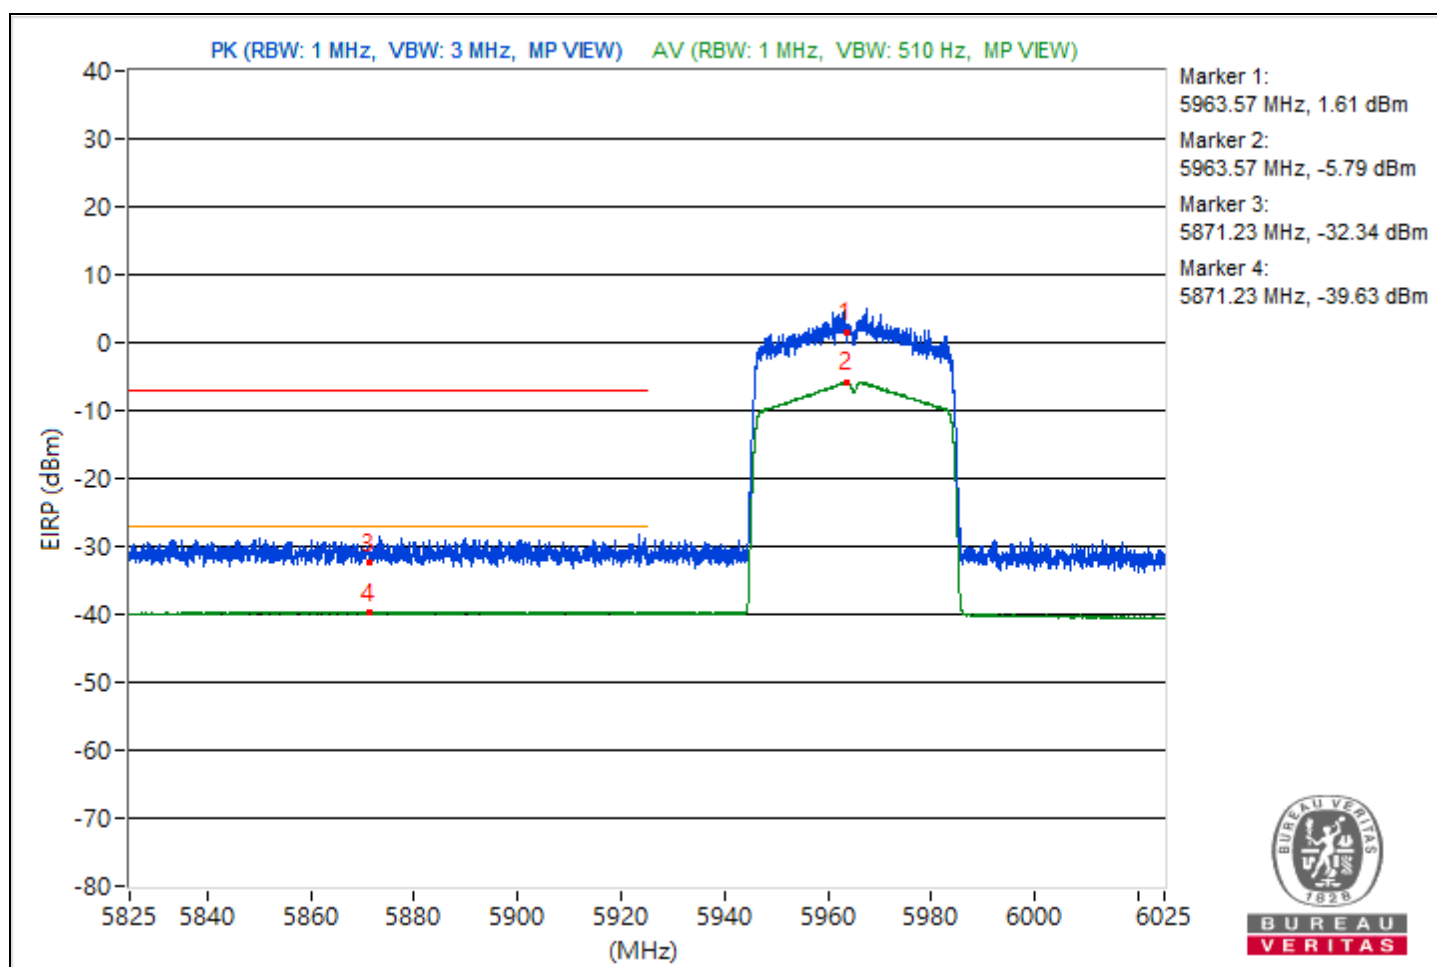


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7086.25	97.68 PK			-4.53	-4.84	4.09	2.42
2	*7086.25	89.31 AV			-12.96	-13.14	4.09	-5.95
3	#7210.68	52.97 PK	88.26	-35.29	-49.79	-49.03	4.09	-42.29
4	#7210.68	44.73 AV	68.26	-23.53	-57.46	-57.82	4.09	-50.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

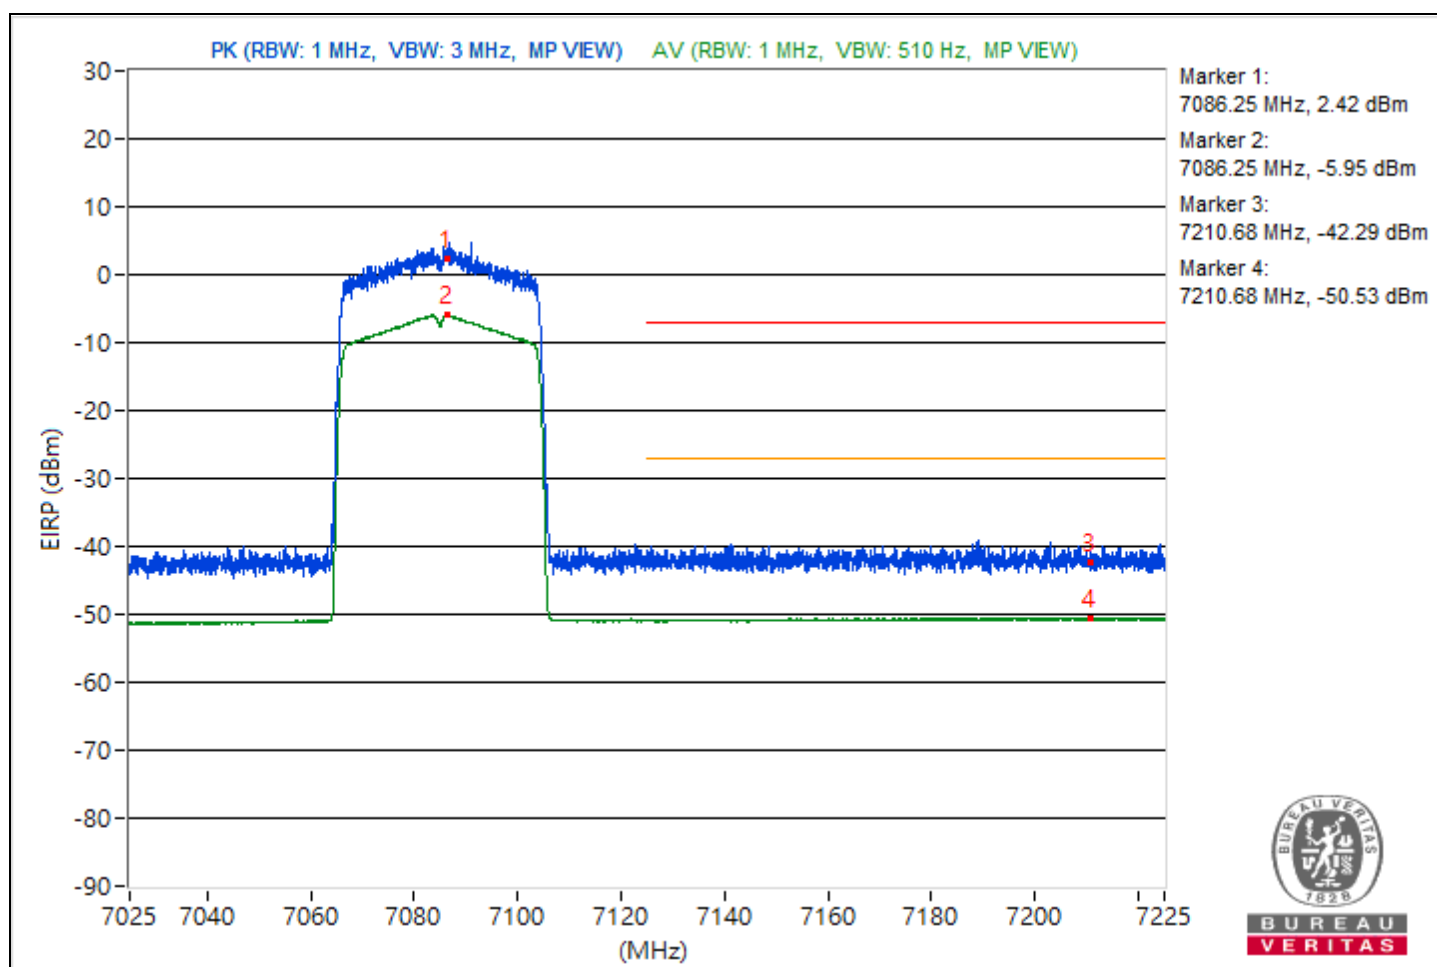


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5983.52	95.38 PK			-8.33	-7.07	4.76	0.12
2	*5983.52	88.19 AV			-14.8	-14.89	4.76	-7.07
3	#5851.25	65.77 PK	88.26	-22.49	-36.61	-38.01	4.76	-29.49
4	#5851.25	55.75 AV	68.26	-12.51	-47.47	-47.1	4.76	-39.51

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

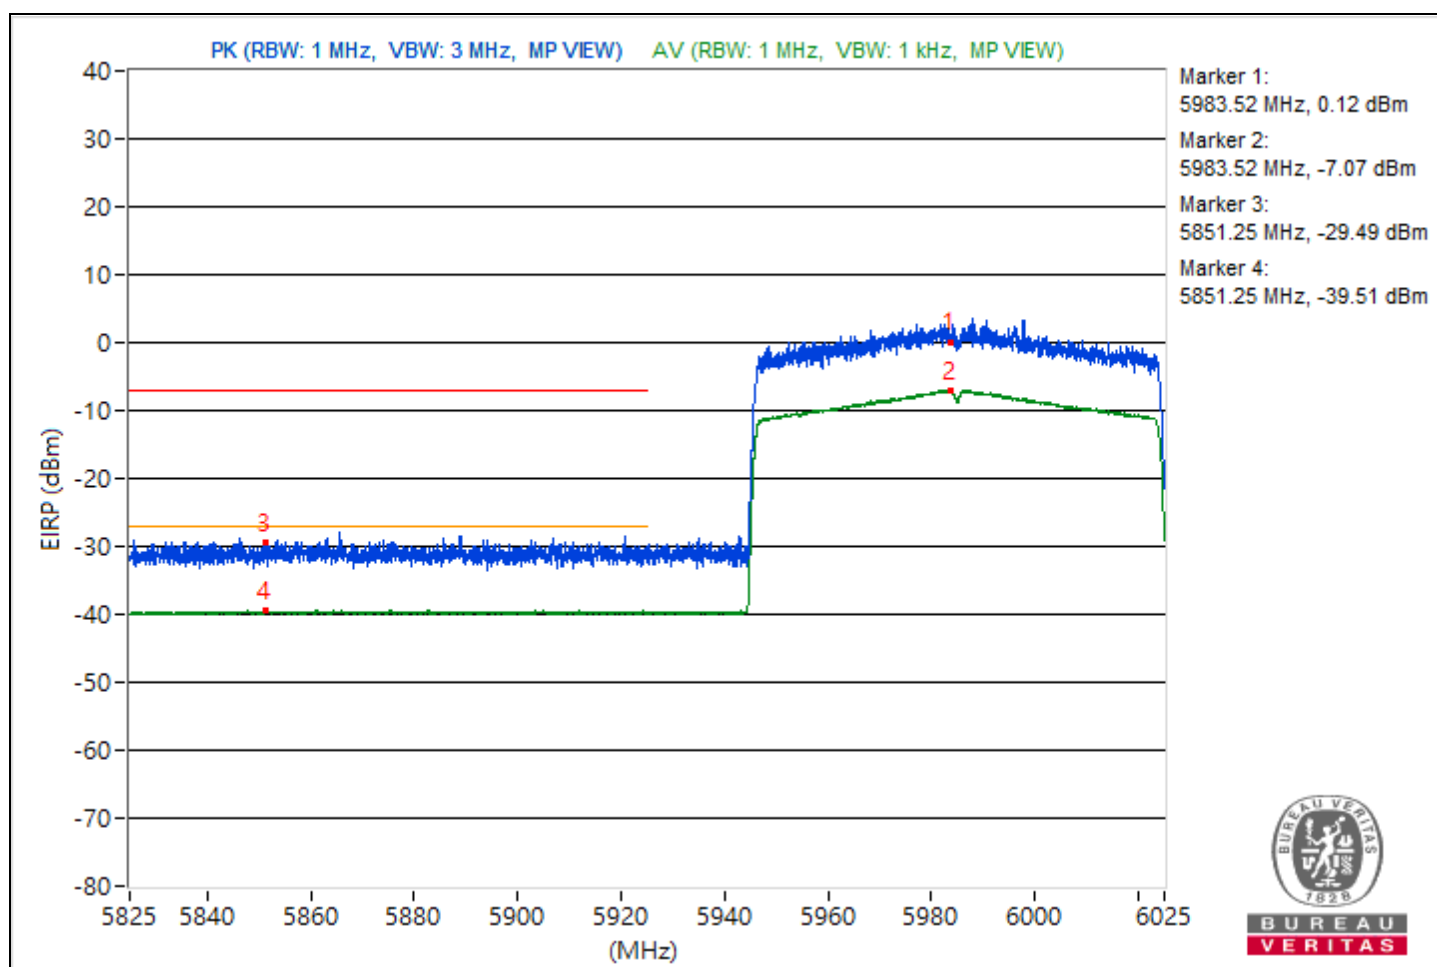


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7026.1	96.87 PK			-4.87	-6.22	4.09	1.61
2	*7026.1	88.4 AV			-14.04	-13.88	4.09	-6.86
3	#7198.43	52.42 PK	88.26	-35.84	-49.25	-50.76	4.09	-42.84
4	#7198.43	45.22 AV	68.26	-23.04	-57.22	-57.06	4.09	-50.04

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

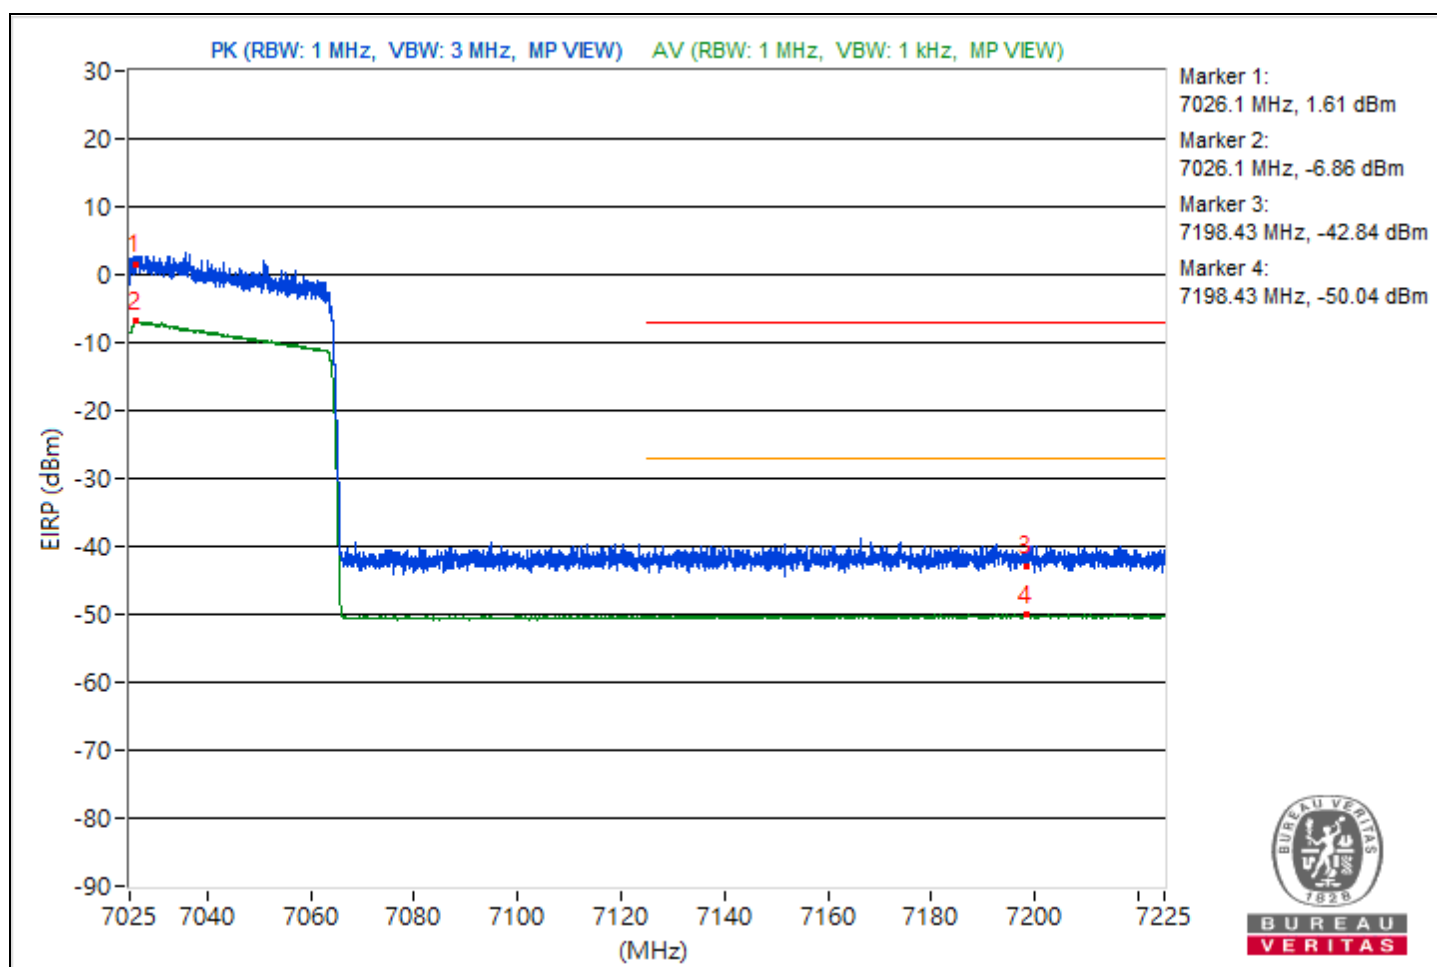


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.8	96.29 PK			-6.54	-6.95	4.76	1.03
2	*6022.8	87.69 AV			-15.7	-15	4.76	-7.57
3	#5859.07	64.19 PK	88.26	-24.07	-38.02	-39.87	4.76	-31.07
4	#5859.07	55.84 AV	68.26	-12.42	-47.31	-47.08	4.76	-39.42

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

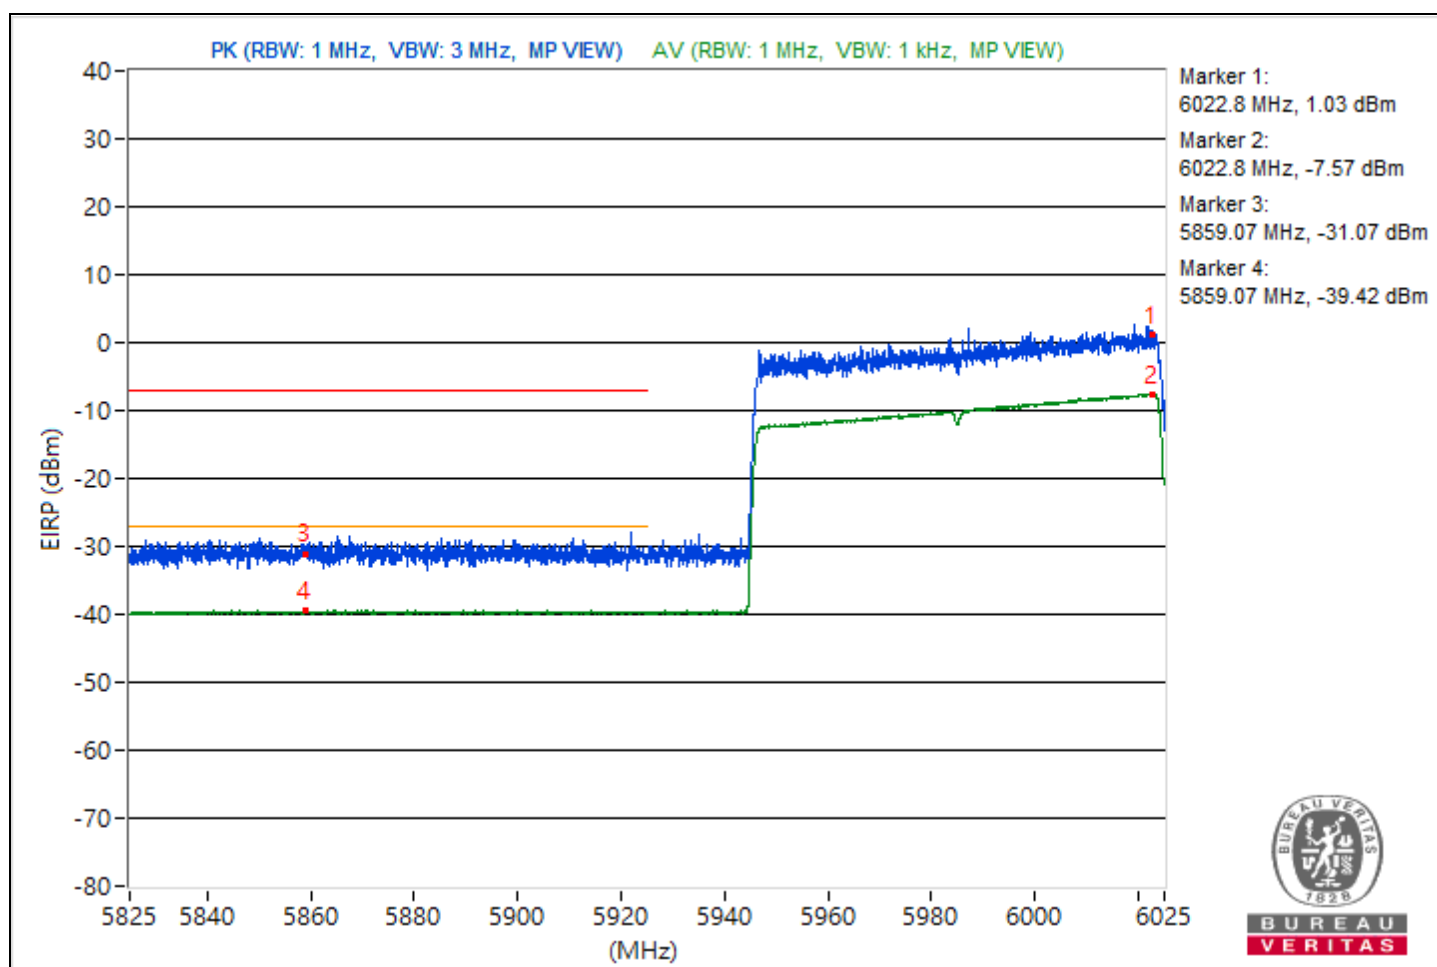


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7026.8	92.46 PK			-9.6	-10.22	4.09	-2.8
2	*7026.8	84.93 AV			-17.43	-17.44	4.09	-10.33
3	#7156.37	53.9 PK	88.26	-34.36	-47.21	-50.22	4.09	-41.36
4	#7156.37	45.12 AV	68.26	-23.14	-57.12	-57.35	4.09	-50.14

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

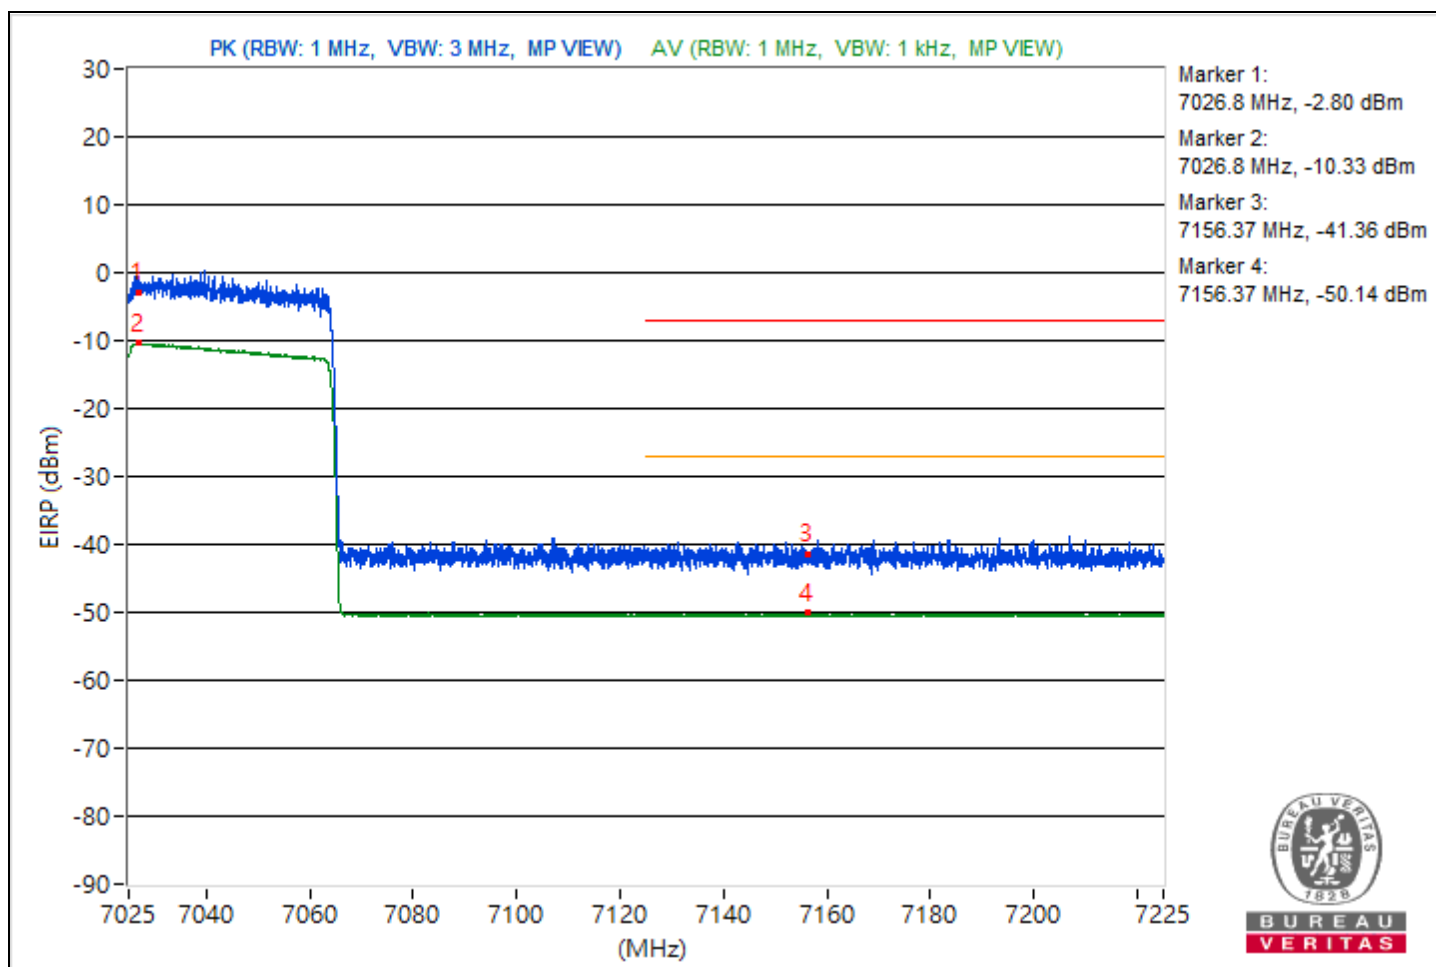


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.68	98.79 PK			-3.3	-5.44	4.76	3.53
2	*5946.68	89.5 AV			-13.46	-13.59	4.76	-5.76
3	#5865.62	65.49 PK	88.26	-22.77	-38.24	-36.94	4.76	-29.77
4	#5865.62	56.23 AV	68.26	-12.03	-46.5	-47.13	4.76	-39.03

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

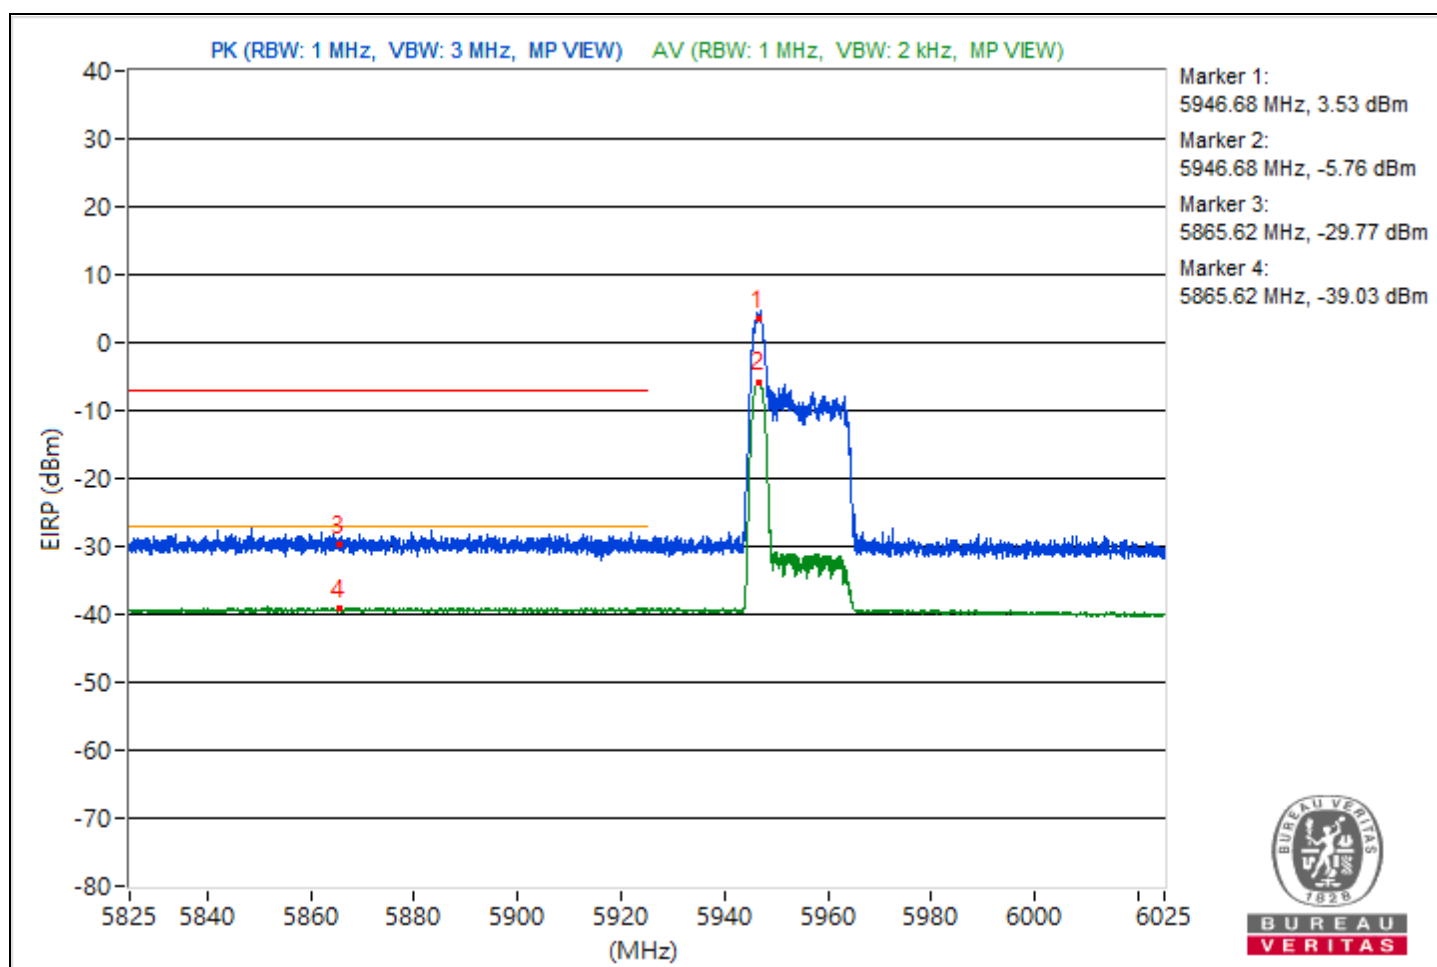

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Chun		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7123.62	93.32 PK			-8.42	-9.77	4.09	-1.94
2	*7123.62	86.76 AV			-15.56	-15.65	4.09	-8.5
3	#7125	86.93 PK	88.26	-1.33	-15.1	-15.78	4.09	-8.33
4	!7125	80.58 AV	68.26	12.32	-21.8	-21.75	4.09	-14.68

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.
 4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Integration method)

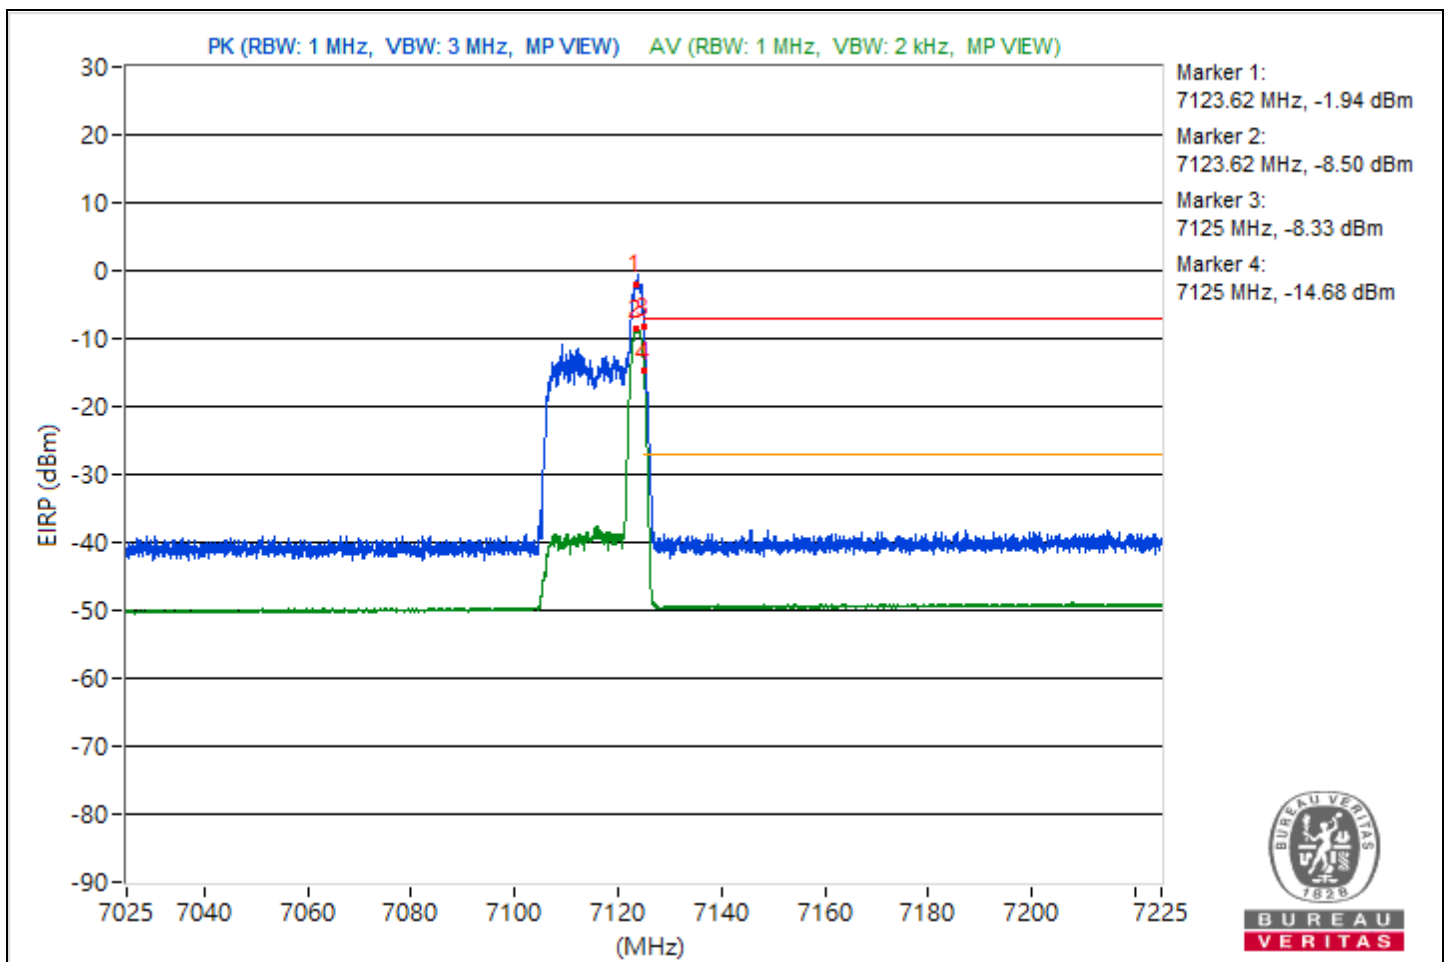



Integration method

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	Katina Lu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7125	56.17 AV	68.2	-12.03	-46.21	-46.18	4.09	-39.09

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

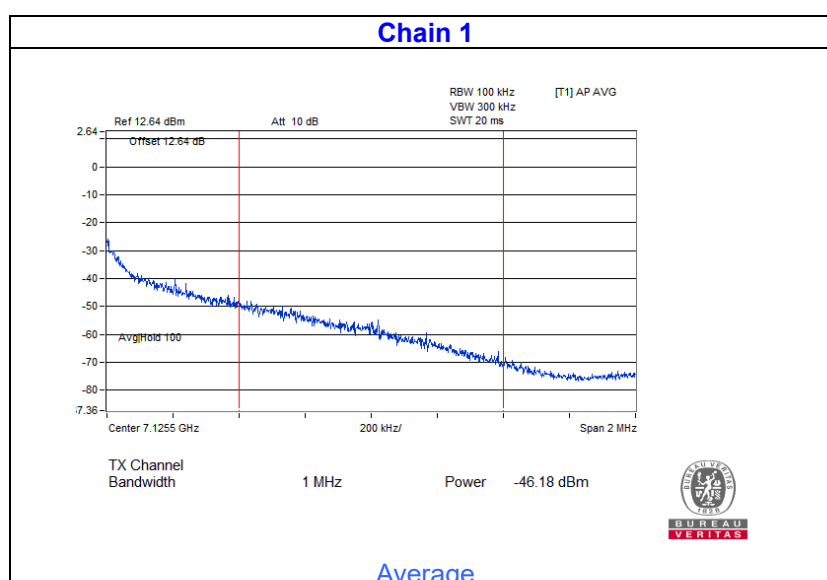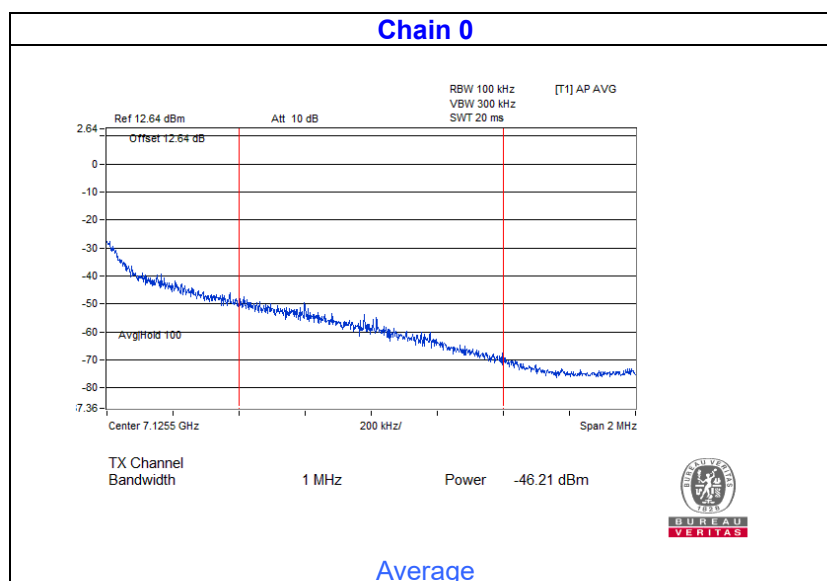


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5948.02	98.25 PK			-5.4	-4.23	4.76	2.99
2	*5948.02	89.28 AV			-13.66	-13.84	4.76	-5.98
3	#5898.25	64.86 PK	88.26	-23.4	-38.69	-37.71	4.76	-30.4
4	#5898.25	56.12 AV	68.26	-12.14	-47.26	-46.59	4.76	-39.14

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

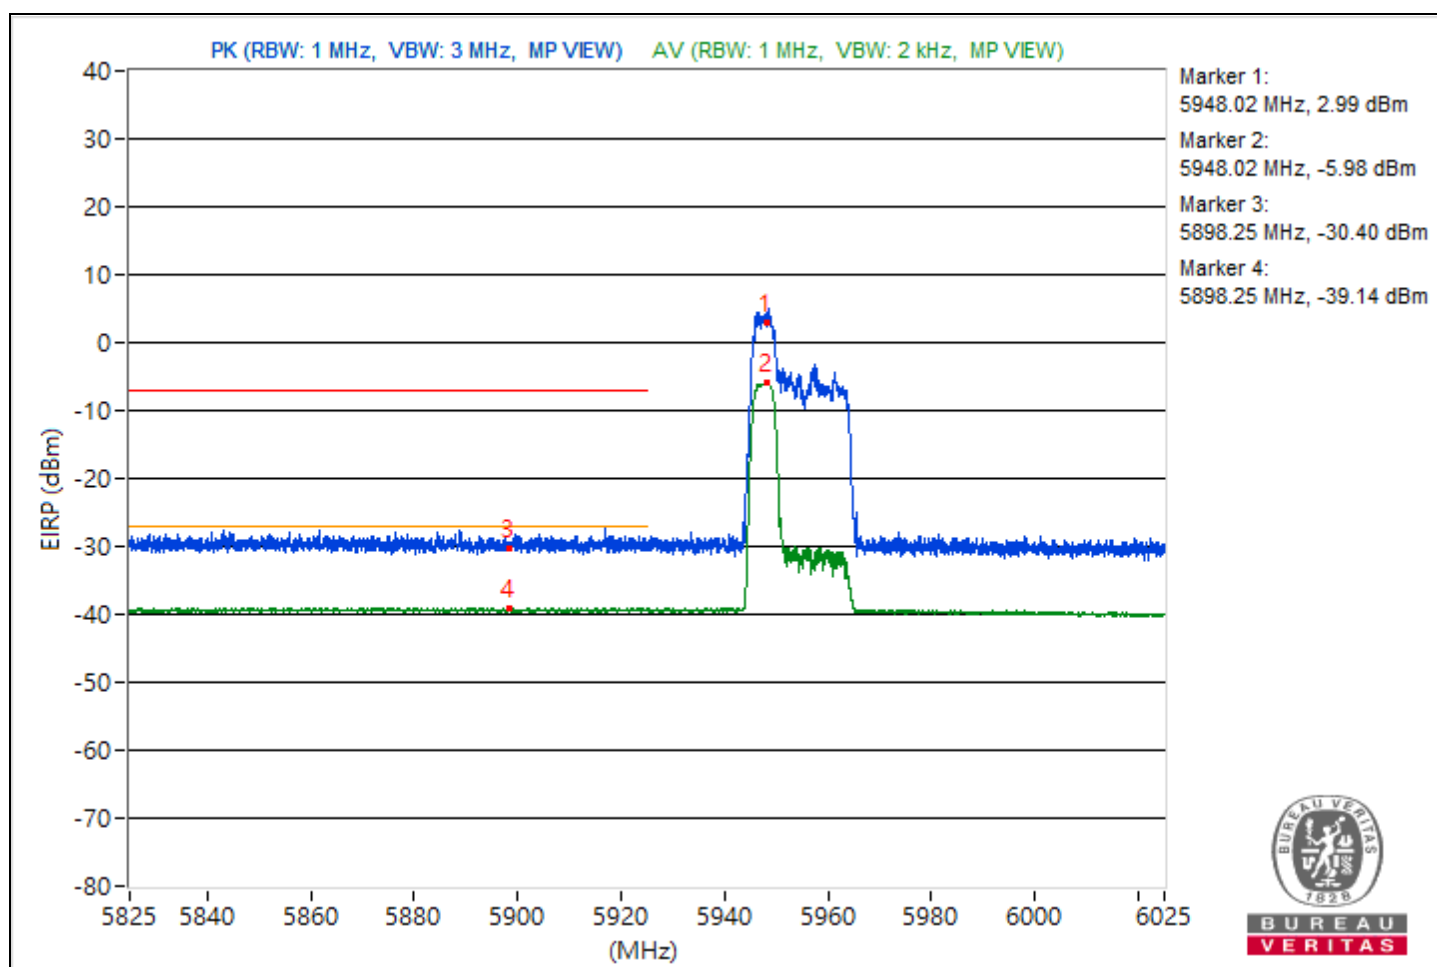

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Chun		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7122.95	94.03 PK			-8.91	-7.81	4.09	-1.23
2	*7122.95	87.26 AV			-14.92	-15.3	4.09	-8
3	#7125	86.65 PK	88.26	-1.61	-15.4	-16.04	4.09	-8.61
4	!#7125	81.11 AV	68.26	12.85	-21.01	-21.5	4.09	-14.15

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.
 4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Integration method.)

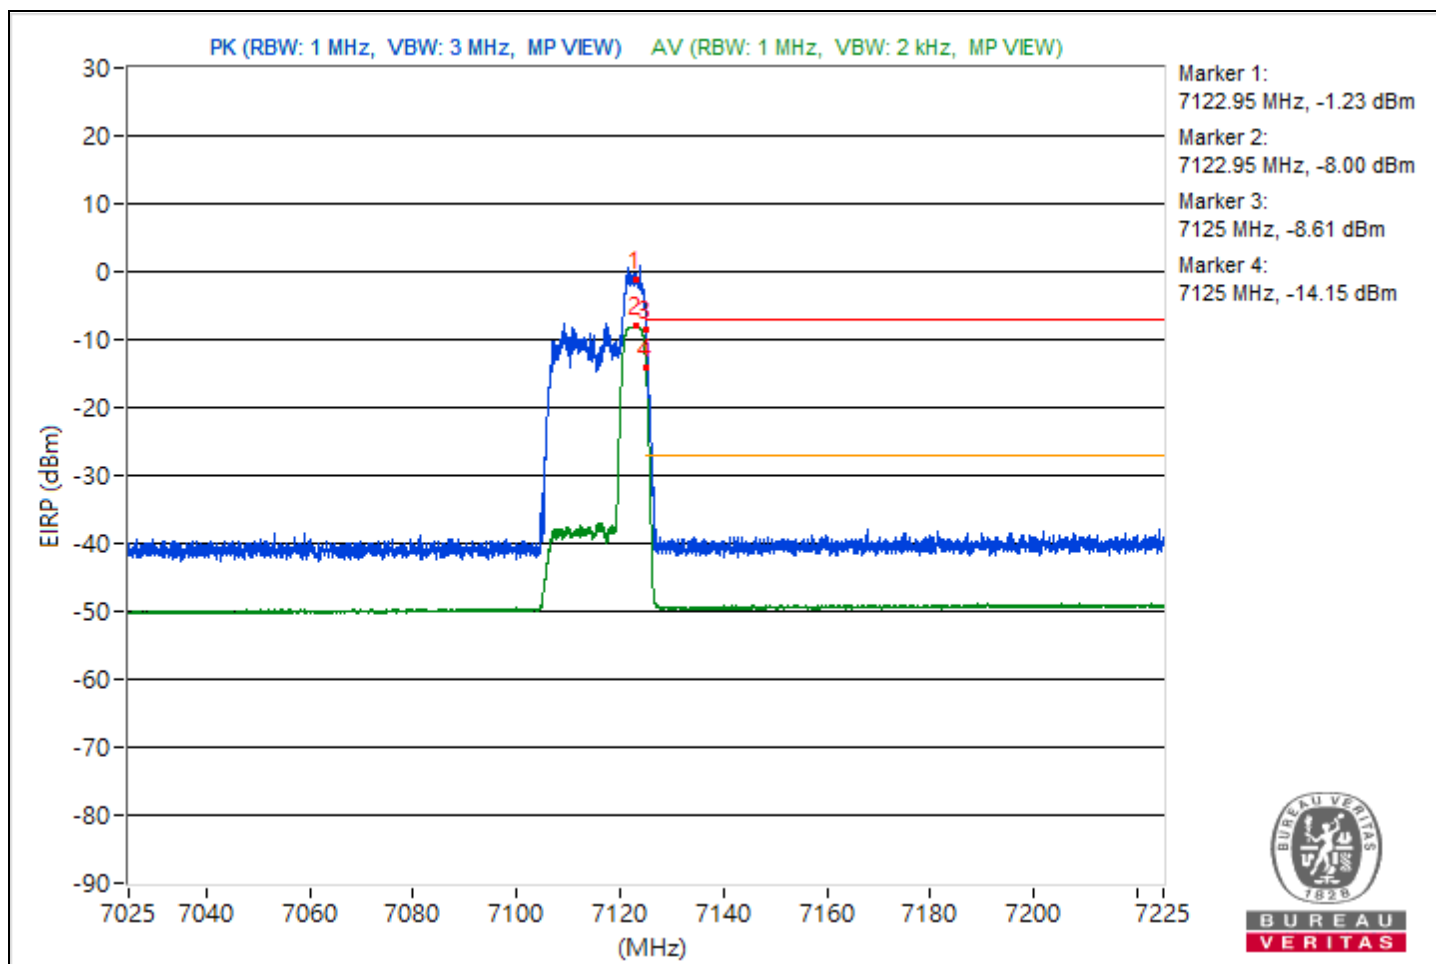



Integration method.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	Katina Lu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7125	56.3 AV	68.2	-11.9	-46.33	-45.8	4.09	-38.96

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

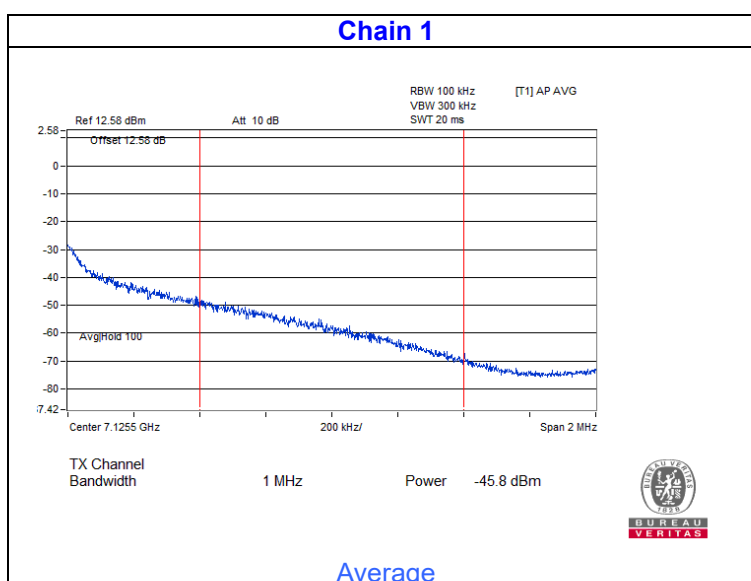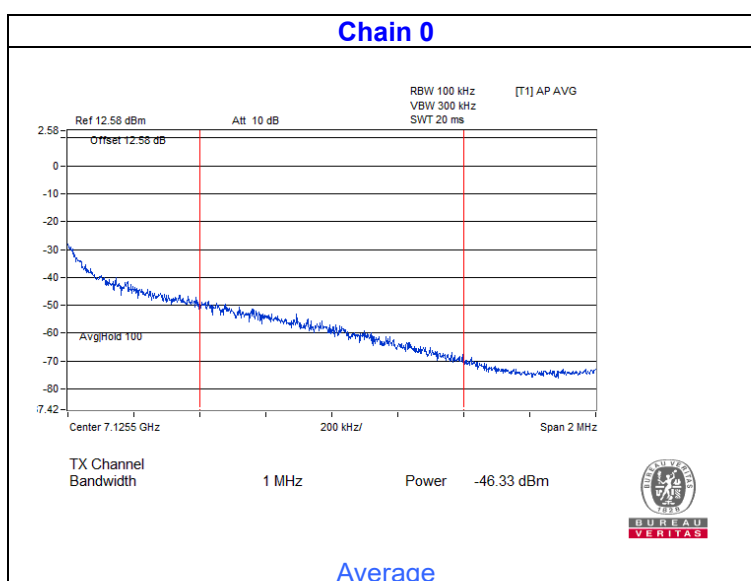


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5951.2	99.33 PK			-3.89	-3.51	4.76	4.07
2	*5951.2	89.42 AV			-13.51	-13.7	4.76	-5.84
3	#5855.43	65.01 PK	88.26	-23.25	-38.22	-37.83	4.76	-30.25
4	#5855.43	56.18 AV	68.26	-12.08	-46.5	-47.24	4.76	-39.08

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

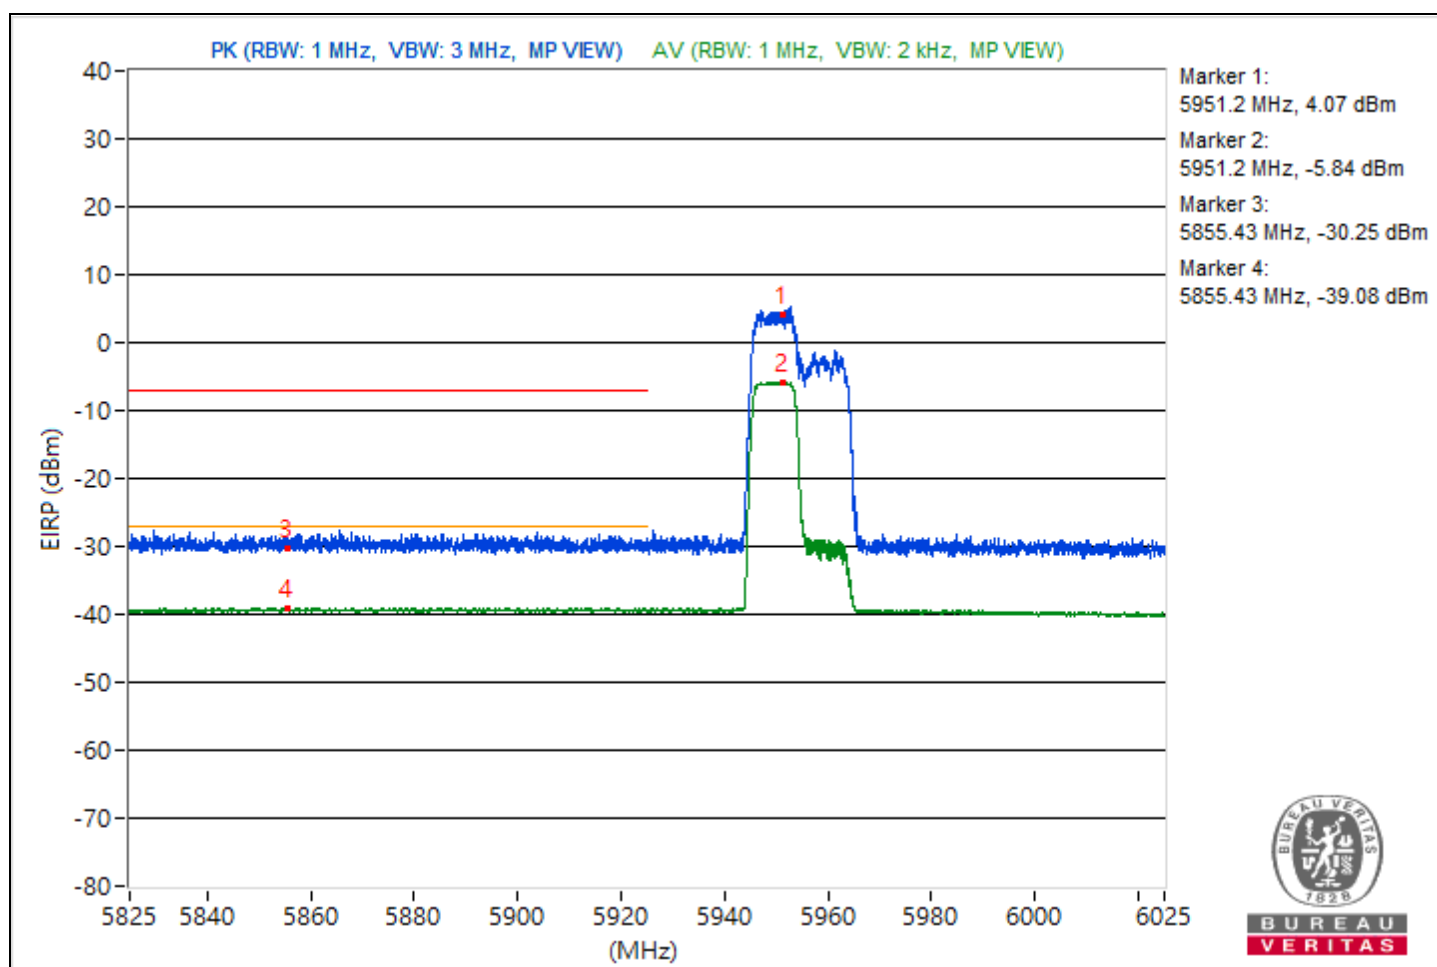

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Chun		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7119	92 PK			-9.89	-10.9	4.09	-3.26
2	*7119	86.42 AV			-15.99	-15.88	4.09	-8.84
3	#7125	86.9 PK	88.26	-1.36	-15.33	-15.6	4.09	-8.36
4	!#7125	80.78 AV	68.26	12.52	-21.6	-21.57	4.09	-14.48

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.
 4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Integration method.)

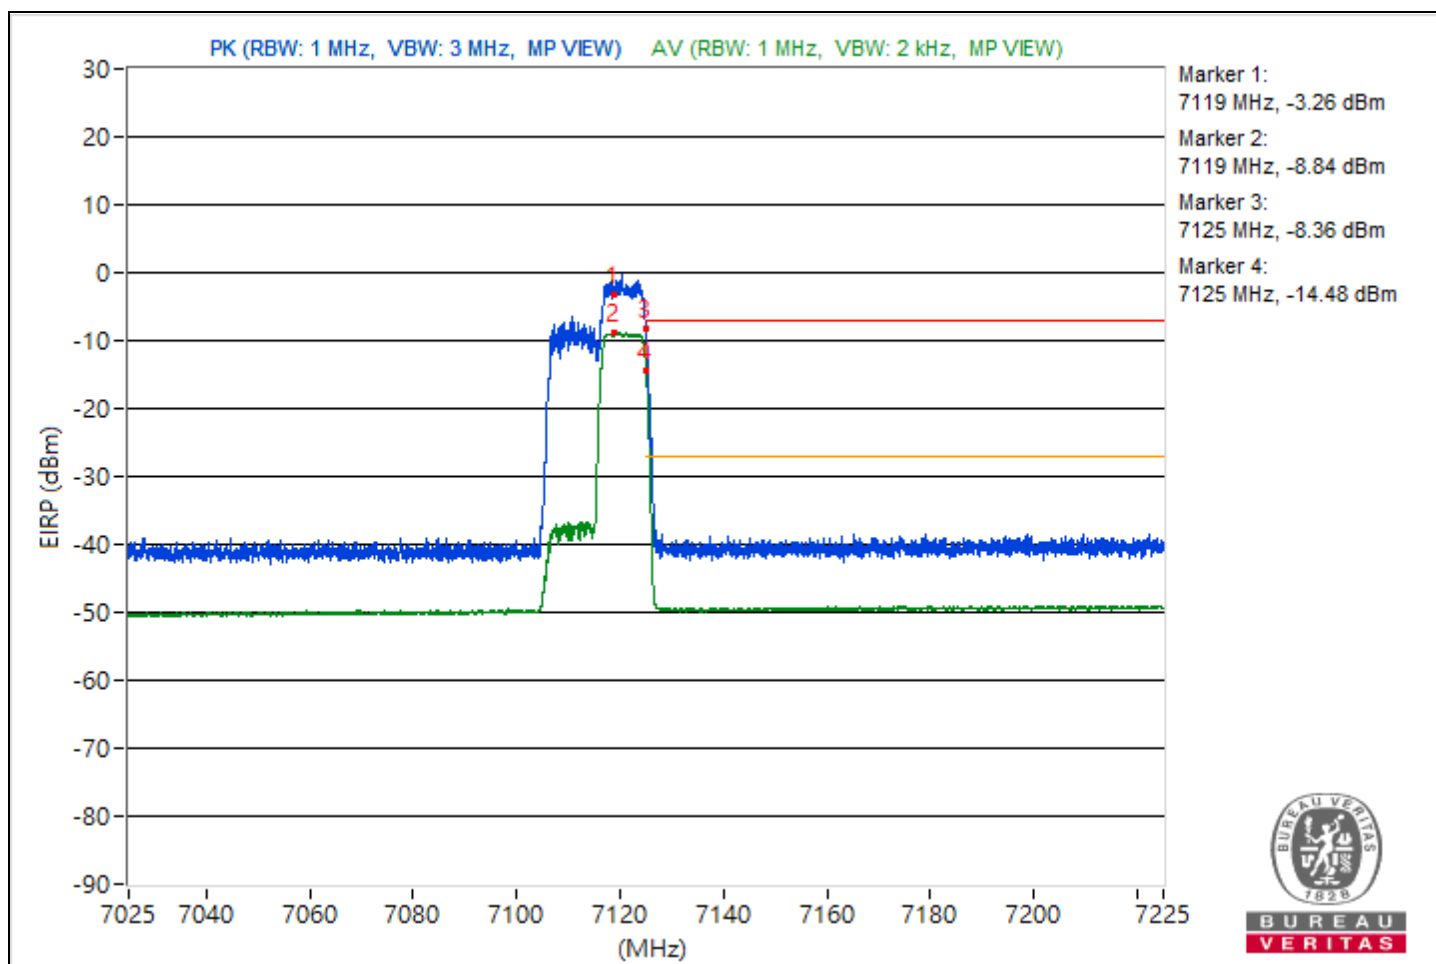



Integration method.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	Katina Lu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7125	57.31 AV	68.2	-10.89	-45.24	-44.87	4.09	-37.95

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

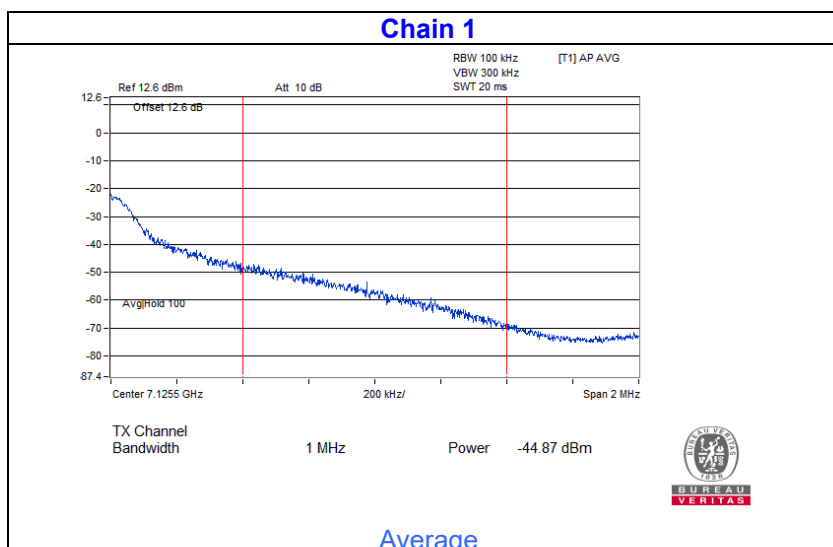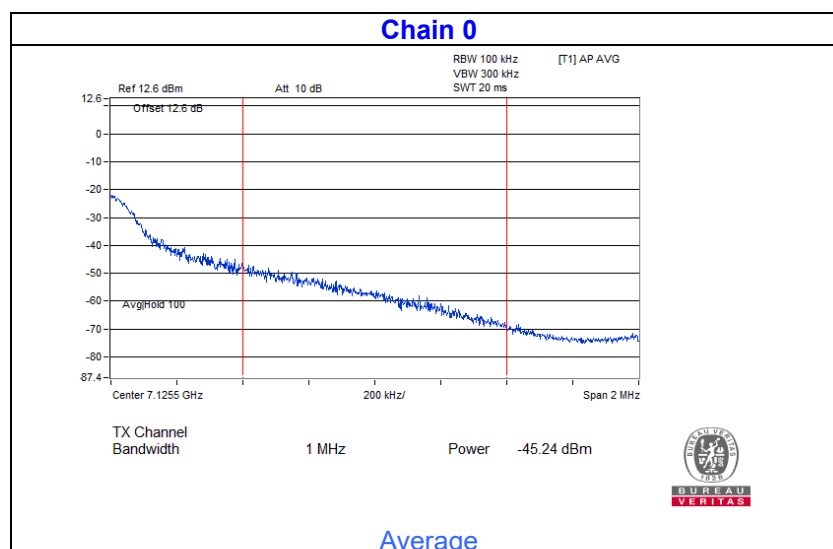


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5952.37	98.18 PK			-5.52	-4.28	4.76	2.92
2	*5952.37	89.86 AV			-13.4	-12.96	4.76	-5.4
3	#5910.52	65 PK	88.26	-23.26	-38.33	-37.75	4.76	-30.26
4	#5910.52	56.24 AV	68.26	-12.02	-47.07	-46.53	4.76	-39.02

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

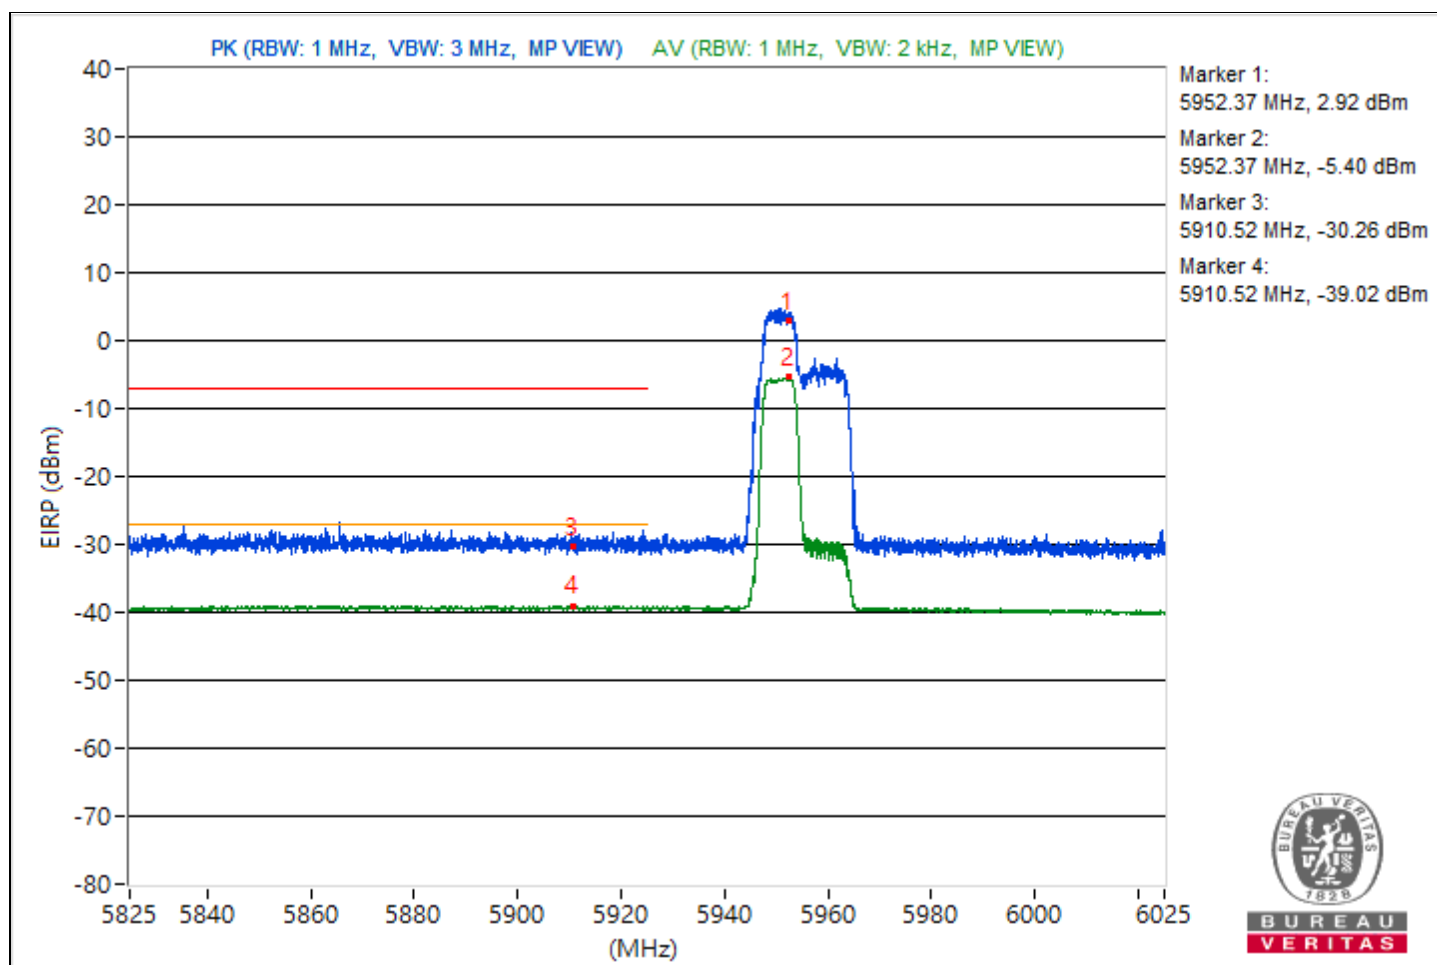


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7118.25	99.47 PK			-2.87	-2.91	4.09	4.21
2	*7118.25	89.83 AV			-12.76	-12.3	4.09	-5.43
3	#7125	75.21 PK	88.26	-13.05	-26.24	-28.31	4.09	-20.05
4	#7125	47.87 AV	68.26	-20.39	-54.2	-54.81	4.09	-47.39

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

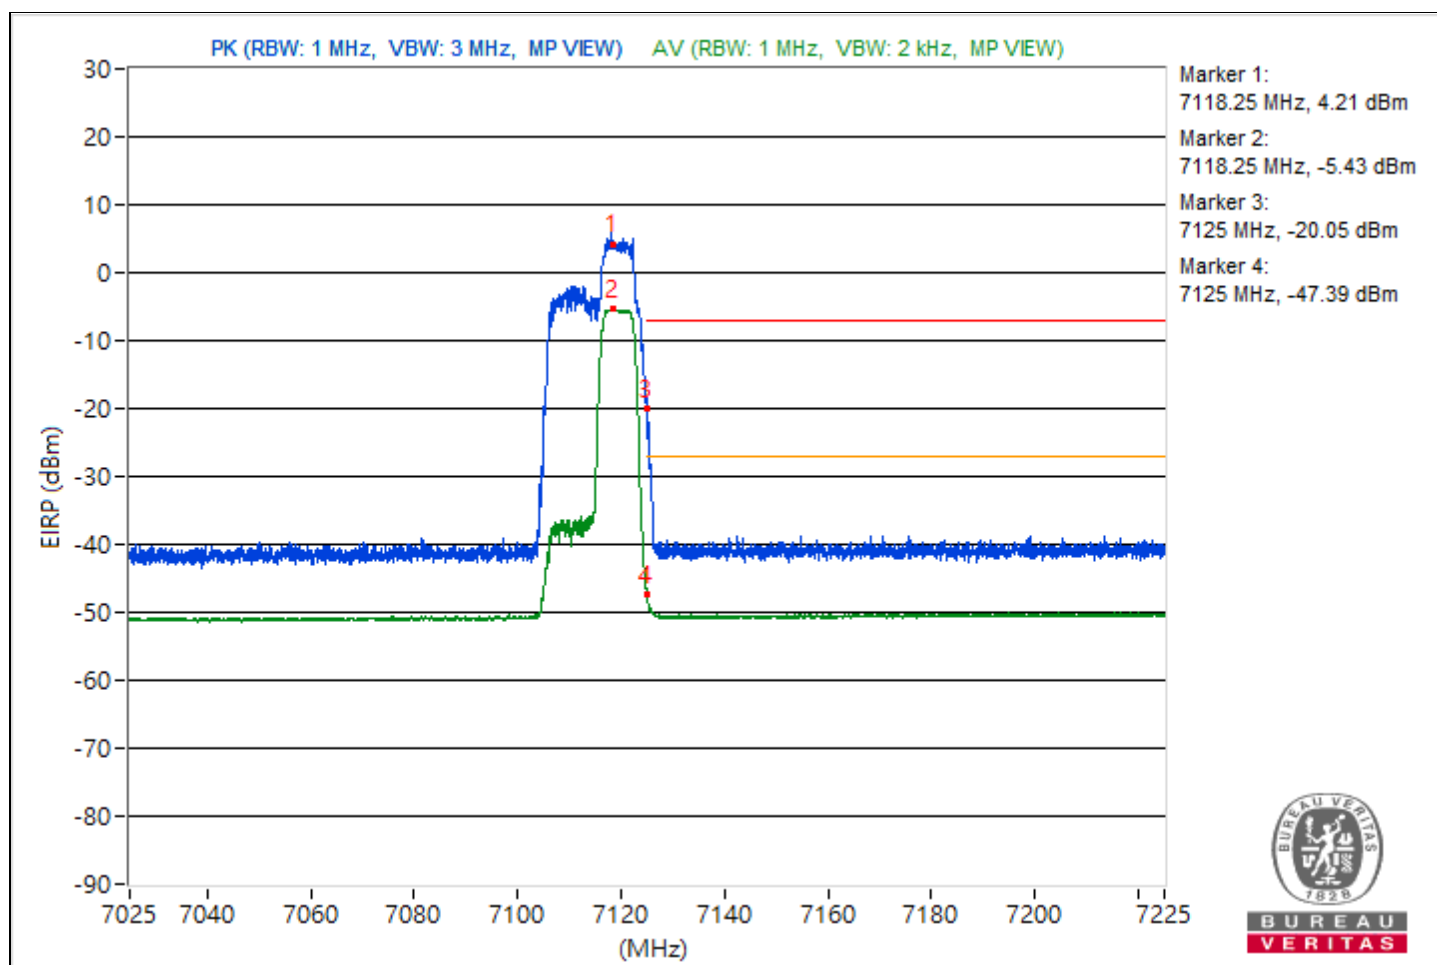


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.52	99.42 PK			-2.9	-4.46	4.76	4.16
2	*5953.52	89.79 AV			-13.21	-13.28	4.76	-5.47
3	#5882.87	64.89 PK	88.26	-23.37	-38.07	-38.22	4.76	-30.37
4	#5882.87	56.17 AV	68.26	-12.09	-46.53	-47.2	4.76	-39.09

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

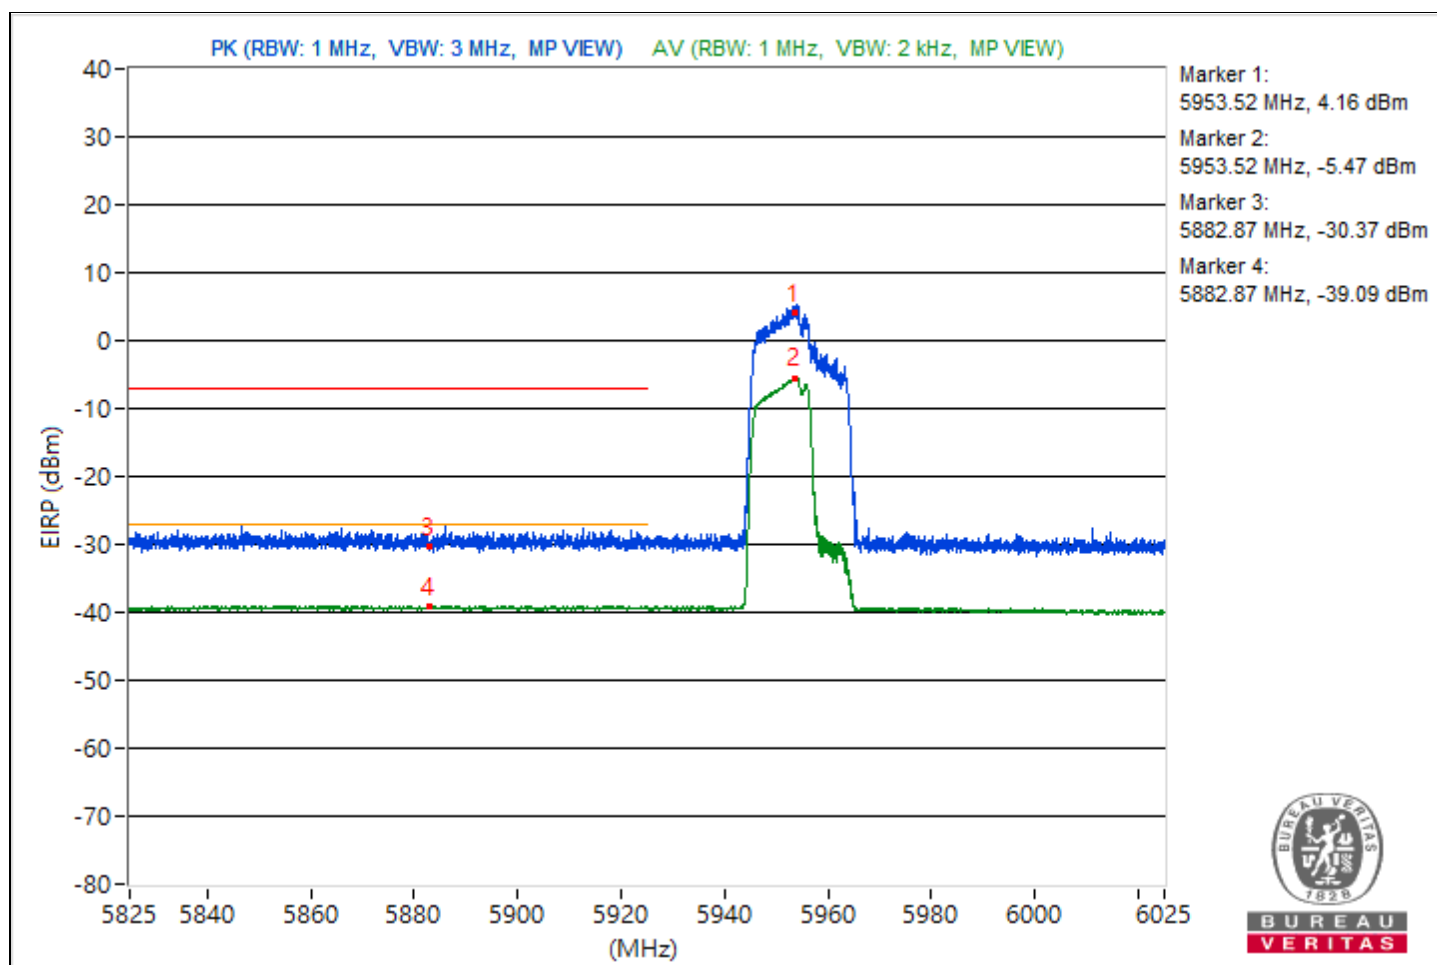


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Chun		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7121.32	93.51 PK			-9.41	-8.35	4.09	-1.75
2	*7121.32	86.29 AV			-16.37	-15.79	4.09	-8.97
3	#7125	87.72 PK	88.26	-0.54	-14.25	-15.05	4.09	-7.54
4	!7125	80.78 AV	68.26	12.52	-21.5	-21.66	4.09	-14.48

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Integration method.)

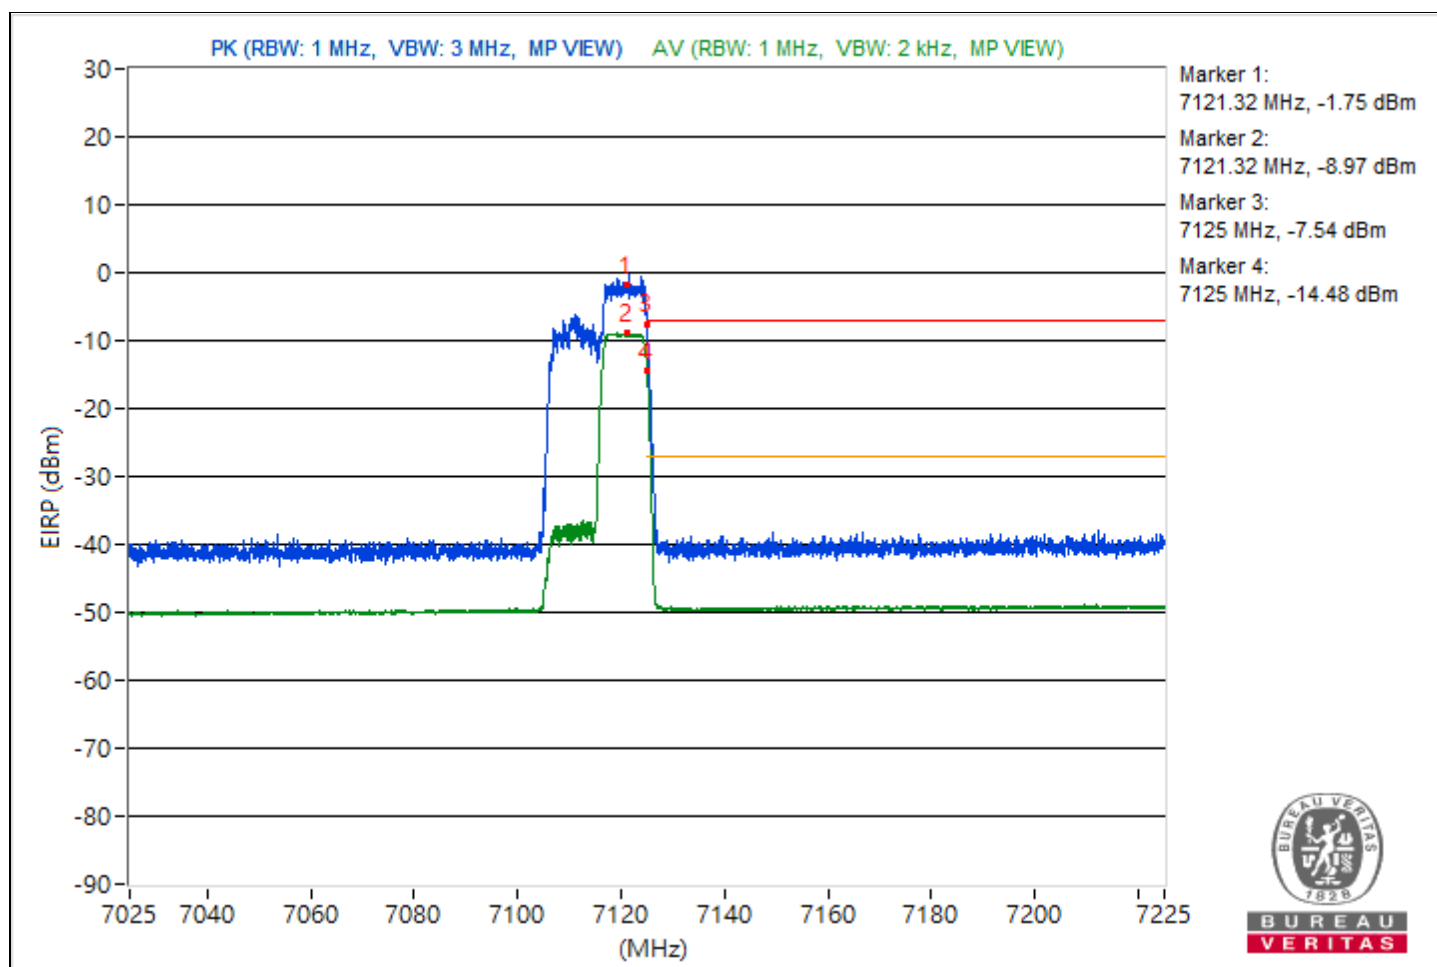



Integration method.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	Katina Lu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7125	53.71 AV	68.2	-14.49	-48.76	-48.55	4.09	-41.55

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

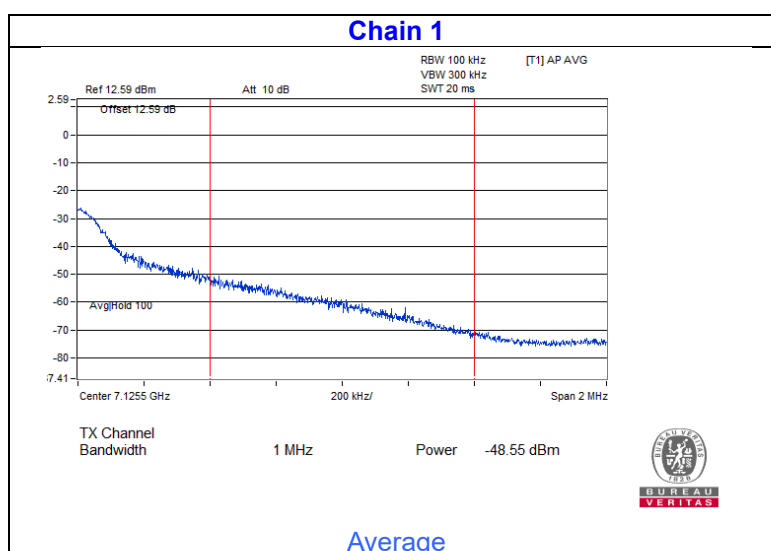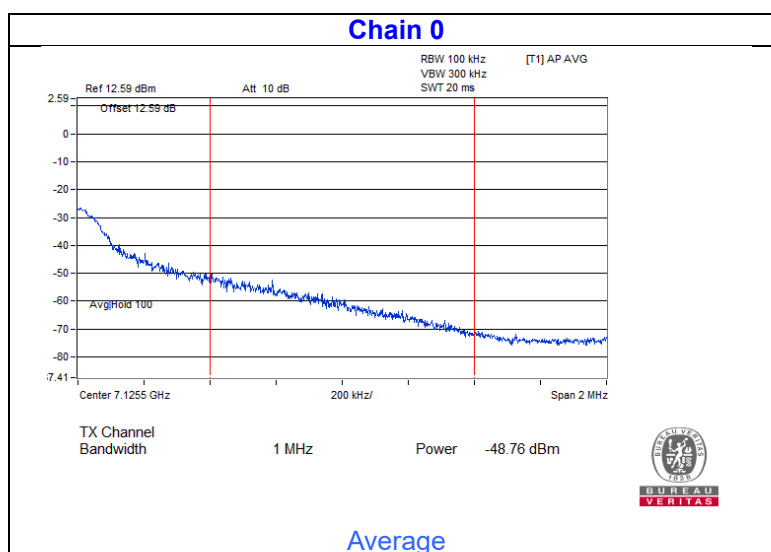


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5983.18	97.65 PK			-6.94	-4.24	4.76	2.39
2	*5983.18	89.66 AV			-13.38	-13.35	4.76	-5.6
3	#5873.73	63.52 PK	88.26	-24.74	-39.65	-39.37	4.76	-31.74
4	#5873.73	56.18 AV	68.26	-12.08	-47.3	-46.44	4.76	-39.08

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

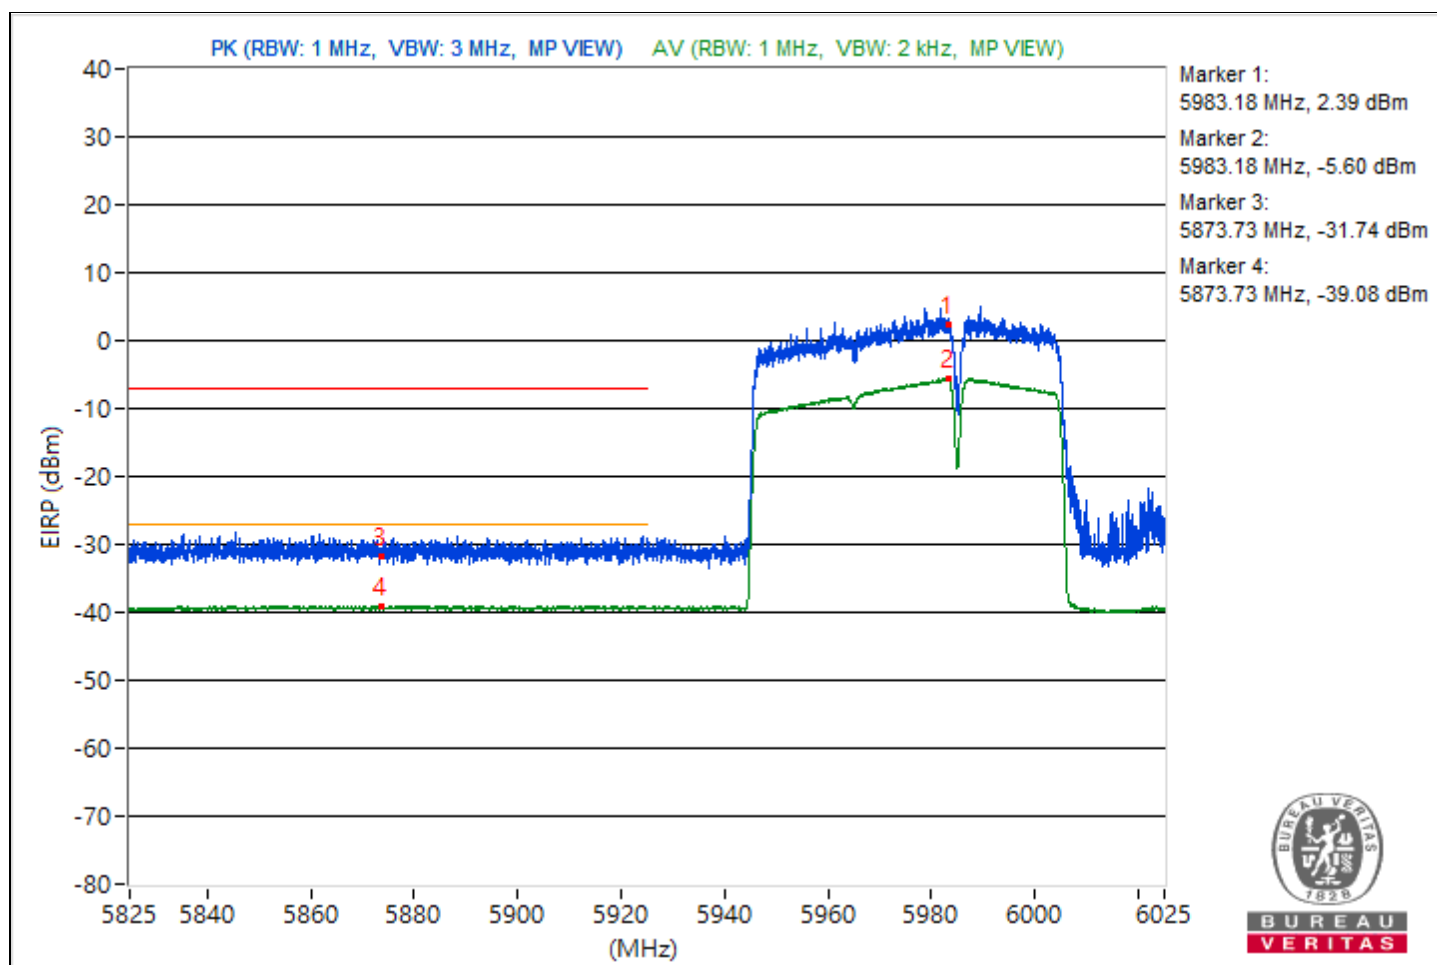


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7026.8	98.34 PK			-3.03	-5.31	4.09	3.08
2	*7026.8	89.81 AV			-12.55	-12.55	4.09	-5.45
3	#7221.2	53.34 PK	88.26	-34.92	-49.01	-49.03	4.09	-41.92
4	#7221.2	45.51 AV	68.26	-22.75	-57.15	-56.56	4.09	-49.75

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

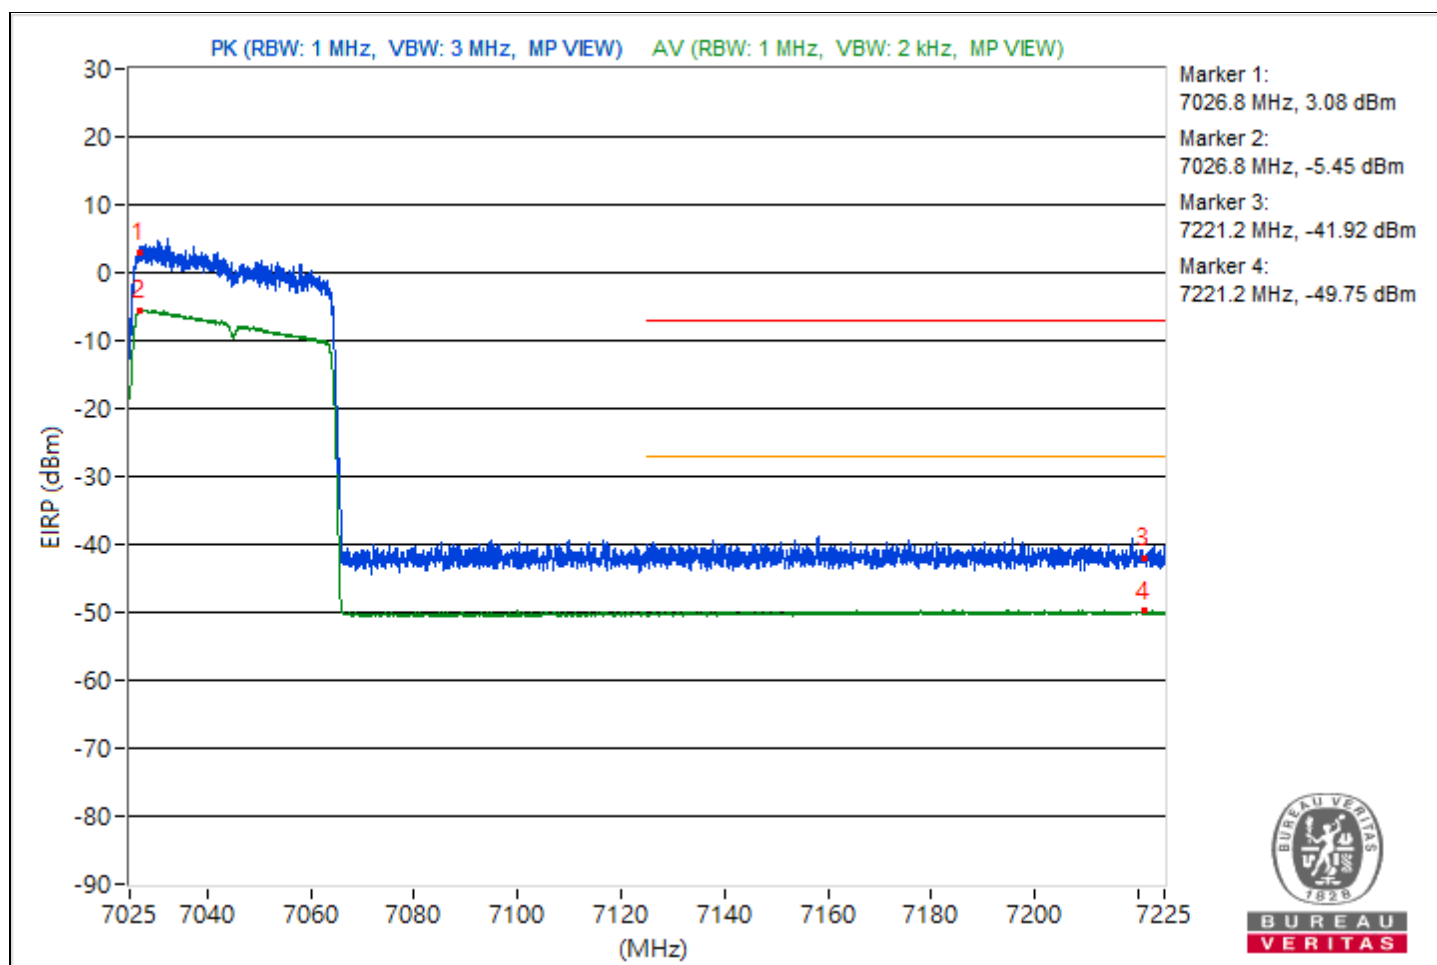


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6021.93	97.51 PK			-5.56	-5.47	4.76	2.25
2	*6021.93	88.58 AV			-14.37	-14.53	4.76	-6.68
3	#5837.1	63.29 PK	88.26	-24.97	-39.18	-40.38	4.76	-31.97
4	#5837.1	56.24 AV	68.26	-12.02	-46.36	-47.27	4.76	-39.02

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

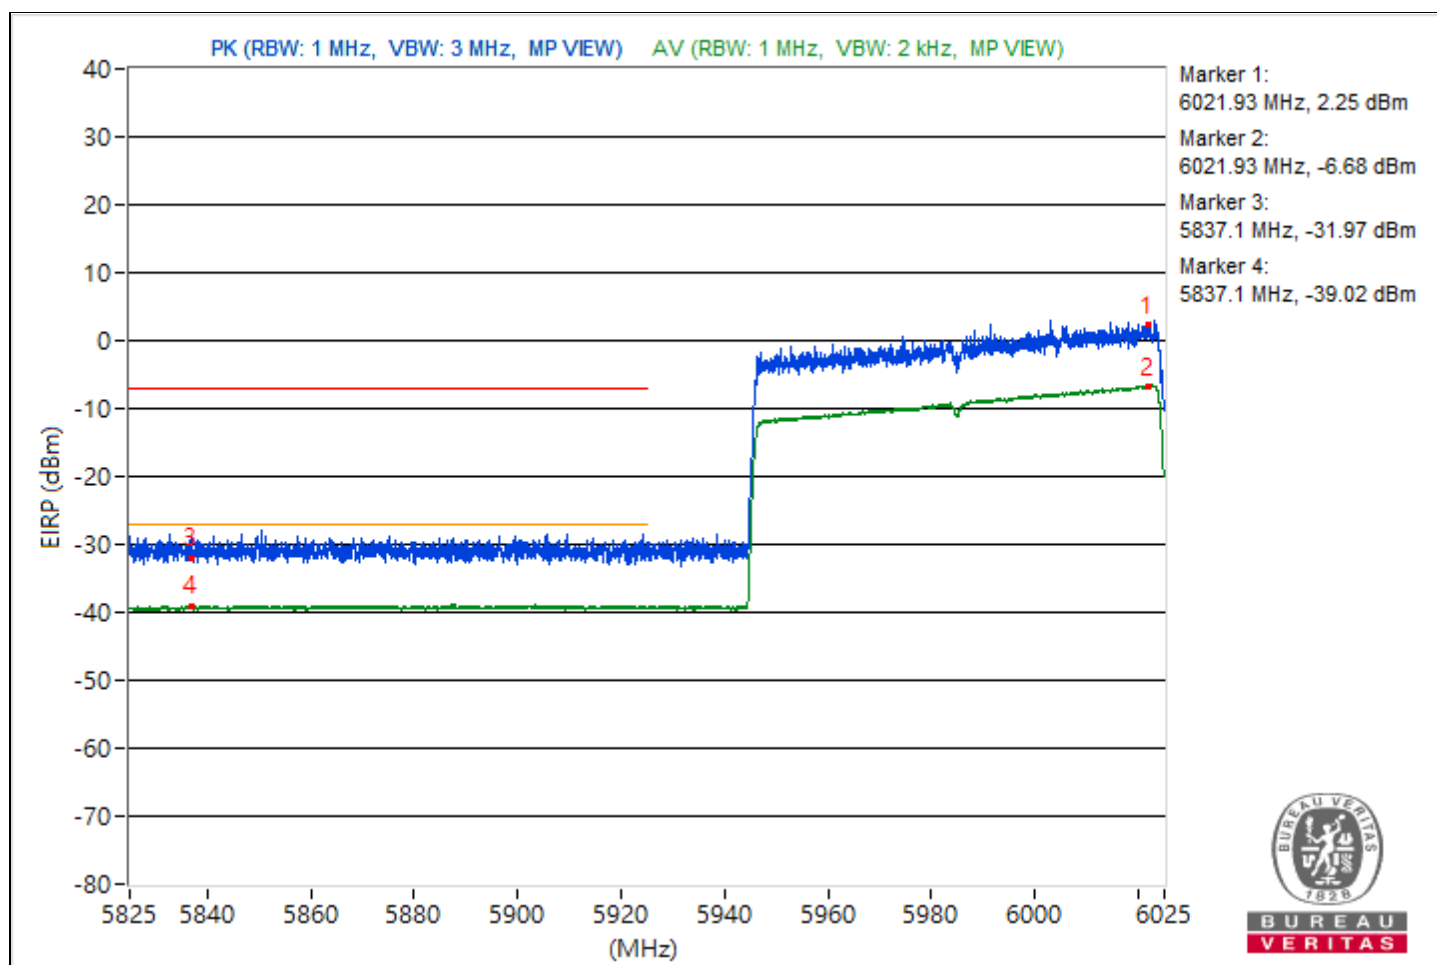


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7027.35	94.36 PK			-7.14	-9.06	4.09	-0.9
2	*7027.35	85.8 AV			-16.51	-16.61	4.09	-9.46
3	#7172.45	53.75 PK	88.26	-34.51	-47.09	-50.97	4.09	-41.51
4	#7172.45	45.35 AV	68.26	-22.91	-56.61	-57.46	4.09	-49.91

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

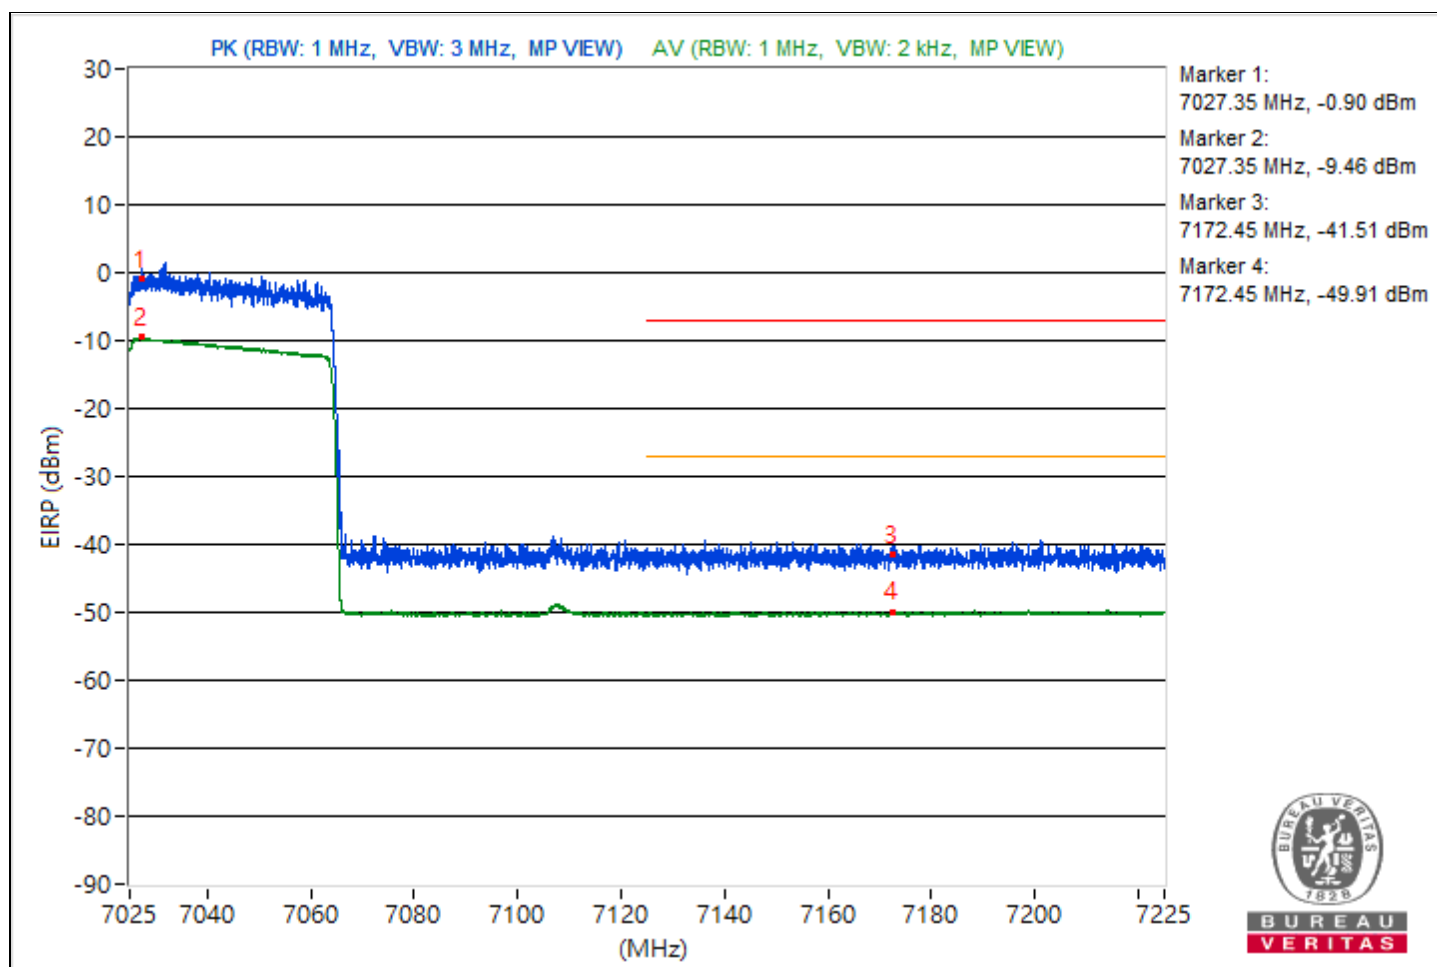


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.12	95.07 PK			-8.24	-7.69	4.76	-0.19
2	*6022.12	88.14 AV			-15.19	-14.61	4.76	-7.12
3	#5906.3	65.44 PK	88.26	-22.82	-37.9	-37.29	4.76	-29.82
4	#5906.3	56.31 AV	68.26	-11.95	-46.29	-47.2	4.76	-38.95

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

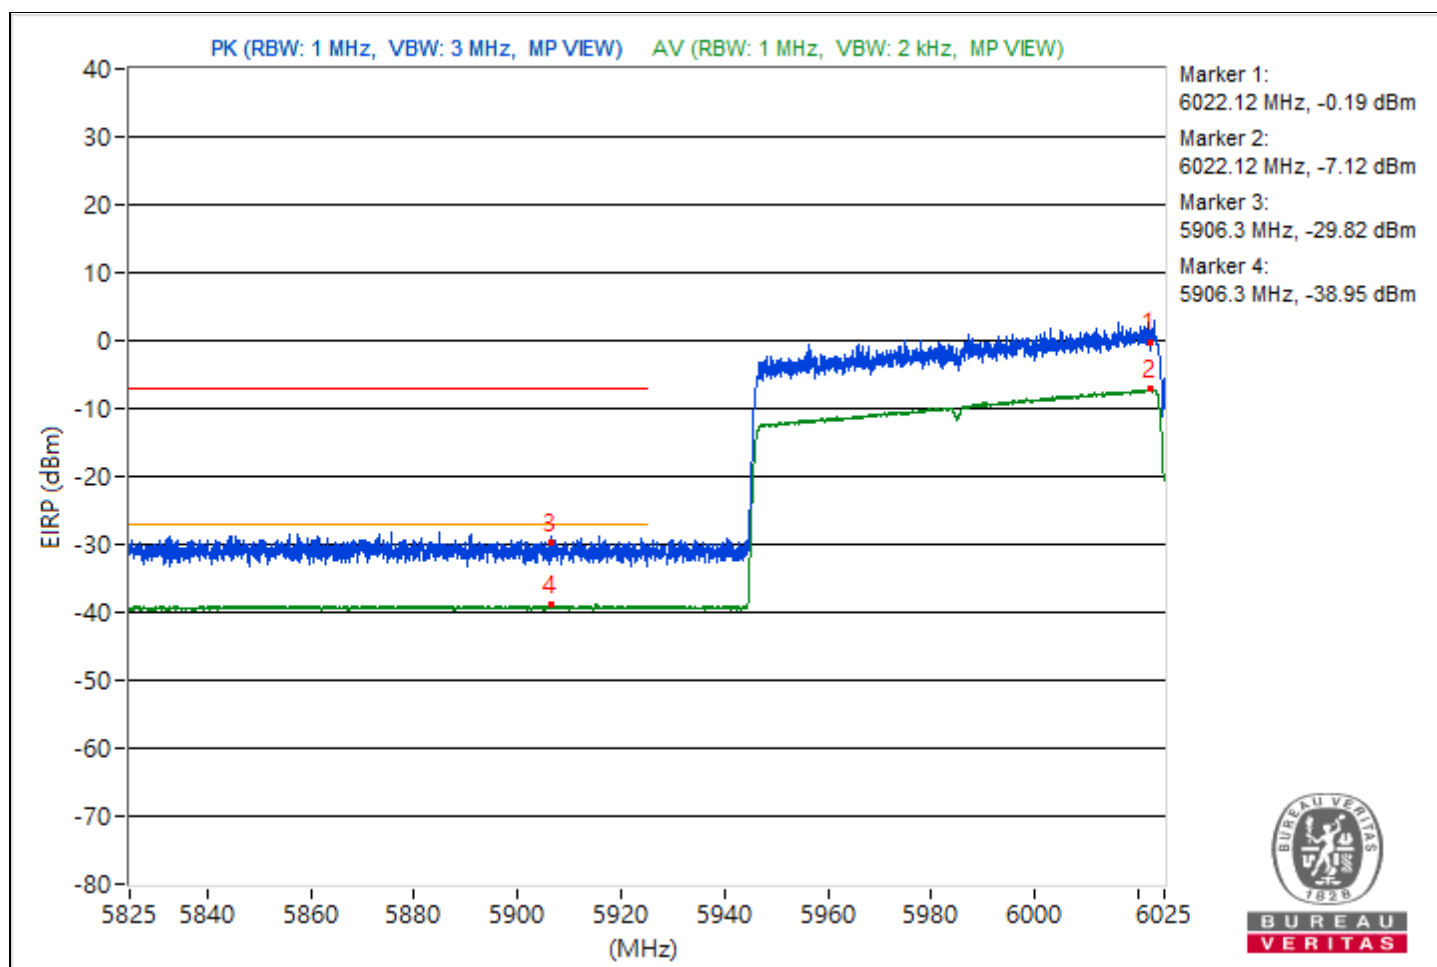


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7026.32	93.02 PK			-10.59	-8.38	4.09	-2.24
2	*7026.32	85.13 AV			-17.27	-17.2	4.09	-10.13
3	#7192.52	53.28 PK	88.26	-34.98	-48.76	-49.42	4.09	-41.98
4	#7192.52	45.39 AV	68.26	-22.87	-57.25	-56.71	4.09	-49.87

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

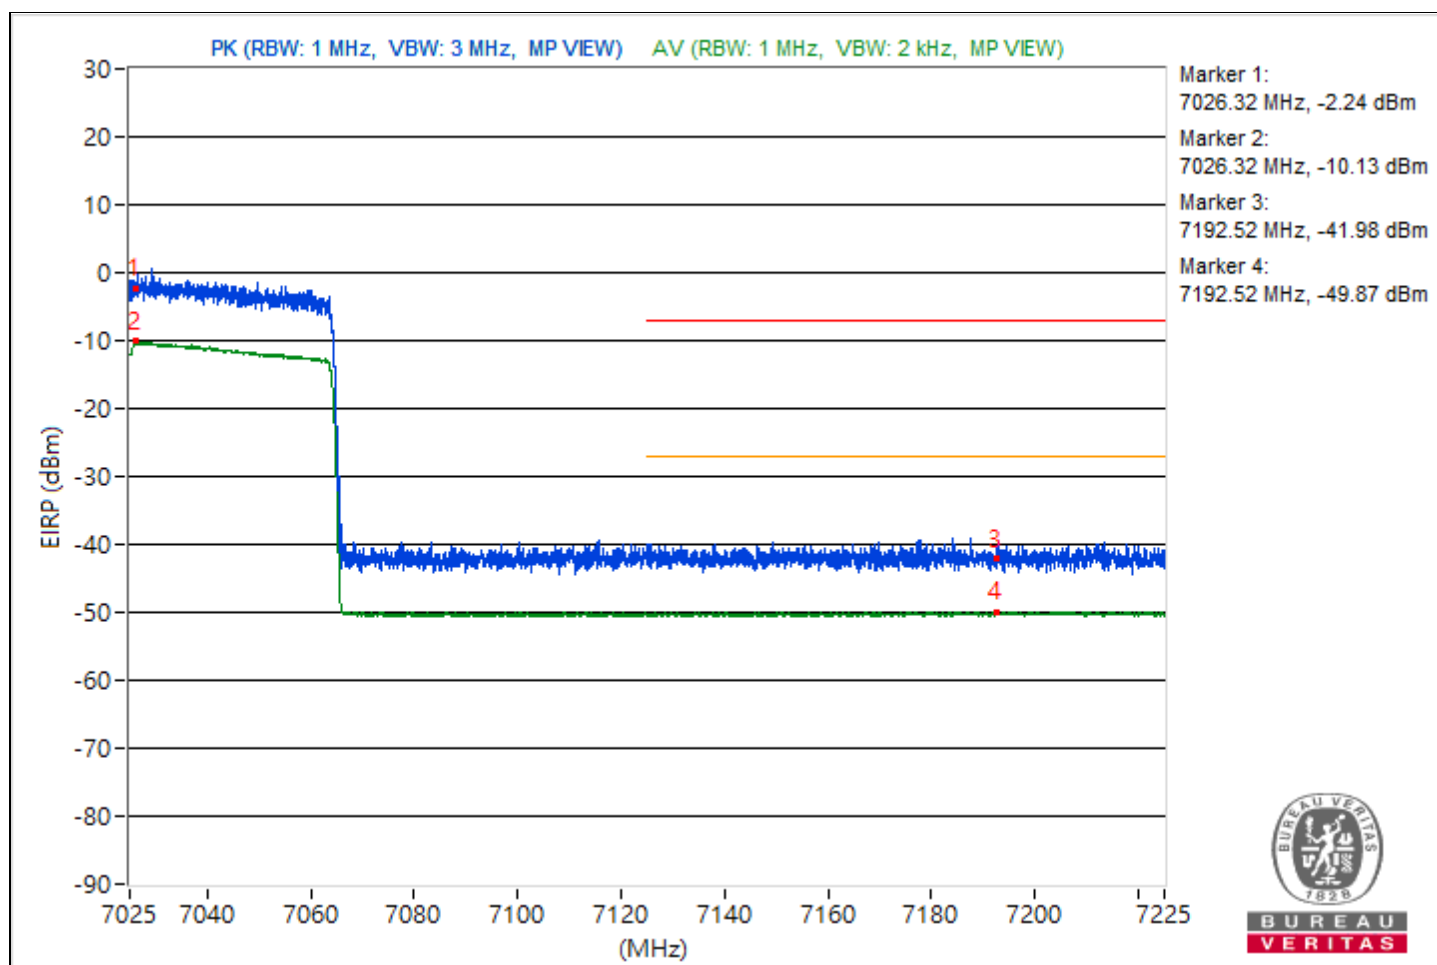

Mode B

1TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.9 PK	74.0	-24.1	1.83 H	113	34.7	15.2
2	11910.00	38.6 AV	54.0	-15.4	1.83 H	113	23.4	15.2
3	17865.00	55.1 PK	74.0	-18.9	1.71 H	196	27.1	28.0
4	17865.00	43.9 AV	54.0	-10.1	1.71 H	196	15.9	28.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.7 PK	74.0	-25.3	1.62 V	226	33.5	15.2
2	11910.00	37.9 AV	54.0	-16.1	1.62 V	226	22.7	15.2
3	17865.00	54.2 PK	74.0	-19.8	1.32 V	173	26.2	28.0
4	17865.00	42.6 AV	54.0	-11.4	1.32 V	173	14.6	28.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	50.1 PK	74.0	-23.9	1.80 H	104	35.0	15.1
2	12350.00	38.9 AV	54.0	-15.1	1.80 H	104	23.8	15.1
3	18525.00	55.1 PK	74.0	-18.9	1.69 H	187	60.0	-4.9
4	18525.00	43.8 AV	54.0	-10.2	1.69 H	187	48.7	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.3 PK	74.0	-25.7	1.63 V	215	33.2	15.1
2	12350.00	37.8 AV	54.0	-16.2	1.63 V	215	22.7	15.1
3	18525.00	53.7 PK	74.0	-20.3	1.32 V	178	58.6	-4.9
4	18525.00	42.8 AV	54.0	-11.2	1.32 V	178	47.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	50.5 PK	88.2	-37.7	1.77 H	112	34.9	15.6
2	#12830.00	39.3 AV	68.2	-28.9	1.77 H	112	23.7	15.6
3	19245.00	55.5 PK	74.0	-18.5	1.73 H	196	59.8	-4.3
4	19245.00	44.2 AV	54.0	-9.8	1.73 H	196	48.5	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.6 PK	88.2	-39.6	1.61 V	234	33.0	15.6
2	#12830.00	38.1 AV	68.2	-30.1	1.61 V	234	22.5	15.6
3	19245.00	53.9 PK	74.0	-20.1	1.38 V	186	58.2	-4.3
4	19245.00	42.6 AV	54.0	-11.4	1.38 V	186	46.9	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	50.2 PK	88.2	-38.0	1.77 H	93	34.5	15.7
2	#12870.00	39.1 AV	68.2	-29.1	1.77 H	93	23.4	15.7
3	19305.00	55.2 PK	74.0	-18.8	1.75 H	186	59.2	-4.0
4	19305.00	43.9 AV	54.0	-10.1	1.75 H	186	47.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.3 PK	88.2	-39.9	1.61 V	220	32.6	15.7
2	#12870.00	37.6 AV	68.2	-30.6	1.61 V	220	21.9	15.7
3	19305.00	53.5 PK	74.0	-20.5	1.29 V	183	57.5	-4.0
4	19305.00	42.9 AV	54.0	-11.1	1.29 V	183	46.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	50.4 PK	88.2	-37.8	1.76 H	99	34.9	15.5
2	#12950.00	39.2 AV	68.2	-29.0	1.76 H	99	23.7	15.5
3	19425.00	54.8 PK	74.0	-19.2	1.73 H	198	58.3	-3.5
4	19425.00	43.5 AV	54.0	-10.5	1.73 H	198	47.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.5 PK	88.2	-39.7	1.63 V	204	33.0	15.5
2	#12950.00	38.1 AV	68.2	-30.1	1.63 V	204	22.6	15.5
3	19425.00	54.1 PK	74.0	-19.9	1.38 V	167	57.6	-3.5
4	19425.00	42.7 AV	54.0	-11.3	1.38 V	167	46.2	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	50.2 PK	88.2	-38.0	1.83 H	98	34.6	15.6
2	#13030.00	39.1 AV	68.2	-29.1	1.83 H	98	23.5	15.6
3	19545.00	55.5 PK	74.0	-18.5	1.63 H	187	58.9	-3.4
4	19545.00	44.1 AV	54.0	-9.9	1.63 H	187	47.5	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.1 PK	88.2	-40.1	1.59 V	211	32.5	15.6
2	#13030.00	37.6 AV	68.2	-30.6	1.59 V	211	22.0	15.6
3	19545.00	54.3 PK	74.0	-19.7	1.38 V	171	57.7	-3.4
4	19545.00	42.8 AV	54.0	-11.2	1.38 V	171	46.2	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.8 PK	88.2	-38.4	1.79 H	110	34.1	15.7
2	#13070.00	38.8 AV	68.2	-29.4	1.79 H	110	23.1	15.7
3	19605.00	54.7 PK	74.0	-19.3	1.73 H	206	58.4	-3.7
4	19605.00	43.3 AV	54.0	-10.7	1.73 H	206	47.0	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.4 PK	88.2	-39.8	1.59 V	204	32.7	15.7
2	#13070.00	38.0 AV	68.2	-30.2	1.59 V	204	22.3	15.7
3	19605.00	54.3 PK	74.0	-19.7	1.42 V	173	58.0	-3.7
4	19605.00	42.7 AV	54.0	-11.3	1.42 V	173	46.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	50.1 PK	74.0	-23.9	1.75 H	119	32.4	17.7
2	13390.00	38.7 AV	54.0	-15.3	1.75 H	119	21.0	17.7
3	20085.00	55.1 PK	74.0	-18.9	1.72 H	192	58.9	-3.8
4	20085.00	43.9 AV	54.0	-10.1	1.72 H	192	47.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.5 PK	74.0	-25.5	1.64 V	226	30.8	17.7
2	13390.00	37.7 AV	54.0	-16.3	1.64 V	226	20.0	17.7
3	20085.00	54.3 PK	74.0	-19.7	1.35 V	182	58.1	-3.8
4	20085.00	42.6 AV	54.0	-11.4	1.35 V	182	46.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	50.8 PK	88.2	-37.4	1.84 H	99	32.3	18.5
2	#13710.00	39.5 AV	68.2	-28.7	1.84 H	99	21.0	18.5
3	20565.00	55.6 PK	74.0	-18.4	1.59 H	199	58.8	-3.2
4	20565.00	44.1 AV	54.0	-9.9	1.59 H	199	47.3	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.9 PK	88.2	-39.3	1.55 V	209	30.4	18.5
2	#13710.00	37.9 AV	68.2	-30.3	1.55 V	209	19.4	18.5
3	20565.00	53.2 PK	74.0	-20.8	1.24 V	182	56.4	-3.2
4	20565.00	42.4 AV	54.0	-11.6	1.24 V	182	45.6	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	50.6 PK	88.2	-37.6	1.76 H	125	32.2	18.4
2	#13750.00	39.0 AV	68.2	-29.2	1.76 H	125	20.6	18.4
3	20625.00	55.2 PK	74.0	-18.8	1.69 H	184	58.4	-3.2
4	20625.00	44.2 AV	54.0	-9.8	1.69 H	184	47.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.3 PK	88.2	-39.9	1.68 V	217	29.9	18.4
2	#13750.00	37.8 AV	68.2	-30.4	1.68 V	217	19.4	18.4
3	20625.00	53.9 PK	74.0	-20.1	1.44 V	152	57.1	-3.2
4	20625.00	42.7 AV	54.0	-11.3	1.44 V	152	45.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	50.4 PK	88.2	-37.8	1.77 H	107	31.3	19.1
2	#13990.00	38.8 AV	68.2	-29.4	1.77 H	107	19.7	19.1
3	20985.00	54.9 PK	74.0	-19.1	1.76 H	207	57.8	-2.9
4	20985.00	43.6 AV	54.0	-10.4	1.76 H	207	46.5	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.7 PK	88.2	-39.5	1.68 V	220	29.6	19.1
2	#13990.00	38.1 AV	68.2	-30.1	1.68 V	220	19.0	19.1
3	20985.00	54.0 PK	74.0	-20.0	1.49 V	166	56.9	-2.9
4	20985.00	42.8 AV	54.0	-11.2	1.49 V	166	45.7	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	50.5 PK	88.2	-37.7	1.81 H	95	30.7	19.8
2	#14230.00	39.4 AV	68.2	-28.8	1.81 H	95	19.6	19.8
3	21345.00	54.6 PK	74.0	-19.4	1.75 H	183	57.1	-2.5
4	21345.00	43.9 AV	54.0	-10.1	1.75 H	183	46.4	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.8 PK	88.2	-39.4	1.65 V	207	29.0	19.8
2	#14230.00	38.2 AV	68.2	-30.0	1.65 V	207	18.4	19.8
3	21345.00	54.1 PK	74.0	-19.9	1.46 V	161	56.6	-2.5
4	21345.00	42.3 AV	54.0	-11.7	1.46 V	161	44.8	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

1S1T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	50.5 PK	74.0	-23.5	1.84 H	105	35.3	15.2
2	11910.00	39.2 AV	54.0	-14.8	1.84 H	105	24.0	15.2
3	17865.00	55.3 PK	74.0	-18.7	1.58 H	204	27.3	28.0
4	17865.00	43.9 AV	54.0	-10.1	1.58 H	204	15.9	28.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.4 PK	74.0	-25.6	1.71 V	213	33.2	15.2
2	11910.00	38.0 AV	54.0	-16.0	1.71 V	213	22.8	15.2
3	17865.00	54.2 PK	74.0	-19.8	1.44 V	141	26.2	28.0
4	17865.00	42.9 AV	54.0	-11.1	1.44 V	141	14.9	28.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	50.1 PK	74.0	-23.9	1.79 H	121	35.0	15.1
2	12350.00	38.3 AV	54.0	-15.7	1.79 H	121	23.2	15.1
3	18525.00	55.1 PK	74.0	-18.9	1.75 H	213	60.0	-4.9
4	18525.00	43.8 AV	54.0	-10.2	1.75 H	213	48.7	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.6 PK	74.0	-25.4	1.74 V	215	33.5	15.1
2	12350.00	38.4 AV	54.0	-15.6	1.74 V	215	23.3	15.1
3	18525.00	54.2 PK	74.0	-19.8	1.45 V	125	59.1	-4.9
4	18525.00	43.0 AV	54.0	-11.0	1.45 V	125	47.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	50.9 PK	88.2	-37.3	1.74 H	133	35.3	15.6
2	#12830.00	39.2 AV	68.2	-29.0	1.74 H	133	23.6	15.6
3	19245.00	55.2 PK	74.0	-18.8	1.65 H	195	59.5	-4.3
4	19245.00	44.1 AV	54.0	-9.9	1.65 H	195	48.4	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.4 PK	88.2	-39.8	1.58 V	190	32.8	15.6
2	#12830.00	37.8 AV	68.2	-30.4	1.58 V	190	22.2	15.6
3	19245.00	54.9 PK	74.0	-19.1	1.39 V	165	59.2	-4.3
4	19245.00	43.1 AV	54.0	-10.9	1.39 V	165	47.4	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	50.2 PK	88.2	-38.0	1.84 H	123	34.5	15.7
2	#12870.00	38.6 AV	68.2	-29.6	1.84 H	123	22.9	15.7
3	19305.00	55.1 PK	74.0	-18.9	1.69 H	209	59.1	-4.0
4	19305.00	43.7 AV	54.0	-10.3	1.69 H	209	47.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.3 PK	88.2	-39.9	1.71 V	217	32.6	15.7
2	#12870.00	37.7 AV	68.2	-30.5	1.71 V	217	22.0	15.7
3	19305.00	54.6 PK	74.0	-19.4	1.44 V	151	58.6	-4.0
4	19305.00	43.3 AV	54.0	-10.7	1.44 V	151	47.3	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	50.5 PK	88.2	-37.7	1.83 H	127	35.0	15.5
2	#12950.00	38.9 AV	68.2	-29.3	1.83 H	127	23.4	15.5
3	19425.00	55.2 PK	74.0	-18.8	1.68 H	210	58.7	-3.5
4	19425.00	43.8 AV	54.0	-10.2	1.68 H	210	47.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.1 PK	88.2	-40.1	1.67 V	229	32.6	15.5
2	#12950.00	37.7 AV	68.2	-30.5	1.67 V	229	22.2	15.5
3	19425.00	54.1 PK	74.0	-19.9	1.47 V	161	57.6	-3.5
4	19425.00	42.8 AV	54.0	-11.2	1.47 V	161	46.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.8 PK	88.2	-38.4	1.80 H	106	34.2	15.6
2	#13030.00	37.9 AV	68.2	-30.3	1.80 H	106	22.3	15.6
3	19545.00	55.1 PK	74.0	-18.9	1.76 H	220	58.5	-3.4
4	19545.00	43.8 AV	54.0	-10.2	1.76 H	220	47.2	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.7 PK	88.2	-39.5	1.69 V	213	33.1	15.6
2	#13030.00	38.1 AV	68.2	-30.1	1.69 V	213	22.5	15.6
3	19545.00	54.3 PK	74.0	-19.7	1.48 V	153	57.7	-3.4
4	19545.00	43.2 AV	54.0	-10.8	1.48 V	153	46.6	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.1 PK	88.2	-39.1	1.81 H	117	33.4	15.7
2	#13070.00	37.5 AV	68.2	-30.7	1.81 H	117	21.8	15.7
3	19605.00	55.0 PK	74.0	-19.0	1.71 H	204	58.7	-3.7
4	19605.00	44.0 AV	54.0	-10.0	1.71 H	204	47.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.3 PK	88.2	-39.9	1.71 V	227	32.6	15.7
2	#13070.00	37.6 AV	68.2	-30.6	1.71 V	227	21.9	15.7
3	19605.00	53.9 PK	74.0	-20.1	1.52 V	145	57.6	-3.7
4	19605.00	42.4 AV	54.0	-11.6	1.52 V	145	46.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	50.3 PK	74.0	-23.7	1.84 H	109	32.6	17.7
2	13390.00	38.9 AV	54.0	-15.1	1.84 H	109	21.2	17.7
3	20085.00	54.8 PK	74.0	-19.2	1.67 H	208	58.6	-3.8
4	20085.00	43.6 AV	54.0	-10.4	1.67 H	208	47.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.5 PK	74.0	-25.5	1.72 V	220	30.8	17.7
2	13390.00	37.6 AV	54.0	-16.4	1.72 V	220	19.9	17.7
3	20085.00	53.8 PK	74.0	-20.2	1.53 V	154	57.6	-3.8
4	20085.00	42.1 AV	54.0	-11.9	1.53 V	154	45.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	50.7 PK	88.2	-37.5	1.89 H	107	32.2	18.5
2	#13710.00	39.3 AV	68.2	-28.9	1.89 H	107	20.8	18.5
3	20565.00	54.2 PK	74.0	-19.8	1.63 H	210	57.4	-3.2
4	20565.00	43.2 AV	54.0	-10.8	1.63 H	210	46.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.8 PK	88.2	-39.4	1.69 V	208	30.3	18.5
2	#13710.00	37.7 AV	68.2	-30.5	1.69 V	208	19.2	18.5
3	20565.00	53.7 PK	74.0	-20.3	1.49 V	157	56.9	-3.2
4	20565.00	42.1 AV	54.0	-11.9	1.49 V	157	45.3	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	50.5 PK	88.2	-37.7	1.82 H	94	32.1	18.4
2	#13750.00	39.2 AV	68.2	-29.0	1.82 H	94	20.8	18.4
3	20625.00	54.7 PK	74.0	-19.3	1.64 H	193	57.9	-3.2
4	20625.00	43.6 AV	54.0	-10.4	1.64 H	193	46.8	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.2 PK	88.2	-40.0	1.64 V	217	29.8	18.4
2	#13750.00	37.2 AV	68.2	-31.0	1.64 V	217	18.8	18.4
3	20625.00	53.4 PK	74.0	-20.6	1.45 V	170	56.6	-3.2
4	20625.00	41.8 AV	54.0	-12.2	1.45 V	170	45.0	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	50.9 PK	88.2	-37.3	1.89 H	95	31.8	19.1
2	#13990.00	39.6 AV	68.2	-28.6	1.89 H	95	20.5	19.1
3	20985.00	54.4 PK	74.0	-19.6	1.66 H	213	57.3	-2.9
4	20985.00	43.4 AV	54.0	-10.6	1.66 H	213	46.3	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.9 PK	88.2	-39.3	1.58 V	217	29.8	19.1
2	#13990.00	36.9 AV	68.2	-31.3	1.58 V	217	17.8	19.1
3	20985.00	53.3 PK	74.0	-20.7	1.42 V	156	56.2	-2.9
4	20985.00	42.0 AV	54.0	-12.0	1.42 V	156	44.9	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	50.3 PK	88.2	-37.9	1.82 H	87	30.5	19.8
2	#14230.00	39.2 AV	68.2	-29.0	1.82 H	87	19.4	19.8
3	21345.00	54.9 PK	74.0	-19.1	1.67 H	188	57.4	-2.5
4	21345.00	43.7 AV	54.0	-10.3	1.67 H	188	46.2	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.5 PK	88.2	-39.7	1.63 V	208	28.7	19.8
2	#14230.00	36.4 AV	68.2	-31.8	1.63 V	208	16.6	19.8
3	21345.00	53.7 PK	74.0	-20.3	1.38 V	149	56.2	-2.5
4	21345.00	42.1 AV	54.0	-11.9	1.38 V	149	44.6	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	50.2 PK	74.0	-23.8	1.92 H	98	35.0	15.2
2	11930.00	39.1 AV	54.0	-14.9	1.92 H	98	23.9	15.2
3	17895.00	54.2 PK	74.0	-19.8	1.66 H	198	25.5	28.7
4	17895.00	43.7 AV	54.0	-10.3	1.66 H	198	15.0	28.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	48.3 PK	74.0	-25.7	1.56 V	231	33.1	15.2
2	11930.00	36.6 AV	54.0	-17.4	1.56 V	231	21.4	15.2
3	17895.00	53.1 PK	74.0	-20.9	1.42 V	160	24.4	28.7
4	17895.00	41.5 AV	54.0	-12.5	1.42 V	160	12.8	28.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	50.6 PK	74.0	-23.4	1.80 H	112	35.4	15.2
2	12330.00	39.3 AV	54.0	-14.7	1.80 H	112	24.1	15.2
3	18495.00	54.7 PK	74.0	-19.3	1.62 H	211	59.6	-4.9
4	18495.00	43.5 AV	54.0	-10.5	1.62 H	211	48.4	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	48.1 PK	74.0	-25.9	1.58 V	217	32.9	15.2
2	12330.00	36.6 AV	54.0	-17.4	1.58 V	217	21.4	15.2
3	18495.00	53.8 PK	74.0	-20.2	1.37 V	157	58.7	-4.9
4	18495.00	41.9 AV	54.0	-12.1	1.37 V	157	46.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	50.6 PK	88.2	-37.6	1.85 H	107	35.0	15.6
2	#12810.00	39.3 AV	68.2	-28.9	1.85 H	107	23.7	15.6
3	19215.00	54.5 PK	74.0	-19.5	1.68 H	202	58.9	-4.4
4	19215.00	43.6 AV	54.0	-10.4	1.68 H	202	48.0	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	48.2 PK	88.2	-40.0	1.62 V	211	32.6	15.6
2	#12810.00	36.5 AV	68.2	-31.7	1.62 V	211	20.9	15.6
3	19215.00	53.7 PK	74.0	-20.3	1.43 V	172	58.1	-4.4
4	19215.00	42.1 AV	54.0	-11.9	1.43 V	172	46.5	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	50.4 PK	88.2	-37.8	1.94 H	88	34.7	15.7
2	#12890.00	39.2 AV	68.2	-29.0	1.94 H	88	23.5	15.7
3	19335.00	54.3 PK	74.0	-19.7	1.67 H	192	58.1	-3.8
4	19335.00	43.2 AV	54.0	-10.8	1.67 H	192	47.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	48.3 PK	88.2	-39.9	1.61 V	227	32.6	15.7
2	#12890.00	36.6 AV	68.2	-31.6	1.61 V	227	20.9	15.7
3	19335.00	53.1 PK	74.0	-20.9	1.37 V	172	56.9	-3.8
4	19335.00	41.5 AV	54.0	-12.5	1.37 V	172	45.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	50.1 PK	88.2	-38.1	1.84 H	119	34.6	15.5
2	#12970.00	38.8 AV	68.2	-29.4	1.84 H	119	23.3	15.5
3	19455.00	54.4 PK	74.0	-19.6	1.56 H	198	57.7	-3.3
4	19455.00	43.4 AV	54.0	-10.6	1.56 H	198	46.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	46.8 PK	88.2	-41.4	1.58 V	216	31.3	15.5
2	#12970.00	36.2 AV	68.2	-32.0	1.58 V	216	20.7	15.5
3	19455.00	54.0 PK	74.0	-20.0	1.45 V	160	57.3	-3.3
4	19455.00	42.6 AV	54.0	-11.4	1.45 V	160	45.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	50.6 PK	88.2	-37.6	1.87 H	89	34.9	15.7
2	#13050.00	39.3 AV	68.2	-28.9	1.87 H	89	23.6	15.7
3	19575.00	53.8 PK	74.0	-20.2	1.66 H	194	57.4	-3.6
4	19575.00	42.9 AV	54.0	-11.1	1.66 H	194	46.5	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	48.4 PK	88.2	-39.8	1.56 V	230	32.7	15.7
2	#13050.00	36.5 AV	68.2	-31.7	1.56 V	230	20.8	15.7
3	19575.00	52.7 PK	74.0	-21.3	1.38 V	179	56.3	-3.6
4	19575.00	41.4 AV	54.0	-12.6	1.38 V	179	45.0	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	50.8 PK	88.2	-37.4	1.86 H	75	34.8	16.0
2	#13130.00	39.7 AV	68.2	-28.5	1.86 H	75	23.7	16.0
3	19695.00	54.1 PK	74.0	-19.9	1.64 H	208	58.0	-3.9
4	19695.00	43.3 AV	54.0	-10.7	1.64 H	208	47.2	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	48.9 PK	88.2	-39.3	1.55 V	245	32.9	16.0
2	#13130.00	36.8 AV	68.2	-31.4	1.55 V	245	20.8	16.0
3	19695.00	52.3 PK	74.0	-21.7	1.43 V	168	56.2	-3.9
4	19695.00	41.1 AV	54.0	-12.9	1.43 V	168	45.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	50.1 PK	88.2	-38.1	1.90 H	63	32.1	18.0
2	#13450.00	39.3 AV	68.2	-28.9	1.90 H	63	21.3	18.0
3	20175.00	54.4 PK	74.0	-19.6	1.63 H	205	58.0	-3.6
4	20175.00	43.4 AV	54.0	-10.6	1.63 H	205	47.0	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	48.6 PK	88.2	-39.6	1.60 V	220	30.6	18.0
2	#13450.00	37.0 AV	68.2	-31.2	1.60 V	220	19.0	18.0
3	20175.00	52.8 PK	74.0	-21.2	1.38 V	186	56.4	-3.6
4	20175.00	41.3 AV	54.0	-12.7	1.38 V	186	44.9	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	50.6 PK	88.2	-37.6	1.82 H	90	32.0	18.6
2	#13690.00	39.5 AV	68.2	-28.7	1.82 H	90	20.9	18.6
3	20535.00	54.1 PK	74.0	-19.9	1.65 H	216	57.3	-3.2
4	20535.00	43.1 AV	54.0	-10.9	1.65 H	216	46.3	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	48.2 PK	88.2	-40.0	1.58 V	229	29.6	18.6
2	#13690.00	36.6 AV	68.2	-31.6	1.58 V	229	18.0	18.6
3	20535.00	52.5 PK	74.0	-21.5	1.40 V	178	55.7	-3.2
4	20535.00	41.1 AV	54.0	-12.9	1.40 V	178	44.3	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	50.6 PK	88.2	-37.6	1.84 H	90	32.0	18.6
2	#13770.00	39.4 AV	68.2	-28.8	1.84 H	90	20.8	18.6
3	20655.00	54.3 PK	74.0	-19.7	1.68 H	210	57.4	-3.1
4	20655.00	43.1 AV	54.0	-10.9	1.68 H	210	46.2	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	48.5 PK	88.2	-39.7	1.59 V	213	29.9	18.6
2	#13770.00	36.7 AV	68.2	-31.5	1.59 V	213	18.1	18.6
3	20655.00	53.2 PK	74.0	-20.8	1.34 V	185	56.3	-3.1
4	20655.00	41.8 AV	54.0	-12.2	1.34 V	185	44.9	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	50.4 PK	88.2	-37.8	1.86 H	102	31.4	19.0
2	#14010.00	39.3 AV	68.2	-28.9	1.86 H	102	20.3	19.0
3	21015.00	54.4 PK	74.0	-19.6	1.65 H	220	57.3	-2.9
4	21015.00	43.3 AV	54.0	-10.7	1.65 H	220	46.2	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	48.7 PK	88.2	-39.5	1.59 V	235	29.7	19.0
2	#14010.00	37.2 AV	68.2	-31.0	1.59 V	235	18.2	19.0
3	21015.00	52.3 PK	74.0	-21.7	1.43 V	190	55.2	-2.9
4	21015.00	41.0 AV	54.0	-13.0	1.43 V	190	43.9	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	50.7 PK	88.2	-37.5	1.82 H	93	31.2	19.5
2	#14170.00	39.6 AV	68.2	-28.6	1.82 H	93	20.1	19.5
3	21255.00	54.0 PK	74.0	-20.0	1.70 H	224	56.8	-2.8
4	21255.00	43.1 AV	54.0	-10.9	1.70 H	224	45.9	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	48.2 PK	88.2	-40.0	1.64 V	250	28.7	19.5
2	#14170.00	37.1 AV	68.2	-31.1	1.64 V	250	17.6	19.5
3	21255.00	52.4 PK	74.0	-21.6	1.44 V	179	55.2	-2.8
4	21255.00	41.4 AV	54.0	-12.6	1.44 V	179	44.2	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	50.6 PK	74.0	-23.4	1.90 H	93	35.4	15.2
2	11970.00	39.5 AV	54.0	-14.5	1.90 H	93	24.3	15.2
3	17955.00	54.5 PK	74.0	-19.5	1.70 H	217	24.2	30.3
4	17955.00	43.3 AV	54.0	-10.7	1.70 H	217	13.0	30.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.5 PK	74.0	-25.5	1.64 V	237	33.3	15.2
2	11970.00	37.4 AV	54.0	-16.6	1.64 V	237	22.2	15.2
3	17955.00	52.6 PK	74.0	-21.4	1.46 V	188	22.3	30.3
4	17955.00	41.8 AV	54.0	-12.2	1.46 V	188	11.5	30.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	50.3 PK	74.0	-23.7	1.92 H	86	35.0	15.3
2	12290.00	39.5 AV	54.0	-14.5	1.92 H	86	24.2	15.3
3	18435.00	54.7 PK	74.0	-19.3	1.69 H	209	59.8	-5.1
4	18435.00	43.6 AV	54.0	-10.4	1.69 H	209	48.7	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	48.3 PK	74.0	-25.7	1.55 V	198	33.0	15.3
2	12290.00	36.6 AV	54.0	-17.4	1.55 V	198	21.3	15.3
3	18435.00	52.9 PK	74.0	-21.1	1.32 V	182	58.0	-5.1
4	18435.00	41.3 AV	54.0	-12.7	1.32 V	182	46.4	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	50.7 PK	88.2	-37.5	1.88 H	85	35.3	15.4
2	#12770.00	39.7 AV	68.2	-28.5	1.88 H	85	24.3	15.4
3	19155.00	54.3 PK	74.0	-19.7	1.69 H	217	58.9	-4.6
4	19155.00	43.2 AV	54.0	-10.8	1.69 H	217	47.8	-4.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	48.0 PK	88.2	-40.2	1.65 V	232	32.6	15.4
2	#12770.00	37.4 AV	68.2	-30.8	1.65 V	232	22.0	15.4
3	19155.00	52.4 PK	74.0	-21.6	1.44 V	177	57.0	-4.6
4	19155.00	41.6 AV	54.0	-12.4	1.44 V	177	46.2	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	50.2 PK	88.2	-38.0	1.83 H	77	34.6	15.6
2	#12930.00	39.3 AV	68.2	-28.9	1.83 H	77	23.7	15.6
3	19395.00	54.6 PK	74.0	-19.4	1.65 H	217	58.1	-3.5
4	19395.00	43.5 AV	54.0	-10.5	1.65 H	217	47.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	48.9 PK	88.2	-39.3	1.62 V	257	33.3	15.6
2	#12930.00	36.9 AV	68.2	-31.3	1.62 V	257	21.3	15.6
3	19395.00	52.1 PK	74.0	-21.9	1.44 V	194	55.6	-3.5
4	19395.00	41.4 AV	54.0	-12.6	1.44 V	194	44.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	50.7 PK	88.2	-37.5	1.76 H	99	34.9	15.8
2	#13090.00	39.7 AV	68.2	-28.5	1.76 H	99	23.9	15.8
3	19635.00	53.8 PK	74.0	-20.2	1.70 H	233	57.6	-3.8
4	19635.00	42.7 AV	54.0	-11.3	1.70 H	233	46.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	48.5 PK	88.2	-39.7	1.52 V	199	32.7	15.8
2	#13090.00	36.1 AV	68.2	-32.1	1.52 V	199	20.3	15.8
3	19635.00	52.9 PK	74.0	-21.1	1.38 V	174	56.7	-3.8
4	19635.00	41.6 AV	54.0	-12.4	1.38 V	174	45.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	50.4 PK	88.2	-37.8	1.91 H	82	32.6	17.8
2	#13410.00	39.5 AV	68.2	-28.7	1.91 H	82	21.7	17.8
3	20115.00	53.5 PK	74.0	-20.5	1.71 H	205	57.2	-3.7
4	20115.00	43.0 AV	54.0	-11.0	1.71 H	205	46.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	48.3 PK	88.2	-39.9	1.60 V	272	30.5	17.8
2	#13410.00	36.8 AV	68.2	-31.4	1.60 V	272	19.0	17.8
3	20115.00	52.6 PK	74.0	-21.4	1.46 V	189	56.3	-3.7
4	20115.00	41.9 AV	54.0	-12.1	1.46 V	189	45.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	50.8 PK	88.2	-37.4	1.80 H	108	32.3	18.5
2	#13730.00	39.8 AV	68.2	-28.4	1.80 H	108	21.3	18.5
3	20595.00	53.3 PK	74.0	-20.7	1.74 H	219	56.6	-3.3
4	20595.00	42.3 AV	54.0	-11.7	1.74 H	219	45.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	48.6 PK	88.2	-39.6	1.62 V	266	30.1	18.5
2	#13730.00	36.3 AV	68.2	-31.9	1.62 V	266	17.8	18.5
3	20595.00	52.7 PK	74.0	-21.3	1.50 V	185	56.0	-3.3
4	20595.00	42.3 AV	54.0	-11.7	1.50 V	185	45.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	50.3 PK	88.2	-37.9	1.91 H	84	31.7	18.6
2	#13890.00	39.4 AV	68.2	-28.8	1.91 H	84	20.8	18.6
3	20835.00	53.4 PK	74.0	-20.6	1.72 H	210	56.1	-2.7
4	20835.00	43.0 AV	54.0	-11.0	1.72 H	210	45.7	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	48.3 PK	88.2	-39.9	1.57 V	275	29.7	18.6
2	#13890.00	36.3 AV	68.2	-31.9	1.57 V	275	17.7	18.6
3	20835.00	52.2 PK	74.0	-21.8	1.47 V	186	54.9	-2.7
4	20835.00	41.8 AV	54.0	-12.2	1.47 V	186	44.5	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	50.7 PK	88.2	-37.5	1.90 H	70	31.7	19.0
2	#14050.00	39.6 AV	68.2	-28.6	1.90 H	70	20.6	19.0
3	21075.00	53.1 PK	74.0	-20.9	1.77 H	203	56.1	-3.0
4	21075.00	42.7 AV	54.0	-11.3	1.77 H	203	45.7	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	48.9 PK	88.2	-39.3	1.60 V	268	29.9	19.0
2	#14050.00	36.9 AV	68.2	-31.3	1.60 V	268	17.9	19.0
3	21075.00	52.6 PK	74.0	-21.4	1.48 V	186	55.6	-3.0
4	21075.00	42.1 AV	54.0	-11.9	1.48 V	186	45.1	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	50.9 PK	74.0	-23.1	1.91 H	99	35.3	15.6
2	12050.00	39.8 AV	54.0	-14.2	1.91 H	99	24.2	15.6
3	18075.00	53.6 PK	74.0	-20.4	1.71 H	200	58.7	-5.1
4	18075.00	43.3 AV	54.0	-10.7	1.71 H	200	48.4	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.4 PK	74.0	-25.6	1.62 V	261	32.8	15.6
2	12050.00	36.3 AV	54.0	-17.7	1.62 V	261	20.7	15.6
3	18075.00	52.5 PK	74.0	-21.5	1.50 V	200	57.6	-5.1
4	18075.00	41.9 AV	54.0	-12.1	1.50 V	200	47.0	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	50.7 PK	74.0	-23.3	1.88 H	78	35.7	15.0
2	12370.00	39.5 AV	54.0	-14.5	1.88 H	78	24.5	15.0
3	18555.00	53.1 PK	74.0	-20.9	1.72 H	208	58.0	-4.9
4	18555.00	42.7 AV	54.0	-11.3	1.72 H	208	47.6	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	48.0 PK	74.0	-26.0	1.56 V	290	33.0	15.0
2	12370.00	35.8 AV	54.0	-18.2	1.56 V	290	20.8	15.0
3	18555.00	51.8 PK	74.0	-22.2	1.44 V	174	56.7	-4.9
4	18555.00	41.3 AV	54.0	-12.7	1.44 V	174	46.2	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	50.2 PK	74.0	-23.8	1.93 H	70	35.3	14.9
2	12690.00	39.3 AV	54.0	-14.7	1.93 H	70	24.4	14.9
3	19035.00	53.5 PK	74.0	-20.5	1.71 H	222	58.2	-4.7
4	19035.00	42.9 AV	54.0	-11.1	1.71 H	222	47.6	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.7 PK	74.0	-25.3	1.59 V	275	33.8	14.9
2	12690.00	36.5 AV	54.0	-17.5	1.59 V	275	21.6	14.9
3	19035.00	51.6 PK	74.0	-22.4	1.50 V	201	56.3	-4.7
4	19035.00	41.4 AV	54.0	-12.6	1.50 V	201	46.1	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	50.7 PK	88.2	-37.5	1.84 H	85	35.2	15.5
2	#13010.00	39.7 AV	68.2	-28.5	1.84 H	85	24.2	15.5
3	19515.00	53.3 PK	74.0	-20.7	1.74 H	192	56.5	-3.2
4	19515.00	42.8 AV	54.0	-11.2	1.74 H	192	46.0	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	48.1 PK	88.2	-40.1	1.61 V	298	32.6	15.5
2	#13010.00	35.6 AV	68.2	-32.6	1.61 V	298	20.1	15.5
3	19515.00	51.8 PK	74.0	-22.2	1.45 V	179	55.0	-3.2
4	19515.00	41.1 AV	54.0	-12.9	1.45 V	179	44.3	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	49.5 PK	74.0	-24.5	1.94 H	63	32.1	17.4
2	13330.00	38.8 AV	54.0	-15.2	1.94 H	63	21.4	17.4
3	19995.00	53.2 PK	74.0	-20.8	1.67 H	207	57.3	-4.1
4	19995.00	42.8 AV	54.0	-11.2	1.67 H	207	46.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.2 PK	74.0	-25.8	1.53 V	292	30.8	17.4
2	13330.00	36.0 AV	54.0	-18.0	1.53 V	292	18.6	17.4
3	19995.00	52.3 PK	74.0	-21.7	1.45 V	189	56.4	-4.1
4	19995.00	41.8 AV	54.0	-12.2	1.45 V	189	45.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	50.3 PK	88.2	-37.9	1.93 H	84	31.7	18.6
2	#13650.00	39.4 AV	68.2	-28.8	1.93 H	84	20.8	18.6
3	20475.00	53.2 PK	74.0	-20.8	1.71 H	221	56.2	-3.0
4	20475.00	43.0 AV	54.0	-11.0	1.71 H	221	46.0	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	48.8 PK	88.2	-39.4	1.60 V	278	30.2	18.6
2	#13650.00	36.5 AV	68.2	-31.7	1.60 V	278	17.9	18.6
3	20475.00	52.2 PK	74.0	-21.8	1.51 V	211	55.2	-3.0
4	20475.00	41.7 AV	54.0	-12.3	1.51 V	211	44.7	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	50.3 PK	88.2	-37.9	1.92 H	77	31.3	19.0
2	#13970.00	39.5 AV	68.2	-28.7	1.92 H	77	20.5	19.0
3	20955.00	53.9 PK	74.0	-20.1	1.74 H	225	56.6	-2.7
4	20955.00	43.5 AV	54.0	-10.5	1.74 H	225	46.2	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	48.2 PK	88.2	-40.0	1.53 V	301	29.2	19.0
2	#13970.00	36.3 AV	68.2	-31.9	1.53 V	301	17.3	19.0
3	20955.00	52.3 PK	74.0	-21.7	1.41 V	174	55.0	-2.7
4	20955.00	41.8 AV	54.0	-12.2	1.41 V	174	44.5	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

Mode B 1S1T

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	50.1 PK	74.0	-23.9	1.93 H	145	34.7	15.4
2	11910.00	38.9 AV	54.0	-15.1	1.93 H	145	23.5	15.4
3	17865.00	53.5 PK	74.0	-20.5	1.21 H	196	25.7	27.8
4	17865.00	42.3 AV	54.0	-11.7	1.21 H	196	14.5	27.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.8 PK	74.0	-25.2	1.79 V	241	33.4	15.4
2	11910.00	37.7 AV	54.0	-16.3	1.79 V	241	22.3	15.4
3	17865.00	52.7 PK	74.0	-21.3	1.33 V	192	24.9	27.8
4	17865.00	41.6 AV	54.0	-12.4	1.33 V	192	13.8	27.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.5 PK	88.2	-38.7	1.90 H	156	33.9	15.6
2	#12830.00	38.5 AV	68.2	-29.7	1.90 H	156	22.9	15.6
3	19245.00	53.1 PK	74.0	-20.9	1.23 H	184	57.4	-4.3
4	19245.00	42.2 AV	54.0	-11.8	1.23 H	184	46.5	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.8 PK	88.2	-39.4	1.85 V	236	33.2	15.6
2	#12830.00	37.6 AV	68.2	-30.6	1.85 V	236	22.0	15.6
3	19245.00	52.5 PK	74.0	-21.5	1.27 V	179	56.8	-4.3
4	19245.00	41.2 AV	54.0	-12.8	1.27 V	179	45.5	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	50.3 PK	88.2	-37.9	1.97 H	139	34.6	15.7
2	#12870.00	39.2 AV	68.2	-29.0	1.97 H	139	23.5	15.7
3	19305.00	53.4 PK	74.0	-20.6	1.24 H	195	57.4	-4.0
4	19305.00	42.2 AV	54.0	-11.8	1.24 H	195	46.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.3 PK	88.2	-39.9	1.75 V	247	32.6	15.7
2	#12870.00	37.4 AV	68.2	-30.8	1.75 V	247	21.7	15.7
3	19305.00	52.9 PK	74.0	-21.1	1.34 V	184	56.9	-4.0
4	19305.00	41.7 AV	54.0	-12.3	1.34 V	184	45.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.7 PK	88.2	-38.5	1.86 H	159	34.1	15.6
2	#13030.00	38.5 AV	68.2	-29.7	1.86 H	159	22.9	15.6
3	19545.00	53.5 PK	74.0	-20.5	1.21 H	183	56.9	-3.4
4	19545.00	42.7 AV	54.0	-11.3	1.21 H	183	46.1	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.6 PK	88.2	-39.6	1.88 V	245	33.0	15.6
2	#13030.00	37.6 AV	68.2	-30.6	1.88 V	245	22.0	15.6
3	19545.00	52.6 PK	74.0	-21.4	1.29 V	177	56.0	-3.4
4	19545.00	41.5 AV	54.0	-12.5	1.29 V	177	44.9	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	50.3 PK	88.2	-37.9	1.97 H	132	34.6	15.7
2	#13070.00	38.9 AV	68.2	-29.3	1.97 H	132	23.2	15.7
3	19605.00	53.8 PK	74.0	-20.2	1.19 H	209	57.5	-3.7
4	19605.00	42.7 AV	54.0	-11.3	1.19 H	209	46.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.5 PK	88.2	-39.7	1.80 V	240	32.8	15.7
2	#13070.00	37.3 AV	68.2	-30.9	1.80 V	240	21.6	15.7
3	19605.00	52.6 PK	74.0	-21.4	1.28 V	193	56.3	-3.7
4	19605.00	41.3 AV	54.0	-12.7	1.28 V	193	45.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.4 PK	88.2	-38.8	1.91 H	144	30.9	18.5
2	#13710.00	38.3 AV	68.2	-29.9	1.91 H	144	19.8	18.5
3	20565.00	53.3 PK	74.0	-20.7	1.18 H	194	56.5	-3.2
4	20565.00	42.6 AV	54.0	-11.4	1.18 H	194	45.8	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.8 PK	88.2	-39.4	1.74 V	243	30.3	18.5
2	#13710.00	37.7 AV	68.2	-30.5	1.74 V	243	19.2	18.5
3	20565.00	52.2 PK	74.0	-21.8	1.34 V	207	55.4	-3.2
4	20565.00	41.2 AV	54.0	-12.8	1.34 V	207	44.4	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.7 PK	88.2	-38.5	1.81 H	163	30.6	19.1
2	#13990.00	38.7 AV	68.2	-29.5	1.81 H	163	19.6	19.1
3	20985.00	52.9 PK	74.0	-21.1	1.22 H	191	55.8	-2.9
4	20985.00	42.4 AV	54.0	-11.6	1.22 H	191	45.3	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.3 PK	88.2	-39.9	1.77 V	229	29.2	19.1
2	#13990.00	37.3 AV	68.2	-30.9	1.77 V	229	18.2	19.1
3	20985.00	52.8 PK	74.0	-21.2	1.33 V	182	55.7	-2.9
4	20985.00	41.4 AV	54.0	-12.6	1.33 V	182	44.3	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.4 PK	88.2	-38.8	1.94 H	143	29.6	19.8
2	#14230.00	38.1 AV	68.2	-30.1	1.94 H	143	18.3	19.8
3	21345.00	53.1 PK	74.0	-20.9	1.12 H	185	55.6	-2.5
4	21345.00	42.4 AV	54.0	-11.6	1.12 H	185	44.9	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.7 PK	88.2	-39.5	1.81 V	250	28.9	19.8
2	#14230.00	37.6 AV	68.2	-30.6	1.81 V	250	17.8	19.8
3	21345.00	52.6 PK	74.0	-21.4	1.26 V	179	55.1	-2.5
4	21345.00	41.6 AV	54.0	-12.4	1.26 V	179	44.1	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.5 PK	74.0	-24.5	1.78 H	157	34.1	15.4
2	11910.00	38.5 AV	54.0	-15.5	1.78 H	157	23.1	15.4
3	17865.00	53.4 PK	74.0	-20.6	1.16 H	204	25.6	27.8
4	17865.00	42.8 AV	54.0	-11.2	1.16 H	204	15.0	27.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.1 PK	74.0	-25.9	1.90 V	259	32.7	15.4
2	11910.00	37.1 AV	54.0	-16.9	1.90 V	259	21.7	15.4
3	17865.00	52.7 PK	74.0	-21.3	1.27 V	182	24.9	27.8
4	17865.00	41.8 AV	54.0	-12.2	1.27 V	182	14.0	27.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.3 PK	88.2	-38.9	1.87 H	164	33.7	15.6
2	#12830.00	38.2 AV	68.2	-30.0	1.87 H	164	22.6	15.6
3	19245.00	53.3 PK	74.0	-20.7	1.25 H	170	57.6	-4.3
4	19245.00	42.6 AV	54.0	-11.4	1.25 H	170	46.9	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.3 PK	88.2	-39.9	1.85 V	252	32.7	15.6
2	#12830.00	37.2 AV	68.2	-31.0	1.85 V	252	21.6	15.6
3	19245.00	53.3 PK	74.0	-20.7	1.23 V	177	57.6	-4.3
4	19245.00	41.7 AV	54.0	-12.3	1.23 V	177	46.0	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.7 PK	88.2	-38.5	1.83 H	144	34.0	15.7
2	#12870.00	38.4 AV	68.2	-29.8	1.83 H	144	22.7	15.7
3	19305.00	53.1 PK	74.0	-20.9	1.16 H	202	57.1	-4.0
4	19305.00	42.5 AV	54.0	-11.5	1.16 H	202	46.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.7 PK	88.2	-39.5	1.72 V	239	33.0	15.7
2	#12870.00	37.8 AV	68.2	-30.4	1.72 V	239	22.1	15.7
3	19305.00	52.2 PK	74.0	-21.8	1.36 V	221	56.2	-4.0
4	19305.00	41.2 AV	54.0	-12.8	1.36 V	221	45.2	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.2 PK	88.2	-39.0	1.82 H	152	33.6	15.6
2	#13030.00	38.2 AV	68.2	-30.0	1.82 H	152	22.6	15.6
3	19545.00	52.9 PK	74.0	-21.1	1.20 H	206	56.3	-3.4
4	19545.00	42.4 AV	54.0	-11.6	1.20 H	206	45.8	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.5 PK	88.2	-39.7	1.72 V	230	32.9	15.6
2	#13030.00	37.5 AV	68.2	-30.7	1.72 V	230	21.9	15.6
3	19545.00	52.3 PK	74.0	-21.7	1.33 V	198	55.7	-3.4
4	19545.00	41.5 AV	54.0	-12.5	1.33 V	198	44.9	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.9 PK	88.2	-38.3	1.79 H	163	34.2	15.7
2	#13070.00	38.7 AV	68.2	-29.5	1.79 H	163	23.0	15.7
3	19605.00	53.2 PK	74.0	-20.8	1.19 H	200	56.9	-3.7
4	19605.00	42.5 AV	54.0	-11.5	1.19 H	200	46.2	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.8 PK	88.2	-39.4	1.70 V	251	33.1	15.7
2	#13070.00	38.1 AV	68.2	-30.1	1.70 V	251	22.4	15.7
3	19605.00	51.8 PK	74.0	-22.2	1.35 V	227	55.5	-3.7
4	19605.00	40.9 AV	54.0	-13.1	1.35 V	227	44.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.3 PK	88.2	-38.9	1.76 H	147	30.8	18.5
2	#13710.00	38.2 AV	68.2	-30.0	1.76 H	147	19.7	18.5
3	20565.00	53.2 PK	74.0	-20.8	1.19 H	218	56.4	-3.2
4	20565.00	42.5 AV	54.0	-11.5	1.19 H	218	45.7	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.6 PK	88.2	-39.6	1.77 V	234	30.1	18.5
2	#13710.00	37.6 AV	68.2	-30.6	1.77 V	234	19.1	18.5
3	20565.00	52.6 PK	74.0	-21.4	1.28 V	202	55.8	-3.2
4	20565.00	41.8 AV	54.0	-12.2	1.28 V	202	45.0	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.1 PK	88.2	-39.1	1.78 H	140	30.0	19.1
2	#13990.00	38.5 AV	68.2	-29.7	1.78 H	140	19.4	19.1
3	20985.00	52.6 PK	74.0	-21.4	1.25 H	210	55.5	-2.9
4	20985.00	42.1 AV	54.0	-11.9	1.25 H	210	45.0	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.1 PK	88.2	-40.1	1.77 V	245	29.0	19.1
2	#13990.00	37.1 AV	68.2	-31.1	1.77 V	245	18.0	19.1
3	20985.00	52.5 PK	74.0	-21.5	1.24 V	190	55.4	-2.9
4	20985.00	41.5 AV	54.0	-12.5	1.24 V	190	44.4	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.2 PK	88.2	-39.0	1.88 H	154	29.4	19.8
2	#14230.00	38.1 AV	68.2	-30.1	1.88 H	154	18.3	19.8
3	21345.00	52.9 PK	74.0	-21.1	1.14 H	214	55.4	-2.5
4	21345.00	42.3 AV	54.0	-11.7	1.14 H	214	44.8	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.1 PK	88.2	-40.1	1.77 V	238	28.3	19.8
2	#14230.00	36.9 AV	68.2	-31.3	1.77 V	238	17.1	19.8
3	21345.00	52.7 PK	74.0	-21.3	1.21 V	197	55.2	-2.5
4	21345.00	41.7 AV	54.0	-12.3	1.21 V	197	44.2	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.5 PK	74.0	-25.5	1.73 H	136	33.1	15.4
2	11910.00	38.2 AV	54.0	-15.8	1.73 H	136	22.8	15.4
3	17865.00	52.7 PK	74.0	-21.3	1.21 H	215	24.9	27.8
4	17865.00	42.4 AV	54.0	-11.6	1.21 H	215	14.6	27.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.1 PK	74.0	-25.9	1.78 V	243	32.7	15.4
2	11910.00	37.2 AV	54.0	-16.8	1.78 V	243	21.8	15.4
3	17865.00	52.7 PK	74.0	-21.3	1.25 V	181	24.9	27.8
4	17865.00	41.8 AV	54.0	-12.2	1.25 V	181	14.0	27.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.7 PK	88.2	-39.5	1.77 H	130	33.1	15.6
2	#12830.00	38.6 AV	68.2	-29.6	1.77 H	130	23.0	15.6
3	19245.00	52.2 PK	74.0	-21.8	1.16 H	217	56.5	-4.3
4	19245.00	42.1 AV	54.0	-11.9	1.16 H	217	46.4	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.6 PK	88.2	-40.6	1.77 V	243	32.0	15.6
2	#12830.00	36.6 AV	68.2	-31.6	1.77 V	243	21.0	15.6
3	19245.00	52.6 PK	74.0	-21.4	1.16 V	209	56.9	-4.3
4	19245.00	41.8 AV	54.0	-12.2	1.16 V	209	46.1	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.5 PK	88.2	-38.7	1.72 H	136	33.8	15.7
2	#12870.00	39.1 AV	68.2	-29.1	1.72 H	136	23.4	15.7
3	19305.00	52.5 PK	74.0	-21.5	1.14 H	213	56.5	-4.0
4	19305.00	42.4 AV	54.0	-11.6	1.14 H	213	46.4	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.2 PK	88.2	-41.0	1.73 V	247	31.5	15.7
2	#12870.00	36.4 AV	68.2	-31.8	1.73 V	247	20.7	15.7
3	19305.00	52.9 PK	74.0	-21.1	1.20 V	215	56.9	-4.0
4	19305.00	41.8 AV	54.0	-12.2	1.20 V	215	45.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.5 PK	88.2	-38.7	1.67 H	142	33.9	15.6
2	#13030.00	38.9 AV	68.2	-29.3	1.67 H	142	23.3	15.6
3	19545.00	52.1 PK	74.0	-21.9	1.20 H	199	55.5	-3.4
4	19545.00	42.2 AV	54.0	-11.8	1.20 H	199	45.6	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.9 PK	88.2	-40.3	1.80 V	238	32.3	15.6
2	#13030.00	37.1 AV	68.2	-31.1	1.80 V	238	21.5	15.6
3	19545.00	52.7 PK	74.0	-21.3	1.29 V	205	56.1	-3.4
4	19545.00	41.8 AV	54.0	-12.2	1.29 V	205	45.2	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.8 PK	88.2	-38.4	1.68 H	129	34.1	15.7
2	#13070.00	39.5 AV	68.2	-28.7	1.68 H	129	23.8	15.7
3	19605.00	52.8 PK	74.0	-21.2	1.18 H	224	56.5	-3.7
4	19605.00	42.5 AV	54.0	-11.5	1.18 H	224	46.2	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.7 PK	88.2	-40.5	1.75 V	240	32.0	15.7
2	#13070.00	36.8 AV	68.2	-31.4	1.75 V	240	21.1	15.7
3	19605.00	52.4 PK	74.0	-21.6	1.33 V	189	56.1	-3.7
4	19605.00	41.8 AV	54.0	-12.2	1.33 V	189	45.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.9 PK	88.2	-38.3	1.67 H	156	31.4	18.5
2	#13710.00	39.1 AV	68.2	-29.1	1.67 H	156	20.6	18.5
3	20565.00	52.1 PK	74.0	-21.9	1.20 H	208	55.3	-3.2
4	20565.00	42.3 AV	54.0	-11.7	1.20 H	208	45.5	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.6 PK	88.2	-40.6	1.70 V	241	29.1	18.5
2	#13710.00	36.6 AV	68.2	-31.6	1.70 V	241	18.1	18.5
3	20565.00	52.3 PK	74.0	-21.7	1.35 V	175	55.5	-3.2
4	20565.00	41.6 AV	54.0	-12.4	1.35 V	175	44.8	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.9 PK	88.2	-39.3	1.72 H	144	29.8	19.1
2	#13990.00	38.5 AV	68.2	-29.7	1.72 H	144	19.4	19.1
3	20985.00	52.2 PK	74.0	-21.8	1.20 H	192	55.1	-2.9
4	20985.00	42.1 AV	54.0	-11.9	1.20 H	192	45.0	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.5 PK	88.2	-40.7	1.80 V	232	28.4	19.1
2	#13990.00	36.5 AV	68.2	-31.7	1.80 V	232	17.4	19.1
3	20985.00	52.4 PK	74.0	-21.6	1.30 V	187	55.3	-2.9
4	20985.00	41.7 AV	54.0	-12.3	1.30 V	187	44.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.3 PK	88.2	-38.9	1.67 H	141	29.5	19.8
2	#14230.00	39.1 AV	68.2	-29.1	1.67 H	141	19.3	19.8
3	21345.00	52.6 PK	74.0	-21.4	1.15 H	233	55.1	-2.5
4	21345.00	42.2 AV	54.0	-11.8	1.15 H	233	44.7	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.4 PK	88.2	-40.8	1.86 V	228	27.6	19.8
2	#14230.00	36.4 AV	68.2	-31.8	1.86 V	228	16.6	19.8
3	21345.00	52.2 PK	74.0	-21.8	1.27 V	171	54.7	-2.5
4	21345.00	41.5 AV	54.0	-12.5	1.27 V	171	44.0	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.2 PK	74.0	-25.8	1.72 H	120	32.8	15.4
2	11910.00	38.2 AV	54.0	-15.8	1.72 H	120	22.8	15.4
3	17865.00	52.7 PK	74.0	-21.3	1.11 H	212	24.9	27.8
4	17865.00	42.4 AV	54.0	-11.6	1.11 H	212	14.6	27.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.2 PK	74.0	-26.8	1.81 V	218	31.8	15.4
2	11910.00	36.5 AV	54.0	-17.5	1.81 V	218	21.1	15.4
3	17865.00	52.5 PK	74.0	-21.5	1.31 V	181	24.7	27.8
4	17865.00	41.7 AV	54.0	-12.3	1.31 V	181	13.9	27.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.4 PK	88.2	-39.8	1.71 H	119	32.8	15.6
2	#12830.00	38.5 AV	68.2	-29.7	1.71 H	119	22.9	15.6
3	19245.00	52.8 PK	74.0	-21.2	1.09 H	205	57.1	-4.3
4	19245.00	42.7 AV	54.0	-11.3	1.09 H	205	47.0	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.7 PK	88.2	-40.5	1.76 V	238	32.1	15.6
2	#12830.00	36.9 AV	68.2	-31.3	1.76 V	238	21.3	15.6
3	19245.00	51.8 PK	74.0	-22.2	1.24 V	179	56.1	-4.3
4	19245.00	41.3 AV	54.0	-12.7	1.24 V	179	45.6	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.9 PK	88.2	-39.3	1.74 H	148	33.2	15.7
2	#12870.00	38.6 AV	68.2	-29.6	1.74 H	148	22.9	15.7
3	19305.00	52.3 PK	74.0	-21.7	1.12 H	216	56.3	-4.0
4	19305.00	42.1 AV	54.0	-11.9	1.12 H	216	46.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.5 PK	88.2	-40.7	1.73 V	229	31.8	15.7
2	#12870.00	36.8 AV	68.2	-31.4	1.73 V	229	21.1	15.7
3	19305.00	51.8 PK	74.0	-22.2	1.27 V	169	55.8	-4.0
4	19305.00	41.1 AV	54.0	-12.9	1.27 V	169	45.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.1 PK	88.2	-40.1	1.66 H	123	32.5	15.6
2	#13030.00	38.2 AV	68.2	-30.0	1.66 H	123	22.6	15.6
3	19545.00	52.4 PK	74.0	-21.6	1.10 H	223	55.8	-3.4
4	19545.00	42.2 AV	54.0	-11.8	1.10 H	223	45.6	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.3 PK	88.2	-40.9	1.72 V	233	31.7	15.6
2	#13030.00	36.7 AV	68.2	-31.5	1.72 V	233	21.1	15.6
3	19545.00	52.1 PK	74.0	-21.9	1.22 V	180	55.5	-3.4
4	19545.00	41.4 AV	54.0	-12.6	1.22 V	180	44.8	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.4 PK	88.2	-38.8	1.70 H	145	33.7	15.7
2	#13070.00	38.6 AV	68.2	-29.6	1.70 H	145	22.9	15.7
3	19605.00	52.1 PK	74.0	-21.9	1.14 H	218	55.8	-3.7
4	19605.00	42.5 AV	54.0	-11.5	1.14 H	218	46.2	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.9 PK	88.2	-41.3	1.73 V	253	31.2	15.7
2	#13070.00	36.1 AV	68.2	-32.1	1.73 V	253	20.4	15.7
3	19605.00	51.7 PK	74.0	-22.3	1.18 V	208	55.4	-3.7
4	19605.00	41.9 AV	54.0	-12.1	1.18 V	208	45.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.6 PK	88.2	-39.6	1.69 H	129	30.1	18.5
2	#13710.00	38.5 AV	68.2	-29.7	1.69 H	129	20.0	18.5
3	20565.00	52.2 PK	74.0	-21.8	1.08 H	205	55.4	-3.2
4	20565.00	42.3 AV	54.0	-11.7	1.08 H	205	45.5	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.9 PK	88.2	-40.3	1.81 V	228	29.4	18.5
2	#13710.00	36.8 AV	68.2	-31.4	1.81 V	228	18.3	18.5
3	20565.00	51.3 PK	74.0	-22.7	1.18 V	166	54.5	-3.2
4	20565.00	41.4 AV	54.0	-12.6	1.18 V	166	44.6	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.3 PK	88.2	-39.9	1.70 H	115	29.2	19.1
2	#13990.00	38.2 AV	68.2	-30.0	1.70 H	115	19.1	19.1
3	20985.00	52.6 PK	74.0	-21.4	1.05 H	213	55.5	-2.9
4	20985.00	42.7 AV	54.0	-11.3	1.05 H	213	45.6	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.2 PK	88.2	-41.0	1.71 V	246	28.1	19.1
2	#13990.00	36.4 AV	68.2	-31.8	1.71 V	246	17.3	19.1
3	20985.00	51.6 PK	74.0	-22.4	1.25 V	166	54.5	-2.9
4	20985.00	41.1 AV	54.0	-12.9	1.25 V	166	44.0	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.5 PK	88.2	-39.7	1.74 H	124	28.7	19.8
2	#14230.00	38.4 AV	68.2	-29.8	1.74 H	124	18.6	19.8
3	21345.00	52.1 PK	74.0	-21.9	1.03 H	208	54.6	-2.5
4	21345.00	42.2 AV	54.0	-11.8	1.03 H	208	44.7	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.8 PK	88.2	-40.4	1.86 V	236	28.0	19.8
2	#14230.00	36.8 AV	68.2	-31.4	1.86 V	236	17.0	19.8
3	21345.00	51.6 PK	74.0	-22.4	1.16 V	171	54.1	-2.5
4	21345.00	41.8 AV	54.0	-12.2	1.16 V	171	44.3	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.1 PK	74.0	-24.9	1.65 H	144	33.7	15.4
2	11910.00	38.4 AV	54.0	-15.6	1.65 H	144	23.0	15.4
3	17865.00	52.7 PK	74.0	-21.3	1.12 H	218	24.9	27.8
4	17865.00	42.8 AV	54.0	-11.2	1.12 H	218	15.0	27.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.1 PK	74.0	-25.9	1.77 V	247	32.7	15.4
2	11910.00	37.4 AV	54.0	-16.6	1.77 V	247	22.0	15.4
3	17865.00	51.8 PK	74.0	-22.2	1.27 V	184	24.0	27.8
4	17865.00	41.4 AV	54.0	-12.6	1.27 V	184	13.6	27.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.7 PK	88.2	-39.5	1.63 H	139	33.1	15.6
2	#12830.00	38.1 AV	68.2	-30.1	1.63 H	139	22.5	15.6
3	19245.00	52.4 PK	74.0	-21.6	1.13 H	224	56.7	-4.3
4	19245.00	42.5 AV	54.0	-11.5	1.13 H	224	46.8	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.3 PK	88.2	-40.9	1.68 V	249	31.7	15.6
2	#12830.00	36.3 AV	68.2	-31.9	1.68 V	249	20.7	15.6
3	19245.00	51.5 PK	74.0	-22.5	1.23 V	201	55.8	-4.3
4	19245.00	41.9 AV	54.0	-12.1	1.23 V	201	46.2	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.9 PK	88.2	-39.3	1.59 H	160	33.2	15.7
2	#12870.00	38.5 AV	68.2	-29.7	1.59 H	160	22.8	15.7
3	19305.00	52.9 PK	74.0	-21.1	1.15 H	205	56.9	-4.0
4	19305.00	42.7 AV	54.0	-11.3	1.15 H	205	46.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.5 PK	88.2	-39.7	1.69 V	221	32.8	15.7
2	#12870.00	36.8 AV	68.2	-31.4	1.69 V	221	21.1	15.7
3	19305.00	52.6 PK	74.0	-21.4	1.27 V	197	56.6	-4.0
4	19305.00	41.6 AV	54.0	-12.4	1.27 V	197	45.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.5 PK	88.2	-39.7	1.71 H	137	32.9	15.6
2	#13030.00	38.2 AV	68.2	-30.0	1.71 H	137	22.6	15.6
3	19545.00	52.2 PK	74.0	-21.8	1.09 H	195	55.6	-3.4
4	19545.00	42.3 AV	54.0	-11.7	1.09 H	195	45.7	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.3 PK	88.2	-40.9	1.73 V	256	31.7	15.6
2	#13030.00	36.2 AV	68.2	-32.0	1.73 V	256	20.6	15.6
3	19545.00	51.5 PK	74.0	-22.5	1.12 V	219	54.9	-3.4
4	19545.00	41.5 AV	54.0	-12.5	1.12 V	219	44.9	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.4 PK	88.2	-39.8	1.62 H	130	32.7	15.7
2	#13070.00	37.8 AV	68.2	-30.4	1.62 H	130	22.1	15.7
3	19605.00	52.5 PK	74.0	-21.5	1.14 H	224	56.2	-3.7
4	19605.00	42.8 AV	54.0	-11.2	1.14 H	224	46.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.1 PK	88.2	-41.1	1.71 V	243	31.4	15.7
2	#13070.00	36.3 AV	68.2	-31.9	1.71 V	243	20.6	15.7
3	19605.00	51.7 PK	74.0	-22.3	1.25 V	166	55.4	-3.7
4	19605.00	41.2 AV	54.0	-12.8	1.25 V	166	44.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.8 PK	88.2	-39.4	1.74 H	153	30.3	18.5
2	#13710.00	38.4 AV	68.2	-29.8	1.74 H	153	19.9	18.5
3	20565.00	52.5 PK	74.0	-21.5	1.07 H	179	55.7	-3.2
4	20565.00	42.6 AV	54.0	-11.4	1.07 H	179	45.8	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.6 PK	88.2	-40.6	1.70 V	253	29.1	18.5
2	#13710.00	36.5 AV	68.2	-31.7	1.70 V	253	18.0	18.5
3	20565.00	52.1 PK	74.0	-21.9	1.29 V	210	55.3	-3.2
4	20565.00	40.9 AV	54.0	-13.1	1.29 V	210	44.1	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.2 PK	88.2	-39.0	1.63 H	148	30.1	19.1
2	#13990.00	38.3 AV	68.2	-29.9	1.63 H	148	19.2	19.1
3	20985.00	53.5 PK	74.0	-20.5	1.18 H	227	56.4	-2.9
4	20985.00	43.3 AV	54.0	-10.7	1.18 H	227	46.2	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.3 PK	88.2	-40.9	1.71 V	253	28.2	19.1
2	#13990.00	36.5 AV	68.2	-31.7	1.71 V	253	17.4	19.1
3	20985.00	51.6 PK	74.0	-22.4	1.33 V	200	54.5	-2.9
4	20985.00	40.7 AV	54.0	-13.3	1.33 V	200	43.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.5 PK	88.2	-38.7	1.74 H	137	29.7	19.8
2	#14230.00	38.6 AV	68.2	-29.6	1.74 H	137	18.8	19.8
3	21345.00	52.7 PK	74.0	-21.3	1.12 H	219	55.2	-2.5
4	21345.00	42.6 AV	54.0	-11.4	1.12 H	219	45.1	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.1 PK	88.2	-41.1	1.77 V	250	27.3	19.8
2	#14230.00	36.1 AV	68.2	-32.1	1.77 V	250	16.3	19.8
3	21345.00	51.7 PK	74.0	-22.3	1.35 V	203	54.2	-2.5
4	21345.00	40.6 AV	54.0	-13.4	1.35 V	203	43.1	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	49.2 PK	74.0	-24.8	1.69 H	150	33.7	15.5
2	11970.00	38.6 AV	54.0	-15.4	1.69 H	150	23.1	15.5
3	17955.00	53.7 PK	74.0	-20.3	1.18 H	226	23.7	30.0
4	17955.00	43.4 AV	54.0	-10.6	1.18 H	226	13.4	30.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	47.2 PK	74.0	-26.8	1.66 V	250	31.7	15.5
2	11970.00	36.6 AV	54.0	-17.4	1.66 V	250	21.1	15.5
3	17955.00	51.5 PK	74.0	-22.5	1.27 V	159	21.5	30.0
4	17955.00	41.2 AV	54.0	-12.8	1.27 V	159	11.2	30.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	49.7 PK	88.2	-38.5	1.72 H	158	34.3	15.4
2	#12770.00	38.9 AV	68.2	-29.3	1.72 H	158	23.5	15.4
3	19155.00	53.9 PK	74.0	-20.1	1.24 H	212	58.5	-4.6
4	19155.00	43.6 AV	54.0	-10.4	1.24 H	212	48.2	-4.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	46.7 PK	88.2	-41.5	1.73 V	258	31.3	15.4
2	#12770.00	36.1 AV	68.2	-32.1	1.73 V	258	20.7	15.4
3	19155.00	51.6 PK	74.0	-22.4	1.36 V	191	56.2	-4.6
4	19155.00	40.9 AV	54.0	-13.1	1.36 V	191	45.5	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	49.9 PK	88.2	-38.3	1.64 H	134	34.3	15.6
2	#12930.00	38.7 AV	68.2	-29.5	1.64 H	134	23.1	15.6
3	19395.00	53.6 PK	74.0	-20.4	1.18 H	228	57.1	-3.5
4	19395.00	43.2 AV	54.0	-10.8	1.18 H	228	46.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	47.4 PK	88.2	-40.8	1.64 V	261	31.8	15.6
2	#12930.00	36.1 AV	68.2	-32.1	1.64 V	261	20.5	15.6
3	19395.00	51.7 PK	74.0	-22.3	1.32 V	213	55.2	-3.5
4	19395.00	40.6 AV	54.0	-13.4	1.32 V	213	44.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	48.6 PK	88.2	-39.6	1.79 H	147	32.8	15.8
2	#13090.00	38.1 AV	68.2	-30.1	1.79 H	147	22.3	15.8
3	19635.00	52.9 PK	74.0	-21.1	1.05 H	192	56.7	-3.8
4	19635.00	43.1 AV	54.0	-10.9	1.05 H	192	46.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	47.4 PK	88.2	-40.8	1.72 V	255	31.6	15.8
2	#13090.00	36.3 AV	68.2	-31.9	1.72 V	255	20.5	15.8
3	19635.00	51.8 PK	74.0	-22.2	1.39 V	206	55.6	-3.8
4	19635.00	40.8 AV	54.0	-13.2	1.39 V	206	44.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	48.6 PK	88.2	-39.6	1.68 H	141	30.1	18.5
2	#13730.00	38.2 AV	68.2	-30.0	1.68 H	141	19.7	18.5
3	20595.00	54.1 PK	74.0	-19.9	1.24 H	236	57.4	-3.3
4	20595.00	43.7 AV	54.0	-10.3	1.24 H	236	47.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	47.8 PK	88.2	-40.4	1.71 V	240	29.3	18.5
2	#13730.00	36.8 AV	68.2	-31.4	1.71 V	240	18.3	18.5
3	20595.00	51.5 PK	74.0	-22.5	1.26 V	219	54.8	-3.3
4	20595.00	40.5 AV	54.0	-13.5	1.26 V	219	43.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	48.2 PK	88.2	-40.0	1.76 H	138	29.6	18.6
2	#13890.00	37.9 AV	68.2	-30.3	1.76 H	138	19.3	18.6
3	20835.00	52.6 PK	74.0	-21.4	1.08 H	189	55.3	-2.7
4	20835.00	42.9 AV	54.0	-11.1	1.08 H	189	45.6	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	47.1 PK	88.2	-41.1	1.68 V	229	28.5	18.6
2	#13890.00	36.4 AV	68.2	-31.8	1.68 V	229	17.8	18.6
3	20835.00	51.4 PK	74.0	-22.6	1.29 V	235	54.1	-2.7
4	20835.00	40.6 AV	54.0	-13.4	1.29 V	235	43.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	48.9 PK	88.2	-39.3	1.67 H	157	29.9	19.0
2	#14050.00	38.1 AV	68.2	-30.1	1.67 H	157	19.1	19.0
3	21075.00	53.9 PK	74.0	-20.1	1.21 H	221	56.9	-3.0
4	21075.00	43.5 AV	54.0	-10.5	1.21 H	221	46.5	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	47.5 PK	88.2	-40.7	1.72 V	237	28.5	19.0
2	#14050.00	36.3 AV	68.2	-31.9	1.72 V	237	17.3	19.0
3	21075.00	51.7 PK	74.0	-22.3	1.35 V	198	54.7	-3.0
4	21075.00	40.4 AV	54.0	-13.6	1.35 V	198	43.4	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	49.1 PK	74.0	-24.9	1.71 H	152	33.5	15.6
2	12050.00	38.6 AV	54.0	-15.4	1.71 H	152	23.0	15.6
3	18075.00	53.3 PK	74.0	-20.7	1.20 H	242	58.4	-5.1
4	18075.00	43.2 AV	54.0	-10.8	1.20 H	242	48.3	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.1 PK	74.0	-26.9	1.76 V	237	31.5	15.6
2	12050.00	36.4 AV	54.0	-17.6	1.76 V	237	20.8	15.6
3	18075.00	51.5 PK	74.0	-22.5	1.23 V	204	56.6	-5.1
4	18075.00	40.2 AV	54.0	-13.8	1.23 V	204	45.3	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.8 PK	74.0	-25.2	1.72 H	136	33.9	14.9
2	12690.00	38.2 AV	54.0	-15.8	1.72 H	136	23.3	14.9
3	19035.00	53.7 PK	74.0	-20.3	1.26 H	228	58.4	-4.7
4	19035.00	43.4 AV	54.0	-10.6	1.26 H	228	48.1	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.8 PK	74.0	-26.2	1.73 V	229	32.9	14.9
2	12690.00	36.7 AV	54.0	-17.3	1.73 V	229	21.8	14.9
3	19035.00	52.1 PK	74.0	-21.9	1.37 V	207	56.8	-4.7
4	19035.00	40.8 AV	54.0	-13.2	1.37 V	207	45.5	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	48.9 PK	88.2	-39.3	1.70 H	146	33.4	15.5
2	#13010.00	37.7 AV	68.2	-30.5	1.70 H	146	22.2	15.5
3	19515.00	52.4 PK	74.0	-21.6	1.07 H	183	55.6	-3.2
4	19515.00	42.4 AV	54.0	-11.6	1.07 H	183	45.6	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	47.7 PK	88.2	-40.5	1.73 V	227	32.2	15.5
2	#13010.00	36.3 AV	68.2	-31.9	1.73 V	227	20.8	15.5
3	19515.00	51.7 PK	74.0	-22.3	1.39 V	203	54.9	-3.2
4	19515.00	40.7 AV	54.0	-13.3	1.39 V	203	43.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.9 PK	74.0	-25.1	1.74 H	149	31.5	17.4
2	13330.00	38.2 AV	54.0	-15.8	1.74 H	149	20.8	17.4
3	19995.00	52.3 PK	74.0	-21.7	1.05 H	204	56.4	-4.1
4	19995.00	42.8 AV	54.0	-11.2	1.05 H	204	46.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	47.2 PK	74.0	-26.8	1.80 V	255	29.8	17.4
2	13330.00	36.4 AV	54.0	-17.6	1.80 V	255	19.0	17.4
3	19995.00	51.2 PK	74.0	-22.8	1.39 V	205	55.3	-4.1
4	19995.00	40.1 AV	54.0	-13.9	1.39 V	205	44.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	49.5 PK	88.2	-38.7	1.69 H	126	30.9	18.6
2	#13650.00	38.5 AV	68.2	-29.7	1.69 H	126	19.9	18.6
3	20475.00	52.6 PK	74.0	-21.4	1.15 H	203	55.6	-3.0
4	20475.00	42.2 AV	54.0	-11.8	1.15 H	203	45.2	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	47.9 PK	88.2	-40.3	1.68 V	217	29.3	18.6
2	#13650.00	36.7 AV	68.2	-31.5	1.68 V	217	18.1	18.6
3	20475.00	51.6 PK	74.0	-22.4	1.34 V	215	54.6	-3.0
4	20475.00	40.6 AV	54.0	-13.4	1.34 V	215	43.6	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	48.9 PK	88.2	-39.3	1.79 H	155	29.9	19.0
2	#13970.00	37.9 AV	68.2	-30.3	1.79 H	155	18.9	19.0
3	20955.00	52.8 PK	74.0	-21.2	1.03 H	189	55.5	-2.7
4	20955.00	43.1 AV	54.0	-10.9	1.03 H	189	45.8	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	47.1 PK	88.2	-41.1	1.78 V	248	28.1	19.0
2	#13970.00	36.1 AV	68.2	-32.1	1.78 V	248	17.1	19.0
3	20955.00	51.4 PK	74.0	-22.6	1.41 V	203	54.1	-2.7
4	20955.00	40.5 AV	54.0	-13.5	1.41 V	203	43.2	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	49.2 PK	74.0	-24.8	1.65 H	114	33.6	15.6
2	12050.00	38.3 AV	54.0	-15.7	1.65 H	114	22.7	15.6
3	18075.00	52.8 PK	74.0	-21.2	1.12 H	199	57.9	-5.1
4	18075.00	42.3 AV	54.0	-11.7	1.12 H	199	47.4	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.8 PK	74.0	-26.2	1.66 V	211	32.2	15.6
2	12050.00	36.3 AV	54.0	-17.7	1.66 V	211	20.7	15.6
3	18075.00	51.4 PK	74.0	-22.6	1.34 V	201	56.5	-5.1
4	18075.00	40.3 AV	54.0	-13.7	1.34 V	201	45.4	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	49.5 PK	74.0	-24.5	1.82 H	153	34.6	14.9
2	12690.00	38.4 AV	54.0	-15.6	1.82 H	153	23.5	14.9
3	19035.00	52.3 PK	74.0	-21.7	1.03 H	199	57.0	-4.7
4	19035.00	42.7 AV	54.0	-11.3	1.03 H	199	47.4	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.9 PK	74.0	-26.1	1.71 V	204	33.0	14.9
2	12690.00	36.9 AV	54.0	-17.1	1.71 V	204	22.0	14.9
3	19035.00	51.2 PK	74.0	-22.8	1.37 V	210	55.9	-4.7
4	19035.00	40.2 AV	54.0	-13.8	1.37 V	210	44.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	48.5 PK	88.2	-39.7	1.80 H	123	33.0	15.5
2	#13010.00	38.2 AV	68.2	-30.0	1.80 H	123	22.7	15.5
3	19515.00	52.3 PK	74.0	-21.7	1.08 H	214	55.5	-3.2
4	19515.00	42.5 AV	54.0	-11.5	1.08 H	214	45.7	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	47.7 PK	88.2	-40.5	1.70 V	240	32.2	15.5
2	#13010.00	36.4 AV	68.2	-31.8	1.70 V	240	20.9	15.5
3	19515.00	51.8 PK	74.0	-22.2	1.40 V	218	55.0	-3.2
4	19515.00	40.7 AV	54.0	-13.3	1.40 V	218	43.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	49.8 PK	74.0	-24.2	1.83 H	169	32.4	17.4
2	13330.00	38.5 AV	54.0	-15.5	1.83 H	169	21.1	17.4
3	19995.00	52.5 PK	74.0	-21.5	1.04 H	211	56.6	-4.1
4	19995.00	42.6 AV	54.0	-11.4	1.04 H	211	46.7	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	47.7 PK	74.0	-26.3	1.69 V	222	30.3	17.4
2	13330.00	36.5 AV	54.0	-17.5	1.69 V	222	19.1	17.4
3	19995.00	52.1 PK	74.0	-21.9	1.40 V	190	56.2	-4.1
4	19995.00	40.8 AV	54.0	-13.2	1.40 V	190	44.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	49.6 PK	88.2	-38.6	1.82 H	172	31.0	18.6
2	#13650.00	38.4 AV	68.2	-29.8	1.82 H	172	19.8	18.6
3	20475.00	52.9 PK	74.0	-21.1	1.01 H	217	55.9	-3.0
4	20475.00	42.9 AV	54.0	-11.1	1.01 H	217	45.9	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	47.6 PK	88.2	-40.6	1.71 V	237	29.0	18.6
2	#13650.00	36.4 AV	68.2	-31.8	1.71 V	237	17.8	18.6
3	20475.00	51.5 PK	74.0	-22.5	1.31 V	210	54.5	-3.0
4	20475.00	40.3 AV	54.0	-13.7	1.31 V	210	43.3	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	48.8 PK	88.2	-39.4	1.81 H	136	29.8	19.0
2	#13970.00	38.6 AV	68.2	-29.6	1.81 H	136	19.6	19.0
3	20955.00	52.1 PK	74.0	-21.9	1.13 H	213	54.8	-2.7
4	20955.00	42.5 AV	54.0	-11.5	1.13 H	213	45.2	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	47.2 PK	88.2	-41.0	1.76 V	228	28.2	19.0
2	#13970.00	36.1 AV	68.2	-32.1	1.76 V	228	17.1	19.0
3	20955.00	51.8 PK	74.0	-22.2	1.29 V	220	54.5	-2.7
4	20955.00	40.7 AV	54.0	-13.3	1.29 V	220	43.4	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

2TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.9 PK	74.0	-25.1	2.12 H	156	33.5	15.4
2	11910.00	37.2 AV	54.0	-16.8	2.12 H	156	21.8	15.4
3	17865.00	54.3 PK	74.0	-19.7	1.79 H	203	26.5	27.8
4	17865.00	42.1 AV	54.0	-11.9	1.79 H	203	14.3	27.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.6 PK	74.0	-24.4	1.71 V	279	34.2	15.4
2	11910.00	38.7 AV	54.0	-15.3	1.71 V	279	23.3	15.4
3	17865.00	55.6 PK	74.0	-18.4	1.62 V	128	27.8	27.8
4	17865.00	43.9 AV	54.0	-10.1	1.62 V	128	16.1	27.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.5 PK	74.0	-25.5	2.12 H	164	33.4	15.1
2	12350.00	36.7 AV	54.0	-17.3	2.12 H	164	21.6	15.1
3	18525.00	54.9 PK	74.0	-19.1	1.82 H	206	59.8	-4.9
4	18525.00	42.5 AV	54.0	-11.5	1.82 H	206	47.4	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	49.7 PK	74.0	-24.3	1.76 V	289	34.6	15.1
2	12350.00	38.6 AV	54.0	-15.4	1.76 V	289	23.5	15.1
3	18525.00	55.6 PK	74.0	-18.4	1.60 V	131	60.5	-4.9
4	18525.00	43.8 AV	54.0	-10.2	1.60 V	131	48.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.3 PK	88.2	-39.9	2.13 H	162	32.7	15.6
2	#12830.00	36.4 AV	68.2	-31.8	2.13 H	162	20.8	15.6
3	19245.00	54.4 PK	74.0	-19.6	1.85 H	220	58.7	-4.3
4	19245.00	42.2 AV	54.0	-11.8	1.85 H	220	46.5	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.4 PK	88.2	-38.8	1.79 V	283	33.8	15.6
2	#12830.00	38.2 AV	68.2	-30.0	1.79 V	283	22.6	15.6
3	19245.00	55.9 PK	74.0	-18.1	1.65 V	127	60.2	-4.3
4	19245.00	43.9 AV	54.0	-10.1	1.65 V	127	48.2	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.5 PK	88.2	-39.7	2.13 H	151	32.8	15.7
2	#12870.00	36.4 AV	68.2	-31.8	2.13 H	151	20.7	15.7
3	19305.00	54.4 PK	74.0	-19.6	1.79 H	210	58.4	-4.0
4	19305.00	42.3 AV	54.0	-11.7	1.79 H	210	46.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.2 PK	88.2	-39.0	1.77 V	301	33.5	15.7
2	#12870.00	38.2 AV	68.2	-30.0	1.77 V	301	22.5	15.7
3	19305.00	55.4 PK	74.0	-18.6	1.58 V	143	59.4	-4.0
4	19305.00	43.5 AV	54.0	-10.5	1.58 V	143	47.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.2 PK	88.2	-40.0	2.13 H	162	32.7	15.5
2	#12950.00	36.3 AV	68.2	-31.9	2.13 H	162	20.8	15.5
3	19425.00	54.2 PK	74.0	-19.8	1.77 H	201	57.7	-3.5
4	19425.00	42.1 AV	54.0	-11.9	1.77 H	201	45.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	49.7 PK	88.2	-38.5	1.77 V	291	34.2	15.5
2	#12950.00	38.6 AV	68.2	-29.6	1.77 V	291	23.1	15.5
3	19425.00	55.8 PK	74.0	-18.2	1.55 V	134	59.3	-3.5
4	19425.00	44.0 AV	54.0	-10.0	1.55 V	134	47.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.3 PK	88.2	-39.9	2.12 H	150	32.7	15.6
2	#13030.00	36.7 AV	68.2	-31.5	2.12 H	150	21.1	15.6
3	19545.00	54.5 PK	74.0	-19.5	1.79 H	219	57.9	-3.4
4	19545.00	42.5 AV	54.0	-11.5	1.79 H	219	45.9	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.2 PK	88.2	-39.0	1.72 V	315	33.6	15.6
2	#13030.00	38.1 AV	68.2	-30.1	1.72 V	315	22.5	15.6
3	19545.00	55.2 PK	74.0	-18.8	1.63 V	139	58.6	-3.4
4	19545.00	43.6 AV	54.0	-10.4	1.63 V	139	47.0	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.9 PK	88.2	-40.3	2.15 H	169	32.2	15.7
2	#13070.00	35.9 AV	68.2	-32.3	2.15 H	169	20.2	15.7
3	19605.00	54.5 PK	74.0	-19.5	1.82 H	192	58.2	-3.7
4	19605.00	42.6 AV	54.0	-11.4	1.82 H	192	46.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.3 PK	88.2	-38.9	1.82 V	312	33.6	15.7
2	#13070.00	38.5 AV	68.2	-29.7	1.82 V	312	22.8	15.7
3	19605.00	55.7 PK	74.0	-18.3	1.60 V	141	59.4	-3.7
4	19605.00	43.6 AV	54.0	-10.4	1.60 V	141	47.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.1 PK	74.0	-25.9	2.13 H	162	30.4	17.7
2	13390.00	36.2 AV	54.0	-17.8	2.13 H	162	18.5	17.7
3	20085.00	54.9 PK	74.0	-19.1	1.80 H	190	58.7	-3.8
4	20085.00	43.1 AV	54.0	-10.9	1.80 H	190	46.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.6 PK	74.0	-24.4	1.79 V	313	31.9	17.7
2	13390.00	37.8 AV	54.0	-16.2	1.79 V	313	20.1	17.7
3	20085.00	55.2 PK	74.0	-18.8	1.56 V	143	59.0	-3.8
4	20085.00	43.5 AV	54.0	-10.5	1.56 V	143	47.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.6 PK	88.2	-40.6	2.06 H	164	29.1	18.5
2	#13710.00	36.2 AV	68.2	-32.0	2.06 H	164	17.7	18.5
3	20565.00	54.9 PK	74.0	-19.1	1.76 H	224	58.1	-3.2
4	20565.00	42.7 AV	54.0	-11.3	1.76 H	224	45.9	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.2 PK	88.2	-39.0	1.73 V	300	30.7	18.5
2	#13710.00	38.4 AV	68.2	-29.8	1.73 V	300	19.9	18.5
3	20565.00	55.3 PK	74.0	-18.7	1.63 V	138	58.5	-3.2
4	20565.00	43.9 AV	54.0	-10.1	1.63 V	138	47.1	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	47.7 PK	88.2	-40.5	2.08 H	177	29.3	18.4
2	#13750.00	36.5 AV	68.2	-31.7	2.08 H	177	18.1	18.4
3	20625.00	54.4 PK	74.0	-19.6	1.75 H	229	57.6	-3.2
4	20625.00	42.3 AV	54.0	-11.7	1.75 H	229	45.5	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.7 PK	88.2	-39.5	1.70 V	314	30.3	18.4
2	#13750.00	38.1 AV	68.2	-30.1	1.70 V	314	19.7	18.4
3	20625.00	55.1 PK	74.0	-18.9	1.66 V	134	58.3	-3.2
4	20625.00	43.7 AV	54.0	-10.3	1.66 V	134	46.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.8 PK	88.2	-39.4	2.14 H	156	29.7	19.1
2	#13990.00	36.6 AV	68.2	-31.6	2.14 H	156	17.5	19.1
3	20985.00	54.2 PK	74.0	-19.8	1.75 H	205	57.1	-2.9
4	20985.00	41.9 AV	54.0	-12.1	1.75 H	205	44.8	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.8 PK	88.2	-38.4	1.84 V	323	30.7	19.1
2	#13990.00	37.6 AV	68.2	-30.6	1.84 V	323	18.5	19.1
3	20985.00	55.3 PK	74.0	-18.7	1.61 V	147	58.2	-2.9
4	20985.00	43.5 AV	54.0	-10.5	1.61 V	147	46.4	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.7 PK	88.2	-39.5	2.09 H	140	28.9	19.8
2	#14230.00	36.7 AV	68.2	-31.5	2.09 H	140	16.9	19.8
3	21345.00	54.7 PK	74.0	-19.3	1.73 H	191	57.2	-2.5
4	21345.00	42.4 AV	54.0	-11.6	1.73 H	191	44.9	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.7 PK	88.2	-38.5	1.80 V	318	29.9	19.8
2	#14230.00	37.7 AV	68.2	-30.5	1.80 V	318	17.9	19.8
3	21345.00	55.4 PK	74.0	-18.6	1.62 V	132	57.9	-2.5
4	21345.00	43.8 AV	54.0	-10.2	1.62 V	132	46.3	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

2S2T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.4 PK	74.0	-25.6	2.17 H	161	33.0	15.4
2	11910.00	36.8 AV	54.0	-17.2	2.17 H	161	21.4	15.4
3	17865.00	54.3 PK	74.0	-19.7	1.79 H	205	26.5	27.8
4	17865.00	41.9 AV	54.0	-12.1	1.79 H	205	14.1	27.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.5 PK	74.0	-24.5	1.74 V	326	34.1	15.4
2	11910.00	37.9 AV	54.0	-16.1	1.74 V	326	22.5	15.4
3	17865.00	55.2 PK	74.0	-18.8	1.62 V	128	27.4	27.8
4	17865.00	43.3 AV	54.0	-10.7	1.62 V	128	15.5	27.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.6 PK	74.0	-26.4	2.13 H	171	32.5	15.1
2	12350.00	36.1 AV	54.0	-17.9	2.13 H	171	21.0	15.1
3	18525.00	54.6 PK	74.0	-19.4	1.81 H	176	59.5	-4.9
4	18525.00	42.5 AV	54.0	-11.5	1.81 H	176	47.4	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	49.1 PK	74.0	-24.9	1.80 V	313	34.0	15.1
2	12350.00	37.6 AV	54.0	-16.4	1.80 V	313	22.5	15.1
3	18525.00	55.5 PK	74.0	-18.5	1.54 V	157	60.4	-4.9
4	18525.00	43.1 AV	54.0	-10.9	1.54 V	157	48.0	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.2 PK	88.2	-41.0	2.13 H	158	31.6	15.6
2	#12830.00	36.2 AV	68.2	-32.0	2.13 H	158	20.6	15.6
3	19245.00	54.7 PK	74.0	-19.3	1.77 H	214	59.0	-4.3
4	19245.00	42.3 AV	54.0	-11.7	1.77 H	214	46.6	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.3 PK	88.2	-38.9	1.79 V	329	33.7	15.6
2	#12830.00	37.5 AV	68.2	-30.7	1.79 V	329	21.9	15.6
3	19245.00	55.9 PK	74.0	-18.1	1.67 V	116	60.2	-4.3
4	19245.00	43.8 AV	54.0	-10.2	1.67 V	116	48.1	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.8 PK	88.2	-39.4	2.18 H	150	33.1	15.7
2	#12870.00	37.1 AV	68.2	-31.1	2.18 H	150	21.4	15.7
3	19305.00	54.6 PK	74.0	-19.4	1.81 H	216	58.6	-4.0
4	19305.00	42.1 AV	54.0	-11.9	1.81 H	216	46.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.5 PK	88.2	-38.7	1.71 V	330	33.8	15.7
2	#12870.00	38.1 AV	68.2	-30.1	1.71 V	330	22.4	15.7
3	19305.00	55.2 PK	74.0	-18.8	1.62 V	137	59.2	-4.0
4	19305.00	43.6 AV	54.0	-10.4	1.62 V	137	47.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	47.5 PK	88.2	-40.7	2.16 H	184	32.0	15.5
2	#12950.00	35.9 AV	68.2	-32.3	2.16 H	184	20.4	15.5
3	19425.00	54.7 PK	74.0	-19.3	1.79 H	179	58.2	-3.5
4	19425.00	42.8 AV	54.0	-11.2	1.79 H	179	46.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	49.9 PK	88.2	-38.3	1.77 V	329	34.4	15.5
2	#12950.00	38.5 AV	68.2	-29.7	1.77 V	329	23.0	15.5
3	19425.00	55.5 PK	74.0	-18.5	1.59 V	152	59.0	-3.5
4	19425.00	43.7 AV	54.0	-10.3	1.59 V	152	47.2	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.3 PK	88.2	-39.9	2.22 H	169	32.7	15.6
2	#13030.00	36.6 AV	68.2	-31.6	2.22 H	169	21.0	15.6
3	19545.00	53.8 PK	74.0	-20.2	1.76 H	215	57.2	-3.4
4	19545.00	41.5 AV	54.0	-12.5	1.76 H	215	44.9	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.3 PK	88.2	-38.9	1.77 V	336	33.7	15.6
2	#13030.00	38.2 AV	68.2	-30.0	1.77 V	336	22.6	15.6
3	19545.00	55.1 PK	74.0	-18.9	1.58 V	133	58.5	-3.4
4	19545.00	43.5 AV	54.0	-10.5	1.58 V	133	46.9	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.8 PK	88.2	-39.4	2.28 H	171	33.1	15.7
2	#13070.00	36.8 AV	68.2	-31.4	2.28 H	171	21.1	15.7
3	19605.00	53.5 PK	74.0	-20.5	1.74 H	218	57.2	-3.7
4	19605.00	41.1 AV	54.0	-12.9	1.74 H	218	44.8	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.6 PK	88.2	-38.6	1.75 V	340	33.9	15.7
2	#13070.00	37.8 AV	68.2	-30.4	1.75 V	340	22.1	15.7
3	19605.00	55.3 PK	74.0	-18.7	1.61 V	117	59.0	-3.7
4	19605.00	43.4 AV	54.0	-10.6	1.61 V	117	47.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.7 PK	74.0	-25.3	2.24 H	186	31.0	17.7
2	13390.00	36.7 AV	54.0	-17.3	2.24 H	186	19.0	17.7
3	20085.00	53.9 PK	74.0	-20.1	1.71 H	224	57.7	-3.8
4	20085.00	41.5 AV	54.0	-12.5	1.71 H	224	45.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.1 PK	74.0	-24.9	1.82 V	347	31.4	17.7
2	13390.00	37.9 AV	54.0	-16.1	1.82 V	347	20.2	17.7
3	20085.00	55.4 PK	74.0	-18.6	1.61 V	145	59.2	-3.8
4	20085.00	43.6 AV	54.0	-10.4	1.61 V	145	47.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.7 PK	88.2	-39.5	2.29 H	172	30.2	18.5
2	#13710.00	36.7 AV	68.2	-31.5	2.29 H	172	18.2	18.5
3	20565.00	54.2 PK	74.0	-19.8	1.68 H	233	57.4	-3.2
4	20565.00	41.9 AV	54.0	-12.1	1.68 H	233	45.1	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.8 PK	88.2	-38.4	1.68 V	342	31.3	18.5
2	#13710.00	38.6 AV	68.2	-29.6	1.68 V	342	20.1	18.5
3	20565.00	55.2 PK	74.0	-18.8	1.57 V	143	58.4	-3.2
4	20565.00	43.5 AV	54.0	-10.5	1.57 V	143	46.7	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.5 PK	88.2	-39.7	2.14 H	160	30.1	18.4
2	#13750.00	37.2 AV	68.2	-31.0	2.14 H	160	18.8	18.4
3	20625.00	54.3 PK	74.0	-19.7	1.80 H	200	57.5	-3.2
4	20625.00	41.9 AV	54.0	-12.1	1.80 H	200	45.1	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	49.5 PK	88.2	-38.7	1.79 V	327	31.1	18.4
2	#13750.00	37.6 AV	68.2	-30.6	1.79 V	327	19.2	18.4
3	20625.00	55.4 PK	74.0	-18.6	1.61 V	103	58.6	-3.2
4	20625.00	43.3 AV	54.0	-10.7	1.61 V	103	46.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.6 PK	88.2	-39.6	2.21 H	171	29.5	19.1
2	#13990.00	36.4 AV	68.2	-31.8	2.21 H	171	17.3	19.1
3	20985.00	54.4 PK	74.0	-19.6	1.68 H	232	57.3	-2.9
4	20985.00	41.9 AV	54.0	-12.1	1.68 H	232	44.8	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.5 PK	88.2	-38.7	1.62 V	341	30.4	19.1
2	#13990.00	38.2 AV	68.2	-30.0	1.62 V	341	19.1	19.1
3	20985.00	54.7 PK	74.0	-19.3	1.58 V	157	57.6	-2.9
4	20985.00	43.2 AV	54.0	-10.8	1.58 V	157	46.1	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.8 PK	88.2	-39.4	2.19 H	149	29.0	19.8
2	#14230.00	37.2 AV	68.2	-31.0	2.19 H	149	17.4	19.8
3	21345.00	54.4 PK	74.0	-19.6	1.79 H	205	56.9	-2.5
4	21345.00	41.8 AV	54.0	-12.2	1.79 H	205	44.3	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.1 PK	88.2	-39.1	1.58 V	331	29.3	19.8
2	#14230.00	37.8 AV	68.2	-30.4	1.58 V	331	18.0	19.8
3	21345.00	55.1 PK	74.0	-18.9	1.52 V	145	57.6	-2.5
4	21345.00	43.5 AV	54.0	-10.5	1.52 V	145	46.0	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	48.5 PK	74.0	-25.5	2.08 H	174	33.1	15.4
2	11930.00	37.1 AV	54.0	-16.9	2.08 H	174	21.7	15.4
3	17895.00	54.5 PK	74.0	-19.5	1.79 H	202	26.0	28.5
4	17895.00	42.1 AV	54.0	-11.9	1.79 H	202	13.6	28.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	49.3 PK	74.0	-24.7	1.68 V	332	33.9	15.4
2	11930.00	37.9 AV	54.0	-16.1	1.68 V	332	22.5	15.4
3	17895.00	55.4 PK	74.0	-18.6	1.57 V	136	26.9	28.5
4	17895.00	43.6 AV	54.0	-10.4	1.57 V	136	15.1	28.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	48.5 PK	74.0	-25.5	2.22 H	160	33.3	15.2
2	12330.00	36.3 AV	54.0	-17.7	2.22 H	160	21.1	15.2
3	18495.00	54.8 PK	74.0	-19.2	1.63 H	221	59.7	-4.9
4	18495.00	42.3 AV	54.0	-11.7	1.63 H	221	47.2	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	49.6 PK	74.0	-24.4	1.64 V	338	34.4	15.2
2	12330.00	38.2 AV	54.0	-15.8	1.64 V	338	23.0	15.2
3	18495.00	55.1 PK	74.0	-18.9	1.54 V	149	60.0	-4.9
4	18495.00	43.3 AV	54.0	-10.7	1.54 V	149	48.2	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	48.8 PK	88.2	-39.4	2.06 H	187	33.2	15.6
2	#12810.00	37.3 AV	68.2	-30.9	2.06 H	187	21.7	15.6
3	19215.00	54.3 PK	74.0	-19.7	1.85 H	205	58.7	-4.4
4	19215.00	41.7 AV	54.0	-12.3	1.85 H	205	46.1	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	49.9 PK	88.2	-38.3	1.76 V	321	34.3	15.6
2	#12810.00	38.4 AV	68.2	-29.8	1.76 V	321	22.8	15.6
3	19215.00	54.7 PK	74.0	-19.3	1.62 V	142	59.1	-4.4
4	19215.00	43.2 AV	54.0	-10.8	1.62 V	142	47.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	48.6 PK	88.2	-39.6	2.13 H	181	32.9	15.7
2	#12890.00	37.1 AV	68.2	-31.1	2.13 H	181	21.4	15.7
3	19335.00	54.9 PK	74.0	-19.1	1.81 H	195	58.7	-3.8
4	19335.00	42.6 AV	54.0	-11.4	1.81 H	195	46.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	49.5 PK	88.2	-38.7	1.78 V	328	33.8	15.7
2	#12890.00	38.1 AV	68.2	-30.1	1.78 V	328	22.4	15.7
3	19335.00	54.8 PK	74.0	-19.2	1.61 V	145	58.6	-3.8
4	19335.00	43.5 AV	54.0	-10.5	1.61 V	145	47.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	48.4 PK	88.2	-39.8	2.28 H	161	32.9	15.5
2	#12970.00	36.4 AV	68.2	-31.8	2.28 H	161	20.9	15.5
3	19455.00	54.6 PK	74.0	-19.4	1.62 H	232	57.9	-3.3
4	19455.00	42.2 AV	54.0	-11.8	1.62 H	232	45.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	49.6 PK	88.2	-38.6	1.66 V	350	34.1	15.5
2	#12970.00	38.4 AV	68.2	-29.8	1.66 V	350	22.9	15.5
3	19455.00	54.9 PK	74.0	-19.1	1.54 V	164	58.2	-3.3
4	19455.00	43.1 AV	54.0	-10.9	1.54 V	164	46.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	48.2 PK	88.2	-40.0	2.21 H	176	32.5	15.7
2	#13050.00	37.1 AV	68.2	-31.1	2.21 H	176	21.4	15.7
3	19575.00	54.4 PK	74.0	-19.6	1.72 H	225	58.0	-3.6
4	19575.00	41.9 AV	54.0	-12.1	1.72 H	225	45.5	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	49.1 PK	88.2	-39.1	1.64 V	350	33.4	15.7
2	#13050.00	38.1 AV	68.2	-30.1	1.64 V	350	22.4	15.7
3	19575.00	54.6 PK	74.0	-19.4	1.52 V	161	58.2	-3.6
4	19575.00	42.9 AV	54.0	-11.1	1.52 V	161	46.5	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	48.8 PK	88.2	-39.4	2.23 H	165	32.8	16.0
2	#13130.00	36.6 AV	68.2	-31.6	2.23 H	165	20.6	16.0
3	19695.00	54.2 PK	74.0	-19.8	1.68 H	217	58.1	-3.9
4	19695.00	41.6 AV	54.0	-12.4	1.68 H	217	45.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	49.4 PK	88.2	-38.8	1.79 V	320	33.4	16.0
2	#13130.00	38.3 AV	68.2	-29.9	1.79 V	320	22.3	16.0
3	19695.00	54.9 PK	74.0	-19.1	1.59 V	151	58.8	-3.9
4	19695.00	43.4 AV	54.0	-10.6	1.59 V	151	47.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	47.9 PK	88.2	-40.3	2.25 H	181	29.9	18.0
2	#13450.00	36.8 AV	68.2	-31.4	2.25 H	181	18.8	18.0
3	20175.00	54.1 PK	74.0	-19.9	1.70 H	225	57.7	-3.6
4	20175.00	41.7 AV	54.0	-12.3	1.70 H	225	45.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	49.6 PK	88.2	-38.6	1.79 V	336	31.6	18.0
2	#13450.00	38.7 AV	68.2	-29.5	1.79 V	336	20.7	18.0
3	20175.00	54.6 PK	74.0	-19.4	1.58 V	150	58.2	-3.6
4	20175.00	43.1 AV	54.0	-10.9	1.58 V	150	46.7	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	48.3 PK	88.2	-39.9	2.24 H	192	29.7	18.6
2	#13690.00	37.1 AV	68.2	-31.1	2.24 H	192	18.5	18.6
3	20535.00	54.9 PK	74.0	-19.1	1.69 H	238	58.1	-3.2
4	20535.00	42.2 AV	54.0	-11.8	1.69 H	238	45.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	49.5 PK	88.2	-38.7	1.76 V	316	30.9	18.6
2	#13690.00	38.1 AV	68.2	-30.1	1.76 V	316	19.5	18.6
3	20535.00	54.5 PK	74.0	-19.5	1.65 V	144	57.7	-3.2
4	20535.00	42.8 AV	54.0	-11.2	1.65 V	144	46.0	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	48.6 PK	88.2	-39.6	2.28 H	163	30.0	18.6
2	#13770.00	36.2 AV	68.2	-32.0	2.28 H	163	17.6	18.6
3	20655.00	54.7 PK	74.0	-19.3	1.59 H	222	57.8	-3.1
4	20655.00	42.5 AV	54.0	-11.5	1.59 H	222	45.6	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	49.4 PK	88.2	-38.8	1.73 V	322	30.8	18.6
2	#13770.00	38.8 AV	68.2	-29.4	1.73 V	322	20.2	18.6
3	20655.00	54.9 PK	74.0	-19.1	1.55 V	161	58.0	-3.1
4	20655.00	43.3 AV	54.0	-10.7	1.55 V	161	46.4	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	48.1 PK	88.2	-40.1	2.24 H	191	29.1	19.0
2	#14010.00	36.8 AV	68.2	-31.4	2.24 H	191	17.8	19.0
3	21015.00	53.9 PK	74.0	-20.1	1.66 H	214	56.8	-2.9
4	21015.00	41.7 AV	54.0	-12.3	1.66 H	214	44.6	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	49.9 PK	88.2	-38.3	1.78 V	321	30.9	19.0
2	#14010.00	38.9 AV	68.2	-29.3	1.78 V	321	19.9	19.0
3	21015.00	54.4 PK	74.0	-19.6	1.61 V	157	57.3	-2.9
4	21015.00	42.7 AV	54.0	-11.3	1.61 V	157	45.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	48.2 PK	88.2	-40.0	2.24 H	188	28.7	19.5
2	#14170.00	36.9 AV	68.2	-31.3	2.24 H	188	17.4	19.5
3	21255.00	54.2 PK	74.0	-19.8	1.71 H	218	57.0	-2.8
4	21255.00	41.9 AV	54.0	-12.1	1.71 H	218	44.7	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	49.3 PK	88.2	-38.9	1.77 V	328	29.8	19.5
2	#14170.00	38.6 AV	68.2	-29.6	1.77 V	328	19.1	19.5
3	21255.00	54.4 PK	74.0	-19.6	1.52 V	155	57.2	-2.8
4	21255.00	42.9 AV	54.0	-11.1	1.52 V	155	45.7	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.8 PK	74.0	-25.2	2.32 H	150	33.3	15.5
2	11970.00	36.6 AV	54.0	-17.4	2.32 H	150	21.1	15.5
3	17955.00	54.3 PK	74.0	-19.7	1.64 H	212	24.3	30.0
4	17955.00	42.2 AV	54.0	-11.8	1.64 H	212	12.2	30.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	49.4 PK	74.0	-24.6	1.84 V	334	33.9	15.5
2	11970.00	38.3 AV	54.0	-15.7	1.84 V	334	22.8	15.5
3	17955.00	54.7 PK	74.0	-19.3	1.58 V	139	24.7	30.0
4	17955.00	43.4 AV	54.0	-10.6	1.58 V	139	13.4	30.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	48.4 PK	74.0	-25.6	2.23 H	169	33.1	15.3
2	12290.00	36.3 AV	54.0	-17.7	2.23 H	169	21.0	15.3
3	18435.00	54.2 PK	74.0	-19.8	1.73 H	204	59.3	-5.1
4	18435.00	41.8 AV	54.0	-12.2	1.73 H	204	46.9	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	49.2 PK	74.0	-24.8	1.69 V	324	33.9	15.3
2	12290.00	38.4 AV	54.0	-15.6	1.69 V	324	23.1	15.3
3	18435.00	54.8 PK	74.0	-19.2	1.59 V	168	59.9	-5.1
4	18435.00	43.3 AV	54.0	-10.7	1.59 V	168	48.4	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	48.2 PK	88.2	-40.0	2.21 H	168	32.8	15.4
2	#12770.00	36.2 AV	68.2	-32.0	2.21 H	168	20.8	15.4
3	19155.00	54.1 PK	74.0	-19.9	1.69 H	193	58.7	-4.6
4	19155.00	41.4 AV	54.0	-12.6	1.69 H	193	46.0	-4.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	48.9 PK	88.2	-39.3	1.79 V	334	33.5	15.4
2	#12770.00	37.9 AV	68.2	-30.3	1.79 V	334	22.5	15.4
3	19155.00	54.8 PK	74.0	-19.2	1.62 V	146	59.4	-4.6
4	19155.00	43.6 AV	54.0	-10.4	1.62 V	146	48.2	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	48.6 PK	88.2	-39.6	2.26 H	158	33.0	15.6
2	#12930.00	36.3 AV	68.2	-31.9	2.26 H	158	20.7	15.6
3	19395.00	54.2 PK	74.0	-19.8	1.61 H	204	57.7	-3.5
4	19395.00	42.2 AV	54.0	-11.8	1.61 H	204	45.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	49.1 PK	88.2	-39.1	1.78 V	319	33.5	15.6
2	#12930.00	38.1 AV	68.2	-30.1	1.78 V	319	22.5	15.6
3	19395.00	54.9 PK	74.0	-19.1	1.57 V	165	58.4	-3.5
4	19395.00	43.1 AV	54.0	-10.9	1.57 V	165	46.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	48.8 PK	88.2	-39.4	2.34 H	151	33.0	15.8
2	#13090.00	36.7 AV	68.2	-31.5	2.34 H	151	20.9	15.8
3	19635.00	54.7 PK	74.0	-19.3	1.69 H	217	58.5	-3.8
4	19635.00	42.4 AV	54.0	-11.6	1.69 H	217	46.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	49.5 PK	88.2	-38.7	1.84 V	342	33.7	15.8
2	#13090.00	38.3 AV	68.2	-29.9	1.84 V	342	22.5	15.8
3	19635.00	55.1 PK	74.0	-18.9	1.65 V	147	58.9	-3.8
4	19635.00	43.7 AV	54.0	-10.3	1.65 V	147	47.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	48.4 PK	88.2	-39.8	2.22 H	171	30.6	17.8
2	#13410.00	36.1 AV	68.2	-32.1	2.22 H	171	18.3	17.8
3	20115.00	53.7 PK	74.0	-20.3	1.68 H	197	57.4	-3.7
4	20115.00	41.5 AV	54.0	-12.5	1.68 H	197	45.2	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	49.3 PK	88.2	-38.9	1.73 V	330	31.5	17.8
2	#13410.00	38.9 AV	68.2	-29.3	1.73 V	330	21.1	17.8
3	20115.00	54.9 PK	74.0	-19.1	1.51 V	168	58.6	-3.7
4	20115.00	43.5 AV	54.0	-10.5	1.51 V	168	47.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	48.8 PK	88.2	-39.4	2.26 H	160	30.3	18.5
2	#13730.00	36.4 AV	68.2	-31.8	2.26 H	160	17.9	18.5
3	20595.00	53.8 PK	74.0	-20.2	1.65 H	198	57.1	-3.3
4	20595.00	42.1 AV	54.0	-11.9	1.65 H	198	45.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	49.2 PK	88.2	-39.0	1.79 V	334	30.7	18.5
2	#13730.00	38.2 AV	68.2	-30.0	1.79 V	334	19.7	18.5
3	20595.00	55.2 PK	74.0	-18.8	1.67 V	156	58.5	-3.3
4	20595.00	43.9 AV	54.0	-10.1	1.67 V	156	47.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	48.6 PK	88.2	-39.6	2.24 H	176	30.0	18.6
2	#13890.00	36.2 AV	68.2	-32.0	2.24 H	176	17.6	18.6
3	20835.00	53.7 PK	74.0	-20.3	1.64 H	191	56.4	-2.7
4	20835.00	41.3 AV	54.0	-12.7	1.64 H	191	44.0	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	49.3 PK	88.2	-38.9	1.76 V	325	30.7	18.6
2	#13890.00	38.7 AV	68.2	-29.5	1.76 V	325	20.1	18.6
3	20835.00	54.5 PK	74.0	-19.5	1.54 V	182	57.2	-2.7
4	20835.00	43.3 AV	54.0	-10.7	1.54 V	182	46.0	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	48.1 PK	88.2	-40.1	2.16 H	160	29.1	19.0
2	#14050.00	36.6 AV	68.2	-31.6	2.16 H	160	17.6	19.0
3	21075.00	54.1 PK	74.0	-19.9	1.66 H	204	57.1	-3.0
4	21075.00	41.8 AV	54.0	-12.2	1.66 H	204	44.8	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	49.7 PK	88.2	-38.5	1.79 V	347	30.7	19.0
2	#14050.00	38.3 AV	68.2	-29.9	1.79 V	347	19.3	19.0
3	21075.00	55.1 PK	74.0	-18.9	1.69 V	151	58.1	-3.0
4	21075.00	43.9 AV	54.0	-10.1	1.69 V	151	46.9	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.2 PK	74.0	-25.8	2.20 H	172	32.6	15.6
2	12050.00	35.9 AV	54.0	-18.1	2.20 H	172	20.3	15.6
3	18075.00	54.8 PK	74.0	-19.2	1.64 H	202	59.9	-5.1
4	18075.00	42.6 AV	54.0	-11.4	1.64 H	202	47.7	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	49.4 PK	74.0	-24.6	1.81 V	333	33.8	15.6
2	12050.00	38.1 AV	54.0	-15.9	1.81 V	333	22.5	15.6
3	18075.00	55.8 PK	74.0	-18.2	1.61 V	144	60.9	-5.1
4	18075.00	44.3 AV	54.0	-9.7	1.61 V	144	49.4	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	48.6 PK	74.0	-25.4	2.26 H	160	33.6	15.0
2	12370.00	36.6 AV	54.0	-17.4	2.26 H	160	21.6	15.0
3	18555.00	53.9 PK	74.0	-20.1	1.71 H	186	58.8	-4.9
4	18555.00	42.1 AV	54.0	-11.9	1.71 H	186	47.0	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	49.9 PK	74.0	-24.1	1.74 V	338	34.9	15.0
2	12370.00	38.2 AV	54.0	-15.8	1.74 V	338	23.2	15.0
3	18555.00	54.4 PK	74.0	-19.6	1.67 V	159	59.3	-4.9
4	18555.00	43.4 AV	54.0	-10.6	1.67 V	159	48.3	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.3 PK	74.0	-25.7	2.18 H	185	33.4	14.9
2	12690.00	36.4 AV	54.0	-17.6	2.18 H	185	21.5	14.9
3	19035.00	53.9 PK	74.0	-20.1	1.69 H	197	58.6	-4.7
4	19035.00	41.5 AV	54.0	-12.5	1.69 H	197	46.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	49.8 PK	74.0	-24.2	1.76 V	319	34.9	14.9
2	12690.00	38.6 AV	54.0	-15.4	1.76 V	319	23.7	14.9
3	19035.00	55.7 PK	74.0	-18.3	1.62 V	154	60.4	-4.7
4	19035.00	44.3 AV	54.0	-9.7	1.62 V	154	49.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	48.5 PK	88.2	-39.7	2.12 H	176	33.0	15.5
2	#13010.00	36.7 AV	68.2	-31.5	2.12 H	176	21.2	15.5
3	19515.00	54.2 PK	74.0	-19.8	1.68 H	206	57.4	-3.2
4	19515.00	41.5 AV	54.0	-12.5	1.68 H	206	44.7	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	49.7 PK	88.2	-38.5	1.72 V	322	34.2	15.5
2	#13010.00	38.3 AV	68.2	-29.9	1.72 V	322	22.8	15.5
3	19515.00	55.1 PK	74.0	-18.9	1.62 V	160	58.3	-3.2
4	19515.00	44.7 AV	54.0	-9.3	1.62 V	160	47.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.3 PK	74.0	-25.7	2.18 H	199	30.9	17.4
2	13330.00	36.5 AV	54.0	-17.5	2.18 H	199	19.1	17.4
3	19995.00	53.9 PK	74.0	-20.1	1.68 H	191	58.0	-4.1
4	19995.00	41.8 AV	54.0	-12.2	1.68 H	191	45.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	49.6 PK	74.0	-24.4	1.70 V	316	32.2	17.4
2	13330.00	37.9 AV	54.0	-16.1	1.70 V	316	20.5	17.4
3	19995.00	55.9 PK	74.0	-18.1	1.64 V	167	60.0	-4.1
4	19995.00	44.7 AV	54.0	-9.3	1.64 V	167	48.8	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	48.8 PK	88.2	-39.4	2.21 H	191	30.2	18.6
2	#13650.00	36.3 AV	68.2	-31.9	2.21 H	191	17.7	18.6
3	20475.00	53.8 PK	74.0	-20.2	1.65 H	202	56.8	-3.0
4	20475.00	41.5 AV	54.0	-12.5	1.65 H	202	44.5	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	49.7 PK	88.2	-38.5	1.77 V	338	31.1	18.6
2	#13650.00	38.5 AV	68.2	-29.7	1.77 V	338	19.9	18.6
3	20475.00	55.6 PK	74.0	-18.4	1.65 V	159	58.6	-3.0
4	20475.00	44.8 AV	54.0	-9.2	1.65 V	159	47.8	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	47.9 PK	88.2	-40.3	2.17 H	187	28.9	19.0
2	#13970.00	36.3 AV	68.2	-31.9	2.17 H	187	17.3	19.0
3	20955.00	54.1 PK	74.0	-19.9	1.66 H	187	56.8	-2.7
4	20955.00	41.7 AV	54.0	-12.3	1.66 H	187	44.4	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	49.1 PK	88.2	-39.1	1.71 V	309	30.1	19.0
2	#13970.00	37.9 AV	68.2	-30.3	1.71 V	309	18.9	19.0
3	20955.00	55.4 PK	74.0	-18.6	1.66 V	158	58.1	-2.7
4	20955.00	44.7 AV	54.0	-9.3	1.66 V	158	47.4	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.8 PK	74.0	-25.2	1.96 H	143	33.4	15.4
2	11910.00	37.5 AV	54.0	-16.5	1.96 H	143	22.1	15.4
3	17865.00	53.3 PK	74.0	-20.7	1.76 H	227	25.5	27.8
4	17865.00	41.7 AV	54.0	-12.3	1.76 H	227	13.9	27.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.6 PK	74.0	-24.4	1.71 V	312	34.2	15.4
2	11910.00	38.7 AV	54.0	-15.3	1.71 V	312	23.3	15.4
3	17865.00	54.5 PK	74.0	-19.5	1.60 V	187	26.7	27.8
4	17865.00	42.7 AV	54.0	-11.3	1.60 V	187	14.9	27.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.9 PK	88.2	-39.3	2.01 H	155	33.3	15.6
2	#12830.00	37.9 AV	68.2	-30.3	2.01 H	155	22.3	15.6
3	19245.00	53.5 PK	74.0	-20.5	1.77 H	216	57.8	-4.3
4	19245.00	41.9 AV	54.0	-12.1	1.77 H	216	46.2	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.4 PK	88.2	-38.8	1.65 V	324	33.8	15.6
2	#12830.00	38.6 AV	68.2	-29.6	1.65 V	324	23.0	15.6
3	19245.00	54.4 PK	74.0	-19.6	1.64 V	187	58.7	-4.3
4	19245.00	42.9 AV	54.0	-11.1	1.64 V	187	47.2	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.8 PK	88.2	-39.4	1.90 H	145	33.1	15.7
2	#12870.00	37.4 AV	68.2	-30.8	1.90 H	145	21.7	15.7
3	19305.00	52.8 PK	74.0	-21.2	1.81 H	228	56.8	-4.0
4	19305.00	41.3 AV	54.0	-12.7	1.81 H	228	45.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.6 PK	88.2	-38.6	1.70 V	314	33.9	15.7
2	#12870.00	38.8 AV	68.2	-29.4	1.70 V	314	23.1	15.7
3	19305.00	54.2 PK	74.0	-19.8	1.58 V	188	58.2	-4.0
4	19305.00	42.5 AV	54.0	-11.5	1.58 V	188	46.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.5 PK	88.2	-39.7	1.91 H	137	32.9	15.6
2	#13030.00	37.1 AV	68.2	-31.1	1.91 H	137	21.5	15.6
3	19545.00	53.2 PK	74.0	-20.8	1.71 H	219	56.6	-3.4
4	19545.00	41.6 AV	54.0	-12.4	1.71 H	219	45.0	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.3 PK	88.2	-38.9	1.70 V	315	33.7	15.6
2	#13030.00	38.3 AV	68.2	-29.9	1.70 V	315	22.7	15.6
3	19545.00	54.3 PK	74.0	-19.7	1.56 V	184	57.7	-3.4
4	19545.00	42.9 AV	54.0	-11.1	1.56 V	184	46.3	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.1 PK	88.2	-39.1	1.84 H	137	33.4	15.7
2	#13070.00	37.6 AV	68.2	-30.6	1.84 H	137	21.9	15.7
3	19605.00	52.9 PK	74.0	-21.1	1.75 H	214	56.6	-3.7
4	19605.00	41.2 AV	54.0	-12.8	1.75 H	214	44.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.9 PK	88.2	-38.3	1.65 V	300	34.2	15.7
2	#13070.00	38.9 AV	68.2	-29.3	1.65 V	300	23.2	15.7
3	19605.00	54.1 PK	74.0	-19.9	1.57 V	184	57.8	-3.7
4	19605.00	42.7 AV	54.0	-11.3	1.57 V	184	46.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.5 PK	88.2	-39.7	1.93 H	128	30.0	18.5
2	#13710.00	36.9 AV	68.2	-31.3	1.93 H	128	18.4	18.5
3	20565.00	52.7 PK	74.0	-21.3	1.76 H	205	55.9	-3.2
4	20565.00	41.3 AV	54.0	-12.7	1.76 H	205	44.5	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.3 PK	88.2	-38.9	1.66 V	305	30.8	18.5
2	#13710.00	38.5 AV	68.2	-29.7	1.66 V	305	20.0	18.5
3	20565.00	54.2 PK	74.0	-19.8	1.59 V	183	57.4	-3.2
4	20565.00	42.6 AV	54.0	-11.4	1.59 V	183	45.8	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.6 PK	88.2	-39.6	1.88 H	150	29.5	19.1
2	#13990.00	37.4 AV	68.2	-30.8	1.88 H	150	18.3	19.1
3	20985.00	53.2 PK	74.0	-20.8	1.72 H	228	56.1	-2.9
4	20985.00	41.7 AV	54.0	-12.3	1.72 H	228	44.6	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.6 PK	88.2	-38.6	1.62 V	315	30.5	19.1
2	#13990.00	38.5 AV	68.2	-29.7	1.62 V	315	19.4	19.1
3	20985.00	53.9 PK	74.0	-20.1	1.53 V	183	56.8	-2.9
4	20985.00	42.3 AV	54.0	-11.7	1.53 V	183	45.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.4 PK	88.2	-39.8	1.98 H	125	28.6	19.8
2	#14230.00	36.9 AV	68.2	-31.3	1.98 H	125	17.1	19.8
3	21345.00	52.2 PK	74.0	-21.8	1.75 H	203	54.7	-2.5
4	21345.00	41.1 AV	54.0	-12.9	1.75 H	203	43.6	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.5 PK	88.2	-38.7	1.63 V	311	29.7	19.8
2	#14230.00	38.4 AV	68.2	-29.8	1.63 V	311	18.6	19.8
3	21345.00	53.4 PK	74.0	-20.6	1.51 V	168	55.9	-2.5
4	21345.00	42.1 AV	54.0	-11.9	1.51 V	168	44.6	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.4 PK	74.0	-25.6	1.97 H	125	33.0	15.4
2	11910.00	36.6 AV	54.0	-17.4	1.97 H	125	21.2	15.4
3	17865.00	52.8 PK	74.0	-21.2	1.80 H	196	25.0	27.8
4	17865.00	41.4 AV	54.0	-12.6	1.80 H	196	13.6	27.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.5 PK	74.0	-24.5	1.67 V	295	34.1	15.4
2	11910.00	38.3 AV	54.0	-15.7	1.67 V	295	22.9	15.4
3	17865.00	53.9 PK	74.0	-20.1	1.56 V	160	26.1	27.8
4	17865.00	42.5 AV	54.0	-11.5	1.56 V	160	14.7	27.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.7 PK	88.2	-39.5	1.99 H	139	33.1	15.6
2	#12830.00	37.1 AV	68.2	-31.1	1.99 H	139	21.5	15.6
3	19245.00	52.1 PK	74.0	-21.9	1.73 H	192	56.4	-4.3
4	19245.00	40.9 AV	54.0	-13.1	1.73 H	192	45.2	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.2 PK	88.2	-39.0	1.64 V	289	33.6	15.6
2	#12830.00	38.3 AV	68.2	-29.9	1.64 V	289	22.7	15.6
3	19245.00	53.2 PK	74.0	-20.8	1.61 V	162	57.5	-4.3
4	19245.00	42.1 AV	54.0	-11.9	1.61 V	162	46.4	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.6 PK	88.2	-39.6	2.01 H	110	32.9	15.7
2	#12870.00	36.9 AV	68.2	-31.3	2.01 H	110	21.2	15.7
3	19305.00	52.9 PK	74.0	-21.1	1.79 H	204	56.9	-4.0
4	19305.00	41.4 AV	54.0	-12.6	1.79 H	204	45.4	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.7 PK	88.2	-38.5	1.62 V	299	34.0	15.7
2	#12870.00	38.5 AV	68.2	-29.7	1.62 V	299	22.8	15.7
3	19305.00	53.6 PK	74.0	-20.4	1.65 V	160	57.6	-4.0
4	19305.00	42.3 AV	54.0	-11.7	1.65 V	160	46.3	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.2 PK	88.2	-40.0	2.04 H	157	32.6	15.6
2	#13030.00	37.5 AV	68.2	-30.7	2.04 H	157	21.9	15.6
3	19545.00	53.1 PK	74.0	-20.9	1.73 H	228	56.5	-3.4
4	19545.00	41.5 AV	54.0	-12.5	1.73 H	228	44.9	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.4 PK	88.2	-38.8	1.62 V	285	33.8	15.6
2	#13030.00	38.1 AV	68.2	-30.1	1.62 V	285	22.5	15.6
3	19545.00	53.7 PK	74.0	-20.3	1.55 V	164	57.1	-3.4
4	19545.00	42.4 AV	54.0	-11.6	1.55 V	164	45.8	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.5 PK	88.2	-39.7	2.01 H	120	32.8	15.7
2	#13070.00	37.1 AV	68.2	-31.1	2.01 H	120	21.4	15.7
3	19605.00	52.8 PK	74.0	-21.2	1.85 H	212	56.5	-3.7
4	19605.00	41.1 AV	54.0	-12.9	1.85 H	212	44.8	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.8 PK	88.2	-38.4	1.61 V	299	34.1	15.7
2	#13070.00	38.6 AV	68.2	-29.6	1.61 V	299	22.9	15.7
3	19605.00	53.5 PK	74.0	-20.5	1.65 V	169	57.2	-3.7
4	19605.00	42.2 AV	54.0	-11.8	1.65 V	169	45.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.4 PK	88.2	-39.8	1.99 H	148	29.9	18.5
2	#13710.00	36.7 AV	68.2	-31.5	1.99 H	148	18.2	18.5
3	20565.00	52.4 PK	74.0	-21.6	1.71 H	192	55.6	-3.2
4	20565.00	41.2 AV	54.0	-12.8	1.71 H	192	44.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.2 PK	88.2	-39.0	1.59 V	301	30.7	18.5
2	#13710.00	38.2 AV	68.2	-30.0	1.59 V	301	19.7	18.5
3	20565.00	53.4 PK	74.0	-20.6	1.62 V	164	56.6	-3.2
4	20565.00	42.6 AV	54.0	-11.4	1.62 V	164	45.8	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.2 PK	88.2	-40.0	1.90 H	125	29.1	19.1
2	#13990.00	36.3 AV	68.2	-31.9	1.90 H	125	17.2	19.1
3	20985.00	52.9 PK	74.0	-21.1	1.76 H	211	55.8	-2.9
4	20985.00	41.4 AV	54.0	-12.6	1.76 H	211	44.3	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.3 PK	88.2	-38.9	1.66 V	306	30.2	19.1
2	#13990.00	38.3 AV	68.2	-29.9	1.66 V	306	19.2	19.1
3	20985.00	54.1 PK	74.0	-19.9	1.61 V	151	57.0	-2.9
4	20985.00	42.7 AV	54.0	-11.3	1.61 V	151	45.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.8 PK	88.2	-39.4	1.94 H	117	29.0	19.8
2	#14230.00	36.7 AV	68.2	-31.5	1.94 H	117	16.9	19.8
3	21345.00	52.4 PK	74.0	-21.6	1.76 H	203	54.9	-2.5
4	21345.00	41.0 AV	54.0	-13.0	1.76 H	203	43.5	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.8 PK	88.2	-39.4	1.59 V	287	29.0	19.8
2	#14230.00	37.9 AV	68.2	-30.3	1.59 V	287	18.1	19.8
3	21345.00	53.1 PK	74.0	-20.9	1.62 V	159	55.6	-2.5
4	21345.00	42.1 AV	54.0	-11.9	1.62 V	159	44.6	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.3 PK	74.0	-25.7	2.04 H	134	32.9	15.4
2	11910.00	36.8 AV	54.0	-17.2	2.04 H	134	21.4	15.4
3	17865.00	51.9 PK	74.0	-22.1	1.71 H	205	24.1	27.8
4	17865.00	40.9 AV	54.0	-13.1	1.71 H	205	13.1	27.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.5 PK	74.0	-24.5	1.72 V	308	34.1	15.4
2	11910.00	38.5 AV	54.0	-15.5	1.72 V	308	23.1	15.4
3	17865.00	53.6 PK	74.0	-20.4	1.57 V	179	25.8	27.8
4	17865.00	42.1 AV	54.0	-11.9	1.57 V	179	14.3	27.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.4 PK	88.2	-39.8	1.95 H	145	32.8	15.6
2	#12830.00	36.5 AV	68.2	-31.7	1.95 H	145	20.9	15.6
3	19245.00	52.1 PK	74.0	-21.9	1.66 H	204	56.4	-4.3
4	19245.00	40.8 AV	54.0	-13.2	1.66 H	204	45.1	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.3 PK	88.2	-38.9	1.63 V	288	33.7	15.6
2	#12830.00	37.7 AV	68.2	-30.5	1.63 V	288	22.1	15.6
3	19245.00	53.8 PK	74.0	-20.2	1.59 V	171	58.1	-4.3
4	19245.00	42.7 AV	54.0	-11.3	1.59 V	171	47.0	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.8 PK	88.2	-39.4	1.90 H	150	33.1	15.7
2	#12870.00	36.8 AV	68.2	-31.4	1.90 H	150	21.1	15.7
3	19305.00	51.8 PK	74.0	-22.2	1.71 H	220	55.8	-4.0
4	19305.00	40.5 AV	54.0	-13.5	1.71 H	220	44.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.4 PK	88.2	-38.8	1.67 V	287	33.7	15.7
2	#12870.00	37.6 AV	68.2	-30.6	1.67 V	287	21.9	15.7
3	19305.00	53.3 PK	74.0	-20.7	1.61 V	183	57.3	-4.0
4	19305.00	42.4 AV	54.0	-11.6	1.61 V	183	46.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.7 PK	88.2	-39.5	1.98 H	159	33.1	15.6
2	#13030.00	36.6 AV	68.2	-31.6	1.98 H	159	21.0	15.6
3	19545.00	52.7 PK	74.0	-21.3	1.69 H	209	56.1	-3.4
4	19545.00	41.1 AV	54.0	-12.9	1.69 H	209	44.5	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.5 PK	88.2	-38.7	1.61 V	302	33.9	15.6
2	#13030.00	37.7 AV	68.2	-30.5	1.61 V	302	22.1	15.6
3	19545.00	53.7 PK	74.0	-20.3	1.63 V	190	57.1	-3.4
4	19545.00	42.8 AV	54.0	-11.2	1.63 V	190	46.2	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.6 PK	88.2	-39.6	1.99 H	166	32.9	15.7
2	#13070.00	36.8 AV	68.2	-31.4	1.99 H	166	21.1	15.7
3	19605.00	52.4 PK	74.0	-21.6	1.70 H	217	56.1	-3.7
4	19605.00	40.8 AV	54.0	-13.2	1.70 H	217	44.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.5 PK	88.2	-38.7	1.62 V	293	33.8	15.7
2	#13070.00	37.8 AV	68.2	-30.4	1.62 V	293	22.1	15.7
3	19605.00	53.2 PK	74.0	-20.8	1.65 V	190	56.9	-3.7
4	19605.00	42.4 AV	54.0	-11.6	1.65 V	190	46.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.9 PK	88.2	-39.3	2.03 H	159	30.4	18.5
2	#13710.00	37.1 AV	68.2	-31.1	2.03 H	159	18.6	18.5
3	20565.00	52.7 PK	74.0	-21.3	1.69 H	225	55.9	-3.2
4	20565.00	41.2 AV	54.0	-12.8	1.69 H	225	44.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.2 PK	88.2	-39.0	1.59 V	299	30.7	18.5
2	#13710.00	37.4 AV	68.2	-30.8	1.59 V	299	18.9	18.5
3	20565.00	53.7 PK	74.0	-20.3	1.65 V	184	56.9	-3.2
4	20565.00	42.6 AV	54.0	-11.4	1.65 V	184	45.8	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.9 PK	88.2	-39.3	2.02 H	163	29.8	19.1
2	#13990.00	36.9 AV	68.2	-31.3	2.02 H	163	17.8	19.1
3	20985.00	52.5 PK	74.0	-21.5	1.70 H	240	55.4	-2.9
4	20985.00	40.9 AV	54.0	-13.1	1.70 H	240	43.8	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.6 PK	88.2	-38.6	1.53 V	293	30.5	19.1
2	#13990.00	37.7 AV	68.2	-30.5	1.53 V	293	18.6	19.1
3	20985.00	53.3 PK	74.0	-20.7	1.69 V	171	56.2	-2.9
4	20985.00	42.4 AV	54.0	-11.6	1.69 V	171	45.3	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.8 PK	88.2	-39.4	1.94 H	166	29.0	19.8
2	#14230.00	36.9 AV	68.2	-31.3	1.94 H	166	17.1	19.8
3	21345.00	53.1 PK	74.0	-20.9	1.73 H	221	55.6	-2.5
4	21345.00	41.4 AV	54.0	-12.6	1.73 H	221	43.9	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.8 PK	88.2	-38.4	1.62 V	299	30.0	19.8
2	#14230.00	37.9 AV	68.2	-30.3	1.62 V	299	18.1	19.8
3	21345.00	53.4 PK	74.0	-20.6	1.66 V	205	55.9	-2.5
4	21345.00	42.9 AV	54.0	-11.1	1.66 V	205	45.4	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.5 PK	74.0	-25.5	2.04 H	169	33.1	15.4
2	11910.00	36.5 AV	54.0	-17.5	2.04 H	169	21.1	15.4
3	17865.00	52.2 PK	74.0	-21.8	1.75 H	219	24.4	27.8
4	17865.00	40.9 AV	54.0	-13.1	1.75 H	219	13.1	27.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.6 PK	74.0	-24.4	1.55 V	300	34.2	15.4
2	11910.00	37.4 AV	54.0	-16.6	1.55 V	300	22.0	15.4
3	17865.00	53.3 PK	74.0	-20.7	1.74 V	167	25.5	27.8
4	17865.00	42.1 AV	54.0	-11.9	1.74 V	167	14.3	27.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.3 PK	88.2	-39.9	1.97 H	140	32.7	15.6
2	#12830.00	36.4 AV	68.2	-31.8	1.97 H	140	20.8	15.6
3	19245.00	52.7 PK	74.0	-21.3	1.68 H	218	57.0	-4.3
4	19245.00	41.2 AV	54.0	-12.8	1.68 H	218	45.5	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.8 PK	88.2	-38.4	1.66 V	283	34.2	15.6
2	#12830.00	38.2 AV	68.2	-30.0	1.66 V	283	22.6	15.6
3	19245.00	53.5 PK	74.0	-20.5	1.70 V	180	57.8	-4.3
4	19245.00	42.7 AV	54.0	-11.3	1.70 V	180	47.0	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.9 PK	88.2	-39.3	1.99 H	163	33.2	15.7
2	#12870.00	36.8 AV	68.2	-31.4	1.99 H	163	21.1	15.7
3	19305.00	52.6 PK	74.0	-21.4	1.74 H	216	56.6	-4.0
4	19305.00	41.2 AV	54.0	-12.8	1.74 H	216	45.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.9 PK	88.2	-38.3	1.60 V	291	34.2	15.7
2	#12870.00	37.7 AV	68.2	-30.5	1.60 V	291	22.0	15.7
3	19305.00	53.4 PK	74.0	-20.6	1.78 V	154	57.4	-4.0
4	19305.00	42.1 AV	54.0	-11.9	1.78 V	154	46.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.1 PK	88.2	-39.1	1.99 H	162	33.5	15.6
2	#13030.00	37.3 AV	68.2	-30.9	1.99 H	162	21.7	15.6
3	19545.00	52.7 PK	74.0	-21.3	1.73 H	215	56.1	-3.4
4	19545.00	40.9 AV	54.0	-13.1	1.73 H	215	44.3	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.7 PK	88.2	-38.5	1.56 V	292	34.1	15.6
2	#13030.00	37.6 AV	68.2	-30.6	1.56 V	292	22.0	15.6
3	19545.00	52.6 PK	74.0	-21.4	1.76 V	167	56.0	-3.4
4	19545.00	41.7 AV	54.0	-12.3	1.76 V	167	45.1	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.8 PK	88.2	-39.4	2.04 H	176	33.1	15.7
2	#13070.00	36.7 AV	68.2	-31.5	2.04 H	176	21.0	15.7
3	19605.00	52.4 PK	74.0	-21.6	1.73 H	234	56.1	-3.7
4	19605.00	41.3 AV	54.0	-12.7	1.73 H	234	45.0	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	50.1 PK	88.2	-38.1	1.57 V	280	34.4	15.7
2	#13070.00	37.9 AV	68.2	-30.3	1.57 V	280	22.2	15.7
3	19605.00	52.5 PK	74.0	-21.5	1.72 V	156	56.2	-3.7
4	19605.00	41.5 AV	54.0	-12.5	1.72 V	156	45.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.6 PK	88.2	-39.6	2.04 H	172	30.1	18.5
2	#13710.00	36.9 AV	68.2	-31.3	2.04 H	172	18.4	18.5
3	20565.00	53.1 PK	74.0	-20.9	1.77 H	200	56.3	-3.2
4	20565.00	41.1 AV	54.0	-12.9	1.77 H	200	44.3	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.5 PK	88.2	-38.7	1.61 V	296	31.0	18.5
2	#13710.00	37.8 AV	68.2	-30.4	1.61 V	296	19.3	18.5
3	20565.00	53.7 PK	74.0	-20.3	1.65 V	169	56.9	-3.2
4	20565.00	42.6 AV	54.0	-11.4	1.65 V	169	45.8	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.2 PK	88.2	-39.0	2.04 H	172	30.1	19.1
2	#13990.00	37.1 AV	68.2	-31.1	2.04 H	172	18.0	19.1
3	20985.00	52.8 PK	74.0	-21.2	1.79 H	225	55.7	-2.9
4	20985.00	41.3 AV	54.0	-12.7	1.79 H	225	44.2	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	50.3 PK	88.2	-37.9	1.65 V	304	31.2	19.1
2	#13990.00	37.9 AV	68.2	-30.3	1.65 V	304	18.8	19.1
3	20985.00	53.3 PK	74.0	-20.7	1.73 V	138	56.2	-2.9
4	20985.00	42.2 AV	54.0	-11.8	1.73 V	138	45.1	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.4 PK	88.2	-39.8	2.02 H	152	28.6	19.8
2	#14230.00	36.6 AV	68.2	-31.6	2.02 H	152	16.8	19.8
3	21345.00	52.6 PK	74.0	-21.4	1.65 H	216	55.1	-2.5
4	21345.00	41.3 AV	54.0	-12.7	1.65 H	216	43.8	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.9 PK	88.2	-38.3	1.66 V	296	30.1	19.8
2	#14230.00	37.6 AV	68.2	-30.6	1.66 V	296	17.8	19.8
3	21345.00	53.6 PK	74.0	-20.4	1.75 V	129	56.1	-2.5
4	21345.00	42.4 AV	54.0	-11.6	1.75 V	129	44.9	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.6 PK	74.0	-25.4	2.04 H	184	33.2	15.4
2	11910.00	37.1 AV	54.0	-16.9	2.04 H	184	21.7	15.4
3	17865.00	52.3 PK	74.0	-21.7	1.77 H	204	24.5	27.8
4	17865.00	40.6 AV	54.0	-13.4	1.77 H	204	12.8	27.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.7 PK	74.0	-24.3	1.62 V	287	34.3	15.4
2	11910.00	38.1 AV	54.0	-15.9	1.62 V	287	22.7	15.4
3	17865.00	53.5 PK	74.0	-20.5	1.61 V	166	25.7	27.8
4	17865.00	42.6 AV	54.0	-11.4	1.61 V	166	14.8	27.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.1 PK	88.2	-39.1	1.98 H	177	33.5	15.6
2	#12830.00	36.9 AV	68.2	-31.3	1.98 H	177	21.3	15.6
3	19245.00	52.1 PK	74.0	-21.9	1.77 H	229	56.4	-4.3
4	19245.00	40.8 AV	54.0	-13.2	1.77 H	229	45.1	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.8 PK	88.2	-38.4	1.69 V	282	34.2	15.6
2	#12830.00	37.7 AV	68.2	-30.5	1.69 V	282	22.1	15.6
3	19245.00	53.6 PK	74.0	-20.4	1.75 V	136	57.9	-4.3
4	19245.00	42.3 AV	54.0	-11.7	1.75 V	136	46.6	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.2 PK	88.2	-40.0	2.01 H	169	32.5	15.7
2	#12870.00	36.8 AV	68.2	-31.4	2.01 H	169	21.1	15.7
3	19305.00	52.6 PK	74.0	-21.4	1.76 H	205	56.6	-4.0
4	19305.00	40.7 AV	54.0	-13.3	1.76 H	205	44.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.5 PK	88.2	-38.7	1.62 V	311	33.8	15.7
2	#12870.00	37.6 AV	68.2	-30.6	1.62 V	311	21.9	15.7
3	19305.00	53.8 PK	74.0	-20.2	1.68 V	155	57.8	-4.0
4	19305.00	42.8 AV	54.0	-11.2	1.68 V	155	46.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.5 PK	88.2	-39.7	1.99 H	154	32.9	15.6
2	#13030.00	36.9 AV	68.2	-31.3	1.99 H	154	21.3	15.6
3	19545.00	52.6 PK	74.0	-21.4	1.74 H	212	56.0	-3.4
4	19545.00	40.8 AV	54.0	-13.2	1.74 H	212	44.2	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.3 PK	88.2	-38.9	1.61 V	312	33.7	15.6
2	#13030.00	37.4 AV	68.2	-30.8	1.61 V	312	21.8	15.6
3	19545.00	53.6 PK	74.0	-20.4	1.63 V	156	57.0	-3.4
4	19545.00	42.7 AV	54.0	-11.3	1.63 V	156	46.1	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.5 PK	88.2	-39.7	1.98 H	143	32.8	15.7
2	#13070.00	36.7 AV	68.2	-31.5	1.98 H	143	21.0	15.7
3	19605.00	52.2 PK	74.0	-21.8	1.73 H	225	55.9	-3.7
4	19605.00	40.5 AV	54.0	-13.5	1.73 H	225	44.2	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.4 PK	88.2	-38.8	1.61 V	319	33.7	15.7
2	#13070.00	37.2 AV	68.2	-31.0	1.61 V	319	21.5	15.7
3	19605.00	53.6 PK	74.0	-20.4	1.61 V	157	57.3	-3.7
4	19605.00	42.5 AV	54.0	-11.5	1.61 V	157	46.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.3 PK	88.2	-39.9	2.07 H	167	29.8	18.5
2	#13710.00	36.9 AV	68.2	-31.3	2.07 H	167	18.4	18.5
3	20565.00	52.6 PK	74.0	-21.4	1.82 H	219	55.8	-3.2
4	20565.00	40.6 AV	54.0	-13.4	1.82 H	219	43.8	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.4 PK	88.2	-38.8	1.62 V	271	30.9	18.5
2	#13710.00	37.7 AV	68.2	-30.5	1.62 V	271	19.2	18.5
3	20565.00	53.5 PK	74.0	-20.5	1.56 V	155	56.7	-3.2
4	20565.00	42.3 AV	54.0	-11.7	1.56 V	155	45.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.5 PK	88.2	-39.7	2.05 H	164	29.4	19.1
2	#13990.00	36.9 AV	68.2	-31.3	2.05 H	164	17.8	19.1
3	20985.00	52.3 PK	74.0	-21.7	1.77 H	230	55.2	-2.9
4	20985.00	40.5 AV	54.0	-13.5	1.77 H	230	43.4	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.7 PK	88.2	-38.5	1.62 V	260	30.6	19.1
2	#13990.00	37.7 AV	68.2	-30.5	1.62 V	260	18.6	19.1
3	20985.00	53.4 PK	74.0	-20.6	1.53 V	164	56.3	-2.9
4	20985.00	42.2 AV	54.0	-11.8	1.53 V	164	45.1	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.7 PK	88.2	-39.5	1.97 H	140	28.9	19.8
2	#14230.00	37.1 AV	68.2	-31.1	1.97 H	140	17.3	19.8
3	21345.00	52.6 PK	74.0	-21.4	1.67 H	240	55.1	-2.5
4	21345.00	40.7 AV	54.0	-13.3	1.67 H	240	43.2	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.3 PK	88.2	-38.9	1.58 V	273	29.5	19.8
2	#14230.00	37.5 AV	68.2	-30.7	1.58 V	273	17.7	19.8
3	21345.00	53.9 PK	74.0	-20.1	1.52 V	173	56.4	-2.5
4	21345.00	42.6 AV	54.0	-11.4	1.52 V	173	45.1	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.4 PK	74.0	-25.6	2.01 H	151	32.9	15.5
2	11970.00	36.8 AV	54.0	-17.2	2.01 H	151	21.3	15.5
3	17955.00	52.3 PK	74.0	-21.7	1.79 H	244	22.3	30.0
4	17955.00	40.8 AV	54.0	-13.2	1.79 H	244	10.8	30.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	49.5 PK	74.0	-24.5	1.60 V	323	34.0	15.5
2	11970.00	37.3 AV	54.0	-16.7	1.60 V	323	21.8	15.5
3	17955.00	53.7 PK	74.0	-20.3	1.69 V	141	23.7	30.0
4	17955.00	42.8 AV	54.0	-11.2	1.69 V	141	12.8	30.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	48.2 PK	88.2	-40.0	2.08 H	175	32.8	15.4
2	#12770.00	36.8 AV	68.2	-31.4	2.08 H	175	21.4	15.4
3	19155.00	52.7 PK	74.0	-21.3	1.81 H	217	57.3	-4.6
4	19155.00	40.7 AV	54.0	-13.3	1.81 H	217	45.3	-4.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	49.9 PK	88.2	-38.3	1.66 V	268	34.5	15.4
2	#12770.00	37.7 AV	68.2	-30.5	1.66 V	268	22.3	15.4
3	19155.00	53.5 PK	74.0	-20.5	1.50 V	179	58.1	-4.6
4	19155.00	42.4 AV	54.0	-11.6	1.50 V	179	47.0	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	48.8 PK	88.2	-39.4	2.03 H	146	33.2	15.6
2	#12930.00	37.3 AV	68.2	-30.9	2.03 H	146	21.7	15.6
3	19395.00	52.7 PK	74.0	-21.3	1.80 H	236	56.2	-3.5
4	19395.00	41.2 AV	54.0	-12.8	1.80 H	236	44.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	50.1 PK	88.2	-38.1	1.59 V	312	34.5	15.6
2	#12930.00	37.7 AV	68.2	-30.5	1.59 V	312	22.1	15.6
3	19395.00	53.7 PK	74.0	-20.3	1.74 V	134	57.2	-3.5
4	19395.00	42.8 AV	54.0	-11.2	1.74 V	134	46.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	48.7 PK	88.2	-39.5	2.00 H	132	32.9	15.8
2	#13090.00	37.1 AV	68.2	-31.1	2.00 H	132	21.3	15.8
3	19635.00	53.1 PK	74.0	-20.9	1.76 H	239	56.9	-3.8
4	19635.00	41.5 AV	54.0	-12.5	1.76 H	239	45.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	50.6 PK	88.2	-37.6	1.57 V	305	34.8	15.8
2	#13090.00	38.1 AV	68.2	-30.1	1.57 V	305	22.3	15.8
3	19635.00	53.8 PK	74.0	-20.2	1.71 V	127	57.6	-3.8
4	19635.00	42.9 AV	54.0	-11.1	1.71 V	127	46.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	48.3 PK	88.2	-39.9	1.97 H	145	29.8	18.5
2	#13730.00	36.7 AV	68.2	-31.5	1.97 H	145	18.2	18.5
3	20595.00	51.8 PK	74.0	-22.2	1.84 H	230	55.1	-3.3
4	20595.00	40.4 AV	54.0	-13.6	1.84 H	230	43.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	49.7 PK	88.2	-38.5	1.58 V	264	31.2	18.5
2	#13730.00	37.7 AV	68.2	-30.5	1.58 V	264	19.2	18.5
3	20595.00	53.6 PK	74.0	-20.4	1.49 V	158	56.9	-3.3
4	20595.00	42.3 AV	54.0	-11.7	1.49 V	158	45.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	48.8 PK	88.2	-39.4	2.08 H	156	30.2	18.6
2	#13890.00	37.3 AV	68.2	-30.9	2.08 H	156	18.7	18.6
3	20835.00	52.2 PK	74.0	-21.8	1.82 H	247	54.9	-2.7
4	20835.00	40.7 AV	54.0	-13.3	1.82 H	247	43.4	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	49.2 PK	88.2	-39.0	1.53 V	279	30.6	18.6
2	#13890.00	37.4 AV	68.2	-30.8	1.53 V	279	18.8	18.6
3	20835.00	53.5 PK	74.0	-20.5	1.47 V	157	56.2	-2.7
4	20835.00	42.2 AV	54.0	-11.8	1.47 V	157	44.9	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	48.5 PK	88.2	-39.7	1.96 H	147	29.5	19.0
2	#14050.00	36.8 AV	68.2	-31.4	1.96 H	147	17.8	19.0
3	21075.00	52.8 PK	74.0	-21.2	1.71 H	225	55.8	-3.0
4	21075.00	41.1 AV	54.0	-12.9	1.71 H	225	44.1	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	49.3 PK	88.2	-38.9	1.57 V	266	30.3	19.0
2	#14050.00	37.4 AV	68.2	-30.8	1.57 V	266	18.4	19.0
3	21075.00	53.9 PK	74.0	-20.1	1.44 V	157	56.9	-3.0
4	21075.00	42.6 AV	54.0	-11.4	1.44 V	157	45.6	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.5 PK	74.0	-25.5	1.92 H	152	32.9	15.6
2	12050.00	36.7 AV	54.0	-17.3	1.92 H	152	21.1	15.6
3	18075.00	52.0 PK	74.0	-22.0	1.81 H	244	57.1	-5.1
4	18075.00	40.5 AV	54.0	-13.5	1.81 H	244	45.6	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	49.5 PK	74.0	-24.5	1.67 V	263	33.9	15.6
2	12050.00	37.6 AV	54.0	-16.4	1.67 V	263	22.0	15.6
3	18075.00	53.3 PK	74.0	-20.7	1.58 V	156	58.4	-5.1
4	18075.00	42.1 AV	54.0	-11.9	1.58 V	156	47.2	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.6 PK	74.0	-25.4	2.12 H	164	33.7	14.9
2	12690.00	37.1 AV	54.0	-16.9	2.12 H	164	22.2	14.9
3	19035.00	52.1 PK	74.0	-21.9	1.82 H	236	56.8	-4.7
4	19035.00	40.6 AV	54.0	-13.4	1.82 H	236	45.3	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	49.1 PK	74.0	-24.9	1.53 V	280	34.2	14.9
2	12690.00	37.4 AV	54.0	-16.6	1.53 V	280	22.5	14.9
3	19035.00	53.3 PK	74.0	-20.7	1.47 V	154	58.0	-4.7
4	19035.00	42.3 AV	54.0	-11.7	1.47 V	154	47.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	48.4 PK	88.2	-39.8	1.86 H	145	32.9	15.5
2	#13010.00	36.4 AV	68.2	-31.8	1.86 H	145	20.9	15.5
3	19515.00	51.6 PK	74.0	-22.4	1.84 H	254	54.8	-3.2
4	19515.00	40.3 AV	54.0	-13.7	1.84 H	254	43.5	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	49.9 PK	88.2	-38.3	1.68 V	253	34.4	15.5
2	#13010.00	37.9 AV	68.2	-30.3	1.68 V	253	22.4	15.5
3	19515.00	53.8 PK	74.0	-20.2	1.58 V	154	57.0	-3.2
4	19515.00	42.4 AV	54.0	-11.6	1.58 V	154	45.6	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.5 PK	74.0	-25.5	1.83 H	140	31.1	17.4
2	13330.00	36.8 AV	54.0	-17.2	1.83 H	140	19.4	17.4
3	19995.00	51.8 PK	74.0	-22.2	1.85 H	244	55.9	-4.1
4	19995.00	40.6 AV	54.0	-13.4	1.85 H	244	44.7	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	49.7 PK	74.0	-24.3	1.56 V	268	32.3	17.4
2	13330.00	37.8 AV	54.0	-16.2	1.56 V	268	20.4	17.4
3	19995.00	53.4 PK	74.0	-20.6	1.46 V	168	57.5	-4.1
4	19995.00	42.4 AV	54.0	-11.6	1.46 V	168	46.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	48.2 PK	88.2	-40.0	1.93 H	148	29.6	18.6
2	#13650.00	36.7 AV	68.2	-31.5	1.93 H	148	18.1	18.6
3	20475.00	51.4 PK	74.0	-22.6	1.88 H	236	54.4	-3.0
4	20475.00	40.1 AV	54.0	-13.9	1.88 H	236	43.1	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	49.9 PK	88.2	-38.3	1.64 V	255	31.3	18.6
2	#13650.00	37.6 AV	68.2	-30.6	1.64 V	255	19.0	18.6
3	20475.00	53.9 PK	74.0	-20.1	1.59 V	141	56.9	-3.0
4	20475.00	42.7 AV	54.0	-11.3	1.59 V	141	45.7	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	48.5 PK	88.2	-39.7	2.08 H	154	29.5	19.0
2	#13970.00	37.1 AV	68.2	-31.1	2.08 H	154	18.1	19.0
3	20955.00	52.2 PK	74.0	-21.8	1.79 H	226	54.9	-2.7
4	20955.00	40.6 AV	54.0	-13.4	1.79 H	226	43.3	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	49.1 PK	88.2	-39.1	1.54 V	260	30.1	19.0
2	#13970.00	37.3 AV	68.2	-30.9	1.54 V	260	18.3	19.0
3	20955.00	53.3 PK	74.0	-20.7	1.45 V	149	56.0	-2.7
4	20955.00	42.3 AV	54.0	-11.7	1.45 V	149	45.0	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.8 PK	74.0	-25.2	2.14 H	158	33.2	15.6
2	12050.00	37.6 AV	54.0	-16.4	2.14 H	158	22.0	15.6
3	18075.00	52.5 PK	74.0	-21.5	1.77 H	223	57.6	-5.1
4	18075.00	40.8 AV	54.0	-13.2	1.77 H	223	45.9	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	50.6 PK	74.0	-23.4	1.69 V	255	35.0	15.6
2	12050.00	38.2 AV	54.0	-15.8	1.69 V	255	22.6	15.6
3	18075.00	53.1 PK	74.0	-20.9	1.44 V	167	58.2	-5.1
4	18075.00	42.2 AV	54.0	-11.8	1.44 V	167	47.3	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.3 PK	74.0	-25.7	2.09 H	140	33.4	14.9
2	12690.00	36.6 AV	54.0	-17.4	2.09 H	140	21.7	14.9
3	19035.00	51.8 PK	74.0	-22.2	1.81 H	221	56.5	-4.7
4	19035.00	40.2 AV	54.0	-13.8	1.81 H	221	44.9	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	49.4 PK	74.0	-24.6	1.63 V	250	34.5	14.9
2	12690.00	37.4 AV	54.0	-16.6	1.63 V	250	22.5	14.9
3	19035.00	53.7 PK	74.0	-20.3	1.64 V	138	58.4	-4.7
4	19035.00	42.4 AV	54.0	-11.6	1.64 V	138	47.1	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	48.4 PK	88.2	-39.8	2.14 H	164	32.9	15.5
2	#13010.00	37.1 AV	68.2	-31.1	2.14 H	164	21.6	15.5
3	19515.00	52.4 PK	74.0	-21.6	1.84 H	230	55.6	-3.2
4	19515.00	40.7 AV	54.0	-13.3	1.84 H	230	43.9	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	49.6 PK	88.2	-38.6	1.51 V	271	34.1	15.5
2	#13010.00	37.6 AV	68.2	-30.6	1.51 V	271	22.1	15.5
3	19515.00	53.6 PK	74.0	-20.4	1.49 V	152	56.8	-3.2
4	19515.00	42.7 AV	54.0	-11.3	1.49 V	152	45.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.5 PK	74.0	-25.5	2.10 H	162	31.1	17.4
2	13330.00	37.4 AV	54.0	-16.6	2.10 H	162	20.0	17.4
3	19995.00	52.3 PK	74.0	-21.7	1.80 H	215	56.4	-4.1
4	19995.00	40.8 AV	54.0	-13.2	1.80 H	215	44.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	49.7 PK	74.0	-24.3	1.65 V	266	32.3	17.4
2	13330.00	37.2 AV	54.0	-16.8	1.65 V	266	19.8	17.4
3	19995.00	54.2 PK	74.0	-19.8	1.60 V	153	58.3	-4.1
4	19995.00	42.8 AV	54.0	-11.2	1.60 V	153	46.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	48.8 PK	88.2	-39.4	2.04 H	155	30.2	18.6
2	#13650.00	37.5 AV	68.2	-30.7	2.04 H	155	18.9	18.6
3	20475.00	51.7 PK	74.0	-22.3	1.83 H	222	54.7	-3.0
4	20475.00	40.4 AV	54.0	-13.6	1.83 H	222	43.4	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	49.5 PK	88.2	-38.7	1.65 V	252	30.9	18.6
2	#13650.00	37.2 AV	68.2	-31.0	1.65 V	252	18.6	18.6
3	20475.00	53.6 PK	74.0	-20.4	1.55 V	147	56.6	-3.0
4	20475.00	42.3 AV	54.0	-11.7	1.55 V	147	45.3	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 76% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	48.2 PK	88.2	-40.0	2.01 H	161	29.2	19.0
2	#13970.00	37.2 AV	68.2	-31.0	2.01 H	161	18.2	19.0
3	20955.00	51.4 PK	74.0	-22.6	1.77 H	218	54.1	-2.7
4	20955.00	40.2 AV	54.0	-13.8	1.77 H	218	42.9	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	49.7 PK	88.2	-38.5	1.55 V	264	30.7	19.0
2	#13970.00	37.8 AV	68.2	-30.4	1.55 V	264	18.8	19.0
3	20955.00	53.3 PK	74.0	-20.7	1.54 V	146	56.0	-2.7
4	20955.00	42.6 AV	54.0	-11.4	1.54 V	146	45.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.


7.10 Transmit power control (TPC) mechanism

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Leo Tsai
--------------	---------	---------------------------	--------------	------------	----------

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	Sensitivity	Conducted PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Test Result
			Chain 0	Chain 1					
47	6185	Low RSSI	-14.44	-14.33	-11.37	4.76	-6.61	-5	Pass
		High RSSI	-23.99	-24.68	-21.31	4.76	-16.55	-11	
111	6505	Low RSSI	-13.88	-14.39	-11.12	4.61	-6.51	-5	Pass
		High RSSI	-23.85	-24.95	-21.35	4.61	-16.74	-11	

Note: EIRP PSD (dBm/MHz) = Conducted PSD (dBm/MHz) + Directional Gain (dBi)

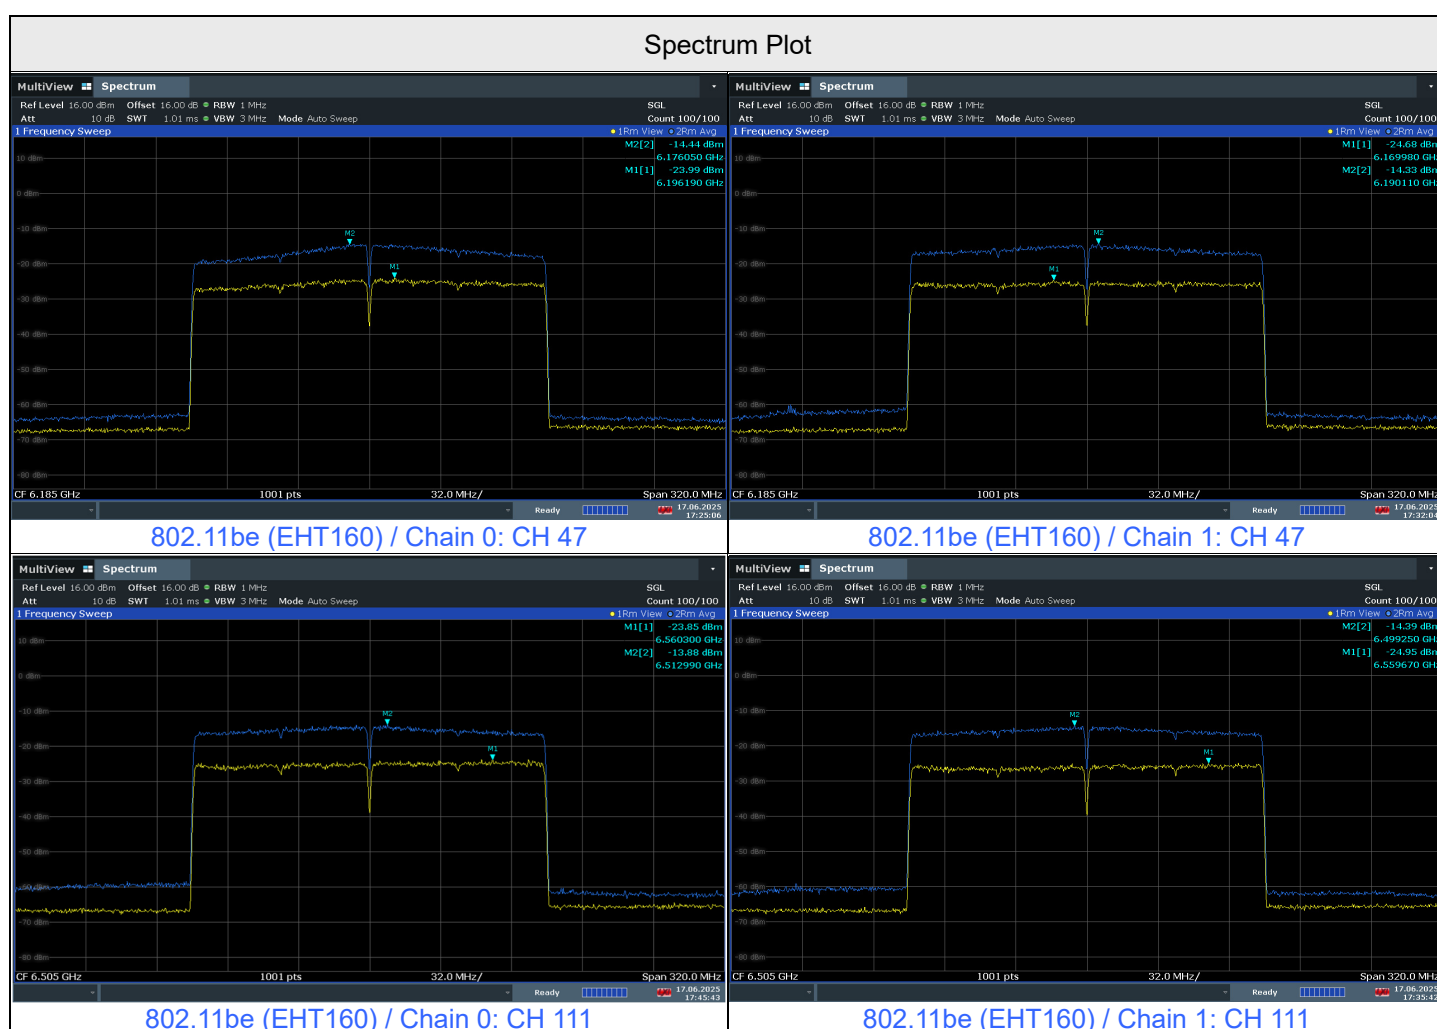

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---