






## 802.11be (EHT80) 484+242-tone MRU 2S2T

| Channel       | Frequency (MHz) | 6 dB Bandwidth (MHz) |         | Minimum Limit (MHz) | Test Result |
|---------------|-----------------|----------------------|---------|---------------------|-------------|
|               |                 | Chain 0              | Chain 1 |                     |             |
| 138 (U-NII-3) | 5690            | 1.32                 | 2.54    | 0.5                 | Pass        |
| 155           | 5775            | 68.76                | 75.06   | 0.5                 | Pass        |

### Spectrum Plot of Minimum Value

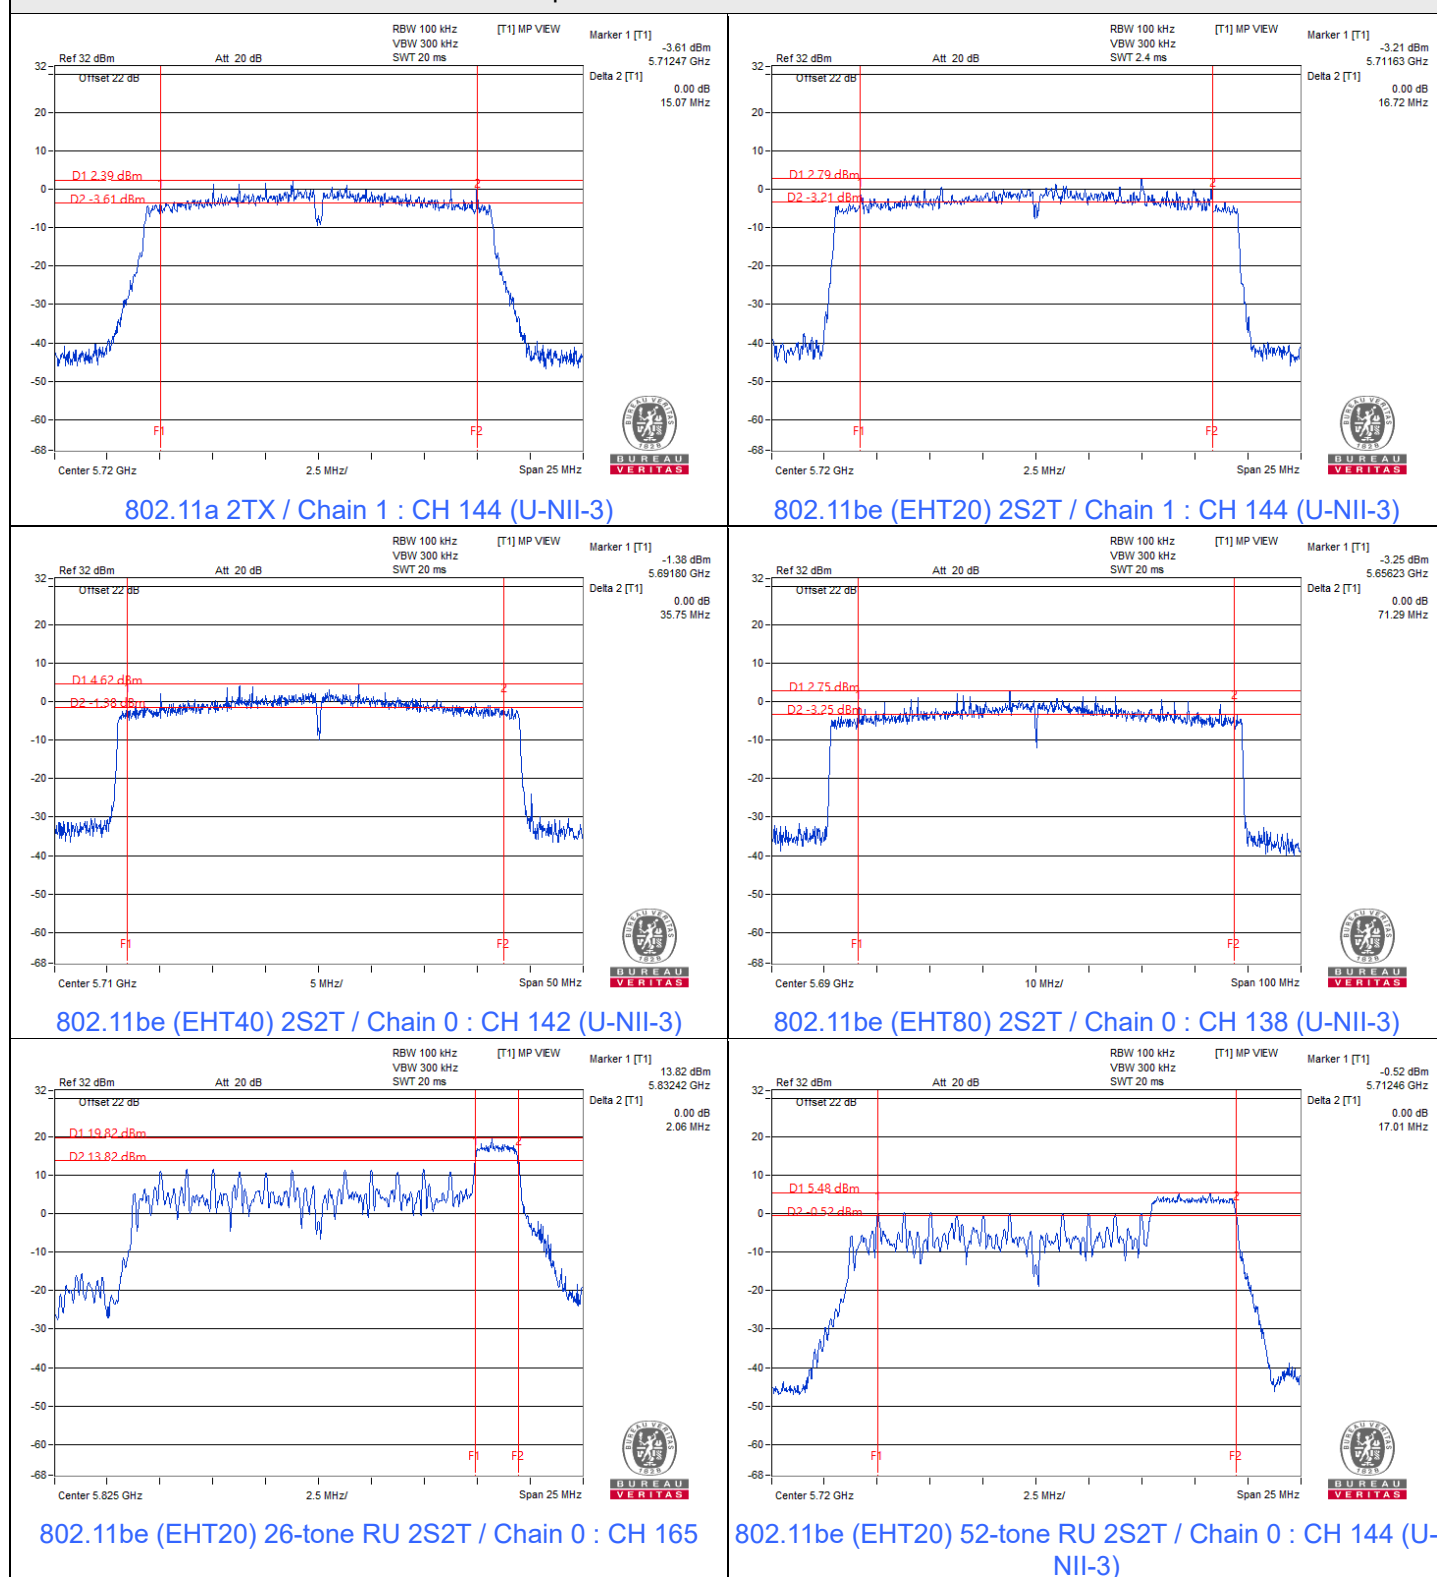

## Spectrum Plot of Minimum Value

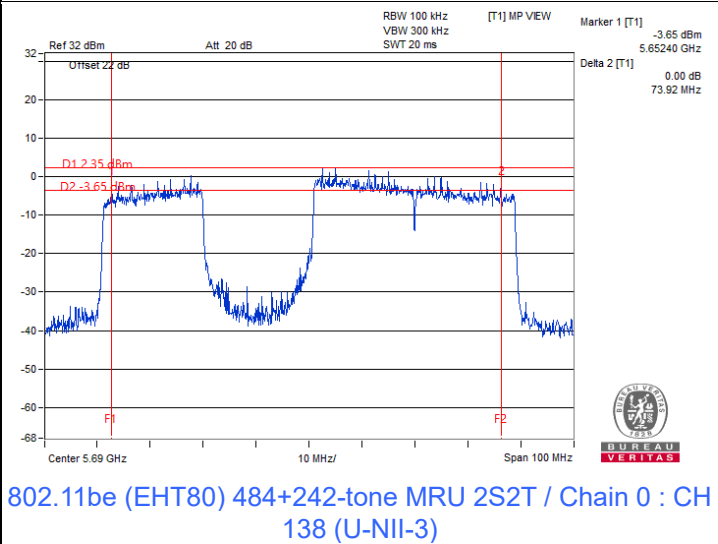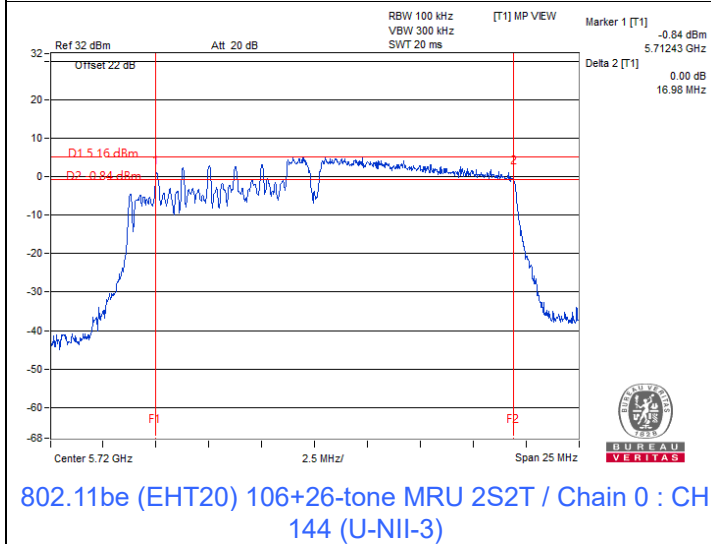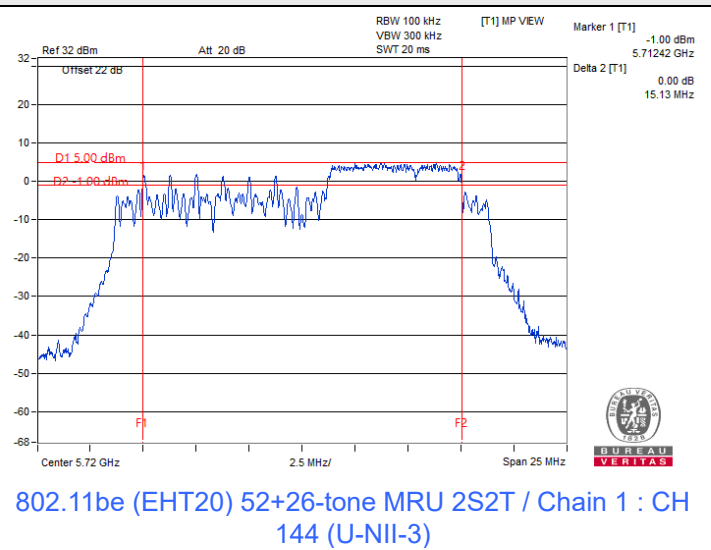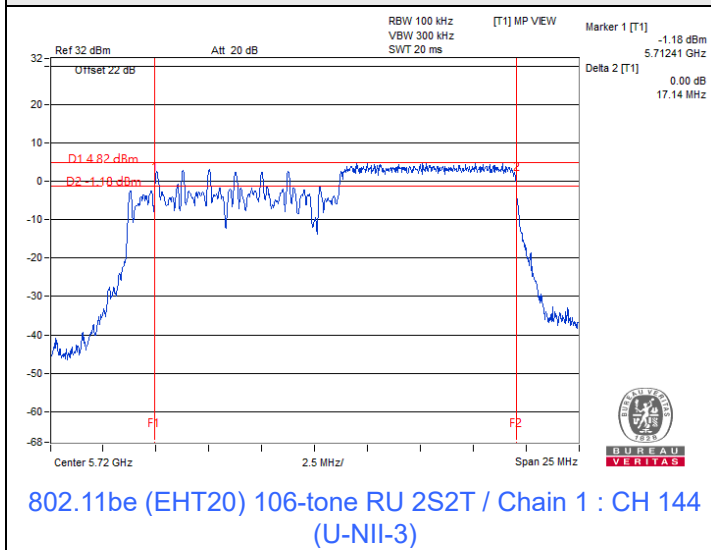

Note: For U-NII-3 straddle channel = Marker 1 + Delta 2 - 5725 MHz

## 7.5 Occupied Bandwidth

|              |         |                           |              |            |           |
|--------------|---------|---------------------------|--------------|------------|-----------|
| Input Power: | 3.3 Vdc | Environmental Conditions: | 20°C, 60% RH | Tested By: | Henry Hsu |
|--------------|---------|---------------------------|--------------|------------|-----------|

### 802.11a 1TX

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |
|----------------|-----------------|--------------------------|
| 36             | 5180            | 16.32                    |
| 40             | 5200            | 16.32                    |
| 48             | 5240            | 16.32                    |
| 52             | 5260            | 16.32                    |
| 60             | 5300            | 16.32                    |
| 64             | 5320            | 16.32                    |
| 100            | 5500            | 16.44                    |
| 116            | 5580            | 16.32                    |
| 140            | 5700            | 16.32                    |
| 144 (U-NII-2C) | 5720            | 13.16                    |
| 144 (U-NII-3)  | 5720            | 3.16                     |
| 149            | 5745            | 16.44                    |
| 157            | 5785            | 16.44                    |
| 165            | 5825            | 16.5                     |

### 802.11be (EHT20) 1S1T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |
|----------------|-----------------|--------------------------|
| 36             | 5180            | 18.78                    |
| 40             | 5200            | 18.78                    |
| 48             | 5240            | 18.72                    |
| 52             | 5260            | 18.84                    |
| 60             | 5300            | 18.78                    |
| 64             | 5320            | 18.84                    |
| 100            | 5500            | 18.84                    |
| 116            | 5580            | 18.84                    |
| 140            | 5700            | 18.78                    |
| 144 (U-NII-2C) | 5720            | 14.42                    |
| 144 (U-NII-3)  | 5720            | 4.42                     |
| 149            | 5745            | 18.9                     |
| 157            | 5785            | 18.84                    |
| 165            | 5825            | 18.96                    |

### 802.11be (EHT40) 1S1T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |
|----------------|-----------------|--------------------------|
| 38             | 5190            | 37.68                    |
| 46             | 5230            | 37.56                    |
| 54             | 5270            | 37.68                    |
| 62             | 5310            | 37.8                     |
| 102            | 5510            | 37.68                    |
| 110            | 5550            | 37.8                     |
| 134            | 5670            | 37.8                     |
| 142 (U-NII-2C) | 5710            | 33.72                    |
| 142 (U-NII-3)  | 5710            | 3.84                     |
| 151            | 5755            | 37.68                    |
| 159            | 5795            | 37.8                     |

### 802.11be (EHT80) 1S1T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |
|----------------|-----------------|--------------------------|
| 42             | 5210            | 77.04                    |
| 58             | 5290            | 77.28                    |
| 106            | 5530            | 77.28                    |
| 122            | 5610            | 76.8                     |
| 138 (U-NII-2C) | 5690            | 73.64                    |
| 138 (U-NII-3)  | 5690            | 3.4                      |
| 155            | 5775            | 77.28                    |

### 802.11be (EHT160) 1S1T

| Channel       | Frequency (MHz) | Occupied Bandwidth (MHz) |
|---------------|-----------------|--------------------------|
| 50 (U-NII-1)  | 5250            | 77.76                    |
| 50 (U-NII-2A) | 5250            | 78.24                    |
| 114           | 5570            | 156                      |

### 802.11be (EHT20) 26-tone RU 1S1T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |
|----------------|-----------------|--------------------------|
| 36             | 5180            | 18.24                    |
| 64             | 5320            | 18.12                    |
| 100            | 5500            | 18.18                    |
| 140            | 5700            | 18.3                     |
| 144 (U-NII-2C) | 5720            | 13.46                    |
| 144 (U-NII-3)  | 5720            | 4.72                     |
| 149            | 5745            | 18.18                    |
| 165            | 5825            | 18.42                    |

### 802.11be (EHT20) 52-tone RU 1S1T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |
|----------------|-----------------|--------------------------|
| 36             | 5180            | 18.12                    |
| 64             | 5320            | 18.18                    |
| 100            | 5500            | 18.12                    |
| 140            | 5700            | 18.12                    |
| 144 (U-NII-2C) | 5720            | 13.46                    |
| 144 (U-NII-3)  | 5720            | 4.6                      |
| 149            | 5745            | 18.3                     |
| 165            | 5825            | 18.3                     |

### 802.11be (EHT20) 106-tone RU 1S1T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |
|----------------|-----------------|--------------------------|
| 36             | 5180            | 18                       |
| 64             | 5320            | 18.06                    |
| 100            | 5500            | 18.12                    |
| 140            | 5700            | 18.12                    |
| 144 (U-NII-2C) | 5720            | 13.52                    |
| 144 (U-NII-3)  | 5720            | 4.6                      |
| 149            | 5745            | 18.24                    |
| 165            | 5825            | 18.12                    |

#### 802.11be (EHT20) 52+26-tone MRU 1S1T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |
|----------------|-----------------|--------------------------|
| 36             | 5180            | 16.92                    |
| 64             | 5320            | 16.98                    |
| 100            | 5500            | 17.22                    |
| 140            | 5700            | 16.68                    |
| 144 (U-NII-2C) | 5720            | 13.52                    |
| 144 (U-NII-3)  | 5720            | 3.58                     |
| 149            | 5745            | 16.74                    |
| 165            | 5825            | 17.22                    |

#### 802.11be (EHT20) 106+26-tone MRU 1S1T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |
|----------------|-----------------|--------------------------|
| 36             | 5180            | 17.76                    |
| 64             | 5320            | 17.88                    |
| 100            | 5500            | 17.76                    |
| 140            | 5700            | 17.82                    |
| 144 (U-NII-2C) | 5720            | 13.4                     |
| 144 (U-NII-3)  | 5720            | 4.48                     |
| 149            | 5745            | 17.7                     |
| 165            | 5825            | 17.94                    |

#### 802.11be (EHT80) 484+242-tone MRU 1S1T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |
|----------------|-----------------|--------------------------|
| 42             | 5210            | 77.28                    |
| 58             | 5290            | 77.28                    |
| 106            | 5530            | 77.04                    |
| 138 (U-NII-2C) | 5690            | 73.64                    |
| 138 (U-NII-3)  | 5690            | 3.88                     |
| 155            | 5775            | 77.28                    |


#### 802.11be (EHT160) 996+484-tone MRU 1S1T

| Channel       | Frequency (MHz) | Occupied Bandwidth (MHz) |
|---------------|-----------------|--------------------------|
| 50 (U-NII-1)  | 5250            | 77.76                    |
| 50 (U-NII-2A) | 5250            | 38.88                    |
| 114           | 5570            | 117.12                   |


## 802.11be (EHT160) 996+484+242-tone MRU 1S1T

| Channel       | Frequency (MHz) | Occupied Bandwidth (MHz) |
|---------------|-----------------|--------------------------|
| 50 (U-NII-1)  | 5250            | 77.76                    |
| 50 (U-NII-2A) | 5250            | 59.52                    |
| 114           | 5570            | 136.8                    |


### Spectrum Plot of Maximum Value

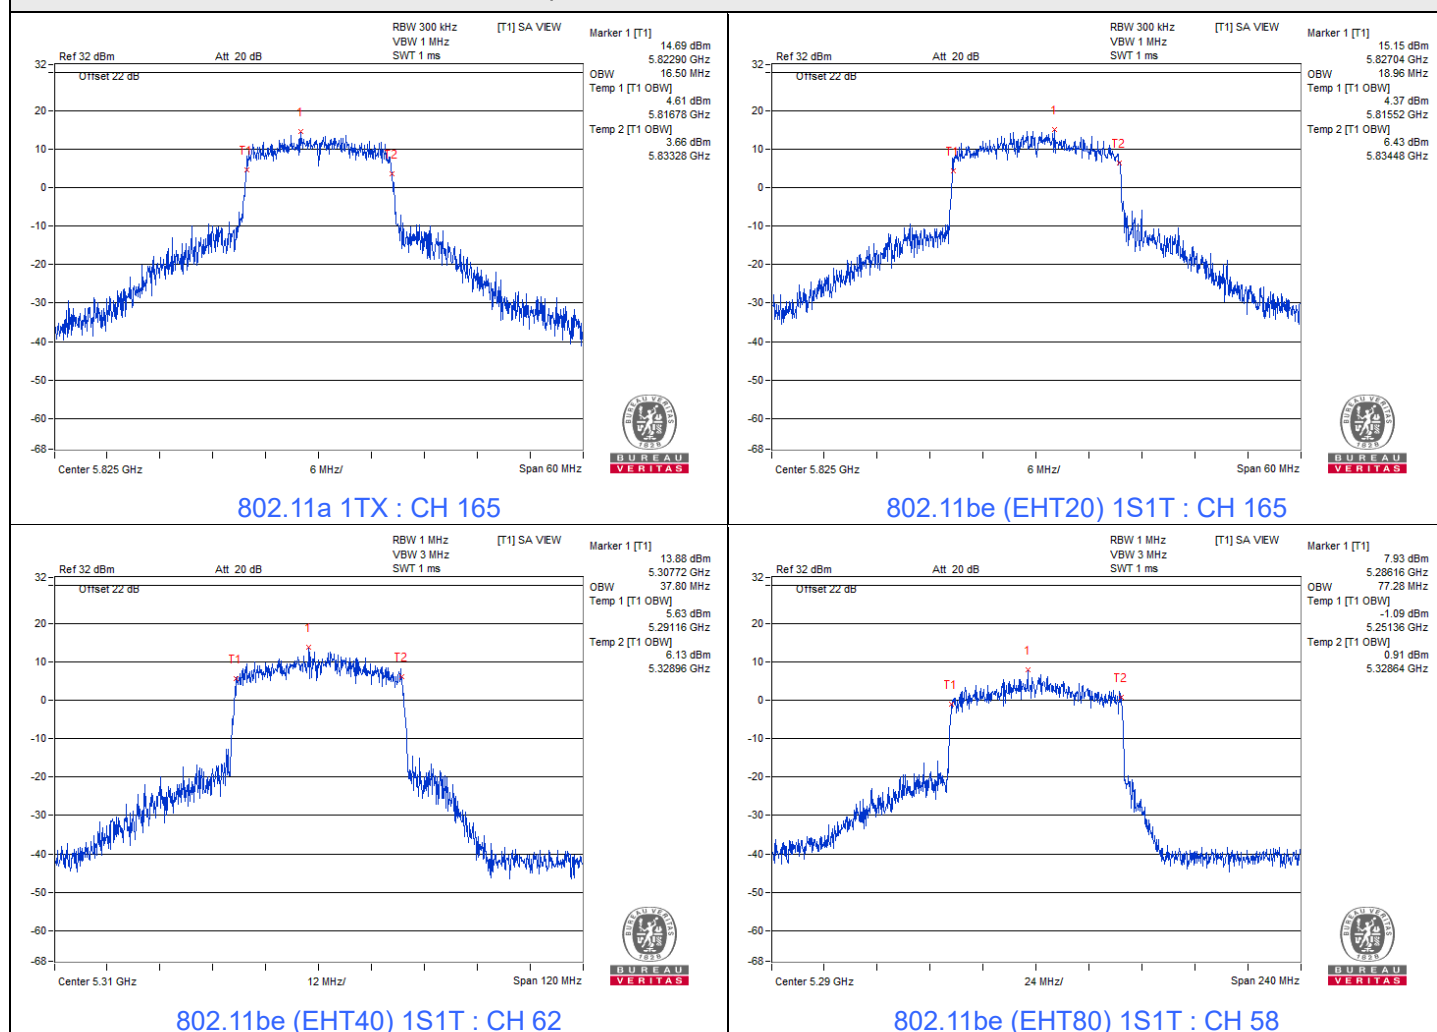


## Spectrum Plot of Maximum Value

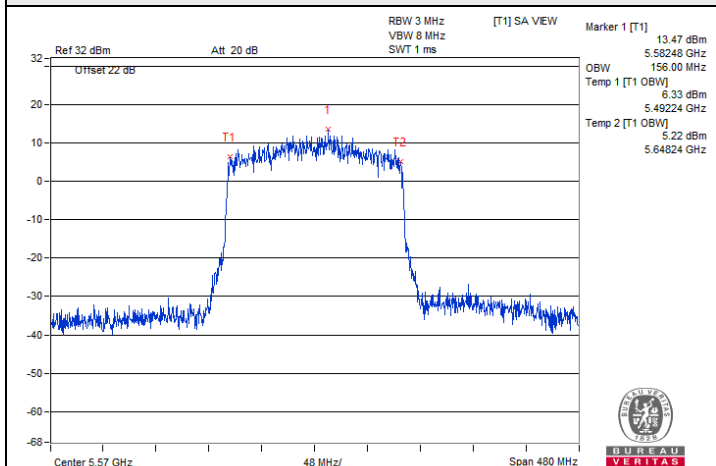


802.11be (EHT160) 1S1T : CH 114

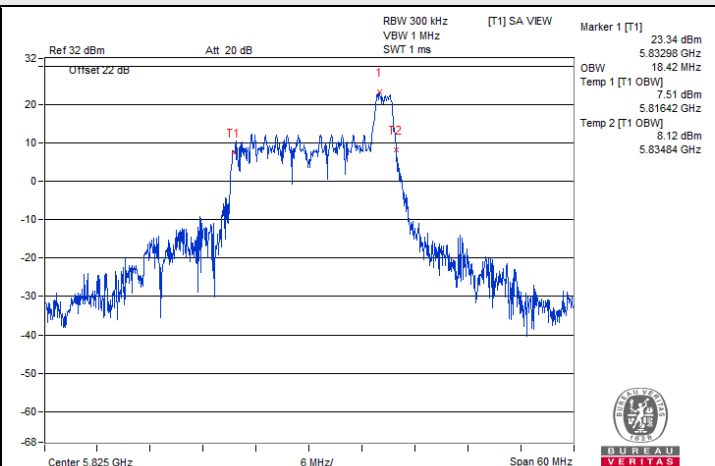


802.11be (EHT20) 26-tone RU 1S1T : CH 165

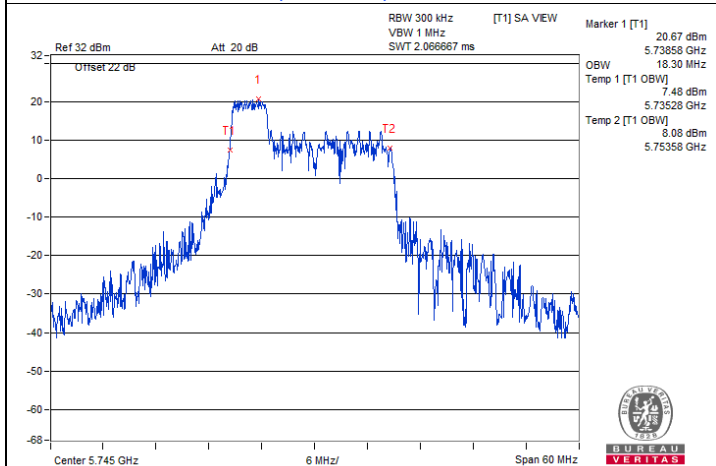


802.11be (EHT20) 52-tone RU 1S1T : CH 149

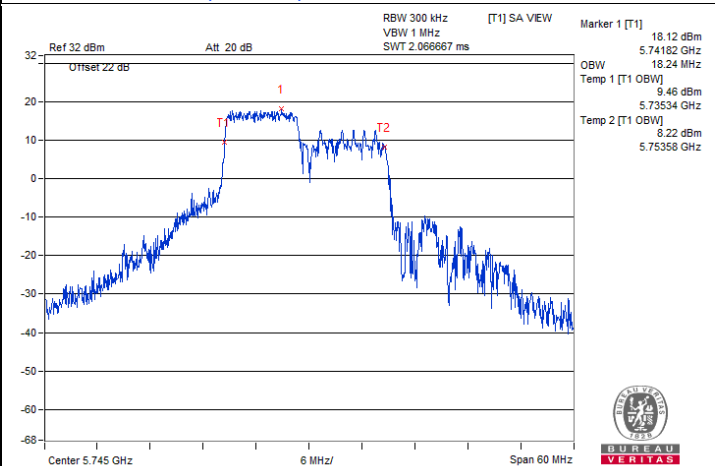

802.11be (EHT20) 106-tone RU 1S1T : CH 149

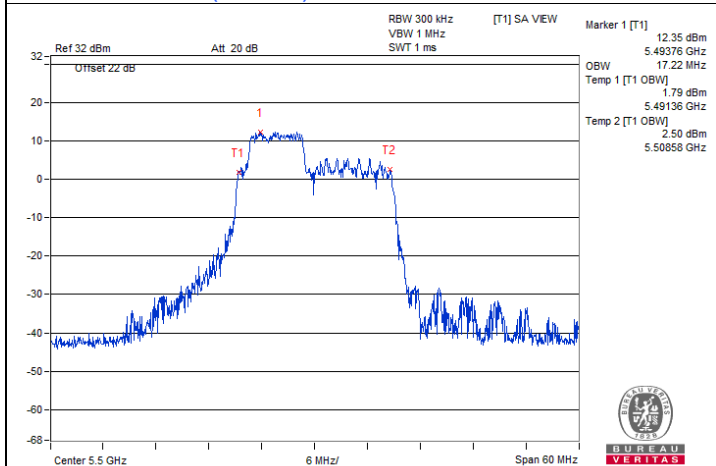


802.11be (EHT20) 52+26-tone MRU 1S1T : CH 100

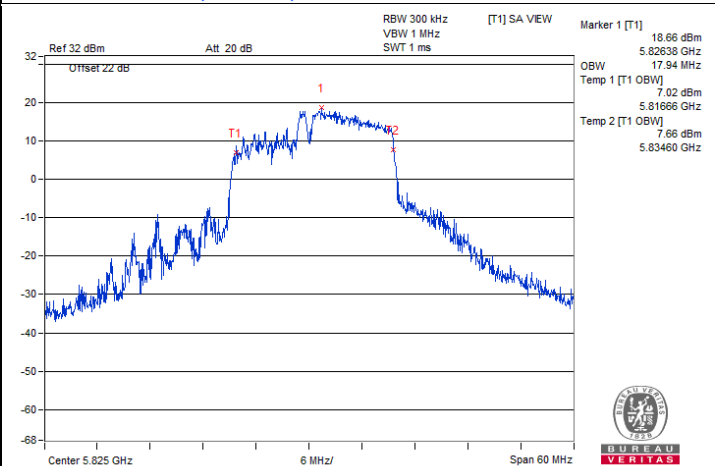


802.11be (EHT20) 106+26-tone MRU 1S1T : CH 165


## Spectrum Plot of Maximum Value

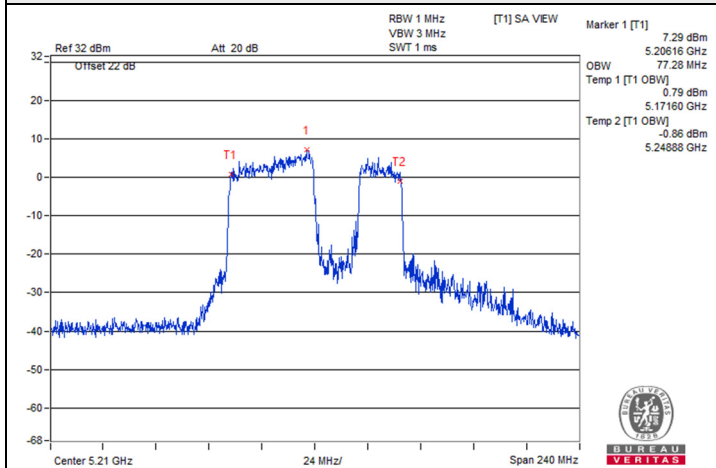

802.11be (EHT80) 484+242-tone MRU 1S1T : CH 42

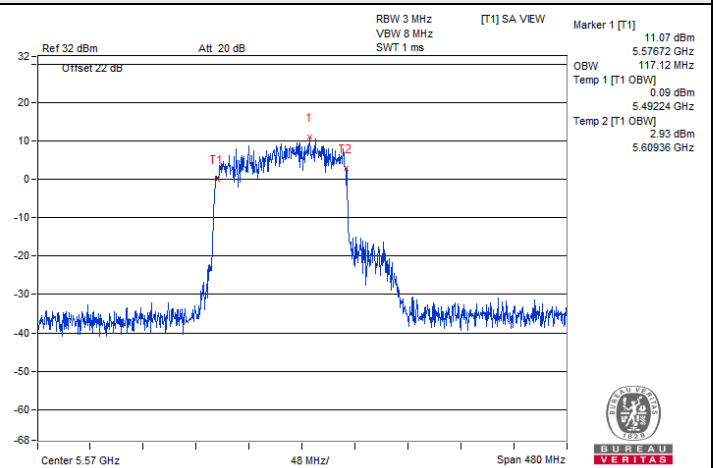


802.11be (EHT160) 996+484-tone MRU 1S1T : CH 114

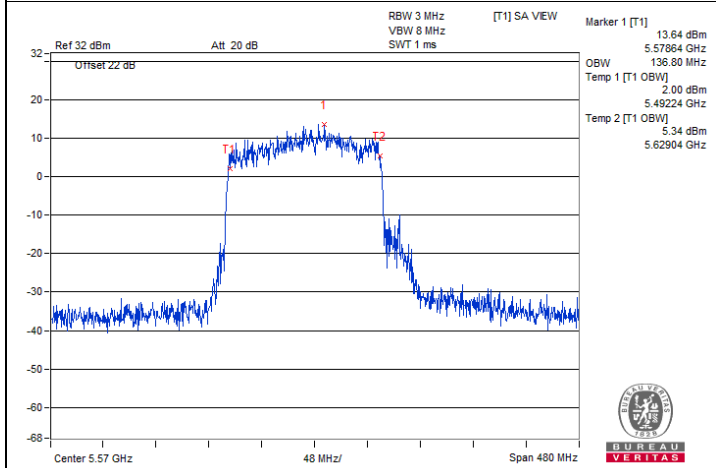


802.11be (EHT160) 996+484+242-tone MRU 1S1T : CH 114


**Spectrum Plot for nearby DFS band**  
(DFS is required, if 99% OCP straddle into U-NII-2A)

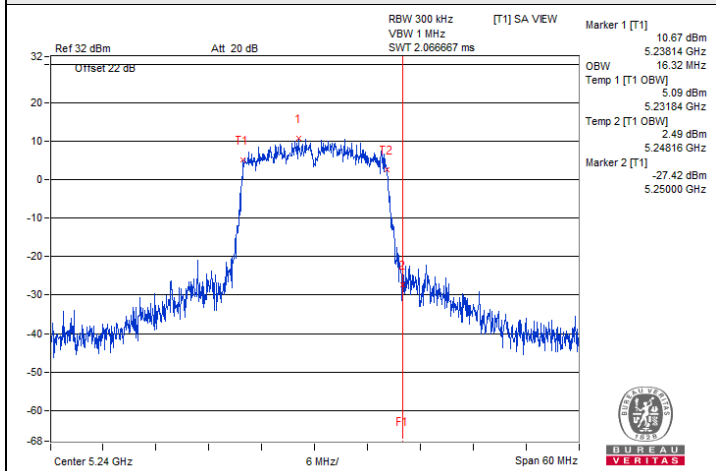


**802.11a 1TX : CH 48**

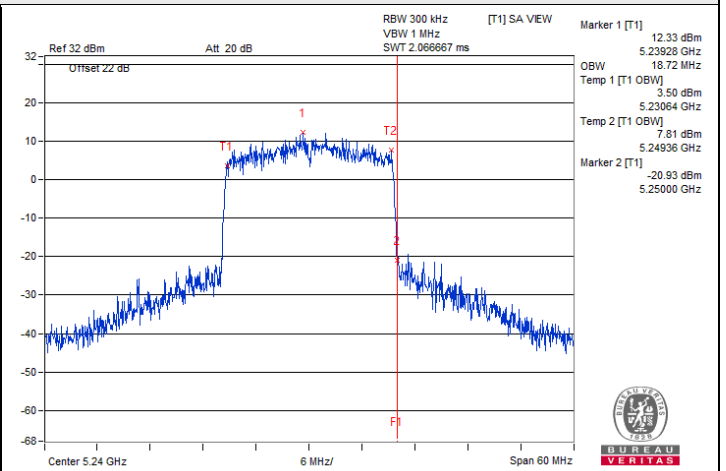


**802.11b (EHT20) 1S1T : CH 48**

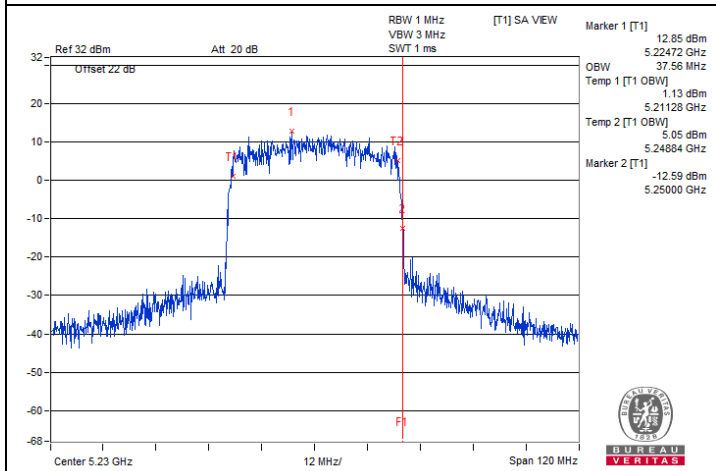

**802.11be (EHT40) 1S1T : CH 46**

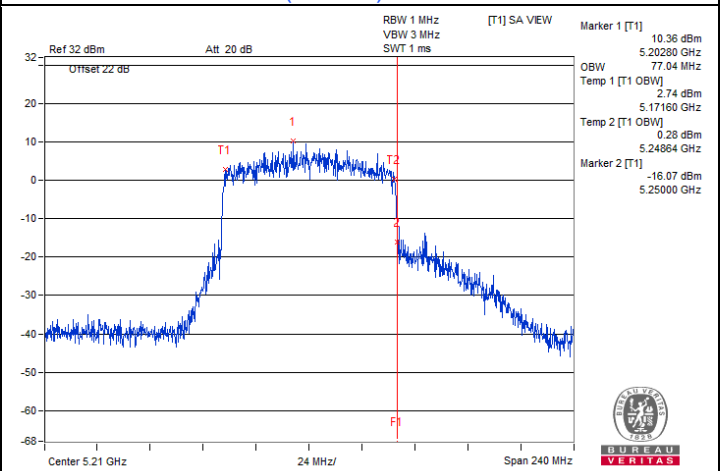


**802.11be (EHT80) 1S1T : CH 42**

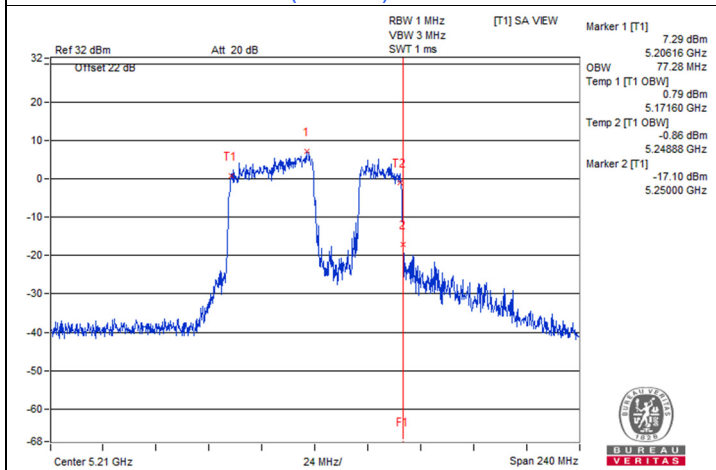


**802.11be (EHT80) 484+242-tone MRU 1S1T : CH 42**


Spectrum Plot for nearby DFS band  
(DFS is required, if 99% OCP straddle into U-NII-2C)

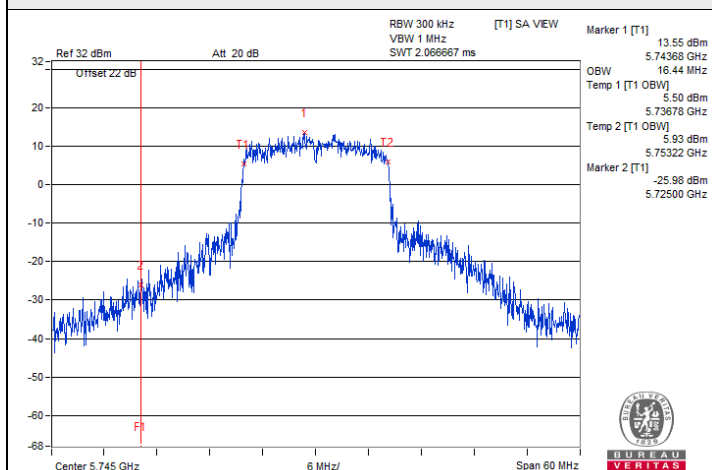


802.11a 1TX : CH 149

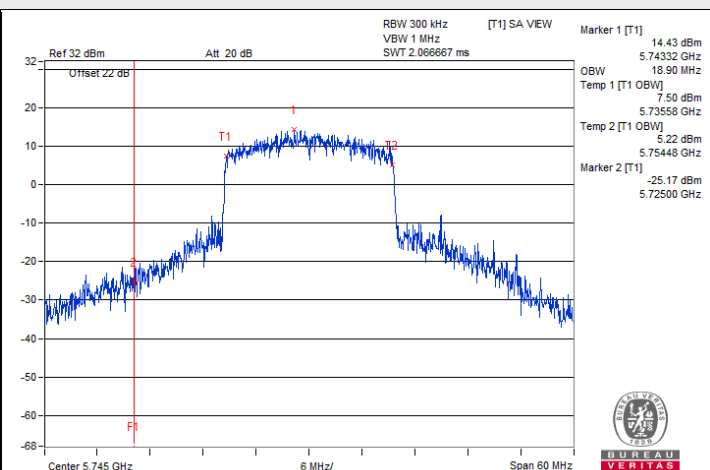


802.11be (EHT20) 1S1T : CH 149

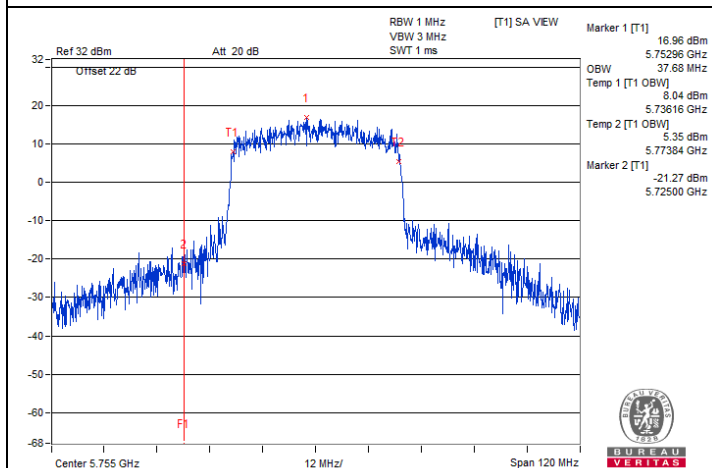


802.11be (EHT40) 1S1T : CH 151

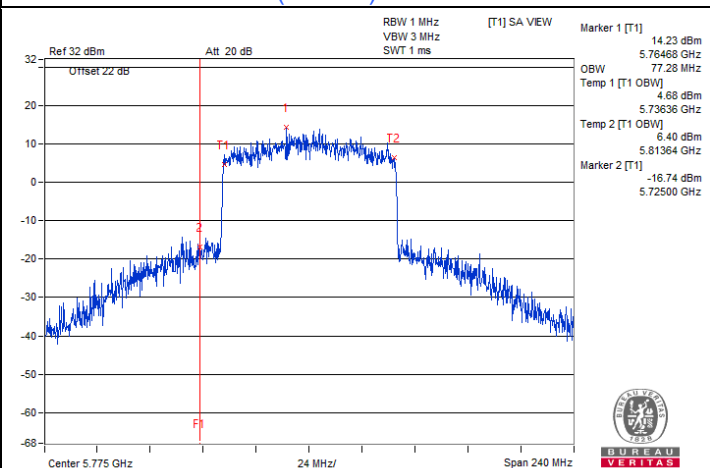

802.11be (EHT80) 1S1T : CH 155

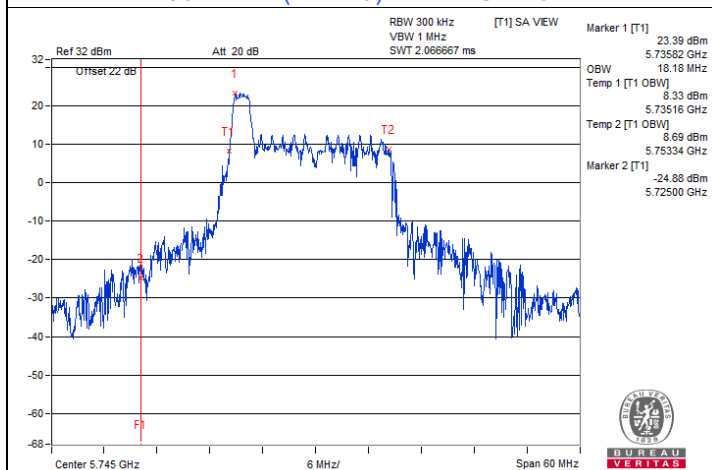


802.11be (EHT20) 26-tone RU 1S1T : CH 149

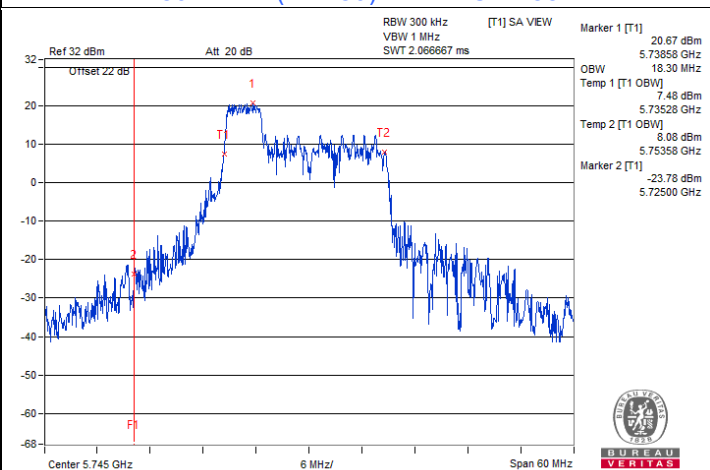


802.11be (EHT20) 52-tone RU 1S1T : CH 149


# Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2C)

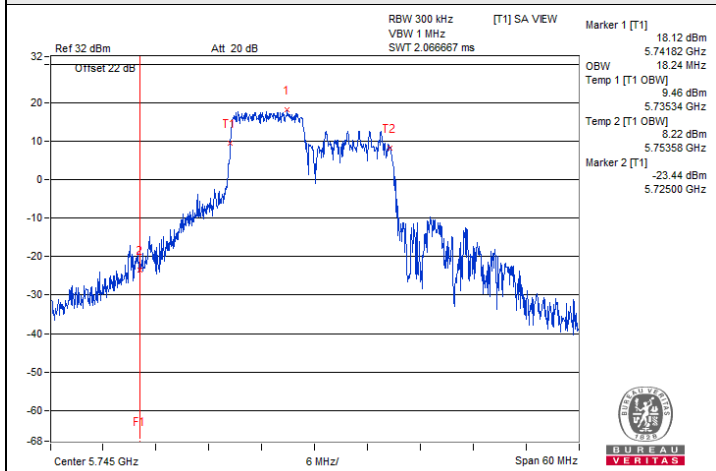


802.11be (EHT20) 106-tone RU 1S1T : CH 149

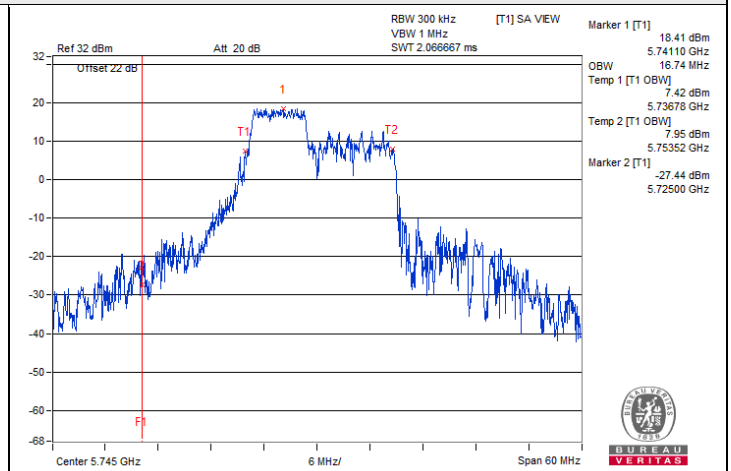

802.11be (EHT20) 52+26-tone MRU 1S1T : CH 149

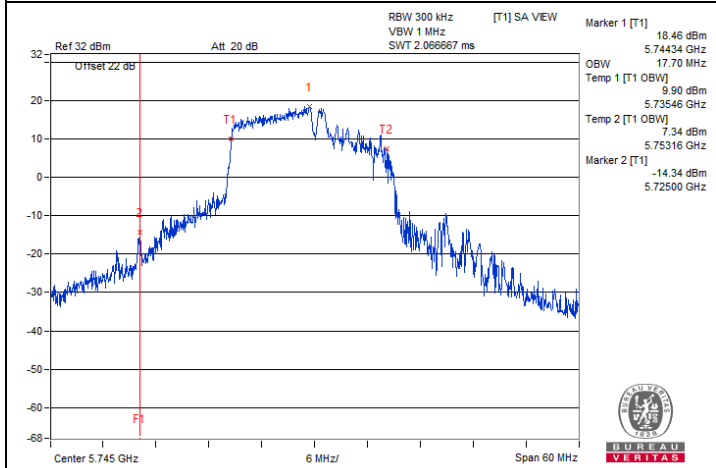

802.11be (EHT20) 106+26-tone MRU 1S1T : CH 149

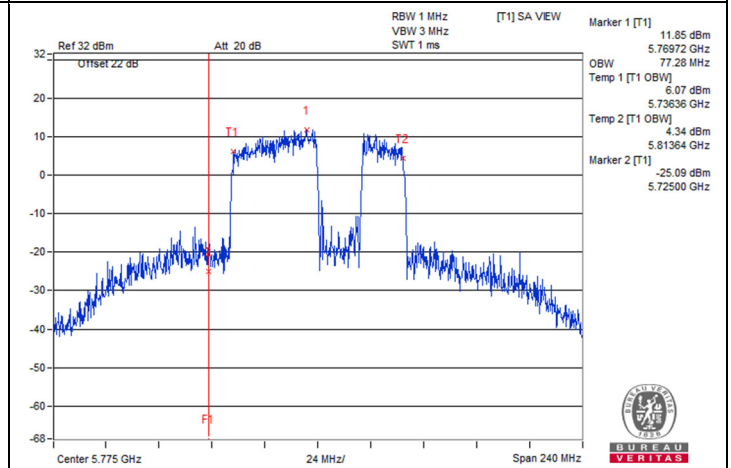

802.11be (EHT80) 484+242-tone MRU 1S1T : CH 155

|              |         |                           |              |            |           |
|--------------|---------|---------------------------|--------------|------------|-----------|
| Input Power: | 3.3 Vdc | Environmental Conditions: | 20°C, 60% RH | Tested By: | Henry Hsu |
|--------------|---------|---------------------------|--------------|------------|-----------|

#### 802.11a 2TX

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |         |
|----------------|-----------------|--------------------------|---------|
|                |                 | Chain 0                  | Chain 1 |
| 36             | 5180            | 16.38                    | 16.32   |
| 40             | 5200            | 16.38                    | 16.32   |
| 48             | 5240            | 16.32                    | 16.32   |
| 52             | 5260            | 16.32                    | 16.32   |
| 60             | 5300            | 16.44                    | 16.44   |
| 64             | 5320            | 16.38                    | 16.32   |
| 100            | 5500            | 16.38                    | 16.44   |
| 116            | 5580            | 16.32                    | 16.32   |
| 140            | 5700            | 16.32                    | 16.38   |
| 144 (U-NII-2C) | 5720            | 13.10                    | 13.16   |
| 144 (U-NII-3)  | 5720            | 3.10                     | 3.16    |
| 149            | 5745            | 16.44                    | 16.50   |
| 157            | 5785            | 16.50                    | 16.44   |
| 165            | 5825            | 16.56                    | 16.56   |

#### 802.11be (EHT20) 2S2T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |         |
|----------------|-----------------|--------------------------|---------|
|                |                 | Chain 0                  | Chain 1 |
| 36             | 5180            | 18.84                    | 18.84   |
| 40             | 5200            | 18.78                    | 18.84   |
| 48             | 5240            | 18.78                    | 18.78   |
| 52             | 5260            | 18.72                    | 18.78   |
| 60             | 5300            | 18.78                    | 18.84   |
| 64             | 5320            | 18.84                    | 18.78   |
| 100            | 5500            | 18.78                    | 18.84   |
| 116            | 5580            | 18.78                    | 18.78   |
| 140            | 5700            | 18.84                    | 18.84   |
| 144 (U-NII-2C) | 5720            | 14.42                    | 14.42   |
| 144 (U-NII-3)  | 5720            | 4.42                     | 4.36    |
| 149            | 5745            | 18.90                    | 18.84   |
| 157            | 5785            | 18.90                    | 18.84   |
| 165            | 5825            | 18.96                    | 18.96   |

### 802.11be (EHT40) 2S2T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |         |
|----------------|-----------------|--------------------------|---------|
|                |                 | Chain 0                  | Chain 1 |
| 38             | 5190            | 37.80                    | 37.68   |
| 46             | 5230            | 37.68                    | 37.80   |
| 54             | 5270            | 37.56                    | 37.68   |
| 62             | 5310            | 37.68                    | 37.68   |
| 102            | 5510            | 37.68                    | 37.80   |
| 110            | 5550            | 37.56                    | 37.68   |
| 134            | 5670            | 37.68                    | 37.80   |
| 142 (U-NII-2C) | 5710            | 33.84                    | 33.72   |
| 142 (U-NII-3)  | 5710            | 3.84                     | 3.96    |
| 151            | 5755            | 37.80                    | 37.80   |
| 159            | 5795            | 37.80                    | 37.68   |

### 802.11be (EHT80) 2S2T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |         |
|----------------|-----------------|--------------------------|---------|
|                |                 | Chain 0                  | Chain 1 |
| 42             | 5210            | 77.28                    | 77.04   |
| 58             | 5290            | 76.80                    | 77.04   |
| 106            | 5530            | 77.04                    | 76.80   |
| 122            | 5610            | 76.80                    | 77.04   |
| 138 (U-NII-2C) | 5690            | 73.64                    | 73.40   |
| 138 (U-NII-3)  | 5690            | 3.64                     | 3.64    |
| 155            | 5775            | 76.80                    | 76.56   |

### 802.11be (EHT160) 2S2T

| Channel       | Frequency (MHz) | Occupied Bandwidth (MHz) |         |
|---------------|-----------------|--------------------------|---------|
|               |                 | Chain 0                  | Chain 1 |
| 50 (U-NII-1)  | 5250            | 77.76                    | 77.76   |
| 50 (U-NII-2A) | 5250            | 78.24                    | 77.76   |
| 114           | 5570            | 156.00                   | 155.52  |

### 802.11be (EHT20) 26-tone RU 2S2T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |         |
|----------------|-----------------|--------------------------|---------|
|                |                 | Chain 0                  | Chain 1 |
| 36             | 5180            | 18.18                    | 18.18   |
| 64             | 5320            | 18.24                    | 18.18   |
| 100            | 5500            | 18.12                    | 18.24   |
| 140            | 5700            | 18.30                    | 18.24   |
| 144 (U-NII-2C) | 5720            | 13.58                    | 13.58   |
| 144 (U-NII-3)  | 5720            | 4.66                     | 4.72    |
| 149            | 5745            | 18.30                    | 18.24   |
| 165            | 5825            | 18.30                    | 18.24   |

### 802.11be (EHT20) 52-tone RU 2S2T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |         |
|----------------|-----------------|--------------------------|---------|
|                |                 | Chain 0                  | Chain 1 |
| 36             | 5180            | 18.18                    | 18.06   |
| 64             | 5320            | 18.06                    | 18.18   |
| 100            | 5500            | 18.12                    | 18.06   |
| 140            | 5700            | 18.18                    | 17.94   |
| 144 (U-NII-2C) | 5720            | 13.52                    | 13.52   |
| 144 (U-NII-3)  | 5720            | 4.60                     | 4.60    |
| 149            | 5745            | 18.30                    | 18.18   |
| 165            | 5825            | 18.30                    | 18.18   |

### 802.11be (EHT20) 106-tone RU 2S2T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |         |
|----------------|-----------------|--------------------------|---------|
|                |                 | Chain 0                  | Chain 1 |
| 36             | 5180            | 18.18                    | 18.00   |
| 64             | 5320            | 18.18                    | 18.12   |
| 100            | 5500            | 18.18                    | 18.06   |
| 140            | 5700            | 18.24                    | 18.12   |
| 144 (U-NII-2C) | 5720            | 13.58                    | 13.34   |
| 144 (U-NII-3)  | 5720            | 4.54                     | 4.54    |
| 149            | 5745            | 18.18                    | 18.18   |
| 165            | 5825            | 18.24                    | 18.12   |

### 802.11be (EHT20) 52+26-tone MRU 2S2T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |         |
|----------------|-----------------|--------------------------|---------|
|                |                 | Chain 0                  | Chain 1 |
| 36             | 5180            | 16.92                    | 17.10   |
| 64             | 5320            | 17.16                    | 17.16   |
| 100            | 5500            | 17.10                    | 17.04   |
| 140            | 5700            | 17.04                    | 17.04   |
| 144 (U-NII-2C) | 5720            | 13.58                    | 13.58   |
| 144 (U-NII-3)  | 5720            | 3.58                     | 3.52    |
| 149            | 5745            | 17.04                    | 17.28   |
| 165            | 5825            | 17.28                    | 17.22   |

### 802.11be (EHT20) 106+26-tone MRU 2S2T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |         |
|----------------|-----------------|--------------------------|---------|
|                |                 | Chain 0                  | Chain 1 |
| 36             | 5180            | 17.82                    | 17.70   |
| 64             | 5320            | 17.40                    | 17.70   |
| 100            | 5500            | 17.88                    | 17.76   |
| 140            | 5700            | 17.82                    | 17.70   |
| 144 (U-NII-2C) | 5720            | 13.28                    | 13.40   |
| 144 (U-NII-3)  | 5720            | 4.48                     | 4.48    |
| 149            | 5745            | 17.82                    | 18.00   |
| 165            | 5825            | 17.94                    | 17.94   |

### 802.11be (EHT80) 484+242-tone MRU 2S2T

| Channel        | Frequency (MHz) | Occupied Bandwidth (MHz) |         |
|----------------|-----------------|--------------------------|---------|
|                |                 | Chain 0                  | Chain 1 |
| 42             | 5210            | 77.28                    | 77.28   |
| 58             | 5290            | 77.28                    | 77.52   |
| 106            | 5530            | 77.04                    | 77.28   |
| 138 (U-NII-2C) | 5690            | 73.40                    | 73.64   |
| 138 (U-NII-3)  | 5690            | 3.88                     | 3.64    |
| 155            | 5775            | 77.28                    | 77.52   |


### 802.11be (EHT160) 996+484-tone MRU 2S2T

| Channel       | Frequency (MHz) | Occupied Bandwidth (MHz) |         |
|---------------|-----------------|--------------------------|---------|
|               |                 | Chain 0                  | Chain 1 |
| 50 (U-NII-1)  | 5250            | 77.76                    | 78.24   |
| 50 (U-NII-2A) | 5250            | 39.36                    | 39.36   |
| 114           | 5570            | 117.12                   | 117.12  |







### 802.11be (EHT160) 996+484+242-tone MRU 2S2T

| Channel       | Frequency (MHz) | Occupied Bandwidth (MHz) |         |
|---------------|-----------------|--------------------------|---------|
|               |                 | Chain 0                  | Chain 1 |
| 50 (U-NII-1)  | 5250            | 77.76                    | 78.24   |
| 50 (U-NII-2A) | 5250            | 59.52                    | 59.52   |
| 114           | 5570            | 136.80                   | 137.28  |




#### Spectrum Plot of Maximum Value

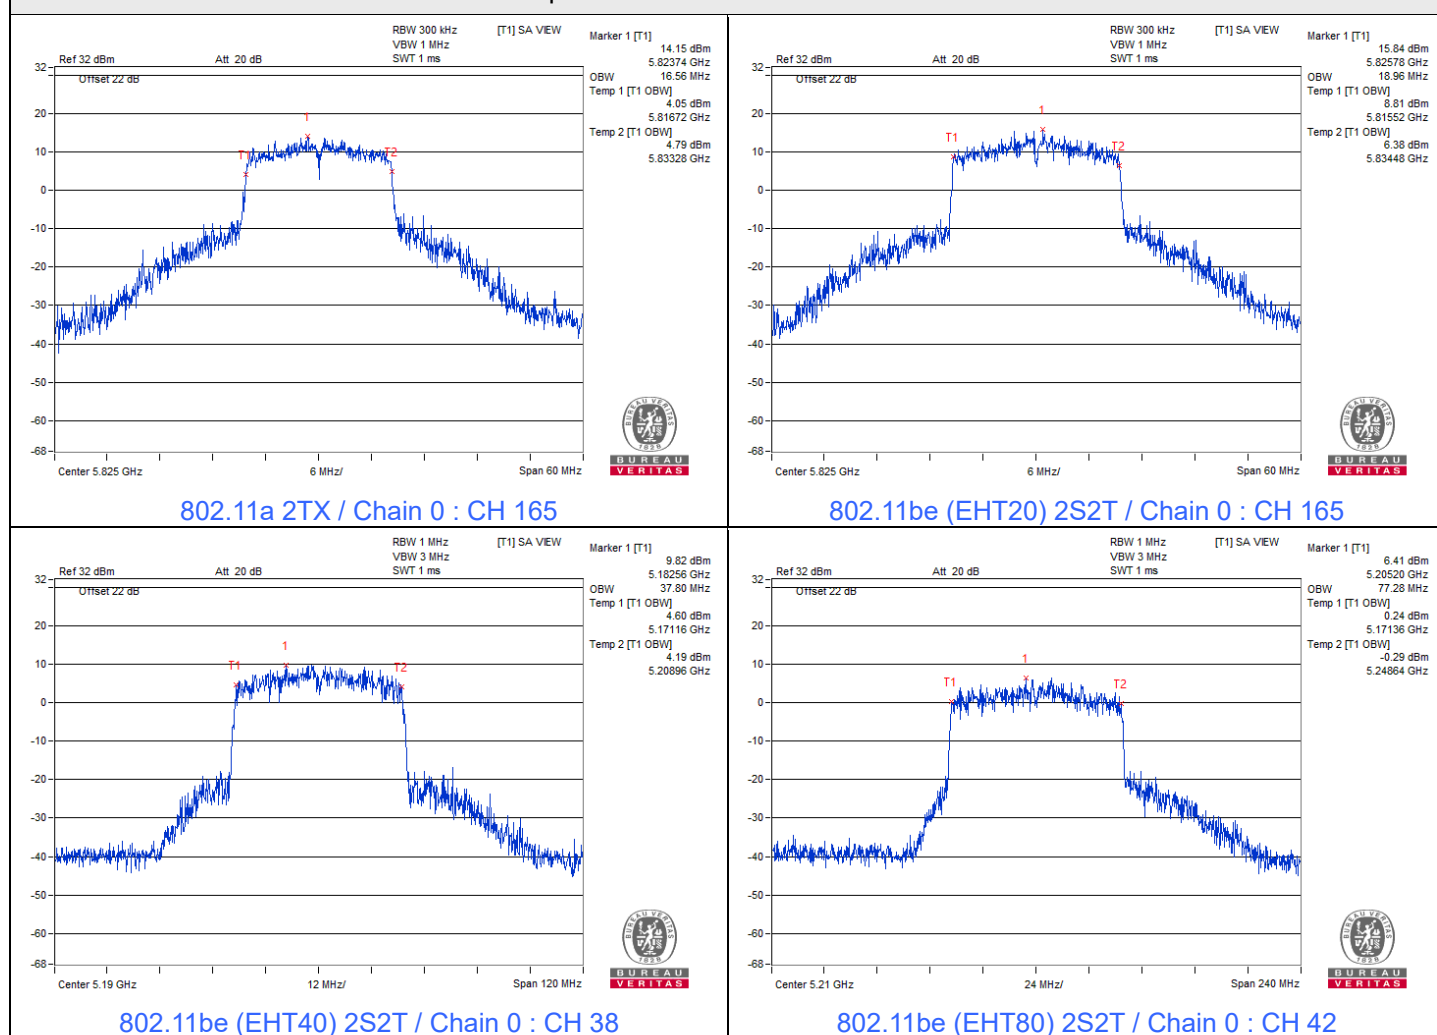


## Spectrum Plot of Maximum Value

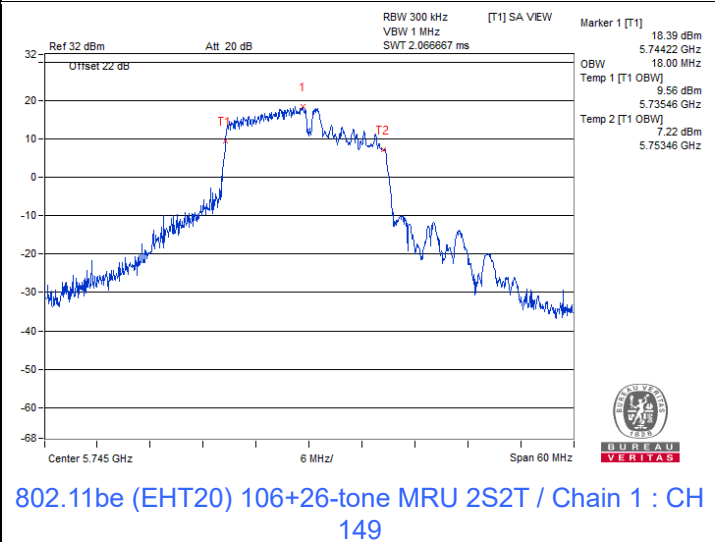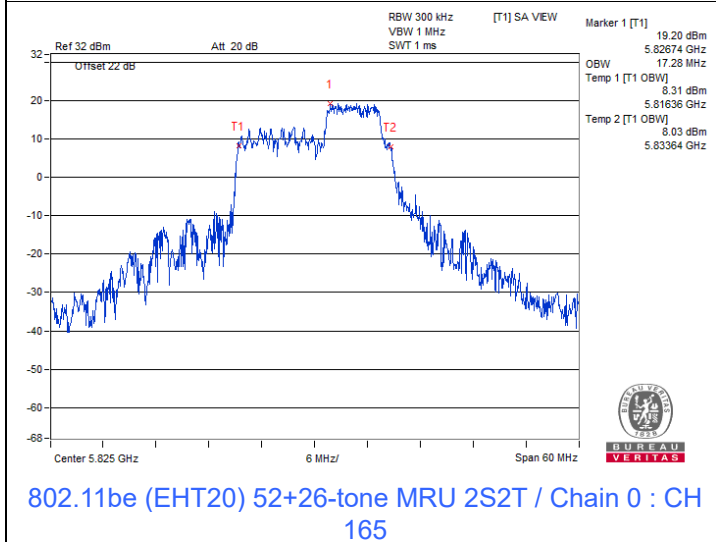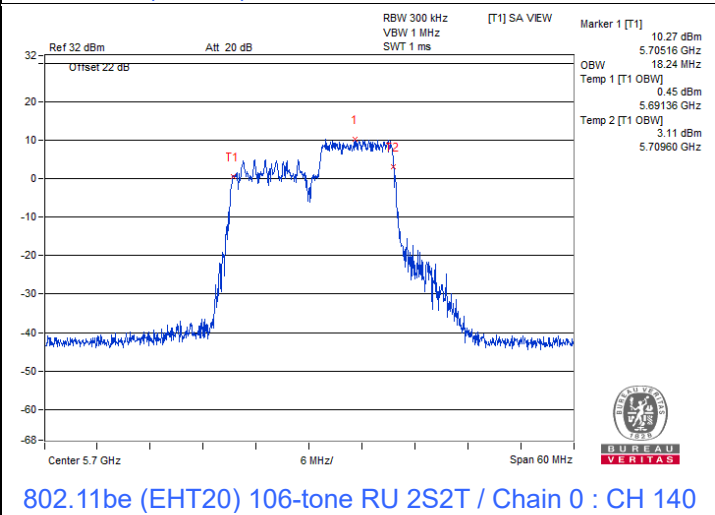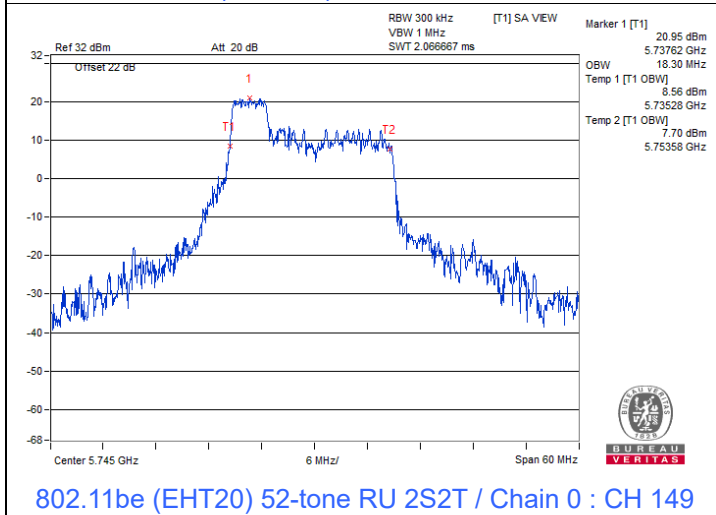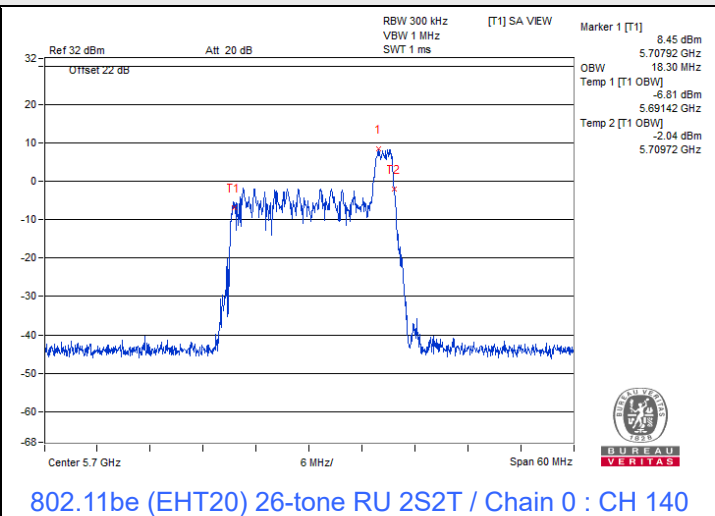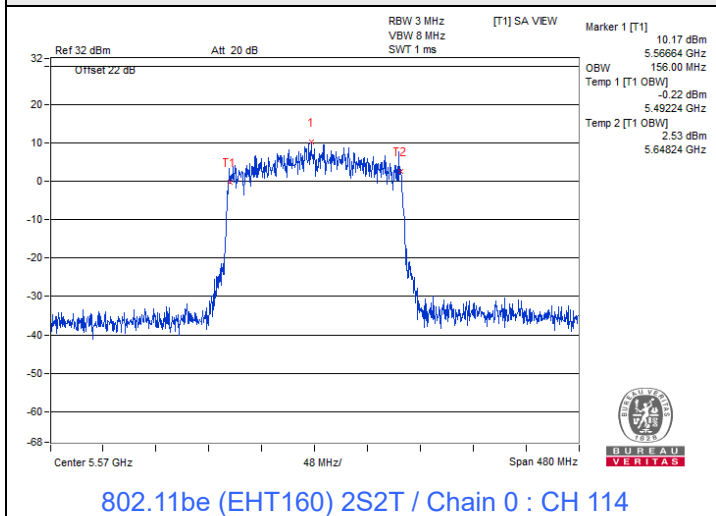


## Spectrum Plot of Maximum Value

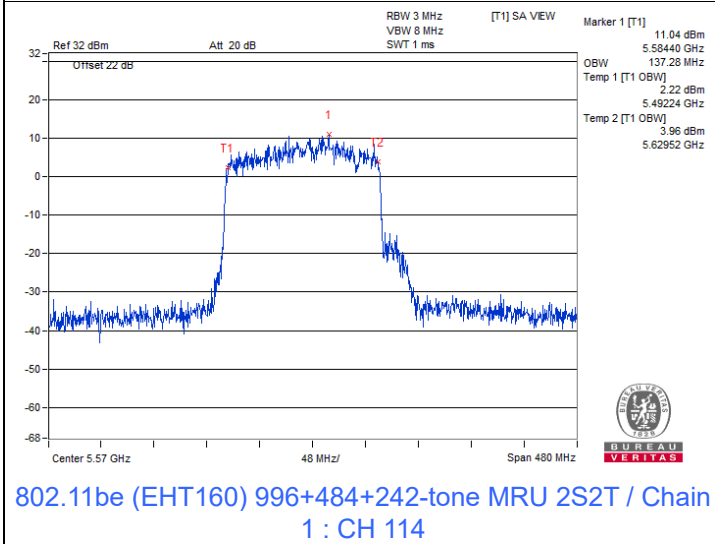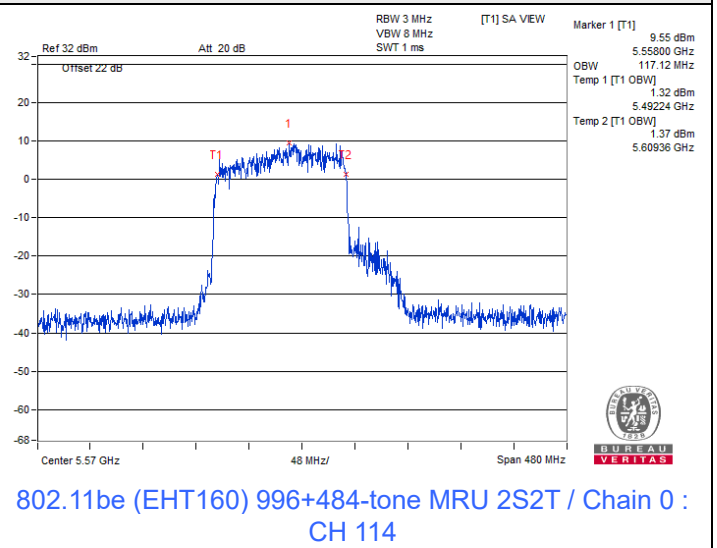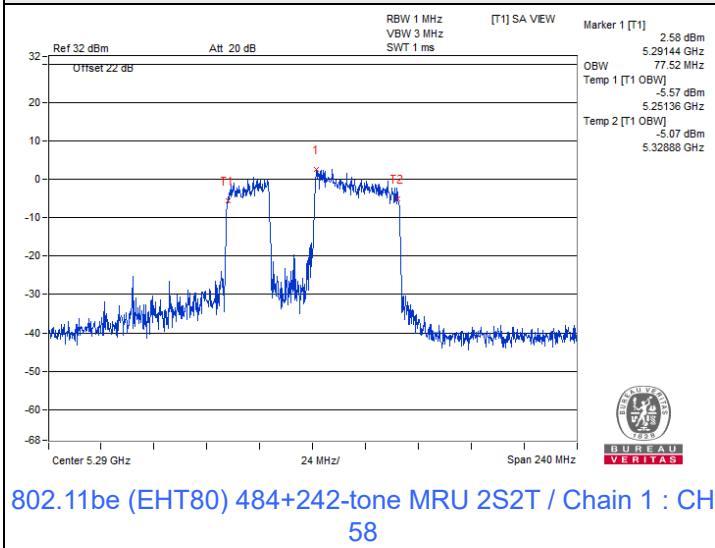


# Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2A)

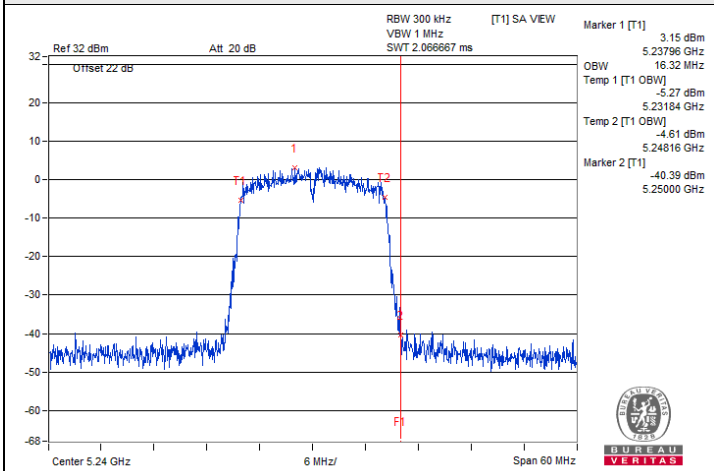


802.11a 2TX / Chain 0 : CH 48

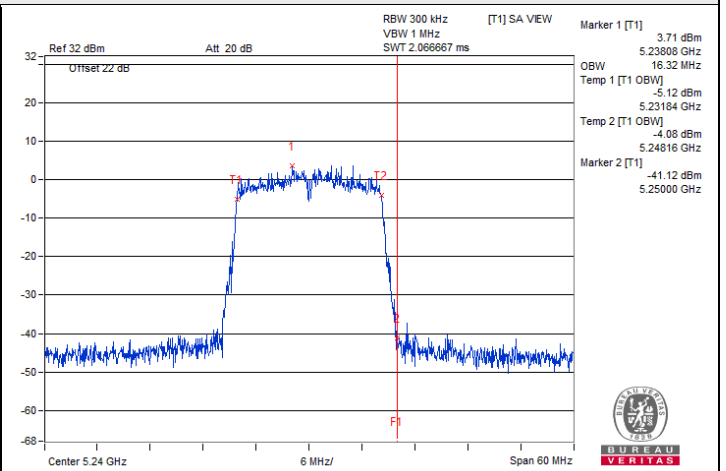


802.11a 2TX / Chain 1 : CH 48

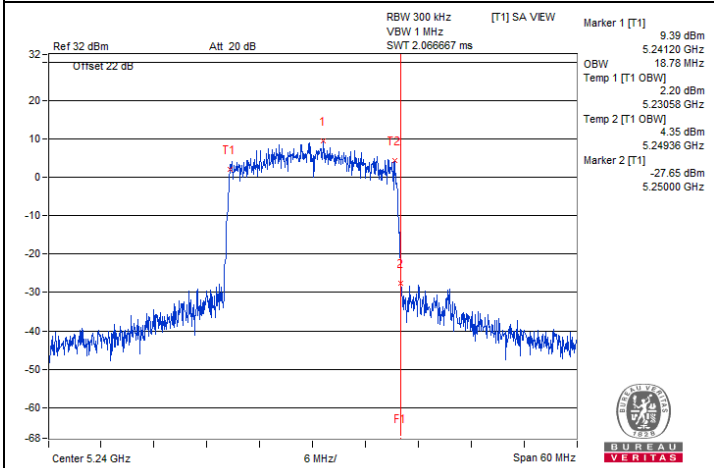


802.11be (EHT20) 2S2T / Chain 0 : CH 48

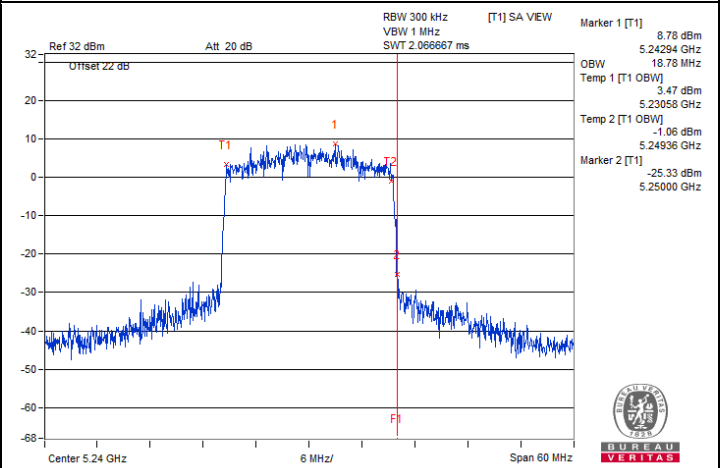

802.11be (EHT20) 2S2T / Chain 1 : CH 48

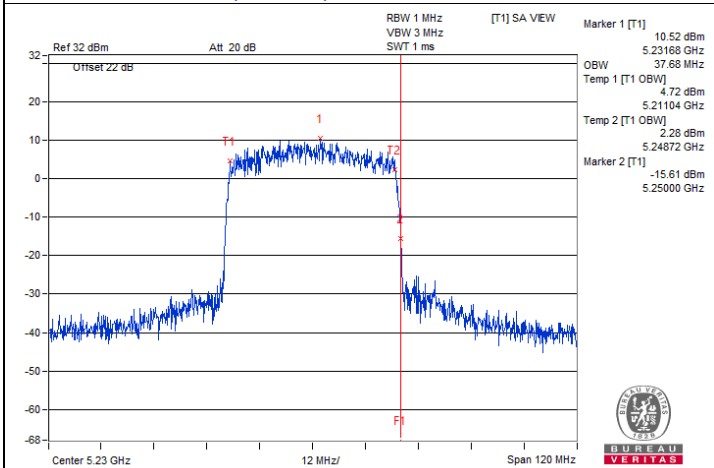


802.11be (EHT40) 2S2T / Chain 0 : CH 46

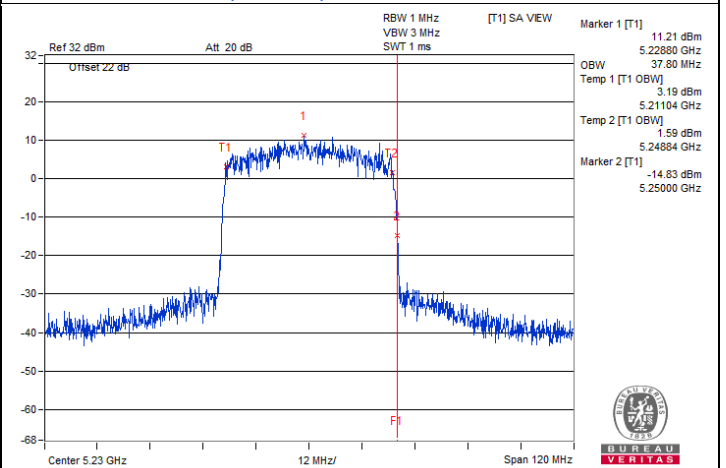


802.11be (EHT40) 2S2T / Chain 1 : CH 46


Spectrum Plot for nearby DFS band  
(DFS is required, if 99% OCP straddle into U-NII-2A)

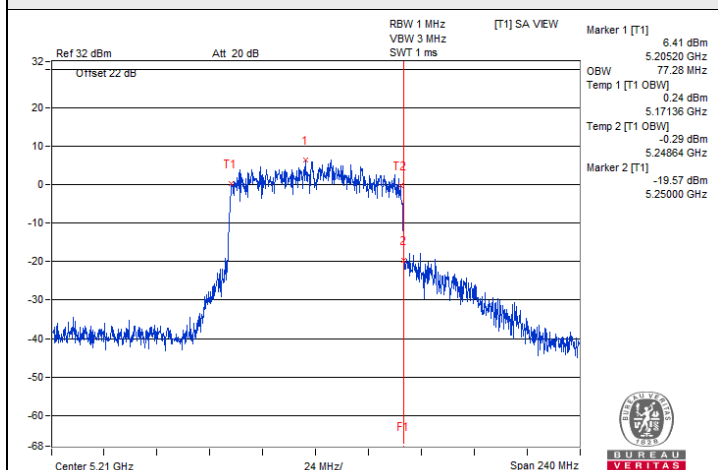


802.11be (EHT80) 2S2T / Chain 0 : CH 42

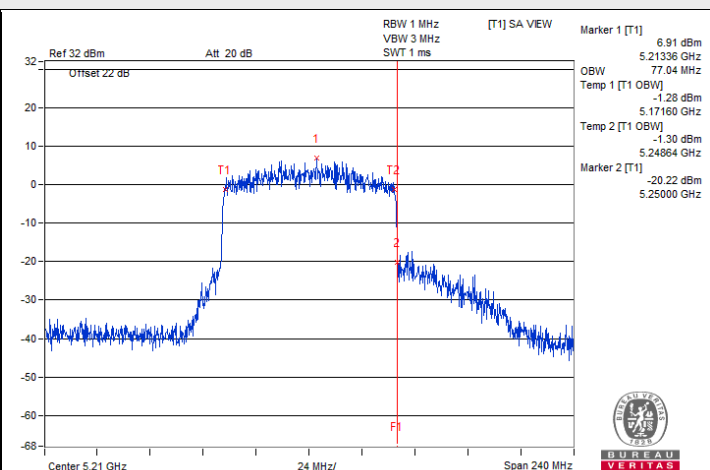

802.11be (EHT80) 2S2T / Chain 1 : CH 42

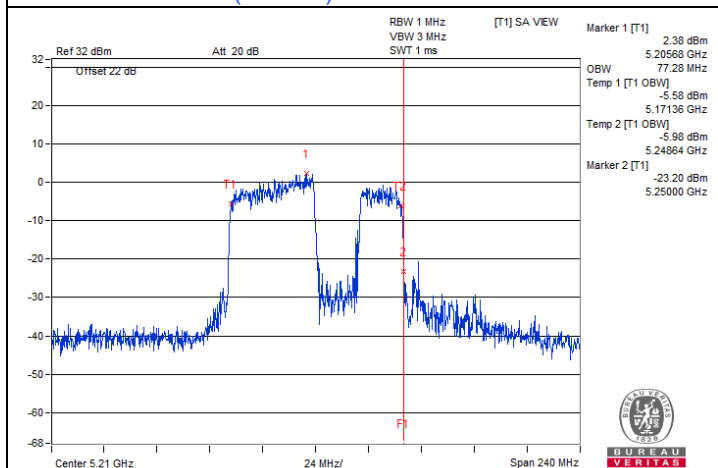


802.11be (EHT80) 484+242-tone MRU 2S2T / Chain 0 : CH 42

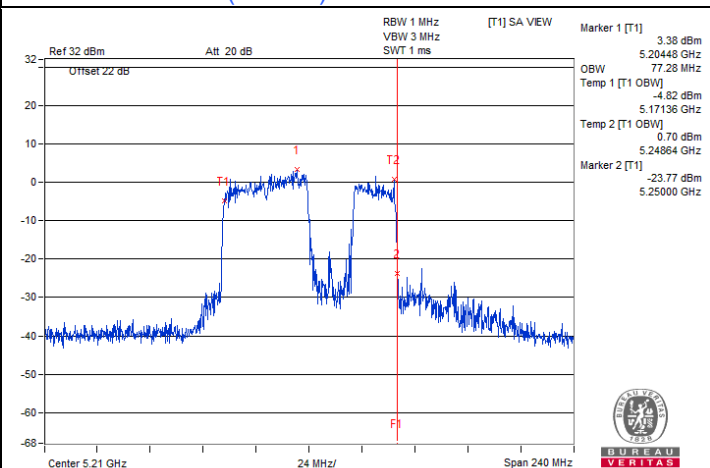


802.11be (EHT80) 484+242-tone MRU 2S2T / Chain 1 : CH 42

Spectrum Plot for nearby DFS band  
(DFS is required, if 99% OCP straddle into U-NII-2C)

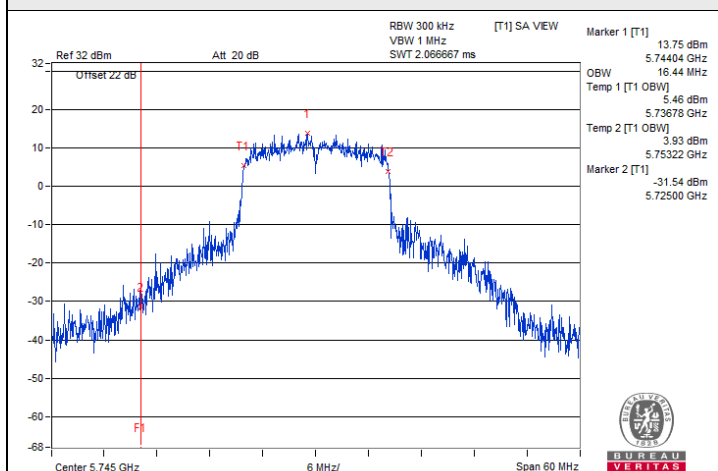


802.11a 2TX / Chain 0 : CH 149

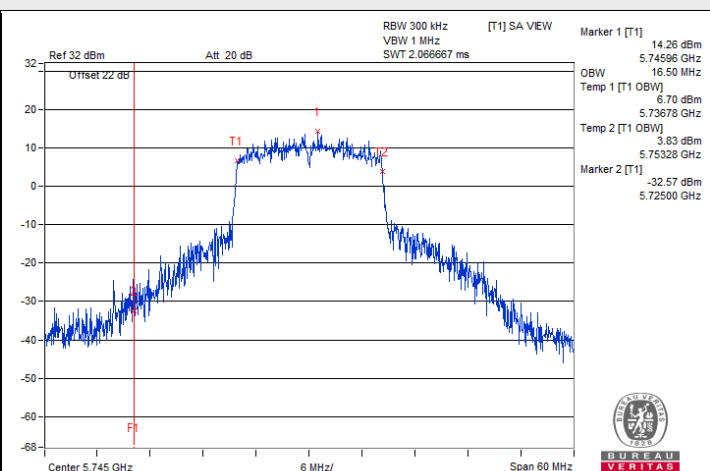


802.11a 2TX / Chain 1 : CH 149


## Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2C)

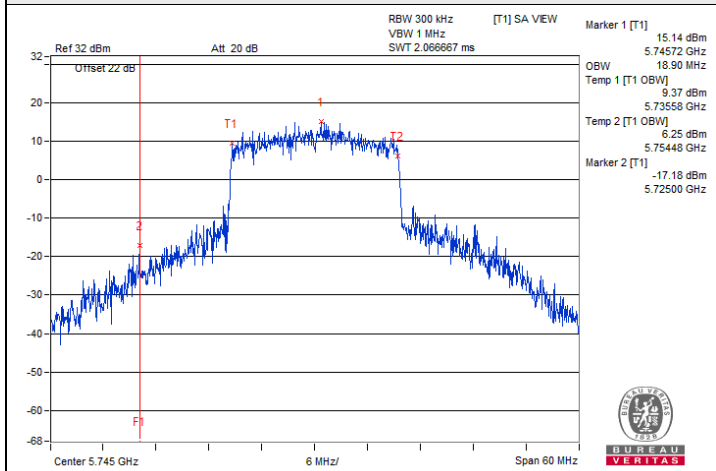


802.11be (EHT20) 2S2T / Chain 0 : CH 149

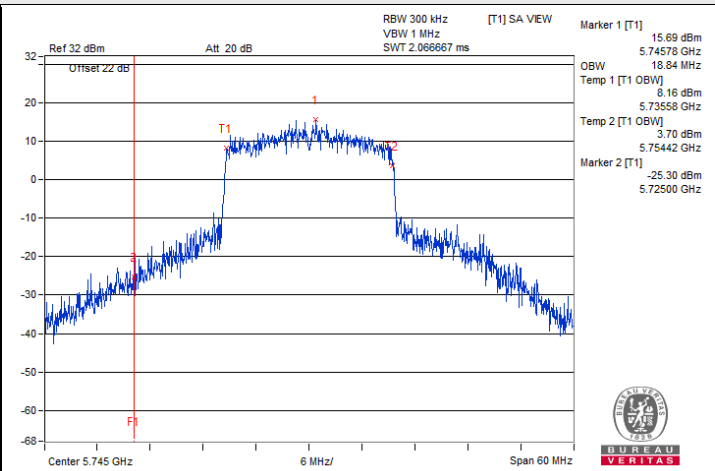


802.11be (EHT20) 2S2T / Chain 1 : CH 149

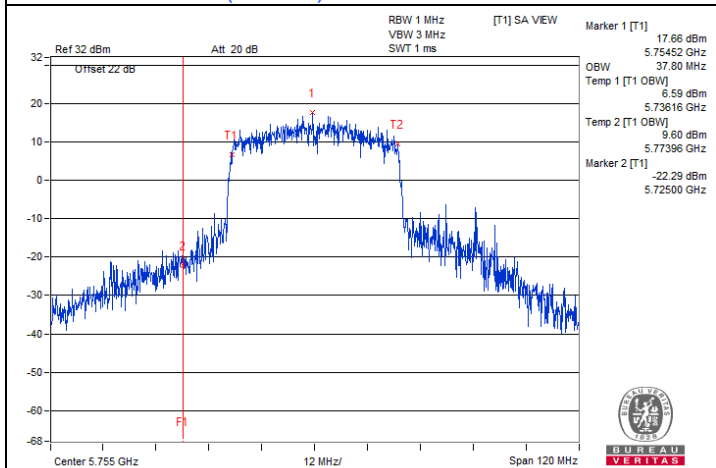


802.11be (EHT40) 2S2T / Chain 0 : CH 151

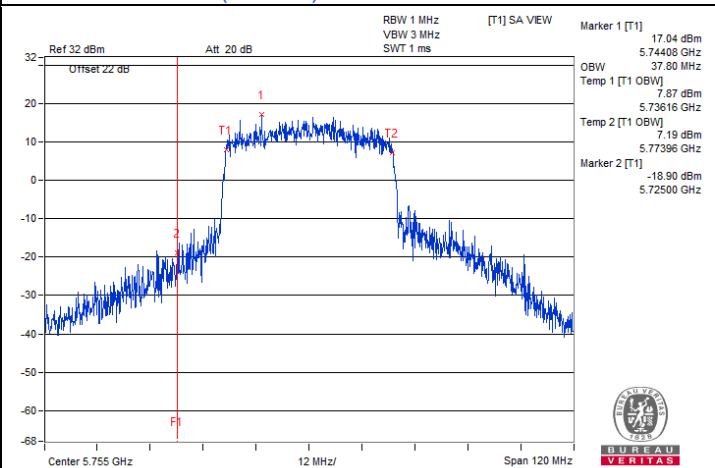

802.11be (EHT40) 2S2T / Chain 1 : CH 151






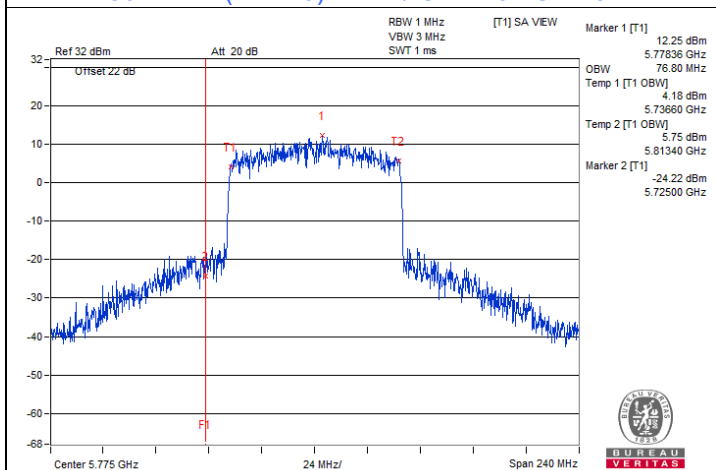


802.11be (EHT80) 2S2T / Chain 0 : CH 155






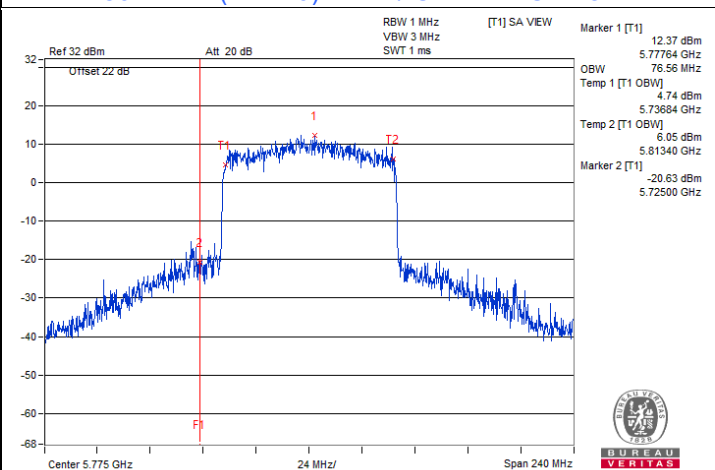


802.11be (EHT80) 2S2T / Chain 1 : CH 155

## Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2C)

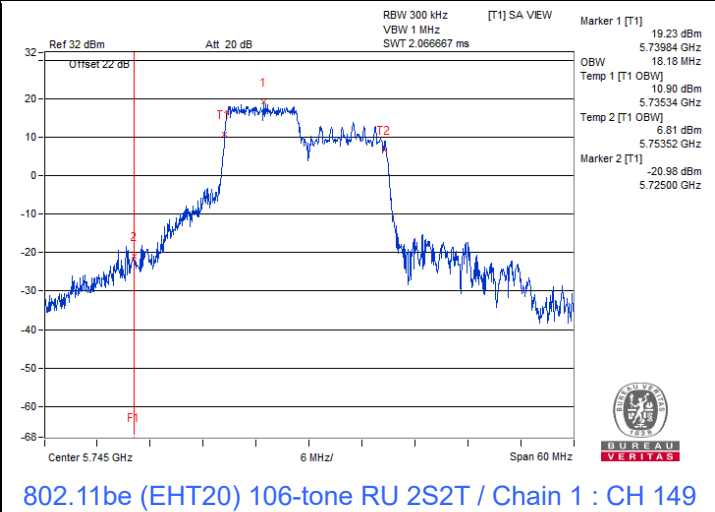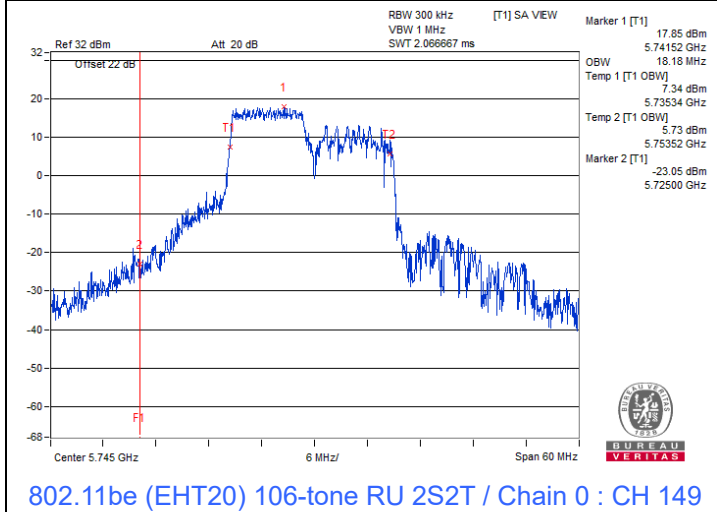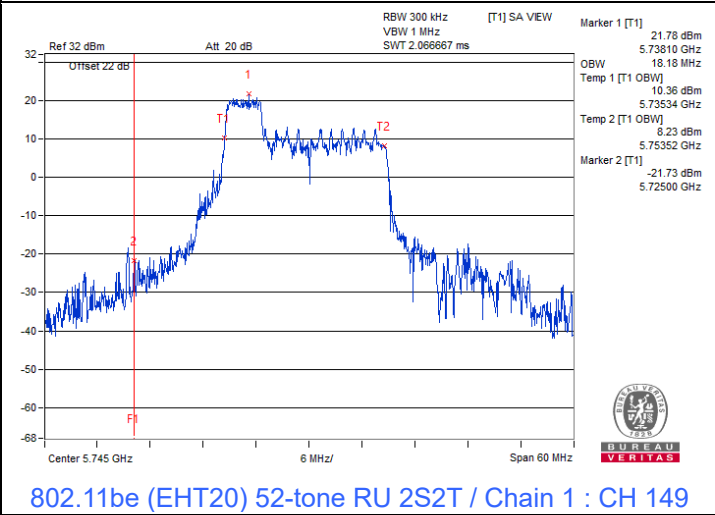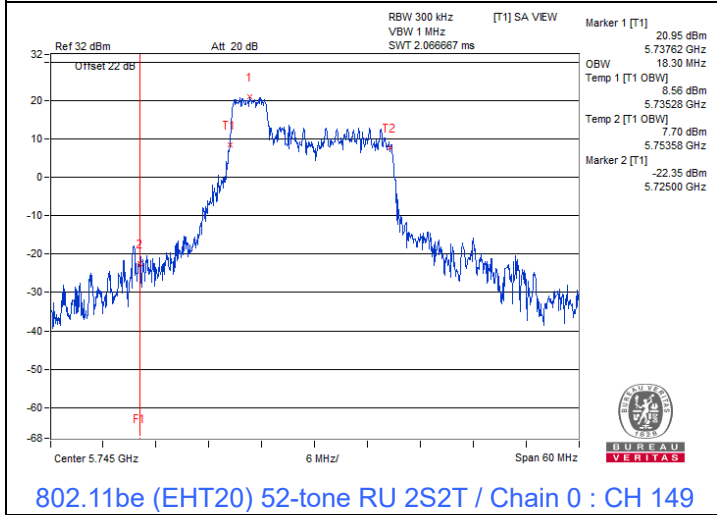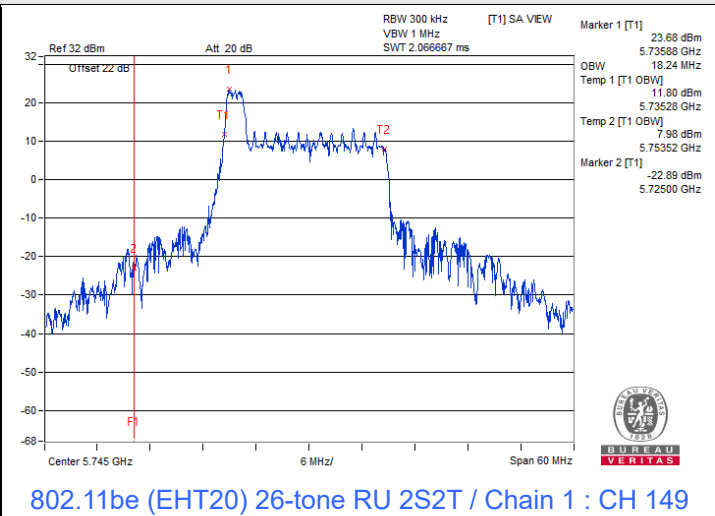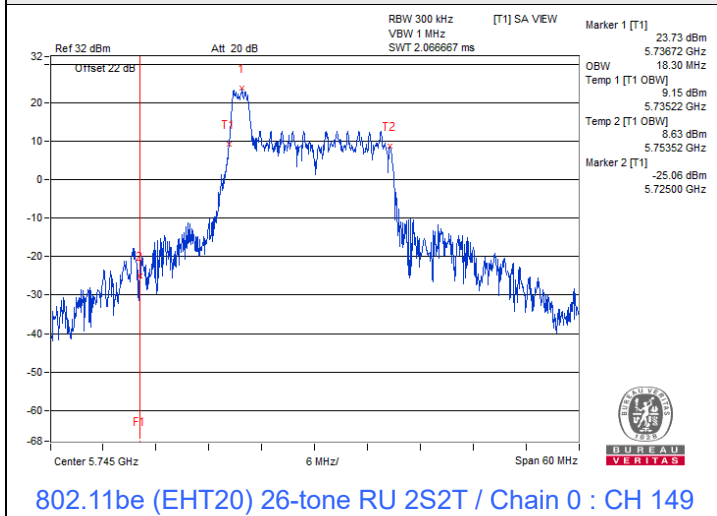

## Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2C)

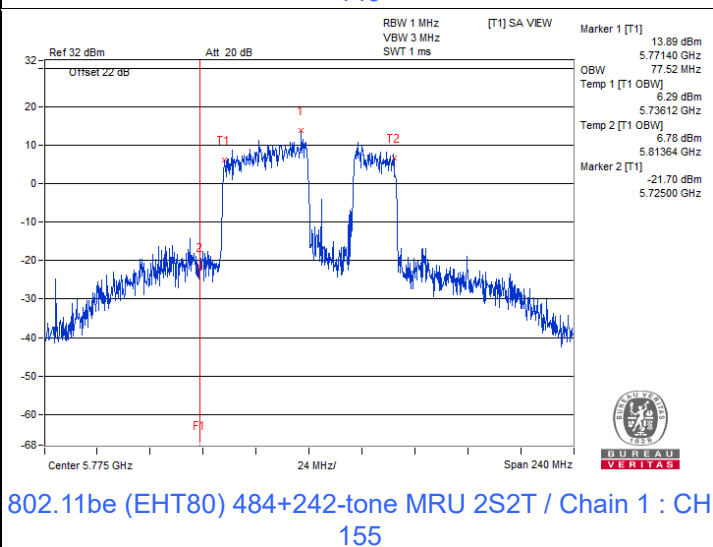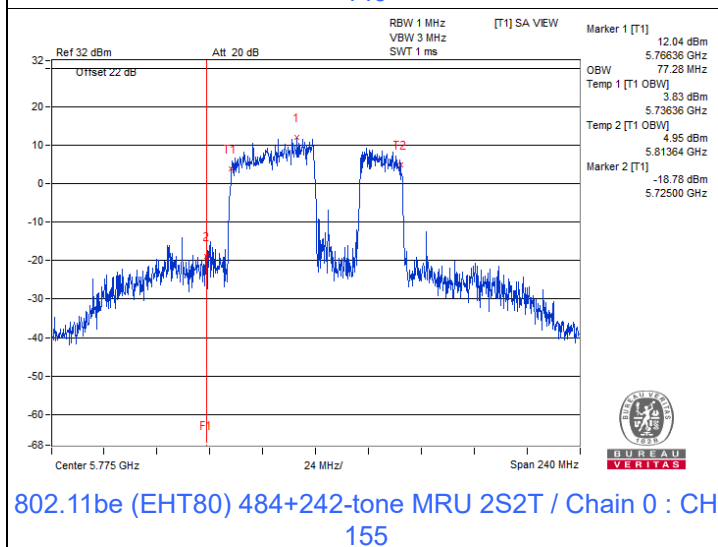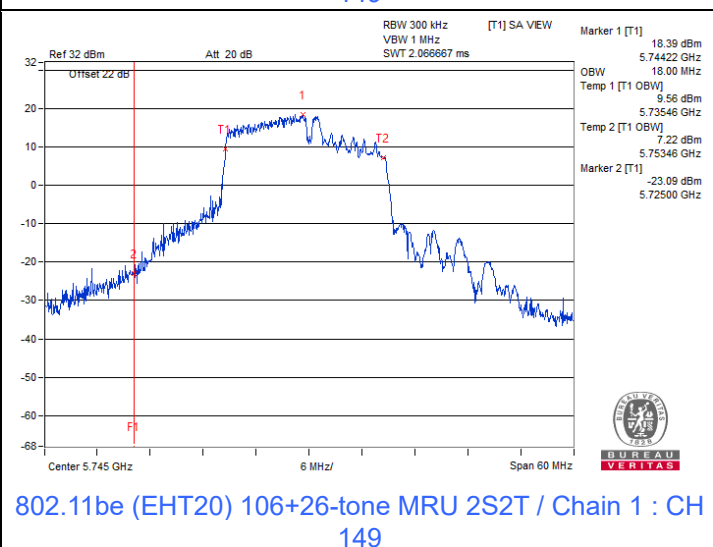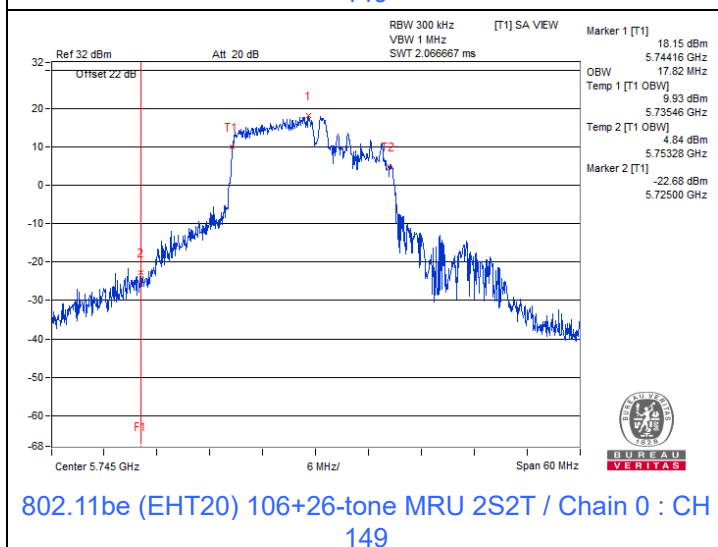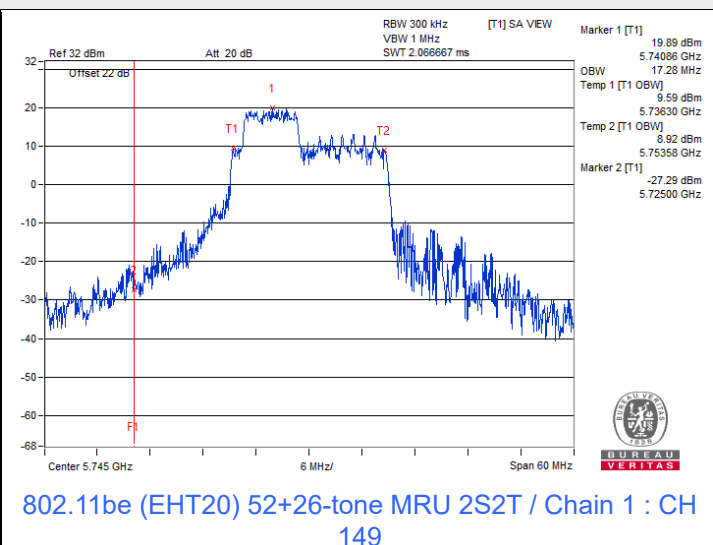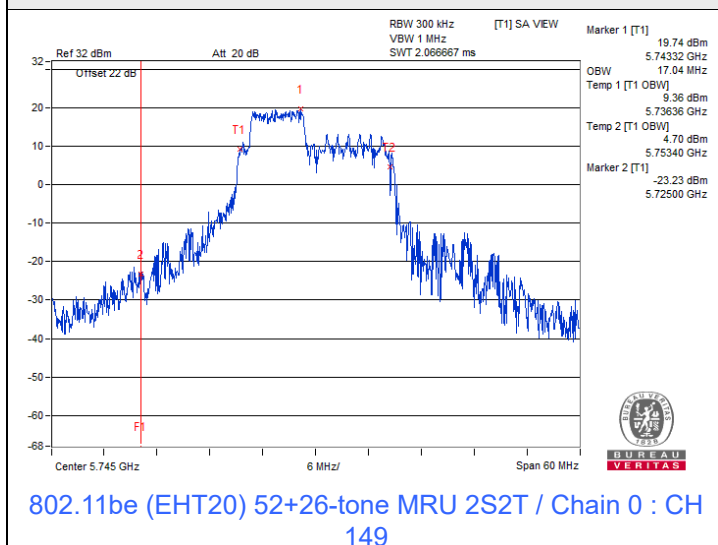

## 7.6 AC Power Conducted Emissions


### 1S1T

|                      |                  |                                          |                                       |
|----------------------|------------------|------------------------------------------|---------------------------------------|
| RF Mode              | 802.11be (EHT20) | Channel                                  | CH 149 : 5745 MHz                     |
| Frequency Range      | 150 kHz ~ 30 MHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9 kHz |
| Input Power (System) | 120 Vac, 60 Hz   | Environmental Conditions                 | 21 °C, 62 % RH                        |
| Tested By            | Willy Lin        |                                          |                                       |

| Phase Of Power : Line (L) |                 |                        |                      |       |                       |       |              |       |             |        |
|---------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No                        | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) |       | Emission Level (dBuV) |       | Limit (dBuV) |       | Margin (dB) |        |
|                           |                 |                        | Q.P.                 | AV.   | Q.P.                  | AV.   | Q.P.         | AV.   | Q.P.        | AV.    |
| 1                         | 0.15000         | 10.01                  | 47.33                | 32.82 | 57.34                 | 42.83 | 66.00        | 56.00 | -8.66       | -13.17 |
| 2                         | 0.29453         | 10.02                  | 29.72                | 16.24 | 39.74                 | 26.26 | 60.40        | 50.40 | -20.66      | -24.14 |
| 3                         | 0.48203         | 10.03                  | 26.81                | 17.99 | 36.84                 | 28.02 | 56.30        | 46.30 | -19.46      | -18.28 |
| 4                         | 2.34766         | 10.11                  | 18.45                | 11.38 | 28.56                 | 21.49 | 56.00        | 46.00 | -27.44      | -24.51 |
| 5                         | 7.67969         | 10.39                  | 13.57                | 8.14  | 23.96                 | 18.53 | 60.00        | 50.00 | -36.04      | -31.47 |
| 6                         | 17.53516        | 10.92                  | 20.76                | 18.40 | 31.68                 | 29.32 | 60.00        | 50.00 | -28.32      | -20.68 |

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

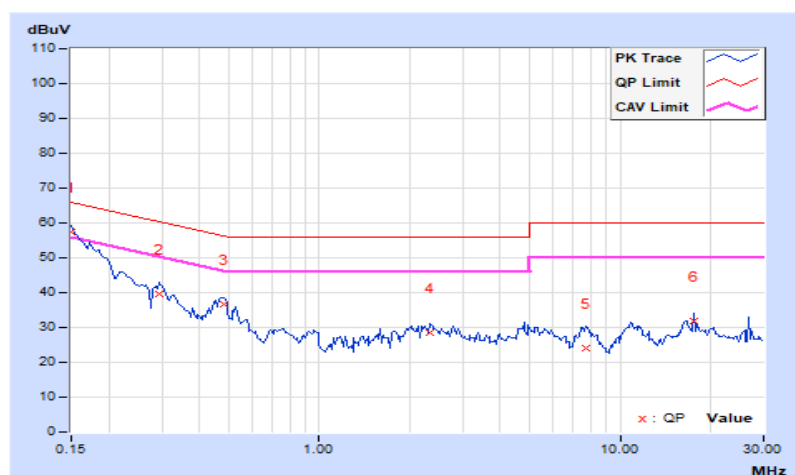


|                      |                  |                                          |                                       |
|----------------------|------------------|------------------------------------------|---------------------------------------|
| RF Mode              | 802.11be (EHT20) | Channel                                  | CH 149 : 5745 MHz                     |
| Frequency Range      | 150 kHz ~ 30 MHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9 kHz |
| Input Power (System) | 120 Vac, 60 Hz   | Environmental Conditions                 | 21 °C, 62 % RH                        |
| Tested By            | Willy Lin        |                                          |                                       |

| Phase Of Power : Neutral (N) |                 |                        |                      |       |                       |       |              |       |             |        |
|------------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No                           | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) |       | Emission Level (dBuV) |       | Limit (dBuV) |       | Margin (dB) |        |
|                              |                 |                        | Q.P.                 | AV.   | Q.P.                  | AV.   | Q.P.         | AV.   | Q.P.        | AV.    |
| 1                            | 0.15000         | 10.00                  | 46.72                | 32.11 | 56.72                 | 42.11 | 66.00        | 56.00 | -9.28       | -13.89 |
| 2                            | 0.22422         | 10.01                  | 34.24                | 19.83 | 44.25                 | 29.84 | 62.66        | 52.66 | -18.41      | -22.82 |
| 3                            | 0.46250         | 10.01                  | 22.94                | 10.06 | 32.95                 | 20.07 | 56.65        | 46.65 | -23.70      | -26.58 |
| 4                            | 3.85938         | 10.15                  | 19.43                | 9.82  | 29.58                 | 19.97 | 56.00        | 46.00 | -26.42      | -26.03 |
| 5                            | 5.05078         | 10.20                  | 19.19                | 11.40 | 29.39                 | 21.60 | 60.00        | 50.00 | -30.61      | -28.40 |
| 6                            | 17.53906        | 10.69                  | 21.32                | 19.77 | 32.01                 | 30.46 | 60.00        | 50.00 | -27.99      | -19.54 |

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

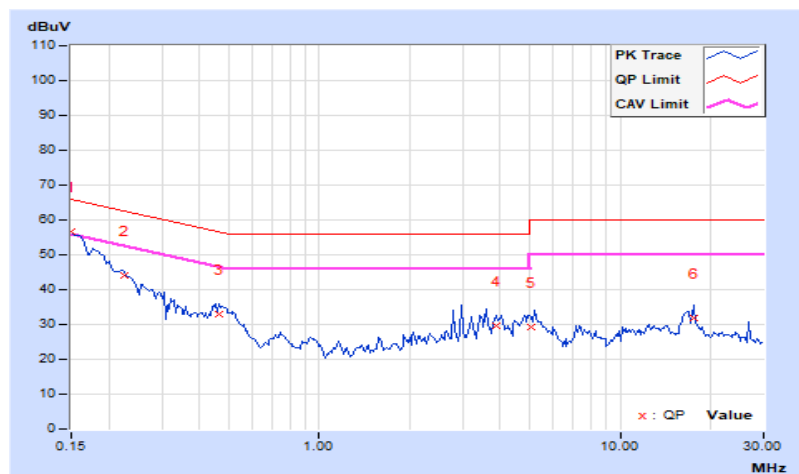


## 2TX

|                      |                  |                                          |                                       |
|----------------------|------------------|------------------------------------------|---------------------------------------|
| RF Mode              | 802.11a          | Channel                                  | CH 165 : 5825 MHz                     |
| Frequency Range      | 150 kHz ~ 30 MHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9 kHz |
| Input Power (System) | 120 Vac, 60 Hz   | Environmental Conditions                 | 21 °C, 62 % RH                        |
| Tested By            | Willy Lin        |                                          |                                       |

| Phase Of Power : Line (L) |                 |                        |                      |       |                       |       |              |       |             |        |
|---------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No                        | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBUV) |       | Emission Level (dBUV) |       | Limit (dBUV) |       | Margin (dB) |        |
|                           |                 |                        | Q.P.                 | AV.   | Q.P.                  | AV.   | Q.P.         | AV.   | Q.P.        | AV.    |
| 1                         | 0.15000         | 10.01                  | 46.64                | 29.26 | 56.65                 | 39.27 | 66.00        | 56.00 | -9.35       | -16.73 |
| 2                         | 0.27500         | 10.02                  | 27.28                | 8.43  | 37.30                 | 18.45 | 60.97        | 50.97 | -23.67      | -32.52 |
| 3                         | 0.48984         | 10.03                  | 25.82                | 14.16 | 35.85                 | 24.19 | 56.17        | 46.17 | -20.32      | -21.98 |
| 4                         | 0.97031         | 10.06                  | 15.49                | 6.01  | 25.55                 | 16.07 | 56.00        | 46.00 | -30.45      | -29.93 |
| 5                         | 3.38281         | 10.17                  | 21.48                | 5.32  | 31.65                 | 15.49 | 56.00        | 46.00 | -24.35      | -30.51 |
| 6                         | 11.00391        | 10.57                  | 15.26                | 9.09  | 25.83                 | 19.66 | 60.00        | 50.00 | -34.17      | -30.34 |

### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

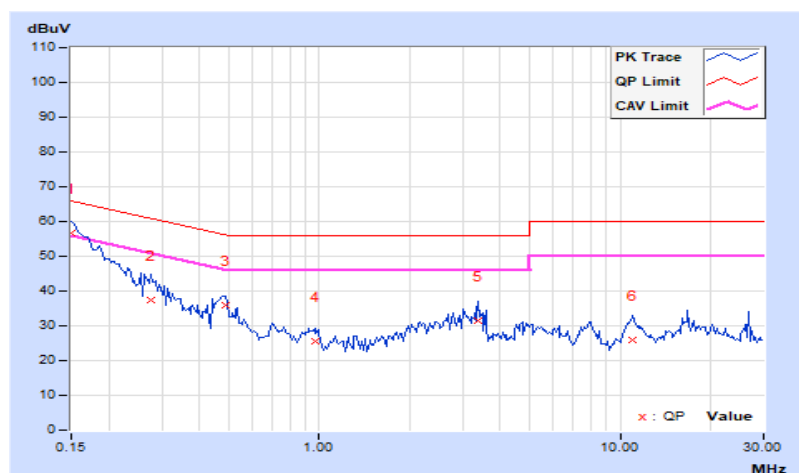


|                      |                  |                                          |                                       |
|----------------------|------------------|------------------------------------------|---------------------------------------|
| RF Mode              | 802.11a          | Channel                                  | CH 165 : 5825 MHz                     |
| Frequency Range      | 150 kHz ~ 30 MHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9 kHz |
| Input Power (System) | 120 Vac, 60 Hz   | Environmental Conditions                 | 21 °C, 62 % RH                        |
| Tested By            | Willy Lin        |                                          |                                       |

| Phase Of Power : Neutral (N) |                 |                        |                      |       |                       |       |              |       |             |        |
|------------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No                           | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) |       | Emission Level (dBuV) |       | Limit (dBuV) |       | Margin (dB) |        |
|                              |                 |                        | Q.P.                 | AV.   | Q.P.                  | AV.   | Q.P.         | AV.   | Q.P.        | AV.    |
| 1                            | 0.15000         | 10.00                  | 46.24                | 28.23 | 56.24                 | 38.23 | 66.00        | 56.00 | -9.76       | -17.77 |
| 2                            | 0.45078         | 10.01                  | 22.88                | 10.92 | 32.89                 | 20.93 | 56.86        | 46.86 | -23.97      | -25.93 |
| 3                            | 0.97422         | 10.04                  | 11.88                | 2.70  | 21.92                 | 12.74 | 56.00        | 46.00 | -34.08      | -33.26 |
| 4                            | 4.88281         | 10.20                  | 19.39                | 11.51 | 29.59                 | 21.71 | 56.00        | 46.00 | -26.41      | -24.29 |
| 5                            | 7.20313         | 10.29                  | 12.48                | 6.17  | 22.77                 | 16.46 | 60.00        | 50.00 | -37.23      | -33.54 |
| 6                            | 16.49219        | 10.65                  | 16.07                | 8.63  | 26.72                 | 19.28 | 60.00        | 50.00 | -33.28      | -30.72 |

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

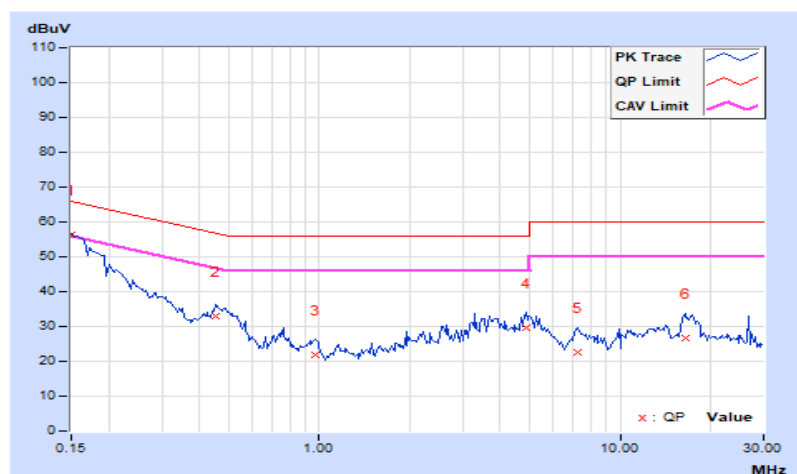

## 7.7 Unwanted Emissions below 1 GHz

### Mode A


#### 1S1T

|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 149 : 5745 MHz |
| Frequency Range | 30 MHz ~ 1 GHz   | Environmental Conditions | 22°C, 61% RH      |
| Tested By       | Katina Lu        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 68.8            | 36.89 PK                | 40             | -3.11       | -71.44                  | 13.07                  | -58.37           |
| 2                            | 147.13          | 36.7 PK                 | 43.5           | -6.8        | -71.63                  | 13.07                  | -58.56           |
| 3                            | 251.04          | 36.99 PK                | 46             | -9.01       | -71.34                  | 13.07                  | -58.27           |
| 4                            | 435.94          | 37.55 PK                | 46             | -8.45       | -70.78                  | 13.07                  | -57.71           |
| 5                            | 797.88          | 38.32 PK                | 46             | -7.68       | -70.01                  | 13.07                  | -56.94           |
| 6                            | 910.88          | 38.75 PK                | 46             | -7.25       | -69.58                  | 13.07                  | -56.51           |

#### Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

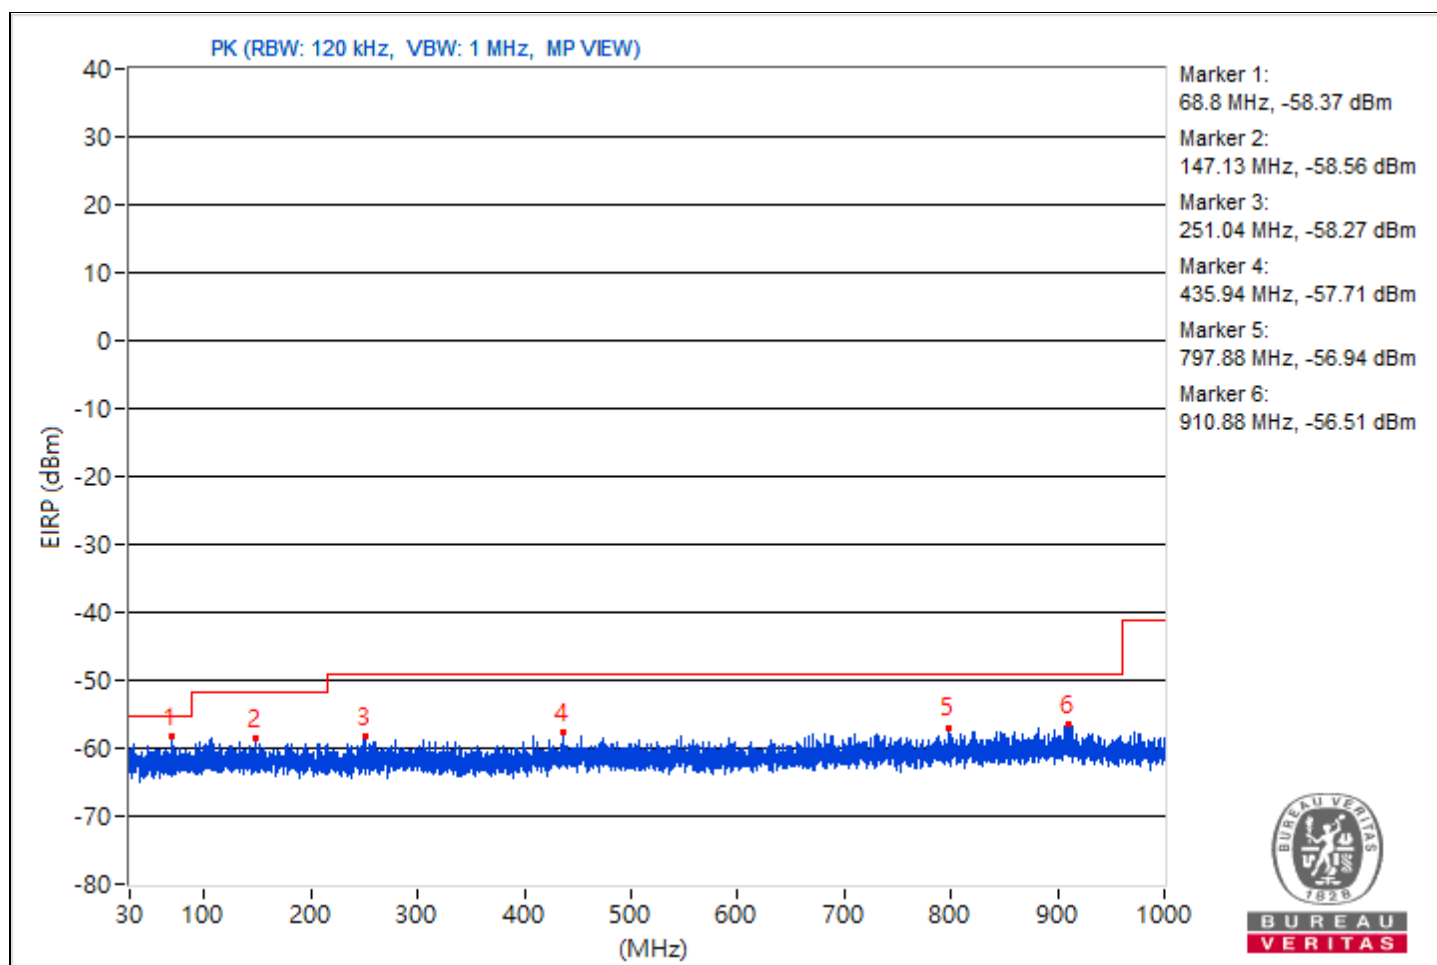


## 2TX

|                 |                |                          |                   |
|-----------------|----------------|--------------------------|-------------------|
| RF Mode         | 802.11a        | Channel                  | CH 165 : 5825 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Environmental Conditions | 22°C, 61% RH      |
| Tested By       | Katina Lu      |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 31.21           | 31.35 PK                | 40             | -8.65       | -82.14                  | -84.07                  | 16.08                  | -63.91           |
| 2                            | 134.15          | 31.36 PK                | 43.5           | -12.14      | -81.44                  | -85.42                  | 16.08                  | -63.9            |
| 3                            | 323.06          | 31.55 PK                | 46             | -14.45      | -84.45                  | -81.61                  | 16.08                  | -63.71           |
| 4                            | 494.99          | 32.44 PK                | 46             | -13.56      | -82.71                  | -81.23                  | 16.08                  | -62.82           |
| 5                            | 743.43          | 33.1 PK                 | 46             | -12.9       | -79.29                  | -84.93                  | 16.08                  | -62.16           |
| 6                            | 987.63          | 33.27 PK                | 54             | -20.73      | -82.5                   | -80.01                  | 16.08                  | -61.99           |

### Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

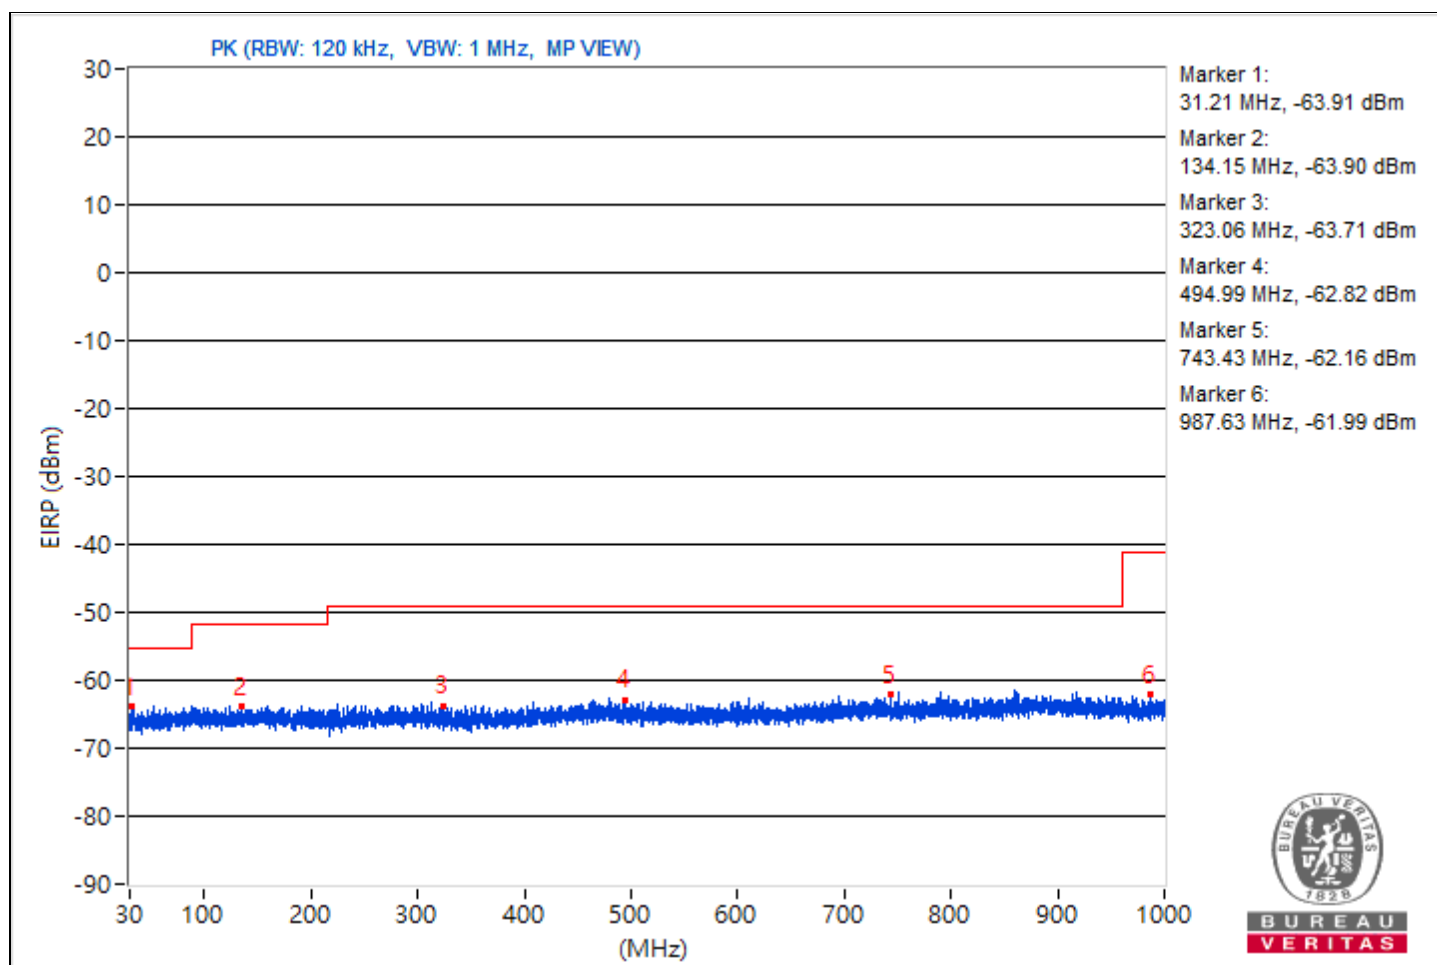


**Mode B**  
**1S1T**

|                             |                  |                                          |                               |
|-----------------------------|------------------|------------------------------------------|-------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 149 : 5745 MHz             |
| <b>Frequency Range</b>      | 30 MHz ~ 1 GHz   | <b>Detector Function &amp; Bandwidth</b> | QP: RB=120kHz, DET=Quasi-Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                |
| <b>Tested By</b>            | Willy Lin        |                                          |                               |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 104.27          | 24.2 QP                 | 43.5           | -19.3       | 1.50 H             | 310                  | 40.4             | -16.2                    |
| 2                                                    | 238.91          | 37.1 QP                 | 46.0           | -8.9        | 1.50 H             | 236                  | 51.6             | -14.5                    |
| 3                                                    | 301.74          | 39.4 QP                 | 46.0           | -6.6        | 2.00 H             | 276                  | 51.7             | -12.3                    |
| 4                                                    | 442.00          | 41.6 QP                 | 46.0           | -4.4        | 2.00 H             | 284                  | 50.0             | -8.4                     |
| 5                                                    | 696.04          | 43.2 QP                 | 46.0           | -2.8        | 1.00 H             | 253                  | 46.7             | -3.5                     |
| 6                                                    | 914.11          | 42.9 QP                 | 46.0           | -3.1        | 1.00 H             | 238                  | 42.8             | 0.1                      |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

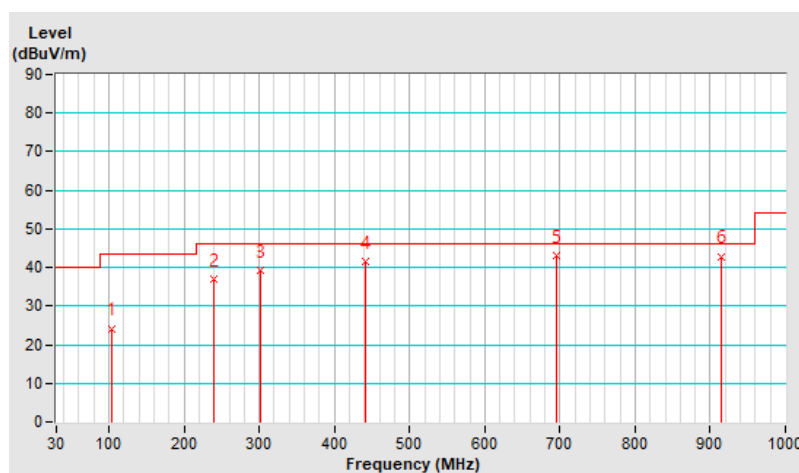


|                      |                  |                               |                               |
|----------------------|------------------|-------------------------------|-------------------------------|
| RF Mode              | 802.11be (EHT20) | Channel                       | CH 149 : 5745 MHz             |
| Frequency Range      | 30 MHz ~ 1 GHz   | Detector Function & Bandwidth | QP: RB=120kHz, DET=Quasi-Peak |
| Input Power (System) | 120 Vac, 60 Hz   | Environmental Conditions      | 22 °C, 65 % RH                |
| Tested By            | Willy Lin        |                               |                               |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 31.67           | 29.6 QP                 | 40.0           | -10.4       | 2.00 V             | 247                  | 43.4             | -13.8                    |
| 2                                                  | 112.15          | 34.0 QP                 | 43.5           | -9.5        | 2.00 V             | 350                  | 49.4             | -15.4                    |
| 3                                                  | 218.20          | 40.6 QP                 | 46.0           | -5.4        | 1.50 V             | 161                  | 57.1             | -16.5                    |
| 4                                                  | 247.99          | 29.5 QP                 | 46.0           | -16.5       | 1.00 V             | 52                   | 43.6             | -14.1                    |
| 5                                                  | 286.82          | 38.3 QP                 | 46.0           | -7.7        | 1.50 V             | 275                  | 51.0             | -12.7                    |
| 6                                                  | 693.24          | 34.4 QP                 | 46.0           | -11.6       | 3.00 V             | 54                   | 37.9             | -3.5                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

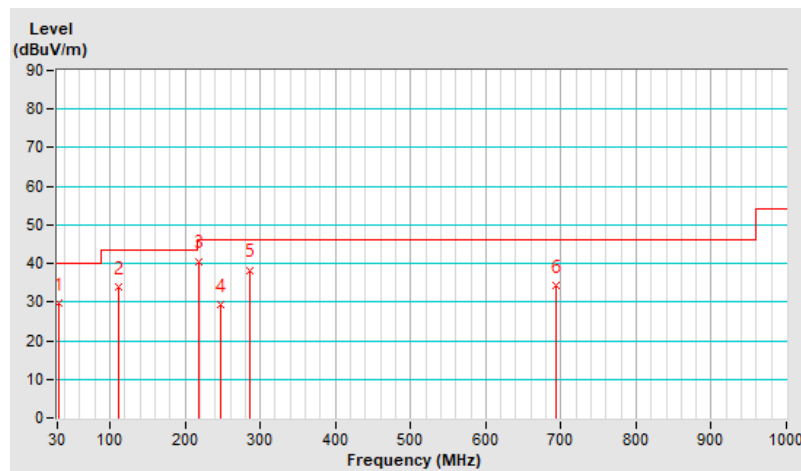


## 2TX

|                      |                |                               |                               |
|----------------------|----------------|-------------------------------|-------------------------------|
| RF Mode              | 802.11a        | Channel                       | CH 165 : 5825 MHz             |
| Frequency Range      | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | QP: RB=120kHz, DET=Quasi-Peak |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions      | 22 °C, 65 % RH                |
| Tested By            | Willy Lin      |                               |                               |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 104.15          | 30.0 QP                 | 43.5           | -13.5       | 2.00 H             | 311                  | 46.3             | -16.3                    |
| 2                                                    | 239.06          | 34.8 QP                 | 46.0           | -11.2       | 1.50 H             | 245                  | 49.3             | -14.5                    |
| 3                                                    | 298.62          | 41.0 QP                 | 46.0           | -5.0        | 1.00 H             | 259                  | 53.4             | -12.4                    |
| 4                                                    | 437.26          | 29.4 QP                 | 46.0           | -16.6       | 2.00 H             | 335                  | 38.0             | -8.6                     |
| 5                                                    | 696.19          | 39.3 QP                 | 46.0           | -6.7        | 2.00 H             | 230                  | 42.8             | -3.5                     |
| 6                                                    | 904.15          | 33.6 QP                 | 46.0           | -12.4       | 3.00 H             | 262                  | 33.7             | -0.1                     |

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

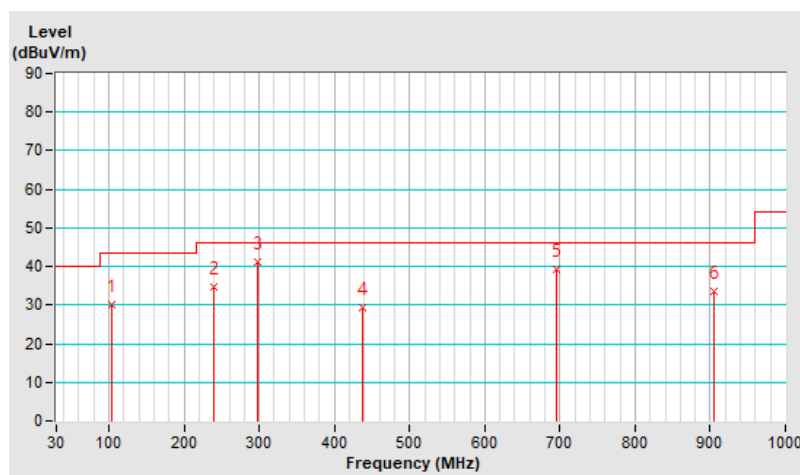


|                      |                |                               |                               |
|----------------------|----------------|-------------------------------|-------------------------------|
| RF Mode              | 802.11a        | Channel                       | CH 165 : 5825 MHz             |
| Frequency Range      | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | QP: RB=120kHz, DET=Quasi-Peak |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions      | 22 °C, 65 % RH                |
| Tested By            | Willy Lin      |                               |                               |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 32.81           | 23.6 QP                 | 40.0           | -16.4       | 1.50 V             | 251                  | 37.4             | -13.8                    |
| 2                                                  | 110.33          | 35.4 QP                 | 43.5           | -8.1        | 1.50 V             | 285                  | 51.0             | -15.6                    |
| 3                                                  | 223.84          | 37.4 QP                 | 46.0           | -8.6        | 3.00 V             | 176                  | 53.8             | -16.4                    |
| 4                                                  | 248.85          | 42.6 QP                 | 46.0           | -3.4        | 2.00 V             | 16                   | 56.7             | -14.1                    |
| 5                                                  | 286.63          | 44.9 QP                 | 46.0           | -1.1        | 1.50 V             | 246                  | 57.7             | -12.8                    |
| 6                                                  | 694.46          | 42.7 QP                 | 46.0           | -3.3        | 1.50 V             | 18                   | 46.2             | -3.5                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

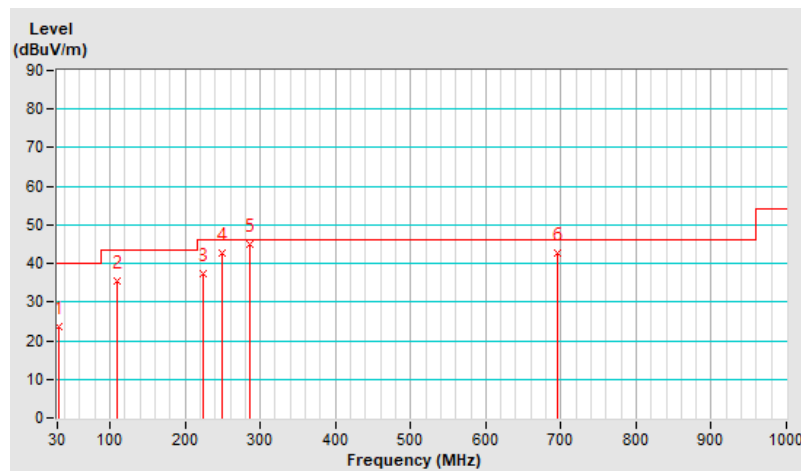

## 7.8 Unwanted Emissions above 1 GHz

### Mode A


### Conducted Unwanted Emissions


### 1TX

|                 |                |                          |                  |
|-----------------|----------------|--------------------------|------------------|
| RF Mode         | 802.11a        | Channel                  | CH 36 : 5180 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu      |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5096.94         | 58.11 PK                | 74             | -15.89      | -45.52                  | 8.37                   | -37.15           |
| 2                            | 5096.94         | 49.8 AV                 | 54             | -4.2        | -53.83                  | 8.37                   | -45.46           |
| 3                            | 9016.98         | 53.54 PK                | 74             | -20.46      | -50.09                  | 8.37                   | -41.72           |
| 4                            | 9016.98         | 46.76 AV                | 54             | -7.24       | -56.87                  | 8.37                   | -48.5            |
| 5                            | 18923.6         | 55.34 PK                | 74             | -18.66      | -48.29                  | 8.37                   | -39.92           |
| 6                            | 18923.6         | 48.85 AV                | 54             | -5.15       | -54.78                  | 8.37                   | -46.41           |
| 7                            | 23774.2         | 54.8 PK                 | 74             | -19.2       | -48.83                  | 8.37                   | -40.46           |
| 8                            | 23774.2         | 50.98 AV                | 54             | -3.02       | -52.65                  | 8.37                   | -44.28           |
| 9                            | 38830.22        | 53.22 PK                | 74             | -20.78      | -50.41                  | 8.37                   | -42.04           |
| 10                           | 38830.22        | 45.3 AV                 | 54             | -8.7        | -58.33                  | 8.37                   | -49.96           |

Note: Margin value = Emission Level - Limit value

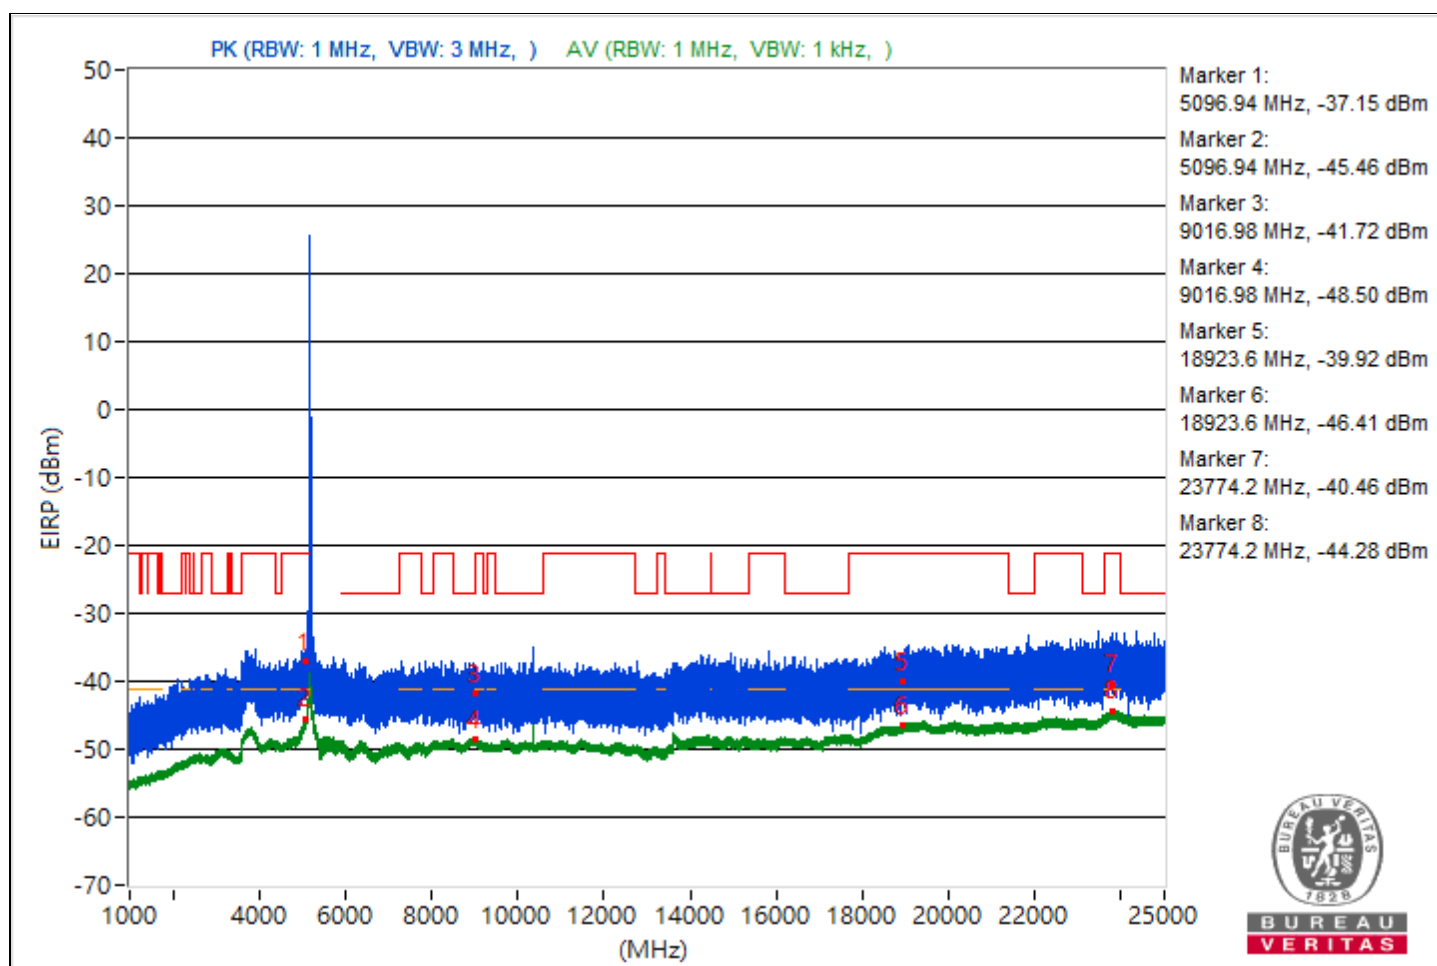


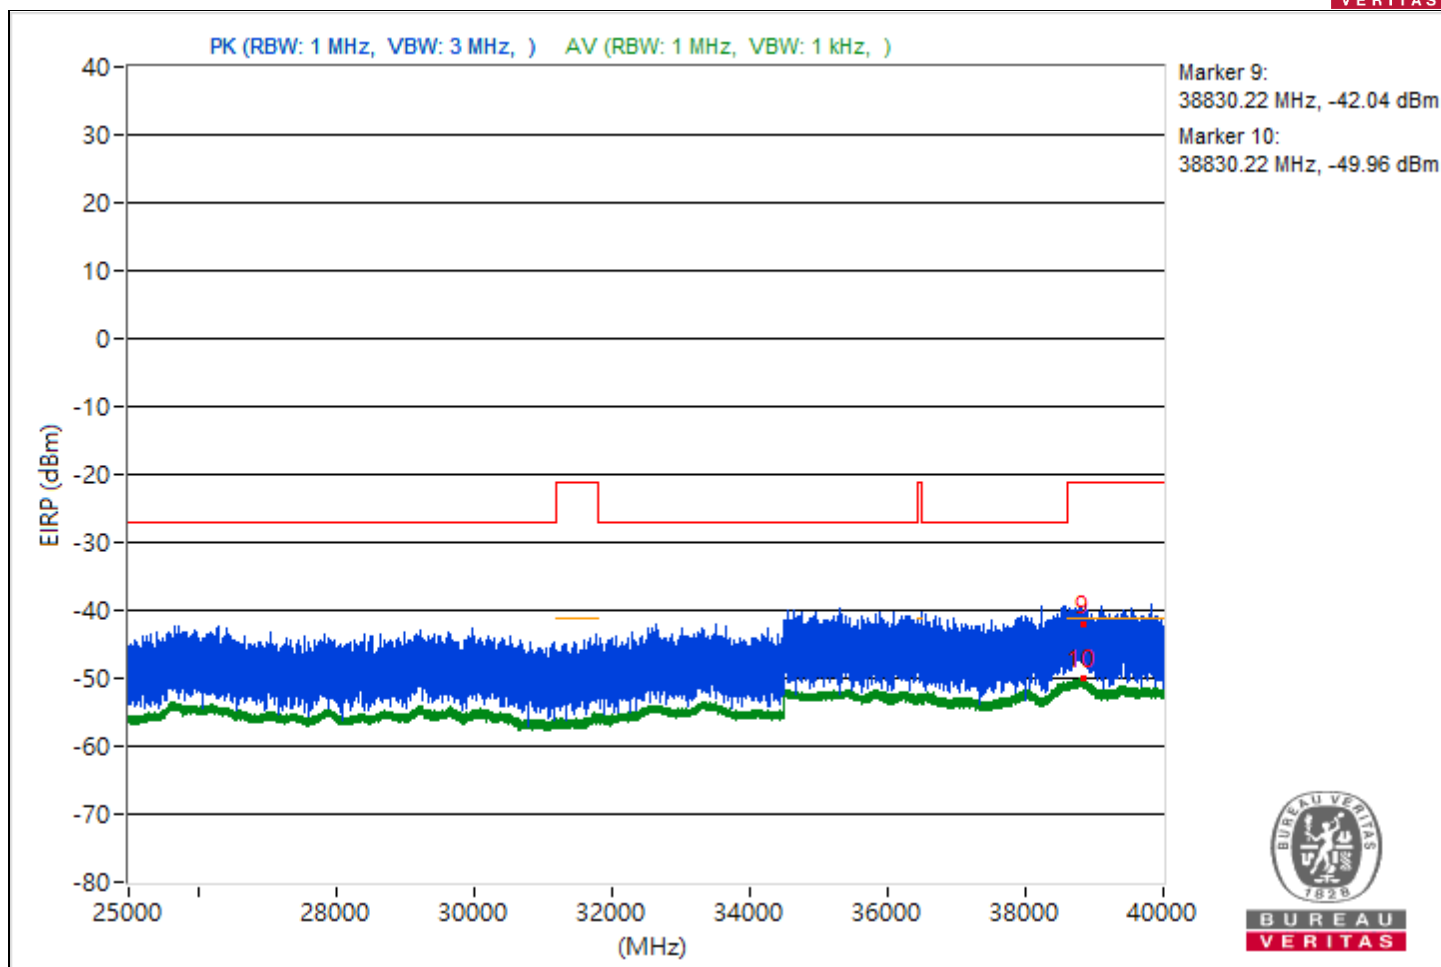


|                 |                |                          |                  |
|-----------------|----------------|--------------------------|------------------|
| RF Mode         | 802.11a        | Channel                  | CH 40 : 5200 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu      |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5097.02         | 57.02 PK                | 74             | -16.98      | -46.61                  | 8.37                   | -38.24           |
| 2                            | 5097.02         | 49.99 AV                | 54             | -4.01       | -53.64                  | 8.37                   | -45.27           |
| 3                            | 9004.36         | 55.6 PK                 | 74             | -18.4       | -48.03                  | 8.37                   | -39.66           |
| 4                            | 9004.36         | 46.77 AV                | 54             | -7.23       | -56.86                  | 8.37                   | -48.49           |
| 5                            | 18983.5         | 55.08 PK                | 74             | -18.92      | -48.55                  | 8.37                   | -40.18           |
| 6                            | 18983.5         | 48.89 AV                | 54             | -5.11       | -54.74                  | 8.37                   | -46.37           |
| 7                            | 23842.6         | 56.55 PK                | 74             | -17.45      | -47.08                  | 8.37                   | -38.71           |
| 8                            | 23842.6         | 51.17 AV                | 54             | -2.83       | -52.46                  | 8.37                   | -44.09           |
| 9                            | 38788.62        | 52.92 PK                | 74             | -21.08      | -50.71                  | 8.37                   | -42.34           |
| 10                           | 38788.62        | 45.39 AV                | 54             | -8.61       | -58.24                  | 8.37                   | -49.87           |

Note: Margin value = Emission Level - Limit value

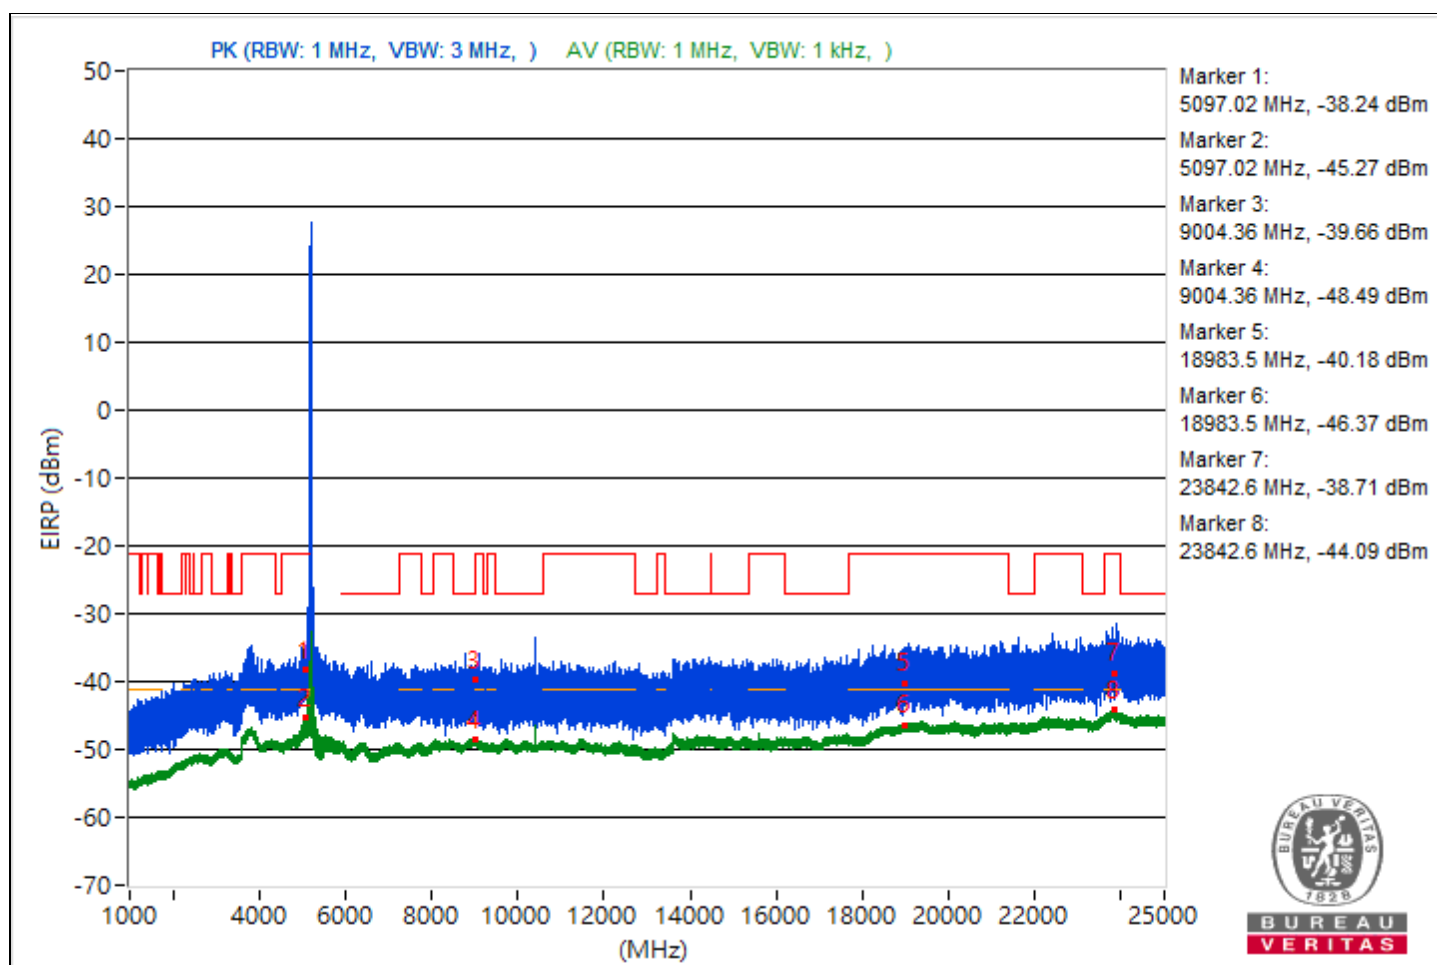


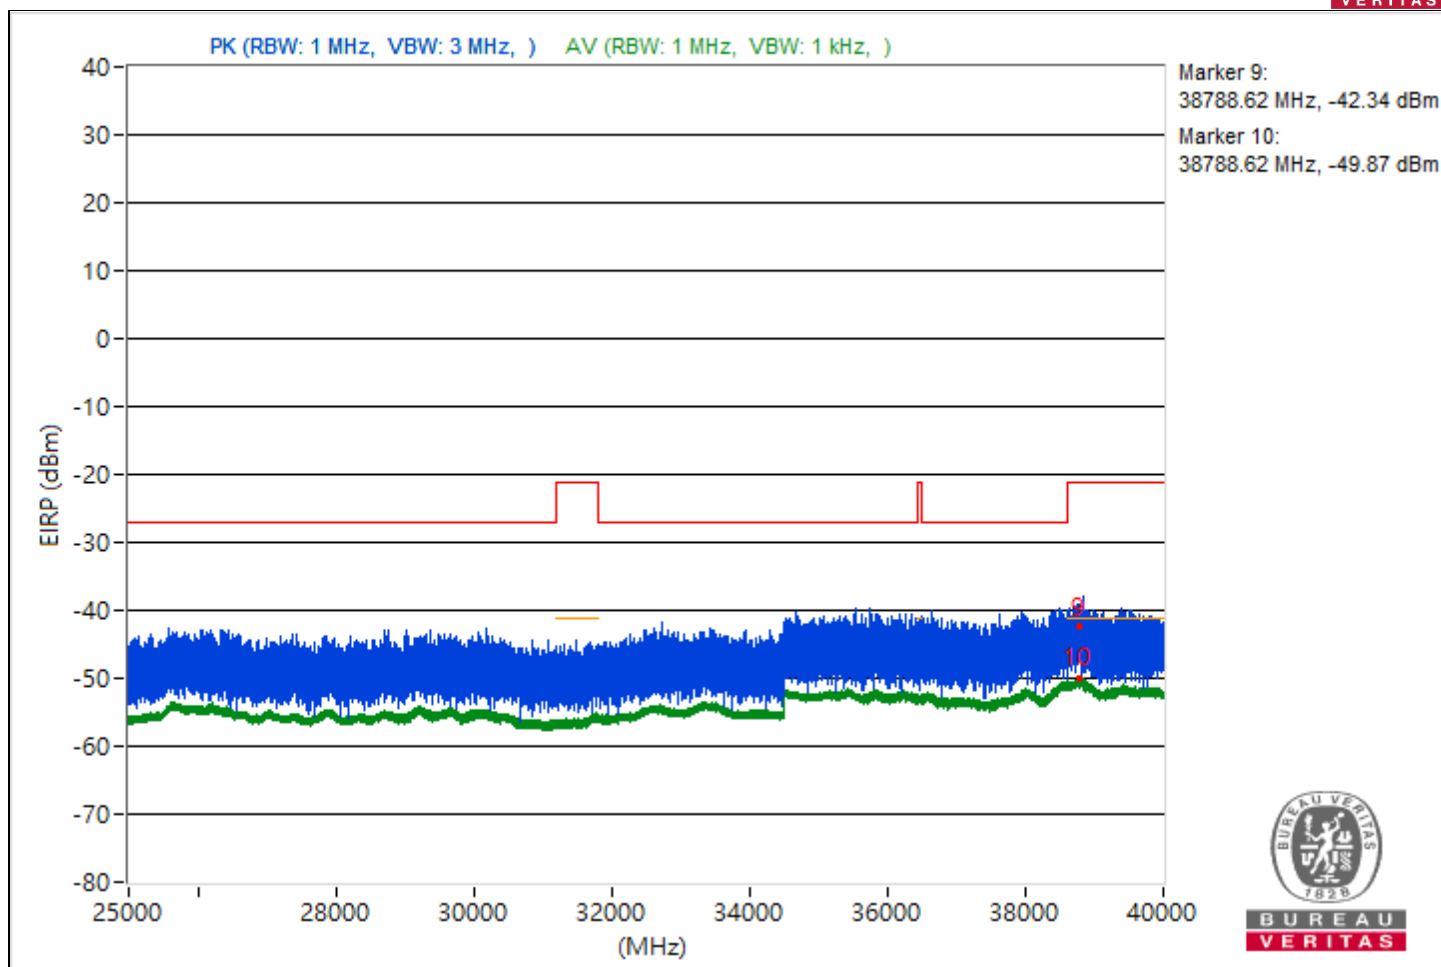


|                 |                |                          |                  |
|-----------------|----------------|--------------------------|------------------|
| RF Mode         | 802.11a        | Channel                  | CH 48 : 5240 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu      |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5088.47         | 56.2 PK                 | 74             | -17.8       | -47.43                  | 8.37                   | -39.06           |
| 2                            | 5088.47         | 49.8 AV                 | 54             | -4.2        | -53.83                  | 8.37                   | -45.46           |
| 3                            | 9020.98         | 53.96 PK                | 74             | -20.04      | -49.67                  | 8.37                   | -41.3            |
| 4                            | 9020.98         | 46.84 AV                | 54             | -7.16       | -56.79                  | 8.37                   | -48.42           |
| 5                            | 18978.2         | 54.6 PK                 | 74             | -19.4       | -49.03                  | 8.37                   | -40.66           |
| 6                            | 18978.2         | 48.95 AV                | 54             | -5.05       | -54.68                  | 8.37                   | -46.31           |
| 7                            | 23803.7         | 55.29 PK                | 74             | -18.71      | -48.34                  | 8.37                   | -39.97           |
| 8                            | 23803.7         | 51.22 AV                | 54             | -2.78       | -52.41                  | 8.37                   | -44.04           |
| 9                            | 38817.87        | 51.84 PK                | 74             | -22.16      | -51.79                  | 8.37                   | -43.42           |
| 10                           | 38817.87        | 45.43 AV                | 54             | -8.57       | -58.2                   | 8.37                   | -49.83           |

Note: Margin value = Emission Level - Limit value

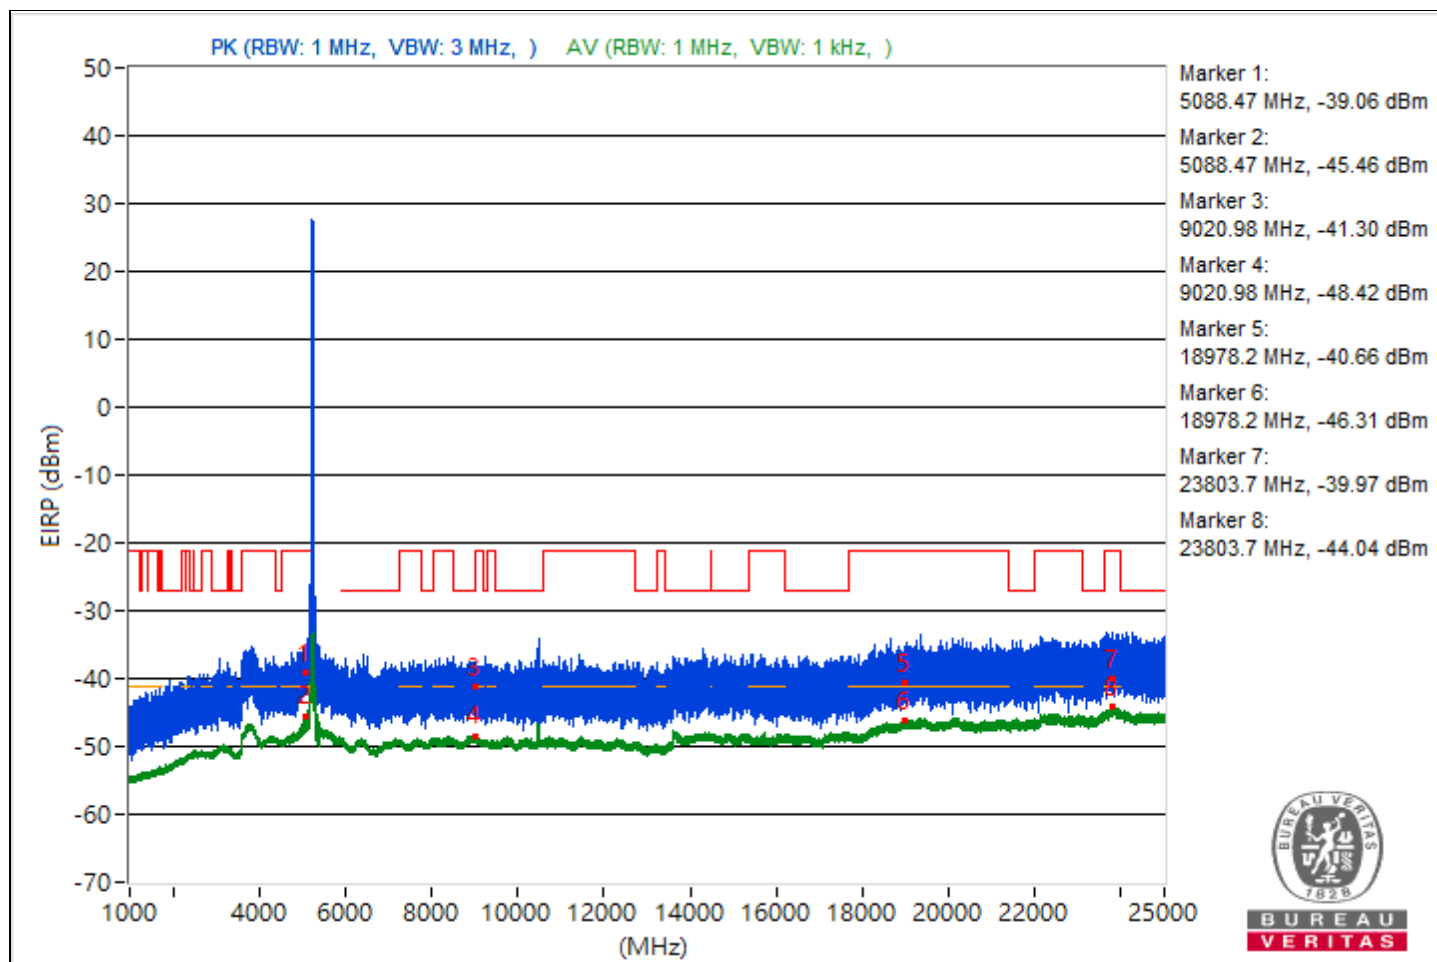


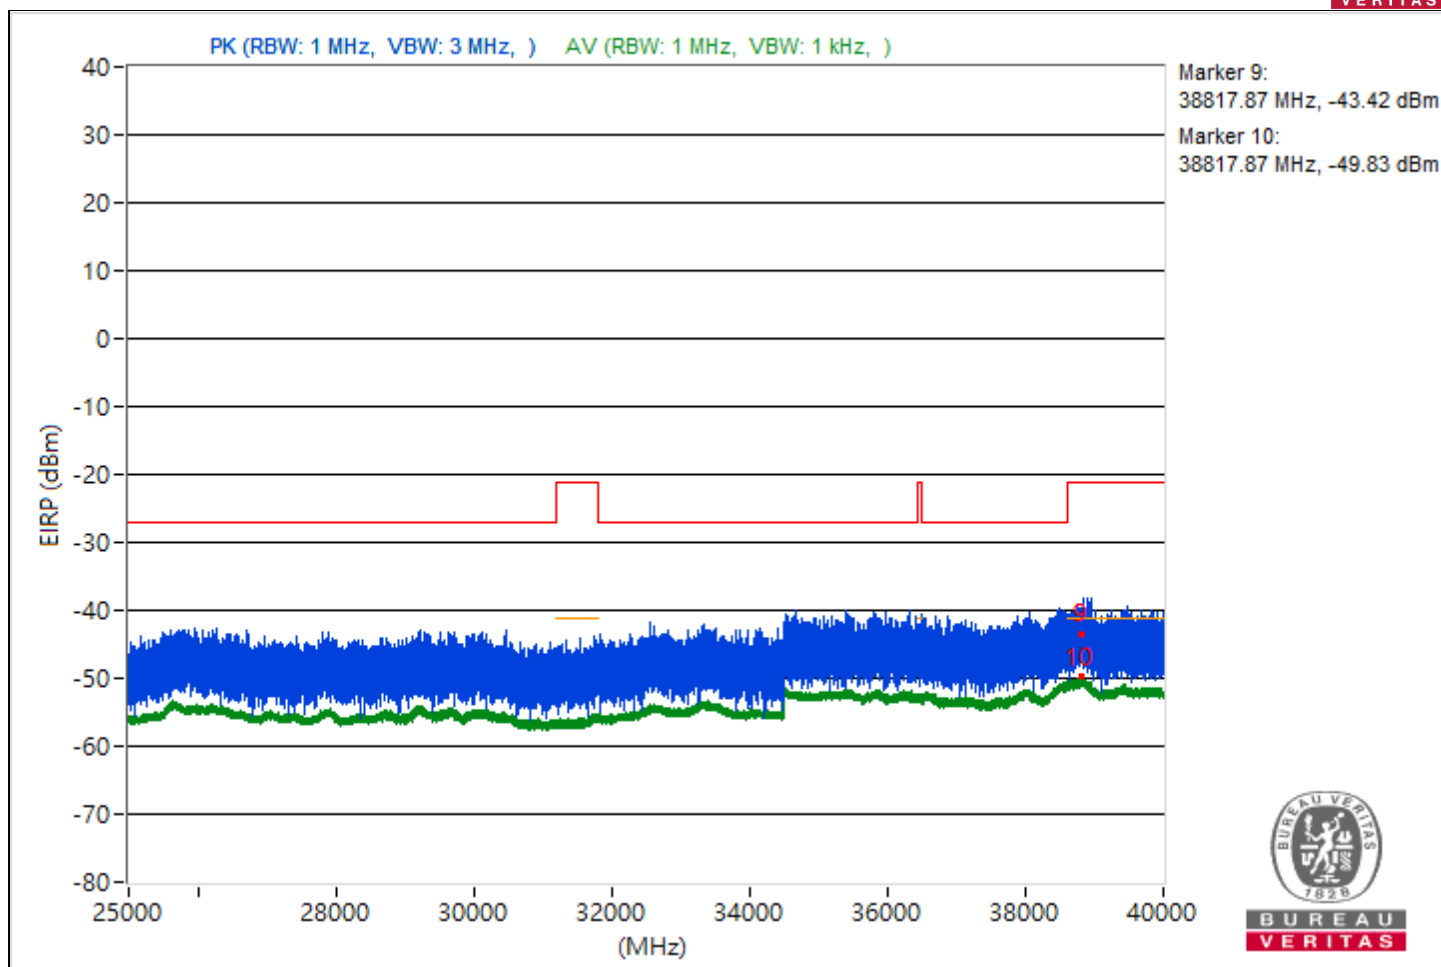


|                 |                |                          |                  |
|-----------------|----------------|--------------------------|------------------|
| RF Mode         | 802.11a        | Channel                  | CH 52 : 5260 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu      |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5089.32         | 56.31 PK                | 74             | -17.69      | -47.32                  | 8.37                   | -38.95           |
| 2                            | 5089.32         | 49.4 AV                 | 54             | -4.6        | -54.23                  | 8.37                   | -45.86           |
| 3                            | 9027.02         | 52.31 PK                | 74             | -21.69      | -51.32                  | 8.37                   | -42.95           |
| 4                            | 9027.02         | 46.79 AV                | 54             | -7.21       | -56.84                  | 8.37                   | -48.47           |
| 5                            | 18941.9         | 55.19 PK                | 74             | -18.81      | -48.44                  | 8.37                   | -40.07           |
| 6                            | 18941.9         | 48.9 AV                 | 54             | -5.1        | -54.73                  | 8.37                   | -46.36           |
| 7                            | 23821.6         | 55.39 PK                | 74             | -18.61      | -48.24                  | 8.37                   | -39.87           |
| 8                            | 23821.6         | 51.1 AV                 | 54             | -2.9        | -52.53                  | 8.37                   | -44.16           |
| 9                            | 38809.33        | 52.93 PK                | 74             | -21.07      | -50.7                   | 8.37                   | -42.33           |
| 10                           | 38809.33        | 45.15 AV                | 54             | -8.85       | -58.48                  | 8.37                   | -50.11           |

Note: Margin value = Emission Level - Limit value

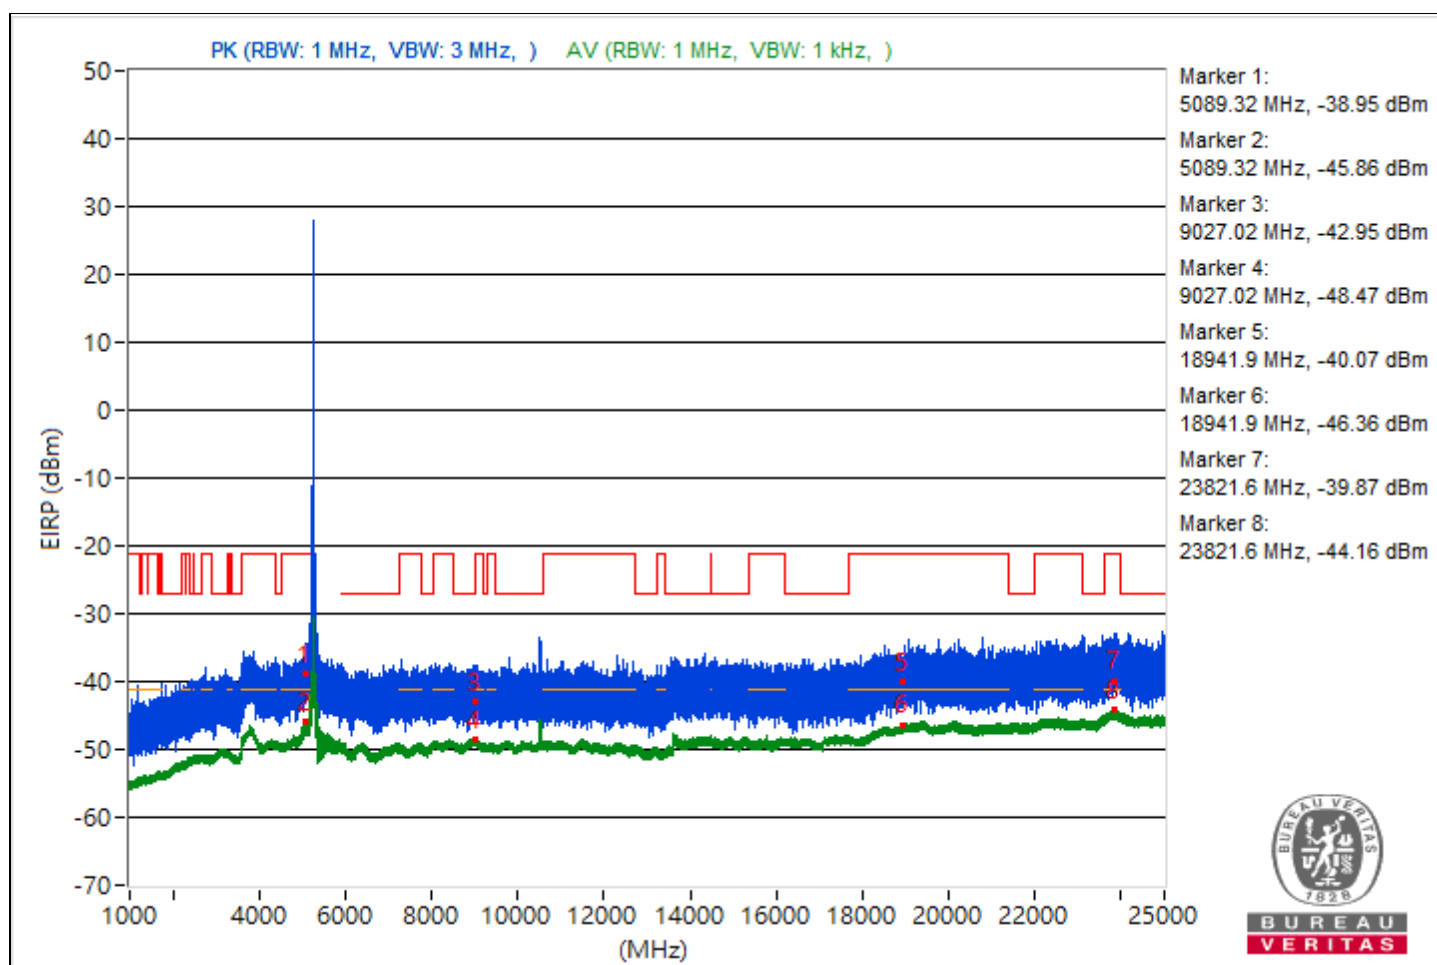


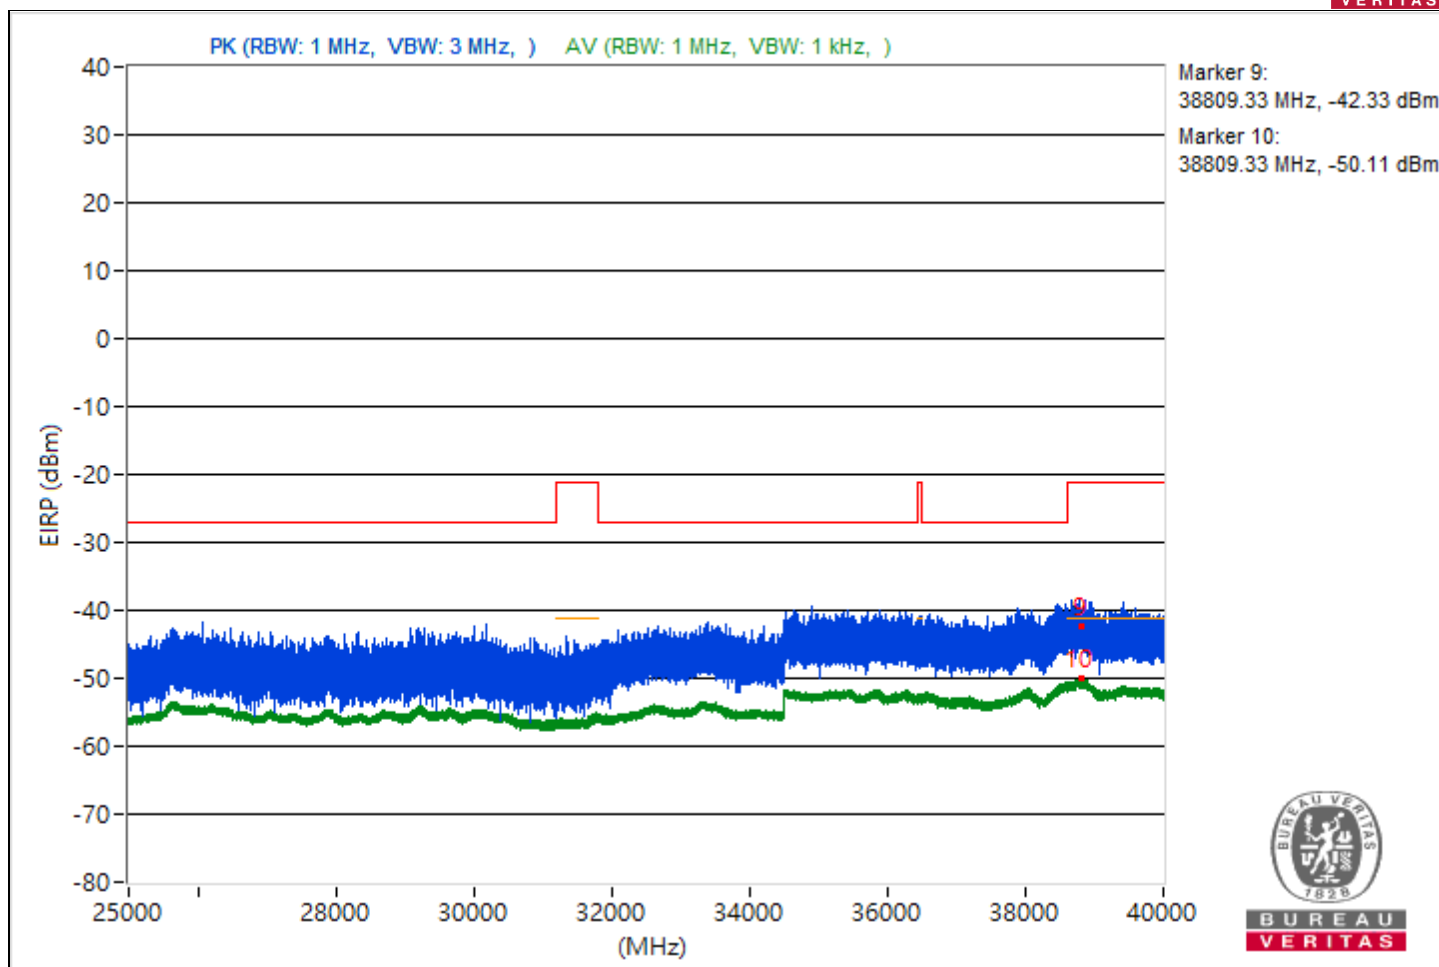


|                 |                |                          |                  |
|-----------------|----------------|--------------------------|------------------|
| RF Mode         | 802.11a        | Channel                  | CH 60 : 5300 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu      |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5096.56         | 56.6 PK                 | 74             | -17.4       | -47.03                  | 8.37                   | -38.66           |
| 2                            | 5096.56         | 49.12 AV                | 54             | -4.88       | -54.51                  | 8.37                   | -46.14           |
| 3                            | 10600           | 56.71 PK                | 74             | -17.29      | -46.92                  | 8.37                   | -38.55           |
| 4                            | 10600           | 49.43 AV                | 54             | -4.57       | -54.2                   | 8.37                   | -45.83           |
| 5                            | 18997.3         | 54.67 PK                | 74             | -19.33      | -48.96                  | 8.37                   | -40.59           |
| 6                            | 18997.3         | 49.05 AV                | 54             | -4.95       | -54.58                  | 8.37                   | -46.21           |
| 7                            | 23817.1         | 59.13 PK                | 74             | -14.87      | -44.5                   | 8.37                   | -36.13           |
| 8                            | 23817.1         | 51.13 AV                | 54             | -2.87       | -52.5                   | 8.37                   | -44.13           |
| 9                            | 38800.98        | 51.11 PK                | 74             | -22.89      | -52.52                  | 8.37                   | -44.15           |
| 10                           | 38800.98        | 45.2 AV                 | 54             | -8.8        | -58.43                  | 8.37                   | -50.06           |

Note: Margin value = Emission Level - Limit value

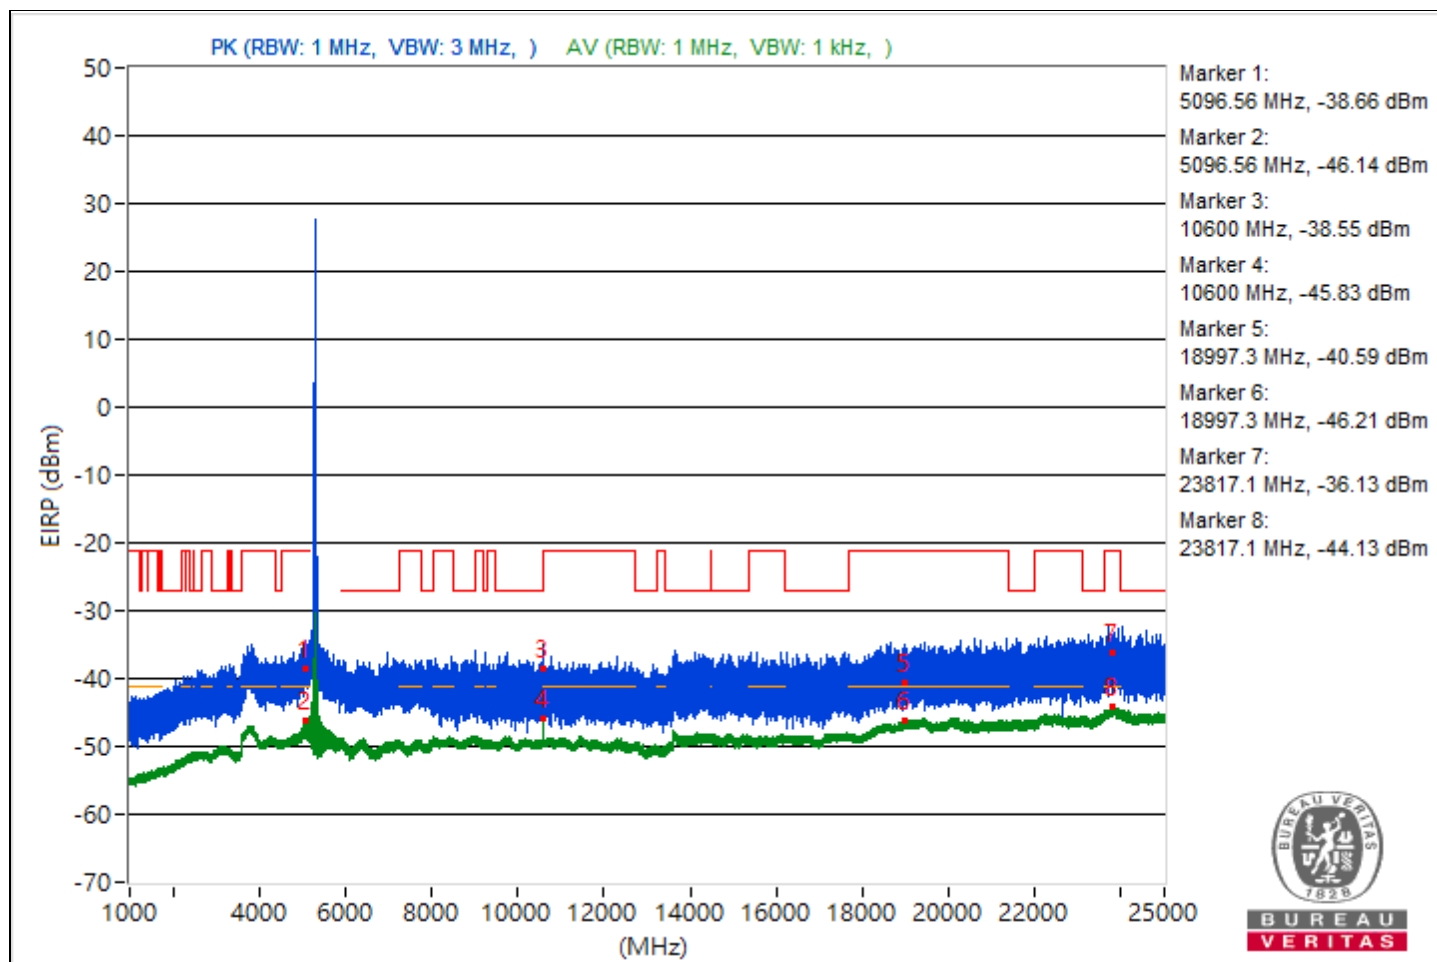


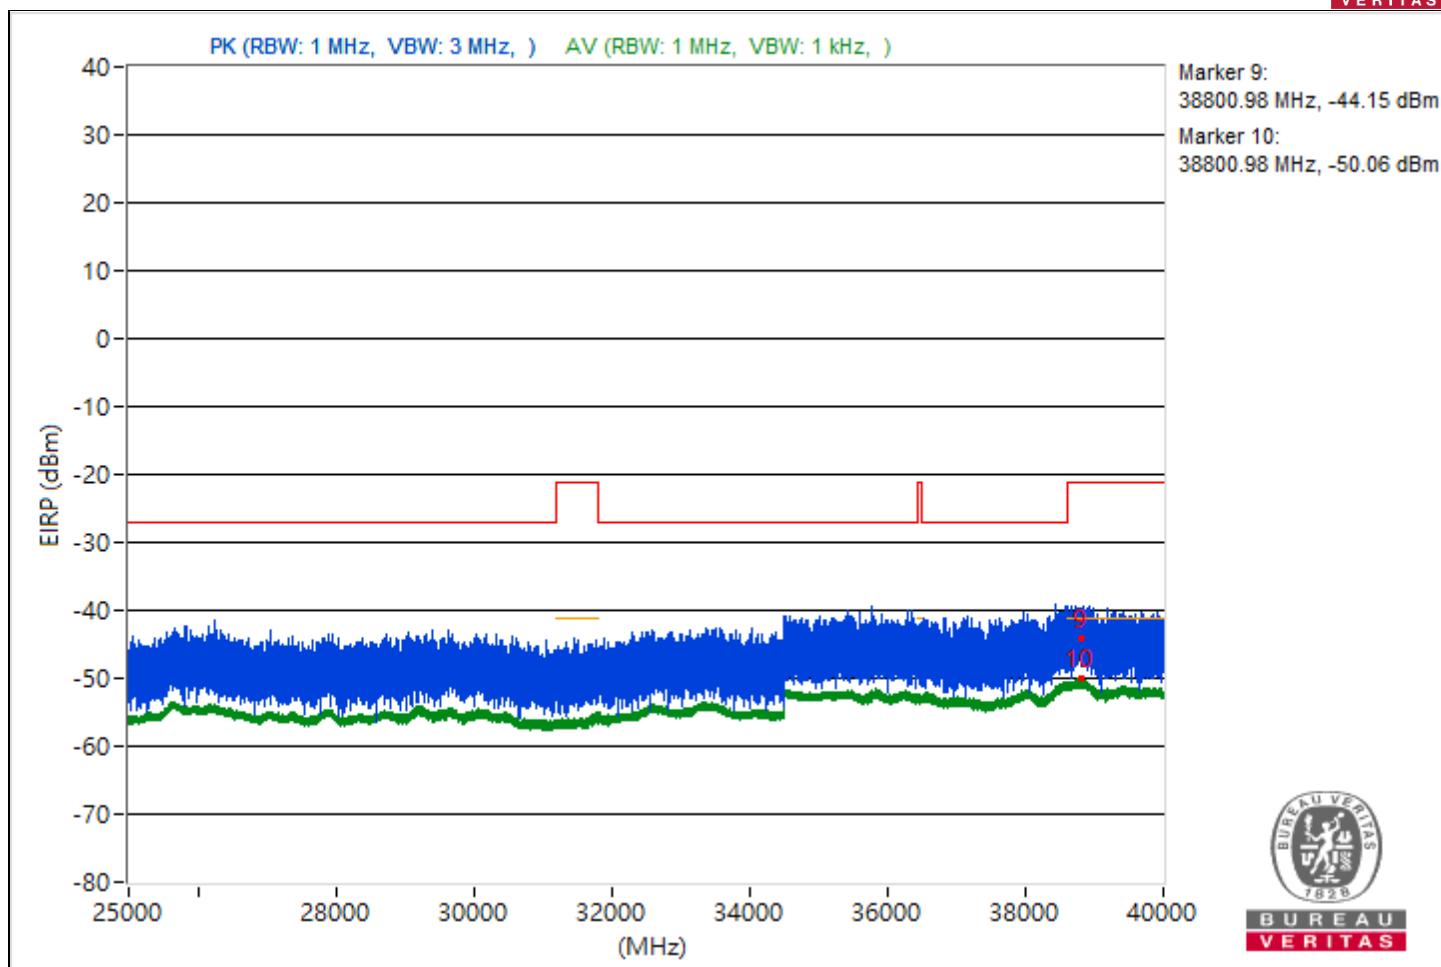


|                 |                |                          |                  |
|-----------------|----------------|--------------------------|------------------|
| RF Mode         | 802.11a        | Channel                  | CH 64 : 5320 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu      |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5098.97         | 57.25 PK                | 74             | -16.75      | -46.38                  | 8.37                   | -38.01           |
| 2                            | 5098.97         | 48.94 AV                | 54             | -5.06       | -54.69                  | 8.37                   | -46.32           |
| 3                            | 10640           | 55.4 PK                 | 74             | -18.6       | -48.23                  | 8.37                   | -39.86           |
| 4                            | 10640           | 49.51 AV                | 54             | -4.49       | -54.12                  | 8.37                   | -45.75           |
| 5                            | 18979.3         | 57.08 PK                | 74             | -16.92      | -46.55                  | 8.37                   | -38.18           |
| 6                            | 18979.3         | 49.08 AV                | 54             | -4.92       | -54.55                  | 8.37                   | -46.18           |
| 7                            | 23831.3         | 59.74 PK                | 74             | -14.26      | -43.89                  | 8.37                   | -35.52           |
| 8                            | 23831.3         | 51.12 AV                | 54             | -2.88       | -52.51                  | 8.37                   | -44.14           |
| 9                            | 38758.13        | 52.07 PK                | 74             | -21.93      | -51.56                  | 8.37                   | -43.19           |
| 10                           | 38758.13        | 45.14 AV                | 54             | -8.86       | -58.49                  | 8.37                   | -50.12           |

Note: Margin value = Emission Level - Limit value

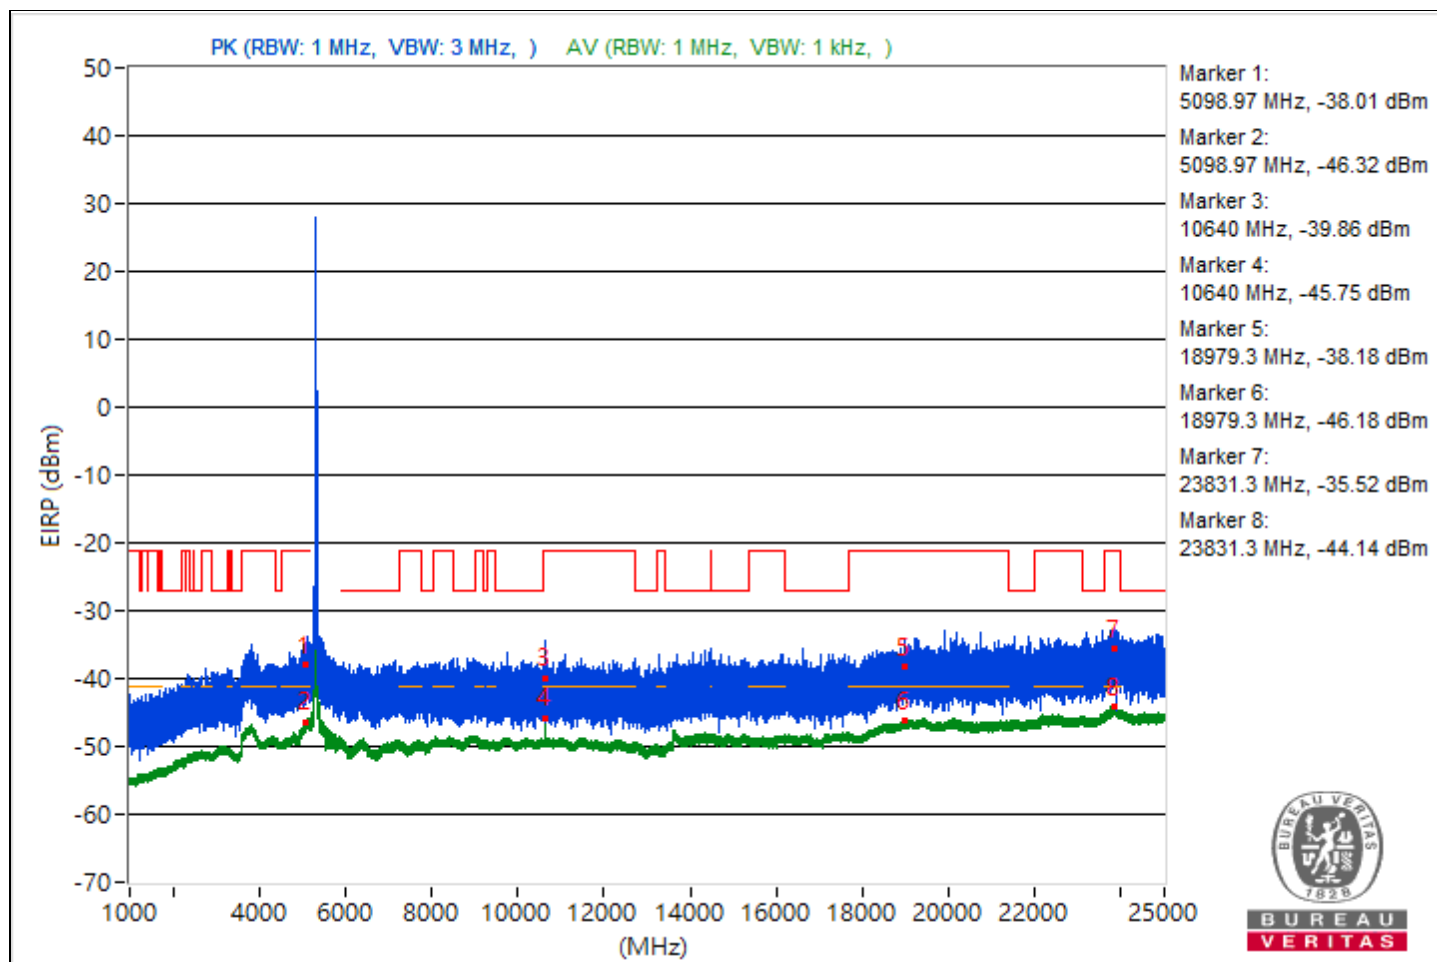


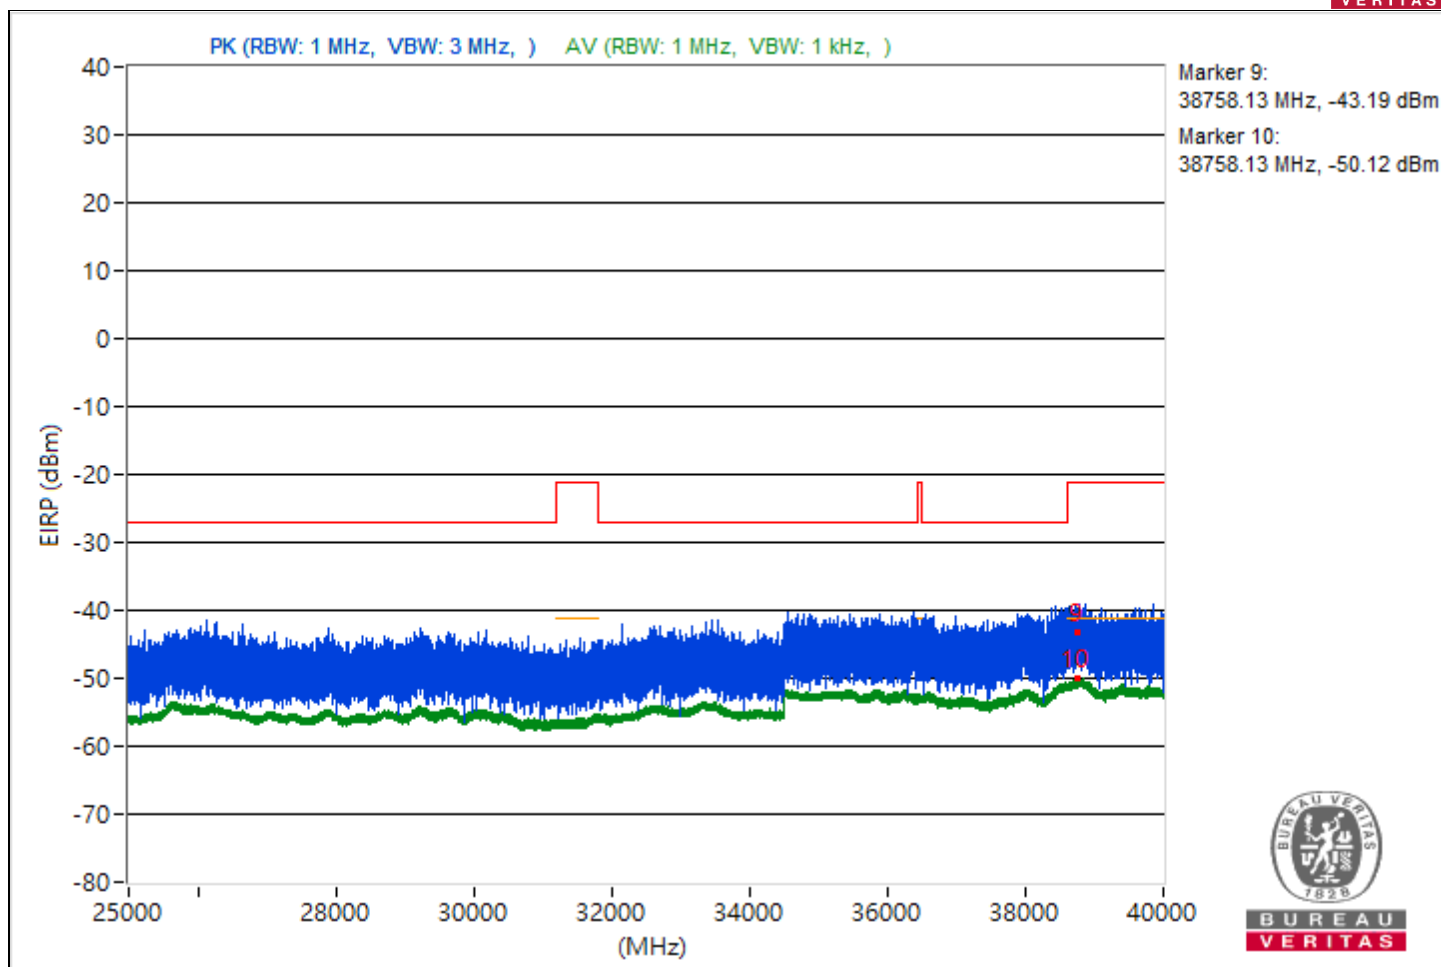


|                 |                |                          |                   |
|-----------------|----------------|--------------------------|-------------------|
| RF Mode         | 802.11a        | Channel                  | CH 100 : 5500 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu      |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3810.89         | 55.31 PK                | 74             | -18.69      | -48.32                  | 8.37                   | -39.95           |
| 2                            | 3810.89         | 48.39 AV                | 54             | -5.61       | -55.24                  | 8.37                   | -46.87           |
| 3                            | 10999.38        | 53.21 PK                | 74             | -20.79      | -50.42                  | 8.37                   | -42.05           |
| 4                            | 10999.38        | 47.26 AV                | 54             | -6.74       | -56.37                  | 8.37                   | -48.00           |
| 5                            | 18949.1         | 56.86 PK                | 74             | -17.14      | -46.77                  | 8.37                   | -38.40           |
| 6                            | 18949.1         | 49.01 AV                | 54             | -4.99       | -54.62                  | 8.37                   | -46.25           |
| 7                            | 23832.7         | 56.37 PK                | 74             | -17.63      | -47.26                  | 8.37                   | -38.89           |
| 8                            | 23832.7         | 51.03 AV                | 54             | -2.97       | -52.6                   | 8.37                   | -44.23           |
| 9                            | 38820.18        | 52.37 PK                | 74             | -21.63      | -51.26                  | 8.37                   | -42.89           |
| 10                           | 38820.18        | 45.21 AV                | 54             | -8.79       | -58.42                  | 8.37                   | -50.05           |

Note: Margin value = Emission Level - Limit value

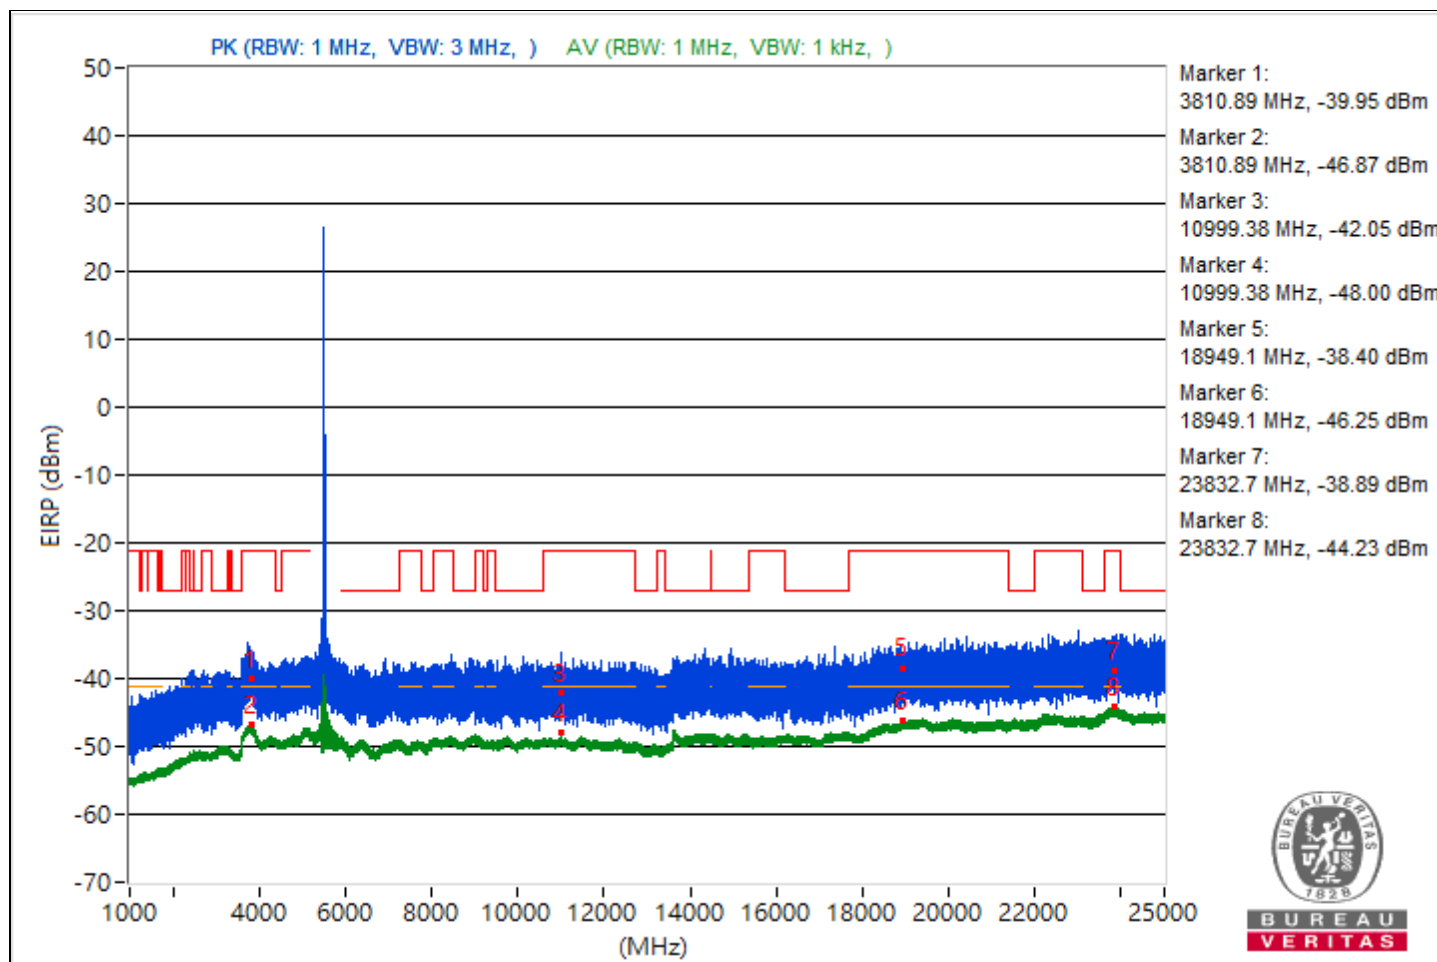


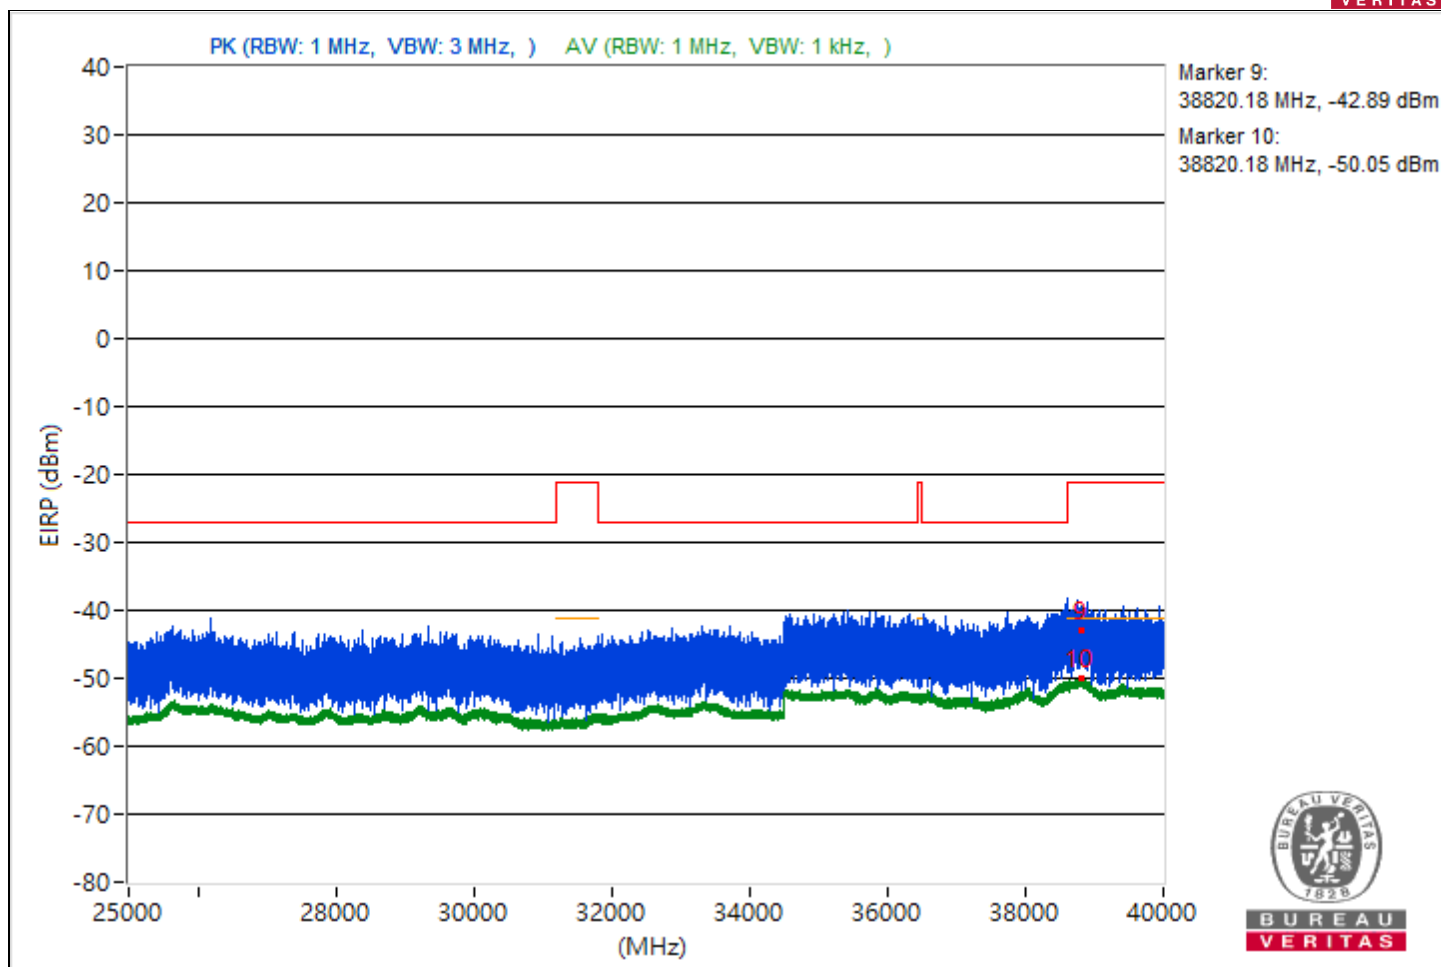


|                 |                |                          |                   |
|-----------------|----------------|--------------------------|-------------------|
| RF Mode         | 802.11a        | Channel                  | CH 116 : 5580 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu      |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3789.66         | 57.09 PK                | 74             | -16.91      | -46.54                  | 8.37                   | -38.17           |
| 2                            | 3789.66         | 48.37 AV                | 54             | -5.63       | -55.26                  | 8.37                   | -46.89           |
| 3                            | 11159.02        | 55.33 PK                | 74             | -18.67      | -48.3                   | 8.37                   | -39.93           |
| 4                            | 11159.02        | 47.74 AV                | 54             | -6.26       | -55.89                  | 8.37                   | -47.52           |
| 5                            | 18942.2         | 54.93 PK                | 74             | -19.07      | -48.7                   | 8.37                   | -40.33           |
| 6                            | 18942.2         | 48.94 AV                | 54             | -5.06       | -54.69                  | 8.37                   | -46.32           |
| 7                            | 23762.4         | 56.84 PK                | 74             | -17.16      | -46.79                  | 8.37                   | -38.42           |
| 8                            | 23762.4         | 51.05 AV                | 54             | -2.95       | -52.58                  | 8.37                   | -44.21           |
| 9                            | 38820.44        | 50 PK                   | 74             | -24         | -53.63                  | 8.37                   | -45.26           |
| 10                           | 38820.44        | 45.19 AV                | 54             | -8.81       | -58.44                  | 8.37                   | -50.07           |

Note: Margin value = Emission Level - Limit value

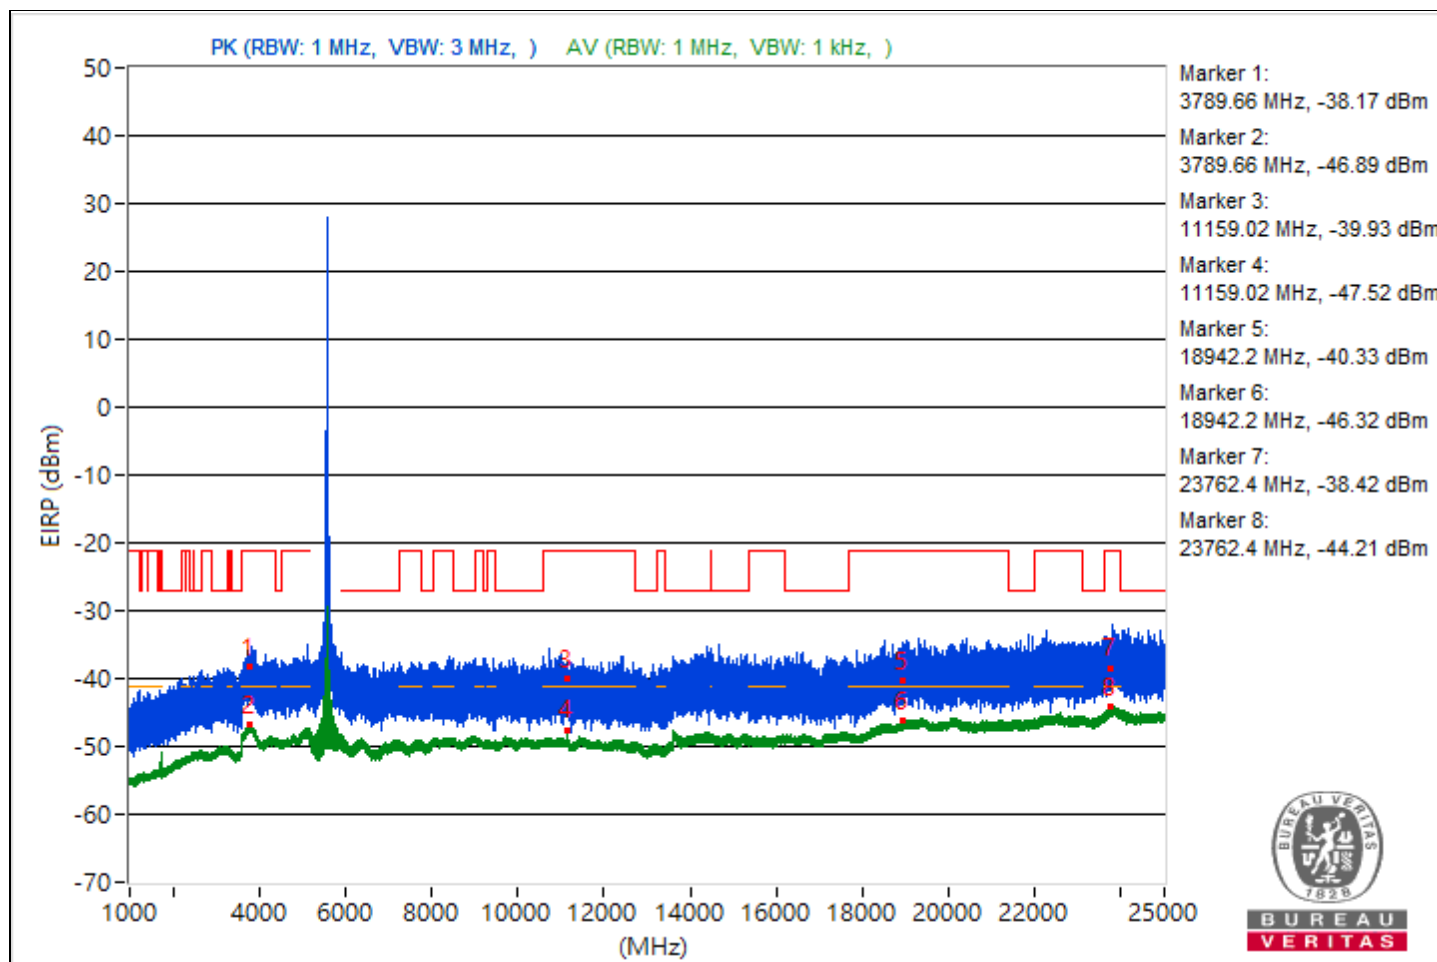


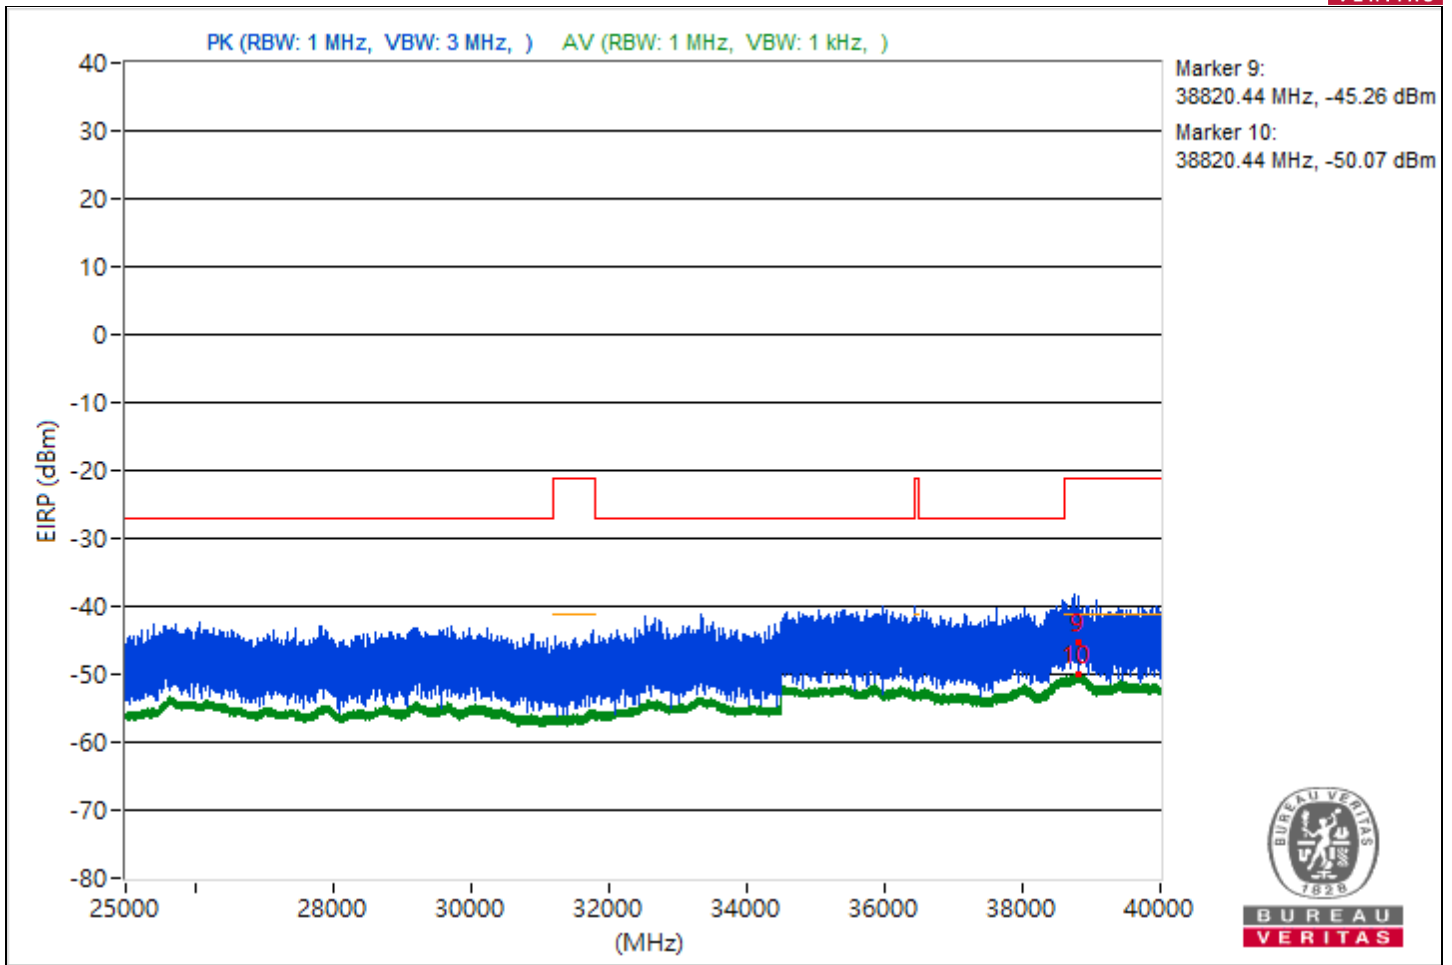


|                 |                |                          |                   |
|-----------------|----------------|--------------------------|-------------------|
| RF Mode         | 802.11a        | Channel                  | CH 140 : 5700 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu      |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3821.7          | 54.66 PK                | 74             | -19.34      | -48.97                  | 8.37                   | -40.6            |
| 2                            | 3821.7          | 48.3 AV                 | 54             | -5.7        | -55.33                  | 8.37                   | -46.96           |
| 3                            | 9014.22         | 56.5 PK                 | 74             | -17.5       | -47.13                  | 8.37                   | -38.76           |
| 4                            | 9014.22         | 46.85 AV                | 54             | -7.15       | -56.78                  | 8.37                   | -48.41           |
| 5                            | 18997           | 56.65 PK                | 74             | -17.35      | -46.98                  | 8.37                   | -38.61           |
| 6                            | 18997           | 48.89 AV                | 54             | -5.11       | -54.74                  | 8.37                   | -46.37           |
| 7                            | 23815.9         | 54.9 PK                 | 74             | -19.1       | -48.73                  | 8.37                   | -40.36           |
| 8                            | 23815.9         | 51.08 AV                | 54             | -2.92       | -52.55                  | 8.37                   | -44.18           |
| 9                            | 38814.13        | 49.57 PK                | 74             | -24.43      | -54.06                  | 8.37                   | -45.69           |
| 10                           | 38814.13        | 45.24 AV                | 54             | -8.76       | -58.39                  | 8.37                   | -50.02           |

Note: Margin value = Emission Level - Limit value

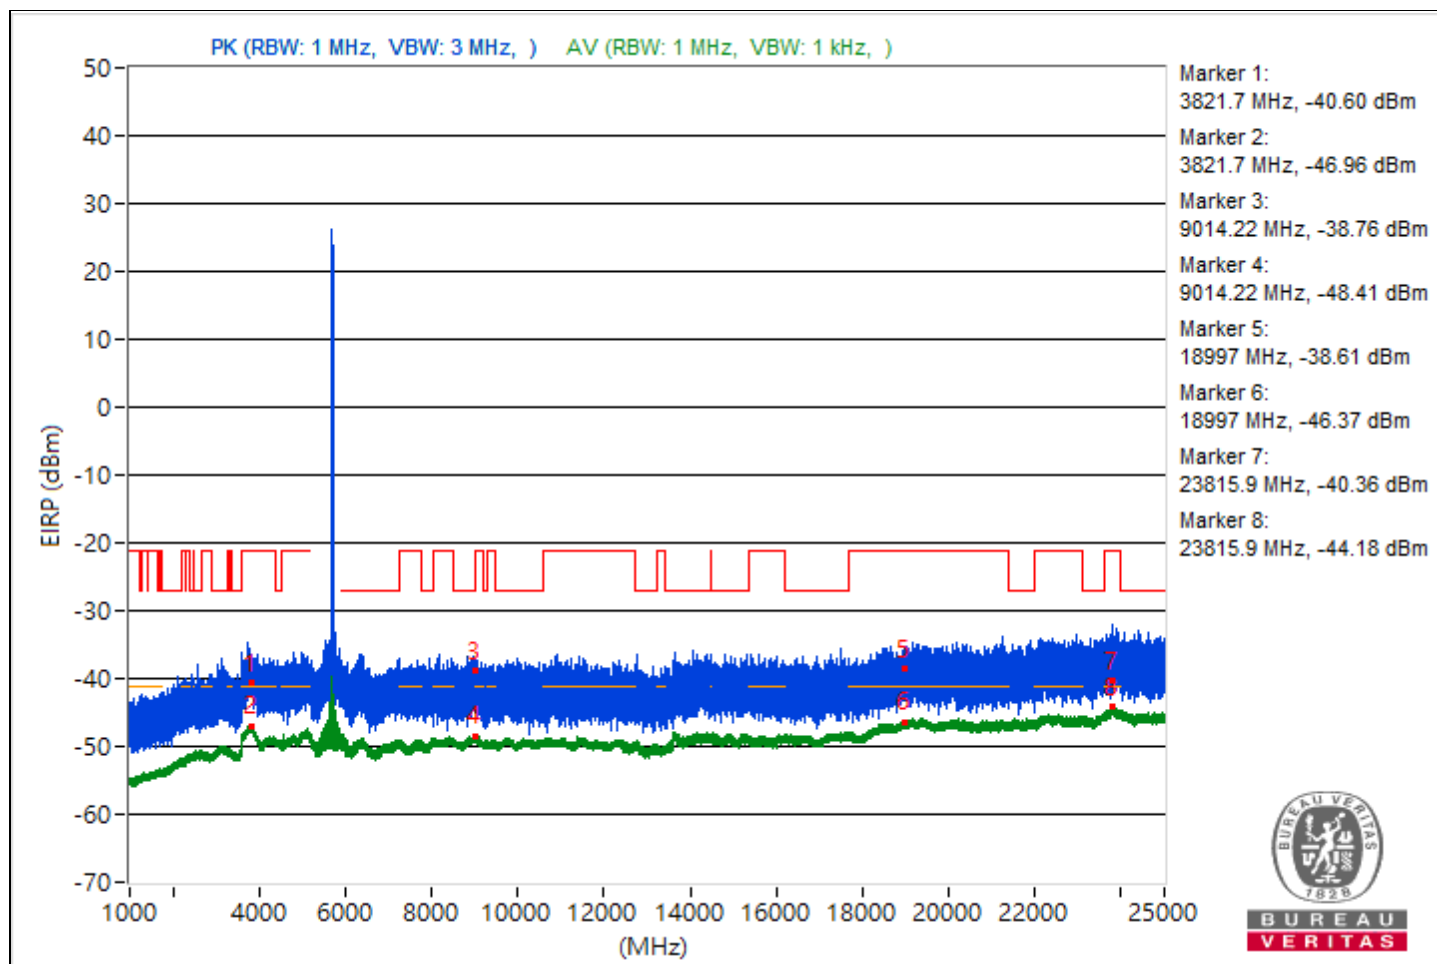


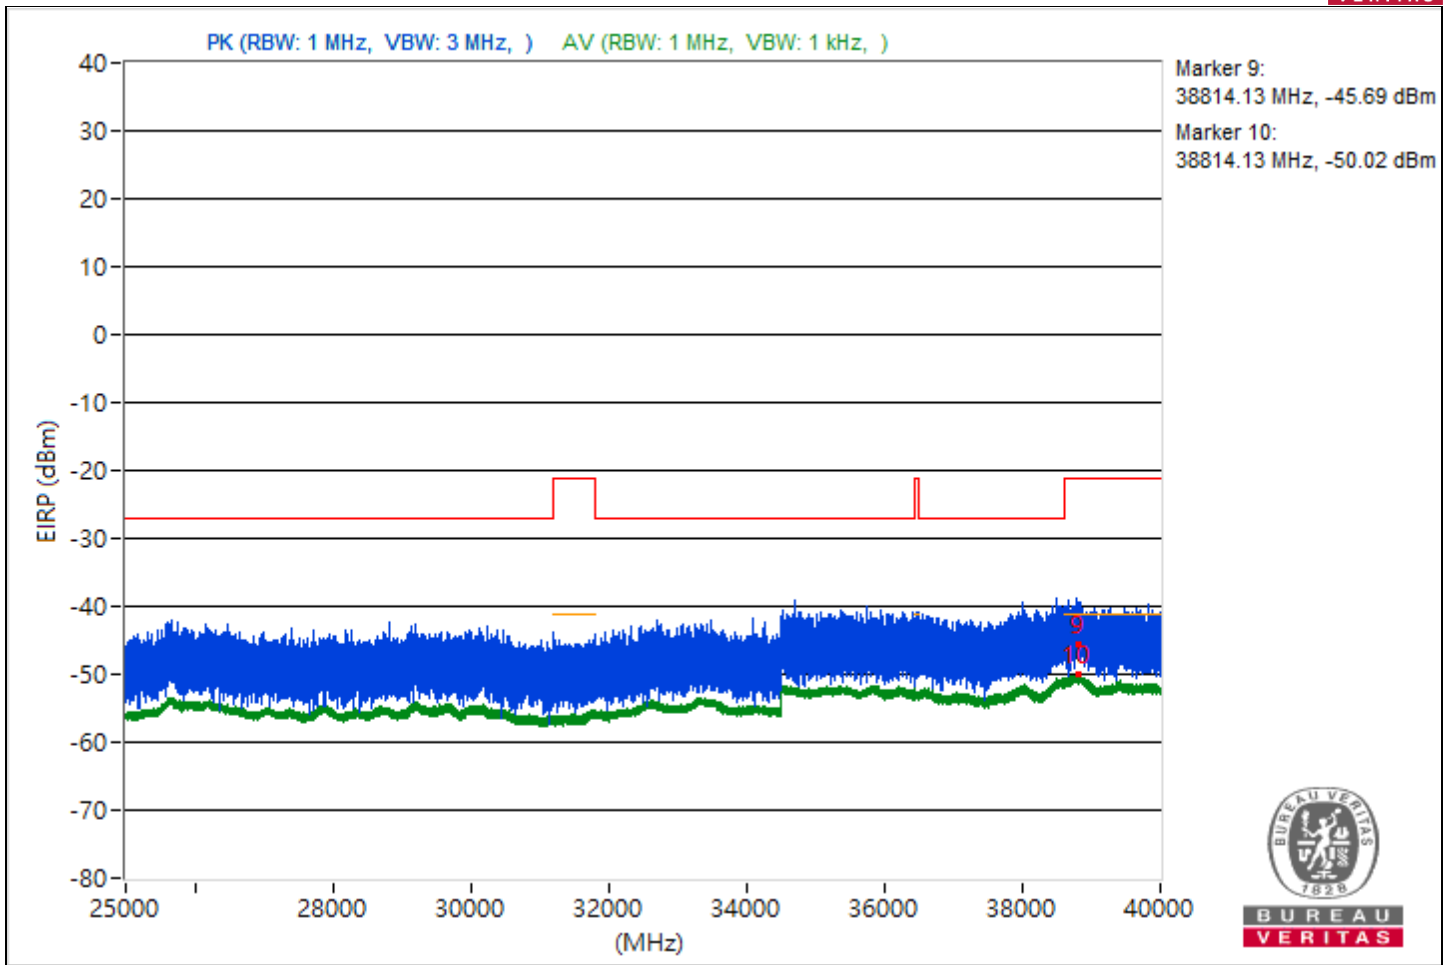


|                 |                |                          |                   |
|-----------------|----------------|--------------------------|-------------------|
| RF Mode         | 802.11a        | Channel                  | CH 144 : 5720 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu      |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3808.48         | 56.06 PK                | 74             | -17.94      | -47.57                  | 8.37                   | -39.2            |
| 2                            | 3808.48         | 48.39 AV                | 54             | -5.61       | -55.24                  | 8.37                   | -46.87           |
| 3                            | 11439.2         | 52.94 PK                | 74             | -21.06      | -50.69                  | 8.37                   | -42.32           |
| 4                            | 11439.2         | 48.24 AV                | 54             | -5.76       | -55.39                  | 8.37                   | -47.02           |
| 5                            | 18955.5         | 55.87 PK                | 74             | -18.13      | -47.76                  | 8.37                   | -39.39           |
| 6                            | 18955.5         | 48.96 AV                | 54             | -5.04       | -54.67                  | 8.37                   | -46.3            |
| 7                            | 23793.1         | 58.68 PK                | 74             | -15.32      | -44.95                  | 8.37                   | -36.58           |
| 8                            | 23793.1         | 50.99 AV                | 54             | -3.01       | -52.64                  | 8.37                   | -44.27           |
| 9                            | 38740.18        | 49.47 PK                | 74             | -24.53      | -54.16                  | 8.37                   | -45.79           |
| 10                           | 38740.18        | 45.22 AV                | 54             | -8.78       | -58.41                  | 8.37                   | -50.04           |

Note: Margin value = Emission Level - Limit value

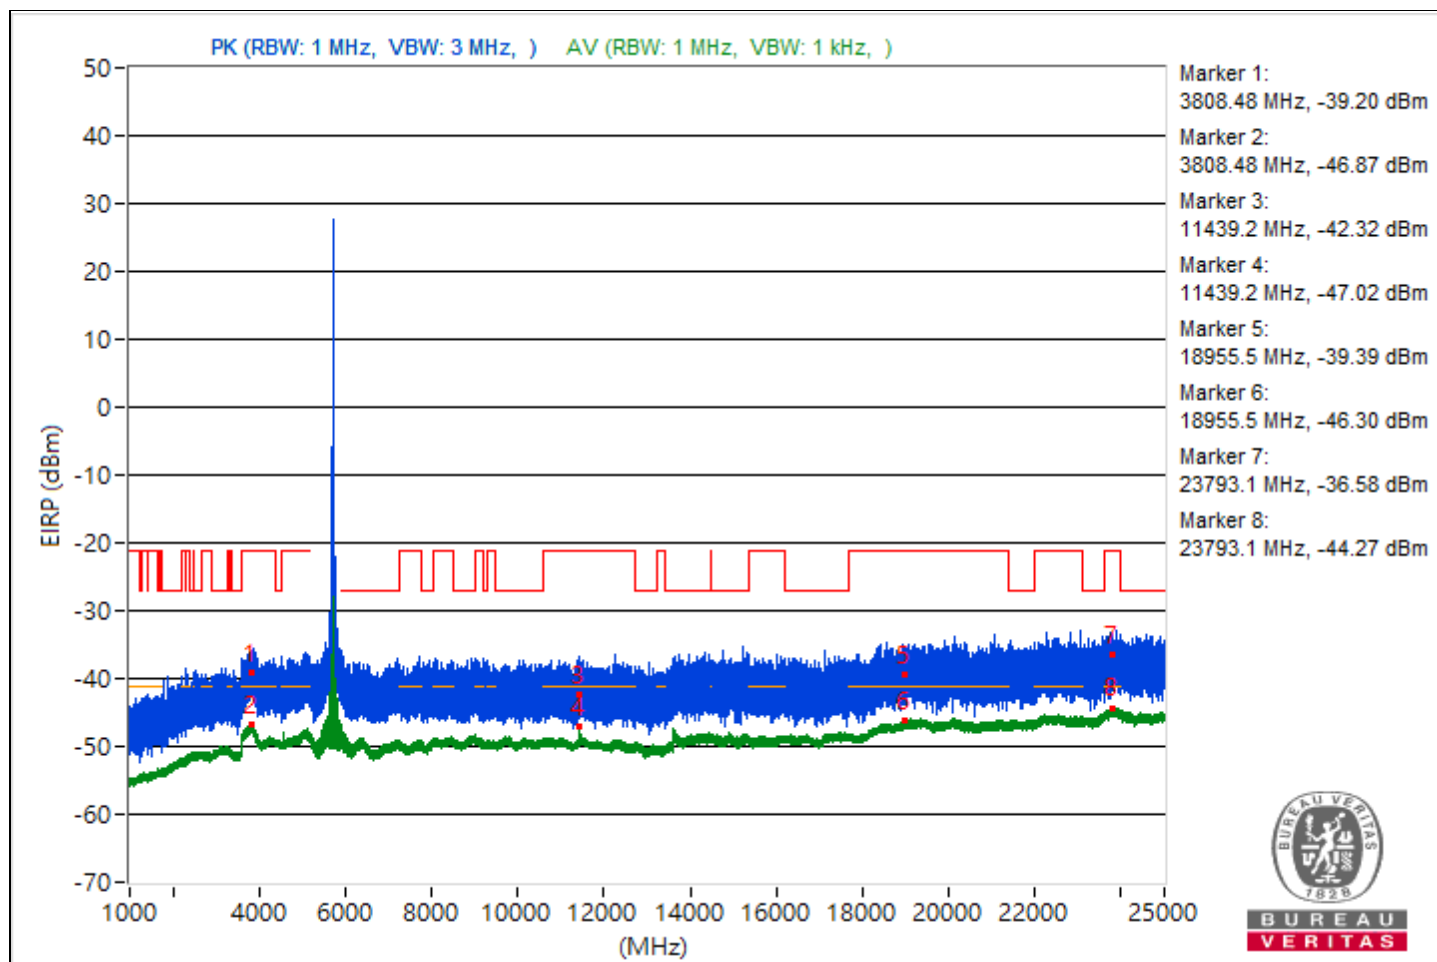


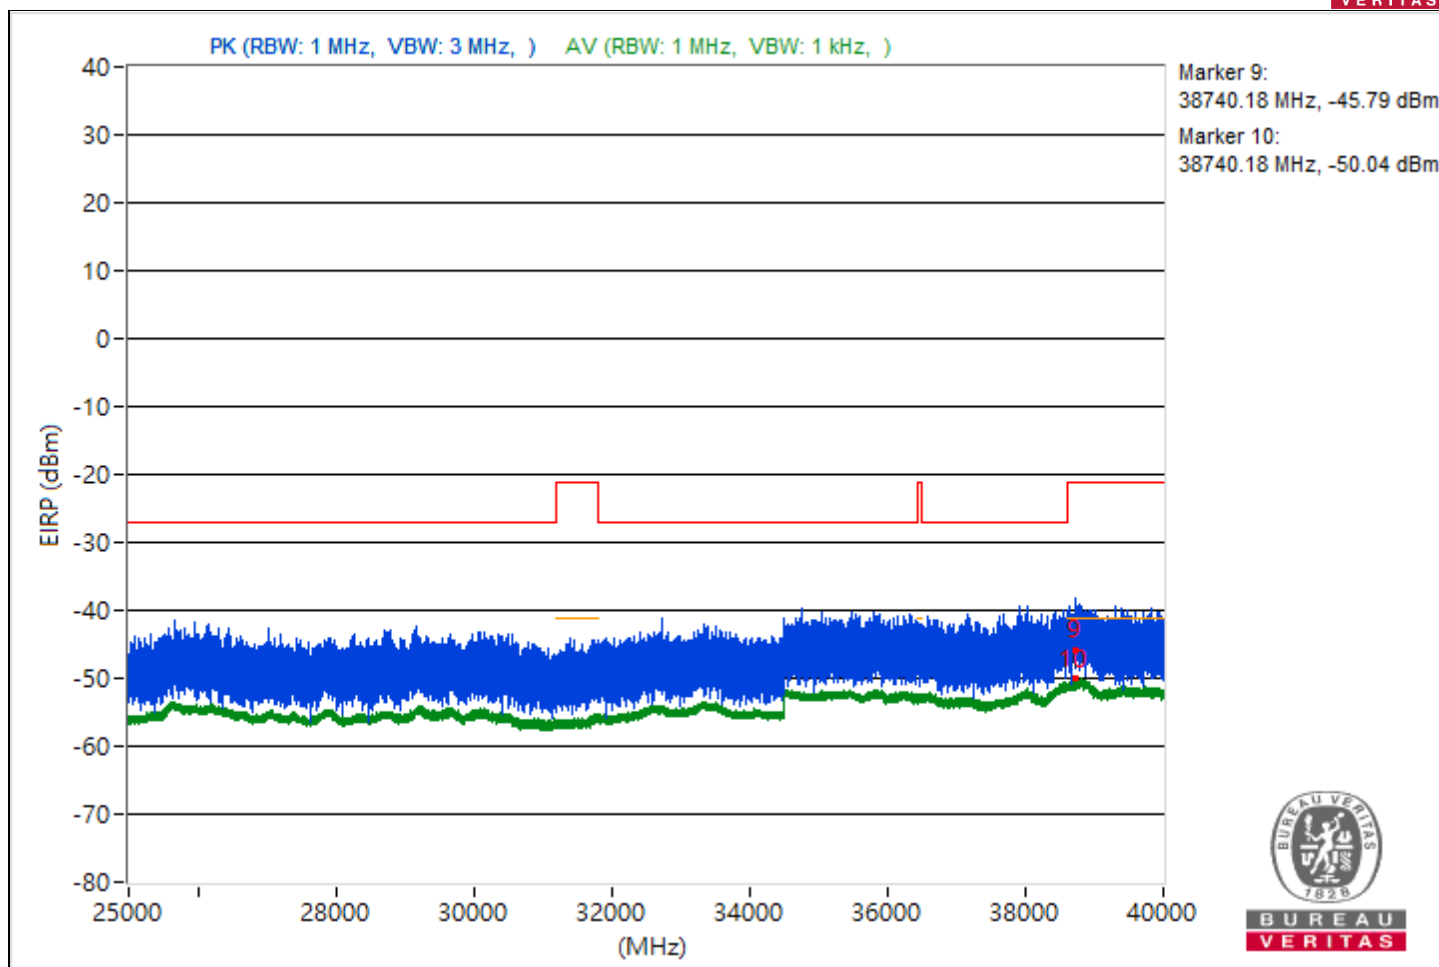


|                 |                |                          |                   |
|-----------------|----------------|--------------------------|-------------------|
| RF Mode         | 802.11a        | Channel                  | CH 149 : 5745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu      |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3809.41         | 56.21 PK                | 74             | -17.79      | -47.42                  | 8.37                   | -39.05           |
| 2                            | 3809.41         | 48.34 AV                | 54             | -5.66       | -55.29                  | 8.37                   | -46.92           |
| 3                            | 11493.16        | 57.02 PK                | 74             | -16.98      | -46.61                  | 8.37                   | -38.24           |
| 4                            | 11493.16        | 48.29 AV                | 54             | -5.71       | -55.34                  | 8.37                   | -46.97           |
| 5                            | 18934.2         | 52.26 PK                | 74             | -21.74      | -51.37                  | 8.37                   | -43              |
| 6                            | 18934.2         | 49.04 AV                | 54             | -4.96       | -54.59                  | 8.37                   | -46.22           |
| 7                            | 23800.6         | 57.14 PK                | 74             | -16.86      | -46.49                  | 8.37                   | -38.12           |
| 8                            | 23800.6         | 51.03 AV                | 54             | -2.97       | -52.6                   | 8.37                   | -44.23           |
| 9                            | 38823.29        | 52.2 PK                 | 74             | -21.8       | -51.43                  | 8.37                   | -43.06           |
| 10                           | 38823.29        | 45.22 AV                | 54             | -8.78       | -58.41                  | 8.37                   | -50.04           |

Note: Margin value = Emission Level - Limit value

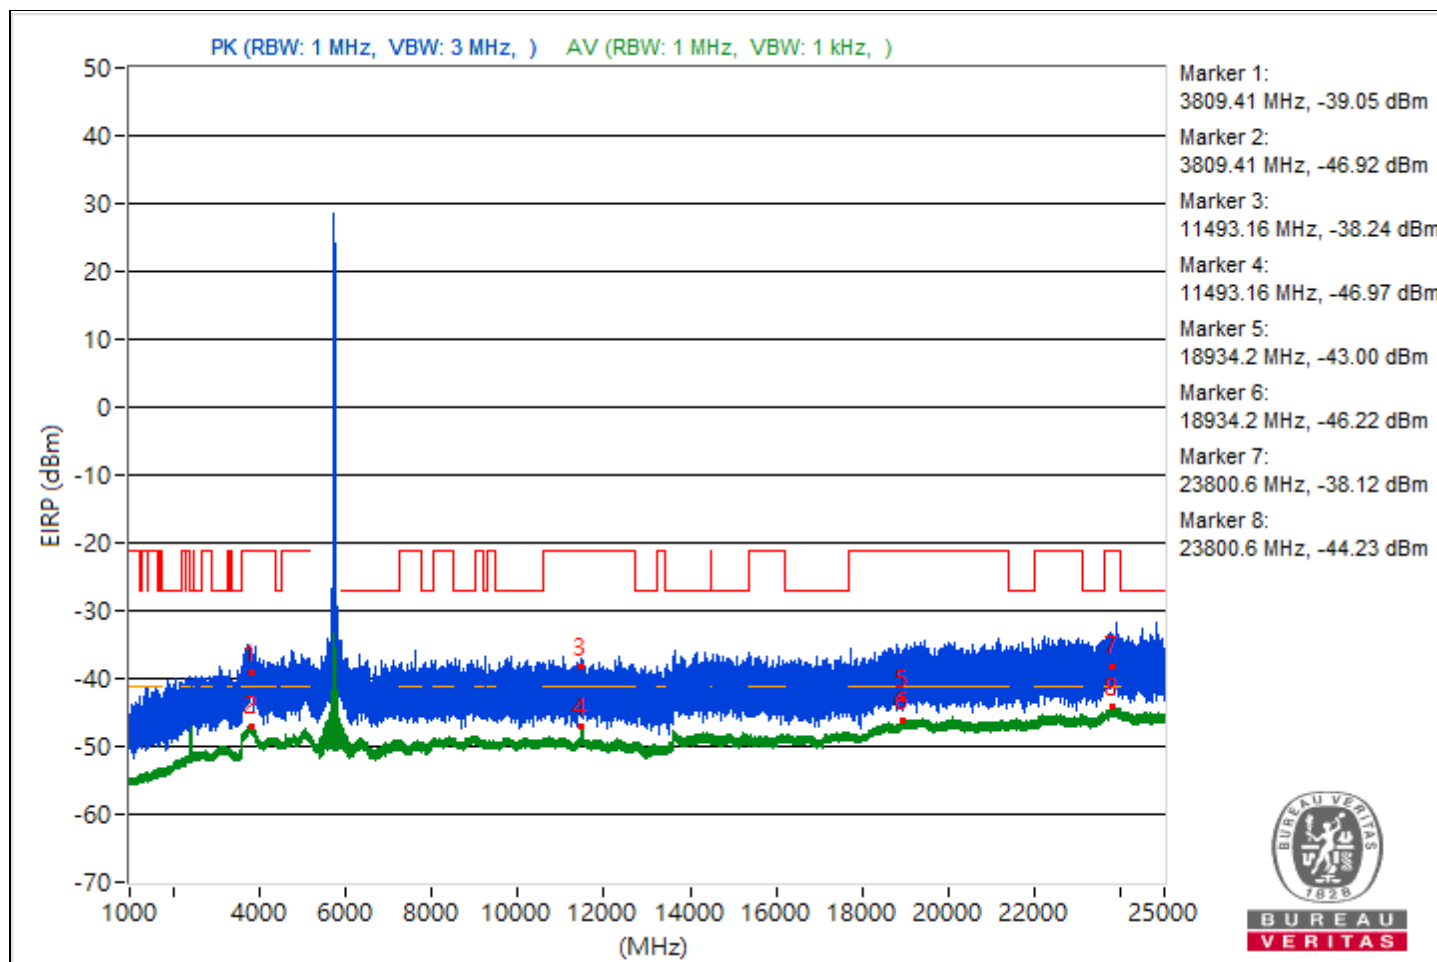


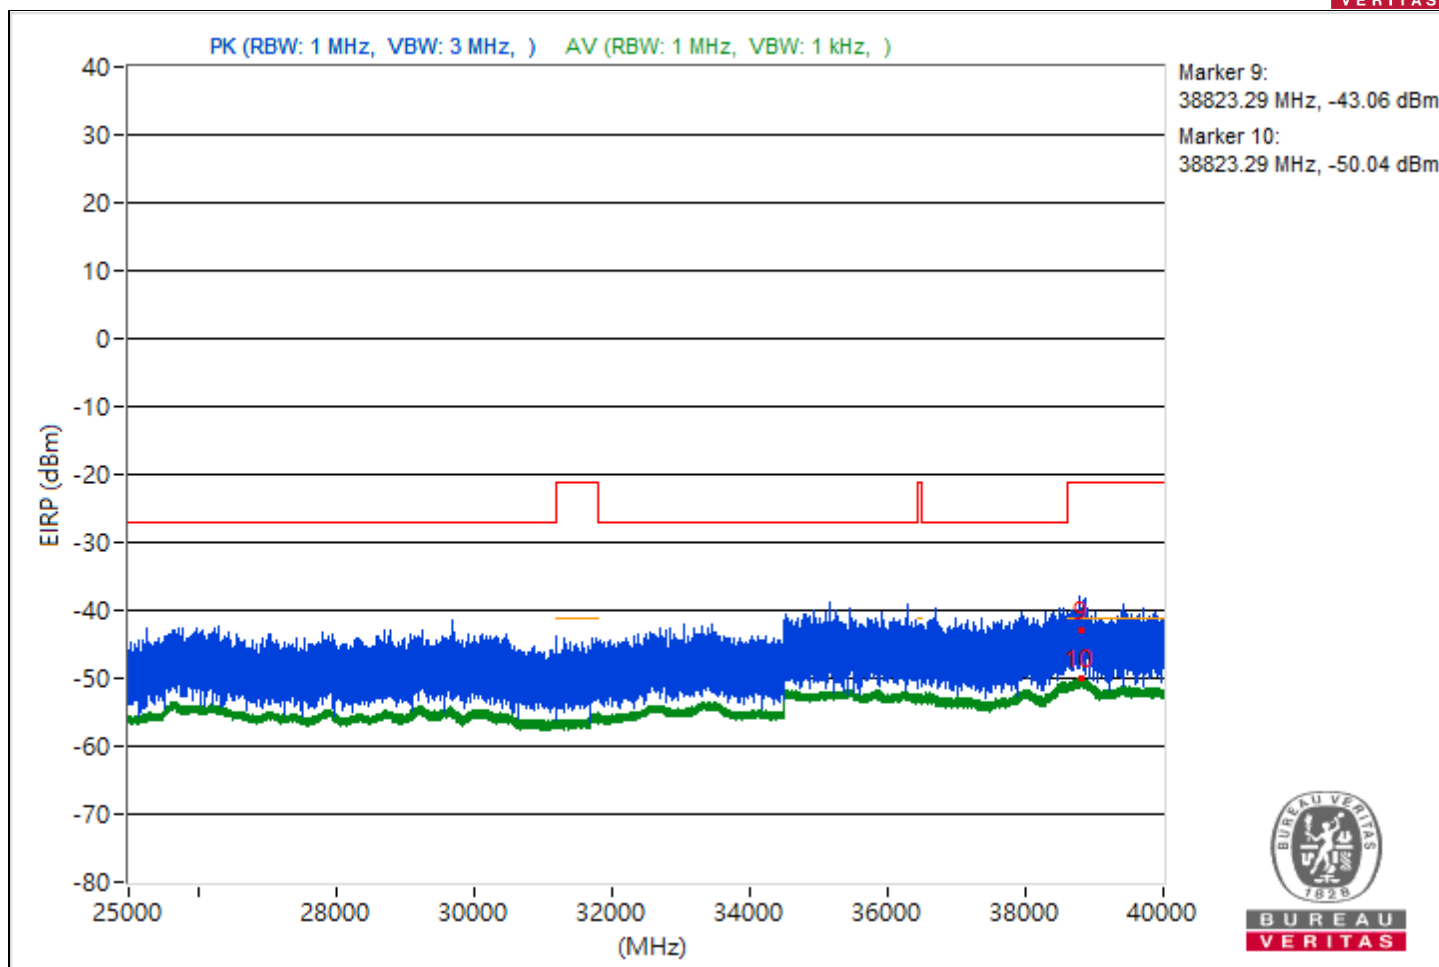


|                 |                |                          |                   |
|-----------------|----------------|--------------------------|-------------------|
| RF Mode         | 802.11a        | Channel                  | CH 157 : 5785 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu      |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3780.79         | 56.84 PK                | 74             | -17.16      | -46.79                  | 8.37                   | -38.42           |
| 2                            | 3780.79         | 48.51 AV                | 54             | -5.49       | -55.12                  | 8.37                   | -46.75           |
| 3                            | 11571.2         | 55.93 PK                | 74             | -18.07      | -47.7                   | 8.37                   | -39.33           |
| 4                            | 11571.2         | 48.12 AV                | 54             | -5.88       | -55.51                  | 8.37                   | -47.14           |
| 5                            | 18999           | 54.36 PK                | 74             | -19.64      | -49.27                  | 8.37                   | -40.9            |
| 6                            | 18999           | 48.94 AV                | 54             | -5.06       | -54.69                  | 8.37                   | -46.32           |
| 7                            | 23845.1         | 56.86 PK                | 74             | -17.14      | -46.77                  | 8.37                   | -38.4            |
| 8                            | 23845.1         | 50.99 AV                | 54             | -3.01       | -52.64                  | 8.37                   | -44.27           |
| 9                            | 38821.87        | 53.68 PK                | 74             | -20.32      | -49.95                  | 8.37                   | -41.58           |
| 10                           | 38821.87        | 45.2 AV                 | 54             | -8.8        | -58.43                  | 8.37                   | -50.06           |

Note: Margin value = Emission Level - Limit value

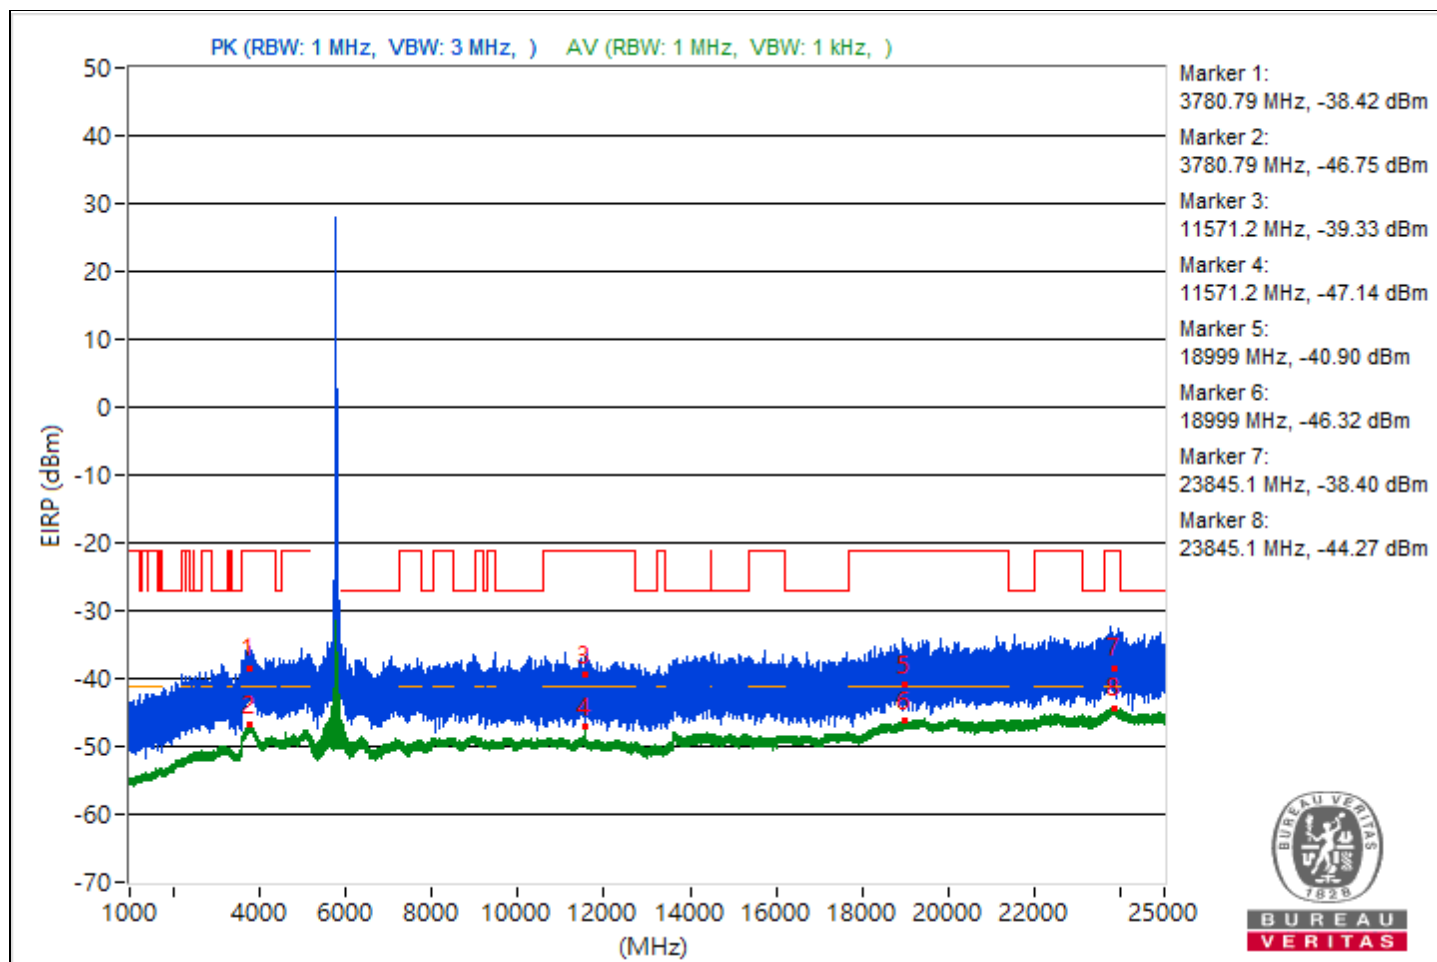


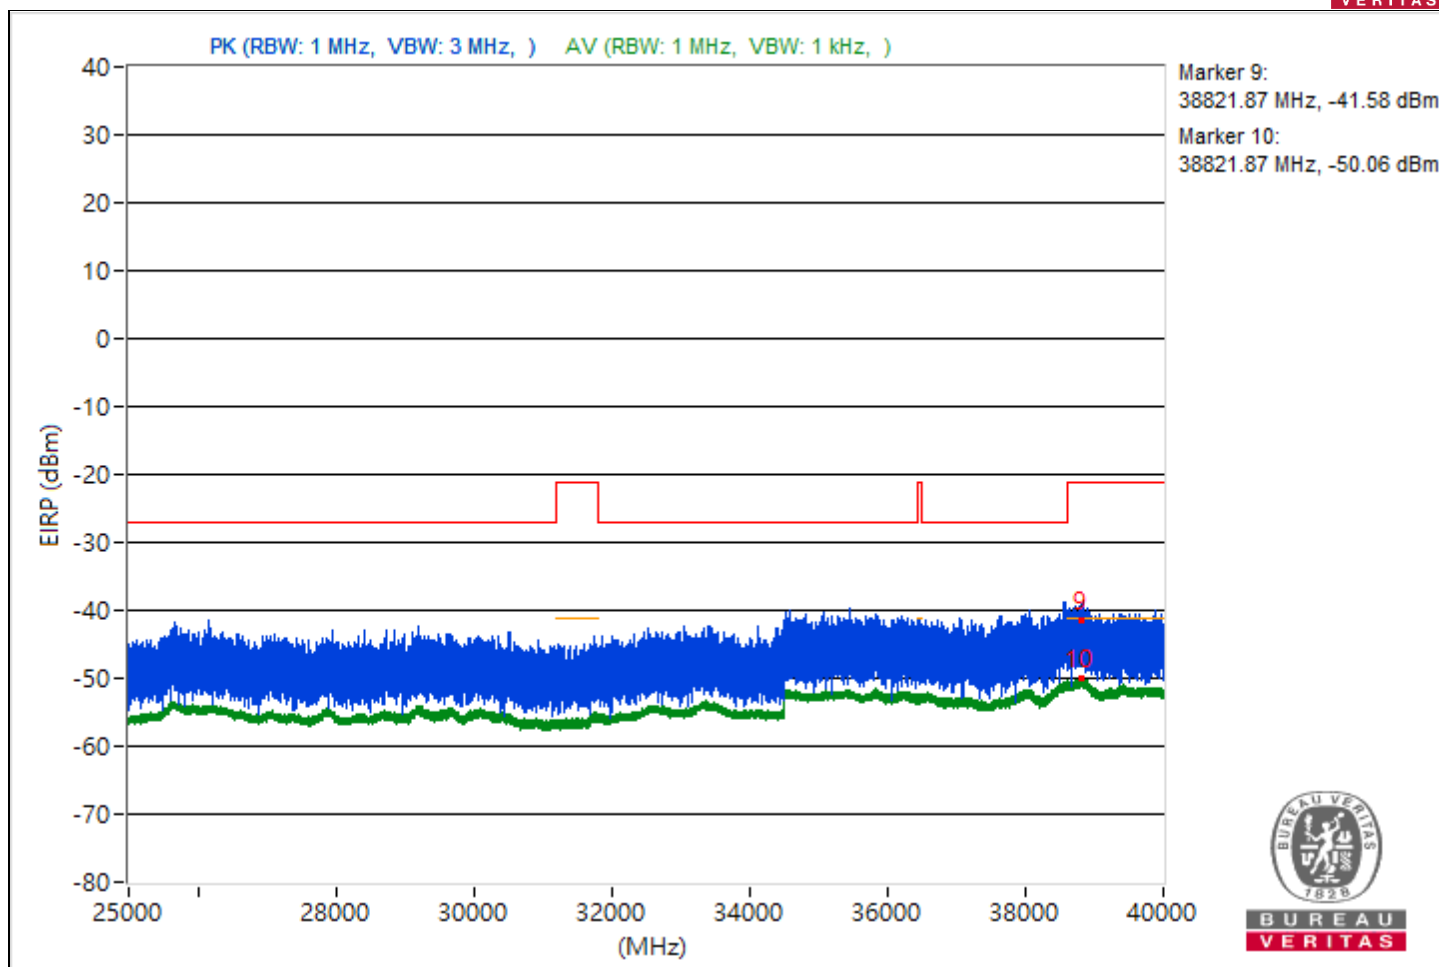


|                 |                |                          |                   |
|-----------------|----------------|--------------------------|-------------------|
| RF Mode         | 802.11a        | Channel                  | CH 165 : 5825 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu      |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3770.68         | 56.36 PK                | 74             | -17.64      | -47.27                  | 8.37                   | -38.9            |
| 2                            | 3770.68         | 48.43 AV                | 54             | -5.57       | -55.2                   | 8.37                   | -46.83           |
| 3                            | 11649.42        | 55.27 PK                | 74             | -18.73      | -48.36                  | 8.37                   | -39.99           |
| 4                            | 11649.42        | 47.87 AV                | 54             | -6.13       | -55.76                  | 8.37                   | -47.39           |
| 5                            | 18973.9         | 55.65 PK                | 74             | -18.35      | -47.98                  | 8.37                   | -39.61           |
| 6                            | 18973.9         | 49.02 AV                | 54             | -4.98       | -54.61                  | 8.37                   | -46.24           |
| 7                            | 23855.9         | 58.17 PK                | 74             | -15.83      | -45.46                  | 8.37                   | -37.09           |
| 8                            | 23855.9         | 51.02 AV                | 54             | -2.98       | -52.61                  | 8.37                   | -44.24           |
| 9                            | 38794.58        | 51.62 PK                | 74             | -22.38      | -52.01                  | 8.37                   | -43.64           |
| 10                           | 38794.58        | 45.21 AV                | 54             | -8.79       | -58.42                  | 8.37                   | -50.05           |

Note: Margin value = Emission Level - Limit value

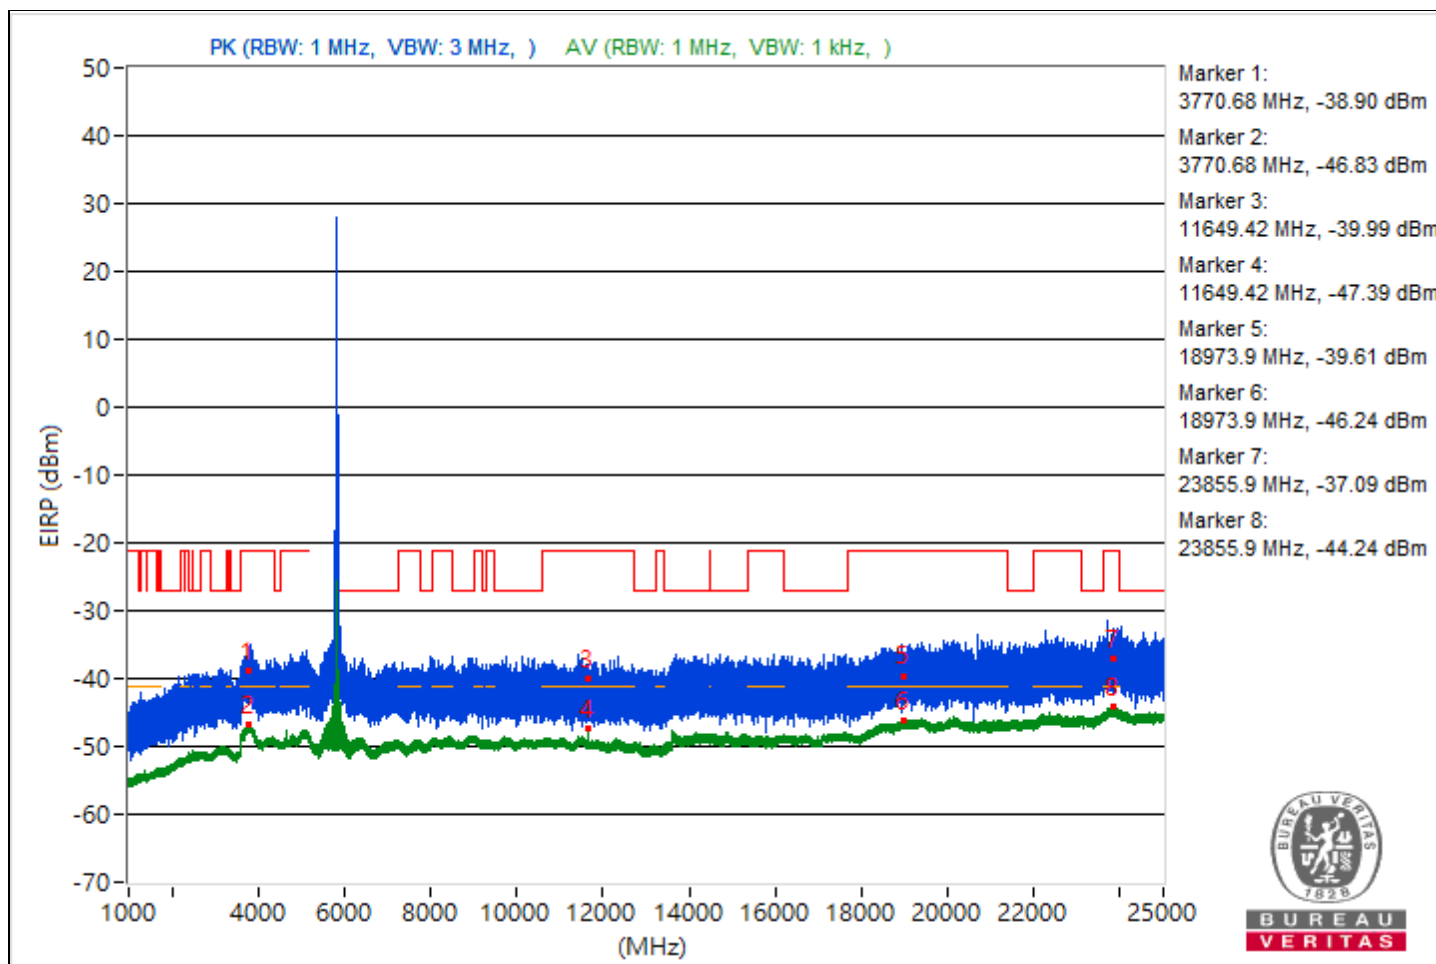

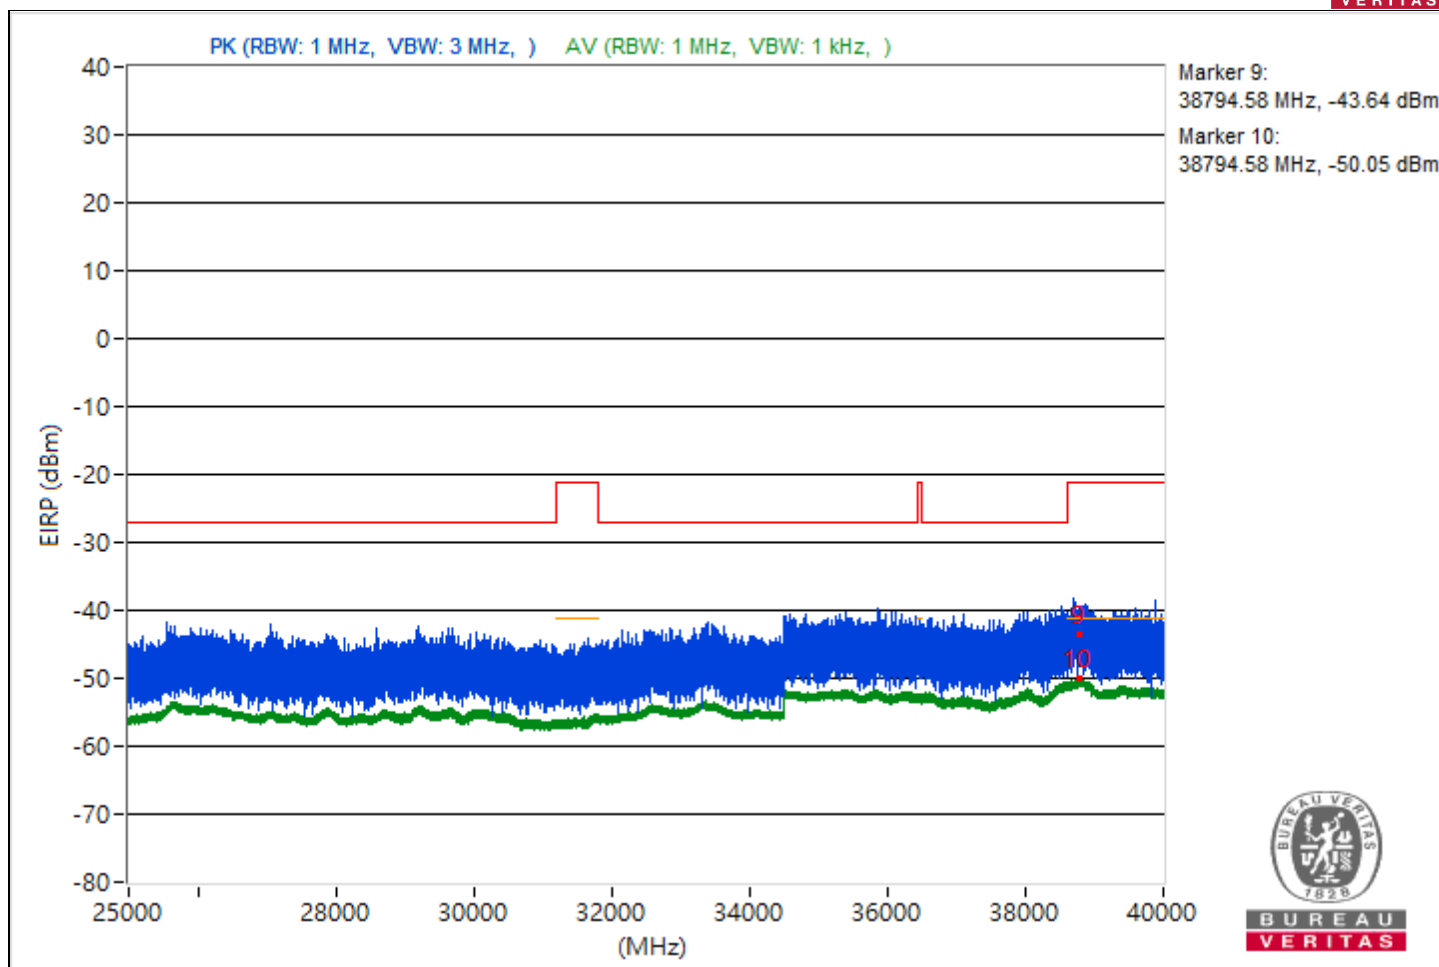



# 1S1T

|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 36 : 5180 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu        |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5099.9          | 55.08 PK                | 74             | -18.92      | -48.55                  | 8.37                   | -40.18           |
| 2                            | 5099.9          | 50.4 AV                 | 54             | -3.6        | -53.23                  | 8.37                   | -44.86           |
| 3                            | 9002.49         | 52.83 PK                | 74             | -21.17      | -50.8                   | 8.37                   | -42.43           |
| 4                            | 9002.49         | 46.88 AV                | 54             | -7.12       | -56.75                  | 8.37                   | -48.38           |
| 5                            | 18987.4         | 55.98 PK                | 74             | -18.02      | -47.65                  | 8.37                   | -39.28           |
| 6                            | 18987.4         | 49.15 AV                | 54             | -4.85       | -54.48                  | 8.37                   | -46.11           |
| 7                            | 23809.3         | 55.74 PK                | 74             | -18.26      | -47.89                  | 8.37                   | -39.52           |
| 8                            | 23809.3         | 51.13 AV                | 54             | -2.87       | -52.5                   | 8.37                   | -44.13           |
| 9                            | 38807.82        | 51.92 PK                | 74             | -22.08      | -51.71                  | 8.37                   | -43.34           |
| 10                           | 38807.82        | 45.18 AV                | 54             | -8.82       | -58.45                  | 8.37                   | -50.08           |

Note: Margin value = Emission Level - Limit value

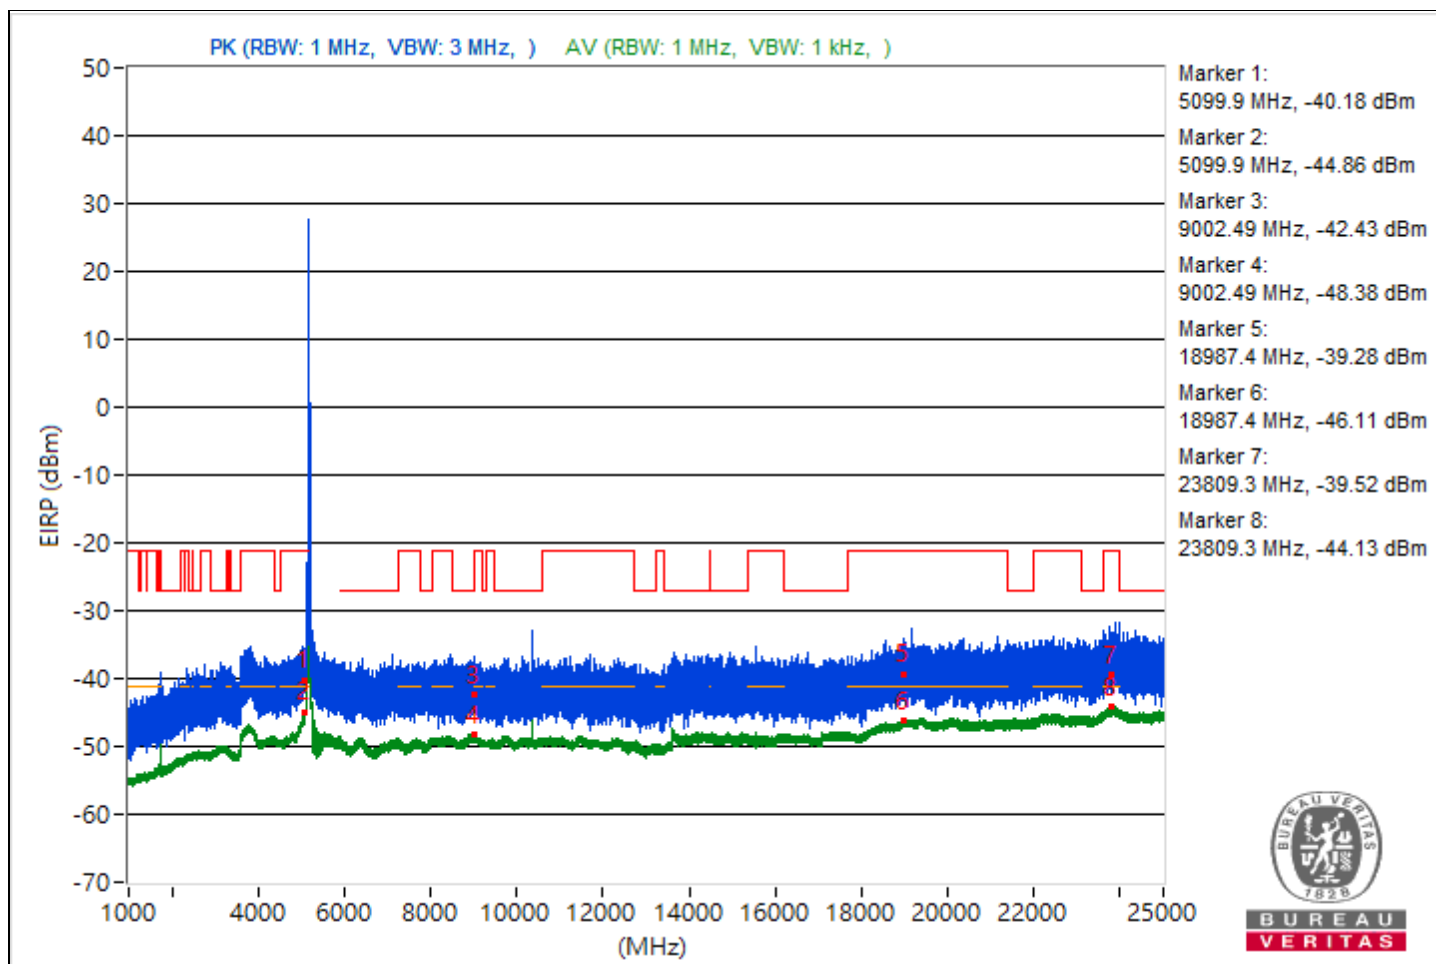


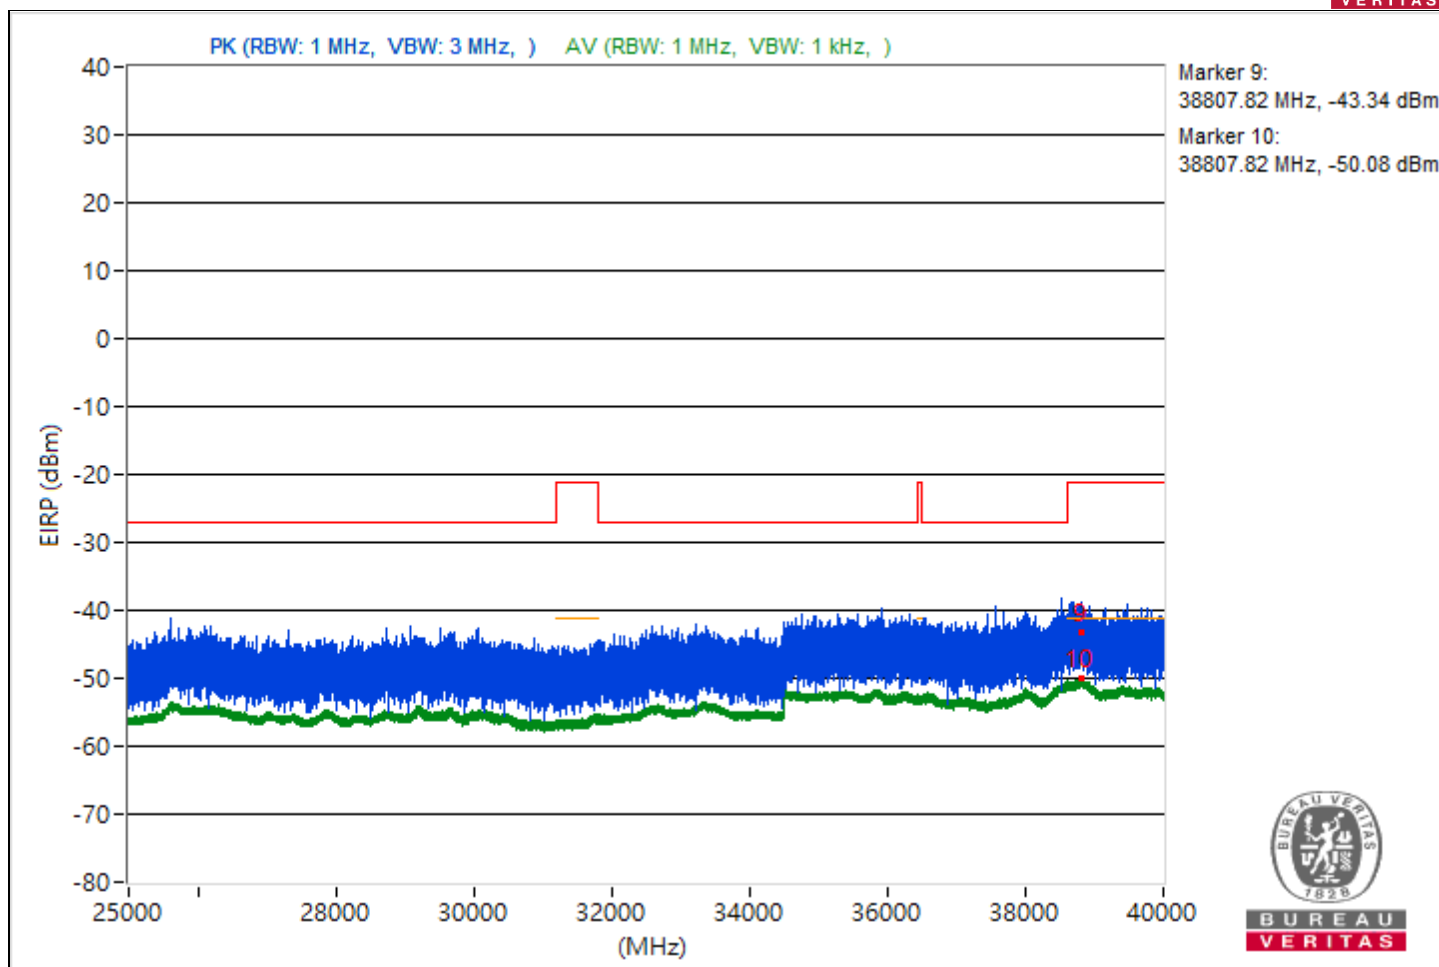


|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 40 : 5200 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu        |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5099.04         | 57.36 PK                | 74             | -16.64      | -46.27                  | 8.37                   | -37.9            |
| 2                            | 5099.04         | 50.75 AV                | 54             | -3.25       | -52.88                  | 8.37                   | -44.51           |
| 3                            | 9003.56         | 56.42 PK                | 74             | -17.58      | -47.21                  | 8.37                   | -38.84           |
| 4                            | 9003.56         | 46.92 AV                | 54             | -7.08       | -56.71                  | 8.37                   | -48.34           |
| 5                            | 18961.7         | 55.66 PK                | 74             | -18.34      | -47.97                  | 8.37                   | -39.6            |
| 6                            | 18961.7         | 49.06 AV                | 54             | -4.94       | -54.57                  | 8.37                   | -46.2            |
| 7                            | 23803.4         | 59.1 PK                 | 74             | -14.9       | -44.53                  | 8.37                   | -36.16           |
| 8                            | 23803.4         | 51.15 AV                | 54             | -2.85       | -52.48                  | 8.37                   | -44.11           |
| 9                            | 38814.04        | 50.88 PK                | 74             | -23.12      | -52.75                  | 8.37                   | -44.38           |
| 10                           | 38814.04        | 45.09 AV                | 54             | -8.91       | -58.54                  | 8.37                   | -50.17           |

Note: Margin value = Emission Level - Limit value

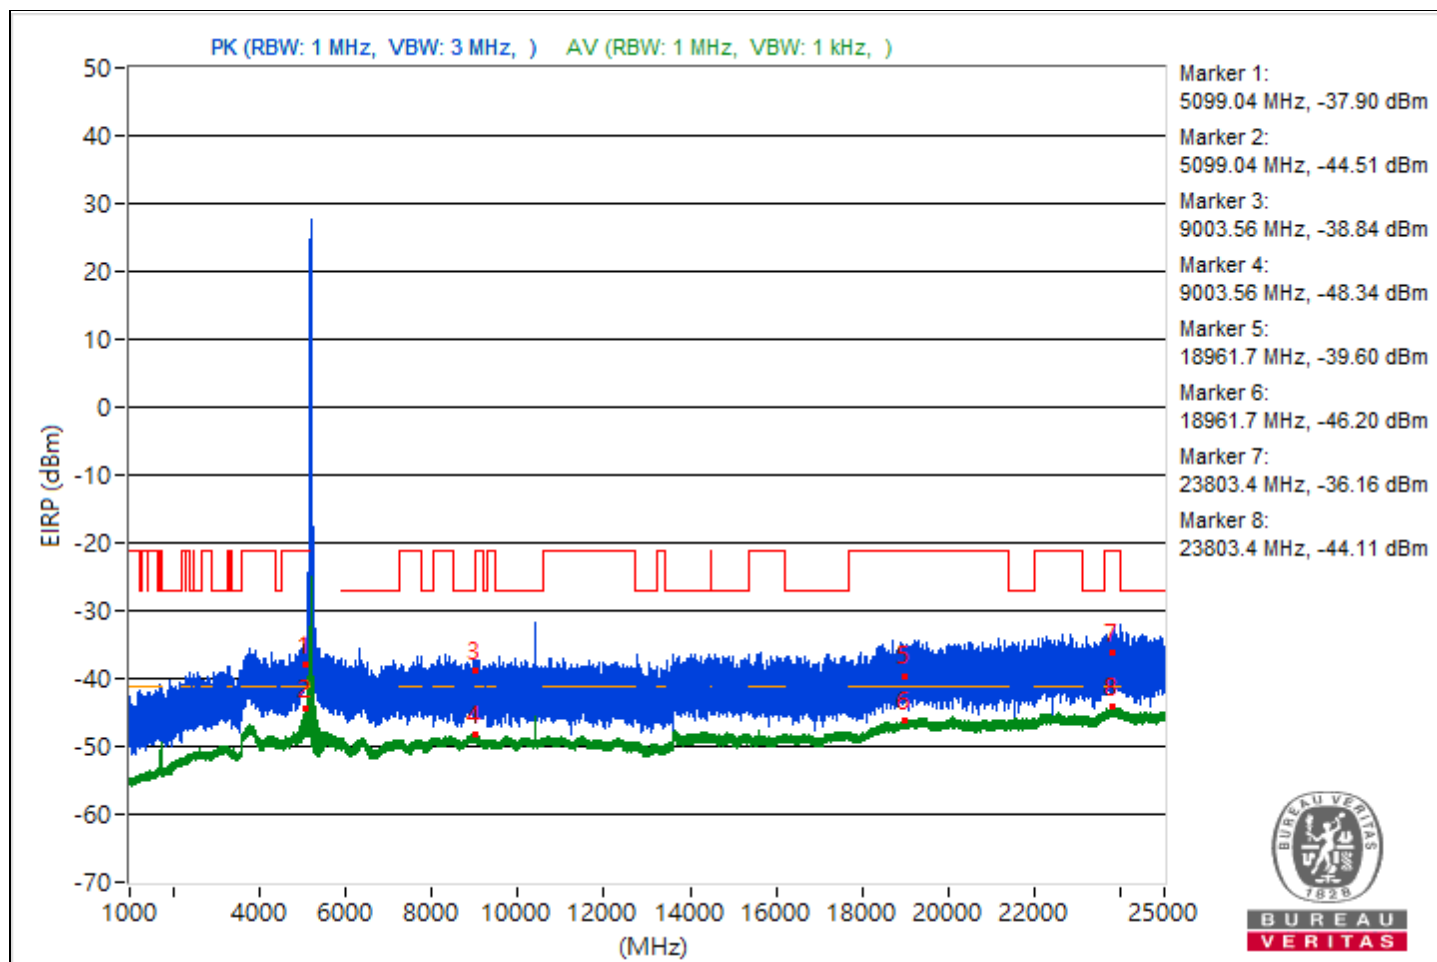


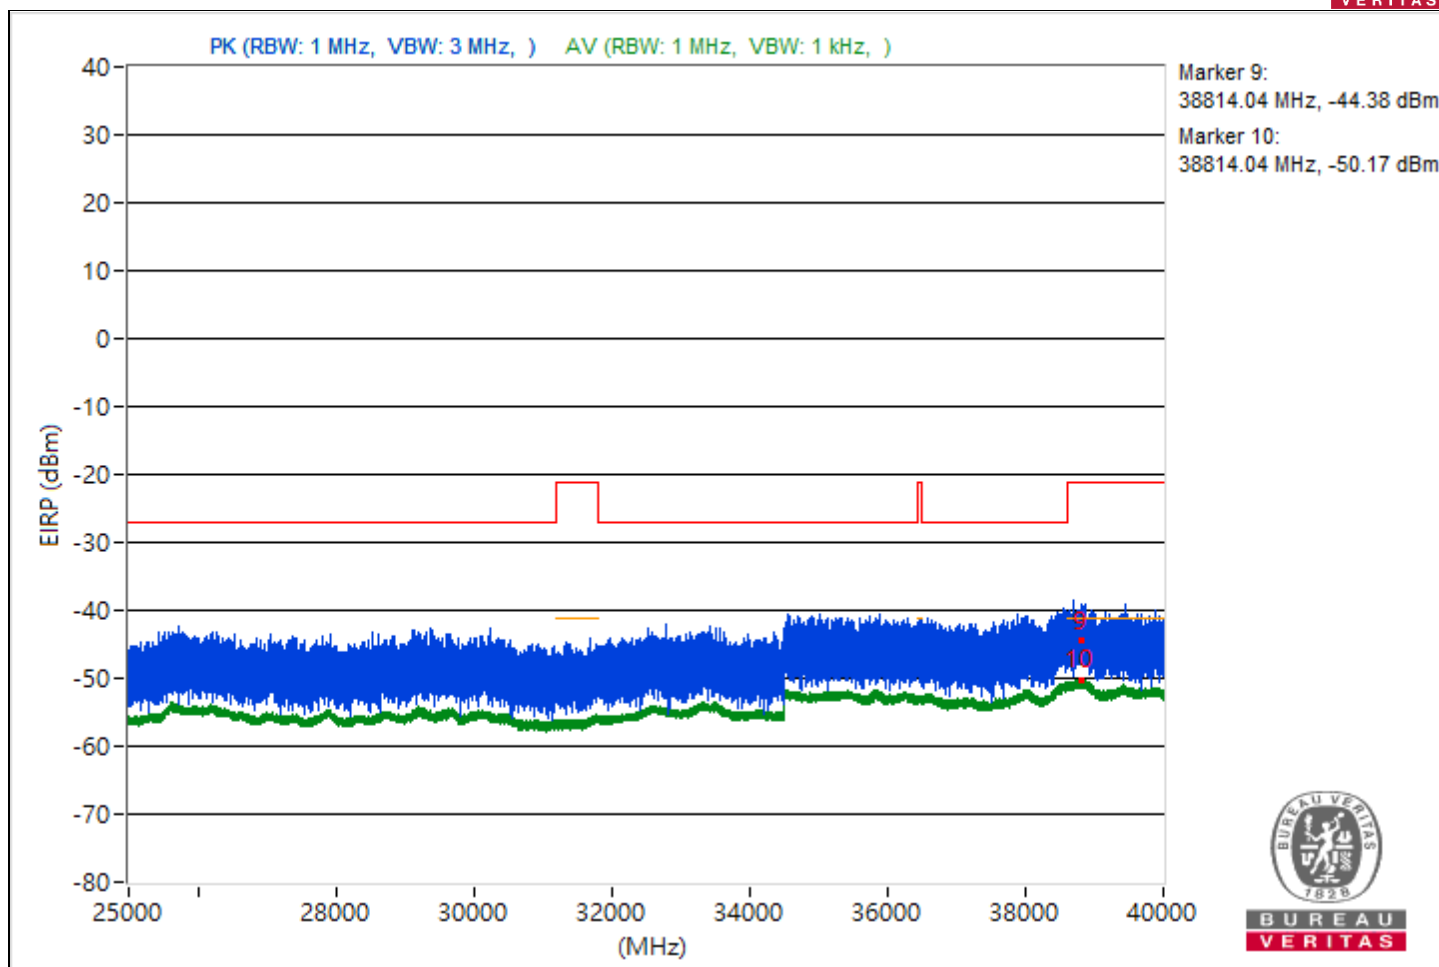


|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 48 : 5240 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu        |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5095.47         | 58.54 PK                | 74             | -15.46      | -45.09                  | 8.37                   | -36.72           |
| 2                            | 5095.47         | 50.13 AV                | 54             | -3.87       | -53.5                   | 8.37                   | -45.13           |
| 3                            | 9005.78         | 56.23 PK                | 74             | -17.77      | -47.4                   | 8.37                   | -39.03           |
| 4                            | 9005.78         | 46.96 AV                | 54             | -7.04       | -56.67                  | 8.37                   | -48.3            |
| 5                            | 18978.1         | 56.52 PK                | 74             | -17.48      | -47.11                  | 8.37                   | -38.74           |
| 6                            | 18978.1         | 49.17 AV                | 54             | -4.83       | -54.46                  | 8.37                   | -46.09           |
| 7                            | 23860.9         | 57.32 PK                | 74             | -16.68      | -46.31                  | 8.37                   | -37.94           |
| 8                            | 23860.9         | 51.3 AV                 | 54             | -2.7        | -52.33                  | 8.37                   | -43.96           |
| 9                            | 38818.4         | 51.22 PK                | 74             | -22.78      | -52.41                  | 8.37                   | -44.04           |
| 10                           | 38818.4         | 45.25 AV                | 54             | -8.75       | -58.38                  | 8.37                   | -50.01           |

Note: Margin value = Emission Level - Limit value

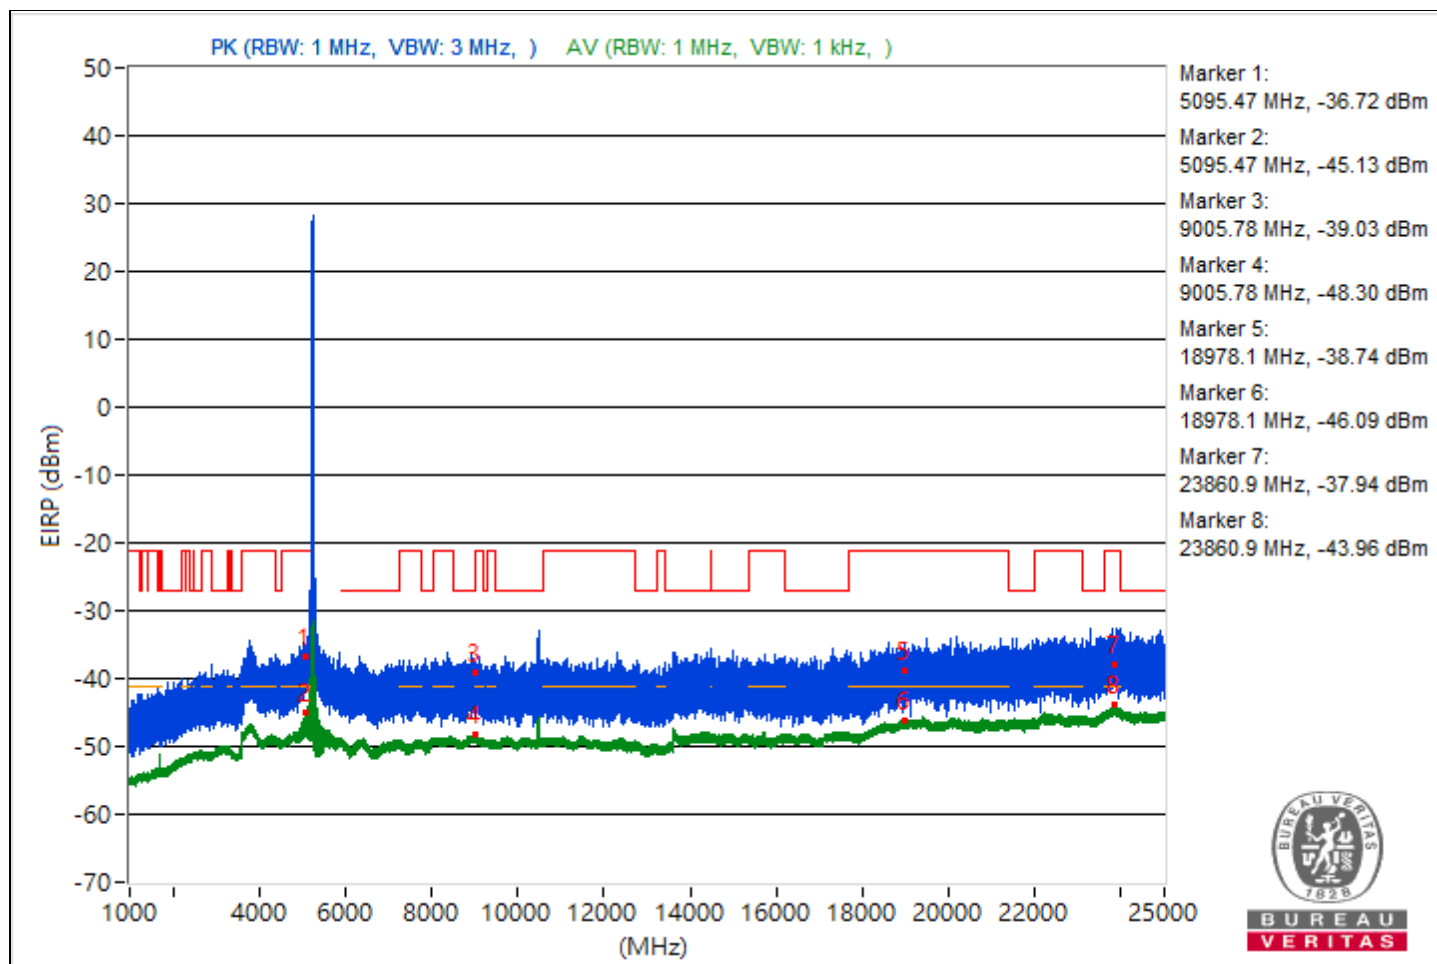


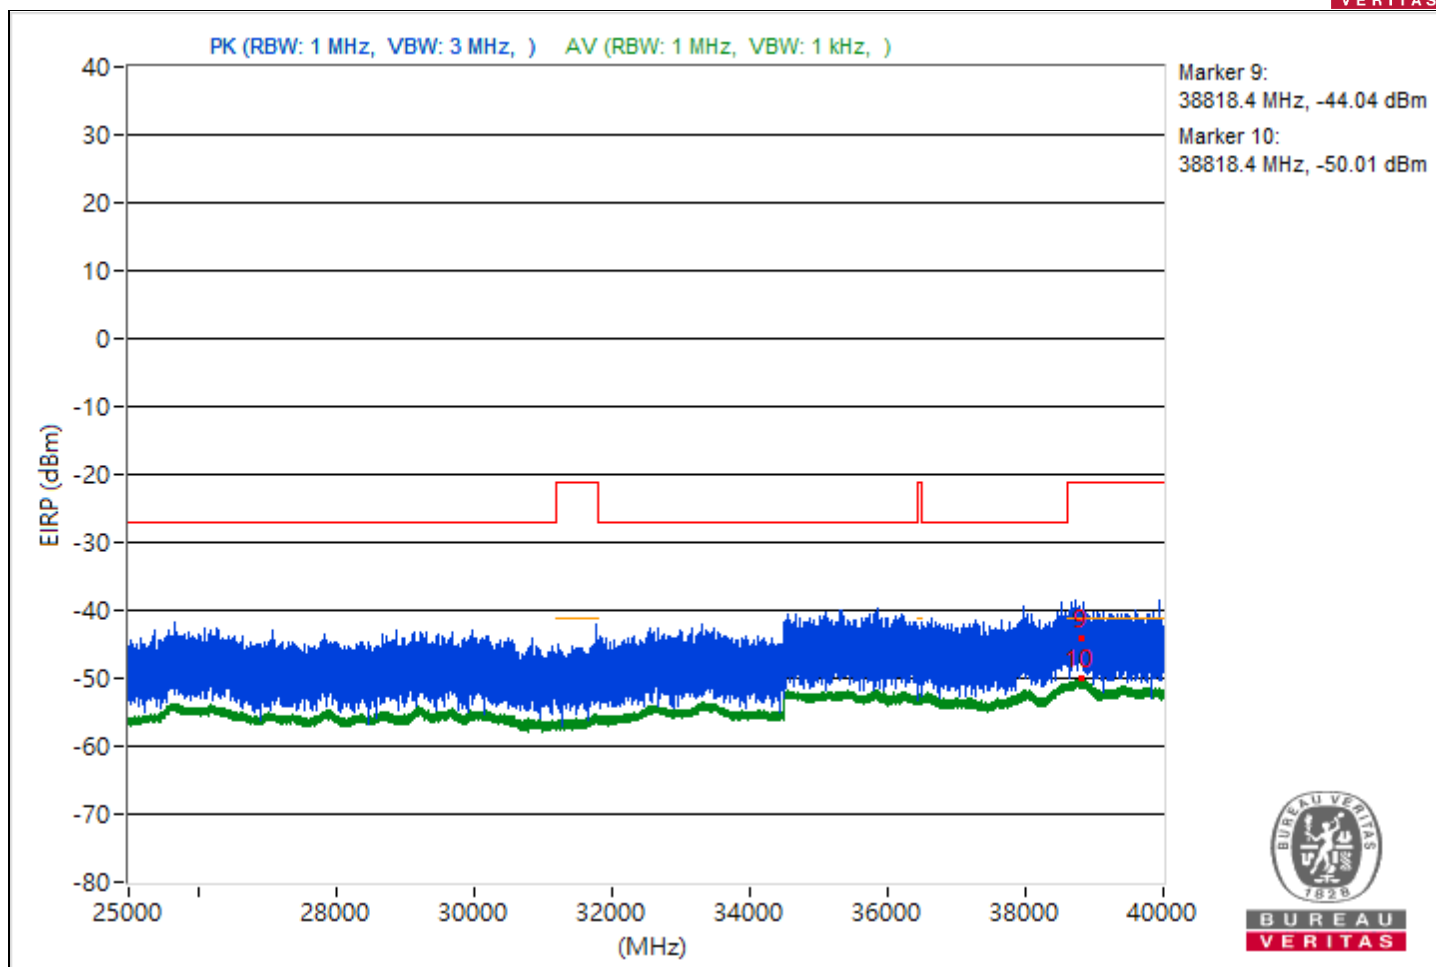


|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 52 : 5260 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu        |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5097.1          | 55.58 PK                | 74             | -18.42      | -48.05                  | 8.37                   | -39.68           |
| 2                            | 5097.1          | 49.88 AV                | 54             | -4.12       | -53.75                  | 8.37                   | -45.38           |
| 3                            | 8415.82         | 54.67 PK                | 74             | -19.33      | -48.96                  | 8.37                   | -40.59           |
| 4                            | 8415.82         | 46.92 AV                | 54             | -7.08       | -56.71                  | 8.37                   | -48.34           |
| 5                            | 18946.8         | 55 PK                   | 74             | -19         | -48.63                  | 8.37                   | -40.26           |
| 6                            | 18946.8         | 49 AV                   | 54             | -5          | -54.63                  | 8.37                   | -46.26           |
| 7                            | 23820.7         | 58.36 PK                | 74             | -15.64      | -45.27                  | 8.37                   | -36.9            |
| 8                            | 23820.7         | 51.44 AV                | 54             | -2.56       | -52.19                  | 8.37                   | -43.82           |
| 9                            | 38784.44        | 52.23 PK                | 74             | -21.77      | -51.4                   | 8.37                   | -43.03           |
| 10                           | 38784.44        | 45.14 AV                | 54             | -8.86       | -58.49                  | 8.37                   | -50.12           |

Note: Margin value = Emission Level - Limit value

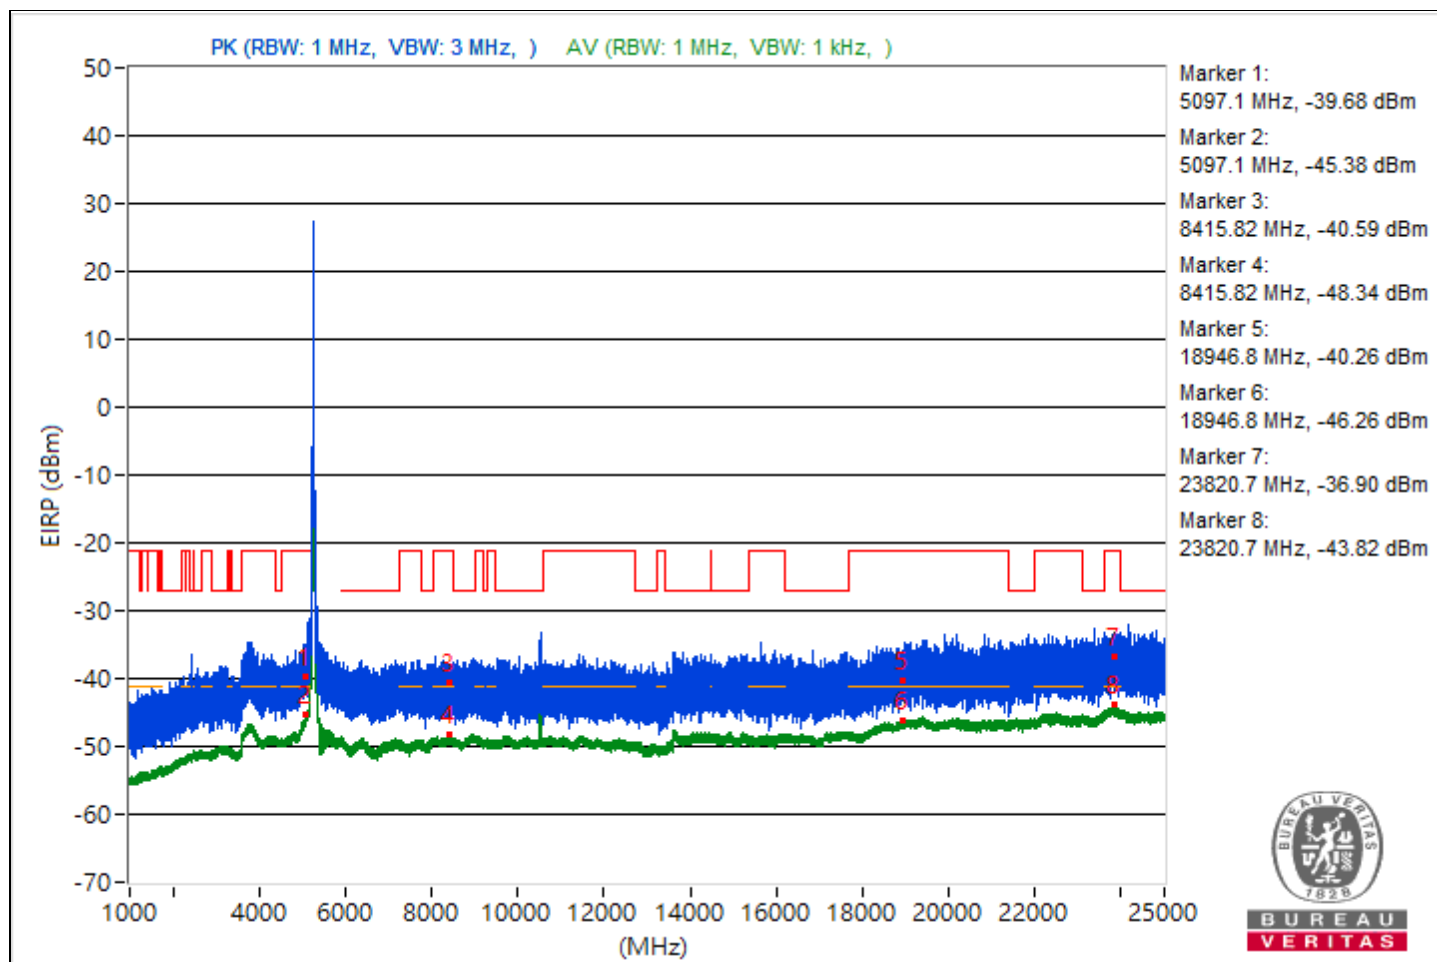


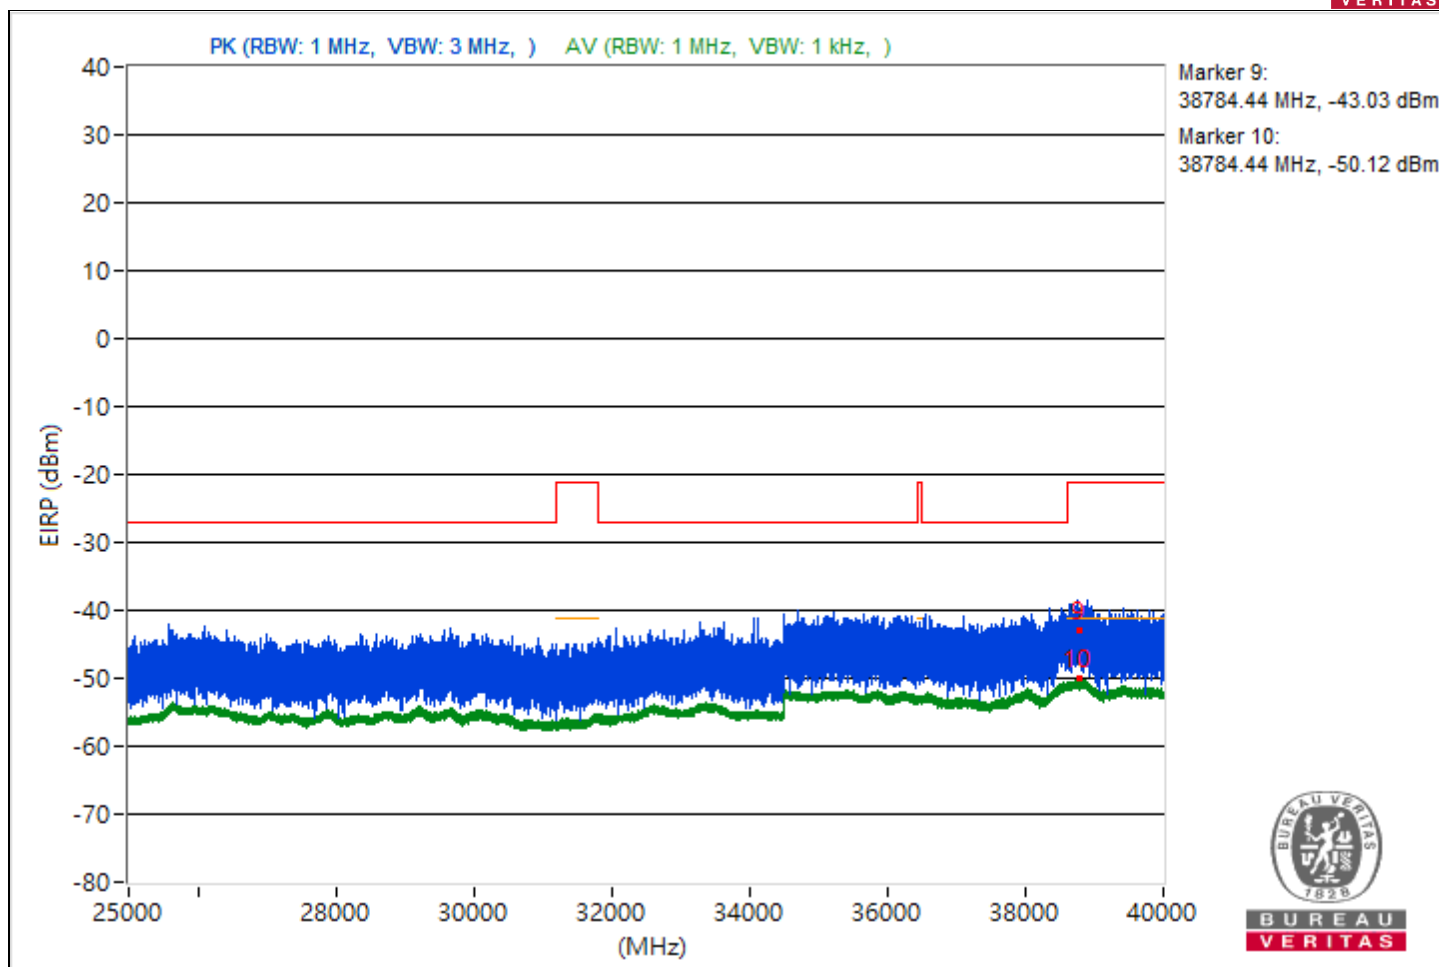


|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 60 : 5300 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu        |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5090.02         | 55.5 PK                 | 74             | -18.5       | -48.13                  | 8.37                   | -39.76           |
| 2                            | 5090.02         | 48.97 AV                | 54             | -5.03       | -54.66                  | 8.37                   | -46.29           |
| 3                            | 10600.09        | 59.11 PK                | 74             | -14.89      | -44.52                  | 8.37                   | -36.15           |
| 4                            | 10600.09        | 50.26 AV                | 54             | -3.74       | -53.37                  | 8.37                   | -45              |
| 5                            | 18939.6         | 54.92 PK                | 74             | -19.08      | -48.71                  | 8.37                   | -40.34           |
| 6                            | 18939.6         | 49.02 AV                | 54             | -4.98       | -54.61                  | 8.37                   | -46.24           |
| 7                            | 23793.3         | 58.3 PK                 | 74             | -15.7       | -45.33                  | 8.37                   | -36.96           |
| 8                            | 23793.3         | 51.26 AV                | 54             | -2.74       | -52.37                  | 8.37                   | -44              |
| 9                            | 38801.07        | 48 PK                   | 74             | -26         | -55.63                  | 8.37                   | -47.26           |
| 10                           | 38801.07        | 45.49 AV                | 54             | -8.51       | -58.14                  | 8.37                   | -49.77           |

Note: Margin value = Emission Level - Limit value

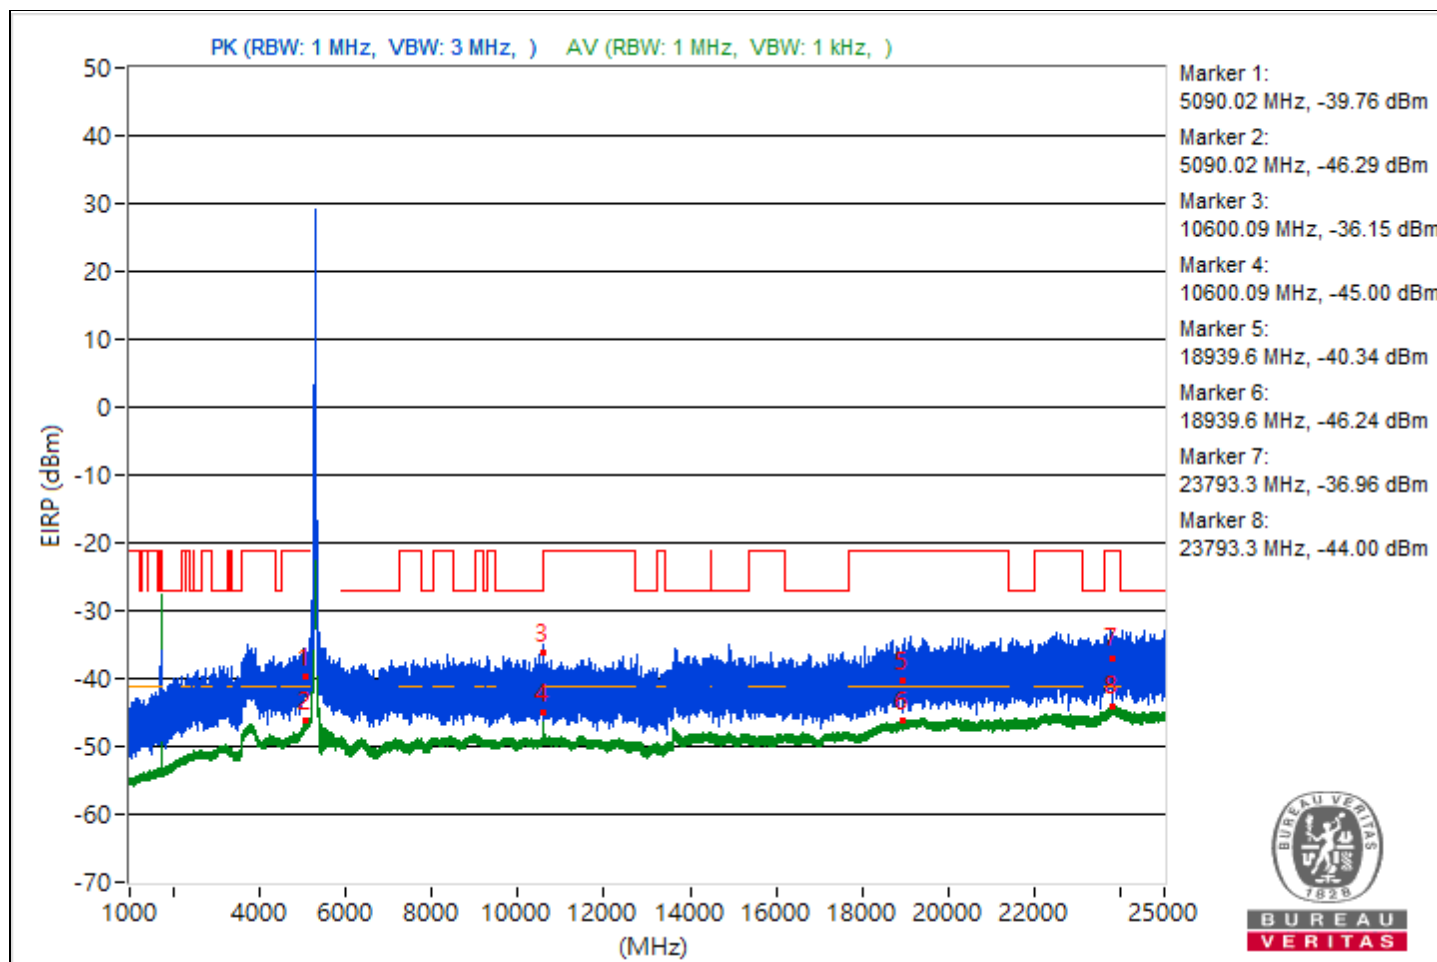


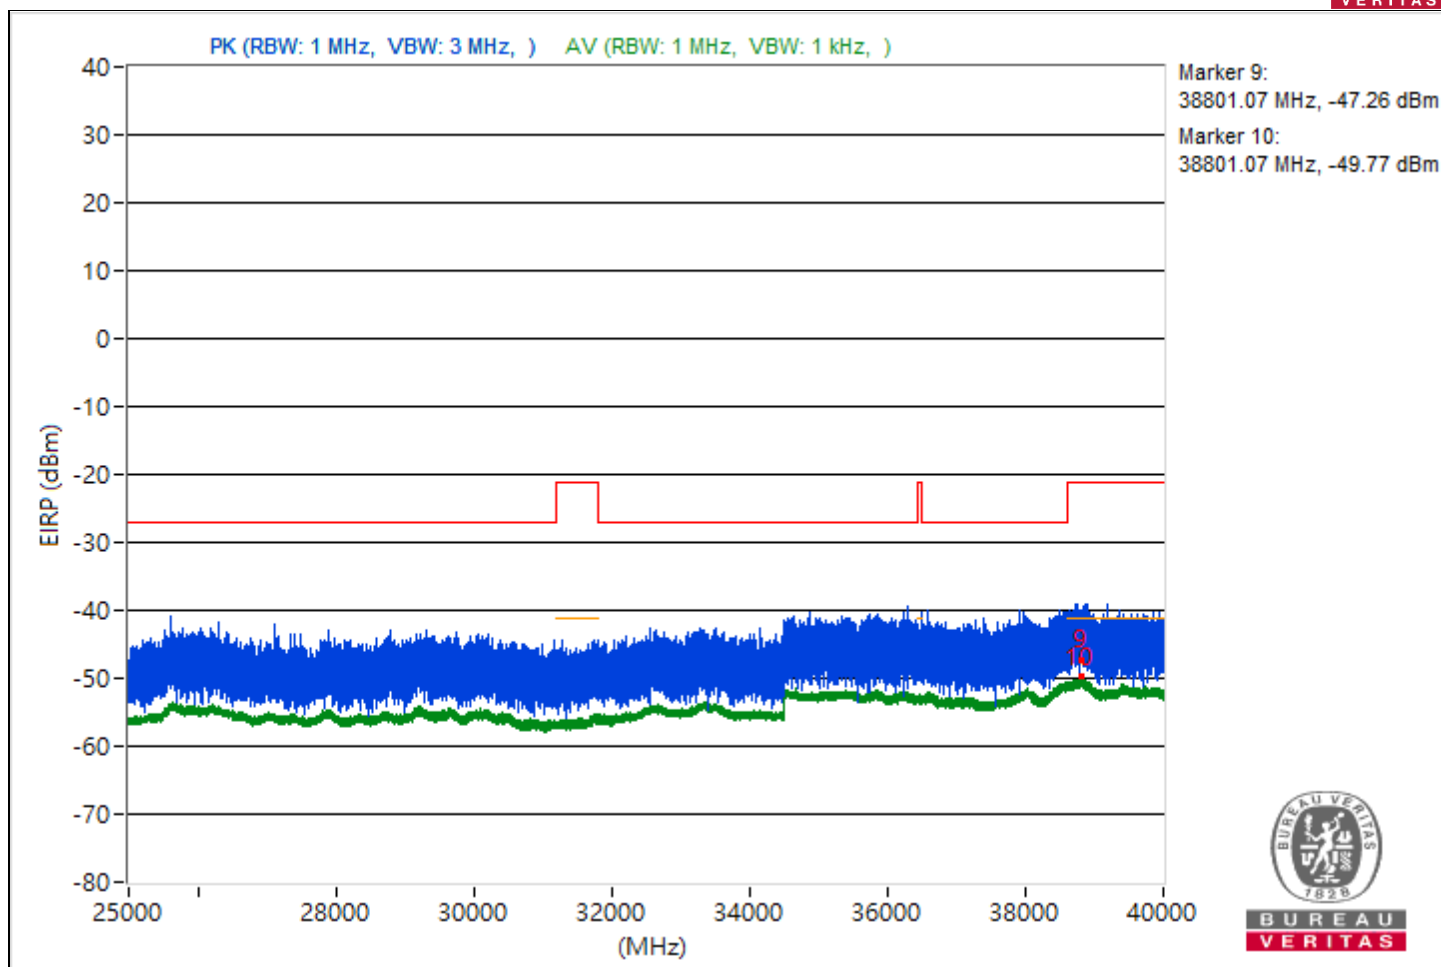


|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 64 : 5320 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu        |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5099.51         | 56.35 PK                | 74             | -17.65      | -47.28                  | 8.37                   | -38.91           |
| 2                            | 5099.51         | 48.82 AV                | 54             | -5.18       | -54.81                  | 8.37                   | -46.44           |
| 3                            | 10639.91        | 56.68 PK                | 74             | -17.32      | -46.95                  | 8.37                   | -38.58           |
| 4                            | 10639.91        | 49.99 AV                | 54             | -4.01       | -53.64                  | 8.37                   | -45.27           |
| 5                            | 18995.8         | 53.68 PK                | 74             | -20.32      | -49.95                  | 8.37                   | -41.58           |
| 6                            | 18995.8         | 49.02 AV                | 54             | -4.98       | -54.61                  | 8.37                   | -46.24           |
| 7                            | 23841.9         | 57.57 PK                | 74             | -16.43      | -46.06                  | 8.37                   | -37.69           |
| 8                            | 23841.9         | 51.14 AV                | 54             | -2.86       | -52.49                  | 8.37                   | -44.12           |
| 9                            | 38803.56        | 51.22 PK                | 74             | -22.78      | -52.41                  | 8.37                   | -44.04           |
| 10                           | 38803.56        | 45.18 AV                | 54             | -8.82       | -58.45                  | 8.37                   | -50.08           |

Note: Margin value = Emission Level - Limit value

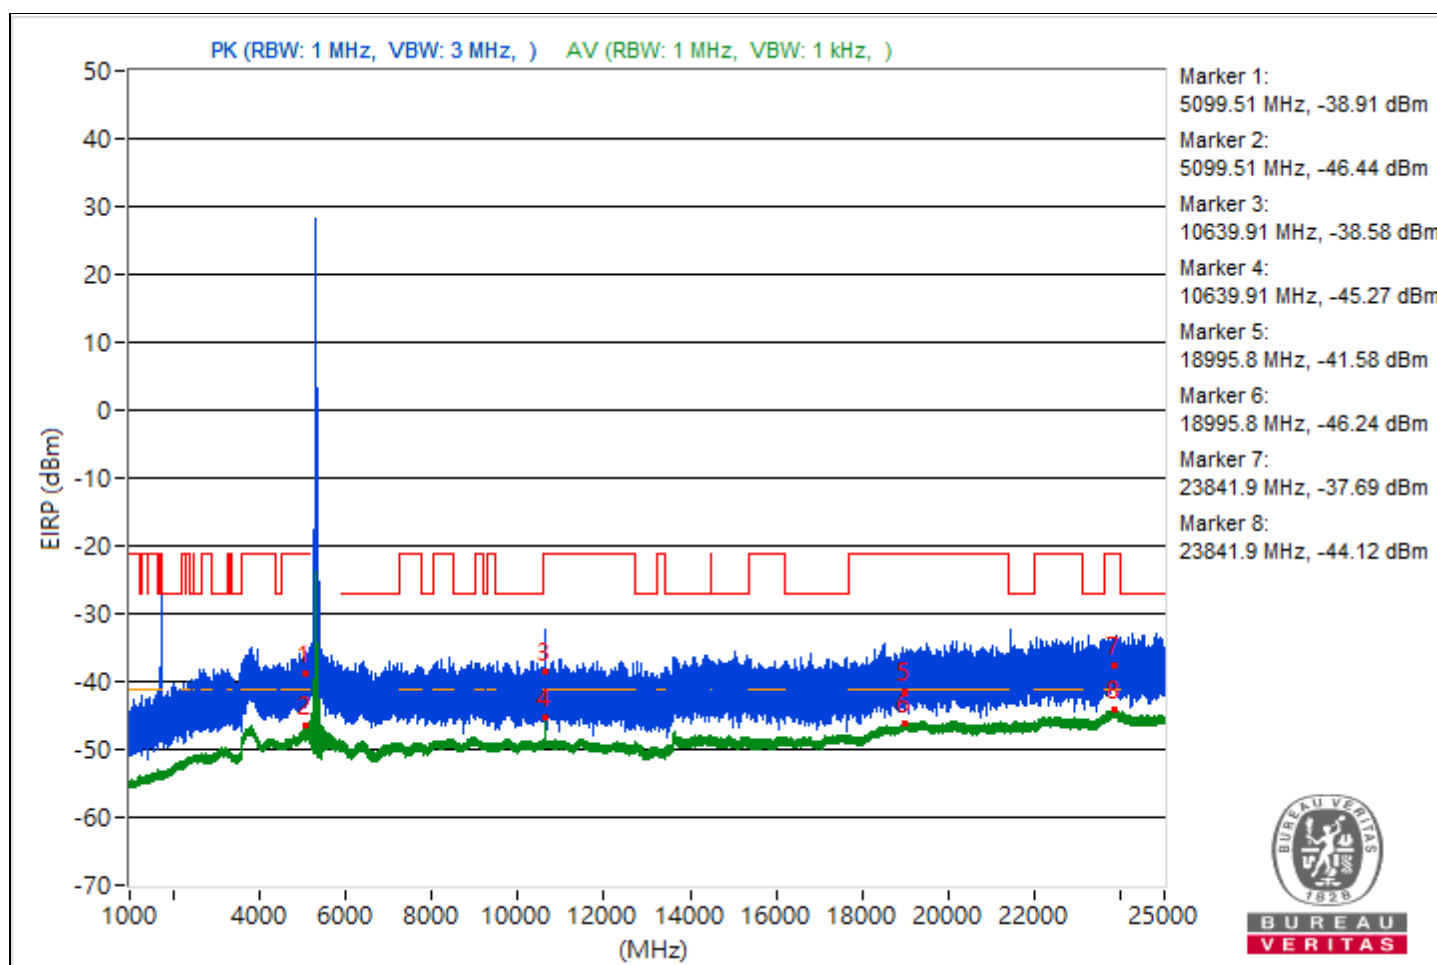


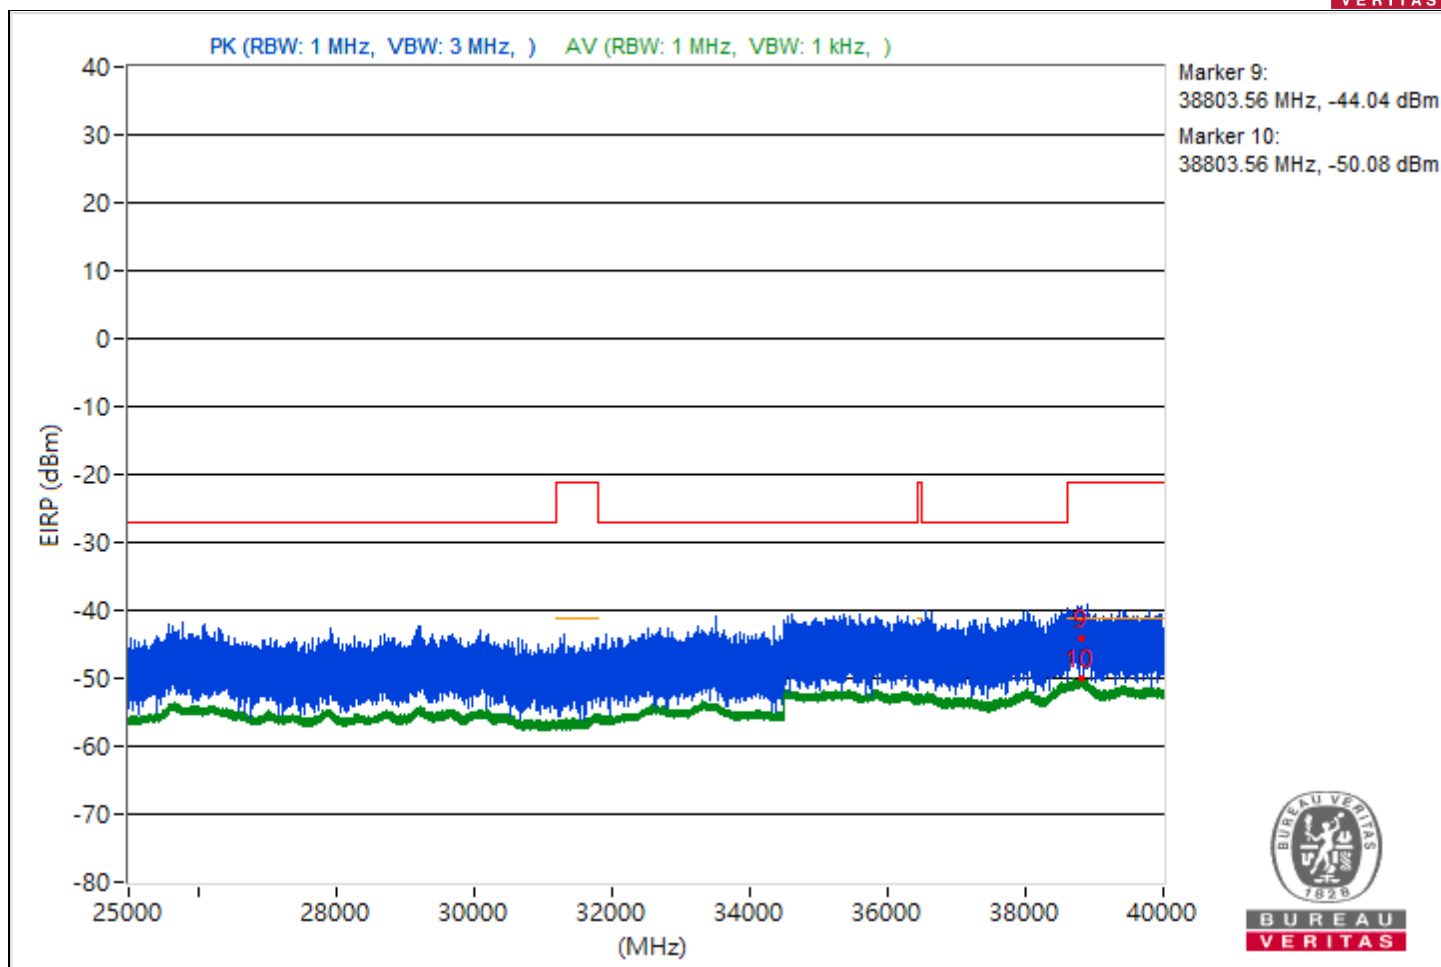


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 100 : 5500 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3791.76         | 57.65 PK                | 74             | -16.35      | -45.98                  | 8.37                   | -37.61           |
| 2                            | 3791.76         | 48.57 AV                | 54             | -5.43       | -55.06                  | 8.37                   | -46.69           |
| 3                            | 10997.87        | 54.88 PK                | 74             | -19.12      | -48.75                  | 8.37                   | -40.38           |
| 4                            | 10997.87        | 47.74 AV                | 54             | -6.26       | -55.89                  | 8.37                   | -47.52           |
| 5                            | 18988.6         | 53.33 PK                | 74             | -20.67      | -50.3                   | 8.37                   | -41.93           |
| 6                            | 18988.6         | 49.02 AV                | 54             | -4.98       | -54.61                  | 8.37                   | -46.24           |
| 7                            | 23807.7         | 58.04 PK                | 74             | -15.96      | -45.59                  | 8.37                   | -37.22           |
| 8                            | 23807.7         | 51.18 AV                | 54             | -2.82       | -52.45                  | 8.37                   | -44.08           |
| 9                            | 38803.02        | 50.77 PK                | 74             | -23.23      | -52.86                  | 8.37                   | -44.49           |
| 10                           | 38803.02        | 45.14 AV                | 54             | -8.86       | -58.49                  | 8.37                   | -50.12           |

Note: Margin value = Emission Level - Limit value

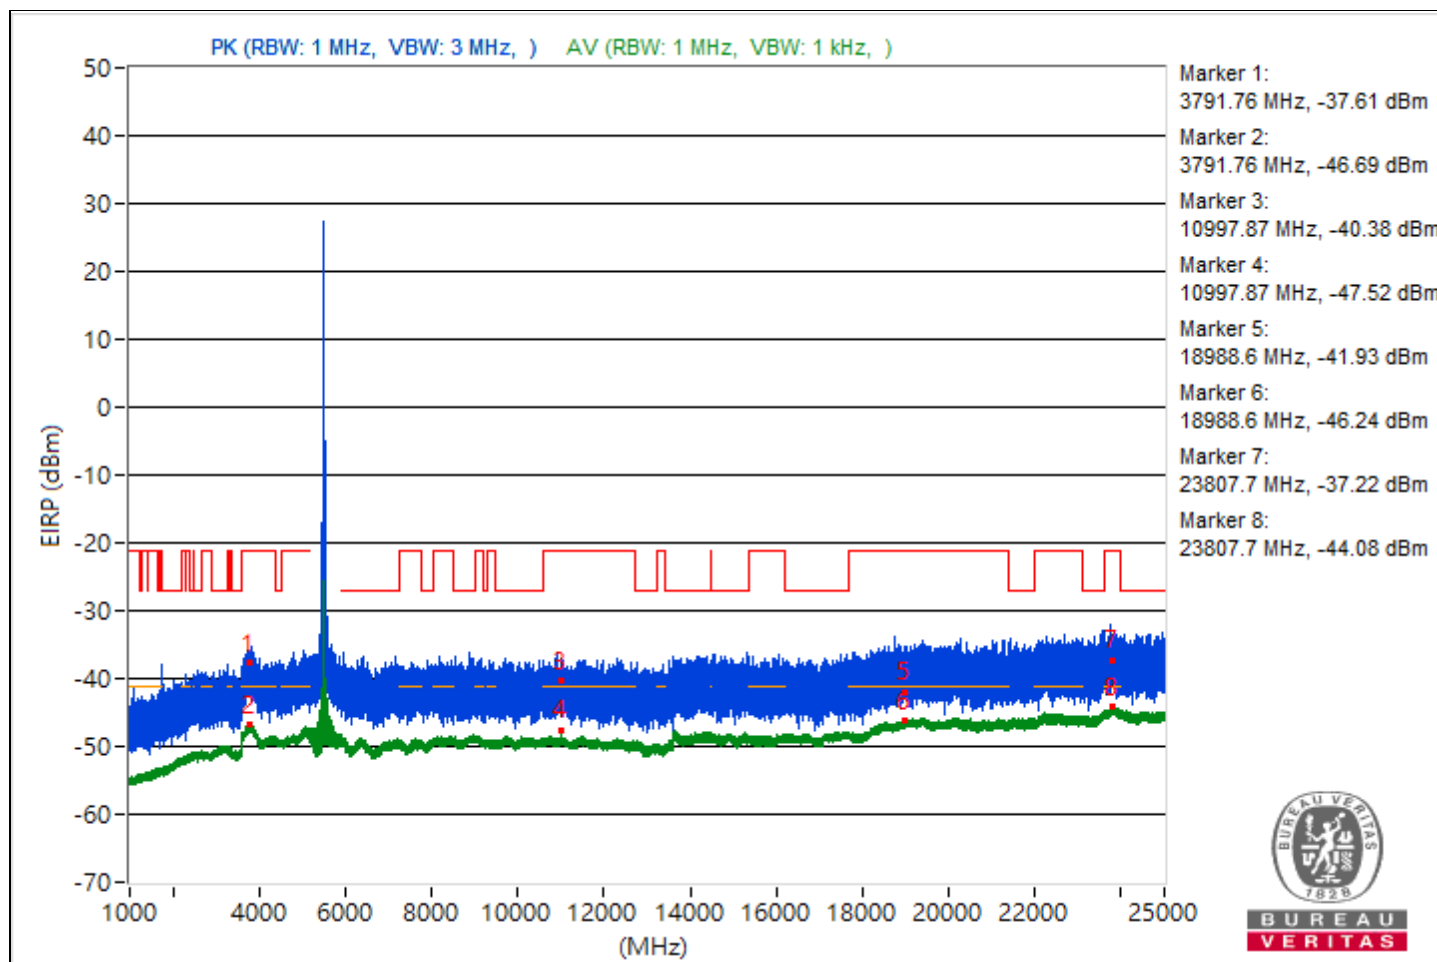

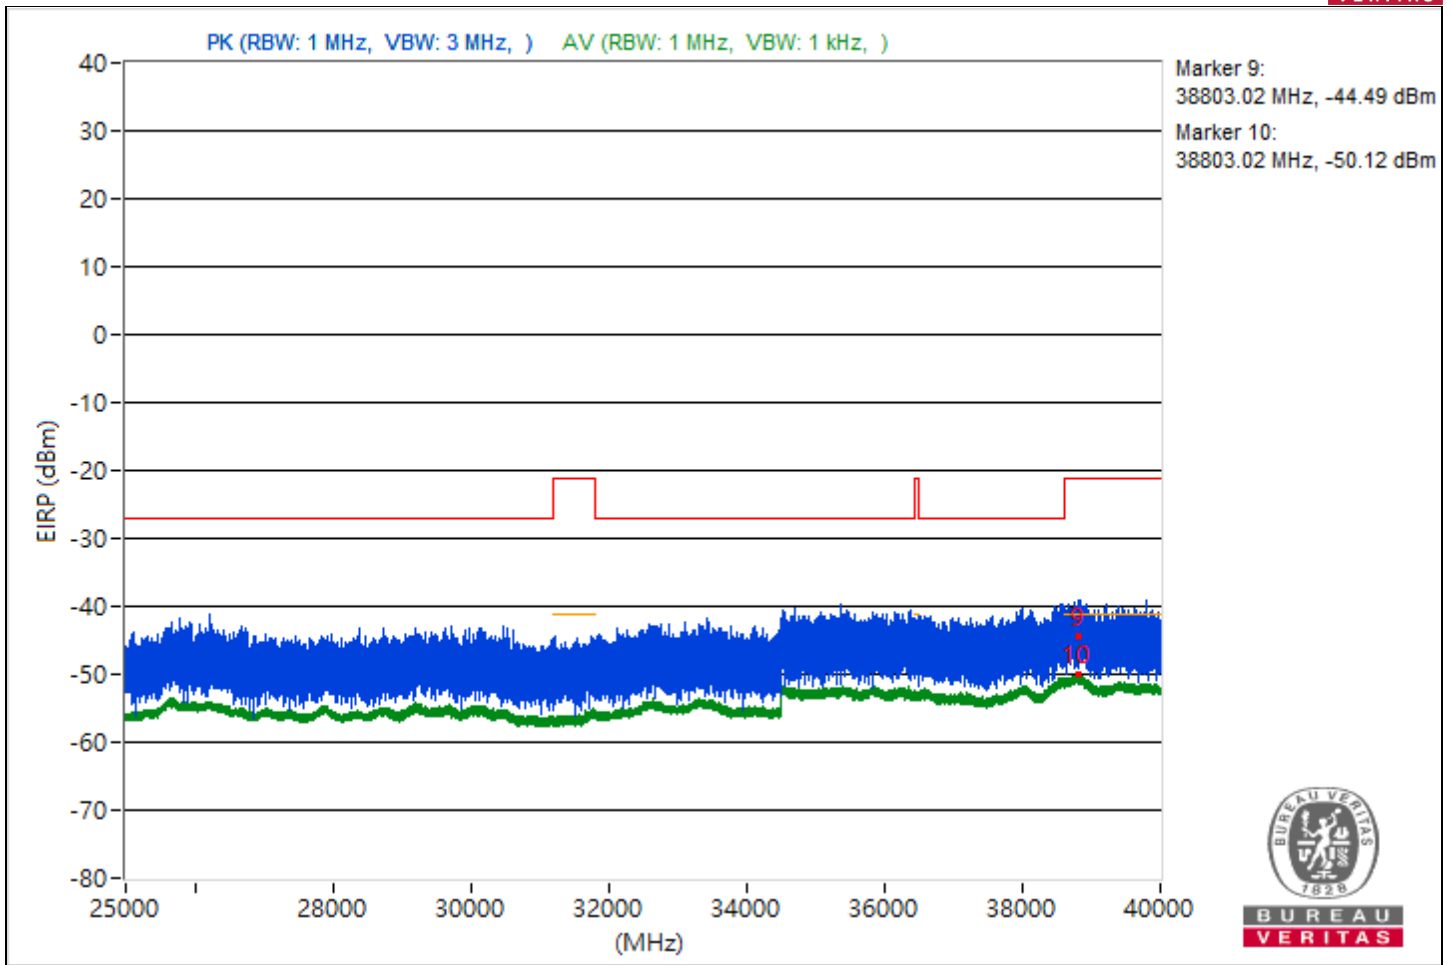



|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 116 : 5580 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 3820.69         | 56.92 PK                | 74             | -17.08      | -46.71                  | 8.37                   | -38.34           |
| 2   | 3820.69         | 48.47 AV                | 54             | -5.53       | -55.16                  | 8.37                   | -46.79           |
| 3   | 11160.89        | 53.32 PK                | 74             | -20.68      | -50.31                  | 8.37                   | -41.94           |
| 4   | 11160.89        | 47.26 AV                | 54             | -6.74       | -56.37                  | 8.37                   | -48.00           |
| 5   | 18970.6         | 54.07 PK                | 74             | -19.93      | -49.56                  | 8.37                   | -41.19           |
| 6   | 18970.6         | 49.34 AV                | 54             | -4.66       | -54.29                  | 8.37                   | -45.92           |
| 7   | 23810           | 57.67 PK                | 74             | -16.33      | -45.96                  | 8.37                   | -37.59           |
| 8   | 23810           | 51.3 AV                 | 54             | -2.7        | -52.33                  | 8.37                   | -43.96           |
| 9   | 38766.49        | 53.61 PK                | 74             | -20.39      | -50.02                  | 8.37                   | -41.65           |
| 10  | 38766.49        | 45.29 AV                | 54             | -8.71       | -58.34                  | 8.37                   | -49.97           |

Note: Margin value = Emission Level - Limit value

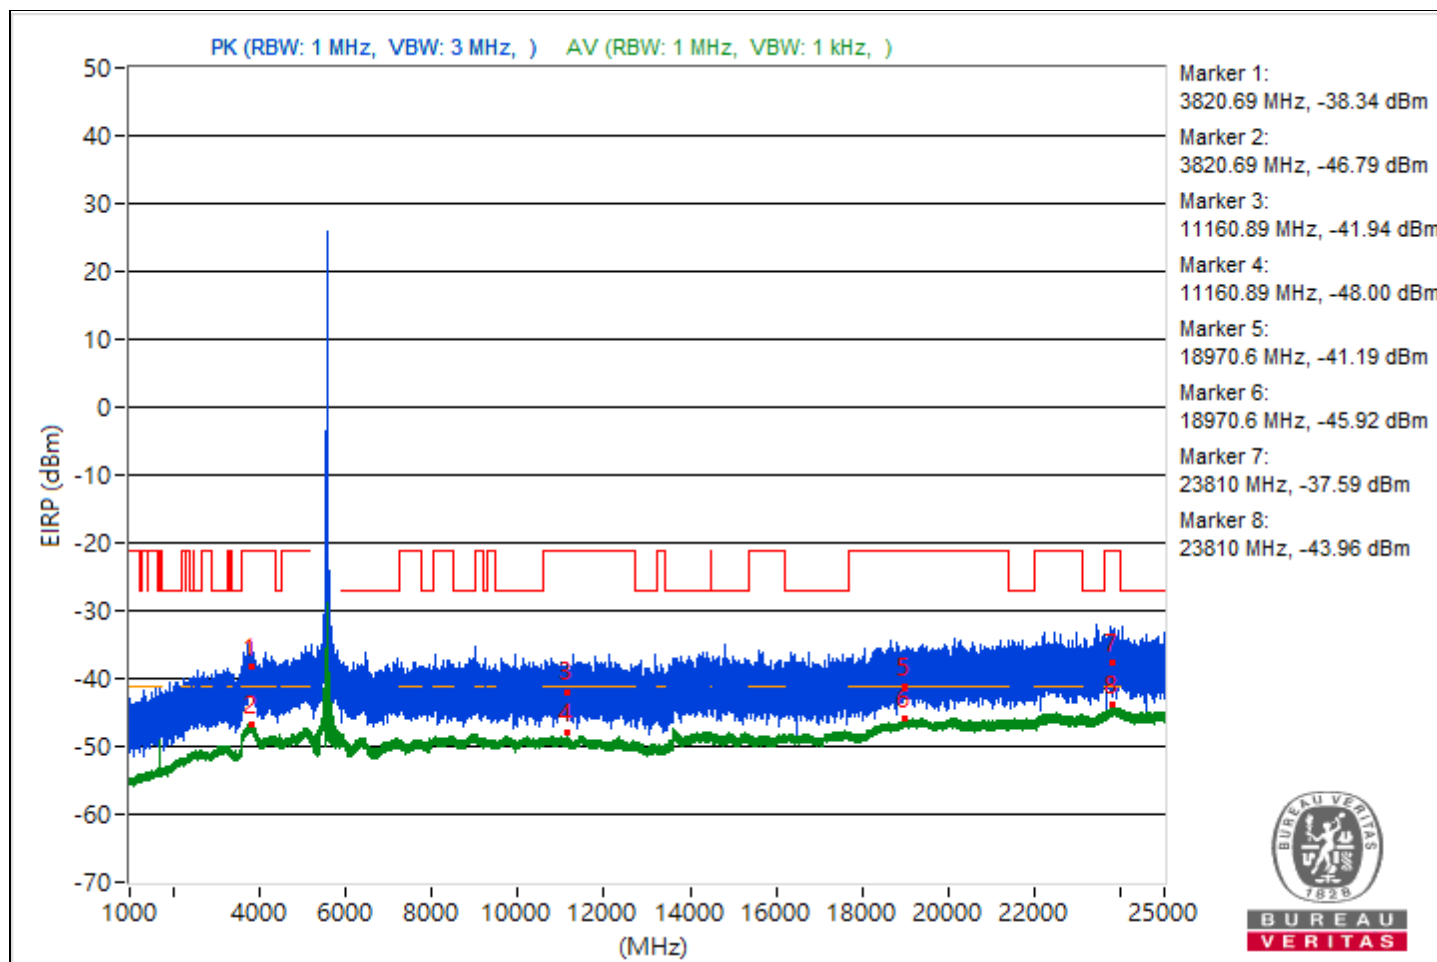


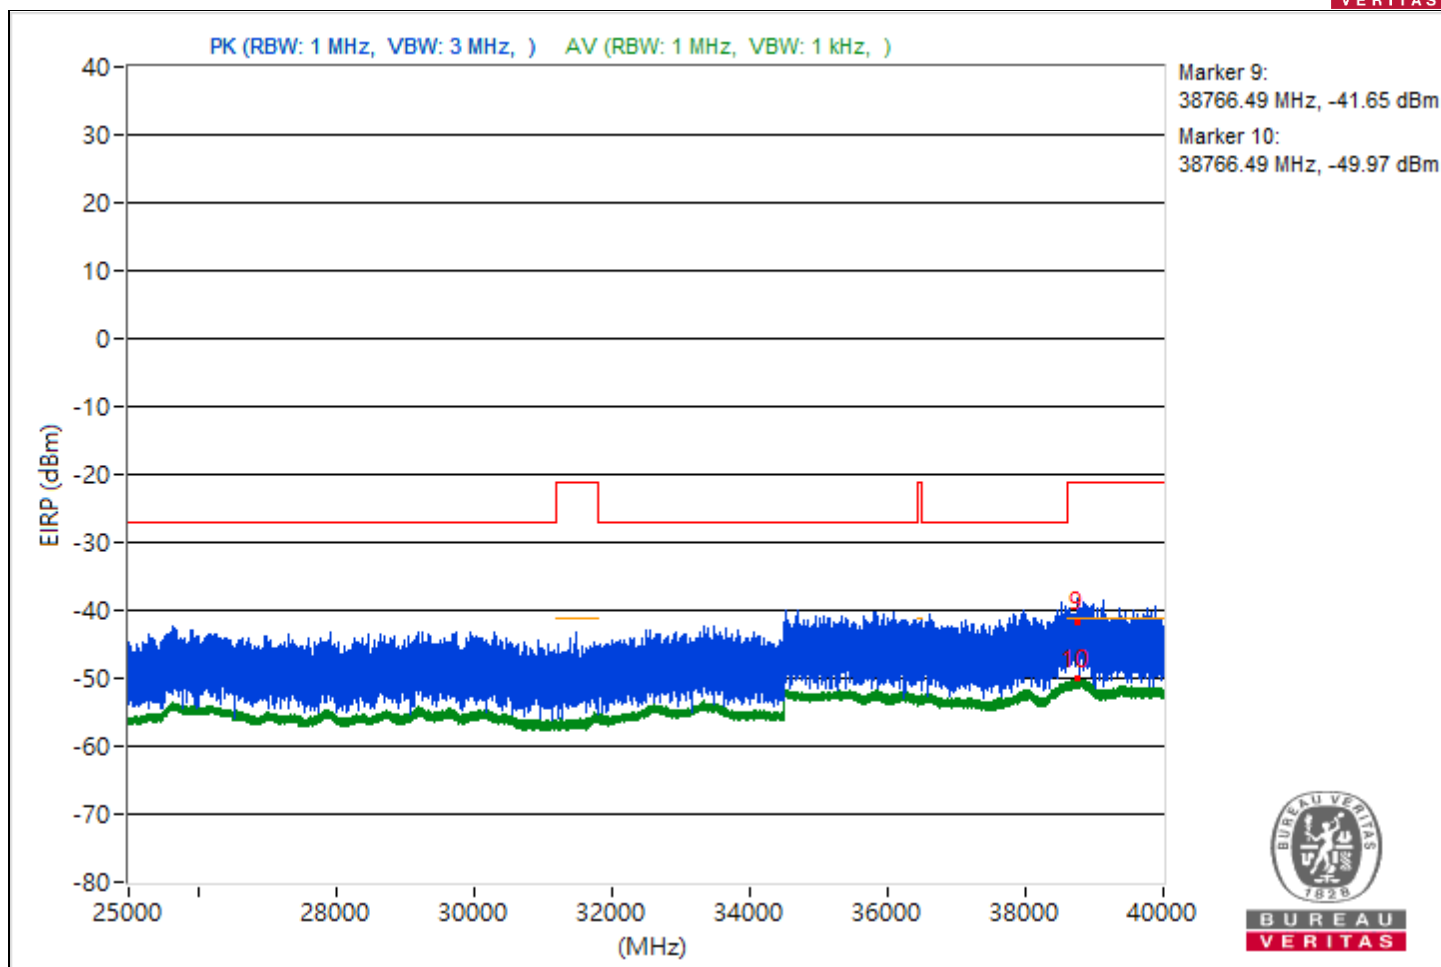


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 140 : 5700 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 1720.69         | 55 PK                   | 74             | -19         | -48.63                  | 8.37                   | -40.26           |
| 2                            | 1720.69         | 48.84 AV                | 54             | -5.16       | -54.79                  | 8.37                   | -46.42           |
| 3                            | 11400.36        | 56.5 PK                 | 74             | -17.5       | -47.13                  | 8.37                   | -38.76           |
| 4                            | 11400.36        | 47.37 AV                | 54             | -6.63       | -56.26                  | 8.37                   | -47.89           |
| 5                            | 18999.4         | 57.58 PK                | 74             | -16.42      | -46.05                  | 8.37                   | -37.68           |
| 6                            | 18999.4         | 49.12 AV                | 54             | -4.88       | -54.51                  | 8.37                   | -46.14           |
| 7                            | 23773.2         | 58.47 PK                | 74             | -15.53      | -45.16                  | 8.37                   | -36.79           |
| 8                            | 23773.2         | 51.18 AV                | 54             | -2.82       | -52.45                  | 8.37                   | -44.08           |
| 9                            | 38765.24        | 53.11 PK                | 74             | -20.89      | -50.52                  | 8.37                   | -42.15           |
| 10                           | 38765.24        | 45.34 AV                | 54             | -8.66       | -58.29                  | 8.37                   | -49.92           |

Note: Margin value = Emission Level - Limit value

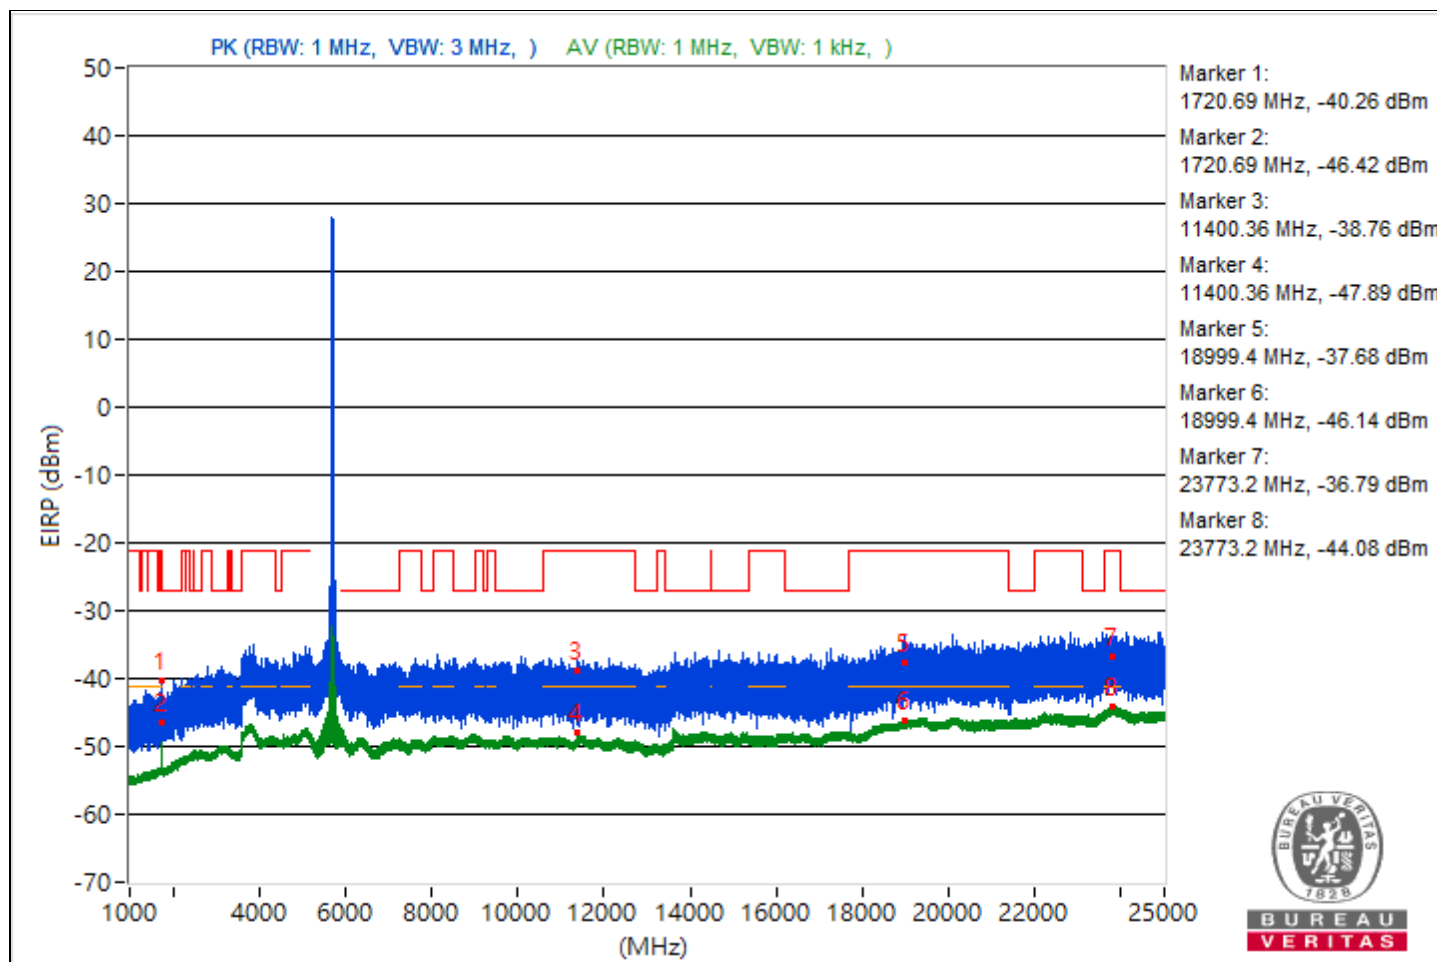


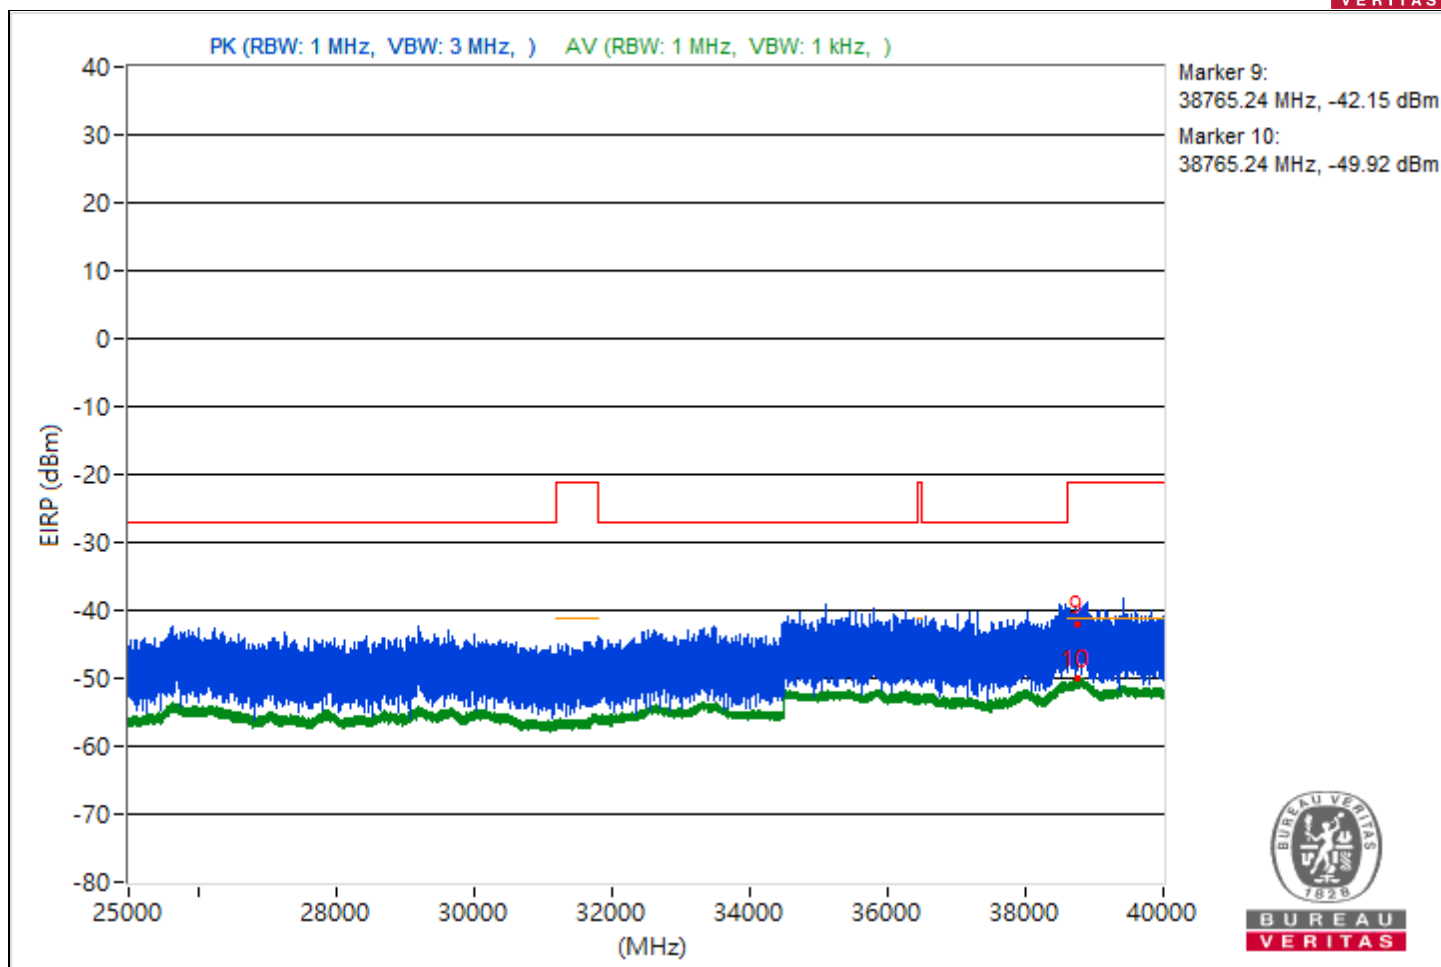


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 144 : 5720 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3785.3          | 56.18 PK                | 74             | -17.82      | -47.45                  | 8.37                   | -39.08           |
| 2                            | 3785.3          | 48.46 AV                | 54             | -5.54       | -55.17                  | 8.37                   | -46.8            |
| 3                            | 11443.11        | 54.45 PK                | 74             | -19.55      | -49.18                  | 8.37                   | -40.81           |
| 4                            | 11443.11        | 47.69 AV                | 54             | -6.31       | -55.94                  | 8.37                   | -47.57           |
| 5                            | 18989.2         | 55.11 PK                | 74             | -18.89      | -48.52                  | 8.37                   | -40.15           |
| 6                            | 18989.2         | 49.16 AV                | 54             | -4.84       | -54.47                  | 8.37                   | -46.1            |
| 7                            | 23840.6         | 58.65 PK                | 74             | -15.35      | -44.98                  | 8.37                   | -36.61           |
| 8                            | 23840.6         | 51.27 AV                | 54             | -2.73       | -52.36                  | 8.37                   | -43.99           |
| 9                            | 38770.93        | 52.11 PK                | 74             | -21.89      | -51.52                  | 8.37                   | -43.15           |
| 10                           | 38770.93        | 45.32 AV                | 54             | -8.68       | -58.31                  | 8.37                   | -49.94           |

Note: Margin value = Emission Level - Limit value

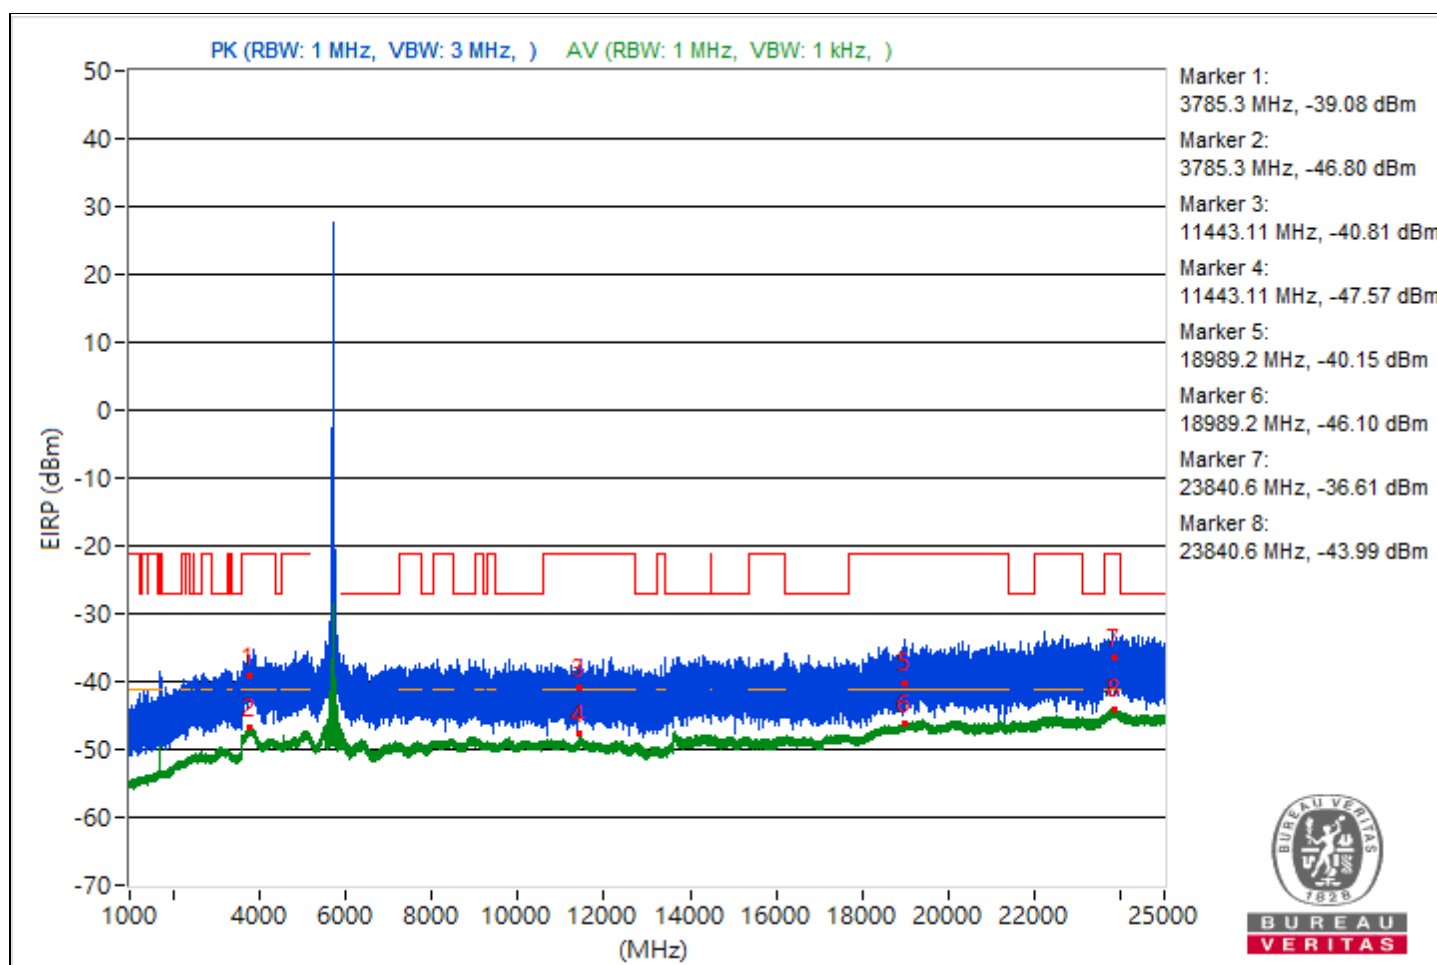


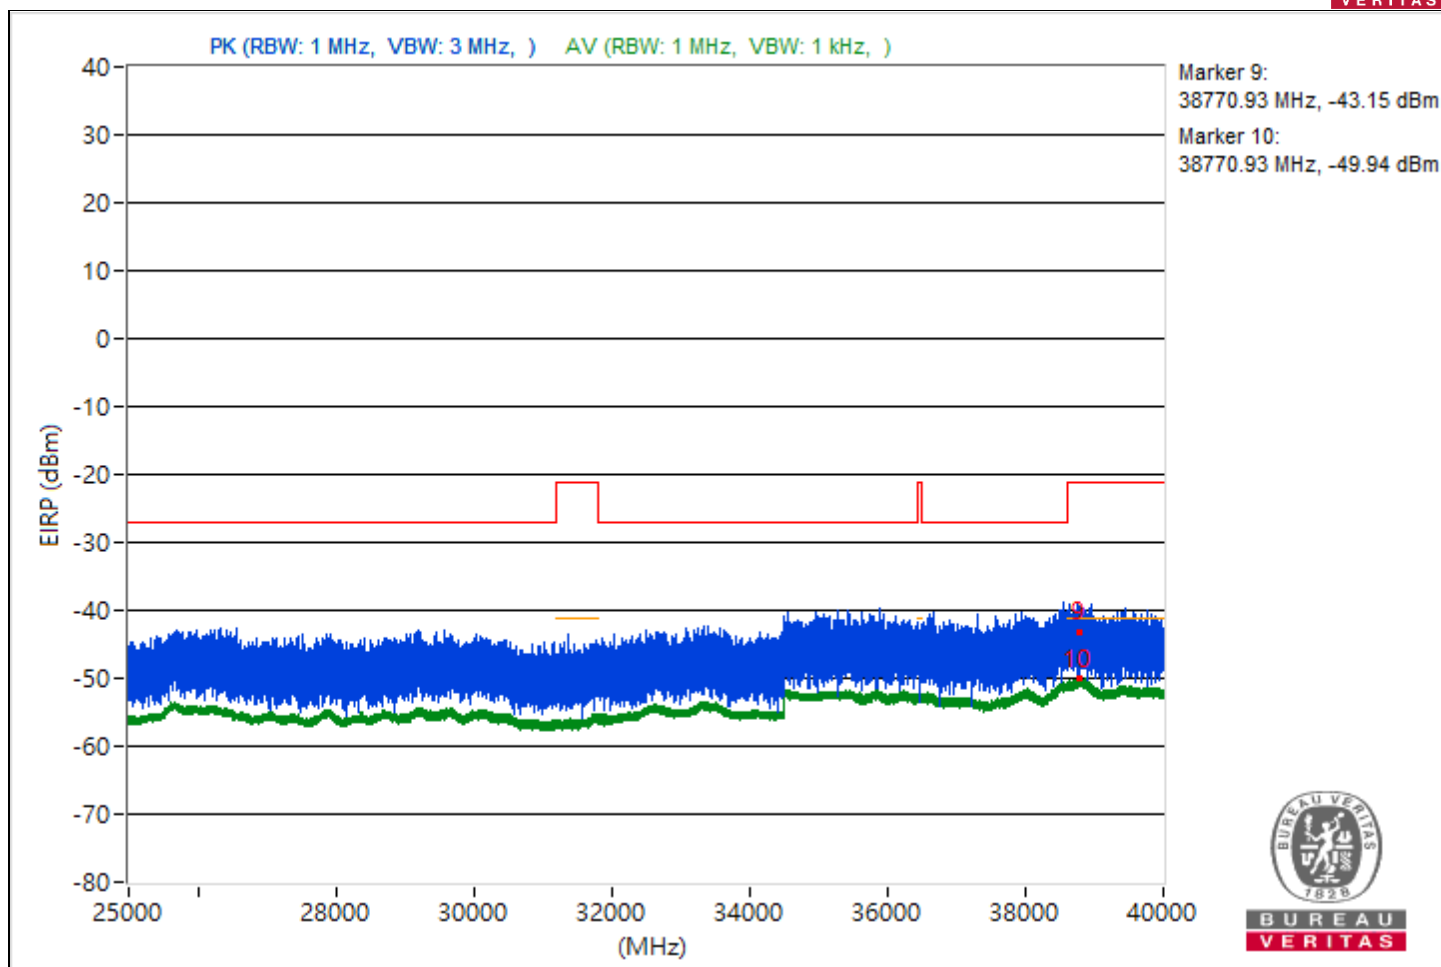


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 149 : 5745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3833.76         | 56.44 PK                | 74             | -17.56      | -47.19                  | 8.37                   | -38.82           |
| 2                            | 3833.76         | 48.54 AV                | 54             | -5.46       | -55.09                  | 8.37                   | -46.72           |
| 3                            | 11489.33        | 54.96 PK                | 74             | -19.04      | -48.67                  | 8.37                   | -40.3            |
| 4                            | 11489.33        | 48.5 AV                 | 54             | -5.5        | -55.13                  | 8.37                   | -46.76           |
| 5                            | 18991.7         | 55.94 PK                | 74             | -18.06      | -47.69                  | 8.37                   | -39.32           |
| 6                            | 18991.7         | 49.24 AV                | 54             | -4.76       | -54.39                  | 8.37                   | -46.02           |
| 7                            | 23836.9         | 58.28 PK                | 74             | -15.72      | -45.35                  | 8.37                   | -36.98           |
| 8                            | 23836.9         | 51.15 AV                | 54             | -2.85       | -52.48                  | 8.37                   | -44.11           |
| 9                            | 38765.69        | 51.03 PK                | 74             | -22.97      | -52.6                   | 8.37                   | -44.23           |
| 10                           | 38765.69        | 45.22 AV                | 54             | -8.78       | -58.41                  | 8.37                   | -50.04           |

Note: Margin value = Emission Level - Limit value

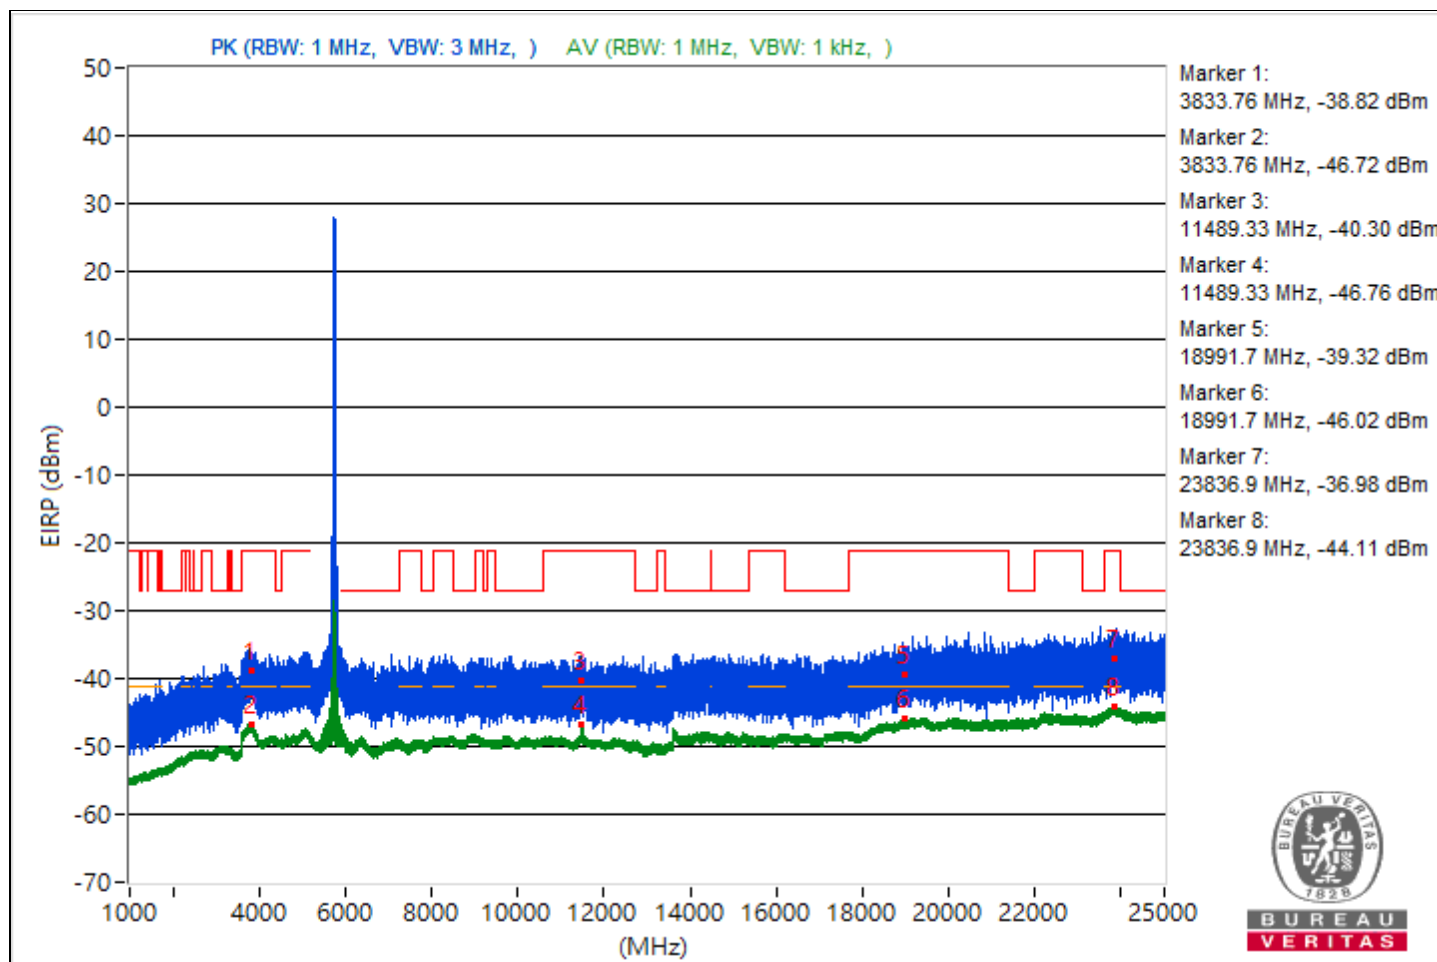


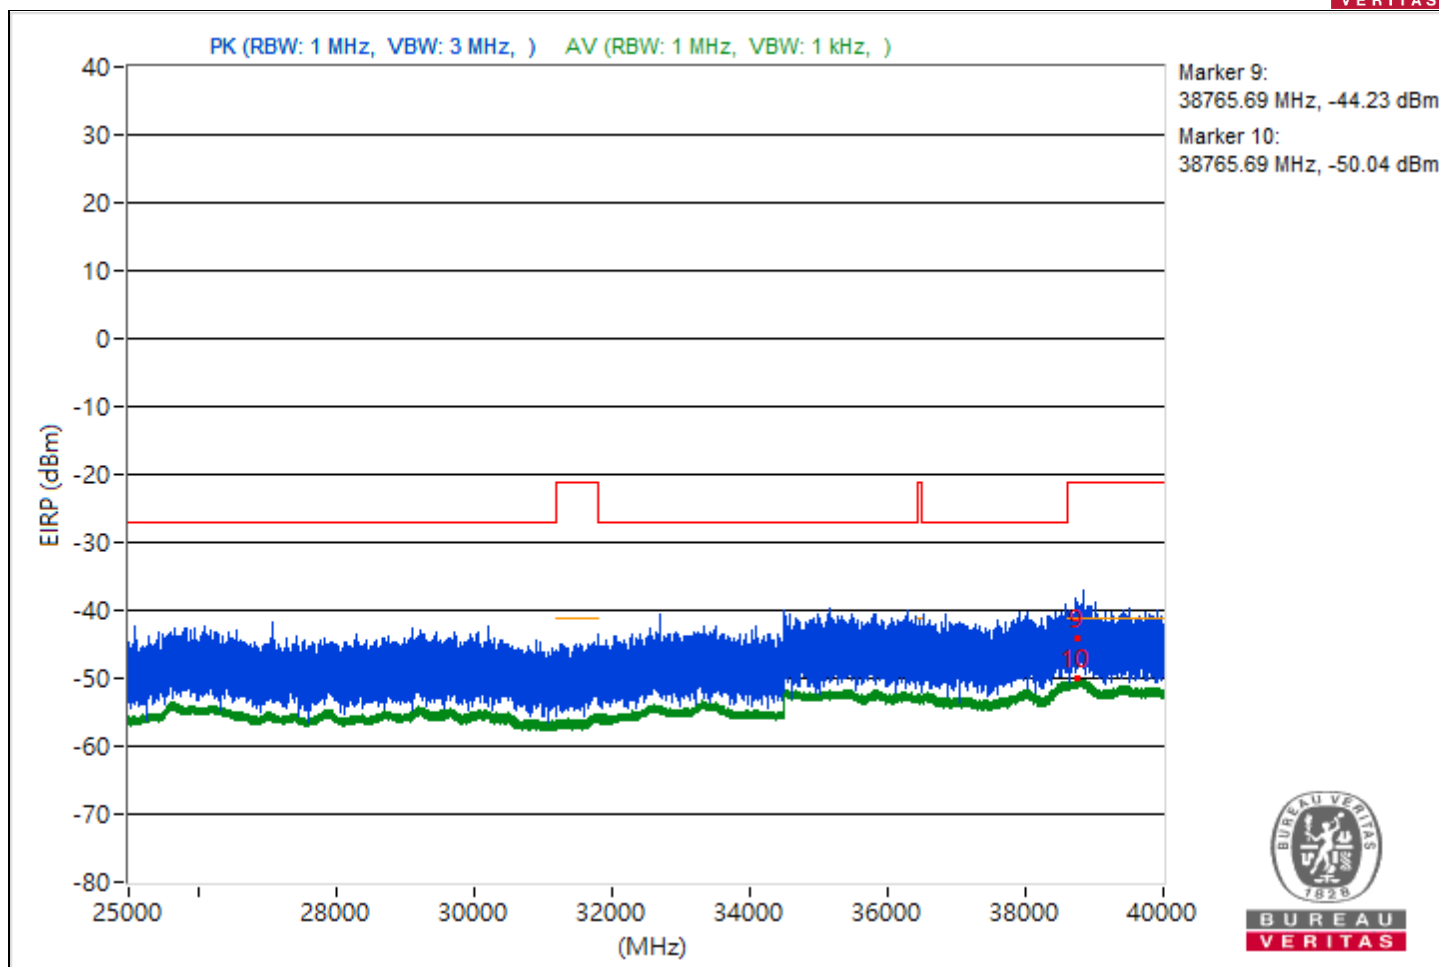


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 157 : 5785 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3834.3          | 58.38 PK                | 74             | -15.62      | -45.25                  | 8.37                   | -36.88           |
| 2                            | 3834.3          | 48.66 AV                | 54             | -5.34       | -54.97                  | 8.37                   | -46.6            |
| 3                            | 11569.16        | 55.79 PK                | 74             | -18.21      | -47.84                  | 8.37                   | -39.47           |
| 4                            | 11569.16        | 48.18 AV                | 54             | -5.82       | -55.45                  | 8.37                   | -47.08           |
| 5                            | 18977.6         | 54.44 PK                | 74             | -19.56      | -49.19                  | 8.37                   | -40.82           |
| 6                            | 18977.6         | 49.12 AV                | 54             | -4.88       | -54.51                  | 8.37                   | -46.14           |
| 7                            | 23815.2         | 57.69 PK                | 74             | -16.31      | -45.94                  | 8.37                   | -37.57           |
| 8                            | 23815.2         | 51.32 AV                | 54             | -2.68       | -52.31                  | 8.37                   | -43.94           |
| 9                            | 38833.69        | 52.53 PK                | 74             | -21.47      | -51.1                   | 8.37                   | -42.73           |
| 10                           | 38833.69        | 45.15 AV                | 54             | -8.85       | -58.48                  | 8.37                   | -50.11           |

Note: Margin value = Emission Level - Limit value

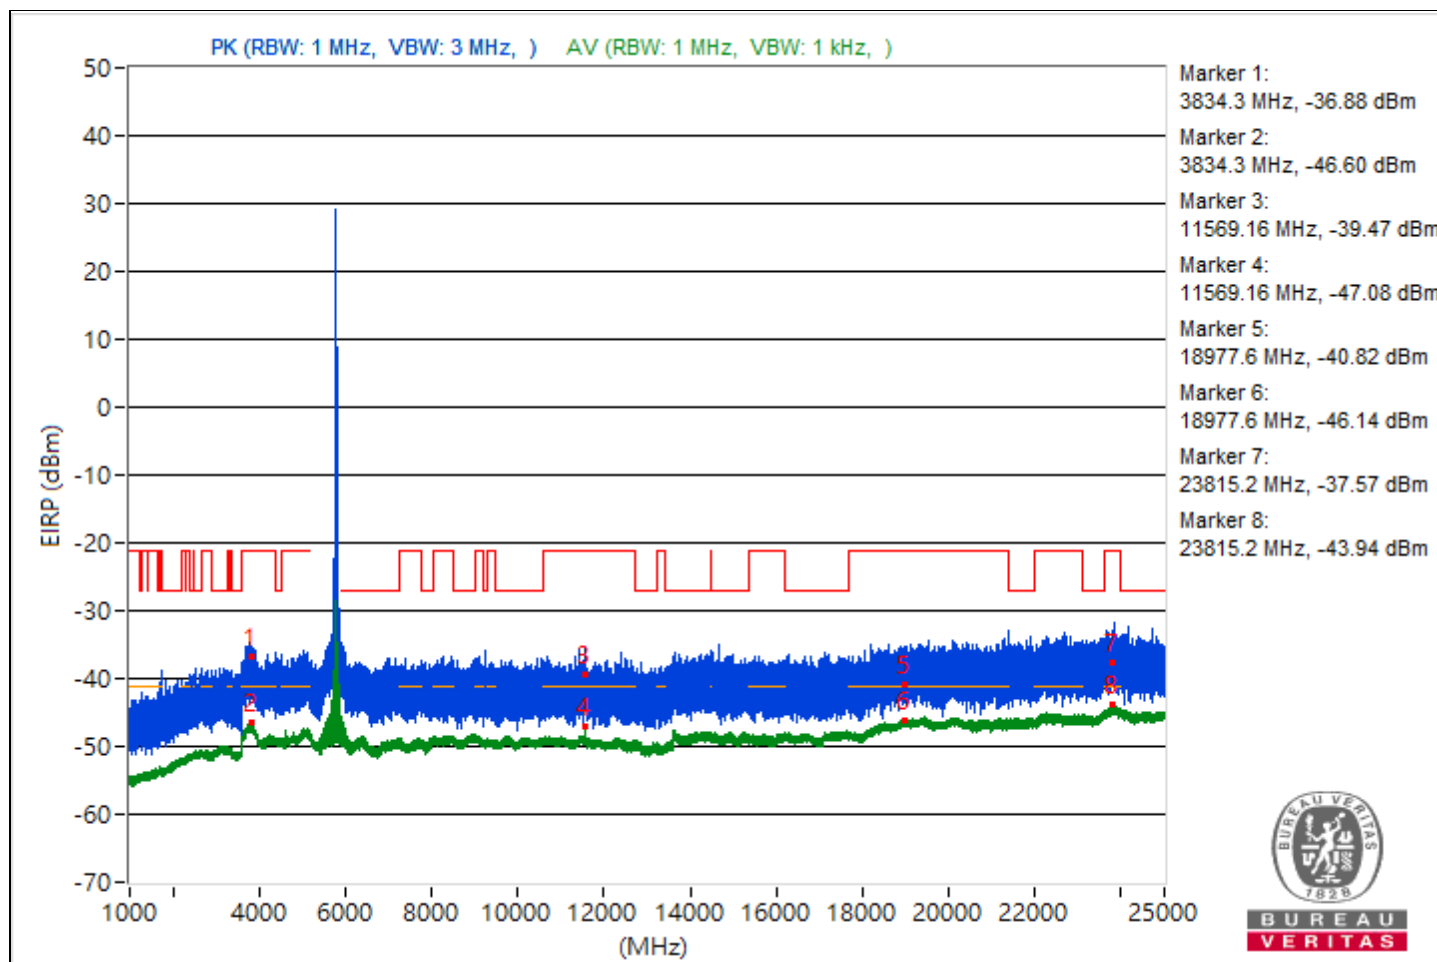


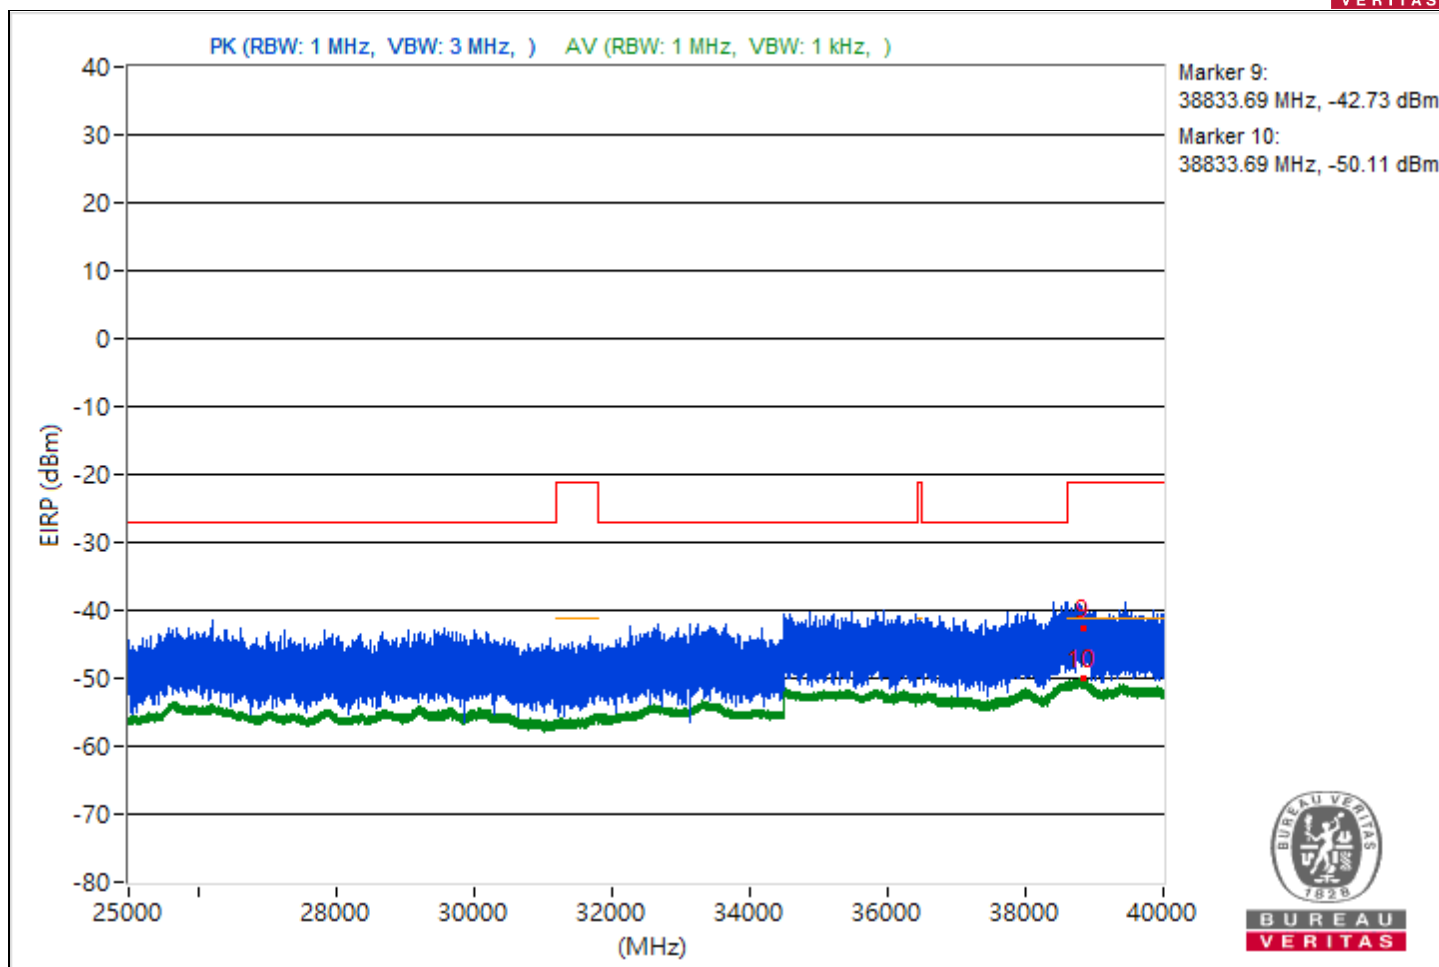


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 165 : 5825 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 1718.82         | 50.53 PK                | 74             | -23.47      | -53.1                   | 8.37                   | -44.73           |
| 2                            | 1718.82         | 48.59 AV                | 54             | -5.41       | -55.04                  | 8.37                   | -46.67           |
| 3                            | 11648.8         | 54.01 PK                | 74             | -19.99      | -49.62                  | 8.37                   | -41.25           |
| 4                            | 11648.8         | 47.09 AV                | 54             | -6.91       | -56.54                  | 8.37                   | -48.17           |
| 5                            | 18919.7         | 58.49 PK                | 74             | -15.51      | -45.14                  | 8.37                   | -36.77           |
| 6                            | 18919.7         | 49.02 AV                | 54             | -4.98       | -54.61                  | 8.37                   | -46.24           |
| 7                            | 23891           | 58.8 PK                 | 74             | -15.2       | -44.83                  | 8.37                   | -36.46           |
| 8                            | 23891           | 51.07 AV                | 54             | -2.93       | -52.56                  | 8.37                   | -44.19           |
| 9                            | 38804.18        | 53.37 PK                | 74             | -20.63      | -50.26                  | 8.37                   | -41.89           |
| 10                           | 38804.18        | 45.2 AV                 | 54             | -8.8        | -58.43                  | 8.37                   | -50.06           |

Note: Margin value = Emission Level - Limit value

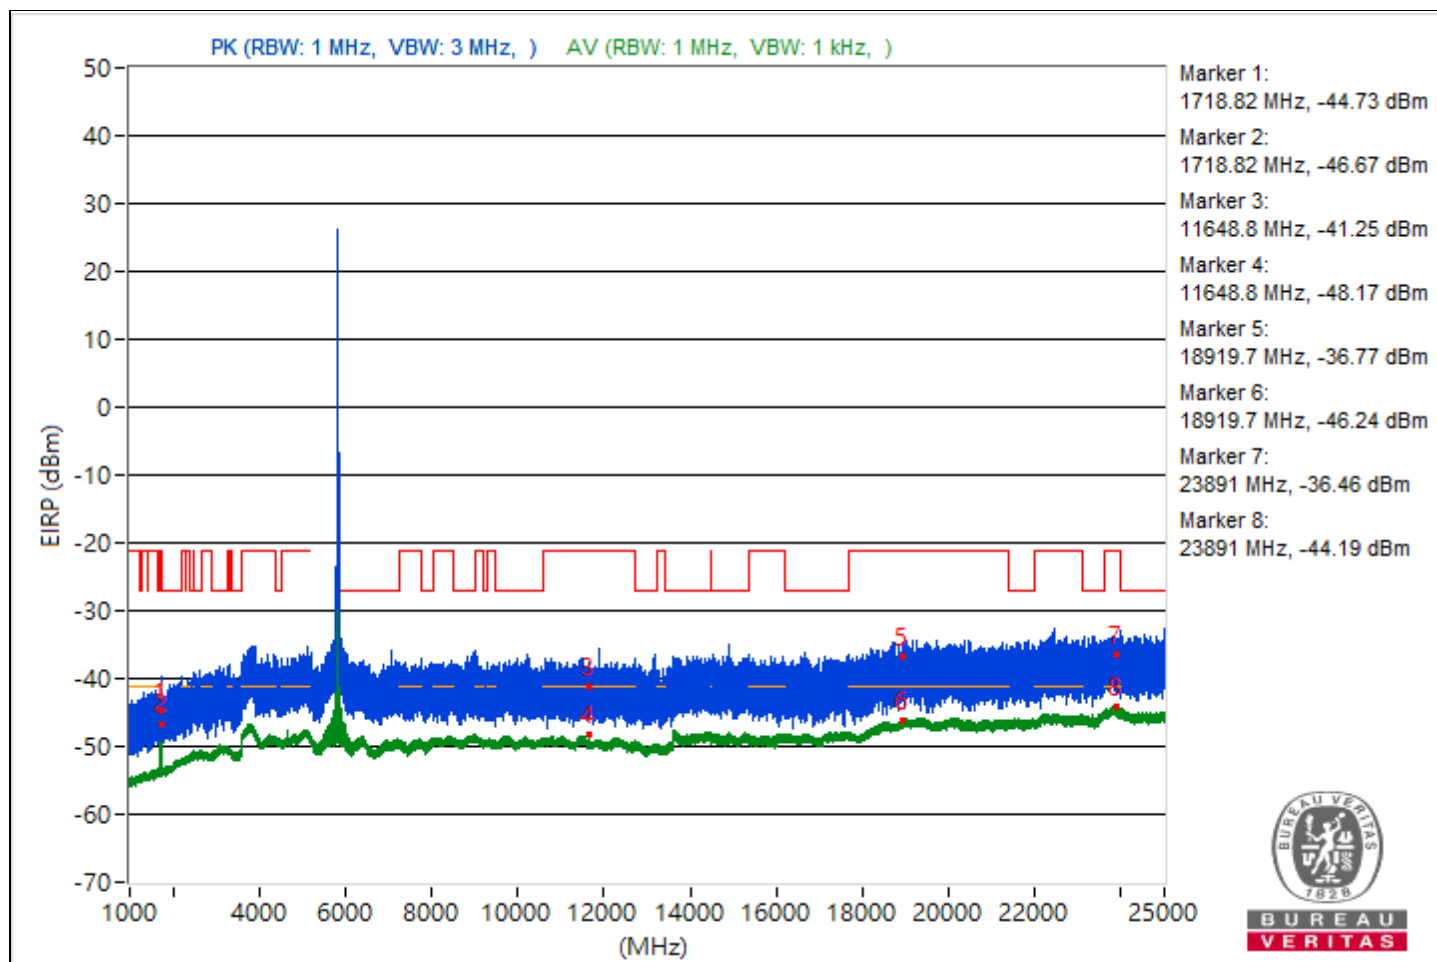


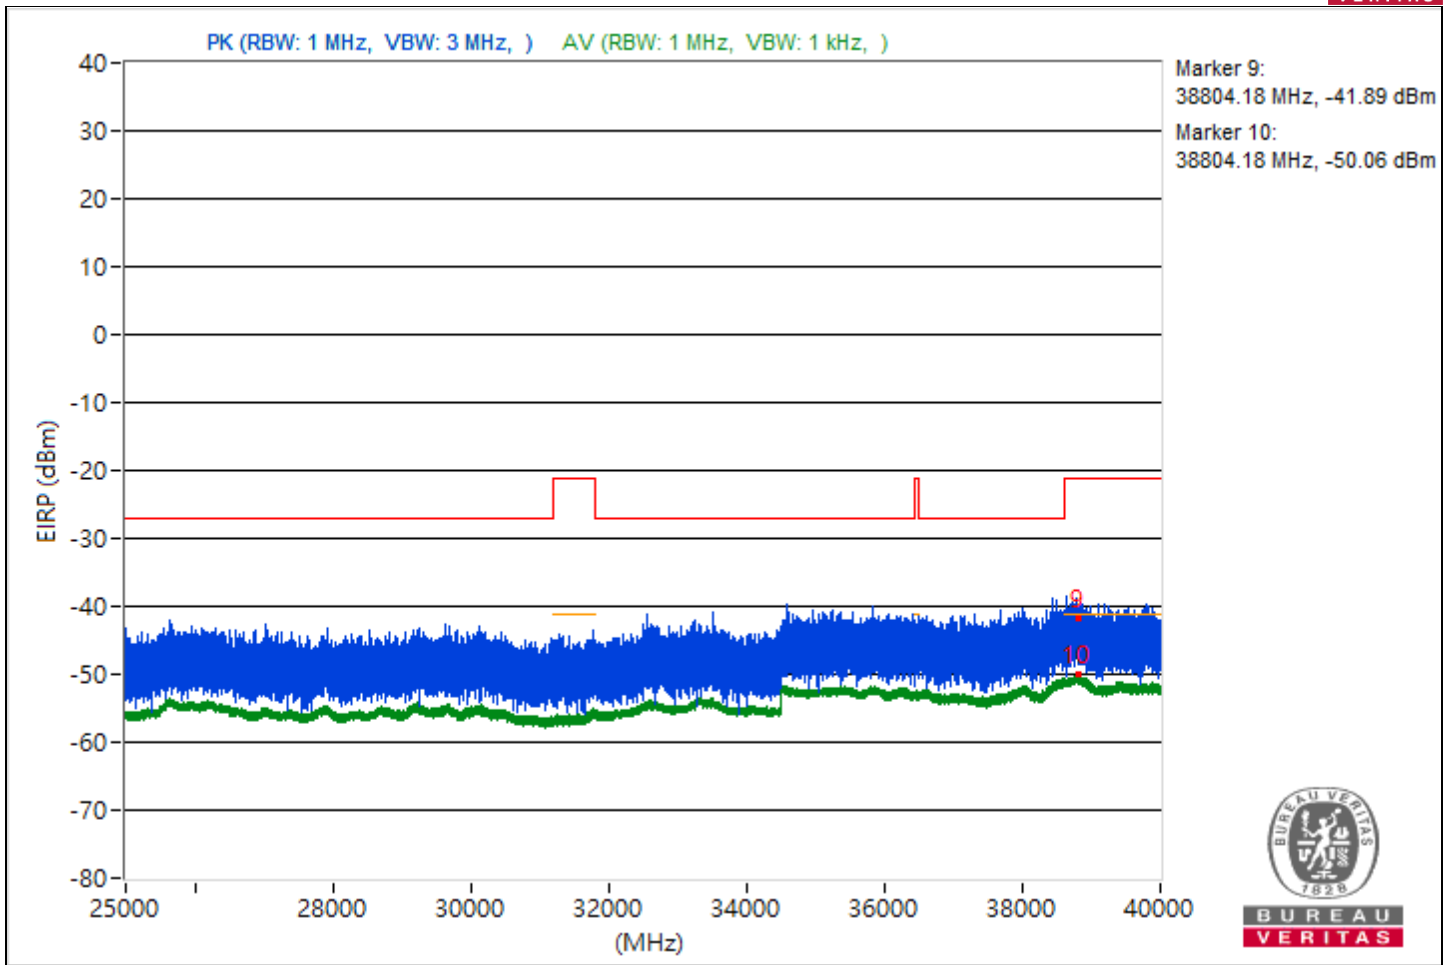


|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT40) | Channel                  | CH 38 : 5190 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu        |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5098.81         | 59.17 PK                | 74             | -14.83      | -44.46                  | 8.37                   | -36.09           |
| 2                            | 5098.81         | 51.11 AV                | 54             | -2.89       | -52.52                  | 8.37                   | -44.15           |
| 3                            | 9022.84         | 54.52 PK                | 74             | -19.48      | -49.11                  | 8.37                   | -40.74           |
| 4                            | 9022.84         | 47.01 AV                | 54             | -6.99       | -56.62                  | 8.37                   | -48.25           |
| 5                            | 18997.7         | 54.97 PK                | 74             | -19.03      | -48.66                  | 8.37                   | -40.29           |
| 6                            | 18997.7         | 49.03 AV                | 54             | -4.97       | -54.6                   | 8.37                   | -46.23           |
| 7                            | 23816           | 57.68 PK                | 74             | -16.32      | -45.95                  | 8.37                   | -37.58           |
| 8                            | 23816           | 51.25 AV                | 54             | -2.75       | -52.38                  | 8.37                   | -44.01           |
| 9                            | 38761.33        | 52.8 PK                 | 74             | -21.2       | -50.83                  | 8.37                   | -42.46           |
| 10                           | 38761.33        | 45.23 AV                | 54             | -8.77       | -58.4                   | 8.37                   | -50.03           |

Note: Margin value = Emission Level - Limit value

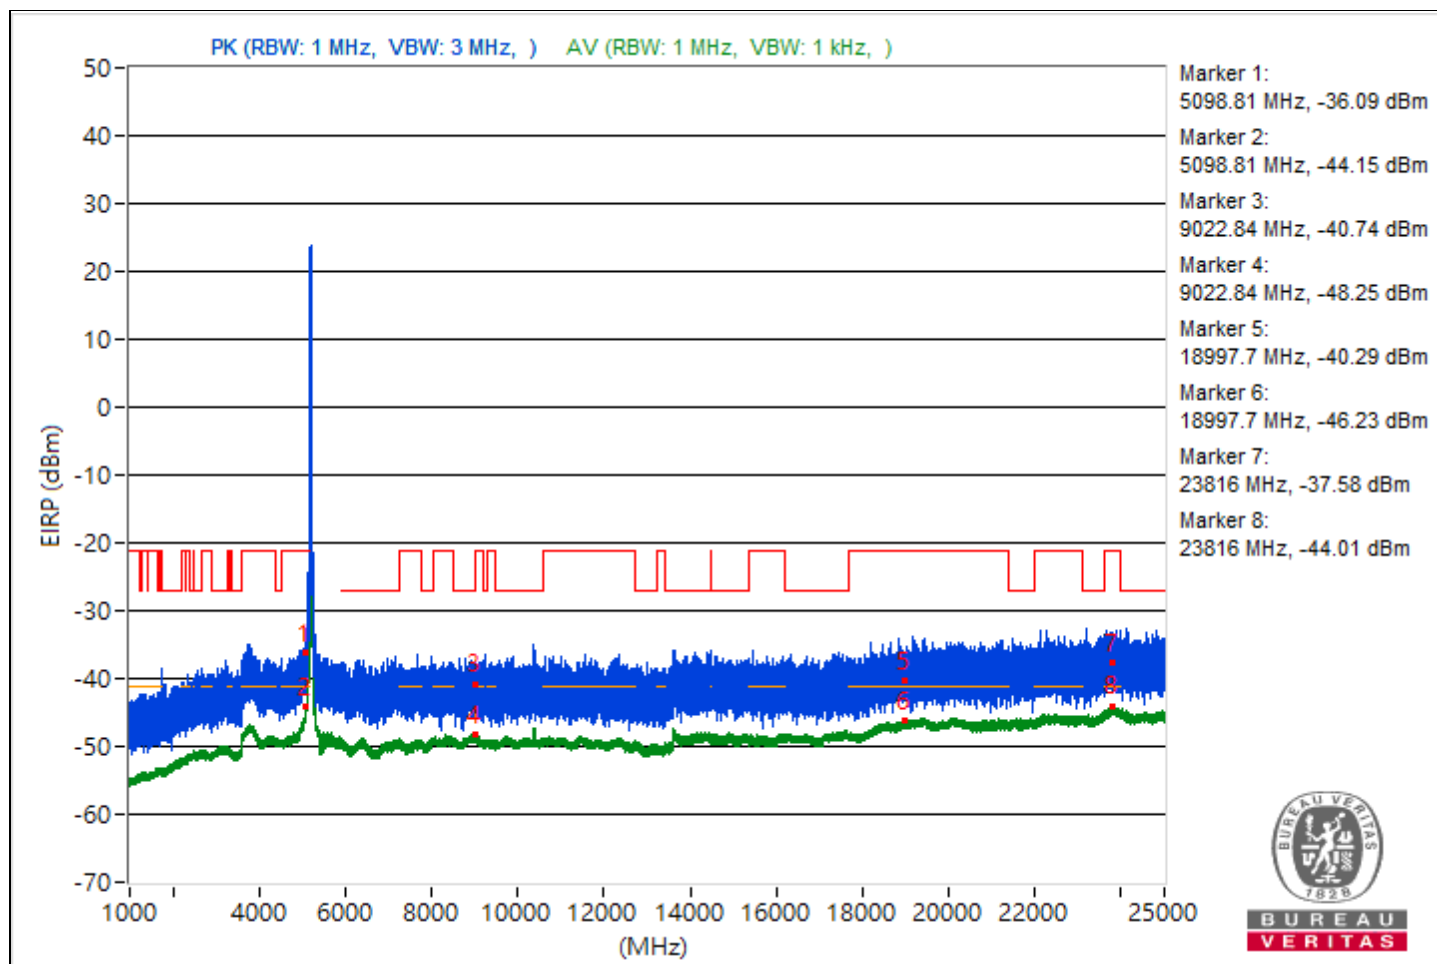


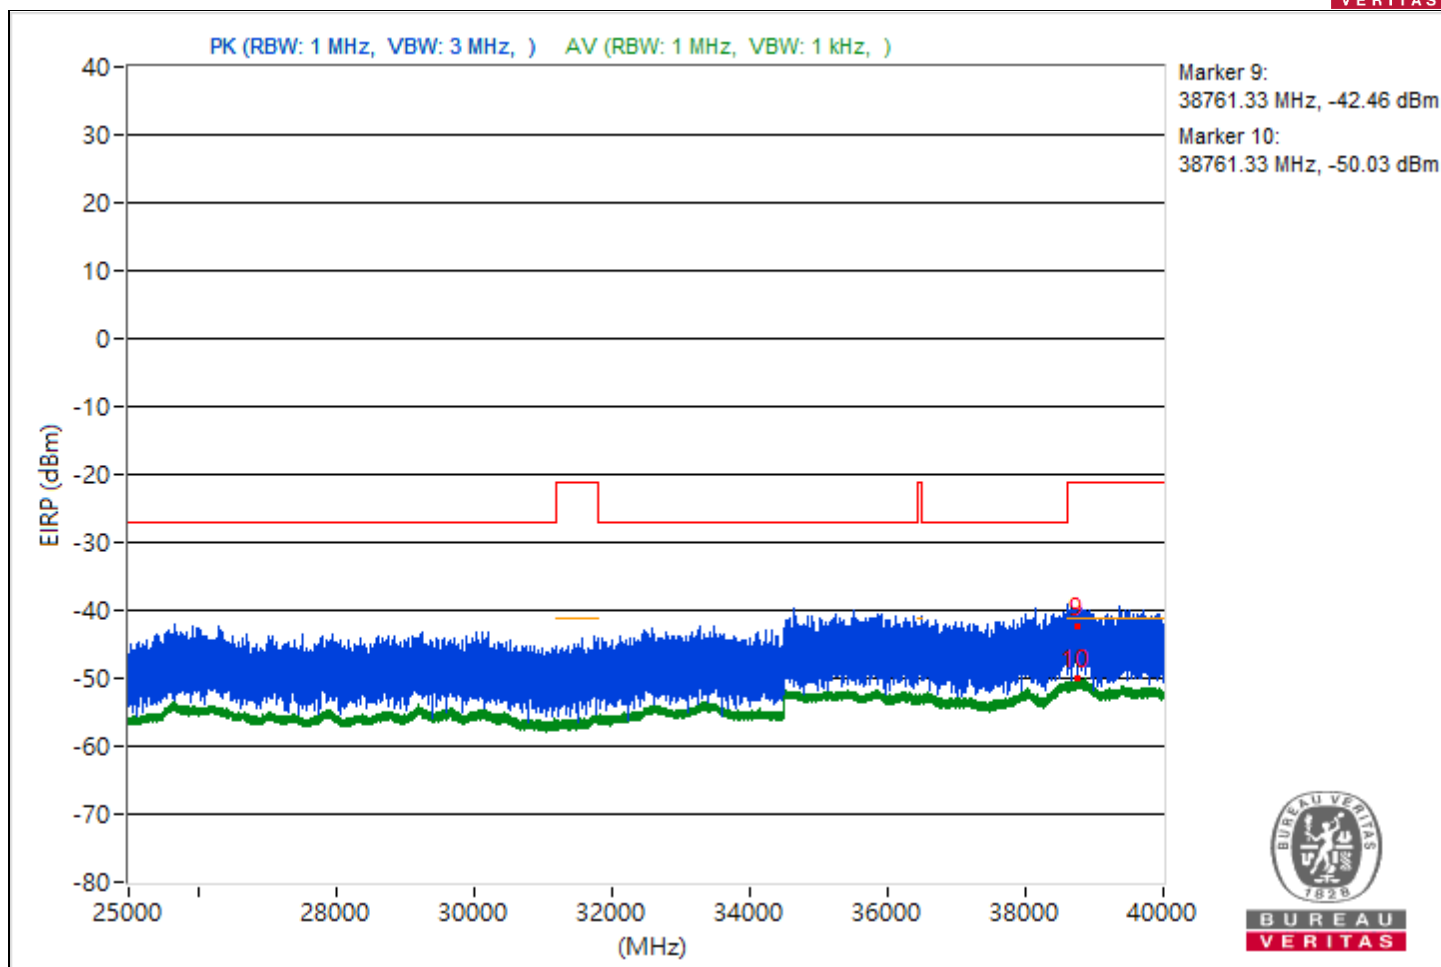


|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT40) | Channel                  | CH 46 : 5230 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu        |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5096.09         | 57.07 PK                | 74             | -16.93      | -46.56                  | 8.37                   | -38.19           |
| 2                            | 5096.09         | 49.89 AV                | 54             | -4.11       | -53.74                  | 8.37                   | -45.37           |
| 3                            | 8368            | 54.22 PK                | 74             | -19.78      | -49.41                  | 8.37                   | -41.04           |
| 4                            | 8368            | 46.96 AV                | 54             | -7.04       | -56.67                  | 8.37                   | -48.3            |
| 5                            | 18962           | 55.76 PK                | 74             | -18.24      | -47.87                  | 8.37                   | -39.5            |
| 6                            | 18962           | 49.29 AV                | 54             | -4.71       | -54.34                  | 8.37                   | -45.97           |
| 7                            | 23894.6         | 58.53 PK                | 74             | -15.47      | -45.1                   | 8.37                   | -36.73           |
| 8                            | 23894.6         | 51.1 AV                 | 54             | -2.9        | -52.53                  | 8.37                   | -44.16           |
| 9                            | 38762.93        | 49.96 PK                | 74             | -24.04      | -53.67                  | 8.37                   | -45.3            |
| 10                           | 38762.93        | 45.05 AV                | 54             | -8.95       | -58.58                  | 8.37                   | -50.21           |

Note: Margin value = Emission Level - Limit value

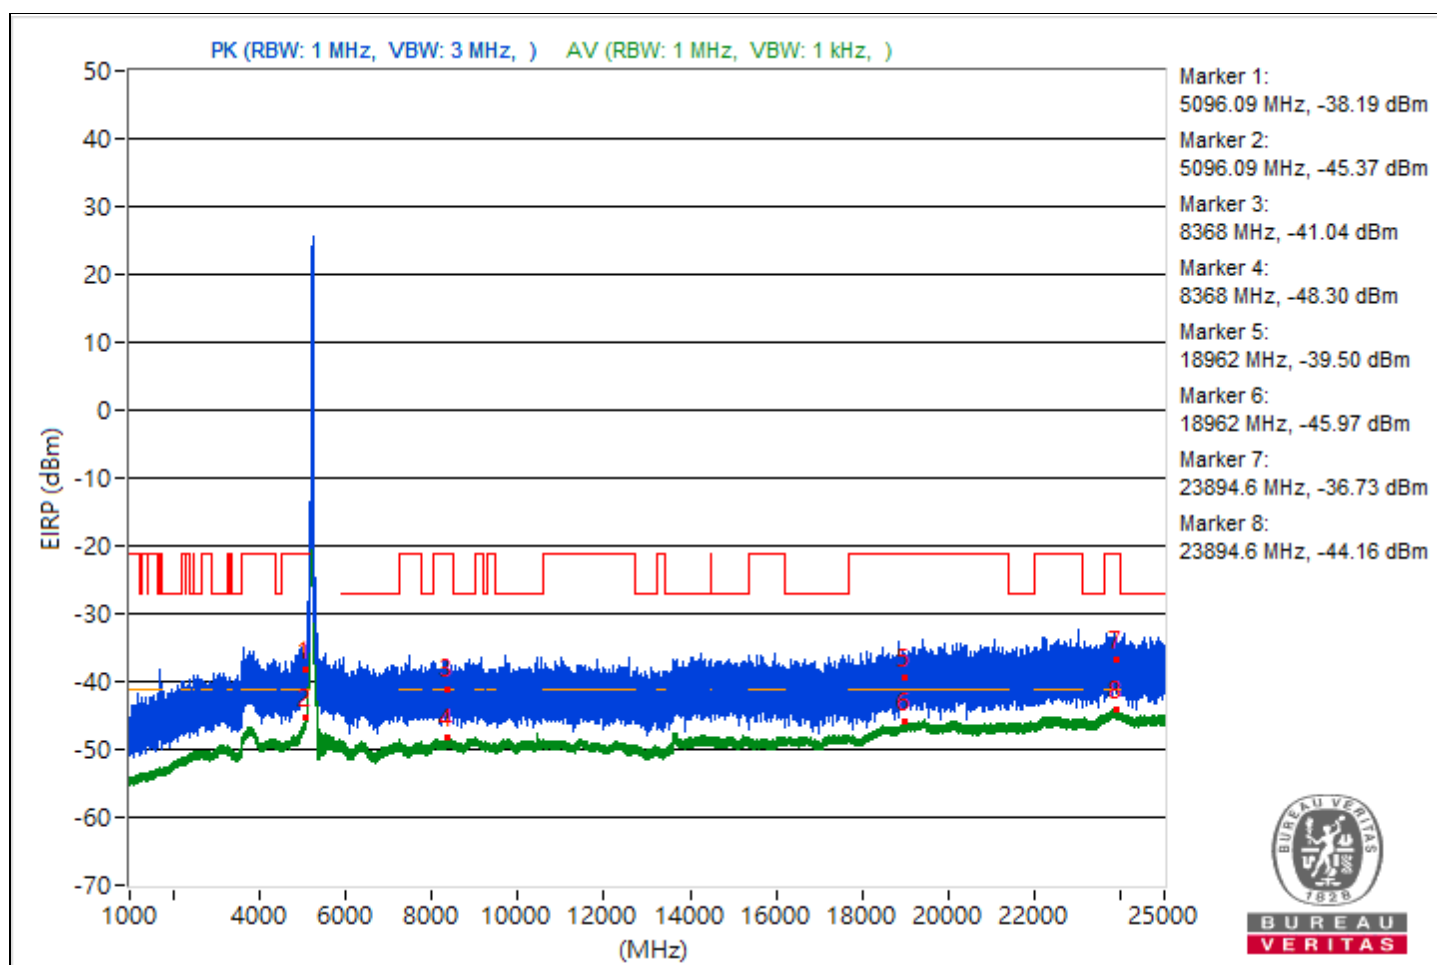


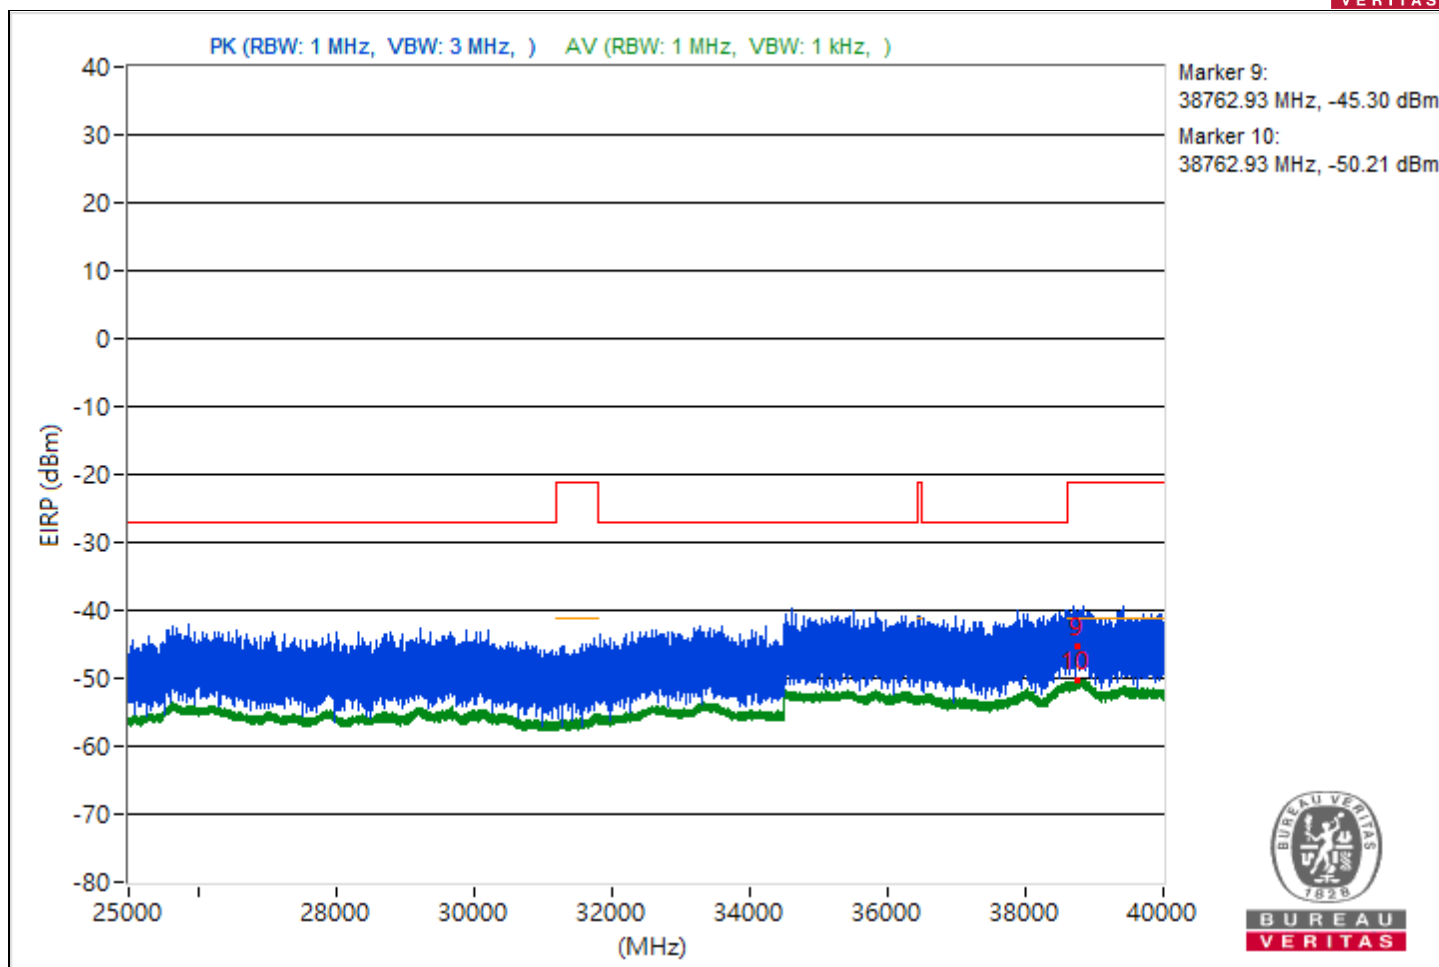


|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT40) | Channel                  | CH 54 : 5270 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu        |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5092.9          | 56.36 PK                | 74             | -17.64      | -47.27                  | 8.37                   | -38.9            |
| 2                            | 5092.9          | 49.18 AV                | 54             | -4.82       | -54.45                  | 8.37                   | -46.08           |
| 3                            | 8431.64         | 54.08 PK                | 74             | -19.92      | -49.55                  | 8.37                   | -41.18           |
| 4                            | 8431.64         | 47.16 AV                | 54             | -6.84       | -56.47                  | 8.37                   | -48.1            |
| 5                            | 18912.5         | 56.61 PK                | 74             | -17.39      | -47.02                  | 8.37                   | -38.65           |
| 6                            | 18912.5         | 48.97 AV                | 54             | -5.03       | -54.66                  | 8.37                   | -46.29           |
| 7                            | 23792.1         | 59.96 PK                | 74             | -14.04      | -43.67                  | 8.37                   | -35.3            |
| 8                            | 23792.1         | 51.14 AV                | 54             | -2.86       | -52.49                  | 8.37                   | -44.12           |
| 9                            | 38806.13        | 50.67 PK                | 74             | -23.33      | -52.96                  | 8.37                   | -44.59           |
| 10                           | 38806.13        | 45.14 AV                | 54             | -8.86       | -58.49                  | 8.37                   | -50.12           |

Note: Margin value = Emission Level - Limit value

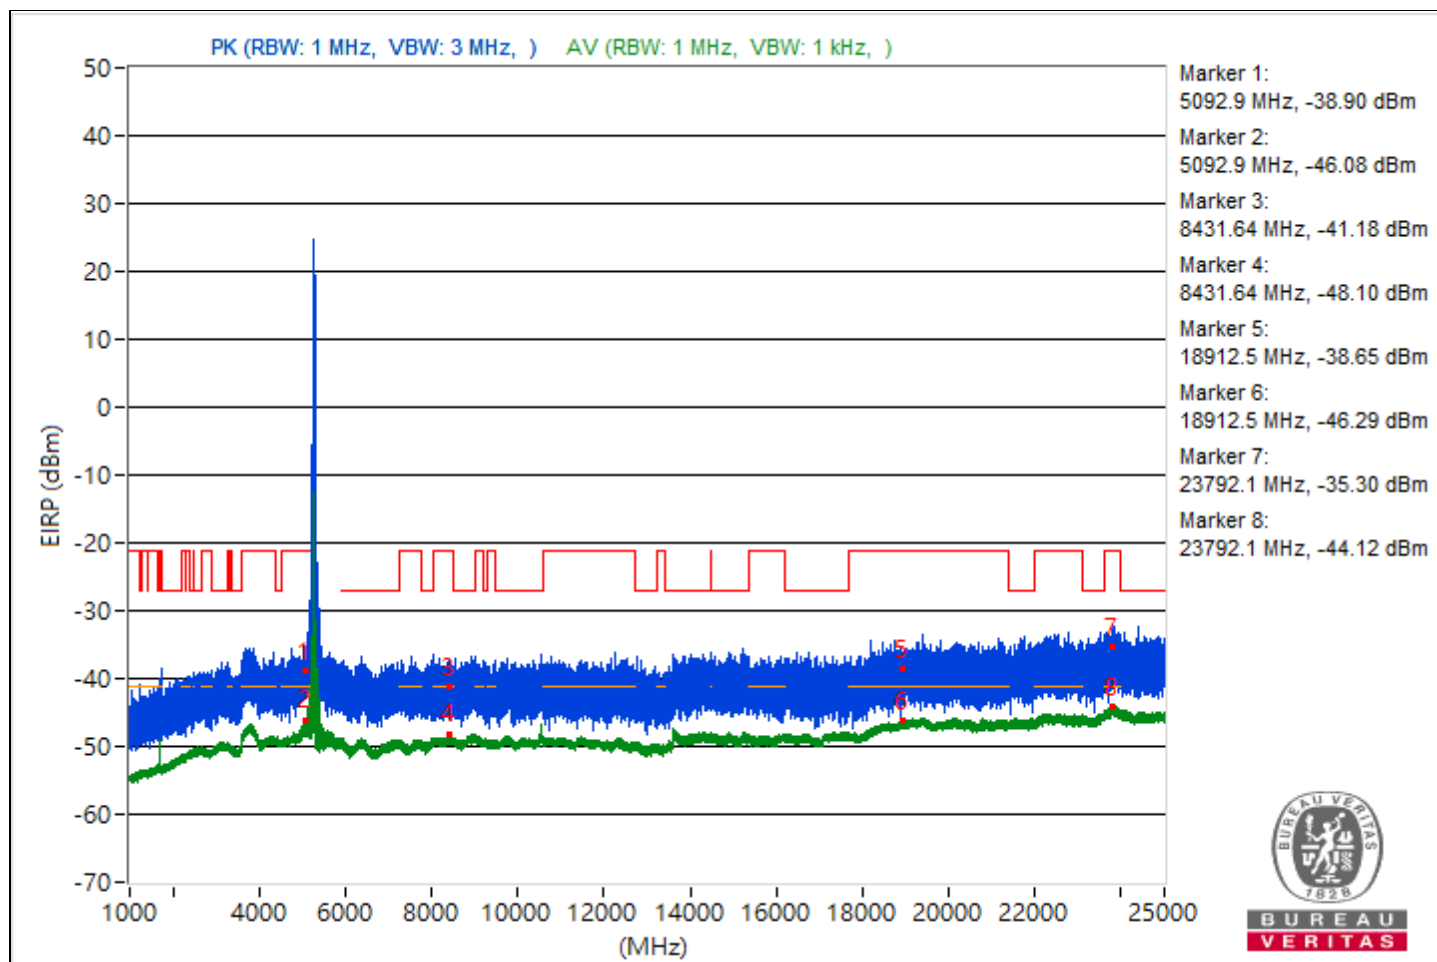


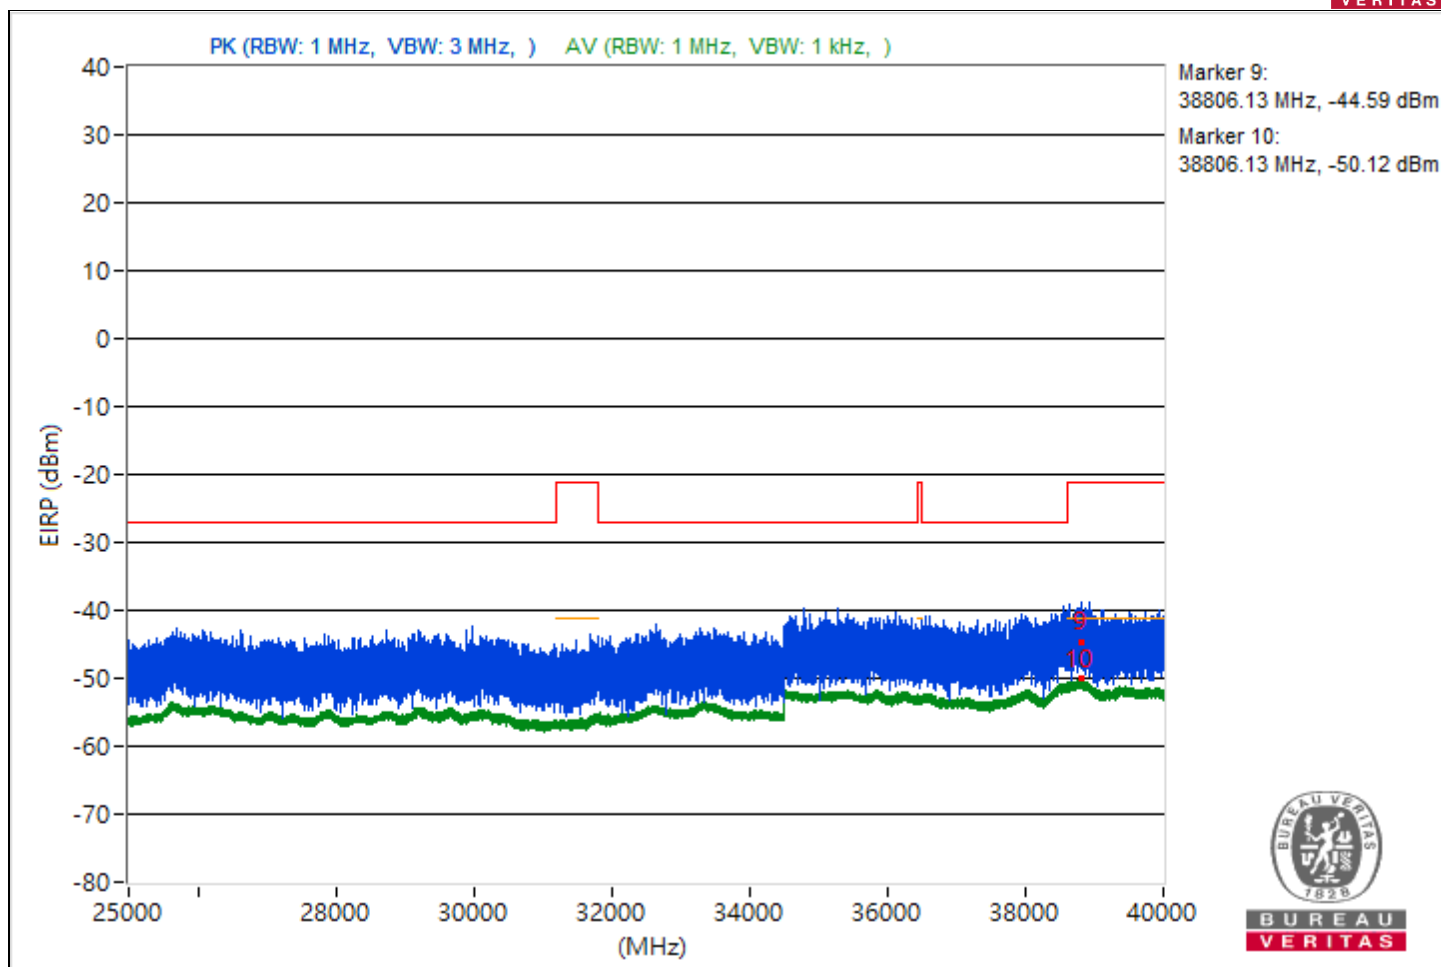


|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT40) | Channel                  | CH 62 : 5310 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu        |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5086.21         | 57.95 PK                | 74             | -16.05      | -45.68                  | 8.37                   | -37.31           |
| 2                            | 5086.21         | 49.05 AV                | 54             | -4.95       | -54.58                  | 8.37                   | -46.21           |
| 3                            | 10615.38        | 53.89 PK                | 74             | -20.11      | -49.74                  | 8.37                   | -41.37           |
| 4                            | 10615.38        | 47.79 AV                | 54             | -6.21       | -55.84                  | 8.37                   | -47.47           |
| 5                            | 18911.5         | 56.25 PK                | 74             | -17.75      | -47.38                  | 8.37                   | -39.01           |
| 6                            | 18911.5         | 49.15 AV                | 54             | -4.85       | -54.48                  | 8.37                   | -46.11           |
| 7                            | 23775.4         | 59.75 PK                | 74             | -14.25      | -43.88                  | 8.37                   | -35.51           |
| 8                            | 23775.4         | 51.06 AV                | 54             | -2.94       | -52.57                  | 8.37                   | -44.2            |
| 9                            | 38812.18        | 50.39 PK                | 74             | -23.61      | -53.24                  | 8.37                   | -44.87           |
| 10                           | 38812.18        | 45.11 AV                | 54             | -8.89       | -58.52                  | 8.37                   | -50.15           |

Note: Margin value = Emission Level - Limit value

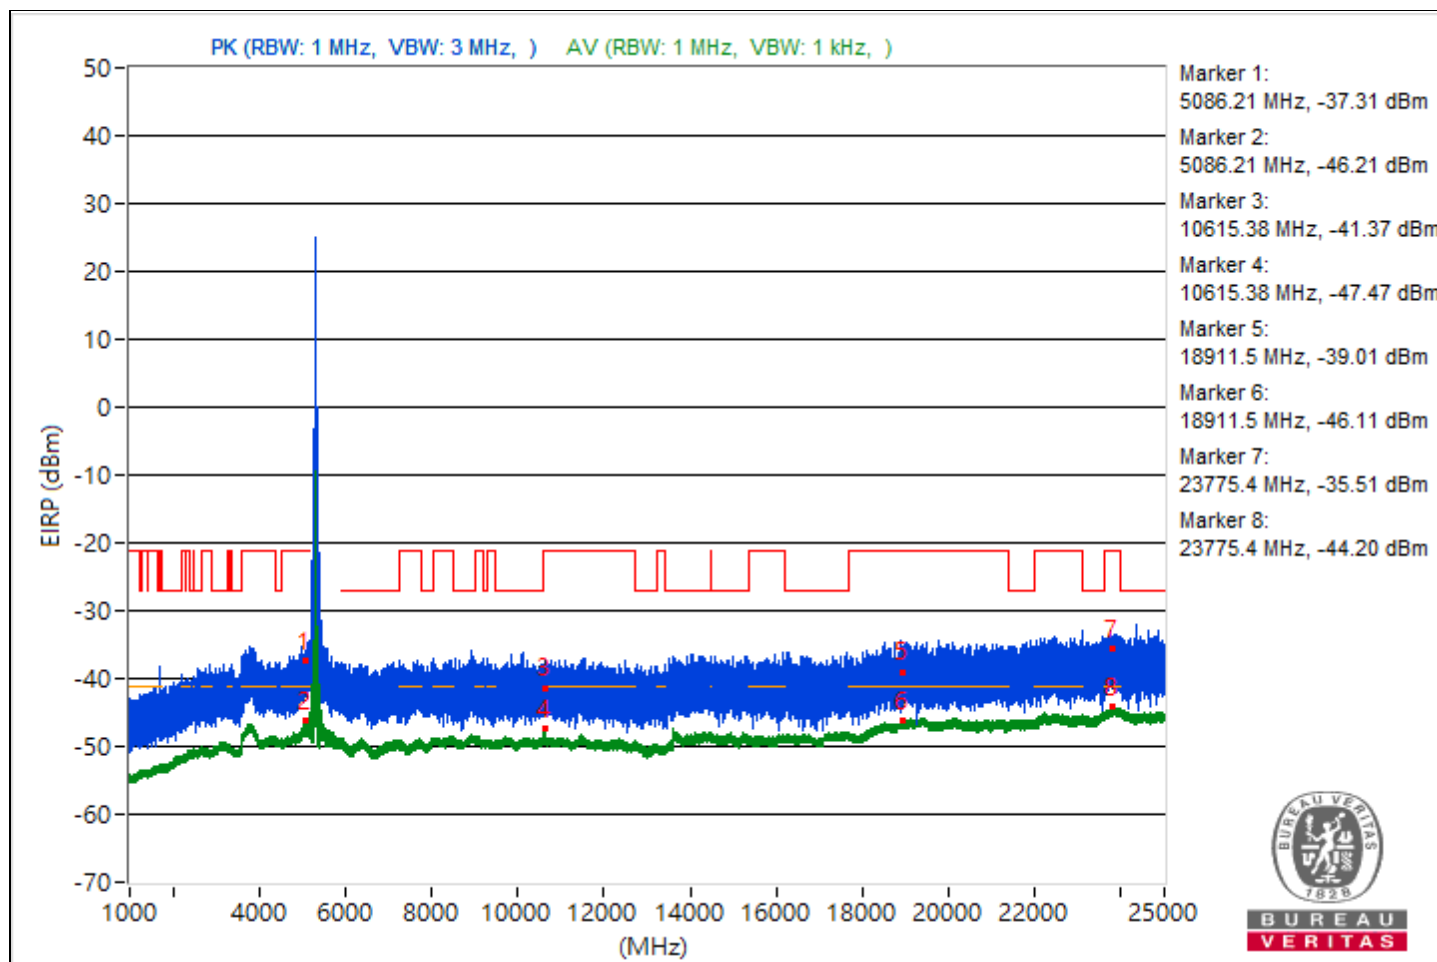


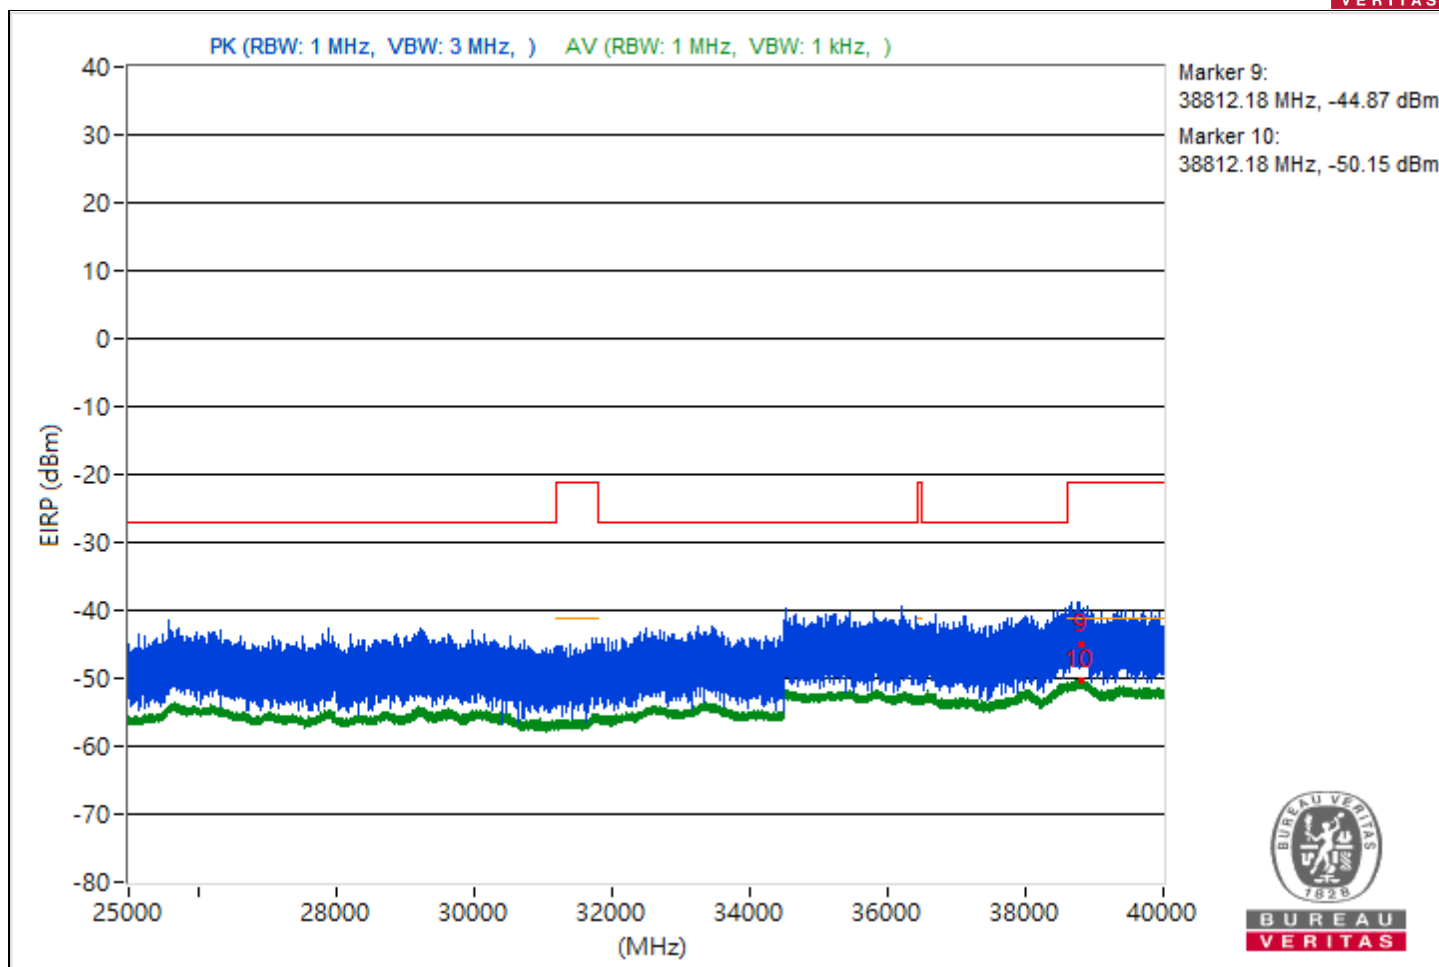


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT40) | Channel                  | CH 102 : 5510 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3820.46         | 55.95 PK                | 74             | -18.05      | -47.68                  | 8.37                   | -39.31           |
| 2                            | 3820.46         | 48.45 AV                | 54             | -5.55       | -55.18                  | 8.37                   | -46.81           |
| 3                            | 9048.44         | 53.35 PK                | 74             | -20.65      | -50.28                  | 8.37                   | -41.91           |
| 4                            | 9048.44         | 46.9 AV                 | 54             | -7.1        | -56.73                  | 8.37                   | -48.36           |
| 5                            | 18951.5         | 55.58 PK                | 74             | -18.42      | -48.05                  | 8.37                   | -39.68           |
| 6                            | 18951.5         | 49.1 AV                 | 54             | -4.9        | -54.53                  | 8.37                   | -46.16           |
| 7                            | 23795.2         | 59.47 PK                | 74             | -14.53      | -44.16                  | 8.37                   | -35.79           |
| 8                            | 23795.2         | 51.19 AV                | 54             | -2.81       | -52.44                  | 8.37                   | -44.07           |
| 9                            | 38804.09        | 48.92 PK                | 74             | -25.08      | -54.71                  | 8.37                   | -46.34           |
| 10                           | 38804.09        | 45.17 AV                | 54             | -8.83       | -58.46                  | 8.37                   | -50.09           |

Note: Margin value = Emission Level - Limit value

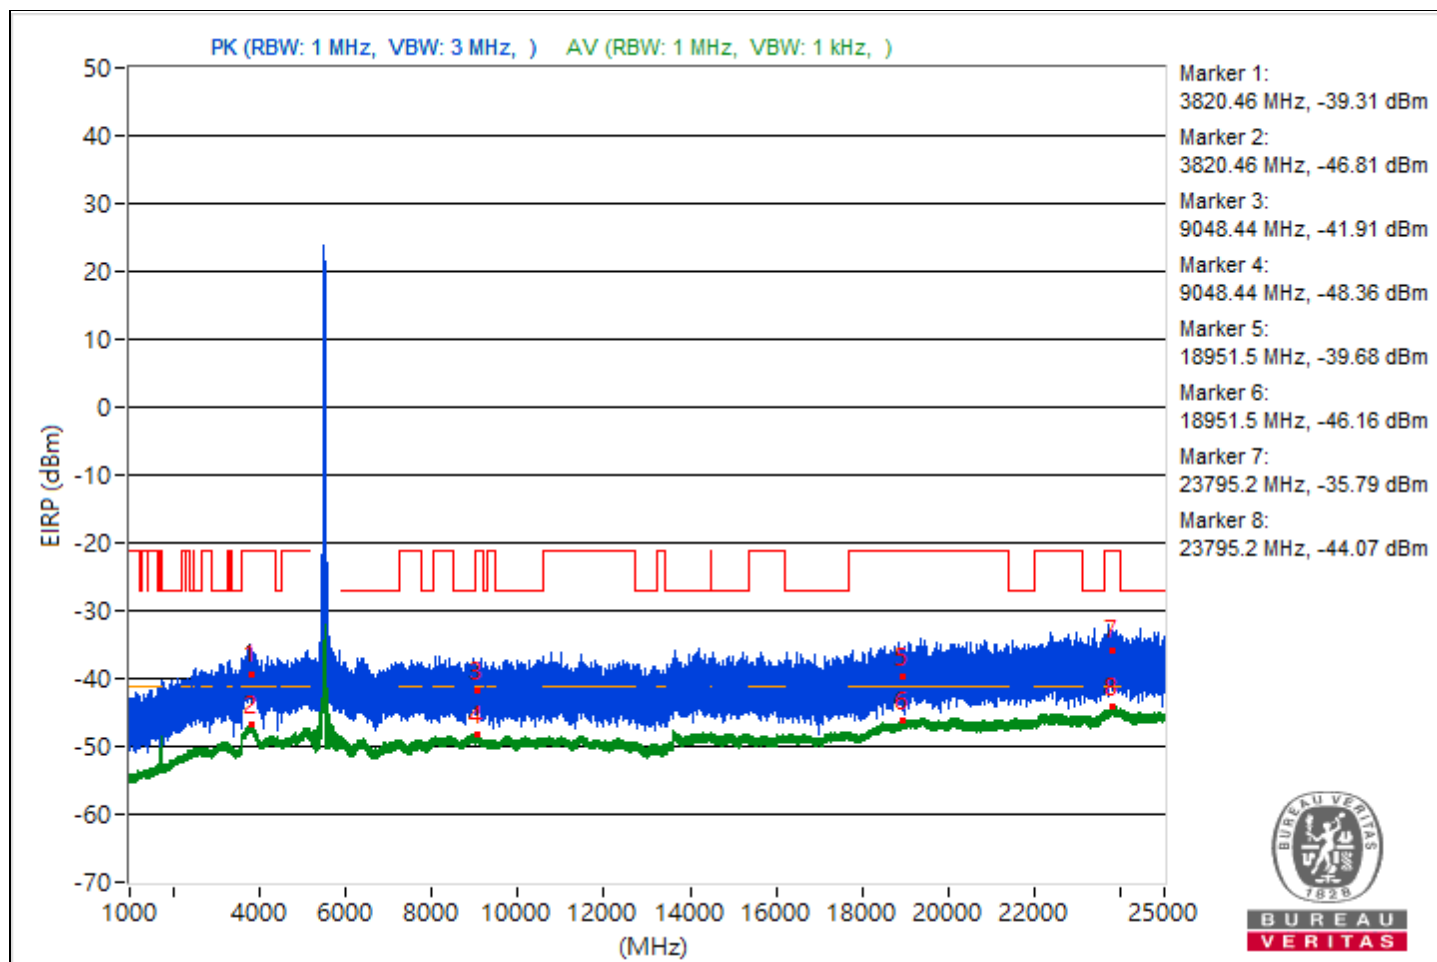


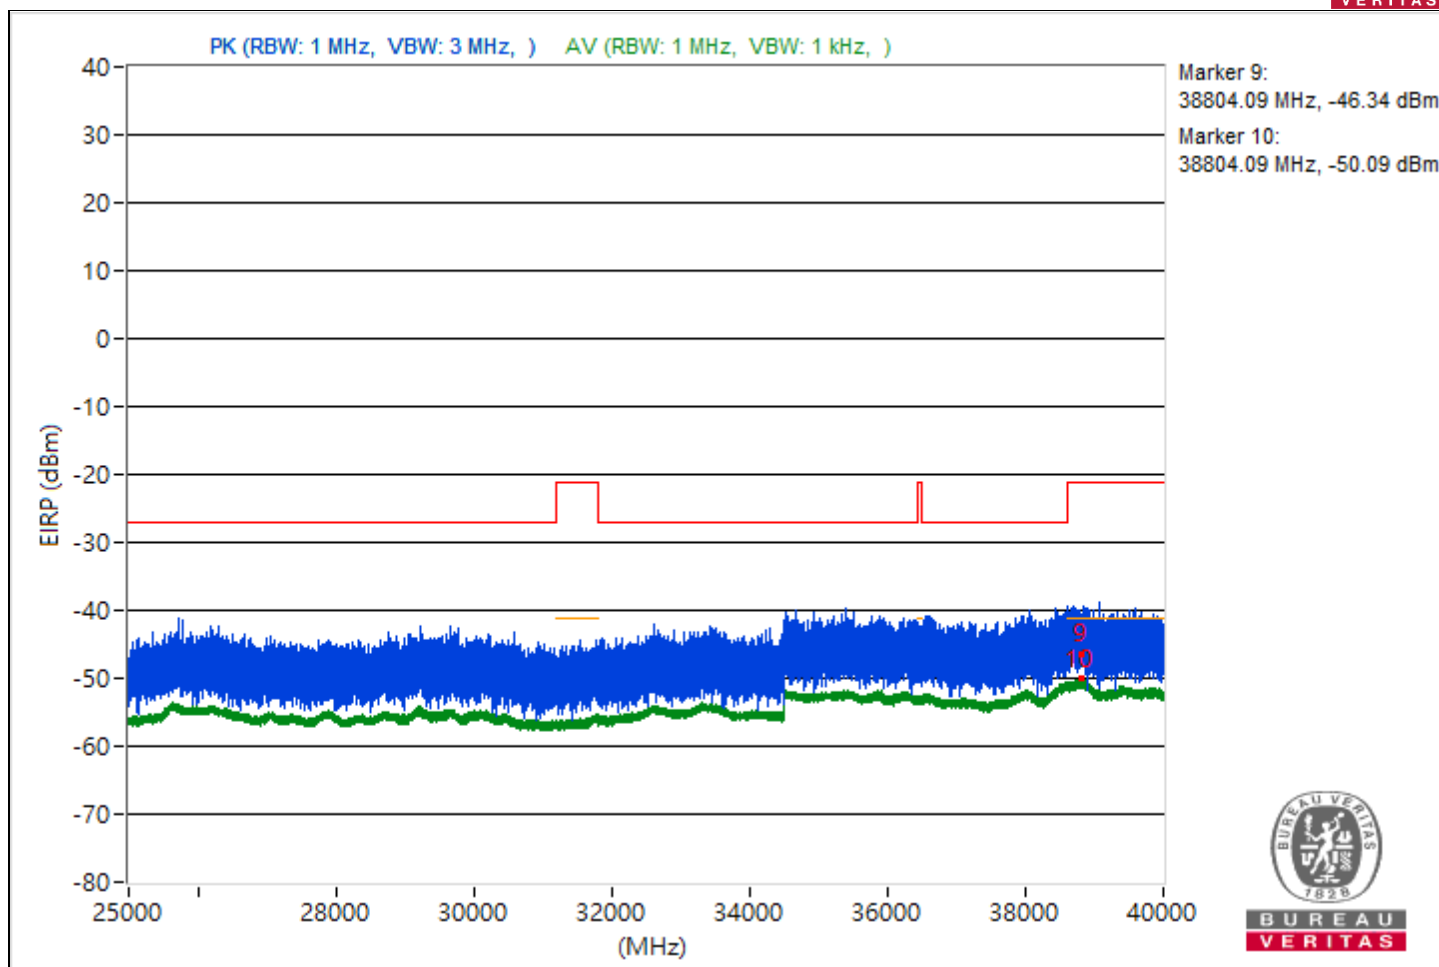


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT40) | Channel                  | CH 110 : 5550 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3790.51         | 55.51 PK                | 74             | -18.49      | -48.12                  | 8.37                   | -39.75           |
| 2                            | 3790.51         | 48.45 AV                | 54             | -5.55       | -55.18                  | 8.37                   | -46.81           |
| 3                            | 9010.76         | 52.56 PK                | 74             | -21.44      | -51.07                  | 8.37                   | -42.7            |
| 4                            | 9010.76         | 46.97 AV                | 54             | -7.03       | -56.66                  | 8.37                   | -48.29           |
| 5                            | 18988.4         | 55.73 PK                | 74             | -18.27      | -47.9                   | 8.37                   | -39.53           |
| 6                            | 18988.4         | 49.19 AV                | 54             | -4.81       | -54.44                  | 8.37                   | -46.07           |
| 7                            | 23823.5         | 55.75 PK                | 74             | -18.25      | -47.88                  | 8.37                   | -39.51           |
| 8                            | 23823.5         | 51.1 AV                 | 54             | -2.9        | -52.53                  | 8.37                   | -44.16           |
| 9                            | 38849.51        | 50.29 PK                | 74             | -23.71      | -53.34                  | 8.37                   | -44.97           |
| 10                           | 38849.51        | 45.15 AV                | 54             | -8.85       | -58.48                  | 8.37                   | -50.11           |

Note: Margin value = Emission Level - Limit value

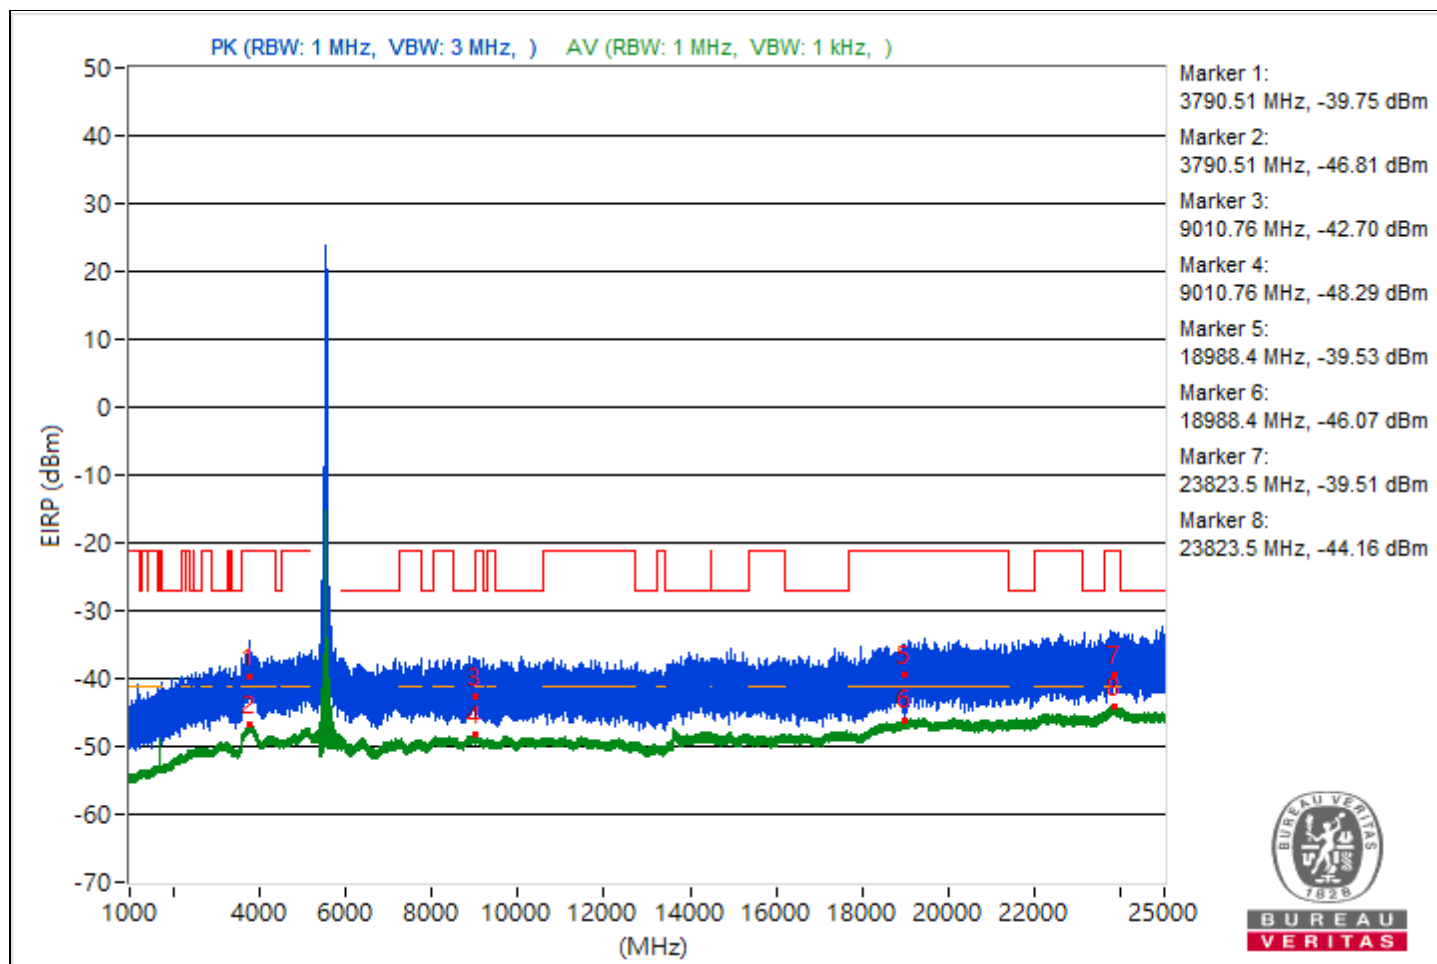


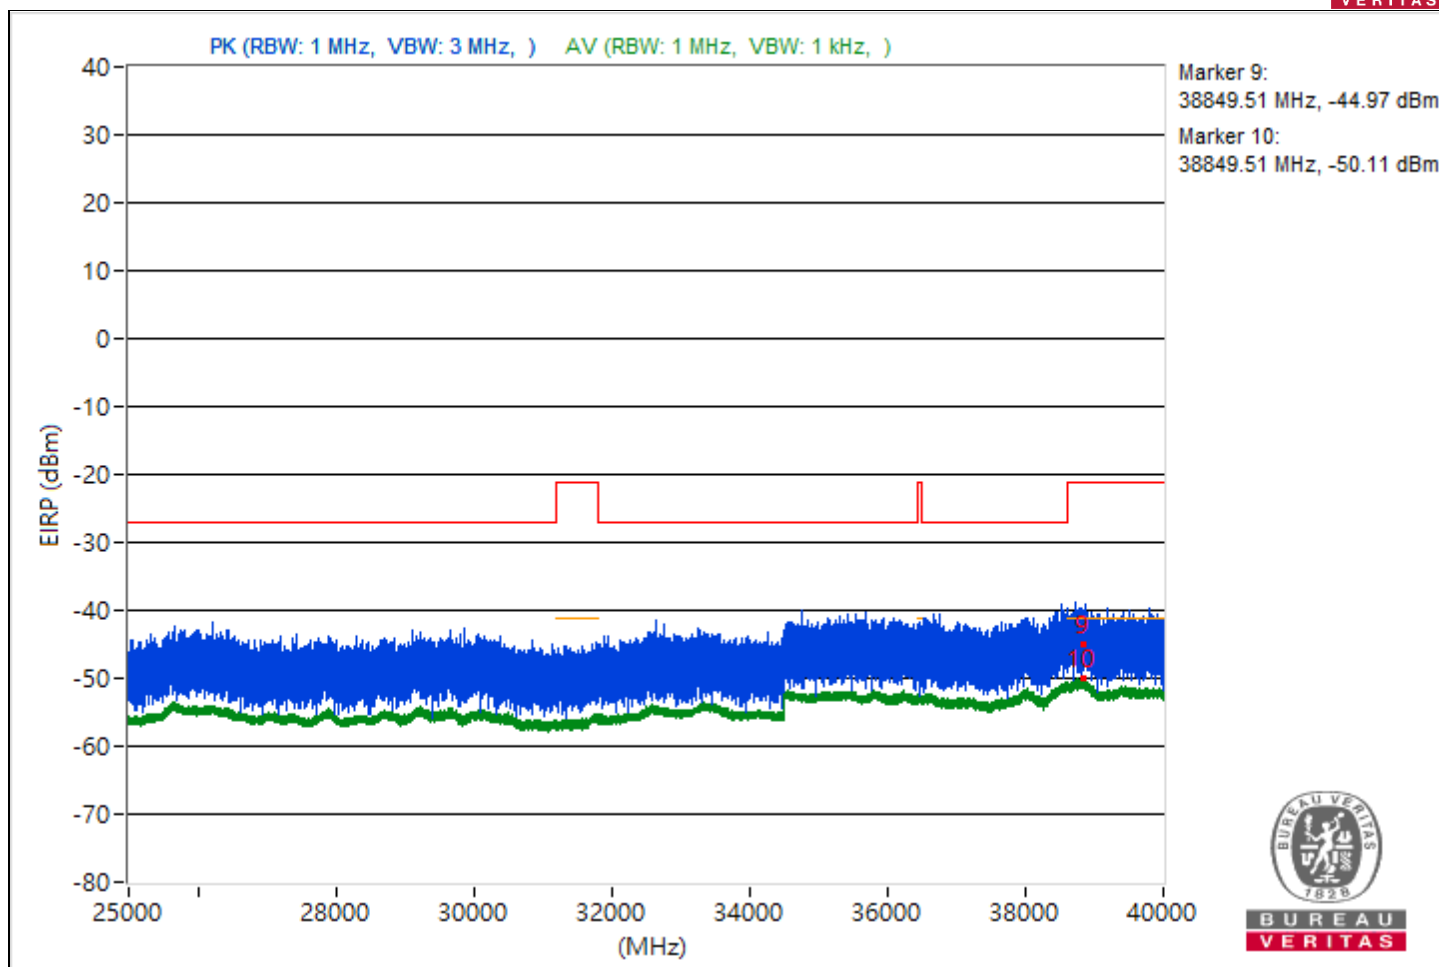


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT40) | Channel                  | CH 134 : 5670 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3757.92         | 54.15 PK                | 74             | -19.85      | -49.48                  | 8.37                   | -41.11           |
| 2                            | 3757.92         | 48.38 AV                | 54             | -5.62       | -55.25                  | 8.37                   | -46.88           |
| 3                            | 9072.09         | 53.82 PK                | 74             | -20.18      | -49.81                  | 8.37                   | -41.44           |
| 4                            | 9072.09         | 46.88 AV                | 54             | -7.12       | -56.75                  | 8.37                   | -48.38           |
| 5                            | 18976.5         | 54.58 PK                | 74             | -19.42      | -49.05                  | 8.37                   | -40.68           |
| 6                            | 18976.5         | 49.04 AV                | 54             | -4.96       | -54.59                  | 8.37                   | -46.22           |
| 7                            | 23838.4         | 56.6 PK                 | 74             | -17.4       | -47.03                  | 8.37                   | -38.66           |
| 8                            | 23838.4         | 51.19 AV                | 54             | -2.81       | -52.44                  | 8.37                   | -44.07           |
| 9                            | 38771.38        | 47.48 PK                | 74             | -26.52      | -56.15                  | 8.37                   | -47.78           |
| 10                           | 38771.38        | 45.13 AV                | 54             | -8.87       | -58.5                   | 8.37                   | -50.13           |

Note: Margin value = Emission Level - Limit value

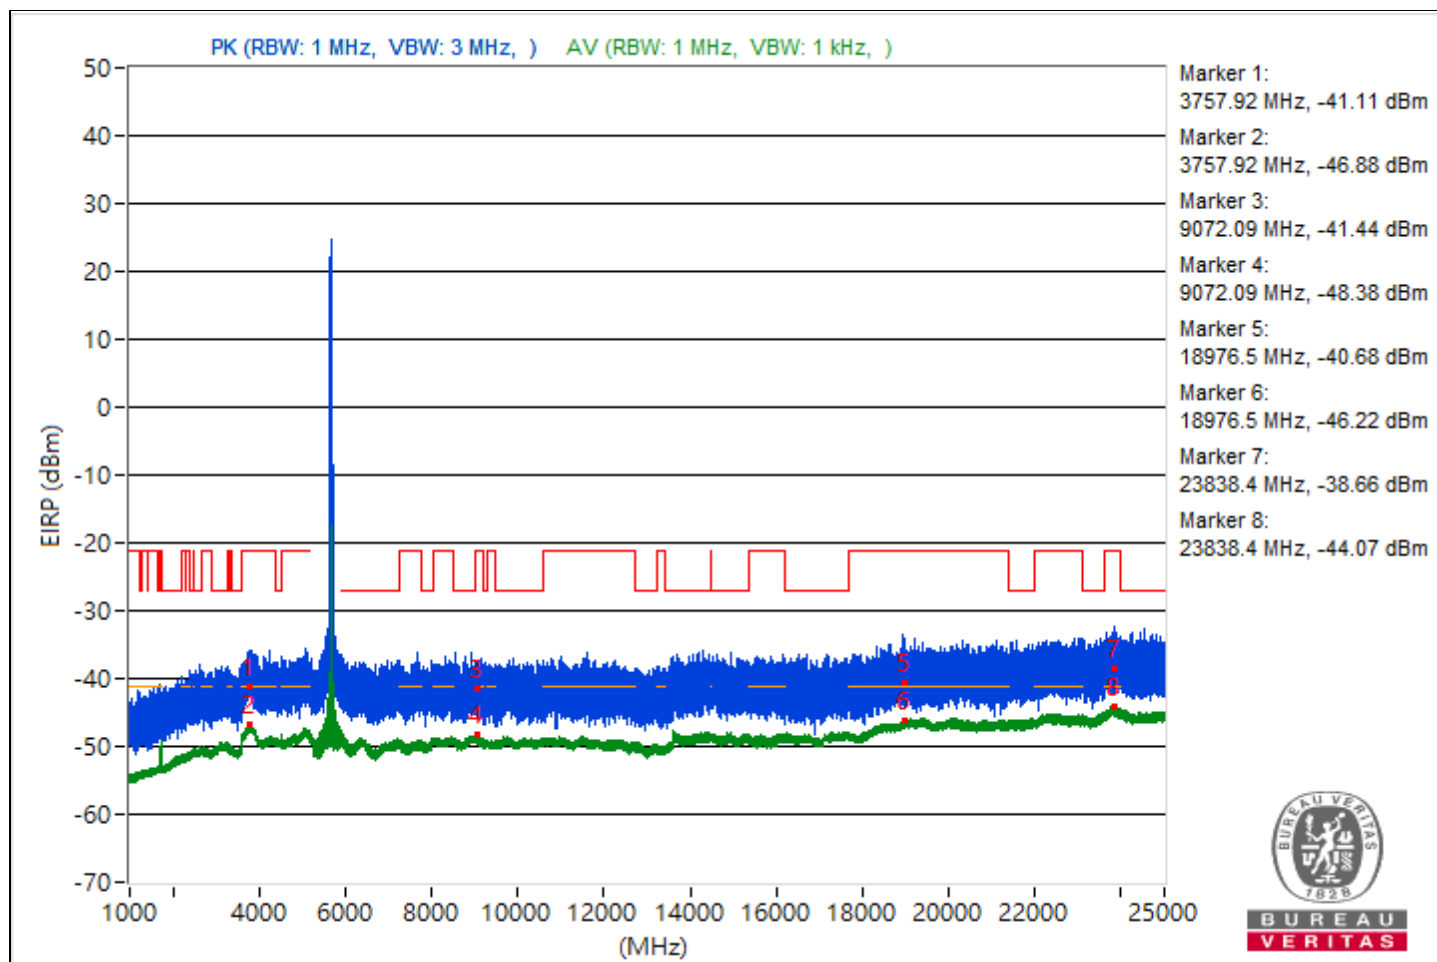


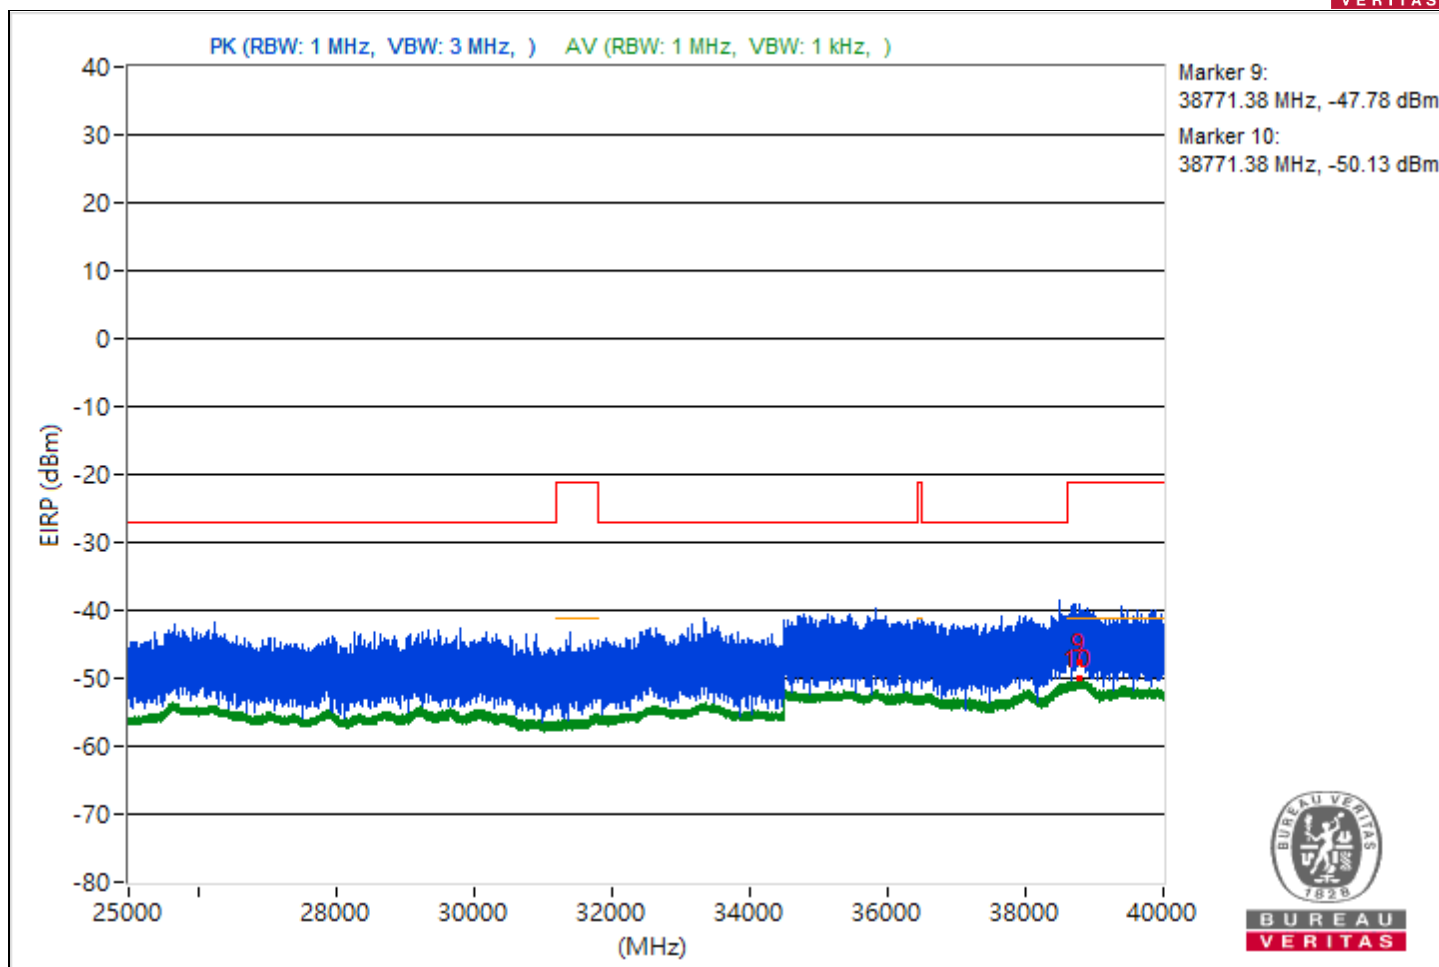


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT40) | Channel                  | CH 142 : 5710 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3761.66         | 53.14 PK                | 74             | -20.86      | -50.49                  | 8.37                   | -42.12           |
| 2                            | 3761.66         | 48.45 AV                | 54             | -5.55       | -55.18                  | 8.37                   | -46.81           |
| 3                            | 9027.56         | 54.47 PK                | 74             | -19.53      | -49.16                  | 8.37                   | -40.79           |
| 4                            | 9027.56         | 46.94 AV                | 54             | -7.06       | -56.69                  | 8.37                   | -48.32           |
| 5                            | 18997.7         | 58.55 PK                | 74             | -15.45      | -45.08                  | 8.37                   | -36.71           |
| 6                            | 18997.7         | 49.01 AV                | 54             | -4.99       | -54.62                  | 8.37                   | -46.25           |
| 7                            | 23813.7         | 59.55 PK                | 74             | -14.45      | -44.08                  | 8.37                   | -35.71           |
| 8                            | 23813.7         | 51.21 AV                | 54             | -2.79       | -52.42                  | 8.37                   | -44.05           |
| 9                            | 38817.6         | 53.05 PK                | 74             | -20.95      | -50.58                  | 8.37                   | -42.21           |
| 10                           | 38817.6         | 45.13 AV                | 54             | -8.87       | -58.5                   | 8.37                   | -50.13           |

Note: Margin value = Emission Level - Limit value

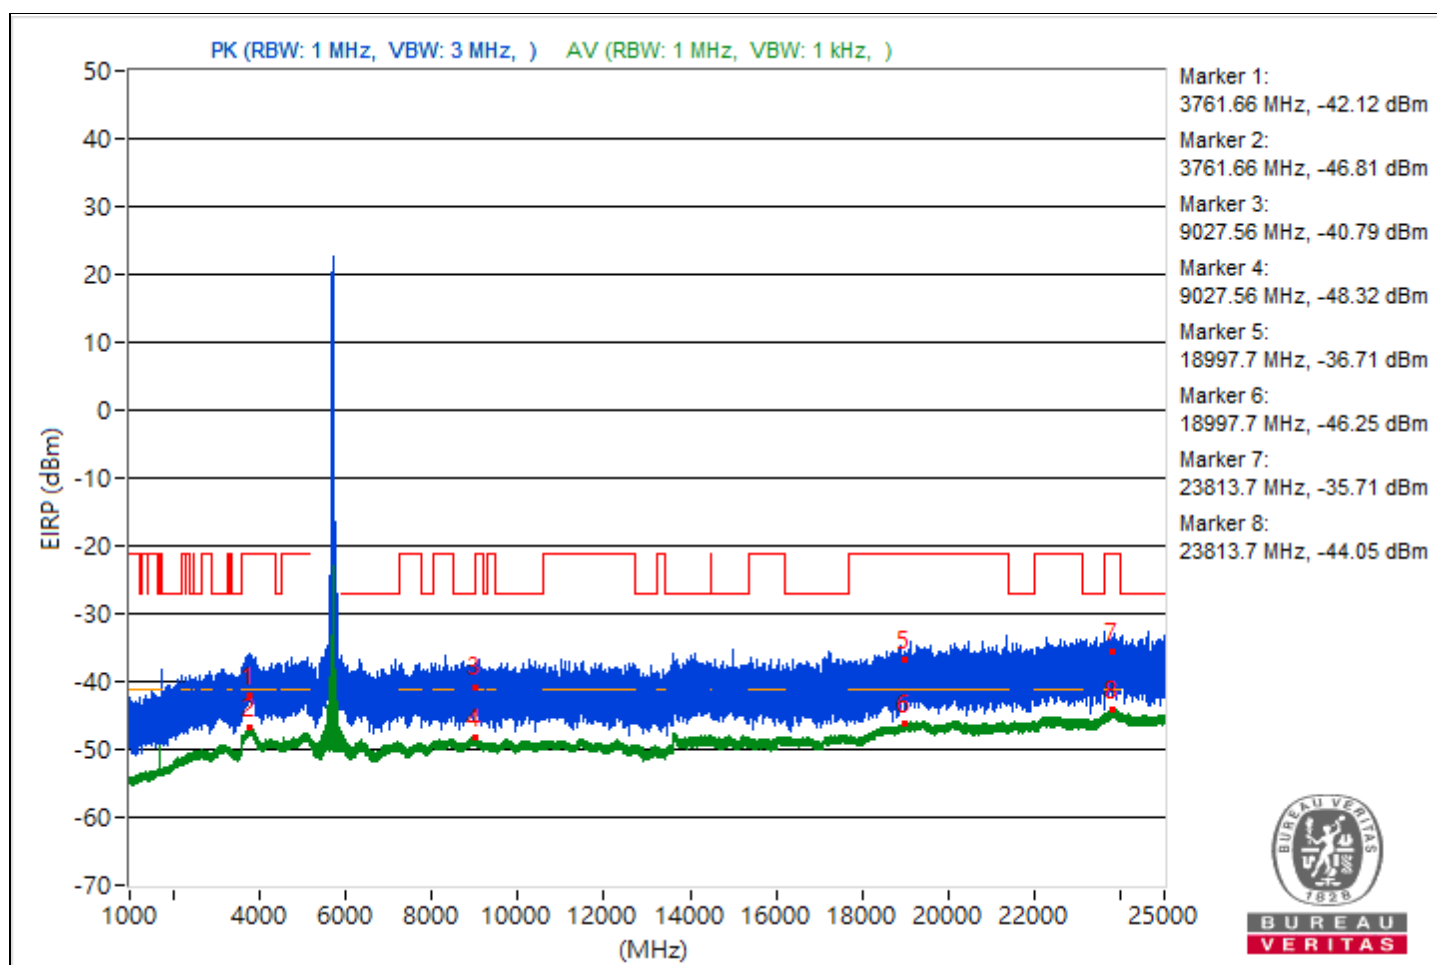


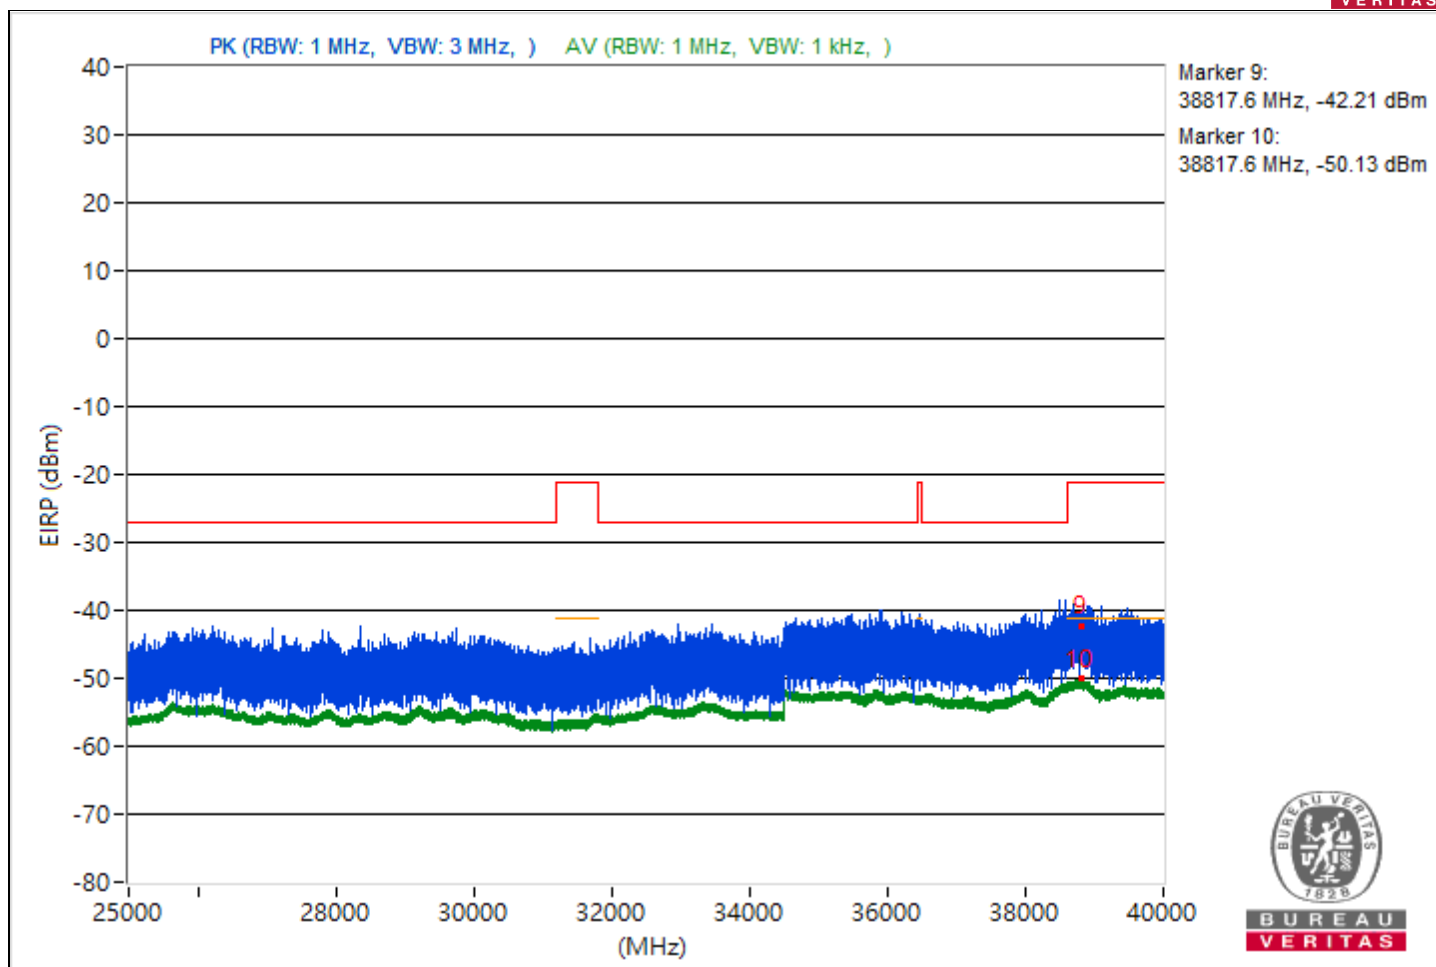


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT40) | Channel                  | CH 151 : 5755 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3819.52         | 58.12 PK                | 74             | -15.88      | -45.51                  | 8.37                   | -37.14           |
| 2                            | 3819.52         | 48.54 AV                | 54             | -5.46       | -55.09                  | 8.37                   | -46.72           |
| 3                            | 11504.71        | 53.88 PK                | 74             | -20.12      | -49.75                  | 8.37                   | -41.38           |
| 4                            | 11504.71        | 47.17 AV                | 54             | -6.83       | -56.46                  | 8.37                   | -48.09           |
| 5                            | 18965           | 55.91 PK                | 74             | -18.09      | -47.72                  | 8.37                   | -39.35           |
| 6                            | 18965           | 49.03 AV                | 54             | -4.97       | -54.6                   | 8.37                   | -46.23           |
| 7                            | 23782.2         | 58.17 PK                | 74             | -15.83      | -45.46                  | 8.37                   | -37.09           |
| 8                            | 23782.2         | 51.12 AV                | 54             | -2.88       | -52.51                  | 8.37                   | -44.14           |
| 9                            | 38784.98        | 47.99 PK                | 74             | -26.01      | -55.64                  | 8.37                   | -47.27           |
| 10                           | 38784.98        | 45.12 AV                | 54             | -8.88       | -58.51                  | 8.37                   | -50.14           |

Note: Margin value = Emission Level - Limit value

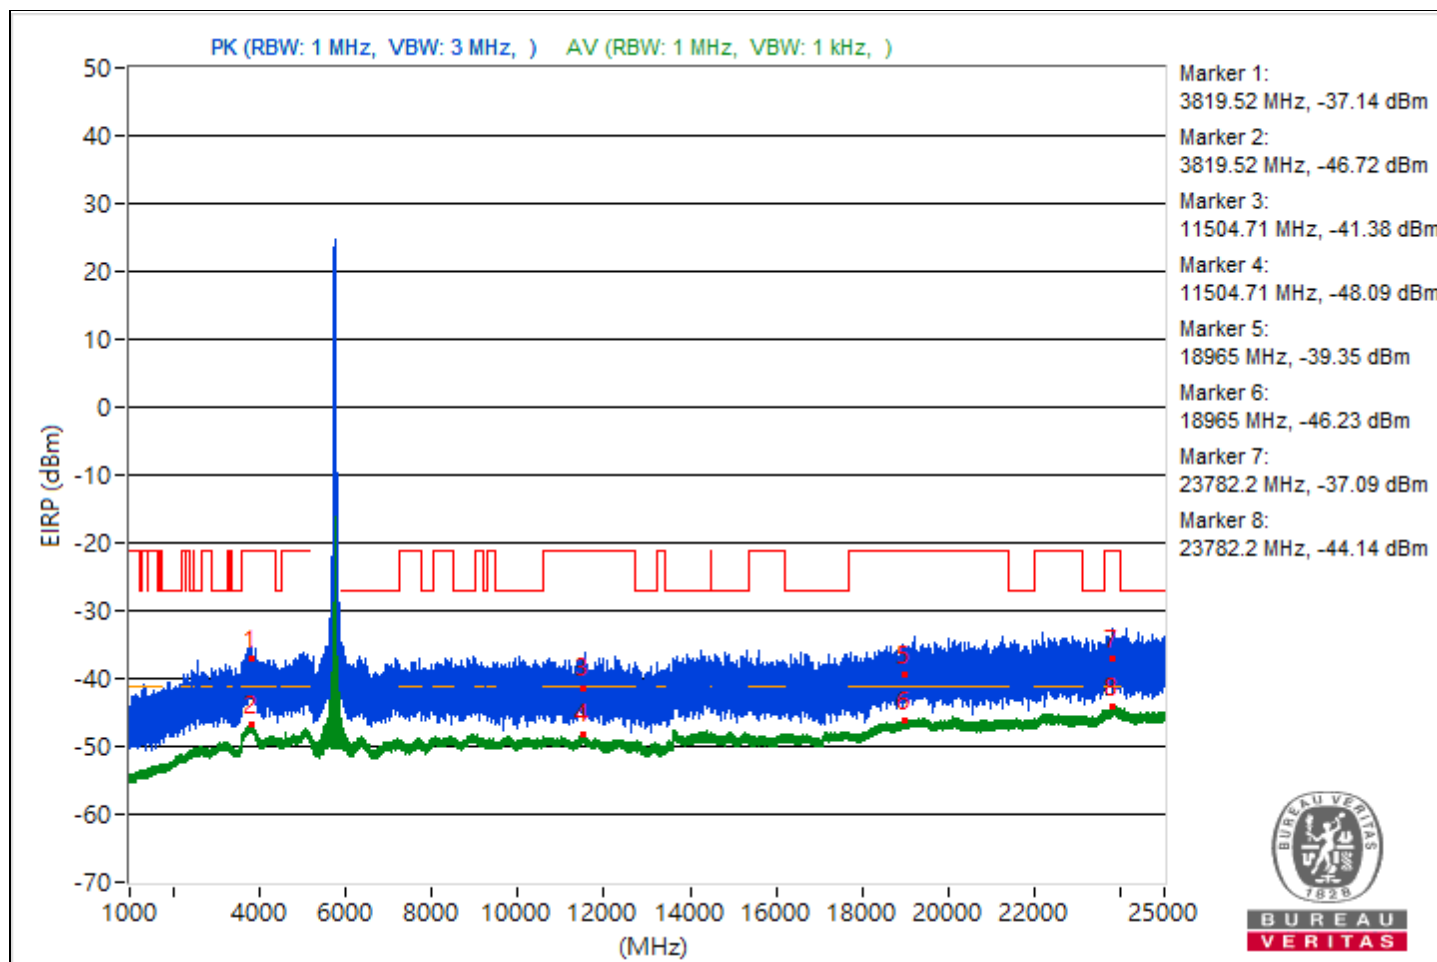


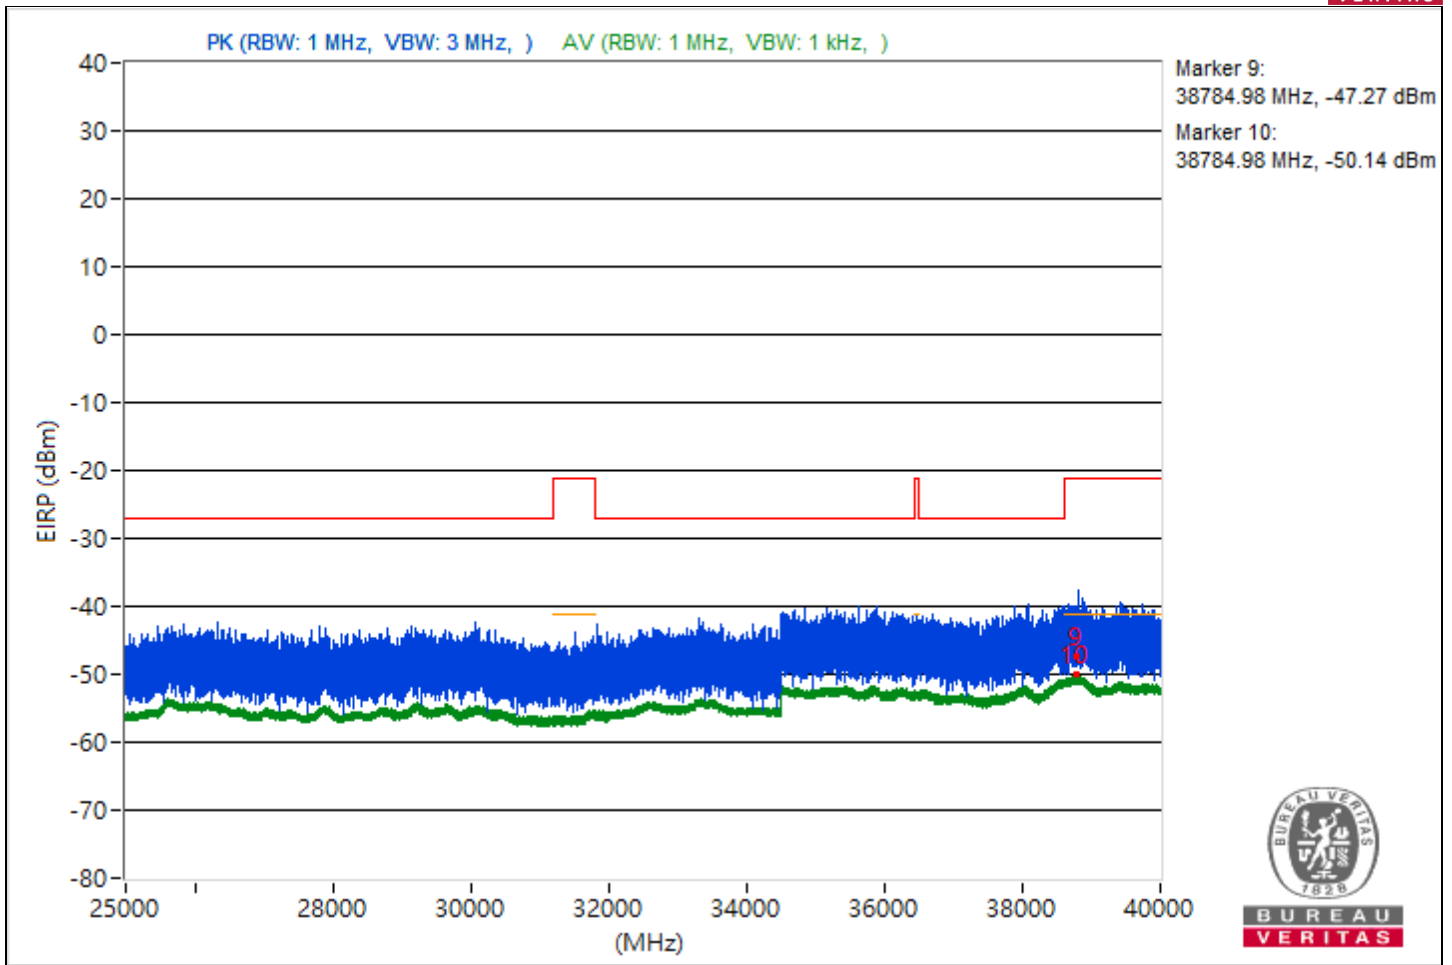


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT40) | Channel                  | CH 159 : 5795 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3805.83         | 55.24 PK                | 74             | -18.76      | -48.39                  | 8.37                   | -40.02           |
| 2                            | 3805.83         | 48.65 AV                | 54             | -5.35       | -54.98                  | 8.37                   | -46.61           |
| 3                            | 9012.98         | 53.59 PK                | 74             | -20.41      | -50.04                  | 8.37                   | -41.67           |
| 4                            | 9012.98         | 47 AV                   | 54             | -7          | -56.63                  | 8.37                   | -48.26           |
| 5                            | 18965.7         | 53.82 PK                | 74             | -20.18      | -49.81                  | 8.37                   | -41.44           |
| 6                            | 18965.7         | 49.09 AV                | 54             | -4.91       | -54.54                  | 8.37                   | -46.17           |
| 7                            | 23849.4         | 56.74 PK                | 74             | -17.26      | -46.89                  | 8.37                   | -38.52           |
| 8                            | 23849.4         | 51.2 AV                 | 54             | -2.8        | -52.43                  | 8.37                   | -44.06           |
| 9                            | 38813.07        | 50.91 PK                | 74             | -23.09      | -52.72                  | 8.37                   | -44.35           |
| 10                           | 38813.07        | 45.07 AV                | 54             | -8.93       | -58.56                  | 8.37                   | -50.19           |

Note: Margin value = Emission Level - Limit value

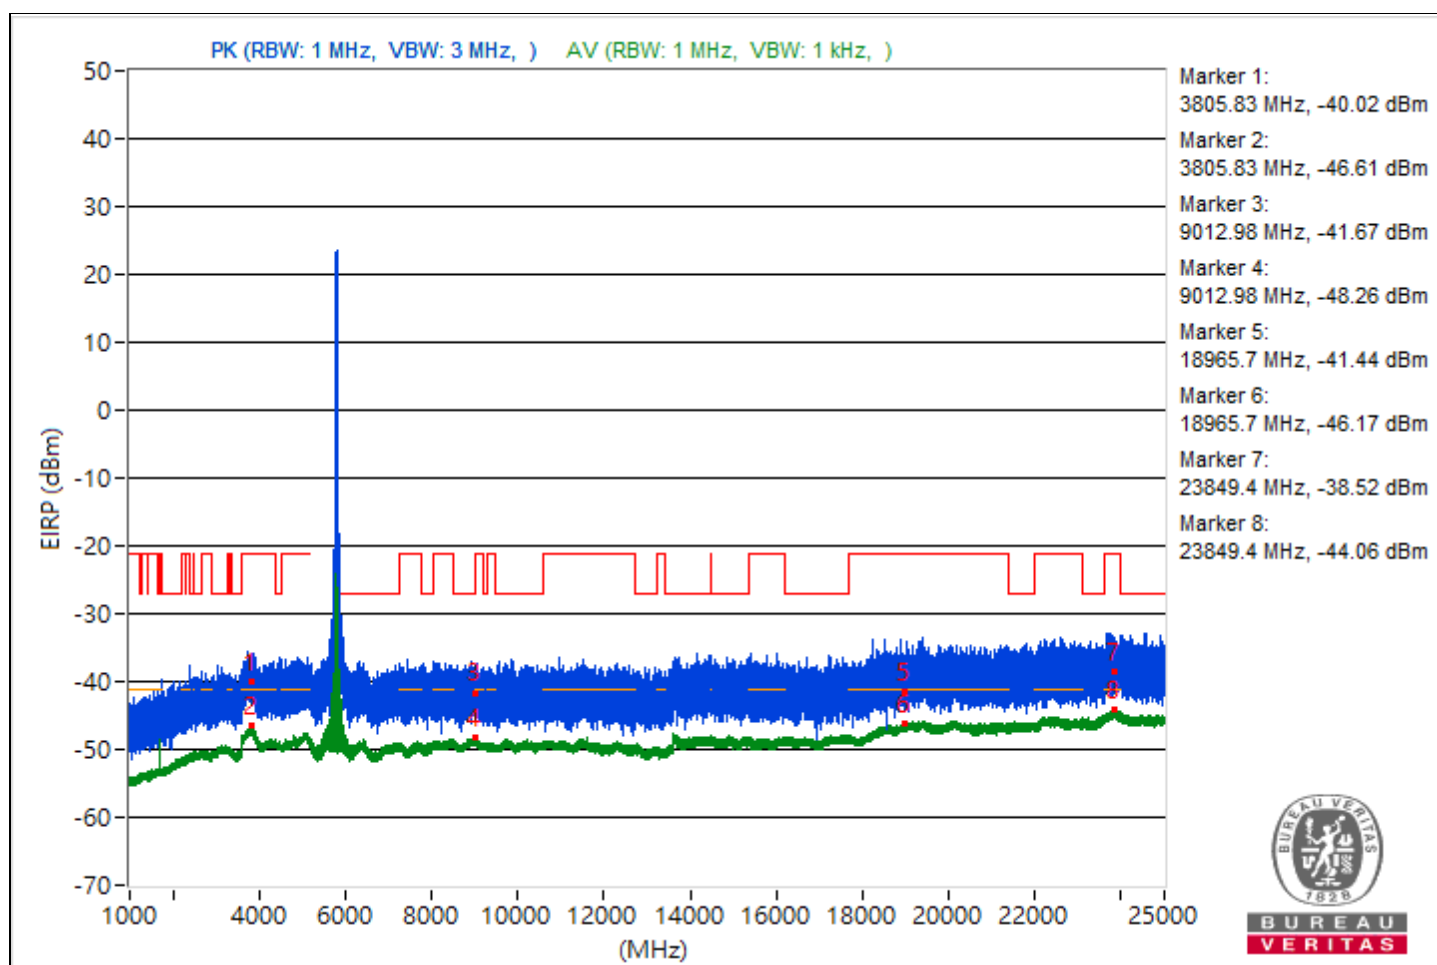


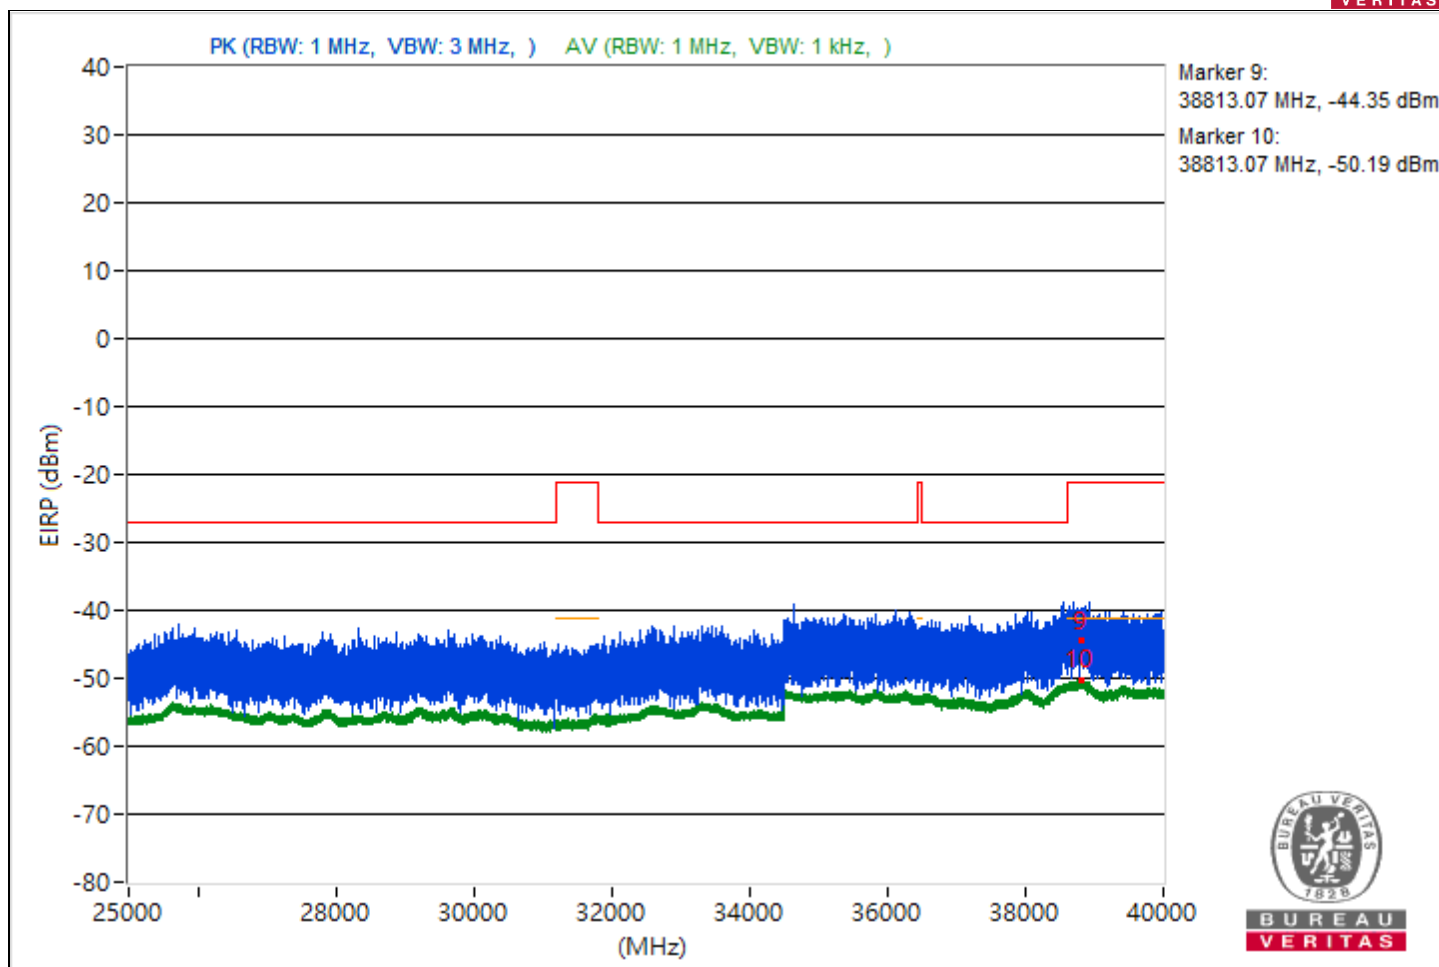


|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT80) | Channel                  | CH 42 : 5210 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu        |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5095.7          | 61.17 PK                | 74             | -12.83      | -42.46                  | 8.37                   | -34.09           |
| 2                            | 5095.7          | 53.27 AV                | 54             | -0.73       | -50.36                  | 8.37                   | -41.99           |
| 3                            | 8335.73         | 53.9 PK                 | 74             | -20.1       | -49.73                  | 8.37                   | -41.36           |
| 4                            | 8335.73         | 46.97 AV                | 54             | -7.03       | -56.66                  | 8.37                   | -48.29           |
| 5                            | 18996.5         | 56.44 PK                | 74             | -17.56      | -47.19                  | 8.37                   | -38.82           |
| 6                            | 18996.5         | 48.94 AV                | 54             | -5.06       | -54.69                  | 8.37                   | -46.32           |
| 7                            | 23790.6         | 58.6 PK                 | 74             | -15.4       | -45.03                  | 8.37                   | -36.66           |
| 8                            | 23790.6         | 51.13 AV                | 54             | -2.87       | -52.5                   | 8.37                   | -44.13           |
| 9                            | 38818.4         | 51.06 PK                | 74             | -22.94      | -52.57                  | 8.37                   | -44.2            |
| 10                           | 38818.4         | 45.13 AV                | 54             | -8.87       | -58.5                   | 8.37                   | -50.13           |

Note: Margin value = Emission Level - Limit value

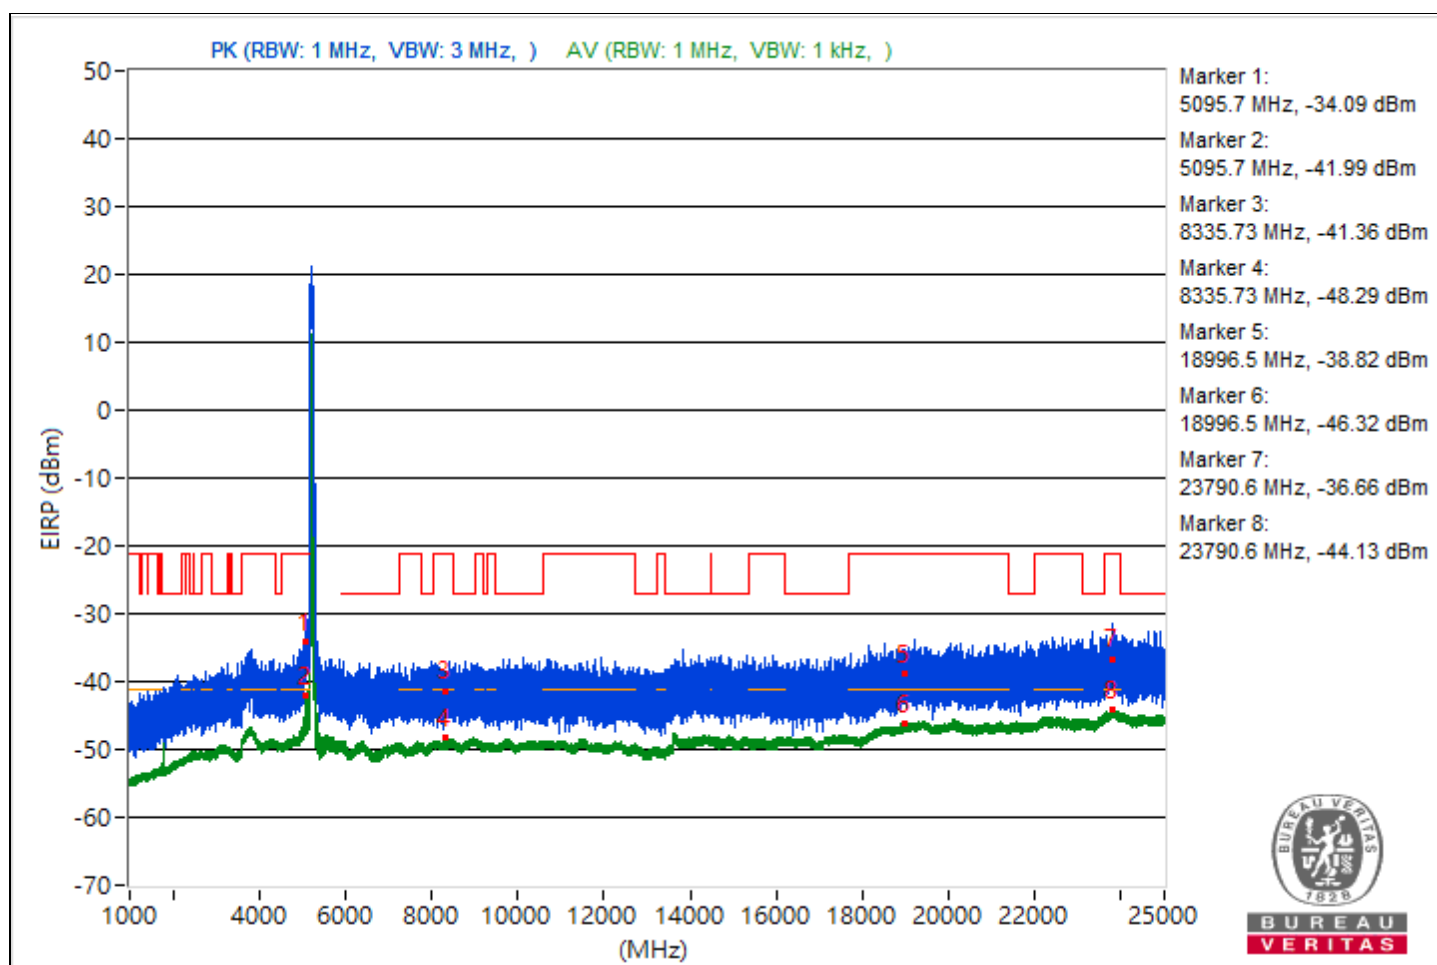


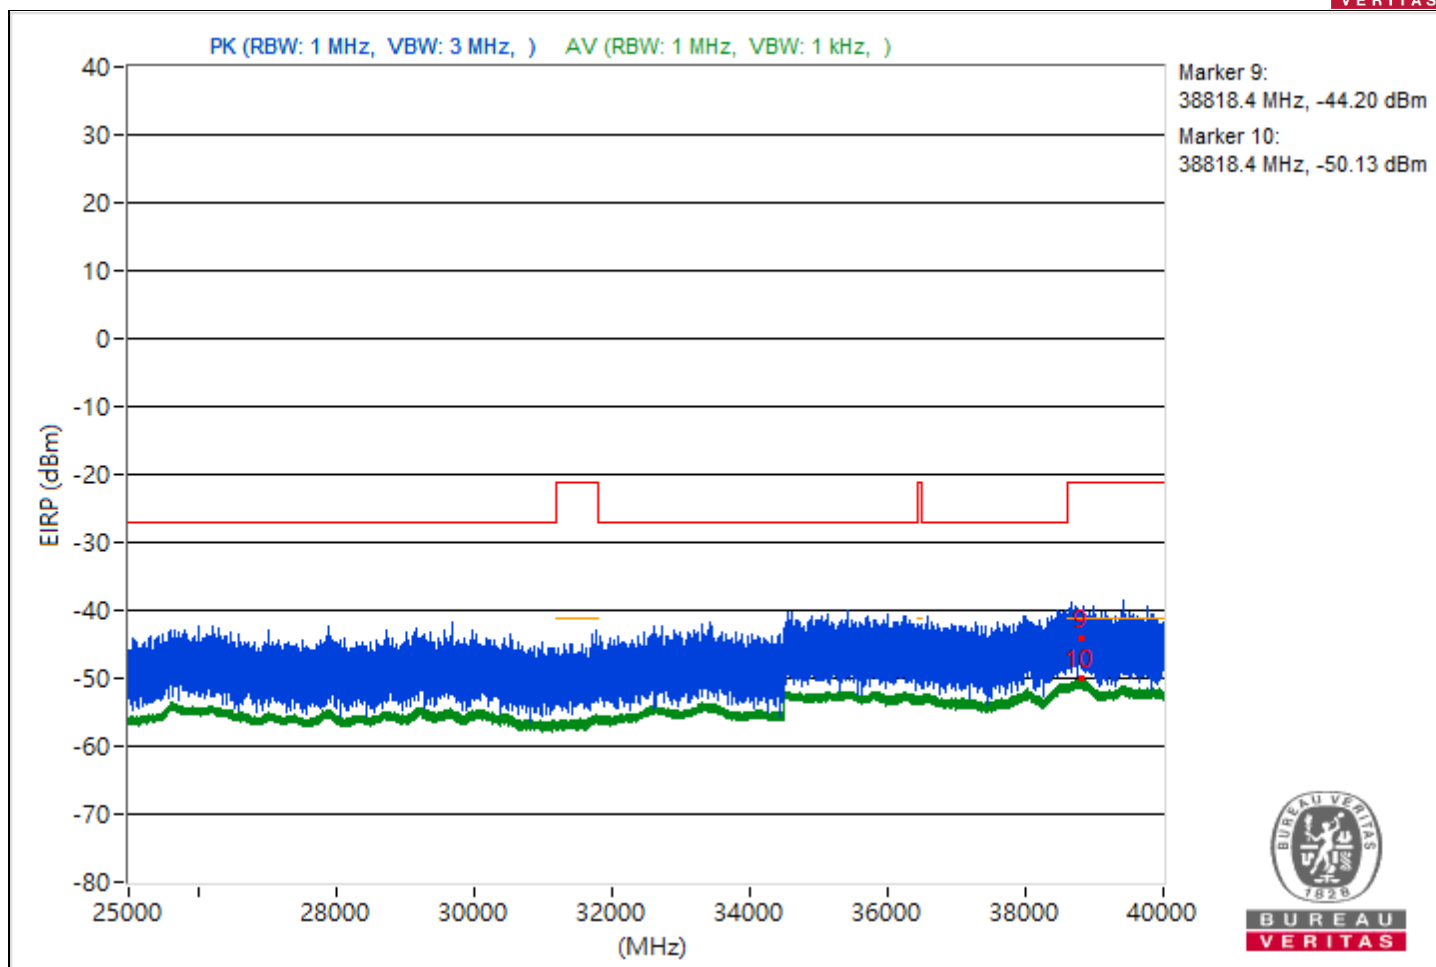


|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT80) | Channel                  | CH 58 : 5290 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu        |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5092.98         | 59 PK                   | 74             | -15         | -44.63                  | 8.37                   | -36.26           |
| 2                            | 5092.98         | 49.7 AV                 | 54             | -4.3        | -53.93                  | 8.37                   | -45.56           |
| 3                            | 9014.76         | 55.1 PK                 | 74             | -18.9       | -48.53                  | 8.37                   | -40.16           |
| 4                            | 9014.76         | 46.9 AV                 | 54             | -7.1        | -56.73                  | 8.37                   | -48.36           |
| 5                            | 18996.1         | 58.04 PK                | 74             | -15.96      | -45.59                  | 8.37                   | -37.22           |
| 6                            | 18996.1         | 49.04 AV                | 54             | -4.96       | -54.59                  | 8.37                   | -46.22           |
| 7                            | 23844.3         | 59.29 PK                | 74             | -14.71      | -44.34                  | 8.37                   | -35.97           |
| 8                            | 23844.3         | 51.43 AV                | 54             | -2.57       | -52.2                   | 8.37                   | -43.83           |
| 9                            | 38779.73        | 54.44 PK                | 74             | -19.56      | -49.19                  | 8.37                   | -40.82           |
| 10                           | 38779.73        | 45.24 AV                | 54             | -8.76       | -58.39                  | 8.37                   | -50.02           |

Note: Margin value = Emission Level - Limit value

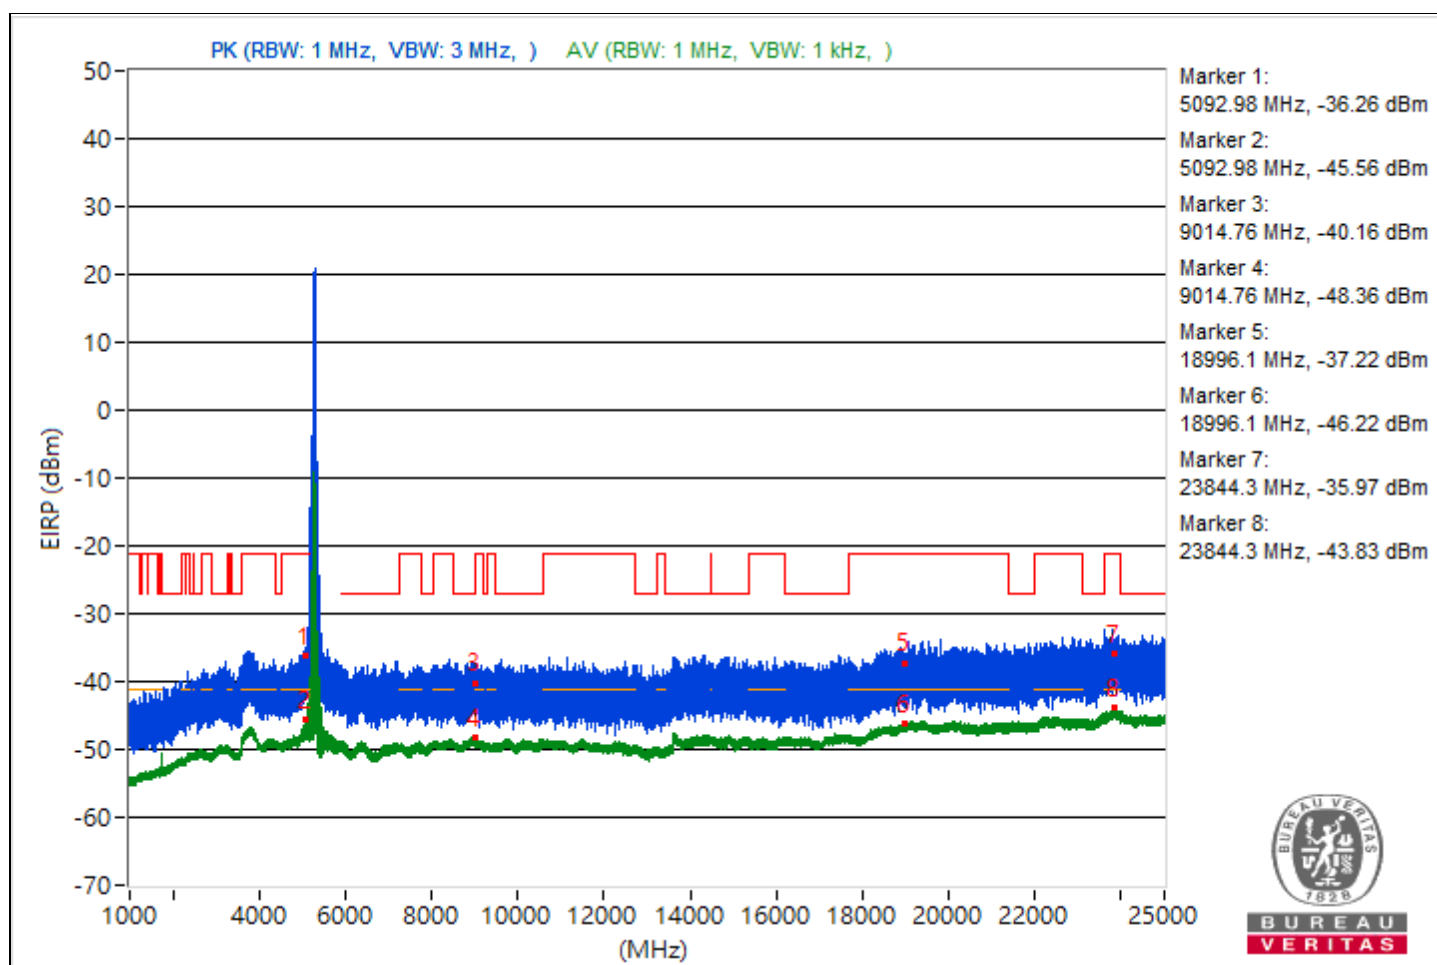


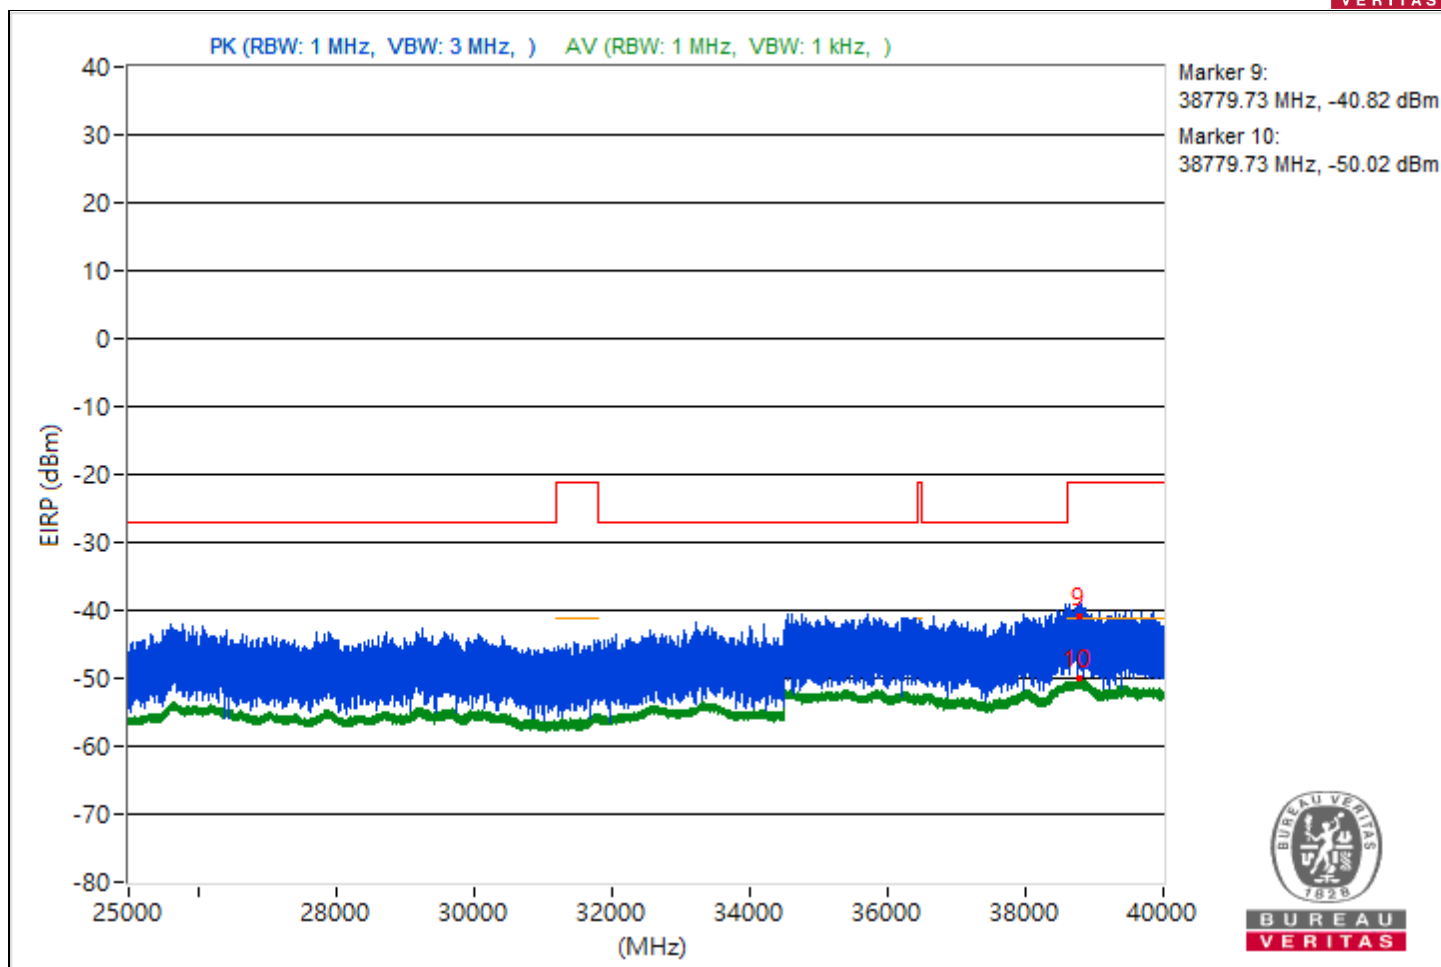


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) | Channel                  | CH 106 : 5530 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3778.22         | 58.67 PK                | 74             | -15.33      | -44.96                  | 8.37                   | -36.59           |
| 2                            | 3778.22         | 48.61 AV                | 54             | -5.39       | -55.02                  | 8.37                   | -46.65           |
| 3                            | 8415.73         | 53.37 PK                | 74             | -20.63      | -50.26                  | 8.37                   | -41.89           |
| 4                            | 8415.73         | 46.89 AV                | 54             | -7.11       | -56.74                  | 8.37                   | -48.37           |
| 5                            | 18958.2         | 54.28 PK                | 74             | -19.72      | -49.35                  | 8.37                   | -40.98           |
| 6                            | 18958.2         | 49.01 AV                | 54             | -4.99       | -54.62                  | 8.37                   | -46.25           |
| 7                            | 23782.9         | 58.1 PK                 | 74             | -15.9       | -45.53                  | 8.37                   | -37.16           |
| 8                            | 23782.9         | 51.07 AV                | 54             | -2.93       | -52.56                  | 8.37                   | -44.19           |
| 9                            | 38766.58        | 50.69 PK                | 74             | -23.31      | -52.94                  | 8.37                   | -44.57           |
| 10                           | 38766.58        | 45.08 AV                | 54             | -8.92       | -58.55                  | 8.37                   | -50.18           |

Note: Margin value = Emission Level - Limit value

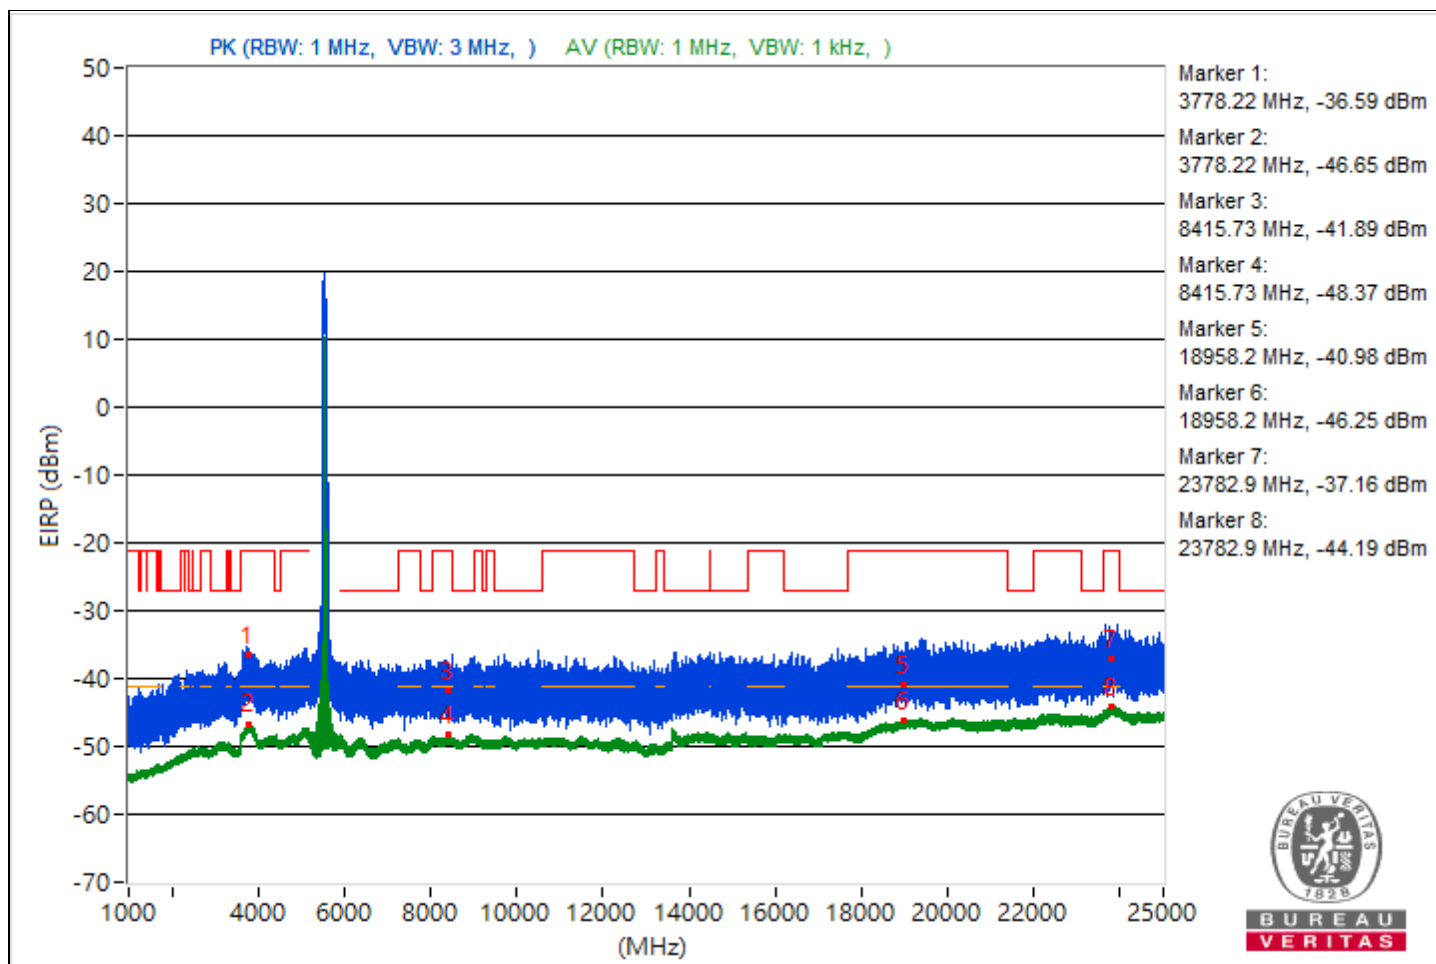


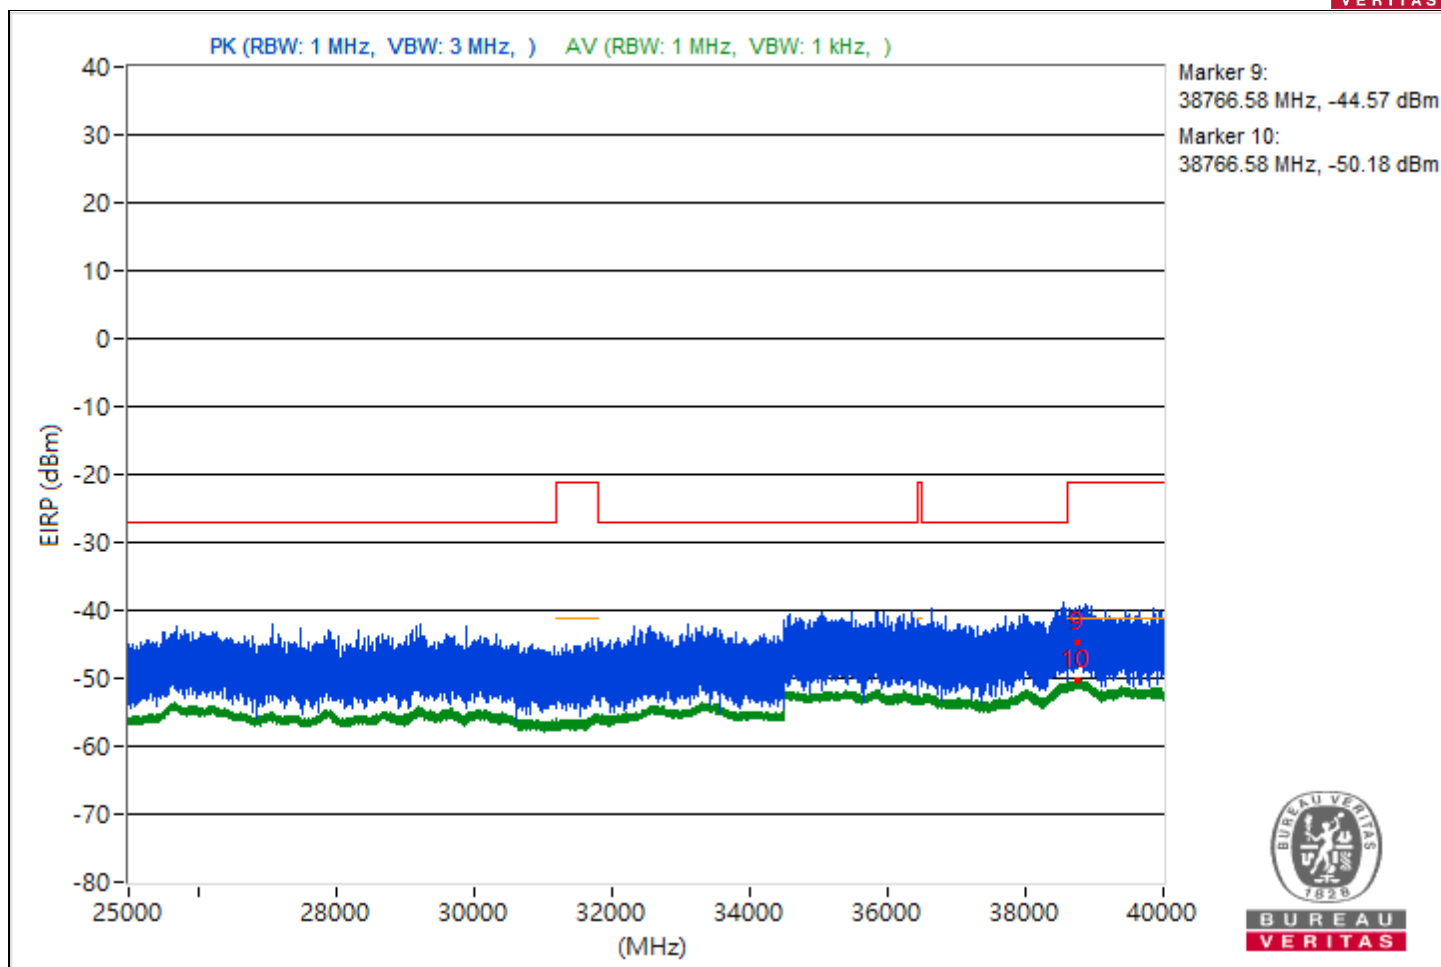


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) | Channel                  | CH 122 : 5610 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3808.48         | 57.27 PK                | 74             | -16.73      | -46.36                  | 8.37                   | -37.99           |
| 2                            | 3808.48         | 48.56 AV                | 54             | -5.44       | -55.07                  | 8.37                   | -46.7            |
| 3                            | 9012.62         | 54.09 PK                | 74             | -19.91      | -49.54                  | 8.37                   | -41.17           |
| 4                            | 9012.62         | 46.86 AV                | 54             | -7.14       | -56.77                  | 8.37                   | -48.4            |
| 5                            | 18948.7         | 55.63 PK                | 74             | -18.37      | -48                     | 8.37                   | -39.63           |
| 6                            | 18948.7         | 49.01 AV                | 54             | -4.99       | -54.62                  | 8.37                   | -46.25           |
| 7                            | 23819.7         | 60.29 PK                | 74             | -13.71      | -43.34                  | 8.37                   | -34.97           |
| 8                            | 23819.7         | 51.18 AV                | 54             | -2.82       | -52.45                  | 8.37                   | -44.08           |
| 9                            | 38815.82        | 54.01 PK                | 74             | -19.99      | -49.62                  | 8.37                   | -41.25           |
| 10                           | 38815.82        | 45.02 AV                | 54             | -8.98       | -58.61                  | 8.37                   | -50.24           |

Note: Margin value = Emission Level - Limit value

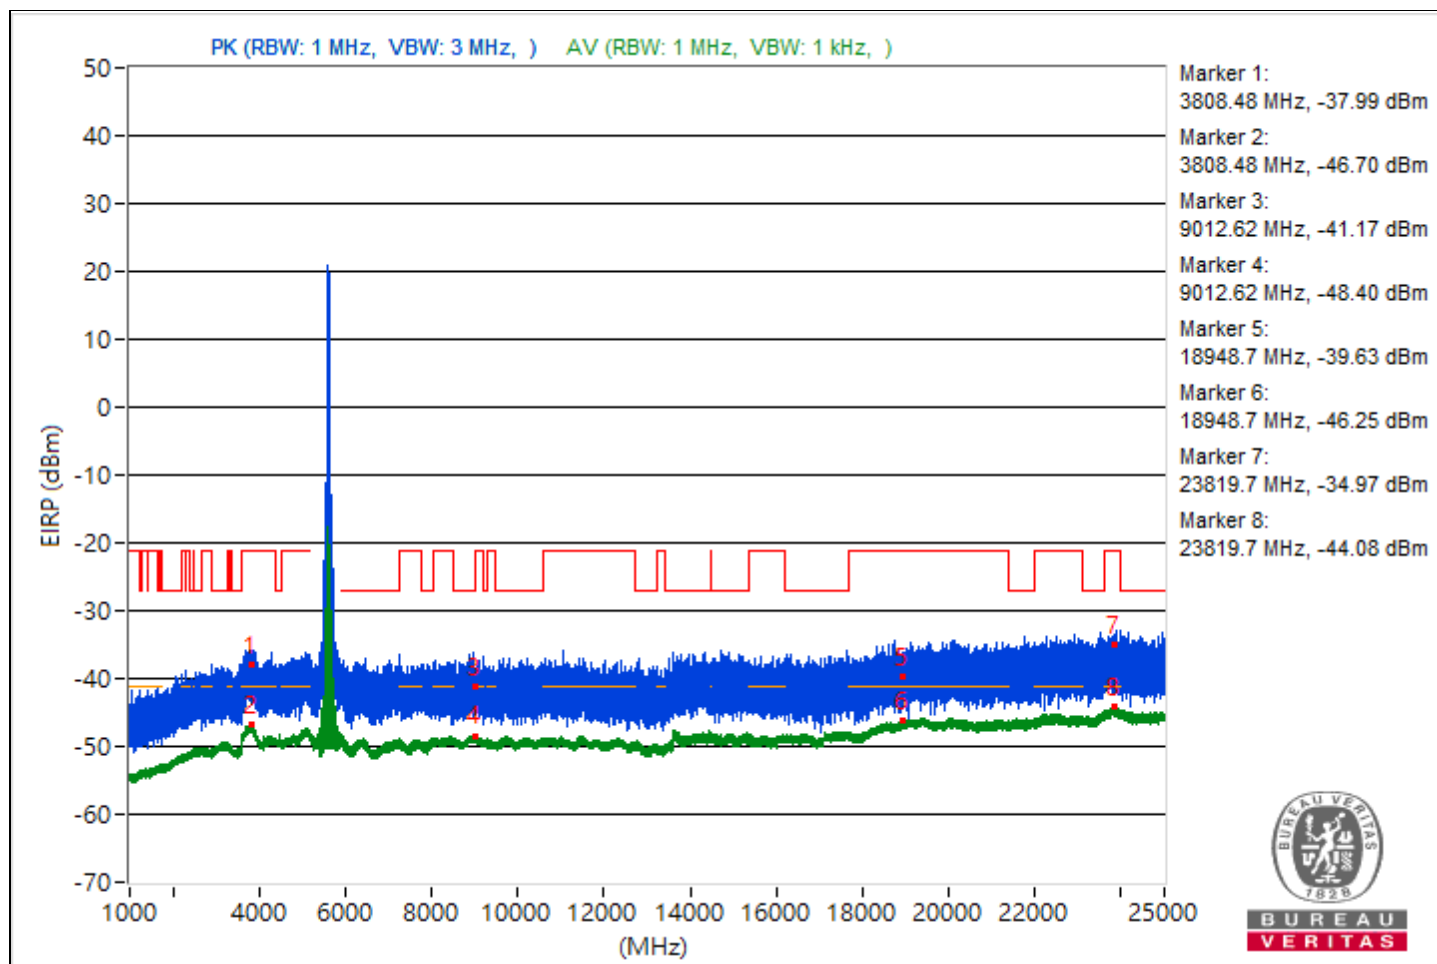


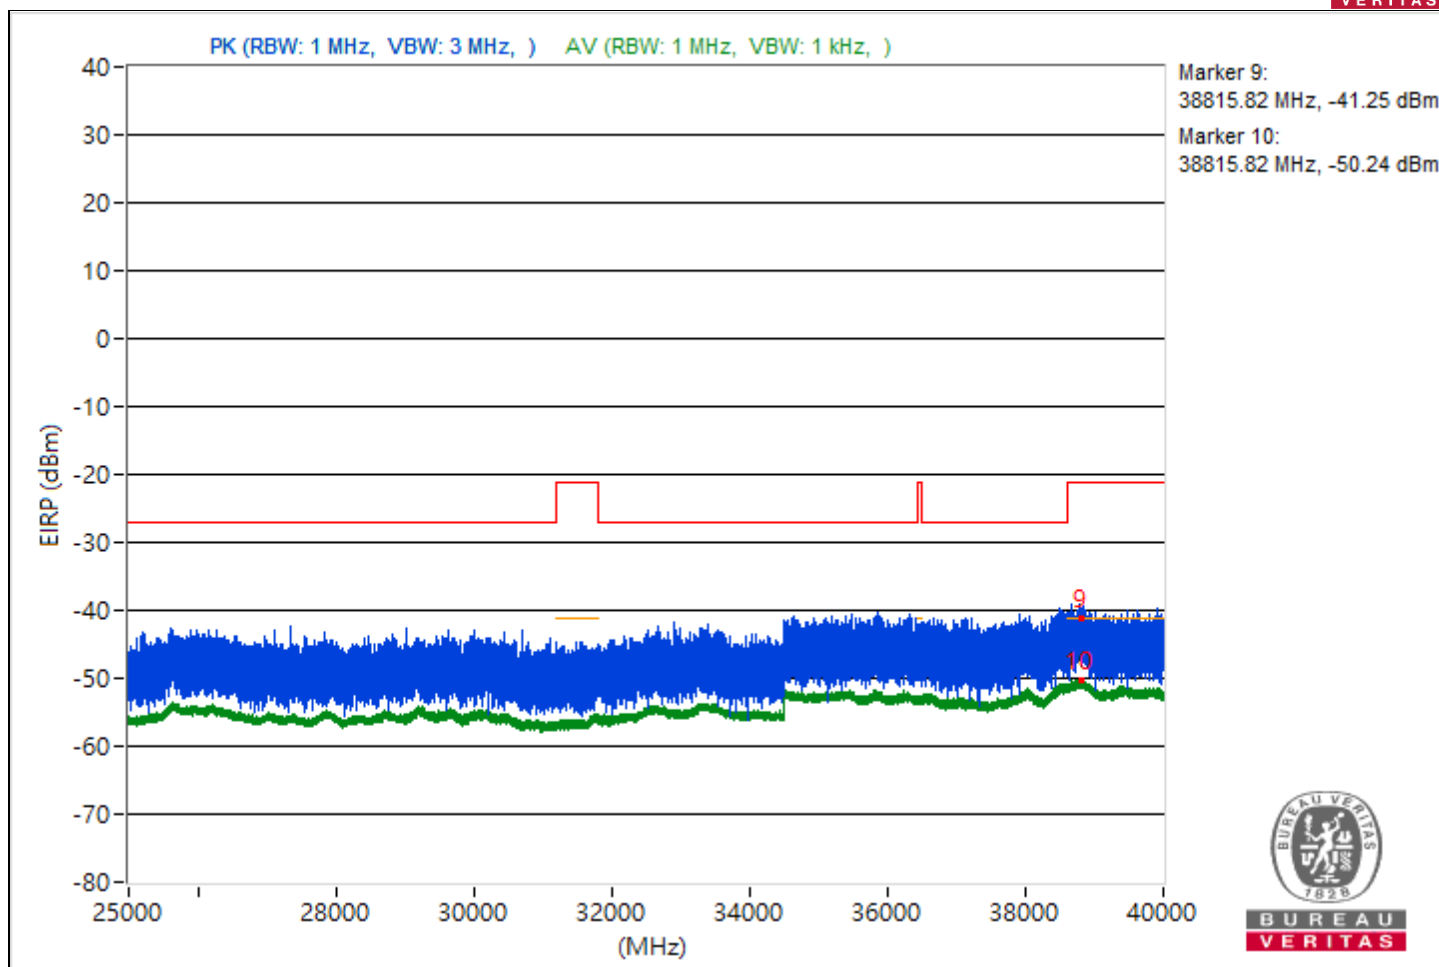


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) | Channel                  | CH 138 : 5690 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3816.64         | 54.8 PK                 | 74             | -19.2       | -48.83                  | 8.37                   | -40.46           |
| 2                            | 3816.64         | 48.41 AV                | 54             | -5.59       | -55.22                  | 8.37                   | -46.85           |
| 3                            | 9047.47         | 53.01 PK                | 74             | -20.99      | -50.62                  | 8.37                   | -42.25           |
| 4                            | 9047.47         | 46.86 AV                | 54             | -7.14       | -56.77                  | 8.37                   | -48.4            |
| 5                            | 18998.5         | 55.23 PK                | 74             | -18.77      | -48.4                   | 8.37                   | -40.03           |
| 6                            | 18998.5         | 49.03 AV                | 54             | -4.97       | -54.6                   | 8.37                   | -46.23           |
| 7                            | 23819.3         | 60.7 PK                 | 74             | -13.3       | -42.93                  | 8.37                   | -34.56           |
| 8                            | 23819.3         | 51.29 AV                | 54             | -2.71       | -52.34                  | 8.37                   | -43.97           |
| 9                            | 38790.58        | 51.16 PK                | 74             | -22.84      | -52.47                  | 8.37                   | -44.1            |
| 10                           | 38790.58        | 45.02 AV                | 54             | -8.98       | -58.61                  | 8.37                   | -50.24           |

Note: Margin value = Emission Level - Limit value

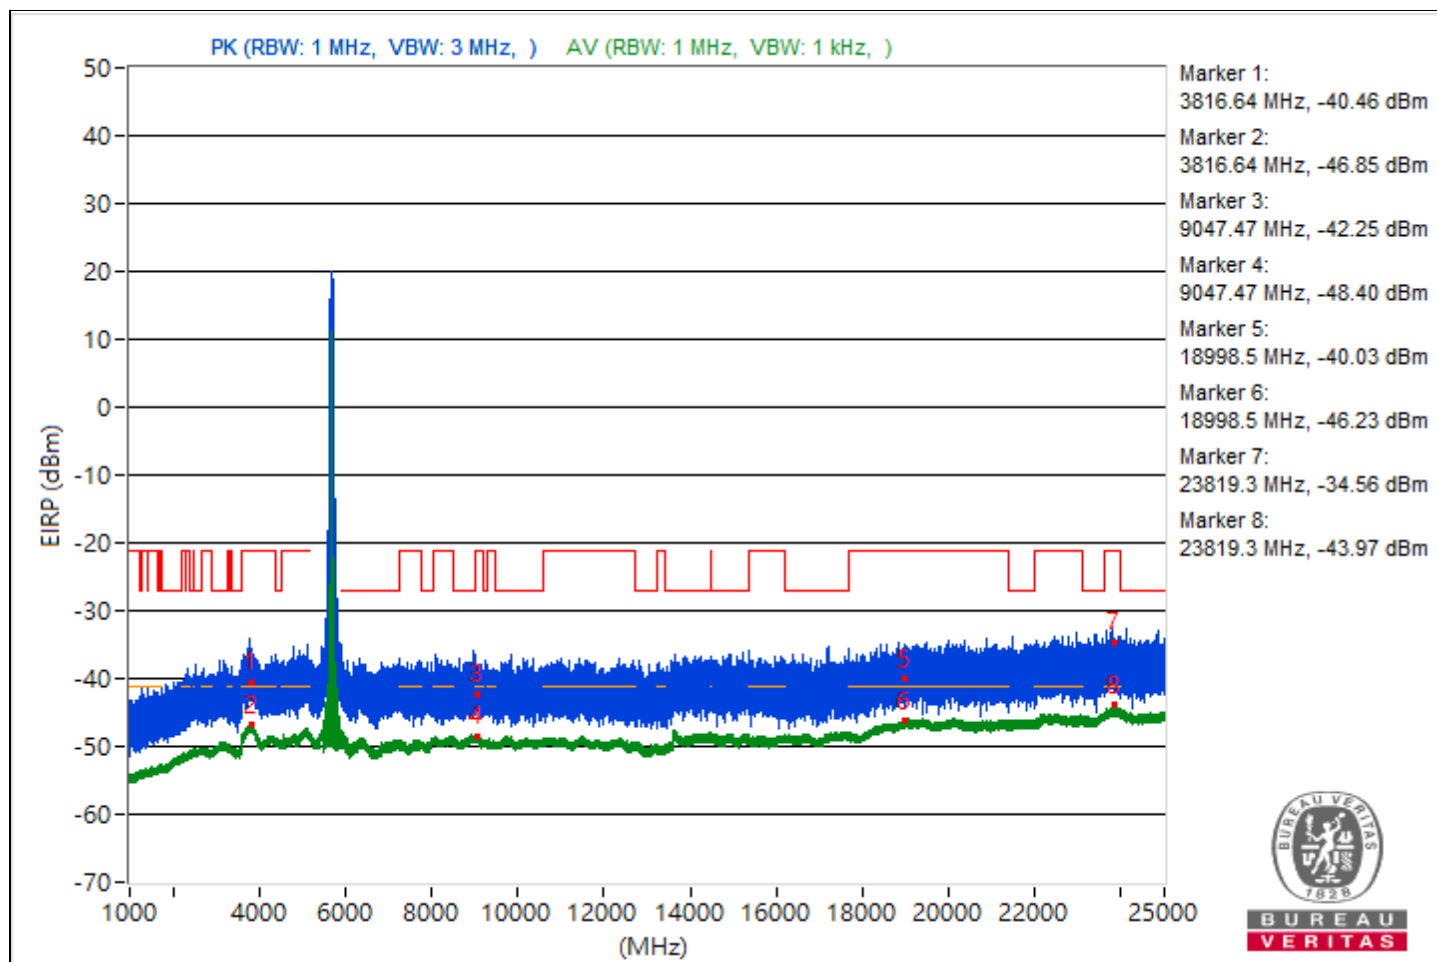


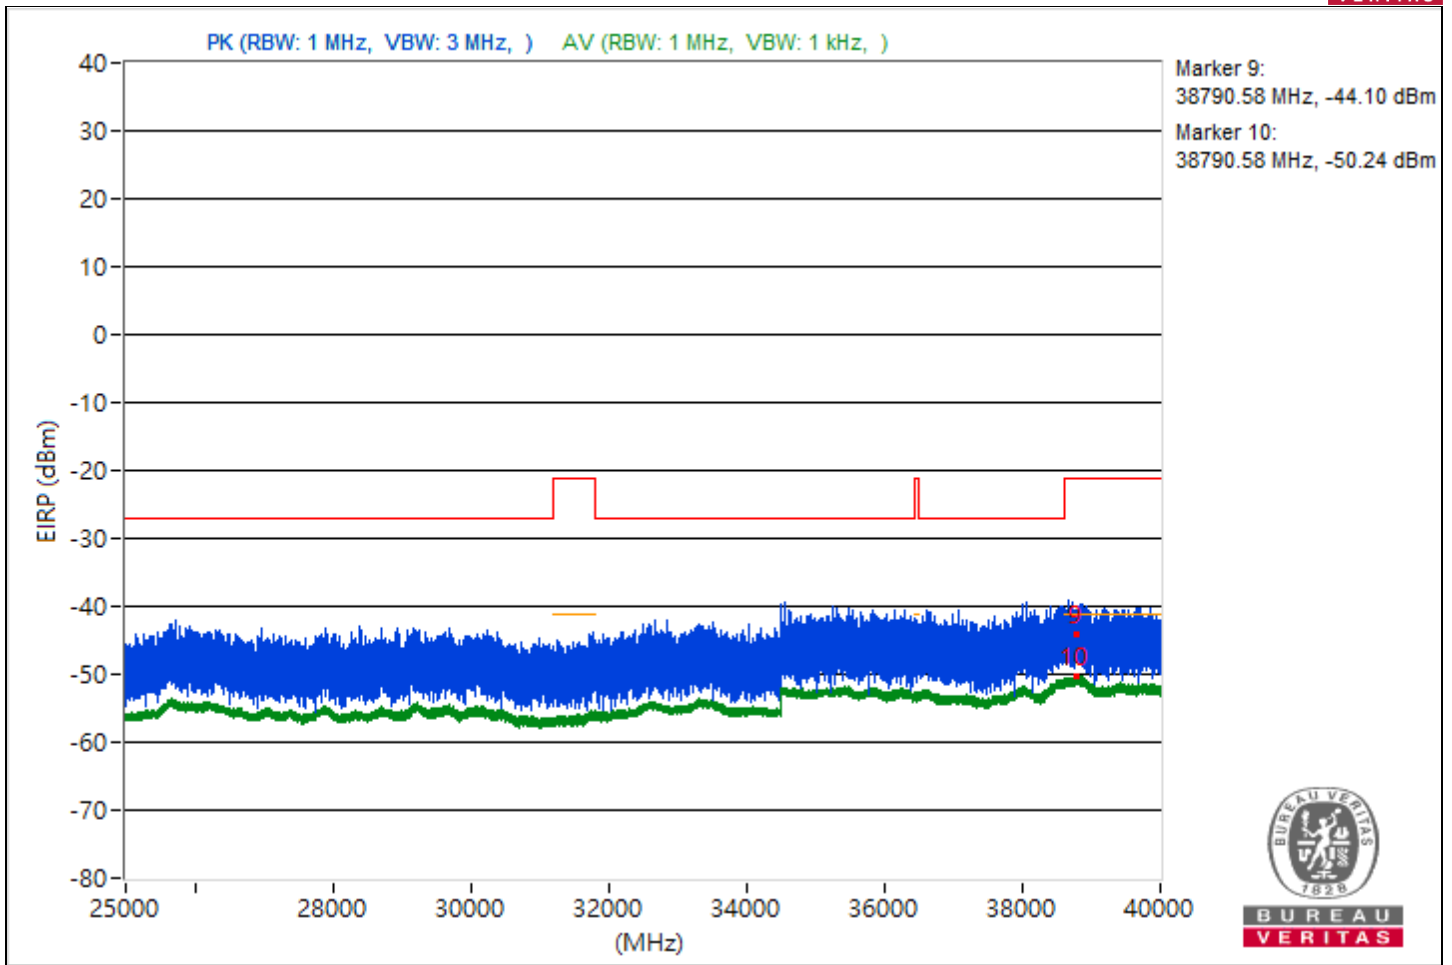


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) | Channel                  | CH 155 : 5775 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3772            | 56.14 PK                | 74             | -17.86      | -47.49                  | 8.37                   | -39.12           |
| 2                            | 3772            | 48.35 AV                | 54             | -5.65       | -55.28                  | 8.37                   | -46.91           |
| 3                            | 9020.89         | 53.83 PK                | 74             | -20.17      | -49.8                   | 8.37                   | -41.43           |
| 4                            | 9020.89         | 46.95 AV                | 54             | -7.05       | -56.68                  | 8.37                   | -48.31           |
| 5                            | 18984.4         | 57.77 PK                | 74             | -16.23      | -45.86                  | 8.37                   | -37.49           |
| 6                            | 18984.4         | 48.95 AV                | 54             | -5.05       | -54.68                  | 8.37                   | -46.31           |
| 7                            | 23793.8         | 57.54 PK                | 74             | -16.46      | -46.09                  | 8.37                   | -37.72           |
| 8                            | 23793.8         | 51.3 AV                 | 54             | -2.7        | -52.33                  | 8.37                   | -43.96           |
| 9                            | 38837.51        | 52.25 PK                | 74             | -21.75      | -51.38                  | 8.37                   | -43.01           |
| 10                           | 38837.51        | 45.05 AV                | 54             | -8.95       | -58.58                  | 8.37                   | -50.21           |

Note: Margin value = Emission Level - Limit value

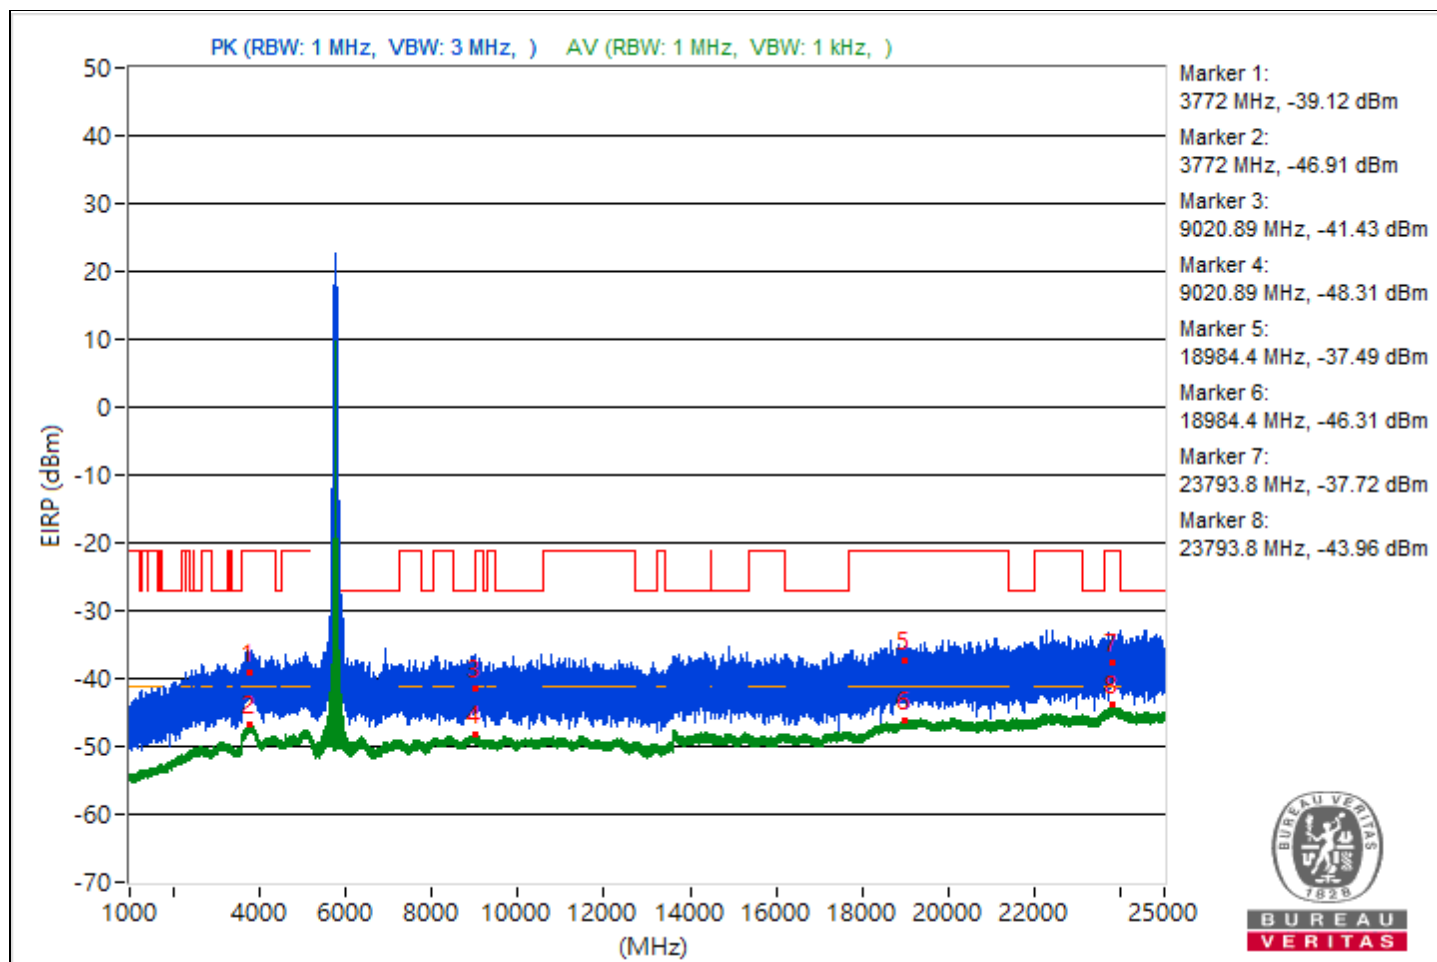


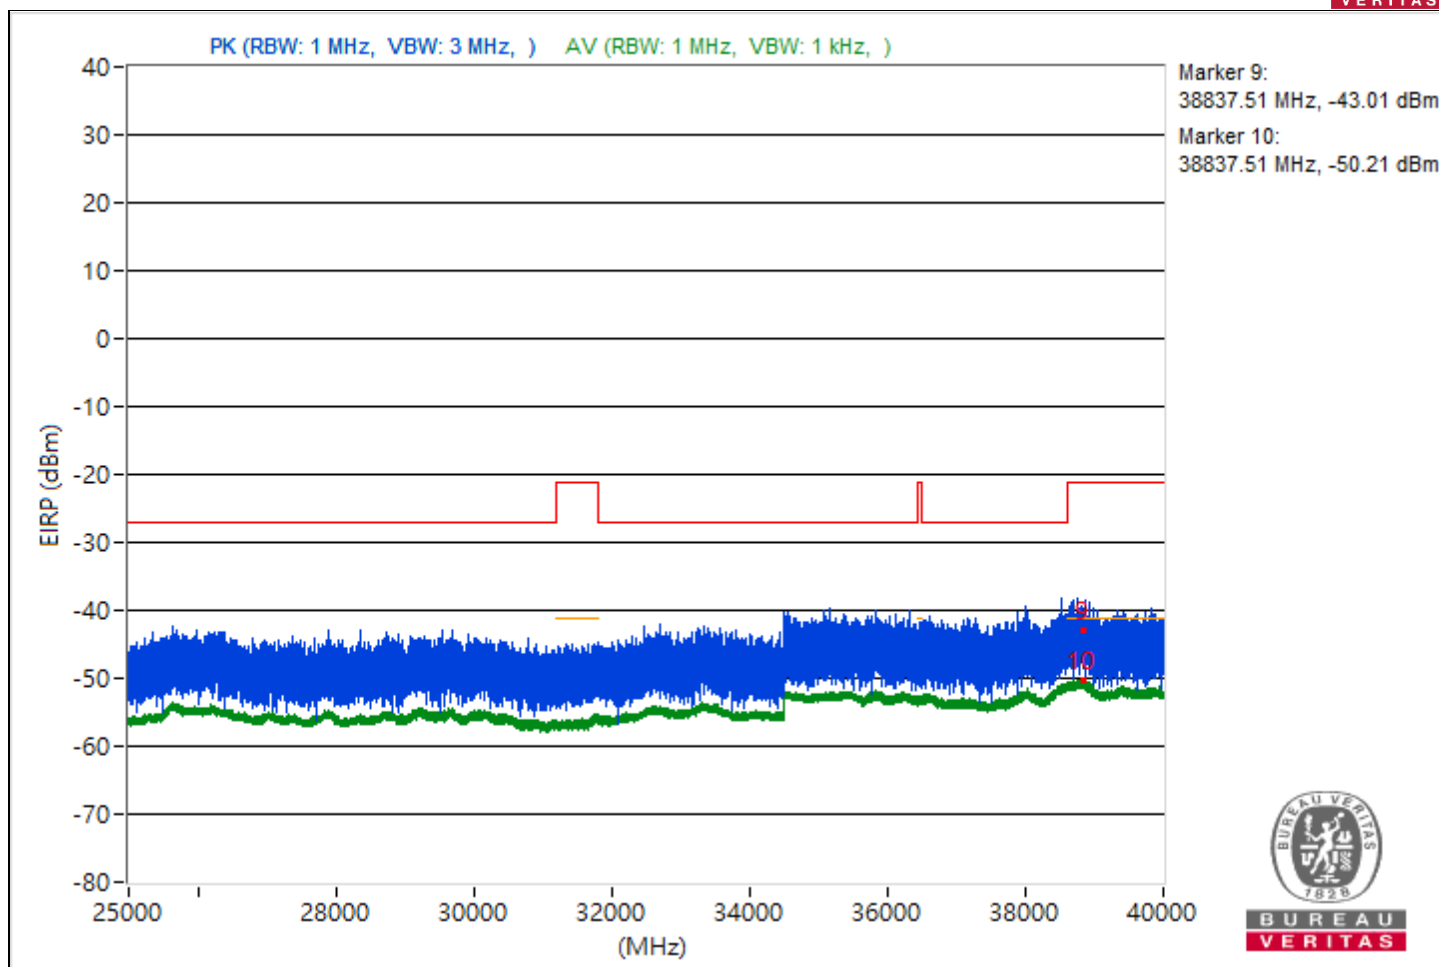


|                 |                   |                          |                  |
|-----------------|-------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160) | Channel                  | CH 50 : 5250 MHz |
| Frequency Range | 1 GHz ~ 40 GHz    | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu         |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5099.12         | 61.36 PK                | 74             | -12.64      | -42.27                  | 8.37                   | -33.9            |
| 2                            | 5099.12         | 52.95 AV                | 54             | -1.05       | -50.68                  | 8.37                   | -42.31           |
| 3                            | 8400            | 51.72 PK                | 74             | -22.28      | -51.91                  | 8.37                   | -43.54           |
| 4                            | 8400            | 47.11 AV                | 54             | -6.89       | -56.52                  | 8.37                   | -48.15           |
| 5                            | 18943.7         | 55.76 PK                | 74             | -18.24      | -47.87                  | 8.37                   | -39.5            |
| 6                            | 18943.7         | 49.05 AV                | 54             | -4.95       | -54.58                  | 8.37                   | -46.21           |
| 7                            | 23771.8         | 57.23 PK                | 74             | -16.77      | -46.4                   | 8.37                   | -38.03           |
| 8                            | 23771.8         | 51.29 AV                | 54             | -2.71       | -52.34                  | 8.37                   | -43.97           |
| 9                            | 38791.2         | 50.9 PK                 | 74             | -23.1       | -52.73                  | 8.37                   | -44.36           |
| 10                           | 38791.2         | 45.06 AV                | 54             | -8.94       | -58.57                  | 8.37                   | -50.2            |

Note: Margin value = Emission Level - Limit value

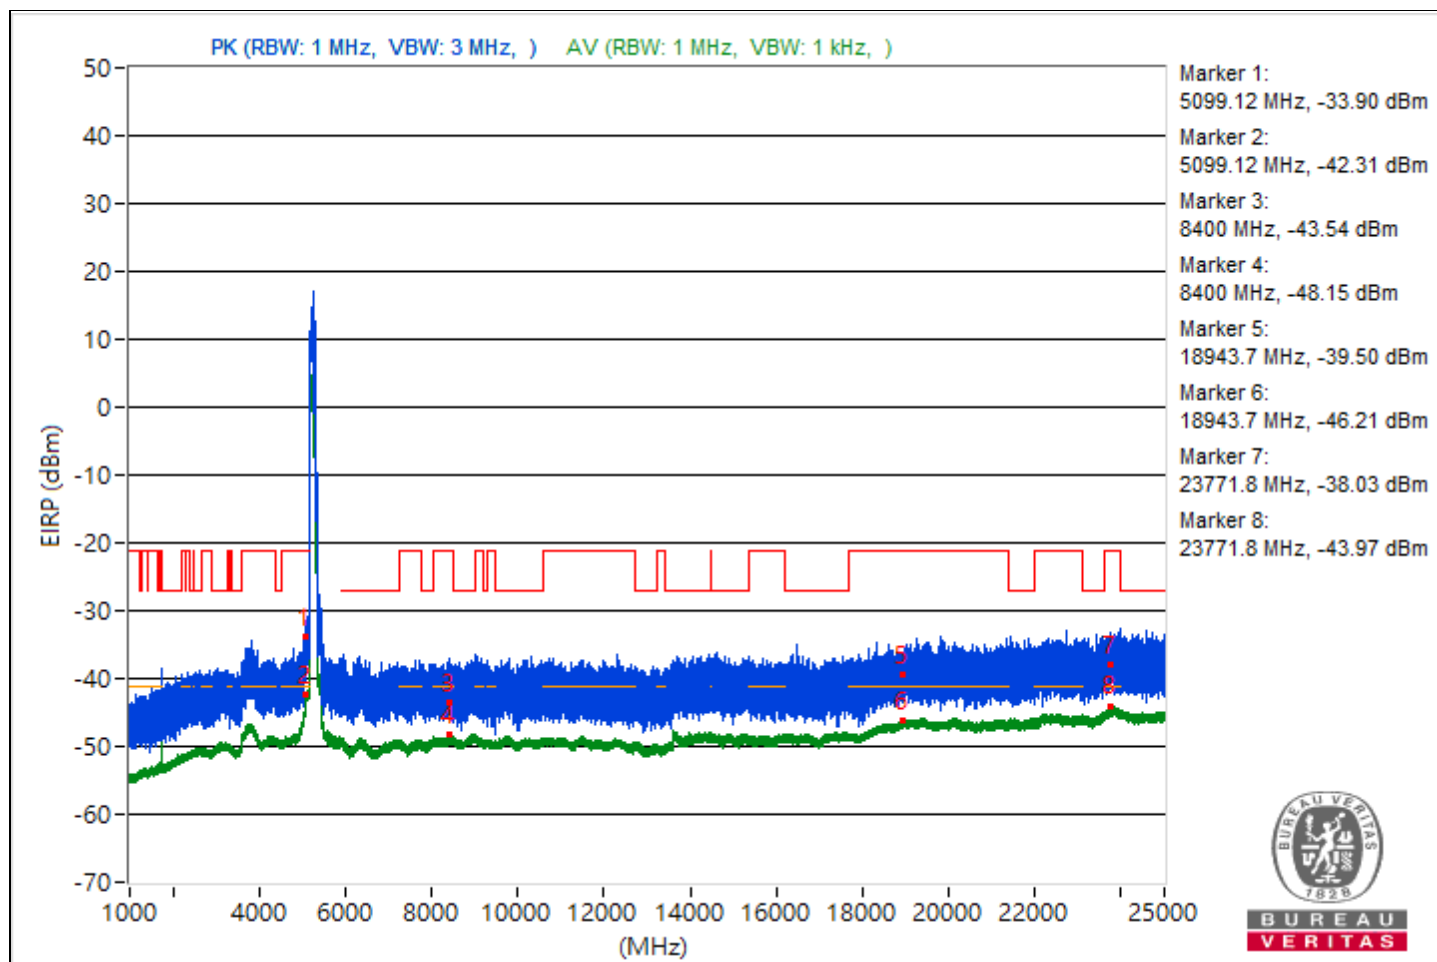


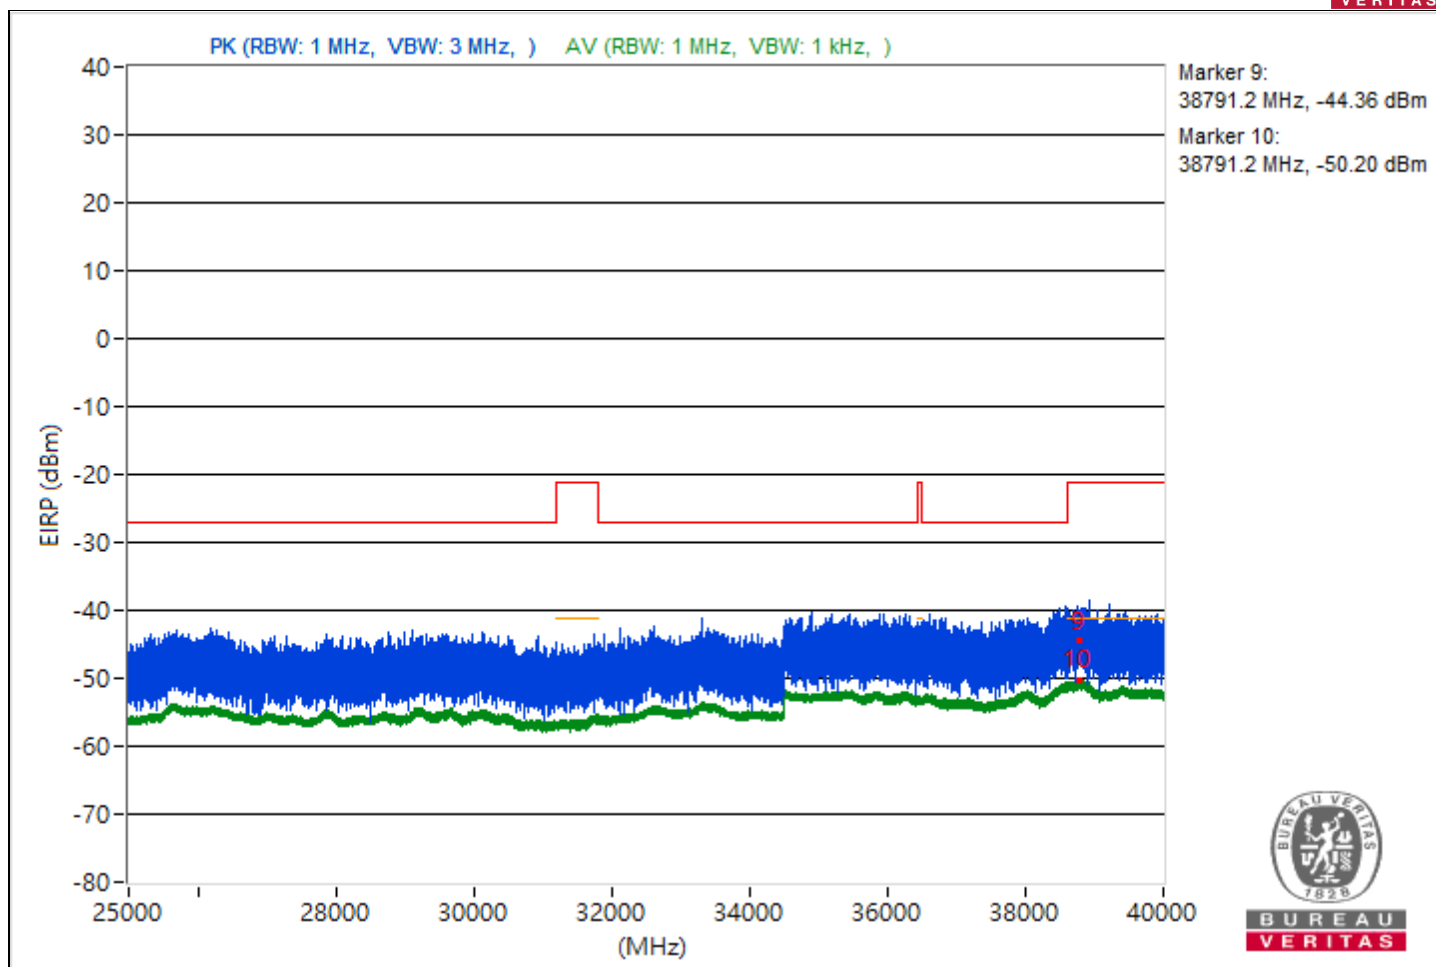


|                 |                   |                          |                   |
|-----------------|-------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160) | Channel                  | CH 114 : 5570 MHz |
| Frequency Range | 1 GHz ~ 40 GHz    | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu         |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3789.03         | 55.12 PK                | 74             | -18.88      | -48.51                  | 8.37                   | -40.14           |
| 2                            | 3789.03         | 48.54 AV                | 54             | -5.46       | -55.09                  | 8.37                   | -46.72           |
| 3                            | 9024.09         | 53.17 PK                | 74             | -20.83      | -50.46                  | 8.37                   | -42.09           |
| 4                            | 9024.09         | 46.79 AV                | 54             | -7.21       | -56.84                  | 8.37                   | -48.47           |
| 5                            | 18985.5         | 56.58 PK                | 74             | -17.42      | -47.05                  | 8.37                   | -38.68           |
| 6                            | 18985.5         | 48.95 AV                | 54             | -5.05       | -54.68                  | 8.37                   | -46.31           |
| 7                            | 23826.2         | 54.71 PK                | 74             | -19.29      | -48.92                  | 8.37                   | -40.55           |
| 8                            | 23826.2         | 51.23 AV                | 54             | -2.77       | -52.4                   | 8.37                   | -44.03           |
| 9                            | 38763.29        | 50.84 PK                | 74             | -23.16      | -52.79                  | 8.37                   | -44.42           |
| 10                           | 38763.29        | 44.99 AV                | 54             | -9.01       | -58.64                  | 8.37                   | -50.27           |

Note: Margin value = Emission Level - Limit value

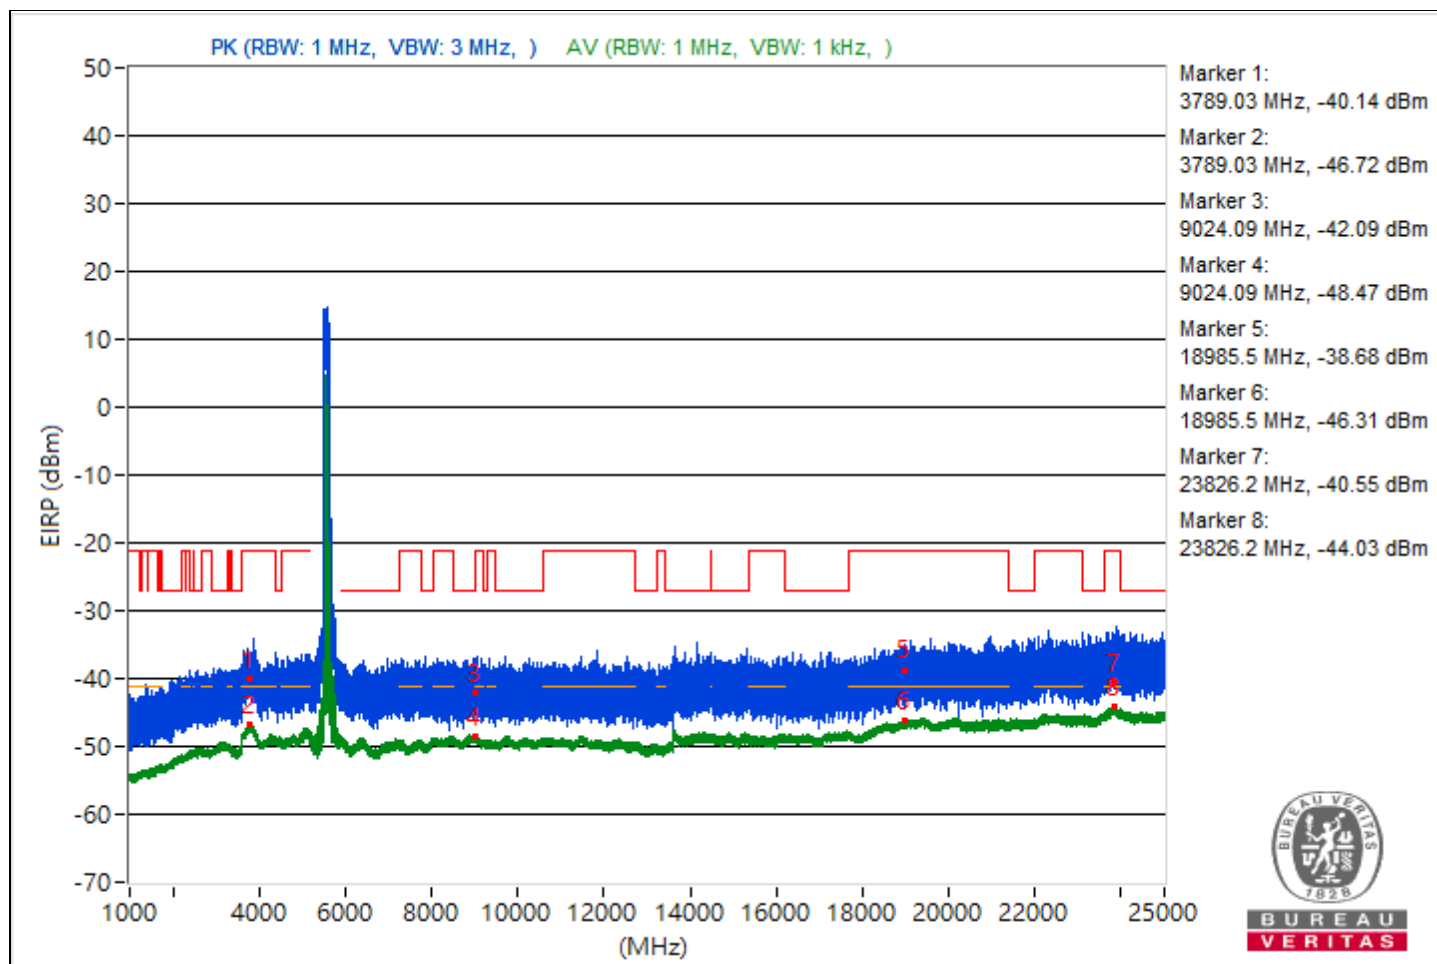


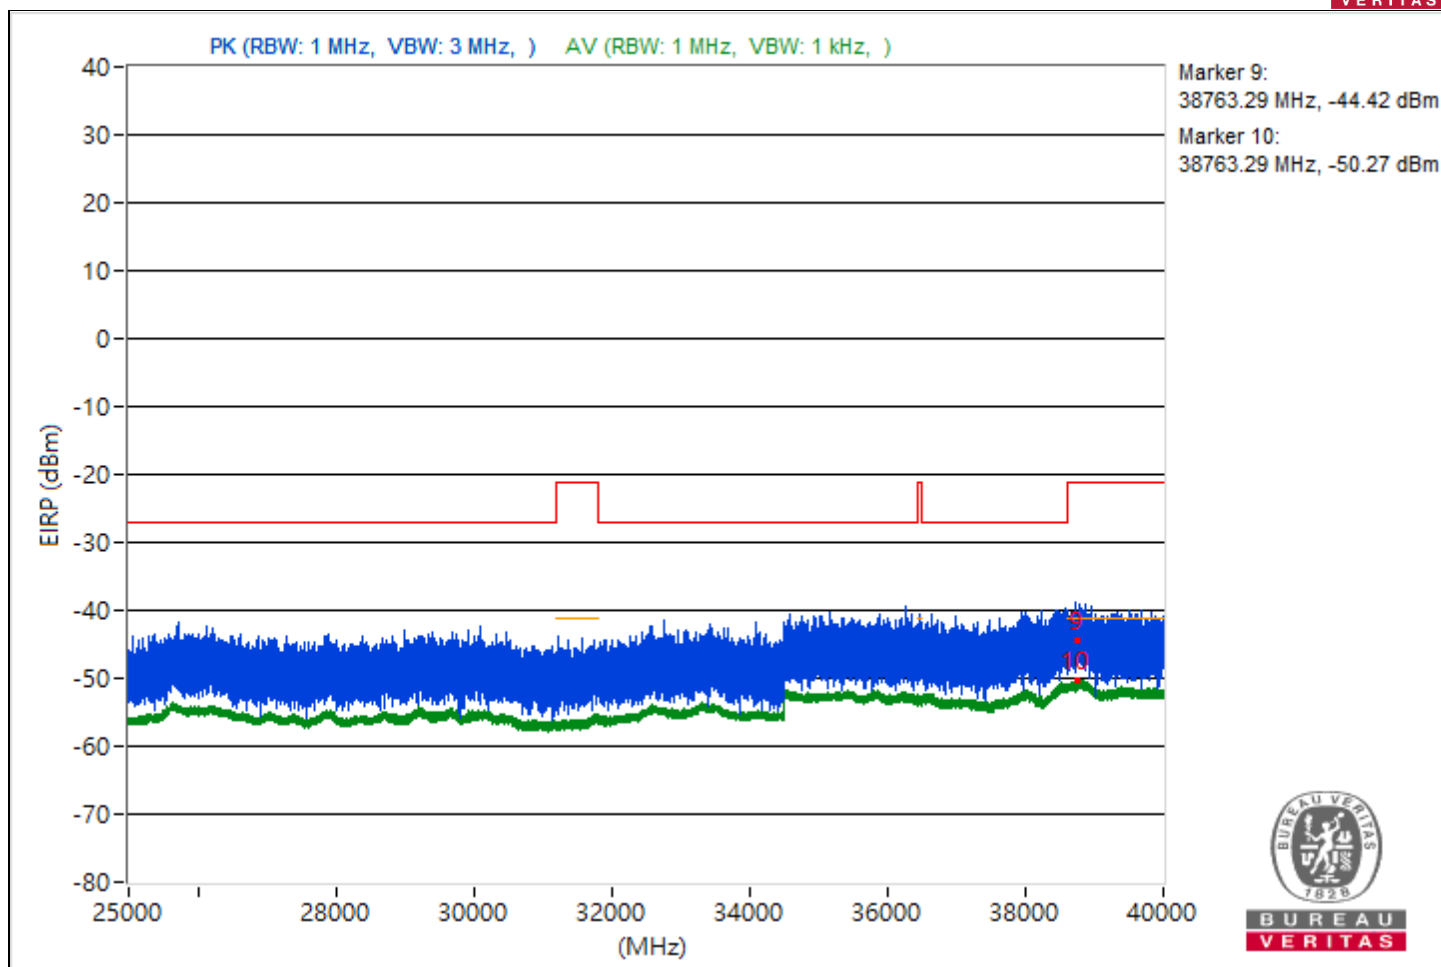


|                 |                             |                          |                  |
|-----------------|-----------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 36 : 5180 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 19°C, 62% RH     |
| Tested By       | Henry Hsu                   |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5090.02         | 52.29 PK                | 74             | -21.71      | -51.34                  | 8.37                   | -42.97           |
| 2                            | 5090.02         | 44.18 AV                | 54             | -9.82       | -59.45                  | 8.37                   | -51.08           |
| 3                            | 8288            | 48.29 PK                | 74             | -25.71      | -55.34                  | 8.37                   | -46.97           |
| 4                            | 8288            | 43.1 AV                 | 54             | -10.9       | -60.53                  | 8.37                   | -52.16           |
| 5                            | 18980.2         | 44.84 PK                | 74             | -29.16      | -58.79                  | 8.37                   | -50.42           |
| 6                            | 18980.2         | 38.67 AV                | 54             | -15.33      | -64.96                  | 8.37                   | -56.59           |
| 7                            | 23808.7         | 47.4 PK                 | 74             | -26.6       | -56.23                  | 8.37                   | -47.86           |
| 8                            | 23808.7         | 40.79 AV                | 54             | -13.21      | -62.84                  | 8.37                   | -54.47           |
| 9                            | 38804.89        | 52.83 PK                | 74             | -21.17      | -50.8                   | 8.37                   | -42.43           |
| 10                           | 38804.89        | 45.45 AV                | 54             | -8.55       | -58.18                  | 8.37                   | -49.81           |

Note: Margin value = Emission Level - Limit value

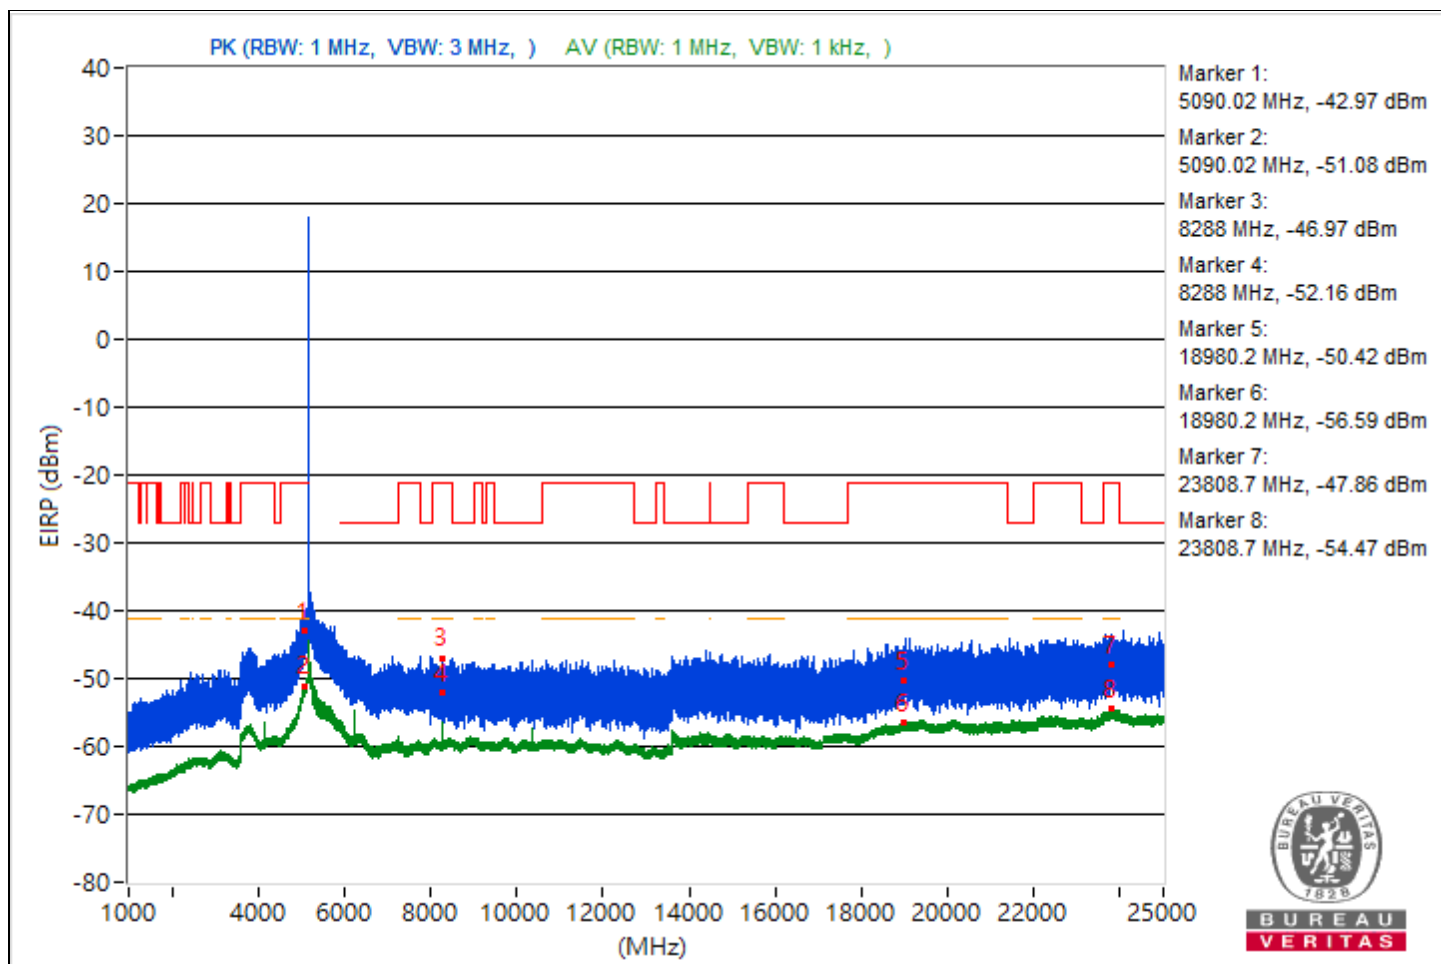


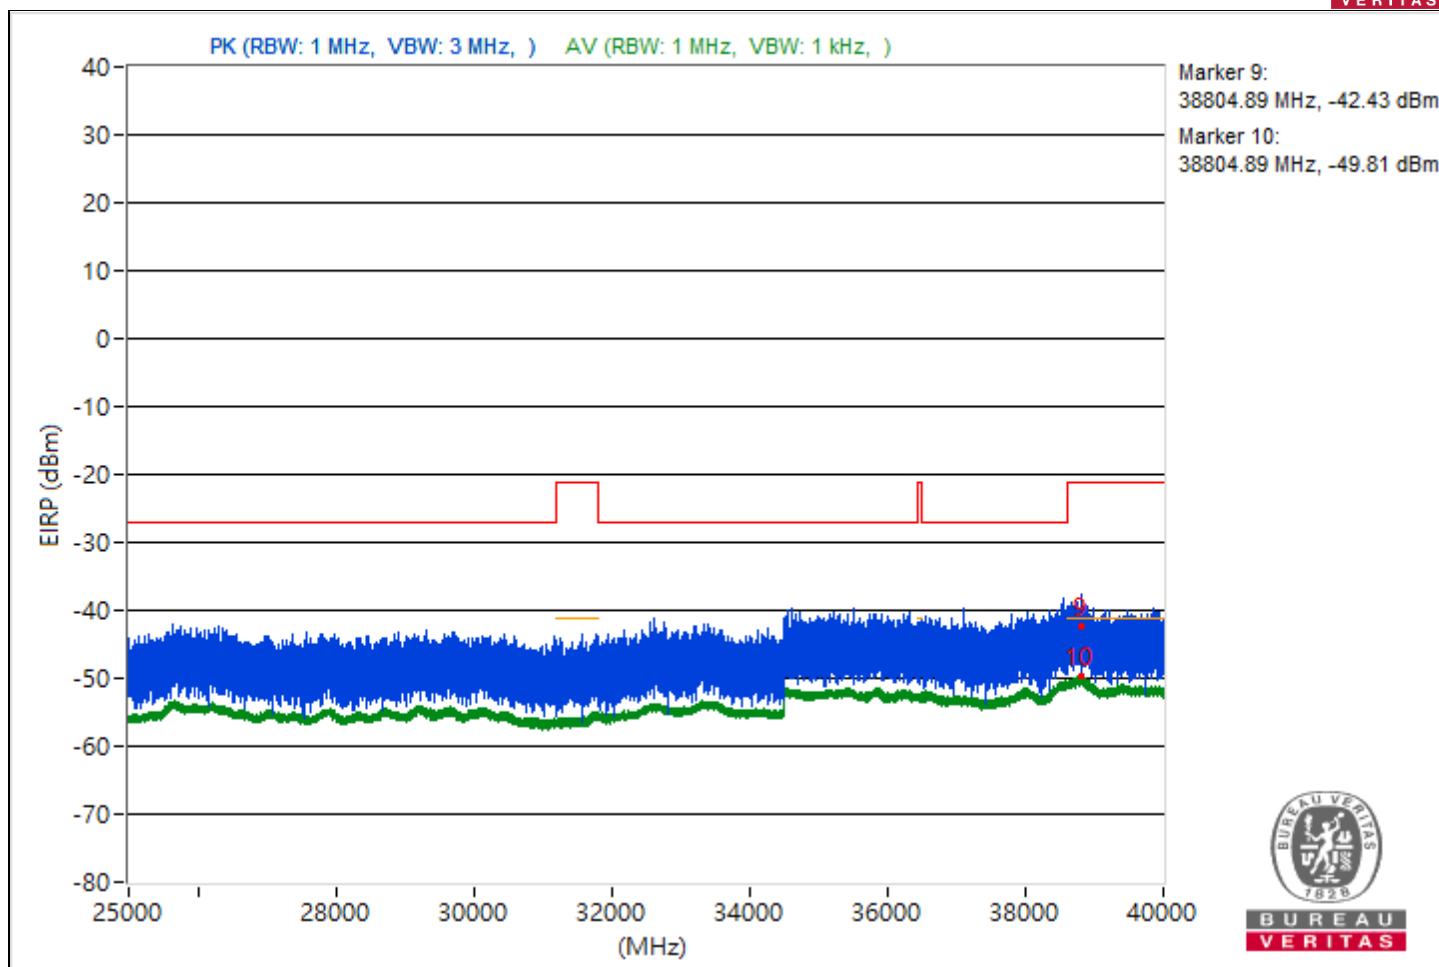


|                 |                             |                          |                  |
|-----------------|-----------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 64 : 5320 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 19°C, 62% RH     |
| Tested By       | Henry Hsu                   |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5090.8          | 28.69 PK                | 74             | -45.31      | -74.94                  | 8.37                   | -66.57           |
| 2                            | 5090.8          | 20.5 AV                 | 54             | -33.5       | -83.13                  | 8.37                   | -74.76           |
| 3                            | 10622.84        | 20.55 PK                | 74             | -53.45      | -83.08                  | 8.37                   | -74.71           |
| 4                            | 10622.84        | 14.64 AV                | 54             | -39.36      | -88.99                  | 8.37                   | -80.62           |
| 5                            | 18992.6         | 21.33 PK                | 74             | -52.67      | -82.3                   | 8.37                   | -73.93           |
| 6                            | 18992.6         | 16.61 AV                | 54             | -37.39      | -87.02                  | 8.37                   | -78.65           |
| 7                            | 23812.2         | 23.12 PK                | 74             | -50.88      | -80.51                  | 8.37                   | -72.14           |
| 8                            | 23812.2         | 18.78 AV                | 54             | -35.22      | -84.85                  | 8.37                   | -76.48           |
| 9                            | 38812           | 30.56 PK                | 74             | -43.44      | -73.07                  | 8.37                   | -64.7            |
| 10                           | 38812           | 23.45 AV                | 54             | -30.55      | -80.18                  | 8.37                   | -71.81           |

Note: Margin value = Emission Level - Limit value

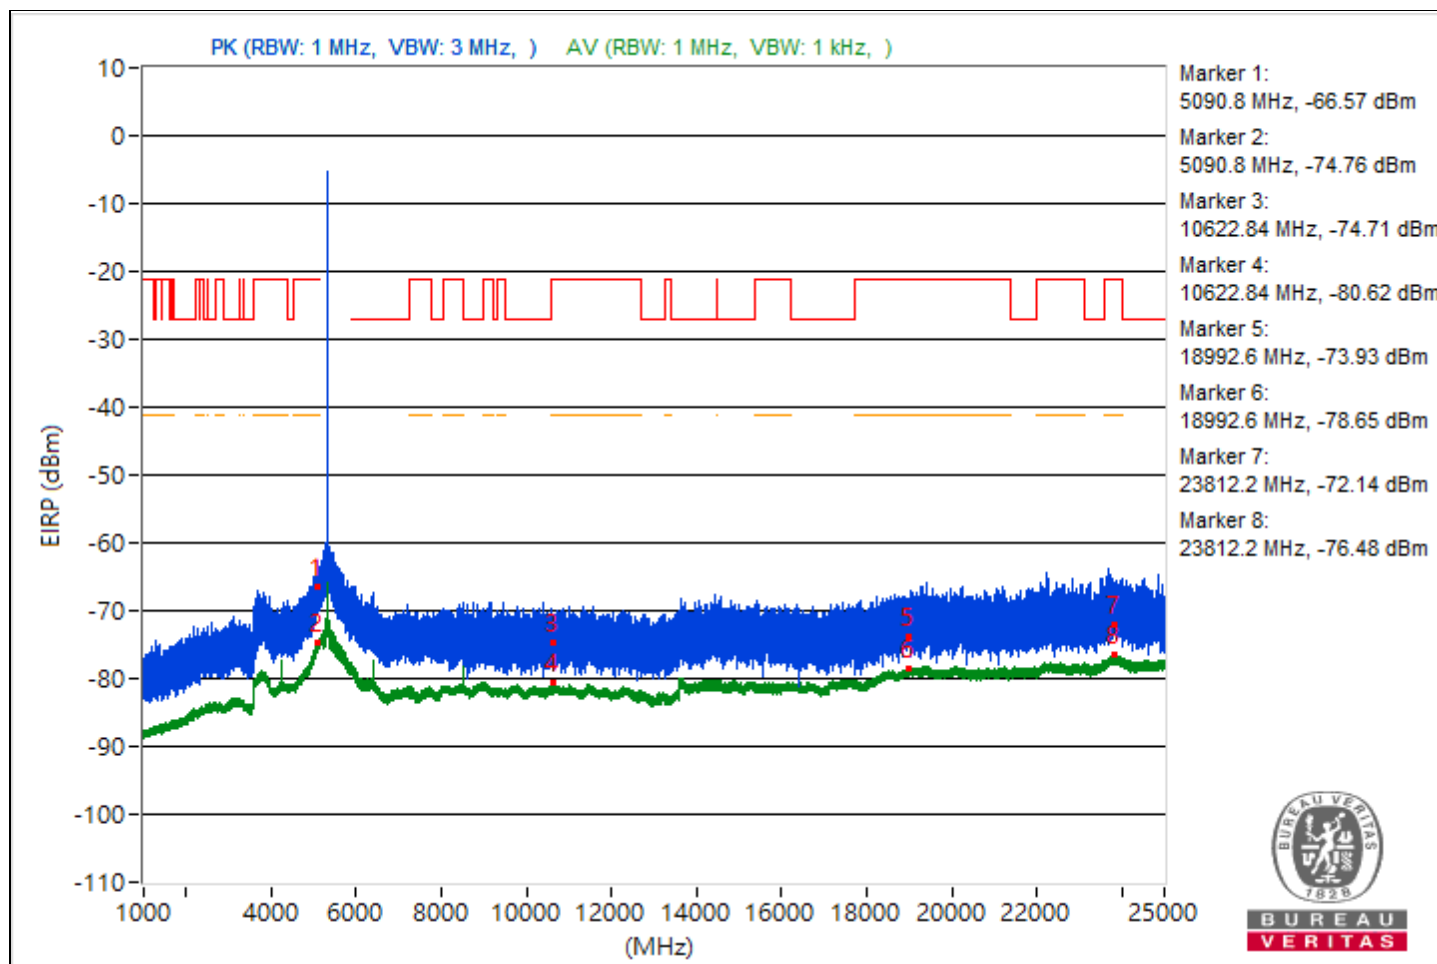


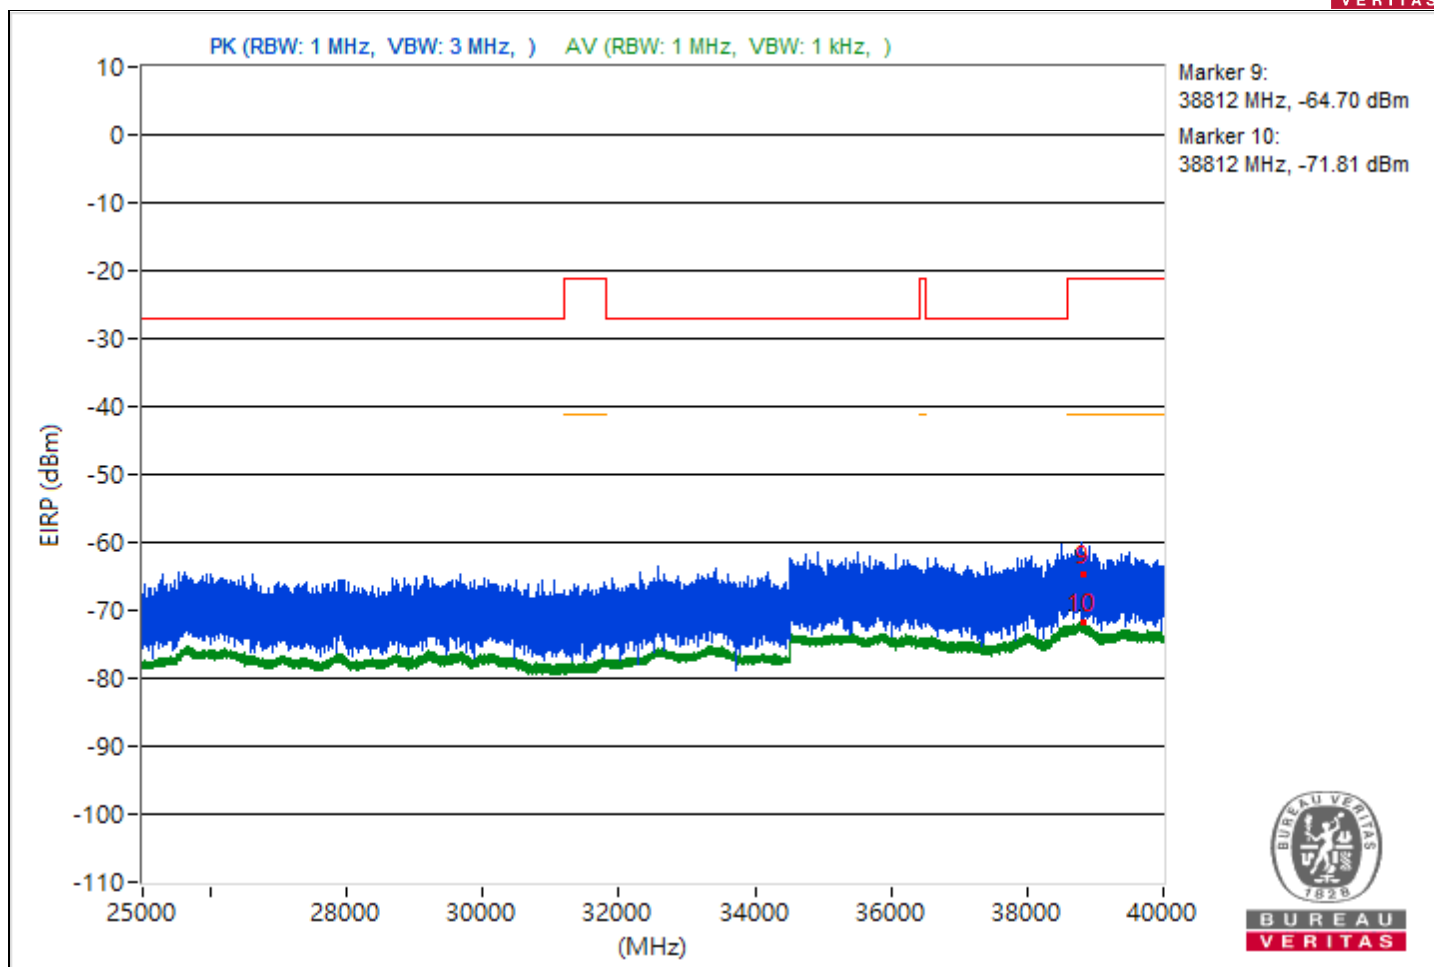


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 100 : 5500 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5095.62         | 48.94 PK                | 74             | -25.06      | -54.69                  | 8.37                   | -46.32           |
| 2                            | 5095.62         | 41.27 AV                | 54             | -12.73      | -62.36                  | 8.37                   | -53.99           |
| 3                            | 10982.93        | 65.16 PK                | 74             | -8.84       | -38.47                  | 8.37                   | -30.1            |
| 4                            | 10982.93        | 49.99 AV                | 54             | -4.01       | -53.64                  | 8.37                   | -45.27           |
| 5                            | 18989.8         | 43.97 PK                | 74             | -30.03      | -59.66                  | 8.37                   | -51.29           |
| 6                            | 18989.8         | 38.64 AV                | 54             | -15.36      | -64.99                  | 8.37                   | -56.62           |
| 7                            | 23779.7         | 45.55 PK                | 74             | -28.45      | -58.08                  | 8.37                   | -49.71           |
| 8                            | 23779.7         | 40.77 AV                | 54             | -13.23      | -62.86                  | 8.37                   | -54.49           |
| 9                            | 38788.71        | 49.24 PK                | 74             | -24.76      | -54.39                  | 8.37                   | -46.02           |
| 10                           | 38788.71        | 45.49 AV                | 54             | -8.51       | -58.14                  | 8.37                   | -49.77           |

Note: Margin value = Emission Level - Limit value

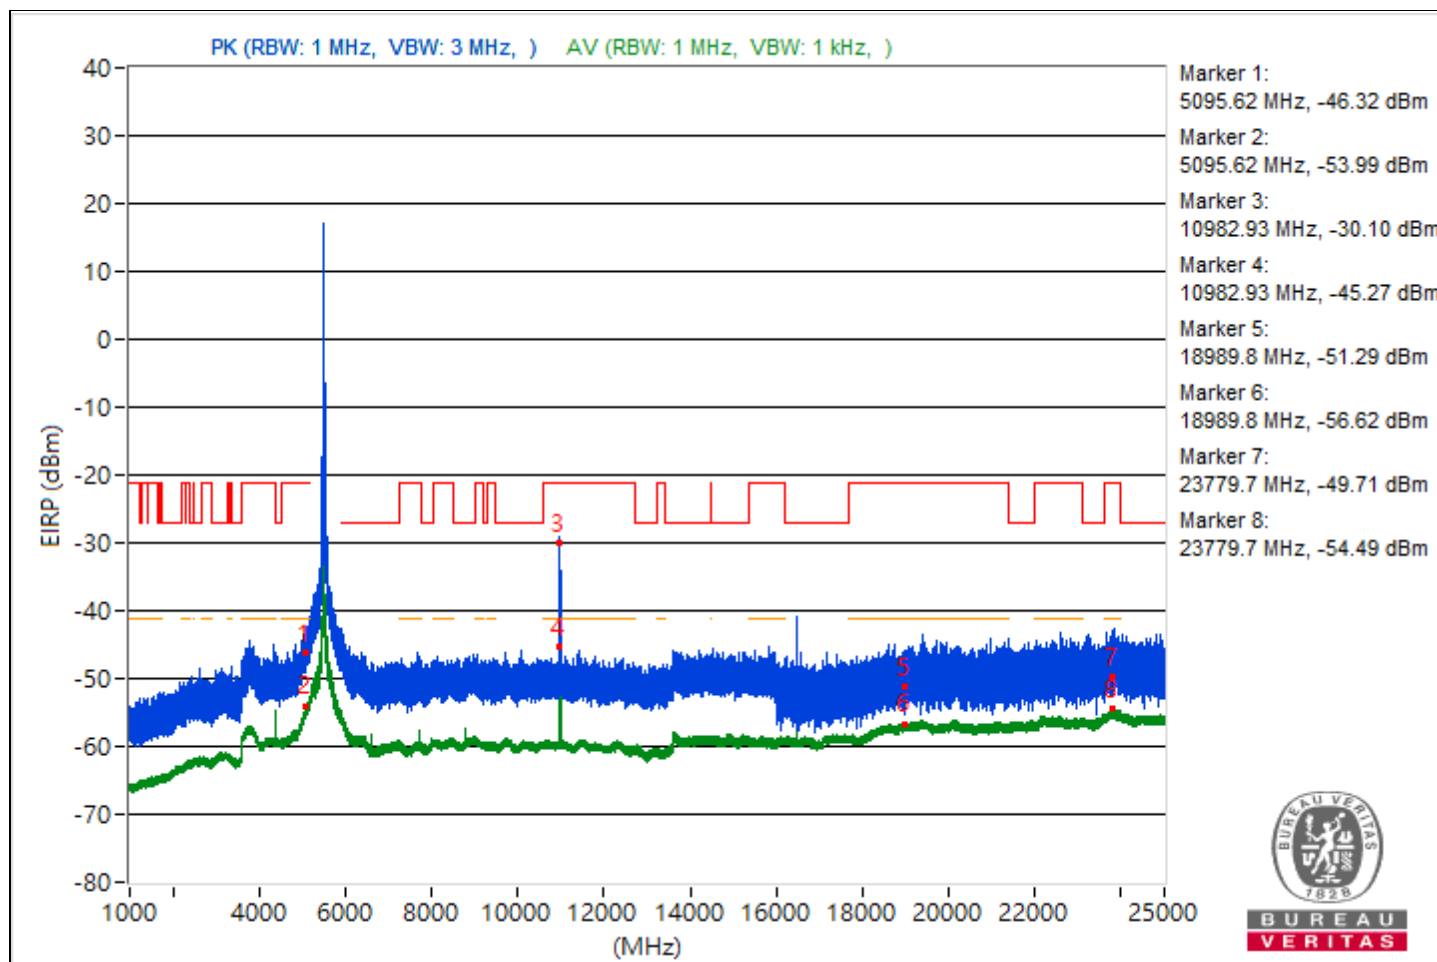


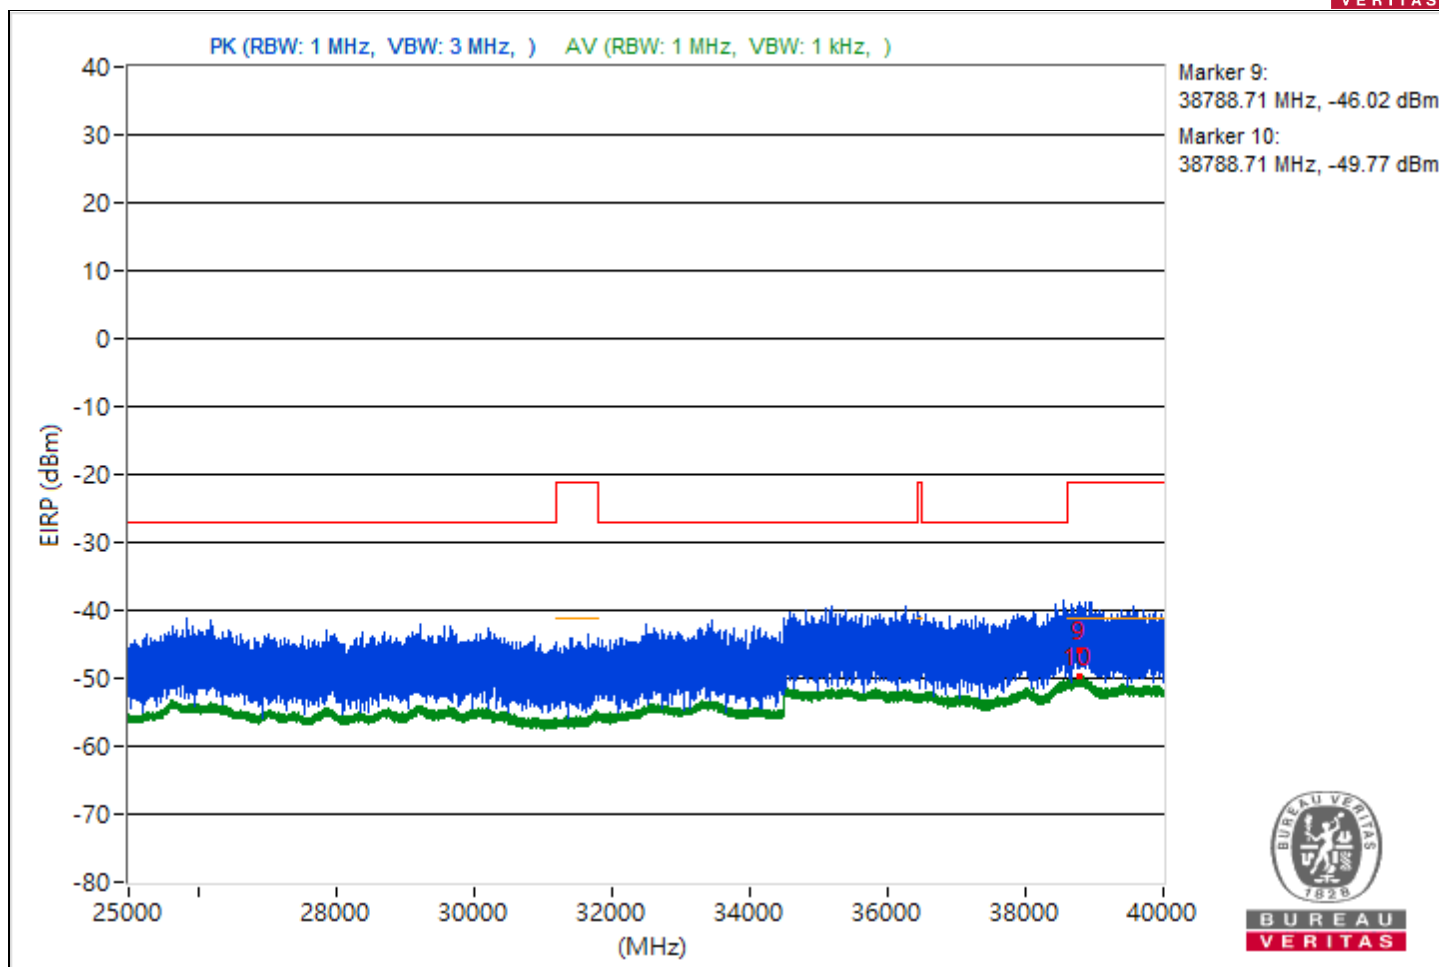


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 140 : 5700 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4560.04         | 47.58 PK                | 74             | -26.42      | -56.05                  | 8.37                   | -47.68           |
| 2                            | 4560.04         | 43.9 AV                 | 54             | -10.1       | -59.73                  | 8.37                   | -51.36           |
| 3                            | 9119.82         | 44.67 PK                | 74             | -29.33      | -58.96                  | 8.37                   | -50.59           |
| 4                            | 9119.82         | 37.55 AV                | 54             | -16.45      | -66.08                  | 8.37                   | -57.71           |
| 5                            | 18990.2         | 44.81 PK                | 74             | -29.19      | -58.82                  | 8.37                   | -50.45           |
| 6                            | 18990.2         | 38.63 AV                | 54             | -15.37      | -65                     | 8.37                   | -56.63           |
| 7                            | 23845.4         | 47.83 PK                | 74             | -26.17      | -55.8                   | 8.37                   | -47.43           |
| 8                            | 23845.4         | 40.89 AV                | 54             | -13.11      | -62.74                  | 8.37                   | -54.37           |
| 9                            | 38855.02        | 51.89 PK                | 74             | -22.11      | -51.74                  | 8.37                   | -43.37           |
| 10                           | 38855.02        | 45.42 AV                | 54             | -8.58       | -58.21                  | 8.37                   | -49.84           |

Note: Margin value = Emission Level - Limit value

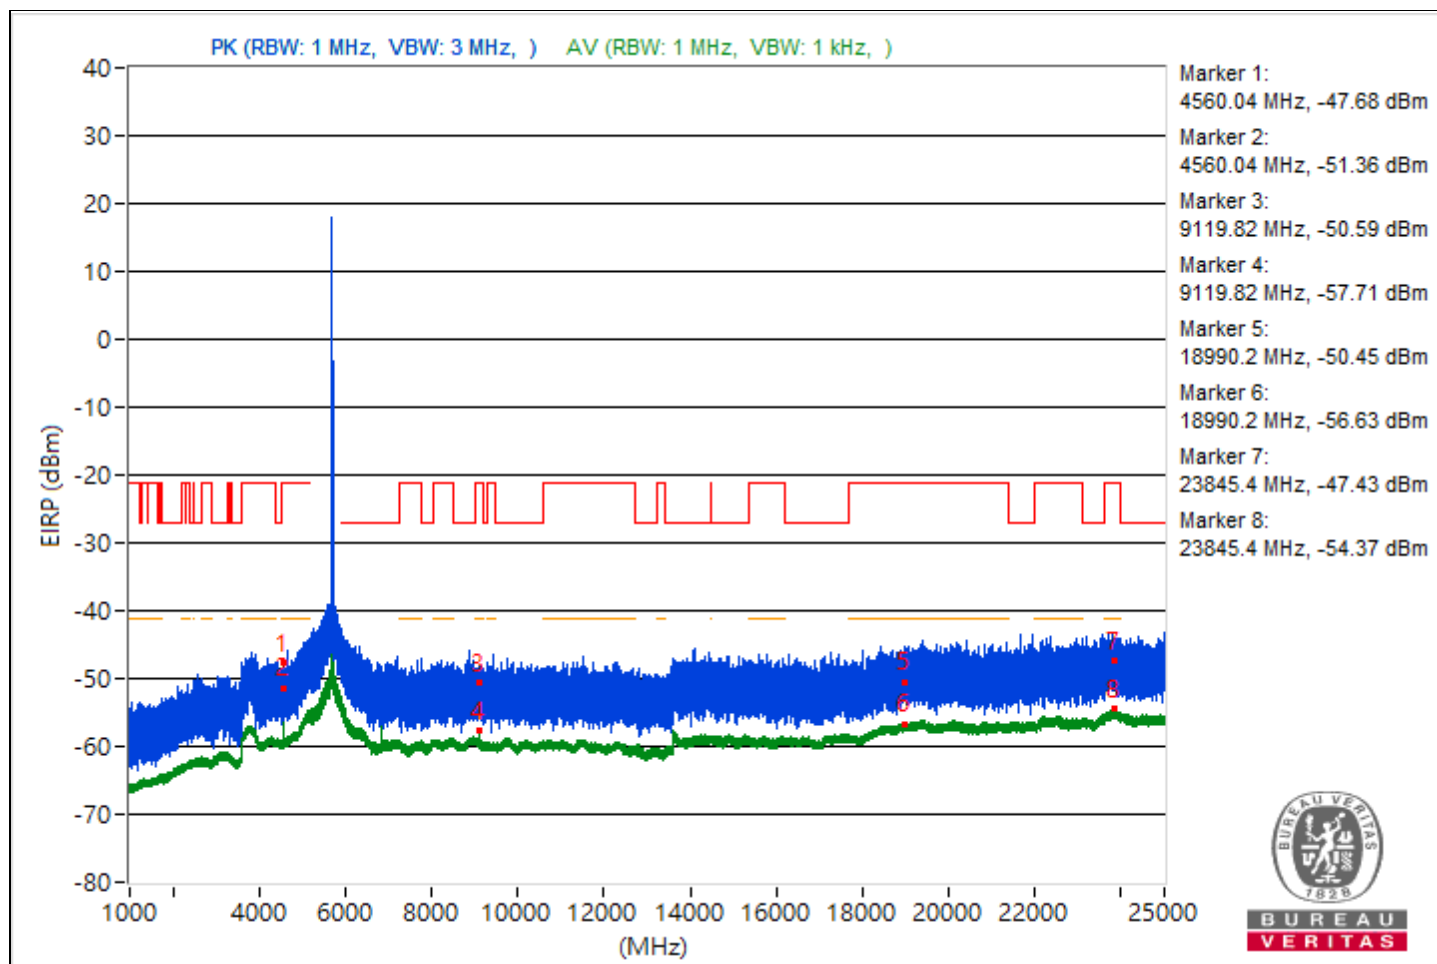


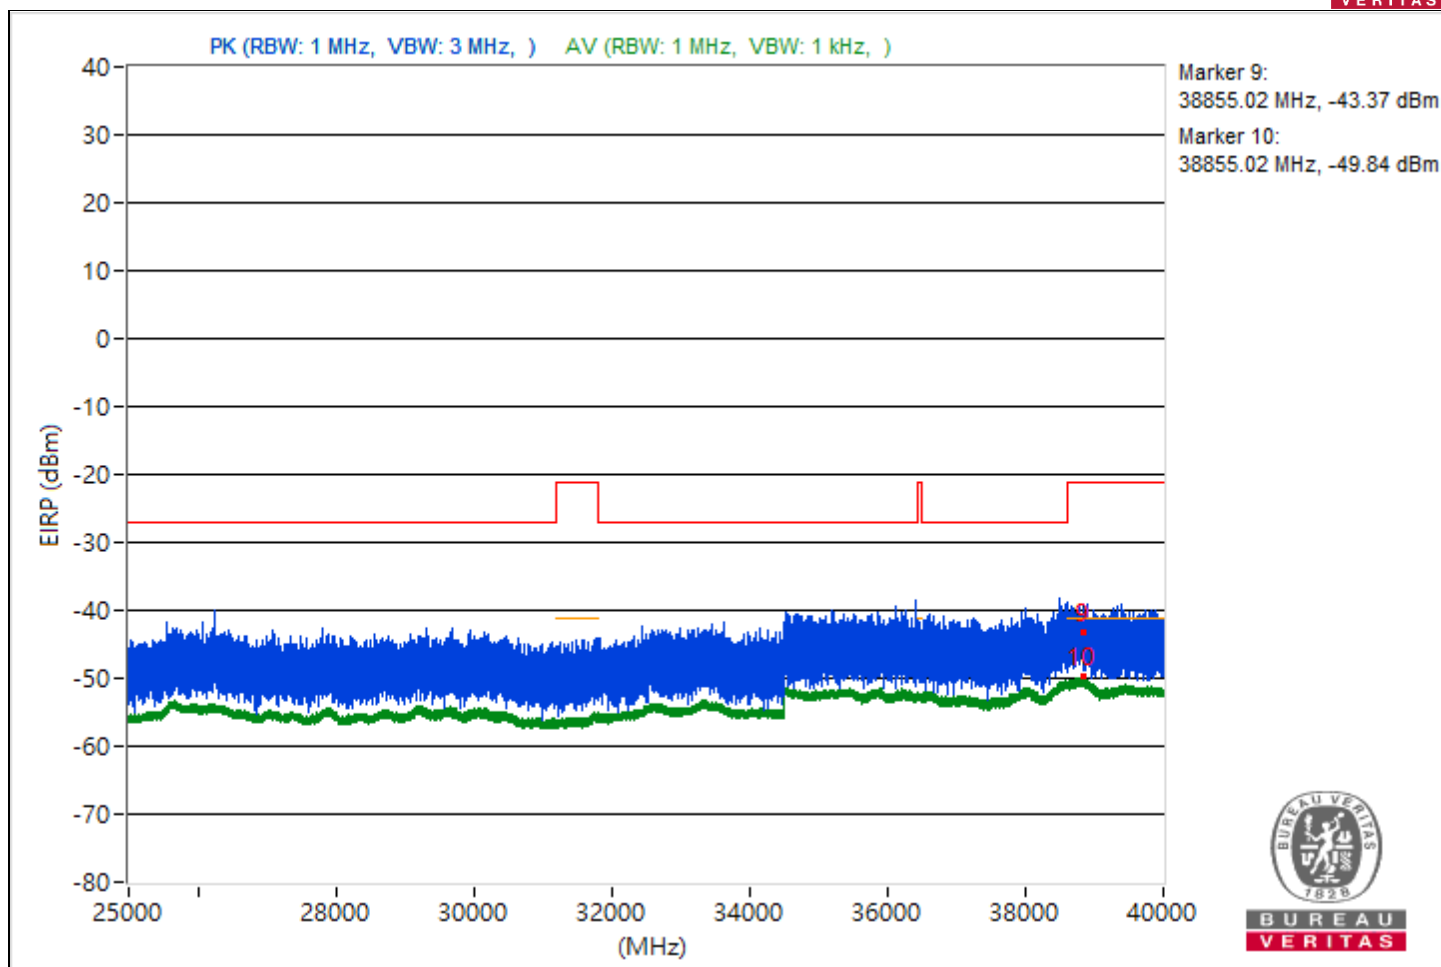


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 144 : 5720 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4575.91         | 48.16 PK                | 74             | -25.84      | -55.47                  | 8.37                   | -47.1            |
| 2                            | 4575.91         | 43.51 AV                | 54             | -10.49      | -60.12                  | 8.37                   | -51.75           |
| 3                            | 9151.82         | 43.33 PK                | 74             | -30.67      | -60.3                   | 8.37                   | -51.93           |
| 4                            | 9151.82         | 37.22 AV                | 54             | -16.78      | -66.41                  | 8.37                   | -58.04           |
| 5                            | 18910.6         | 43.47 PK                | 74             | -30.53      | -60.16                  | 8.37                   | -51.79           |
| 6                            | 18910.6         | 38.64 AV                | 54             | -15.36      | -64.99                  | 8.37                   | -56.62           |
| 7                            | 23784.9         | 47.55 PK                | 74             | -26.45      | -56.08                  | 8.37                   | -47.71           |
| 8                            | 23784.9         | 40.6 AV                 | 54             | -13.4       | -63.03                  | 8.37                   | -54.66           |
| 9                            | 38764           | 49.97 PK                | 74             | -24.03      | -53.66                  | 8.37                   | -45.29           |
| 10                           | 38764           | 45.43 AV                | 54             | -8.57       | -58.2                   | 8.37                   | -49.83           |

Note: Margin value = Emission Level - Limit value

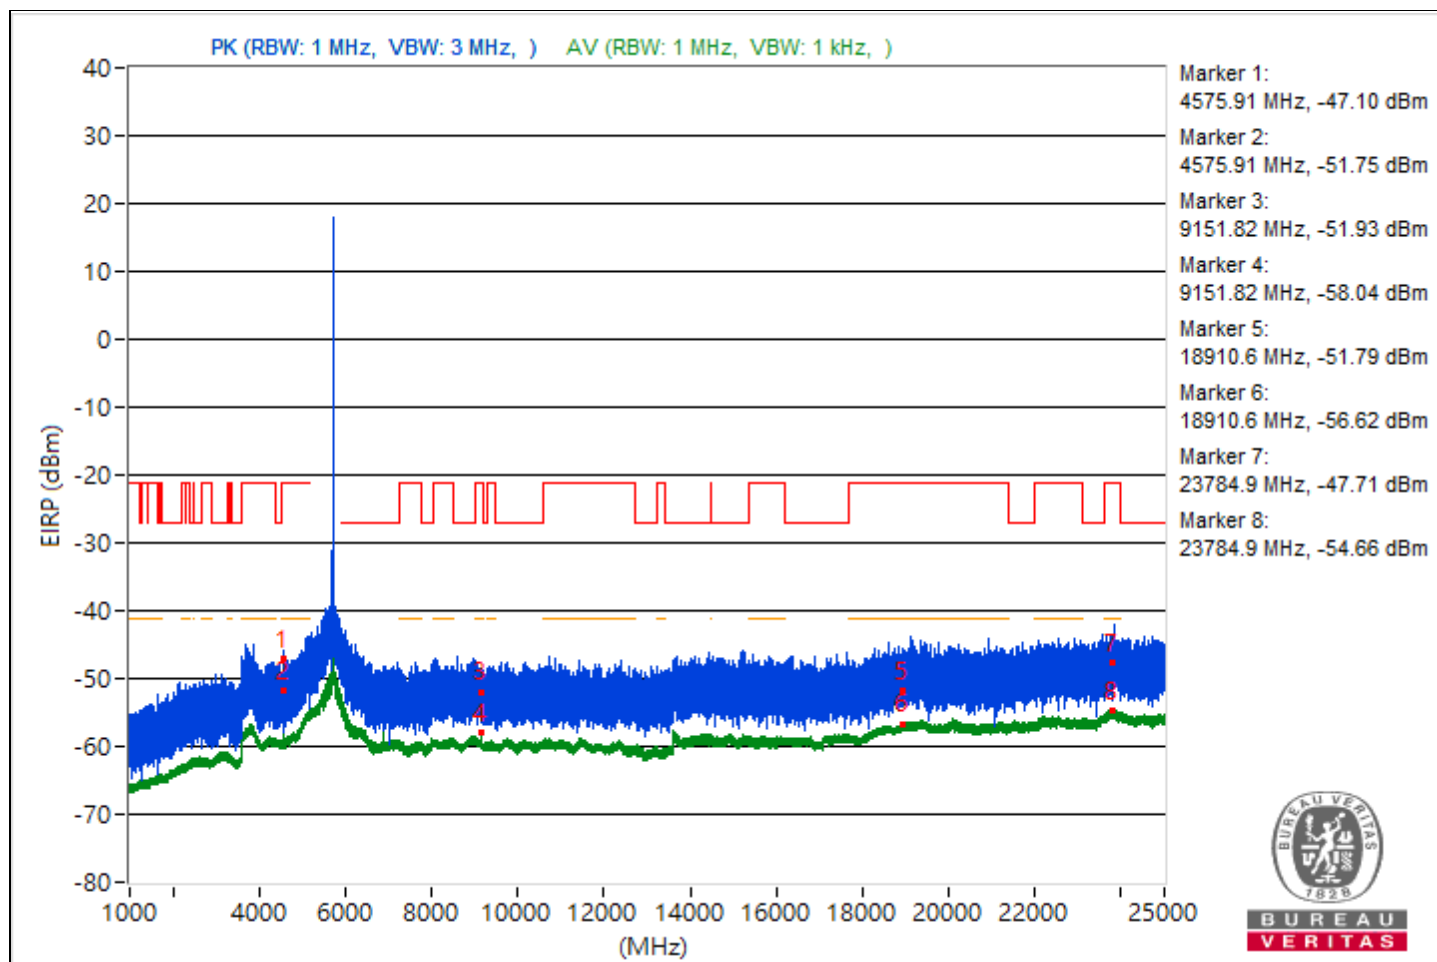


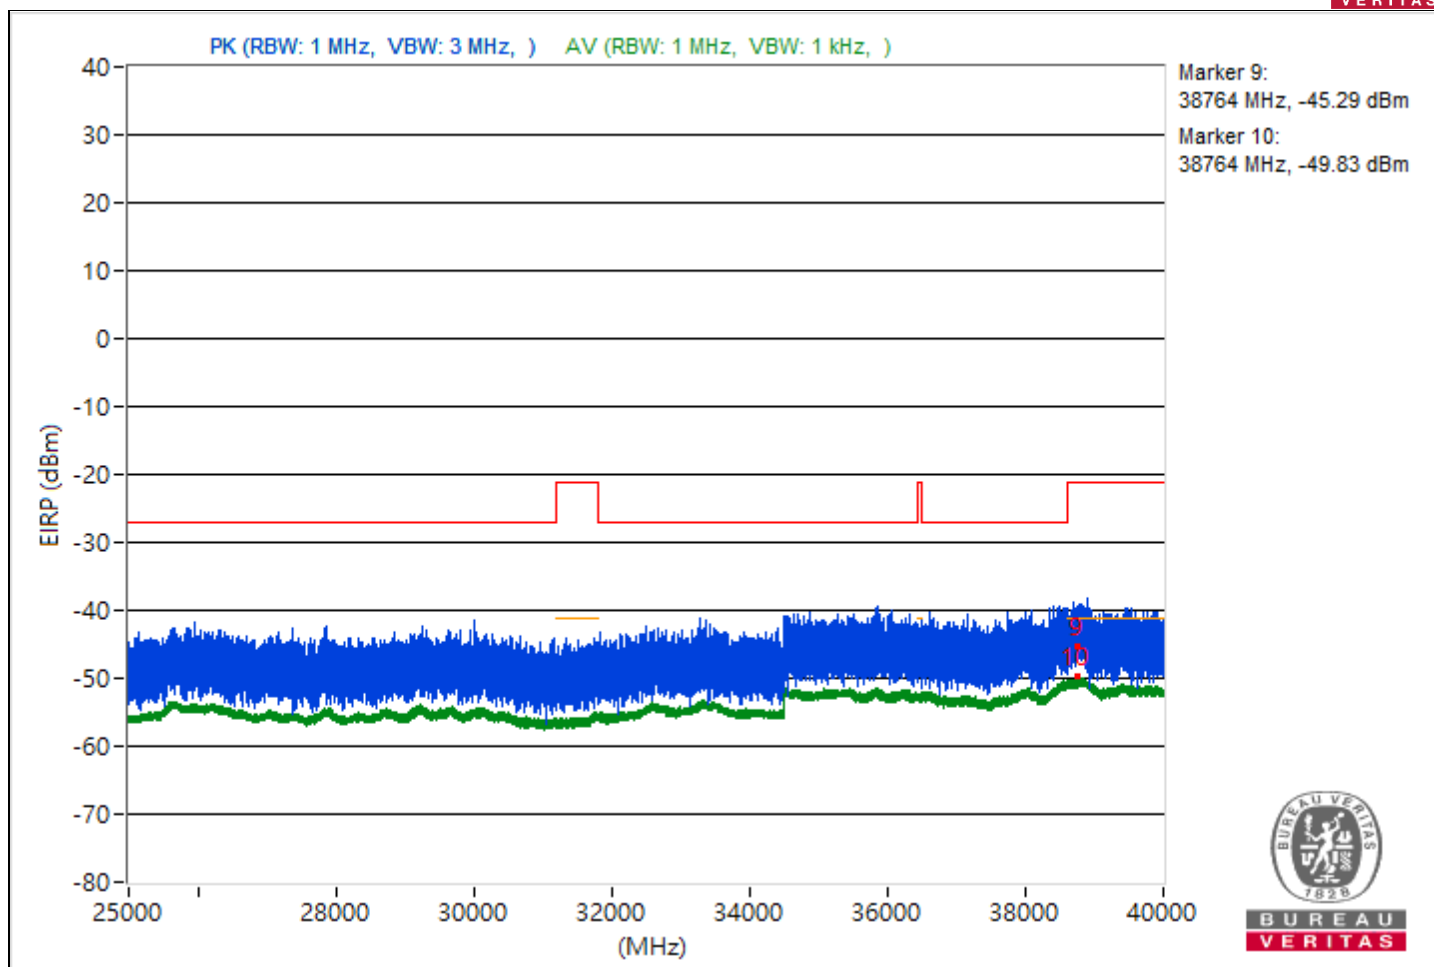


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 149 : 5745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4595.98         | 48.93 PK                | 74             | -25.07      | -54.7                   | 8.37                   | -46.33           |
| 2                            | 4595.98         | 43.24 AV                | 54             | -10.76      | -60.39                  | 8.37                   | -52.02           |
| 3                            | 11473.16        | 64.71 PK                | 74             | -9.29       | -38.92                  | 8.37                   | -30.55           |
| 4                            | 11473.16        | 51.77 AV                | 54             | -2.23       | -51.86                  | 8.37                   | -43.49           |
| 5                            | 18942.6         | 42.48 PK                | 74             | -31.52      | -61.15                  | 8.37                   | -52.78           |
| 6                            | 18942.6         | 38.78 AV                | 54             | -15.22      | -64.85                  | 8.37                   | -56.48           |
| 7                            | 23822.5         | 47.48 PK                | 74             | -26.52      | -56.15                  | 8.37                   | -47.78           |
| 8                            | 23822.5         | 40.7 AV                 | 54             | -13.3       | -62.93                  | 8.37                   | -54.56           |
| 9                            | 38848.18        | 53.44 PK                | 74             | -20.56      | -50.19                  | 8.37                   | -41.82           |
| 10                           | 38848.18        | 45.58 AV                | 54             | -8.42       | -58.05                  | 8.37                   | -49.68           |

Note: Margin value = Emission Level - Limit value

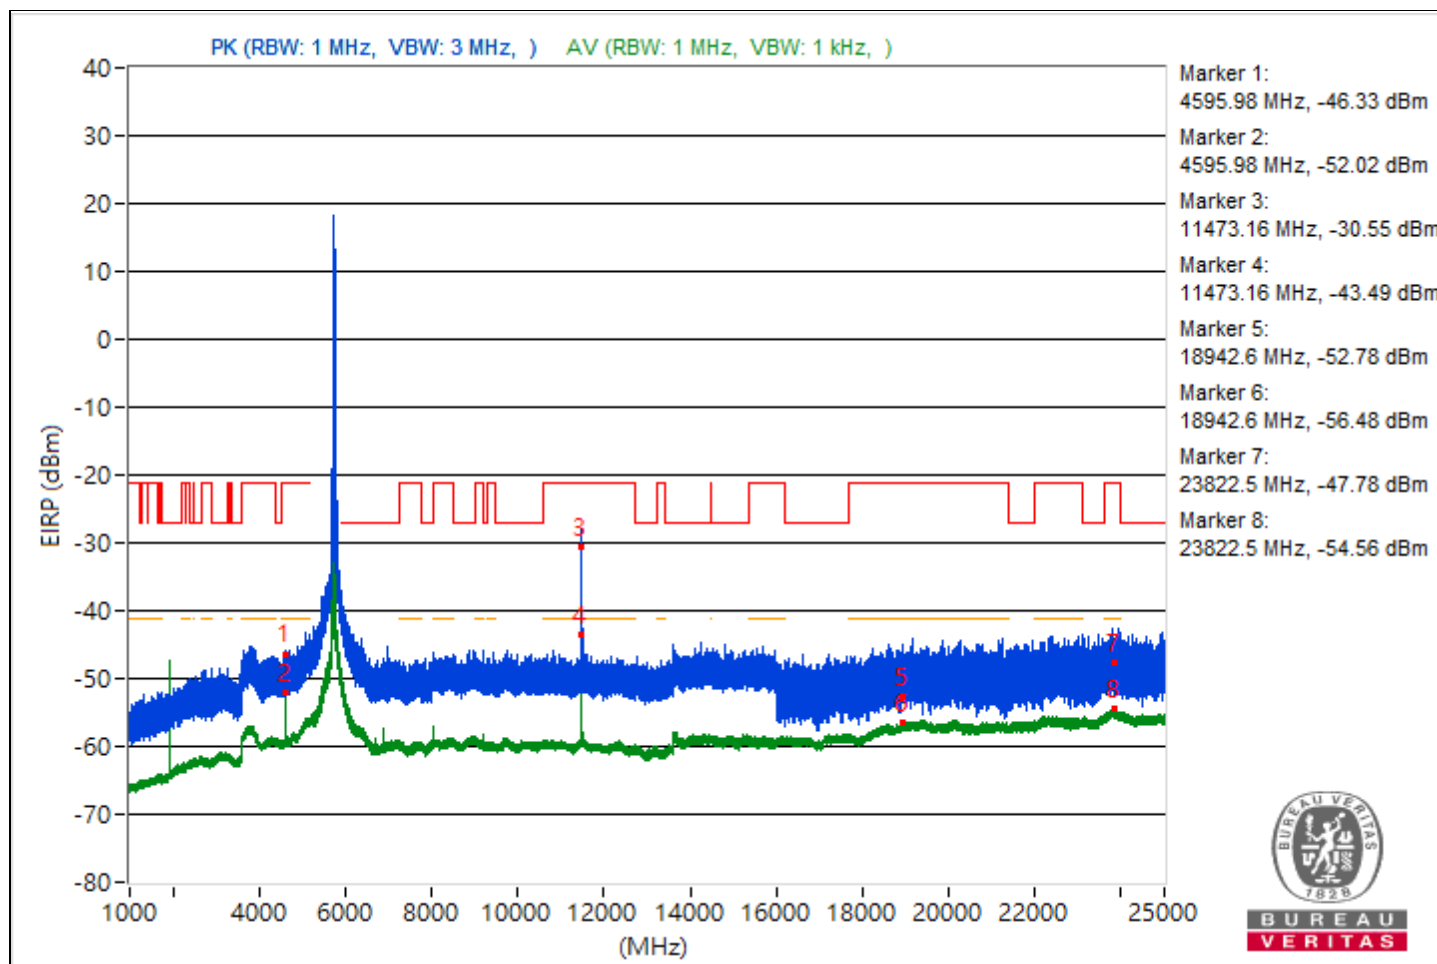

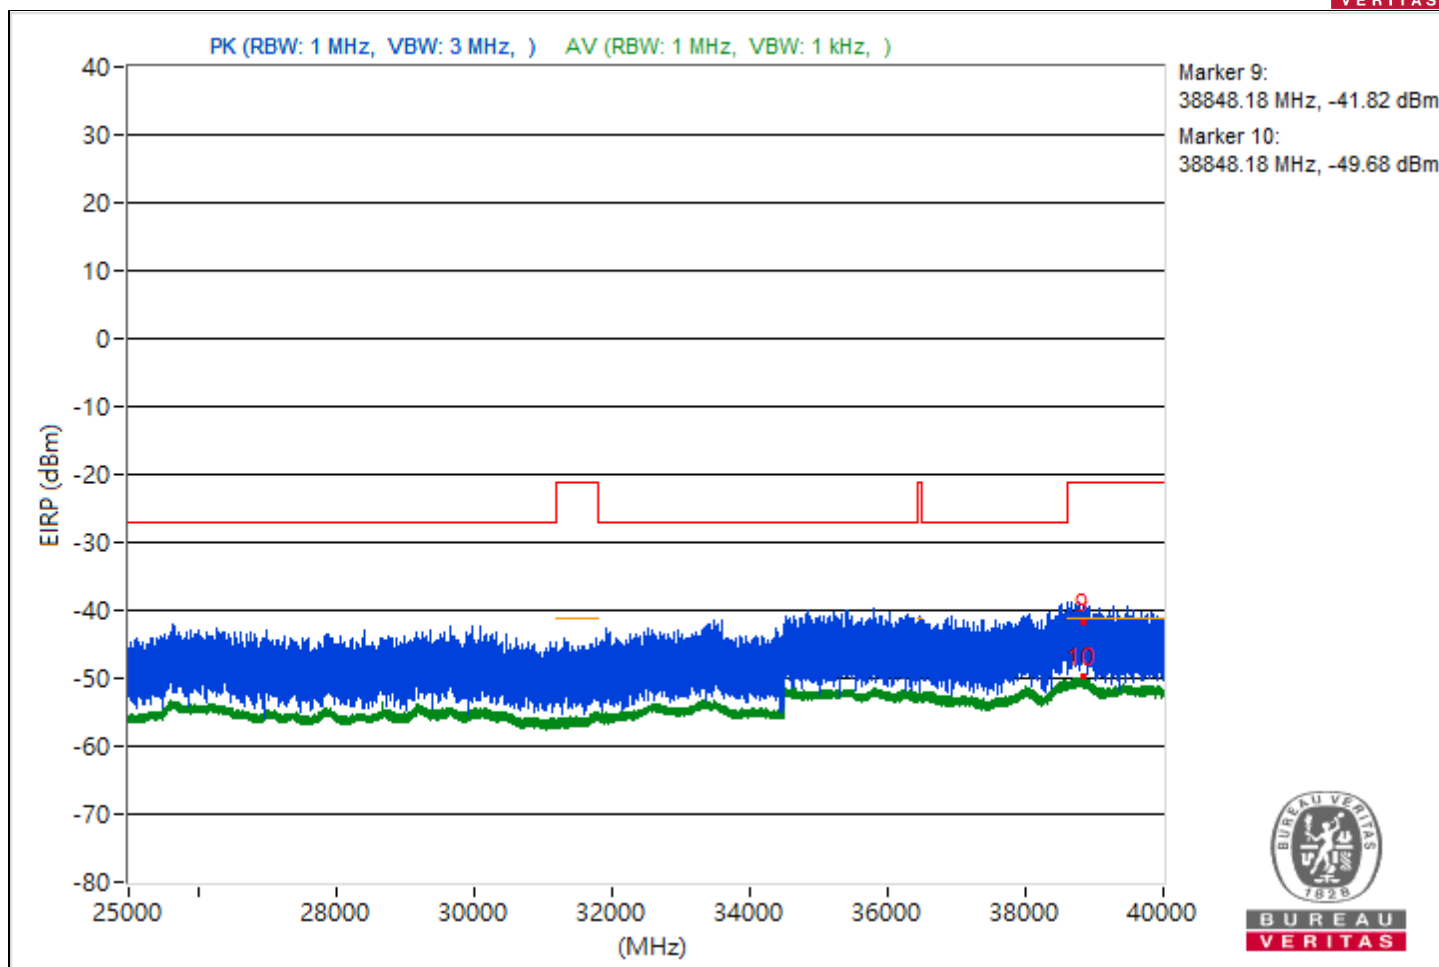



|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 165 : 5825 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 4659.91         | 47.65 PK                | 74             | -26.35      | -55.98                  | 8.37                   | -47.61           |
| 2   | 4659.91         | 45.15 AV                | 54             | -8.85       | -58.48                  | 8.37                   | -50.11           |
| 3   | 11632.71        | 61.41 PK                | 74             | -12.59      | -42.22                  | 8.37                   | -33.85           |
| 4   | 11632.71        | 51.44 AV                | 54             | -2.56       | -52.19                  | 8.37                   | -43.82           |
| 5   | 18993.2         | 44.97 PK                | 74             | -29.03      | -58.66                  | 8.37                   | -50.29           |
| 6   | 18993.2         | 38.63 AV                | 54             | -15.37      | -65                     | 8.37                   | -56.63           |
| 7   | 23764.7         | 47.09 PK                | 74             | -26.91      | -56.54                  | 8.37                   | -48.17           |
| 8   | 23764.7         | 40.74 AV                | 54             | -13.26      | -62.89                  | 8.37                   | -54.52           |
| 9   | 38806.04        | 51.17 PK                | 74             | -22.83      | -52.46                  | 8.37                   | -44.09           |
| 10  | 38806.04        | 45.32 AV                | 54             | -8.68       | -58.31                  | 8.37                   | -49.94           |

Note: Margin value = Emission Level - Limit value

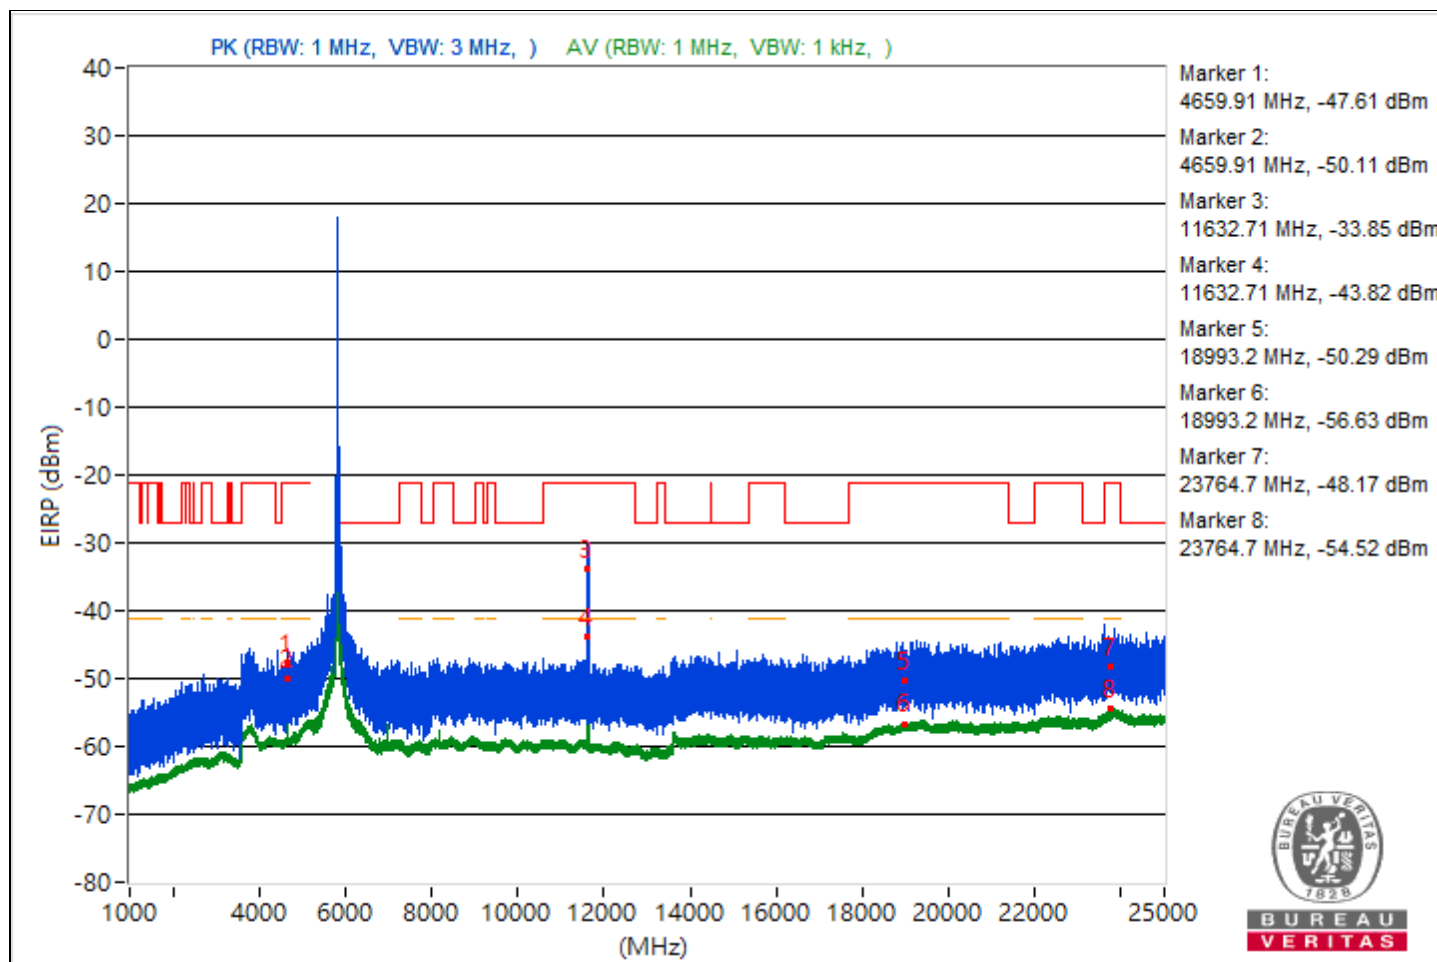


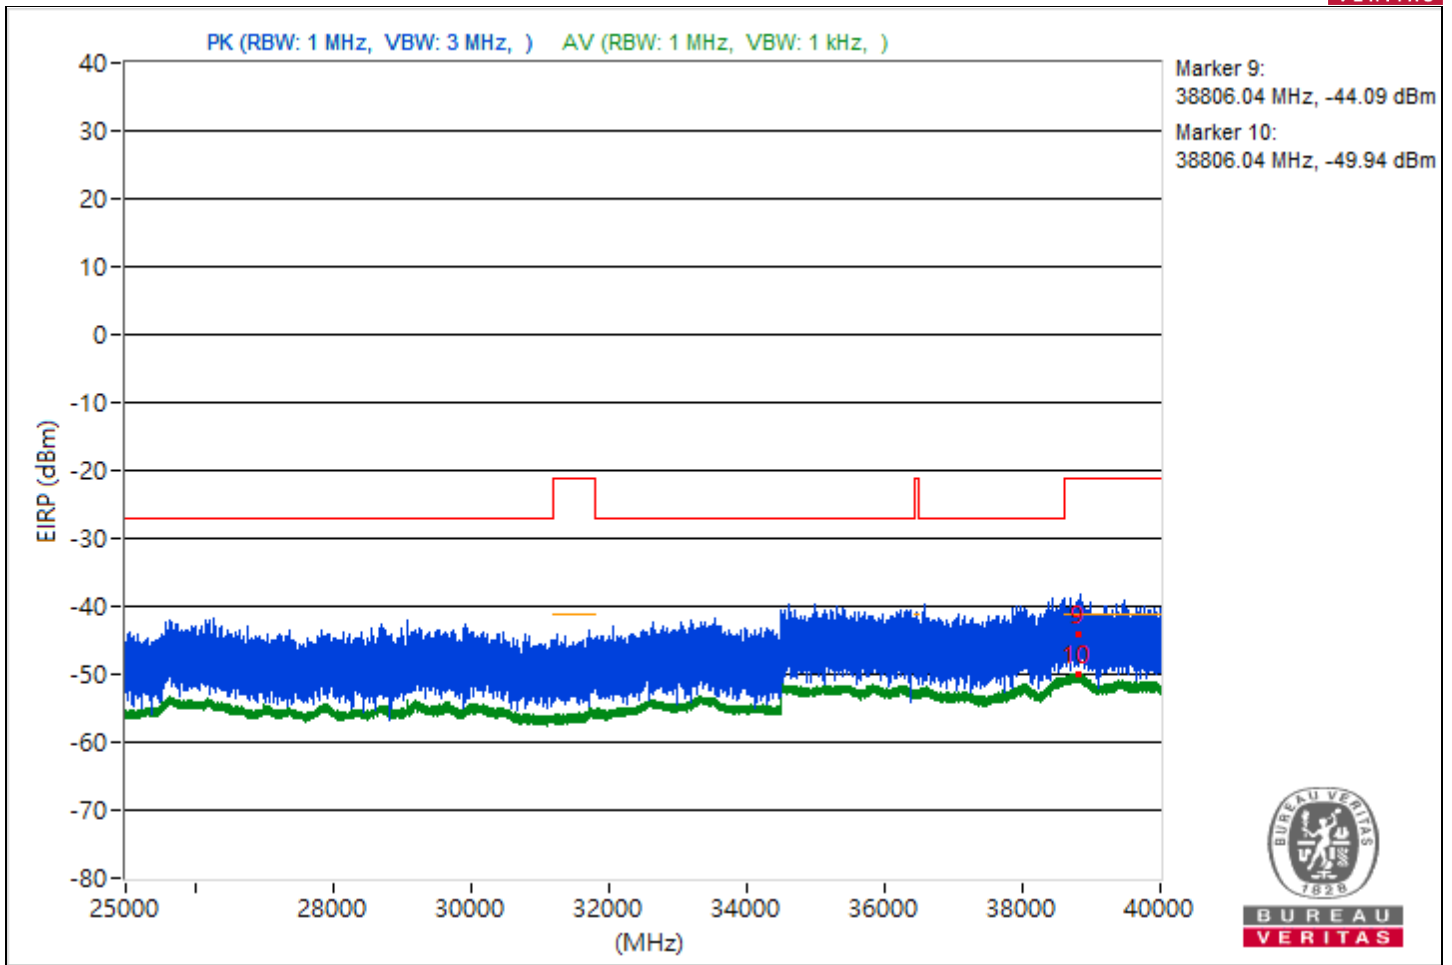


|                 |                             |                          |                  |
|-----------------|-----------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 36 : 5180 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 19°C, 62% RH     |
| Tested By       | Henry Hsu                   |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5097.8          | 52.97 PK                | 74             | -21.03      | -50.66                  | 8.37                   | -42.29           |
| 2                            | 5097.8          | 44.26 AV                | 54             | -9.74       | -59.37                  | 8.37                   | -51              |
| 3                            | 8287.91         | 49.37 PK                | 74             | -24.63      | -54.26                  | 8.37                   | -45.89           |
| 4                            | 8287.91         | 43.11 AV                | 54             | -10.89      | -60.52                  | 8.37                   | -52.15           |
| 5                            | 18964.7         | 46.92 PK                | 74             | -27.08      | -56.71                  | 8.37                   | -48.34           |
| 6                            | 18964.7         | 38.75 AV                | 54             | -15.25      | -64.88                  | 8.37                   | -56.51           |
| 7                            | 23864.4         | 49.24 PK                | 74             | -24.76      | -54.39                  | 8.37                   | -46.02           |
| 8                            | 23864.4         | 40.82 AV                | 54             | -13.18      | -62.81                  | 8.37                   | -54.44           |
| 9                            | 38760.09        | 50.98 PK                | 74             | -23.02      | -52.65                  | 8.37                   | -44.28           |
| 10                           | 38760.09        | 45.45 AV                | 54             | -8.55       | -58.18                  | 8.37                   | -49.81           |

Note: Margin value = Emission Level - Limit value

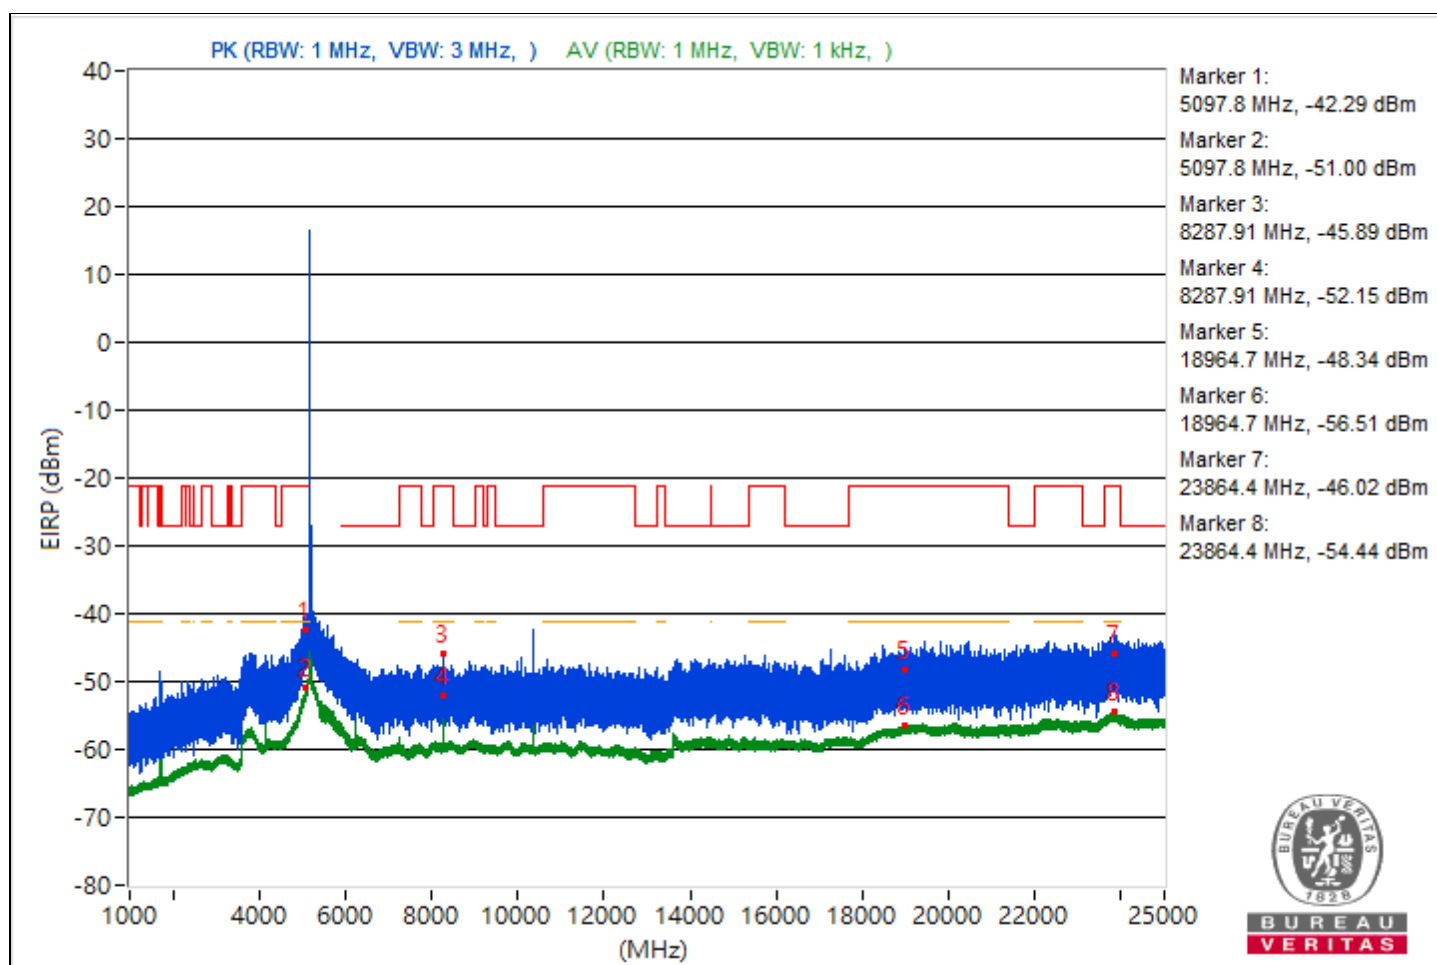


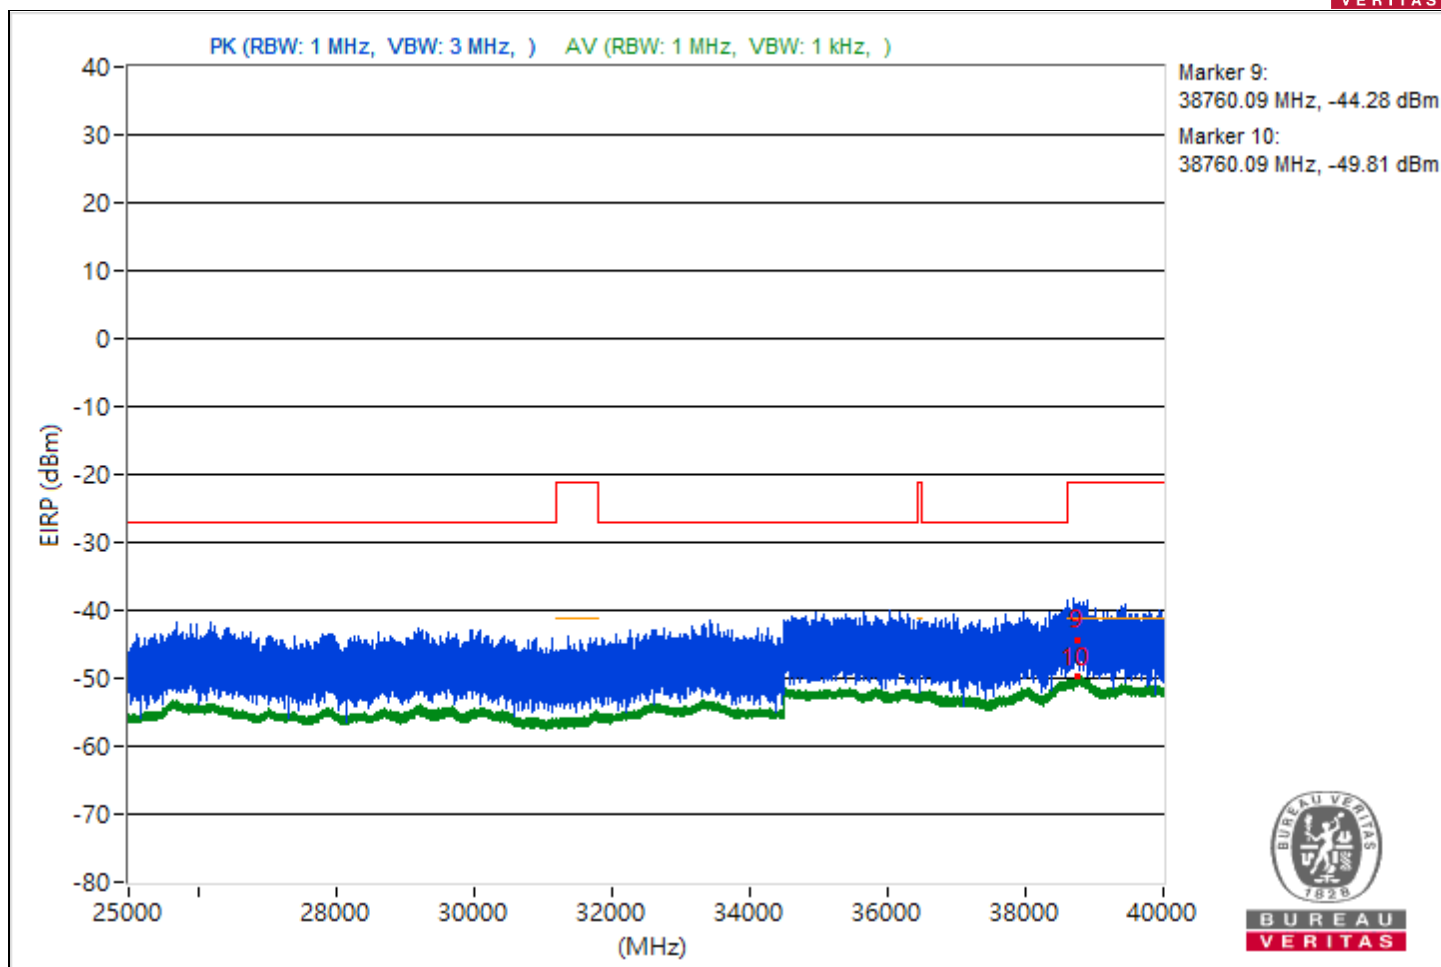


|                 |                             |                          |                  |
|-----------------|-----------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 64 : 5320 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 19°C, 62% RH     |
| Tested By       | Henry Hsu                   |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5096.63         | 50.69 PK                | 74             | -23.31      | -52.94                  | 8.37                   | -44.57           |
| 2                            | 5096.63         | 42.57 AV                | 54             | -11.43      | -61.06                  | 8.37                   | -52.69           |
| 3                            | 10625.51        | 42.15 PK                | 74             | -31.85      | -61.48                  | 8.37                   | -53.11           |
| 4                            | 10625.51        | 37.46 AV                | 54             | -16.54      | -66.17                  | 8.37                   | -57.8            |
| 5                            | 18994.5         | 44.05 PK                | 74             | -29.95      | -59.58                  | 8.37                   | -51.21           |
| 6                            | 18994.5         | 38.74 AV                | 54             | -15.26      | -64.89                  | 8.37                   | -56.52           |
| 7                            | 23744.6         | 47.97 PK                | 74             | -26.03      | -55.66                  | 8.37                   | -47.29           |
| 8                            | 23744.6         | 40.79 AV                | 54             | -13.21      | -62.84                  | 8.37                   | -54.47           |
| 9                            | 38788           | 50.93 PK                | 74             | -23.07      | -52.7                   | 8.37                   | -44.33           |
| 10                           | 38788           | 45.35 AV                | 54             | -8.65       | -58.28                  | 8.37                   | -49.91           |

Note: Margin value = Emission Level - Limit value

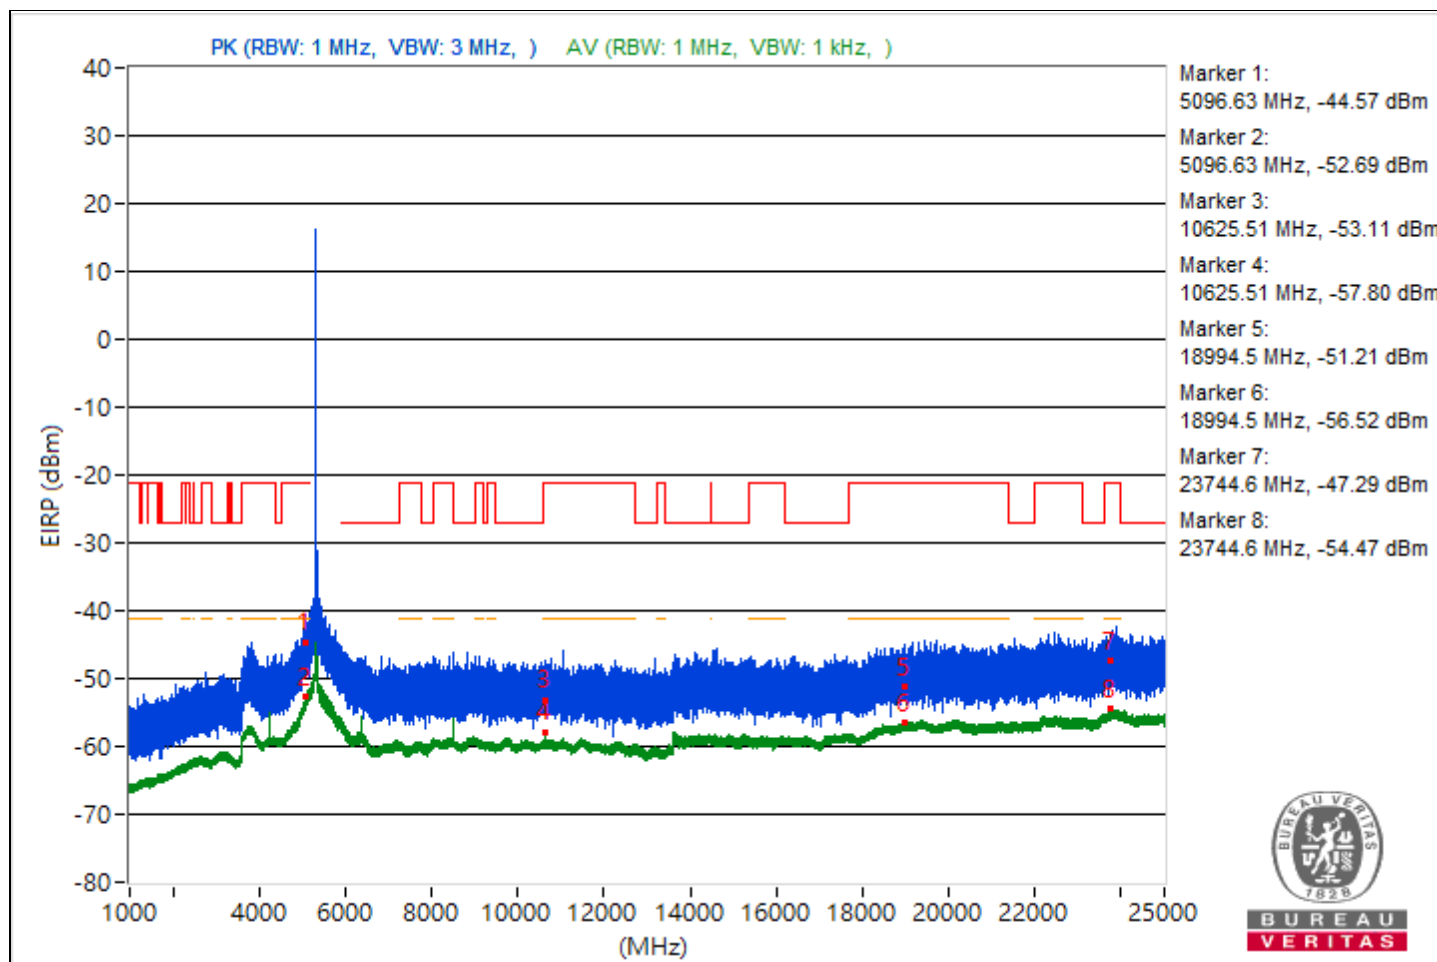


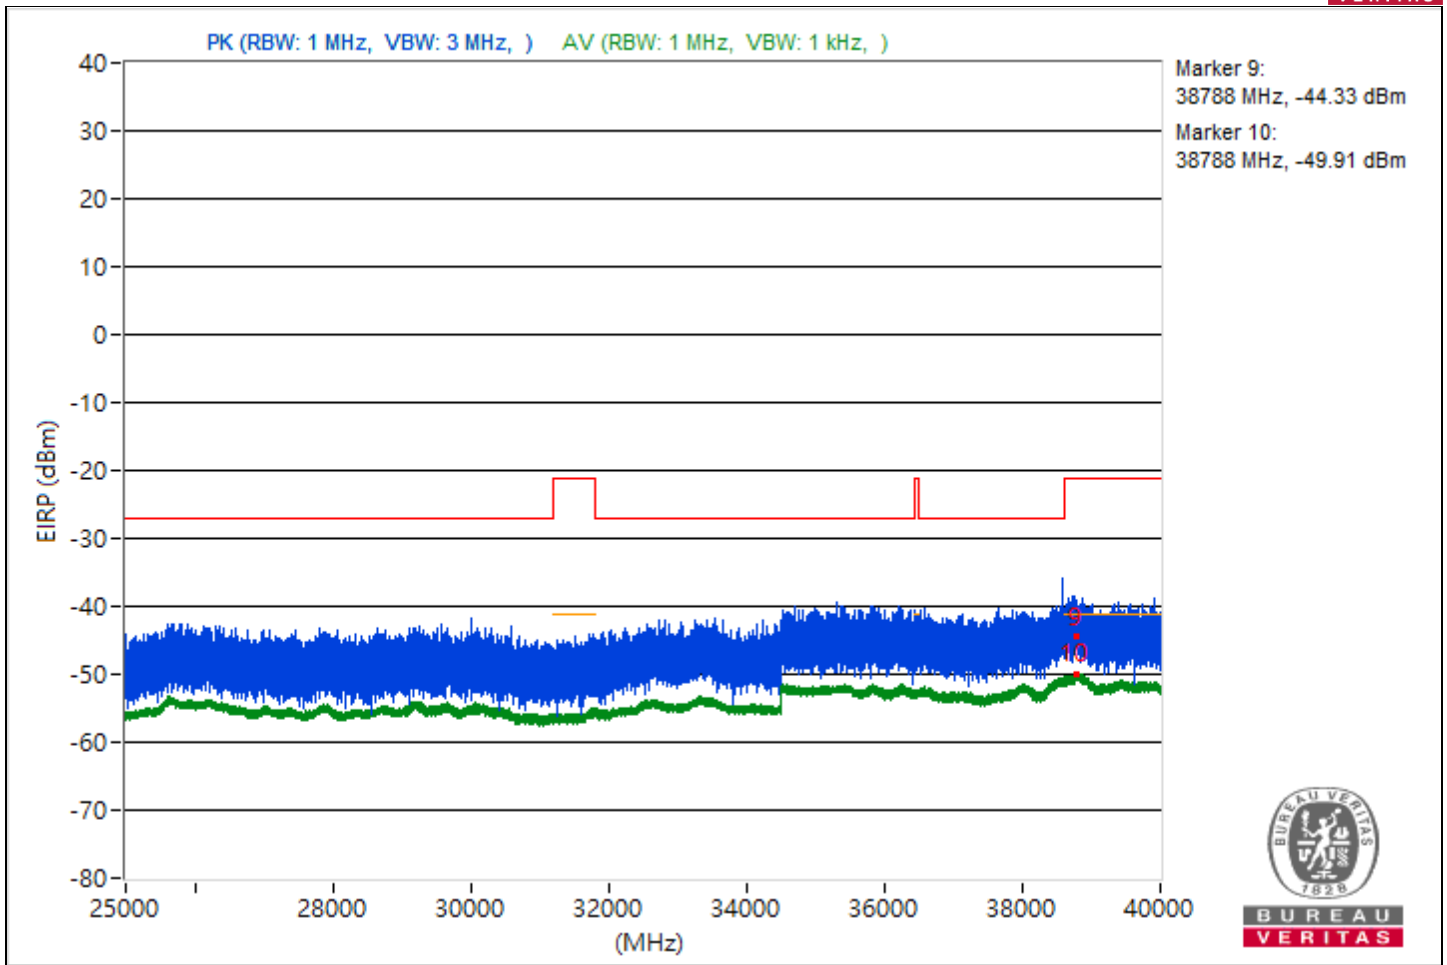


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 100 : 5500 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 1718.82         | 47.66 PK                | 74             | -26.34      | -55.97                  | 8.37                   | -47.6            |
| 2                            | 1718.82         | 42.73 AV                | 54             | -11.27      | -60.9                   | 8.37                   | -52.53           |
| 3                            | 9010.58         | 44.05 PK                | 74             | -29.95      | -59.58                  | 8.37                   | -51.21           |
| 4                            | 9010.58         | 36.57 AV                | 54             | -17.43      | -67.06                  | 8.37                   | -58.69           |
| 5                            | 18979.9         | 46.19 PK                | 74             | -27.81      | -57.44                  | 8.37                   | -49.07           |
| 6                            | 18979.9         | 38.69 AV                | 54             | -15.31      | -64.94                  | 8.37                   | -56.57           |
| 7                            | 23860.2         | 44.71 PK                | 74             | -29.29      | -58.92                  | 8.37                   | -50.55           |
| 8                            | 23860.2         | 40.75 AV                | 54             | -13.25      | -62.88                  | 8.37                   | -54.51           |
| 9                            | 38793.51        | 51.59 PK                | 74             | -22.41      | -52.04                  | 8.37                   | -43.67           |
| 10                           | 38793.51        | 45.36 AV                | 54             | -8.64       | -58.27                  | 8.37                   | -49.9            |

Note: Margin value = Emission Level - Limit value

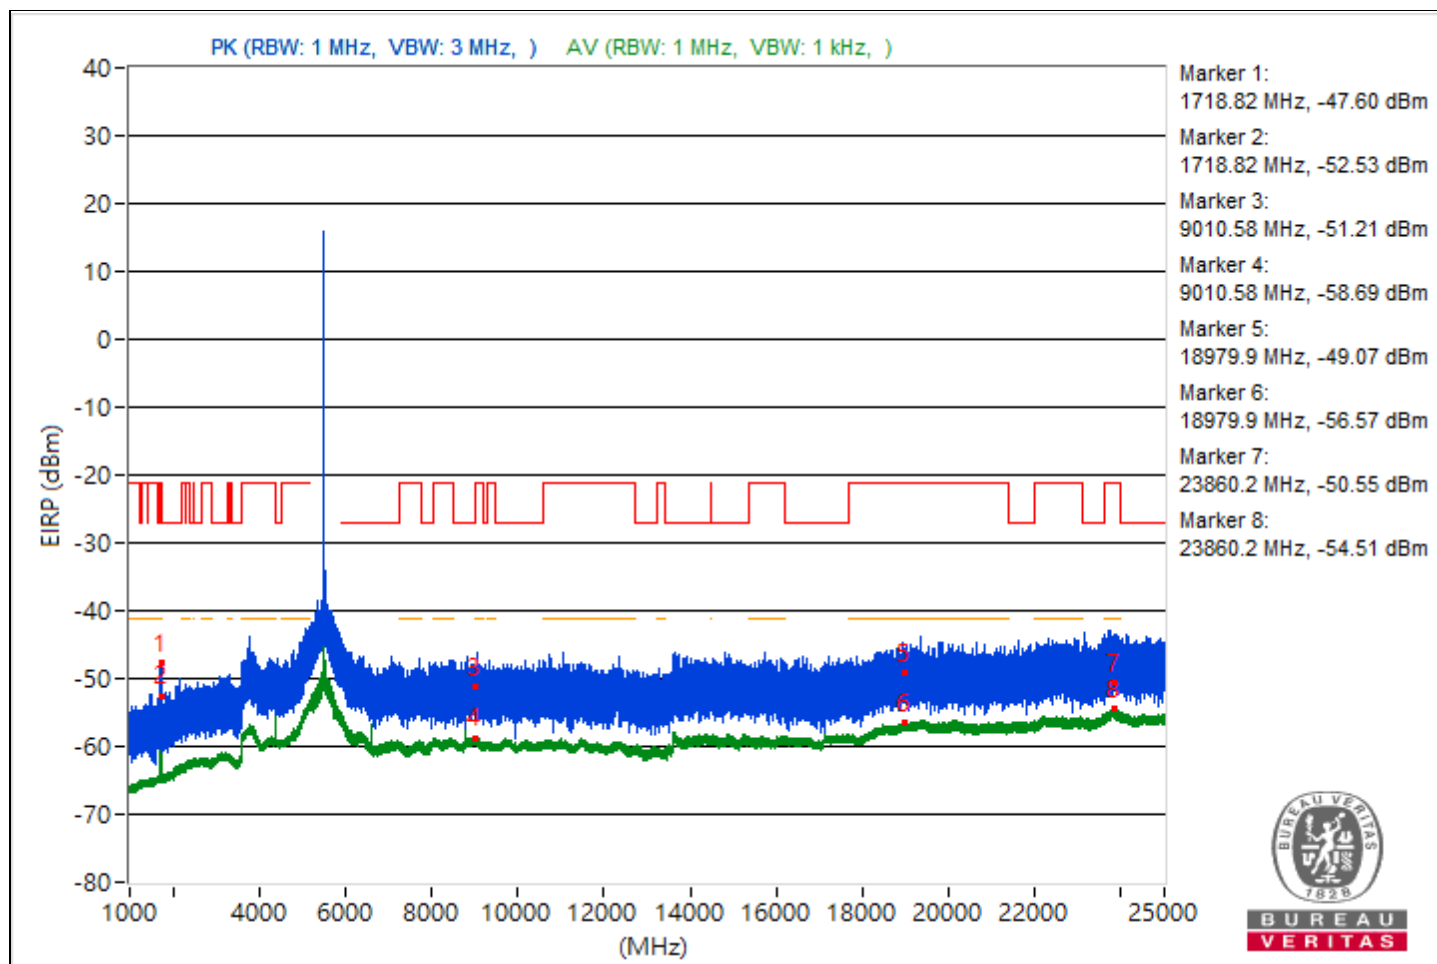


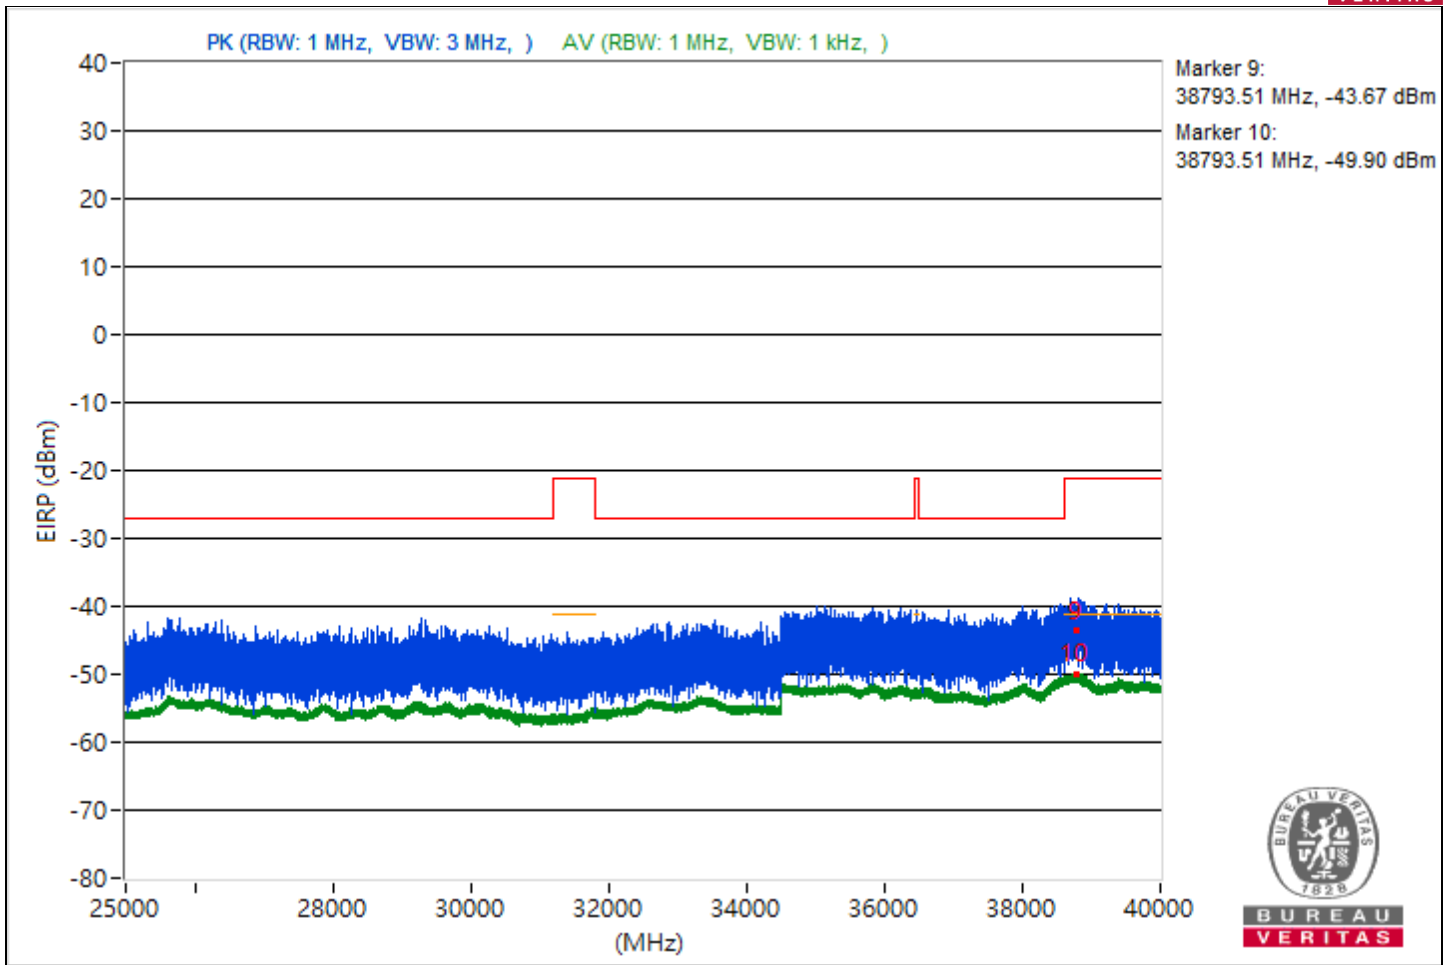


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 140 : 5700 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4560.04         | 49.9 PK                 | 74             | -24.1       | -53.73                  | 8.37                   | -45.36           |
| 2                            | 4560.04         | 43.66 AV                | 54             | -10.34      | -59.97                  | 8.37                   | -51.6            |
| 3                            | 9119.64         | 45.16 PK                | 74             | -28.84      | -58.47                  | 8.37                   | -50.1            |
| 4                            | 9119.64         | 37.26 AV                | 54             | -16.74      | -66.37                  | 8.37                   | -58              |
| 5                            | 18951           | 43.2 PK                 | 74             | -30.8       | -60.43                  | 8.37                   | -52.06           |
| 6                            | 18951           | 38.82 AV                | 54             | -15.18      | -64.81                  | 8.37                   | -56.44           |
| 7                            | 23787.5         | 44.96 PK                | 74             | -29.04      | -58.67                  | 8.37                   | -50.3            |
| 8                            | 23787.5         | 40.71 AV                | 54             | -13.29      | -62.92                  | 8.37                   | -54.55           |
| 9                            | 38761.69        | 51.22 PK                | 74             | -22.78      | -52.41                  | 8.37                   | -44.04           |
| 10                           | 38761.69        | 45.68 AV                | 54             | -8.32       | -57.95                  | 8.37                   | -49.58           |

Note: Margin value = Emission Level - Limit value

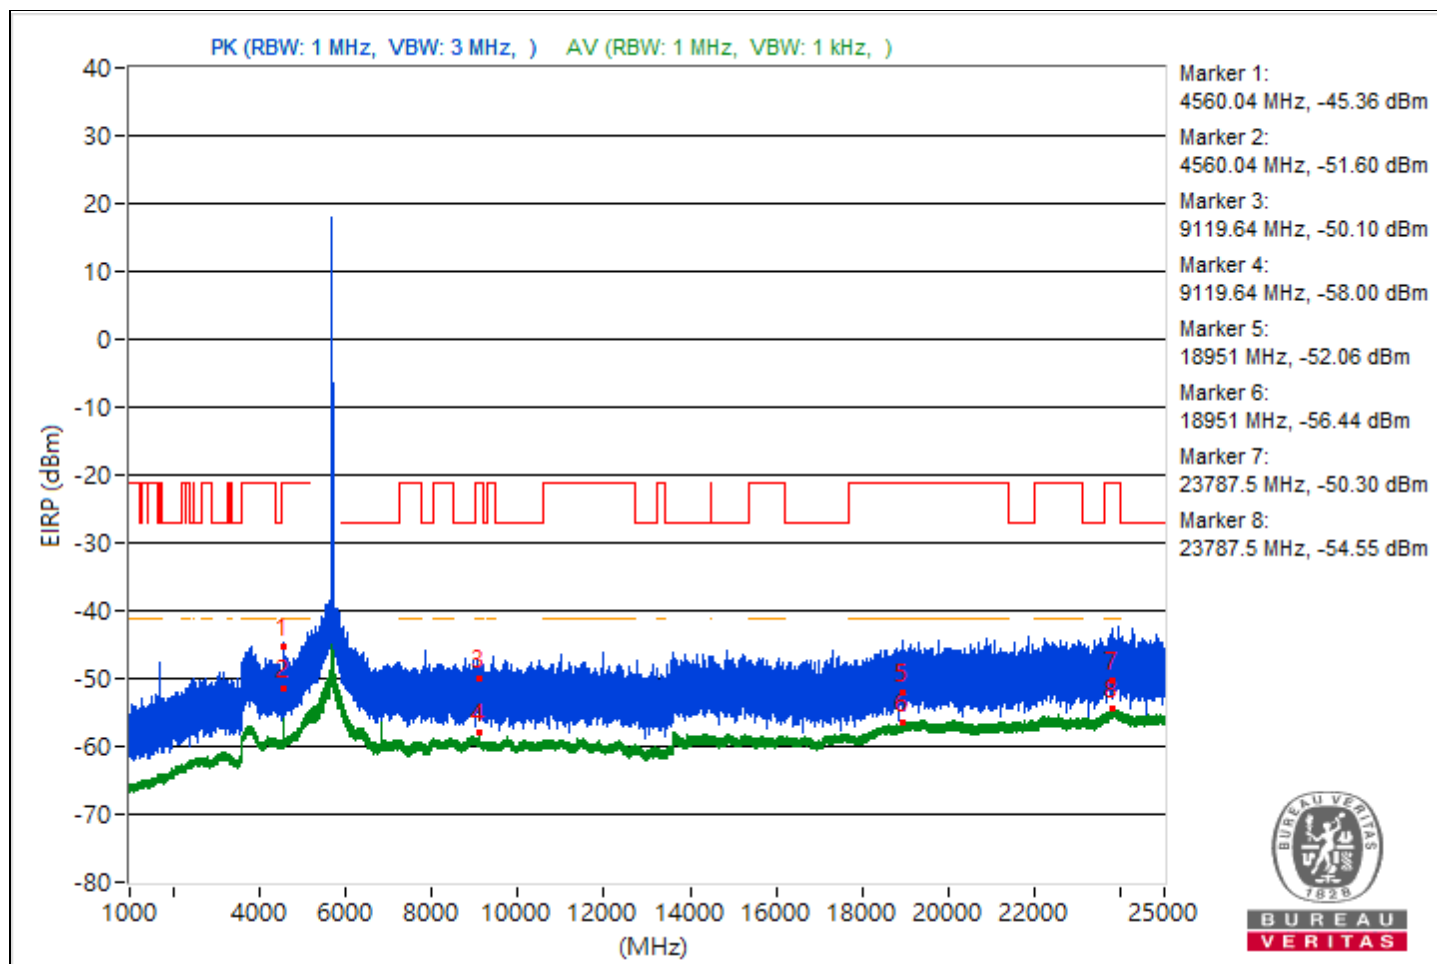


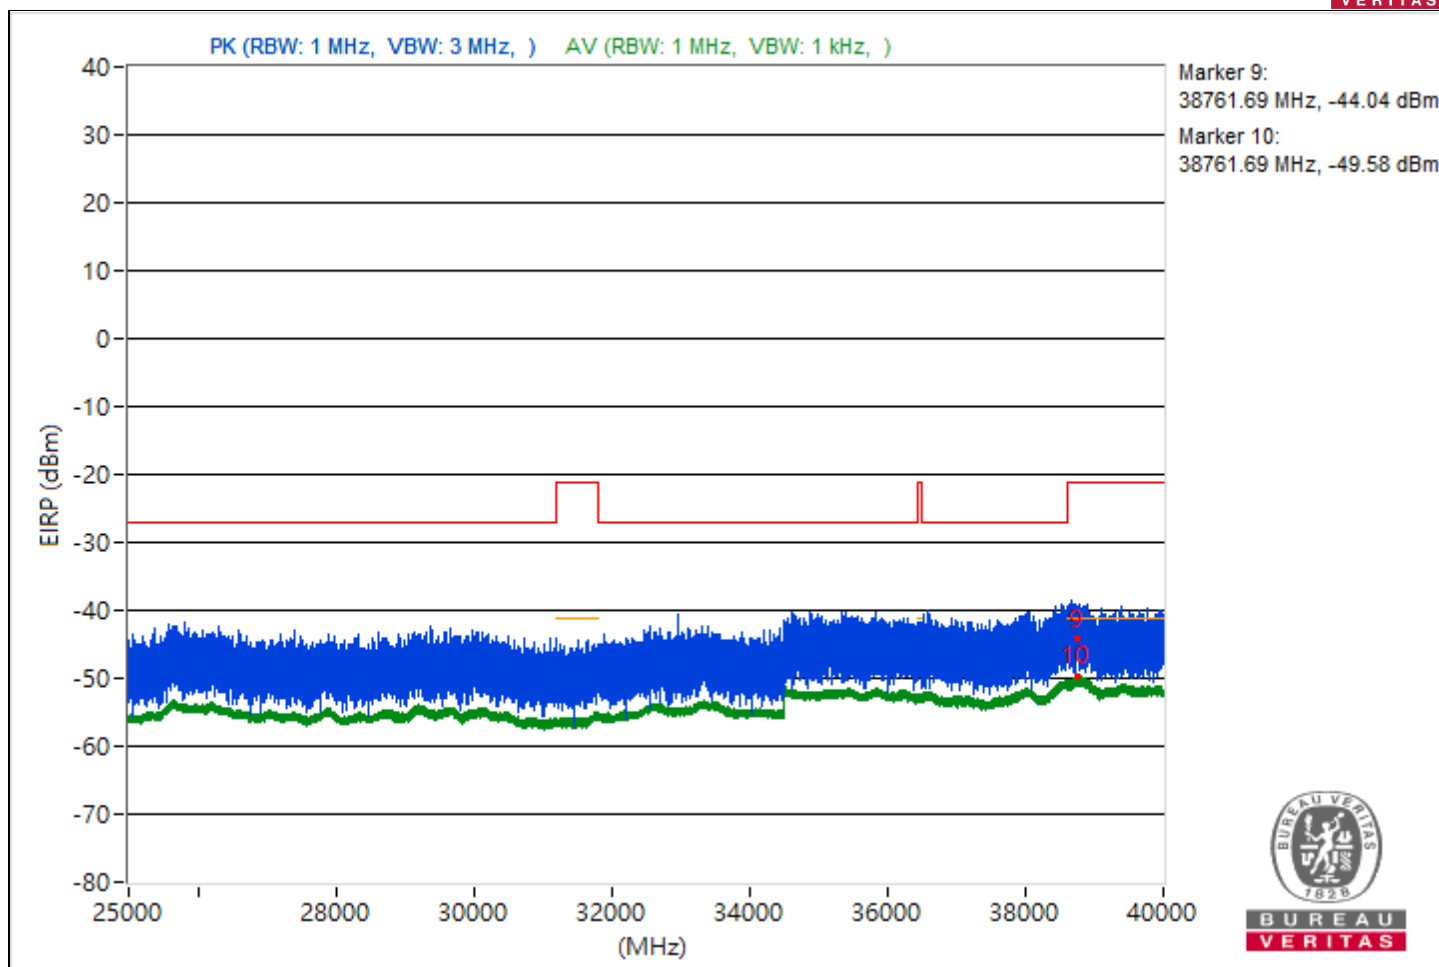


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 144 : 5720 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4575.99         | 49.75 PK                | 74             | -24.25      | -53.88                  | 8.37                   | -45.51           |
| 2                            | 4575.99         | 45.52 AV                | 54             | -8.48       | -58.11                  | 8.37                   | -49.74           |
| 3                            | 9151.73         | 43.16 PK                | 74             | -30.84      | -60.47                  | 8.37                   | -52.1            |
| 4                            | 9151.73         | 36.96 AV                | 54             | -17.04      | -66.67                  | 8.37                   | -58.3            |
| 5                            | 18990.5         | 45.3 PK                 | 74             | -28.7       | -58.33                  | 8.37                   | -49.96           |
| 6                            | 18990.5         | 38.76 AV                | 54             | -15.24      | -64.87                  | 8.37                   | -56.5            |
| 7                            | 23804.3         | 47.7 PK                 | 74             | -26.3       | -55.93                  | 8.37                   | -47.56           |
| 8                            | 23804.3         | 40.65 AV                | 54             | -13.35      | -62.98                  | 8.37                   | -54.61           |
| 9                            | 38758.04        | 50.56 PK                | 74             | -23.44      | -53.07                  | 8.37                   | -44.7            |
| 10                           | 38758.04        | 45.35 AV                | 54             | -8.65       | -58.28                  | 8.37                   | -49.91           |

Note: Margin value = Emission Level - Limit value

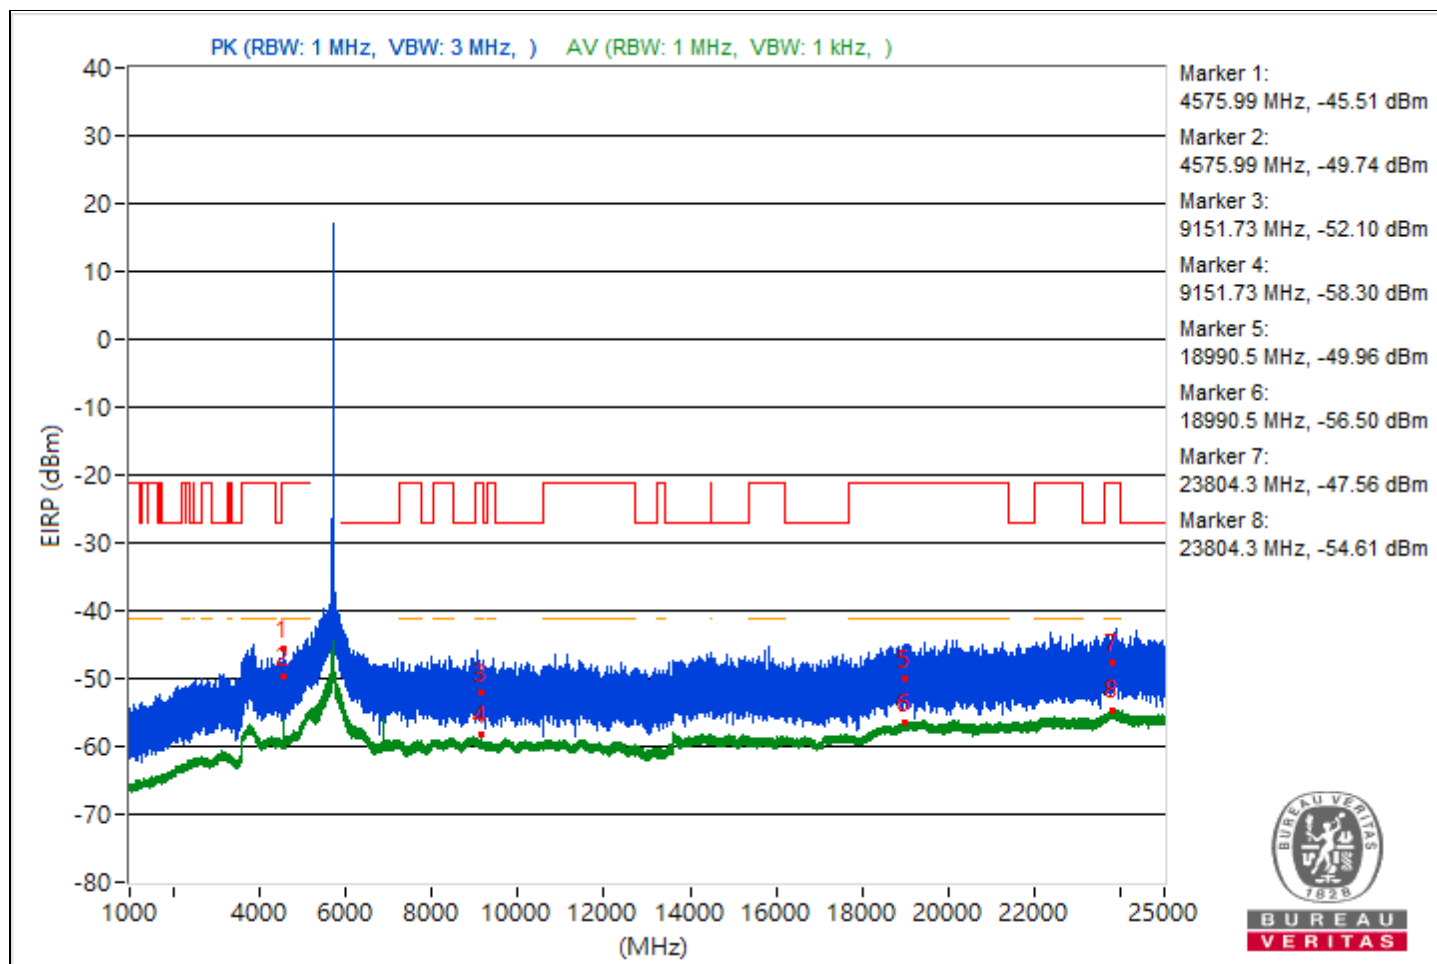


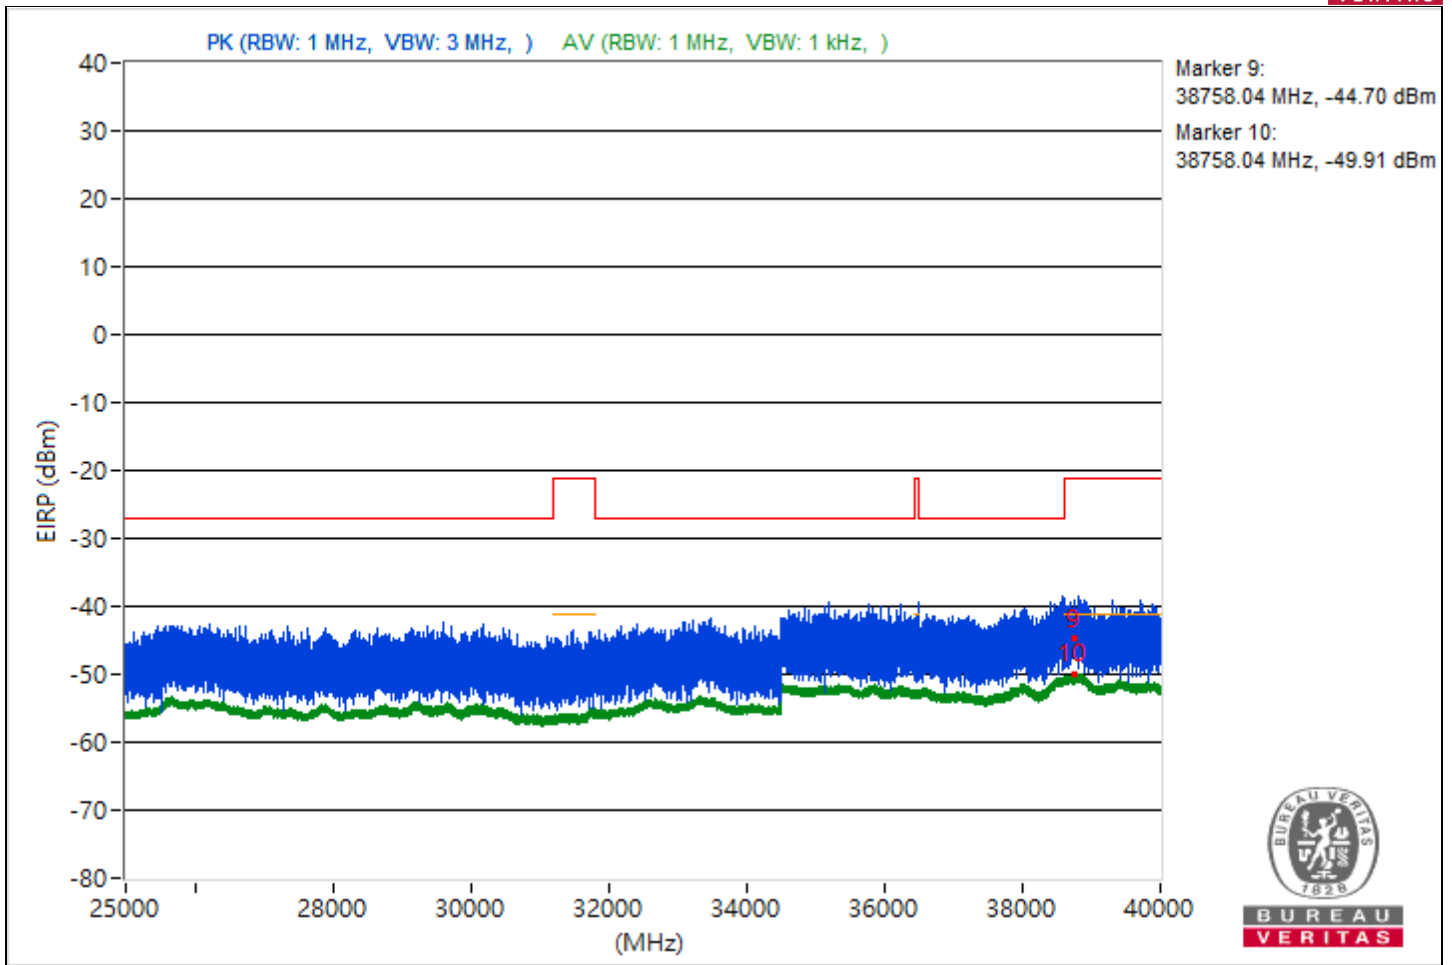


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 149 : 5745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4596.06         | 48.02 PK                | 74             | -25.98      | -55.61                  | 8.37                   | -47.24           |
| 2                            | 4596.06         | 42.99 AV                | 54             | -11.01      | -60.64                  | 8.37                   | -52.27           |
| 3                            | 11475.11        | 58.69 PK                | 74             | -15.31      | -44.94                  | 8.37                   | -36.57           |
| 4                            | 11475.11        | 51.13 AV                | 54             | -2.87       | -52.5                   | 8.37                   | -44.13           |
| 5                            | 18964.8         | 45.18 PK                | 74             | -28.82      | -58.45                  | 8.37                   | -50.08           |
| 6                            | 18964.8         | 38.61 AV                | 54             | -15.39      | -65.02                  | 8.37                   | -56.65           |
| 7                            | 23917.8         | 46.64 PK                | 74             | -27.36      | -56.99                  | 8.37                   | -48.62           |
| 8                            | 23917.8         | 40.83 AV                | 54             | -13.17      | -62.8                   | 8.37                   | -54.43           |
| 9                            | 38794.93        | 49.92 PK                | 74             | -24.08      | -53.71                  | 8.37                   | -45.34           |
| 10                           | 38794.93        | 45.42 AV                | 54             | -8.58       | -58.21                  | 8.37                   | -49.84           |

Note: Margin value = Emission Level - Limit value

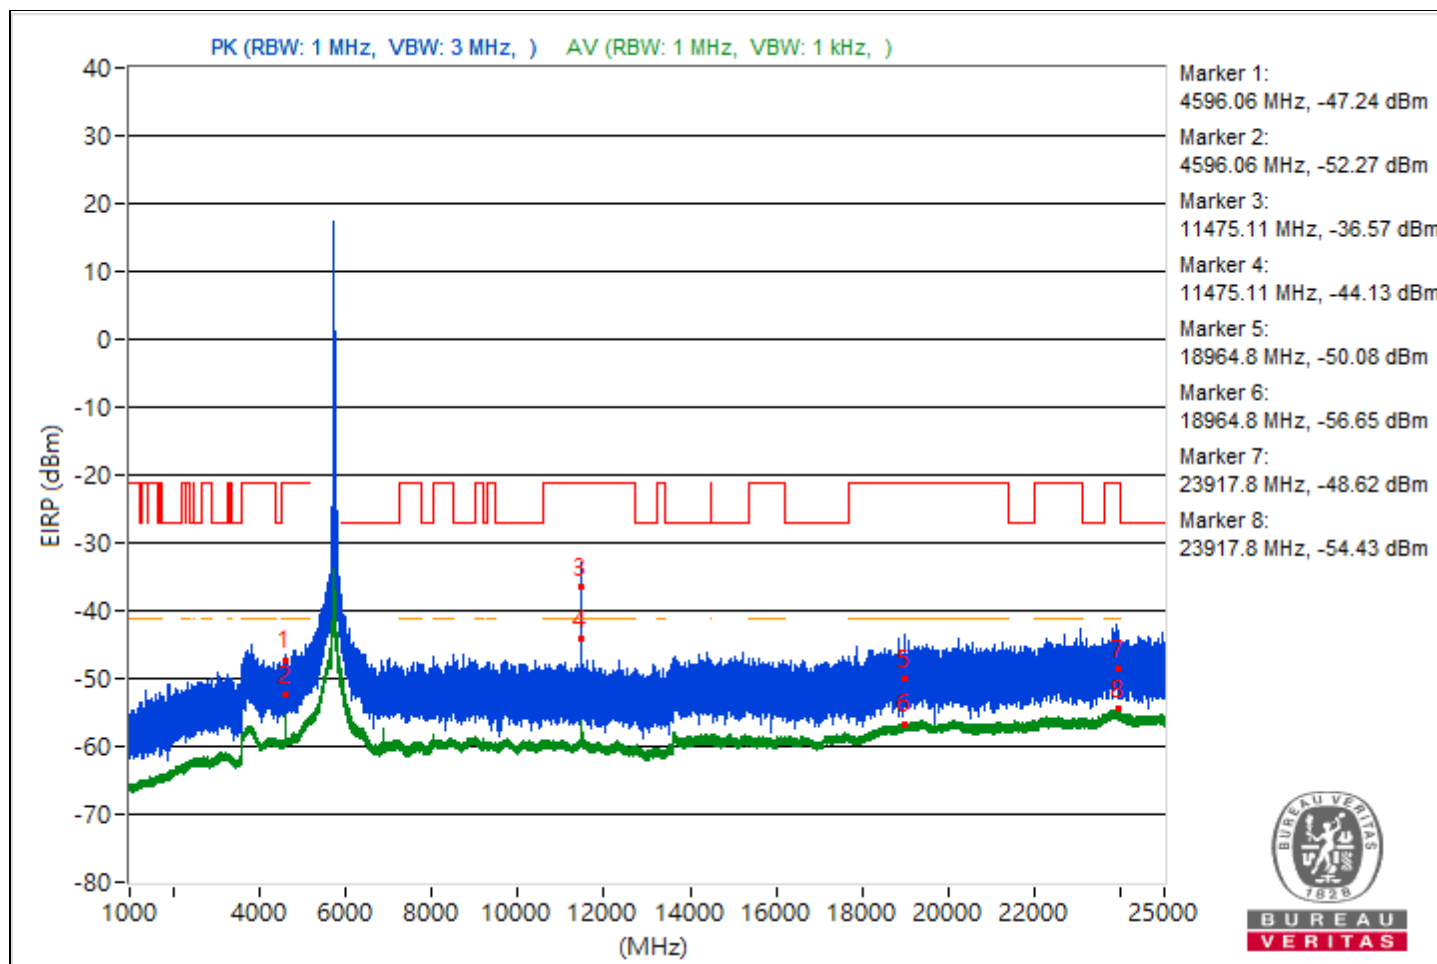


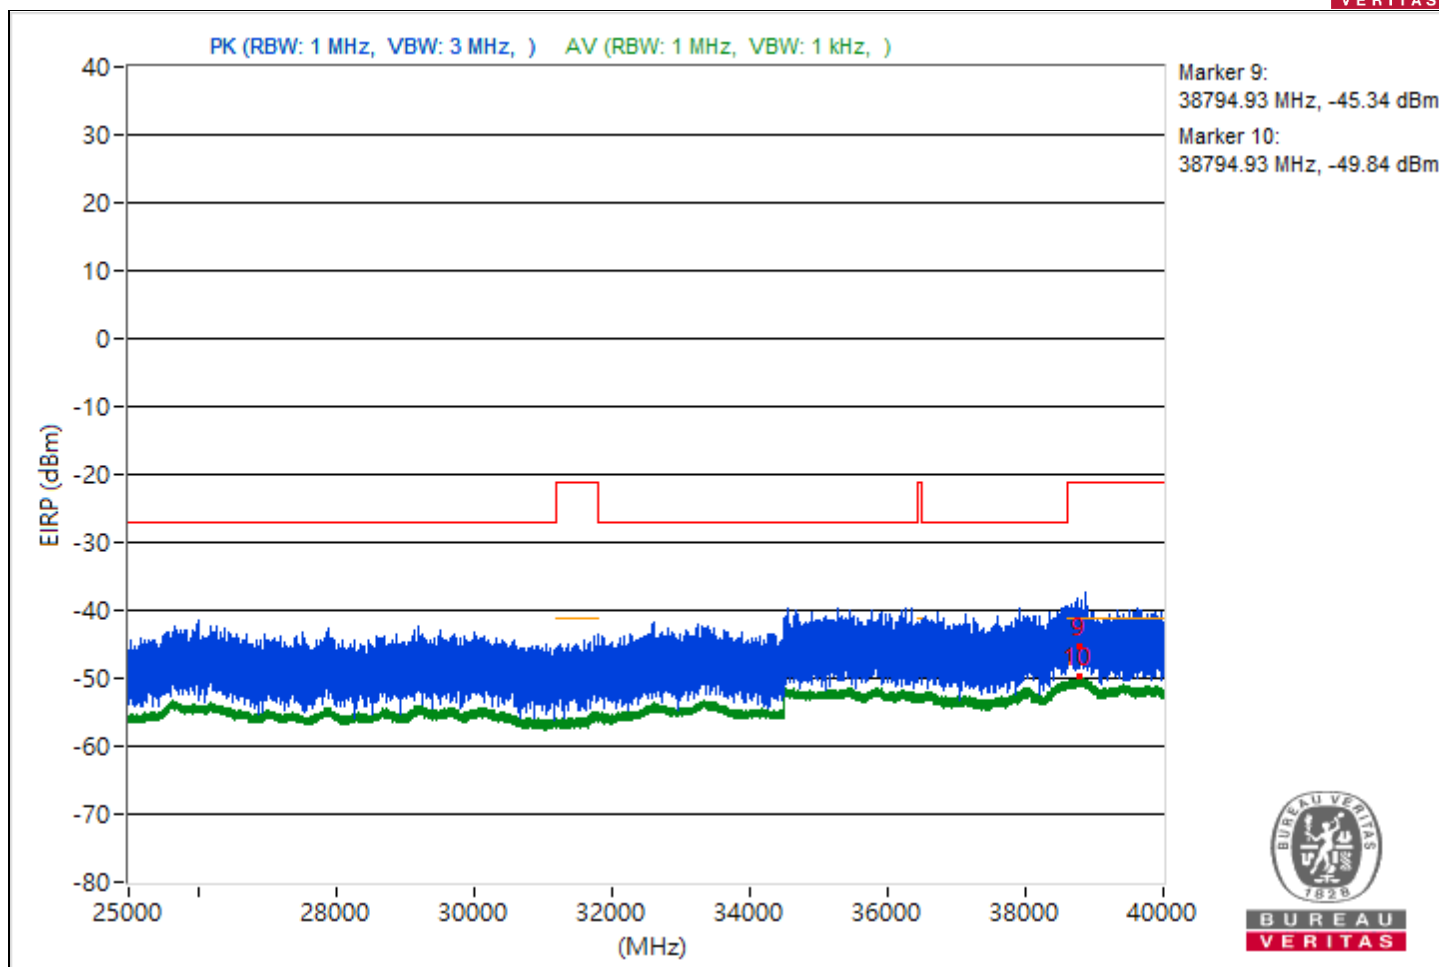


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 165 : 5825 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4659.99         | 48.39 PK                | 74             | -25.61      | -55.24                  | 8.37                   | -46.87           |
| 2                            | 4659.99         | 44.06 AV                | 54             | -9.94       | -59.57                  | 8.37                   | -51.2            |
| 3                            | 11635.2         | 58.54 PK                | 74             | -15.46      | -45.09                  | 8.37                   | -36.72           |
| 4                            | 11635.2         | 50.58 AV                | 54             | -3.42       | -53.05                  | 8.37                   | -44.68           |
| 5                            | 18999.3         | 44.22 PK                | 74             | -29.78      | -59.41                  | 8.37                   | -51.04           |
| 6                            | 18999.3         | 38.62 AV                | 54             | -15.38      | -65.01                  | 8.37                   | -56.64           |
| 7                            | 23786.1         | 47.08 PK                | 74             | -26.92      | -56.55                  | 8.37                   | -48.18           |
| 8                            | 23786.1         | 40.82 AV                | 54             | -13.18      | -62.81                  | 8.37                   | -54.44           |
| 9                            | 38815.11        | 51.97 PK                | 74             | -22.03      | -51.66                  | 8.37                   | -43.29           |
| 10                           | 38815.11        | 45.5 AV                 | 54             | -8.5        | -58.13                  | 8.37                   | -49.76           |

Note: Margin value = Emission Level - Limit value

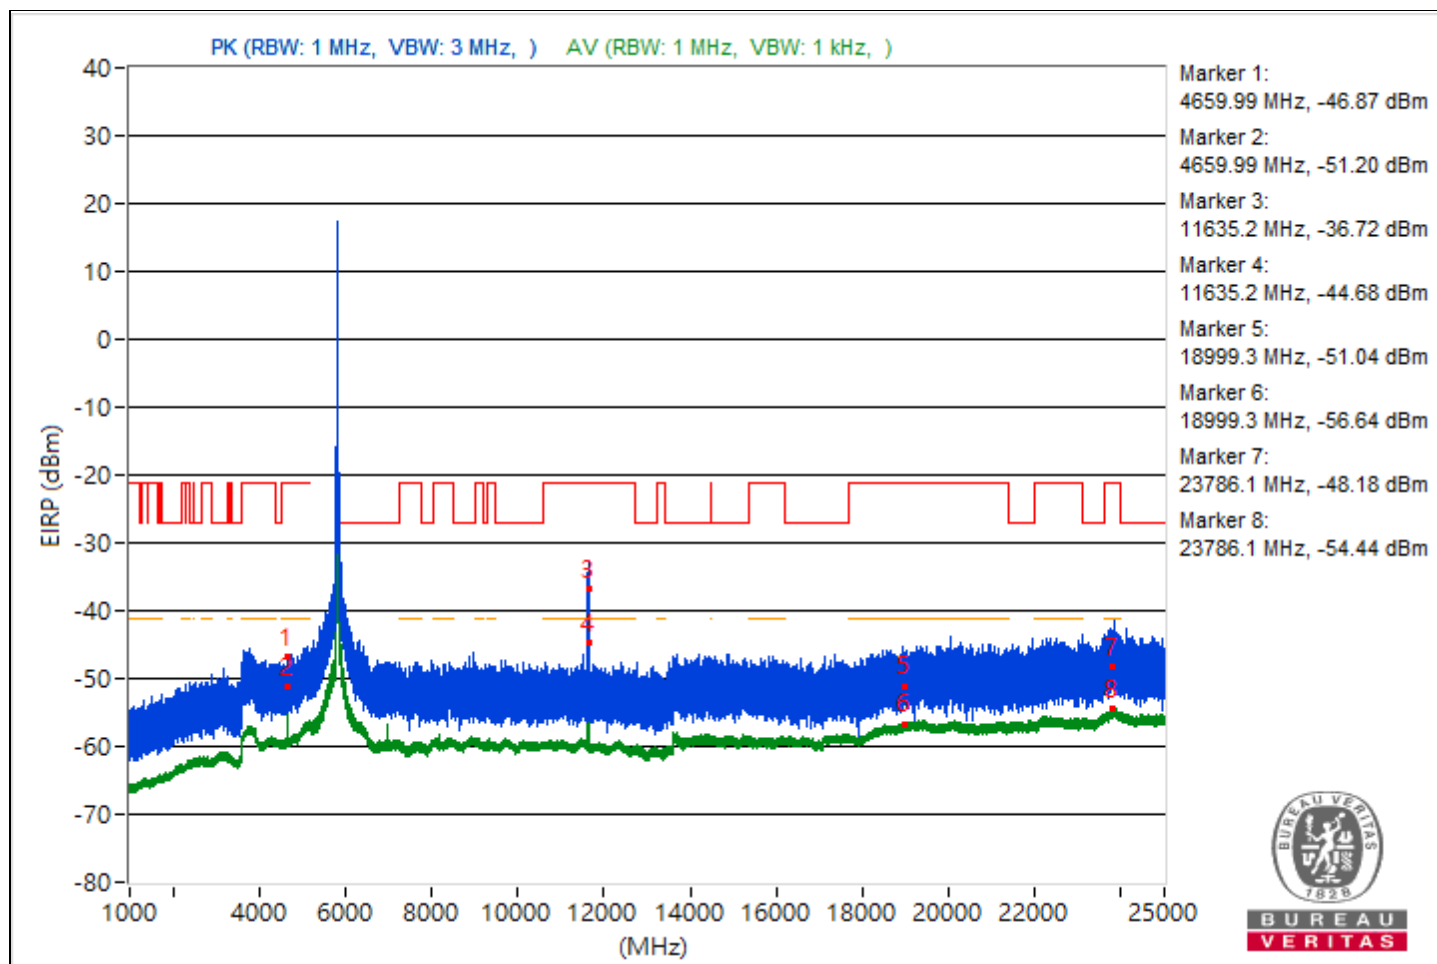


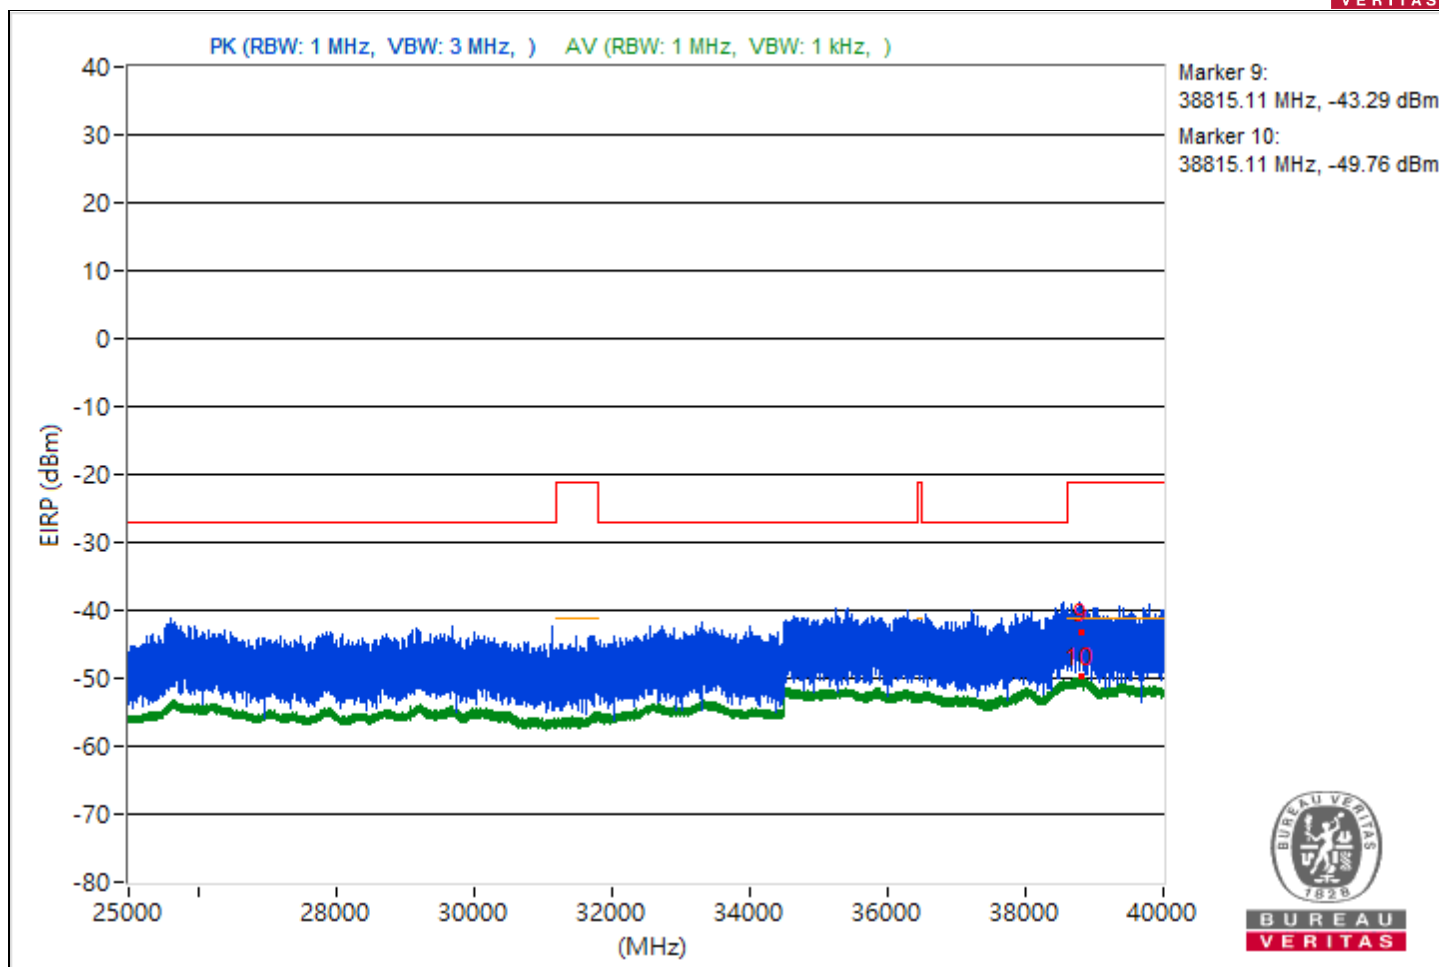


|                 |                              |                          |                  |
|-----------------|------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 36 : 5180 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 19°C, 62% RH     |
| Tested By       | Henry Hsu                    |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5098.81         | 51.96 PK                | 74             | -22.04      | -51.67                  | 8.37                   | -43.3            |
| 2                            | 5098.81         | 45.22 AV                | 54             | -8.78       | -58.41                  | 8.37                   | -50.04           |
| 3                            | 8288            | 48.29 PK                | 74             | -25.71      | -55.34                  | 8.37                   | -46.97           |
| 4                            | 8288            | 43.07 AV                | 54             | -10.93      | -60.56                  | 8.37                   | -52.19           |
| 5                            | 18985           | 46.57 PK                | 74             | -27.43      | -57.06                  | 8.37                   | -48.69           |
| 6                            | 18985           | 38.57 AV                | 54             | -15.43      | -65.06                  | 8.37                   | -56.69           |
| 7                            | 23766.6         | 47.08 PK                | 74             | -26.92      | -56.55                  | 8.37                   | -48.18           |
| 8                            | 23766.6         | 40.91 AV                | 54             | -13.09      | -62.72                  | 8.37                   | -54.35           |
| 9                            | 38806.67        | 51.34 PK                | 74             | -22.66      | -52.29                  | 8.37                   | -43.92           |
| 10                           | 38806.67        | 45.53 AV                | 54             | -8.47       | -58.1                   | 8.37                   | -49.73           |

Note: Margin value = Emission Level - Limit value

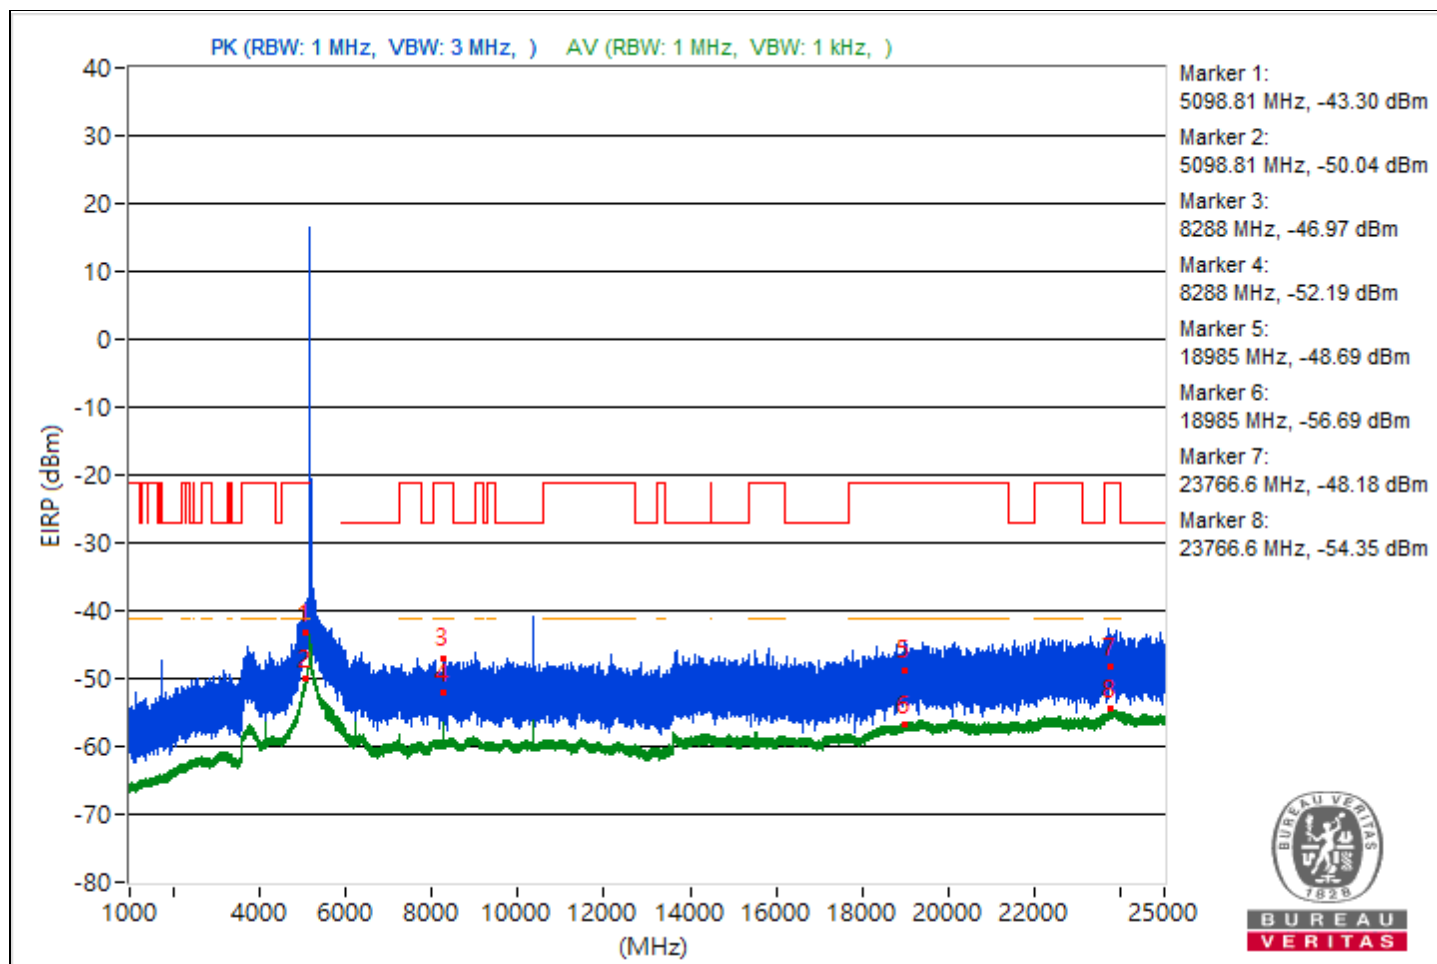


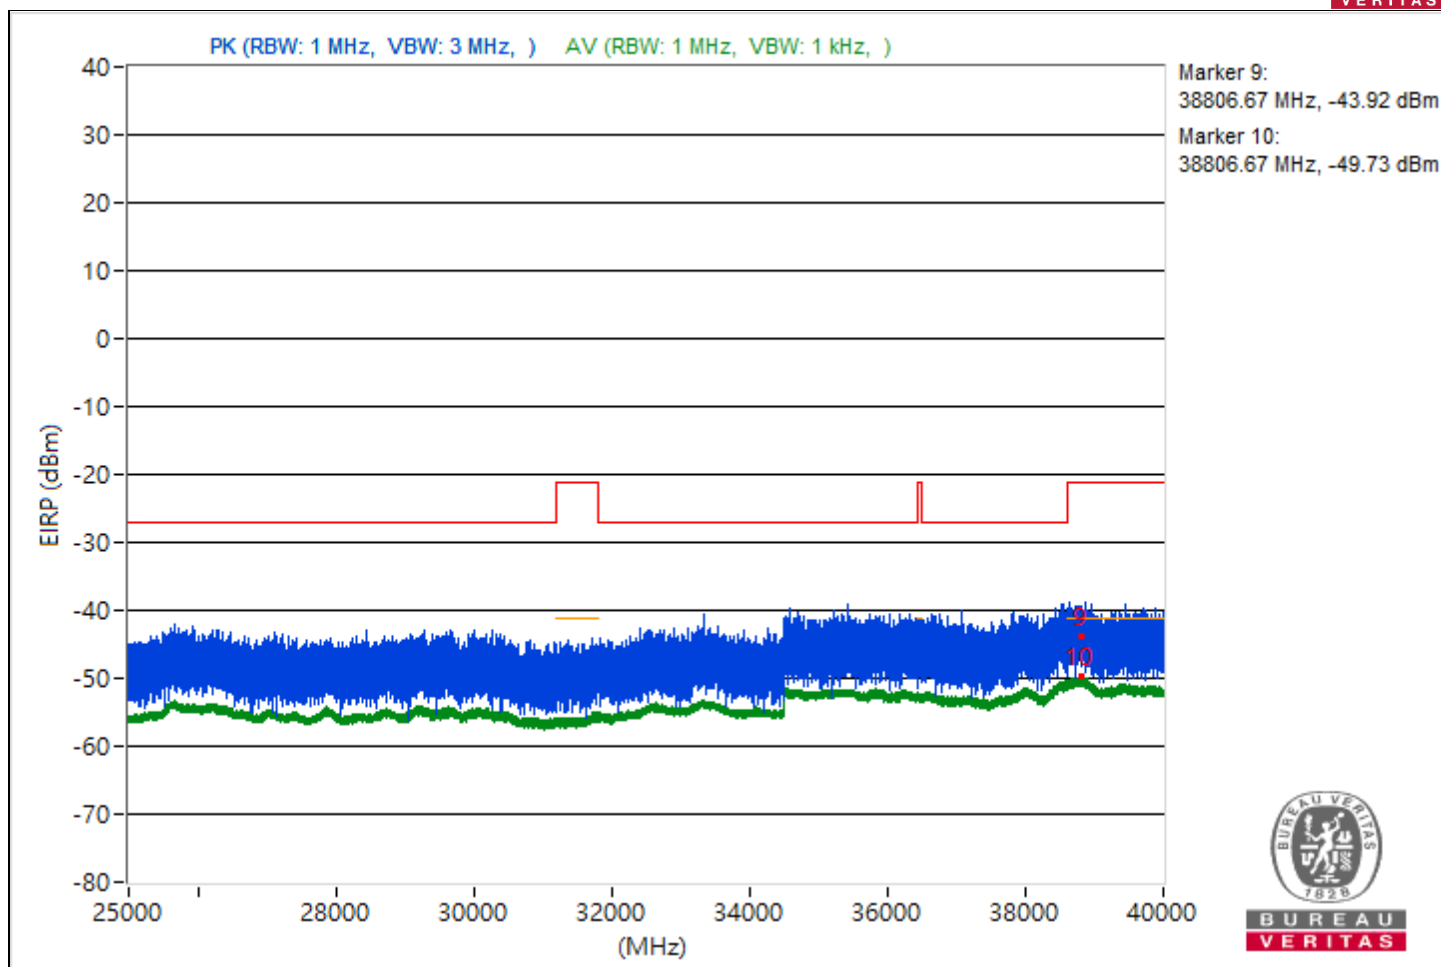


|                 |                              |                          |                  |
|-----------------|------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 64 : 5320 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 19°C, 62% RH     |
| Tested By       | Henry Hsu                    |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5099.59         | 47.87 PK                | 74             | -26.13      | -55.76                  | 8.37                   | -47.39           |
| 2                            | 5099.59         | 42.84 AV                | 54             | -11.16      | -60.79                  | 8.37                   | -52.42           |
| 3                            | 10628.71        | 48.22 PK                | 74             | -25.78      | -55.41                  | 8.37                   | -47.04           |
| 4                            | 10628.71        | 38.58 AV                | 54             | -15.42      | -65.05                  | 8.37                   | -56.68           |
| 5                            | 18928.6         | 46.87 PK                | 74             | -27.13      | -56.76                  | 8.37                   | -48.39           |
| 6                            | 18928.6         | 38.74 AV                | 54             | -15.26      | -64.89                  | 8.37                   | -56.52           |
| 7                            | 23812.7         | 46.02 PK                | 74             | -27.98      | -57.61                  | 8.37                   | -49.24           |
| 8                            | 23812.7         | 40.73 AV                | 54             | -13.27      | -62.9                   | 8.37                   | -54.53           |
| 9                            | 38782.84        | 48.51 PK                | 74             | -25.49      | -55.12                  | 8.37                   | -46.75           |
| 10                           | 38782.84        | 45.56 AV                | 54             | -8.44       | -58.07                  | 8.37                   | -49.7            |

Note: Margin value = Emission Level - Limit value

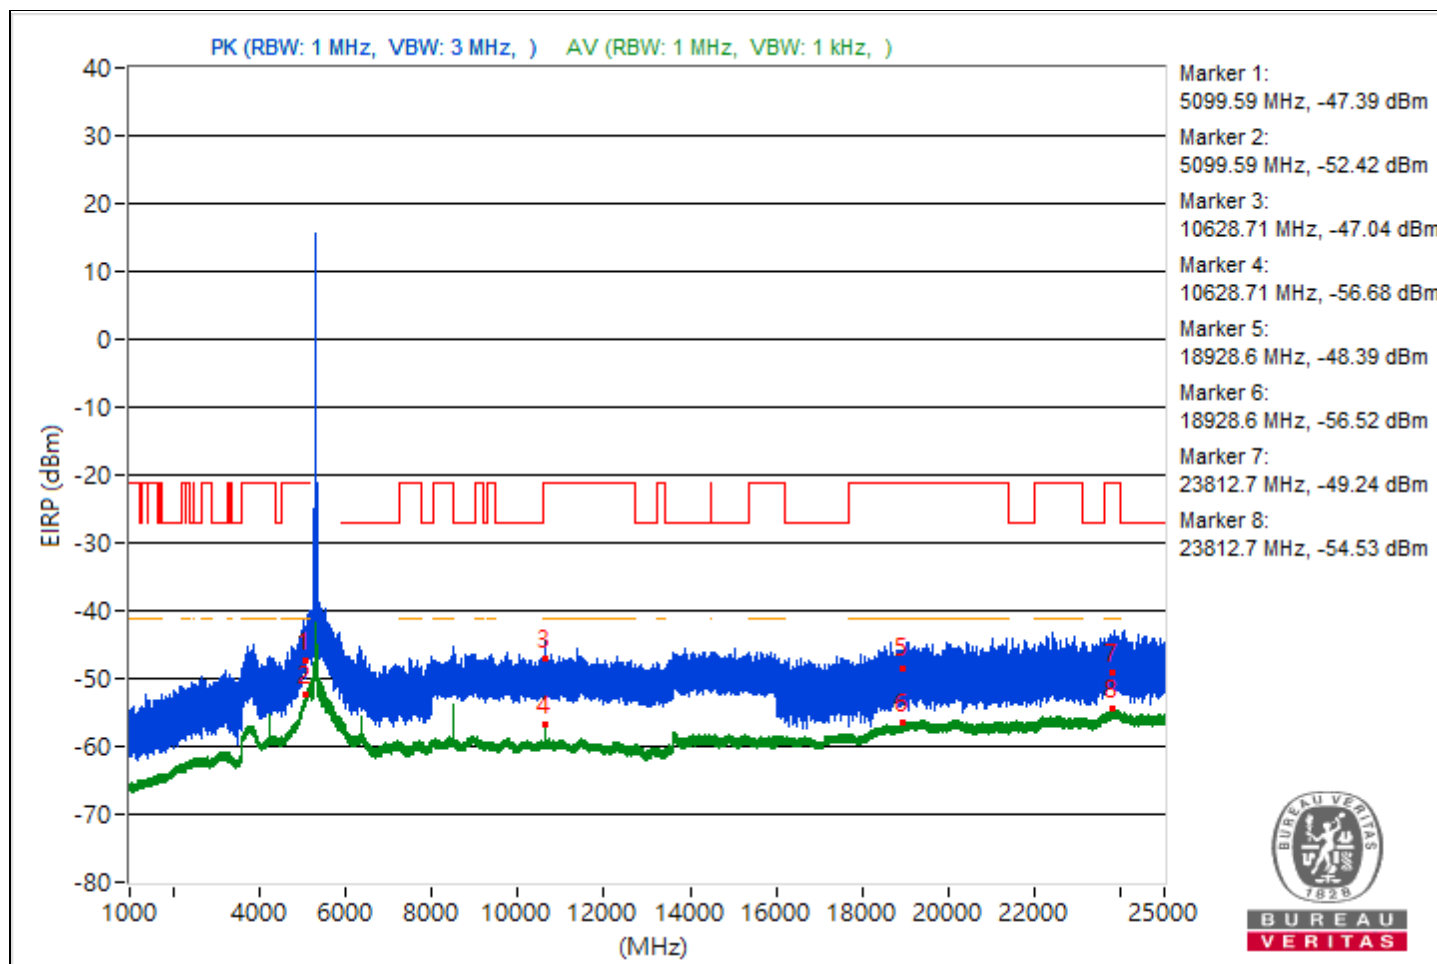


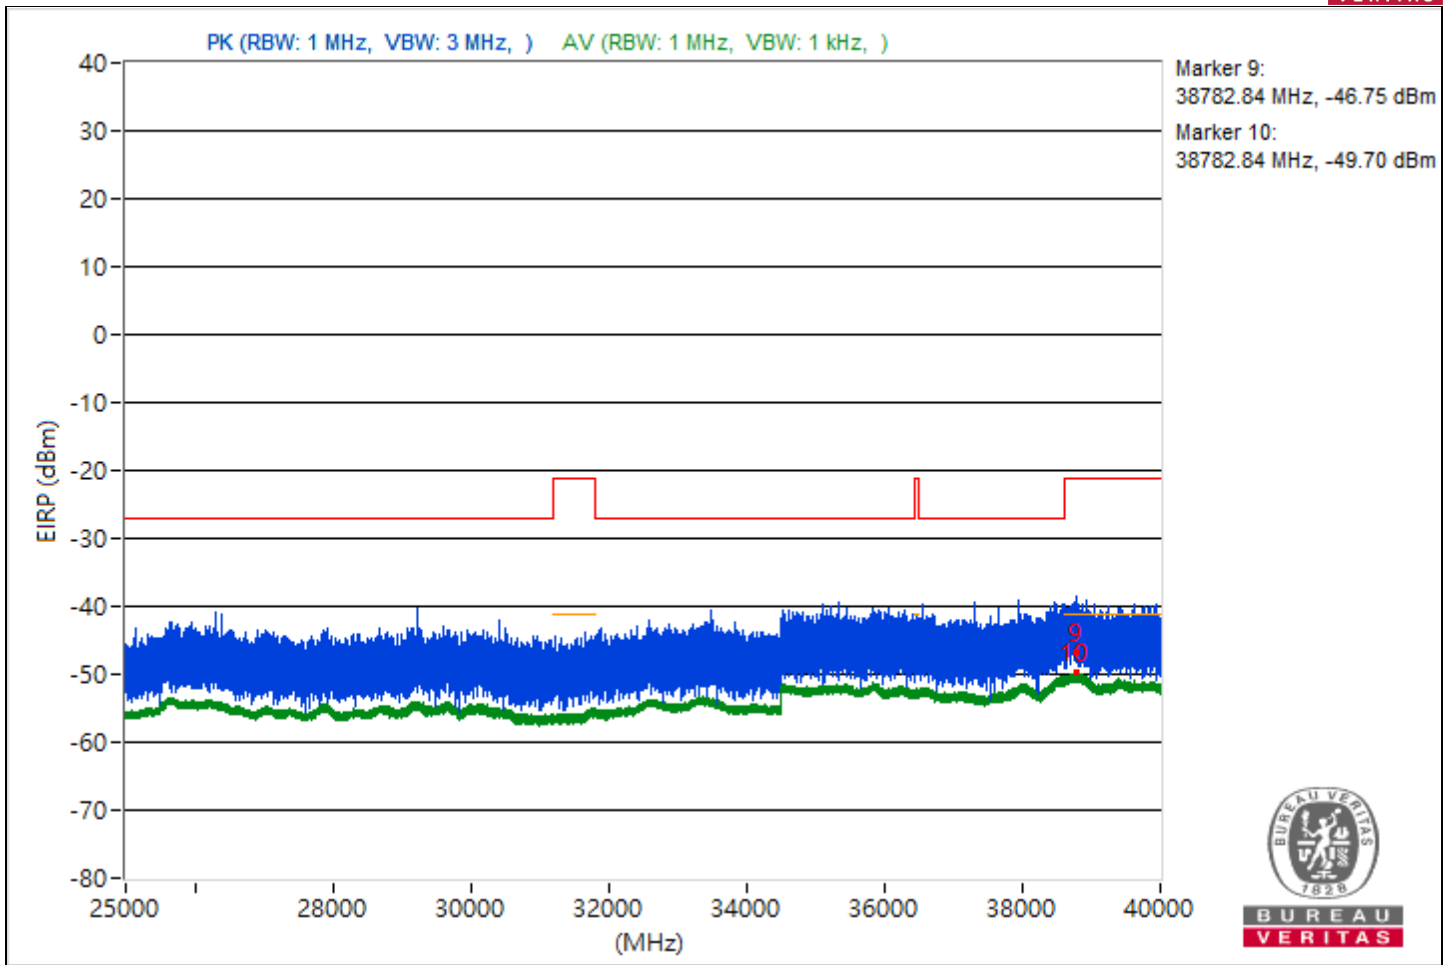


|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 100 : 5500 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                    |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4399.98         | 46.65 PK                | 74             | -27.35      | -56.98                  | 8.37                   | -48.61           |
| 2                            | 4399.98         | 41.31 AV                | 54             | -12.69      | -62.32                  | 8.37                   | -53.95           |
| 3                            | 9020.18         | 44.26 PK                | 74             | -29.74      | -59.37                  | 8.37                   | -51.00           |
| 4                            | 9020.18         | 36.52 AV                | 54             | -17.48      | -67.11                  | 8.37                   | -58.74           |
| 5                            | 18970.6         | 46.42 PK                | 74             | -27.58      | -57.21                  | 8.37                   | -48.84           |
| 6                            | 18970.6         | 38.58 AV                | 54             | -15.42      | -65.05                  | 8.37                   | -56.68           |
| 7                            | 23799.1         | 47.81 PK                | 74             | -26.19      | -55.82                  | 8.37                   | -47.45           |
| 8                            | 23799.1         | 40.68 AV                | 54             | -13.32      | -62.95                  | 8.37                   | -54.58           |
| 9                            | 38798.13        | 49.54 PK                | 74             | -24.46      | -54.09                  | 8.37                   | -45.72           |
| 10                           | 38798.13        | 45.39 AV                | 54             | -8.61       | -58.24                  | 8.37                   | -49.87           |

Note: Margin value = Emission Level - Limit value

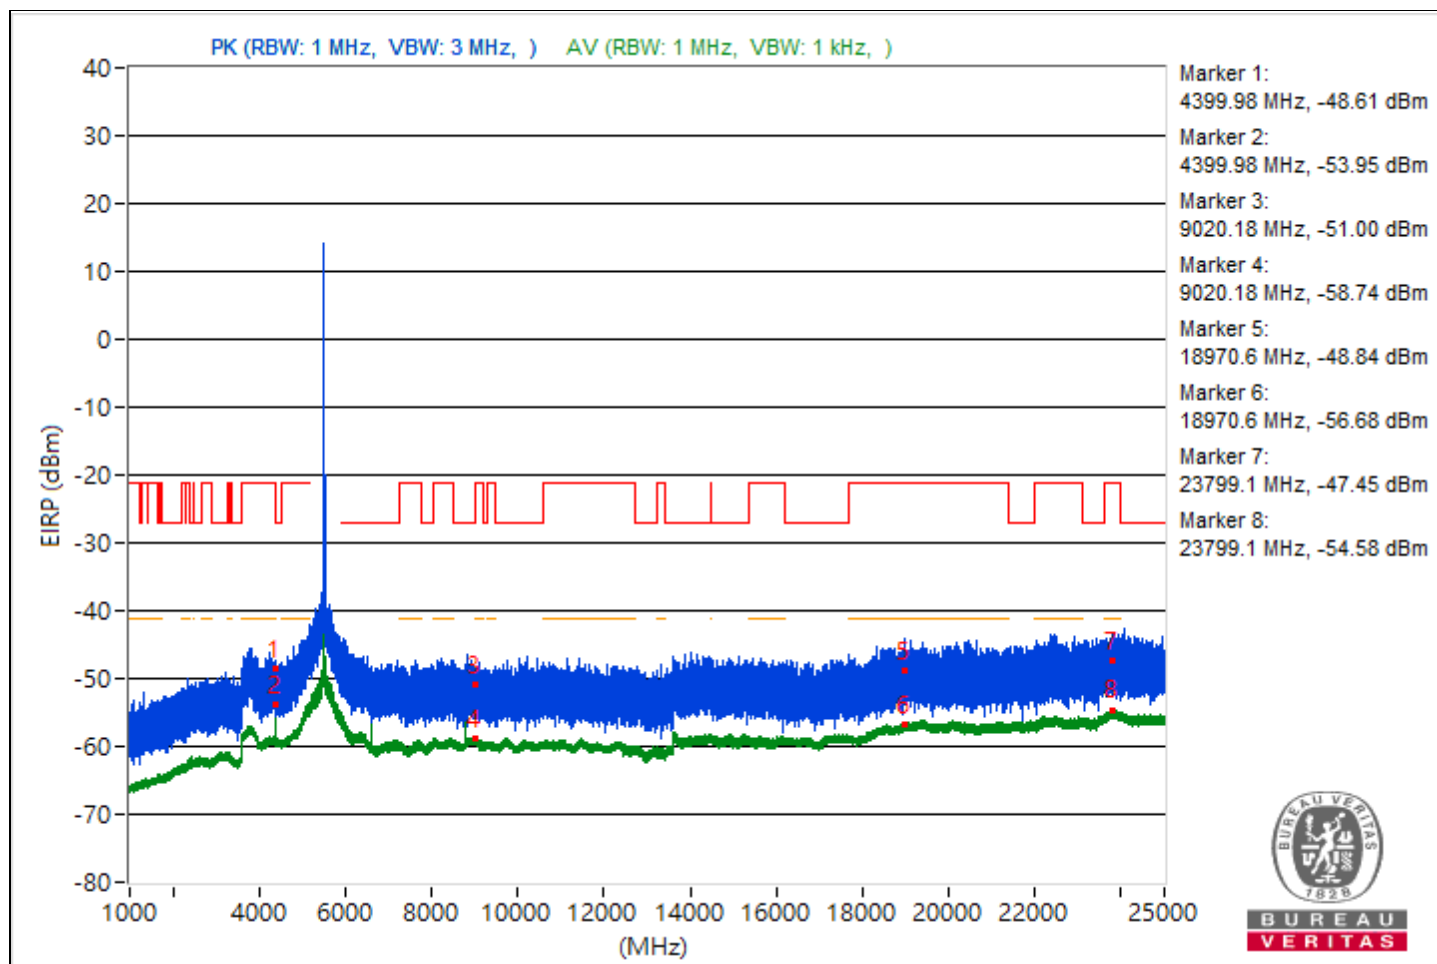


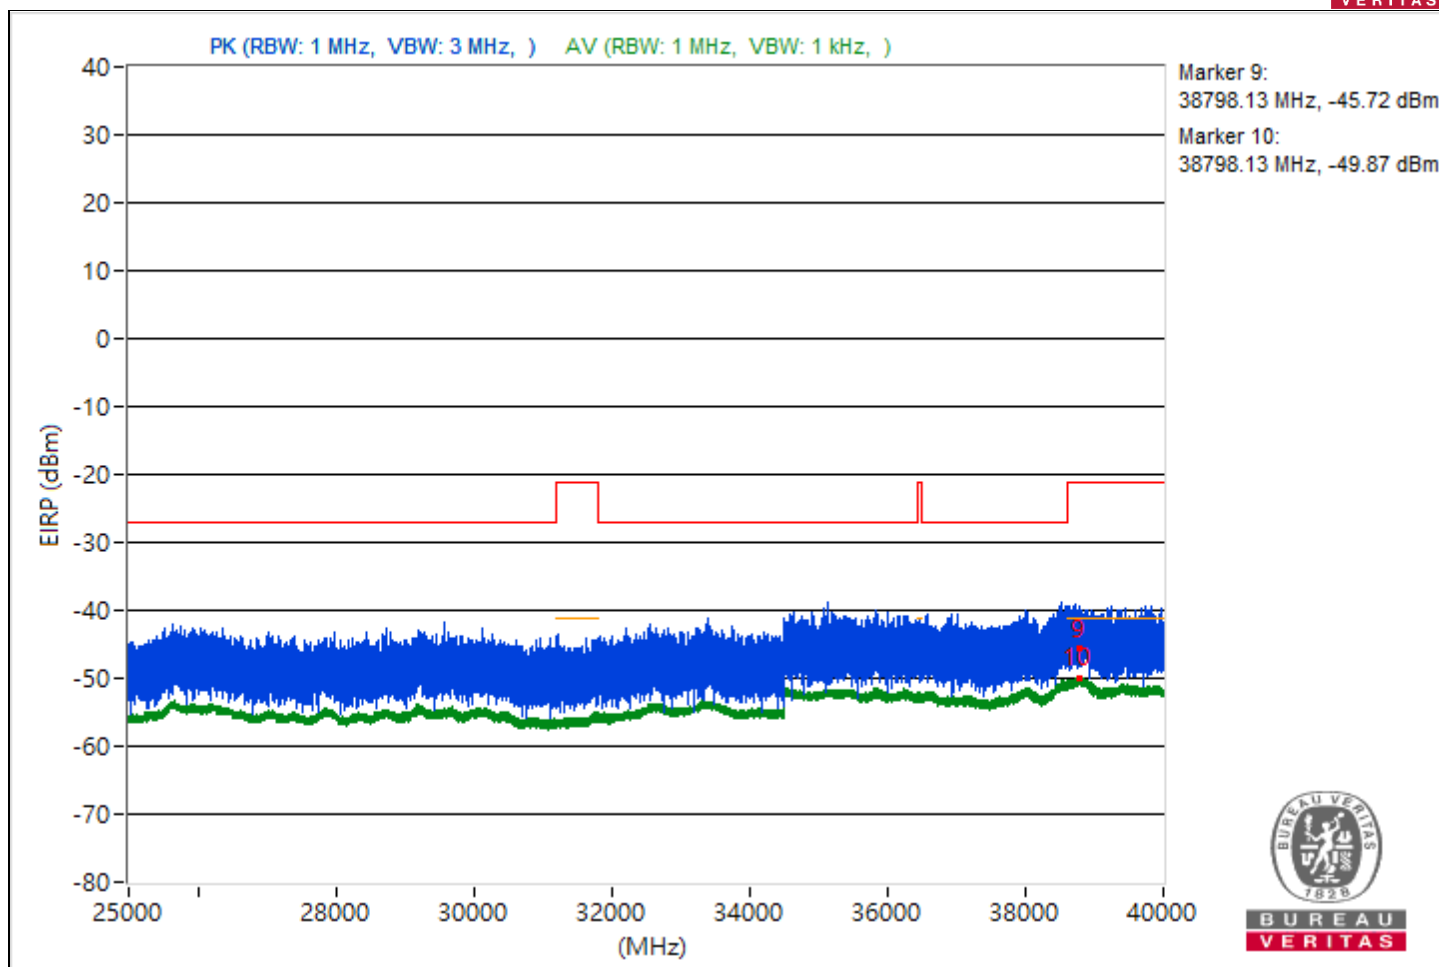


|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 140 : 5700 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                    |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4559.97         | 48.53 PK                | 74             | -25.47      | -55.1                   | 8.37                   | -46.73           |
| 2                            | 4559.97         | 43.8 AV                 | 54             | -10.2       | -59.83                  | 8.37                   | -51.46           |
| 3                            | 9119.91         | 43.5 PK                 | 74             | -30.5       | -60.13                  | 8.37                   | -51.76           |
| 4                            | 9119.91         | 37.27 AV                | 54             | -16.73      | -66.36                  | 8.37                   | -57.99           |
| 5                            | 18990           | 45.66 PK                | 74             | -28.34      | -57.97                  | 8.37                   | -49.6            |
| 6                            | 18990           | 38.89 AV                | 54             | -15.11      | -64.74                  | 8.37                   | -56.37           |
| 7                            | 23828.2         | 45.45 PK                | 74             | -28.55      | -58.18                  | 8.37                   | -49.81           |
| 8                            | 23828.2         | 40.72 AV                | 54             | -13.28      | -62.91                  | 8.37                   | -54.54           |
| 9                            | 38783.82        | 51.94 PK                | 74             | -22.06      | -51.69                  | 8.37                   | -43.32           |
| 10                           | 38783.82        | 45.49 AV                | 54             | -8.51       | -58.14                  | 8.37                   | -49.77           |

Note: Margin value = Emission Level - Limit value

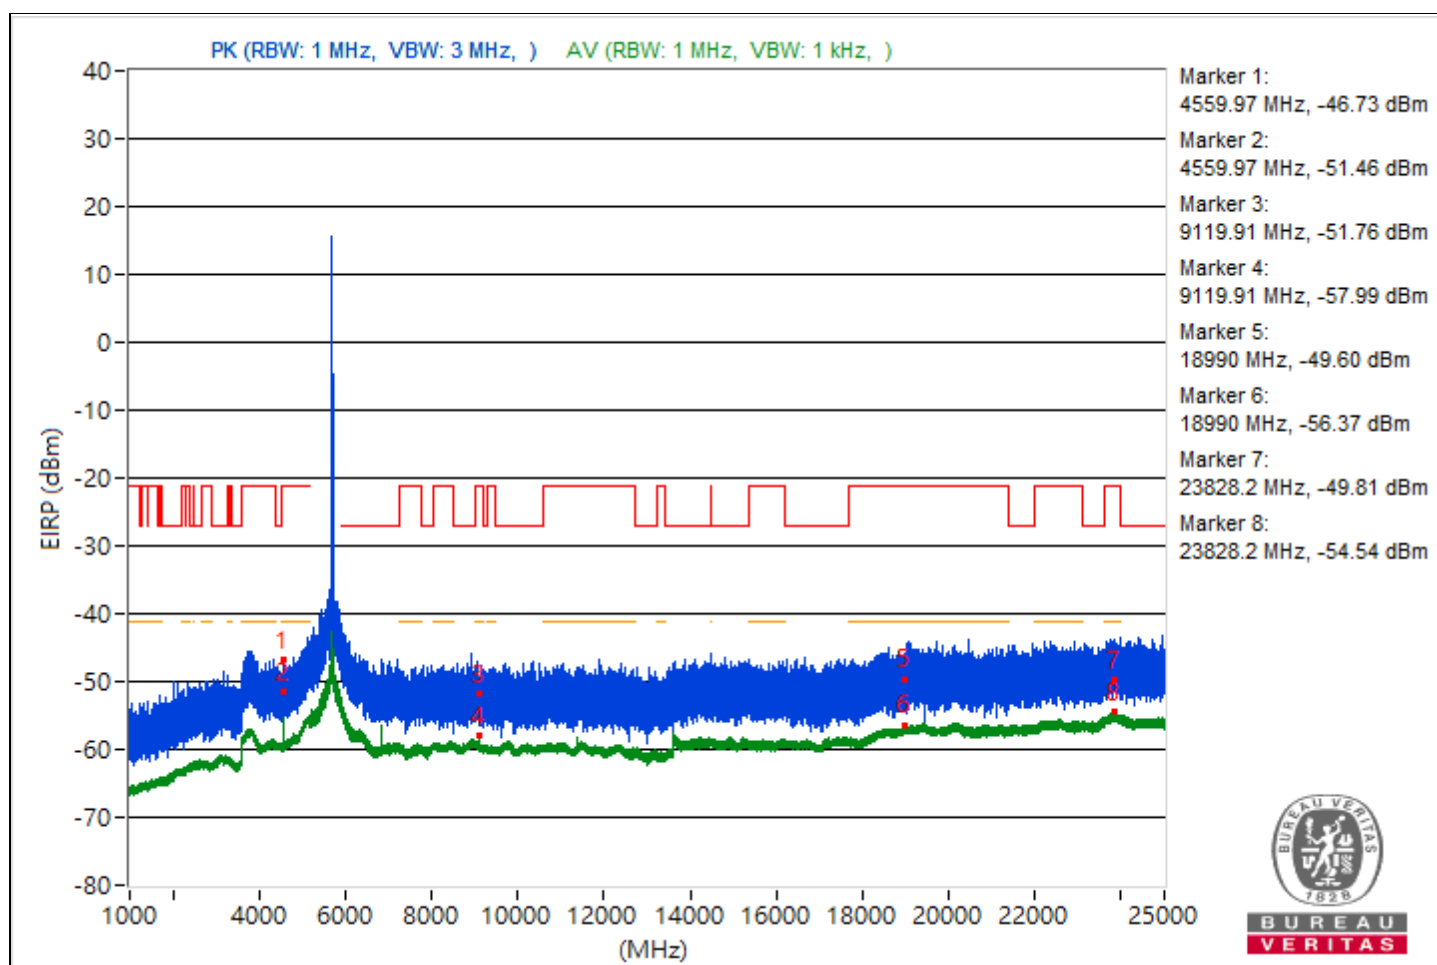


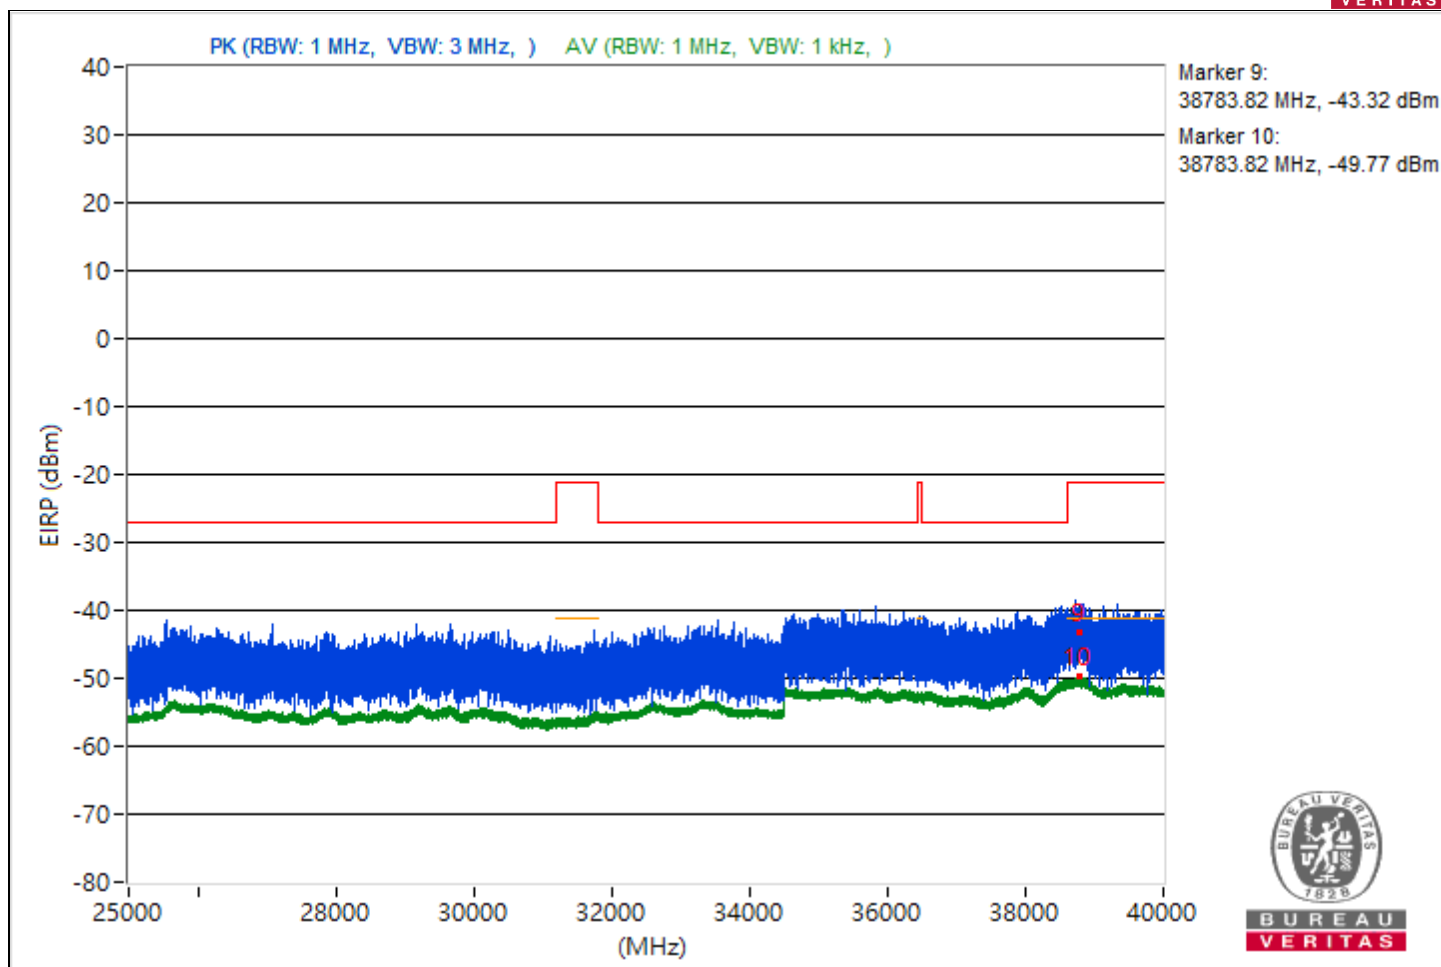


|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 144 : 5720 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                    |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4576.07         | 48.28 PK                | 74             | -25.72      | -55.35                  | 8.37                   | -46.98           |
| 2                            | 4576.07         | 43.74 AV                | 54             | -10.26      | -59.89                  | 8.37                   | -51.52           |
| 3                            | 11428.53        | 44.42 PK                | 74             | -29.58      | -59.21                  | 8.37                   | -50.84           |
| 4                            | 11428.53        | 37.39 AV                | 54             | -16.61      | -66.24                  | 8.37                   | -57.87           |
| 5                            | 18982.5         | 44.34 PK                | 74             | -29.66      | -59.29                  | 8.37                   | -50.92           |
| 6                            | 18982.5         | 38.8 AV                 | 54             | -15.2       | -64.83                  | 8.37                   | -56.46           |
| 7                            | 23832.3         | 47.35 PK                | 74             | -26.65      | -56.28                  | 8.37                   | -47.91           |
| 8                            | 23832.3         | 40.84 AV                | 54             | -13.16      | -62.79                  | 8.37                   | -54.42           |
| 9                            | 38840           | 52.14 PK                | 74             | -21.86      | -51.49                  | 8.37                   | -43.12           |
| 10                           | 38840           | 45.43 AV                | 54             | -8.57       | -58.2                   | 8.37                   | -49.83           |

Note: Margin value = Emission Level - Limit value

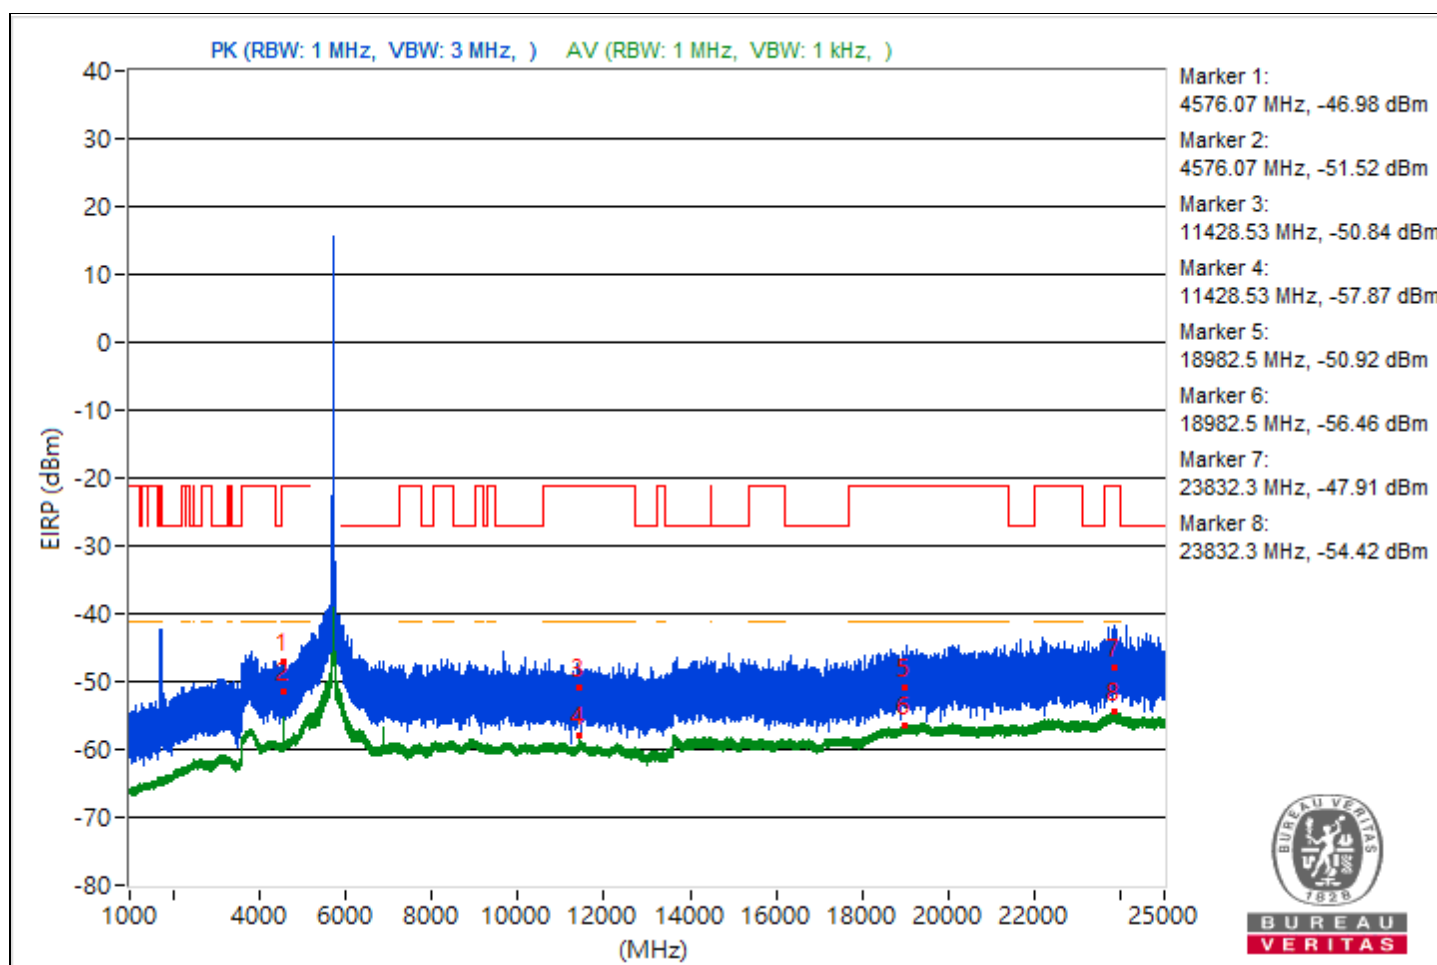


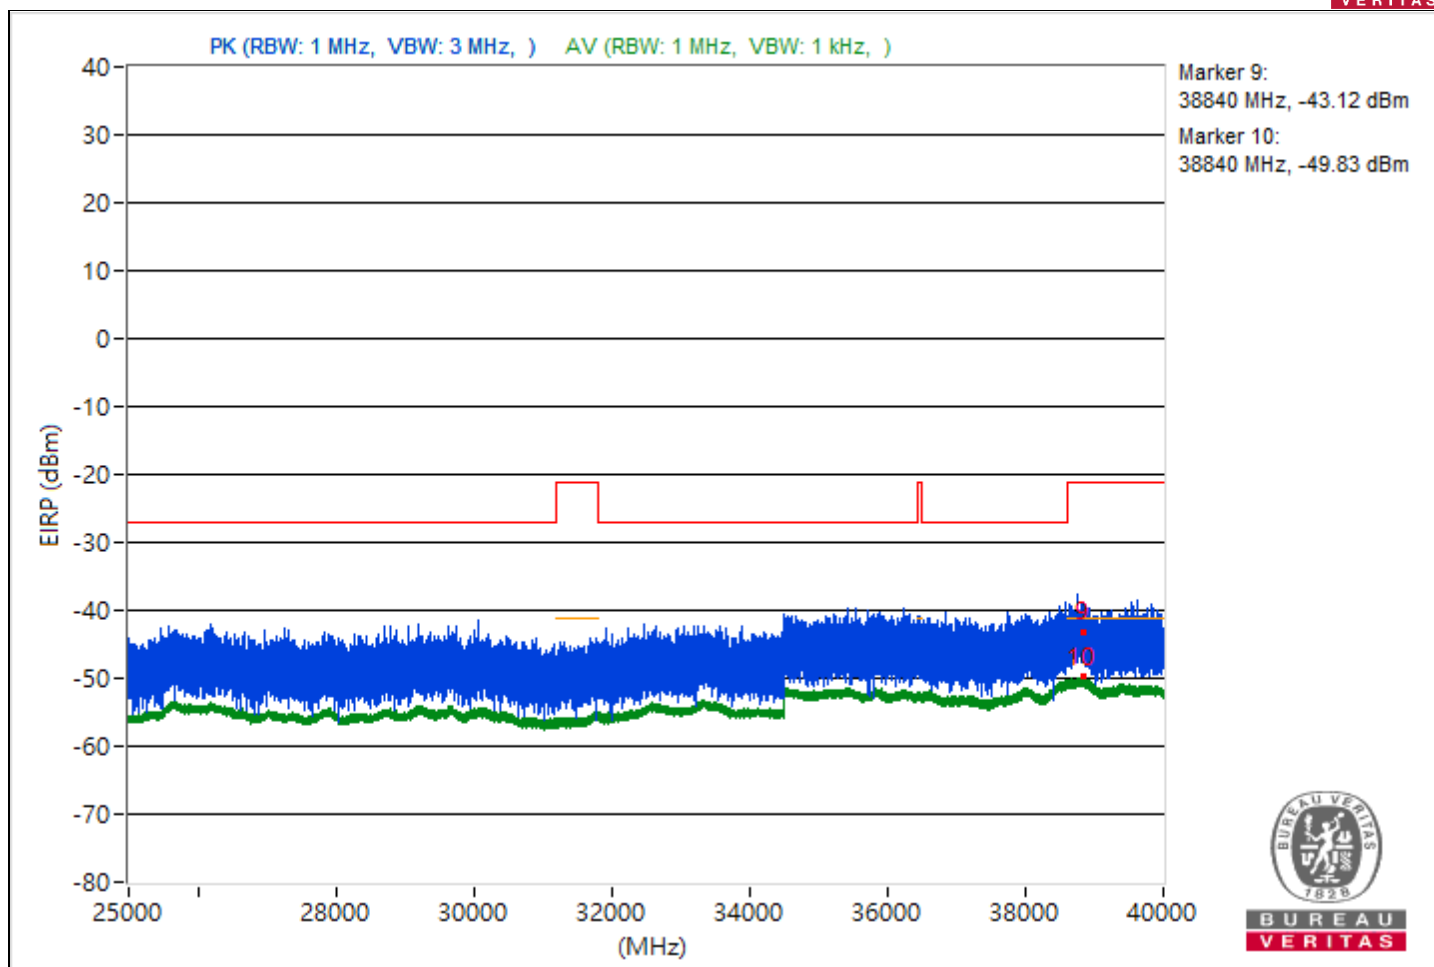


|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 149 : 5745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                    |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4596.13         | 48.73 PK                | 74             | -25.27      | -54.9                   | 8.37                   | -46.53           |
| 2                            | 4596.13         | 43.16 AV                | 54             | -10.84      | -60.47                  | 8.37                   | -52.1            |
| 3                            | 11478.4         | 55.22 PK                | 74             | -18.78      | -48.41                  | 8.37                   | -40.04           |
| 4                            | 11478.4         | 46.67 AV                | 54             | -7.33       | -56.96                  | 8.37                   | -48.59           |
| 5                            | 18994.5         | 45.47 PK                | 74             | -28.53      | -58.16                  | 8.37                   | -49.79           |
| 6                            | 18994.5         | 38.59 AV                | 54             | -15.41      | -65.04                  | 8.37                   | -56.67           |
| 7                            | 23842.1         | 47.32 PK                | 74             | -26.68      | -56.31                  | 8.37                   | -47.94           |
| 8                            | 23842.1         | 40.82 AV                | 54             | -13.18      | -62.81                  | 8.37                   | -54.44           |
| 9                            | 38795.82        | 50.91 PK                | 74             | -23.09      | -52.72                  | 8.37                   | -44.35           |
| 10                           | 38795.82        | 45.45 AV                | 54             | -8.55       | -58.18                  | 8.37                   | -49.81           |

Note: Margin value = Emission Level - Limit value

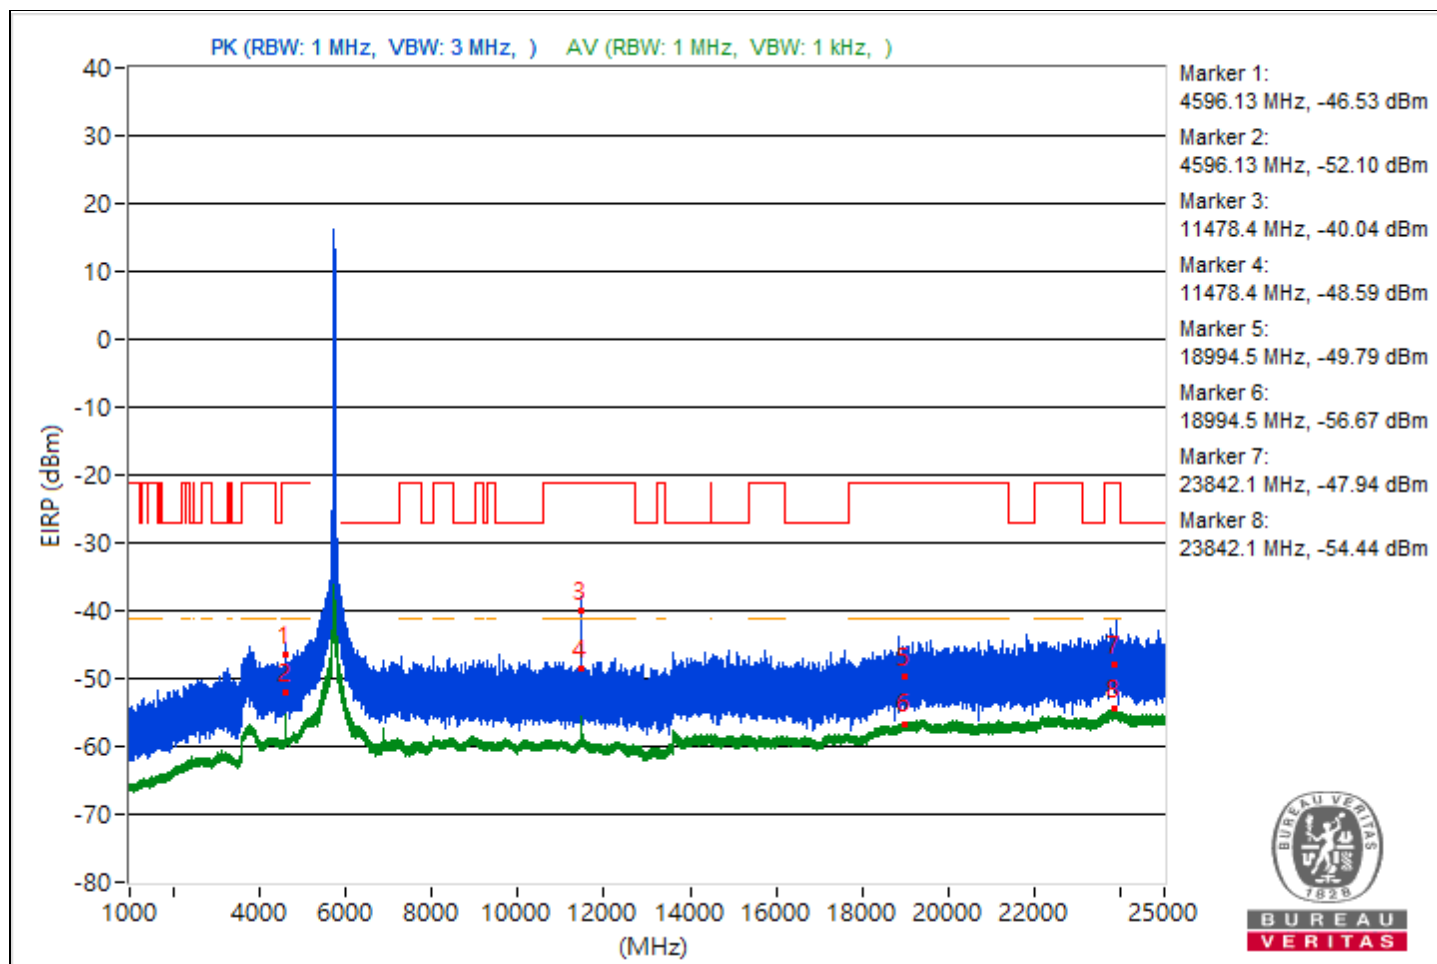


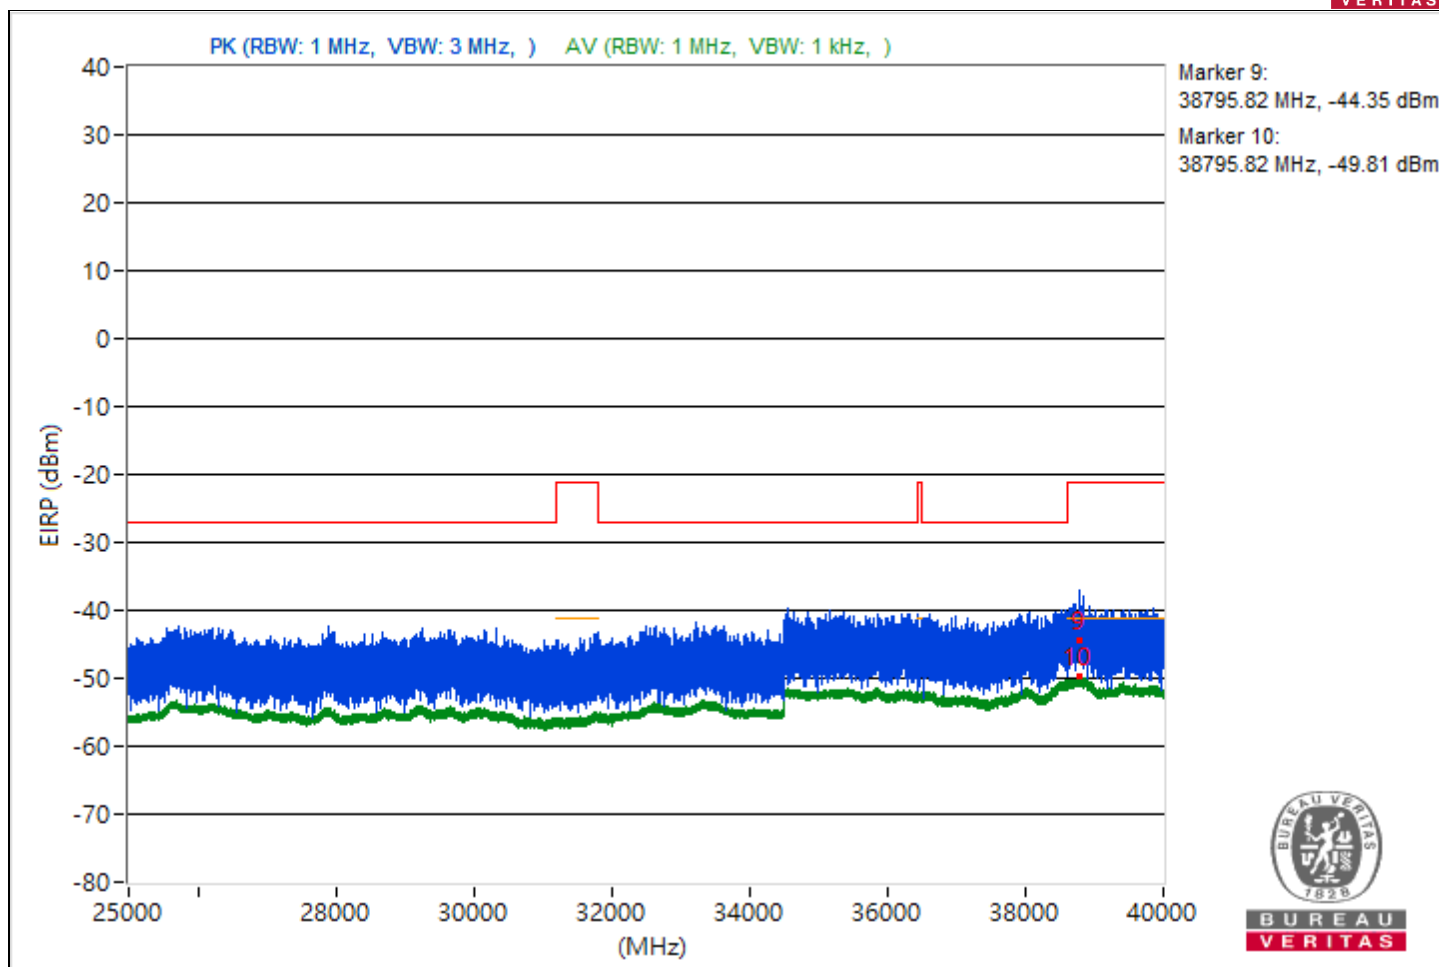


|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 165 : 5825 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                    |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4659.91         | 48.81 PK                | 74             | -25.19      | -54.82                  | 8.37                   | -46.45           |
| 2                            | 4659.91         | 44.36 AV                | 54             | -9.64       | -59.27                  | 8.37                   | -50.9            |
| 3                            | 11638.84        | 58.6 PK                 | 74             | -15.4       | -45.03                  | 8.37                   | -36.66           |
| 4                            | 11638.84        | 48.87 AV                | 54             | -5.13       | -54.76                  | 8.37                   | -46.39           |
| 5                            | 18996.4         | 46.03 PK                | 74             | -27.97      | -57.6                   | 8.37                   | -49.23           |
| 6                            | 18996.4         | 38.8 AV                 | 54             | -15.2       | -64.83                  | 8.37                   | -56.46           |
| 7                            | 23822.2         | 46.37 PK                | 74             | -27.63      | -57.26                  | 8.37                   | -48.89           |
| 8                            | 23822.2         | 40.88 AV                | 54             | -13.12      | -62.75                  | 8.37                   | -54.38           |
| 9                            | 38824.89        | 52.02 PK                | 74             | -21.98      | -51.61                  | 8.37                   | -43.24           |
| 10                           | 38824.89        | 45.45 AV                | 54             | -8.55       | -58.18                  | 8.37                   | -49.81           |

Note: Margin value = Emission Level - Limit value

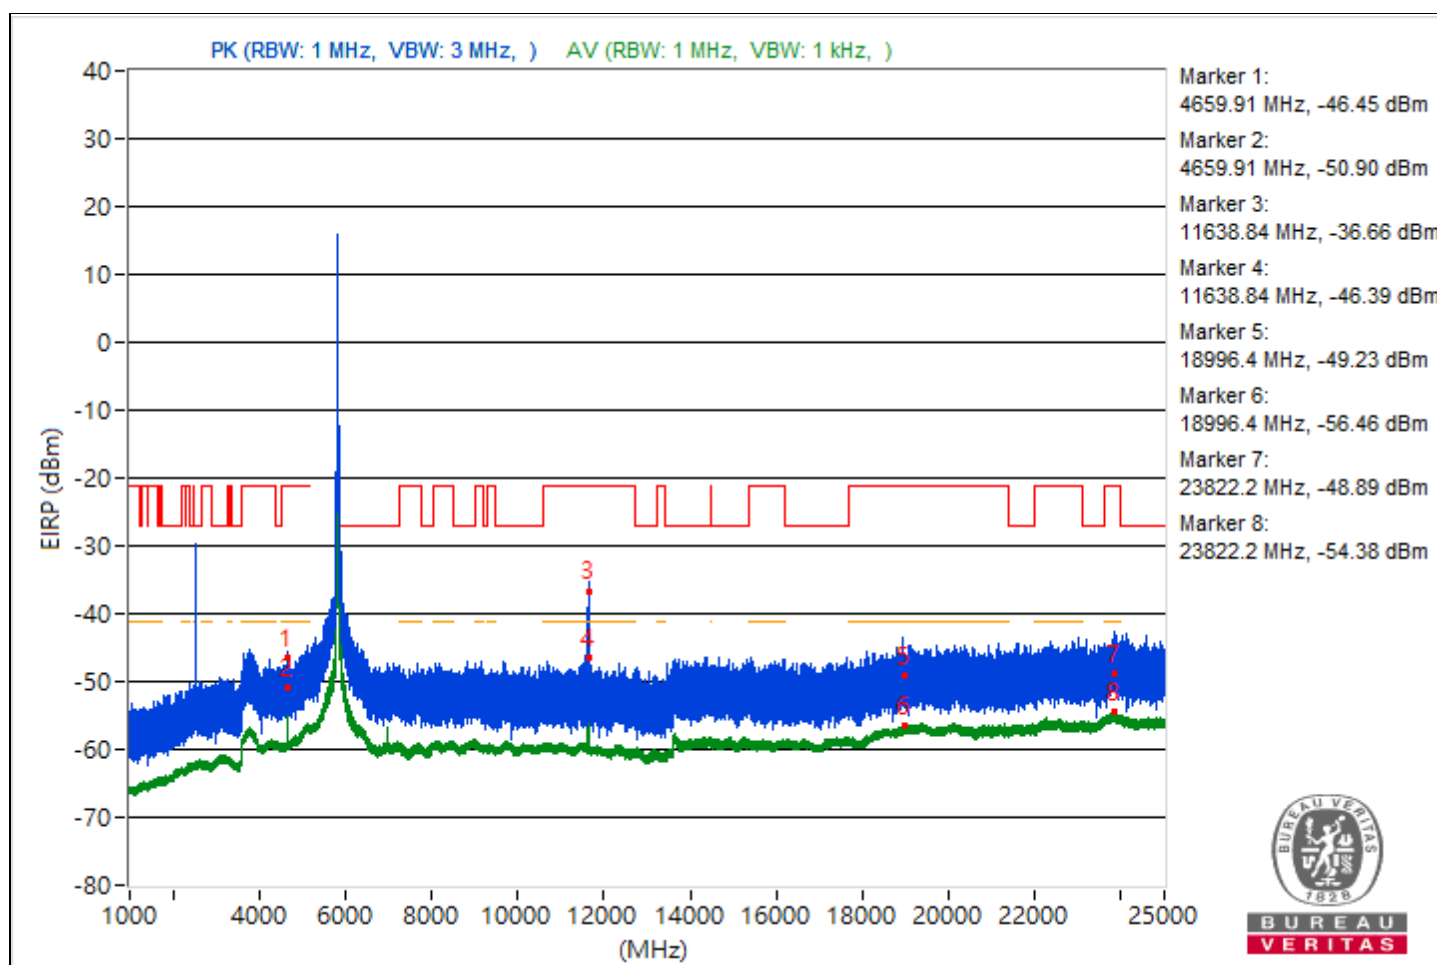


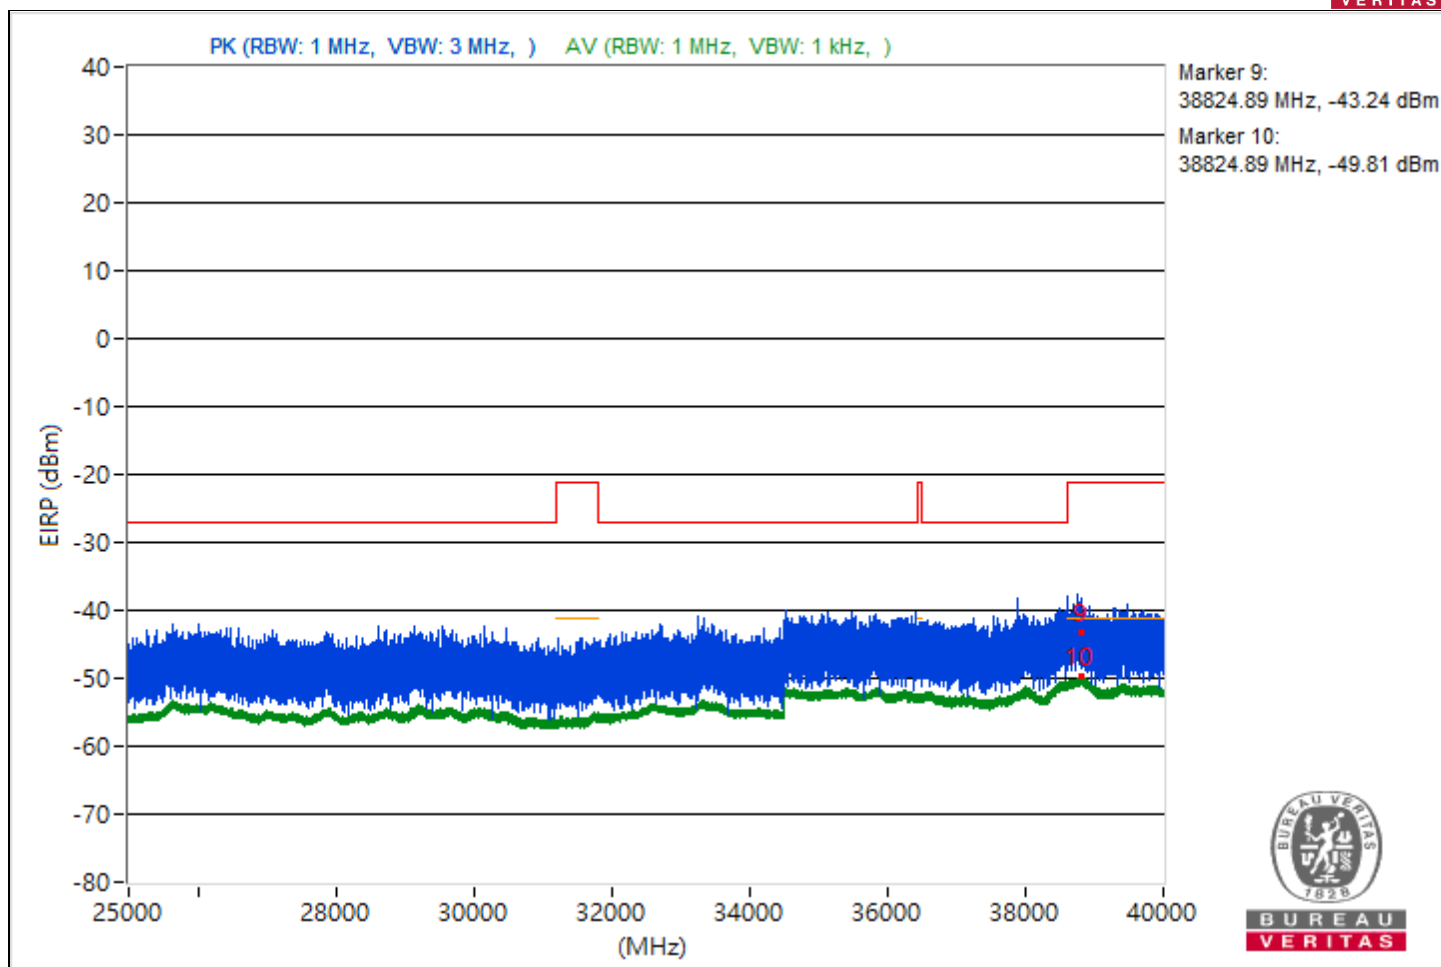


|                 |                                 |                          |                  |
|-----------------|---------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone MRU | Channel                  | CH 36 : 5180 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 19°C, 62% RH     |
| Tested By       | Henry Hsu                       |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5094.53         | 51.8 PK                 | 74             | -22.2       | -51.83                  | 8.37                   | -43.46           |
| 2                            | 5094.53         | 44.54 AV                | 54             | -9.46       | -59.09                  | 8.37                   | -50.72           |
| 3                            | 8288            | 46.98 PK                | 74             | -27.02      | -56.65                  | 8.37                   | -48.28           |
| 4                            | 8288            | 43.03 AV                | 54             | -10.97      | -60.6                   | 8.37                   | -52.23           |
| 5                            | 18934.4         | 45.36 PK                | 74             | -28.64      | -58.27                  | 8.37                   | -49.9            |
| 6                            | 18934.4         | 38.76 AV                | 54             | -15.24      | -64.87                  | 8.37                   | -56.5            |
| 7                            | 23773.6         | 45.85 PK                | 74             | -28.15      | -57.78                  | 8.37                   | -49.41           |
| 8                            | 23773.6         | 40.7 AV                 | 54             | -13.3       | -62.93                  | 8.37                   | -54.56           |
| 9                            | 38790.84        | 52.46 PK                | 74             | -21.54      | -51.17                  | 8.37                   | -42.8            |
| 10                           | 38790.84        | 45.65 AV                | 54             | -8.35       | -57.98                  | 8.37                   | -49.61           |

Note: Margin value = Emission Level - Limit value

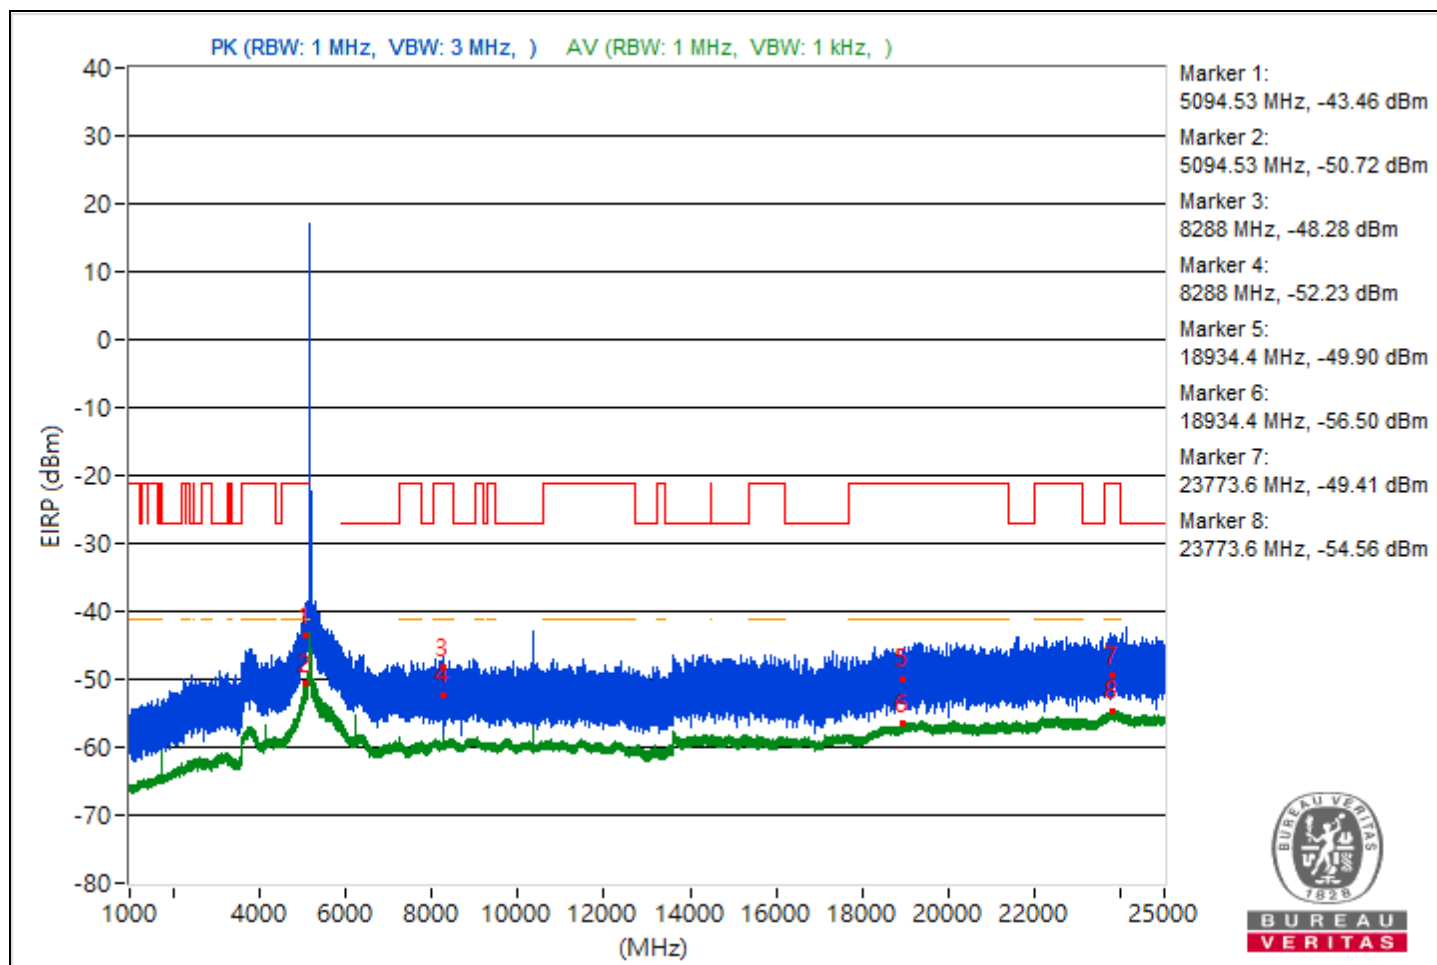

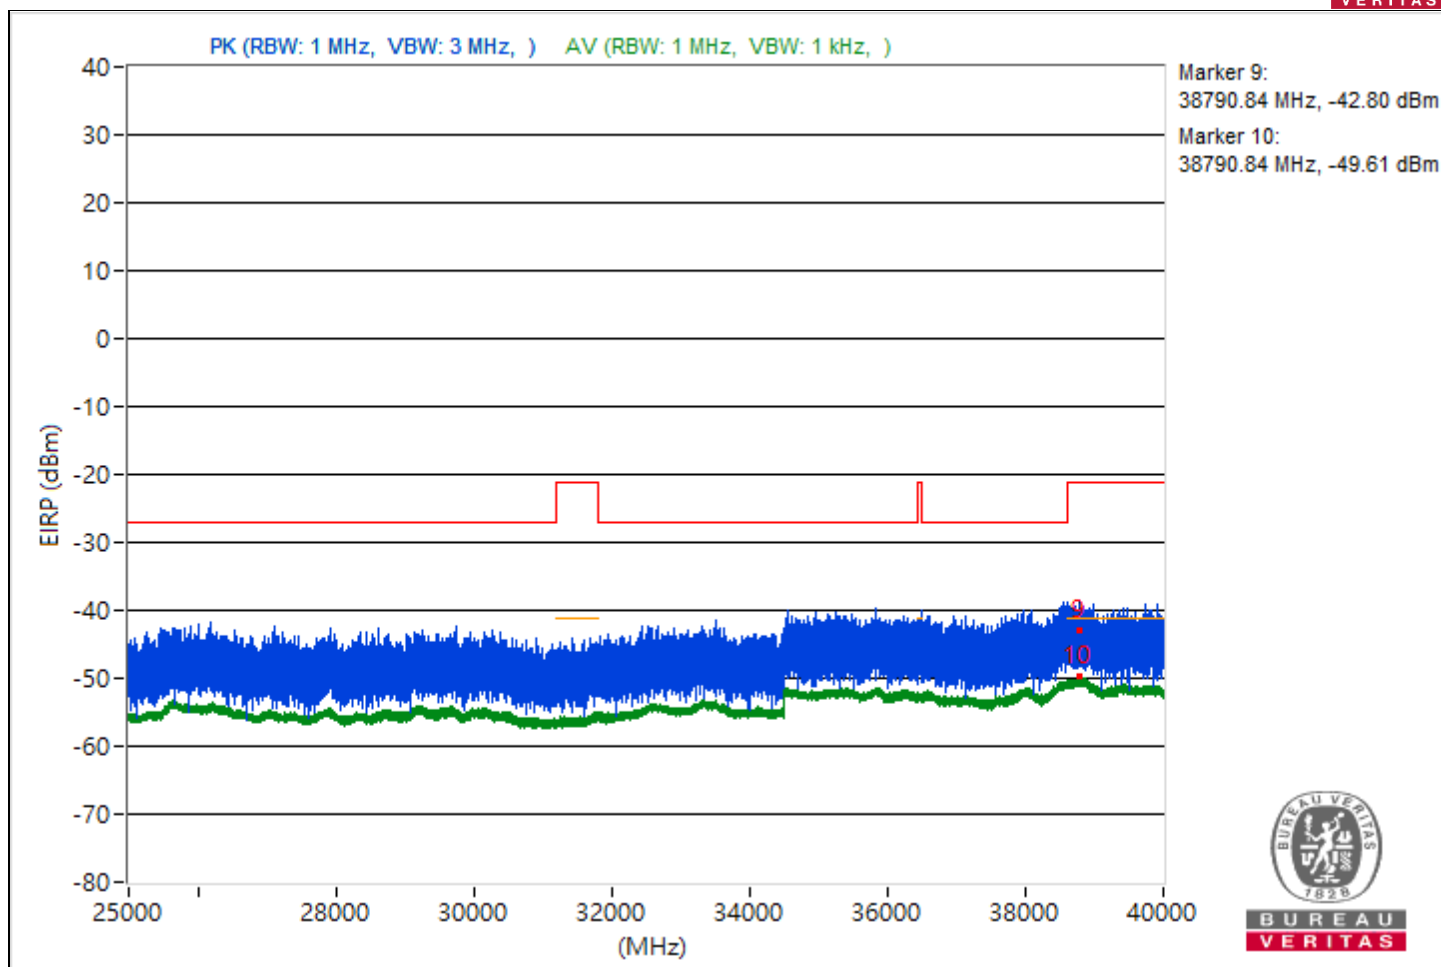



|                 |                                 |                          |                  |
|-----------------|---------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone MRU | Channel                  | CH 64 : 5320 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 19°C, 62% RH     |
| Tested By       | Henry Hsu                       |                          |                  |

#### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 5091.03         | 51.11 PK                | 74             | -22.89      | -52.52                  | 8.37                   | -44.15           |
| 2   | 5091.03         | 42.55 AV                | 54             | -11.45      | -61.08                  | 8.37                   | -52.71           |
| 3   | 10632           | 45.45 PK                | 74             | -28.55      | -58.18                  | 8.37                   | -49.81           |
| 4   | 10632           | 37.79 AV                | 54             | -16.21      | -65.84                  | 8.37                   | -57.47           |
| 5   | 18984.3         | 47.04 PK                | 74             | -26.96      | -56.59                  | 8.37                   | -48.22           |
| 6   | 18984.3         | 38.65 AV                | 54             | -15.35      | -64.98                  | 8.37                   | -56.61           |
| 7   | 23792.7         | 49.21 PK                | 74             | -24.79      | -54.42                  | 8.37                   | -46.05           |
| 8   | 23792.7         | 40.75 AV                | 54             | -13.25      | -62.88                  | 8.37                   | -54.51           |
| 9   | 38779.82        | 53.61 PK                | 74             | -20.39      | -50.02                  | 8.37                   | -41.65           |
| 10  | 38779.82        | 45.51 AV                | 54             | -8.49       | -58.12                  | 8.37                   | -49.75           |

Note: Margin value = Emission Level - Limit value

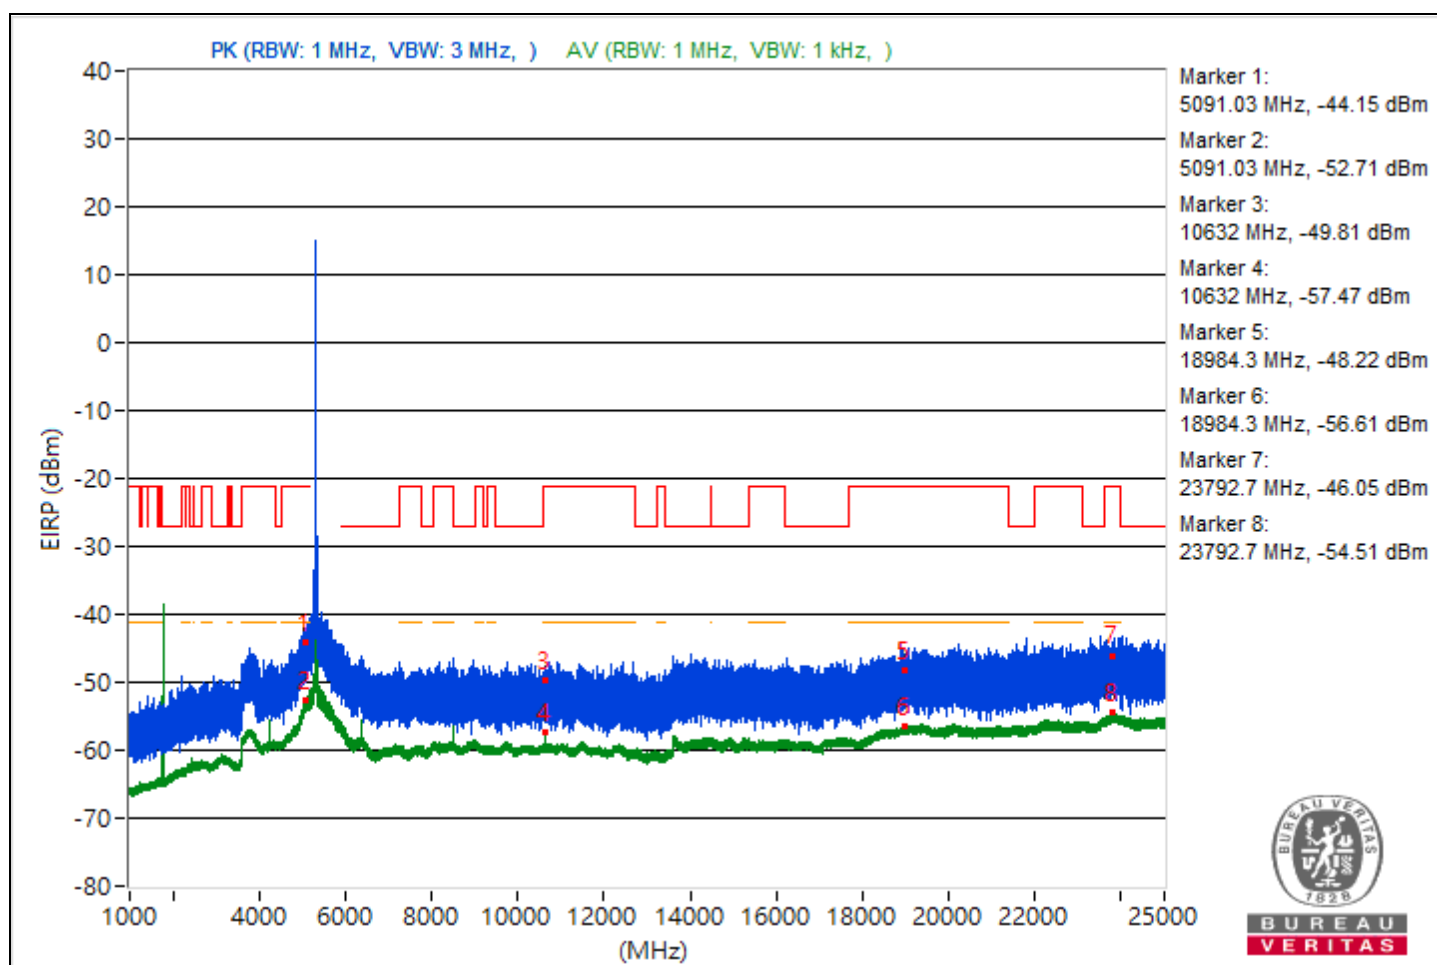

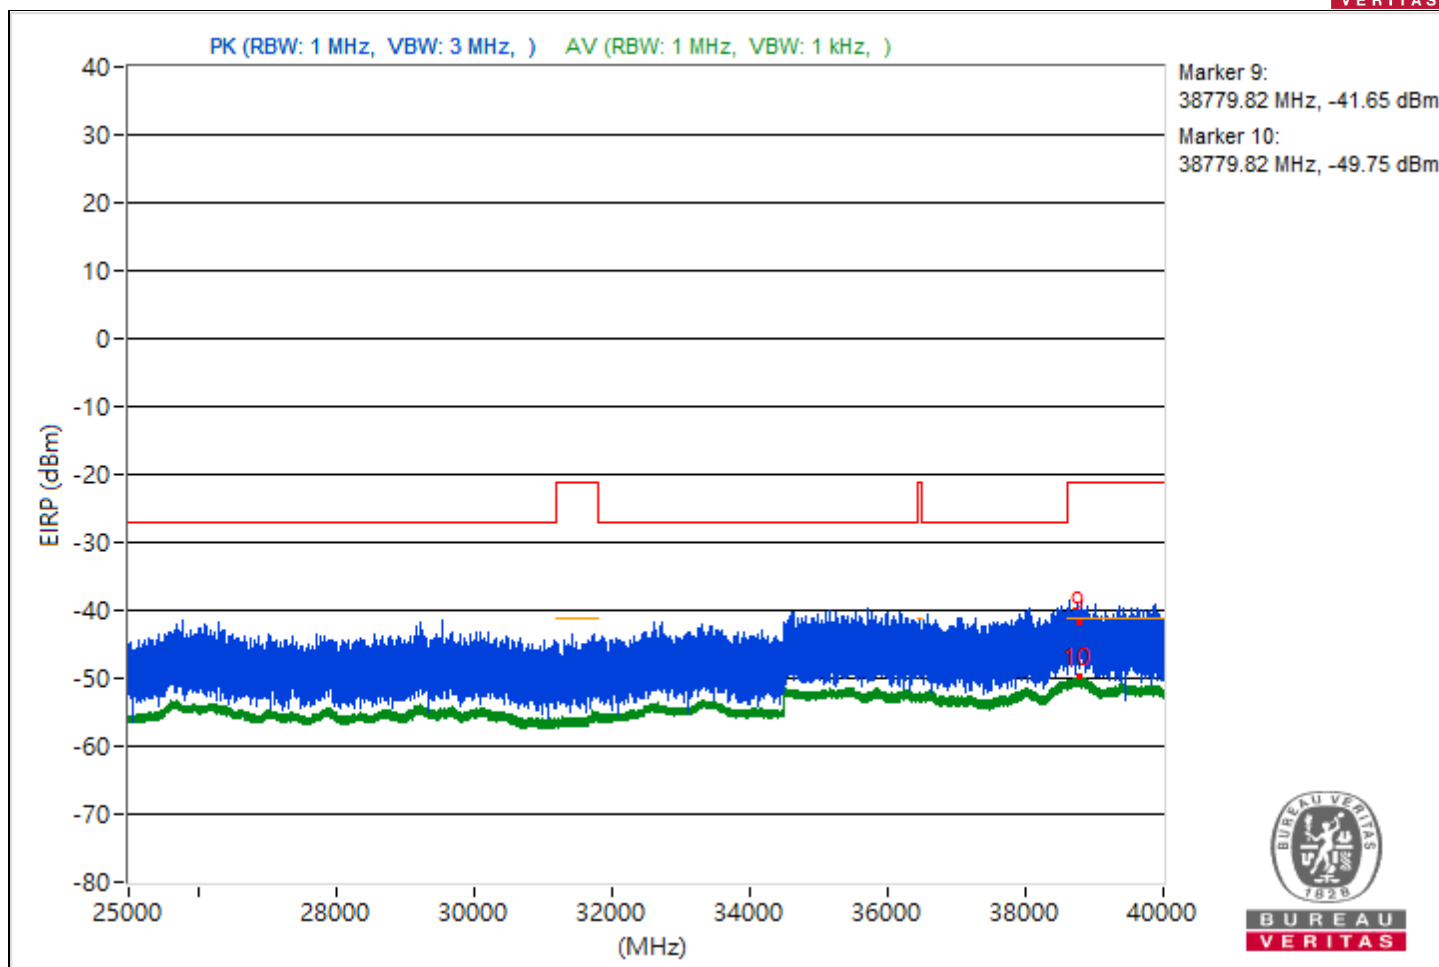



|                 |                                 |                          |                   |
|-----------------|---------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone MRU | Channel                  | CH 100 : 5500 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                       |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 4399.98         | 48 PK                   | 74             | -26         | -55.63                  | 8.37                   | -47.26           |
| 2   | 4399.98         | 41.11 AV                | 54             | -12.89      | -62.52                  | 8.37                   | -54.15           |
| 3   | 10991.2         | 43.22 PK                | 74             | -30.78      | -60.41                  | 8.37                   | -52.04           |
| 4   | 10991.2         | 36.64 AV                | 54             | -17.36      | -66.99                  | 8.37                   | -58.62           |
| 5   | 18995.2         | 45.42 PK                | 74             | -28.58      | -58.21                  | 8.37                   | -49.84           |
| 6   | 18995.2         | 38.65 AV                | 54             | -15.35      | -64.98                  | 8.37                   | -56.61           |
| 7   | 23843.7         | 47.24 PK                | 74             | -26.76      | -56.39                  | 8.37                   | -48.02           |
| 8   | 23843.7         | 40.89 AV                | 54             | -13.11      | -62.74                  | 8.37                   | -54.37           |
| 9   | 38778.4         | 52.01 PK                | 74             | -21.99      | -51.62                  | 8.37                   | -43.25           |
| 10  | 38778.4         | 45.48 AV                | 54             | -8.52       | -58.15                  | 8.37                   | -49.78           |

Note: Margin value = Emission Level - Limit value

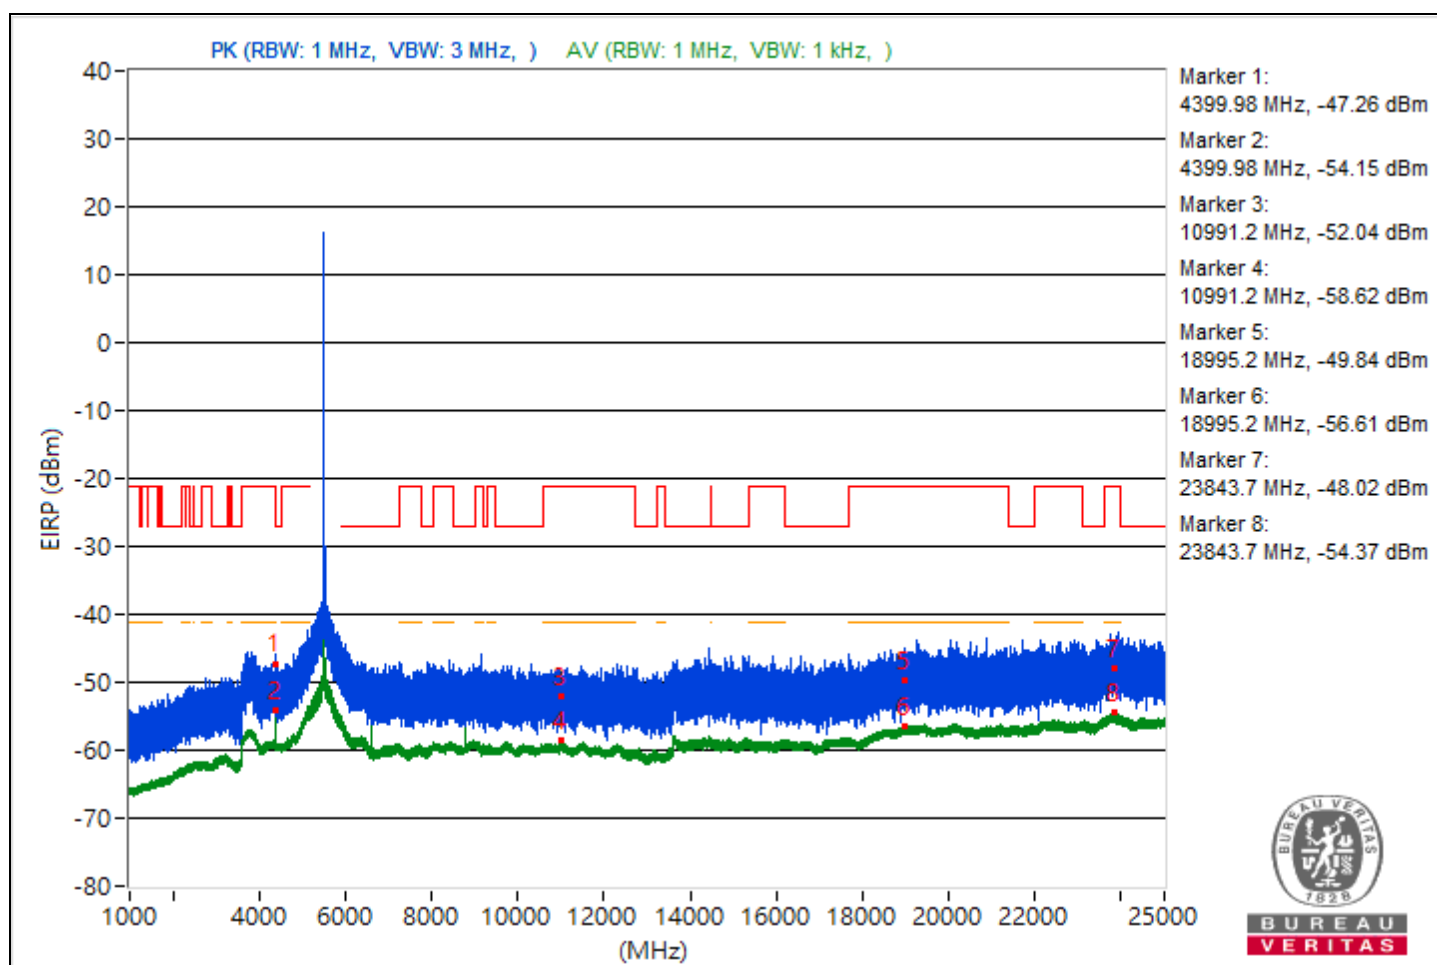

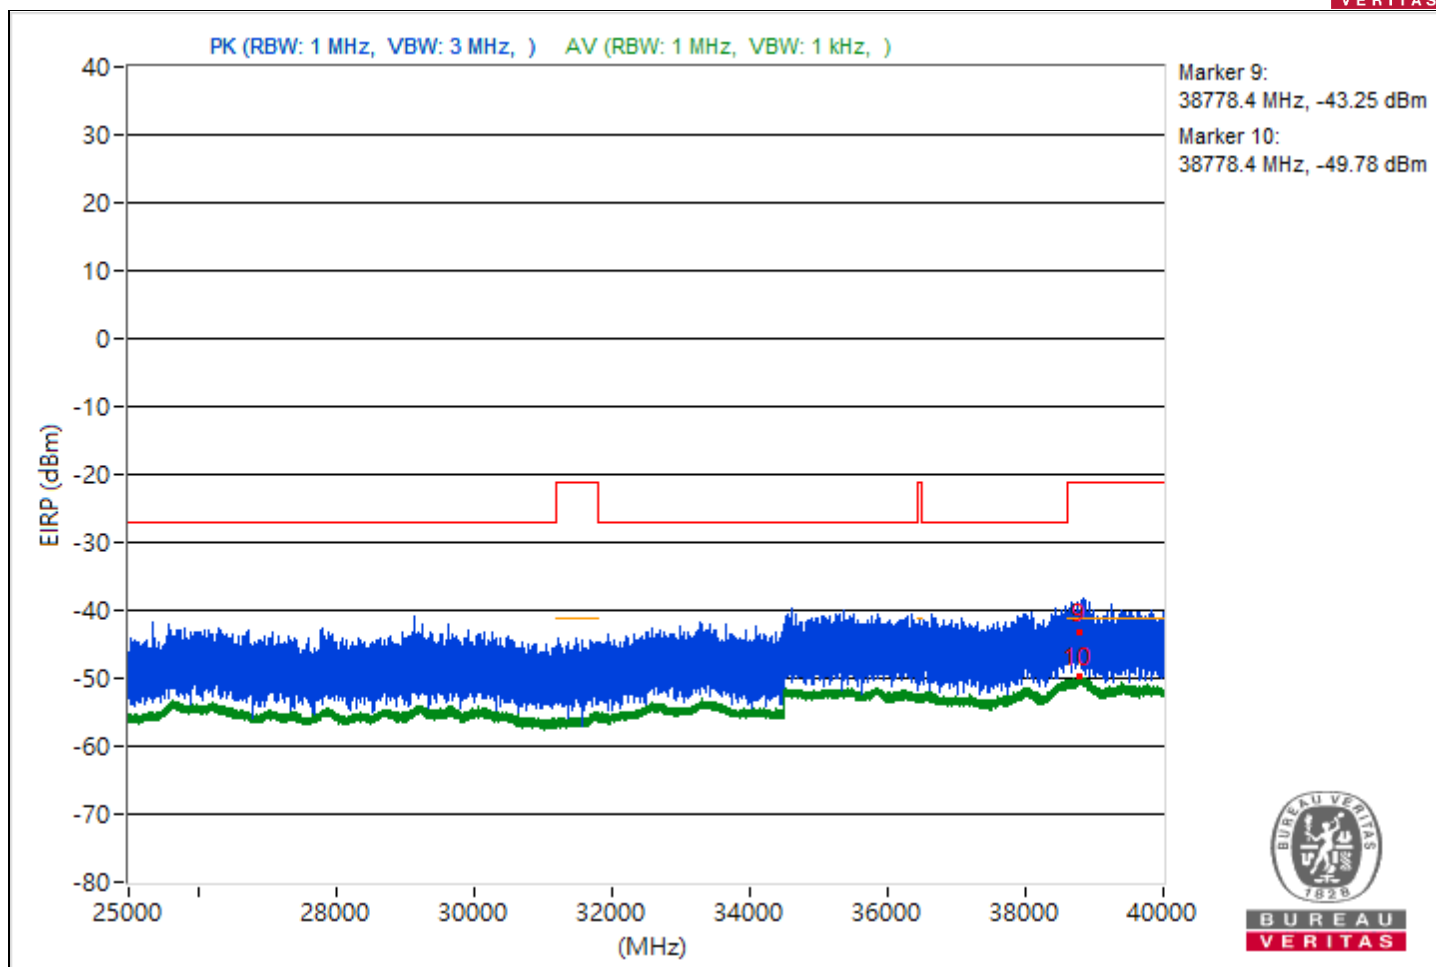



|                 |                                 |                          |                   |
|-----------------|---------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone MRU | Channel                  | CH 140 : 5700 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                       |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 4560.04         | 47.22 PK                | 74             | -26.78      | -56.41                  | 8.37                   | -48.04           |
| 2   | 4560.04         | 43.85 AV                | 54             | -10.15      | -59.78                  | 8.37                   | -51.41           |
| 3   | 9038.58         | 44.17 PK                | 74             | -29.83      | -59.46                  | 8.37                   | -51.09           |
| 4   | 9038.58         | 36.76 AV                | 54             | -17.24      | -66.87                  | 8.37                   | -58.5            |
| 5   | 18988.7         | 45.49 PK                | 74             | -28.51      | -58.14                  | 8.37                   | -49.77           |
| 6   | 18988.7         | 38.6 AV                 | 54             | -15.4       | -65.03                  | 8.37                   | -56.66           |
| 7   | 23829.2         | 48.5 PK                 | 74             | -25.5       | -55.13                  | 8.37                   | -46.76           |
| 8   | 23829.2         | 40.8 AV                 | 54             | -13.2       | -62.83                  | 8.37                   | -54.46           |
| 9   | 38807.47        | 52.56 PK                | 74             | -21.44      | -51.07                  | 8.37                   | -42.7            |
| 10  | 38807.47        | 45.45 AV                | 54             | -8.55       | -58.18                  | 8.37                   | -49.81           |

Note: Margin value = Emission Level - Limit value

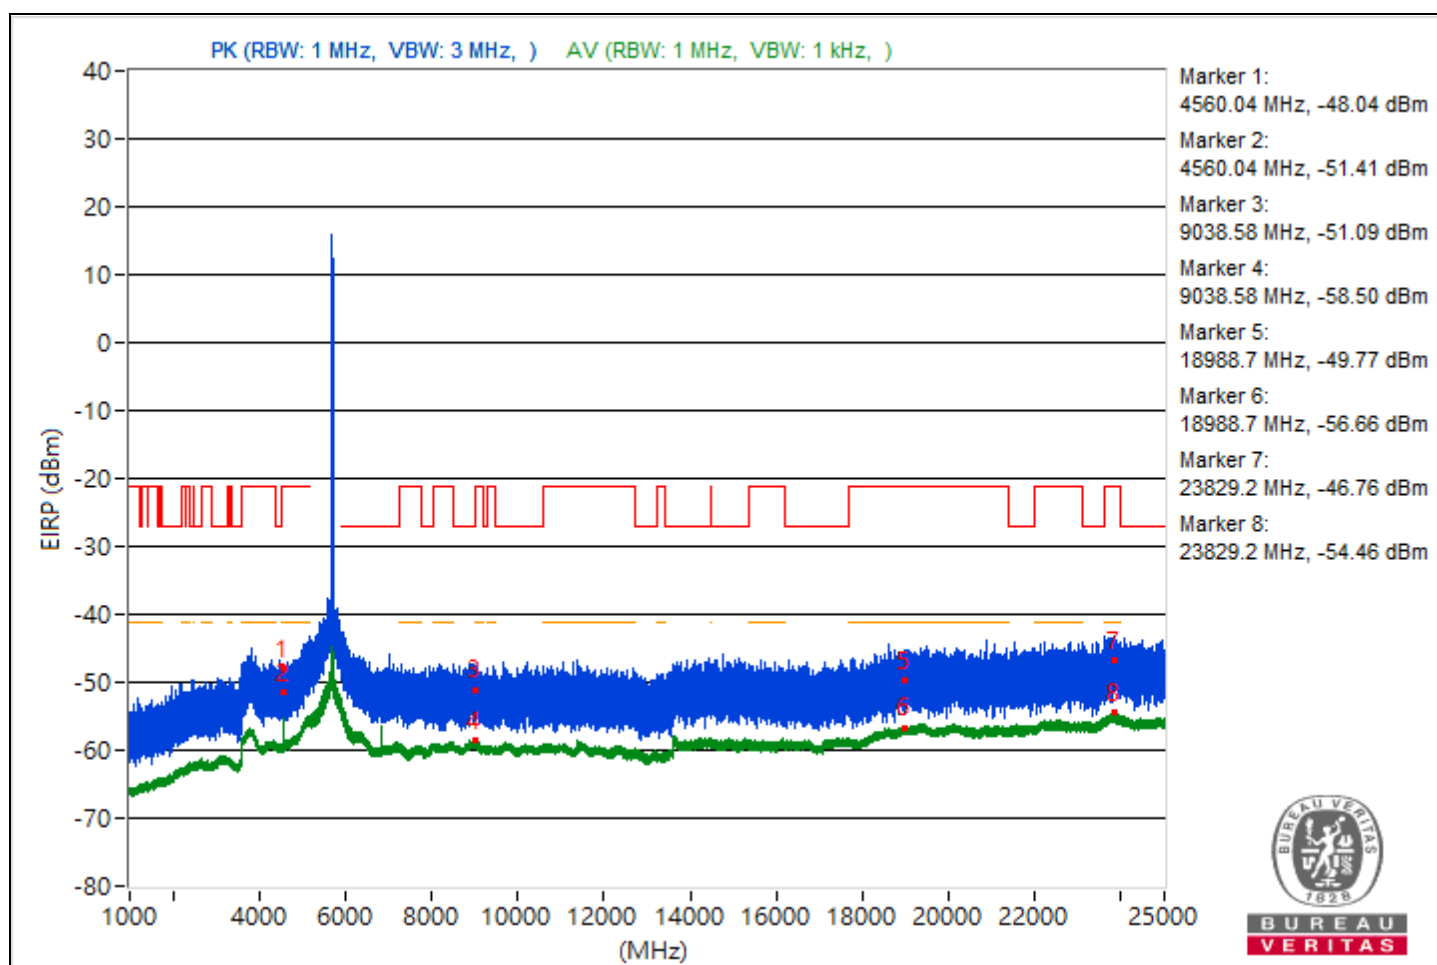


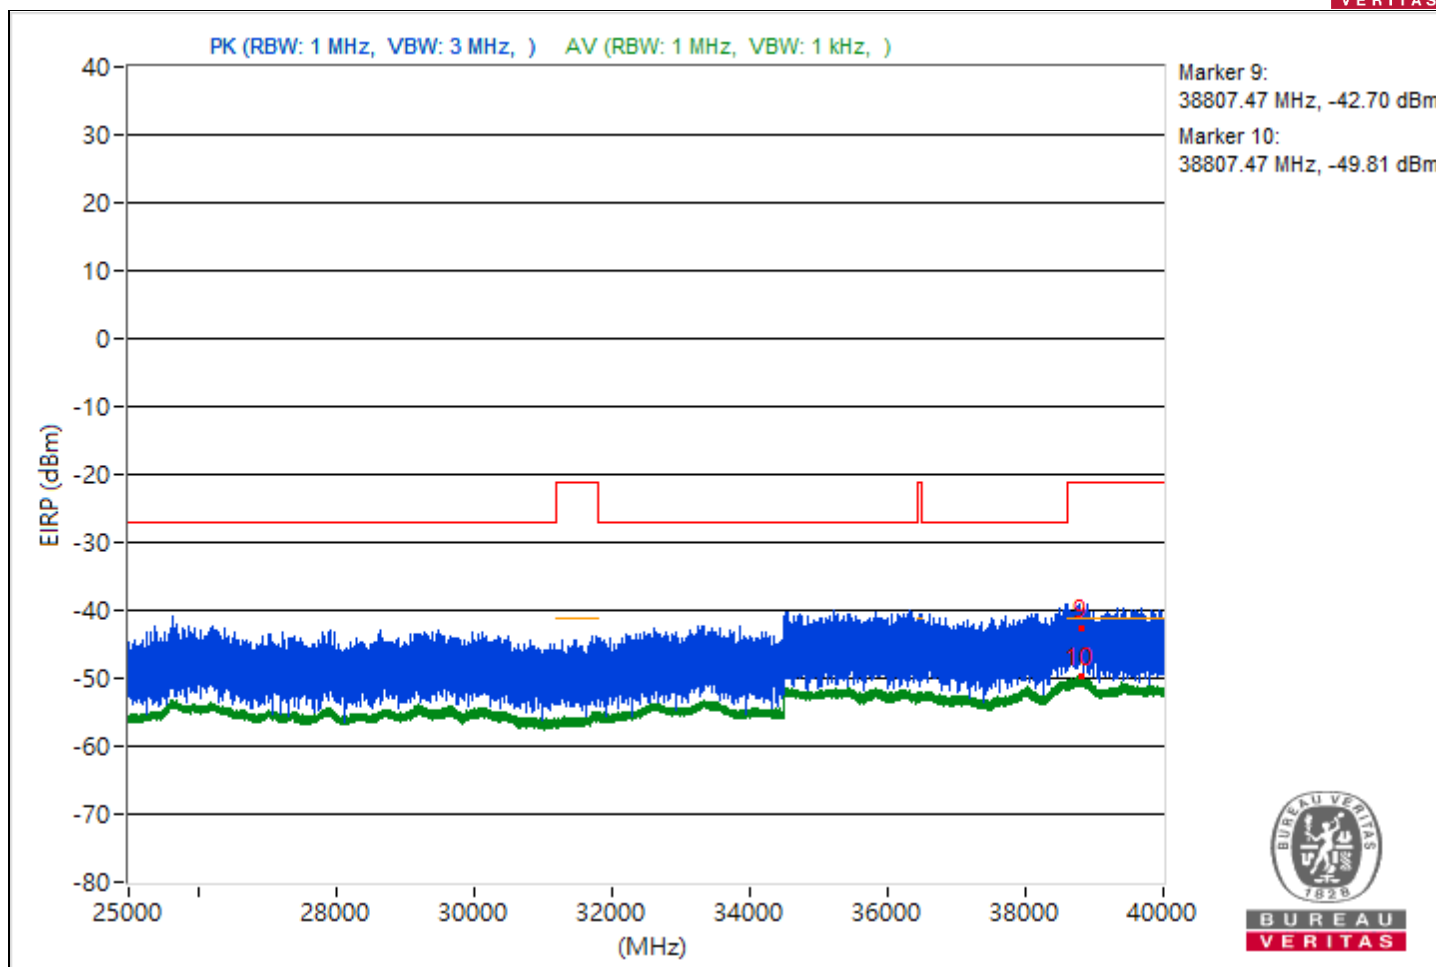


|                 |                                 |                          |                   |
|-----------------|---------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone MRU | Channel                  | CH 144 : 5720 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                       |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4575.99         | 49.7 PK                 | 74             | -24.3       | -53.93                  | 8.37                   | -45.56           |
| 2                            | 4575.99         | 44.89 AV                | 54             | -9.11       | -58.74                  | 8.37                   | -50.37           |
| 3                            | 11430.13        | 47.33 PK                | 74             | -26.67      | -56.3                   | 8.37                   | -47.93           |
| 4                            | 11430.13        | 37.06 AV                | 54             | -16.94      | -66.57                  | 8.37                   | -58.2            |
| 5                            | 18988           | 45.32 PK                | 74             | -28.68      | -58.31                  | 8.37                   | -49.94           |
| 6                            | 18988           | 38.66 AV                | 54             | -15.34      | -64.97                  | 8.37                   | -56.6            |
| 7                            | 23865.7         | 44.98 PK                | 74             | -29.02      | -58.65                  | 8.37                   | -50.28           |
| 8                            | 23865.7         | 40.67 AV                | 54             | -13.33      | -62.96                  | 8.37                   | -54.59           |
| 9                            | 38800.98        | 52.44 PK                | 74             | -21.56      | -51.19                  | 8.37                   | -42.82           |
| 10                           | 38800.98        | 45.77 AV                | 54             | -8.23       | -57.86                  | 8.37                   | -49.49           |

Note: Margin value = Emission Level - Limit value

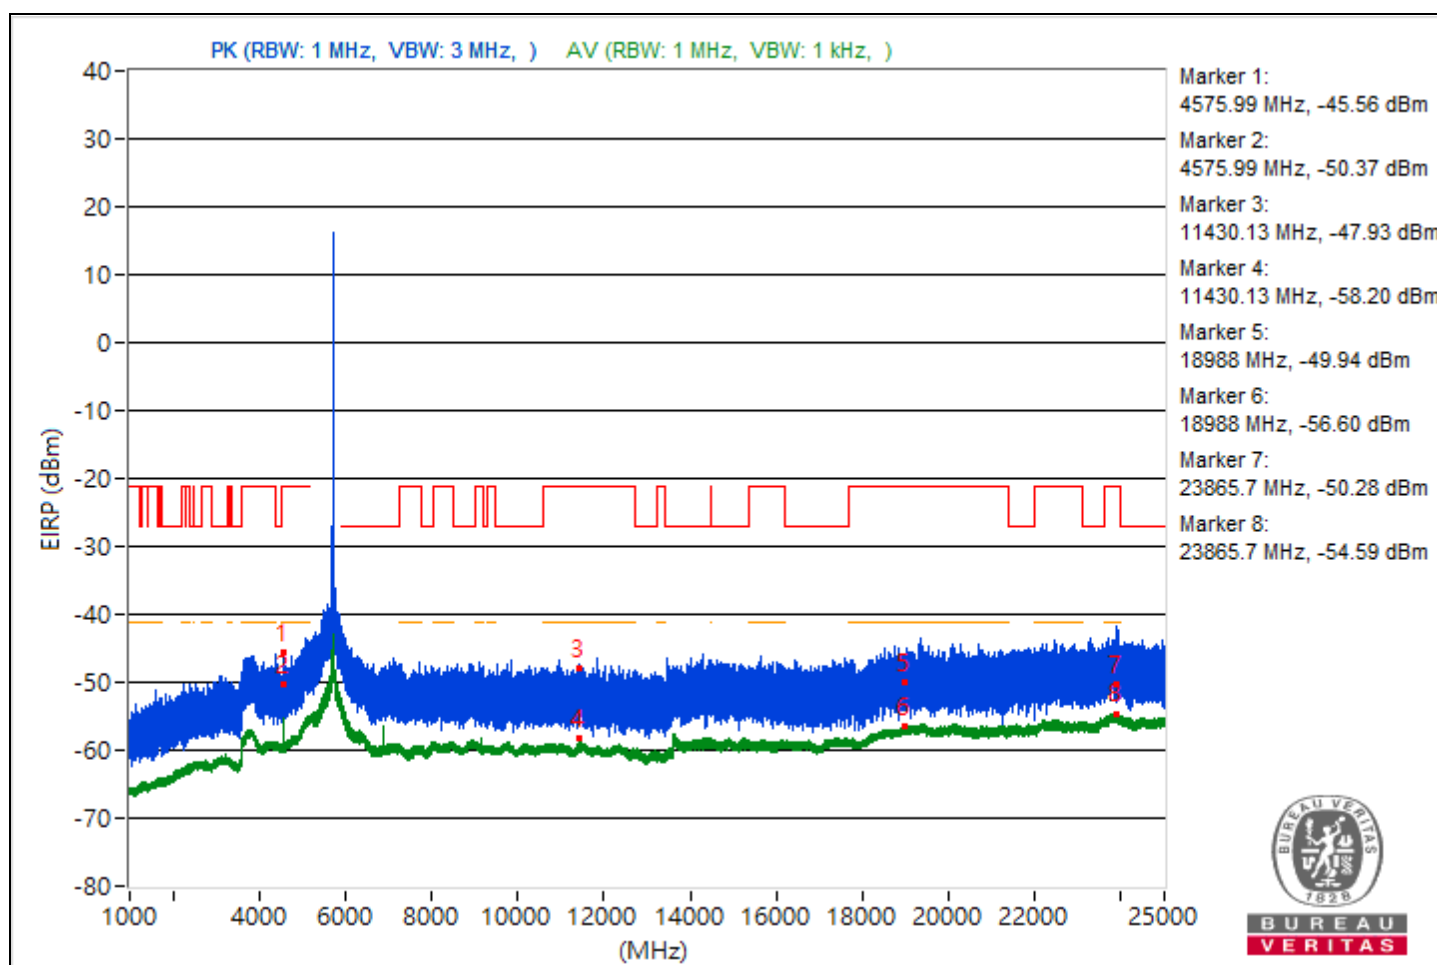

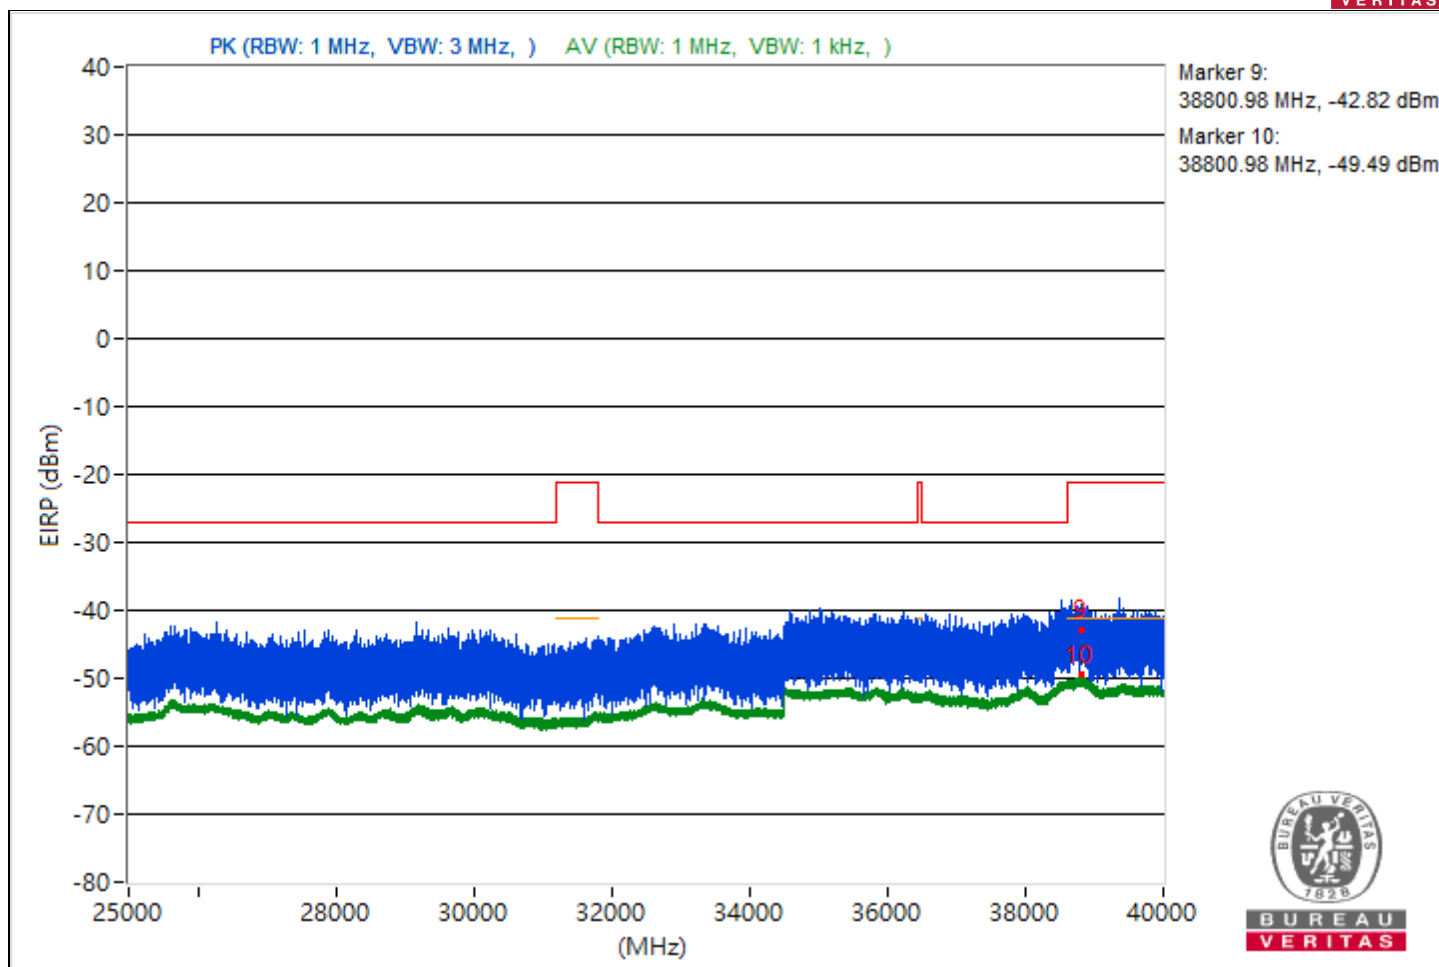



|                 |                                 |                          |                   |
|-----------------|---------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone MRU | Channel                  | CH 149 : 5745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                       |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 4595.9          | 48 PK                   | 74             | -26         | -55.63                  | 8.37                   | -47.26           |
| 2   | 4595.9          | 43.02 AV                | 54             | -10.98      | -60.61                  | 8.37                   | -52.24           |
| 3   | 11481.07        | 57.56 PK                | 74             | -16.44      | -46.07                  | 8.37                   | -37.7            |
| 4   | 11481.07        | 47.38 AV                | 54             | -6.62       | -56.25                  | 8.37                   | -47.88           |
| 5   | 18881.1         | 47.69 PK                | 74             | -26.31      | -55.94                  | 8.37                   | -47.57           |
| 6   | 18881.1         | 38.65 AV                | 54             | -15.35      | -64.98                  | 8.37                   | -56.61           |
| 7   | 23856.8         | 49.67 PK                | 74             | -24.33      | -53.96                  | 8.37                   | -45.59           |
| 8   | 23856.8         | 40.73 AV                | 54             | -13.27      | -62.9                   | 8.37                   | -54.53           |
| 9   | 38819.11        | 51.09 PK                | 74             | -22.91      | -52.54                  | 8.37                   | -44.17           |
| 10  | 38819.11        | 45.4 AV                 | 54             | -8.6        | -58.23                  | 8.37                   | -49.86           |

Note: Margin value = Emission Level - Limit value

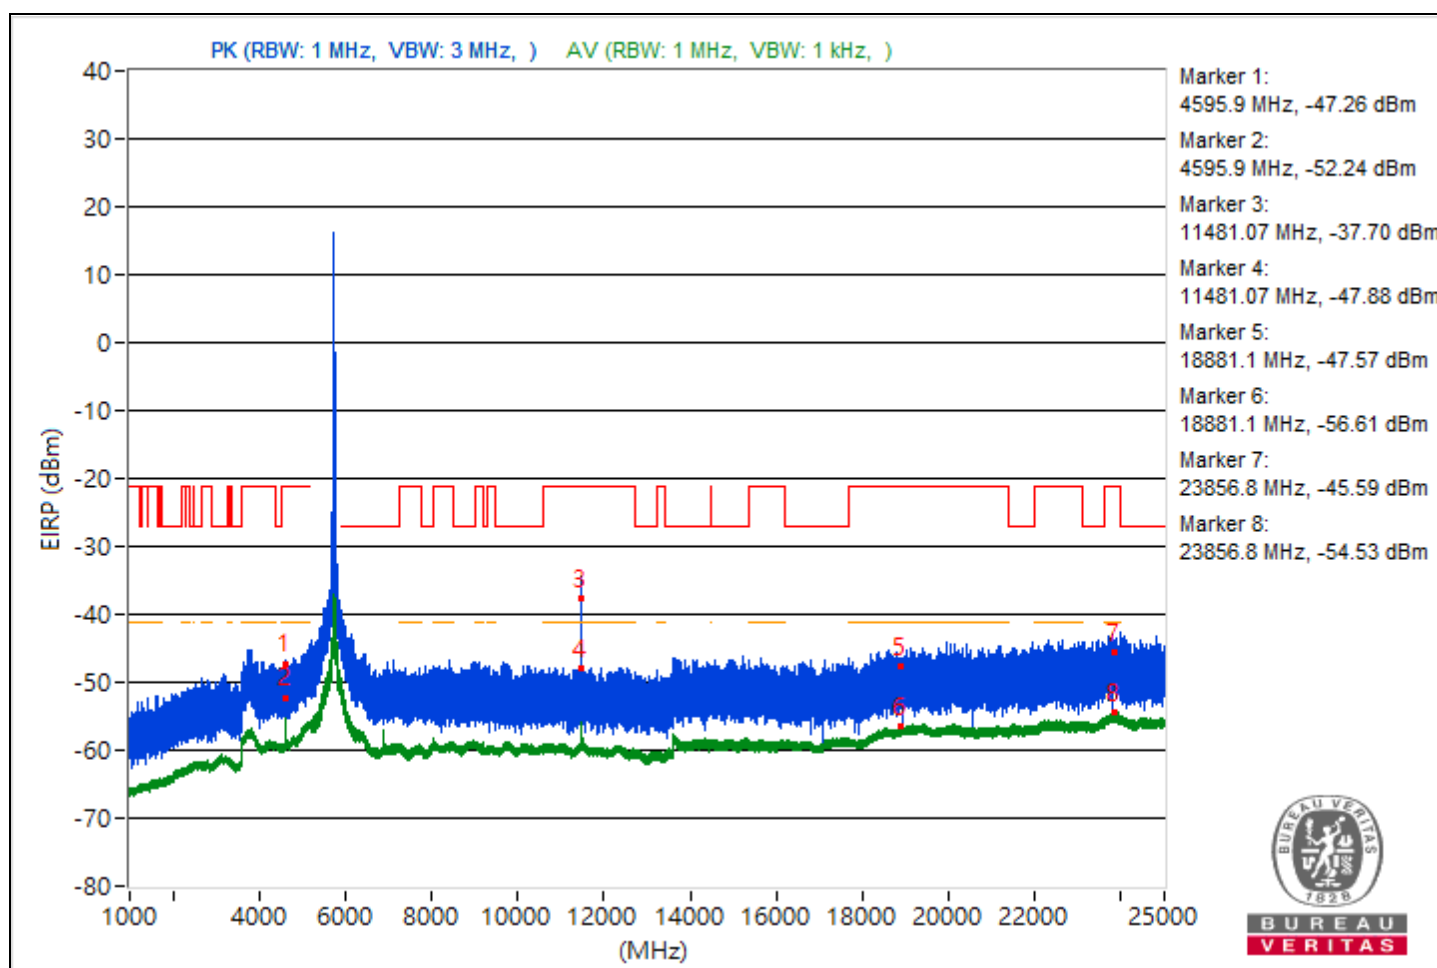

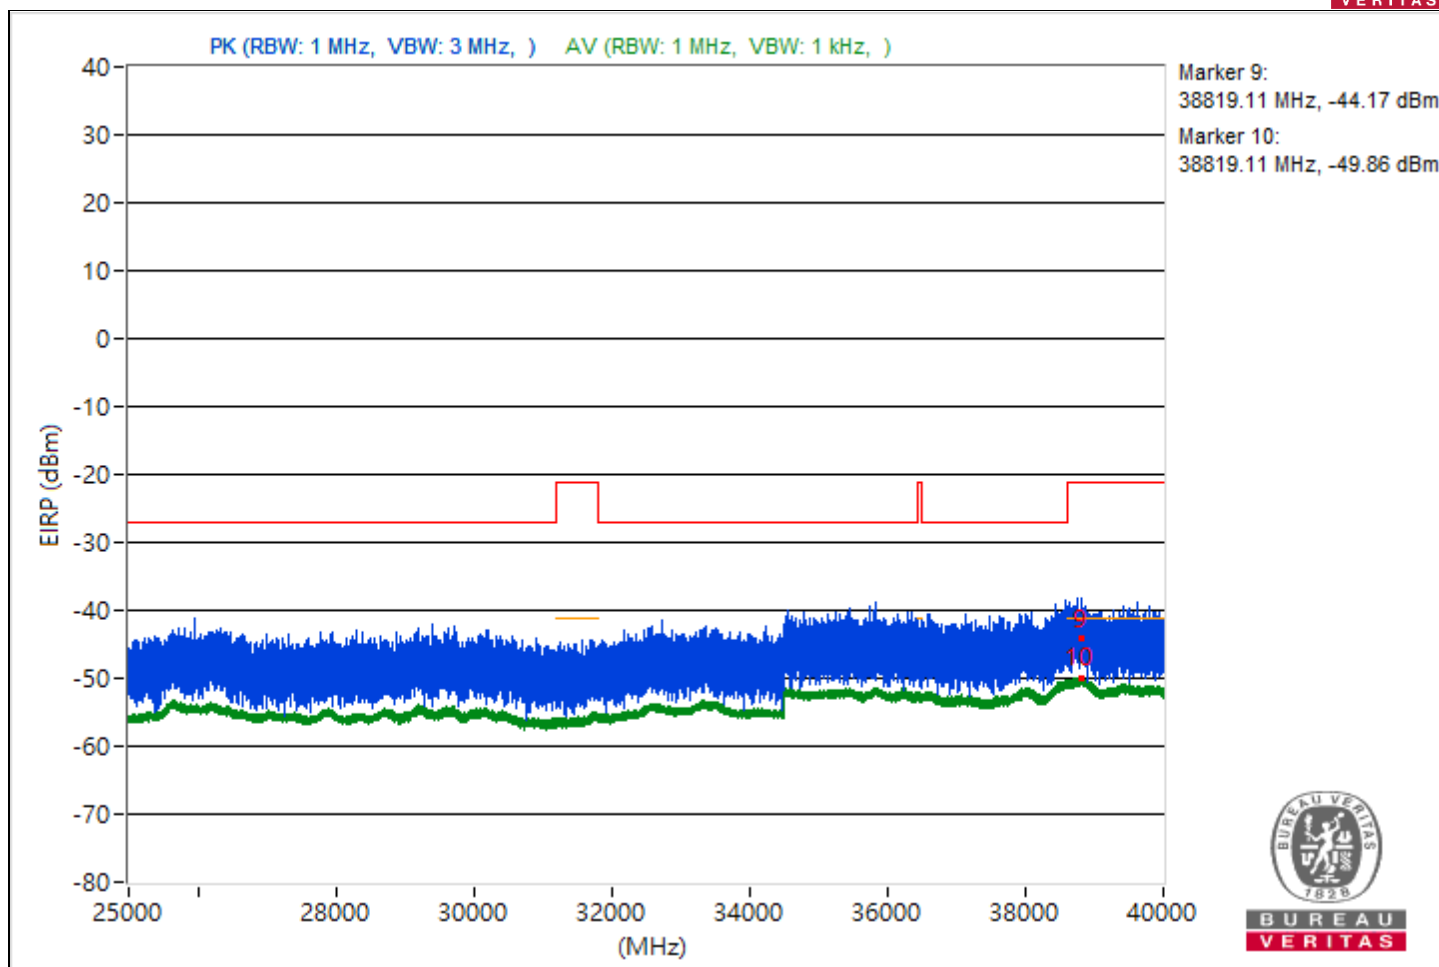



|                 |                                 |                          |                   |
|-----------------|---------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone MRU | Channel                  | CH 165 : 5825 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                       |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 4659.99         | 48.09 PK                | 74             | -25.91      | -55.54                  | 8.37                   | -47.17           |
| 2   | 4659.99         | 44.32 AV                | 54             | -9.68       | -59.31                  | 8.37                   | -50.94           |
| 3   | 11640.98        | 61.1 PK                 | 74             | -12.9       | -42.53                  | 8.37                   | -34.16           |
| 4   | 11640.98        | 49.77 AV                | 54             | -4.23       | -53.86                  | 8.37                   | -45.49           |
| 5   | 18989.8         | 47.91 PK                | 74             | -26.09      | -55.72                  | 8.37                   | -47.35           |
| 6   | 18989.8         | 38.73 AV                | 54             | -15.27      | -64.9                   | 8.37                   | -56.53           |
| 7   | 23801.6         | 44.33 PK                | 74             | -29.67      | -59.3                   | 8.37                   | -50.93           |
| 8   | 23801.6         | 40.82 AV                | 54             | -13.18      | -62.81                  | 8.37                   | -54.44           |
| 9   | 38867.2         | 48.03 PK                | 74             | -25.97      | -55.6                   | 8.37                   | -47.23           |
| 10  | 38867.2         | 45.41 AV                | 54             | -8.59       | -58.22                  | 8.37                   | -49.85           |

Note: Margin value = Emission Level - Limit value

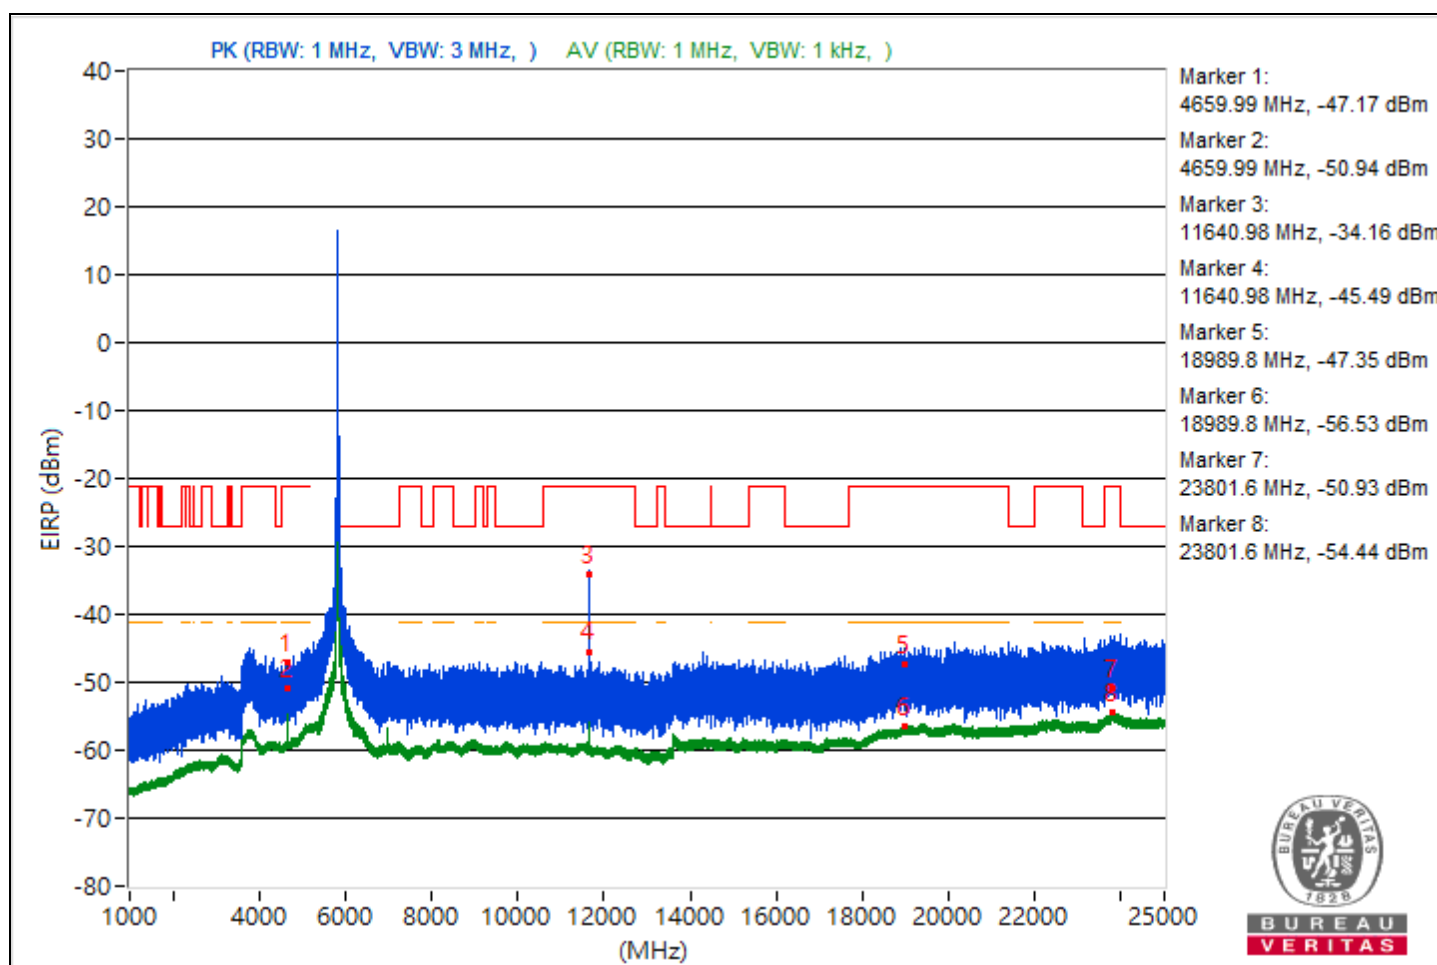

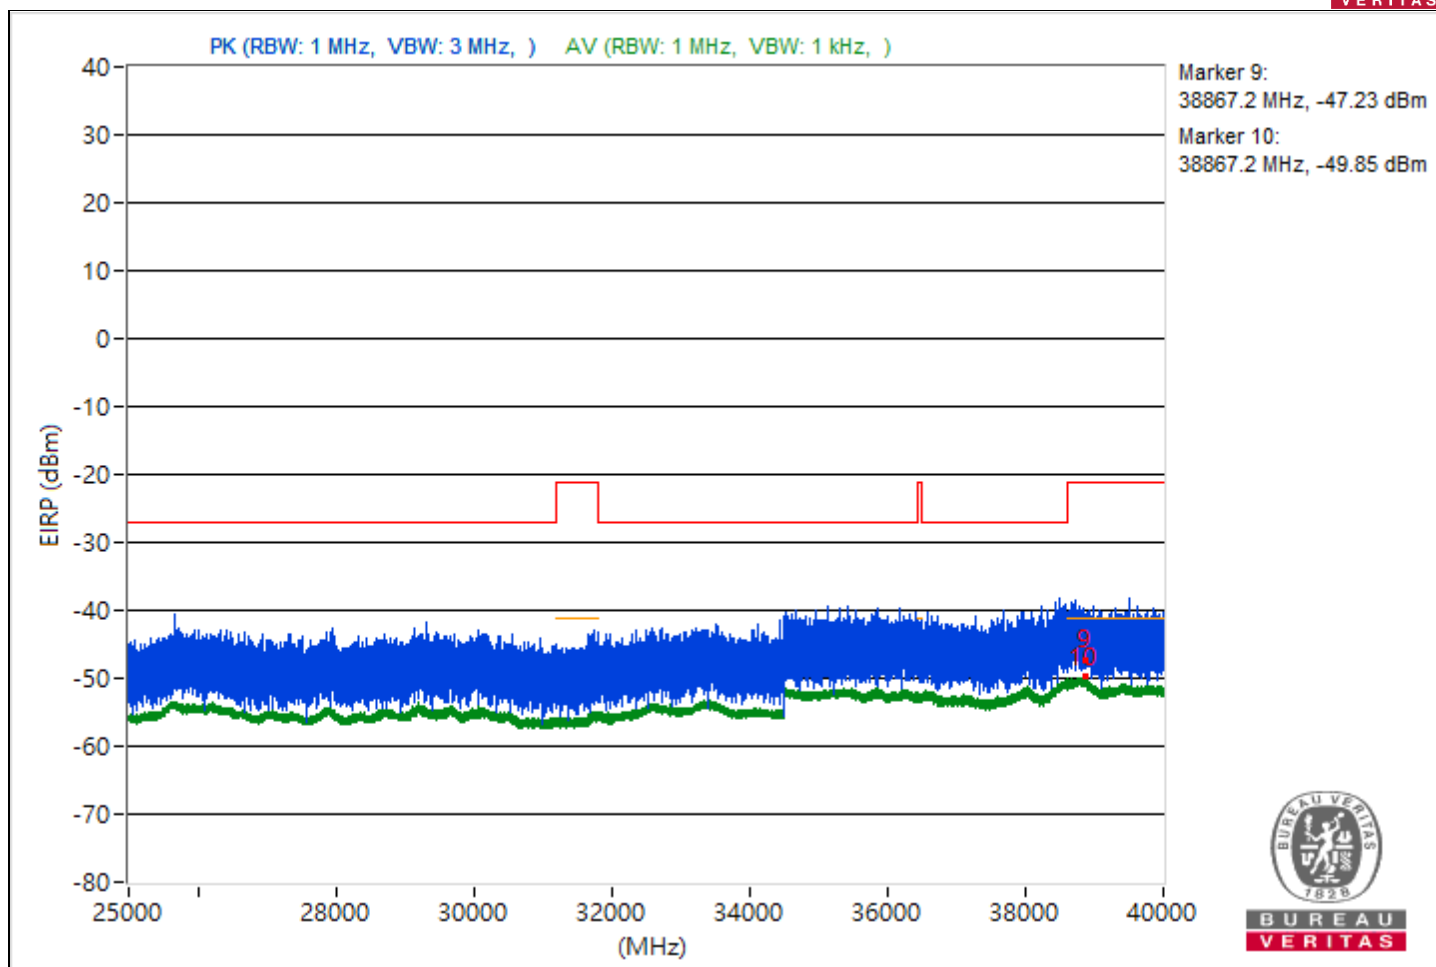



|                 |                                  |                          |                  |
|-----------------|----------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone MRU | Channel                  | CH 36 : 5180 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                   | Environmental Conditions | 19°C, 62% RH     |
| Tested By       | Henry Hsu                        |                          |                  |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 5096.71         | 53.55 PK                | 74             | -20.45      | -50.08                  | 8.37                   | -41.71           |
| 2   | 5096.71         | 44.91 AV                | 54             | -9.09       | -58.72                  | 8.37                   | -50.35           |
| 3   | 8288.09         | 47.48 PK                | 74             | -26.52      | -56.15                  | 8.37                   | -47.78           |
| 4   | 8288.09         | 42.76 AV                | 54             | -11.24      | -60.87                  | 8.37                   | -52.5            |
| 5   | 18981.2         | 44.61 PK                | 74             | -29.39      | -59.02                  | 8.37                   | -50.65           |
| 6   | 18981.2         | 38.7 AV                 | 54             | -15.3       | -64.93                  | 8.37                   | -56.56           |
| 7   | 23822.3         | 48.7 PK                 | 74             | -25.3       | -54.93                  | 8.37                   | -46.56           |
| 8   | 23822.3         | 40.76 AV                | 54             | -13.24      | -62.87                  | 8.37                   | -54.5            |
| 9   | 38784.09        | 52.07 PK                | 74             | -21.93      | -51.56                  | 8.37                   | -43.19           |
| 10  | 38784.09        | 45.43 AV                | 54             | -8.57       | -58.2                   | 8.37                   | -49.83           |

Note: Margin value = Emission Level - Limit value

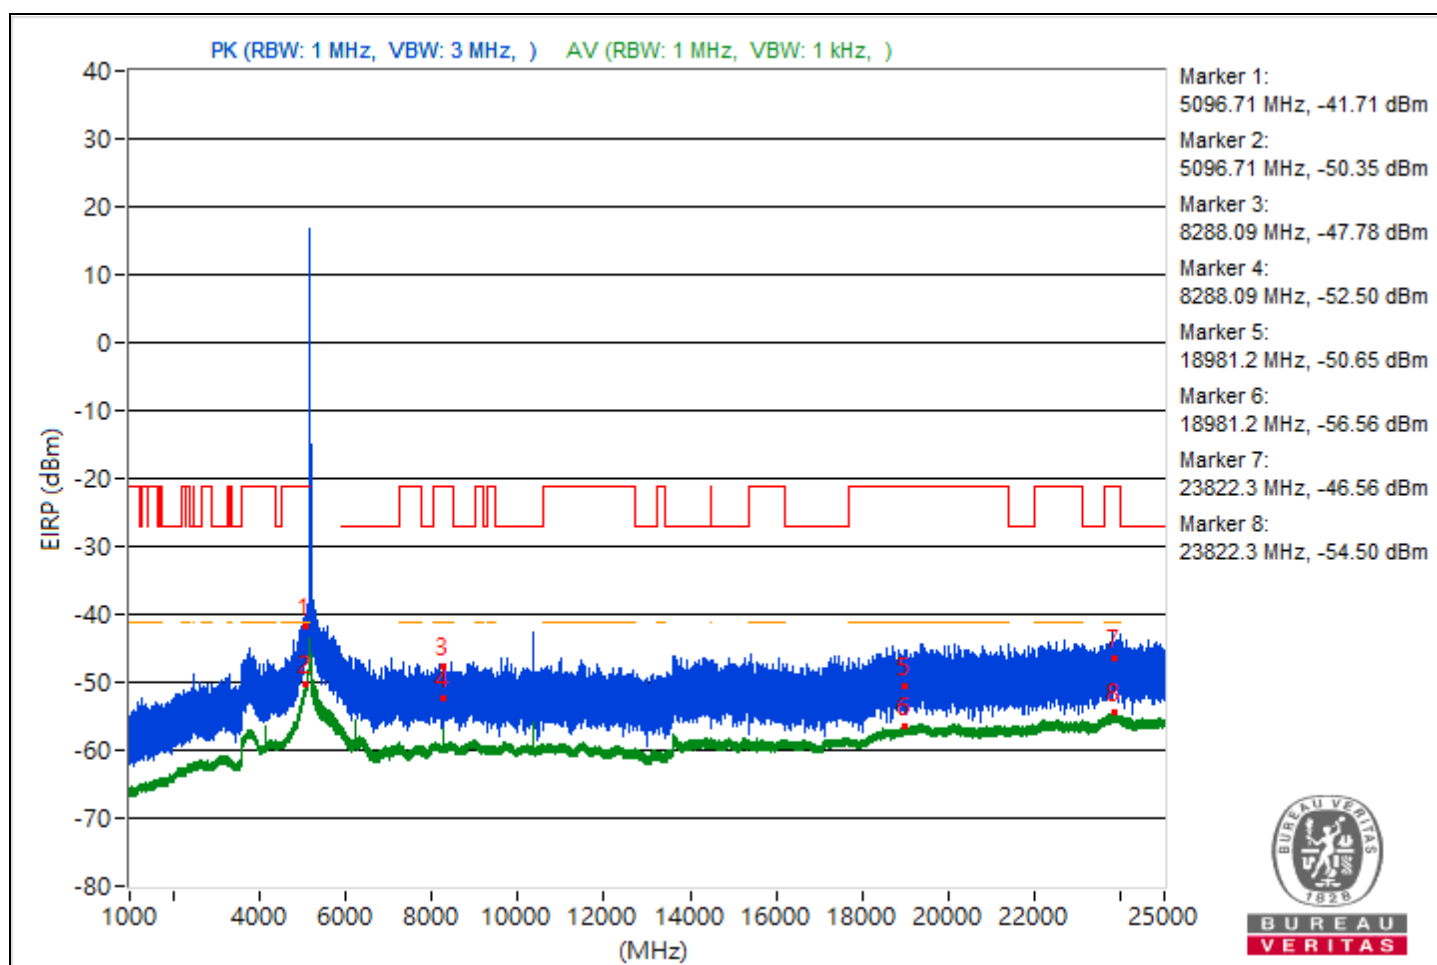


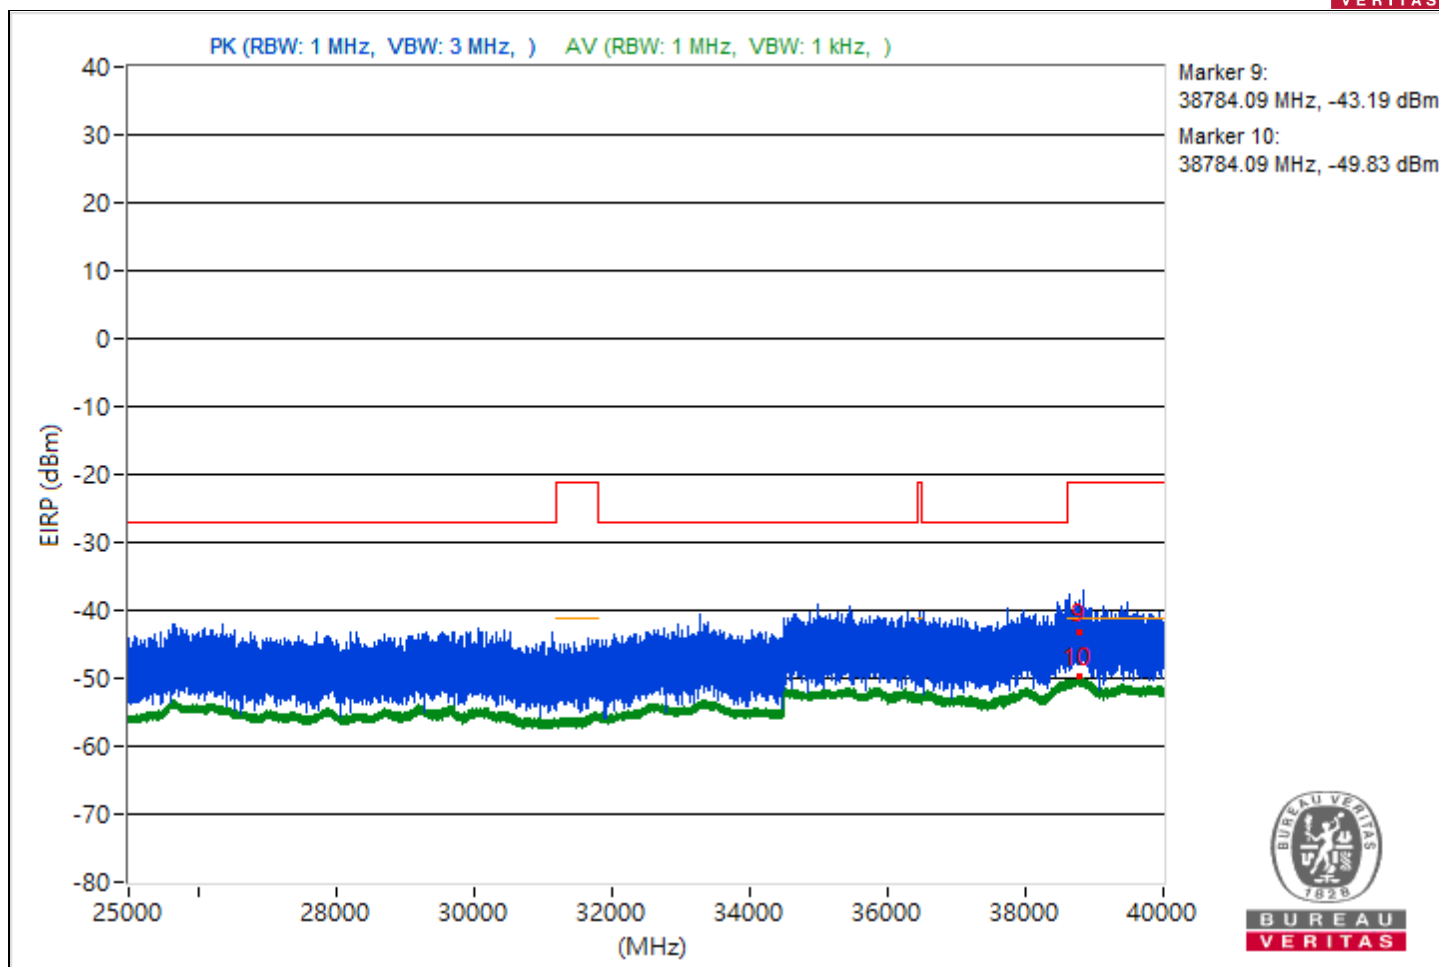


|                 |                                  |                          |                  |
|-----------------|----------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone MRU | Channel                  | CH 64 : 5320 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                   | Environmental Conditions | 19°C, 62% RH     |
| Tested By       | Henry Hsu                        |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5097.18         | 48.54 PK                | 74             | -25.46      | -55.09                  | 8.37                   | -46.72           |
| 2                            | 5097.18         | 42.54 AV                | 54             | -11.46      | -61.09                  | 8.37                   | -52.72           |
| 3                            | 10633.07        | 45.06 PK                | 74             | -28.94      | -58.57                  | 8.37                   | -50.2            |
| 4                            | 10633.07        | 36.97 AV                | 54             | -17.03      | -66.66                  | 8.37                   | -58.29           |
| 5                            | 18950.4         | 42.76 PK                | 74             | -31.24      | -60.87                  | 8.37                   | -52.5            |
| 6                            | 18950.4         | 38.72 AV                | 54             | -15.28      | -64.91                  | 8.37                   | -56.54           |
| 7                            | 23774.3         | 47.14 PK                | 74             | -26.86      | -56.49                  | 8.37                   | -48.12           |
| 8                            | 23774.3         | 40.75 AV                | 54             | -13.25      | -62.88                  | 8.37                   | -54.51           |
| 9                            | 38802.84        | 51.67 PK                | 74             | -22.33      | -51.96                  | 8.37                   | -43.59           |
| 10                           | 38802.84        | 45.45 AV                | 54             | -8.55       | -58.18                  | 8.37                   | -49.81           |

Note: Margin value = Emission Level - Limit value

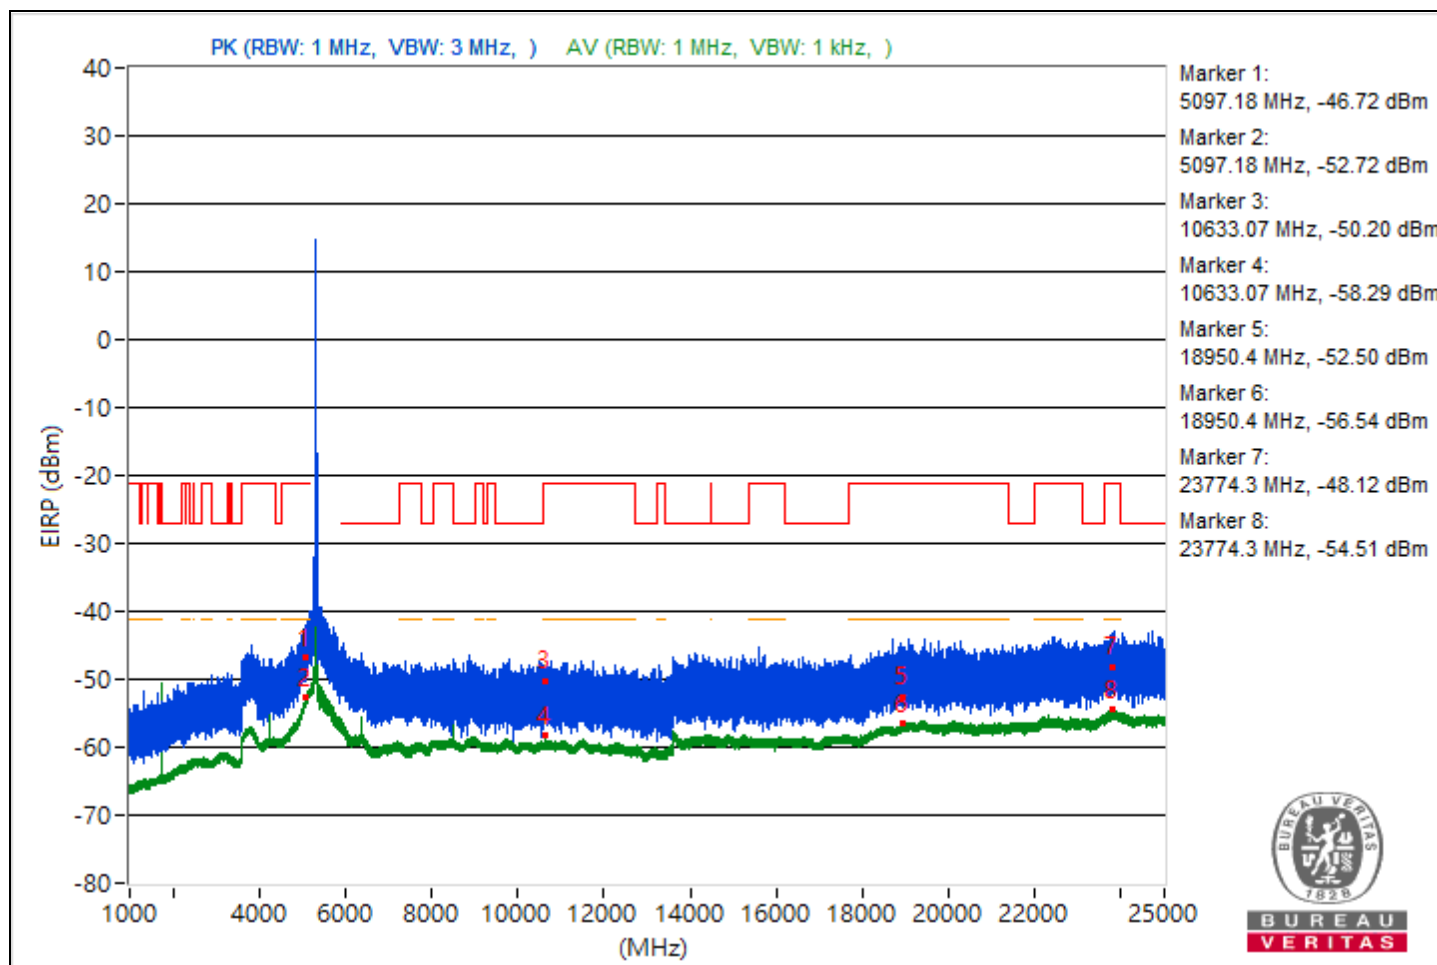

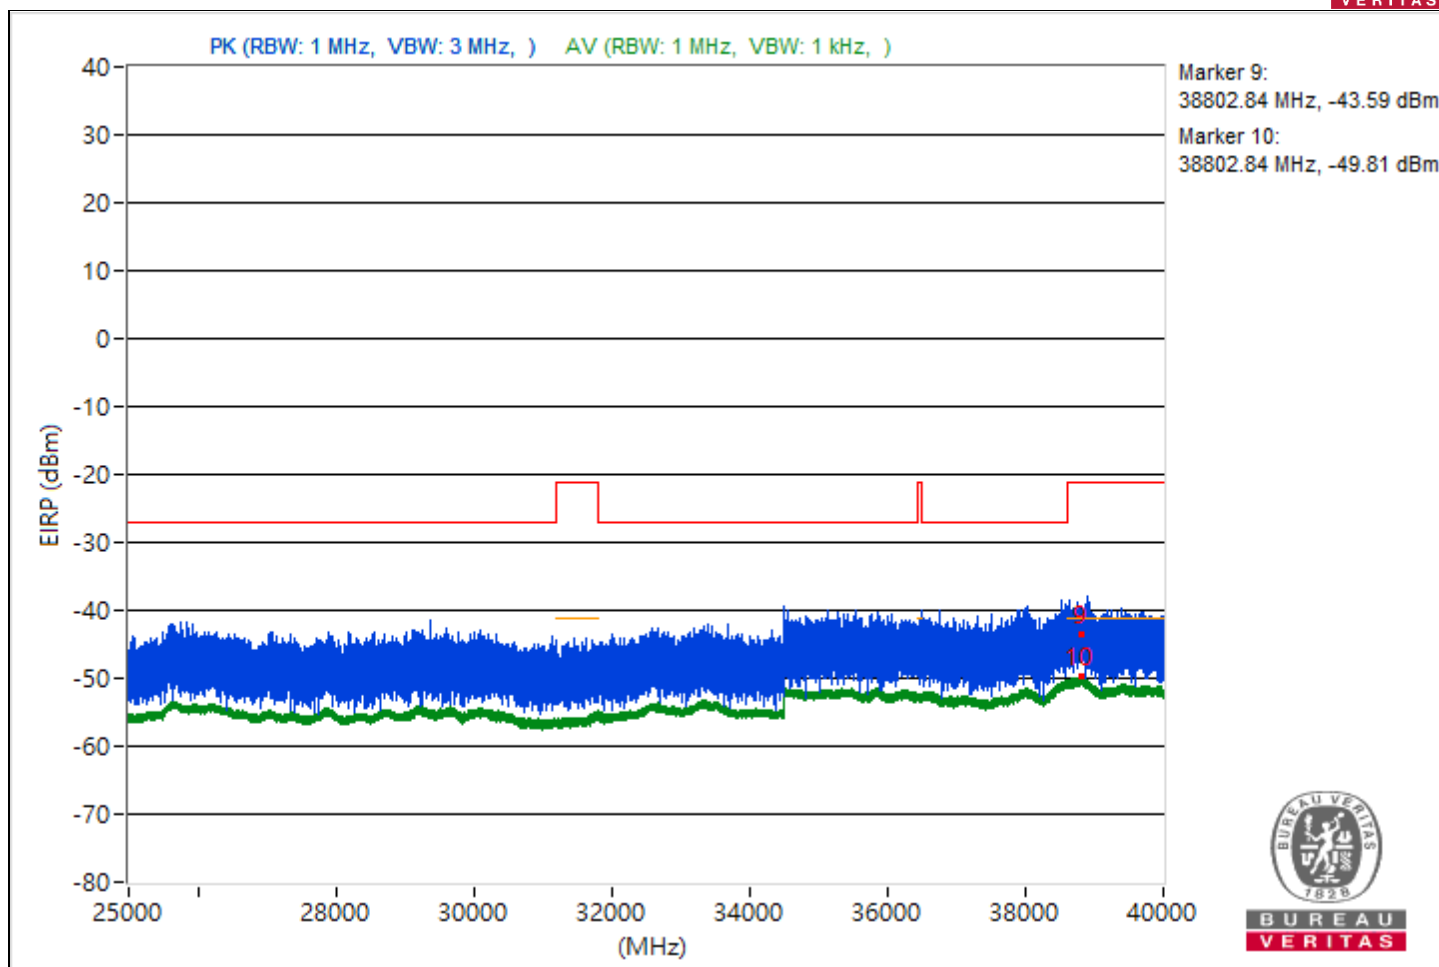



|                 |                                  |                          |                   |
|-----------------|----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone MRU | Channel                  | CH 100 : 5500 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                   | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                        |                          |                   |

#### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 4399.98         | 46.95 PK                | 74             | -27.05      | -56.68                  | 8.37                   | -48.31           |
| 2   | 4399.98         | 41.6 AV                 | 54             | -12.4       | -62.03                  | 8.37                   | -53.66           |
| 3   | 9007.29         | 41.9 PK                 | 74             | -32.1       | -61.73                  | 8.37                   | -53.36           |
| 4   | 9007.29         | 36.62 AV                | 54             | -17.38      | -67.01                  | 8.37                   | -58.64           |
| 5   | 18985.3         | 46.12 PK                | 74             | -27.88      | -57.51                  | 8.37                   | -49.14           |
| 6   | 18985.3         | 38.65 AV                | 54             | -15.35      | -64.98                  | 8.37                   | -56.61           |
| 7   | 23812           | 48.81 PK                | 74             | -25.19      | -54.82                  | 8.37                   | -46.45           |
| 8   | 23812           | 40.65 AV                | 54             | -13.35      | -62.98                  | 8.37                   | -54.61           |
| 9   | 38818.31        | 50.01 PK                | 74             | -23.99      | -53.62                  | 8.37                   | -45.25           |
| 10  | 38818.31        | 45.42 AV                | 54             | -8.58       | -58.21                  | 8.37                   | -49.84           |

Note: Margin value = Emission Level - Limit value

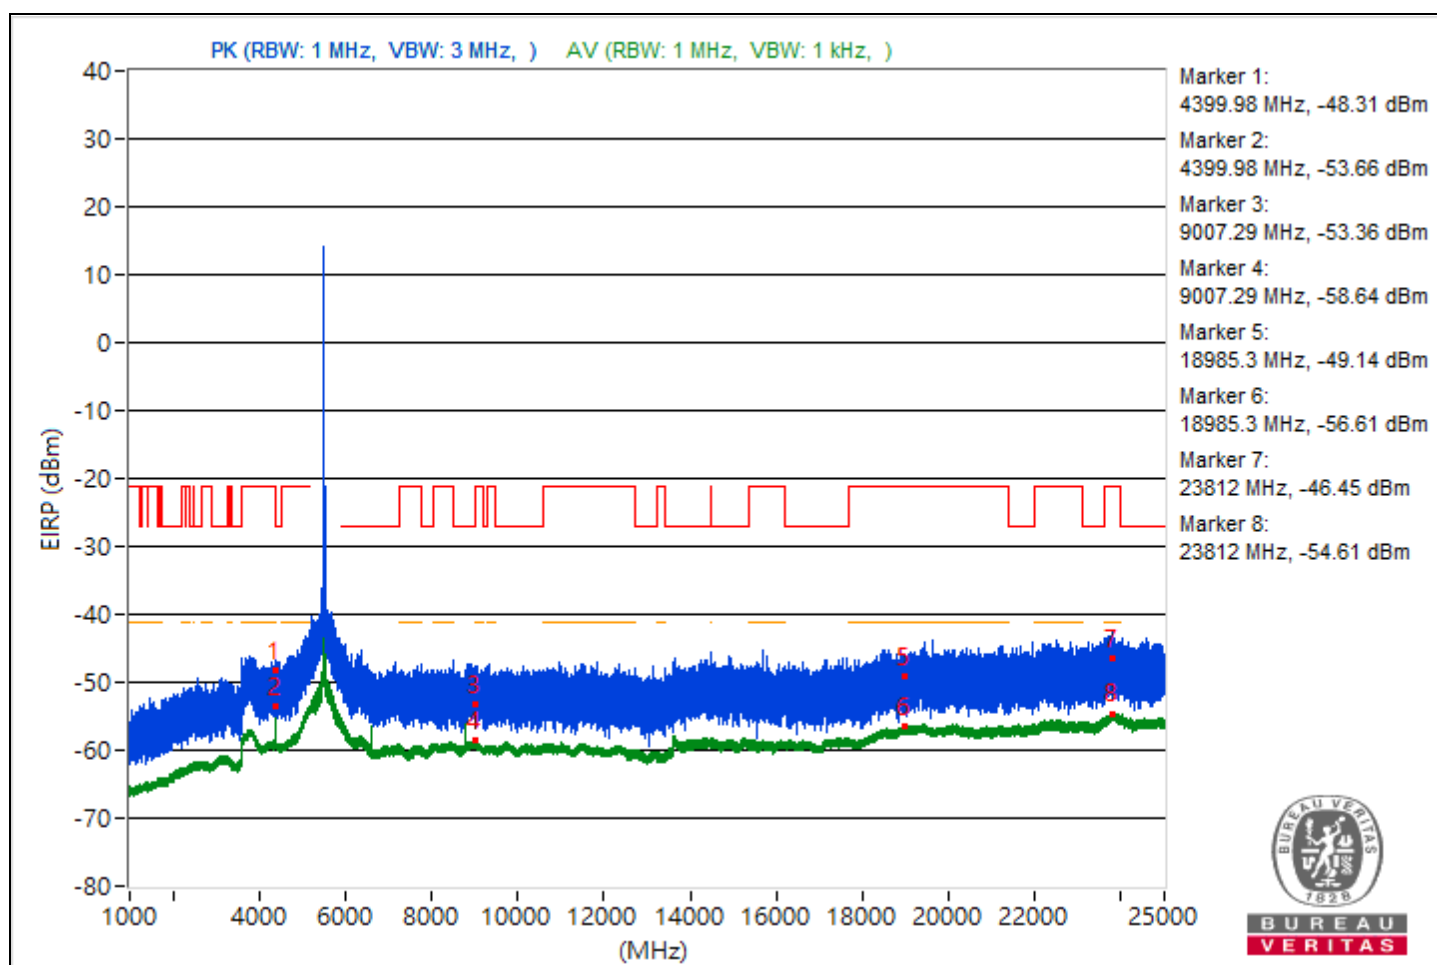

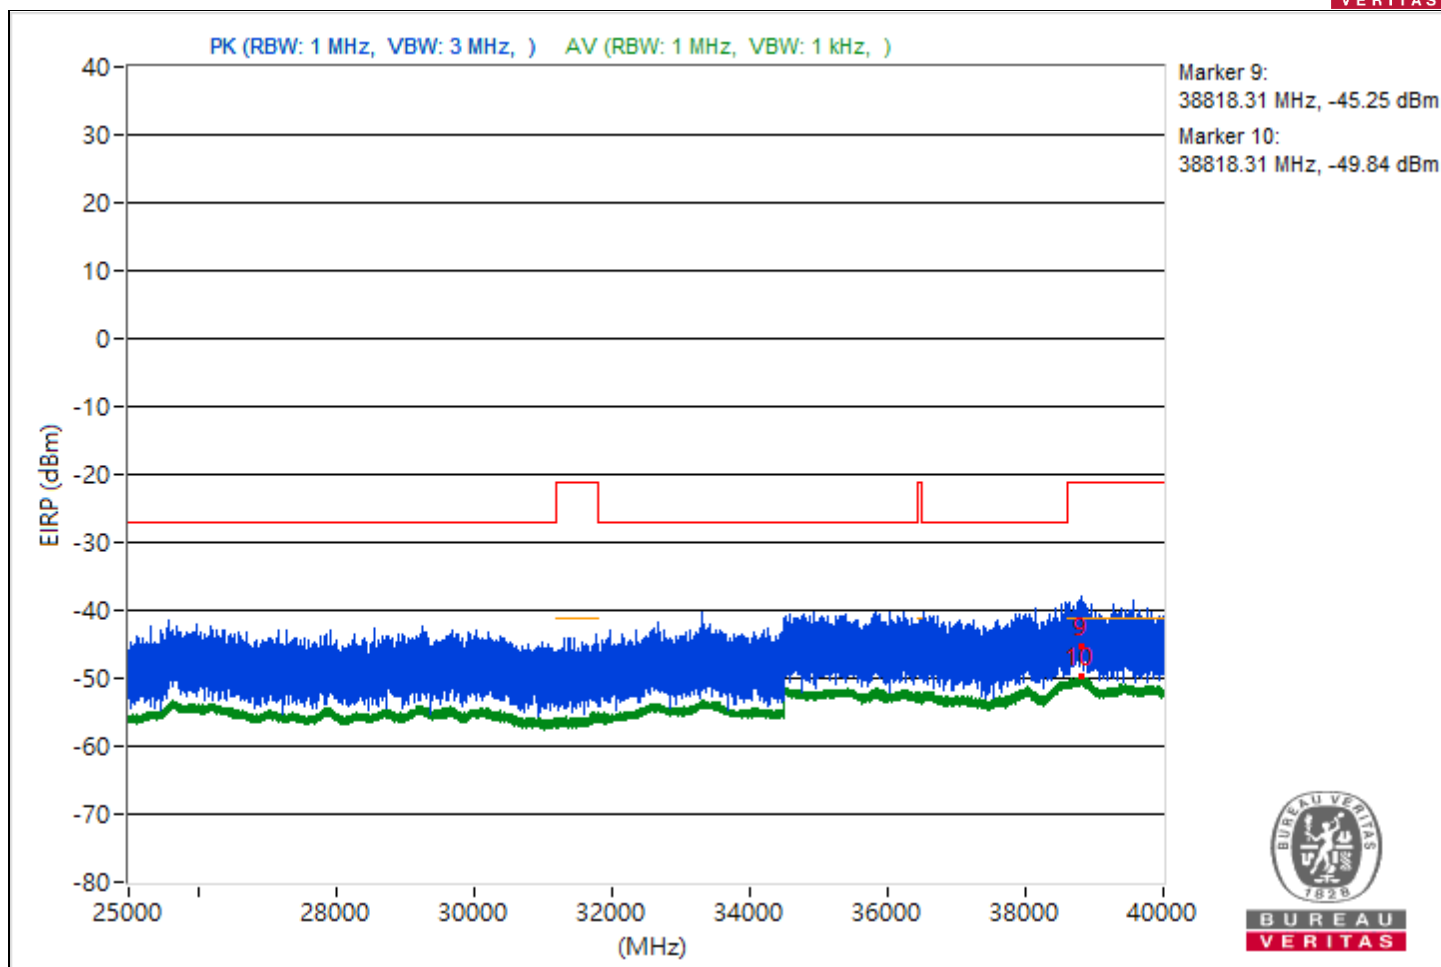



|                 |                                  |                          |                   |
|-----------------|----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone MRU | Channel                  | CH 140 : 5700 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                   | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                        |                          |                   |

#### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 4560.04         | 47.45 PK                | 74             | -26.55      | -56.18                  | 8.37                   | -47.81           |
| 2   | 4560.04         | 43.44 AV                | 54             | -10.56      | -60.19                  | 8.37                   | -51.82           |
| 3   | 9120.18         | 42.38 PK                | 74             | -31.62      | -61.25                  | 8.37                   | -52.88           |
| 4   | 9120.18         | 37.37 AV                | 54             | -16.63      | -66.26                  | 8.37                   | -57.89           |
| 5   | 18962.2         | 46.45 PK                | 74             | -27.55      | -57.18                  | 8.37                   | -48.81           |
| 6   | 18962.2         | 38.66 AV                | 54             | -15.34      | -64.97                  | 8.37                   | -56.6            |
| 7   | 23834.6         | 46.41 PK                | 74             | -27.59      | -57.22                  | 8.37                   | -48.85           |
| 8   | 23834.6         | 40.76 AV                | 54             | -13.24      | -62.87                  | 8.37                   | -54.5            |
| 9   | 38762.31        | 52.04 PK                | 74             | -21.96      | -51.59                  | 8.37                   | -43.22           |
| 10  | 38762.31        | 45.63 AV                | 54             | -8.37       | -58                     | 8.37                   | -49.63           |

Note: Margin value = Emission Level - Limit value

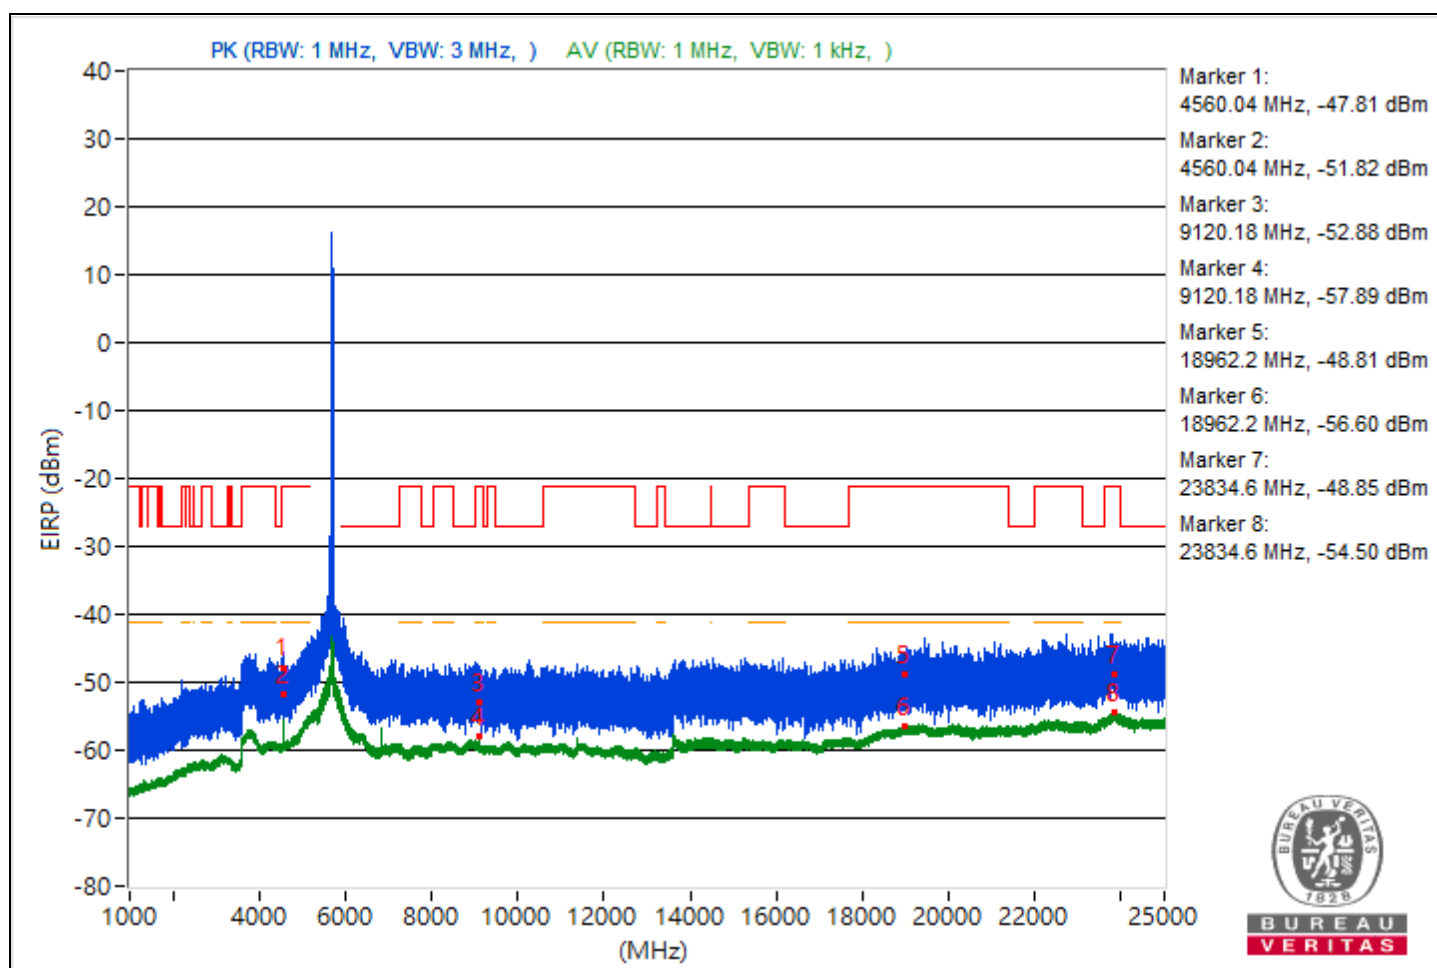

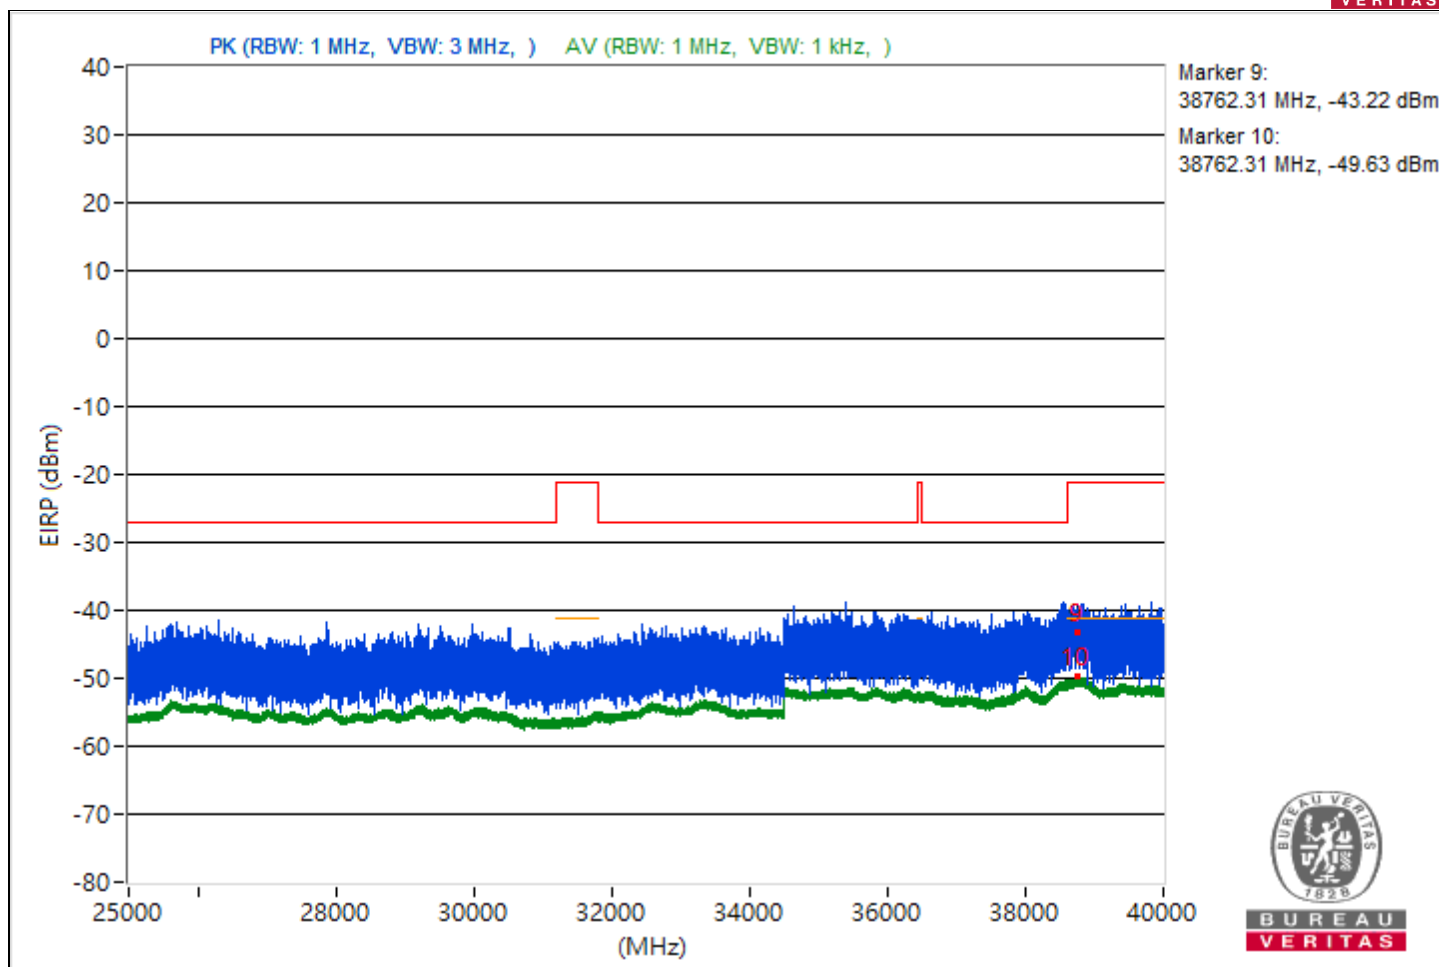



|                 |                                  |                          |                   |
|-----------------|----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone MRU | Channel                  | CH 144 : 5720 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                   | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                        |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 4576.07         | 49.39 PK                | 74             | -24.61      | -54.24                  | 8.37                   | -45.87           |
| 2   | 4576.07         | 44.52 AV                | 54             | -9.48       | -59.11                  | 8.37                   | -50.74           |
| 3   | 9151.91         | 42.8 PK                 | 74             | -31.2       | -60.83                  | 8.37                   | -52.46           |
| 4   | 9151.91         | 37.57 AV                | 54             | -16.43      | -66.06                  | 8.37                   | -57.69           |
| 5   | 18989.1         | 45.75 PK                | 74             | -28.25      | -57.88                  | 8.37                   | -49.51           |
| 6   | 18989.1         | 38.7 AV                 | 54             | -15.3       | -64.93                  | 8.37                   | -56.56           |
| 7   | 23928           | 50.23 PK                | 74             | -23.77      | -53.4                   | 8.37                   | -45.03           |
| 8   | 23928           | 40.78 AV                | 54             | -13.22      | -62.85                  | 8.37                   | -54.48           |
| 9   | 38782.13        | 51.98 PK                | 74             | -22.02      | -51.65                  | 8.37                   | -43.28           |
| 10  | 38782.13        | 45.67 AV                | 54             | -8.33       | -57.96                  | 8.37                   | -49.59           |

Note: Margin value = Emission Level - Limit value

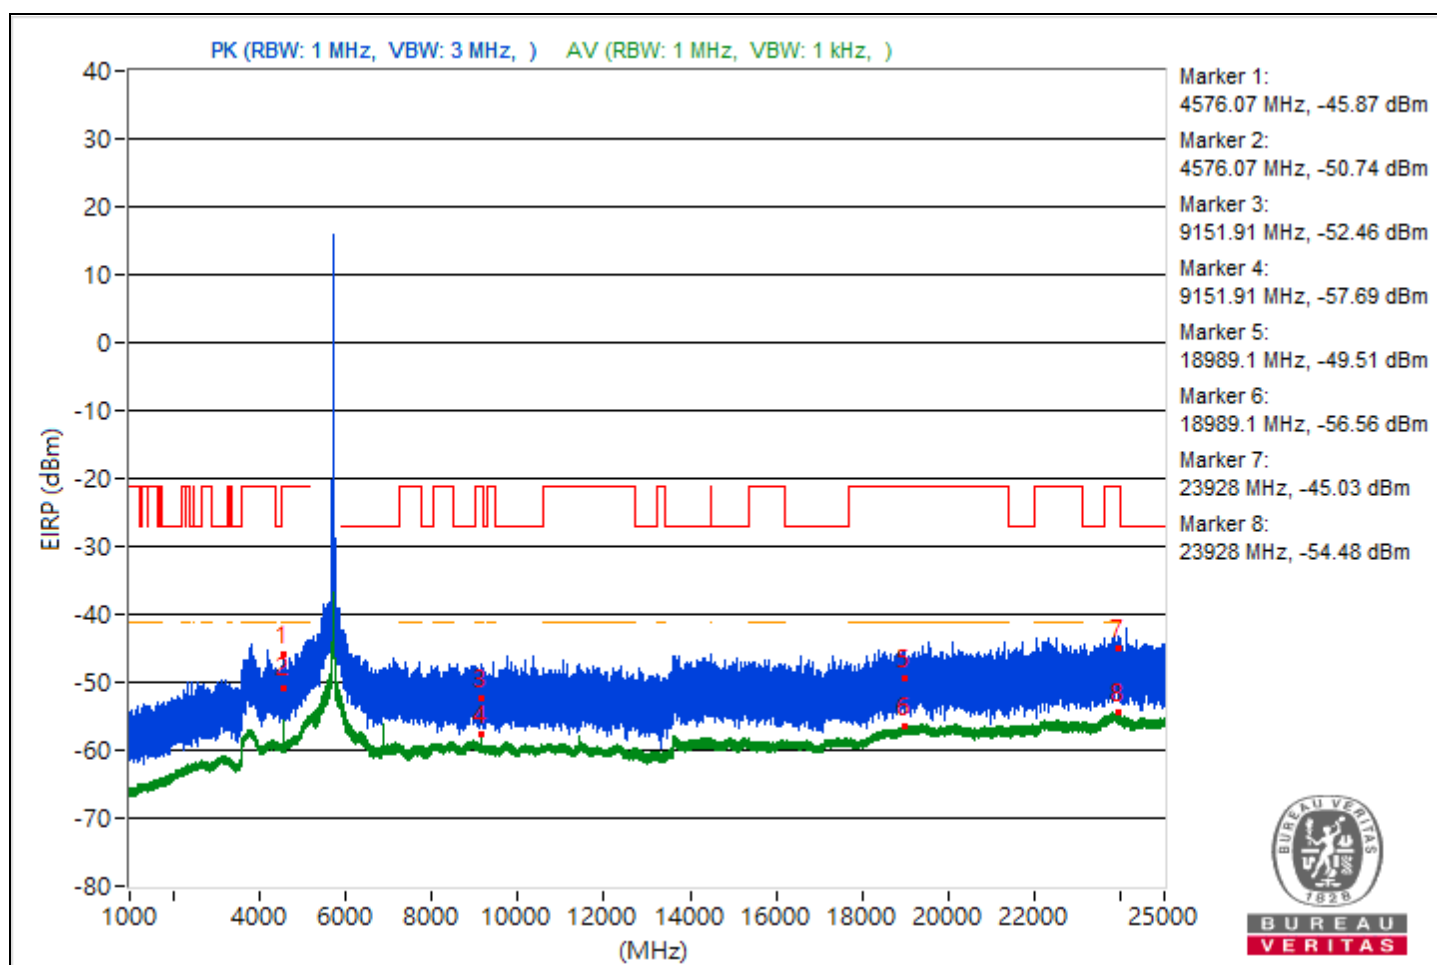

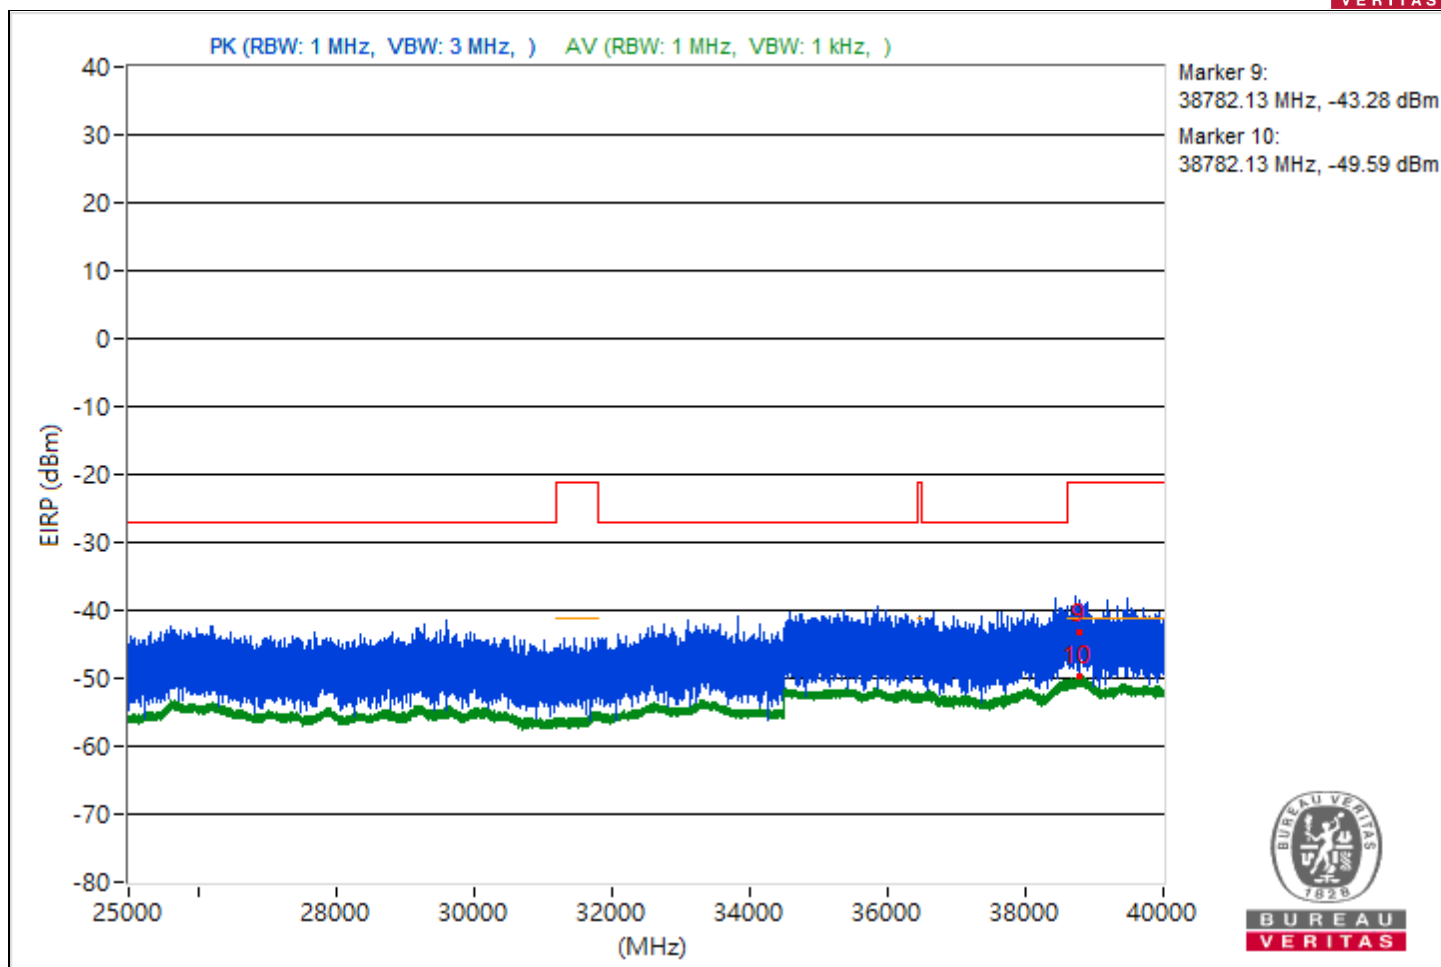



|                 |                                  |                          |                   |
|-----------------|----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone MRU | Channel                  | CH 149 : 5745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                   | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                        |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 4595.98         | 50.29 PK                | 74             | -23.71      | -53.34                  | 8.37                   | -44.97           |
| 2   | 4595.98         | 43.34 AV                | 54             | -10.66      | -60.29                  | 8.37                   | -51.92           |
| 3   | 11482.93        | 53.76 PK                | 74             | -20.24      | -49.87                  | 8.37                   | -41.5            |
| 4   | 11482.93        | 45.79 AV                | 54             | -8.21       | -57.84                  | 8.37                   | -49.47           |
| 5   | 18987           | 47.3 PK                 | 74             | -26.7       | -56.33                  | 8.37                   | -47.96           |
| 6   | 18987           | 38.78 AV                | 54             | -15.22      | -64.85                  | 8.37                   | -56.48           |
| 7   | 23834.3         | 47.92 PK                | 74             | -26.08      | -55.71                  | 8.37                   | -47.34           |
| 8   | 23834.3         | 40.75 AV                | 54             | -13.25      | -62.88                  | 8.37                   | -54.51           |
| 9   | 38748.44        | 52.05 PK                | 74             | -21.95      | -51.58                  | 8.37                   | -43.21           |
| 10  | 38748.44        | 45.51 AV                | 54             | -8.49       | -58.12                  | 8.37                   | -49.75           |

Note: Margin value = Emission Level - Limit value

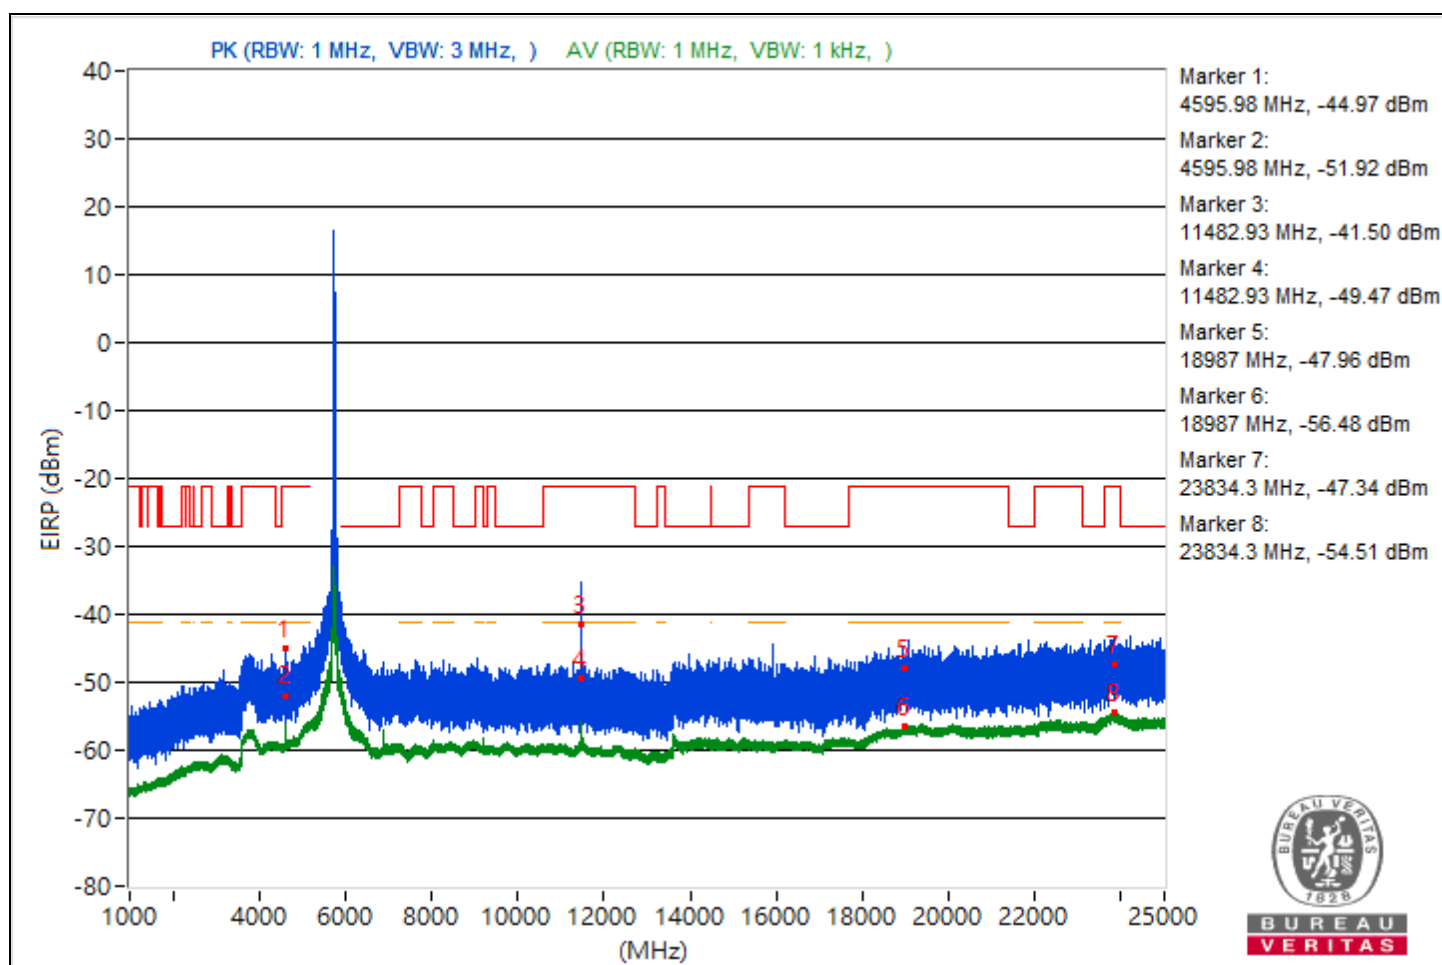

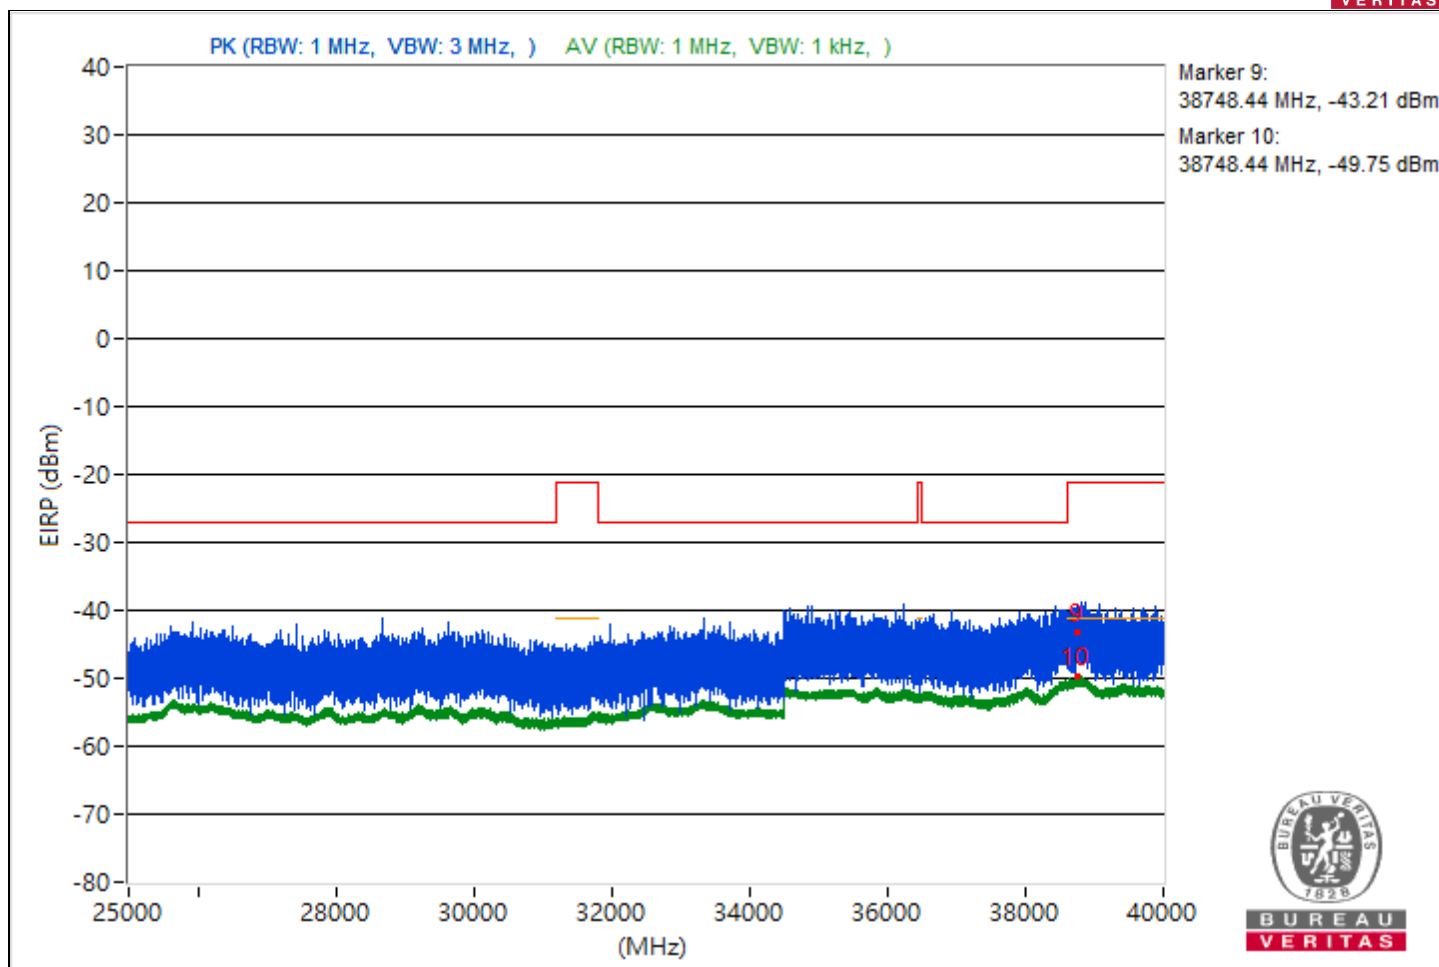



|                 |                                  |                          |                   |
|-----------------|----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone MRU | Channel                  | CH 165 : 5825 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                   | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                        |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 4659.91         | 48.93 PK                | 74             | -25.07      | -54.7                   | 8.37                   | -46.33           |
| 2   | 4659.91         | 45 AV                   | 54             | -9          | -58.63                  | 8.37                   | -50.26           |
| 3   | 11641.87        | 57.26 PK                | 74             | -16.74      | -46.37                  | 8.37                   | -38              |
| 4   | 11641.87        | 48.16 AV                | 54             | -5.84       | -55.47                  | 8.37                   | -47.1            |
| 5   | 18987.7         | 43.91 PK                | 74             | -30.09      | -59.72                  | 8.37                   | -51.35           |
| 6   | 18987.7         | 38.95 AV                | 54             | -15.05      | -64.68                  | 8.37                   | -56.31           |
| 7   | 23791.5         | 46.4 PK                 | 74             | -27.6       | -57.23                  | 8.37                   | -48.86           |
| 8   | 23791.5         | 40.9 AV                 | 54             | -13.1       | -62.73                  | 8.37                   | -54.36           |
| 9   | 38798.84        | 52.92 PK                | 74             | -21.08      | -50.71                  | 8.37                   | -42.34           |
| 10  | 38798.84        | 45.46 AV                | 54             | -8.54       | -58.17                  | 8.37                   | -49.8            |

Note: Margin value = Emission Level - Limit value

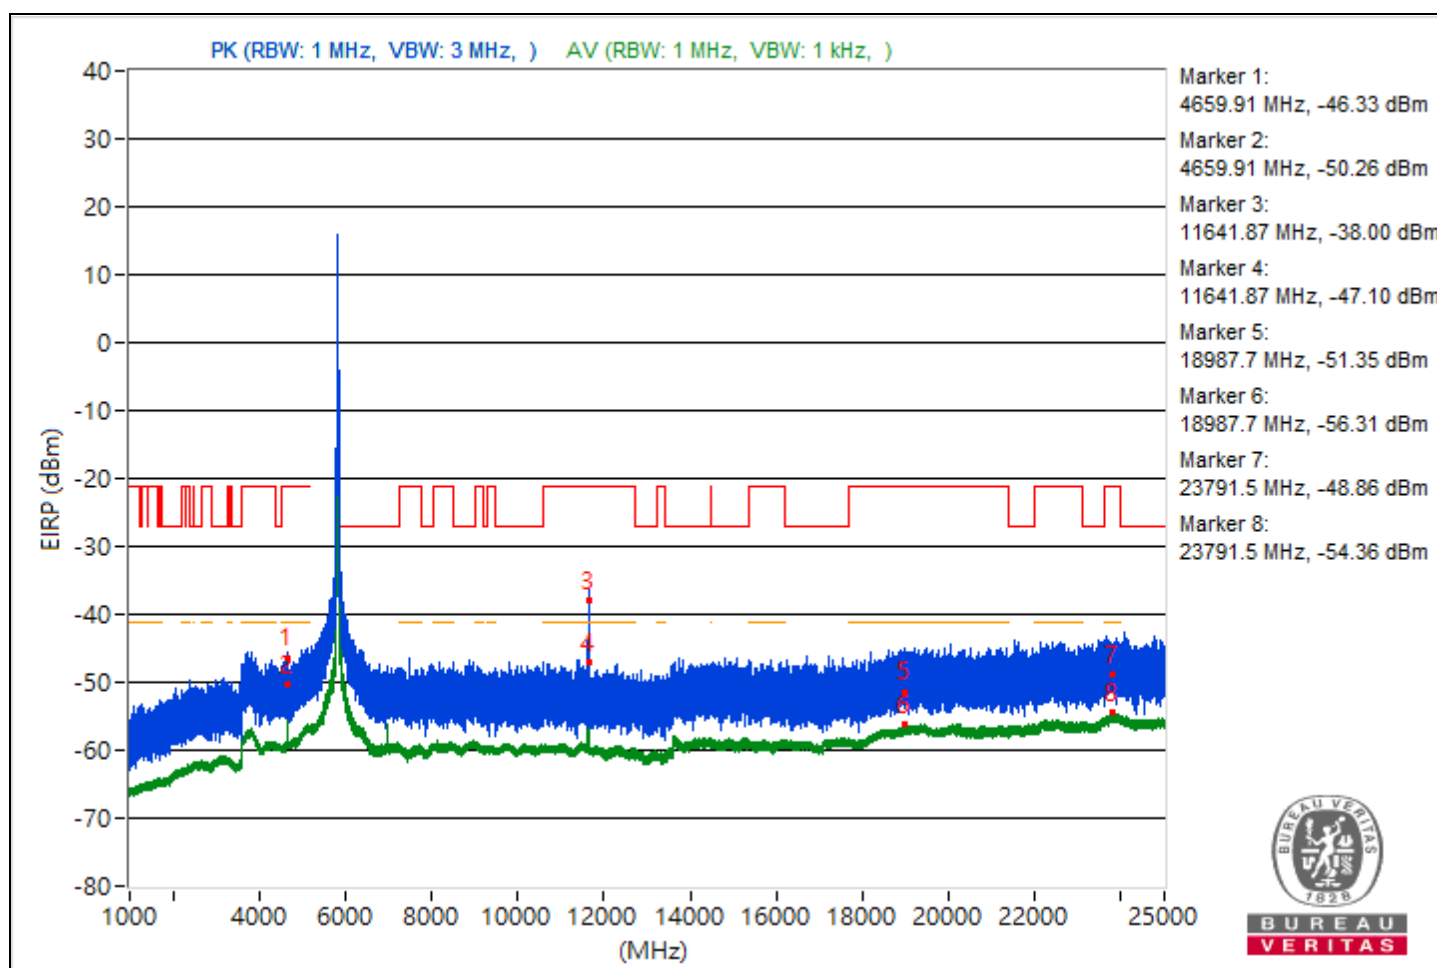

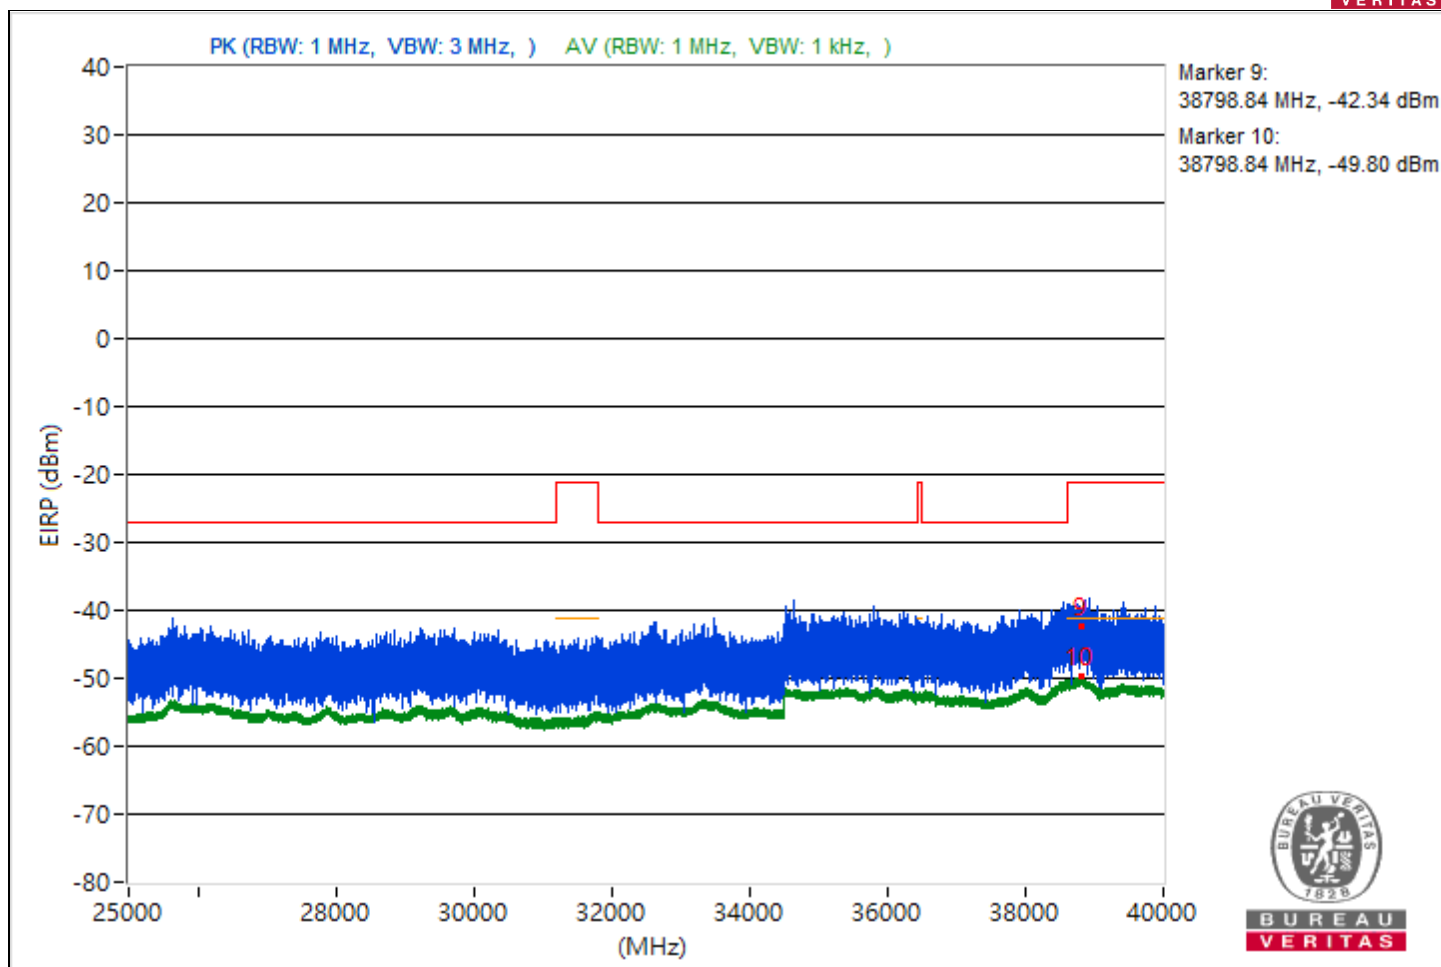



|                 |                                   |                          |                  |
|-----------------|-----------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 42 : 5210 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                    | Environmental Conditions | 19°C, 62% RH     |
| Tested By       | Henry Hsu                         |                          |                  |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 5099.51         | 55.71 PK                | 74             | -18.29      | -47.92                  | 8.37                   | -39.55           |
| 2   | 5099.51         | 46.96 AV                | 54             | -7.04       | -56.67                  | 8.37                   | -48.3            |
| 3   | 8335.91         | 47.32 PK                | 74             | -26.68      | -56.31                  | 8.37                   | -47.94           |
| 4   | 8335.91         | 42.48 AV                | 54             | -11.52      | -61.15                  | 8.37                   | -52.78           |
| 5   | 18982.4         | 50.01 PK                | 74             | -23.99      | -53.62                  | 8.37                   | -45.25           |
| 6   | 18982.4         | 38.61 AV                | 54             | -15.39      | -65.02                  | 8.37                   | -56.65           |
| 7   | 23839.1         | 46.21 PK                | 74             | -27.79      | -57.42                  | 8.37                   | -49.05           |
| 8   | 23839.1         | 40.84 AV                | 54             | -13.16      | -62.79                  | 8.37                   | -54.42           |
| 9   | 38754.13        | 52.99 PK                | 74             | -21.01      | -50.64                  | 8.37                   | -42.27           |
| 10  | 38754.13        | 45.4 AV                 | 54             | -8.6        | -58.23                  | 8.37                   | -49.86           |

Note: Margin value = Emission Level - Limit value

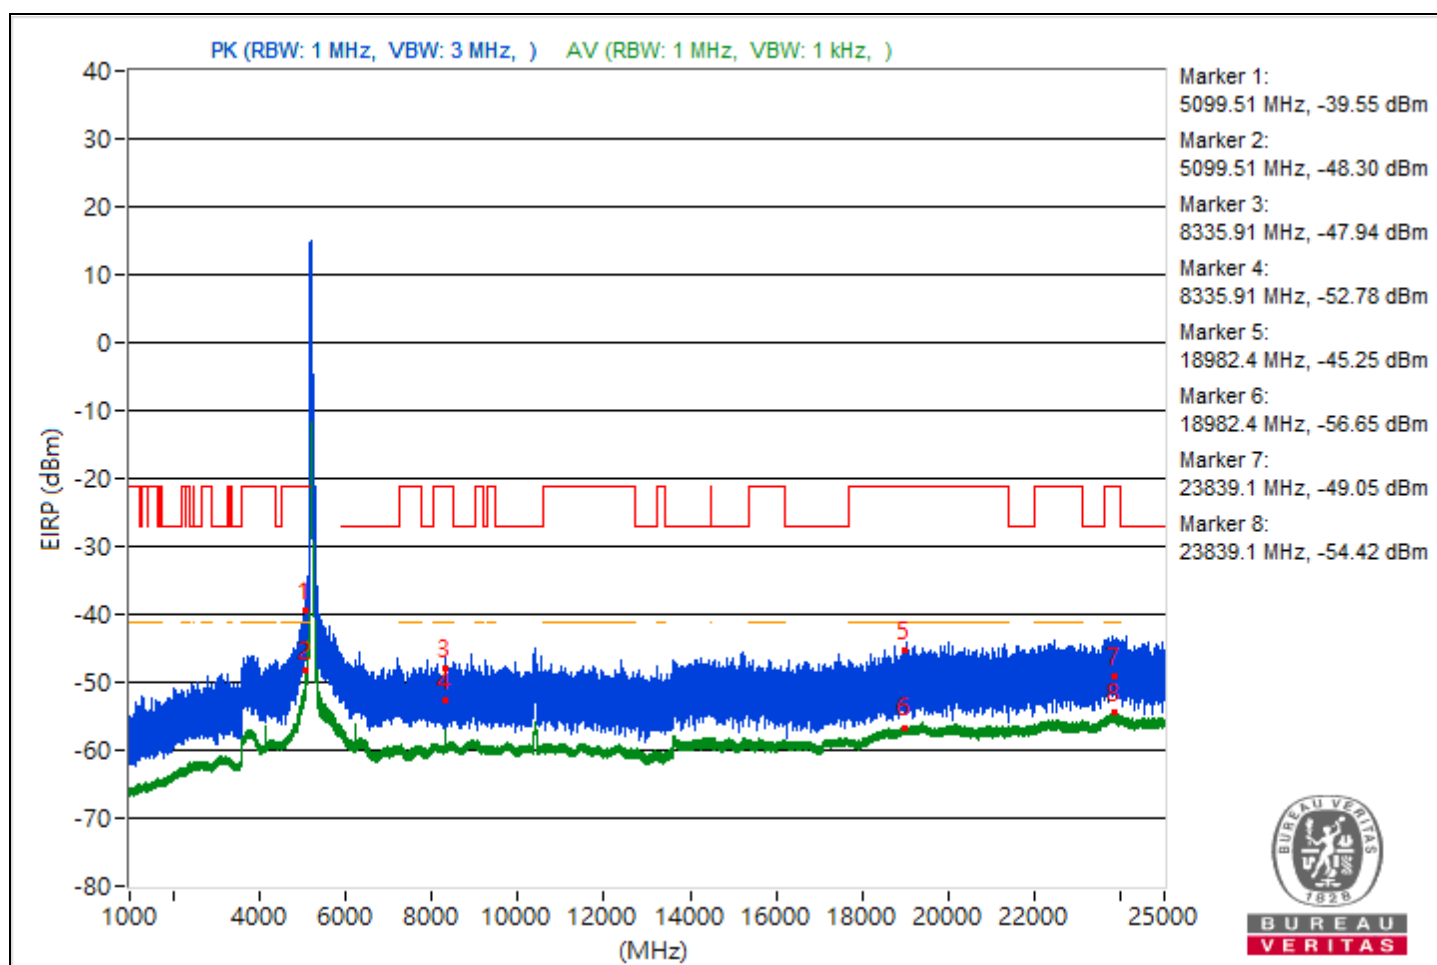


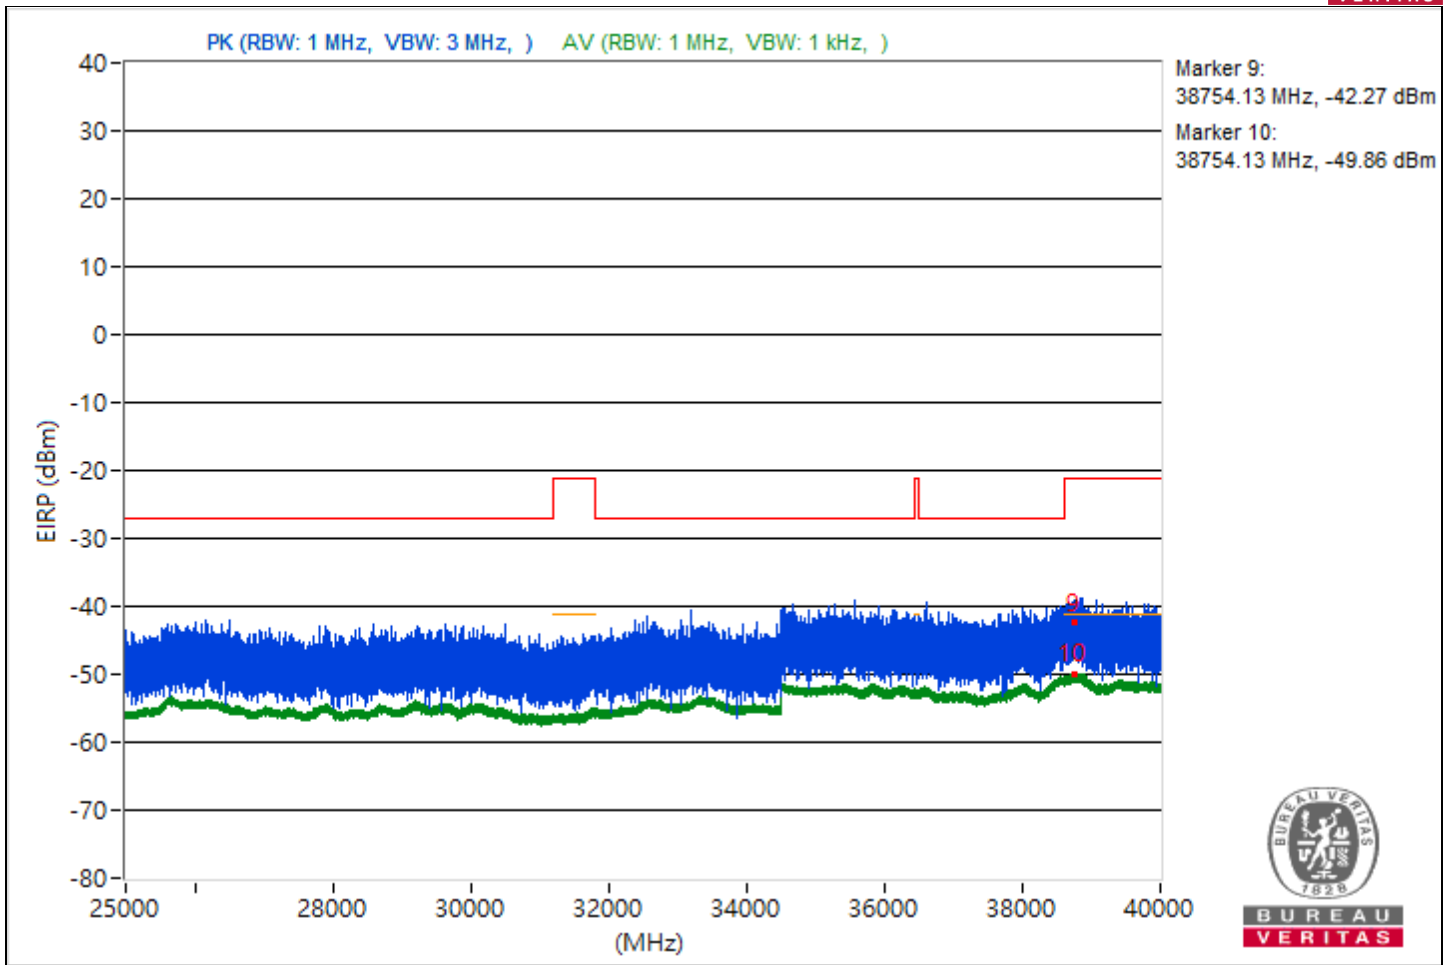


|                 |                                   |                          |                  |
|-----------------|-----------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 58 : 5290 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                    | Environmental Conditions | 19°C, 62% RH     |
| Tested By       | Henry Hsu                         |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5088            | 49.88 PK                | 74             | -24.12      | -53.75                  | 8.37                   | -45.38           |
| 2                            | 5088            | 43.58 AV                | 54             | -10.42      | -60.05                  | 8.37                   | -51.68           |
| 3                            | 8463.91         | 47.3 PK                 | 74             | -26.7       | -56.33                  | 8.37                   | -47.96           |
| 4                            | 8463.91         | 41.6 AV                 | 54             | -12.4       | -62.03                  | 8.37                   | -53.66           |
| 5                            | 18997.1         | 45.14 PK                | 74             | -28.86      | -58.49                  | 8.37                   | -50.12           |
| 6                            | 18997.1         | 38.78 AV                | 54             | -15.22      | -64.85                  | 8.37                   | -56.48           |
| 7                            | 23872.7         | 47.13 PK                | 74             | -26.87      | -56.5                   | 8.37                   | -48.13           |
| 8                            | 23872.7         | 40.93 AV                | 54             | -13.07      | -62.7                   | 8.37                   | -54.33           |
| 9                            | 38802.04        | 49.22 PK                | 74             | -24.78      | -54.41                  | 8.37                   | -46.04           |
| 10                           | 38802.04        | 45.41 AV                | 54             | -8.59       | -58.22                  | 8.37                   | -49.85           |

Note: Margin value = Emission Level - Limit value

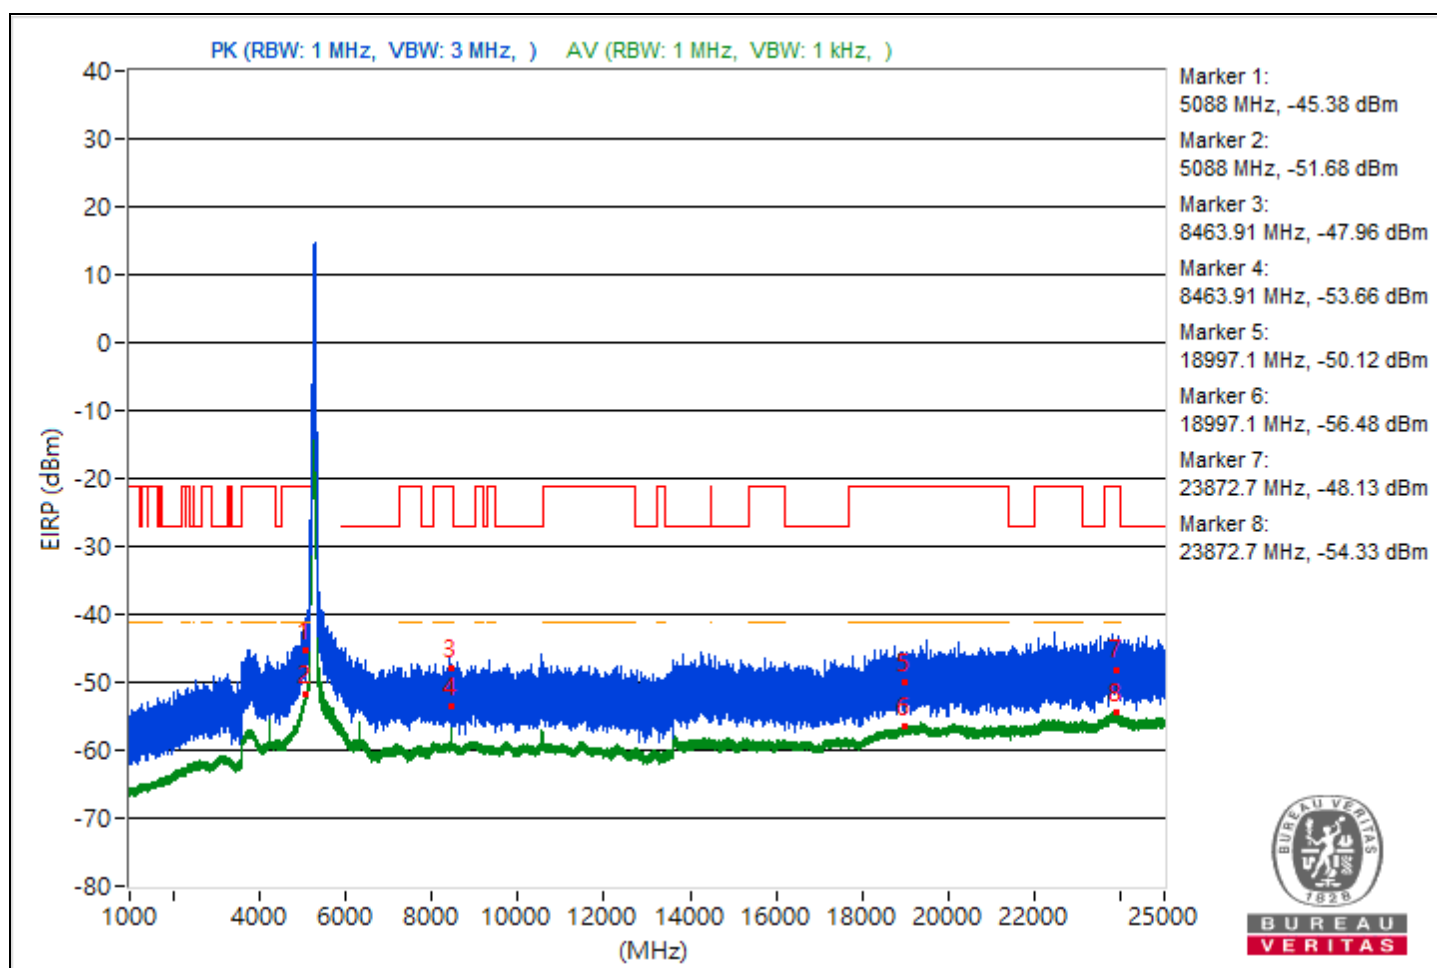

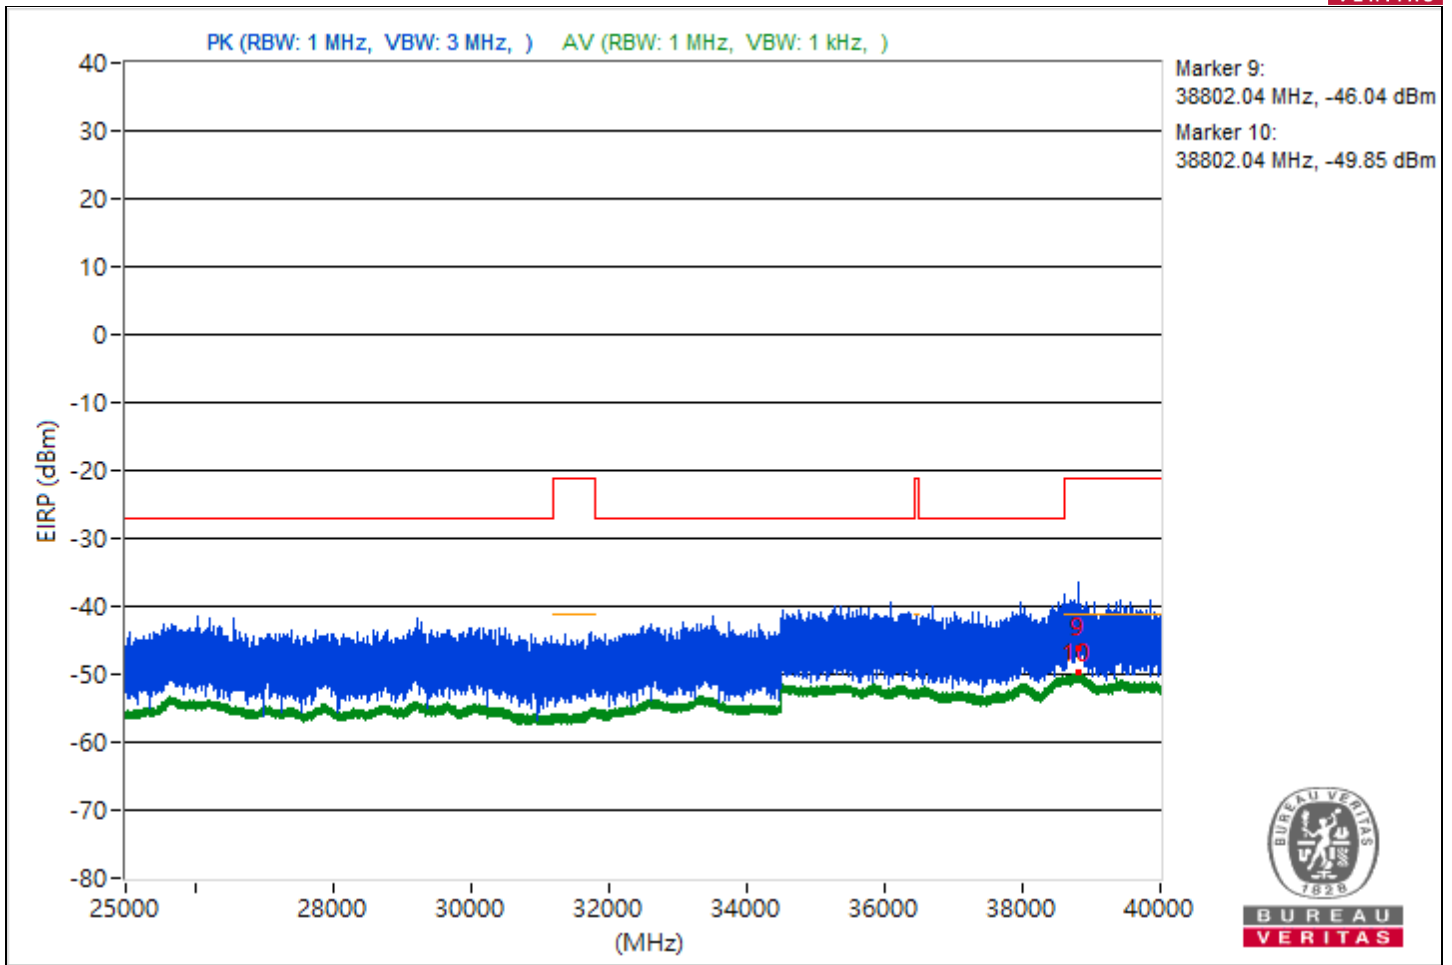



|                 |                                   |                          |                   |
|-----------------|-----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 106 : 5530 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                    | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                         |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 5096.24         | 49.72 PK                | 74             | -24.28      | -53.91                  | 8.37                   | -45.54           |
| 2   | 5096.24         | 40.82 AV                | 54             | -13.18      | -62.81                  | 8.37                   | -54.44           |
| 3   | 11041.42        | 44.06 PK                | 74             | -29.94      | -59.57                  | 8.37                   | -51.2            |
| 4   | 11041.42        | 37.72 AV                | 54             | -16.28      | -65.91                  | 8.37                   | -57.54           |
| 5   | 18970.4         | 44.03 PK                | 74             | -29.97      | -59.6                   | 8.37                   | -51.23           |
| 6   | 18970.4         | 38.64 AV                | 54             | -15.36      | -64.99                  | 8.37                   | -56.62           |
| 7   | 23852.9         | 50.05 PK                | 74             | -23.95      | -53.58                  | 8.37                   | -45.21           |
| 8   | 23852.9         | 40.75 AV                | 54             | -13.25      | -62.88                  | 8.37                   | -54.51           |
| 9   | 38762.49        | 50.15 PK                | 74             | -23.85      | -53.48                  | 8.37                   | -45.11           |
| 10  | 38762.49        | 45.42 AV                | 54             | -8.58       | -58.21                  | 8.37                   | -49.84           |

Note: Margin value = Emission Level - Limit value

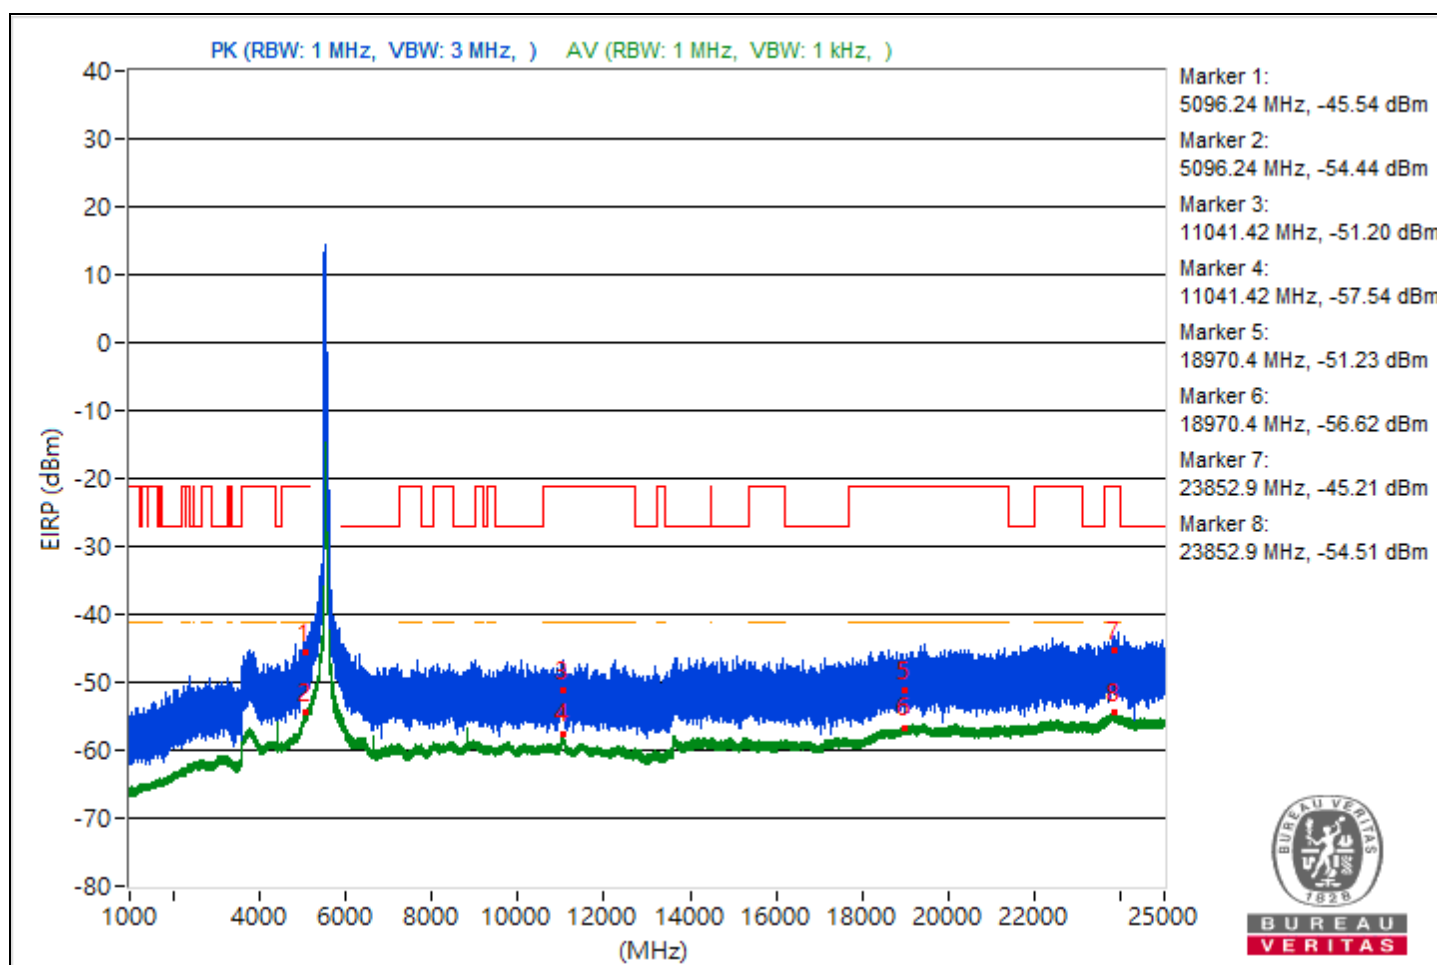

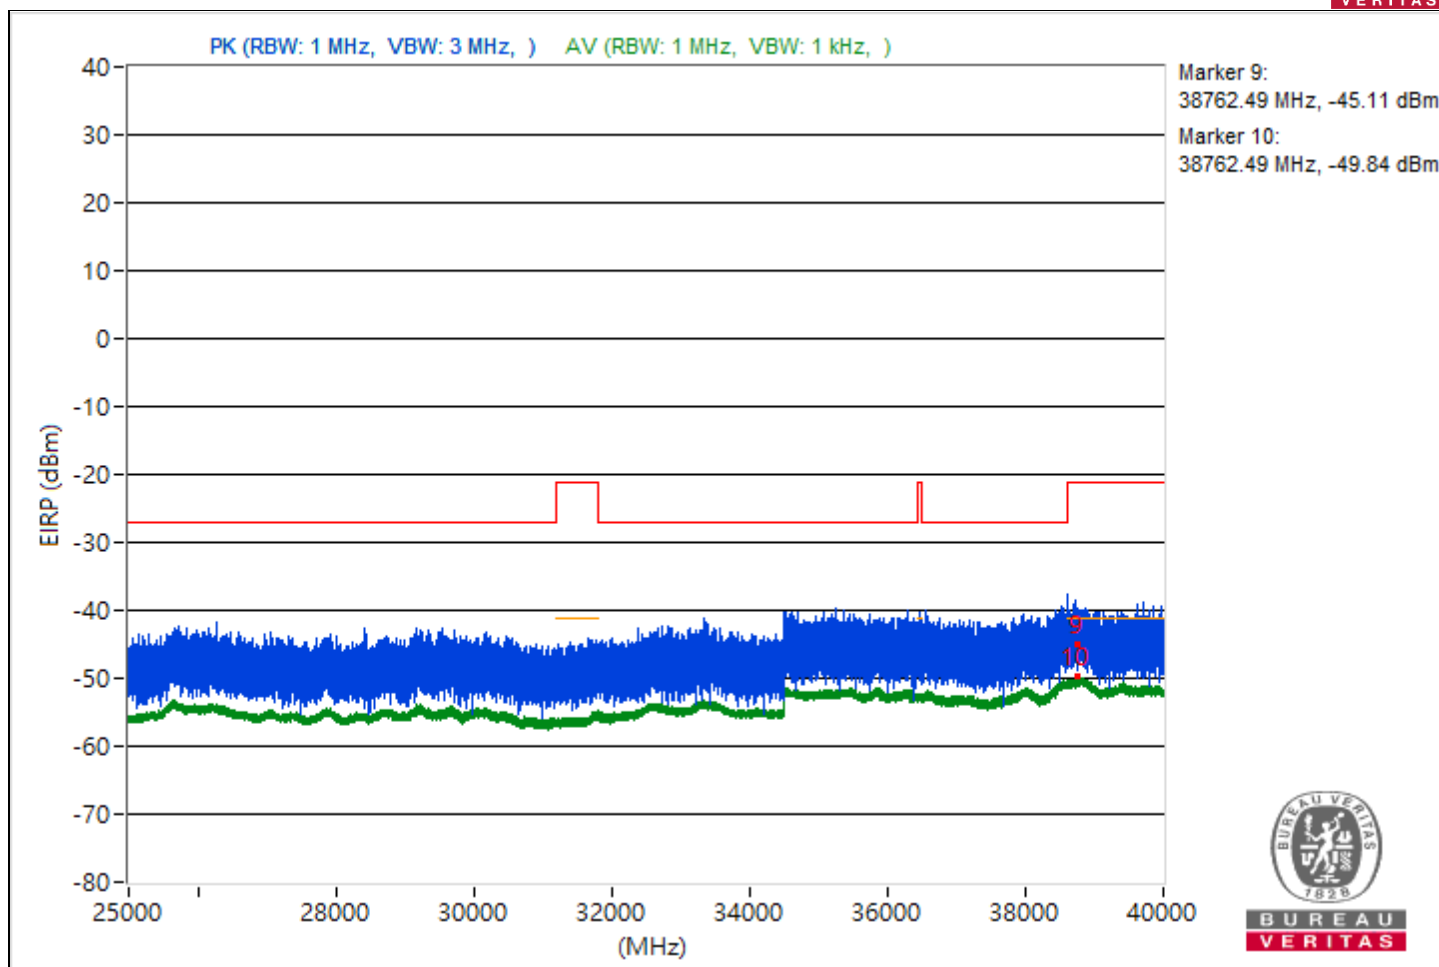



|                 |                                   |                          |                   |
|-----------------|-----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 122 : 5610 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                    | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                         |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 5094.61         | 47.52 PK                | 74             | -26.48      | -56.11                  | 8.37                   | -47.74           |
| 2   | 5094.61         | 40.27 AV                | 54             | -13.73      | -63.36                  | 8.37                   | -54.99           |
| 3   | 11210.84        | 44.3 PK                 | 74             | -29.7       | -59.33                  | 8.37                   | -50.96           |
| 4   | 11210.84        | 38.51 AV                | 54             | -15.49      | -65.12                  | 8.37                   | -56.75           |
| 5   | 18968.3         | 44.72 PK                | 74             | -29.28      | -58.91                  | 8.37                   | -50.54           |
| 6   | 18968.3         | 38.63 AV                | 54             | -15.37      | -65                     | 8.37                   | -56.63           |
| 7   | 23824.7         | 46.56 PK                | 74             | -27.44      | -57.07                  | 8.37                   | -48.7            |
| 8   | 23824.7         | 40.71 AV                | 54             | -13.29      | -62.92                  | 8.37                   | -54.55           |
| 9   | 38813.6         | 54.12 PK                | 74             | -19.88      | -49.51                  | 8.37                   | -41.14           |
| 10  | 38813.6         | 45.37 AV                | 54             | -8.63       | -58.26                  | 8.37                   | -49.89           |

Note: Margin value = Emission Level - Limit value

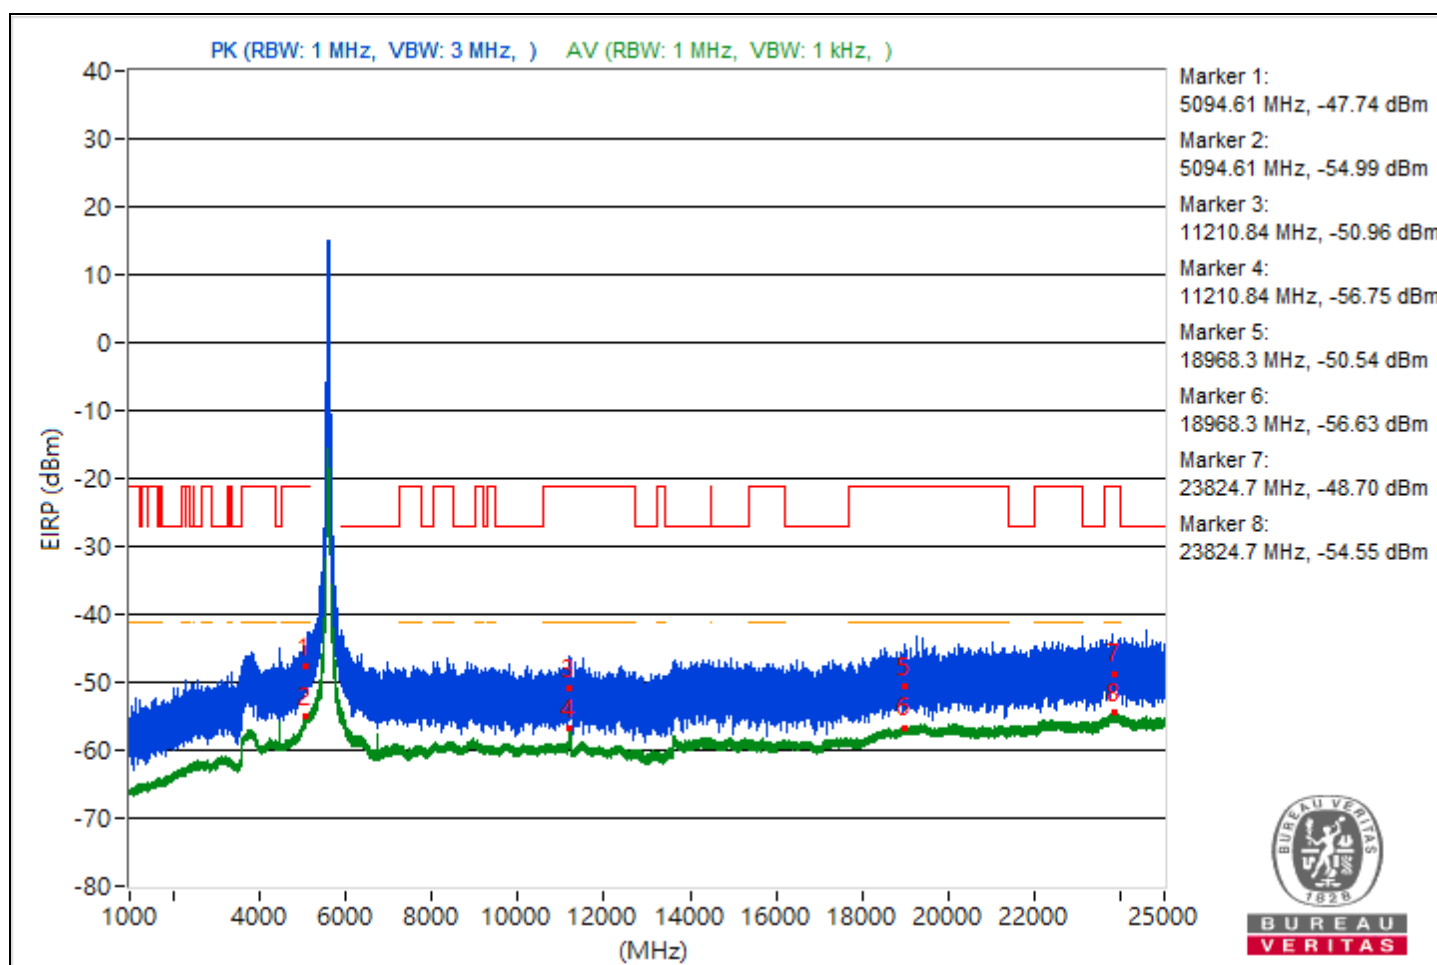

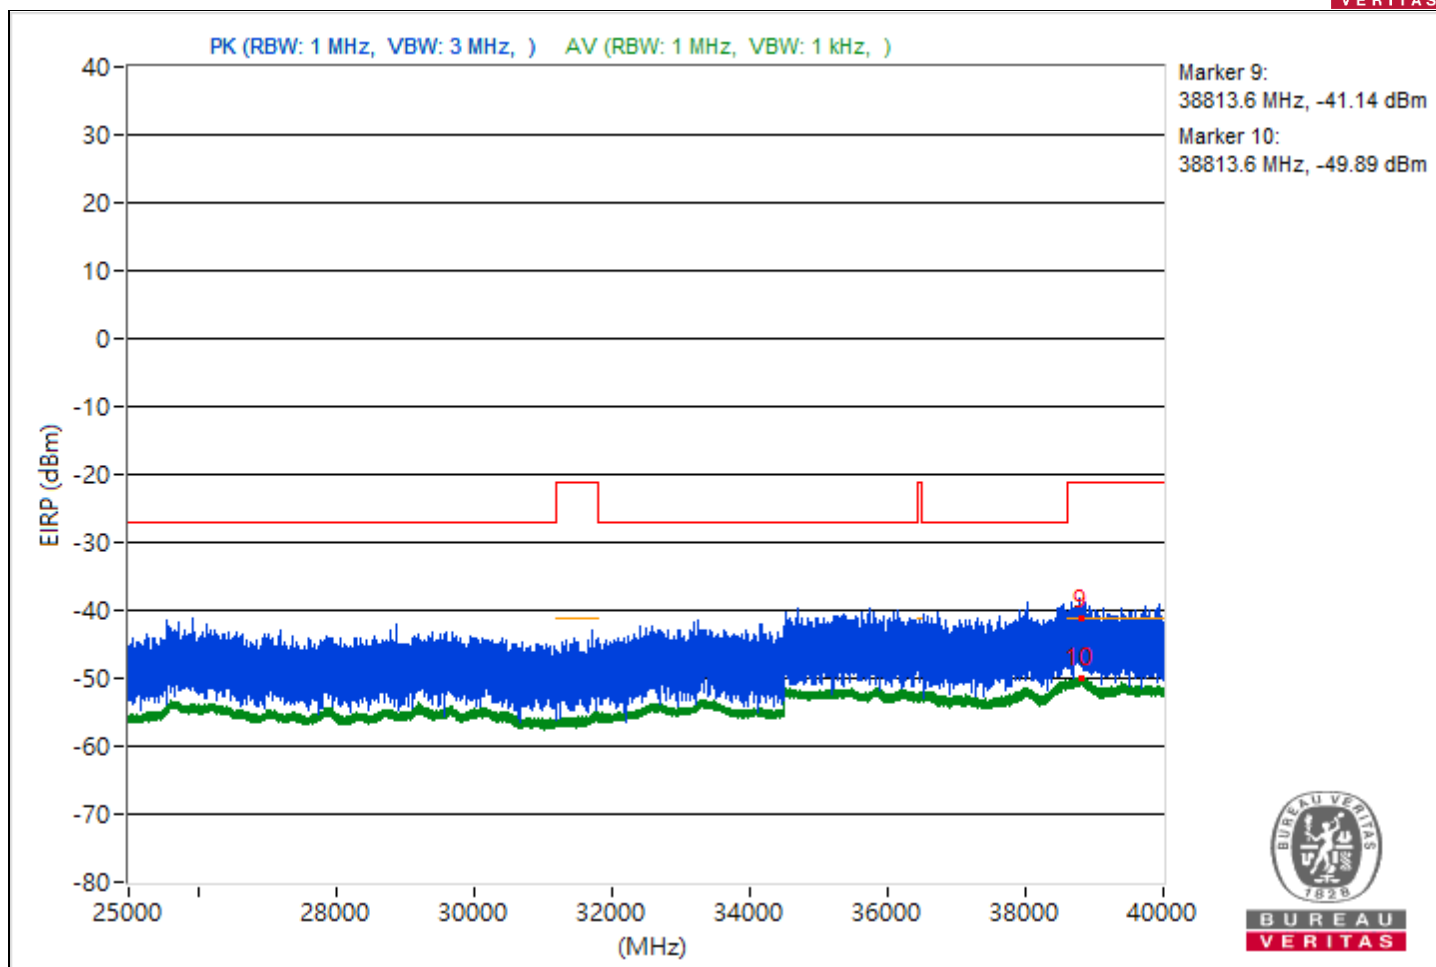



|                 |                                   |                          |                   |
|-----------------|-----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 138 : 5690 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                    | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                         |                          |                   |

#### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 4551.96         | 49.63 PK                | 74             | -24.37      | -54                     | 8.37                   | -45.63           |
| 2   | 4551.96         | 43.49 AV                | 54             | -10.51      | -60.14                  | 8.37                   | -51.77           |
| 3   | 9029.07         | 44.93 PK                | 74             | -29.07      | -58.7                   | 8.37                   | -50.33           |
| 4   | 9029.07         | 36.6 AV                 | 54             | -17.4       | -67.03                  | 8.37                   | -58.66           |
| 5   | 18978.9         | 45.9 PK                 | 74             | -28.1       | -57.73                  | 8.37                   | -49.36           |
| 6   | 18978.9         | 38.76 AV                | 54             | -15.24      | -64.87                  | 8.37                   | -56.5            |
| 7   | 23825.6         | 46.43 PK                | 74             | -27.57      | -57.2                   | 8.37                   | -48.83           |
| 8   | 23825.6         | 40.77 AV                | 54             | -13.23      | -62.86                  | 8.37                   | -54.49           |
| 9   | 38812.8         | 51.43 PK                | 74             | -22.57      | -52.2                   | 8.37                   | -43.83           |
| 10  | 38812.8         | 45.57 AV                | 54             | -8.43       | -58.06                  | 8.37                   | -49.69           |

Note: Margin value = Emission Level - Limit value

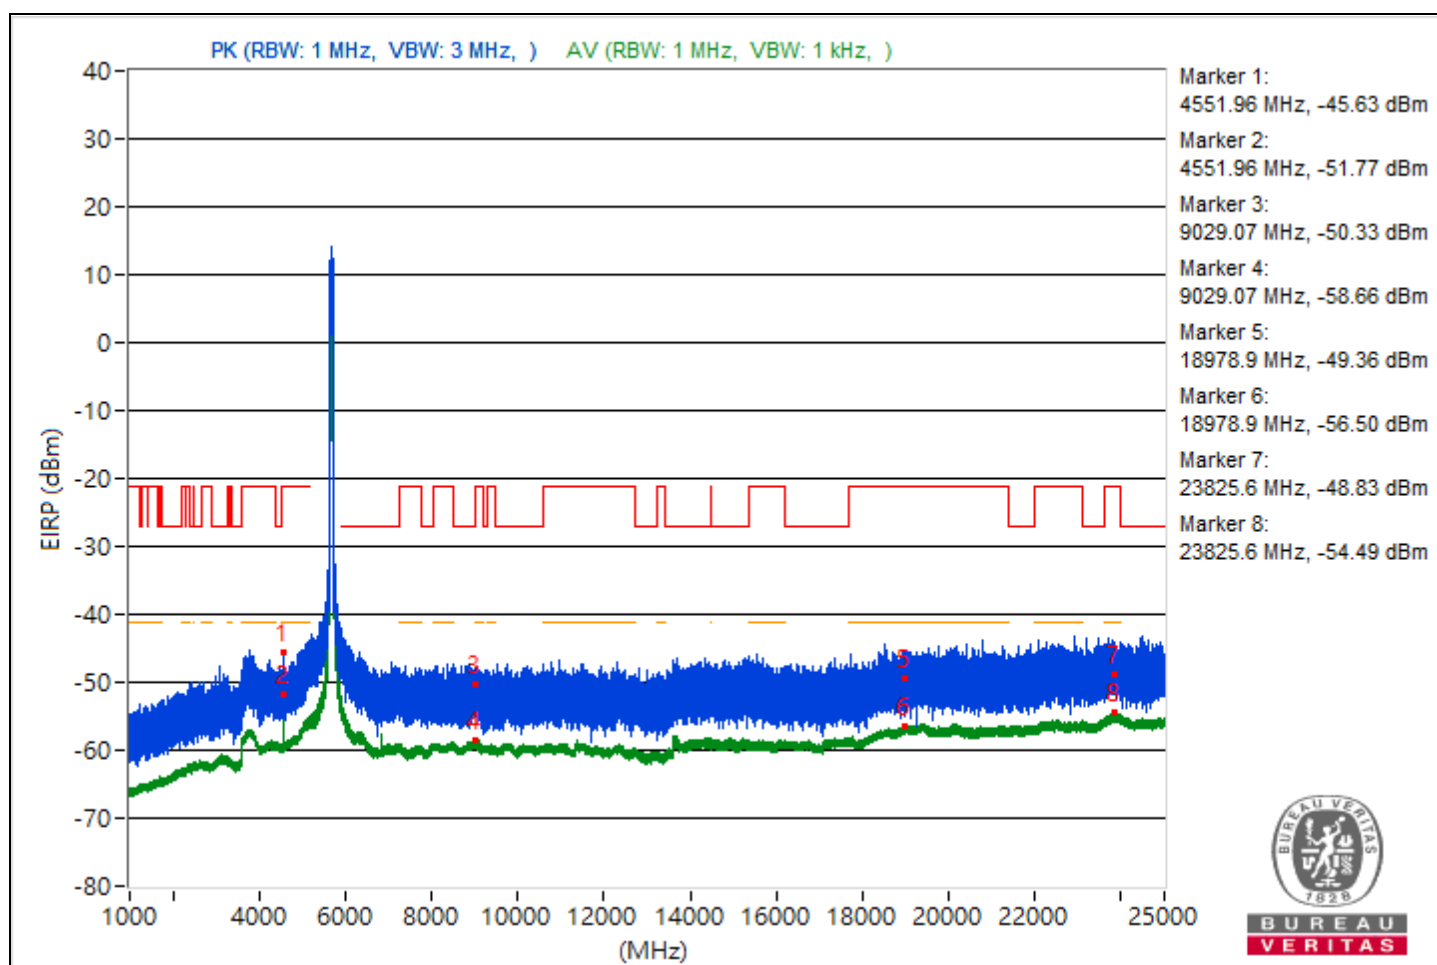

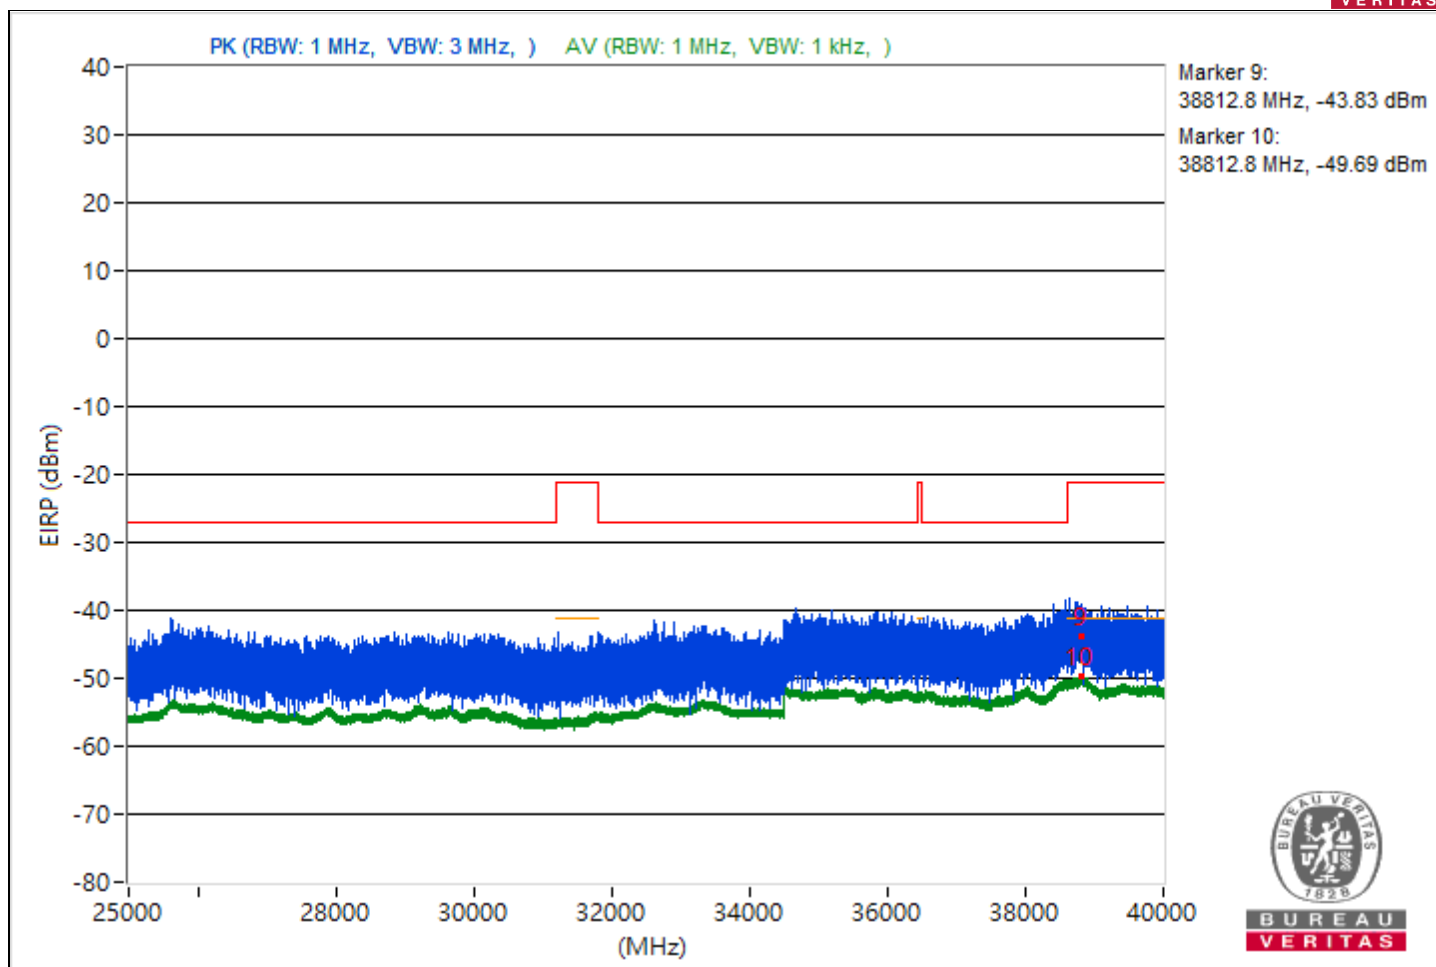



|                 |                                   |                          |                   |
|-----------------|-----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 155 : 5775 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                    | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                         |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 4620.09         | 48.62 PK                | 74             | -25.38      | -55.01                  | 8.37                   | -46.64           |
| 2   | 4620.09         | 43.48 AV                | 54             | -10.52      | -60.15                  | 8.37                   | -51.78           |
| 3   | 11549.96        | 42.9 PK                 | 74             | -31.1       | -60.73                  | 8.37                   | -52.36           |
| 4   | 11549.96        | 38.61 AV                | 54             | -15.39      | -65.02                  | 8.37                   | -56.65           |
| 5   | 18979.2         | 45.94 PK                | 74             | -28.06      | -57.69                  | 8.37                   | -49.32           |
| 6   | 18979.2         | 38.64 AV                | 54             | -15.36      | -64.99                  | 8.37                   | -56.62           |
| 7   | 23796.1         | 48.21 PK                | 74             | -25.79      | -55.42                  | 8.37                   | -47.05           |
| 8   | 23796.1         | 40.74 AV                | 54             | -13.26      | -62.89                  | 8.37                   | -54.52           |
| 9   | 38798.04        | 51.11 PK                | 74             | -22.89      | -52.52                  | 8.37                   | -44.15           |
| 10  | 38798.04        | 45.51 AV                | 54             | -8.49       | -58.12                  | 8.37                   | -49.75           |

Note: Margin value = Emission Level - Limit value

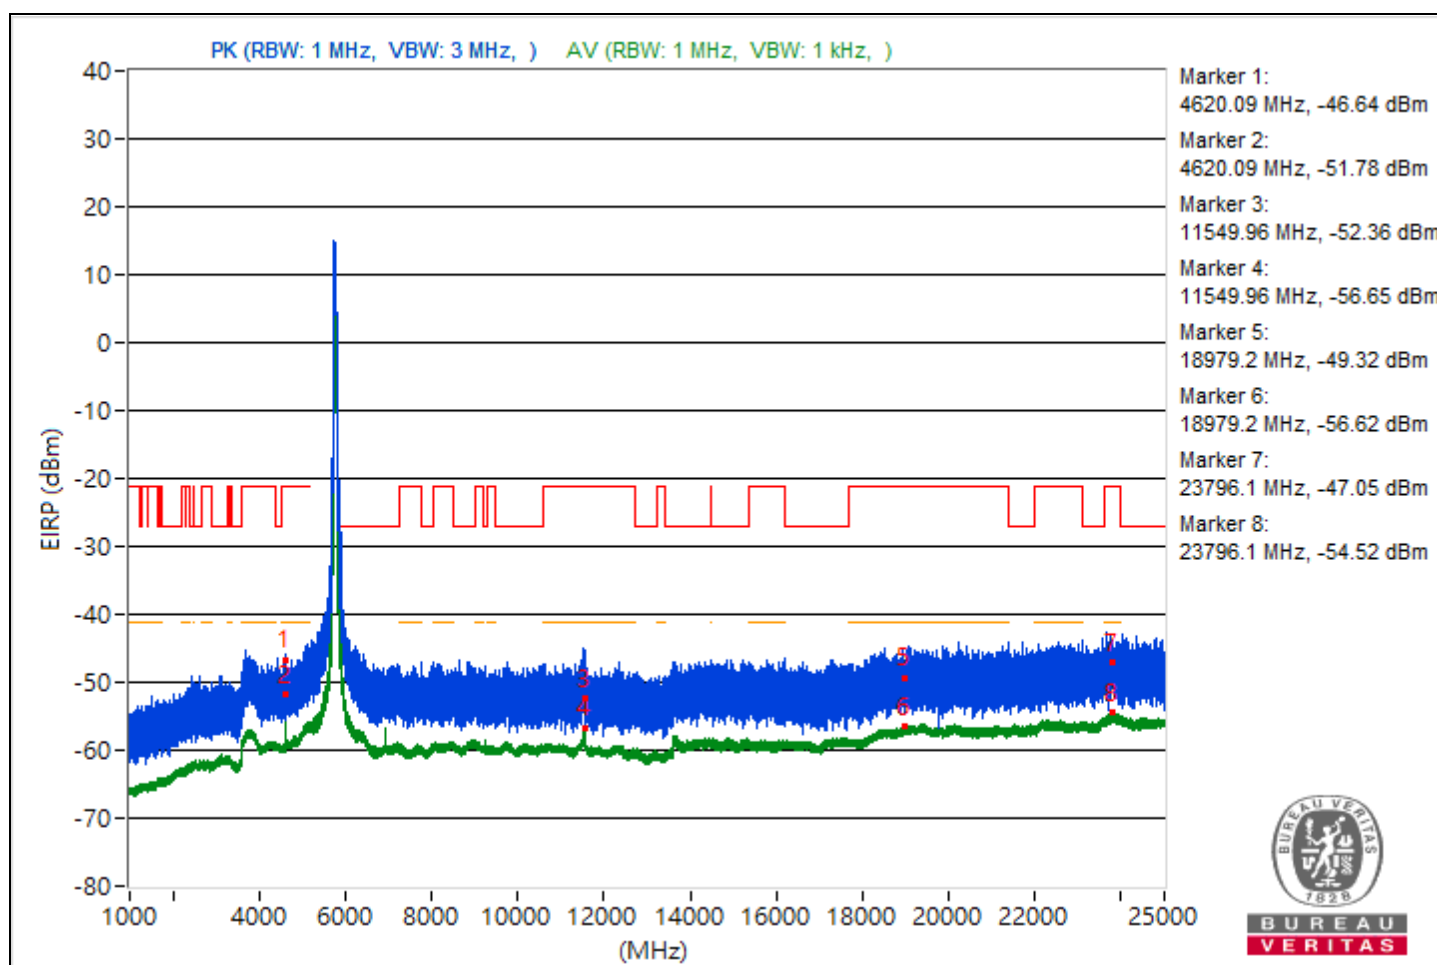

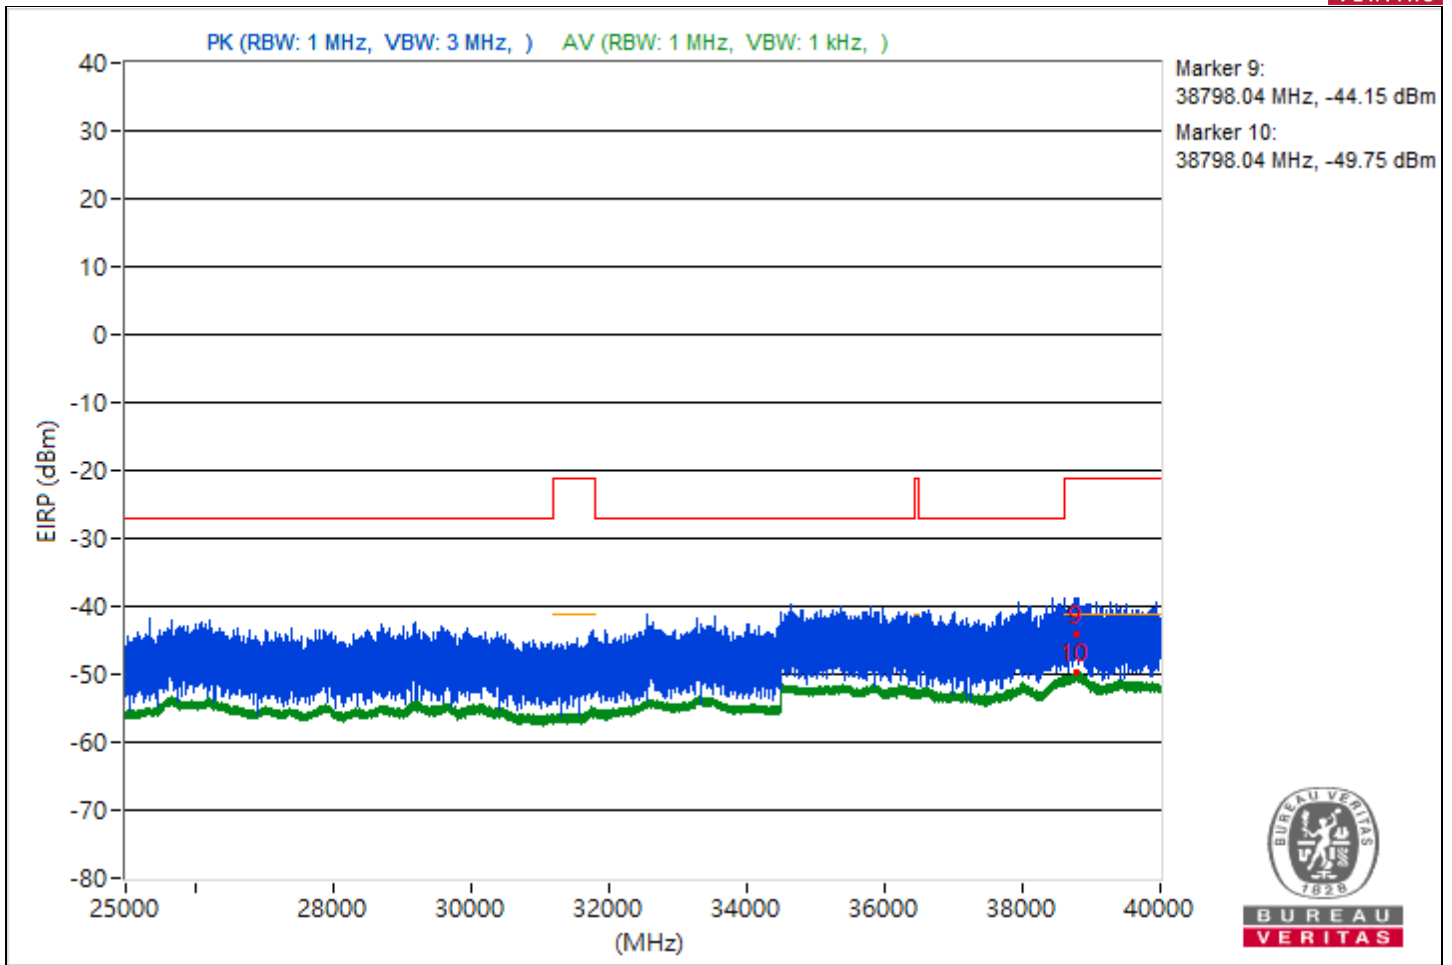



|                 |                                    |                          |                  |
|-----------------|------------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160) 996+484-tone MRU | Channel                  | CH 50 : 5250 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                     | Environmental Conditions | 19°C, 62% RH     |
| Tested By       | Henry Hsu                          |                          |                  |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 5097.33         | 52.27 PK                | 74             | -21.73      | -51.36                  | 8.37                   | -42.99           |
| 2   | 5097.33         | 46.13 AV                | 54             | -7.87       | -57.5                   | 8.37                   | -49.13           |
| 3   | 8400            | 47.76 PK                | 74             | -26.24      | -55.87                  | 8.37                   | -47.5            |
| 4   | 8400            | 42.7 AV                 | 54             | -11.3       | -60.93                  | 8.37                   | -52.56           |
| 5   | 18975           | 45.47 PK                | 74             | -28.53      | -58.16                  | 8.37                   | -49.79           |
| 6   | 18975           | 38.67 AV                | 54             | -15.33      | -64.96                  | 8.37                   | -56.59           |
| 7   | 23785.5         | 49.64 PK                | 74             | -24.36      | -53.99                  | 8.37                   | -45.62           |
| 8   | 23785.5         | 40.72 AV                | 54             | -13.28      | -62.91                  | 8.37                   | -54.54           |
| 9   | 38795.73        | 50.94 PK                | 74             | -23.06      | -52.69                  | 8.37                   | -44.32           |
| 10  | 38795.73        | 45.38 AV                | 54             | -8.62       | -58.25                  | 8.37                   | -49.88           |

Note: Margin value = Emission Level - Limit value

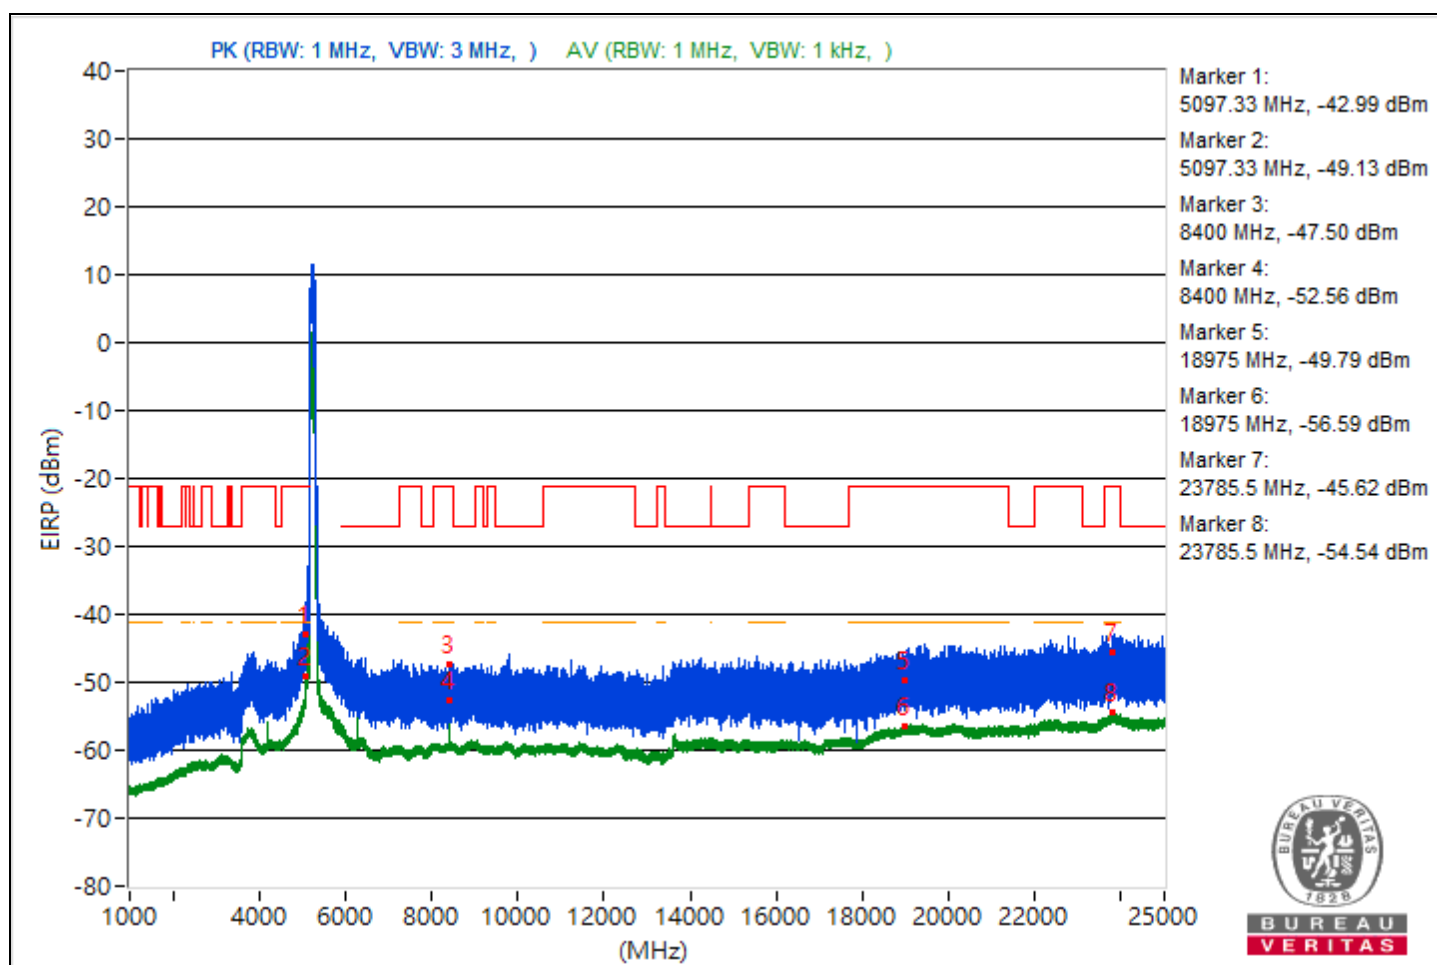

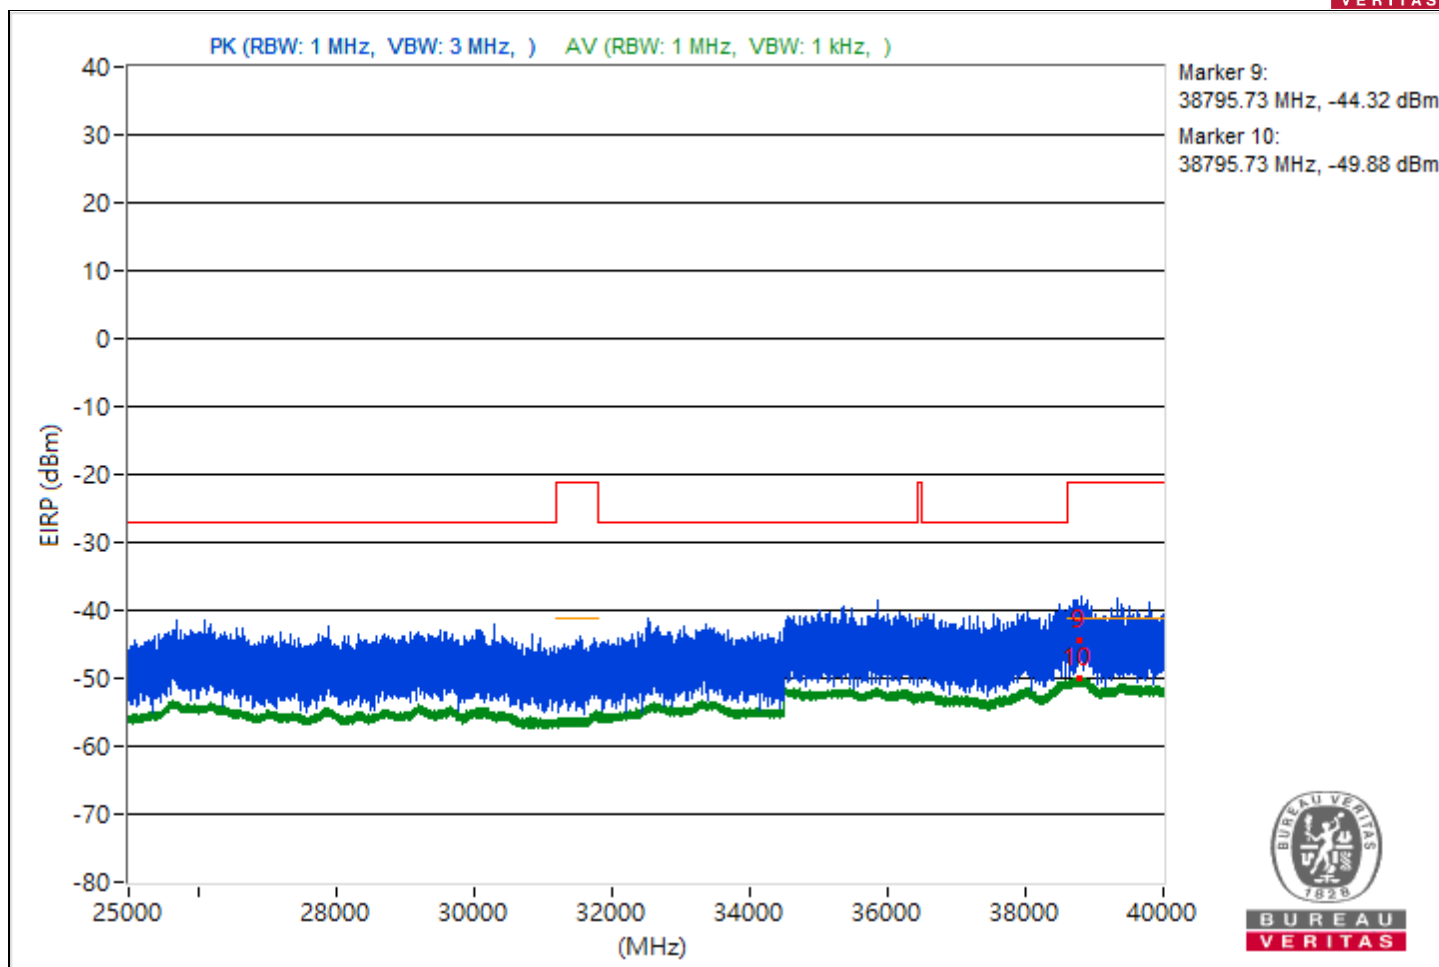



|                 |                                    |                          |                   |
|-----------------|------------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160) 996+484-tone MRU | Channel                  | CH 114 : 5570 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                     | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                          |                          |                   |

#### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 5090.96         | 50.19 PK                | 74             | -23.81      | -53.44                  | 8.37                   | -45.07           |
| 2   | 5090.96         | 40.82 AV                | 54             | -13.18      | -62.81                  | 8.37                   | -54.44           |
| 3   | 9025.78         | 45 PK                   | 74             | -29         | -58.63                  | 8.37                   | -50.26           |
| 4   | 9025.78         | 36.61 AV                | 54             | -17.39      | -67.02                  | 8.37                   | -58.65           |
| 5   | 18989.8         | 46.23 PK                | 74             | -27.77      | -57.4                   | 8.37                   | -49.03           |
| 6   | 18989.8         | 38.6 AV                 | 54             | -15.4       | -65.03                  | 8.37                   | -56.66           |
| 7   | 23801.2         | 47.98 PK                | 74             | -26.02      | -55.65                  | 8.37                   | -47.28           |
| 8   | 23801.2         | 40.76 AV                | 54             | -13.24      | -62.87                  | 8.37                   | -54.5            |
| 9   | 38837.33        | 52.84 PK                | 74             | -21.16      | -50.79                  | 8.37                   | -42.42           |
| 10  | 38837.33        | 45.5 AV                 | 54             | -8.5        | -58.13                  | 8.37                   | -49.76           |

Note: Margin value = Emission Level - Limit value

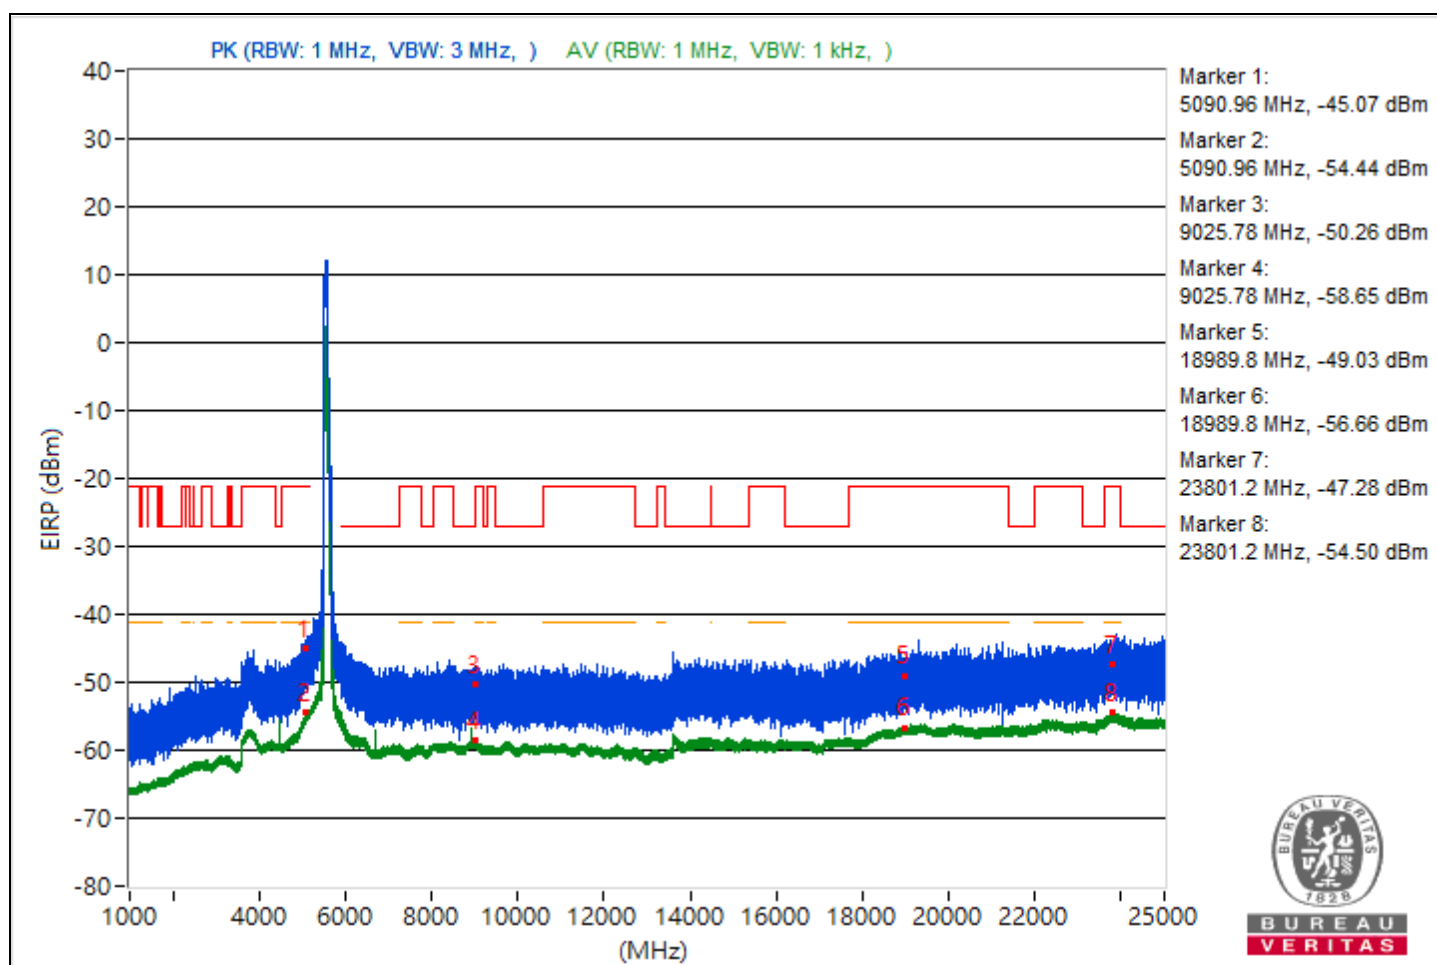

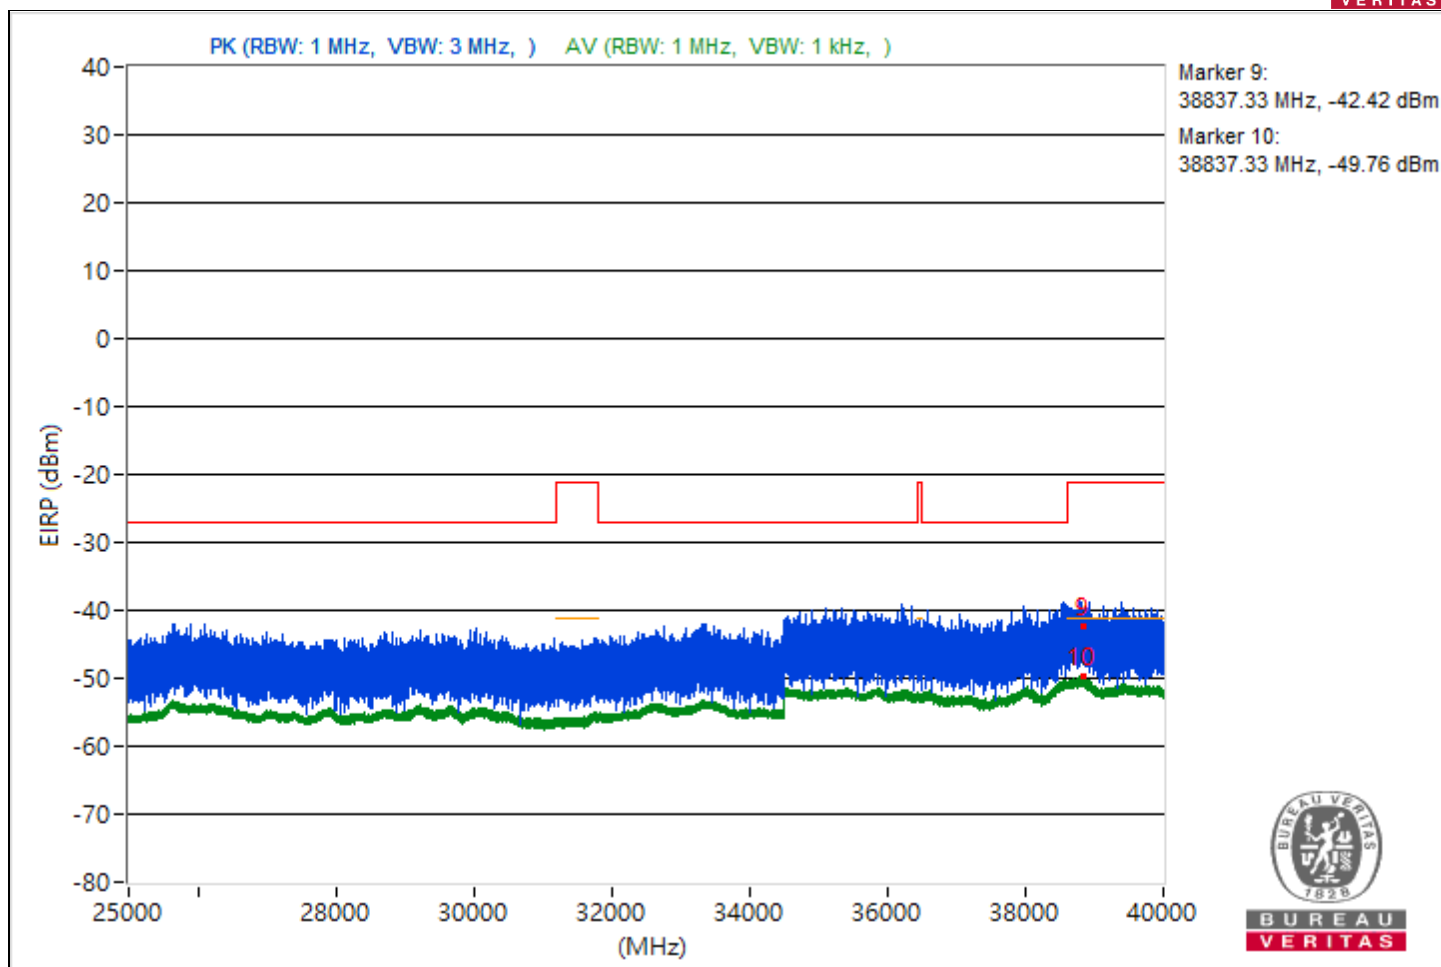



|                 |                                        |                          |                  |
|-----------------|----------------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160) 996+484+242-tone MRU | Channel                  | CH 50 : 5250 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                         | Environmental Conditions | 19°C, 62% RH     |
| Tested By       | Henry Hsu                              |                          |                  |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 5099.82         | 53.87 PK                | 74             | -20.13      | -49.76                  | 8.37                   | -41.39           |
| 2   | 5099.82         | 46.9 AV                 | 54             | -7.1        | -56.73                  | 8.37                   | -48.36           |
| 3   | 8400            | 47.28 PK                | 74             | -26.72      | -56.35                  | 8.37                   | -47.98           |
| 4   | 8400            | 42.83 AV                | 54             | -11.17      | -60.8                   | 8.37                   | -52.43           |
| 5   | 18978.3         | 43.5 PK                 | 74             | -30.5       | -60.13                  | 8.37                   | -51.76           |
| 6   | 18978.3         | 38.65 AV                | 54             | -15.35      | -64.98                  | 8.37                   | -56.61           |
| 7   | 23826.4         | 46.34 PK                | 74             | -27.66      | -57.29                  | 8.37                   | -48.92           |
| 8   | 23826.4         | 40.81 AV                | 54             | -13.19      | -62.82                  | 8.37                   | -54.45           |
| 9   | 38782.84        | 47.8 PK                 | 74             | -26.2       | -55.83                  | 8.37                   | -47.46           |
| 10  | 38782.84        | 45.38 AV                | 54             | -8.62       | -58.25                  | 8.37                   | -49.88           |

Note: Margin value = Emission Level - Limit value

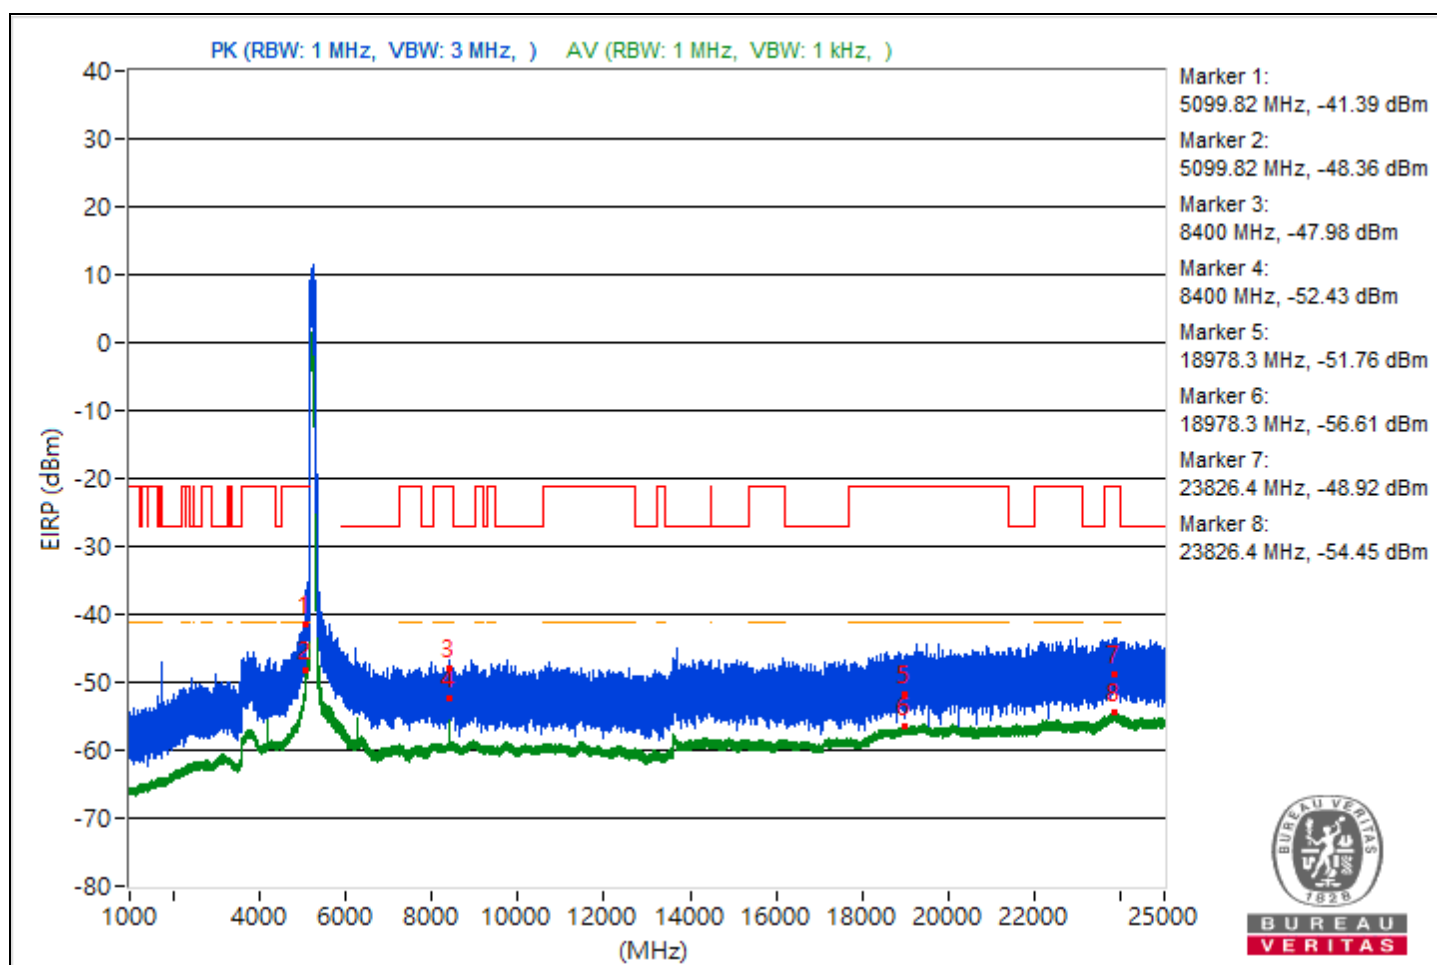

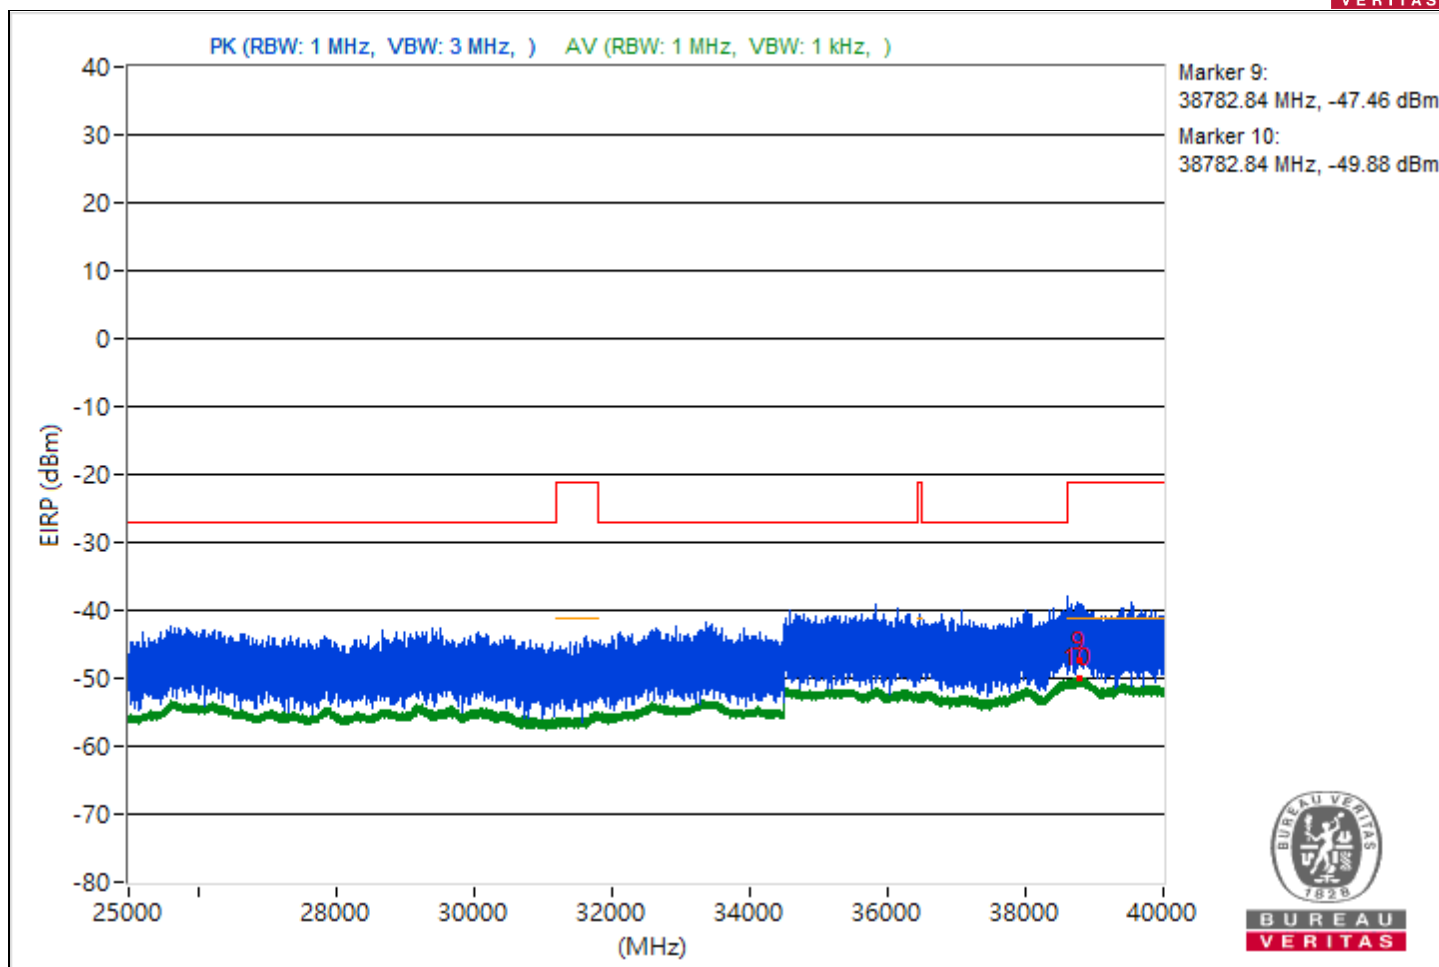



|                 |                                        |                          |                   |
|-----------------|----------------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160) 996+484+242-tone MRU | Channel                  | CH 114 : 5570 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                         | Environmental Conditions | 19°C, 62% RH      |
| Tested By       | Henry Hsu                              |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 5099.28         | 48.77 PK                | 74             | -25.23      | -54.86                  | 8.37                   | -46.49           |
| 2   | 5099.28         | 40.69 AV                | 54             | -13.31      | -62.94                  | 8.37                   | -54.57           |
| 3   | 9020.8          | 44.52 PK                | 74             | -29.48      | -59.11                  | 8.37                   | -50.74           |
| 4   | 9020.8          | 36.6 AV                 | 54             | -17.4       | -67.03                  | 8.37                   | -58.66           |
| 5   | 18993.1         | 44.61 PK                | 74             | -29.39      | -59.02                  | 8.37                   | -50.65           |
| 6   | 18993.1         | 38.77 AV                | 54             | -15.23      | -64.86                  | 8.37                   | -56.49           |
| 7   | 23783.1         | 47.74 PK                | 74             | -26.26      | -55.89                  | 8.37                   | -47.52           |
| 8   | 23783.1         | 40.81 AV                | 54             | -13.19      | -62.82                  | 8.37                   | -54.45           |
| 9   | 38832.98        | 52.47 PK                | 74             | -21.53      | -51.16                  | 8.37                   | -42.79           |
| 10  | 38832.98        | 45.52 AV                | 54             | -8.48       | -58.11                  | 8.37                   | -49.74           |

Note: Margin value = Emission Level - Limit value

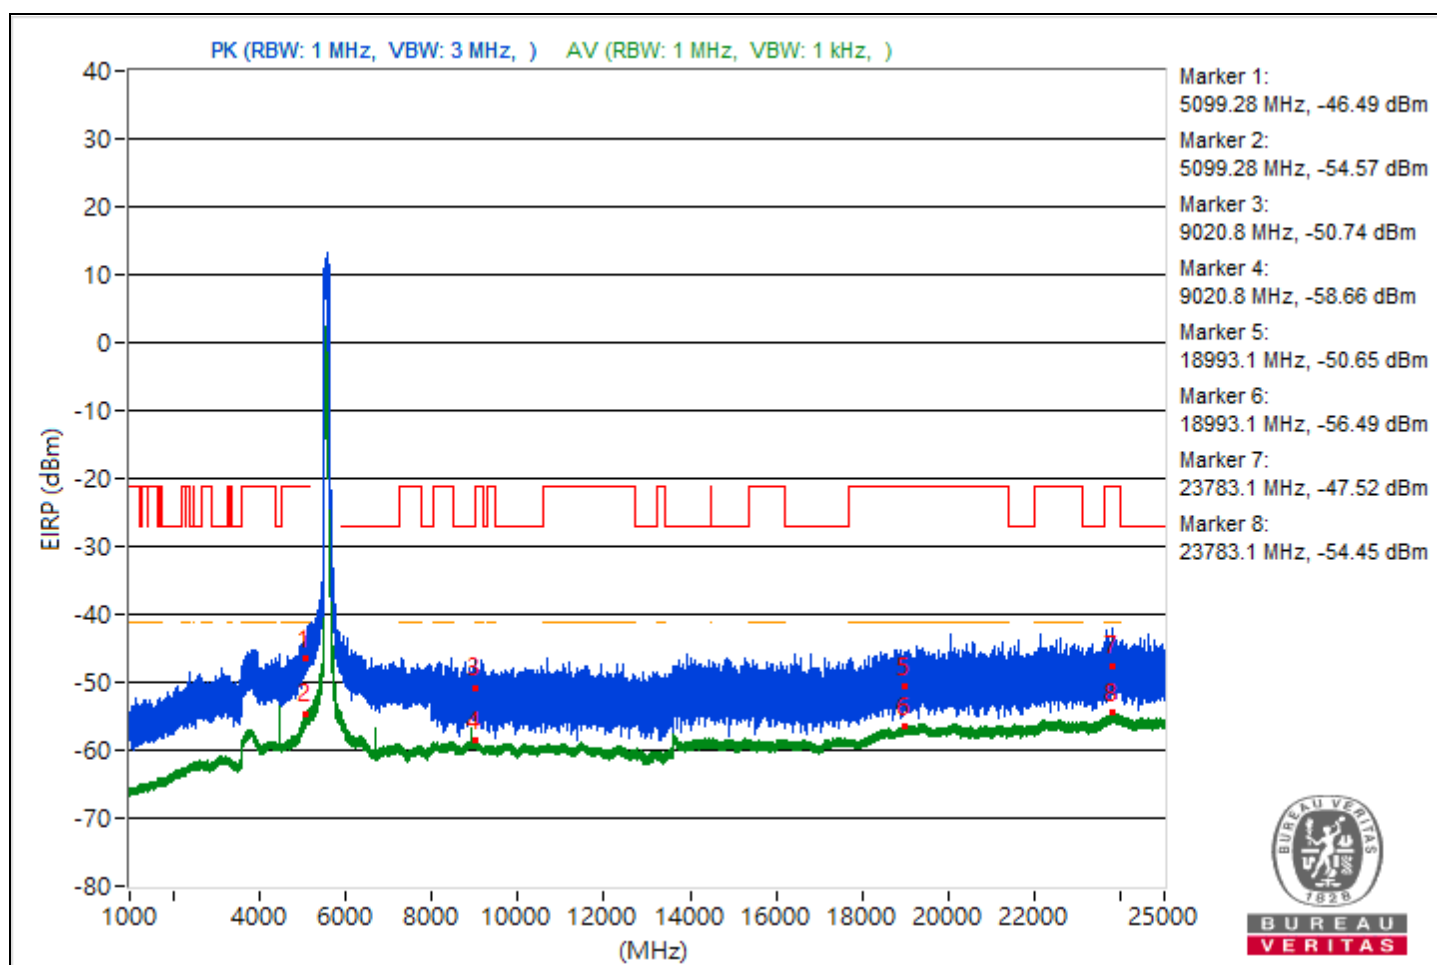

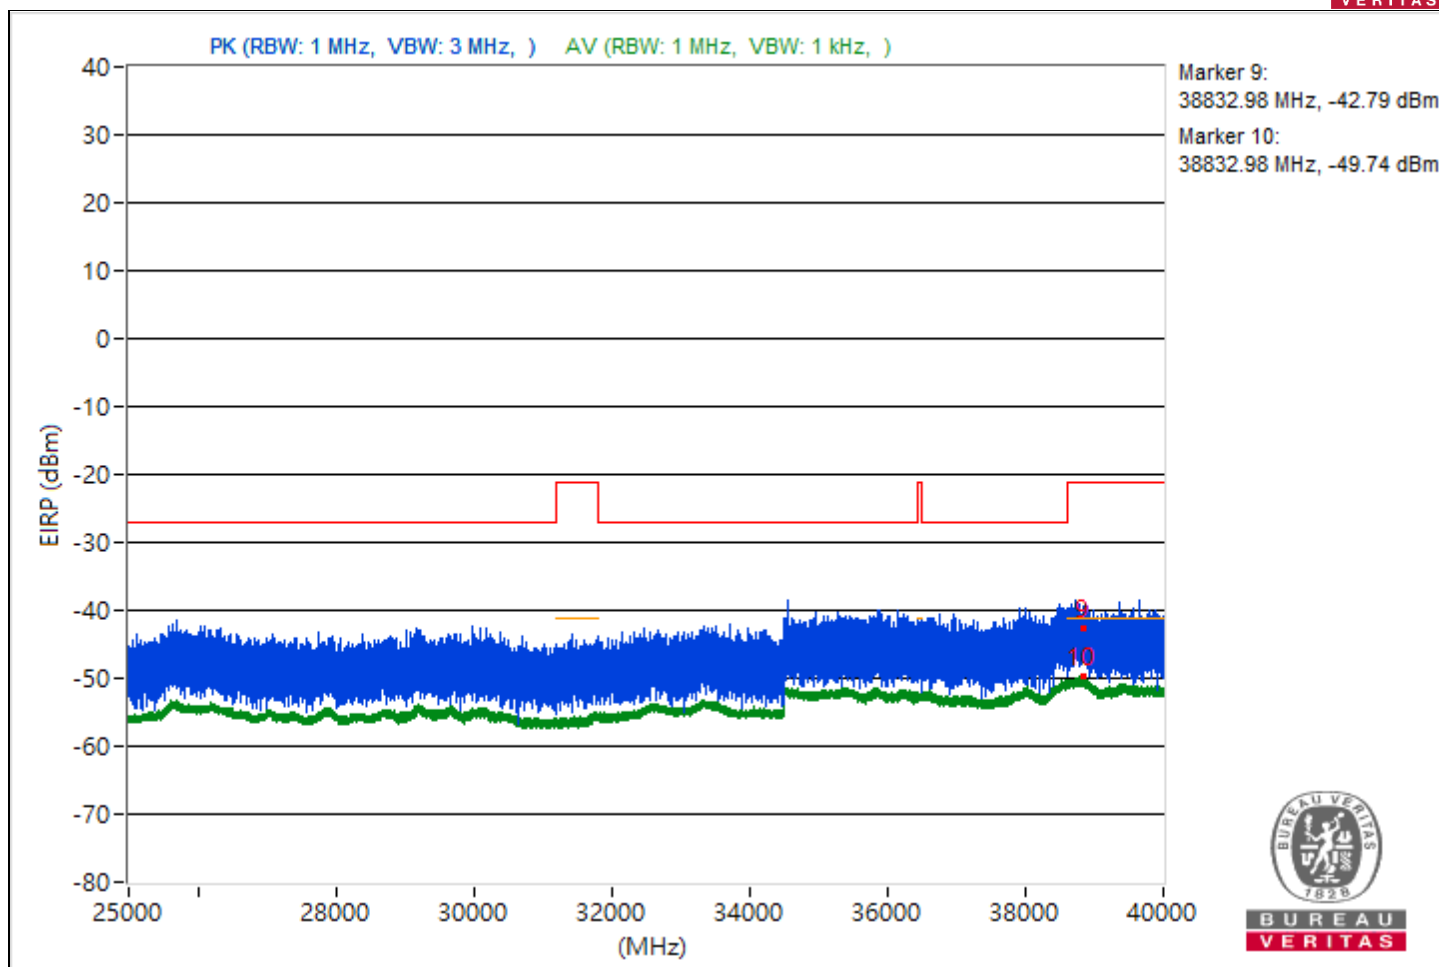

## Conducted Band Edges


### 1TX

|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11a             | Channel                  | CH 36 : 5180 MHz |
| Frequency Range | 5.05 GHz ~ 5.25 GHz | Environmental Conditions | 22°C, 60% RH     |
| Tested By       | Henry Hsu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5180.87        | 120.04 PK               |                |             | 16.41                   | 8.37                   | 24.78            |
| 2                   | *5180.87        | 112.65 AV               |                |             | 9.02                    | 8.37                   | 17.39            |
| 3                   | 5149.62         | 61.93 PK                | 74             | -12.07      | -41.7                   | 8.37                   | -33.33           |
| 4                   | 5149.62         | 53.01 AV                | 54             | -0.99       | -50.62                  | 8.37                   | -42.25           |

#### Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

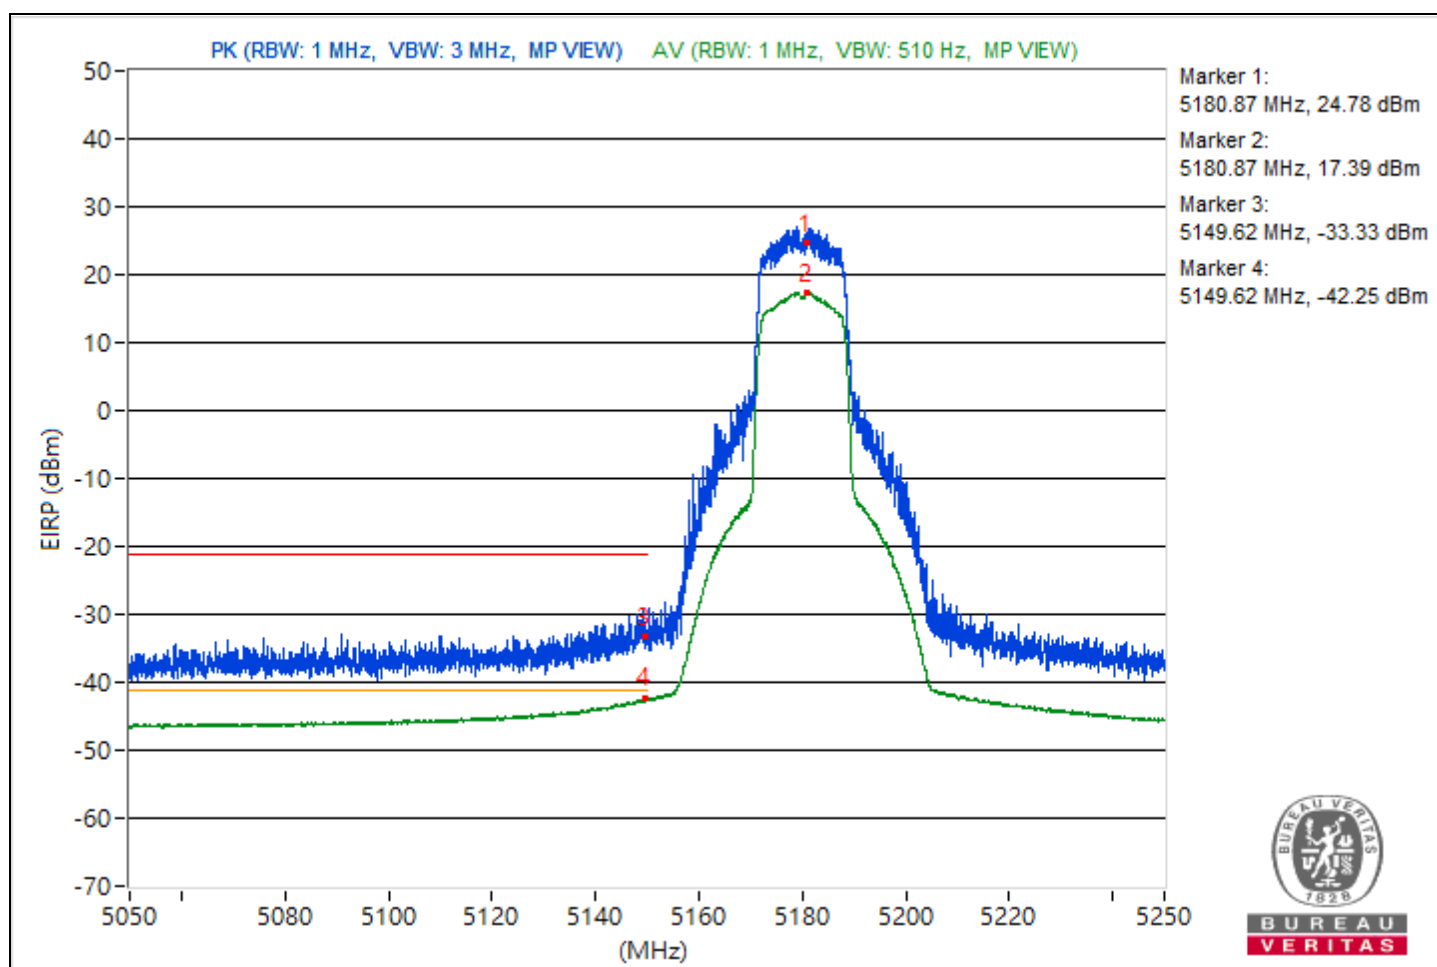


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11a             | Channel                  | CH 40 : 5200 MHz |
| Frequency Range | 5.05 GHz ~ 5.25 GHz | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5201.05        | 123.34 PK               |                |             | 19.71                   | 8.37                   | 28.08            |
| 2                   | *5201.05        | 114.25 AV               |                |             | 10.62                   | 8.37                   | 18.99            |
| 3                   | 5149.95         | 64.22 PK                | 74             | -9.78       | -39.41                  | 8.37                   | -31.04           |
| 4                   | 5149.95         | 53.43 AV                | 54             | -0.57       | -50.2                   | 8.37                   | -41.83           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

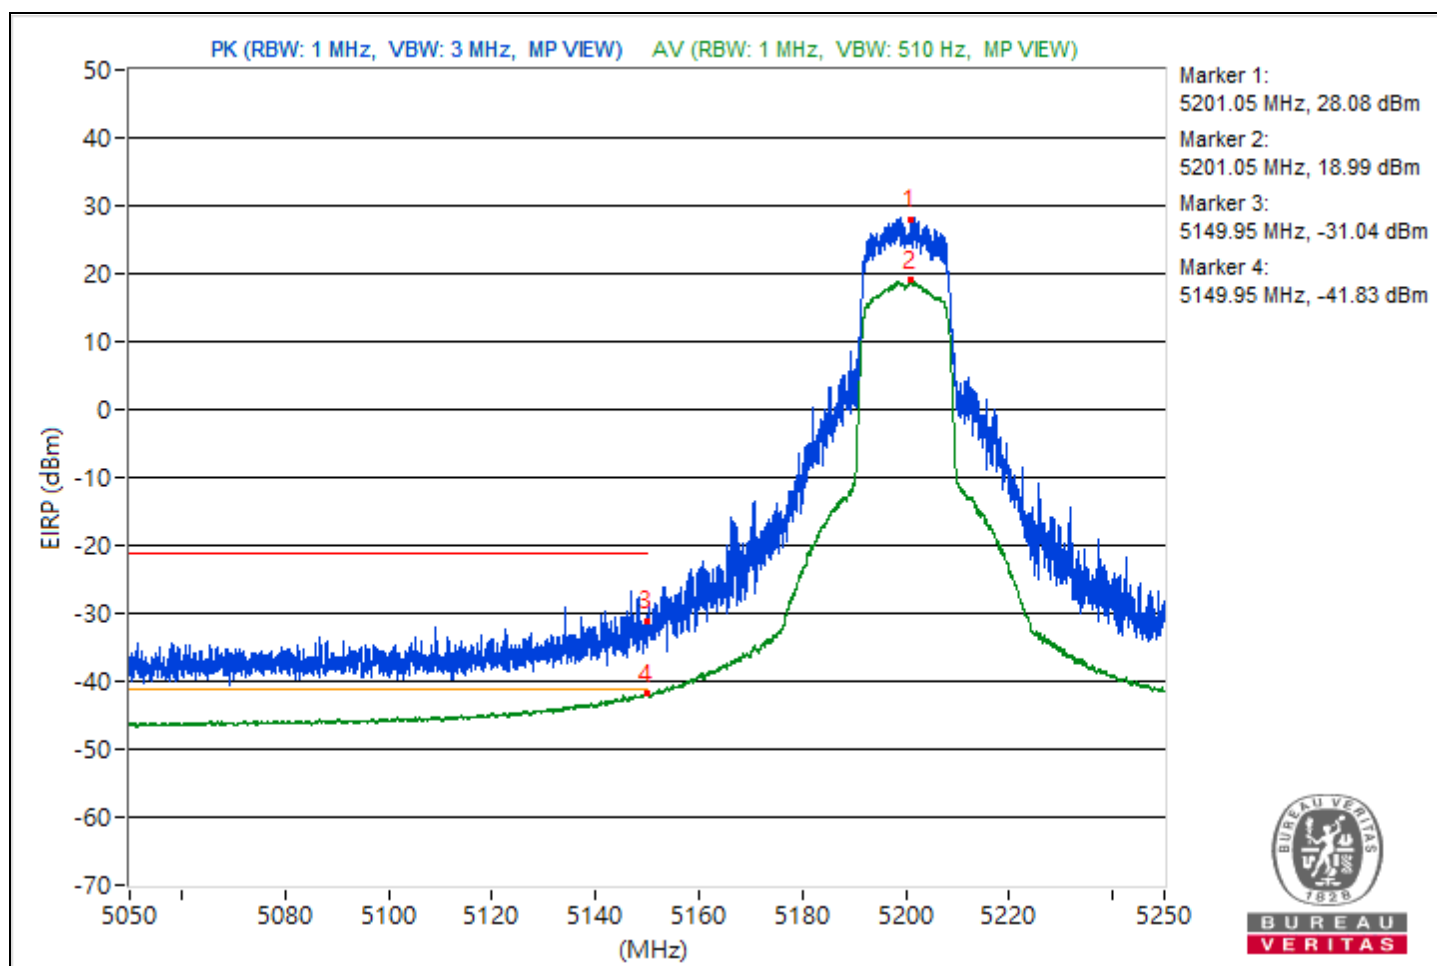


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11a             | Channel                  | CH 48 : 5240 MHz |
| Frequency Range | 5.05 GHz ~ 5.25 GHz | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5238.95        | 123.46 PK               |                |             | 19.83                   | 8.37                   | 28.2             |
| 2                   | *5238.95        | 114.29 AV               |                |             | 10.66                   | 8.37                   | 19.03            |
| 3                   | 5147.73         | 57.55 PK                | 74             | -16.45      | -46.08                  | 8.37                   | -37.71           |
| 4                   | 5147.73         | 50.43 AV                | 54             | -3.57       | -53.2                   | 8.37                   | -44.83           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

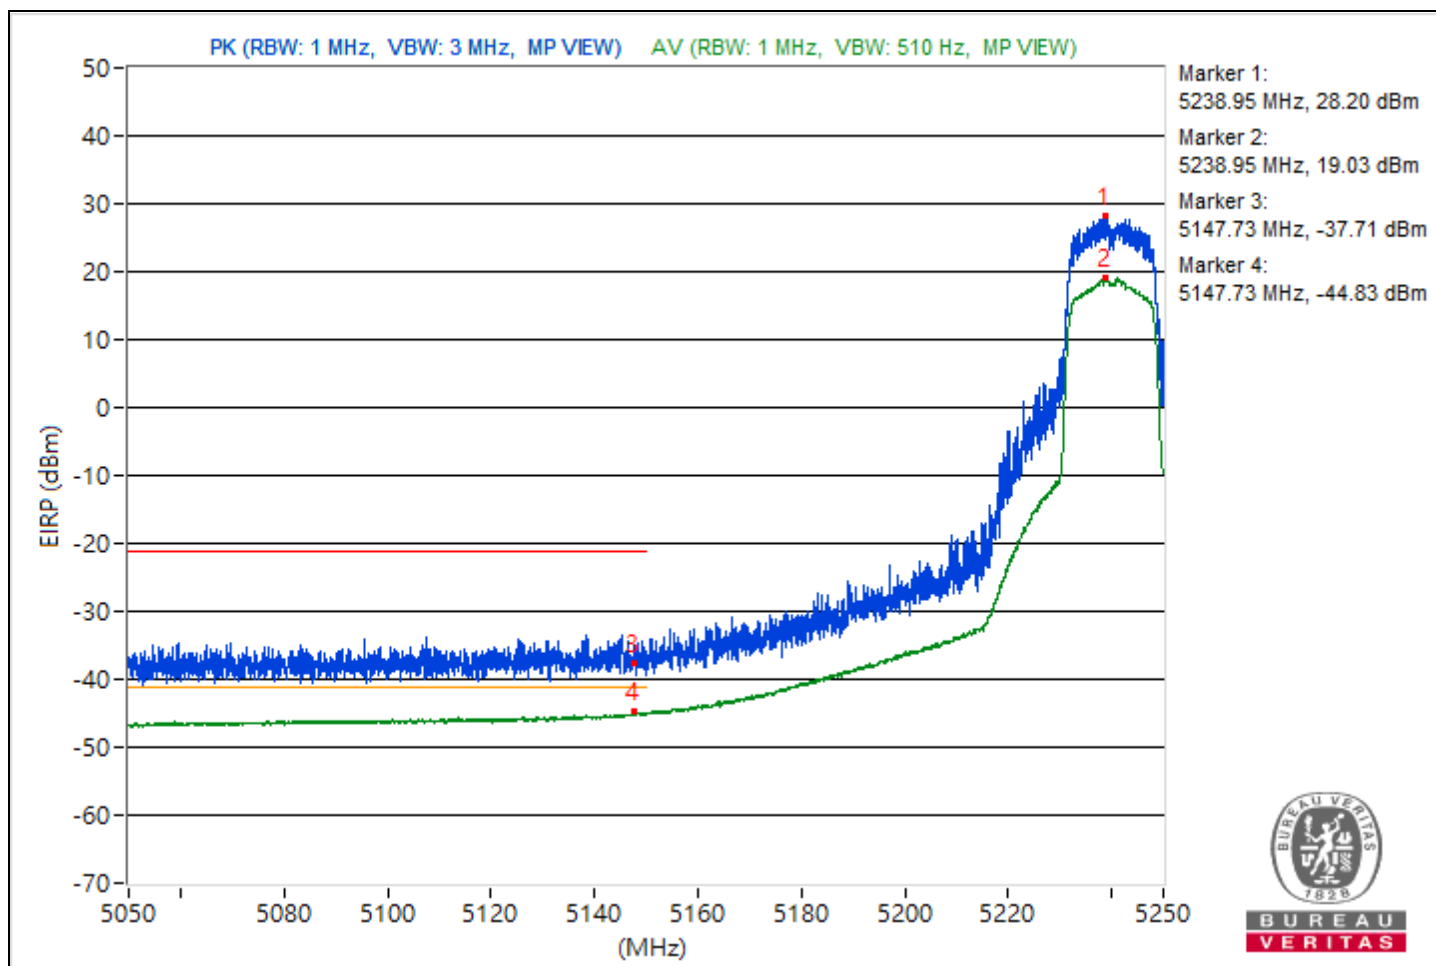


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11a             | Channel                  | CH 52 : 5260 MHz |
| Frequency Range | 5.25 GHz ~ 5.45 GHz | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5261           | 123.79 PK               |                |             | 20.16                   | 8.37                   | 28.53            |
| 2                   | *5261           | 114.21 AV               |                |             | 10.58                   | 8.37                   | 18.95            |
| 3                   | 5350            | 58.35 PK                | 74             | -15.65      | -45.28                  | 8.37                   | -36.91           |
| 4                   | 5350            | 50.01 AV                | 54             | -3.99       | -53.62                  | 8.37                   | -45.25           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

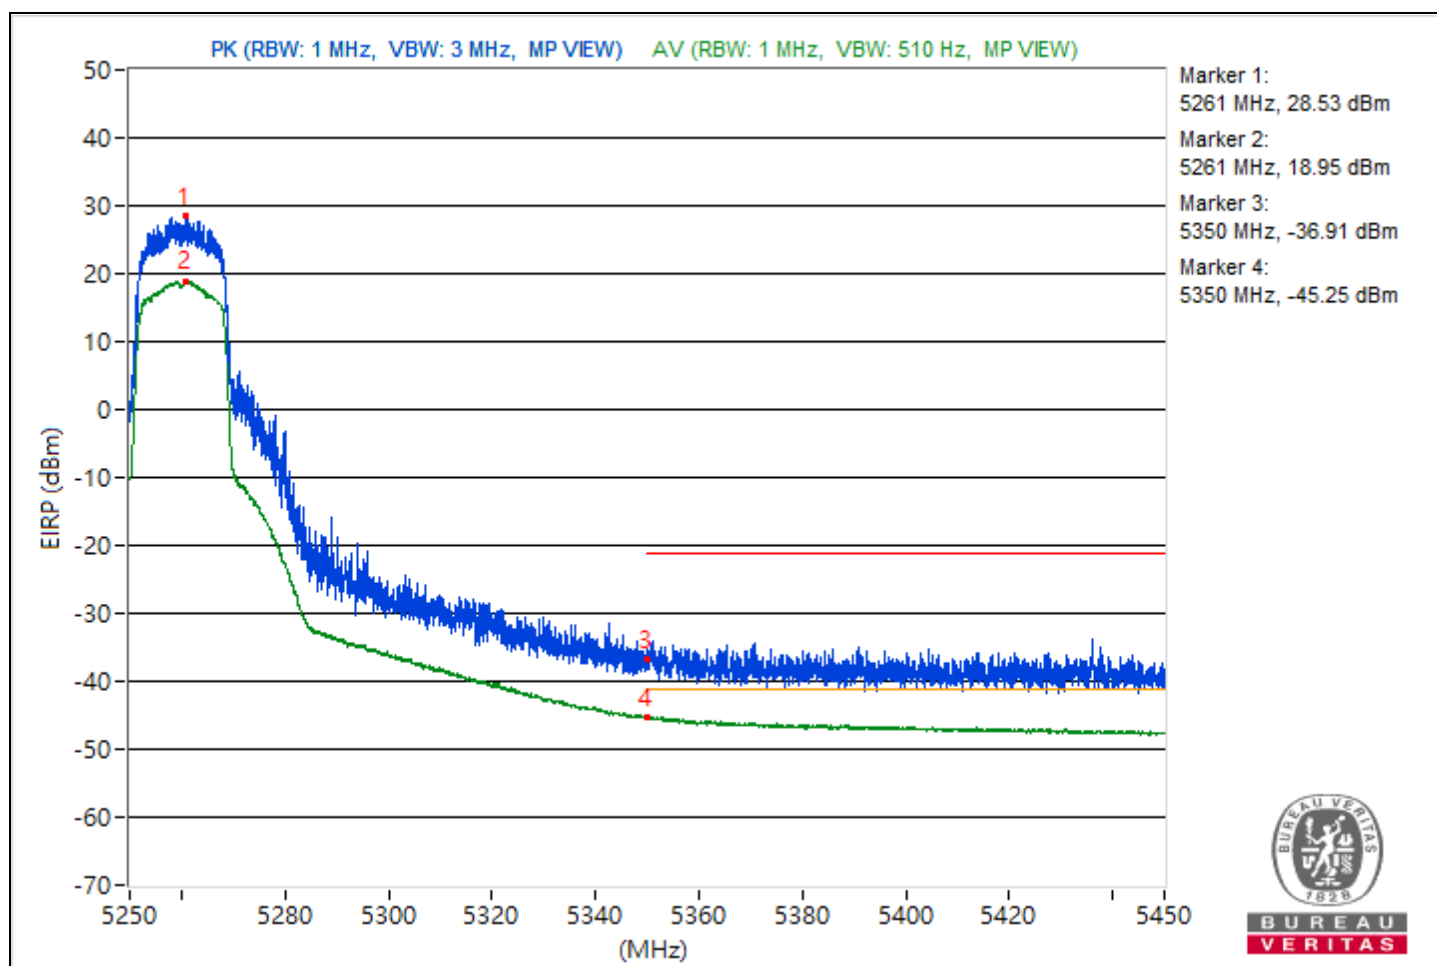


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11a             | Channel                  | CH 60 : 5300 MHz |
| Frequency Range | 5.25 GHz ~ 5.45 GHz | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5301.3         | 120.78 PK               |                |             | 17.15                   | 8.37                   | 25.52            |
| 2                   | *5301.3         | 114.19 AV               |                |             | 10.56                   | 8.37                   | 18.93            |
| 3                   | 5350.12         | 61.15 PK                | 74             | -12.85      | -42.48                  | 8.37                   | -34.11           |
| 4                   | 5350.12         | 52.83 AV                | 54             | -1.17       | -50.8                   | 8.37                   | -42.43           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

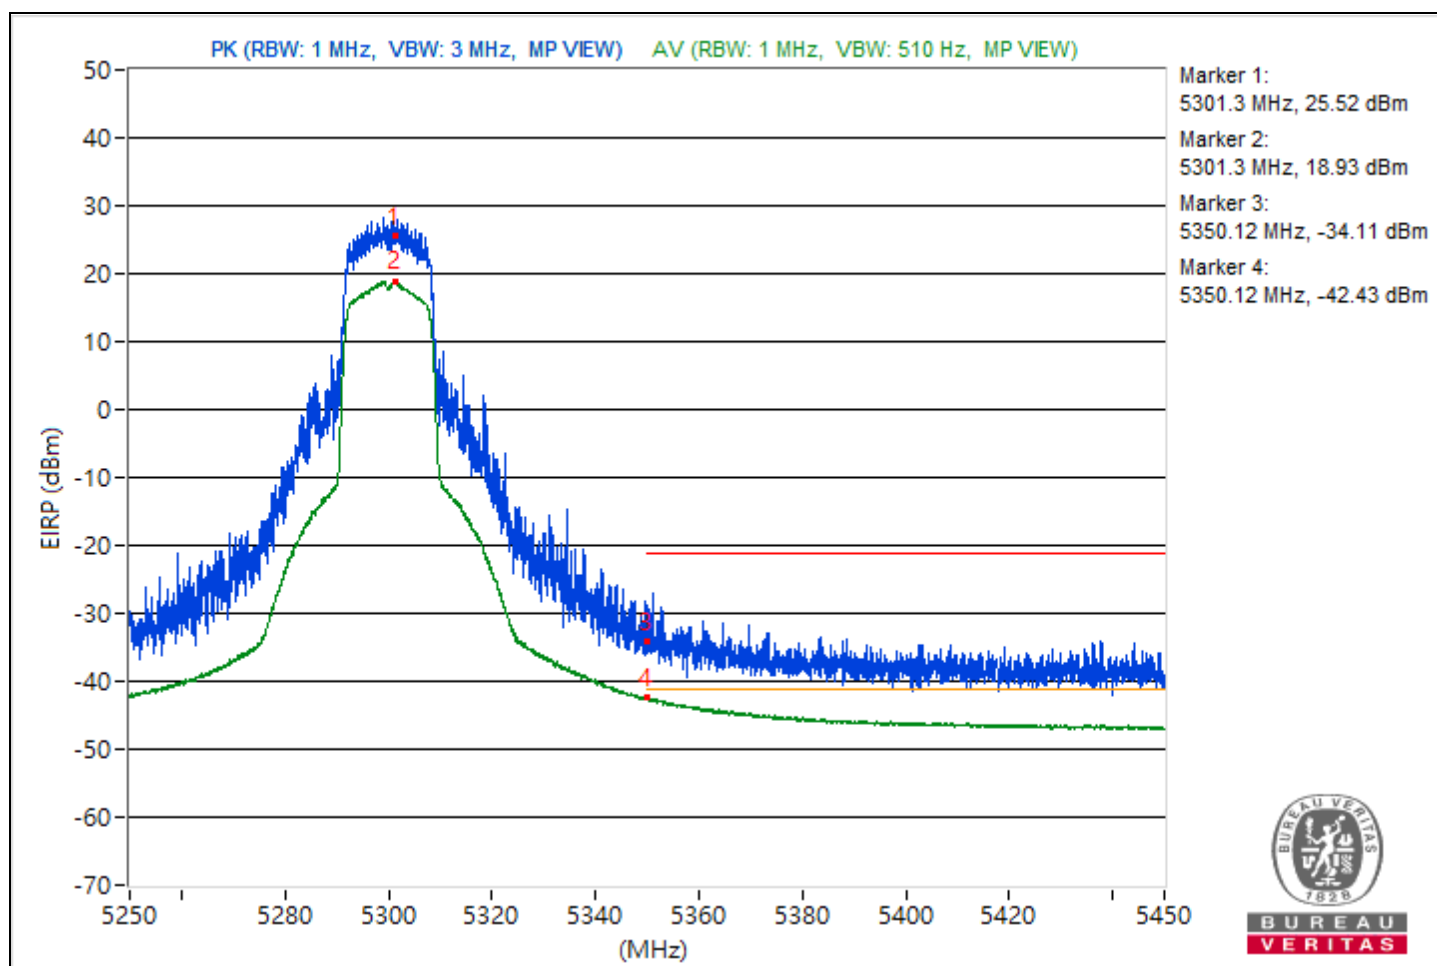


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11a             | Channel                  | CH 64 : 5320 MHz |
| Frequency Range | 5.25 GHz ~ 5.45 GHz | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5319           | 118.79 PK               |                |             | 15.16                   | 8.37                   | 23.53            |
| 2                   | *5319           | 113.06 AV               |                |             | 9.43                    | 8.37                   | 17.8             |
| 3                   | 5351.65         | 61.33 PK                | 74             | -12.67      | -42.3                   | 8.37                   | -33.93           |
| 4                   | 5351.65         | 53.43 AV                | 54             | -0.57       | -50.2                   | 8.37                   | -41.83           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

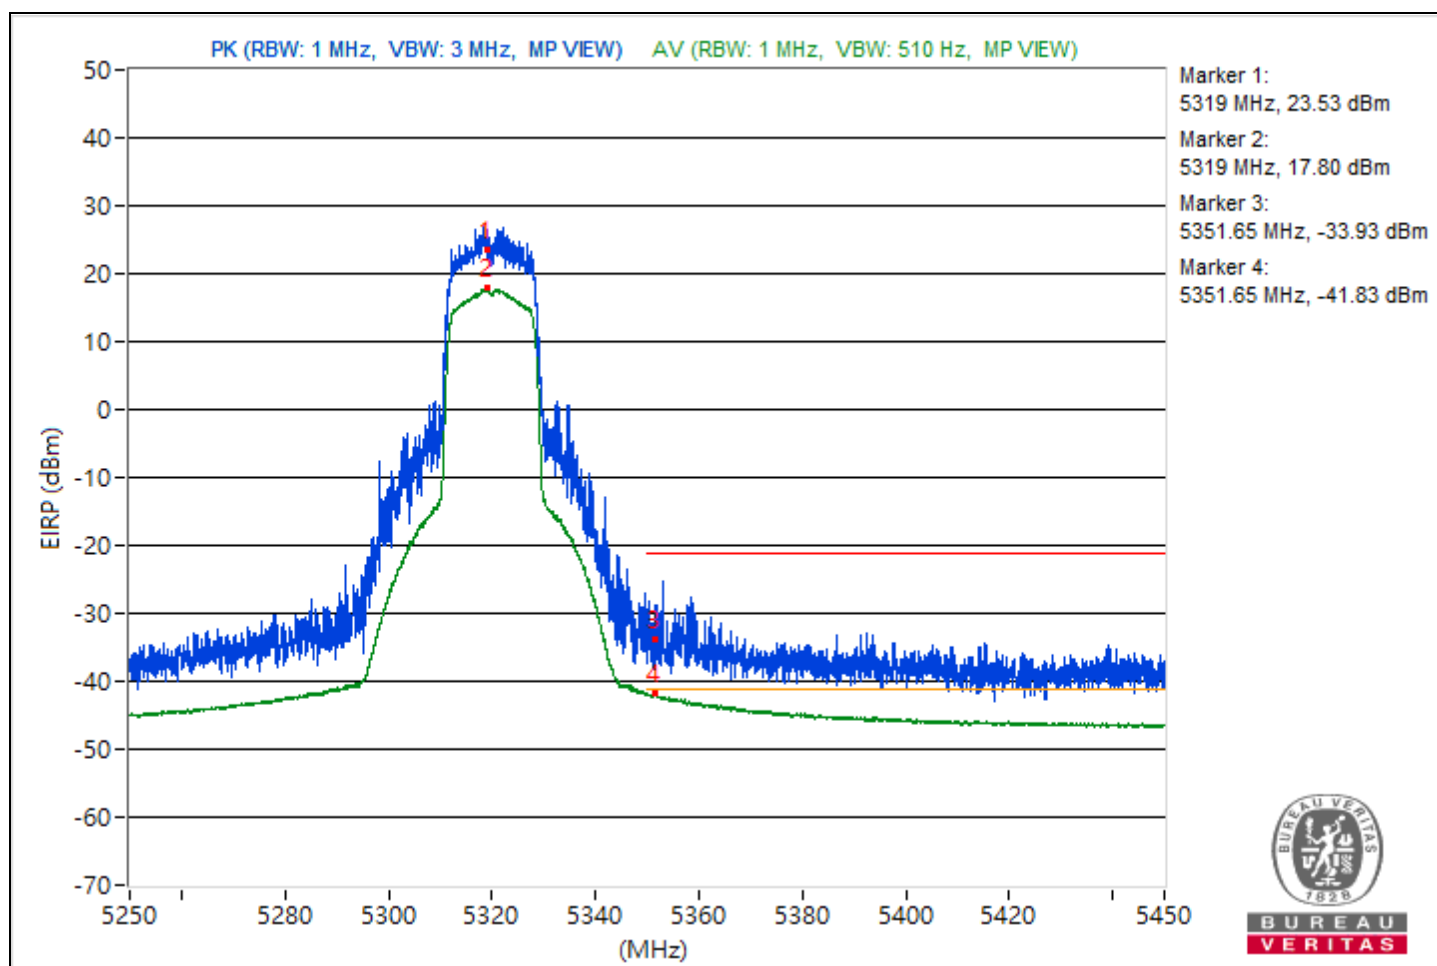


|                 |                    |                          |                   |
|-----------------|--------------------|--------------------------|-------------------|
| RF Mode         | 802.11a            | Channel                  | CH 100 : 5500 MHz |
| Frequency Range | 5.35 GHz ~ 5.6 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu          |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5501.91        | 122.11 PK               |                |             | 18.48                   | 8.37                   | 26.85            |
| 2                   | 5448.12         | 64.9 PK                 | 74             | -9.1        | -38.73                  | 8.37                   | -30.36           |
| 3                   | #5467.87        | 67.37 PK                | 68.26          | -0.89       | -36.26                  | 8.37                   | -27.89           |
| 4                   | *5501.28        | 112.61 AV               |                |             | 8.98                    | 8.37                   | 17.35            |
| 5                   | 5459.97         | 51.75 AV                | 54             | -2.25       | -51.88                  | 8.37                   | -43.51           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

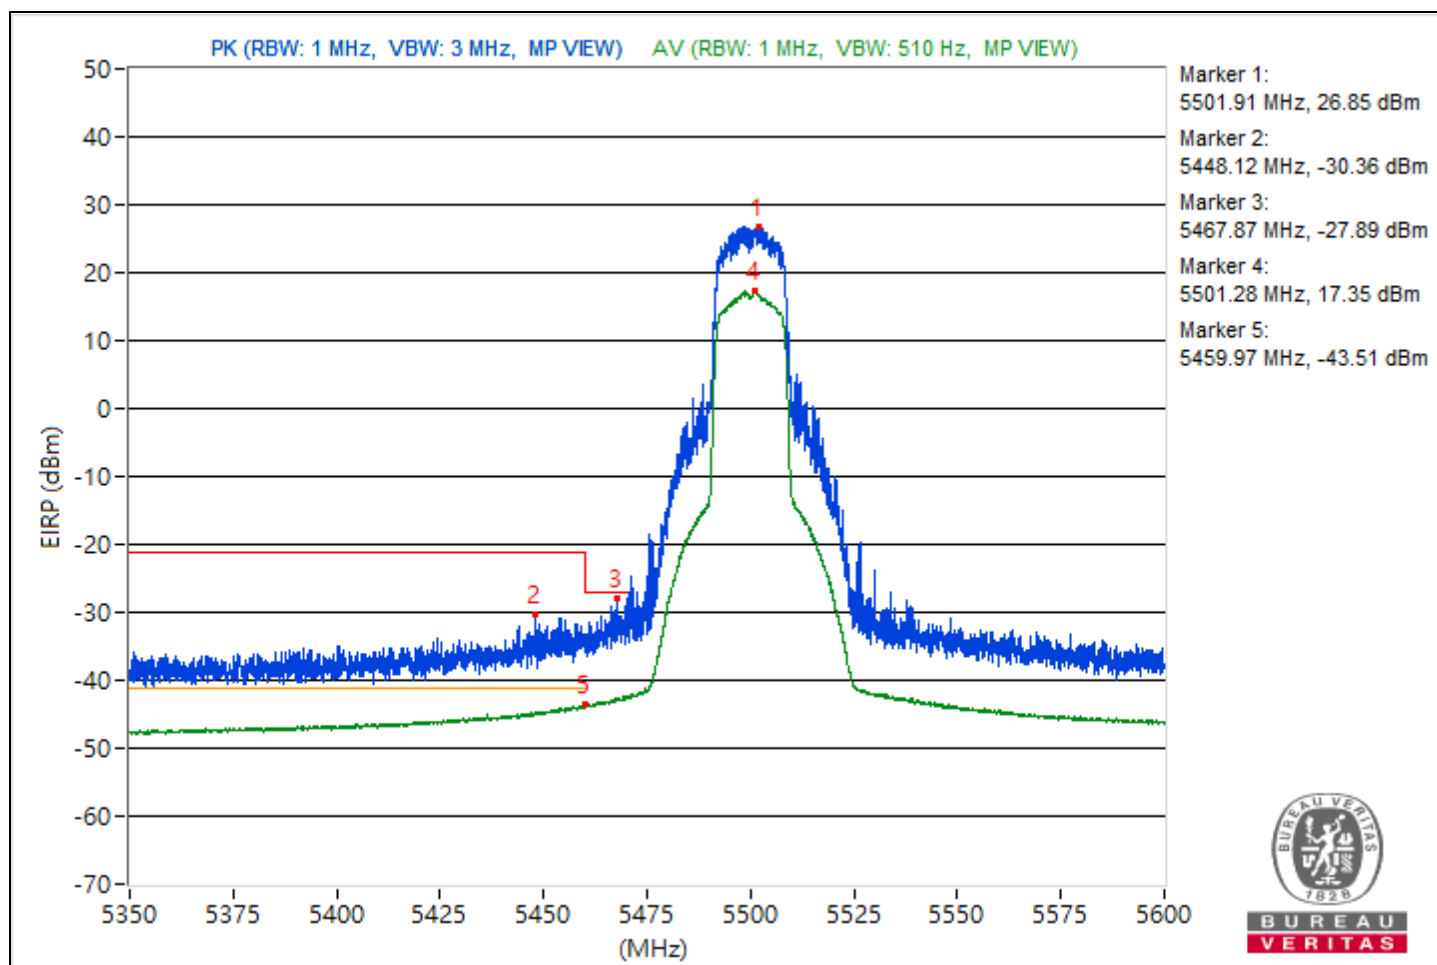


|                 |                       |                          |                   |
|-----------------|-----------------------|--------------------------|-------------------|
| RF Mode         | 802.11a               | Channel                  | CH 140 : 5700 MHz |
| Frequency Range | 5.625 GHz ~ 5.825 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu             |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5702.18        | 122.58                  |                |             | 18.95                   | 8.37                   | 27.32            |
| 2                   | #5725           | 67.93                   | 68.26          | -0.33       | -35.7                   | 8.37                   | -27.33           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

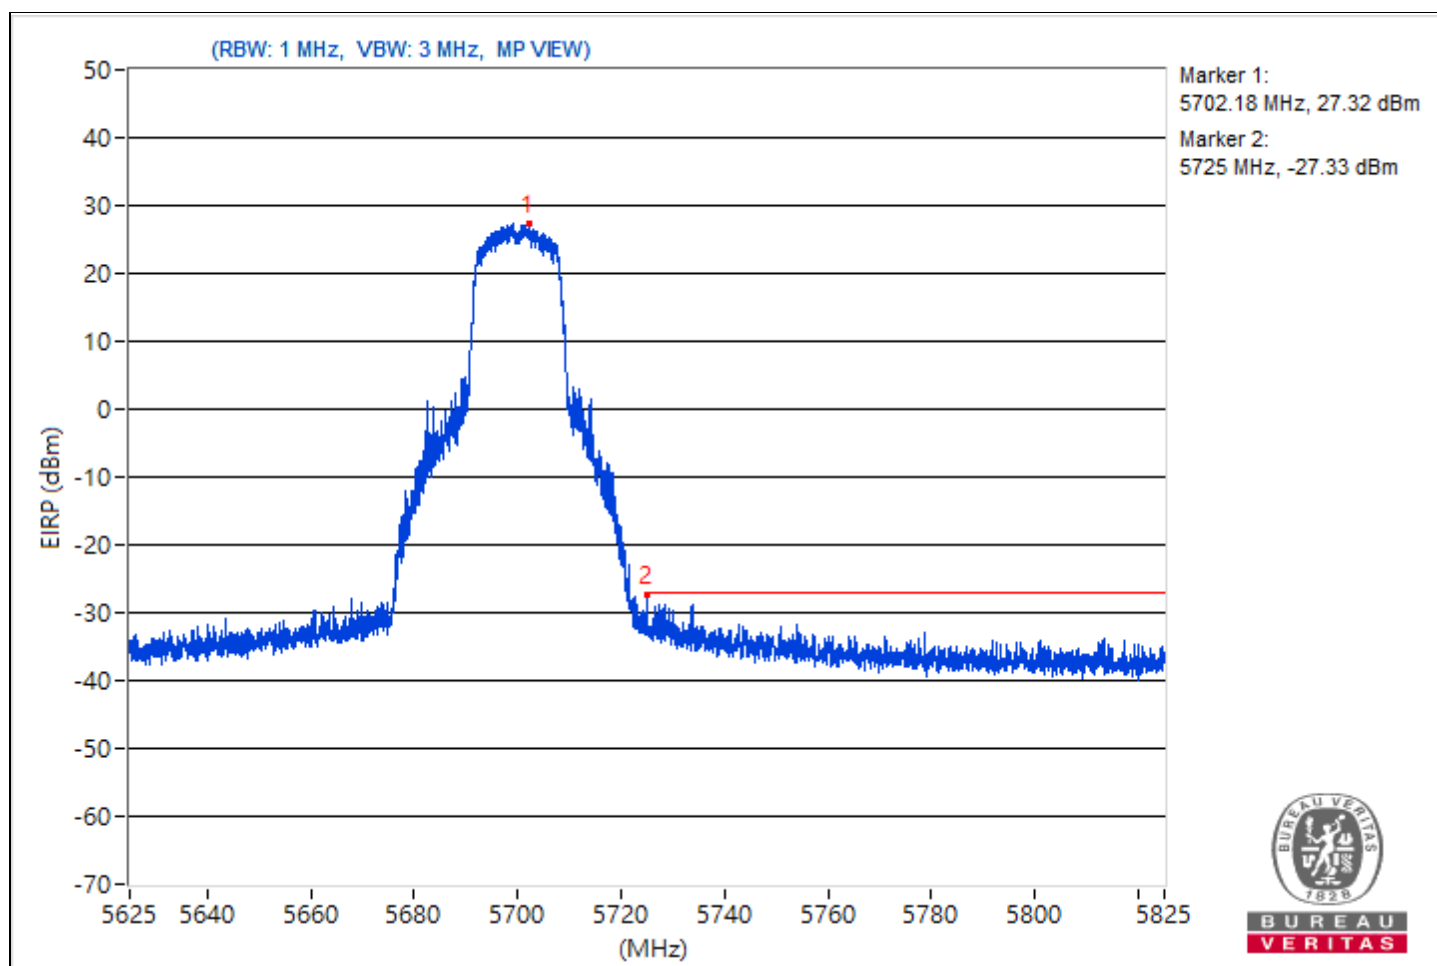


|                 |                 |                          |                   |
|-----------------|-----------------|--------------------------|-------------------|
| RF Mode         | 802.11a         | Channel                  | CH 144 : 5720 MHz |
| Frequency Range | 5.7 GHz ~ 6 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu       |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5721.37        | 124.04                  |                |             | 20.41                   | 8.37                   | 28.78            |
| 2                   | #5856.15        | 60.73                   | 68.26          | -7.53       | -42.9                   | 8.37                   | -34.53           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

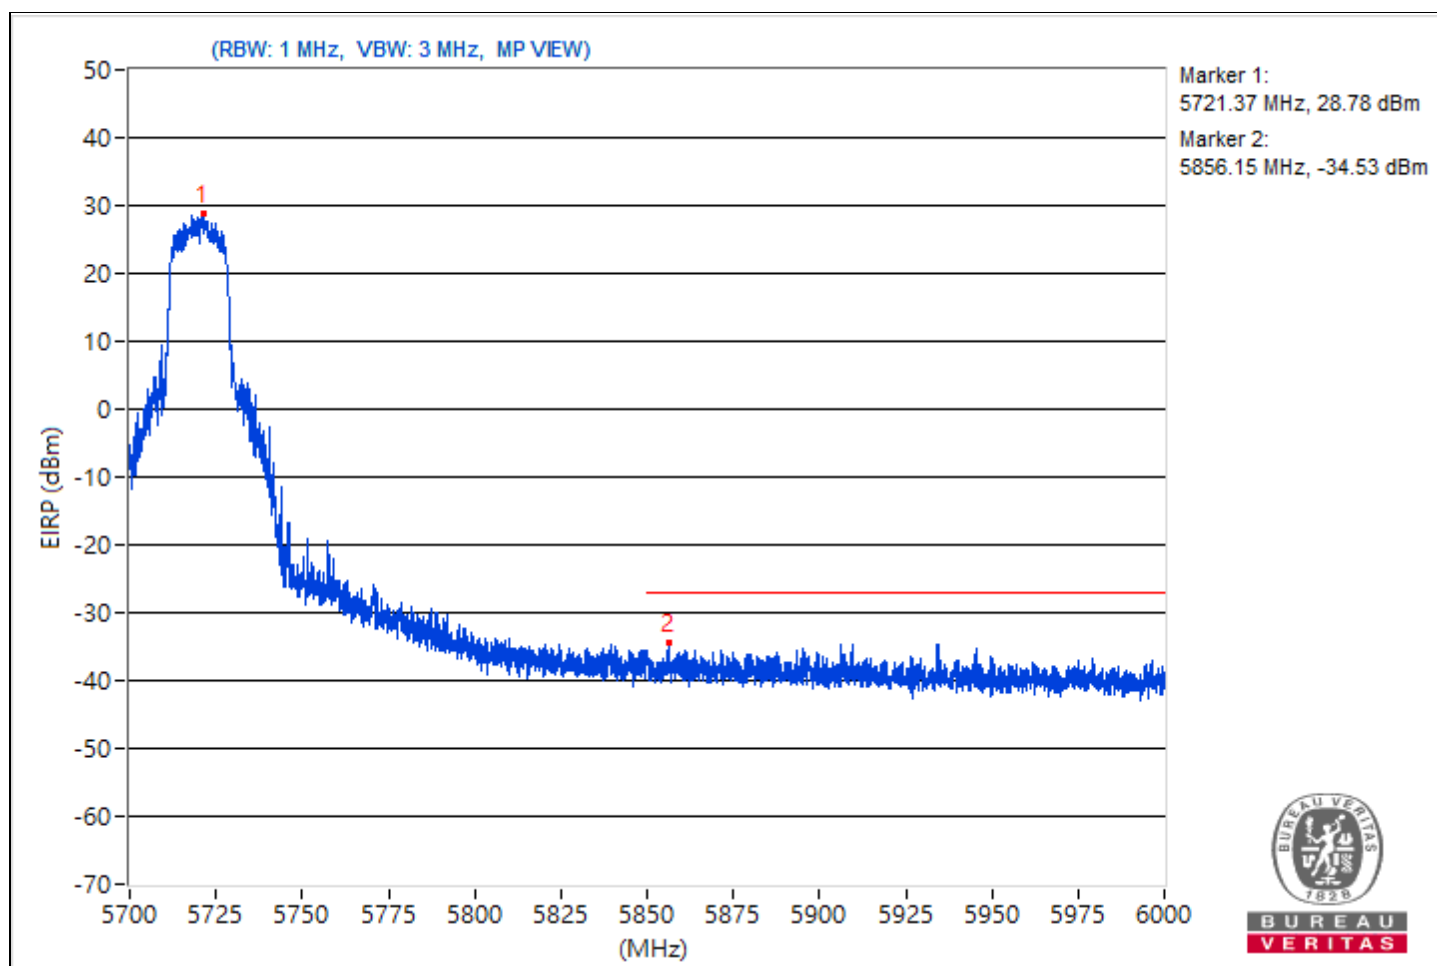


|                 |                      |                          |                   |
|-----------------|----------------------|--------------------------|-------------------|
| RF Mode         | 802.11a              | Channel                  | CH 149 : 5745 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu            |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5743.21        | 124.05                  |                |             | 20.42                   | 8.37                   | 28.79            |
| 2                   | #5616.74        | 61.93                   | 68.26          | -6.33       | -41.7                   | 8.37                   | -33.33           |
| 3                   | #5651.89        | 61.11                   | 69.66          | -8.55       | -42.52                  | 8.37                   | -34.15           |
| 4                   | #5712.81        | 80.42                   | 108.85         | -28.43      | -23.21                  | 8.37                   | -14.84           |
| 5                   | #5722.07        | 84.06                   | 115.58         | -31.52      | -19.57                  | 8.37                   | -11.2            |
| 6                   | #5854.83        | 59.14                   | 111.24         | -52.1       | -44.49                  | 8.37                   | -36.12           |
| 7                   | #5873           | 59.72                   | 105.82         | -46.1       | -43.91                  | 8.37                   | -35.54           |
| 8                   | #5924.66        | 58.89                   | 68.51          | -9.62       | -44.74                  | 8.37                   | -36.37           |
| 9                   | #6010.75        | 59.88                   | 68.26          | -8.38       | -43.75                  | 8.37                   | -35.38           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

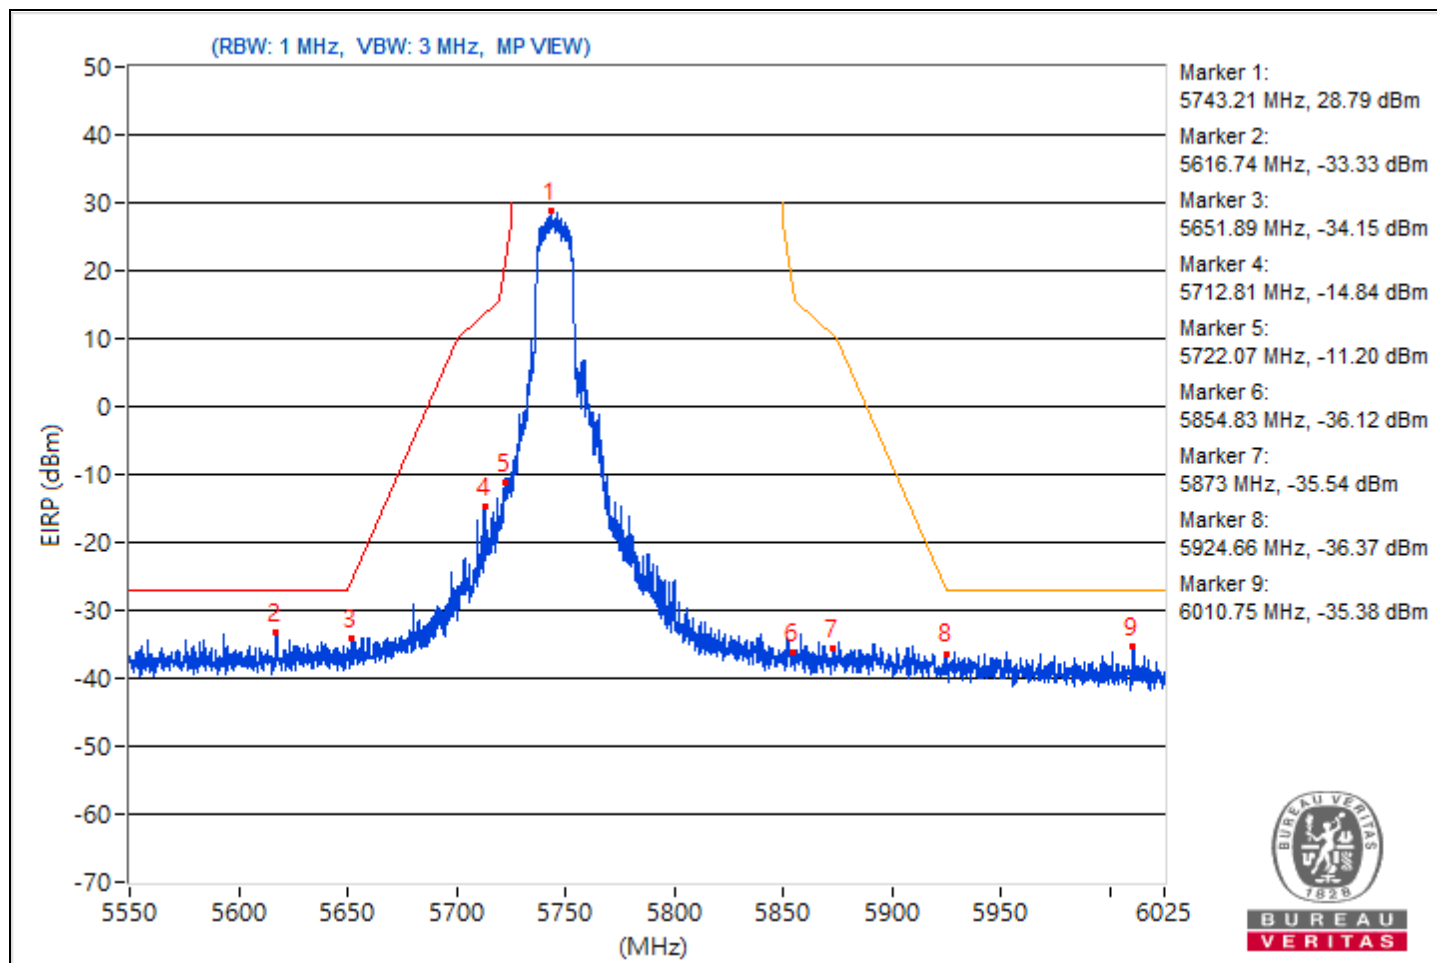


|                 |                      |                          |                   |
|-----------------|----------------------|--------------------------|-------------------|
| RF Mode         | 802.11a              | Channel                  | CH 157 : 5785 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu            |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5786.43        | 123.91                  |                |             | 20.28                   | 8.37                   | 28.65            |
| 2                   | #5630.51        | 60.85                   | 68.26          | -7.41       | -42.78                  | 8.37                   | -34.41           |
| 3                   | #5650.34        | 59.56                   | 68.51          | -8.95       | -44.07                  | 8.37                   | -35.7            |
| 4                   | #5701.17        | 61.61                   | 105.59         | -43.98      | -42.02                  | 8.37                   | -33.65           |
| 5                   | #5720.05        | 63.11                   | 110.97         | -47.86      | -40.52                  | 8.37                   | -32.15           |
| 6                   | #5854.48        | 63.05                   | 112.06         | -49.01      | -40.58                  | 8.37                   | -32.21           |
| 7                   | #5871.34        | 61.8                    | 106.29         | -44.49      | -41.83                  | 8.37                   | -33.46           |
| 8                   | #5924.66        | 58.5                    | 68.51          | -10.01      | -45.13                  | 8.37                   | -36.76           |
| 9                   | #5938.55        | 60.13                   | 68.26          | -8.13       | -43.5                   | 8.37                   | -35.13           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

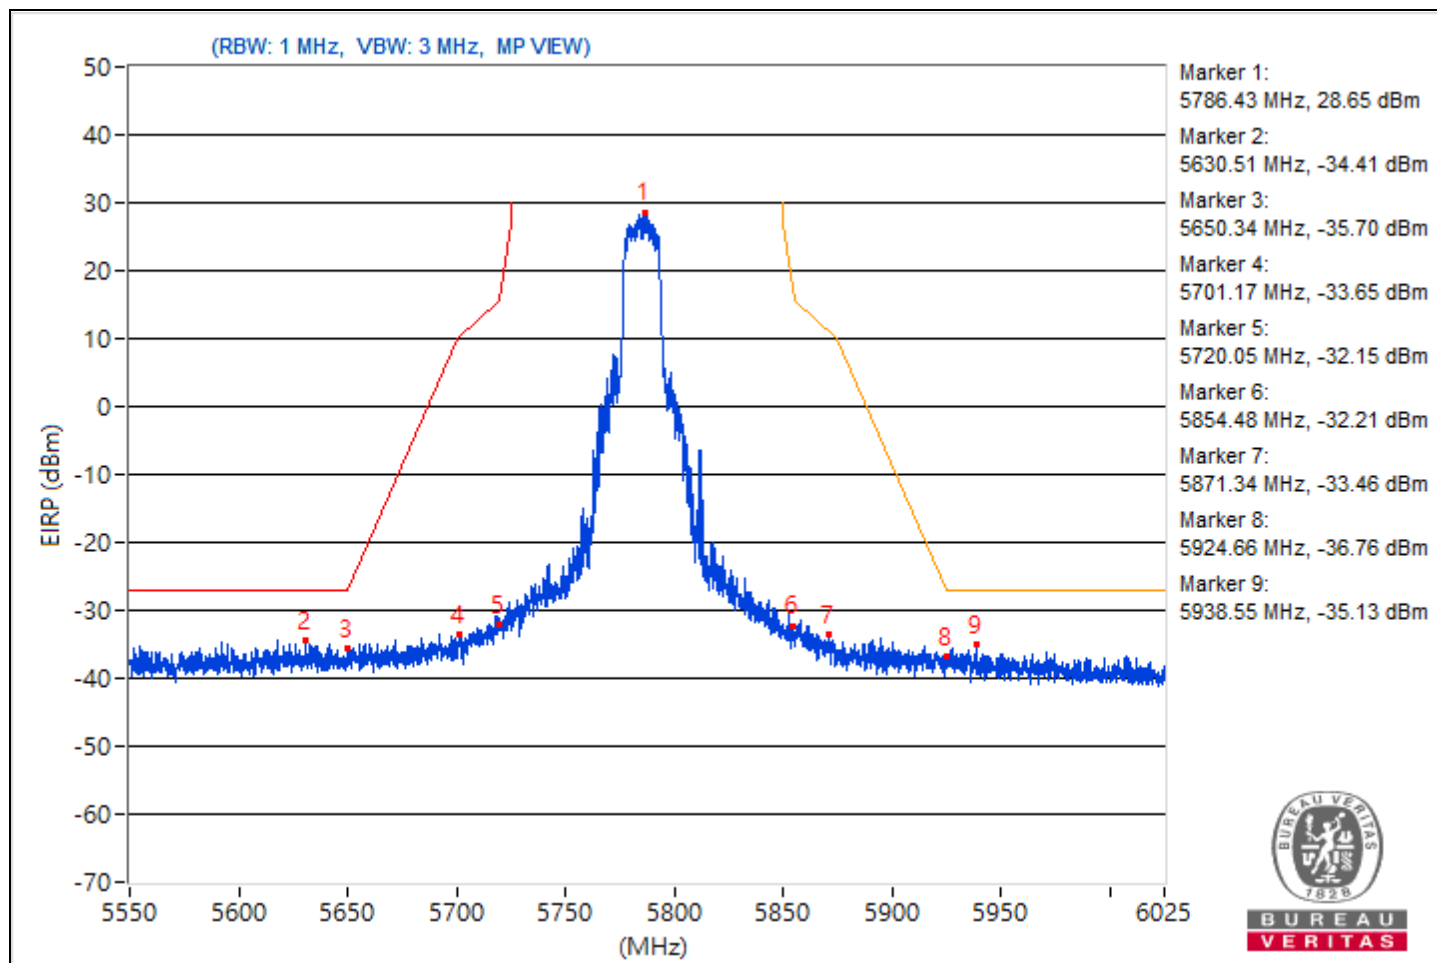


|                 |                      |                          |                   |
|-----------------|----------------------|--------------------------|-------------------|
| RF Mode         | 802.11a              | Channel                  | CH 165 : 5825 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu            |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5823.48        | 123.92                  |                |             | 20.29                   | 8.37                   | 28.66            |
| 2                   | #5621.37        | 60.26                   | 68.26          | -8          | -43.37                  | 8.37                   | -35              |
| 3                   | #5650.82        | 58.97                   | 68.87          | -9.9        | -44.66                  | 8.37                   | -36.29           |
| 4                   | #5700.1         | 60.46                   | 105.29         | -44.83      | -43.17                  | 8.37                   | -34.8            |
| 5                   | #5720.29        | 58.51                   | 111.52         | -53.01      | -45.12                  | 8.37                   | -36.75           |
| 6                   | #5854.83        | 77.53                   | 111.24         | -33.71      | -26.1                   | 8.37                   | -17.73           |
| 7                   | #5863.14        | 78.83                   | 108.58         | -29.75      | -24.8                   | 8.37                   | -16.43           |
| 8                   | #5922.99        | 60.25                   | 69.74          | -9.49       | -43.38                  | 8.37                   | -35.01           |
| 9                   | #5952.8         | 60.42                   | 68.26          | -7.84       | -43.21                  | 8.37                   | -34.84           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

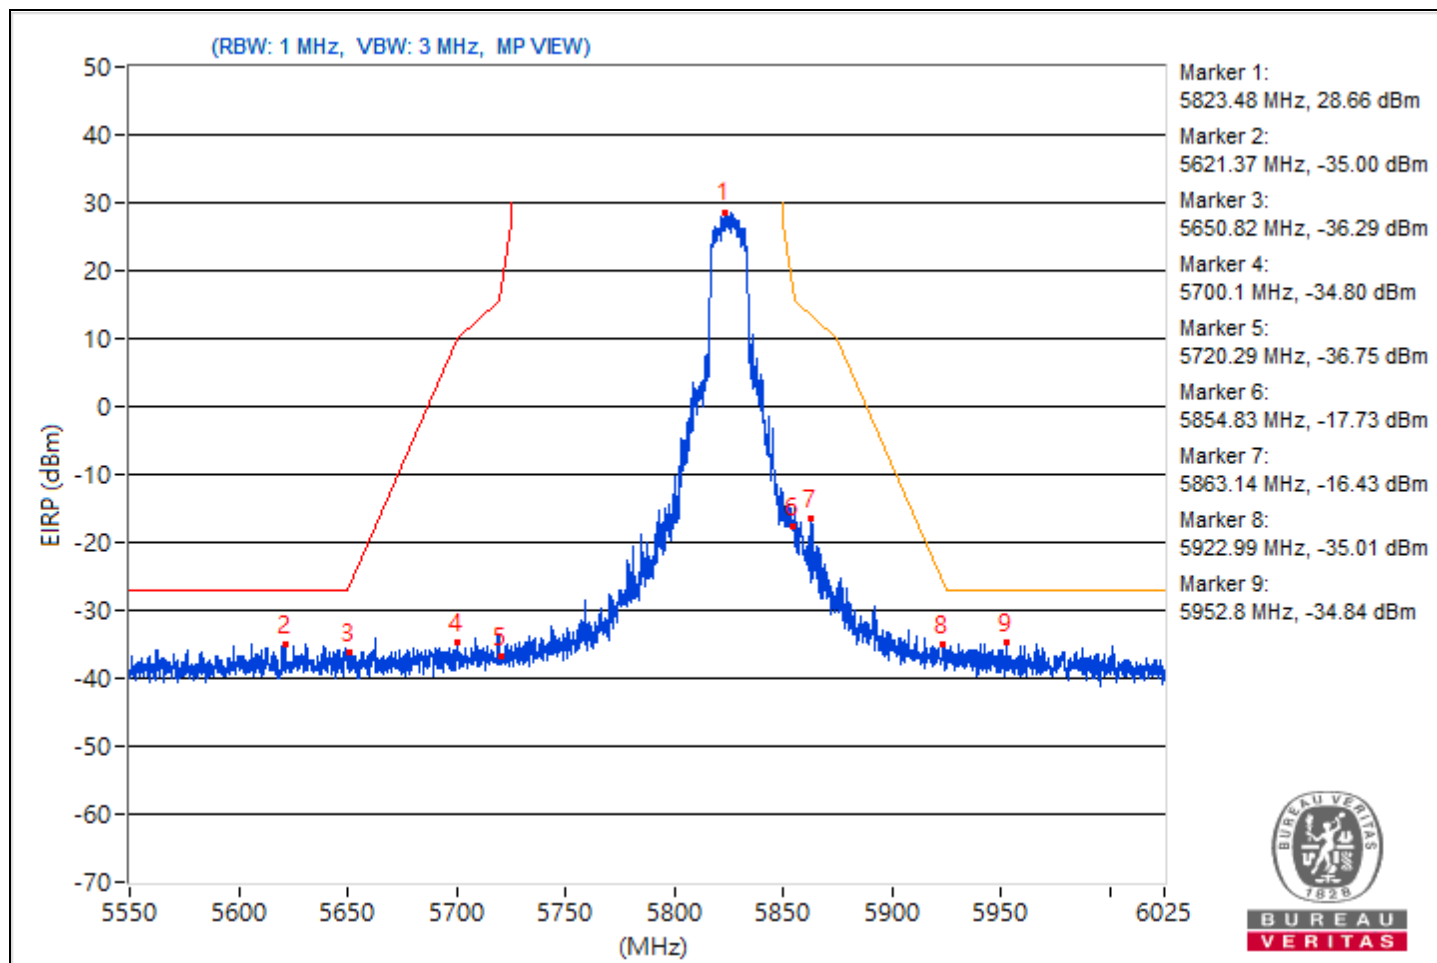


# 1S1T

|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20)    | Channel                  | CH 36 : 5180 MHz |
| Frequency Range | 5.05 GHz ~ 5.25 GHz | Environmental Conditions | 19°C, 61% RH     |
| Tested By       | Henry Hsu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5180.82        | 122.32 PK               |                |             | 18.69                   | 8.37                   | 27.06            |
| 2                   | *5180.82        | 112.26 AV               |                |             | 8.63                    | 8.37                   | 17               |
| 3                   | 5149.57         | 67.62 PK                | 74             | -6.38       | -36.01                  | 8.37                   | -27.64           |
| 4                   | 5149.57         | 53.67 AV                | 54             | -0.33       | -49.96                  | 8.37                   | -41.59           |

## Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

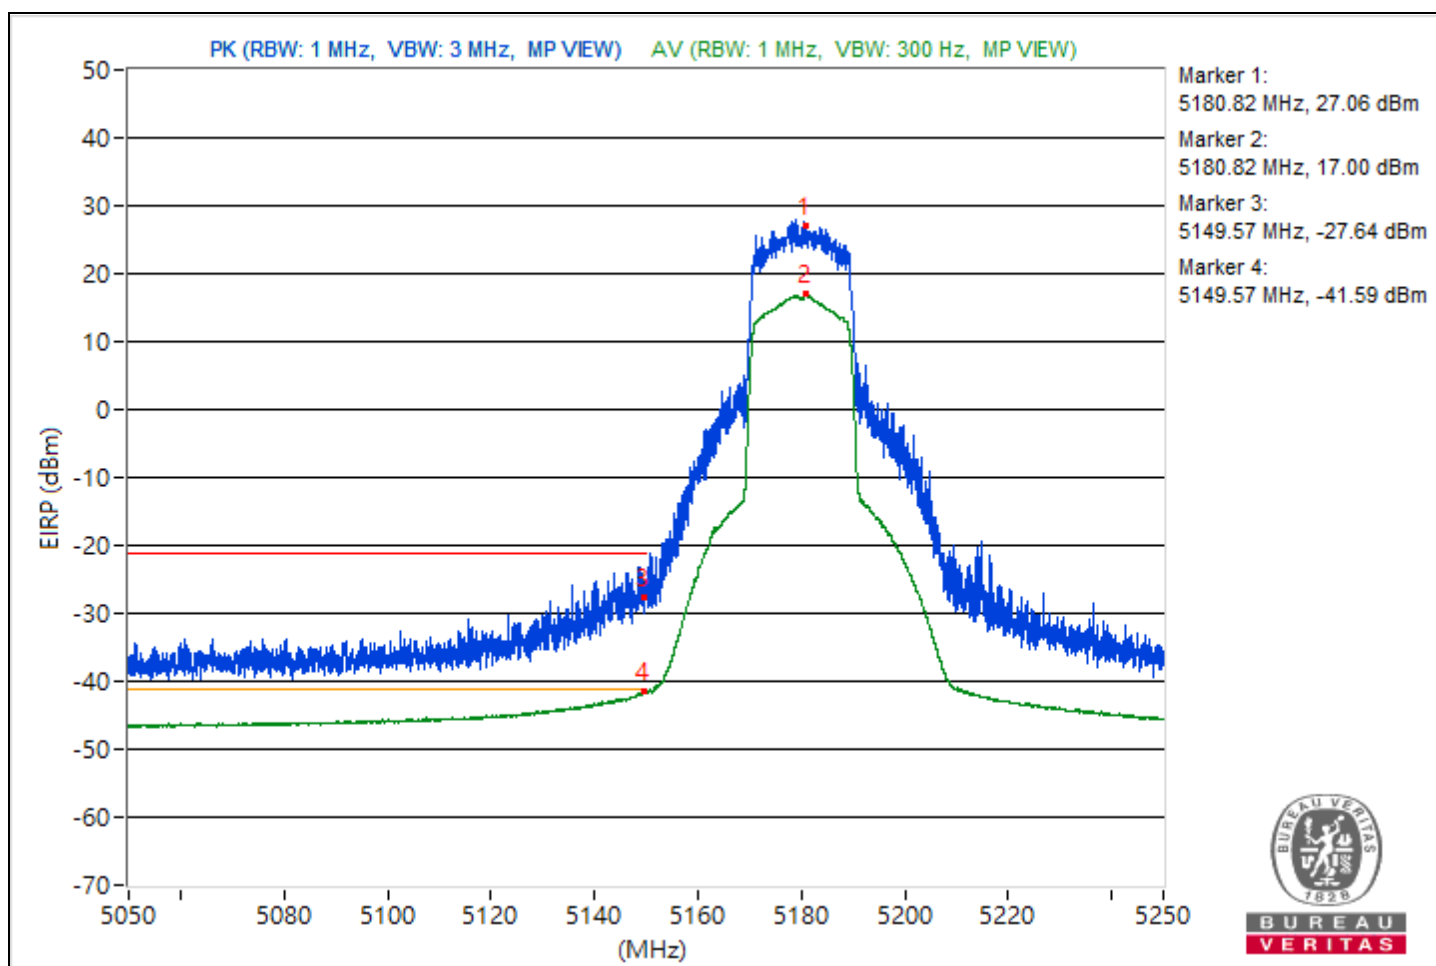


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20)    | Channel                  | CH 40 : 5200 MHz |
| Frequency Range | 5.05 GHz ~ 5.25 GHz | Environmental Conditions | 19°C, 61% RH     |
| Tested By       | Henry Hsu           |                          |                  |

| Conducted Band Edge |                 |                         |                |              |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|--------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB)  | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5200.82        | 120.67 PK               |                |              | 17.04                   | 8.37                   | 25.41            |
| 2                   | *5200.82        | 113.44 AV               |                |              | 9.81                    | 8.37                   | 18.18            |
| 3                   | 5149.85         | 65.79 PK                | 74             | -8.21        | -37.84                  | 8.37                   | -29.47           |
| 4                   | <b>5149.85</b>  | <b>53.88 AV</b>         | <b>54</b>      | <b>-0.12</b> | <b>-49.75</b>           | <b>8.37</b>            | <b>-41.38</b>    |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

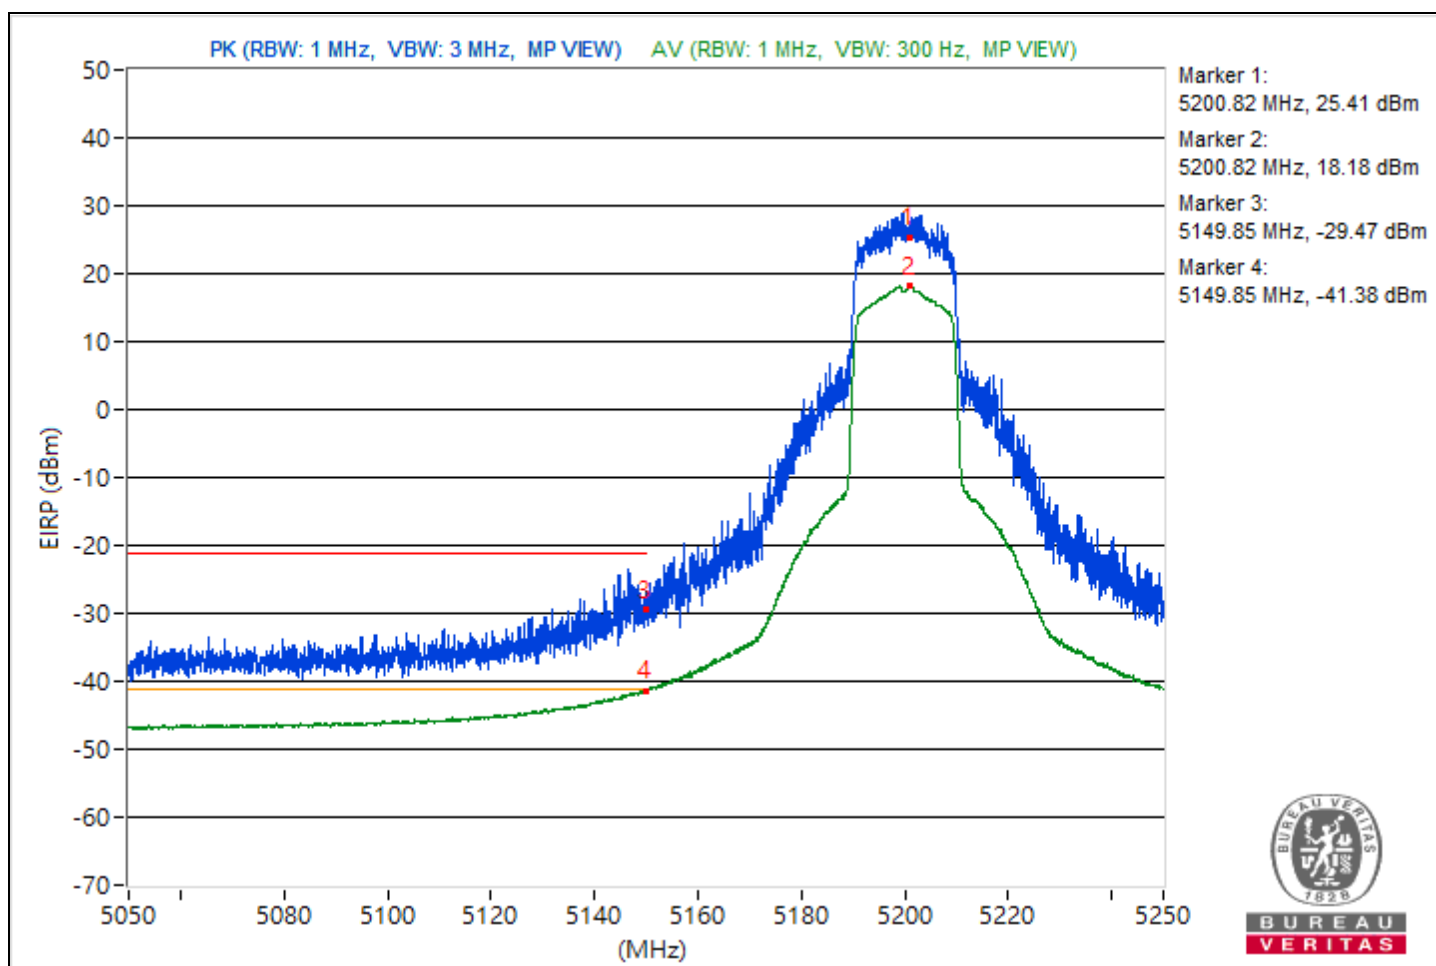


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20)    | Channel                  | CH 48 : 5240 MHz |
| Frequency Range | 5.05 GHz ~ 5.25 GHz | Environmental Conditions | 19°C, 61% RH     |
| Tested By       | Henry Hsu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5239.2         | 121.96 PK               |                |             | 18.33                   | 8.37                   | 26.7             |
| 2                   | *5239.2         | 113.84 AV               |                |             | 10.21                   | 8.37                   | 18.58            |
| 3                   | 5149.55         | 59.66 PK                | 74             | -14.34      | -43.97                  | 8.37                   | -35.6            |
| 4                   | 5149.55         | 50.61 AV                | 54             | -3.39       | -53.02                  | 8.37                   | -44.65           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

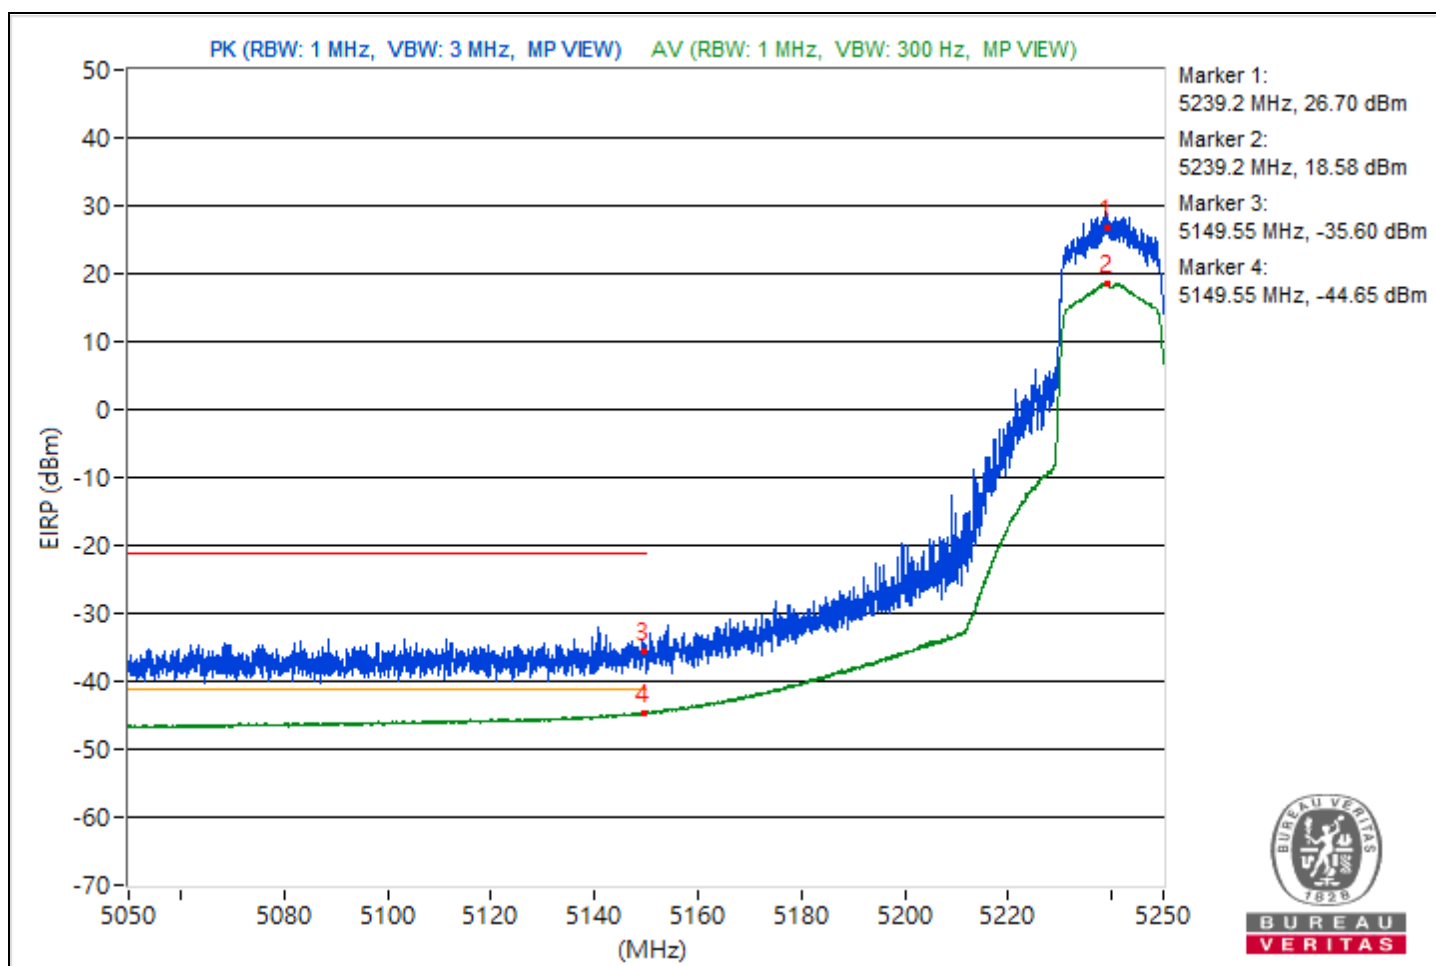


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20)    | Channel                  | CH 52 : 5260 MHz |
| Frequency Range | 5.25 GHz ~ 5.45 GHz | Environmental Conditions | 19°C, 61% RH     |
| Tested By       | Henry Hsu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5259.12        | 121.25 PK               |                |             | 17.62                   | 8.37                   | 25.99            |
| 2                   | *5259.12        | 114.01 AV               |                |             | 10.38                   | 8.37                   | 18.75            |
| 3                   | 5350.75         | 57.69 PK                | 74             | -16.31      | -45.94                  | 8.37                   | -37.57           |
| 4                   | 5350.75         | 50.64 AV                | 54             | -3.36       | -52.99                  | 8.37                   | -44.62           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

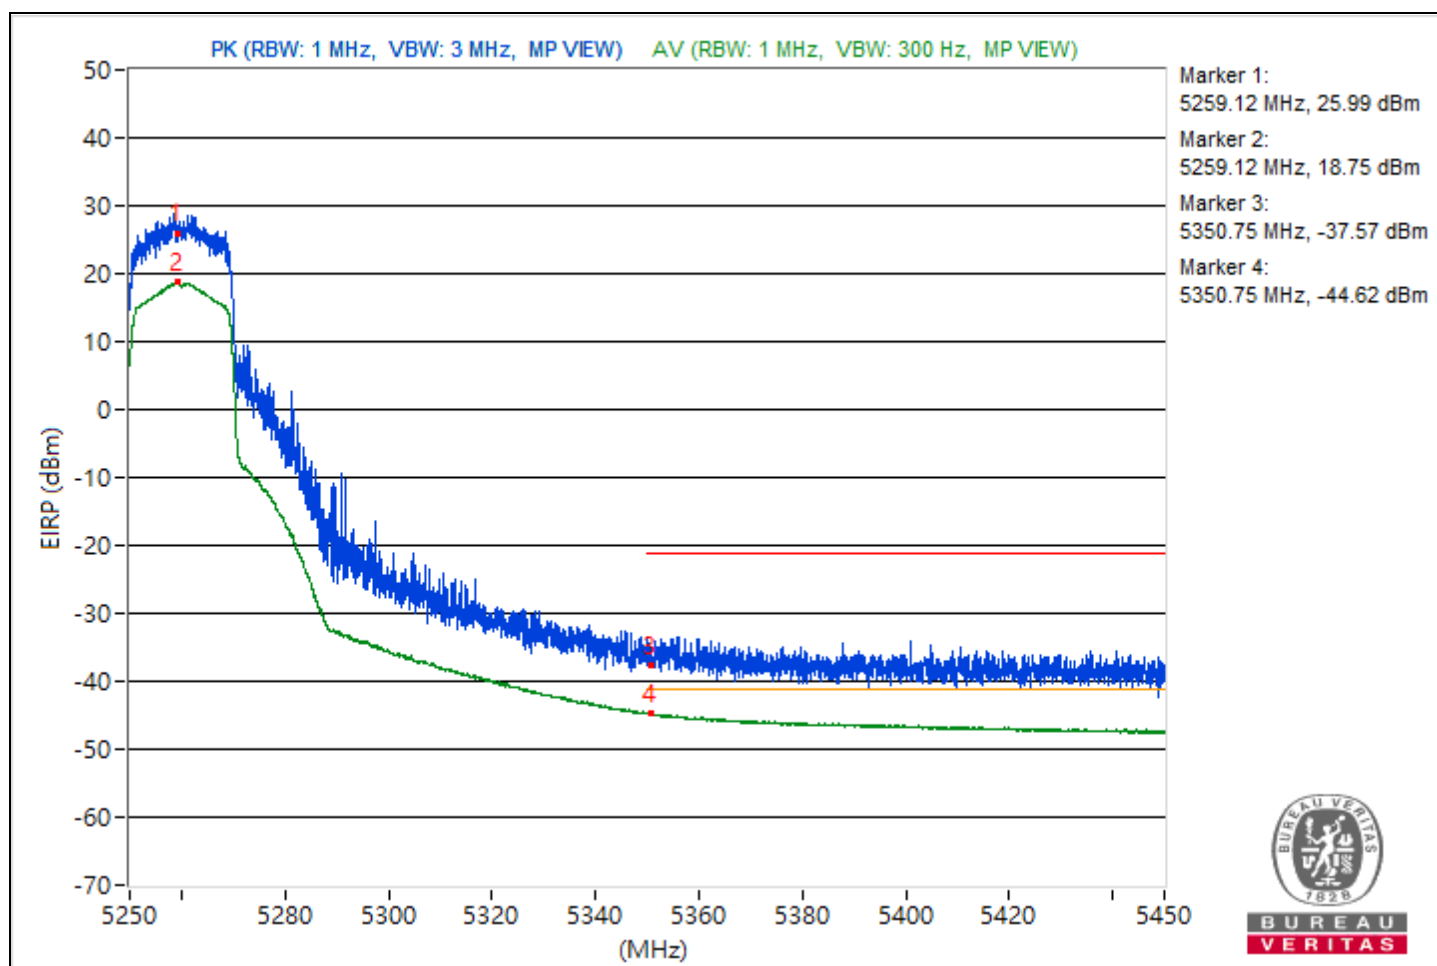


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20)    | Channel                  | CH 60 : 5300 MHz |
| Frequency Range | 5.25 GHz ~ 5.45 GHz | Environmental Conditions | 19°C, 61% RH     |
| Tested By       | Henry Hsu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5300.93        | 122.17 PK               |                |             | 18.54                   | 8.37                   | 26.91            |
| 2                   | *5300.93        | 114.03 AV               |                |             | 10.4                    | 8.37                   | 18.77            |
| 3                   | 5350.12         | 64.16 PK                | 74             | -9.84       | -39.47                  | 8.37                   | -31.1            |
| 4                   | 5350.12         | 53.17 AV                | 54             | -0.83       | -50.46                  | 8.37                   | -42.09           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

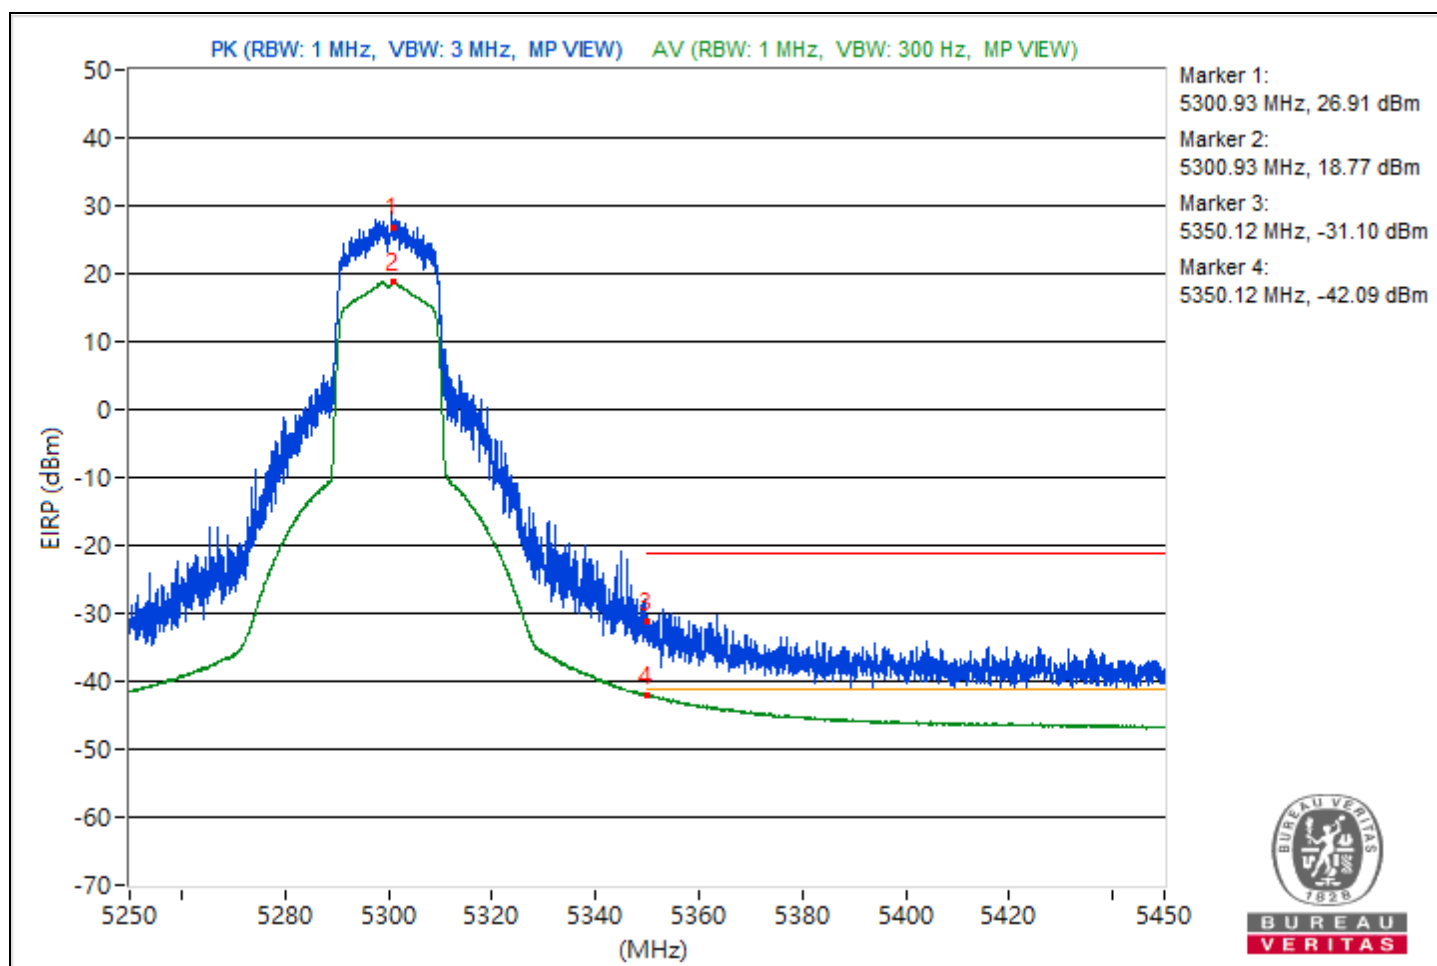


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20)    | Channel                  | CH 64 : 5320 MHz |
| Frequency Range | 5.25 GHz ~ 5.45 GHz | Environmental Conditions | 19°C, 61% RH     |
| Tested By       | Henry Hsu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5318.98        | 120.24 PK               |                |             | 16.61                   | 8.37                   | 24.98            |
| 2                   | *5318.98        | 112.53 AV               |                |             | 8.9                     | 8.37                   | 17.27            |
| 3                   | 5350.2          | 63.4 PK                 | 74             | -10.6       | -40.23                  | 8.37                   | -31.86           |
| 4                   | 5350.2          | 53.26 AV                | 54             | -0.74       | -50.37                  | 8.37                   | -42              |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

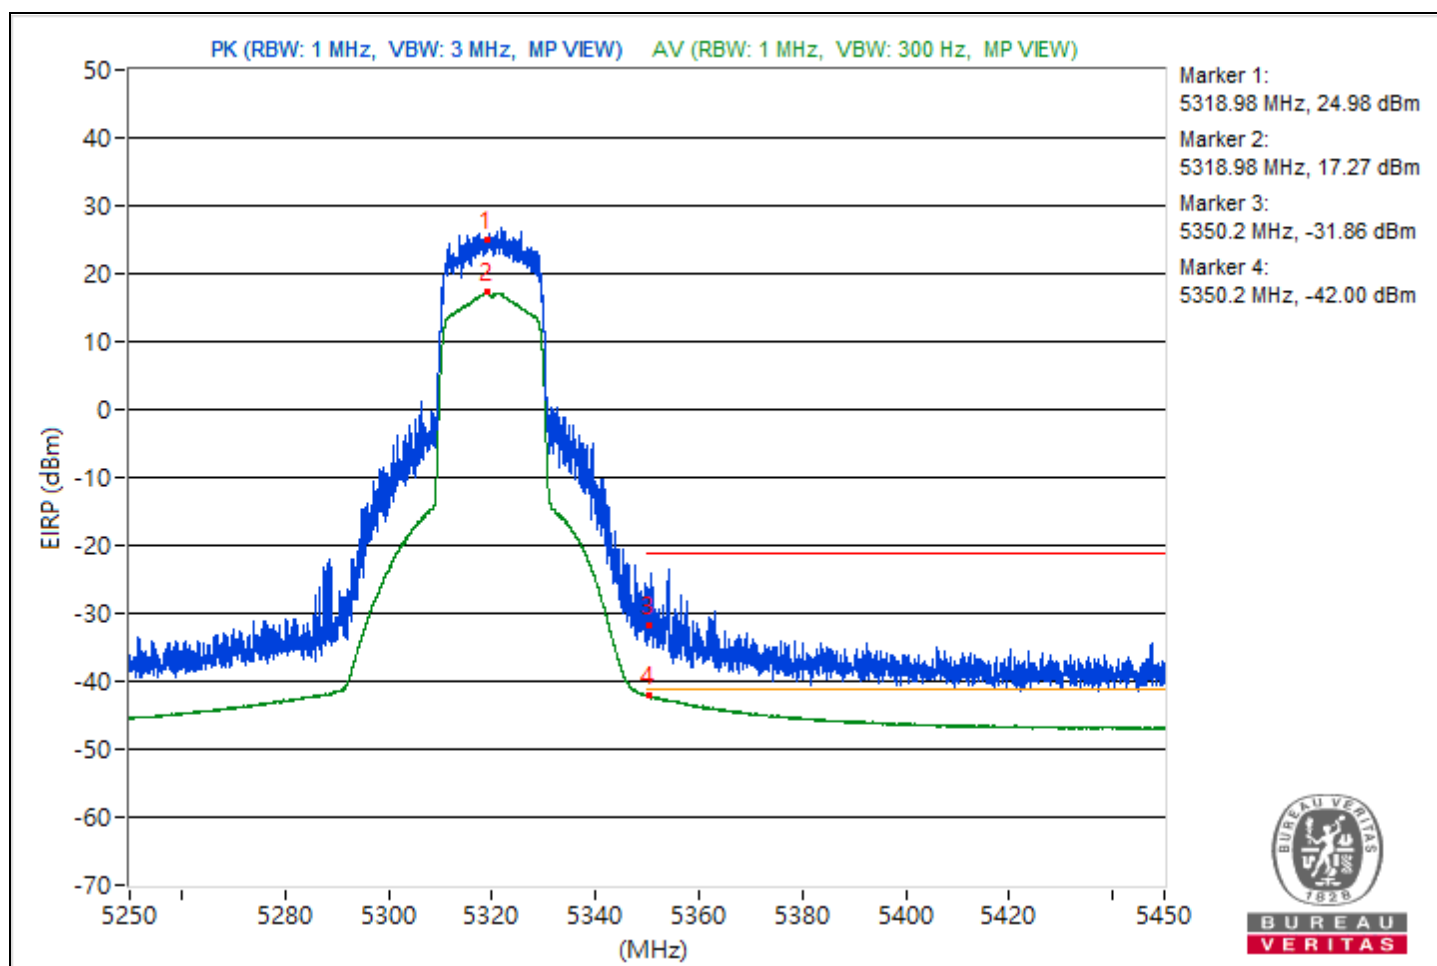


|                 |                    |                          |                   |
|-----------------|--------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20)   | Channel                  | CH 100 : 5500 MHz |
| Frequency Range | 5.35 GHz ~ 5.6 GHz | Environmental Conditions | 19°C, 61% RH      |
| Tested By       | Henry Hsu          |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5499.94        | 121.78 PK               |                |             | 18.15                   | 8.37                   | 26.52            |
| 2                   | 5459.75         | 67 PK                   | 74             | -7          | -36.63                  | 8.37                   | -28.26           |
| 3                   | #5464.66        | 67.88 PK                | 68.26          | -0.38       | -35.75                  | 8.37                   | -27.38           |
| 4                   | *5501.03        | 111.93 AV               |                |             | 8.3                     | 8.37                   | 16.67            |
| 5                   | 5459.97         | 51.87 AV                | 54             | -2.13       | -51.76                  | 8.37                   | -43.39           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

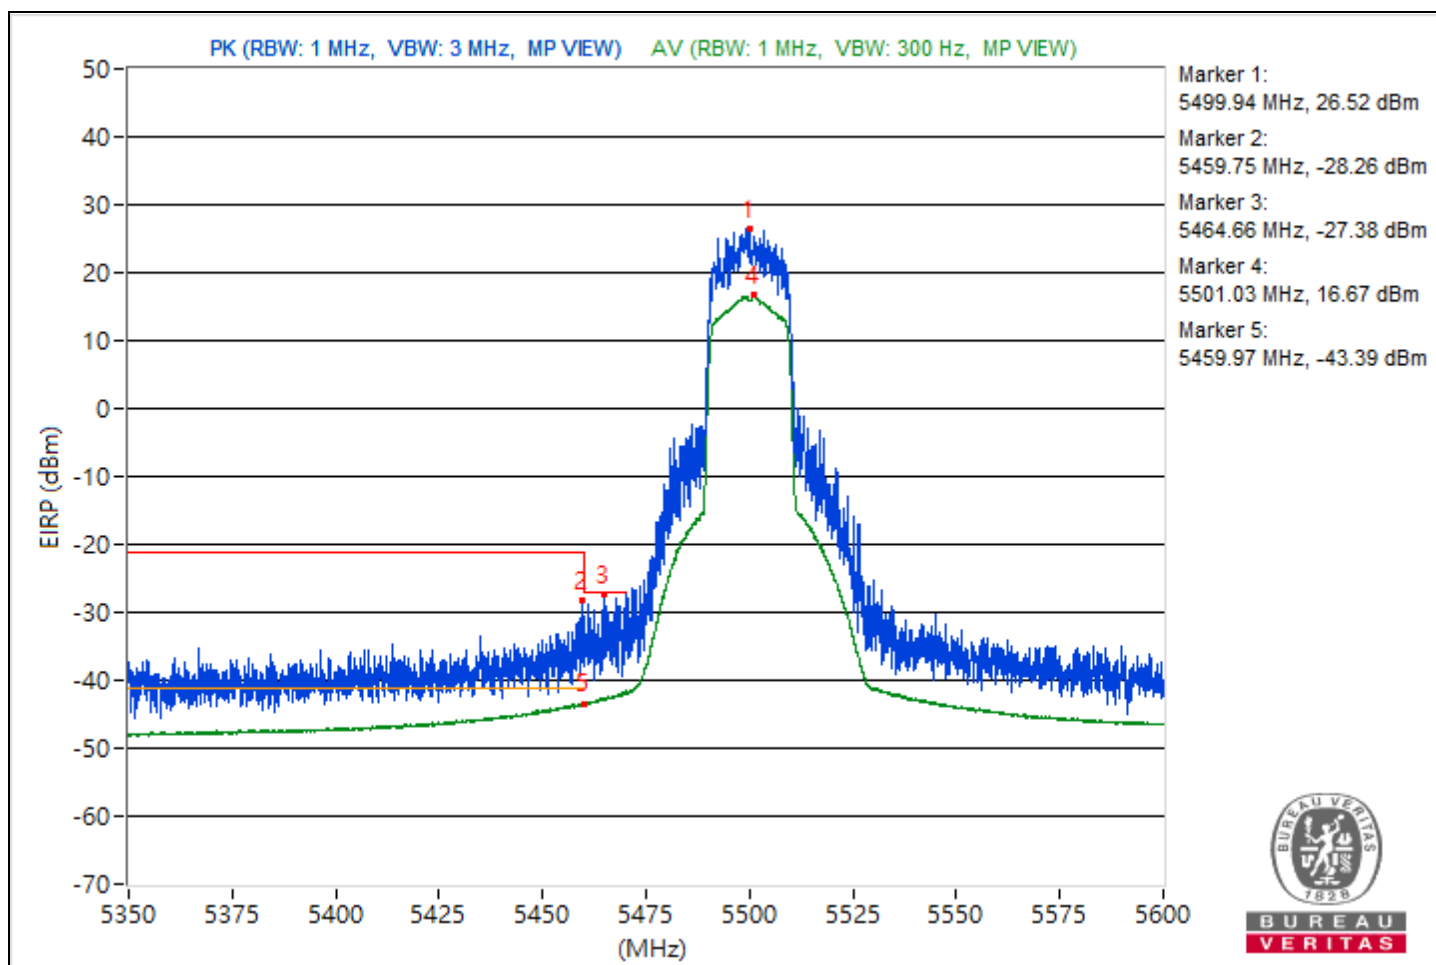


|                 |                    |                          |                   |
|-----------------|--------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20)   | Channel                  | CH 116 : 5580 MHz |
| Frequency Range | 5.35 GHz ~ 5.6 GHz | Environmental Conditions | 19°C, 61% RH      |
| Tested By       | Henry Hsu          |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5580.91        | 124.13 PK               |                |             | 20.5                    | 8.37                   | 28.87            |
| 2                   | 5457.5          | 60.09 PK                | 74             | -13.91      | -43.54                  | 8.37                   | -35.17           |
| 3                   | #5460.87        | 61.4 PK                 | 68.26          | -6.86       | -42.23                  | 8.37                   | -33.86           |
| 4                   | *5581.06        | 113.68 AV               |                |             | 10.05                   | 8.37                   | 18.42            |
| 5                   | 5456.53         | 48.52 AV                | 54             | -5.48       | -55.11                  | 8.37                   | -46.74           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

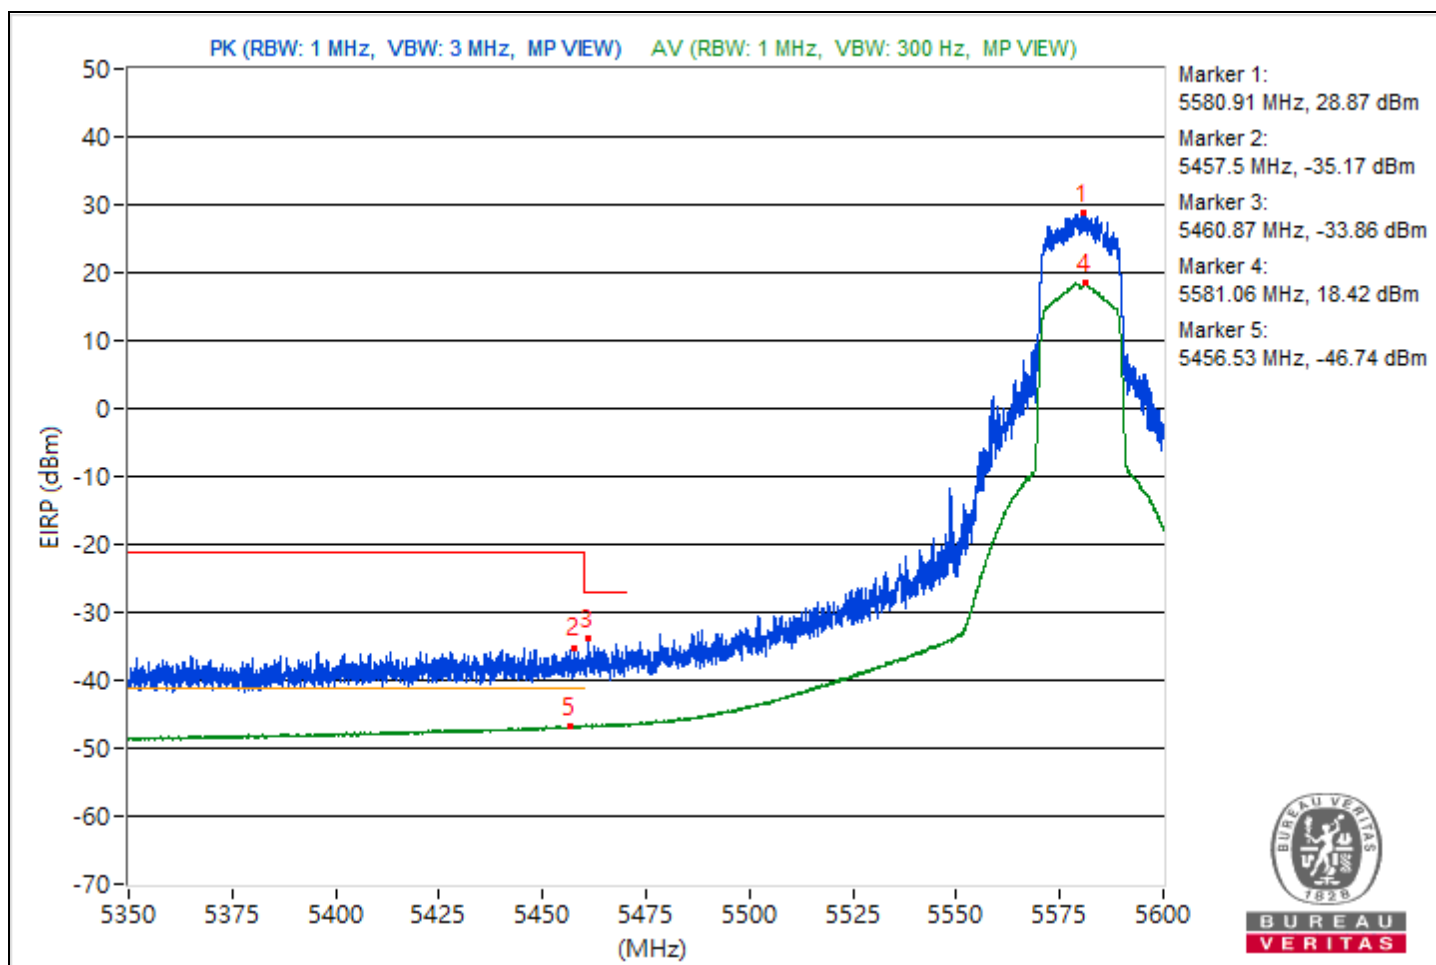


|                 |                       |                          |                   |
|-----------------|-----------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20)      | Channel                  | CH 140 : 5700 MHz |
| Frequency Range | 5.625 GHz ~ 5.825 GHz | Environmental Conditions | 19°C, 61% RH      |
| Tested By       | Henry Hsu             |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5701.15        | 123.09                  |                |             | 19.46                   | 8.37                   | 27.83            |
| 2                   | #5725.18        | 67.57                   | 68.26          | -0.69       | -36.06                  | 8.37                   | -27.69           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

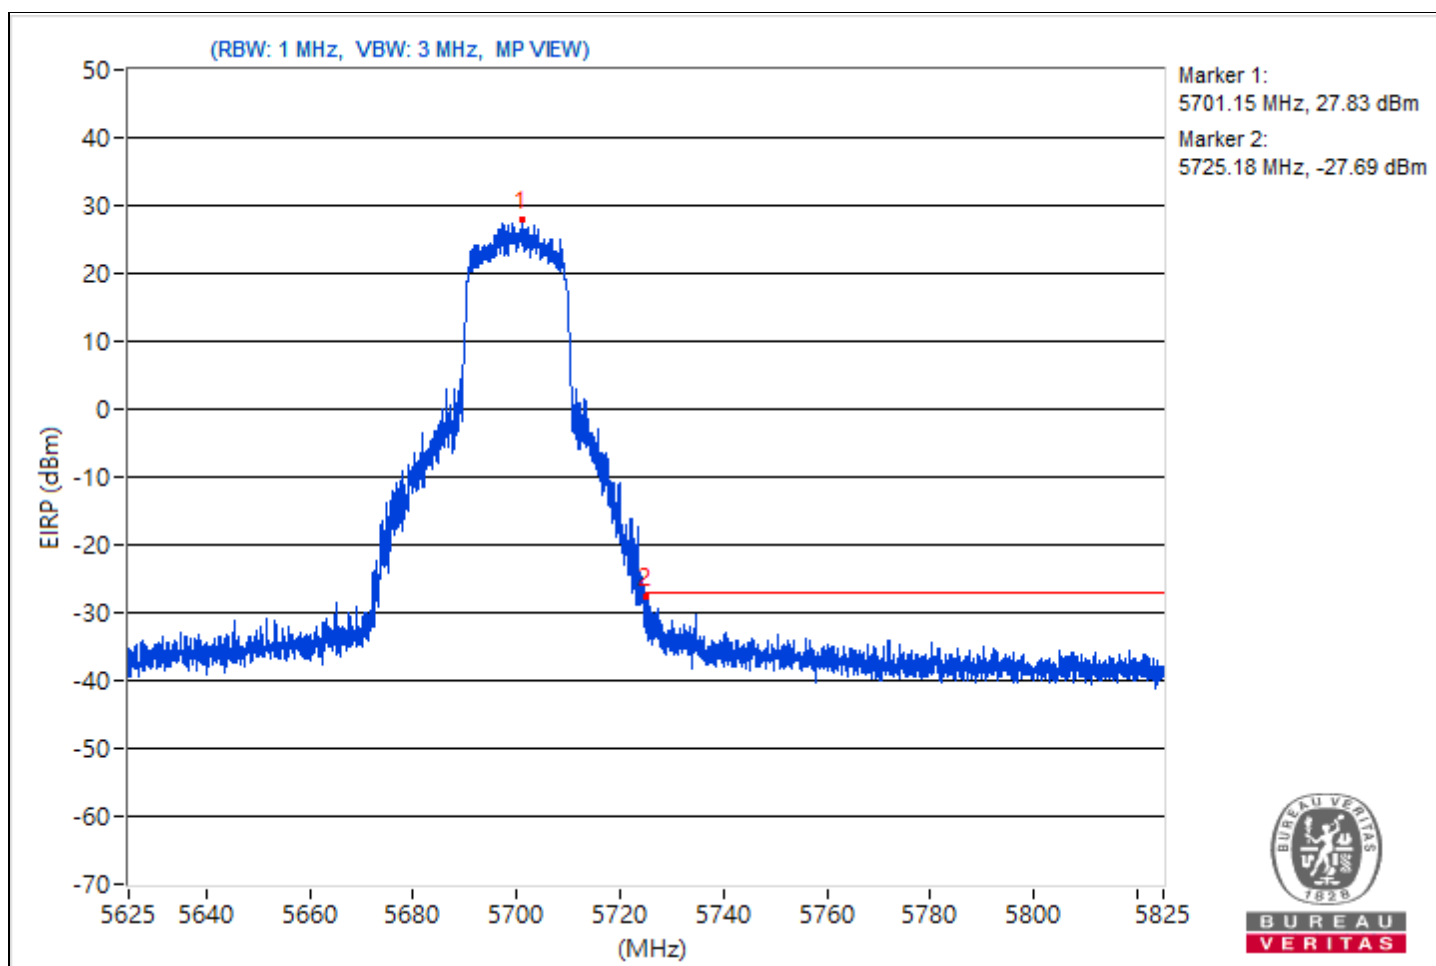


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 144 : 5720 MHz |
| Frequency Range | 5.7 GHz ~ 6 GHz  | Environmental Conditions | 19°C, 61% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5719.61        | 123.7                   |                |             | 20.07                   | 8.37                   | 28.44            |
| 2                   | #5859.07        | 60.84                   | 68.26          | -7.42       | -42.79                  | 8.37                   | -34.42           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

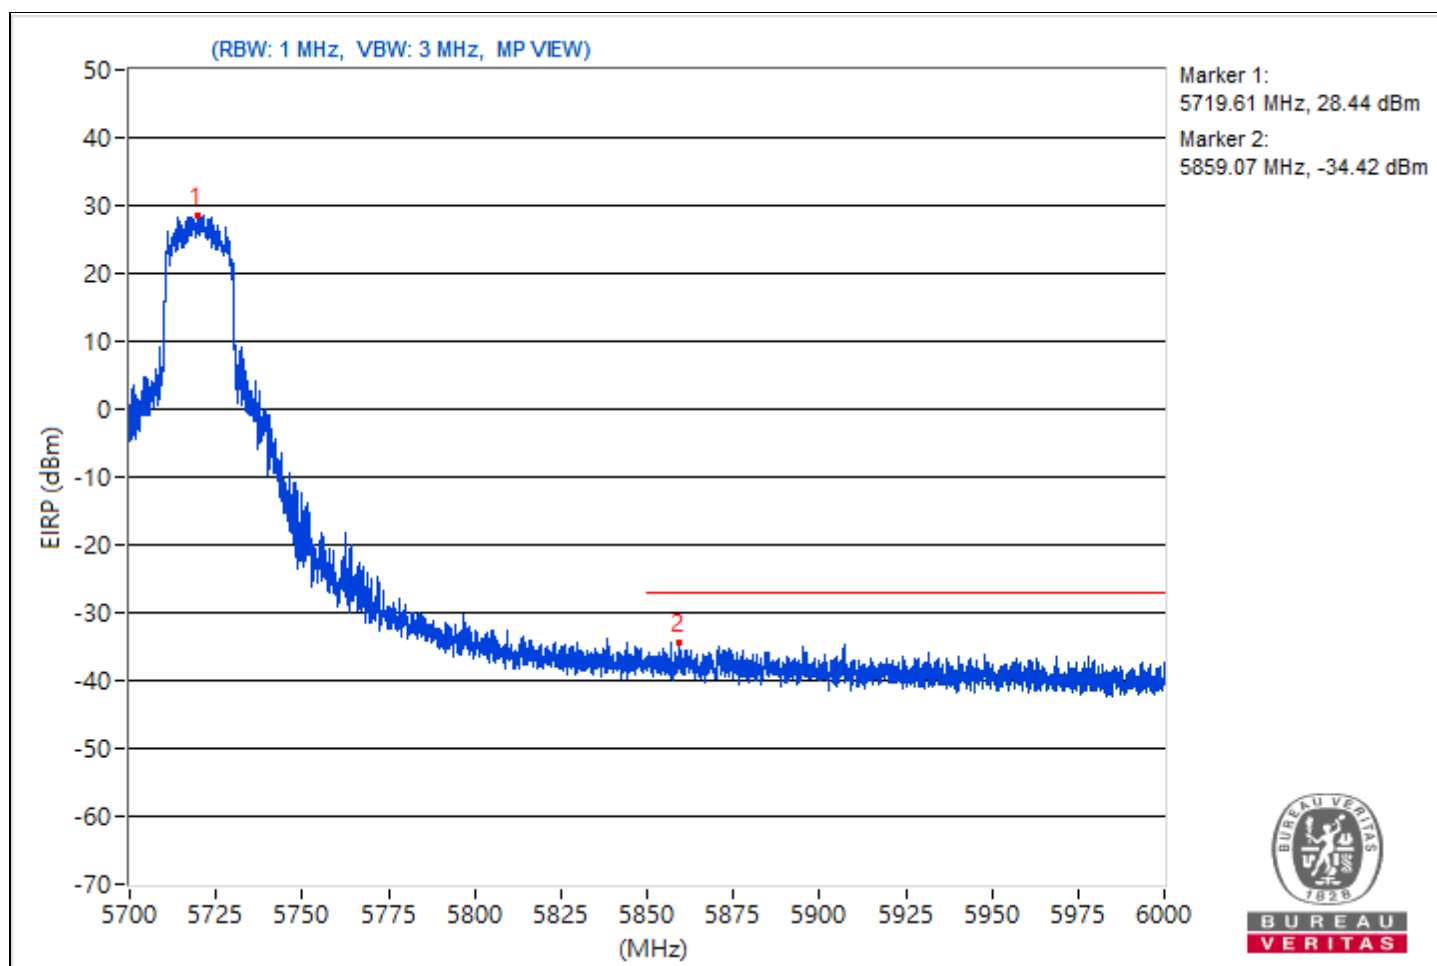


|                 |                      |                          |                   |
|-----------------|----------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20)     | Channel                  | CH 149 : 5745 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz | Environmental Conditions | 19°C, 61% RH      |
| Tested By       | Henry Hsu            |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5747.48        | 123.53                  |                |             | 19.9                    | 8.37                   | 28.27            |
| 2                   | #5639.3         | 61.56                   | 68.26          | -6.7        | -42.07                  | 8.37                   | -33.7            |
| 3                   | #5649.99        | 60.95                   | 68.26          | -7.31       | -42.68                  | 8.37                   | -34.31           |
| 4                   | #5719.57        | 84.83                   | 110.74         | -25.91      | -18.8                   | 8.37                   | -10.43           |
| 5                   | #5720.88        | 87.46                   | 112.87         | -25.41      | -16.17                  | 8.37                   | -7.8             |
| 6                   | #5854.83        | 58.31                   | 111.24         | -52.93      | -45.32                  | 8.37                   | -36.95           |
| 7                   | #5874.66        | 60.72                   | 105.35         | -44.63      | -42.91                  | 8.37                   | -34.54           |
| 8                   | #5924.77        | 58.51                   | 68.43          | -9.92       | -45.12                  | 8.37                   | -36.75           |
| 9                   | #5928.93        | 59.48                   | 68.26          | -8.78       | -44.15                  | 8.37                   | -35.78           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

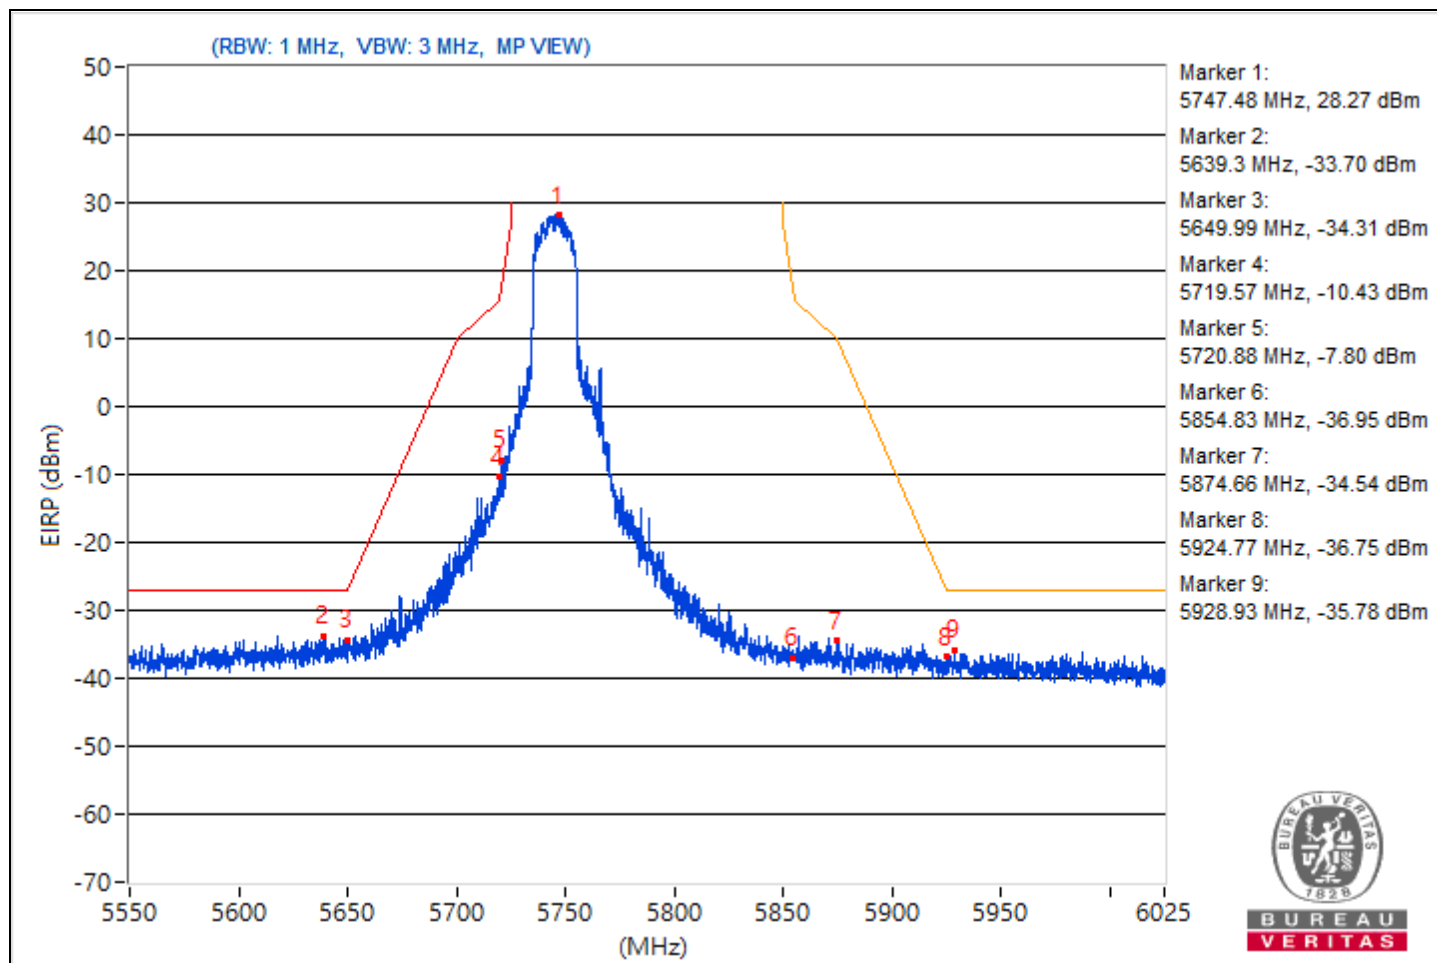


|                 |                      |                          |                   |
|-----------------|----------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20)     | Channel                  | CH 157 : 5785 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz | Environmental Conditions | 19°C, 61% RH      |
| Tested By       | Henry Hsu            |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5785.24        | 123.2                   |                |             | 19.57                   | 8.37                   | 27.94            |
| 2                   | #5614.96        | 60.94                   | 68.26          | -7.32       | -42.69                  | 8.37                   | -34.32           |
| 3                   | #5649.99        | 59.96                   | 68.26          | -8.3        | -43.67                  | 8.37                   | -35.3            |
| 4                   | #5711.14        | 65.09                   | 108.38         | -43.29      | -38.54                  | 8.37                   | -30.17           |
| 5                   | #5720.05        | 66.37                   | 110.97         | -44.6       | -37.26                  | 8.37                   | -28.89           |
| 6                   | #5854.71        | 63.19                   | 111.52         | -48.33      | -40.44                  | 8.37                   | -32.07           |
| 7                   | #5871.81        | 61.32                   | 106.15         | -44.83      | -42.31                  | 8.37                   | -33.94           |
| 8                   | #5923.71        | 59.91                   | 69.22          | -9.31       | -43.72                  | 8.37                   | -35.35           |
| 9                   | #5953.87        | 59.88                   | 68.26          | -8.38       | -43.75                  | 8.37                   | -35.38           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

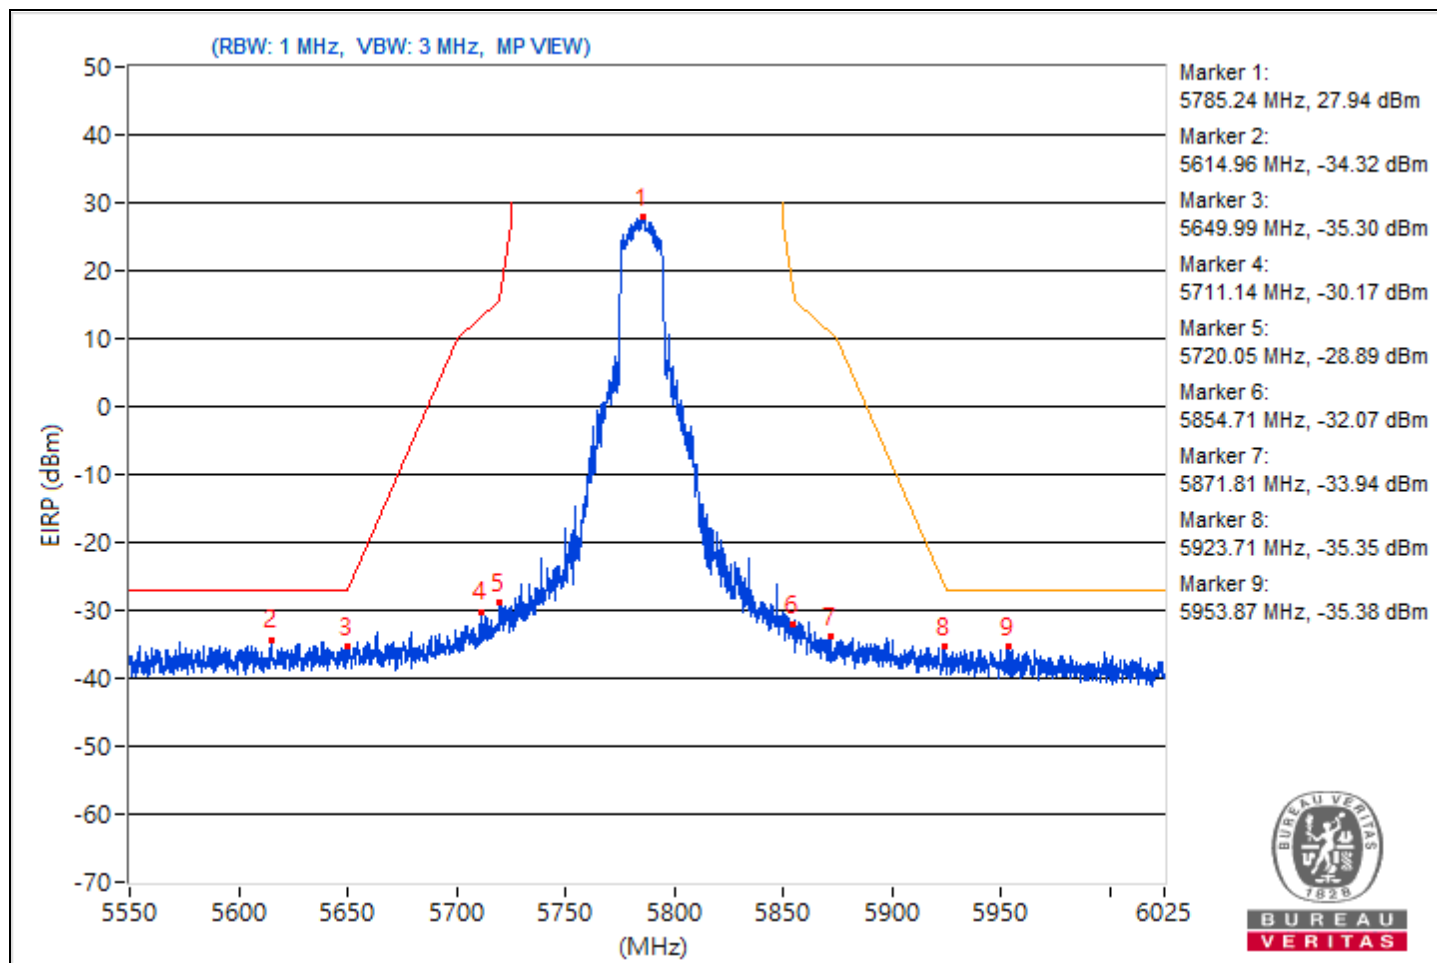


|                 |                      |                          |                   |
|-----------------|----------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20)     | Channel                  | CH 165 : 5825 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz | Environmental Conditions | 19°C, 61% RH      |
| Tested By       | Henry Hsu            |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5828.35        | 123.9                   |                |             | 20.27                   | 8.37                   | 28.64            |
| 2                   | #5593.34        | 60.96                   | 68.26          | -7.3        | -42.67                  | 8.37                   | -34.3            |
| 3                   | #5650.7         | 58.28                   | 68.78          | -10.5       | -45.35                  | 8.37                   | -36.98           |
| 4                   | #5702           | 60.85                   | 105.82         | -44.97      | -42.78                  | 8.37                   | -34.41           |
| 5                   | #5720.29        | 59.96                   | 111.52         | -51.56      | -43.67                  | 8.37                   | -35.3            |
| 6                   | #5854.83        | 80.24                   | 111.24         | -31         | -23.39                  | 8.37                   | -15.02           |
| 7                   | #5870.27        | 77.55                   | 106.58         | -29.03      | -26.08                  | 8.37                   | -17.71           |
| 8                   | #5922.64        | 61.24                   | 70.01          | -8.77       | -42.39                  | 8.37                   | -34.02           |
| 9                   | #5930.12        | 62.17                   | 68.26          | -6.09       | -41.46                  | 8.37                   | -33.09           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

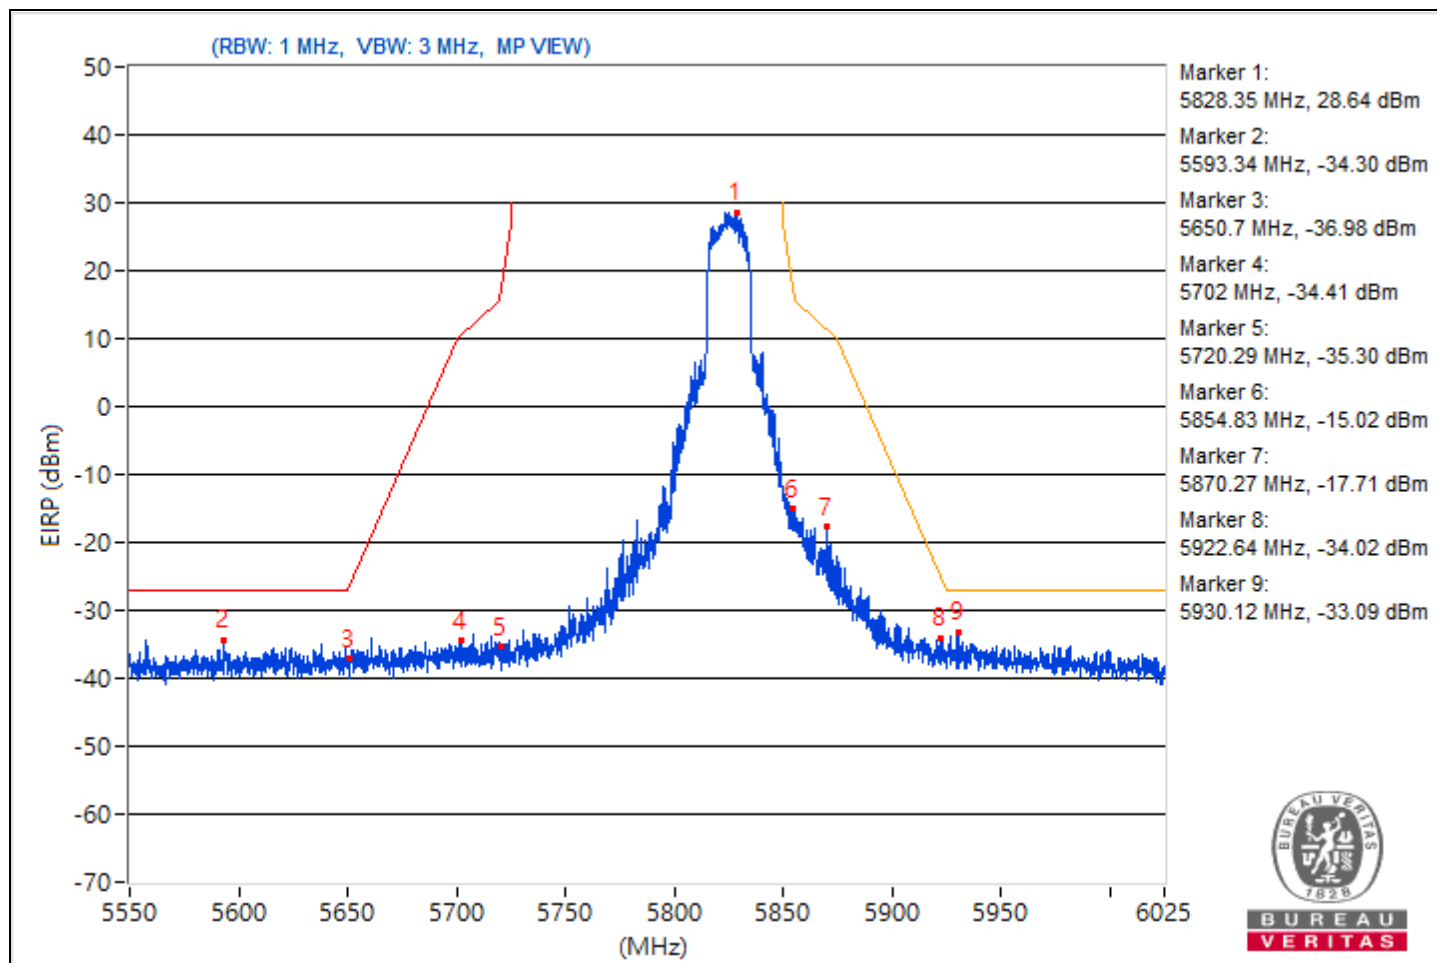


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT40)    | Channel                  | CH 38 : 5190 MHz |
| Frequency Range | 5.05 GHz ~ 5.25 GHz | Environmental Conditions | 24°C, 64% RH     |
| Tested By       | Katina Lu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5188.75        | 114.82 PK               |                |             | 11.19                   | 8.37                   | 19.56            |
| 2                   | *5188.75        | 107.77 AV               |                |             | 4.14                    | 8.37                   | 12.51            |
| 3                   | 5149.77         | 60.54 PK                | 74             | -13.46      | -43.09                  | 8.37                   | -34.72           |
| 4                   | 5149.77         | 53.36 AV                | 54             | -0.64       | -50.27                  | 8.37                   | -41.9            |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

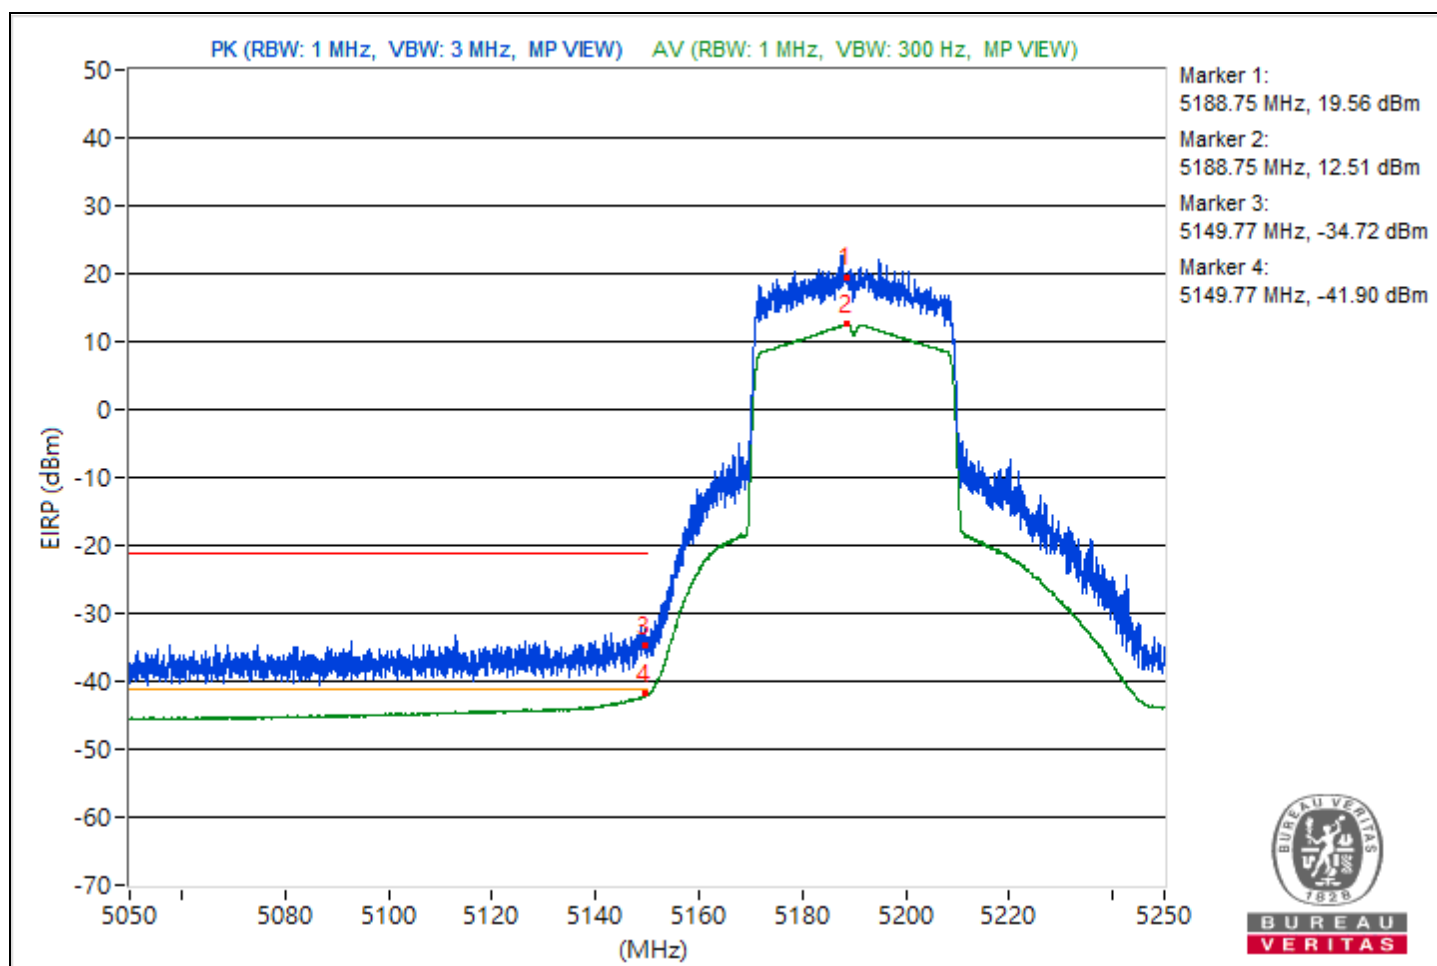


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT40)    | Channel                  | CH 46 : 5230 MHz |
| Frequency Range | 5.05 GHz ~ 5.25 GHz | Environmental Conditions | 24°C, 64% RH     |
| Tested By       | Katina Lu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5228.77        | 115.41 PK               |                |             | 11.78                   | 8.37                   | 20.15            |
| 2                   | *5228.77        | 108.36 AV               |                |             | 4.73                    | 8.37                   | 13.1             |
| 3                   | 5149.4          | 61.88 PK                | 74             | -12.12      | -41.75                  | 8.37                   | -33.38           |
| 4                   | 5149.4          | 53.73 AV                | 54             | -0.27       | -49.9                   | 8.37                   | -41.53           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

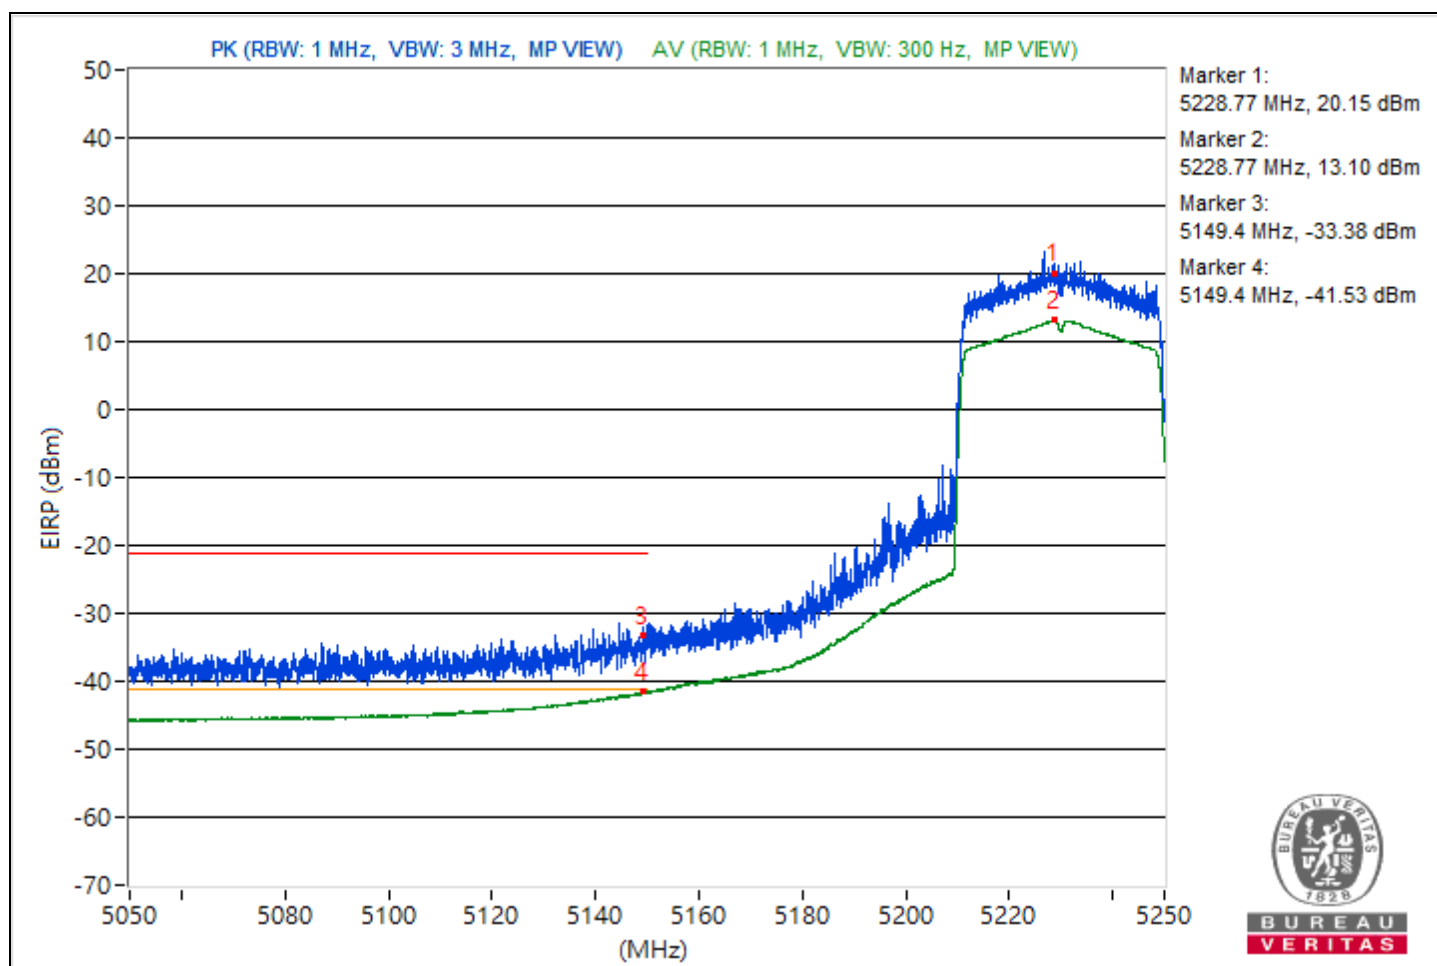


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT40)    | Channel                  | CH 54 : 5270 MHz |
| Frequency Range | 5.25 GHz ~ 5.45 GHz | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5268.23        | 117.09 PK               |                |             | 13.46                   | 8.37                   | 21.83            |
| 2                   | *5268.23        | 108.06 AV               |                |             | 4.43                    | 8.37                   | 12.8             |
| 3                   | 5350.18         | 62.92 PK                | 74             | -11.08      | -40.71                  | 8.37                   | -32.34           |
| 4                   | 5350.18         | 53.36 AV                | 54             | -0.64       | -50.27                  | 8.37                   | -41.9            |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

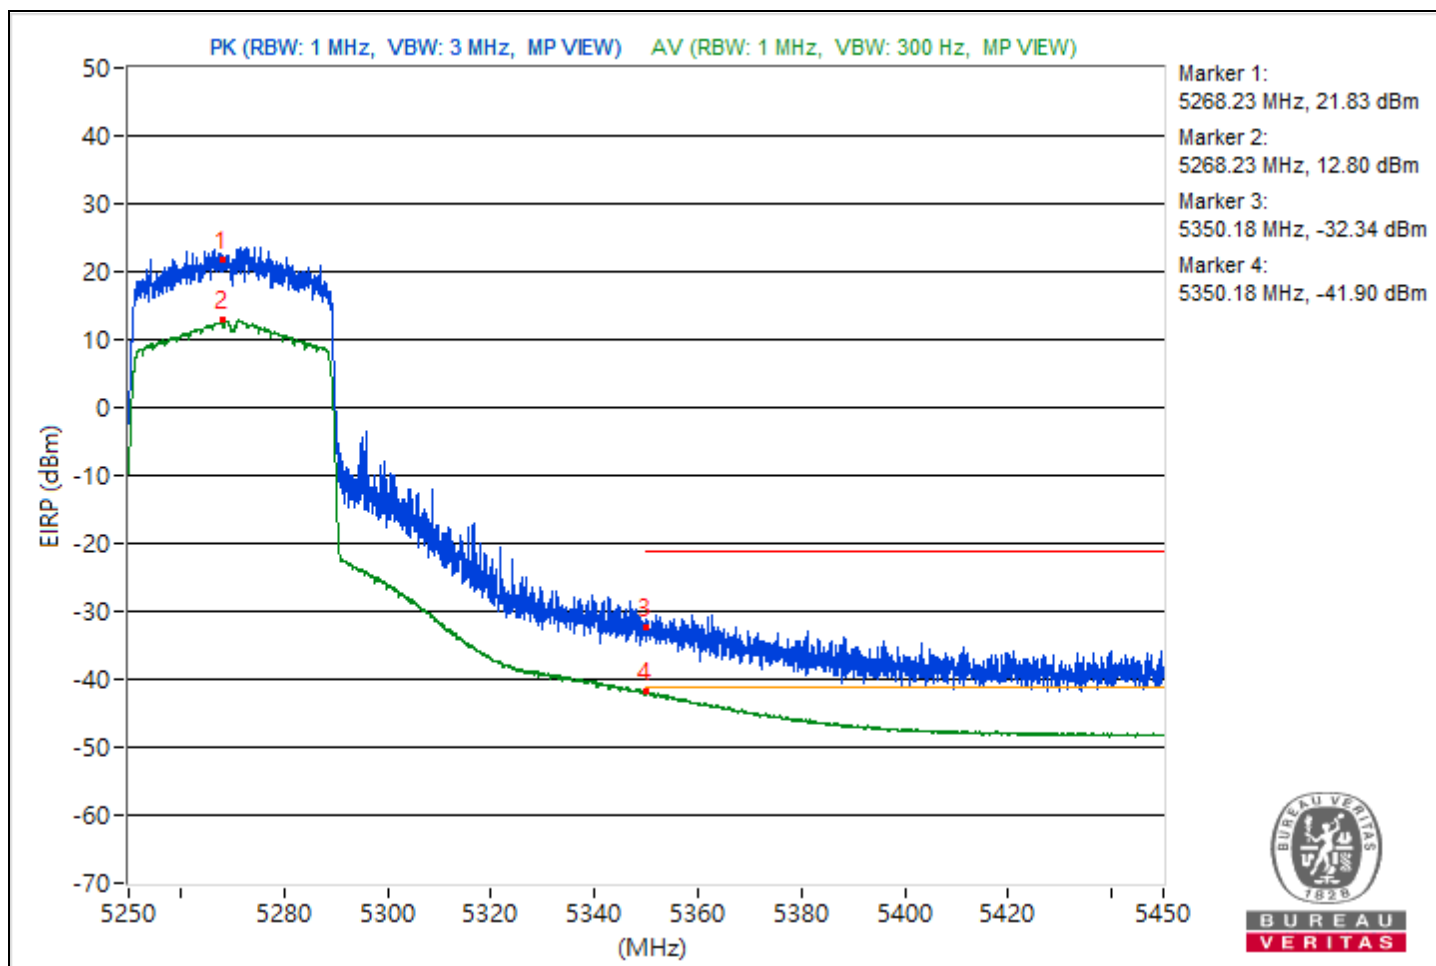


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT40)    | Channel                  | CH 62 : 5310 MHz |
| Frequency Range | 5.25 GHz ~ 5.45 GHz | Environmental Conditions | 24°C, 64% RH     |
| Tested By       | Katina Lu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5311.45        | 113.04 PK               |                |             | 9.41                    | 8.37                   | 17.78            |
| 2                   | *5311.45        | 108.53 AV               |                |             | 4.9                     | 8.37                   | 13.27            |
| 3                   | 5350.12         | 59.32 PK                | 74             | -14.68      | -44.31                  | 8.37                   | -35.94           |
| 4                   | 5350.12         | 53.09 AV                | 54             | -0.91       | -50.54                  | 8.37                   | -42.17           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

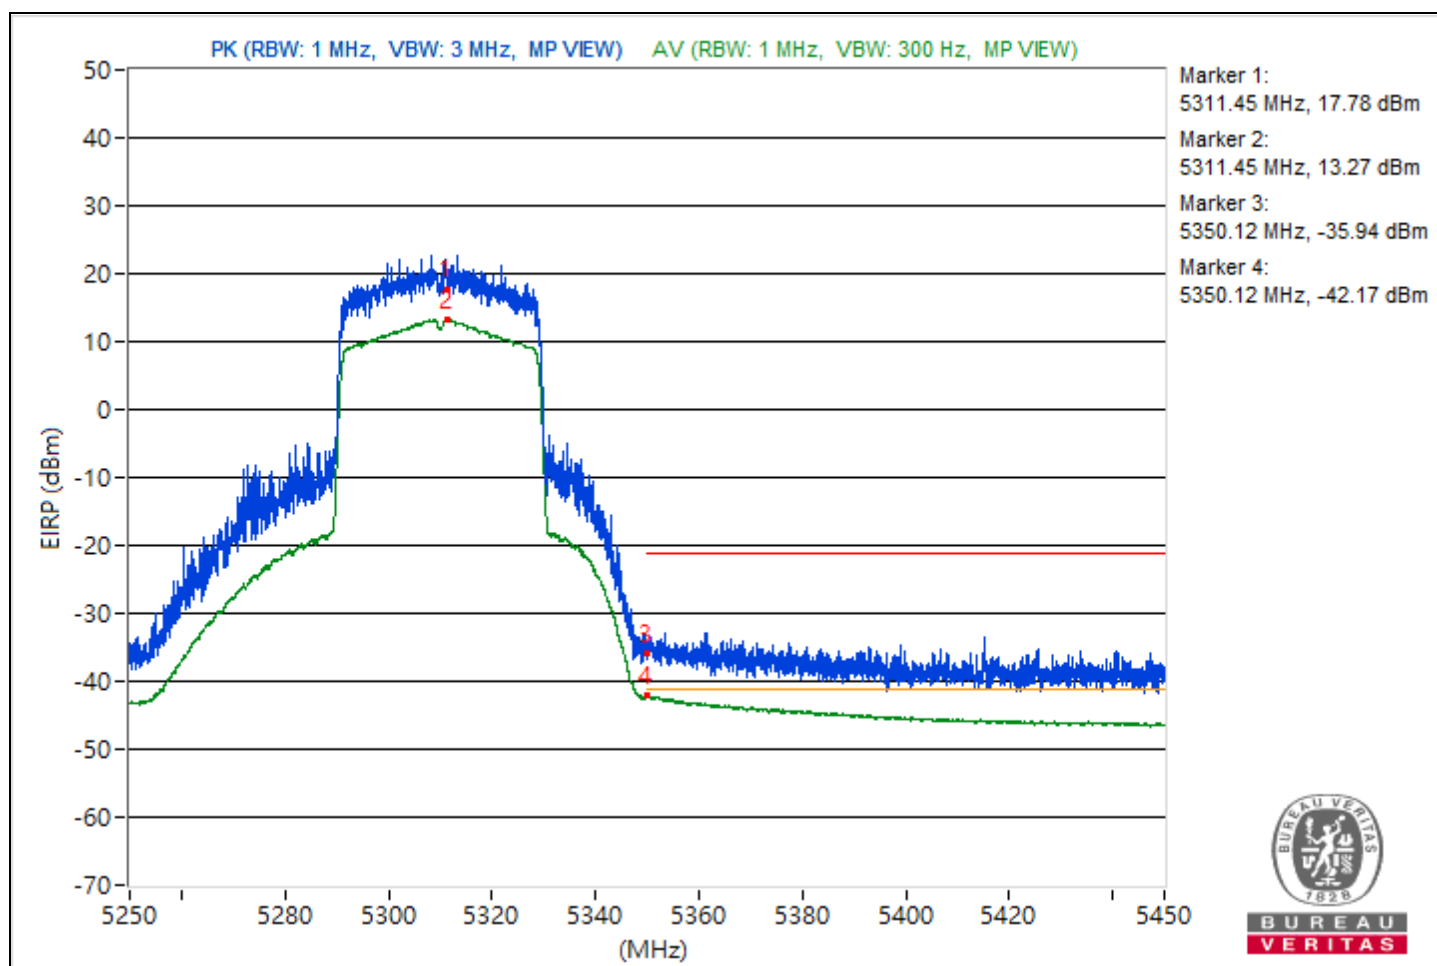


|                 |                    |                          |                   |
|-----------------|--------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT40)   | Channel                  | CH 102 : 5510 MHz |
| Frequency Range | 5.35 GHz ~ 5.6 GHz | Environmental Conditions | 24°C, 64% RH      |
| Tested By       | Katina Lu          |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5506.03        | 118.61 PK               |                |             | 14.98                   | 8.37                   | 23.35            |
| 2                   | 5441.03         | 62.81 PK                | 74             | -11.19      | -40.82                  | 8.37                   | -32.45           |
| 3                   | #5465.78        | 64.27 PK                | 68.26          | -3.99       | -39.36                  | 8.37                   | -30.99           |
| 4                   | *5508.44        | 108.92 AV               |                |             | 5.29                    | 8.37                   | 13.66            |
| 5                   | 5459.94         | 52.17 AV                | 54             | -1.83       | -51.46                  | 8.37                   | -43.09           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

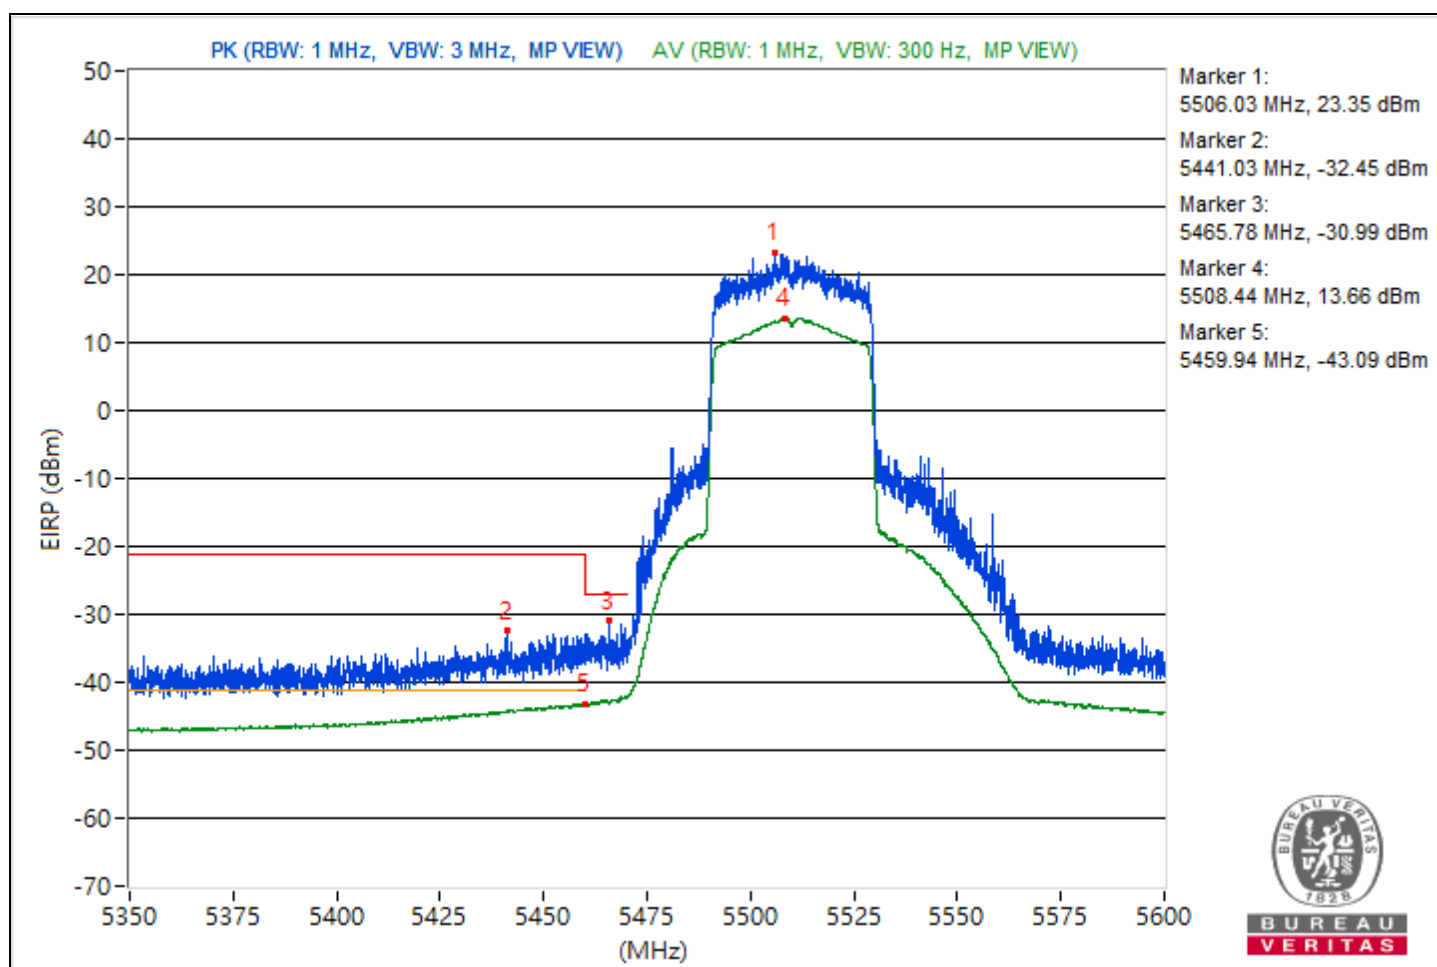


|                 |                    |                          |                   |
|-----------------|--------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT40)   | Channel                  | CH 110 : 5550 MHz |
| Frequency Range | 5.35 GHz ~ 5.6 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu          |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5548.66        | 121.48 PK               |                |             | 17.85                   | 8.37                   | 26.22            |
| 2                   | 5453.31         | 65.56 PK                | 74             | -8.44       | -38.07                  | 8.37                   | -29.7            |
| 3                   | #5469.25        | 66.93 PK                | 68.26          | -1.33       | -36.7                   | 8.37                   | -28.33           |
| 4                   | *5551.72        | 108.7 AV                |                |             | 5.07                    | 8.37                   | 13.44            |
| 5                   | 5459.09         | 53.28 AV                | 54             | -0.72       | -50.35                  | 8.37                   | -41.98           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

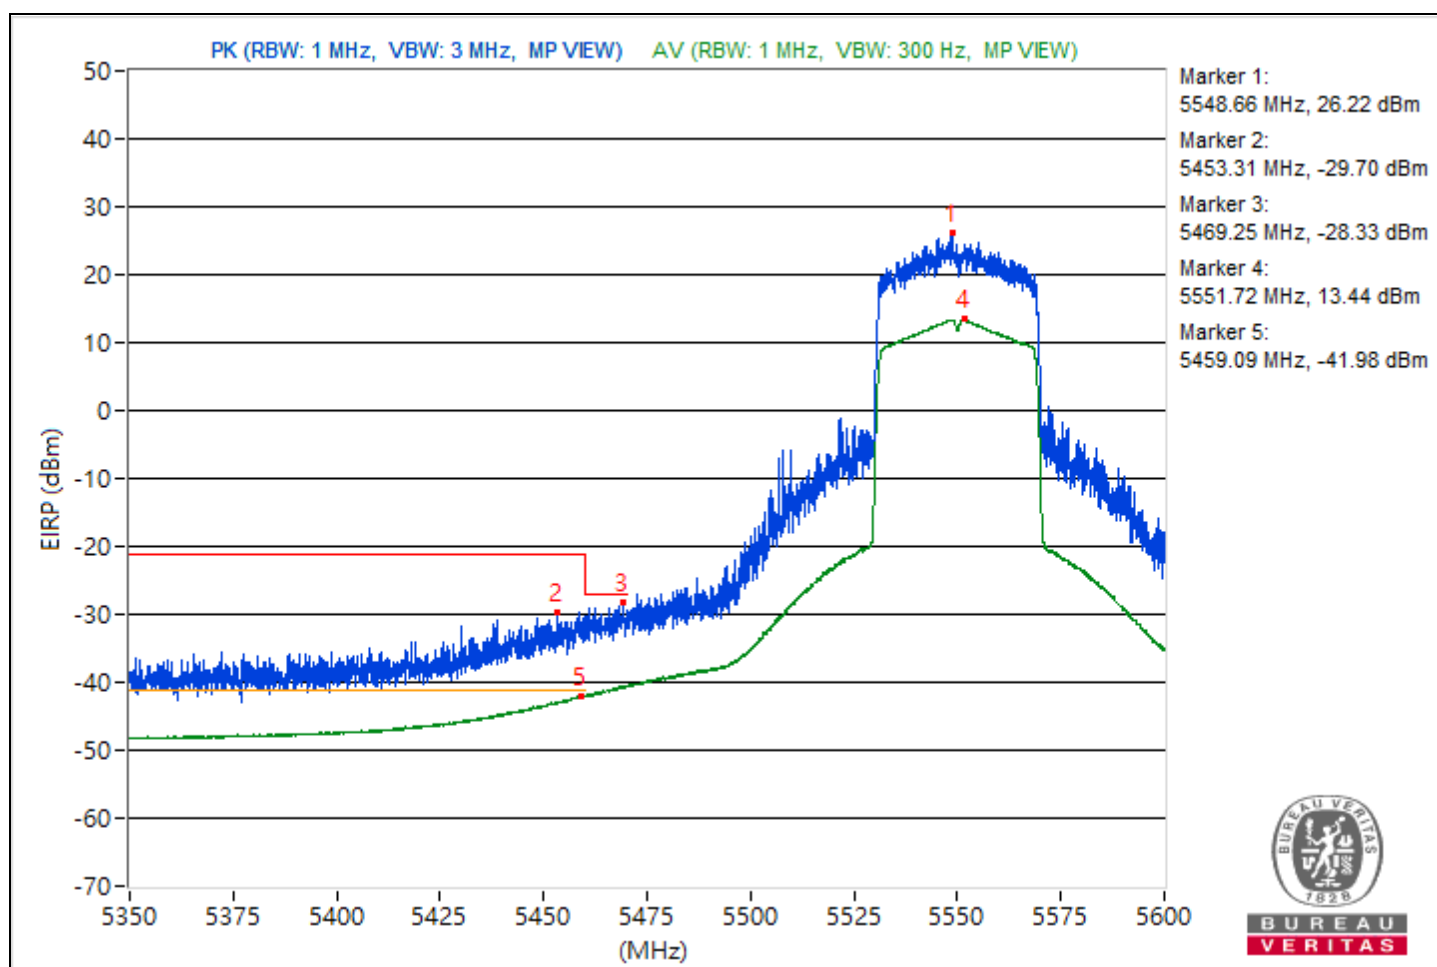


|                 |                       |                          |                   |
|-----------------|-----------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT40)      | Channel                  | CH 134 : 5670 MHz |
| Frequency Range | 5.625 GHz ~ 5.825 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu             |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5674.25        | 120.32                  |                |             | 16.69                   | 8.37                   | 25.06            |
| 2                   | #5726.52        | 67.66                   | 68.26          | -0.6        | -35.97                  | 8.37                   | -27.6            |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

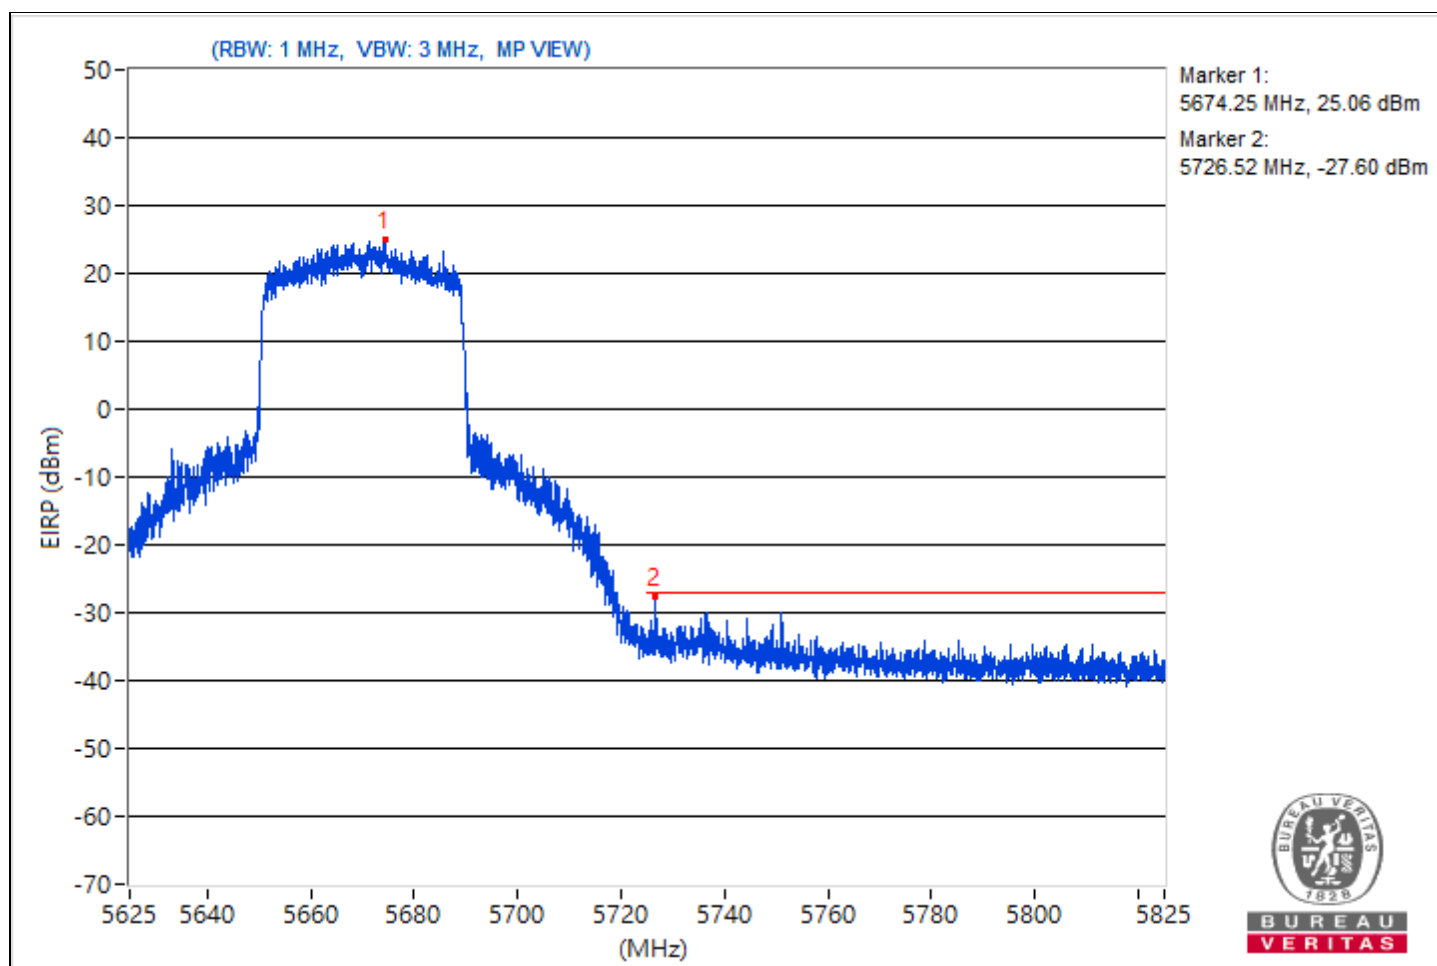


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT40) | Channel                  | CH 142 : 5710 MHz |
| Frequency Range | 5.7 GHz ~ 6 GHz  | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5708.48        | 123.35                  |                |             | 19.72                   | 8.37                   | 28.09            |
| 2                   | #5853.52        | 61.34                   | 68.26          | -6.92       | -42.29                  | 8.37                   | -33.92           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

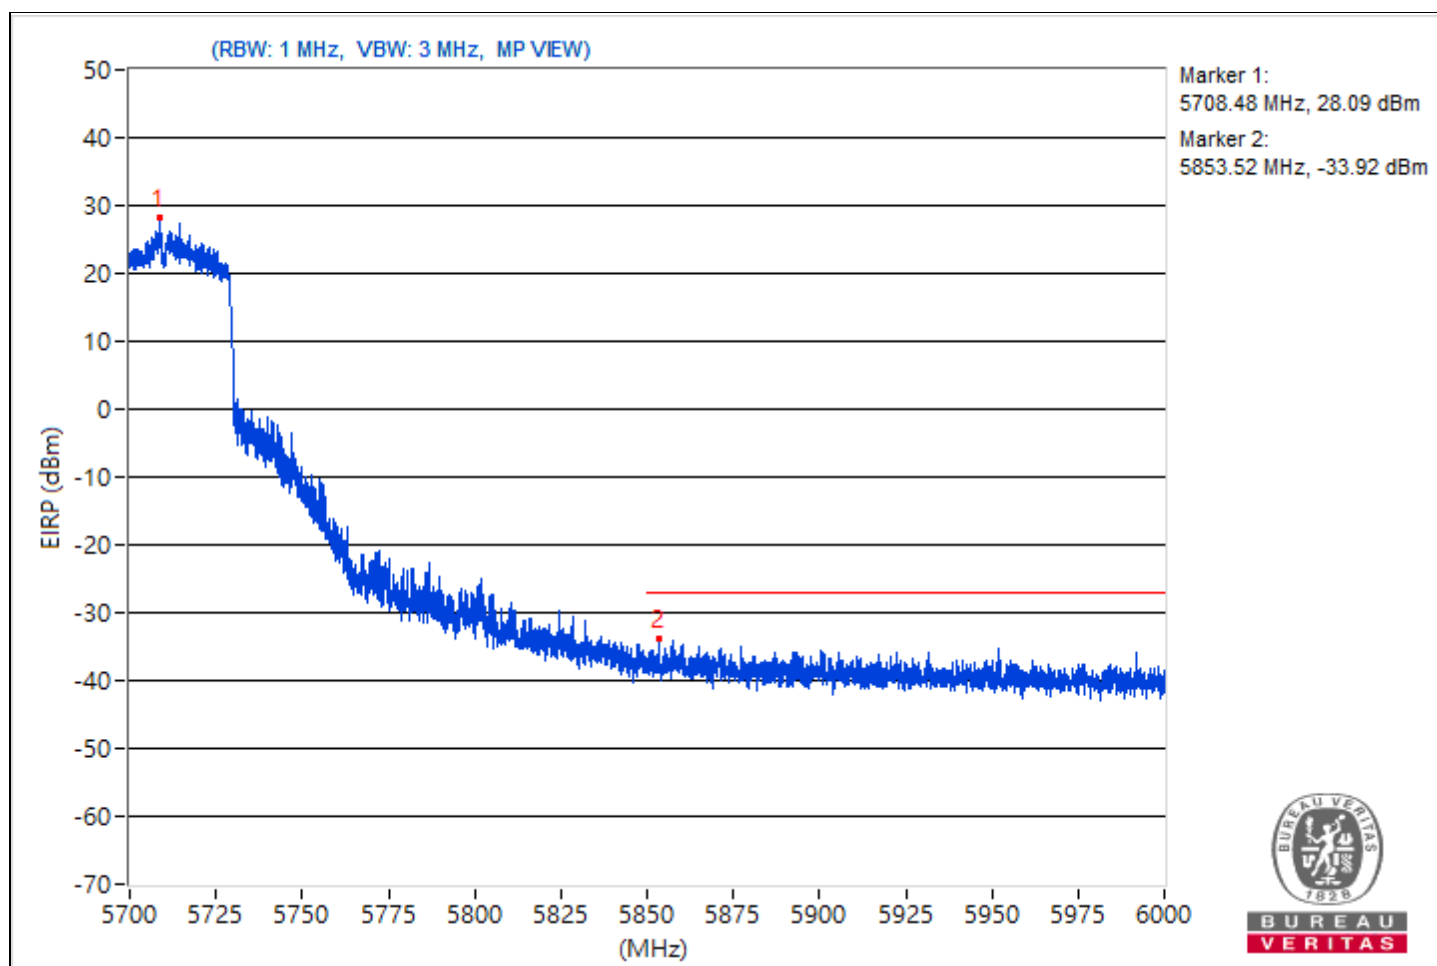


|                 |                      |                          |                   |
|-----------------|----------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT40)     | Channel                  | CH 151 : 5755 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu            |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5761.37        | 122.39                  |                |             | 18.76                   | 8.37                   | 27.13            |
| 2                   | #5635.5         | 63.87                   | 68.26          | -4.39       | -39.76                  | 8.37                   | -31.39           |
| 3                   | #5653.43        | 67.28                   | 70.8           | -3.52       | -36.35                  | 8.37                   | -27.98           |
| 4                   | #5718.86        | 85.58                   | 110.54         | -24.96      | -18.05                  | 8.37                   | -9.68            |
| 5                   | #5720.17        | 84.04                   | 111.24         | -27.2       | -19.59                  | 8.37                   | -11.22           |
| 6                   | #5854.48        | 64.49                   | 112.06         | -47.57      | -39.14                  | 8.37                   | -30.77           |
| 7                   | #5874.78        | 64.38                   | 105.32         | -40.94      | -39.25                  | 8.37                   | -30.88           |
| 8                   | #5922.28        | 61.07                   | 70.27          | -9.2        | -42.56                  | 8.37                   | -34.19           |
| 9                   | #5962.3         | 59.66                   | 68.26          | -8.6        | -43.97                  | 8.37                   | -35.6            |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

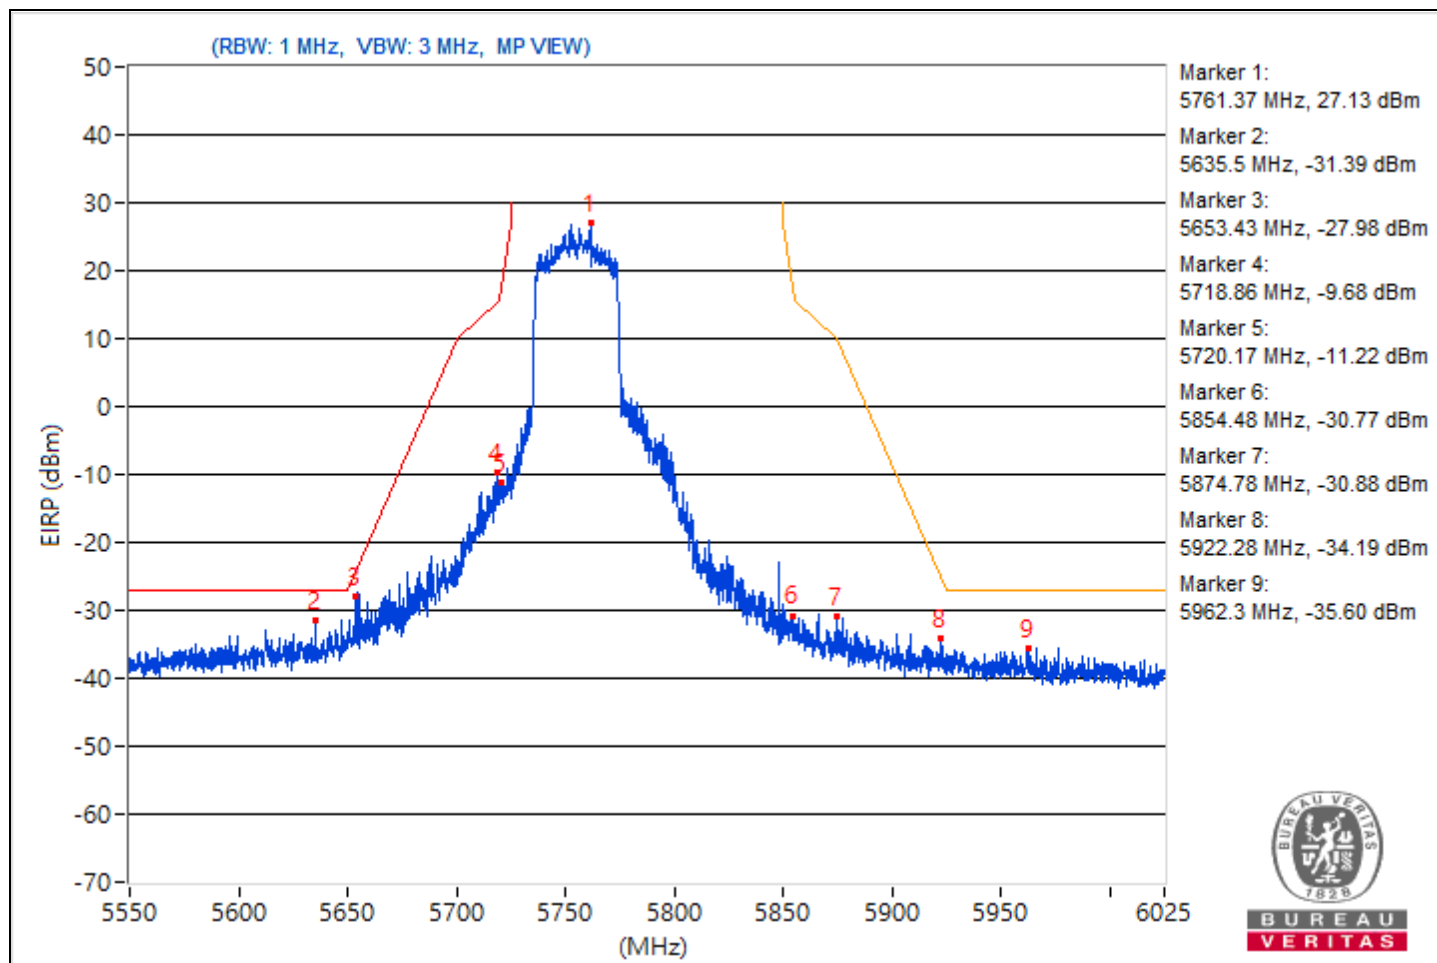


|                 |                      |                          |                   |
|-----------------|----------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT40)     | Channel                  | CH 159 : 5795 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu            |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5797.24        | 120.36                  |                |             | 16.73                   | 8.37                   | 25.1             |
| 2                   | #5646.66        | 60.75                   | 68.26          | -7.51       | -42.88                  | 8.37                   | -34.51           |
| 3                   | #5650.58        | 59.69                   | 68.69          | -9          | -43.94                  | 8.37                   | -35.57           |
| 4                   | #5703.54        | 66.39                   | 106.25         | -39.86      | -37.24                  | 8.37                   | -28.87           |
| 5                   | #5720.05        | 68.9                    | 110.97         | -42.07      | -34.73                  | 8.37                   | -26.36           |
| 6                   | #5854           | 73.9                    | 113.14         | -39.24      | -29.73                  | 8.37                   | -21.36           |
| 7                   | #5870.39        | 71.67                   | 106.55         | -34.88      | -31.96                  | 8.37                   | -23.59           |
| 8                   | #5922.4         | 61.51                   | 70.18          | -8.67       | -42.12                  | 8.37                   | -33.75           |
| 9                   | #5925.01        | 63.02                   | 68.26          | -5.24       | -40.61                  | 8.37                   | -32.24           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

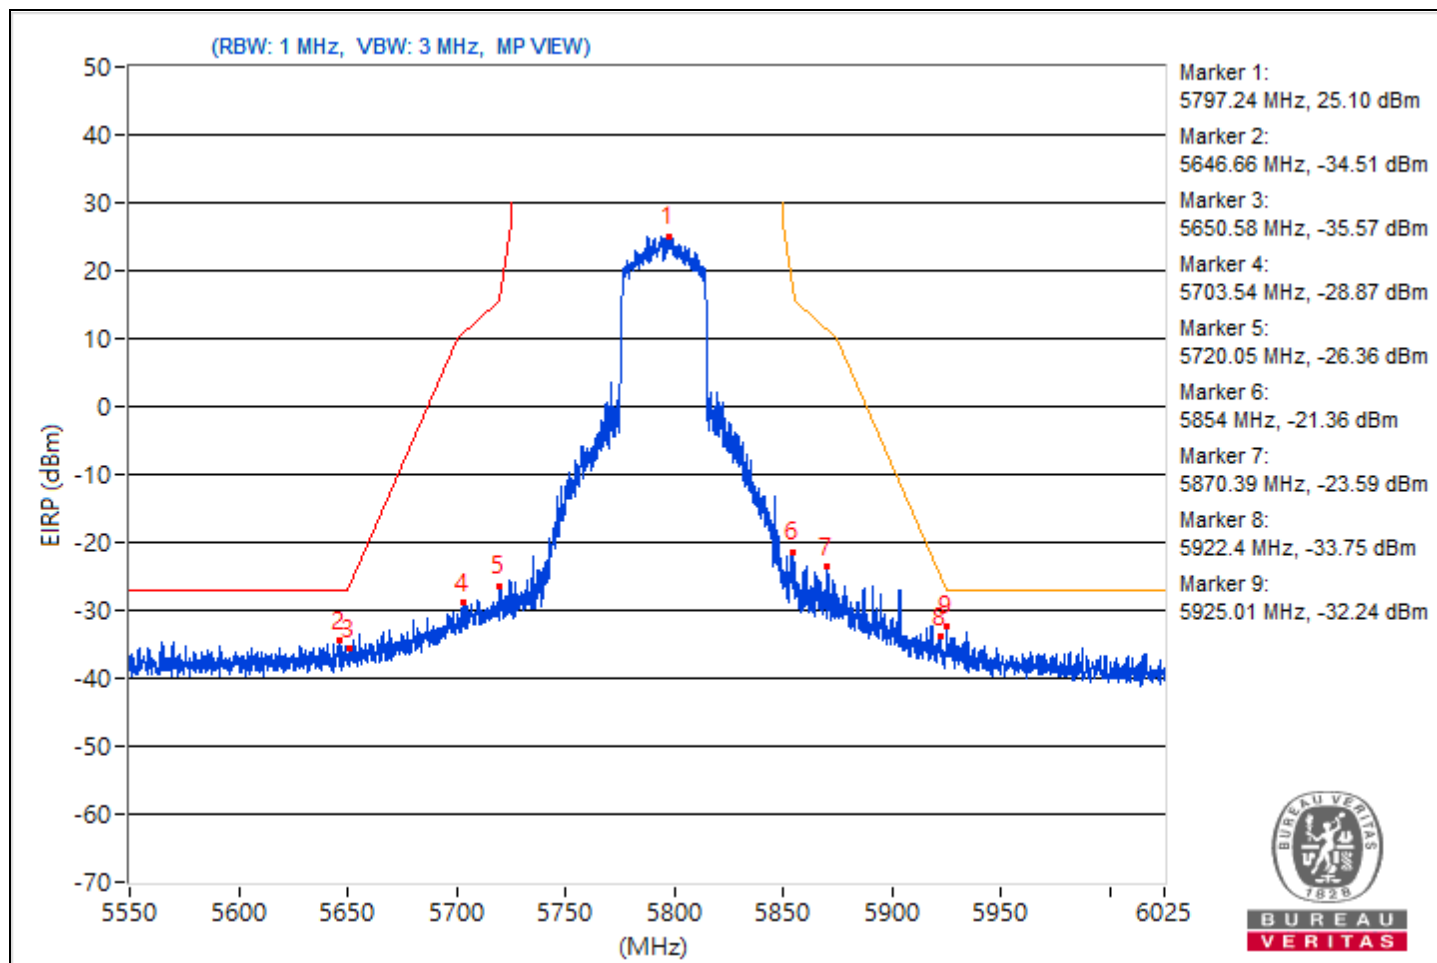


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT80)    | Channel                  | CH 42 : 5210 MHz |
| Frequency Range | 5.05 GHz ~ 5.25 GHz | Environmental Conditions | 22°C, 61% RH     |
| Tested By       | Katina Lu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5208.35        | 112.74 PK               |                |             | 9.11                    | 8.37                   | 17.48            |
| 2                   | *5208.35        | 105.27 AV               |                |             | 1.64                    | 8.37                   | 10.01            |
| 3                   | 5149.98         | 58.53 PK                | 74             | -15.47      | -45.1                   | 8.37                   | -36.73           |
| 4                   | 5149.98         | 52.68 AV                | 54             | -1.32       | -50.95                  | 8.37                   | -42.58           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

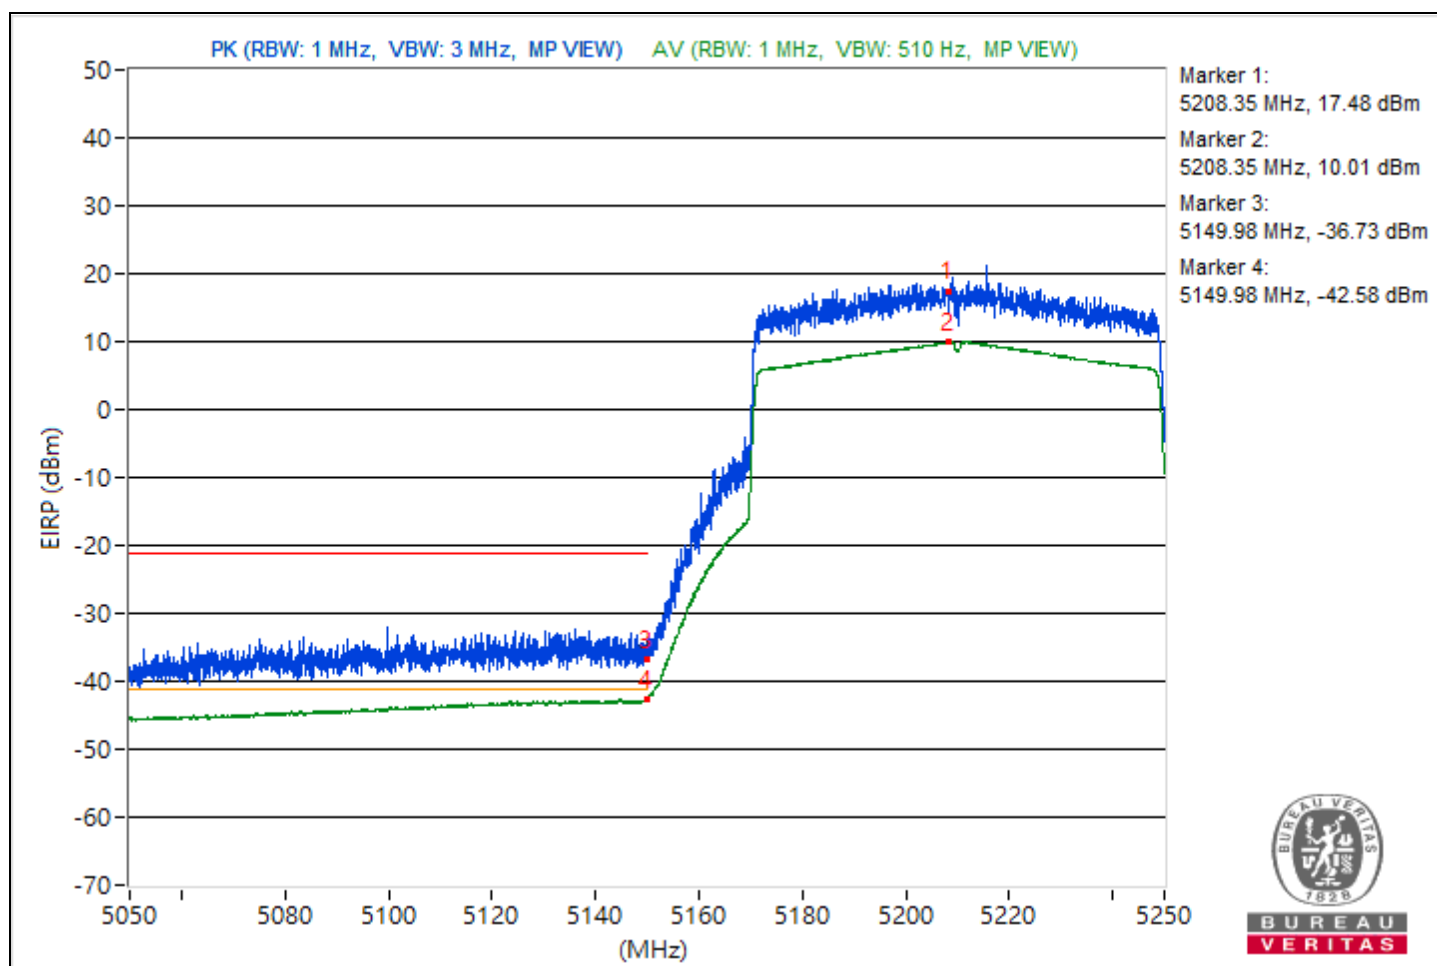


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT80)    | Channel                  | CH 58 : 5290 MHz |
| Frequency Range | 5.25 GHz ~ 5.45 GHz | Environmental Conditions | 22°C, 61% RH     |
| Tested By       | Katina Lu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5288.93        | 111.11 PK               |                |             | 7.48                    | 8.37                   | 15.85            |
| 2                   | *5288.93        | 104.02 AV               |                |             | 0.39                    | 8.37                   | 8.76             |
| 3                   | 5353.12         | 59.95 PK                | 74             | -14.05      | -43.68                  | 8.37                   | -35.31           |
| 4                   | 5353.12         | 53.03 AV                | 54             | -0.97       | -50.6                   | 8.37                   | -42.23           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

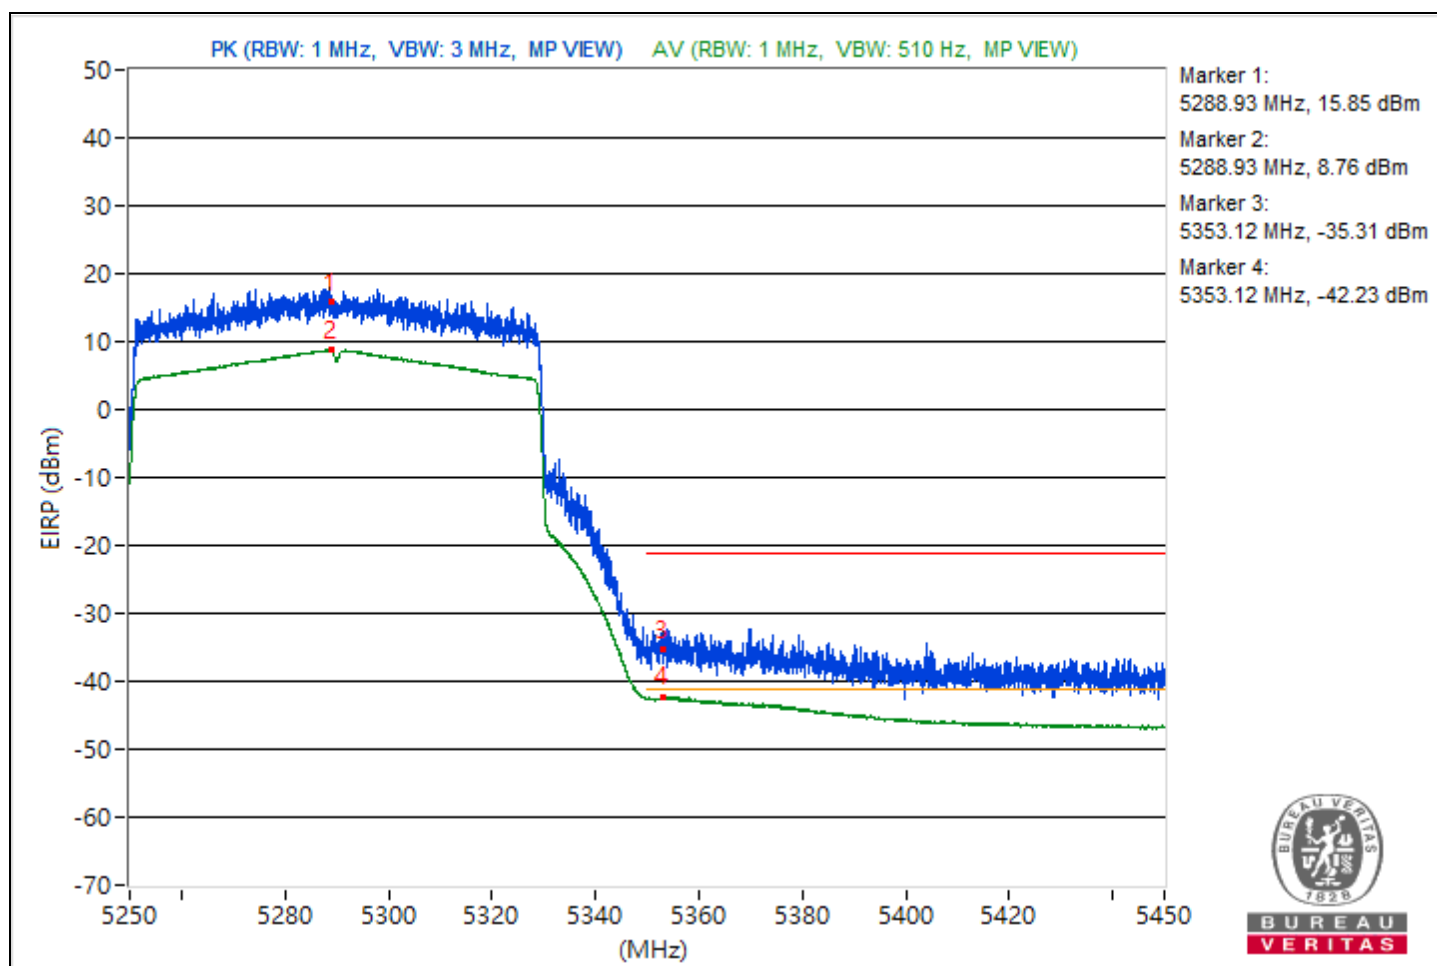


|                 |                    |                          |                   |
|-----------------|--------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80)   | Channel                  | CH 106 : 5530 MHz |
| Frequency Range | 5.35 GHz ~ 5.6 GHz | Environmental Conditions | 22°C, 61% RH      |
| Tested By       | Katina Lu          |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5525.84        | 117.15 PK               |                |             | 13.52                   | 8.37                   | 21.89            |
| 2                   | 5456.34         | 63.73 PK                | 74             | -10.27      | -39.9                   | 8.37                   | -31.53           |
| 3                   | #5461.44        | 64.99 PK                | 68.26          | -3.27       | -38.64                  | 8.37                   | -30.27           |
| 4                   | *5528.53        | 105.79 AV               |                |             | 2.16                    | 8.37                   | 10.53            |
| 5                   | 5456.94         | 52.86 AV                | 54             | -1.14       | -50.77                  | 8.37                   | -42.4            |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

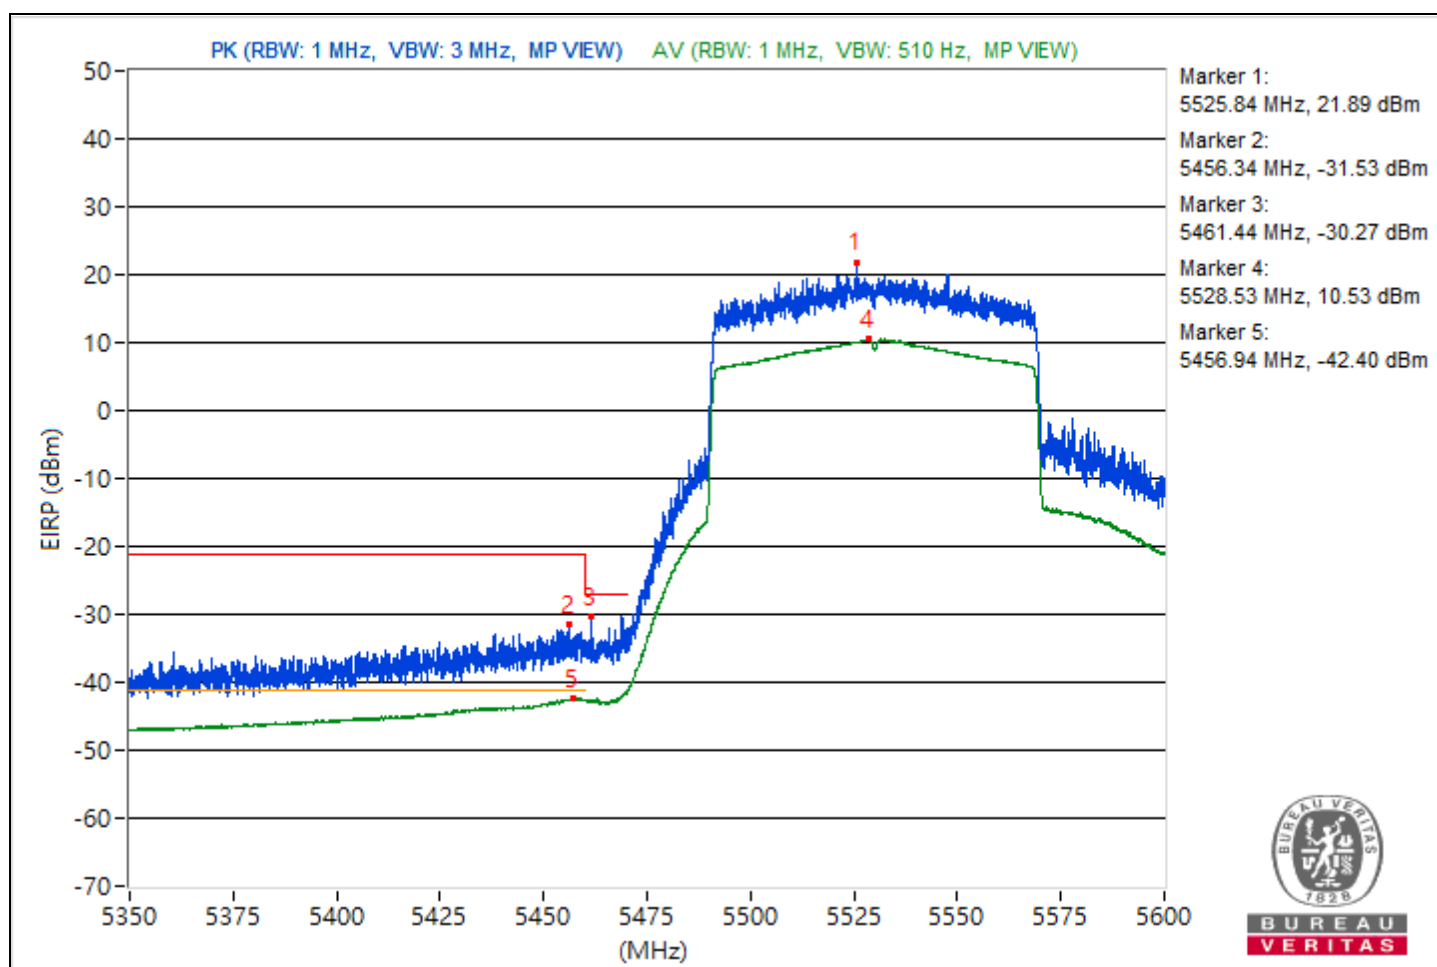


|                 |                    |                          |                   |
|-----------------|--------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80)   | Channel                  | CH 122 : 5610 MHz |
| Frequency Range | 5.35 GHz ~ 5.6 GHz | Environmental Conditions | 22°C, 61% RH      |
| Tested By       | Katina Lu          |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5598.19        | 116.16 PK               |                |             | 12.53                   | 8.37                   | 20.9             |
| 2                   | 5445.69         | 64.13 PK                | 74             | -9.87       | -39.5                   | 8.37                   | -31.13           |
| 3                   | #5462.34        | 65.73 PK                | 68.26          | -2.53       | -37.9                   | 8.37                   | -29.53           |
| 4                   | *5599.87        | 105.63 AV               |                |             | 2                       | 8.37                   | 10.37            |
| 5                   | 5458.53         | 51.66 AV                | 54             | -2.34       | -51.97                  | 8.37                   | -43.6            |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

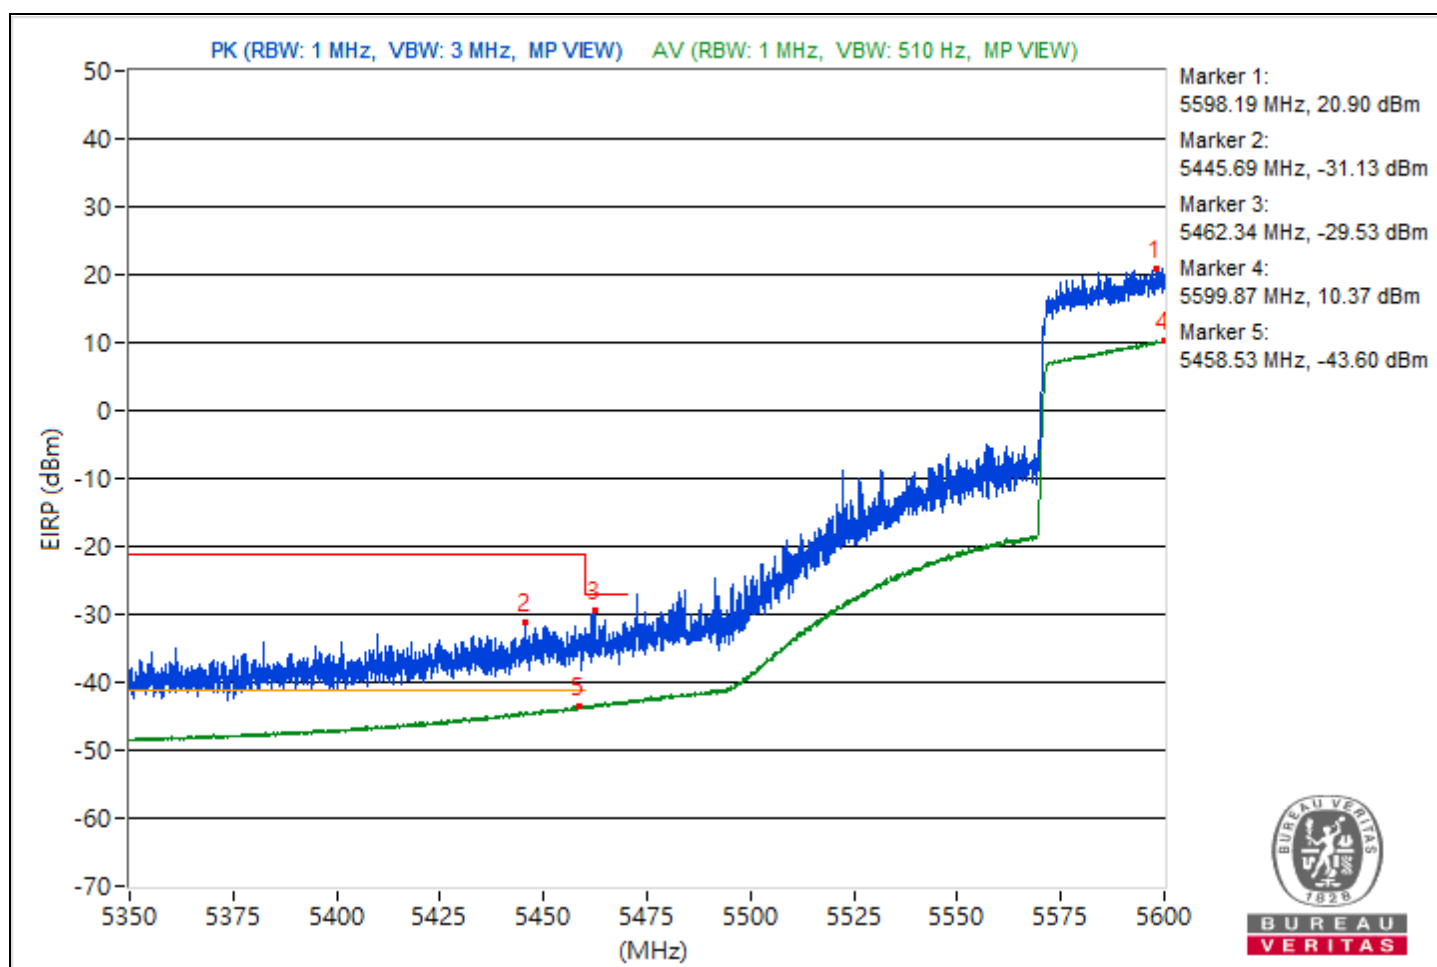


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) | Channel                  | CH 138 : 5690 MHz |
| Frequency Range | 5.7 GHz ~ 6 GHz  | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu        |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5703.07        | 116.46                  |                |             | 12.83                   | 8.37                   | 21.2             |
| 2                   | #5865.34        | 66.2                    | 68.26          | -2.06       | -37.43                  | 8.37                   | -29.06           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

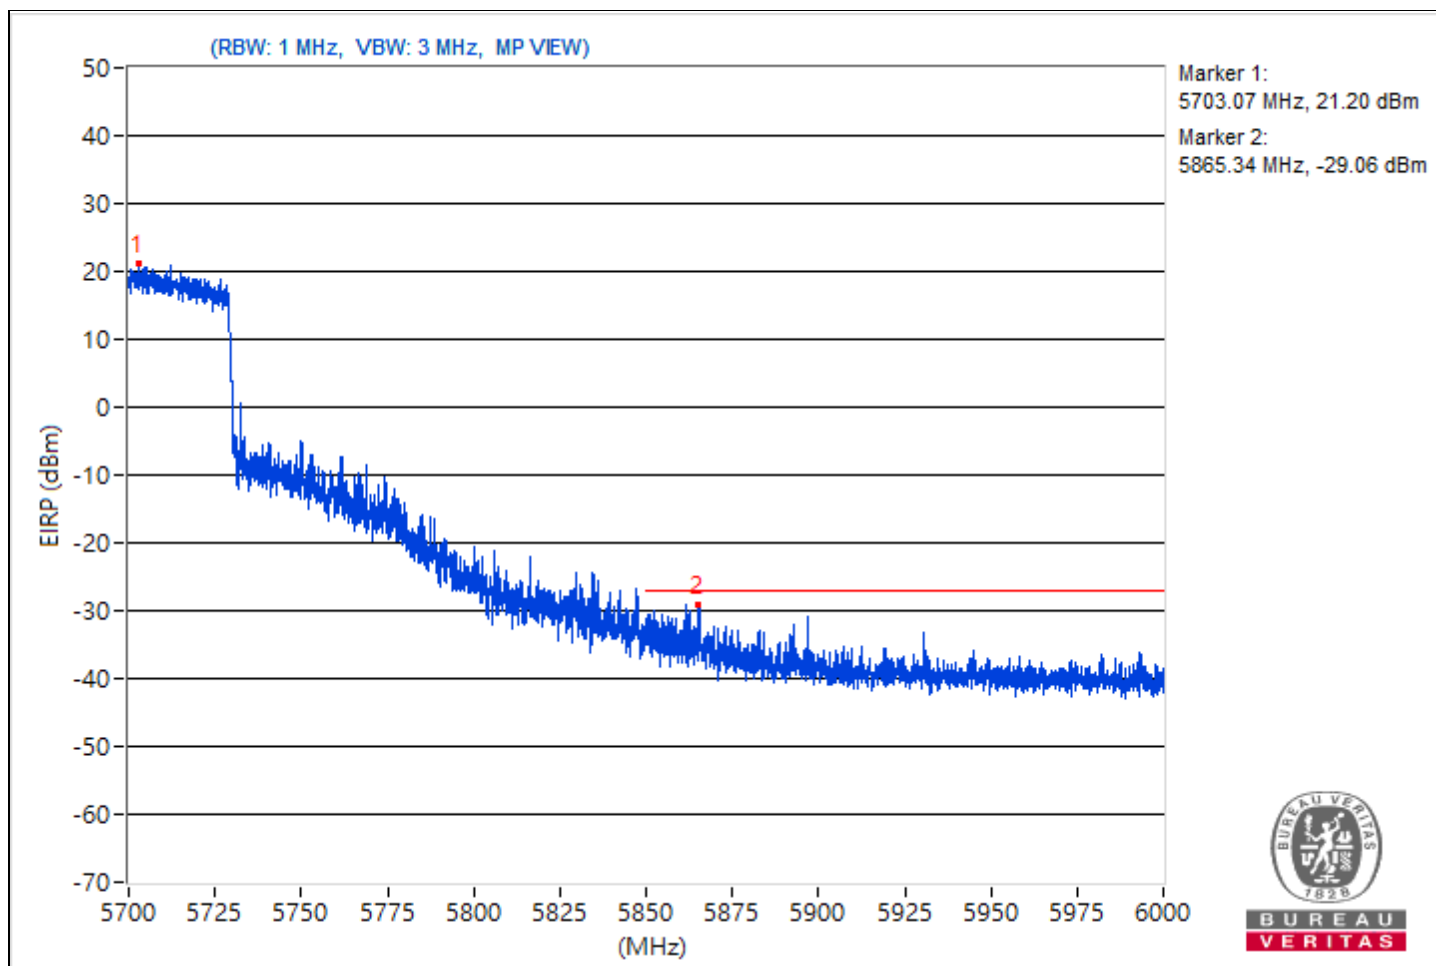


|                 |                      |                          |                   |
|-----------------|----------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80)     | Channel                  | CH 155 : 5775 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu            |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5776.57        | 116.45                  |                |             | 12.82                   | 8.37                   | 21.19            |
| 2                   | #5623.98        | 67.75                   | 68.26          | -0.51       | -35.88                  | 8.37                   | -27.51           |
| 3                   | #5652.36        | 68.07                   | 70.01          | -1.94       | -35.56                  | 8.37                   | -27.19           |
| 4                   | #5715.06        | 90.24                   | 109.48         | -19.24      | -13.39                  | 8.37                   | -5.02            |
| 5                   | #5720.05        | 87.6                    | 110.97         | -23.37      | -16.03                  | 8.37                   | -7.66            |
| 6                   | #5853.52        | 82.67                   | 114.22         | -31.55      | -20.96                  | 8.37                   | -12.59           |
| 7                   | #5870.03        | 80.07                   | 106.65         | -26.58      | -23.56                  | 8.37                   | -15.19           |
| 8                   | #5924.54        | 68.38                   | 68.6           | -0.22       | -35.25                  | 8.37                   | -26.88           |
| 9                   | #5928.69        | 66.29                   | 68.26          | -1.97       | -37.34                  | 8.37                   | -28.97           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

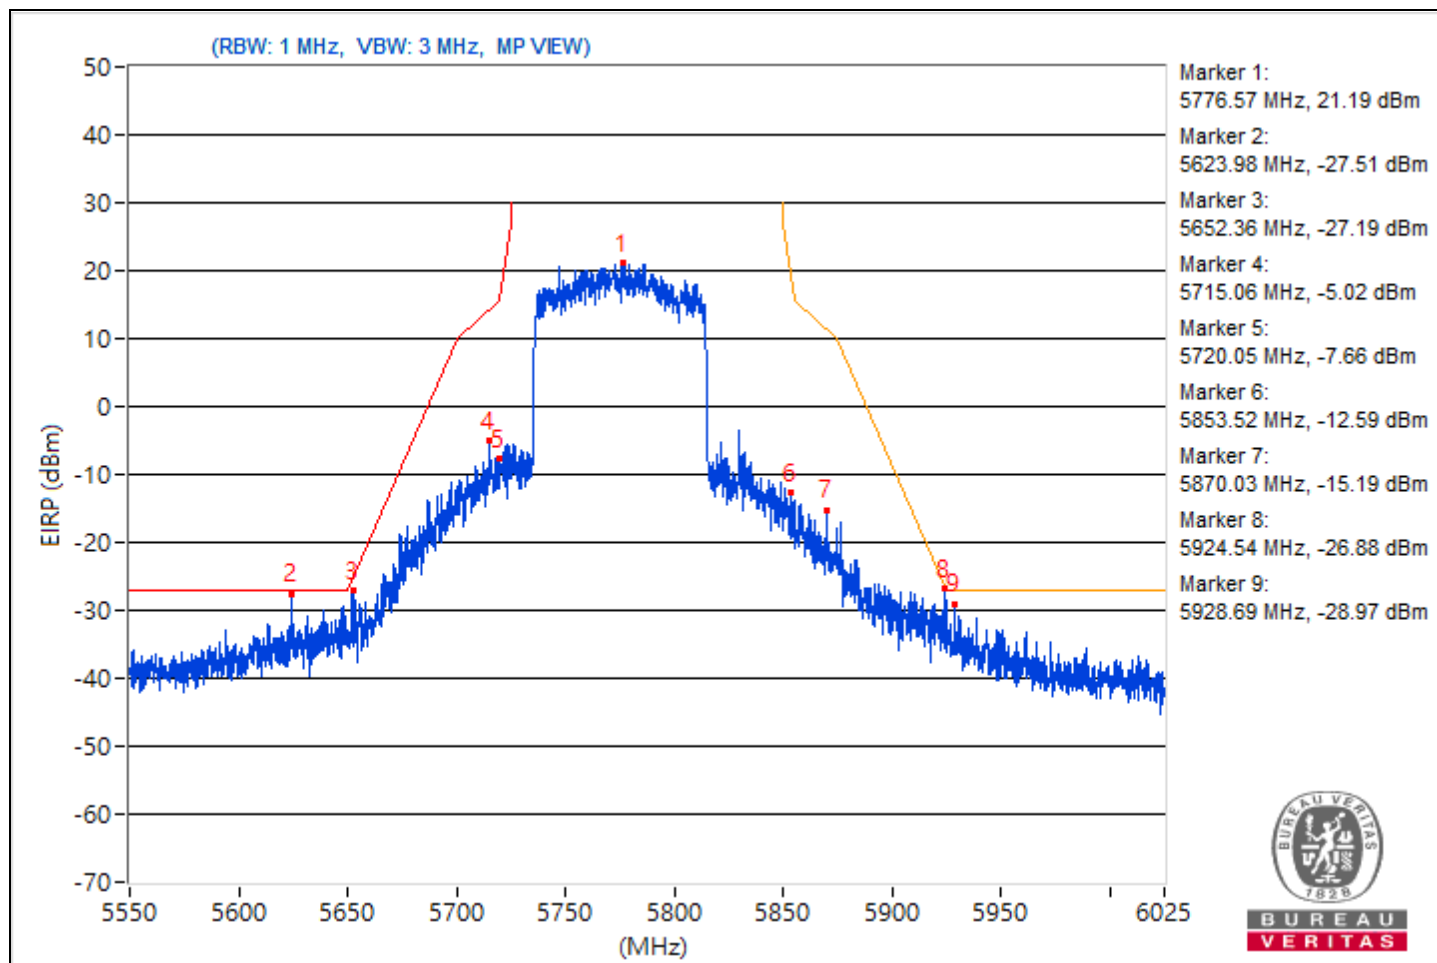


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160)   | Channel                  | CH 50 : 5250 MHz |
| Frequency Range | 5.05 GHz ~ 5.25 GHz | Environmental Conditions | 22°C, 61% RH     |
| Tested By       | Katina Lu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5247.62        | 106.73 PK               |                |             | 3.1                     | 8.37                   | 11.47            |
| 2                   | *5247.62        | 98.94 AV                |                |             | -4.69                   | 8.37                   | 3.68             |
| 3                   | 5110.57         | 57.7 PK                 | 74             | -16.3       | -45.93                  | 8.37                   | -37.56           |
| 4                   | 5110.57         | 52 AV                   | 54             | -2          | -51.63                  | 8.37                   | -43.26           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

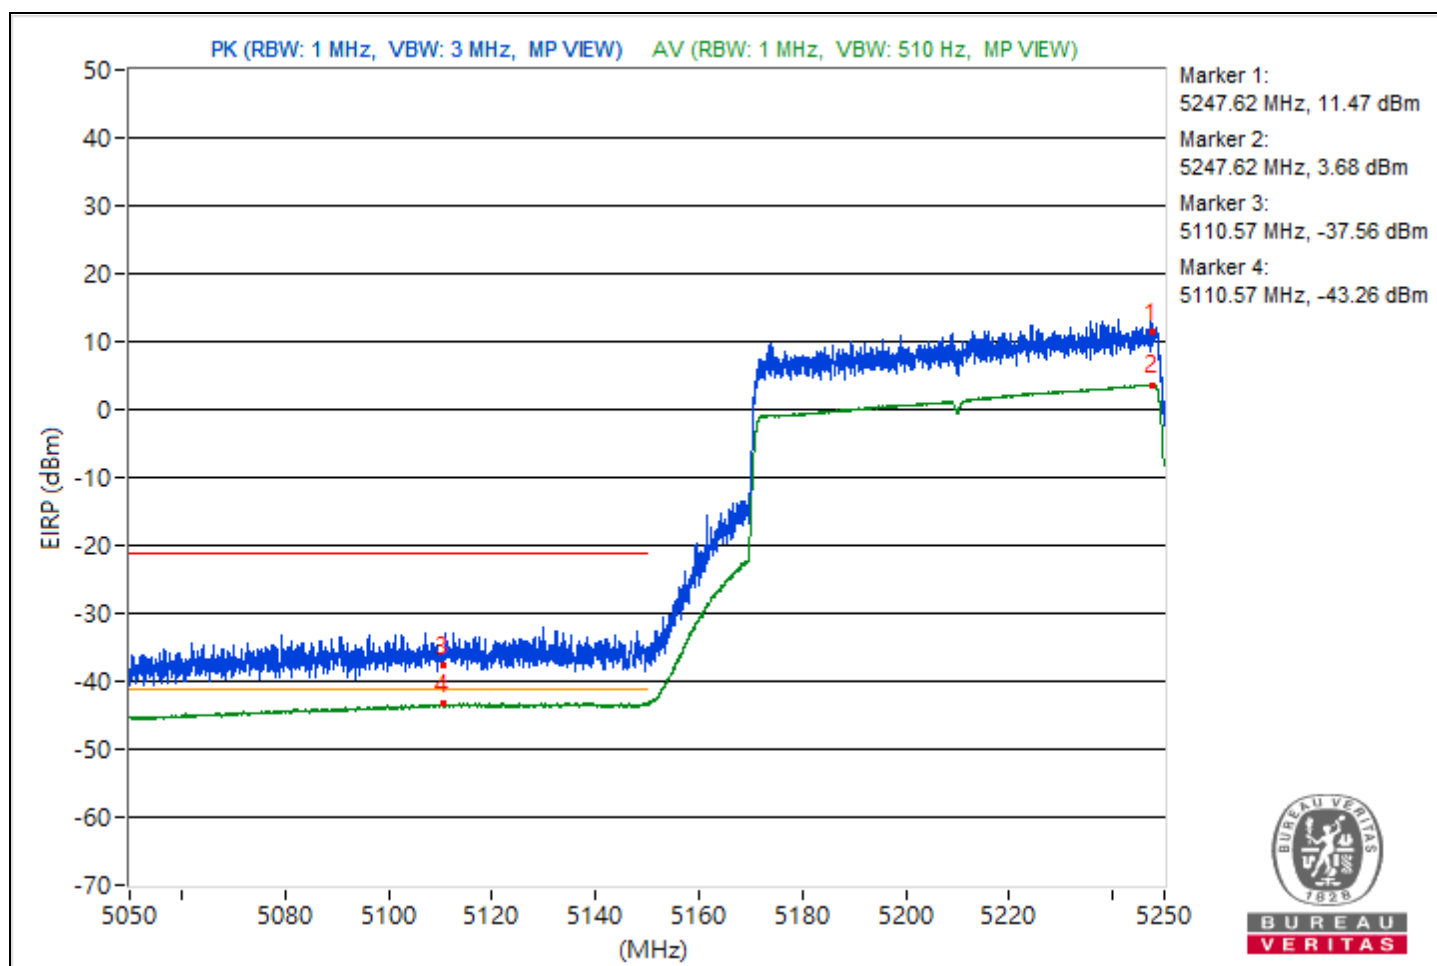


|                 |                     |                          |                  |
|-----------------|---------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160)   | Channel                  | CH 50 : 5250 MHz |
| Frequency Range | 5.25 GHz ~ 5.45 GHz | Environmental Conditions | 22°C, 61% RH     |
| Tested By       | Katina Lu           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5252.15        | 106.51 PK               |                |             | 2.88                    | 8.37                   | 11.25            |
| 2                   | *5252.15        | 98.95 AV                |                |             | -4.68                   | 8.37                   | 3.69             |
| 3                   | 5374.45         | 59.74 PK                | 74             | -14.26      | -43.89                  | 8.37                   | -35.52           |
| 4                   | 5374.45         | 53.14 AV                | 54             | -0.86       | -50.49                  | 8.37                   | -42.12           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

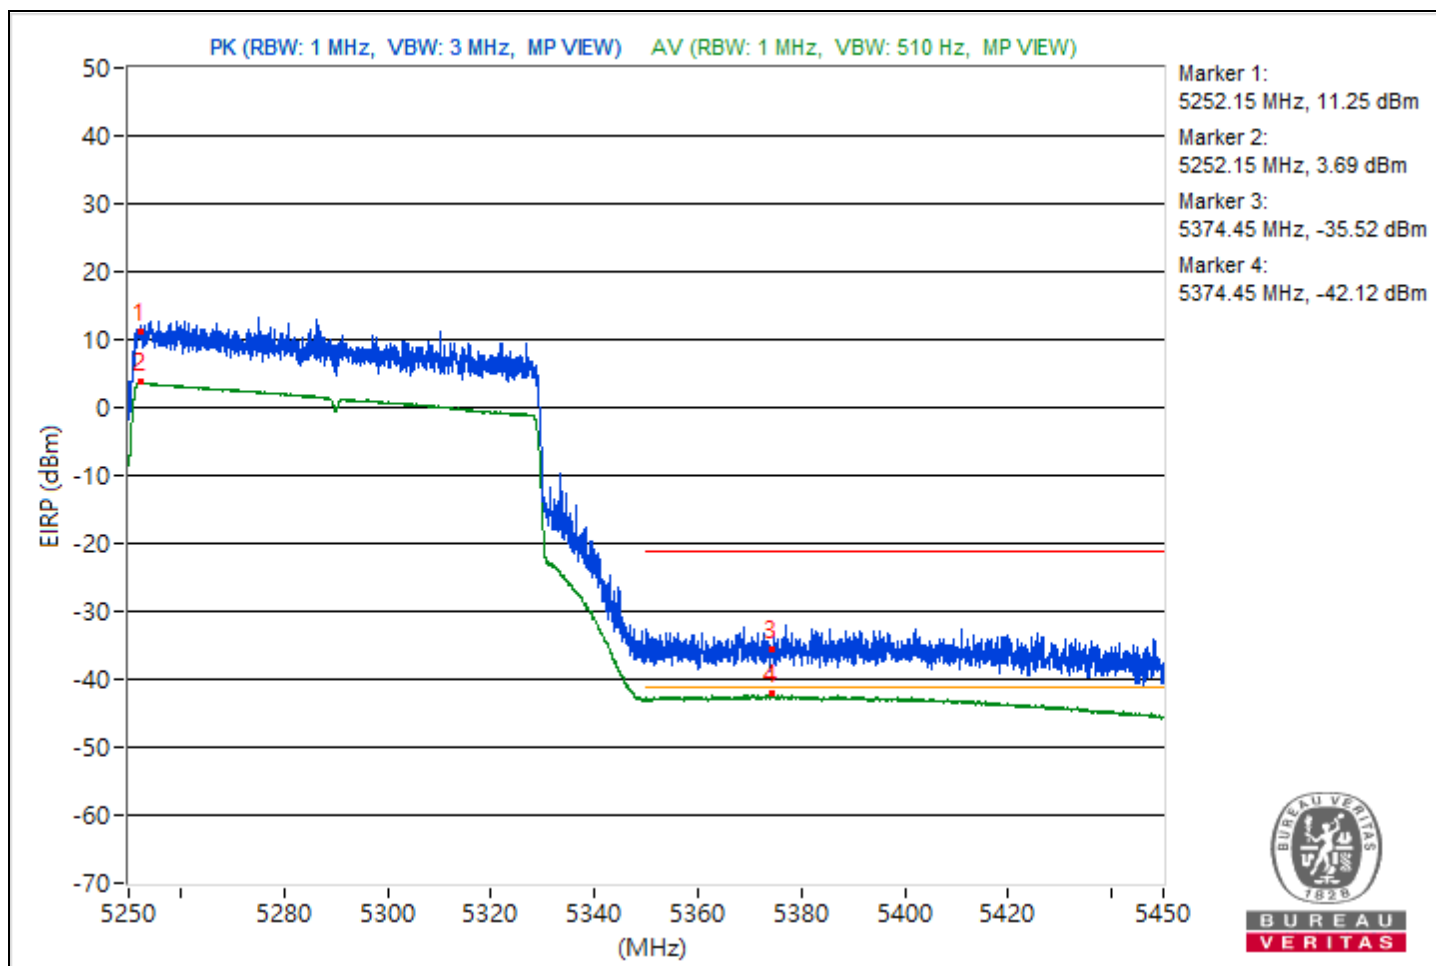


|                 |                    |                          |                   |
|-----------------|--------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160)  | Channel                  | CH 114 : 5570 MHz |
| Frequency Range | 5.35 GHz ~ 5.6 GHz | Environmental Conditions | 22°C, 61% RH      |
| Tested By       | Katina Lu          |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5578.78        | 111.44 PK               |                |             | 7.81                    | 8.37                   | 16.18            |
| 2                   | 5435.59         | 64.25 PK                | 74             | -9.75       | -39.38                  | 8.37                   | -31.01           |
| 3                   | #5469.28        | 62.5 PK                 | 68.26          | -5.76       | -41.13                  | 8.37                   | -32.76           |
| 4                   | *5572.47        | 101.02 AV               |                |             | -2.61                   | 8.37                   | 5.76             |
| 5                   | 5456.41         | 53.39 AV                | 54             | -0.61       | -50.24                  | 8.37                   | -41.87           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

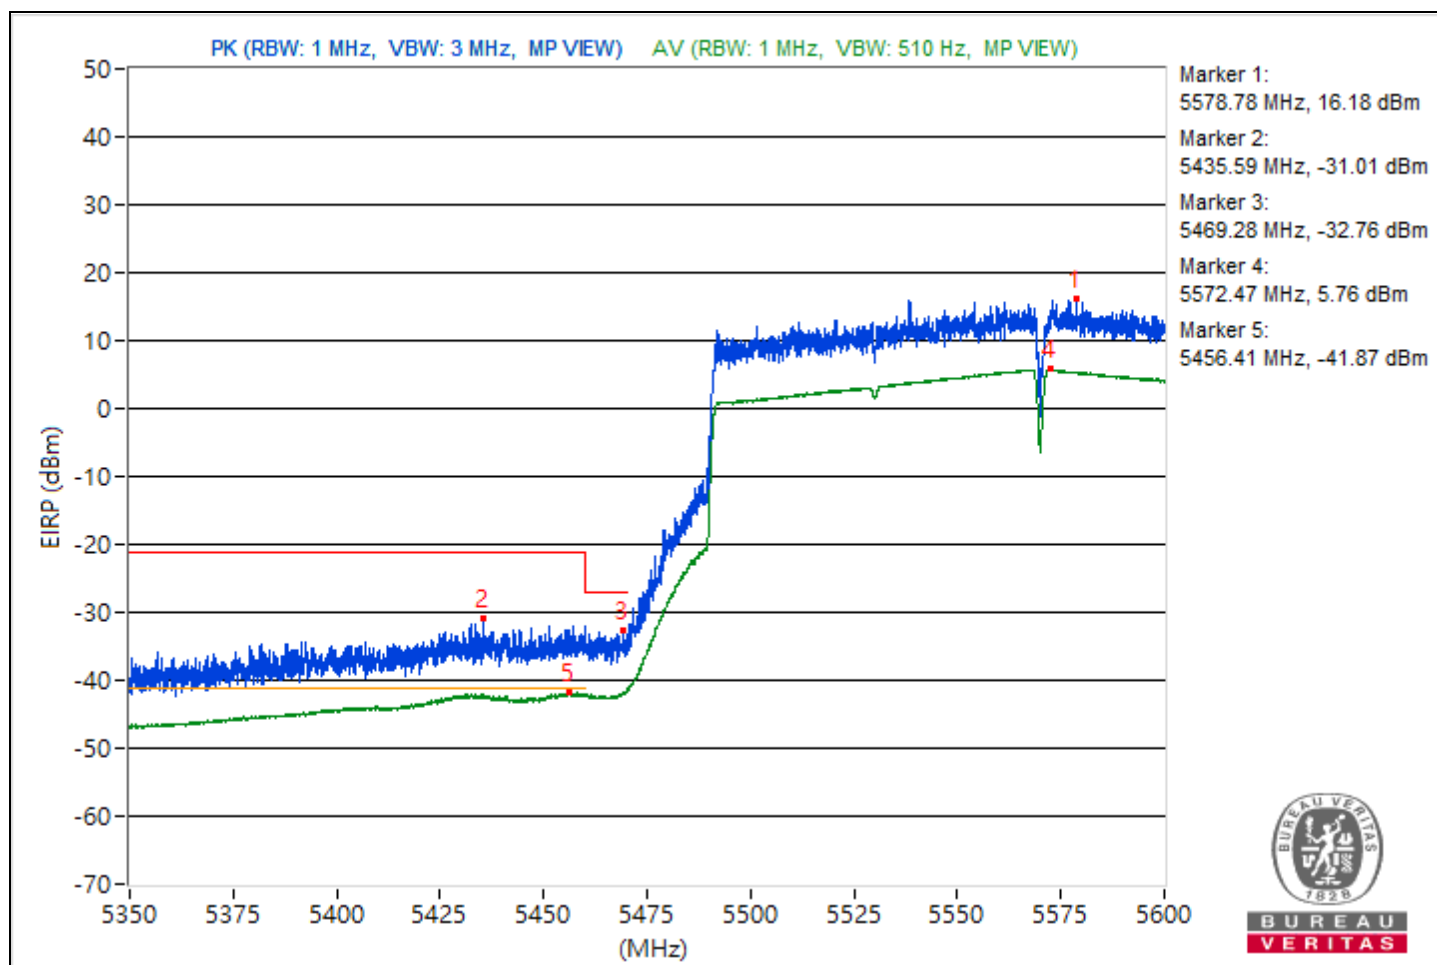


|                 |                             |                          |                  |
|-----------------|-----------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 36 : 5180 MHz |
| Frequency Range | 5.05 GHz ~ 5.25 GHz         | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu                   |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5171.3         | 120.36 PK               |                |             | 16.73                   | 8.37                   | 25.1             |
| 2                   | *5171.3         | 112.59 AV               |                |             | 8.96                    | 8.37                   | 17.33            |
| 3                   | 5146.5          | 58.81 PK                | 74             | -15.19      | -44.82                  | 8.37                   | -36.45           |
| 4                   | 5146.5          | 49.29 AV                | 54             | -4.71       | -54.34                  | 8.37                   | -45.97           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

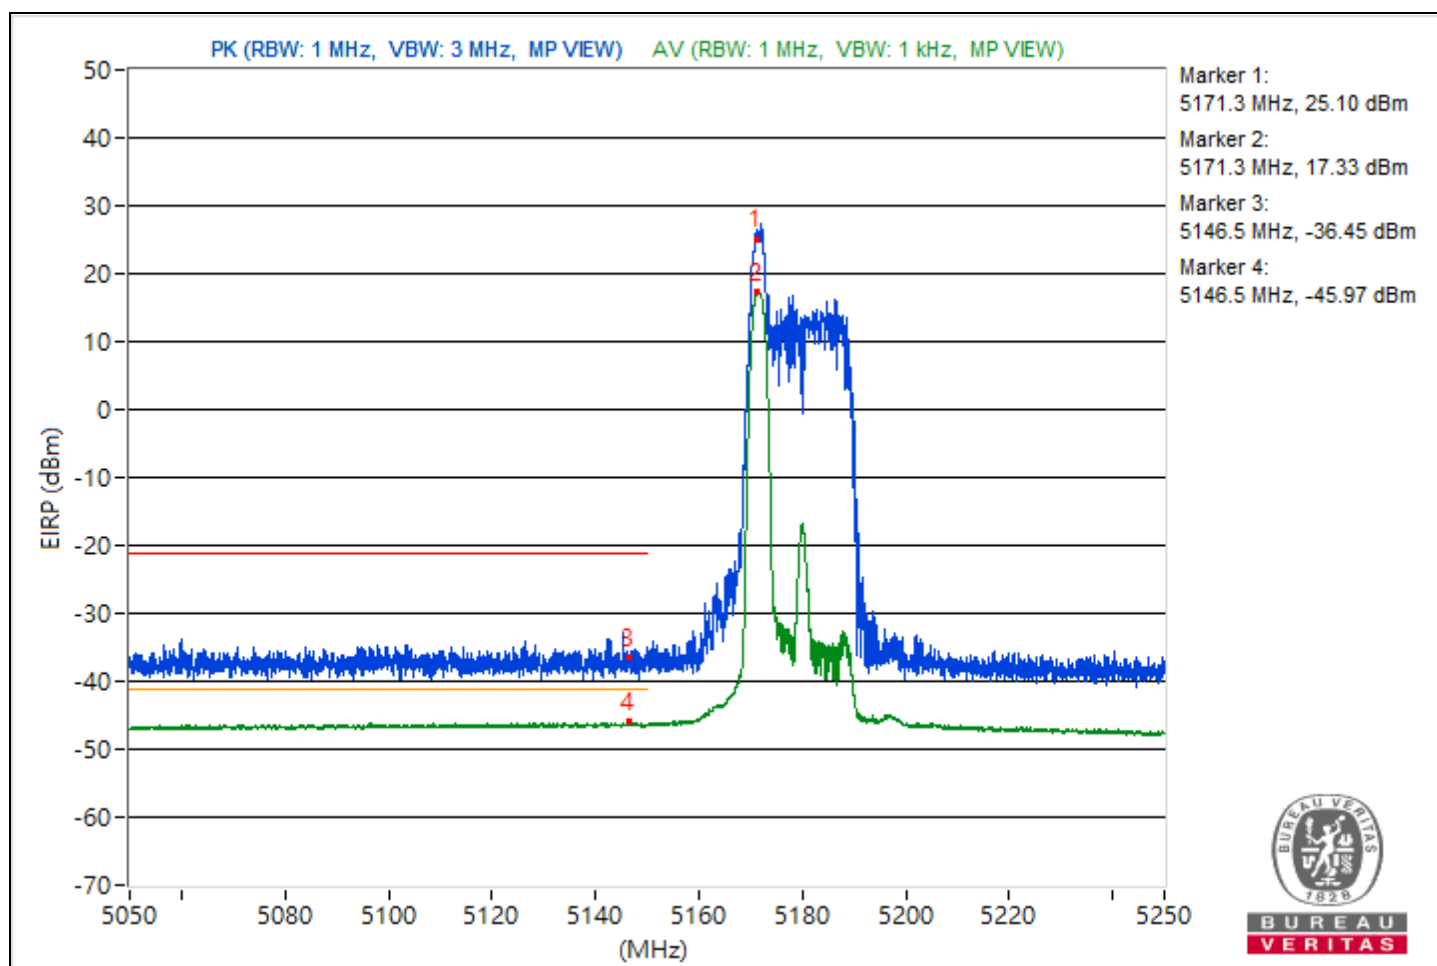


|                 |                             |                          |                  |
|-----------------|-----------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 64 : 5320 MHz |
| Frequency Range | 5.25 GHz ~ 5.45 GHz         | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu                   |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5328.73        | 122.22 PK               |                |             | 18.59                   | 8.37                   | 26.96            |
| 2                   | *5328.73        | 112.52 AV               |                |             | 8.89                    | 8.37                   | 17.26            |
| 3                   | 5355.77         | 57.41 PK                | 74             | -16.59      | -46.22                  | 8.37                   | -37.85           |
| 4                   | 5355.77         | 47.97 AV                | 54             | -6.03       | -55.66                  | 8.37                   | -47.29           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

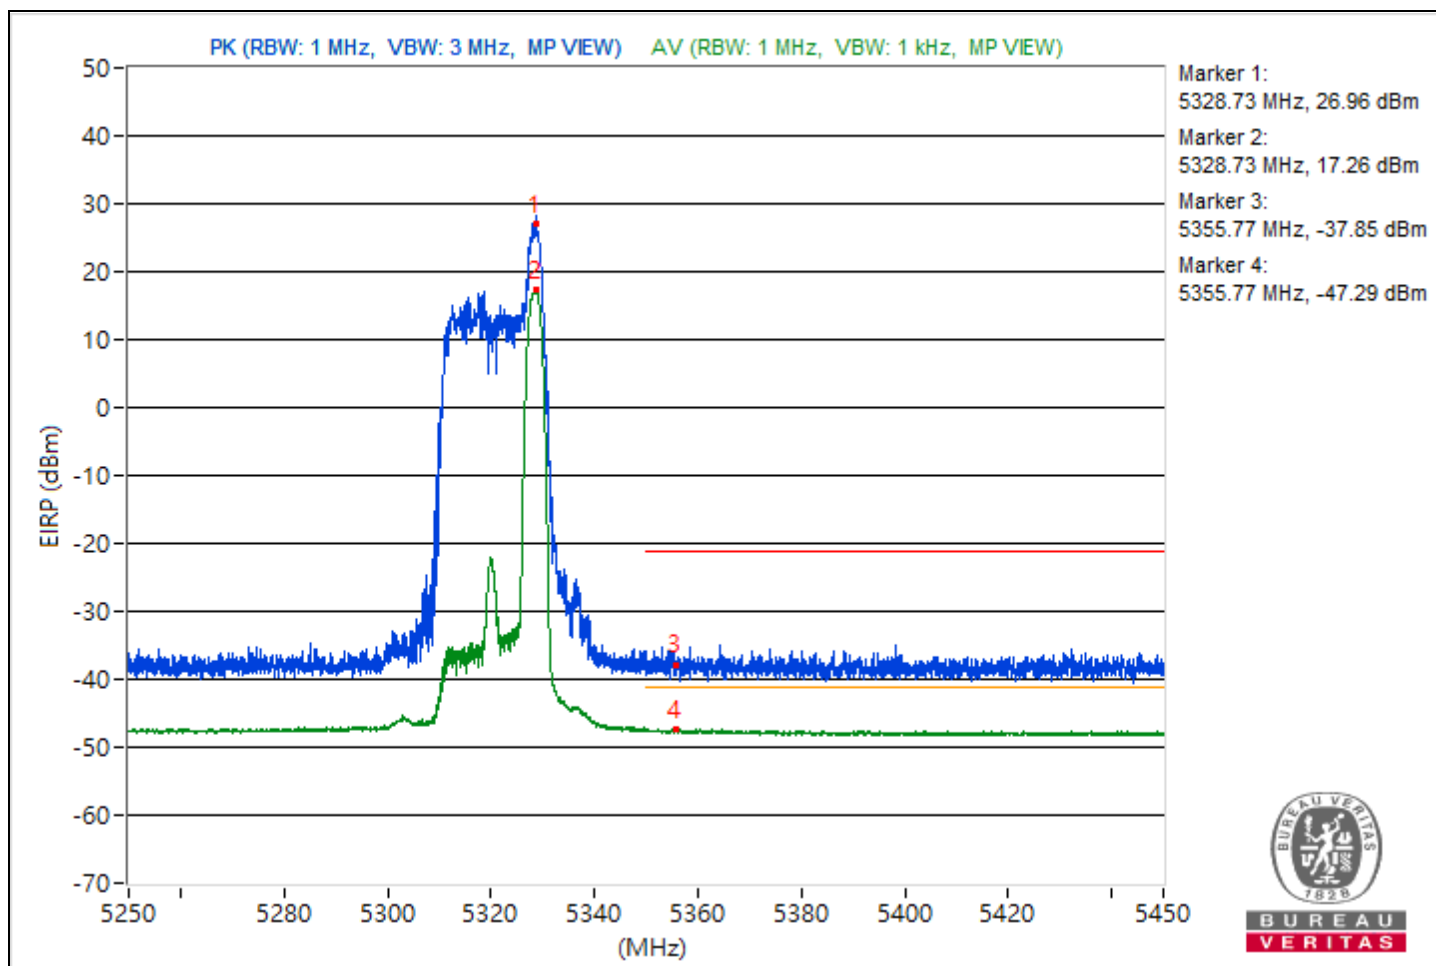


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 100 : 5500 MHz |
| Frequency Range | 5.35 GHz ~ 5.6 GHz          | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5491.5         | 123.61 PK               |                |             | 19.98                   | 8.37                   | 28.35            |
| 2                   | 5429.34         | 60.69 PK                | 74             | -13.31      | -42.94                  | 8.37                   | -34.57           |
| 3                   | #5464.62        | 61.34 PK                | 68.26          | -6.92       | -42.29                  | 8.37                   | -33.92           |
| 4                   | *5491.66        | 112.33 AV               |                |             | 8.7                     | 8.37                   | 17.07            |
| 5                   | 5455.69         | 48.43 AV                | 54             | -5.57       | -55.2                   | 8.37                   | -46.83           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

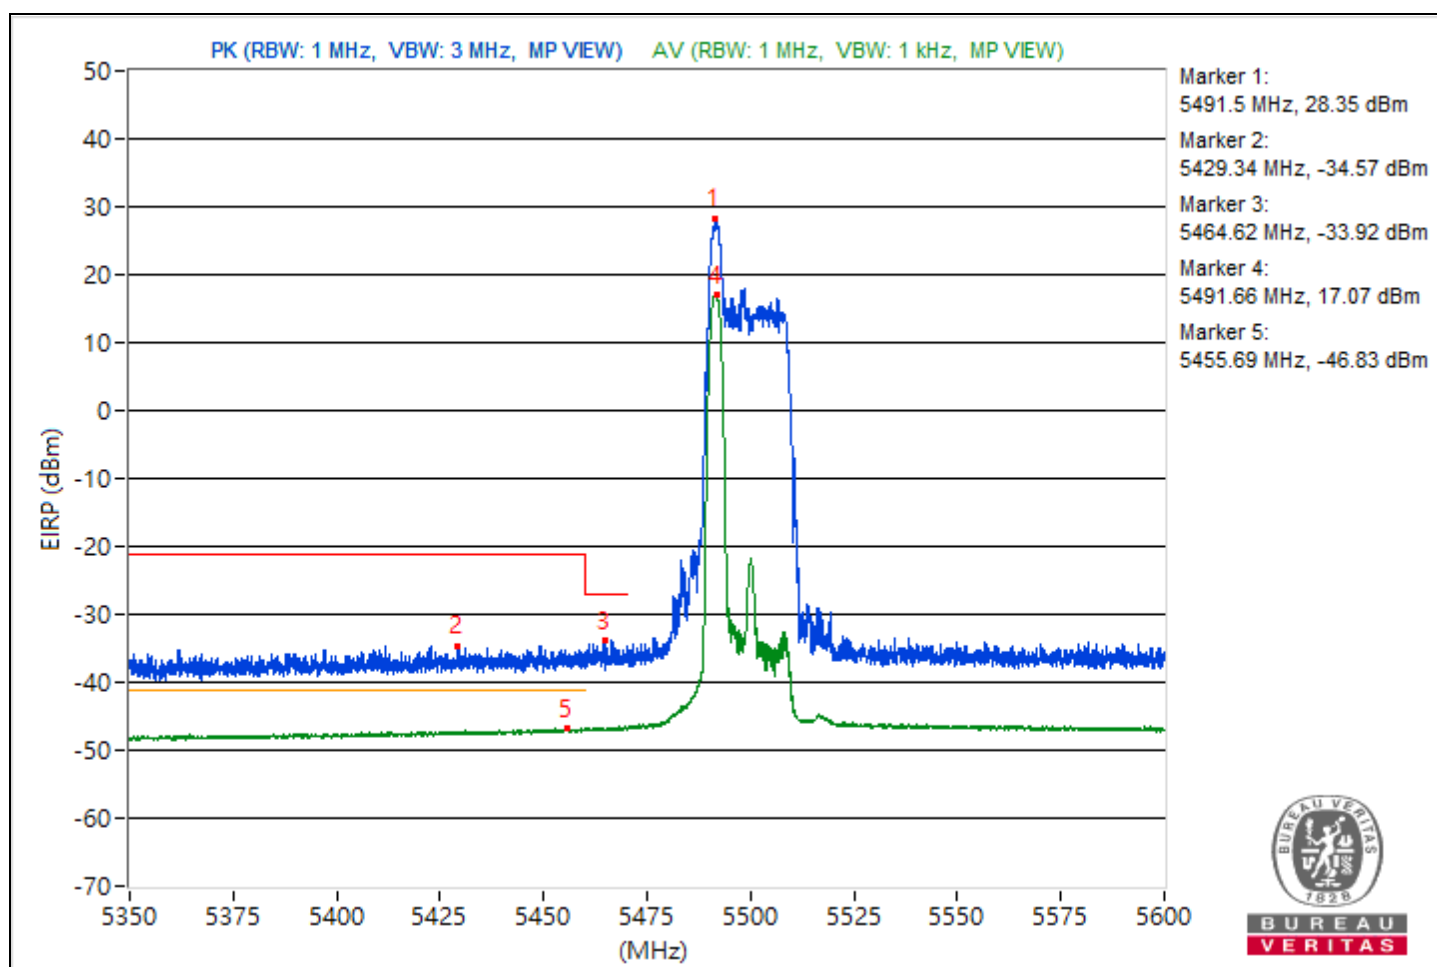


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 140 : 5700 MHz |
| Frequency Range | 5.625 GHz ~ 5.825 GHz       | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5708.48        | 124.99                  |                |             | 21.36                   | 8.37                   | 29.73            |
| 2                   | #5819.07        | 60.84                   | 68.26          | -7.42       | -42.79                  | 8.37                   | -34.42           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

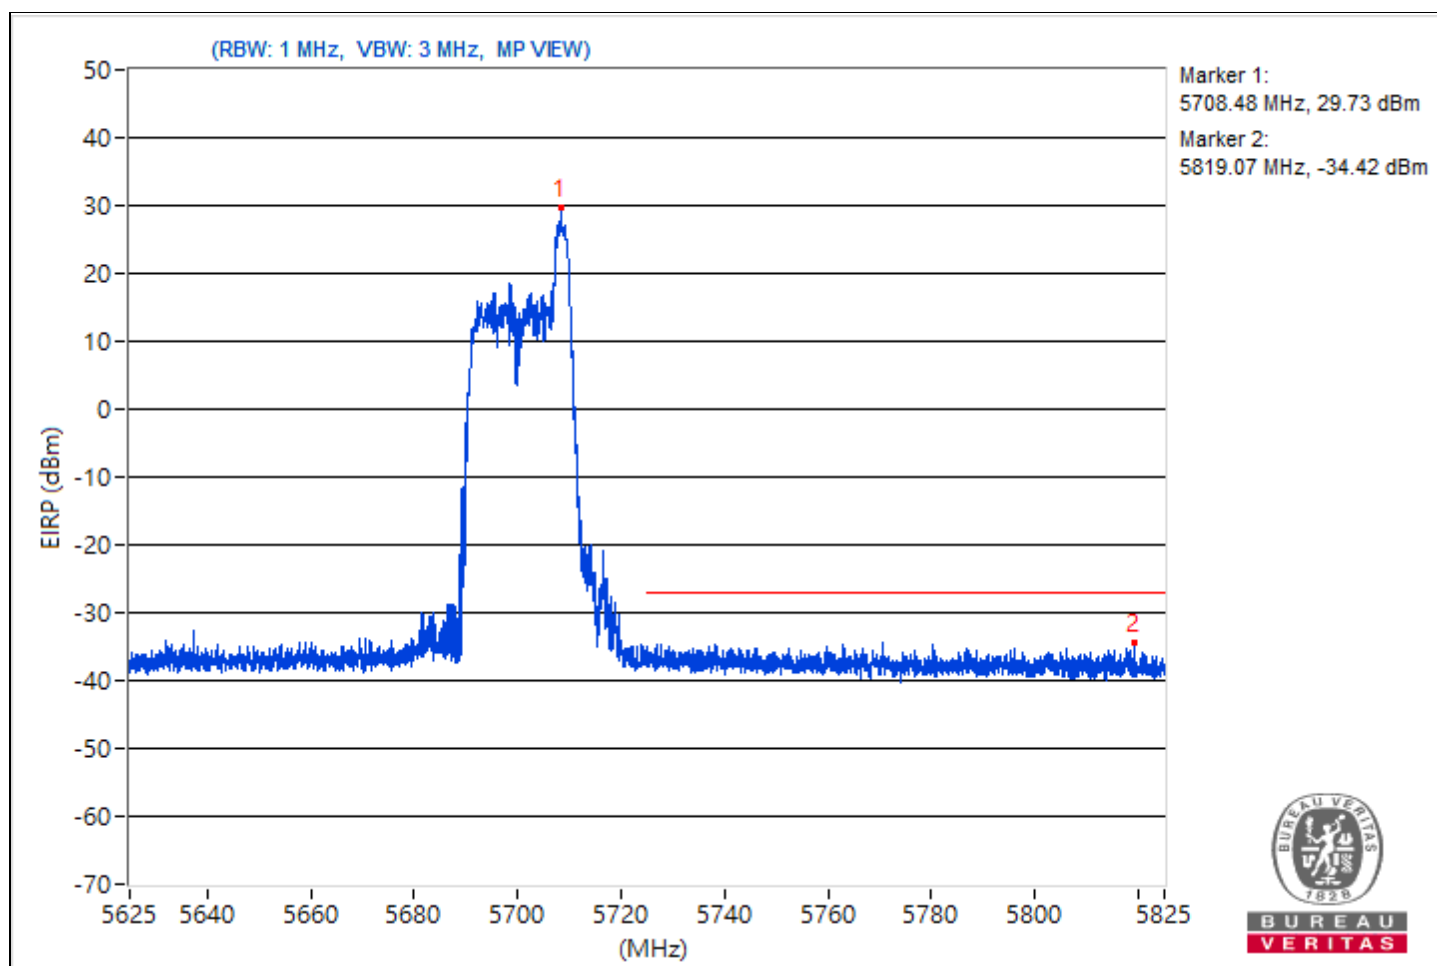


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 144 : 5720 MHz |
| Frequency Range | 5.7 GHz ~ 6 GHz             | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5728.57        | 123.49                  |                |             | 19.86                   | 8.37                   | 28.23            |
| 2                   | #5924.06        | 60.47                   | 68.26          | -7.79       | -43.16                  | 8.37                   | -34.79           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

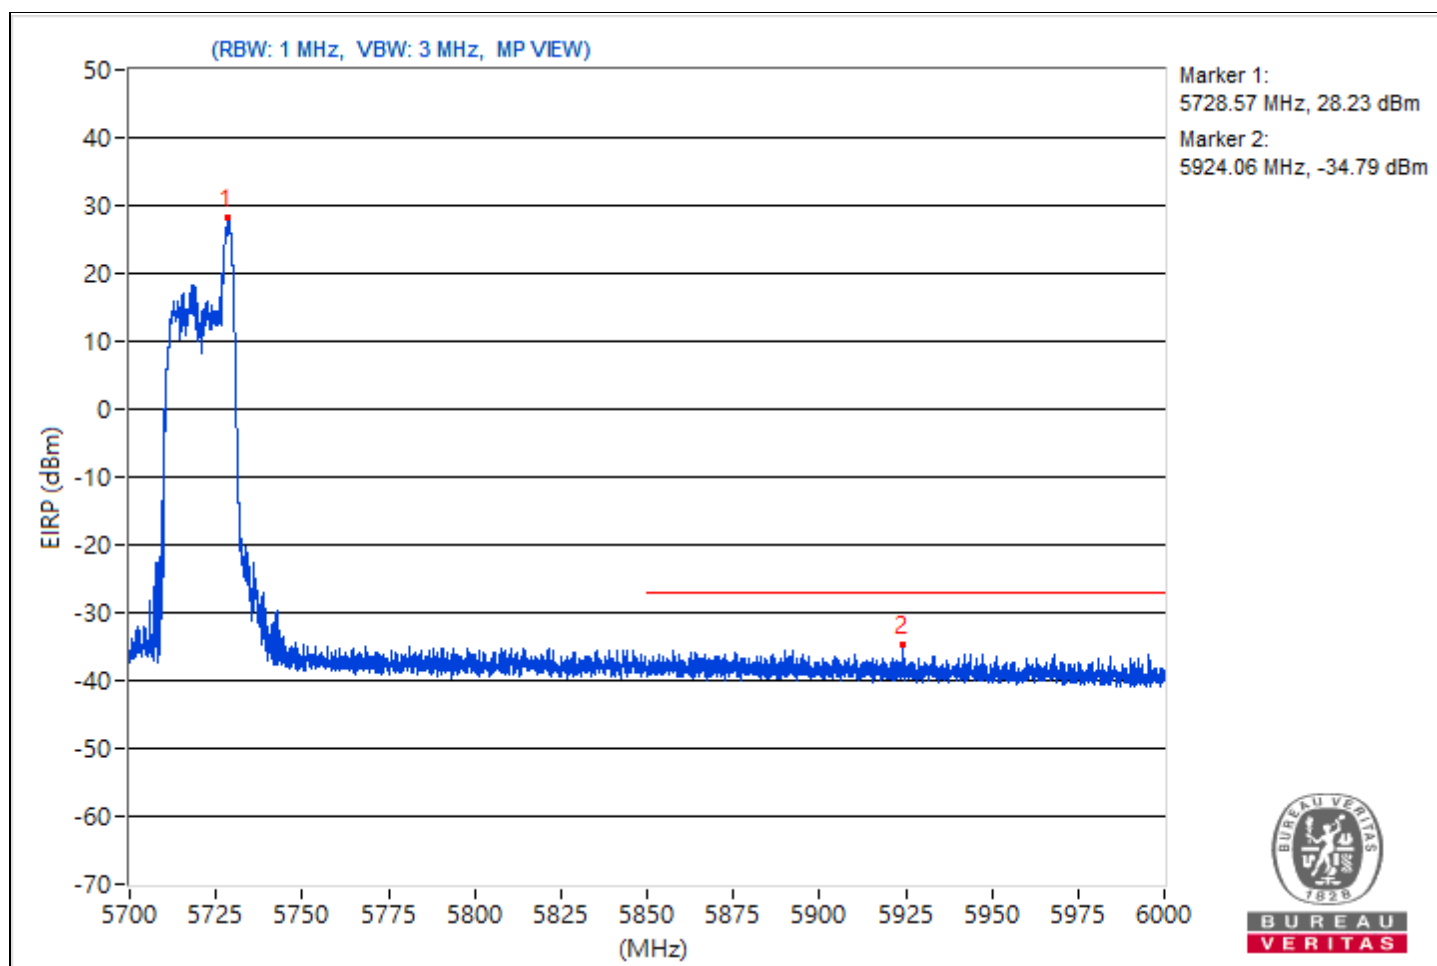


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 149 : 5745 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz        | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5736.08        | 130.92                  |                |             | 27.29                   | 8.37                   | 35.66            |
| 2                   | #5643.34        | 63.55                   | 68.26          | -4.71       | -40.08                  | 8.37                   | -31.71           |
| 3                   | #5649.99        | 61.28                   | 68.26          | -6.98       | -42.35                  | 8.37                   | -33.98           |
| 4                   | #5703.66        | 81.89                   | 106.29         | -24.4       | -21.74                  | 8.37                   | -13.37           |
| 5                   | #5720.05        | 84.42                   | 110.97         | -26.55      | -19.21                  | 8.37                   | -10.84           |
| 6                   | #5854.83        | 61.09                   | 111.24         | -50.15      | -42.54                  | 8.37                   | -34.17           |
| 7                   | #5874.43        | 61.9                    | 105.42         | -43.52      | -41.73                  | 8.37                   | -33.36           |
| 8                   | #5924.77        | 59.51                   | 68.43          | -8.92       | -44.12                  | 8.37                   | -35.75           |
| 9                   | #5938.79        | 61.1                    | 68.26          | -7.16       | -42.53                  | 8.37                   | -34.16           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

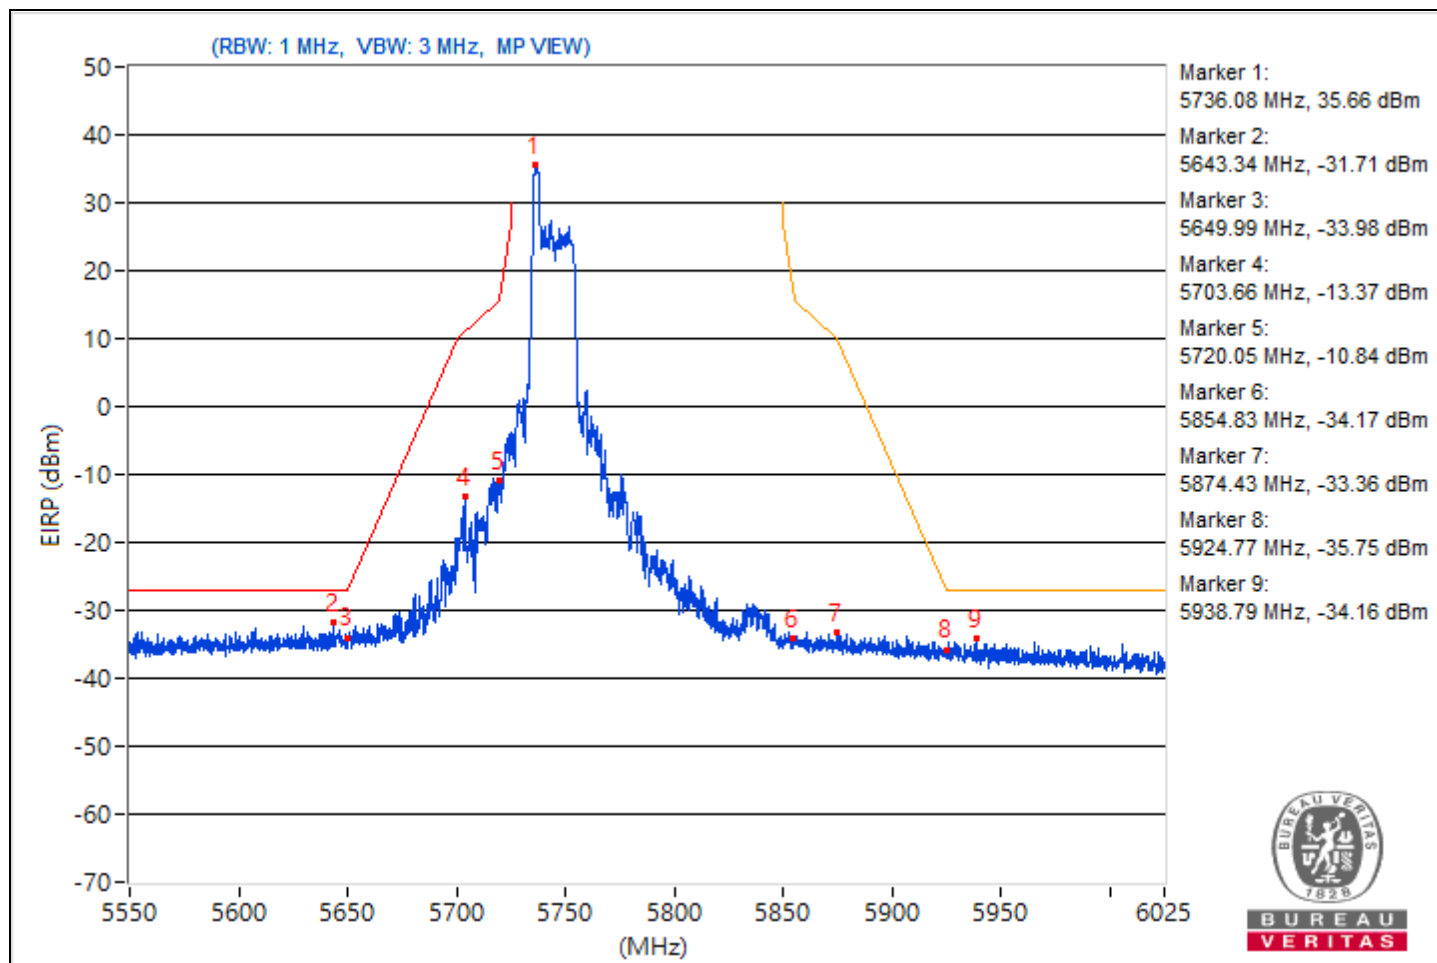


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 165 : 5825 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz        | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5834.05        | 130.67                  |                |             | 27.04                   | 8.37                   | 35.41            |
| 2                   | #5614.12        | 61.02                   | 68.26          | -7.24       | -42.61                  | 8.37                   | -34.24           |
| 3                   | #5650.58        | 59.63                   | 68.69          | -9.06       | -44                     | 8.37                   | -35.63           |
| 4                   | #5701.52        | 61.57                   | 105.69         | -44.12      | -42.06                  | 8.37                   | -33.69           |
| 5                   | #5720.05        | 60.39                   | 110.97         | -50.58      | -43.24                  | 8.37                   | -34.87           |
| 6                   | #5854.71        | 78.28                   | 111.52         | -33.24      | -25.35                  | 8.37                   | -16.98           |
| 7                   | #5855.9         | 84.22                   | 110.61         | -26.39      | -19.41                  | 8.37                   | -11.04           |
| 8                   | #5924.66        | 60.43                   | 68.51          | -8.08       | -43.2                   | 8.37                   | -34.83           |
| 9                   | #5976.55        | 61.07                   | 68.26          | -7.19       | -42.56                  | 8.37                   | -34.19           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

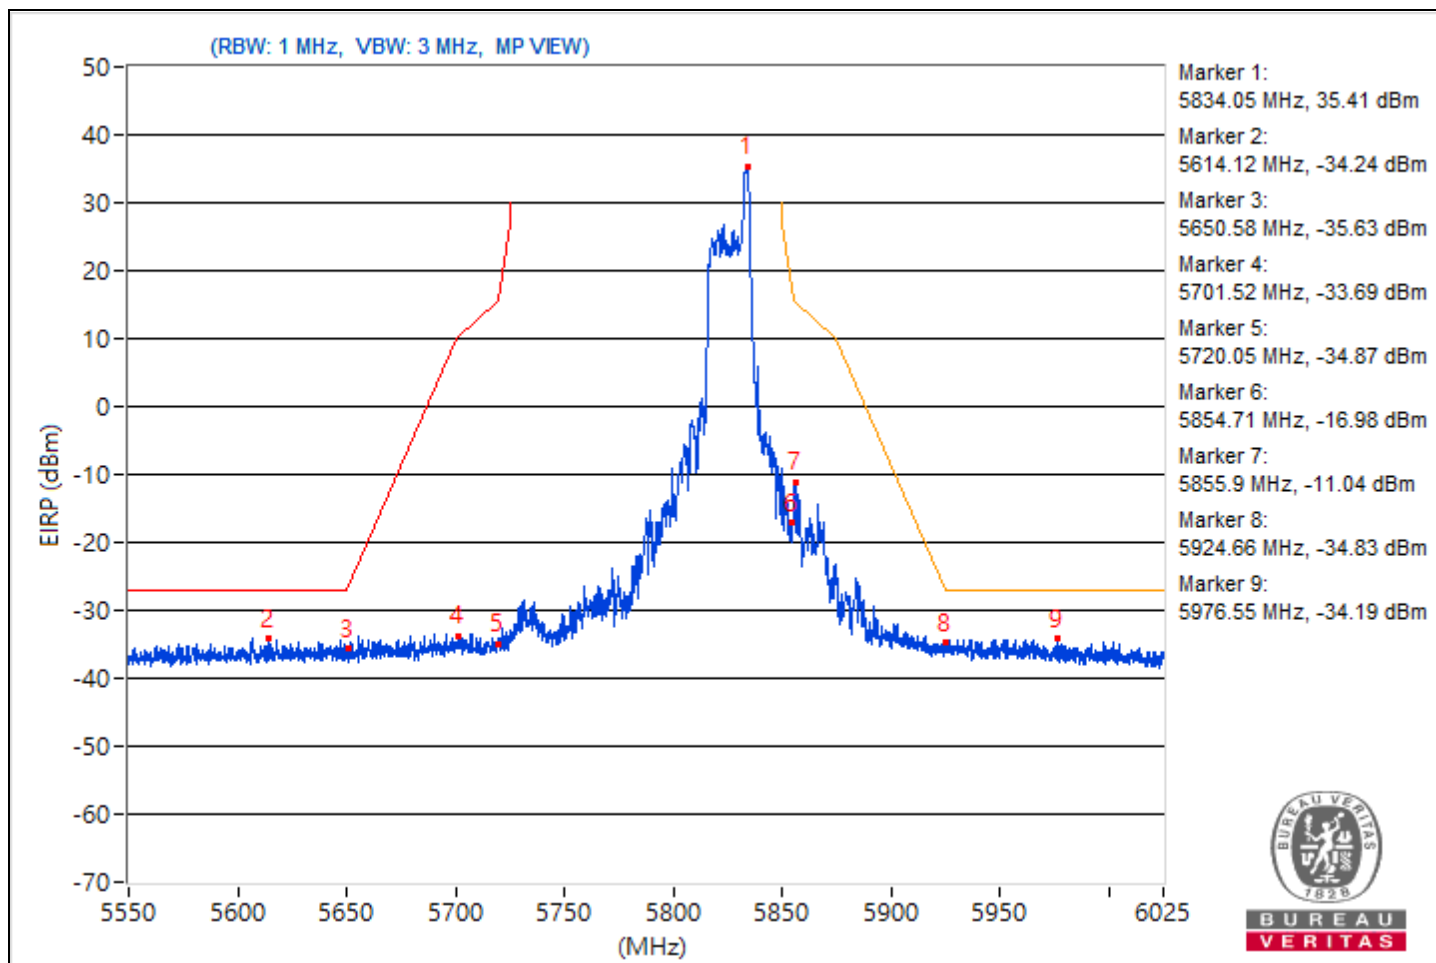


|                 |                             |                          |                  |
|-----------------|-----------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 36 : 5180 MHz |
| Frequency Range | 5.05 GHz ~ 5.25 GHz         | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu                   |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5172.65        | 121.2 PK                |                |             | 17.57                   | 8.37                   | 25.94            |
| 2                   | *5172.65        | 111.83 AV               |                |             | 8.2                     | 8.37                   | 16.57            |
| 3                   | 5147.77         | 59.08 PK                | 74             | -14.92      | -44.55                  | 8.37                   | -36.18           |
| 4                   | 5147.77         | 49.27 AV                | 54             | -4.73       | -54.36                  | 8.37                   | -45.99           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

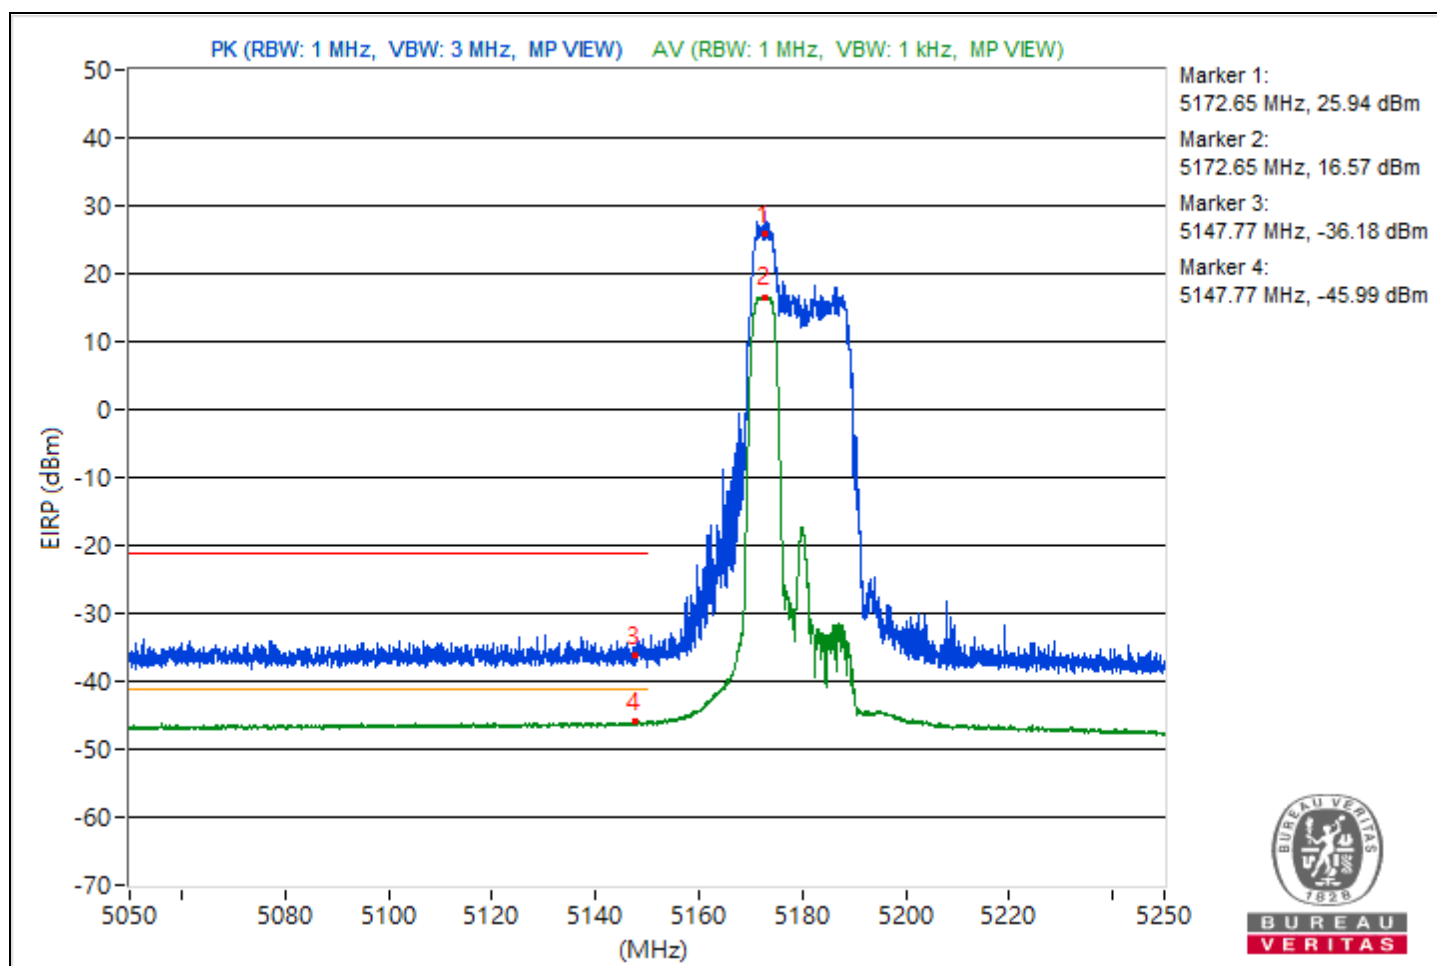


|                 |                             |                          |                  |
|-----------------|-----------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 64 : 5320 MHz |
| Frequency Range | 5.25 GHz ~ 5.45 GHz         | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu                   |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5326.75        | 117.29 PK               |                |             | 13.66                   | 8.37                   | 22.03            |
| 2                   | *5326.75        | 109.76 AV               |                |             | 6.13                    | 8.37                   | 14.5             |
| 3                   | 5355.1          | 57.02 PK                | 74             | -16.98      | -46.61                  | 8.37                   | -38.24           |
| 4                   | 5355.1          | 47.97 AV                | 54             | -6.03       | -55.66                  | 8.37                   | -47.29           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

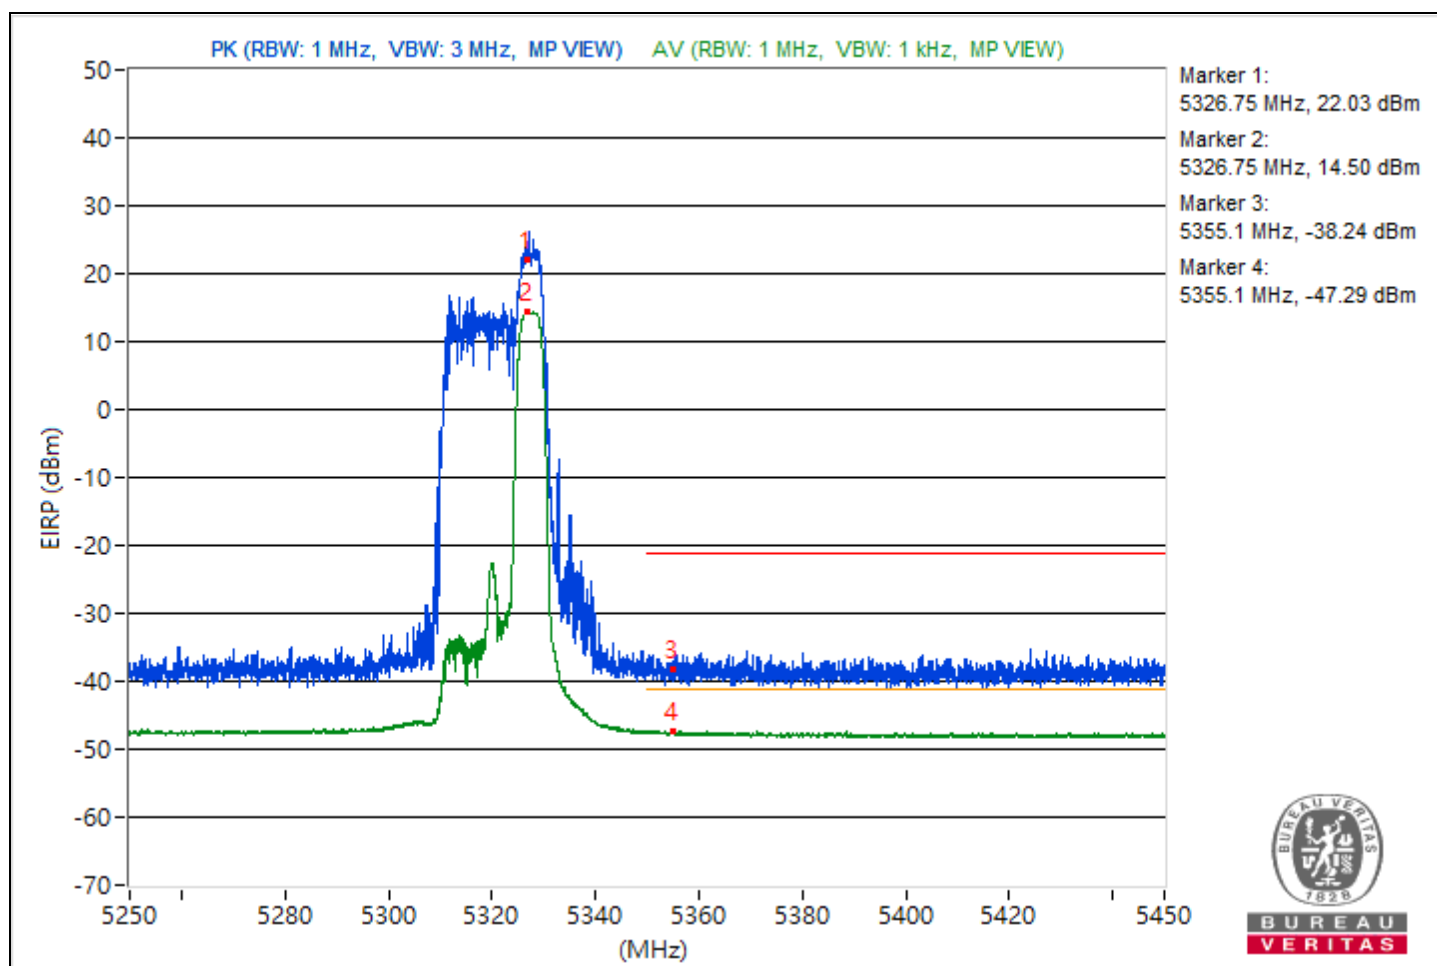


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 100 : 5500 MHz |
| Frequency Range | 5.35 GHz ~ 5.6 GHz          | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5491.47        | 123.67 PK               |                |             | 20.04                   | 8.37                   | 28.41            |
| 2                   | 5414.56         | 60.85 PK                | 74             | -13.15      | -42.78                  | 8.37                   | -34.41           |
| 3                   | #5460.31        | 60.37 PK                | 68.26          | -7.89       | -43.26                  | 8.37                   | -34.89           |
| 4                   | *5492.84        | 111.54 AV               |                |             | 7.91                    | 8.37                   | 16.28            |
| 5                   | 5457.94         | 48.56 AV                | 54             | -5.44       | -55.07                  | 8.37                   | -46.7            |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

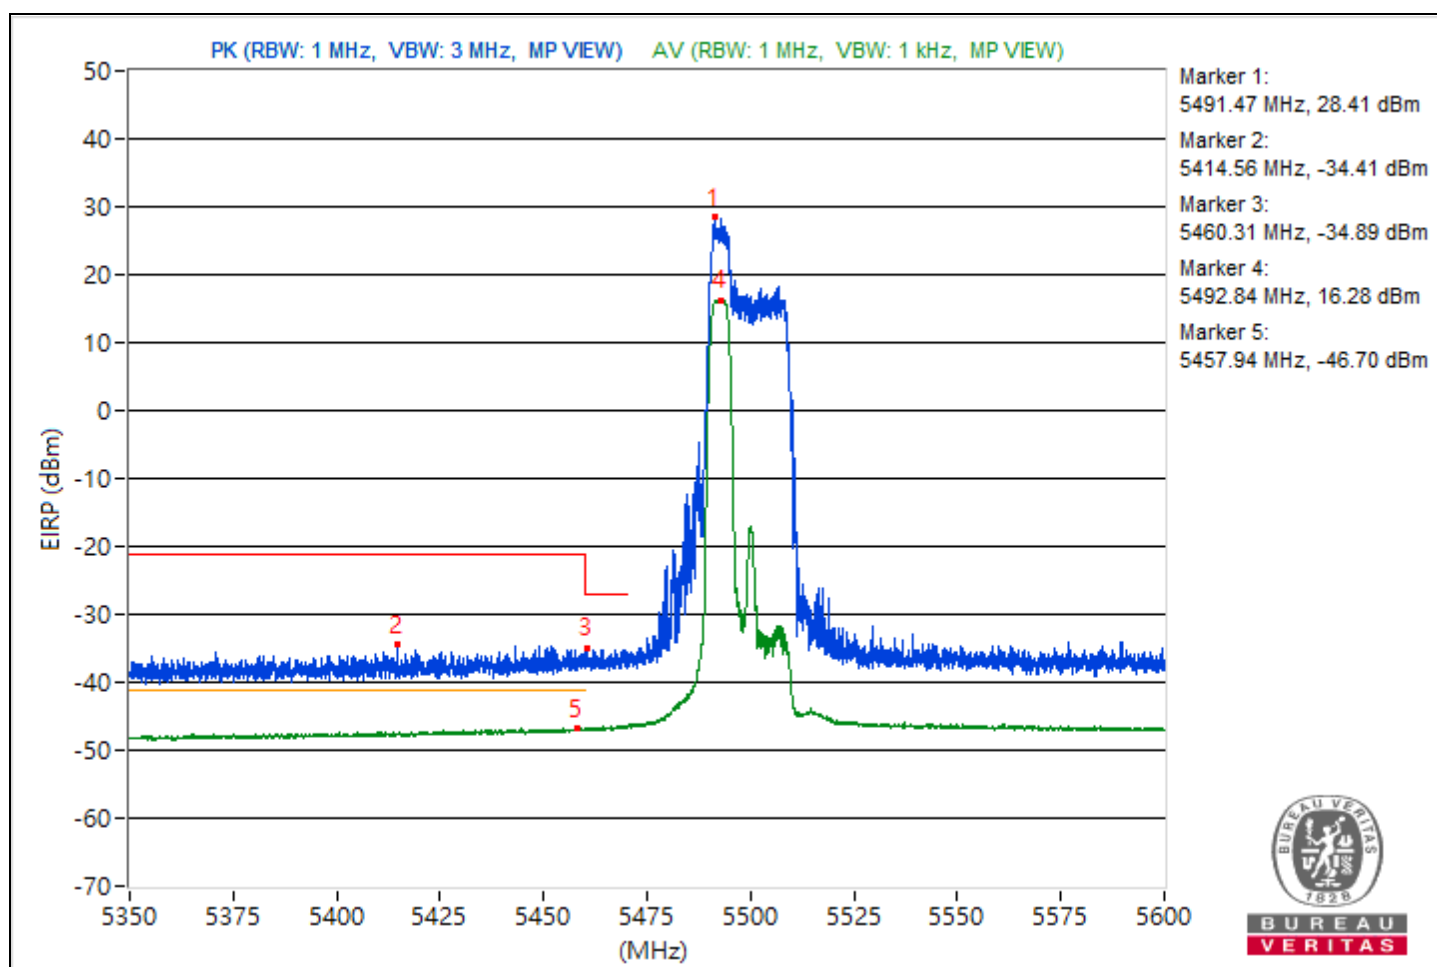


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 140 : 5700 MHz |
| Frequency Range | 5.625 GHz ~ 5.825 GHz       | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5707.68        | 122.97                  |                |             | 19.34                   | 8.37                   | 27.71            |
| 2                   | #5750.45        | 61.66                   | 68.26          | -6.6        | -41.97                  | 8.37                   | -33.6            |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

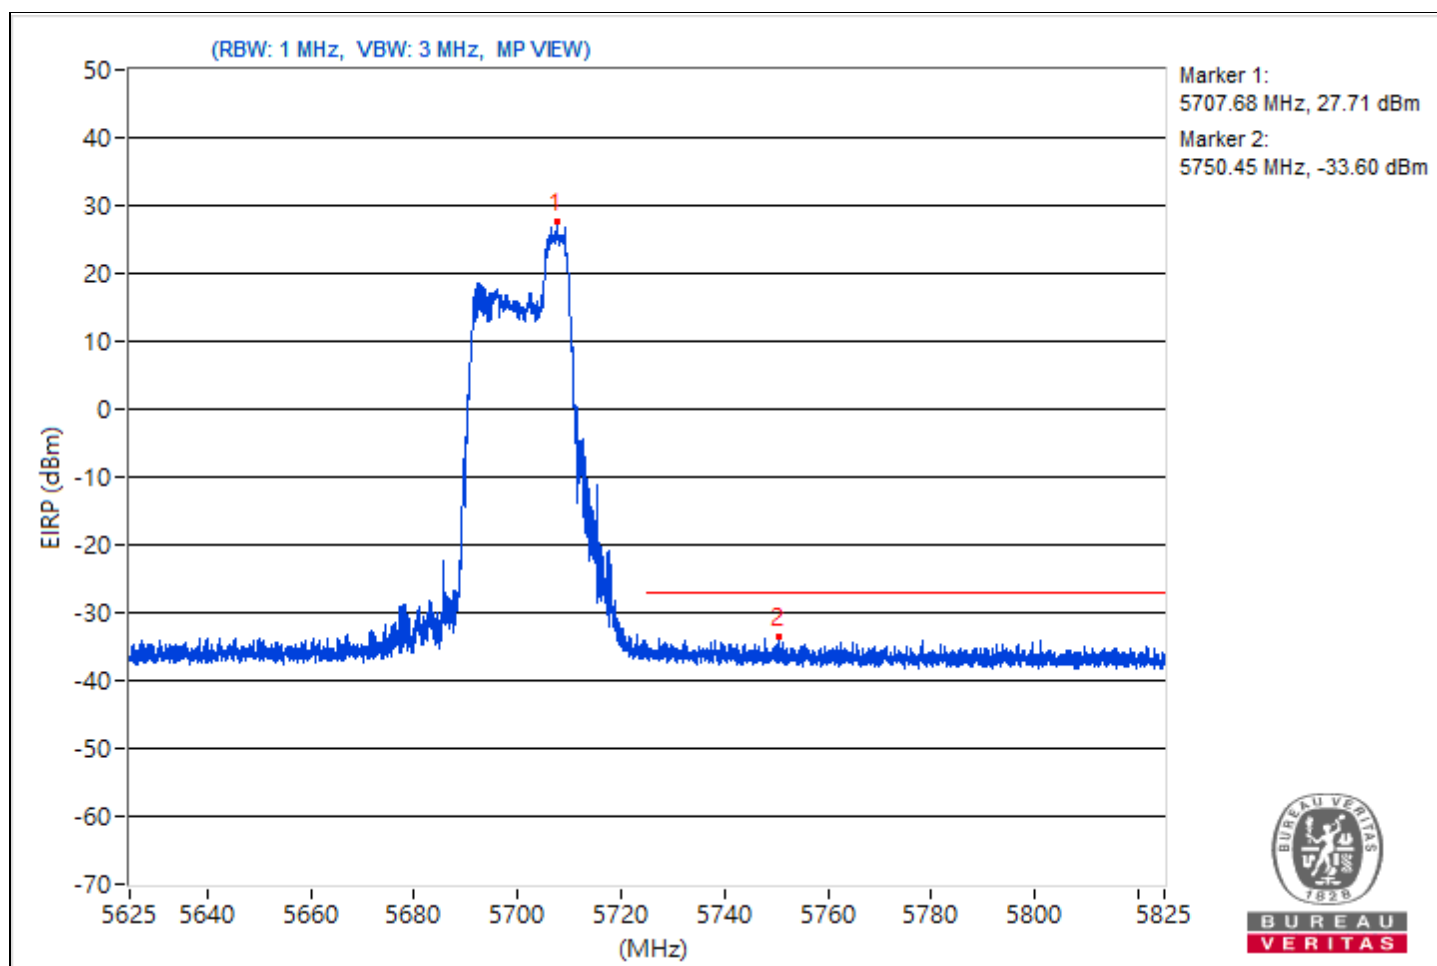


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 144 : 5720 MHz |
| Frequency Range | 5.7 GHz ~ 6 GHz             | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5728.54        | 123.06                  |                |             | 19.43                   | 8.37                   | 27.8             |
| 2                   | #5926.01        | 60.36                   | 68.26          | -7.9        | -43.27                  | 8.37                   | -34.9            |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

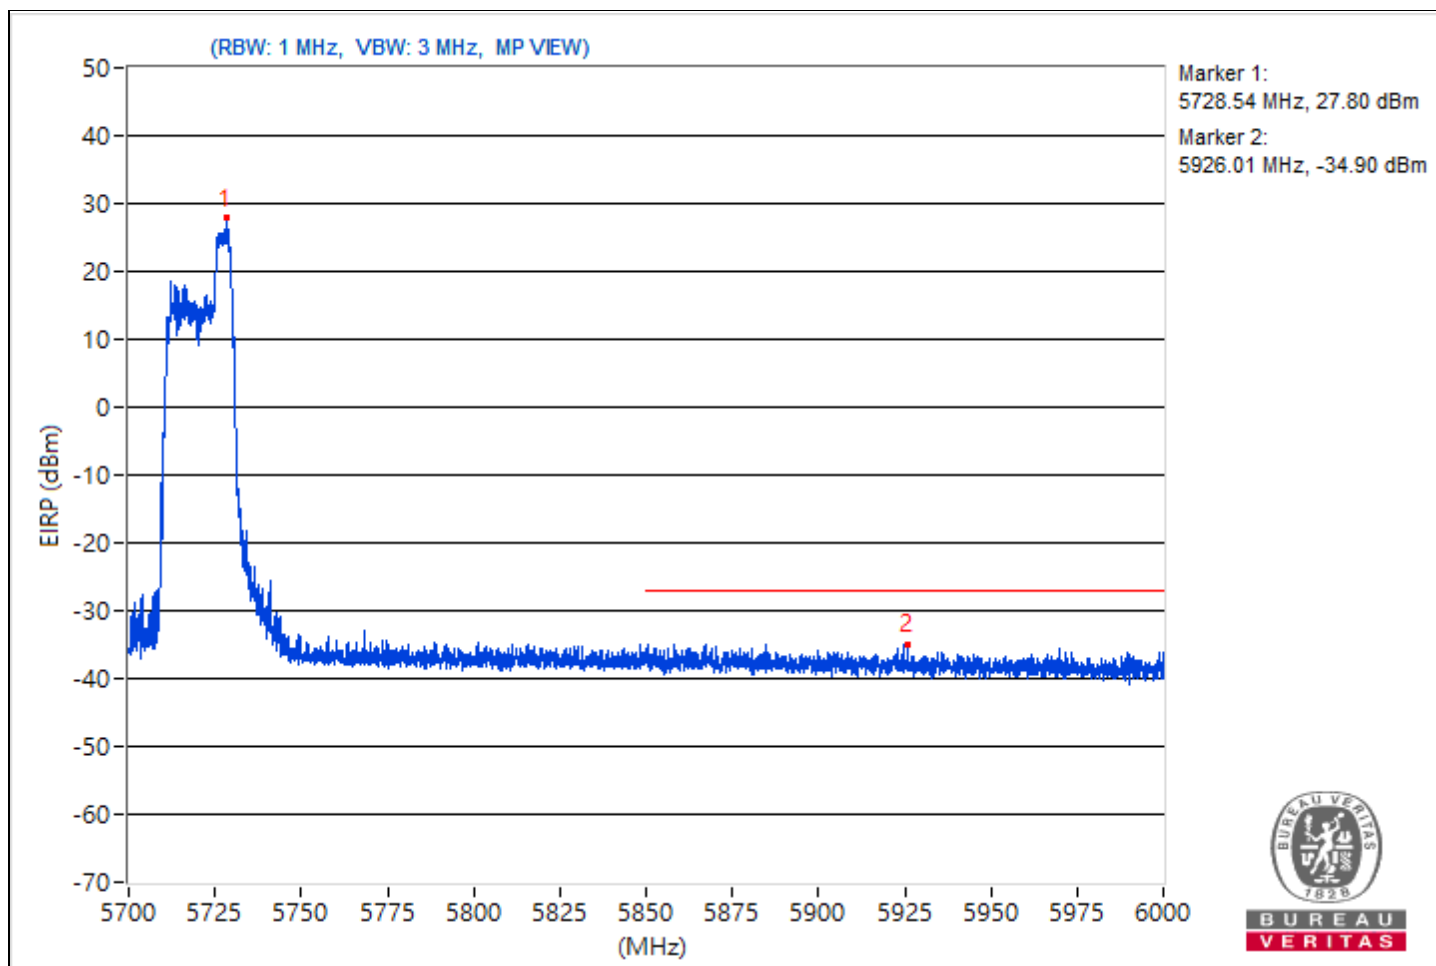


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 149 : 5745 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz        | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5737.39        | 129.68                  |                |             | 26.05                   | 8.37                   | 34.42            |
| 2                   | #5649.75        | 61.65                   | 68.26          | -6.61       | -41.98                  | 8.37                   | -33.61           |
| 3                   | #5651.29        | 61.39                   | 69.22          | -7.83       | -42.24                  | 8.37                   | -33.87           |
| 4                   | #5707.46        | 84.4                    | 107.35         | -22.95      | -19.23                  | 8.37                   | -10.86           |
| 5                   | #5721.59        | 91.86                   | 114.49         | -22.63      | -11.77                  | 8.37                   | -3.4             |
| 6                   | #5854.83        | 59.38                   | 111.24         | -51.86      | -44.25                  | 8.37                   | -35.88           |
| 7                   | #5874.66        | 60.4                    | 105.35         | -44.95      | -43.23                  | 8.37                   | -34.86           |
| 8                   | #5924.66        | 58.2                    | 68.51          | -10.31      | -45.43                  | 8.37                   | -37.06           |
| 9                   | #5934.27        | 60.88                   | 68.26          | -7.38       | -42.75                  | 8.37                   | -34.38           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

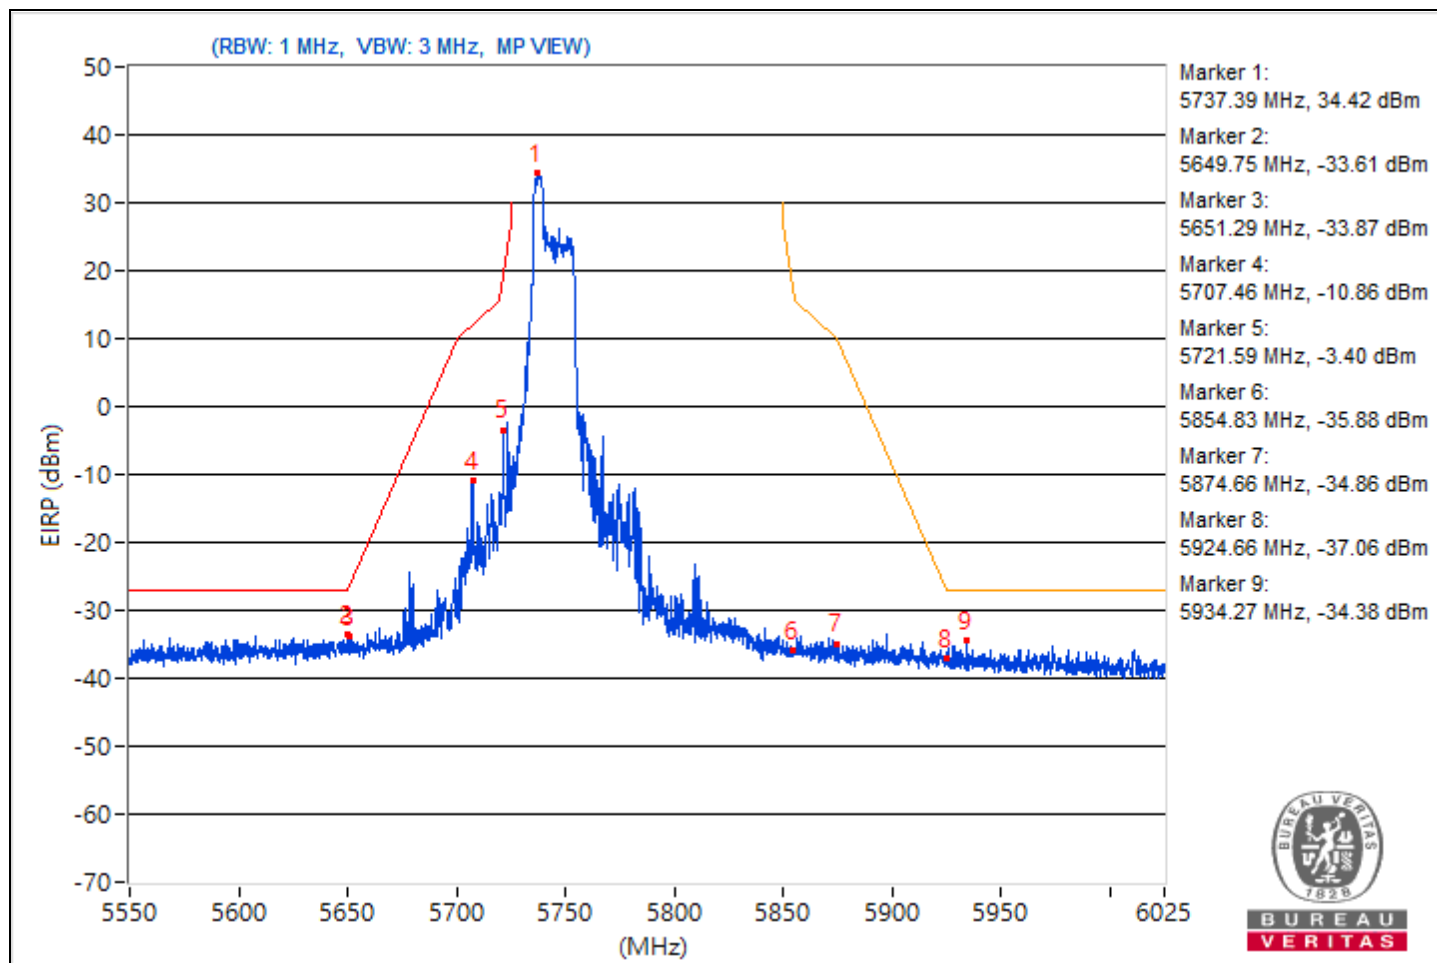


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 165 : 5825 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz        | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                   |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5833.93        | 129.3                   |                |             | 25.67                   | 8.37                   | 34.04            |
| 2                   | #5570.19        | 60.8                    | 68.26          | -7.46       | -42.83                  | 8.37                   | -34.46           |
| 3                   | #5650.34        | 59.93                   | 68.51          | -8.58       | -43.7                   | 8.37                   | -35.33           |
| 4                   | #5701.17        | 60.96                   | 105.59         | -44.63      | -42.67                  | 8.37                   | -34.3            |
| 5                   | #5720.05        | 59.75                   | 110.97         | -51.22      | -43.88                  | 8.37                   | -35.51           |
| 6                   | #5854.71        | 78.22                   | 111.52         | -33.3       | -25.41                  | 8.37                   | -17.04           |
| 7                   | #5862.79        | 81.58                   | 108.68         | -27.1       | -22.05                  | 8.37                   | -13.68           |
| 8                   | #5924.66        | 60.87                   | 68.51          | -7.64       | -42.76                  | 8.37                   | -34.39           |
| 9                   | #5925.01        | 61.24                   | 68.26          | -7.02       | -42.39                  | 8.37                   | -34.02           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

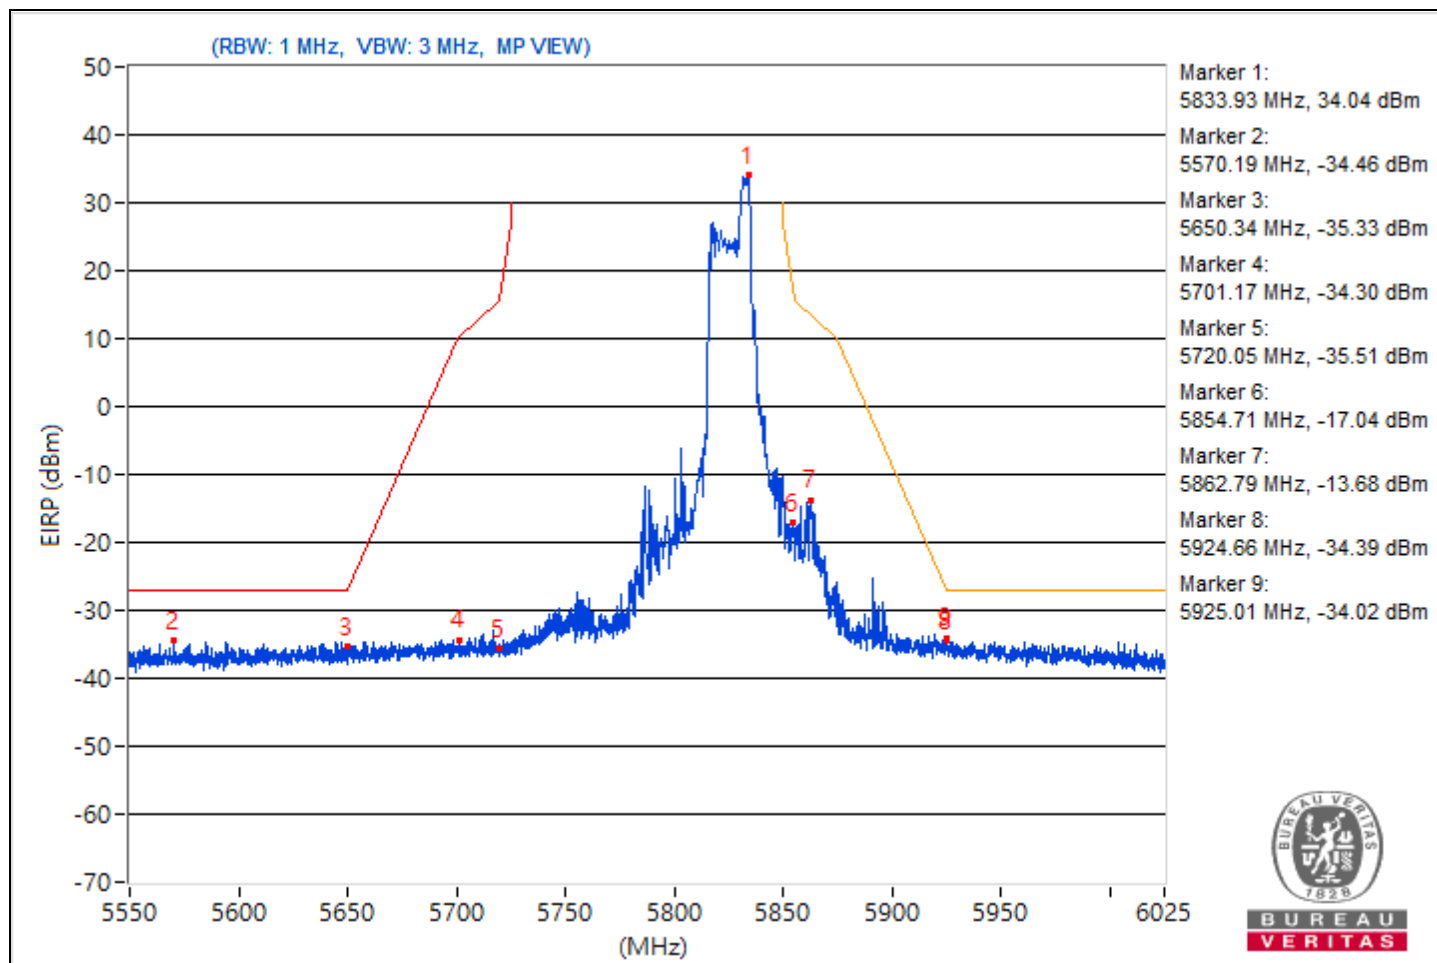


|                 |                              |                          |                  |
|-----------------|------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 36 : 5180 MHz |
| Frequency Range | 5.05 GHz ~ 5.25 GHz          | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu                    |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5177.1         | 119.59 PK               |                |             | 15.96                   | 8.37                   | 24.33            |
| 2                   | *5177.1         | 110.93 AV               |                |             | 7.3                     | 8.37                   | 15.67            |
| 3                   | 5148.48         | 60.27 PK                | 74             | -13.73      | -43.36                  | 8.37                   | -34.99           |
| 4                   | 5148.48         | 50.49 AV                | 54             | -3.51       | -53.14                  | 8.37                   | -44.77           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

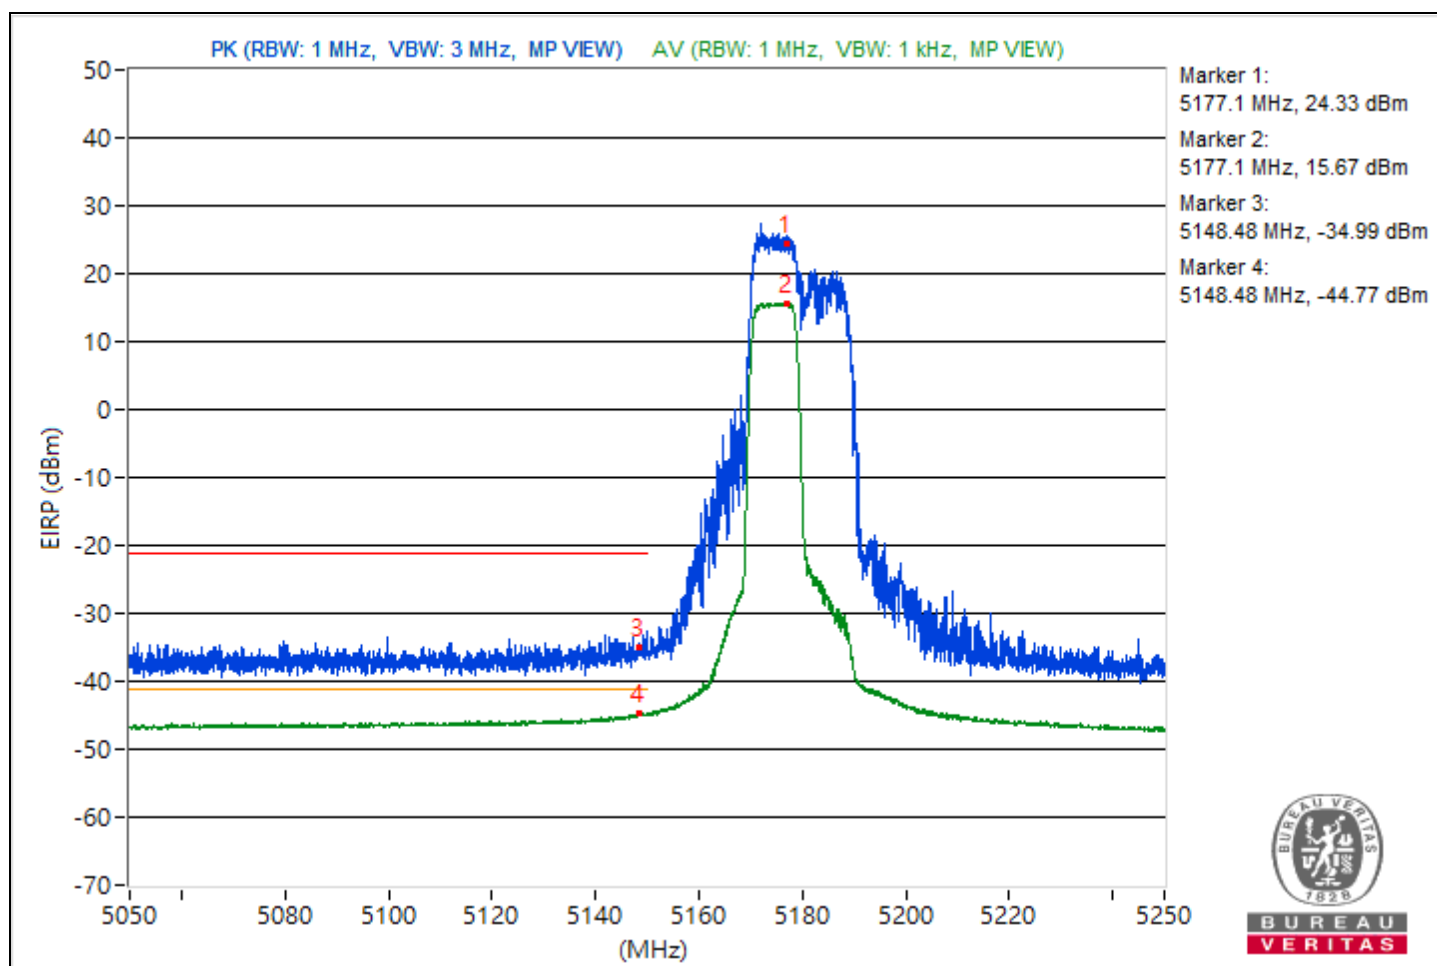


|                 |                              |                          |                  |
|-----------------|------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 64 : 5320 MHz |
| Frequency Range | 5.25 GHz ~ 5.45 GHz          | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu                    |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5327.55        | 119.85 PK               |                |             | 16.22                   | 8.37                   | 24.59            |
| 2                   | *5327.55        | 110.5 AV                |                |             | 6.87                    | 8.37                   | 15.24            |
| 3                   | 5350.4          | 61.34 PK                | 74             | -12.66      | -42.29                  | 8.37                   | -33.92           |
| 4                   | 5350.4          | 49.97 AV                | 54             | -4.03       | -53.66                  | 8.37                   | -45.29           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

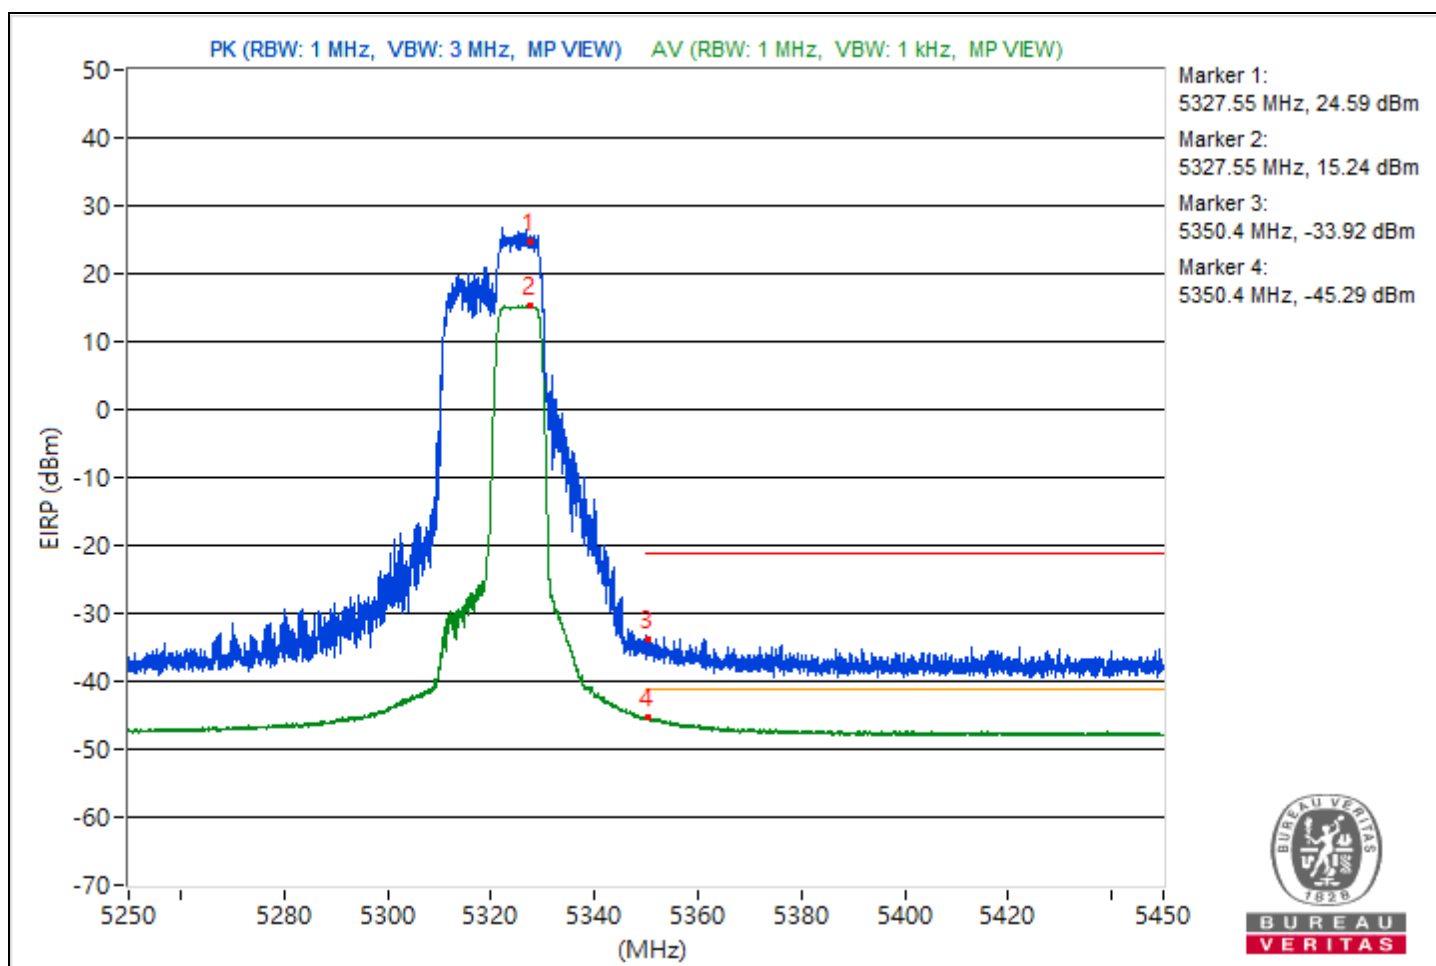


|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 100 : 5500 MHz |
| Frequency Range | 5.35 GHz ~ 5.6 GHz           | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                    |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5492.28        | 120.59 PK               |                |             | 16.96                   | 8.37                   | 25.33            |
| 2                   | 5459.87         | 60.74 PK                | 74             | -13.26      | -42.89                  | 8.37                   | -34.52           |
| 3                   | #5468.75        | 61.28 PK                | 68.26          | -6.98       | -42.35                  | 8.37                   | -33.98           |
| 4                   | *5496.91        | 108.35 AV               |                |             | 4.72                    | 8.37                   | 13.09            |
| 5                   | 5459.56         | 48.44 AV                | 54             | -5.56       | -55.19                  | 8.37                   | -46.82           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

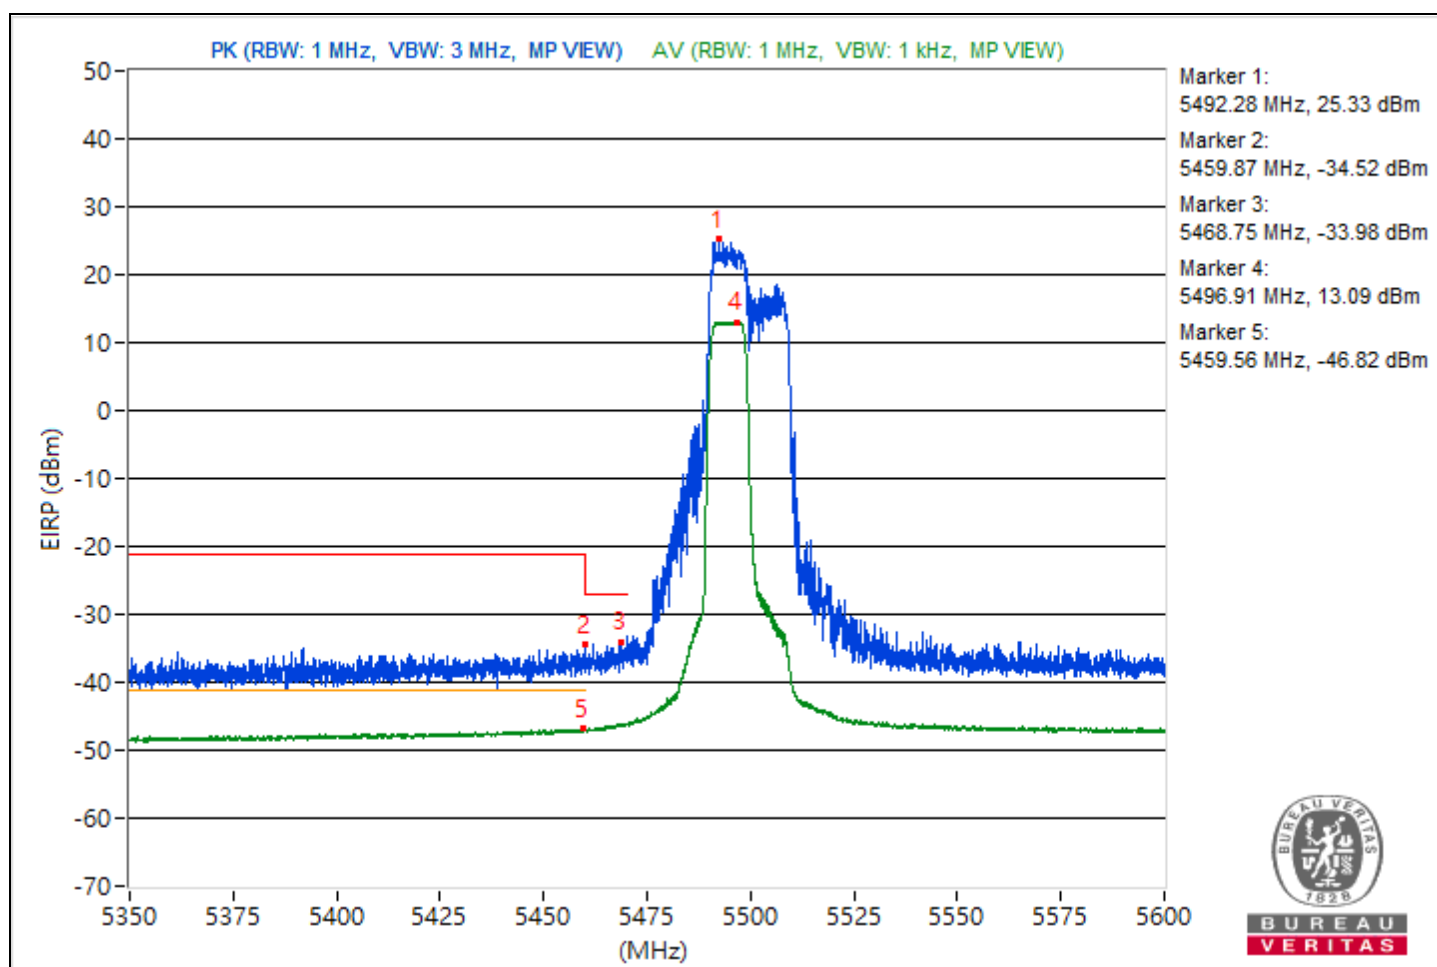


|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 140 : 5700 MHz |
| Frequency Range | 5.625 GHz ~ 5.825 GHz        | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                    |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5705.1         | 123.9                   |                |             | 20.27                   | 8.37                   | 28.64            |
| 2                   | #5725.12        | 63.69                   | 68.26          | -4.57       | -39.94                  | 8.37                   | -31.57           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

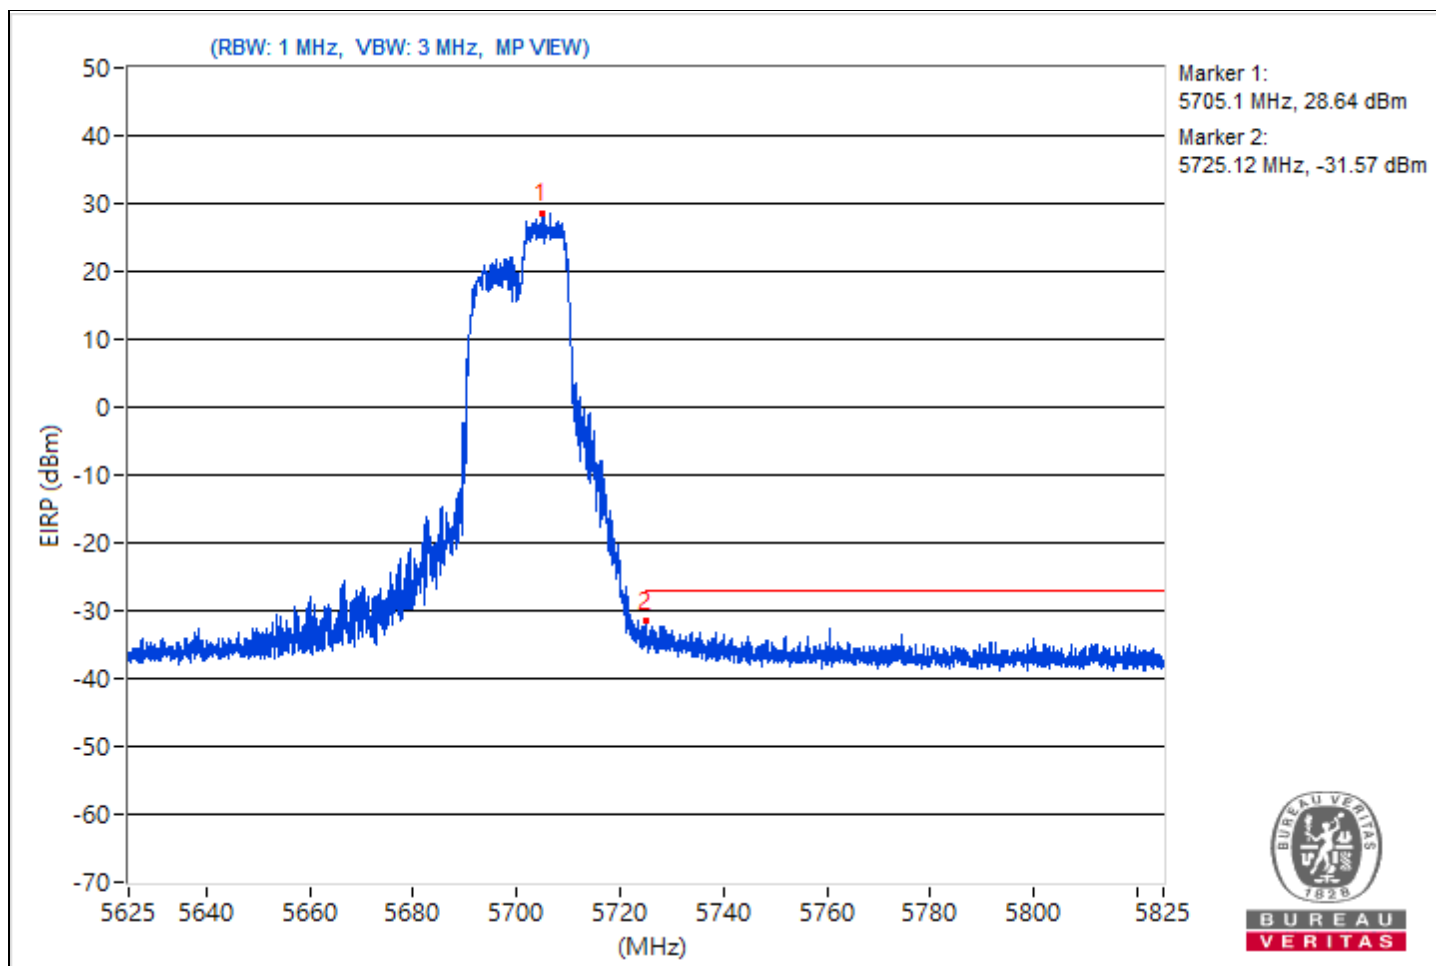


|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 144 : 5720 MHz |
| Frequency Range | 5.7 GHz ~ 6 GHz              | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                    |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5724.52        | 124.73                  |                |             | 21.1                    | 8.37                   | 29.47            |
| 2                   | #5851.5         | 60.11                   | 68.26          | -8.15       | -43.52                  | 8.37                   | -35.15           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

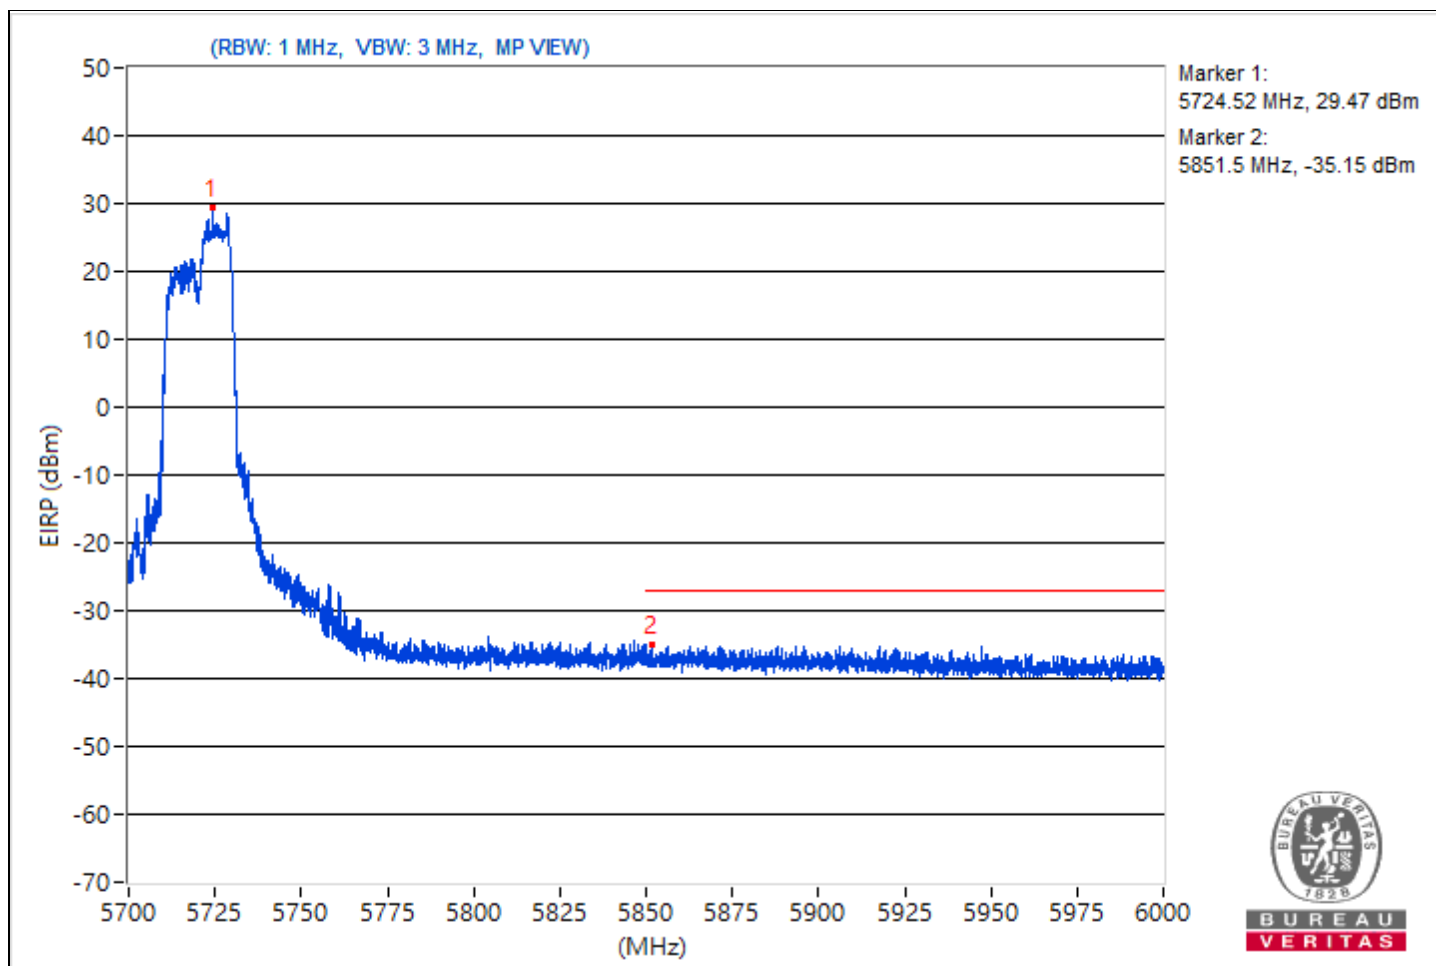


|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 149 : 5745 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz         | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                    |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5738.34        | 126.83                  |                |             | 23.2                    | 8.37                   | 31.57            |
| 2                   | #5649.27        | 62.34                   | 68.26          | -5.92       | -41.29                  | 8.37                   | -32.92           |
| 3                   | #5650.94        | 60.14                   | 68.95          | -8.81       | -43.49                  | 8.37                   | -35.12           |
| 4                   | #5718.74        | 85.22                   | 110.51         | -25.29      | -18.41                  | 8.37                   | -10.04           |
| 5                   | #5722.66        | 89.78                   | 116.93         | -27.15      | -13.85                  | 8.37                   | -5.48            |
| 6                   | #5854.71        | 59.73                   | 111.52         | -51.79      | -43.9                   | 8.37                   | -35.53           |
| 7                   | #5873           | 60.56                   | 105.82         | -45.26      | -43.07                  | 8.37                   | -34.7            |
| 8                   | #5924.3         | 58.5                    | 68.78          | -10.28      | -45.13                  | 8.37                   | -36.76           |
| 9                   | #5950.9         | 59.53                   | 68.26          | -8.73       | -44.1                   | 8.37                   | -35.73           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

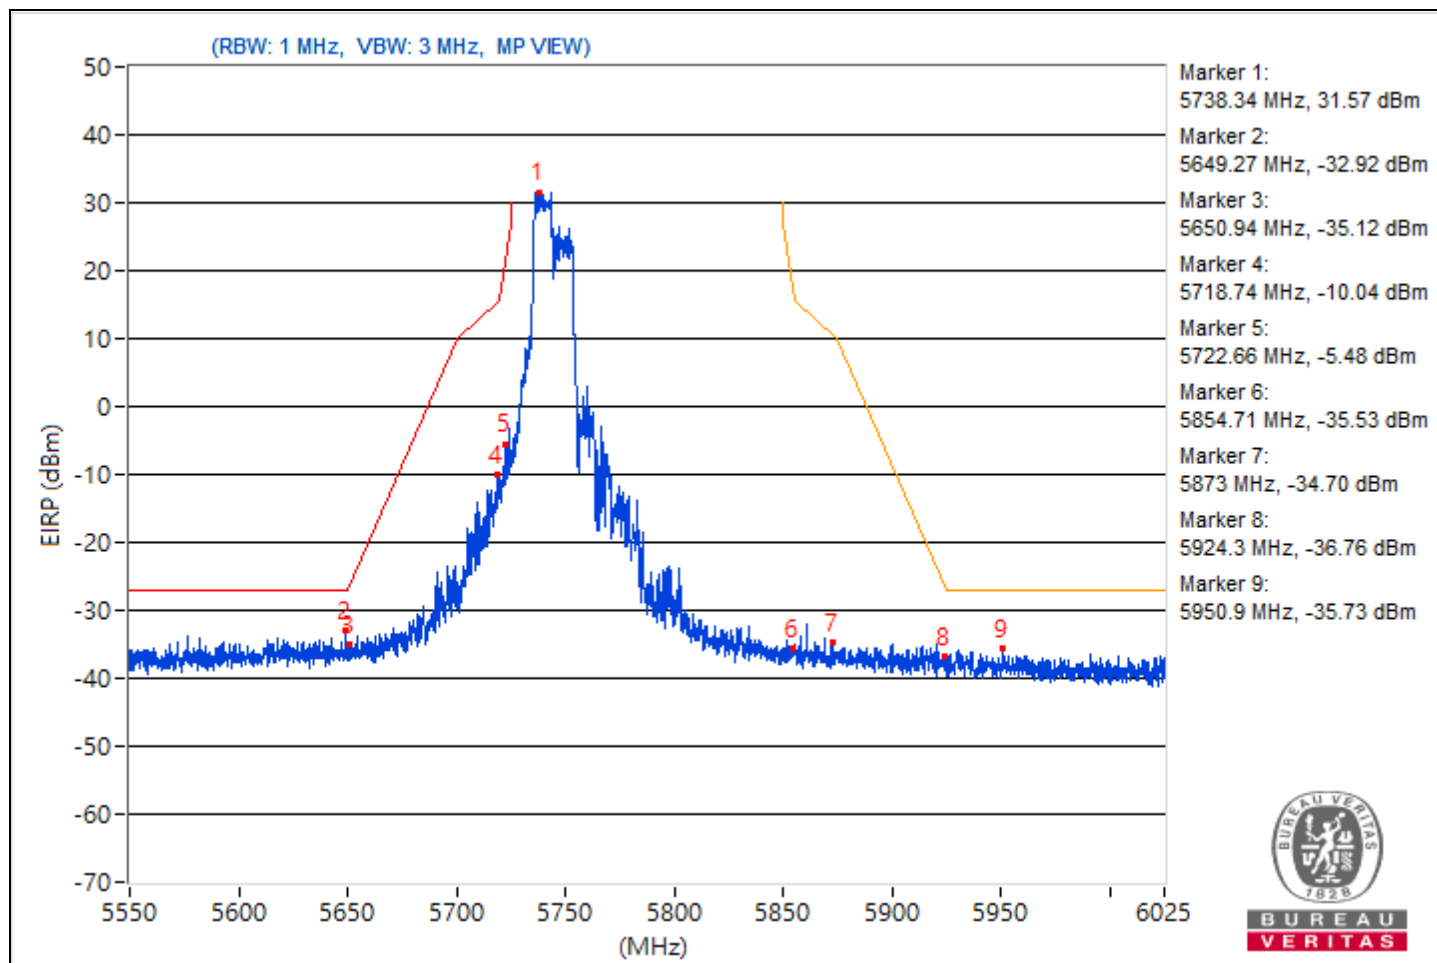


|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 165 : 5825 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz         | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                    |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5829.42        | 126.29                  |                |             | 22.66                   | 8.37                   | 31.03            |
| 2                   | #5629.92        | 60.63                   | 68.26          | -7.63       | -43                     | 8.37                   | -34.63           |
| 3                   | #5650.58        | 59.94                   | 68.69          | -8.75       | -43.69                  | 8.37                   | -35.32           |
| 4                   | #5700.1         | 59.62                   | 105.29         | -45.67      | -44.01                  | 8.37                   | -35.64           |
| 5                   | #5720.29        | 58.8                    | 111.52         | -52.72      | -44.83                  | 8.37                   | -36.46           |
| 6                   | #5853.64        | 82.41                   | 113.95         | -31.54      | -21.22                  | 8.37                   | -12.85           |
| 7                   | #5859.11        | 82.72                   | 109.71         | -26.99      | -20.91                  | 8.37                   | -12.54           |
| 8                   | #5924.18        | 59.61                   | 68.87          | -9.26       | -44.02                  | 8.37                   | -35.65           |
| 9                   | #5935.34        | 61.99                   | 68.26          | -6.27       | -41.64                  | 8.37                   | -33.27           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

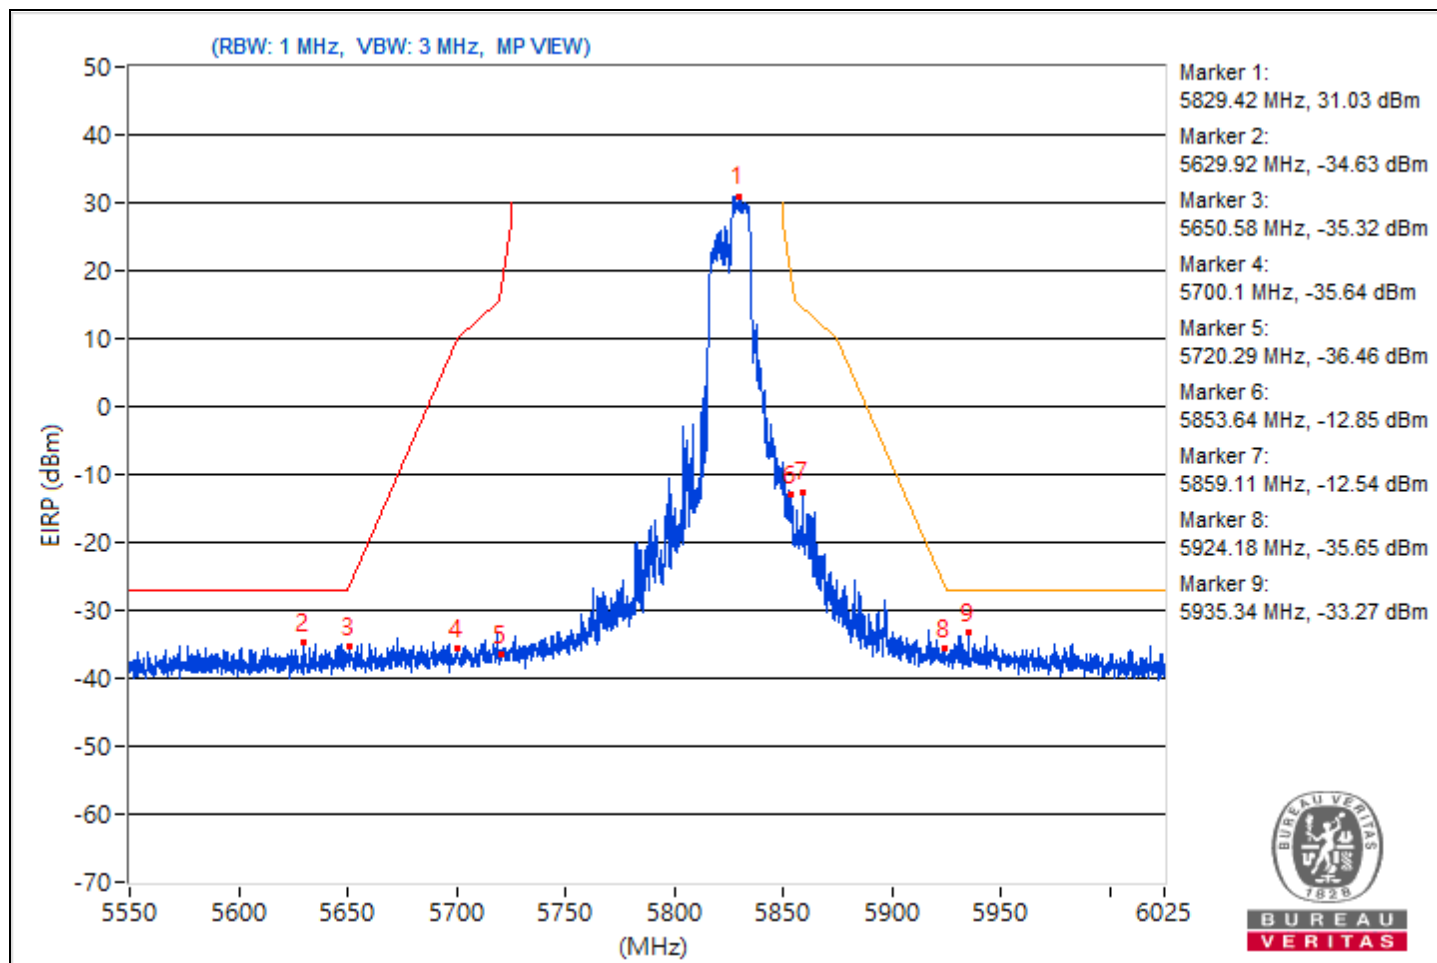


|                 |                                 |                          |                  |
|-----------------|---------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone MRU | Channel                  | CH 36 : 5180 MHz |
| Frequency Range | 5.05 GHz ~ 5.25 GHz             | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu                       |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5177.5         | 120.32 PK               |                |             | 16.69                   | 8.37                   | 25.06            |
| 2                   | *5177.5         | 111.2 AV                |                |             | 7.57                    | 8.37                   | 15.94            |
| 3                   | 5145.62         | 59.19 PK                | 74             | -14.81      | -44.44                  | 8.37                   | -36.07           |
| 4                   | 5145.62         | 49.55 AV                | 54             | -4.45       | -54.08                  | 8.37                   | -45.71           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

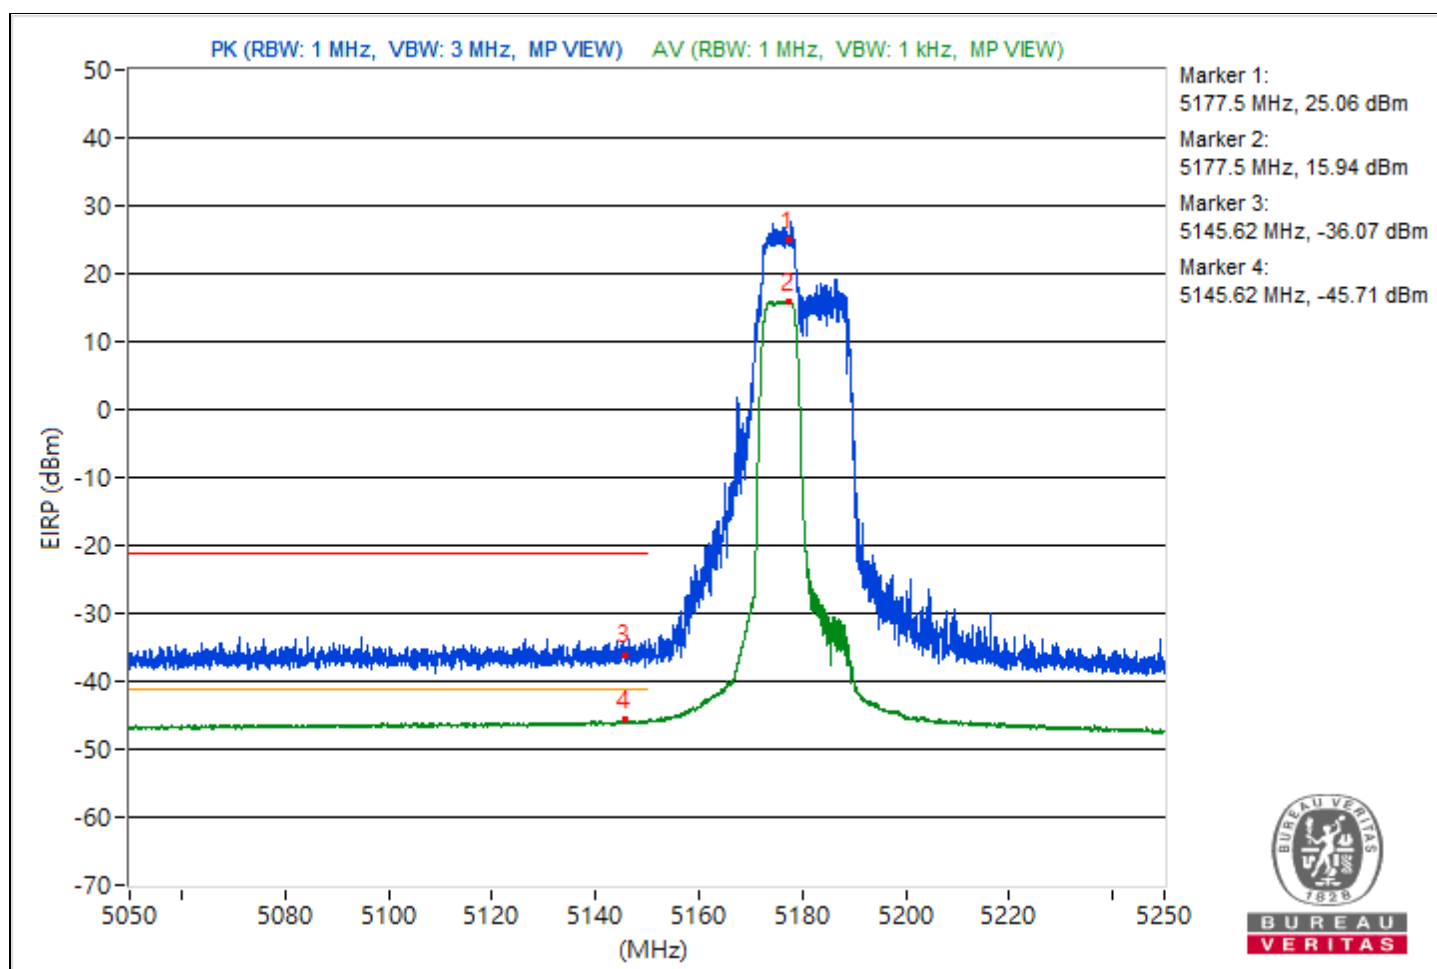


|                 |                                 |                          |                  |
|-----------------|---------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone MRU | Channel                  | CH 64 : 5320 MHz |
| Frequency Range | 5.25 GHz ~ 5.45 GHz             | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu                       |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5323.3         | 121.7 PK                |                |             | 18.07                   | 8.37                   | 26.44            |
| 2                   | *5323.3         | 111.99 AV               |                |             | 8.36                    | 8.37                   | 16.73            |
| 3                   | 5350.95         | 60.1 PK                 | 74             | -13.9       | -43.53                  | 8.37                   | -35.16           |
| 4                   | 5350.95         | 49.11 AV                | 54             | -4.89       | -54.52                  | 8.37                   | -46.15           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

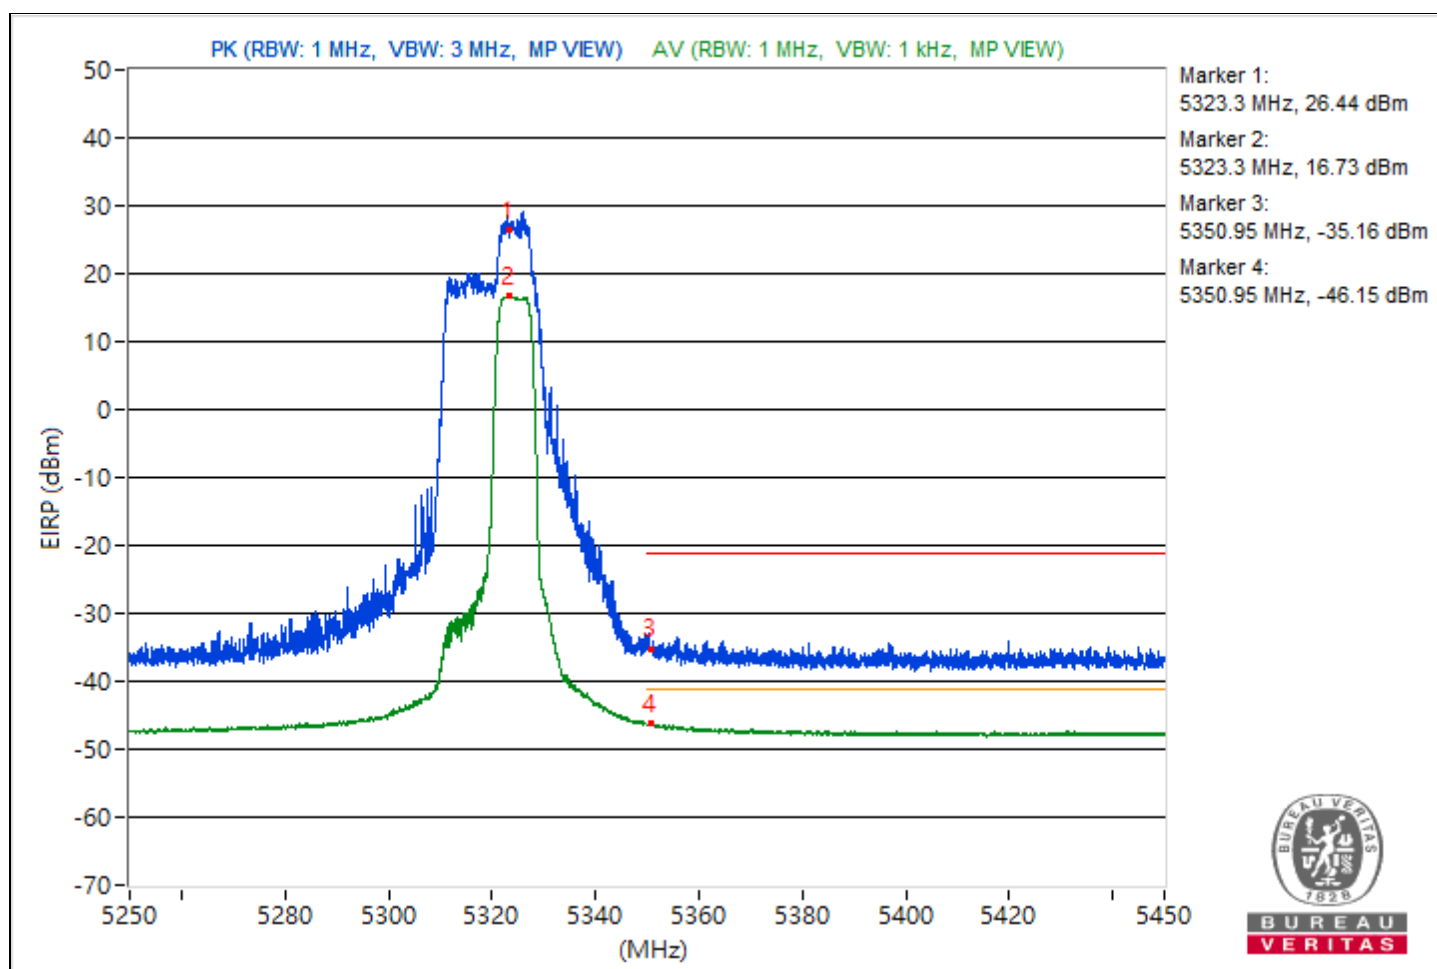


|                 |                                 |                          |                   |
|-----------------|---------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone MRU | Channel                  | CH 100 : 5500 MHz |
| Frequency Range | 5.35 GHz ~ 5.6 GHz              | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                       |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5497.87        | 120.81 PK               |                |             | 17.18                   | 8.37                   | 25.55            |
| 2                   | 5428.12         | 60.87 PK                | 74             | -13.13      | -42.76                  | 8.37                   | -34.39           |
| 3                   | #5469.34        | 60.38 PK                | 68.26          | -7.88       | -43.25                  | 8.37                   | -34.88           |
| 4                   | *5497.56        | 109.83 AV               |                |             | 6.2                     | 8.37                   | 14.57            |
| 5                   | 5459.62         | 48.6 AV                 | 54             | -5.4        | -55.03                  | 8.37                   | -46.66           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

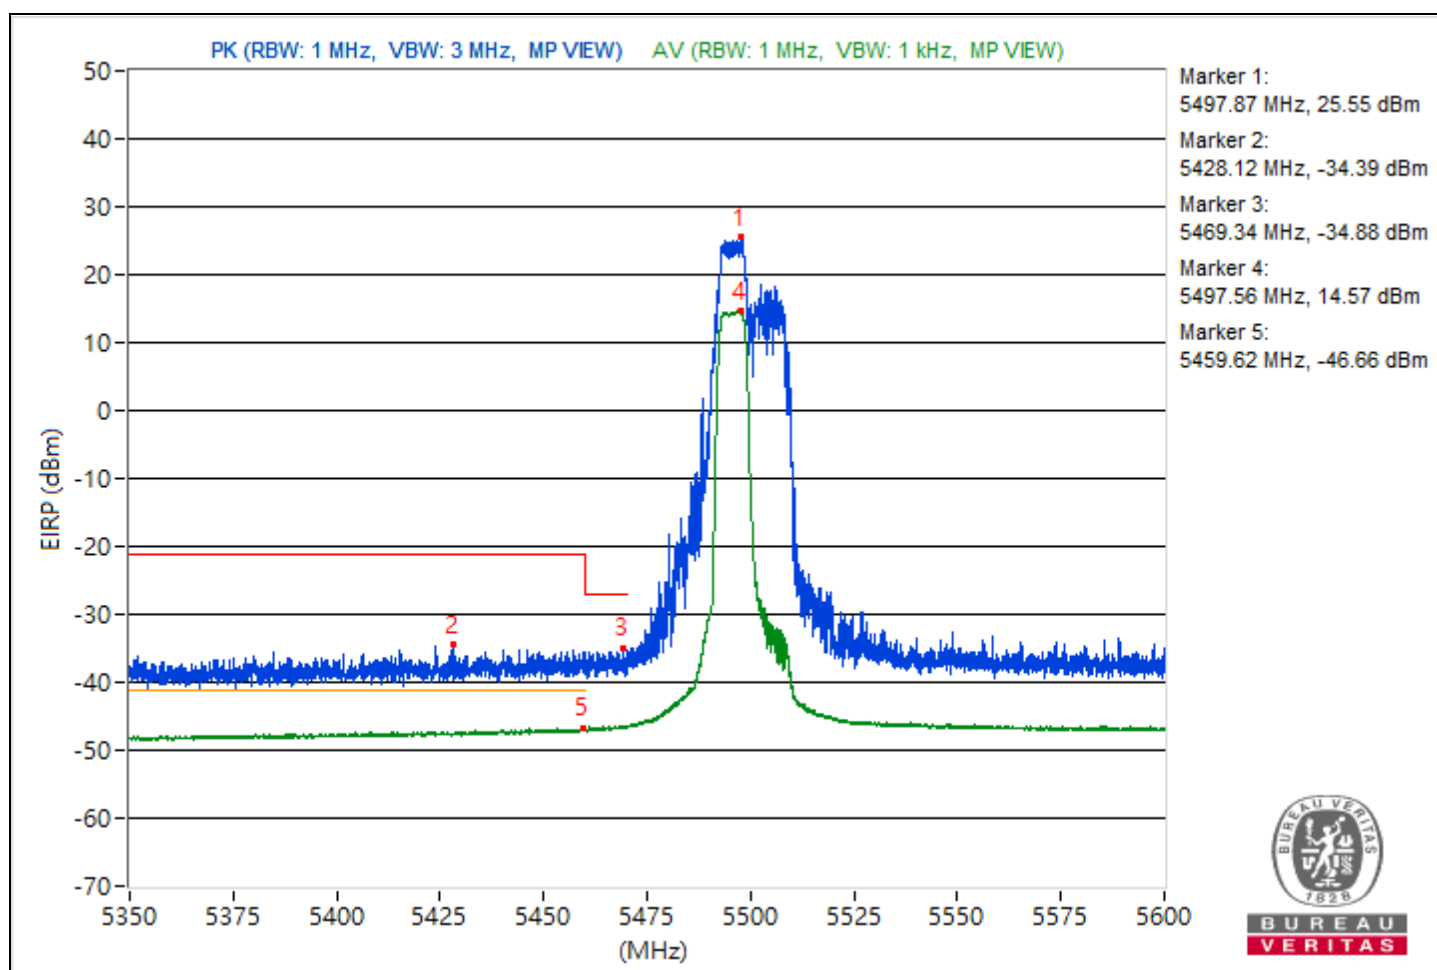


|                 |                                 |                          |                   |
|-----------------|---------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone MRU | Channel                  | CH 140 : 5700 MHz |
| Frequency Range | 5.625 GHz ~ 5.825 GHz           | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                       |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5703.43        | 122.85                  |                |             | 19.22                   | 8.37                   | 27.59            |
| 2                   | #5726.18        | 63.36                   | 68.26          | -4.9        | -40.27                  | 8.37                   | -31.9            |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

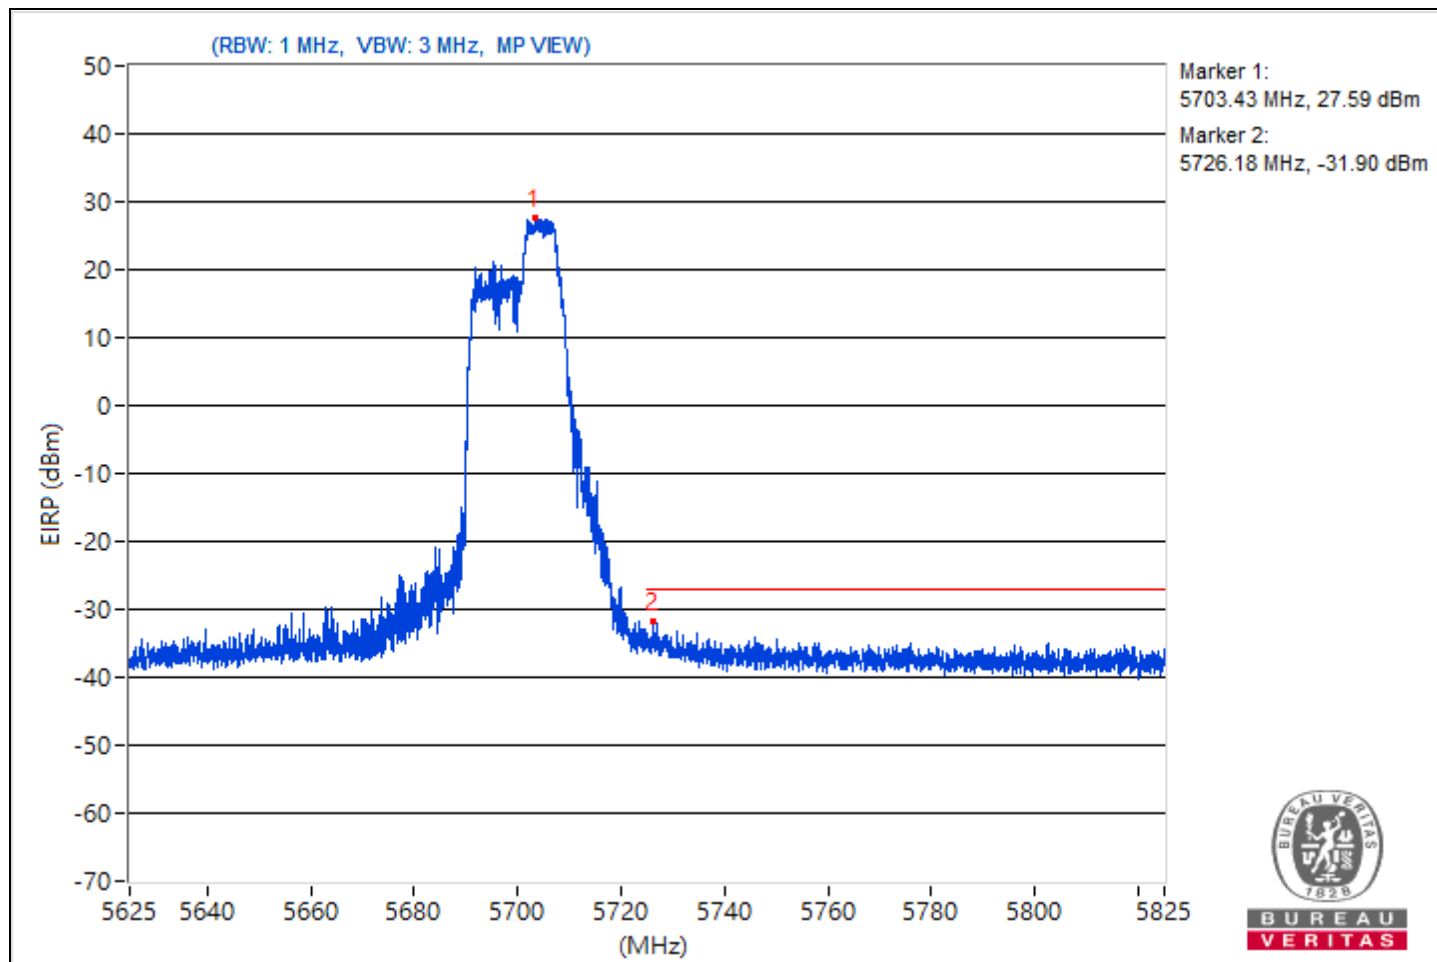


|                 |                                 |                          |                   |
|-----------------|---------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone MRU | Channel                  | CH 144 : 5720 MHz |
| Frequency Range | 5.7 GHz ~ 6 GHz                 | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                       |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5725.8         | 123.8                   |                |             | 20.17                   | 8.37                   | 28.54            |
| 2                   | #5872.24        | 60.4                    | 68.26          | -7.86       | -43.23                  | 8.37                   | -34.86           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

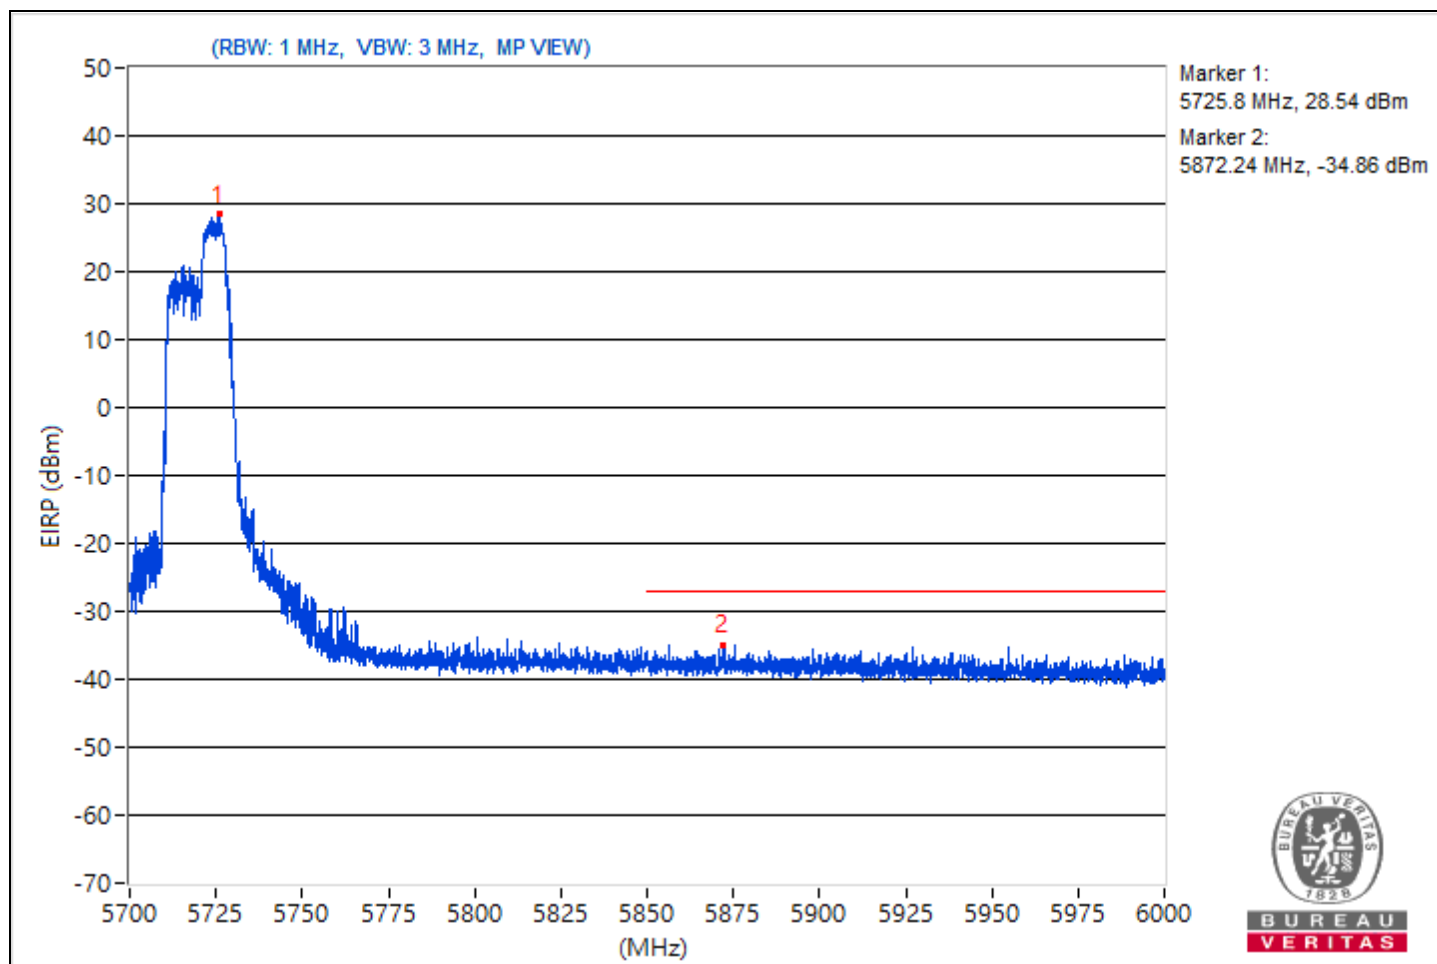


|                 |                                 |                          |                   |
|-----------------|---------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone MRU | Channel                  | CH 149 : 5745 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz            | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                       |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5741.43        | 128.23                  |                |             | 24.6                    | 8.37                   | 32.97            |
| 2                   | #5620.06        | 62.91                   | 68.26          | -5.35       | -40.72                  | 8.37                   | -32.35           |
| 3                   | #5650.94        | 61.83                   | 68.95          | -7.12       | -41.8                   | 8.37                   | -33.43           |
| 4                   | #5719.46        | 84.56                   | 110.71         | -26.15      | -19.07                  | 8.37                   | -10.7            |
| 5                   | #5720.05        | 84.58                   | 110.97         | -26.39      | -19.05                  | 8.37                   | -10.68           |
| 6                   | #5854.83        | 59.26                   | 111.24         | -51.98      | -44.37                  | 8.37                   | -36              |
| 7                   | #5874.54        | 60.72                   | 105.39         | -44.67      | -42.91                  | 8.37                   | -34.54           |
| 8                   | #5924.3         | 59.64                   | 68.78          | -9.14       | -43.99                  | 8.37                   | -35.62           |
| 9                   | #5925.49        | 60.73                   | 68.26          | -7.53       | -42.9                   | 8.37                   | -34.53           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

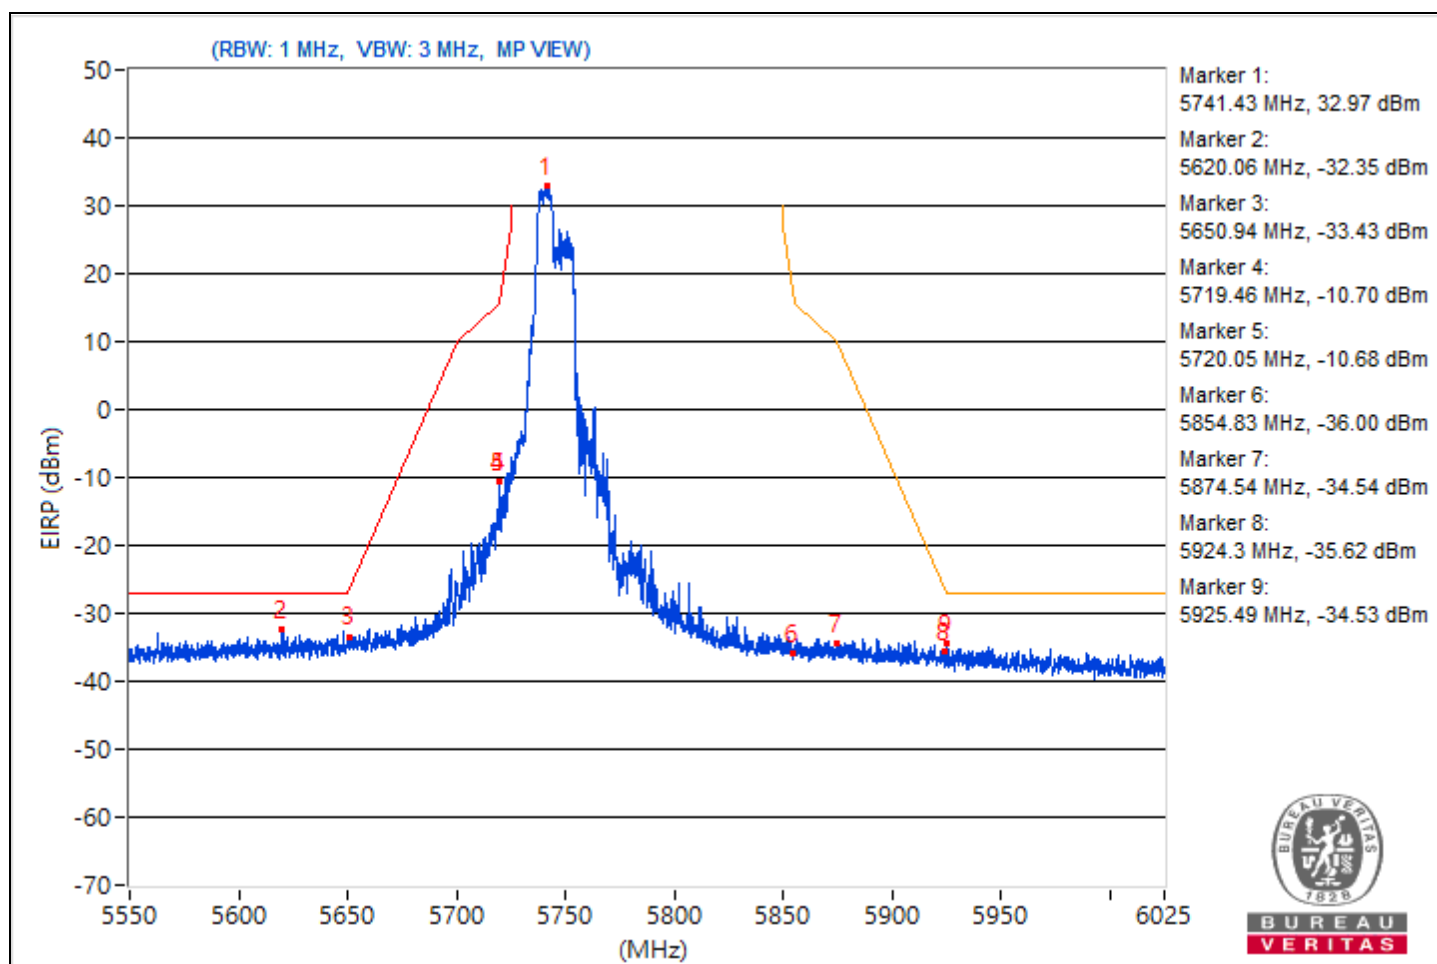


|                 |                                 |                          |                   |
|-----------------|---------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone MRU | Channel                  | CH 165 : 5825 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz            | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                       |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5828.11        | 123.92                  |                |             | 20.29                   | 8.37                   | 28.66            |
| 2                   | #5556.41        | 60.9                    | 68.26          | -7.36       | -42.73                  | 8.37                   | -34.36           |
| 3                   | #5650.94        | 59.3                    | 68.95          | -9.65       | -44.33                  | 8.37                   | -35.96           |
| 4                   | #5699.98        | 59.96                   | 105.25         | -45.29      | -43.67                  | 8.37                   | -35.3            |
| 5                   | #5720.17        | 60.1                    | 111.24         | -51.14      | -43.53                  | 8.37                   | -35.16           |
| 6                   | #5854.59        | 60.3                    | 111.79         | -51.49      | -43.33                  | 8.37                   | -34.96           |
| 7                   | #5872.76        | 59.65                   | 105.89         | -46.24      | -43.98                  | 8.37                   | -35.61           |
| 8                   | #5924.54        | 59.55                   | 68.6           | -9.05       | -44.08                  | 8.37                   | -35.71           |
| 9                   | #5946.98        | 60.32                   | 68.26          | -7.94       | -43.31                  | 8.37                   | -34.94           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

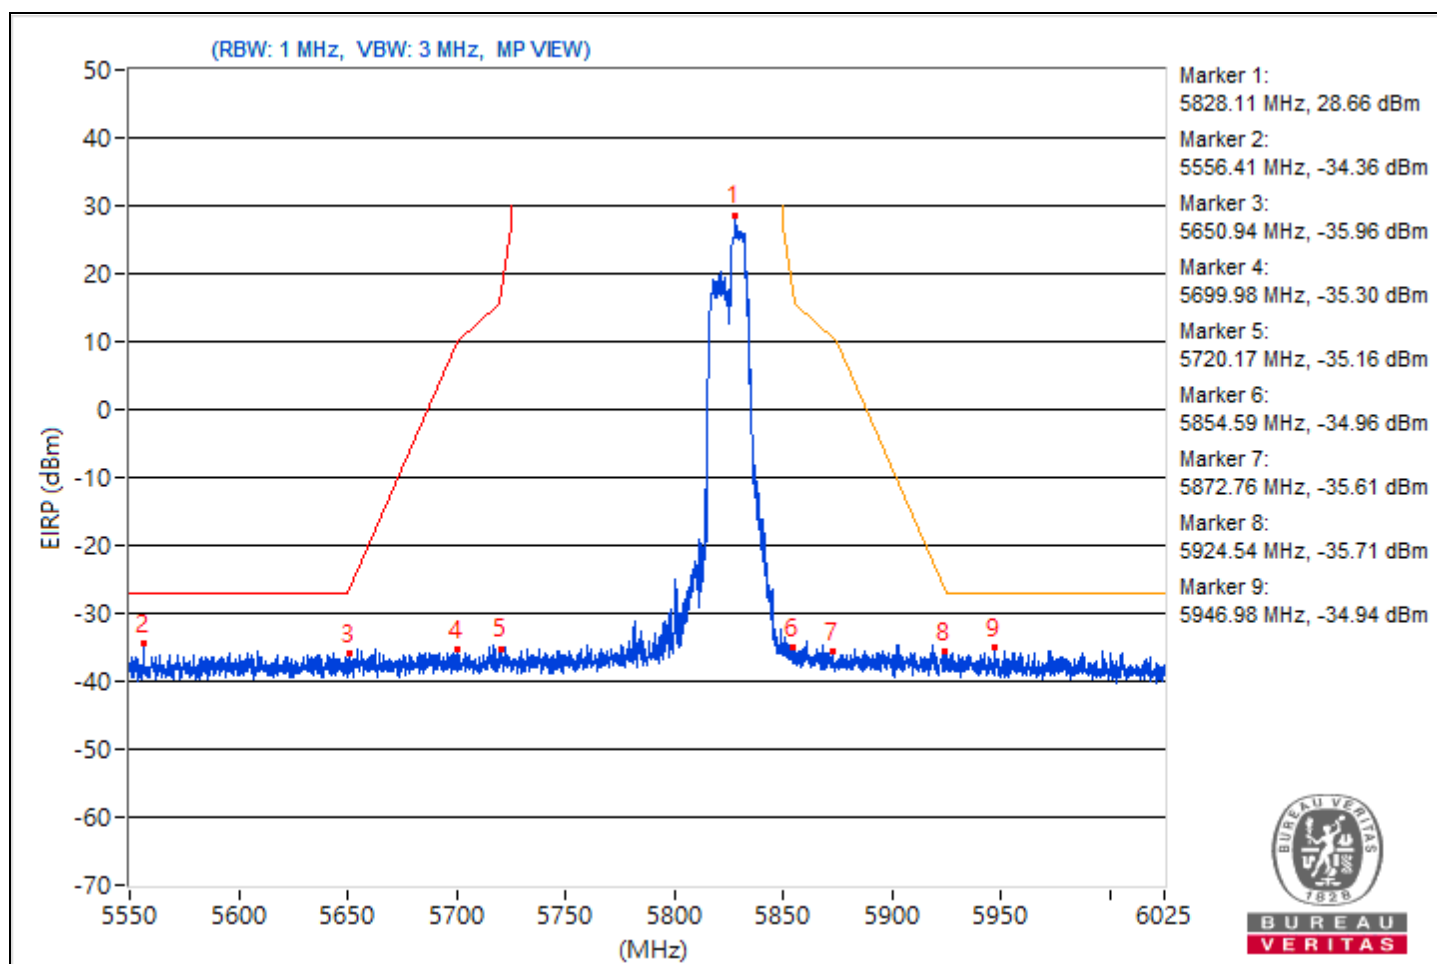


|                 |                                  |                          |                  |
|-----------------|----------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone MRU | Channel                  | CH 36 : 5180 MHz |
| Frequency Range | 5.05 GHz ~ 5.25 GHz              | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu                        |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5178.48        | 119.79 PK               |                |             | 16.16                   | 8.37                   | 24.53            |
| 2                   | *5178.48        | 111.34 AV               |                |             | 7.71                    | 8.37                   | 16.08            |
| 3                   | 5149.5          | 60.17 PK                | 74             | -13.83      | -43.46                  | 8.37                   | -35.09           |
| 4                   | 5149.5          | 50.97 AV                | 54             | -3.03       | -52.66                  | 8.37                   | -44.29           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

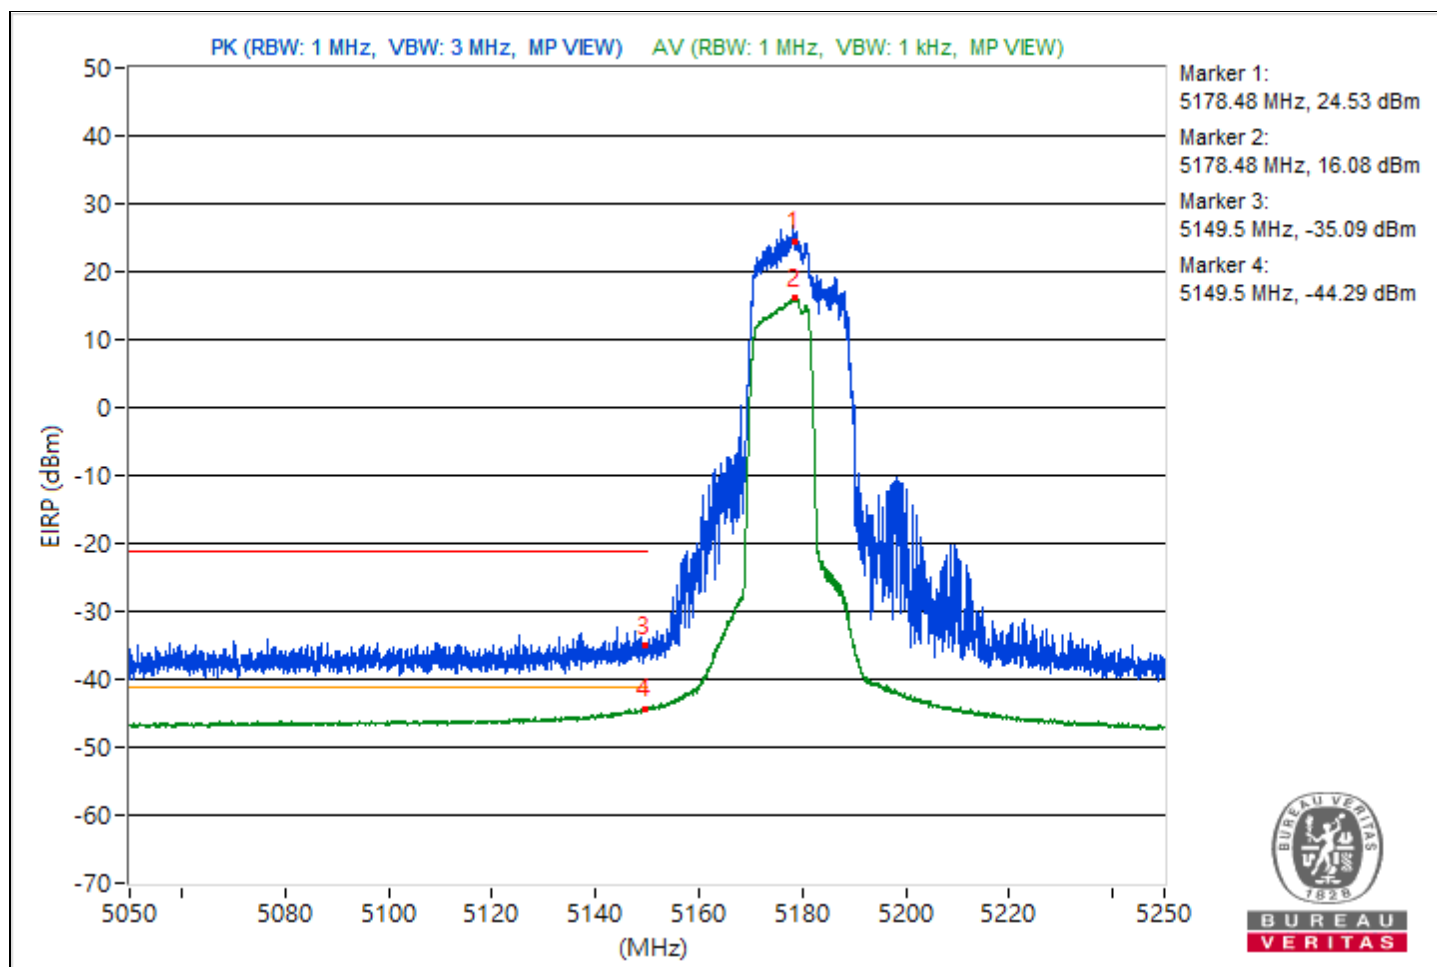


|                 |                                  |                          |                  |
|-----------------|----------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone MRU | Channel                  | CH 64 : 5320 MHz |
| Frequency Range | 5.25 GHz ~ 5.45 GHz              | Environmental Conditions | 20°C, 60% RH     |
| Tested By       | Henry Hsu                        |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5321.3         | 120.06 PK               |                |             | 16.43                   | 8.37                   | 24.8             |
| 2                   | *5321.3         | 110.99 AV               |                |             | 7.36                    | 8.37                   | 15.73            |
| 3                   | 5350.18         | 57.19 PK                | 74             | -16.81      | -46.44                  | 8.37                   | -38.07           |
| 4                   | 5350.18         | 49.81 AV                | 54             | -4.19       | -53.82                  | 8.37                   | -45.45           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

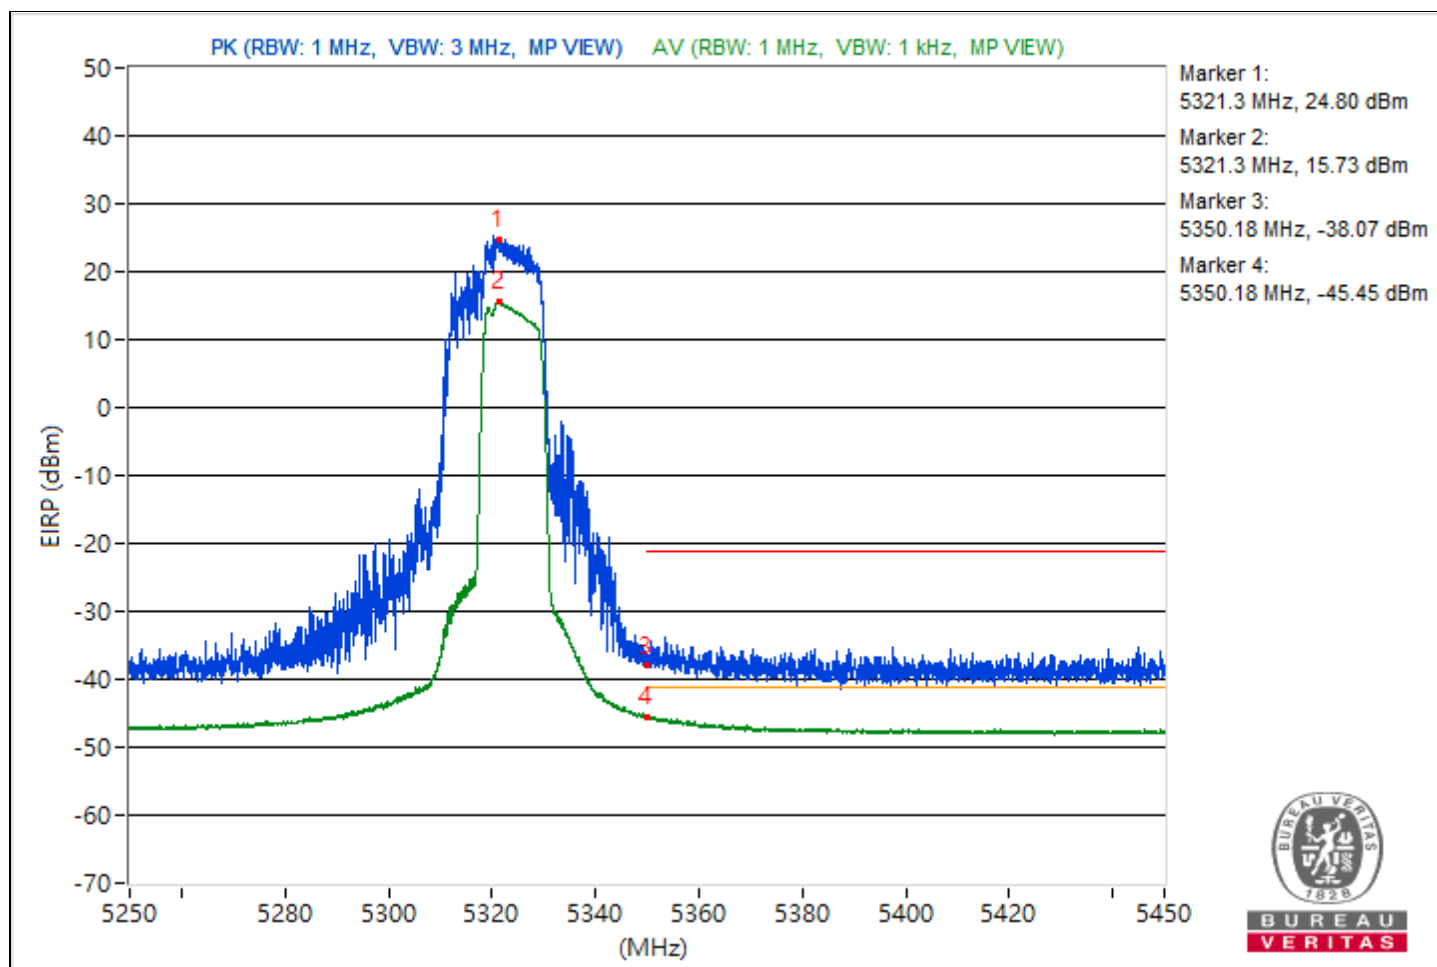


|                 |                                  |                          |                   |
|-----------------|----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone MRU | Channel                  | CH 100 : 5500 MHz |
| Frequency Range | 5.35 GHz ~ 5.6 GHz               | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                        |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5500.91        | 121.85 PK               |                |             | 18.22                   | 8.37                   | 26.59            |
| 2                   | 5395.91         | 59.96 PK                | 74             | -14.04      | -43.67                  | 8.37                   | -35.3            |
| 3                   | #5469.03        | 62.12 PK                | 68.26          | -6.14       | -41.51                  | 8.37                   | -33.14           |
| 4                   | *5499           | 110.88 AV               |                |             | 7.25                    | 8.37                   | 15.62            |
| 5                   | 5459.91         | 49.12 AV                | 54             | -4.88       | -54.51                  | 8.37                   | -46.14           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

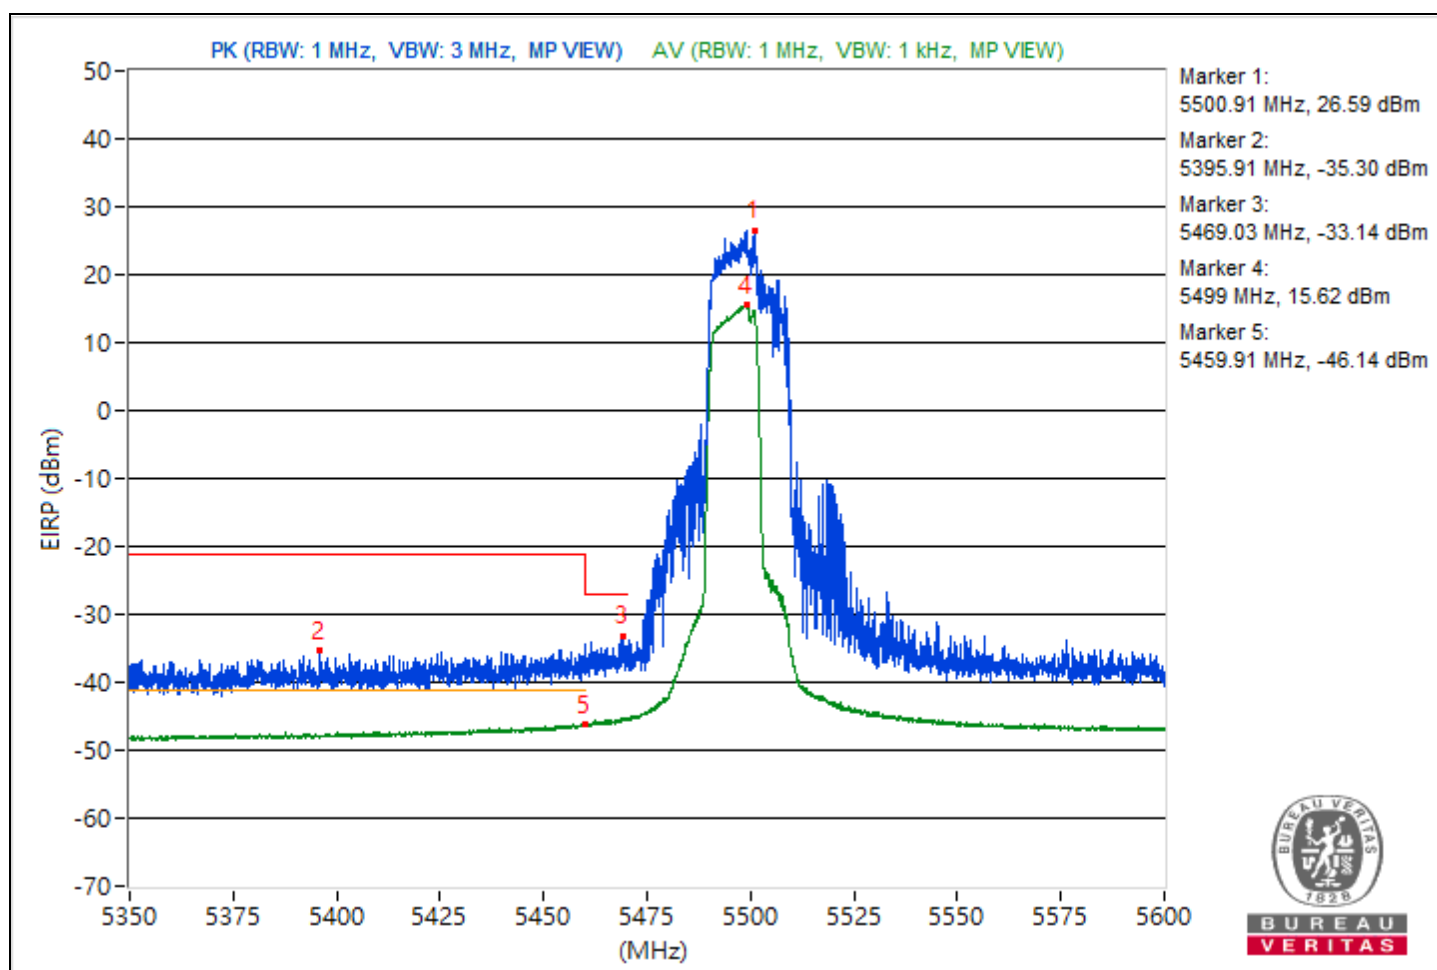


|                 |                                  |                          |                   |
|-----------------|----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone MRU | Channel                  | CH 140 : 5700 MHz |
| Frequency Range | 5.625 GHz ~ 5.825 GHz            | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                        |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5701.52        | 122.35                  |                |             | 18.72                   | 8.37                   | 27.09            |
| 2                   | #5725.32        | 61.61                   | 68.26          | -6.65       | -42.02                  | 8.37                   | -33.65           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

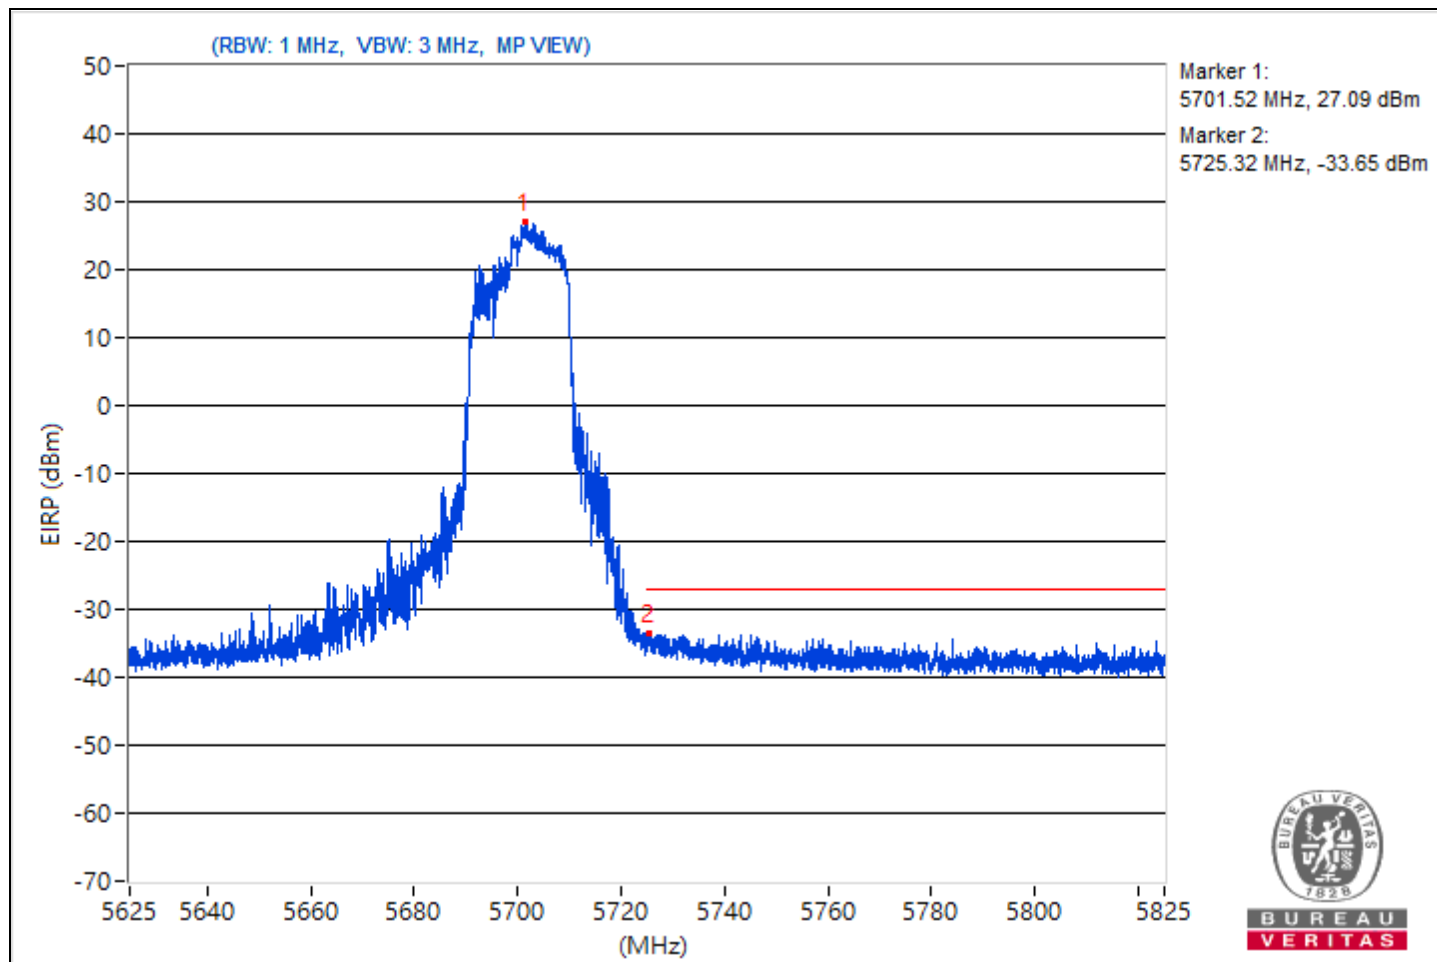


|                 |                                  |                          |                   |
|-----------------|----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone MRU | Channel                  | CH 144 : 5720 MHz |
| Frequency Range | 5.7 GHz ~ 6 GHz                  | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                        |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5722.57        | 121.24                  |                |             | 17.61                   | 8.37                   | 25.98            |
| 2                   | #5863.16        | 59.62                   | 68.26          | -8.64       | -44.01                  | 8.37                   | -35.64           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

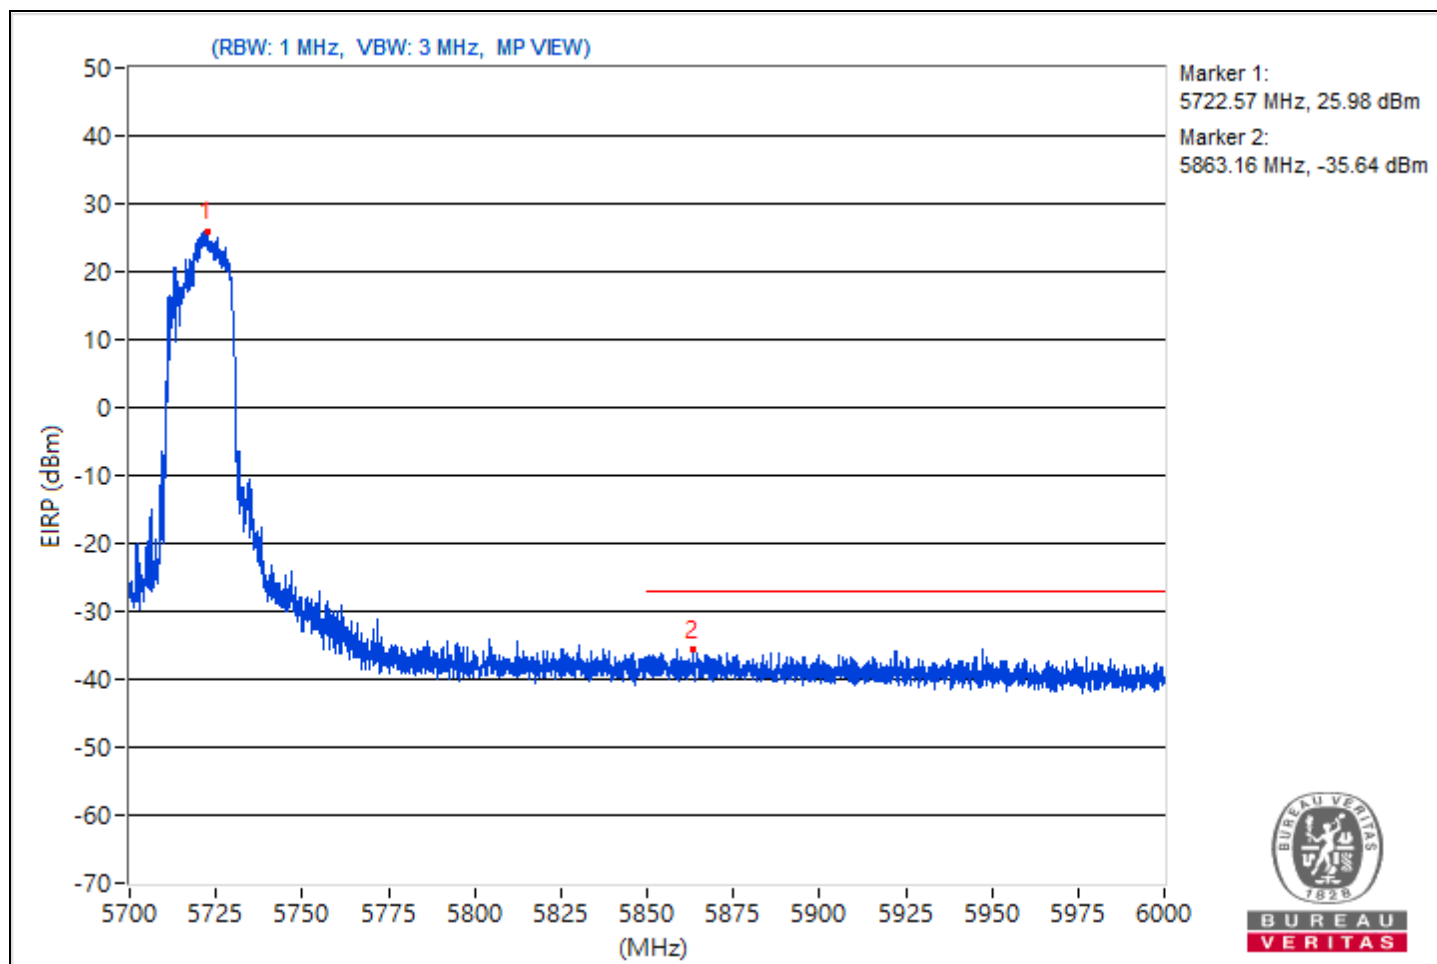


|                 |                                  |                          |                   |
|-----------------|----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone MRU | Channel                  | CH 149 : 5745 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz             | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                        |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5741.9         | 127.55                  |                |             | 23.92                   | 8.37                   | 32.29            |
| 2                   | #5551.78        | 61.04                   | 68.26          | -7.22       | -42.59                  | 8.37                   | -34.22           |
| 3                   | #5650.11        | 62.05                   | 68.34          | -6.29       | -41.58                  | 8.37                   | -33.21           |
| 4                   | #5718.98        | 88.96                   | 110.57         | -21.61      | -14.67                  | 8.37                   | -6.3             |
| 5                   | #5720.05        | 88.21                   | 110.97         | -22.76      | -15.42                  | 8.37                   | -7.05            |
| 6                   | #5854.83        | 60.83                   | 111.24         | -50.41      | -42.8                   | 8.37                   | -34.43           |
| 7                   | #5873.24        | 59.96                   | 105.75         | -45.79      | -43.67                  | 8.37                   | -35.3            |
| 8                   | #5924.77        | 58.26                   | 68.43          | -10.17      | -45.37                  | 8.37                   | -37              |
| 9                   | #5993.41        | 59.72                   | 68.26          | -8.54       | -43.91                  | 8.37                   | -35.54           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

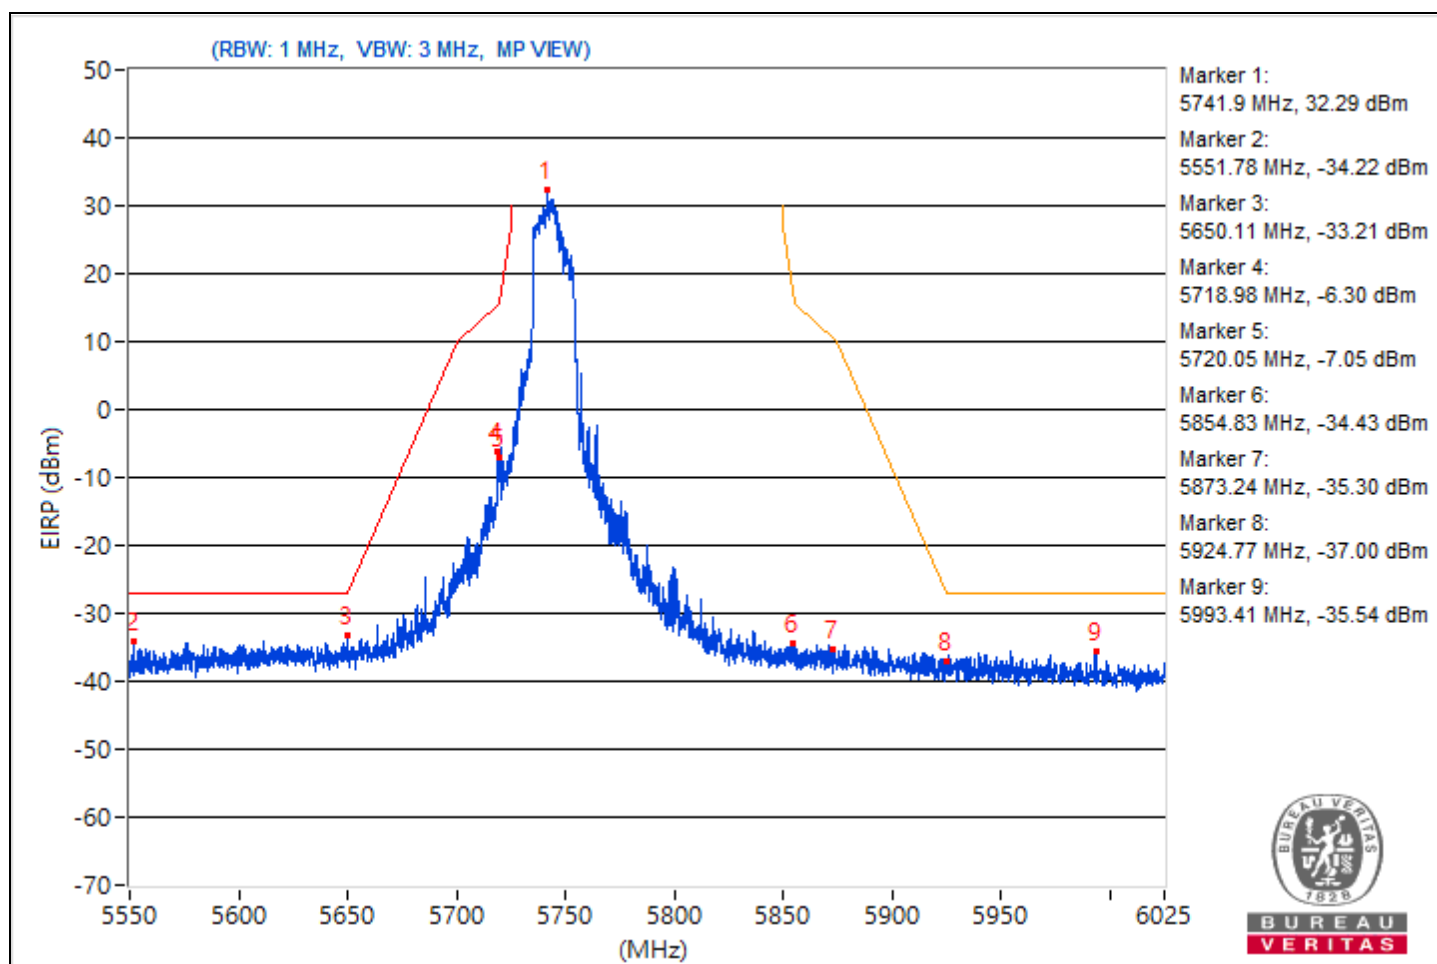


|                 |                                  |                          |                   |
|-----------------|----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone MRU | Channel                  | CH 165 : 5825 MHz |
| Frequency Range | 5.55 GHz ~ 6.025 GHz             | Environmental Conditions | 20°C, 60% RH      |
| Tested By       | Henry Hsu                        |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5827.16        | 126.3                   |                |             | 22.67                   | 8.37                   | 31.04            |
| 2                   | #5641.91        | 60.5                    | 68.26          | -7.76       | -43.13                  | 8.37                   | -34.76           |
| 3                   | #5650.46        | 59.25                   | 68.6           | -9.35       | -44.38                  | 8.37                   | -36.01           |
| 4                   | #5703.19        | 61.22                   | 106.15         | -44.93      | -42.41                  | 8.37                   | -34.04           |
| 5                   | #5720.52        | 59.63                   | 112.06         | -52.43      | -44                     | 8.37                   | -35.63           |
| 6                   | #5854.24        | 79.4                    | 112.6          | -33.2       | -24.23                  | 8.37                   | -15.86           |
| 7                   | #5856.49        | 81.47                   | 110.44         | -28.97      | -22.16                  | 8.37                   | -13.79           |
| 8                   | #5924.77        | 59.35                   | 68.43          | -9.08       | -44.28                  | 8.37                   | -35.91           |
| 9                   | #5937.12        | 61.48                   | 68.26          | -6.78       | -42.15                  | 8.37                   | -33.78           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

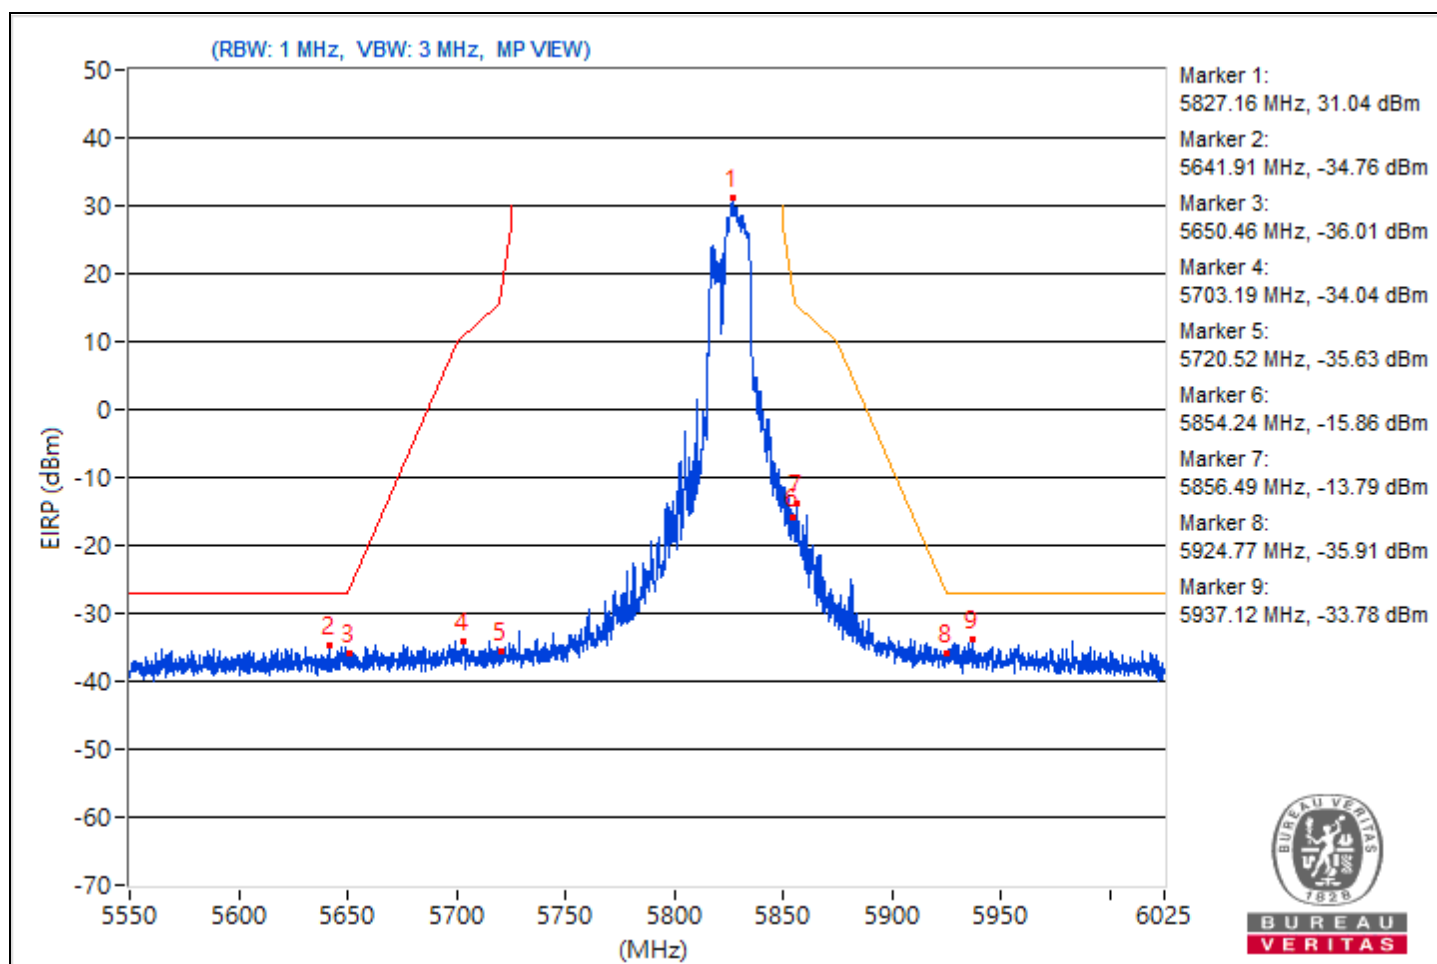


|                 |                                   |                          |                  |
|-----------------|-----------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 42 : 5210 MHz |
| Frequency Range | 5.05 GHz ~ 5.25 GHz               | Environmental Conditions | 24°C, 64% RH     |
| Tested By       | Katina Lu                         |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5208.02        | 112.33 PK               |                |             | 8.7                     | 8.37                   | 17.07            |
| 2                   | *5208.02        | 105.12 AV               |                |             | 1.49                    | 8.37                   | 9.86             |
| 3                   | 5140.3          | 58.72 PK                | 74             | -15.28      | -44.91                  | 8.37                   | -36.54           |
| 4                   | 5140.3          | 53.11 AV                | 54             | -0.89       | -50.52                  | 8.37                   | -42.15           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

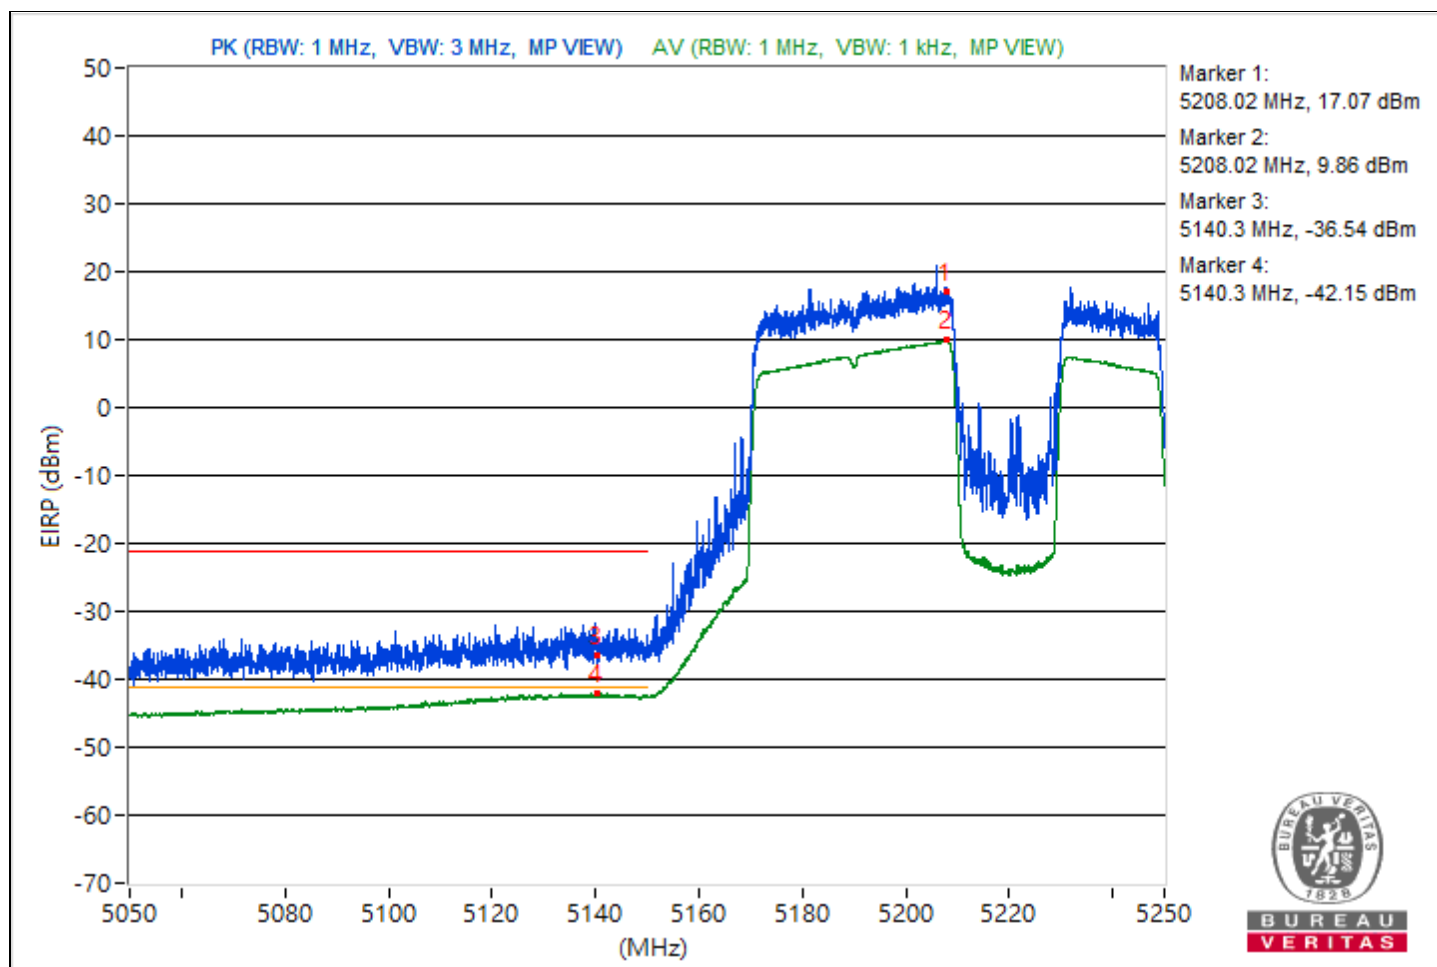


|                 |                                   |                          |                  |
|-----------------|-----------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 58 : 5290 MHz |
| Frequency Range | 5.25 GHz ~ 5.45 GHz               | Environmental Conditions | 24°C, 64% RH     |
| Tested By       | Katina Lu                         |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5292.15        | 110.56 PK               |                |             | 6.93                    | 8.37                   | 15.3             |
| 2                   | *5292.15        | 104.16 AV               |                |             | 0.53                    | 8.37                   | 8.9              |
| 3                   | 5355.32         | 58.49 PK                | 74             | -15.51      | -45.14                  | 8.37                   | -36.77           |
| 4                   | 5355.32         | 53.35 AV                | 54             | -0.65       | -50.28                  | 8.37                   | -41.91           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

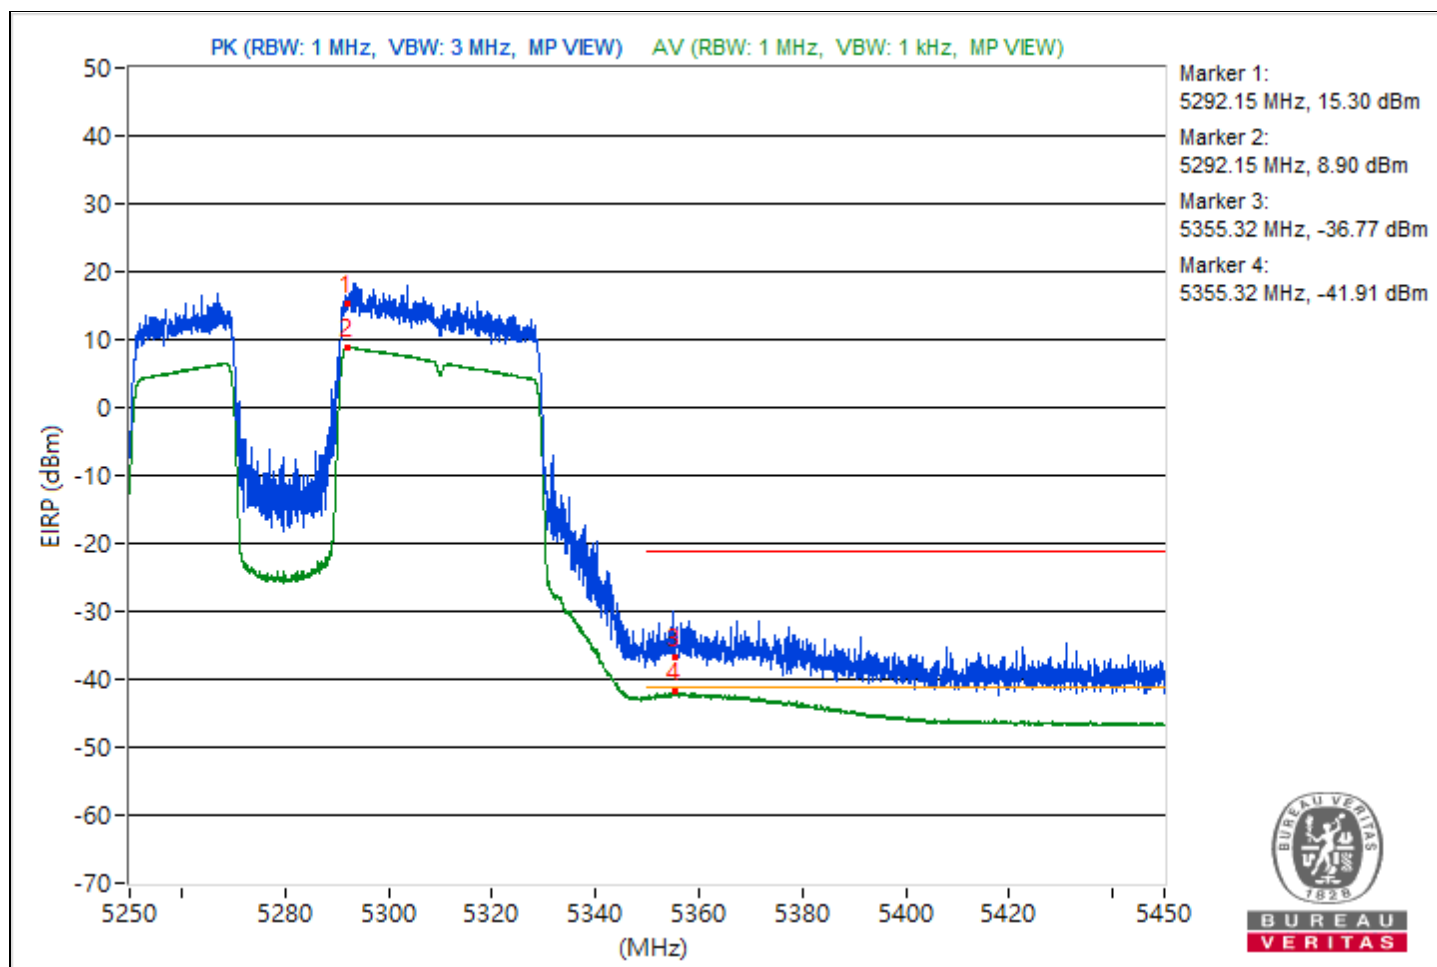

|                 |                                   |                          |                   |
|-----------------|-----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 106 : 5530 MHz |
| Frequency Range | 5.35 GHz ~ 5.6 GHz                | Environmental Conditions | 24°C, 64% RH      |
| Tested By       | Katina Lu                         |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5526.75        | 116.12 PK               |                |             | 12.49                   | 8.37                   | 20.86            |
| 2                   | 5446.47         | 62.97 PK                | 74             | -11.03      | -40.66                  | 8.37                   | -32.29           |
| 3                   | #5465.09        | 62.68 PK                | 68.26          | -5.58       | -40.95                  | 8.37                   | -32.58           |
| 4                   | *5527.28        | 106.51 AV               |                |             | 2.88                    | 8.37                   | 11.25            |
| 5                   | 5457.66         | 53.39 AV                | 54             | -0.61       | -50.24                  | 8.37                   | -41.87           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

