


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5706.26	114.51			10.88	8.37	19.25
2	#5864.85	67.27	68.26	-0.99	-36.36	8.37	-27.99

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

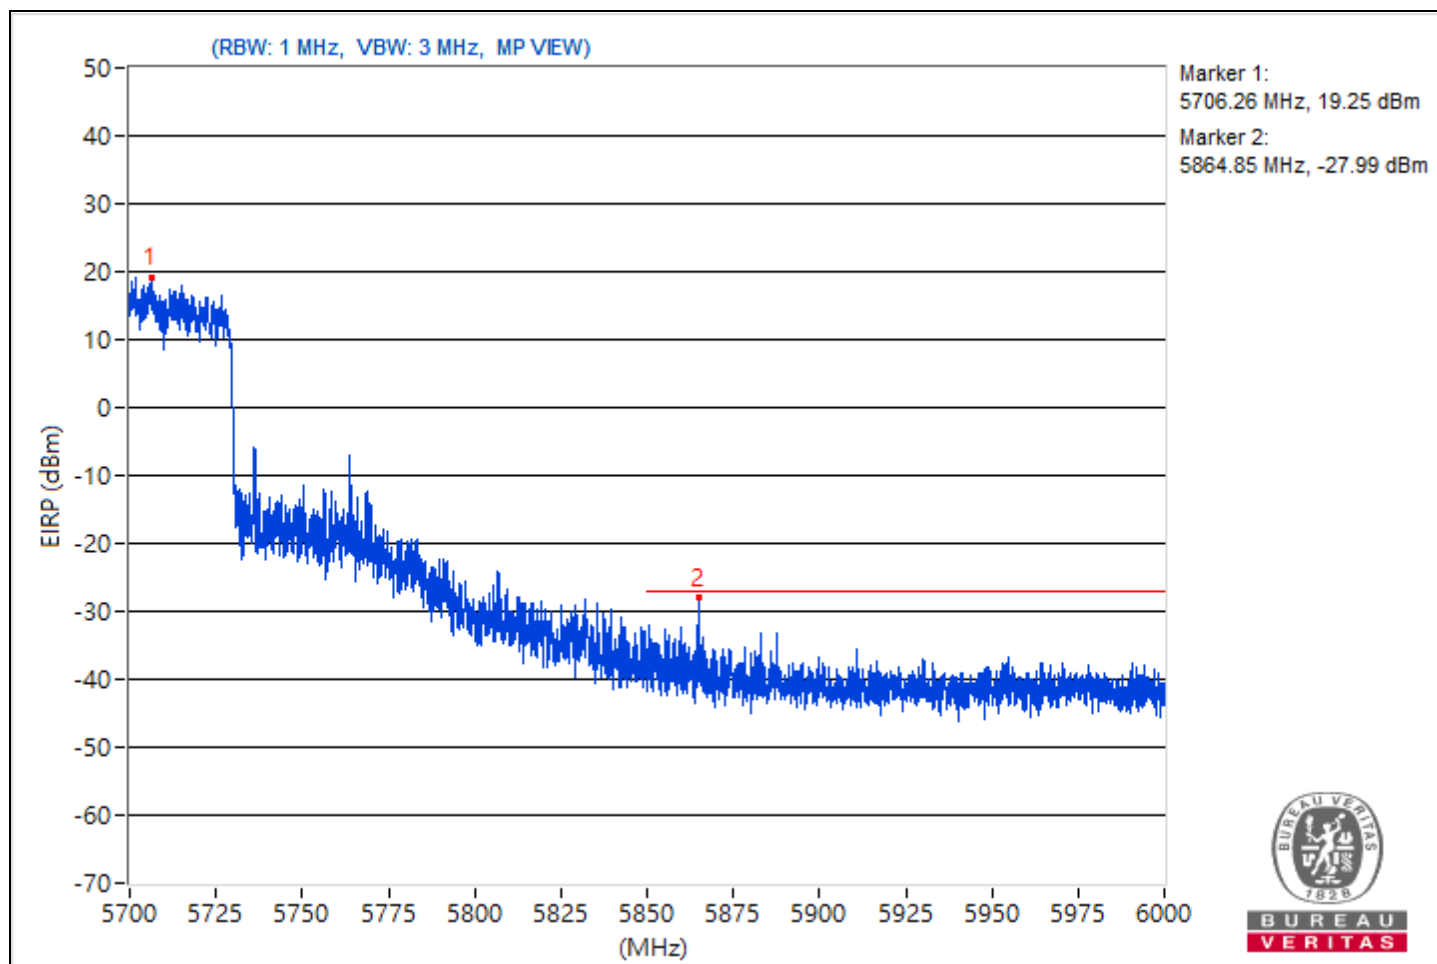


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5766.6	115.87			12.24	8.37	20.61
2	#5631.58	66.04	68.26	-2.22	-37.59	8.37	-29.22
3	#5652.01	69.41	69.74	-0.33	-34.22	8.37	-25.85
4	#5713.4	89.95	109.01	-19.06	-13.68	8.37	-5.31
5	#5720.76	80.03	112.6	-32.57	-23.6	8.37	-15.23
6	#5854.36	73.1	112.33	-39.23	-30.53	8.37	-22.16
7	#5867.06	73.26	107.48	-34.22	-30.37	8.37	-22
8	#5924.06	59.81	68.95	-9.14	-43.82	8.37	-35.45
9	#5928.22	61.14	68.26	-7.12	-42.49	8.37	-34.12

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

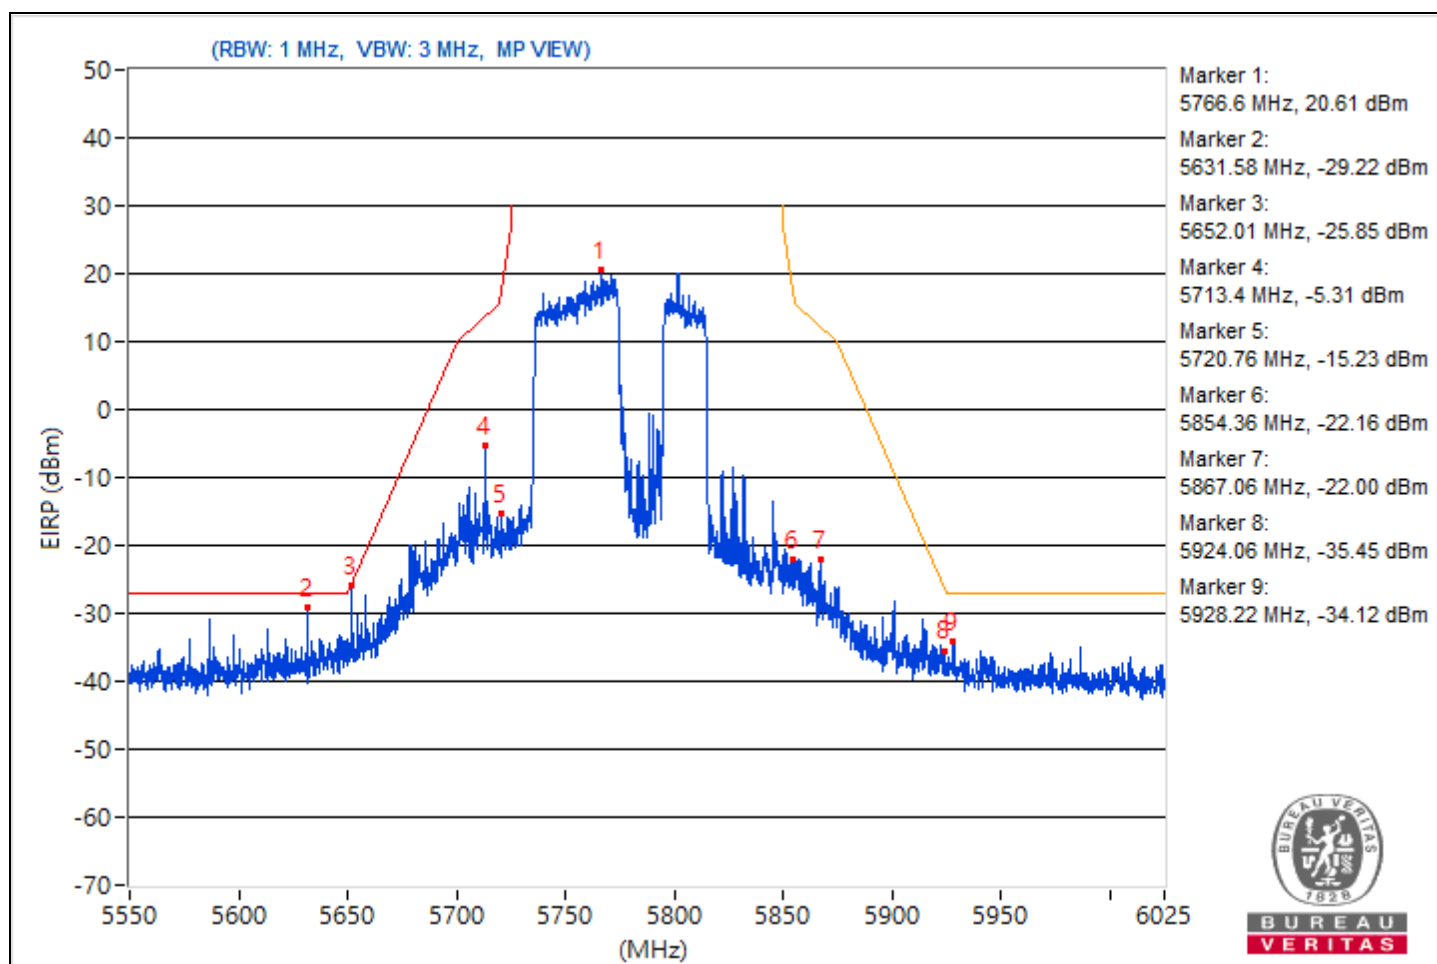


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5247.75	108.99 PK			5.36	8.37	13.73
2	*5247.75	97.79 AV			-5.84	8.37	2.53
3	5127.65	62.55 PK	74	-11.45	-41.08	8.37	-32.71
4	5127.65	53.53 AV	54	-0.47	-50.1	8.37	-41.73

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

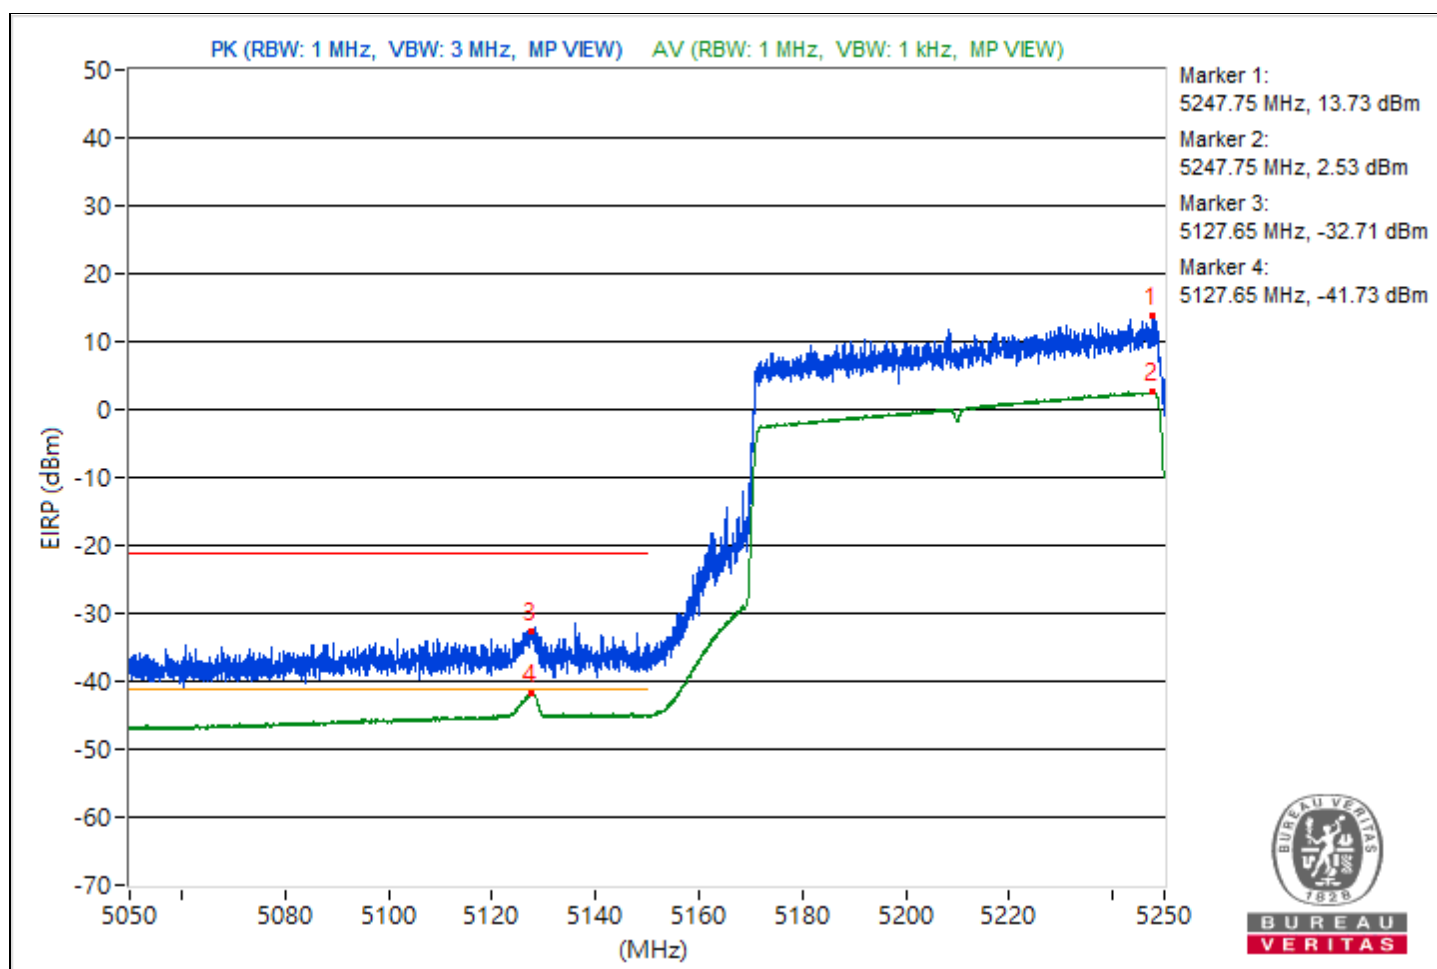


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5252.25	106.55 PK			2.92	8.37	11.29
2	*5252.25	97.73 AV			-5.9	8.37	2.47
3	5350.75	58.48 PK	74	-15.52	-45.15	8.37	-36.78
4	5350.75	49.64 AV	54	-4.36	-53.99	8.37	-45.62

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

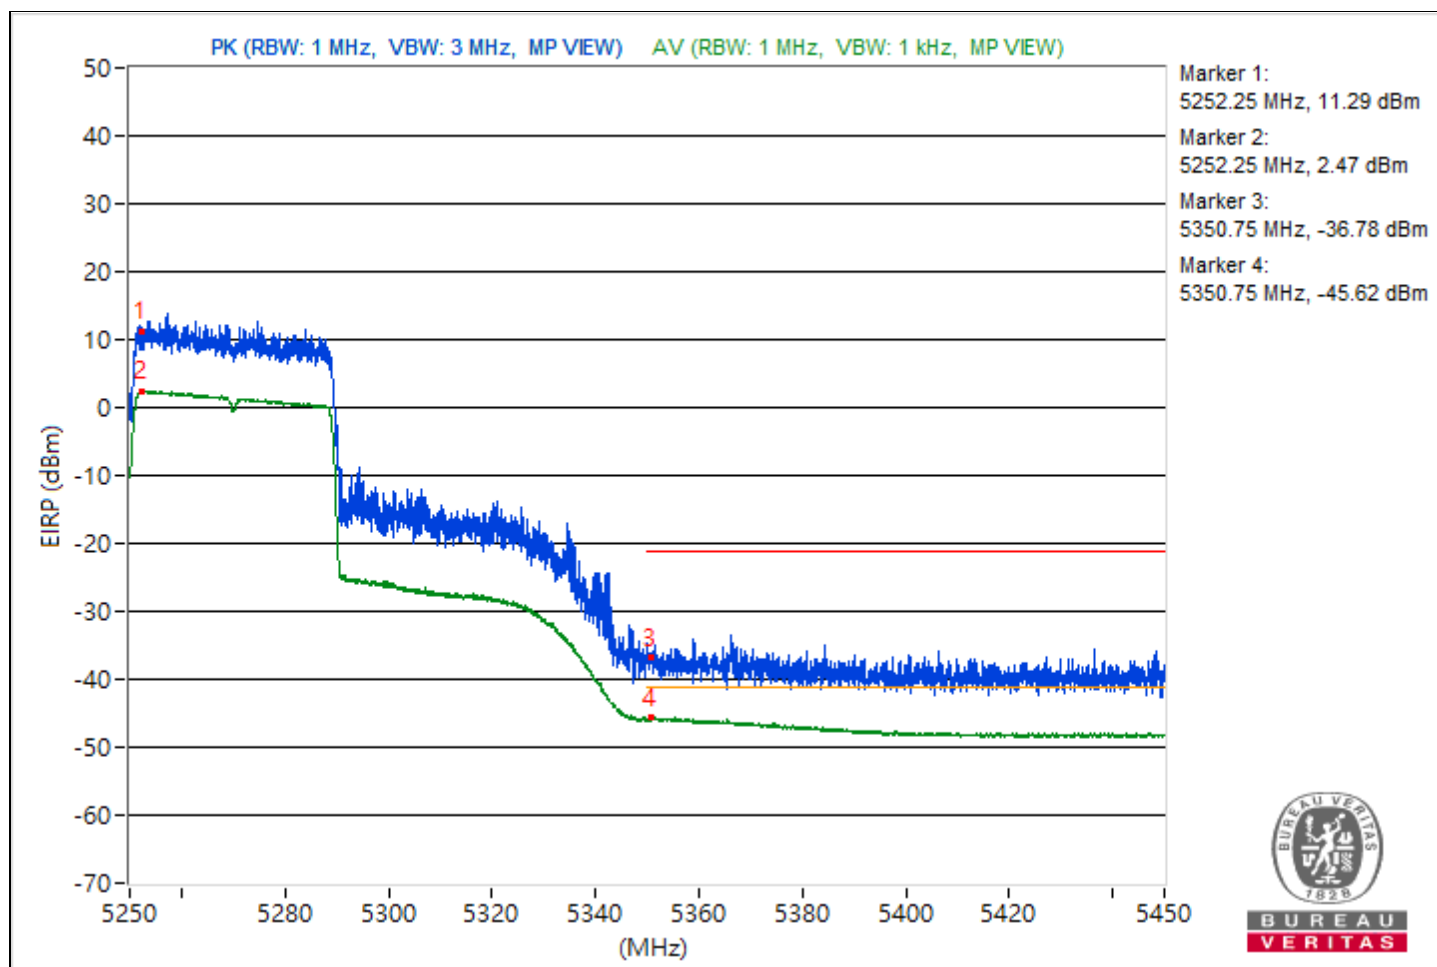


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5581.16	111.15 PK			7.52	8.37	15.89
2	5446.75	64.33 PK	74	-9.67	-39.3	8.37	-30.93
3	#5461.56	60.76 PK	68.26	-7.5	-42.87	8.37	-34.5
4	*5567.47	99.26 AV			-4.37	8.37	4
5	5447.72	53.44 AV	54	-0.56	-50.19	8.37	-41.82

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

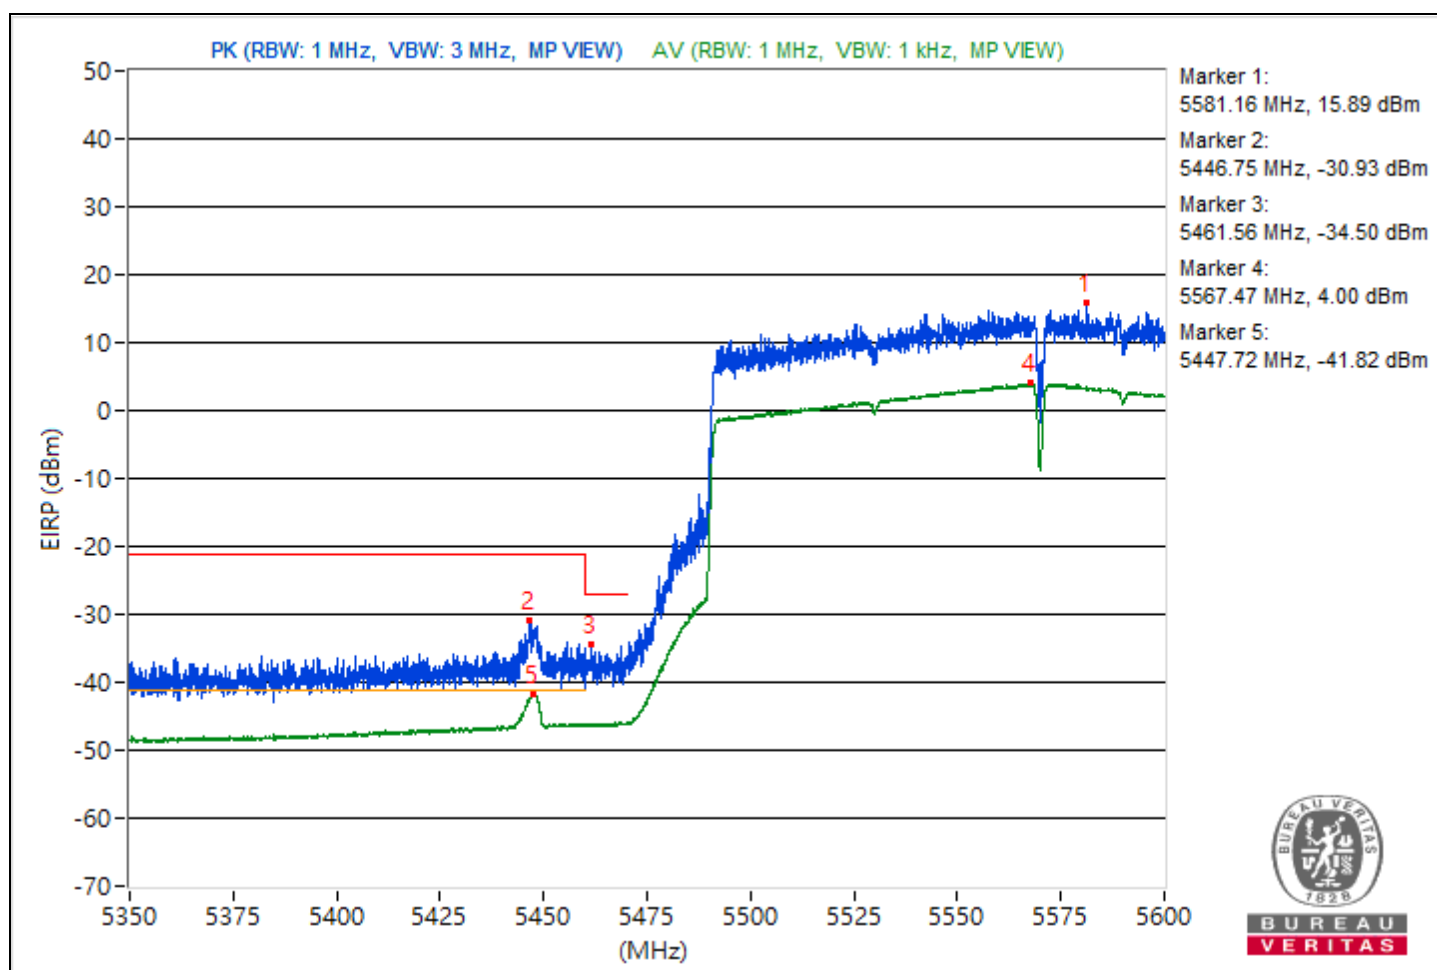


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5246.5	107.6 PK			3.97	8.37	12.34
2	*5246.5	99.39 AV			-4.24	8.37	4.13
3	5143.98	62.12 PK	74	-11.88	-41.51	8.37	-33.14
4	5143.98	52.43 AV	54	-1.57	-51.2	8.37	-42.83

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

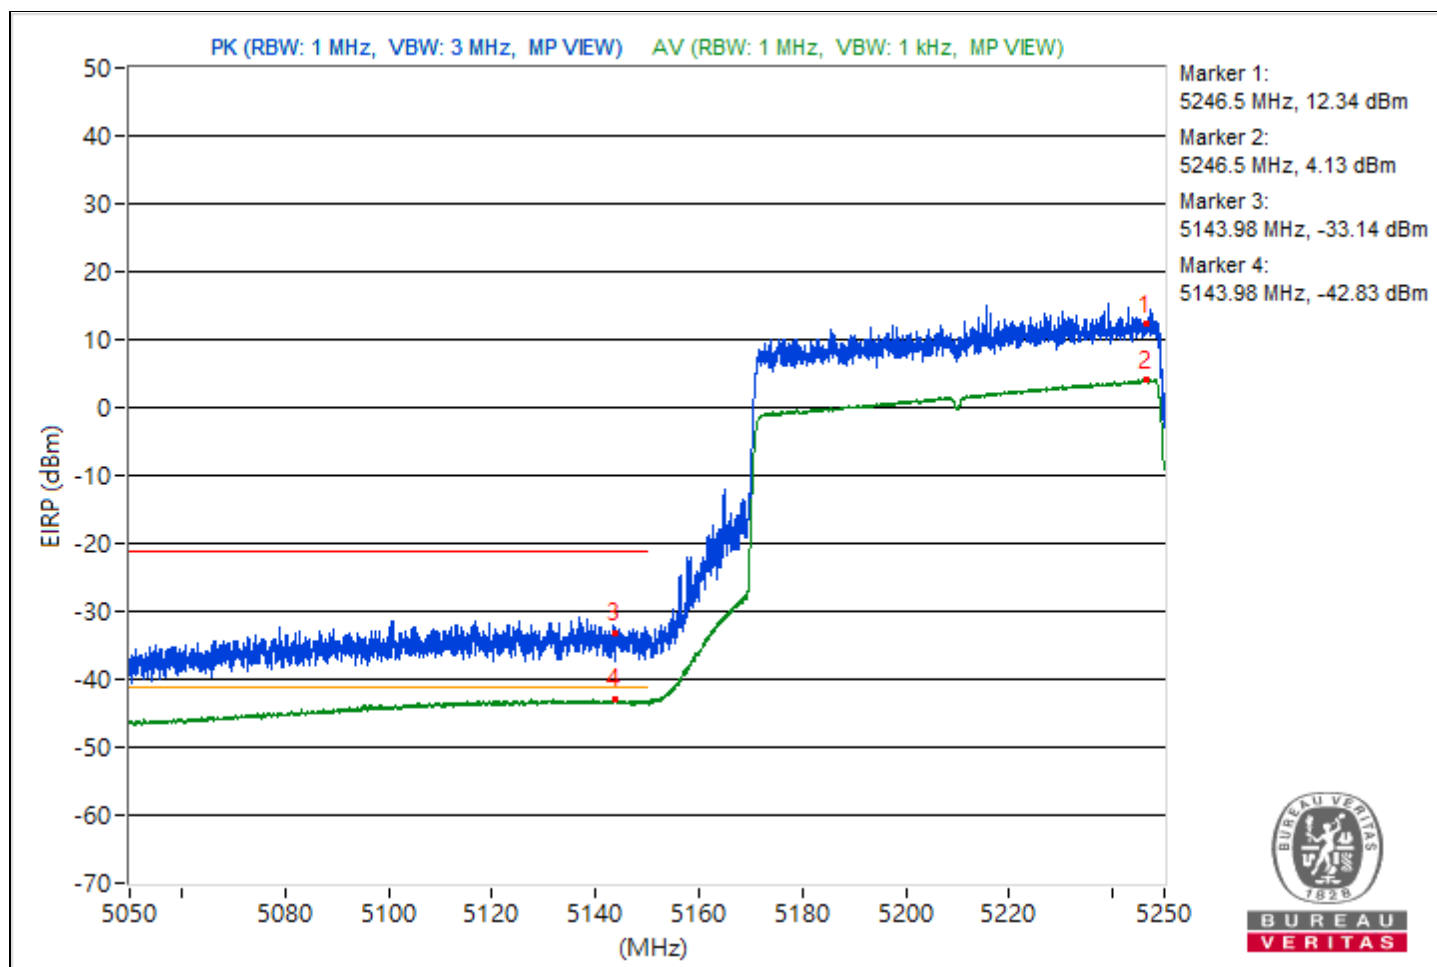


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5252.8	105.98 PK			2.35	8.37	10.72
2	*5252.8	99.16 AV			-4.47	8.37	3.9
3	5356.8	60.15 PK	74	-13.85	-43.48	8.37	-35.11
4	5356.8	53.43 AV	54	-0.57	-50.2	8.37	-41.83

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

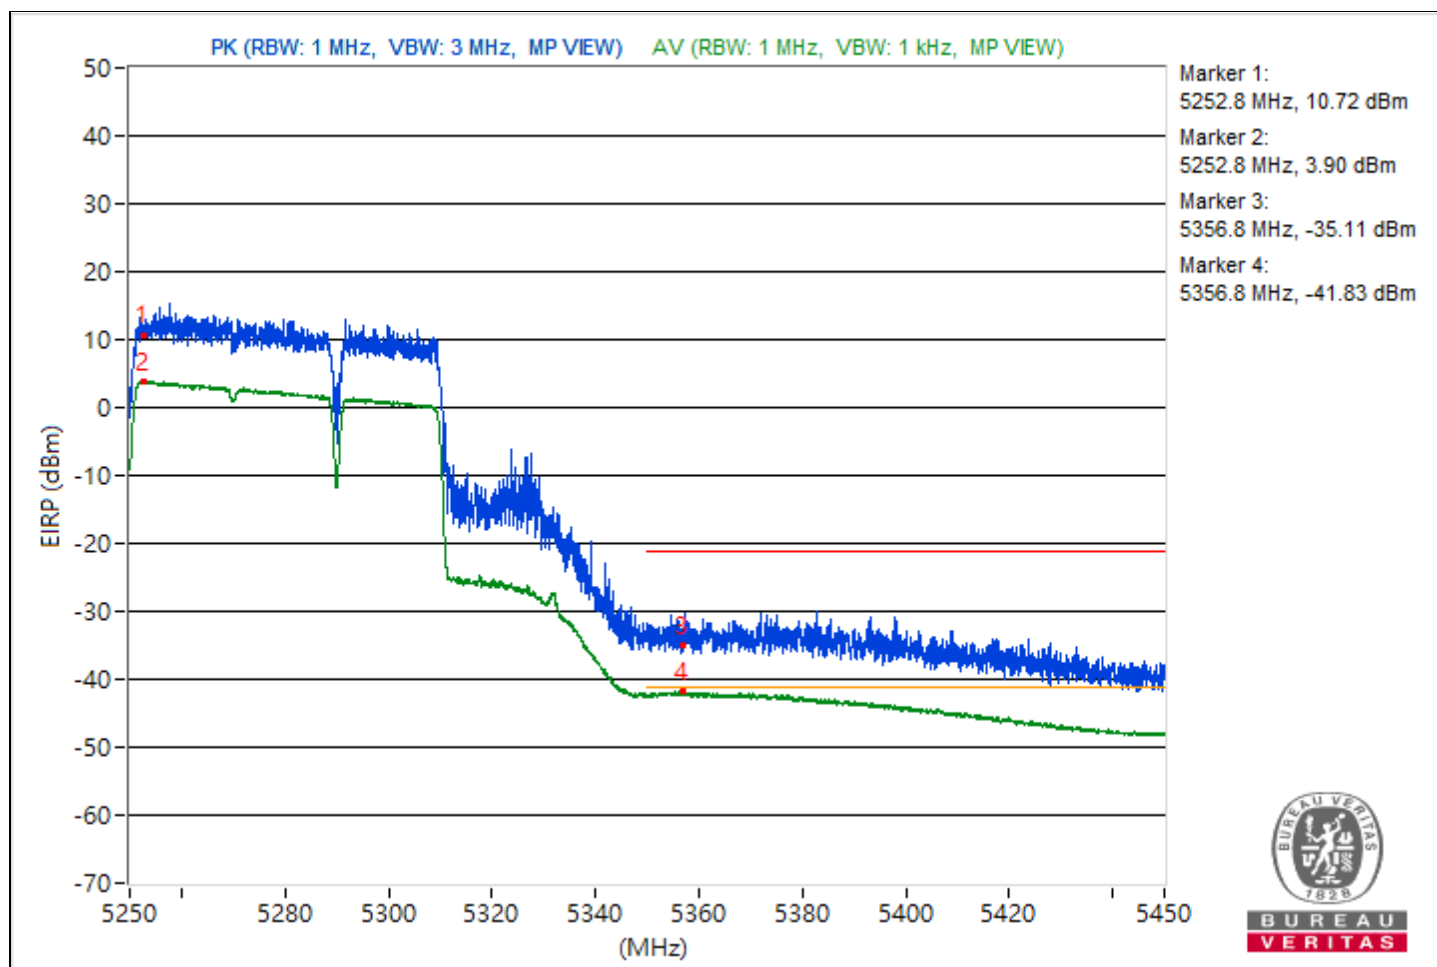


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5584.62	113.54 PK			9.91	8.37	18.28
2	5455.75	64.73 PK	74	-9.27	-38.9	8.37	-30.53
3	#5467.31	64.18 PK	68.26	-4.08	-39.45	8.37	-31.08
4	*5567.44	101.84 AV			-1.79	8.37	6.58
5	5459.12	52.31 AV	54	-1.69	-51.32	8.37	-42.95

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

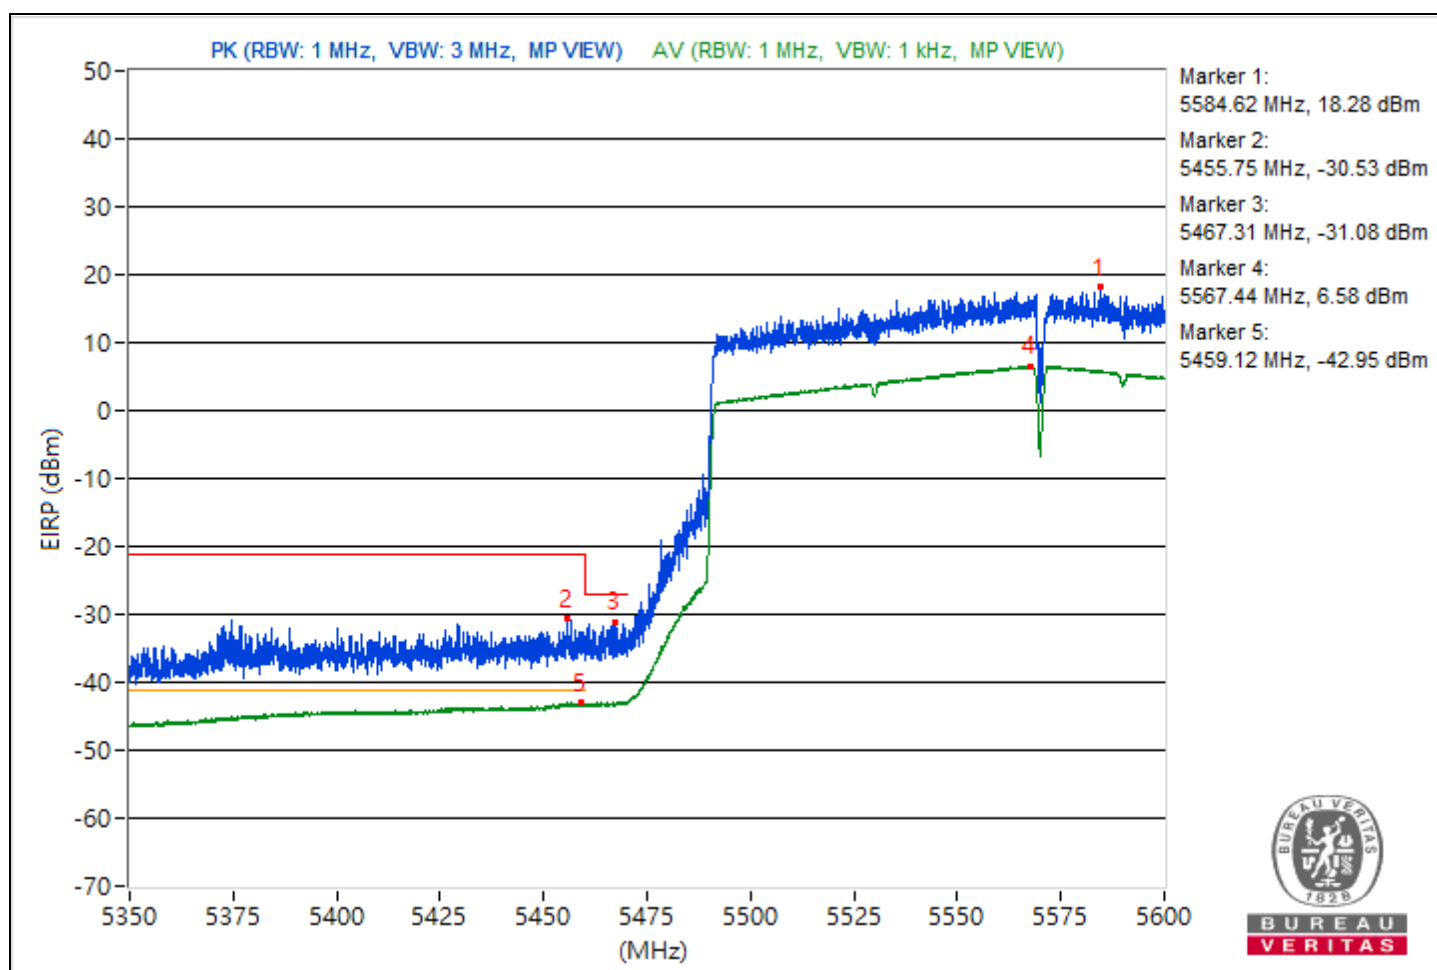



Conducted Unwanted Emissions 2TX

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5098.89	57.19 PK	74	-16.81	-54.69	-51	11.38	-38.07
2	5098.89	48.77 AV	54	-5.23	-60.4	-61.42	11.38	-46.49
3	8287.91	51.44 PK	74	-22.56	-58.98	-57.56	11.38	-43.82
4	8287.91	43.26 AV	54	-10.74	-65.7	-67.22	11.38	-52
5	18978.6	49.74 PK	74	-24.26	-60	-59.83	11.38	-45.52
6	18978.6	44.13 AV	54	-9.87	-65.15	-65.92	11.38	-51.13
7	23847.2	55.32 PK	74	-18.68	-56	-53.12	11.38	-39.94
8	23847.2	46.19 AV	54	-7.81	-63.73	-63.2	11.38	-49.07
9	38809.69	58.75 PK	74	-15.25	-51.83	-50.14	11.38	-36.51
10	38809.69	51 AV	54	-3	-58.89	-58.42	11.38	-44.26

Note: Margin value = Emission Level - Limit value

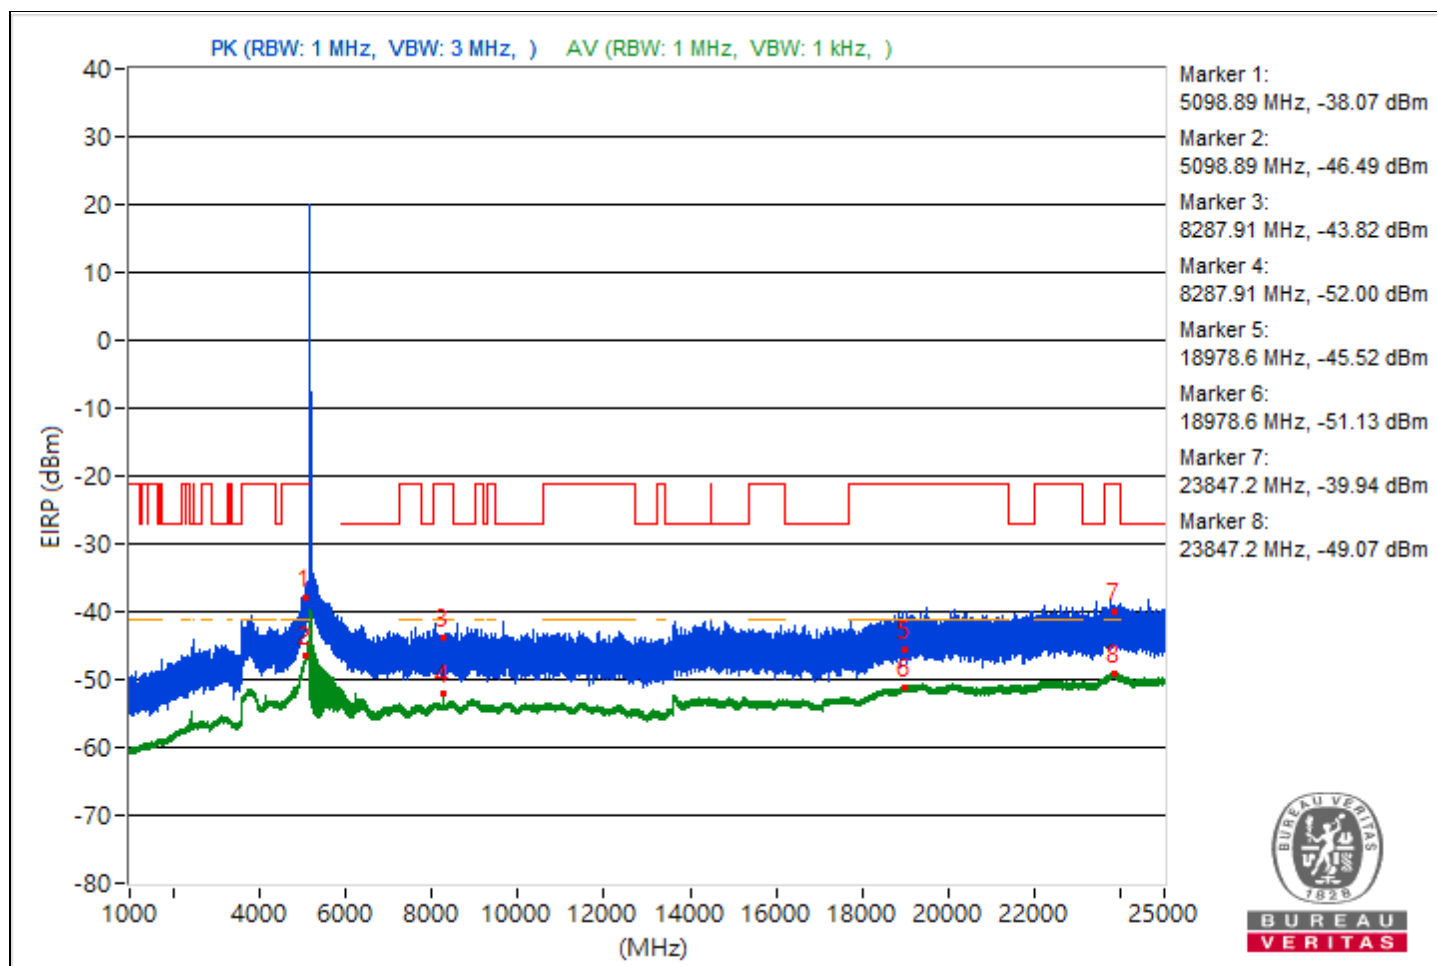


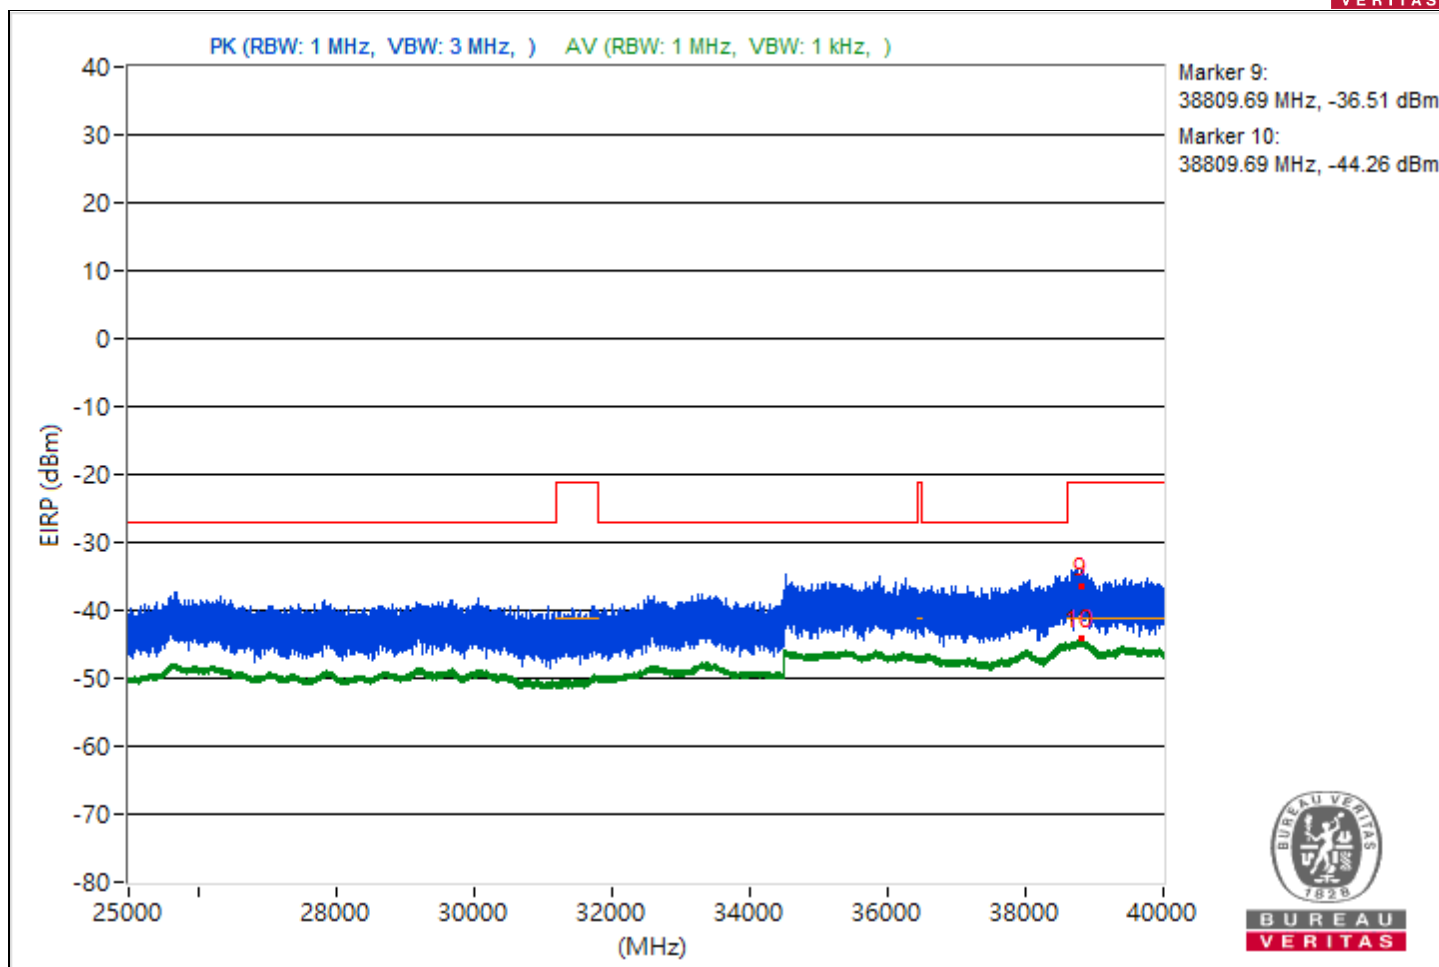


RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5097.26	54.86 PK	74	-19.14	-54.77	-54.81	11.38	-40.4
2	5097.26	48.89 AV	54	-5.11	-60.49	-61.05	11.38	-46.37
3	8320.18	49.91 PK	74	-24.09	-58.66	-61.18	11.38	-45.35
4	8320.18	43.11 AV	54	-10.89	-65.84	-67.37	11.38	-52.15
5	18993.7	53.48 PK	74	-20.52	-57.07	-55.42	11.38	-41.78
6	18993.7	44.18 AV	54	-9.82	-65.11	-65.85	11.38	-51.08
7	23775.5	52.23 PK	74	-21.77	-58.77	-56.39	11.38	-43.03
8	23775.5	46.31 AV	54	-7.69	-63.02	-63.68	11.38	-48.95
9	38766.76	57.07 PK	74	-16.93	-54.59	-51.2	11.38	-38.19
10	38766.76	50.85 AV	54	-3.15	-58.49	-59.14	11.38	-44.41

Note: Margin value = Emission Level - Limit value

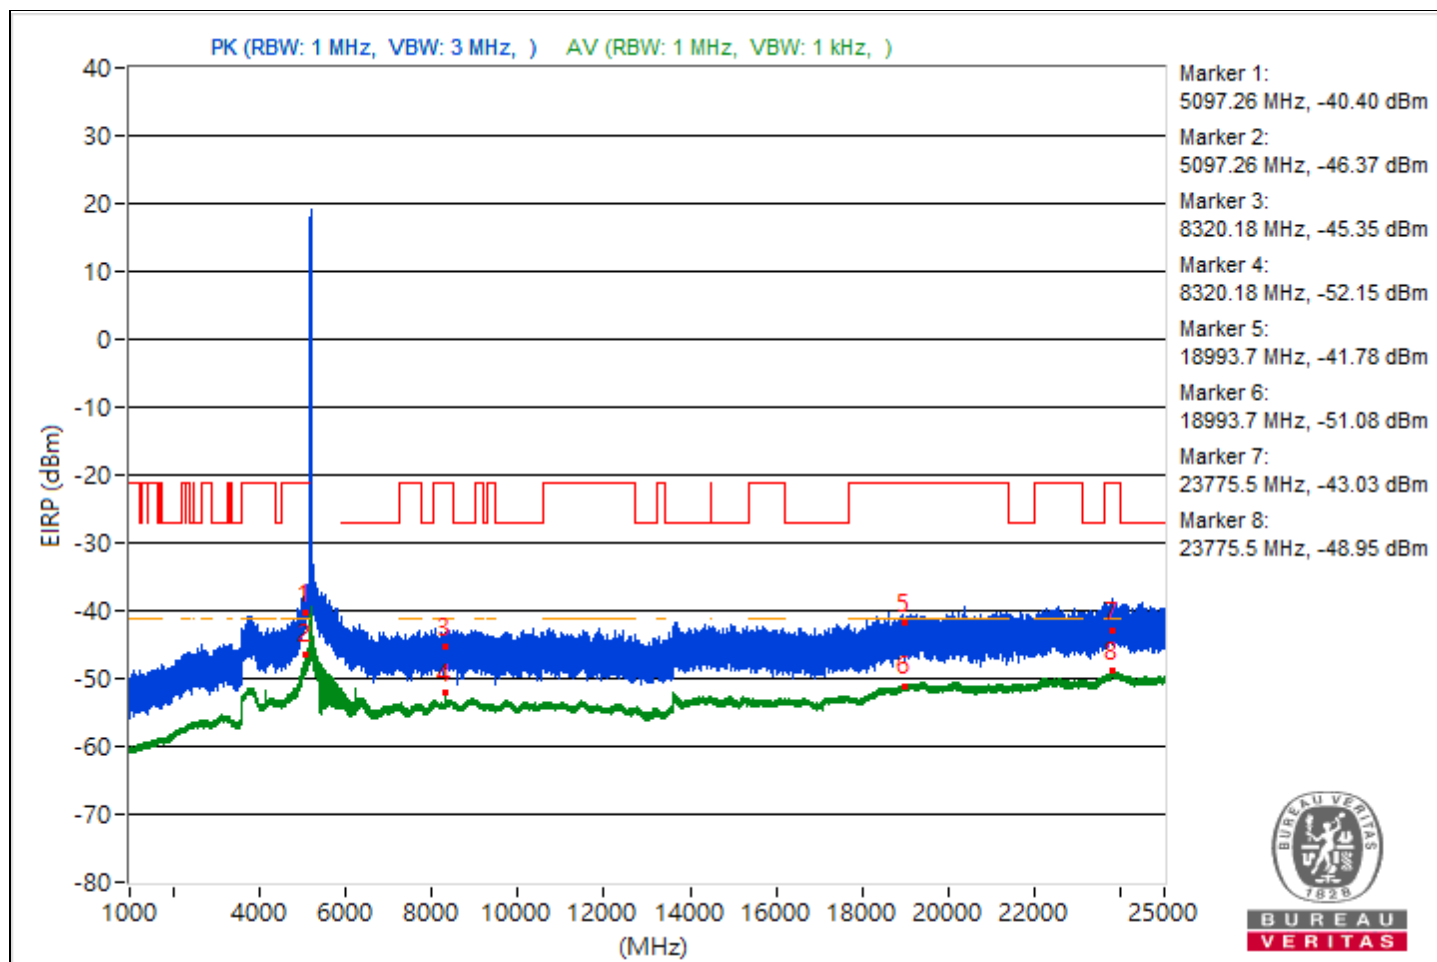


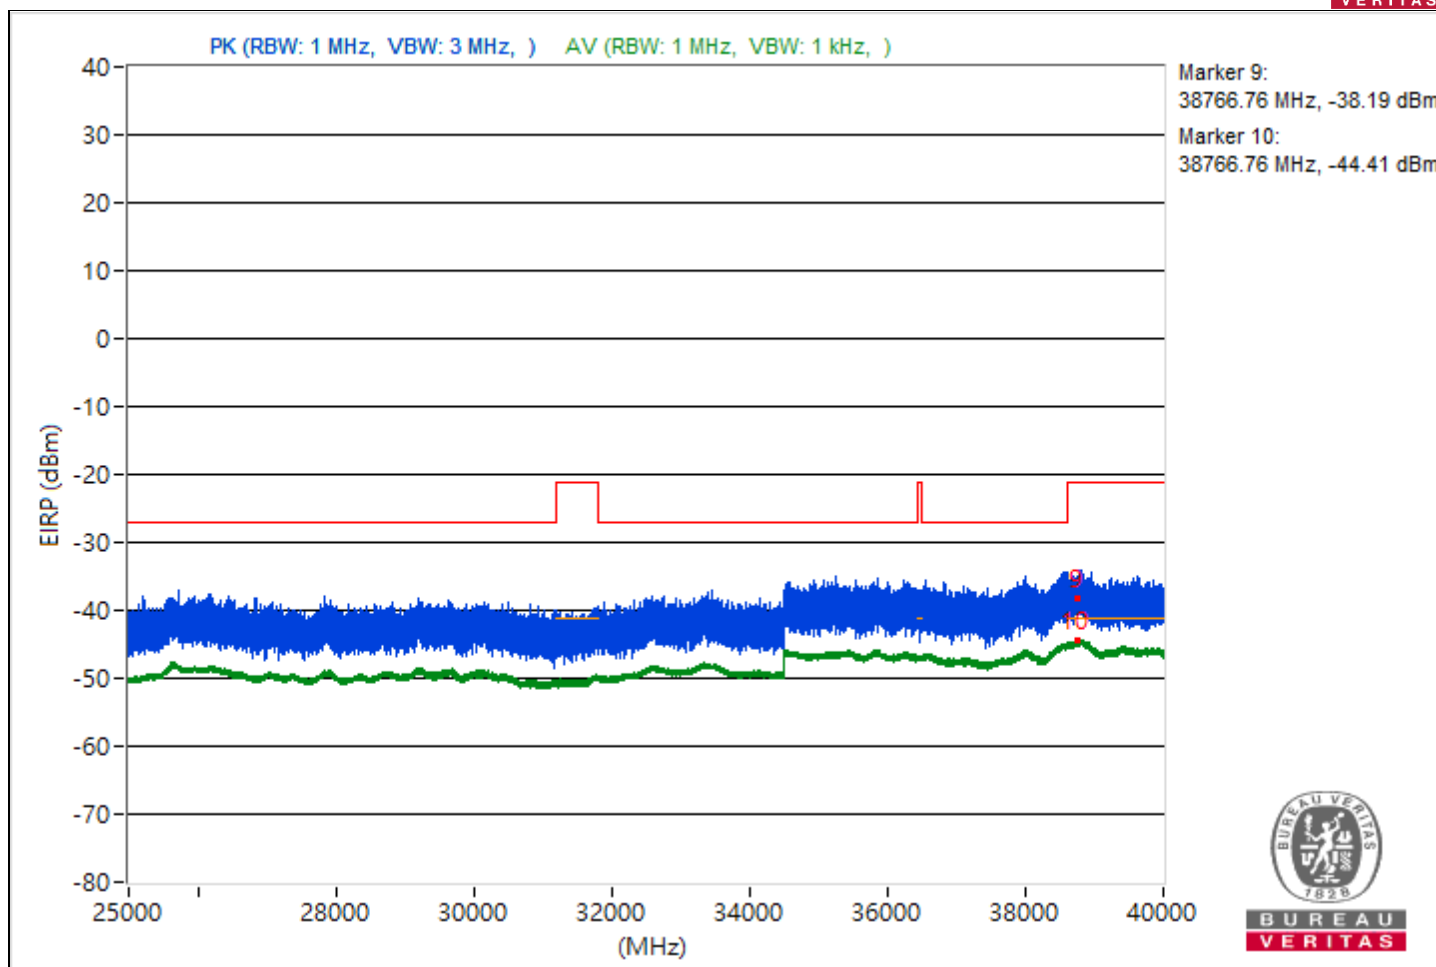


RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5097.72	55.17 PK	74	-18.83	-53.23	-56.25	11.38	-40.09
2	5097.72	48.1 AV	54	-5.9	-61.69	-61.41	11.38	-47.16
3	8384.09	49.46 PK	74	-24.54	-60.2	-60.18	11.38	-45.8
4	8384.09	43.47 AV	54	-10.53	-65.63	-66.81	11.38	-51.79
5	18987.9	51.94 PK	74	-22.06	-57.39	-58.04	11.38	-43.32
6	18987.9	44.27 AV	54	-9.73	-65.49	-65.27	11.38	-50.99
7	23869.5	52.99 PK	74	-21.01	-55.56	-58.13	11.38	-42.27
8	23869.5	46.33 AV	54	-7.67	-63.1	-63.56	11.38	-48.93
9	38806.93	58.5 PK	74	-15.5	-52.16	-50.32	11.38	-36.76
10	38806.93	50.93 AV	54	-3.07	-58.52	-58.94	11.38	-44.33

Note: Margin value = Emission Level - Limit value

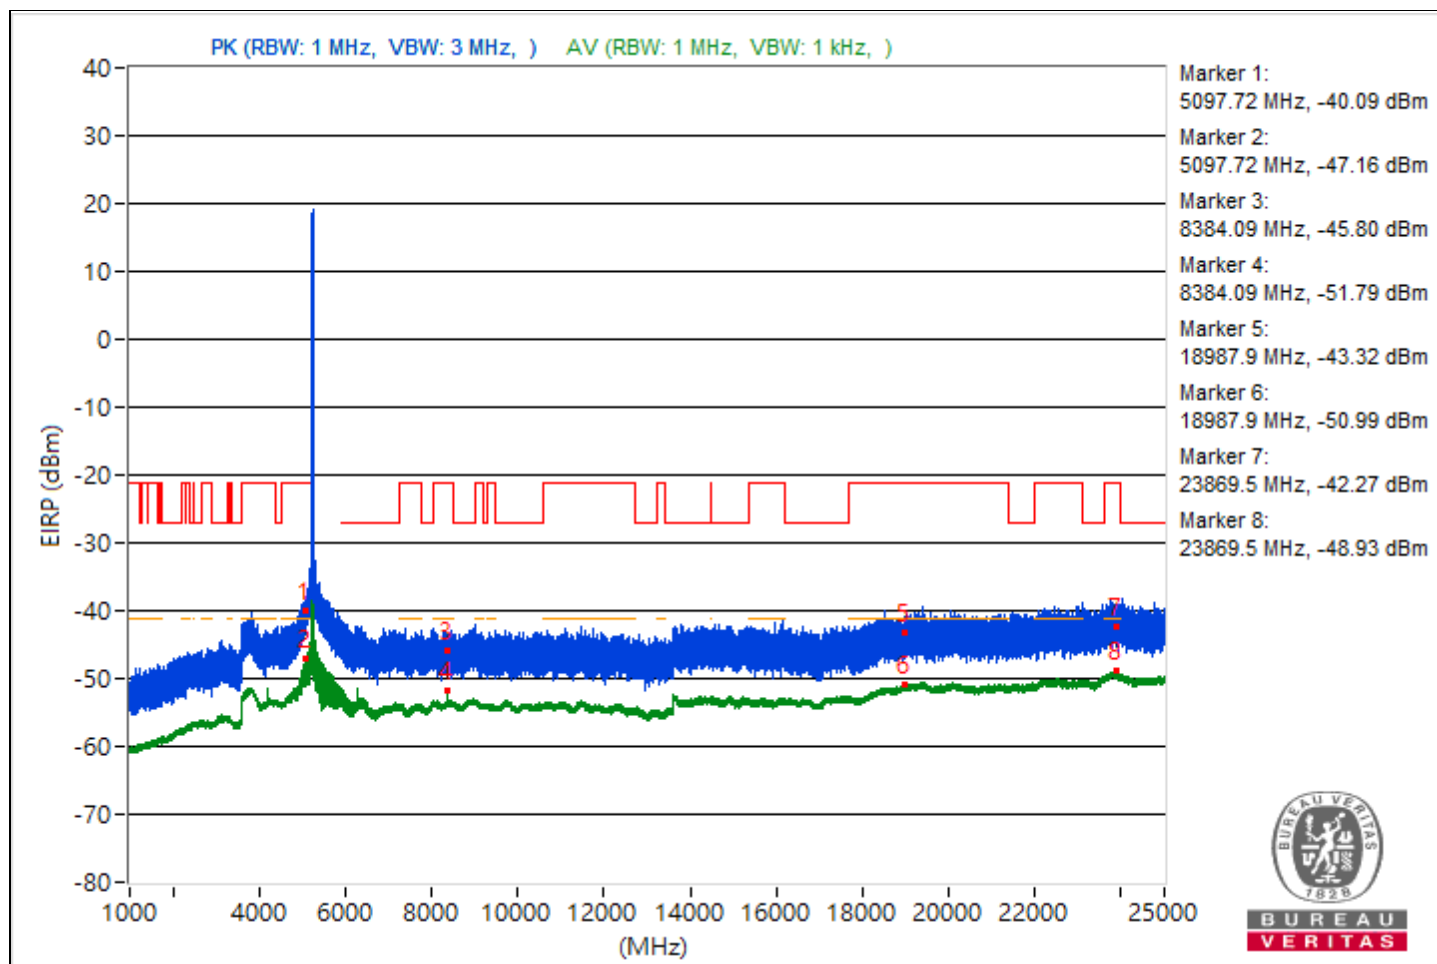


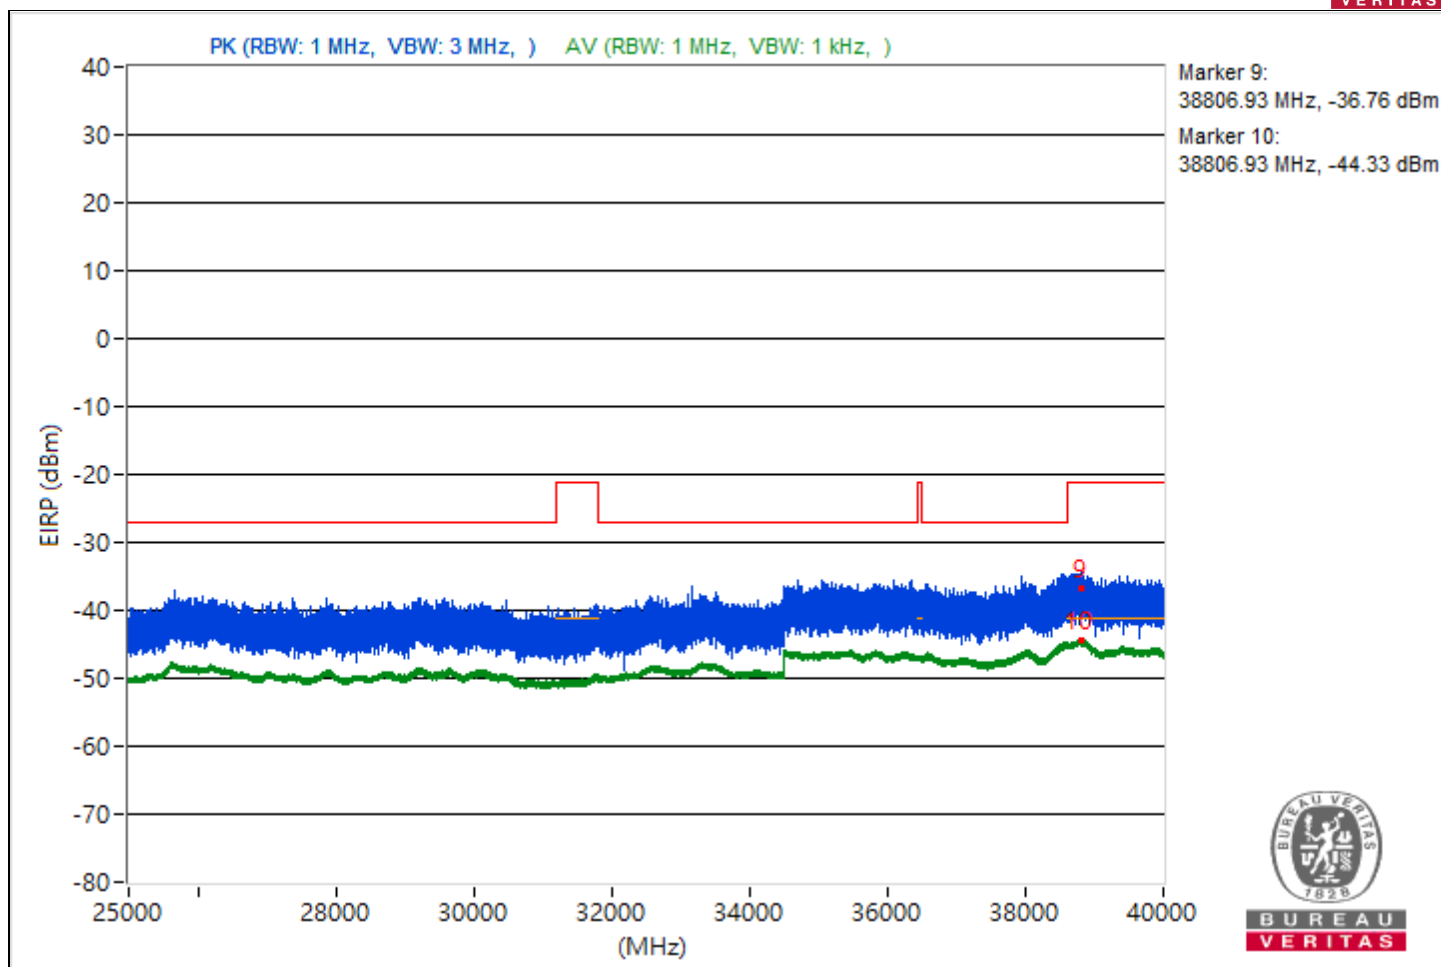


RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.59	54.57 PK	74	-19.43	-54.68	-55.52	11.38	-40.69
2	5099.59	47.91 AV	54	-6.09	-61.38	-62.13	11.38	-47.35
3	8415.91	49.82 PK	74	-24.18	-60.9	-58.98	11.38	-45.44
4	8415.91	42.94 AV	54	-11.06	-66.29	-67.19	11.38	-52.32
5	18909	51.1 PK	74	-22.9	-58.9	-58.23	11.38	-44.16
6	18909	44.16 AV	54	-9.84	-65.2	-65.8	11.38	-51.1
7	23817.1	56 PK	74	-18	-51.53	-57.98	11.38	-39.26
8	23817.1	46.2 AV	54	-7.8	-63.16	-63.76	11.38	-49.06
9	38819.11	57.44 PK	74	-16.56	-54.25	-50.83	11.38	-37.82
10	38819.11	50.84 AV	54	-3.16	-58.41	-59.26	11.38	-44.42

Note: Margin value = Emission Level - Limit value

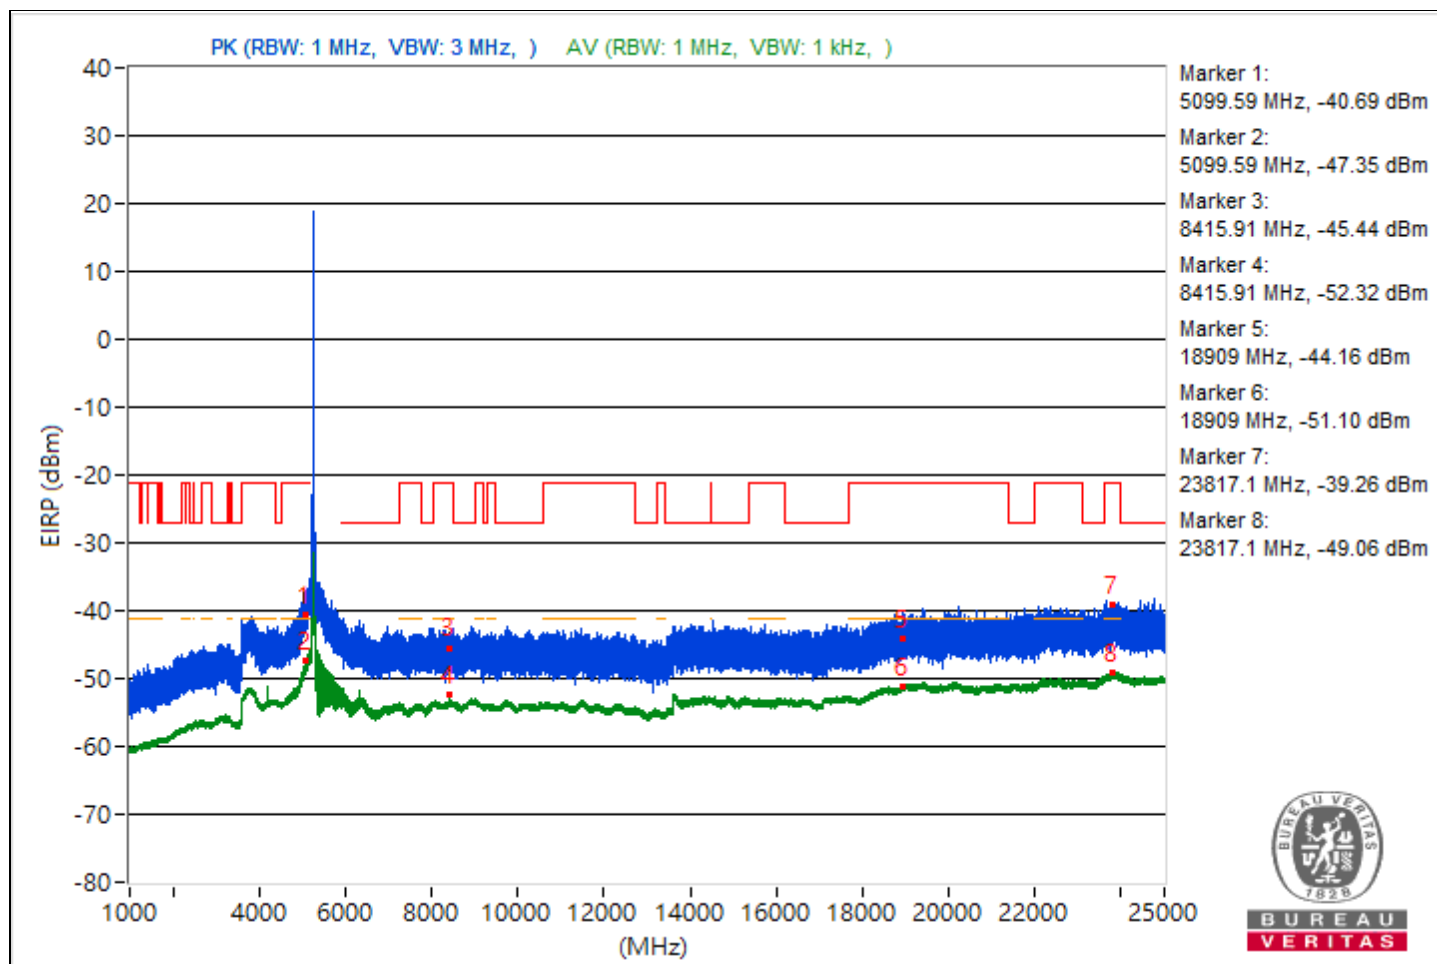


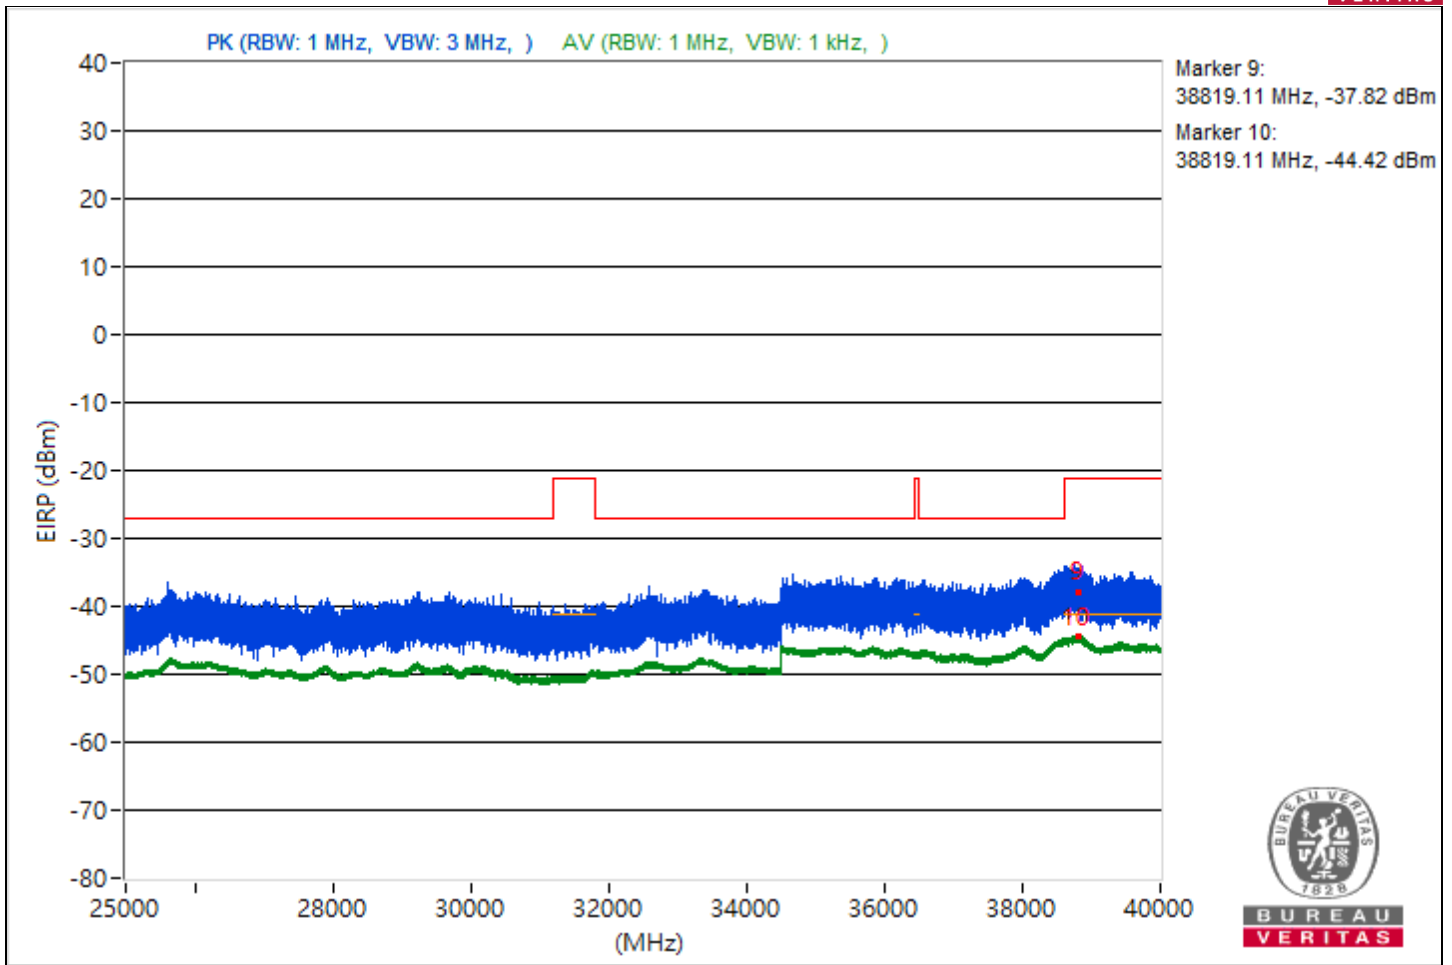


RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5092.9	53.98 PK	74	-20.02	-57.45	-54.42	11.38	-41.28
2	5092.9	47.42 AV	54	-6.58	-61.87	-62.64	11.38	-47.84
3	8479.91	52.03 PK	74	-21.97	-56.19	-59.77	11.38	-43.23
4	8479.91	42.65 AV	54	-11.35	-66.86	-67.16	11.38	-52.61
5	18997.1	51.23 PK	74	-22.77	-59.59	-57.49	11.38	-44.03
6	18997.1	44.32 AV	54	-9.68	-65.53	-65.14	11.38	-50.94
7	23843.6	54.54 PK	74	-19.46	-56.44	-54.09	11.38	-40.72
8	23843.6	46.31 AV	54	-7.69	-63.09	-63.6	11.38	-48.95
9	38811.73	56.33 PK	74	-17.67	-52.93	-53.76	11.38	-38.93
10	38811.73	51.1 AV	54	-2.9	-58.64	-58.46	11.38	-44.16

Note: Margin value = Emission Level - Limit value

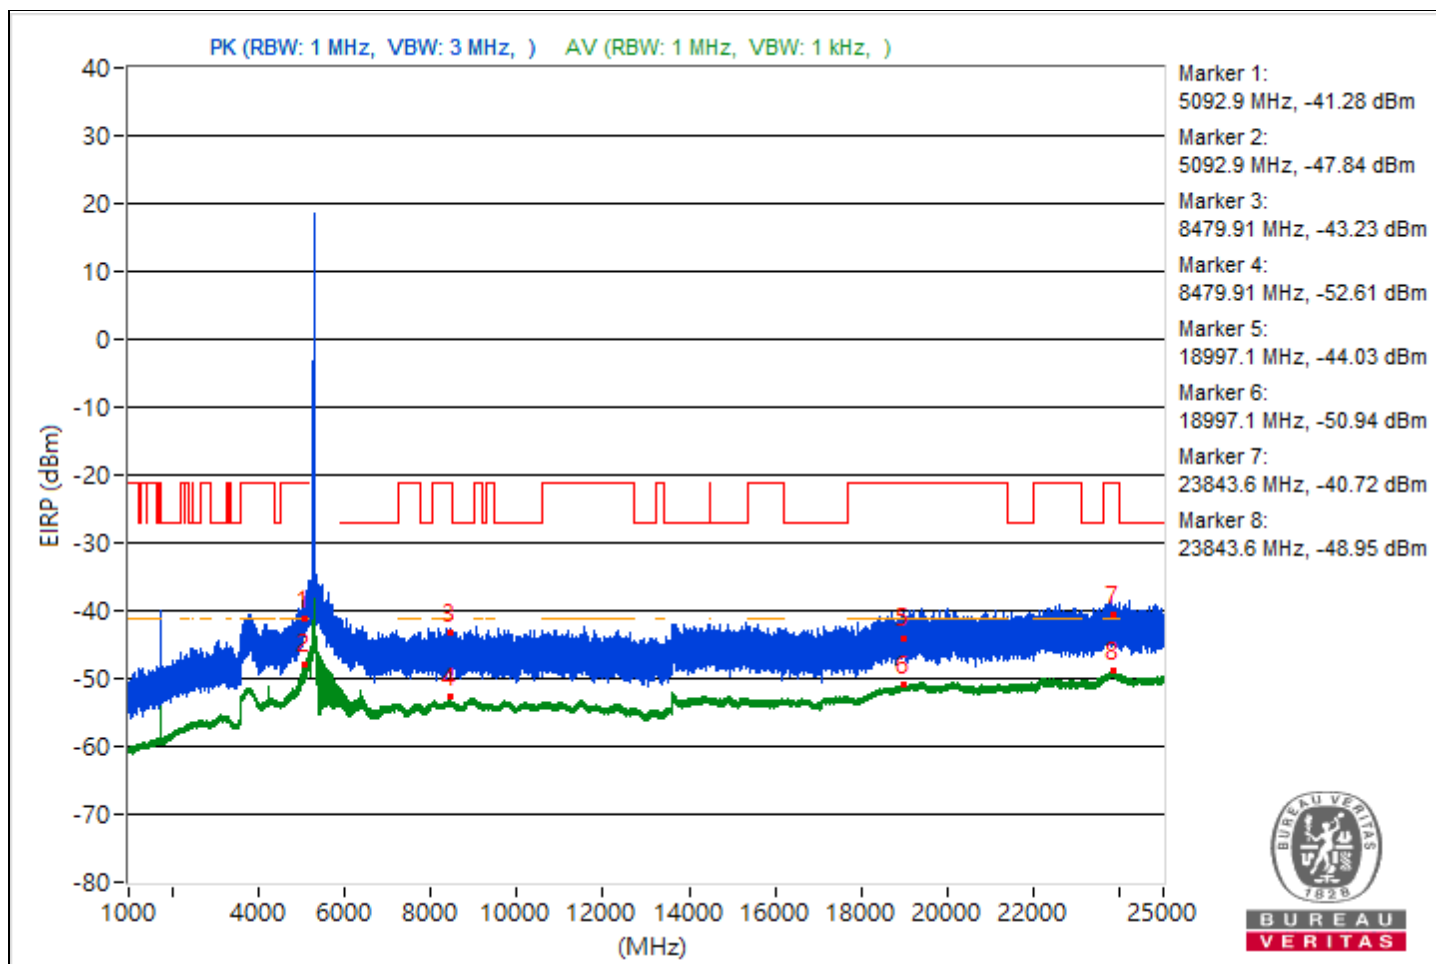


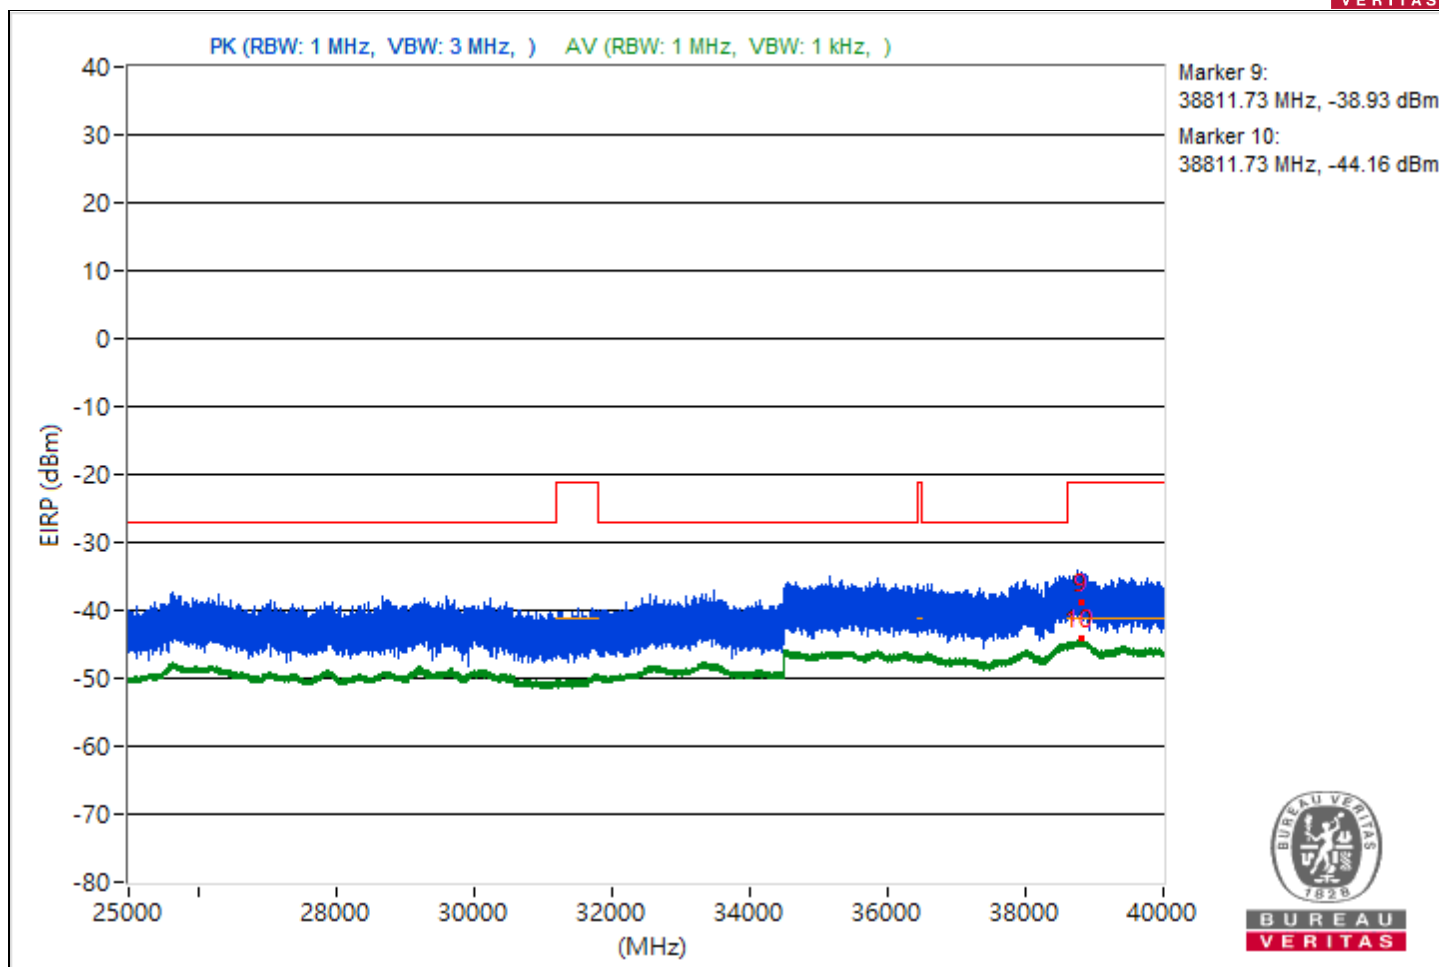


RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5097.18	55.16 PK	74	-18.84	-54.34	-54.65	11.38	-40.1
2	5097.18	47.08 AV	54	-6.92	-62.12	-63.08	11.38	-48.18
3	9023.64	49.19 PK	74	-24.81	-62.34	-59.16	11.38	-46.07
4	9023.64	42.25 AV	54	-11.75	-67.59	-67.23	11.38	-53.01
5	18947.3	51.74 PK	74	-22.26	-57.57	-58.27	11.38	-43.52
6	18947.3	44.18 AV	54	-9.82	-65.76	-65.2	11.38	-51.08
7	23768.1	53.27 PK	74	-20.73	-55.13	-58.16	11.38	-41.99
8	23768.1	46.21 AV	54	-7.79	-63.12	-63.79	11.38	-49.05
9	38814.04	57.72 PK	74	-16.28	-50.98	-53.15	11.38	-37.54
10	38814.04	50.92 AV	54	-3.08	-58.9	-58.56	11.38	-44.34

Note: Margin value = Emission Level - Limit value

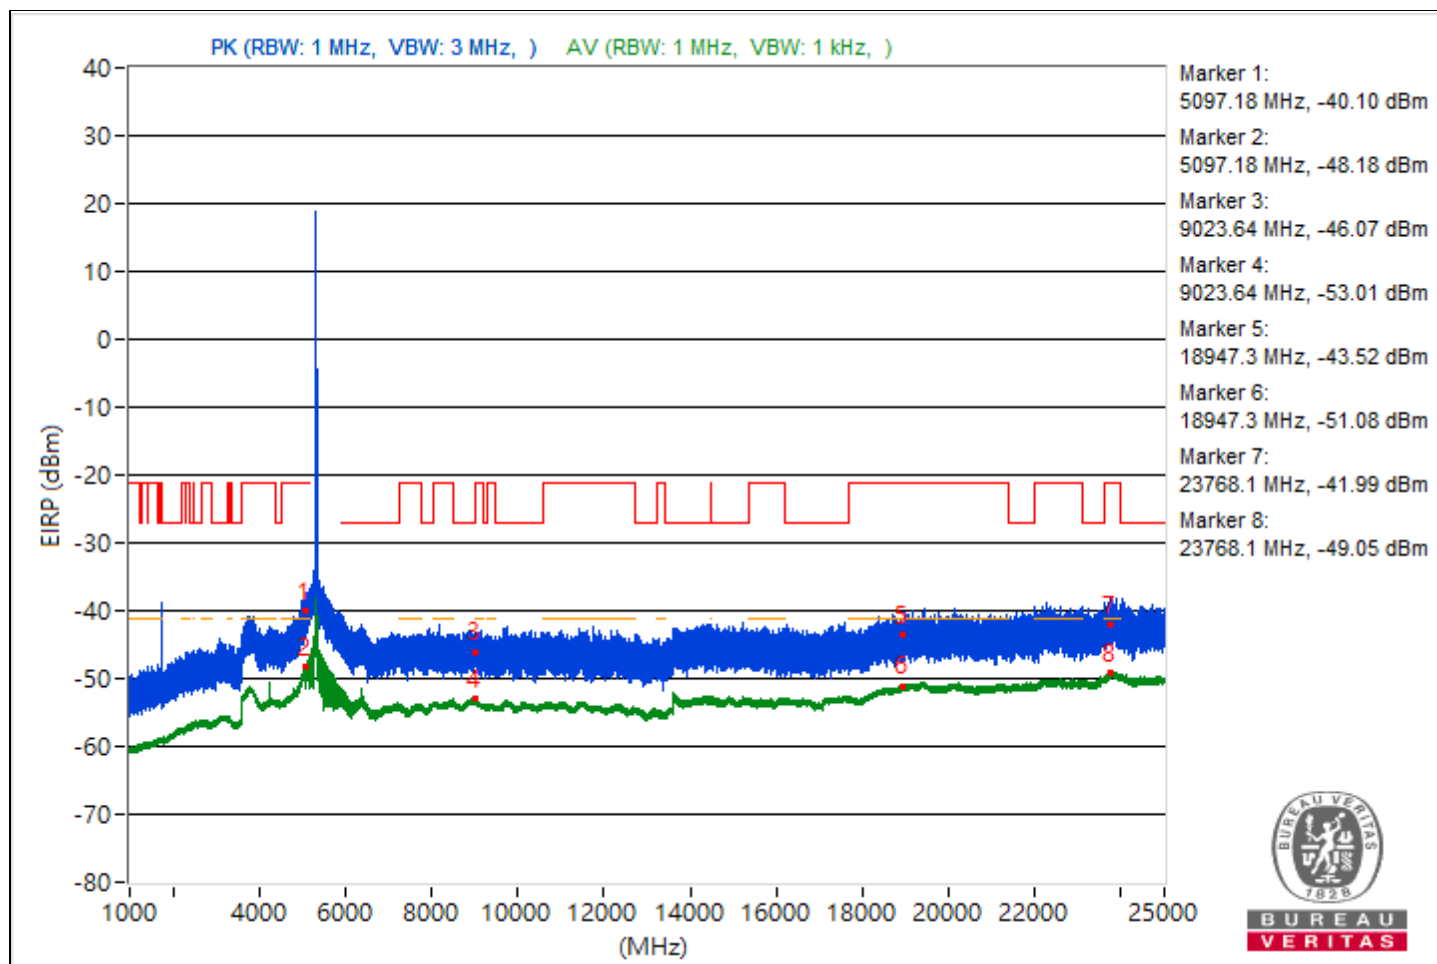


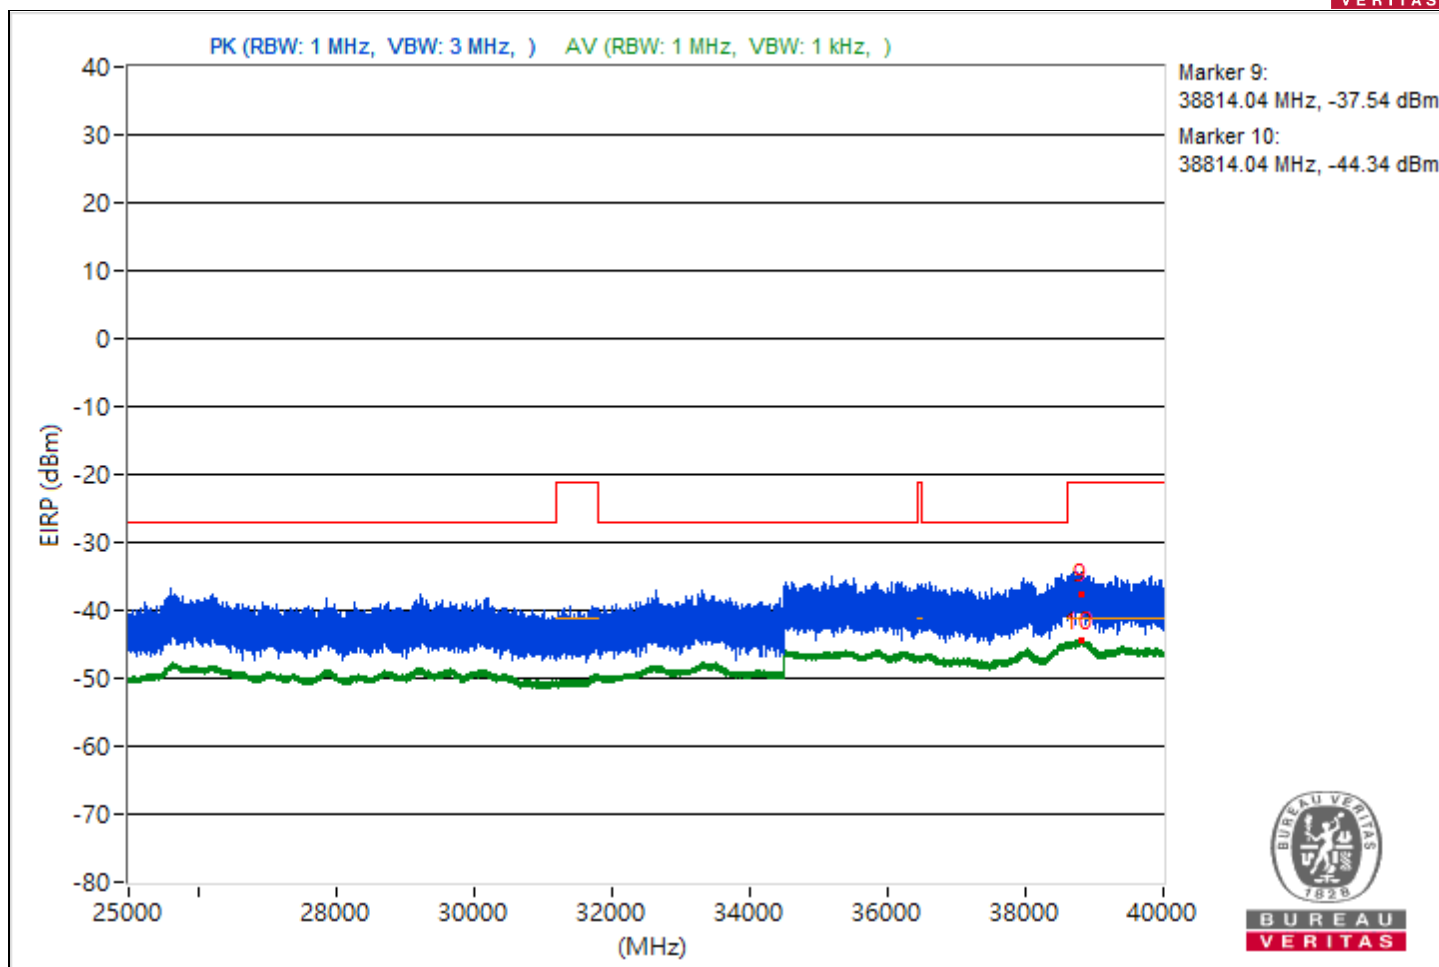


RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5089.09	53.93 PK	74	-20.07	-54.86	-56.8	11.38	-41.33
2	5089.09	46.37 AV	54	-7.63	-63.07	-63.5	11.38	-48.89
3	11001.6	56.63 PK	74	-17.37	-50.27	-62.27	11.38	-38.63
4	11001.6	48.58 AV	54	-5.42	-58.47	-68.42	11.38	-46.68
5	18998	51.98 PK	74	-22.02	-57.11	-58.31	11.38	-43.28
6	18998	44.39 AV	54	-9.61	-65.33	-65.19	11.38	-50.87
7	23844.3	53.39 PK	74	-20.61	-57.24	-55.46	11.38	-41.87
8	23844.3	46.28 AV	54	-7.72	-63.6	-63.16	11.38	-48.98
9	38847.02	57.04 PK	74	-16.96	-55.72	-50.82	11.38	-38.22
10	38847.02	51.01 AV	54	-2.99	-58.94	-58.36	11.38	-44.25

Note: Margin value = Emission Level - Limit value

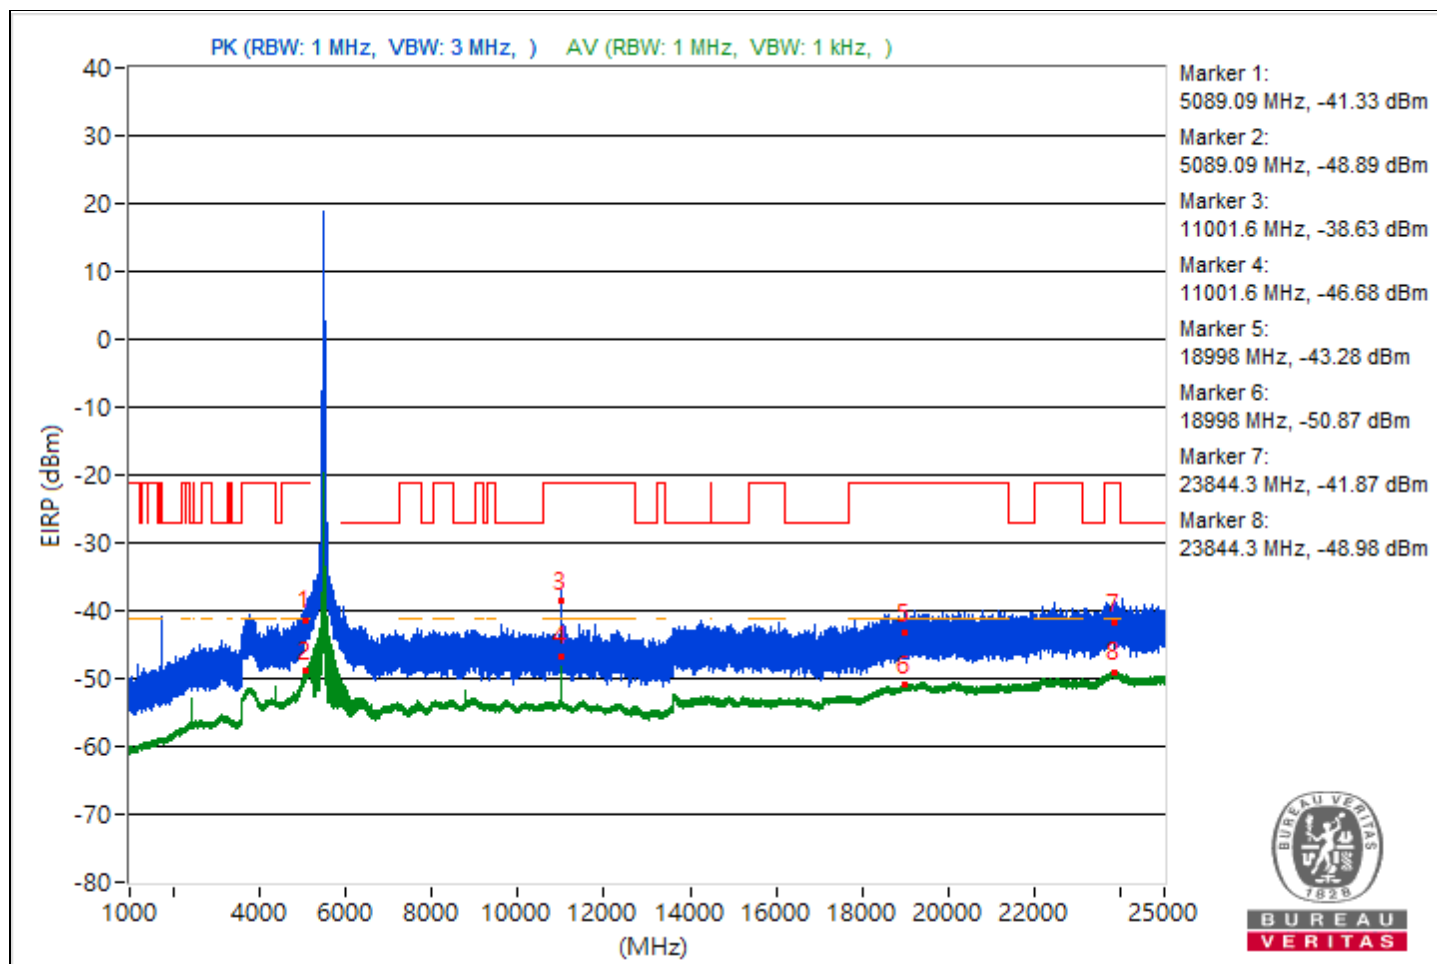


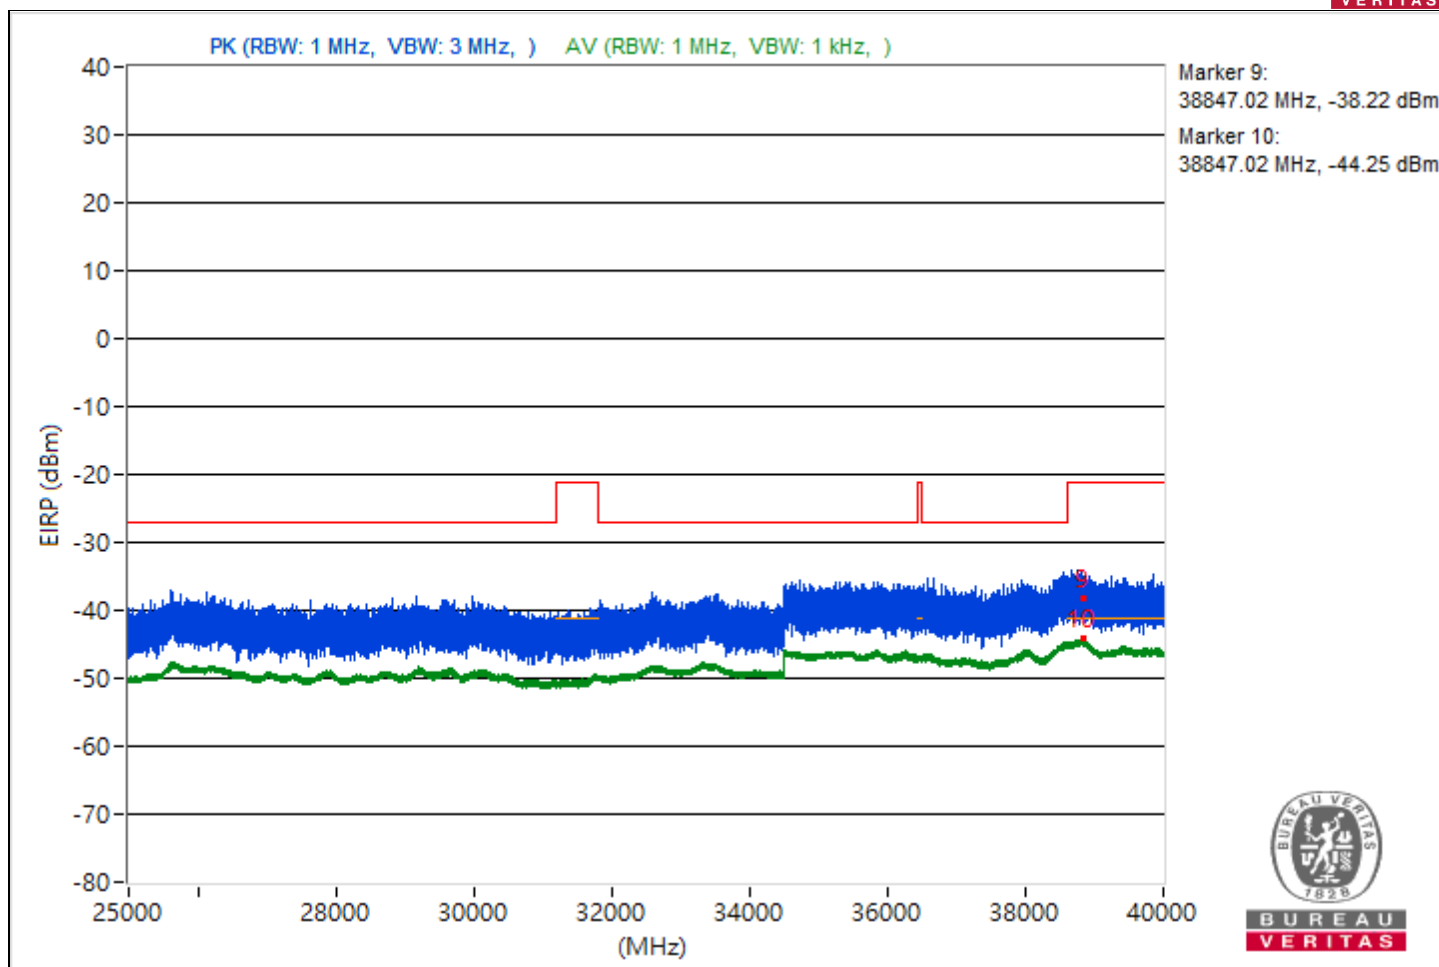


RF Mode	802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5078.98	52.57 PK	74	-21.43	-57.76	-56.49	11.38	-42.69
2	5078.98	45.51 AV	54	-8.49	-63.8	-64.51	11.38	-49.75
3	8436.27	48.43 PK	74	-25.57	-61.04	-61.41	11.38	-46.83
4	8436.27	42.02 AV	54	-11.98	-67.91	-67.36	11.38	-53.24
5	18962.1	51.56 PK	74	-22.44	-57.43	-58.87	11.38	-43.7
6	18962.1	44.34 AV	54	-9.66	-65.06	-65.58	11.38	-50.92
7	23827.5	53.08 PK	74	-20.92	-56.33	-56.82	11.38	-42.18
8	23827.5	46.28 AV	54	-7.72	-63.69	-63.08	11.38	-48.98
9	38795.82	60.19 PK	74	-13.81	-49.29	-49.64	11.38	-35.07
10	38795.82	50.84 AV	54	-3.16	-58.46	-59.19	11.38	-44.42

Note: Margin value = Emission Level - Limit value

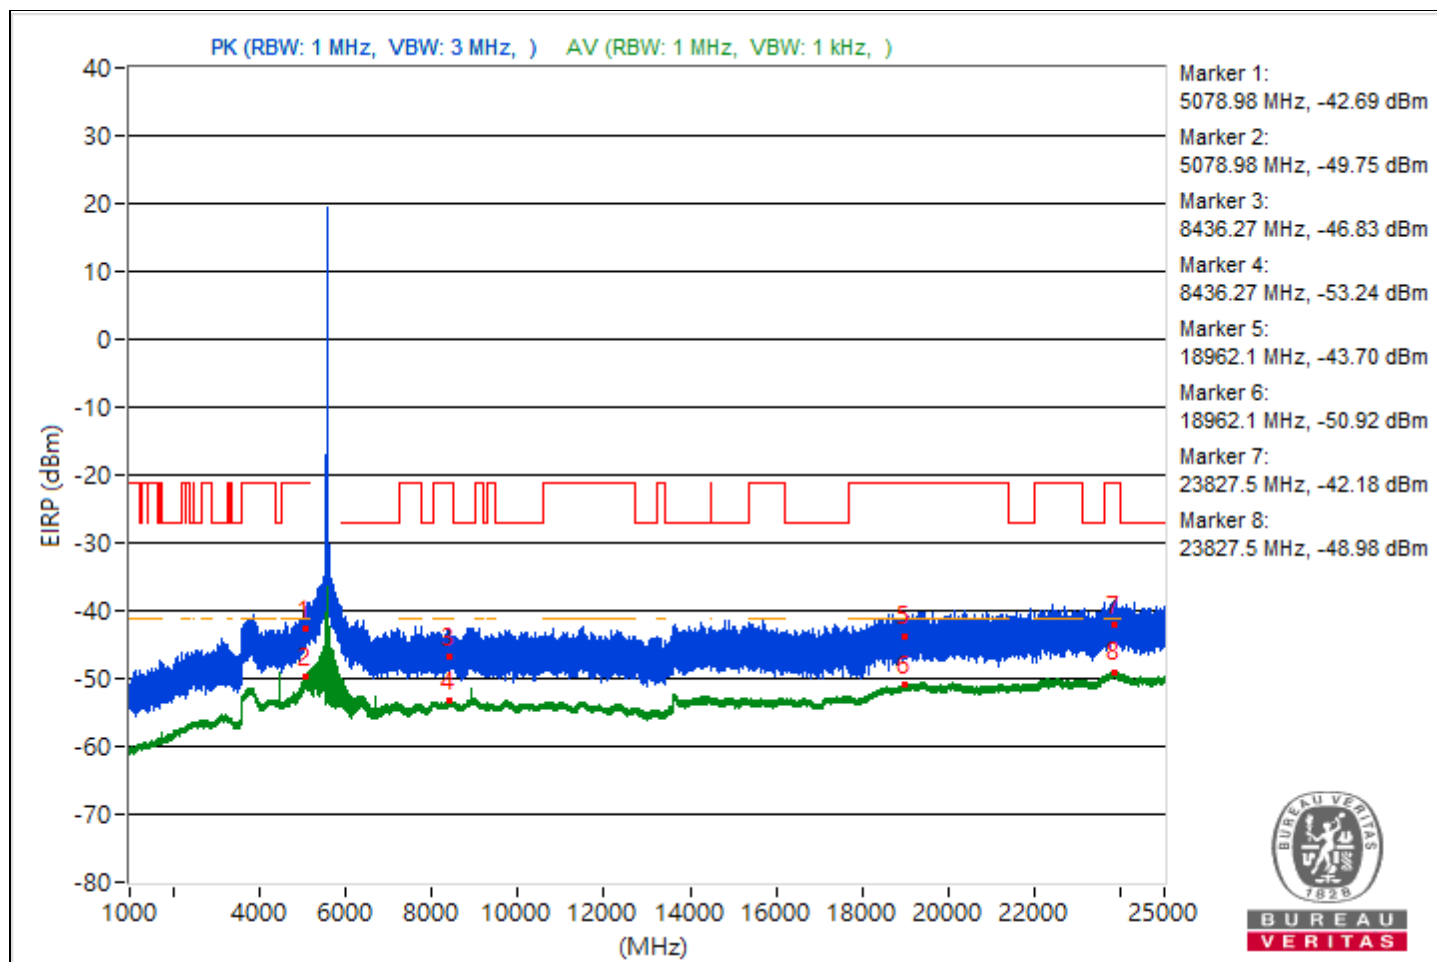


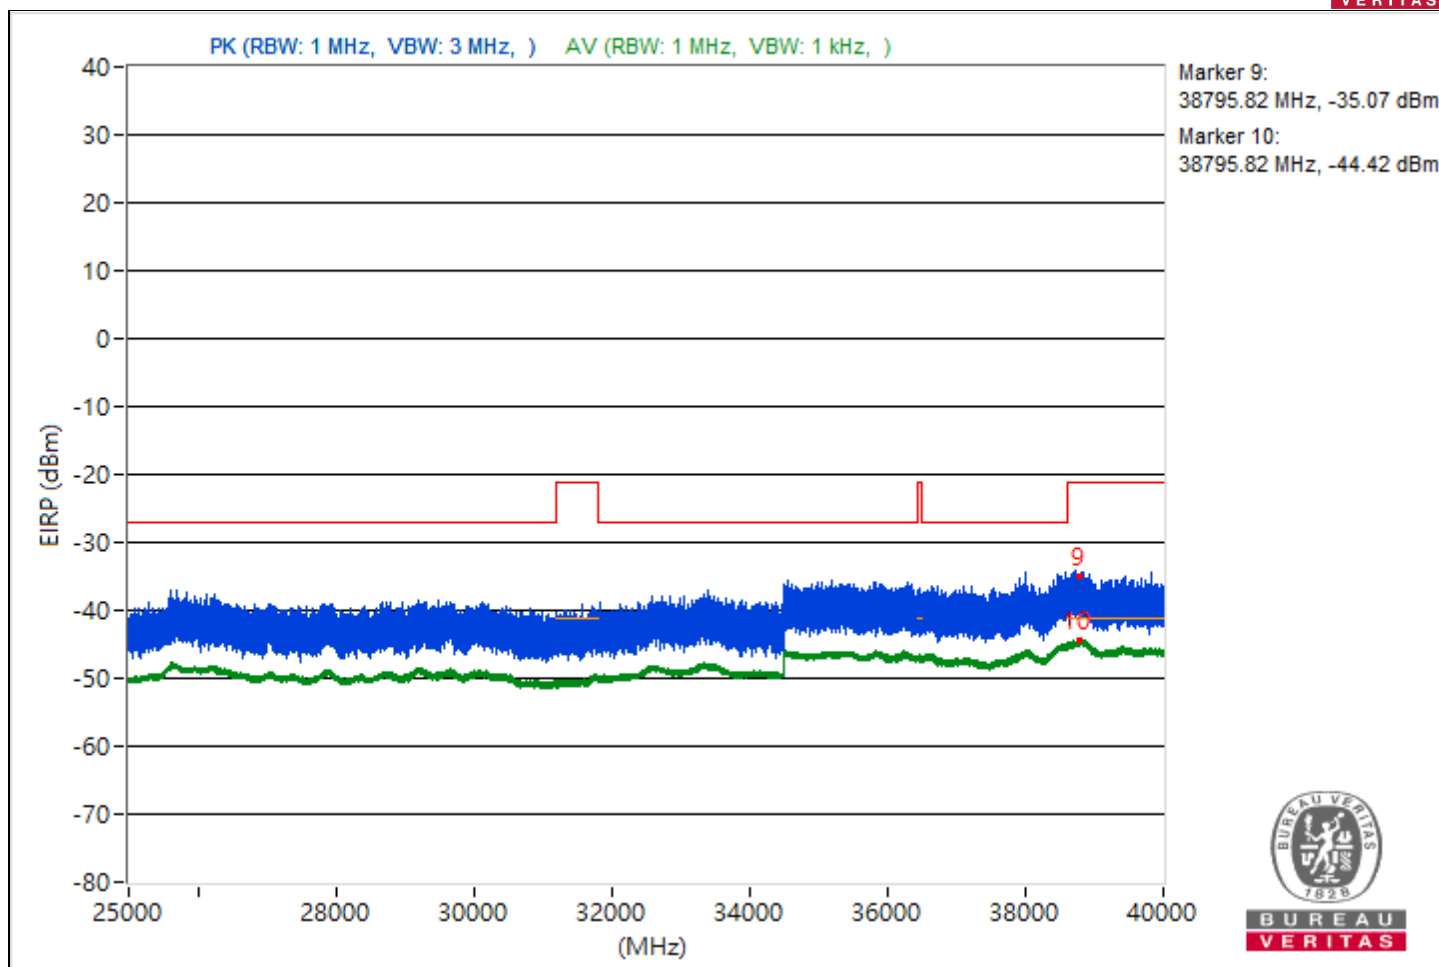


RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4559.97	52.26 PK	74	-21.74	-55.18	-62.13	11.38	-43
2	4559.97	47.53 AV	54	-6.47	-59.77	-67.66	11.38	-47.73
3	9120	51.64 PK	74	-22.36	-56.57	-60.17	11.38	-43.62
4	9120	43.84 AV	54	-10.16	-64.58	-67.54	11.38	-51.42
5	18990.4	51.49 PK	74	-22.51	-56.84	-60.07	11.38	-43.77
6	18990.4	44.26 AV	54	-9.74	-65.19	-65.59	11.38	-51
7	23821.7	53.13 PK	74	-20.87	-57.95	-55.44	11.38	-42.13
8	23821.7	46.3 AV	54	-7.7	-63.12	-63.59	11.38	-48.96
9	38809.24	59.71 PK	74	-14.29	-49.86	-50.03	11.38	-35.55
10	38809.24	50.88 AV	54	-3.12	-59.04	-58.51	11.38	-44.38

Note: Margin value = Emission Level - Limit value

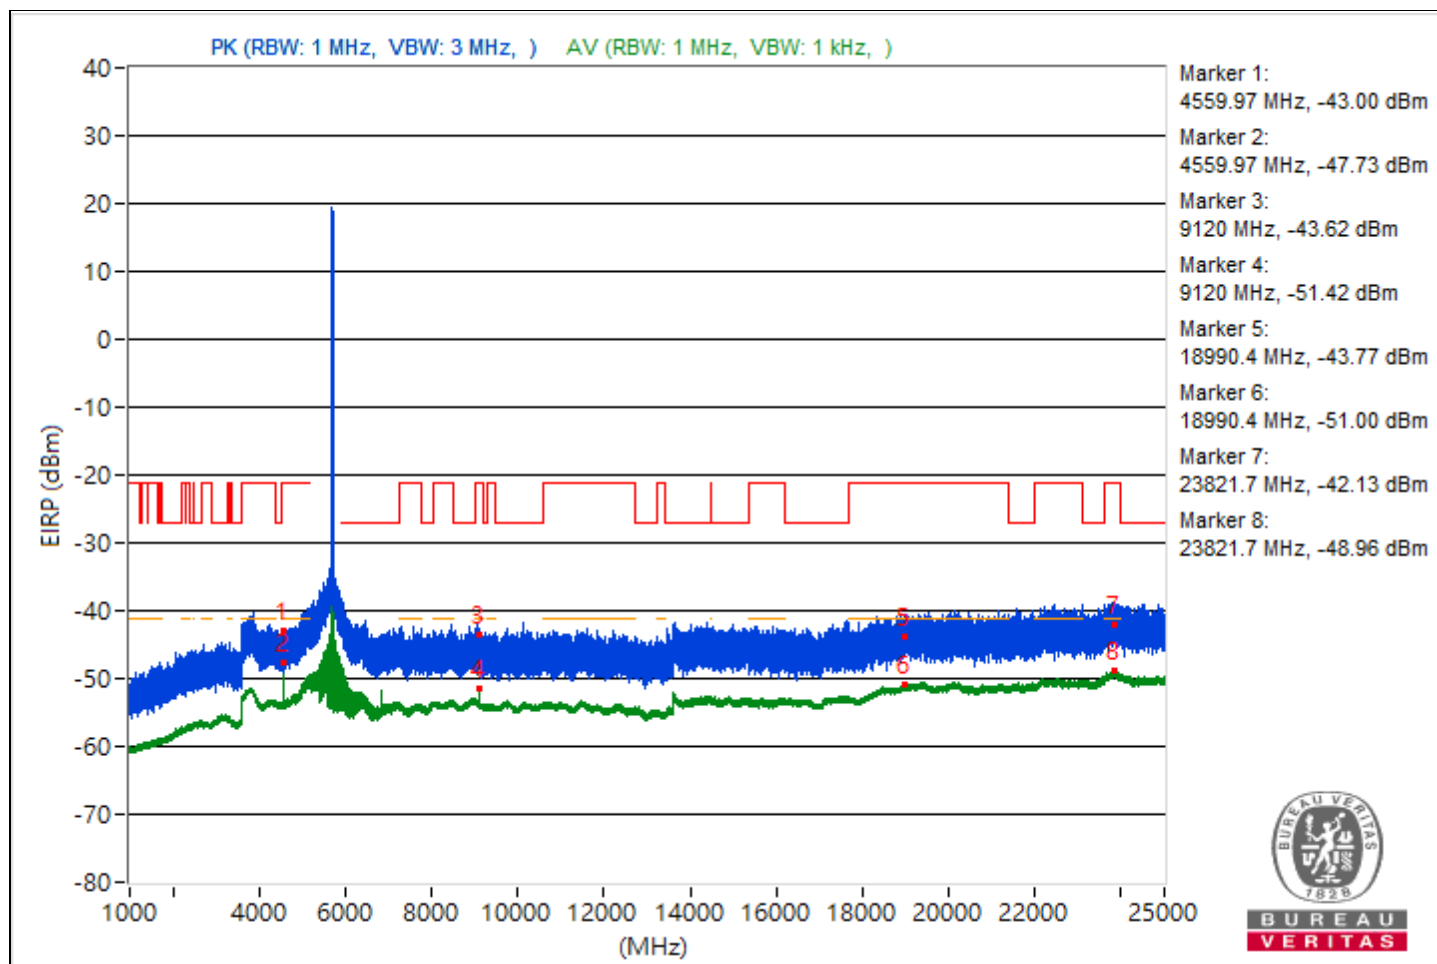


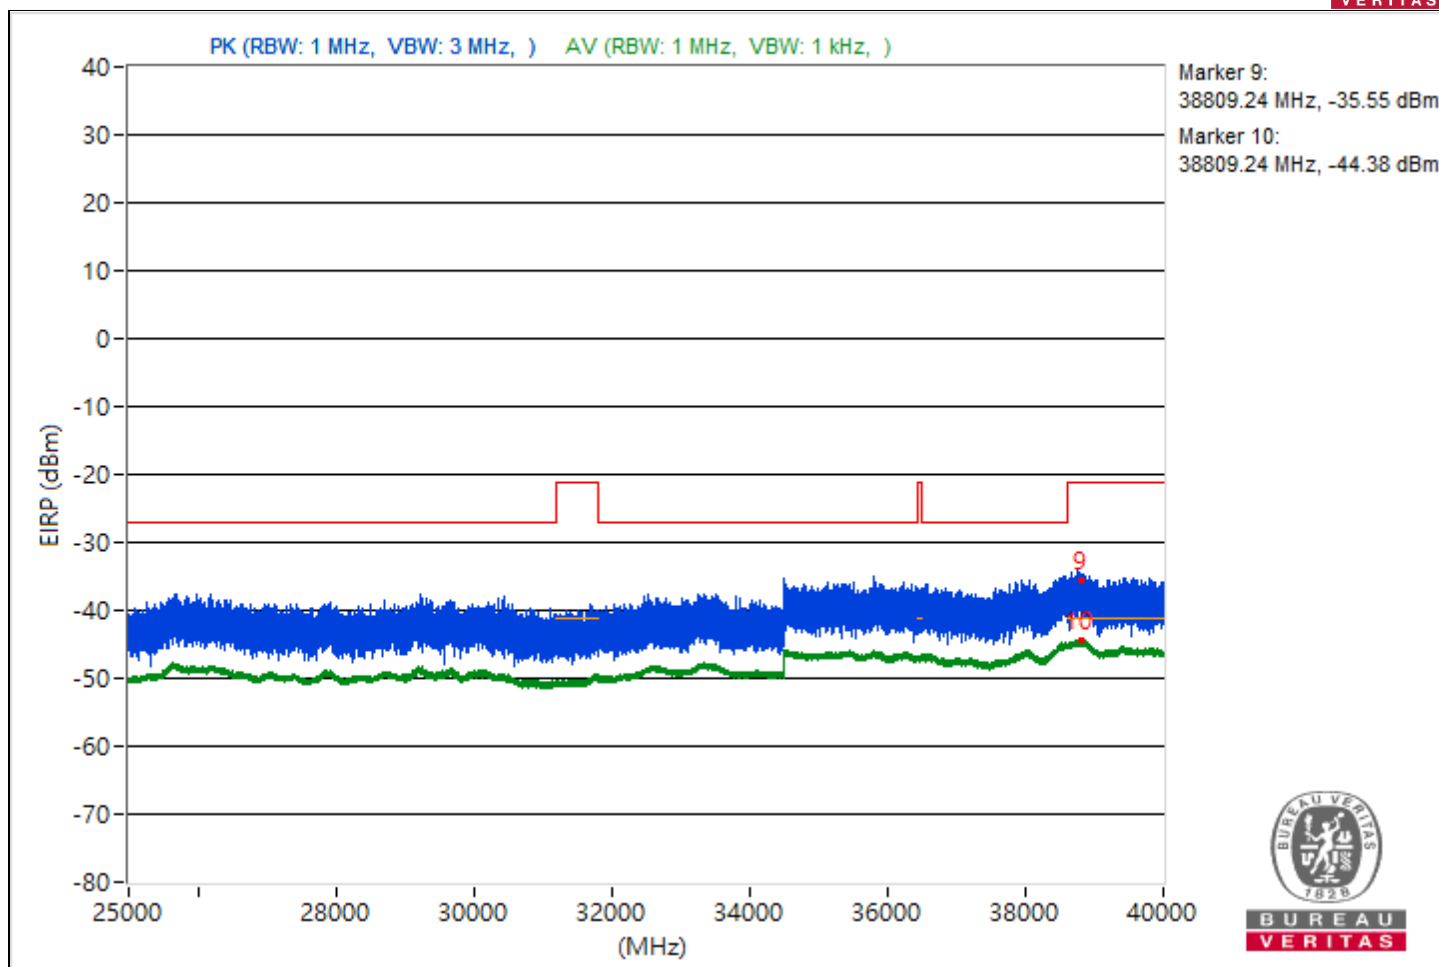


RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4575.99	52.23 PK	74	-21.77	-55.33	-61.56	11.38	-43.03
2	4575.99	48.23 AV	54	-5.77	-58.89	-68.23	11.38	-47.03
3	9151.82	51.37 PK	74	-22.63	-60.41	-56.86	11.38	-43.89
4	9151.82	43.5 AV	54	-10.5	-64.88	-67.95	11.38	-51.76
5	18930.1	50.65 PK	74	-23.35	-59.35	-58.67	11.38	-44.61
6	18930.1	44.22 AV	54	-9.78	-65.68	-65.19	11.38	-51.04
7	23770.8	55.29 PK	74	-18.71	-55.69	-53.34	11.38	-39.97
8	23770.8	46.15 AV	54	-7.85	-63.18	-63.85	11.38	-49.11
9	38792.44	57.61 PK	74	-16.39	-50.79	-53.79	11.38	-37.65
10	38792.44	51 AV	54	-3	-58.76	-58.55	11.38	-44.26

Note: Margin value = Emission Level - Limit value

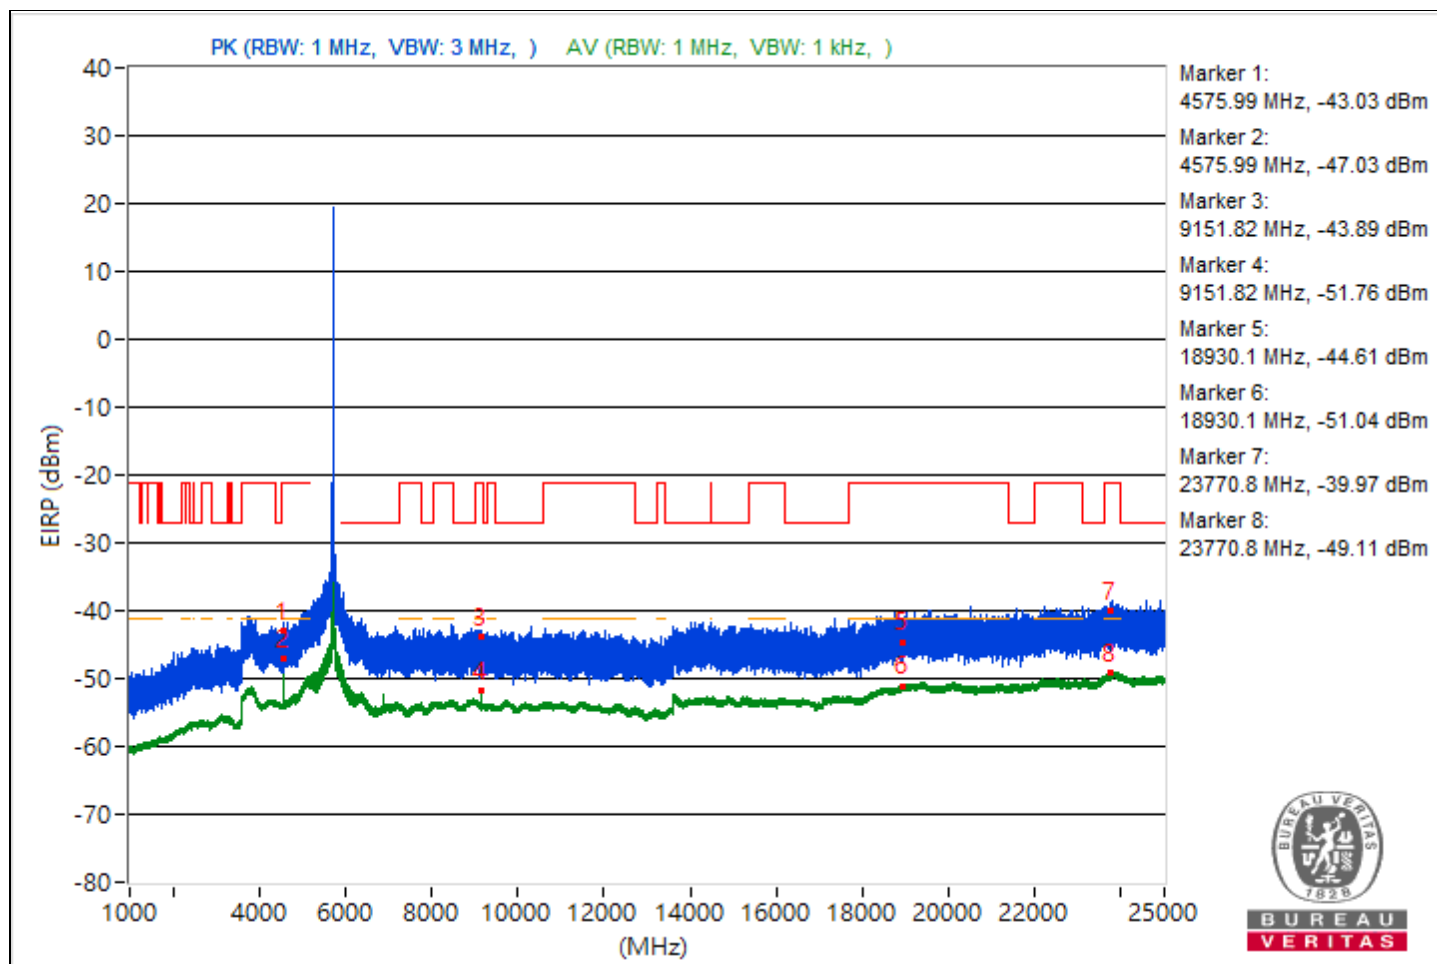


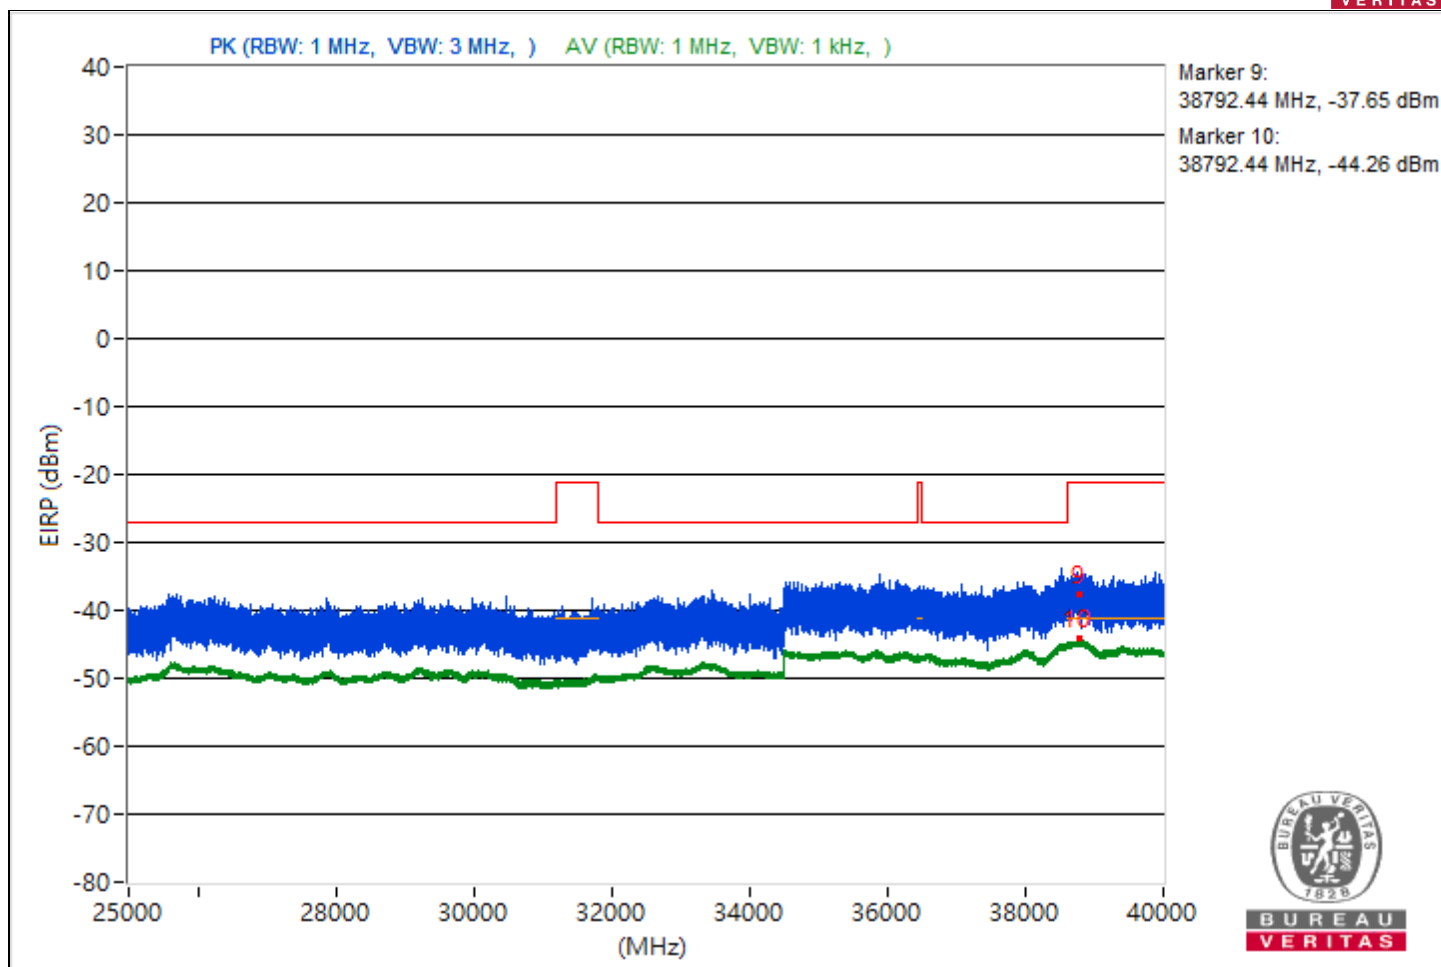


RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4596.13	53.41 PK	74	-20.59	-54.9	-58.19	11.38	-41.85
2	4596.13	45.66 AV	54	-8.34	-61.96	-67.97	11.38	-49.6
3	11488.71	57.32 PK	74	-16.68	-50.69	-54.98	11.38	-37.94
4	11488.71	49.74 AV	54	-4.26	-58.52	-61.98	11.38	-45.52
5	18955.8	50.48 PK	74	-23.52	-59.46	-58.9	11.38	-44.78
6	18955.8	44.06 AV	54	-9.94	-65.3	-65.91	11.38	-51.2
7	23857.4	54.7 PK	74	-19.3	-54.86	-55.05	11.38	-40.56
8	23857.4	46.15 AV	54	-7.85	-63.83	-63.19	11.38	-49.11
9	38810.13	58.34 PK	74	-15.66	-51.34	-51.28	11.38	-36.92
10	38810.13	50.81 AV	54	-3.19	-58.45	-59.28	11.38	-44.45

Note: Margin value = Emission Level - Limit value

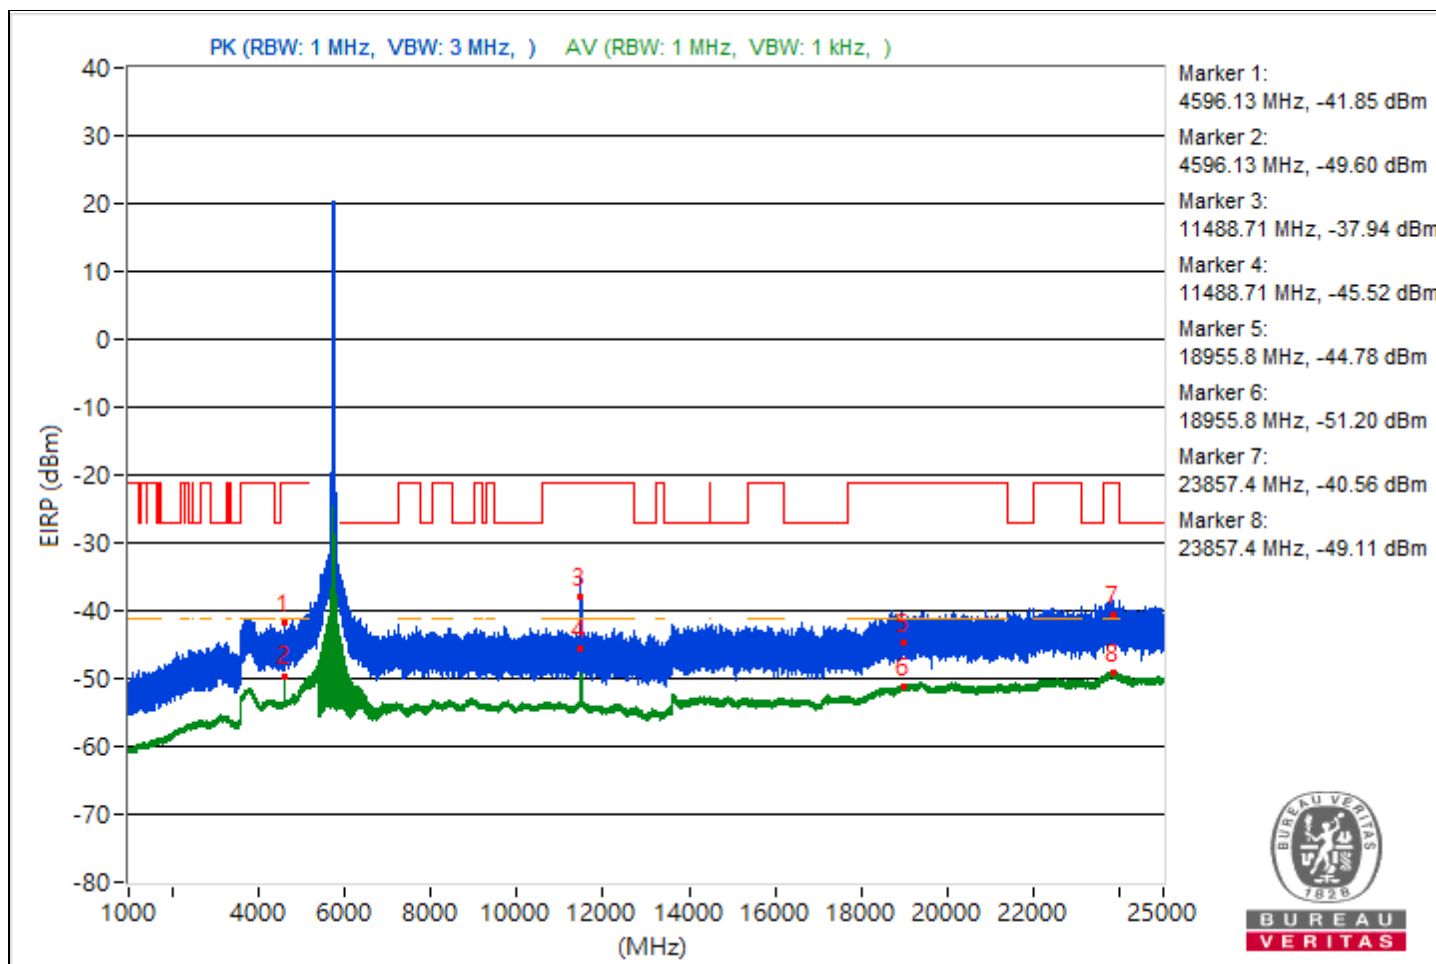


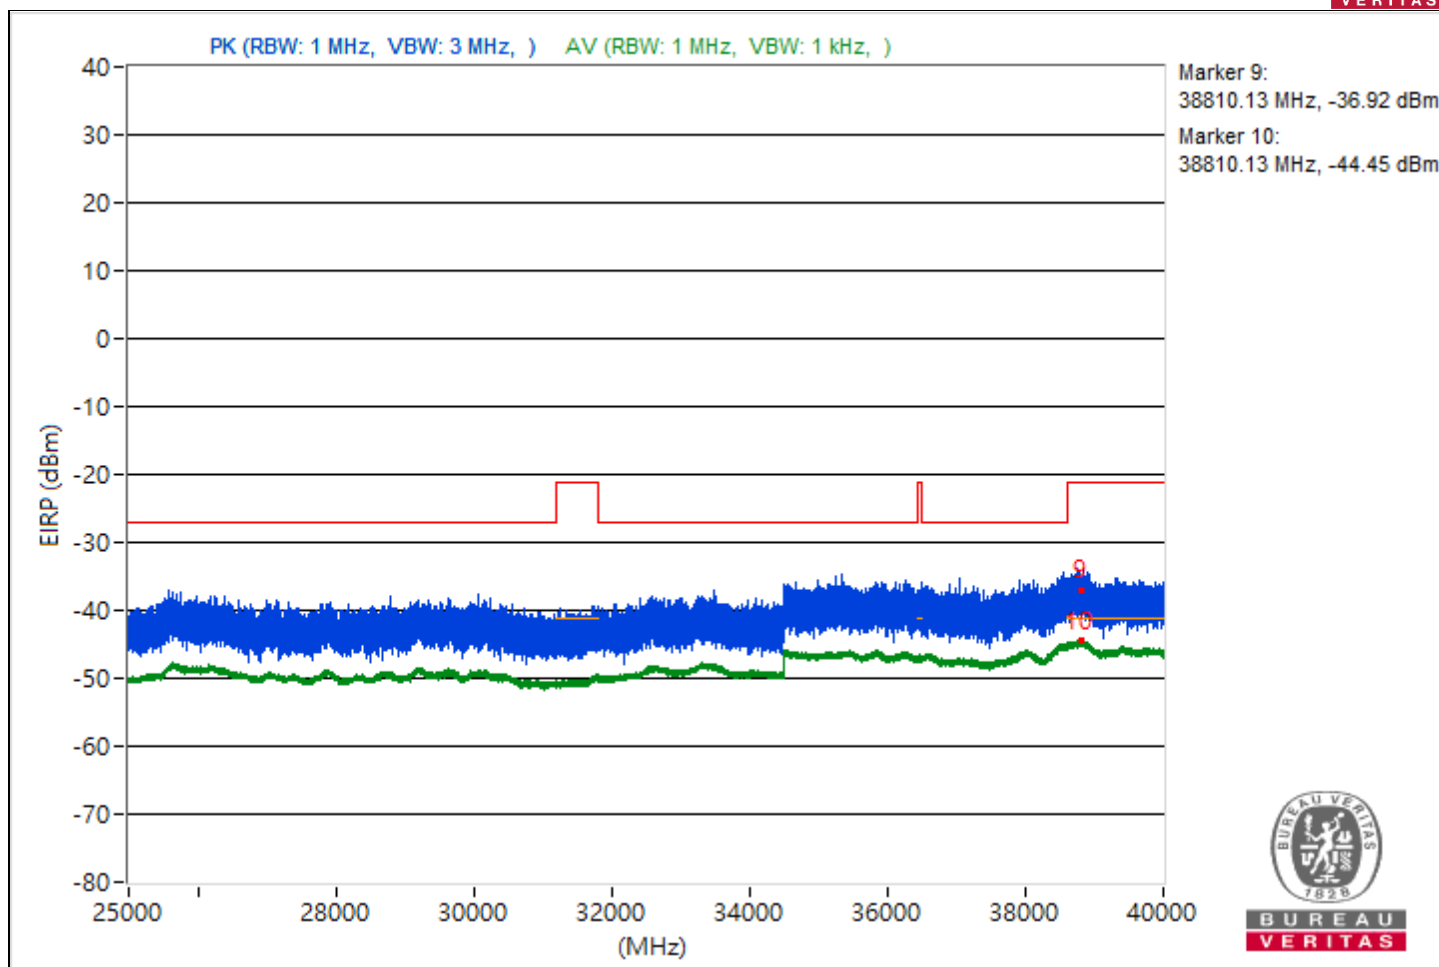


RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4628.1	53.31 PK	74	-20.69	-54.75	-58.87	11.38	-41.95
2	4628.1	47.27 AV	54	-6.73	-60.08	-67.62	11.38	-47.99
3	11567.56	59.08 PK	74	-14.92	-48.41	-55.04	11.38	-36.18
4	11567.56	49.91 AV	54	-4.09	-58.2	-62.16	11.38	-45.35
5	18996.7	49.64 PK	74	-24.36	-59.62	-60.44	11.38	-45.62
6	18996.7	44.28 AV	54	-9.72	-65.13	-65.62	11.38	-50.98
7	23837.3	53.81 PK	74	-20.19	-56.12	-55.57	11.38	-41.45
8	23837.3	46.39 AV	54	-7.61	-63.45	-63.08	11.38	-48.87
9	38815.73	57.71 PK	74	-16.29	-51.3	-52.71	11.38	-37.55
10	38815.73	51.11 AV	54	-2.89	-58.62	-58.46	11.38	-44.15

Note: Margin value = Emission Level - Limit value

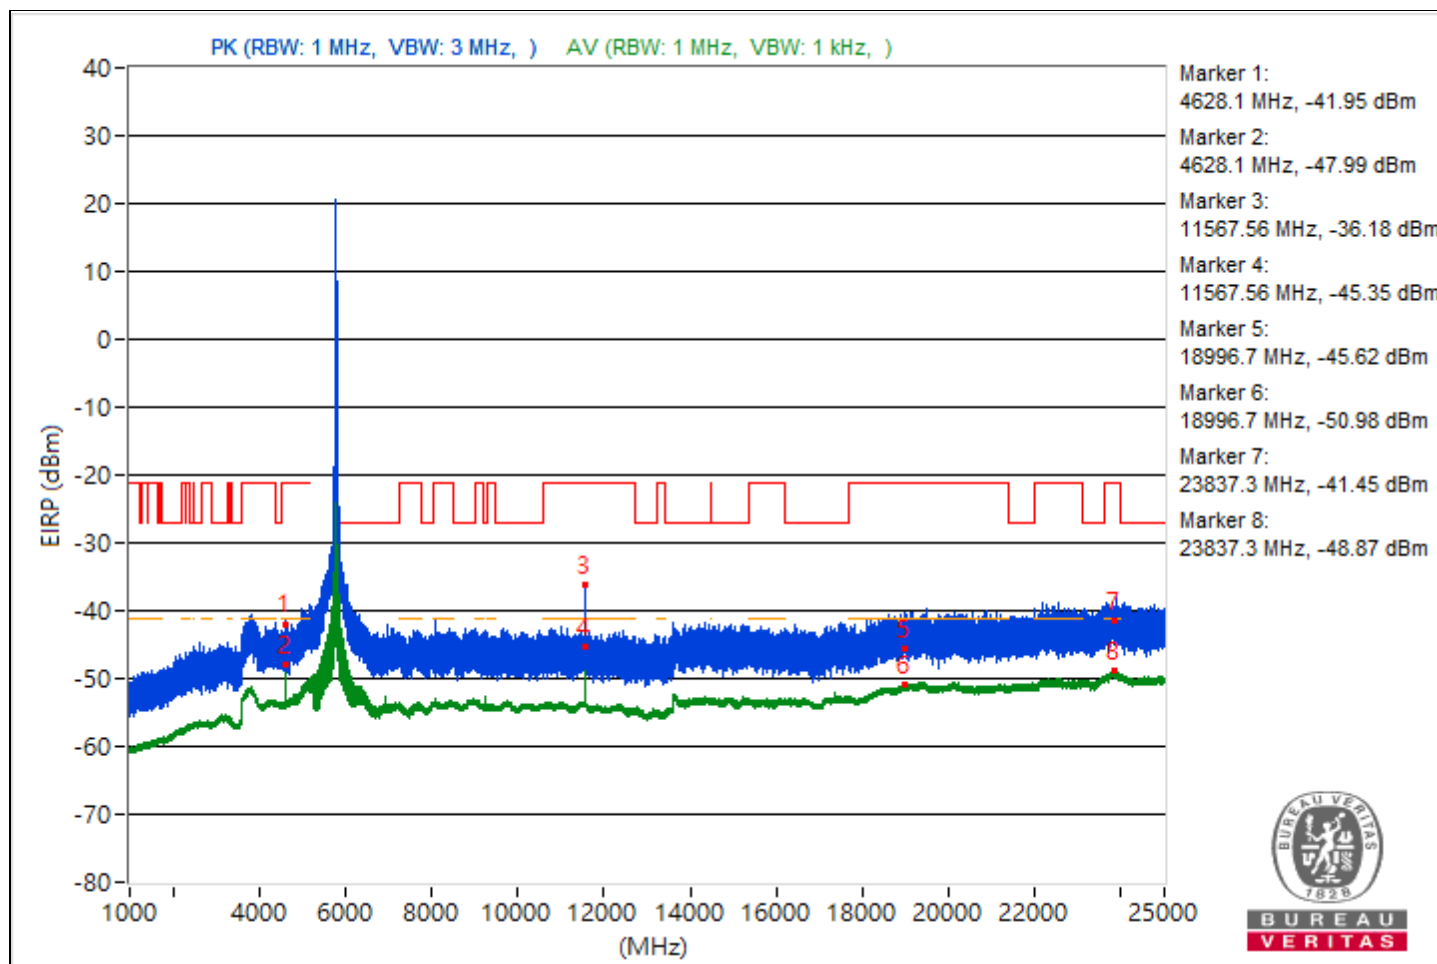


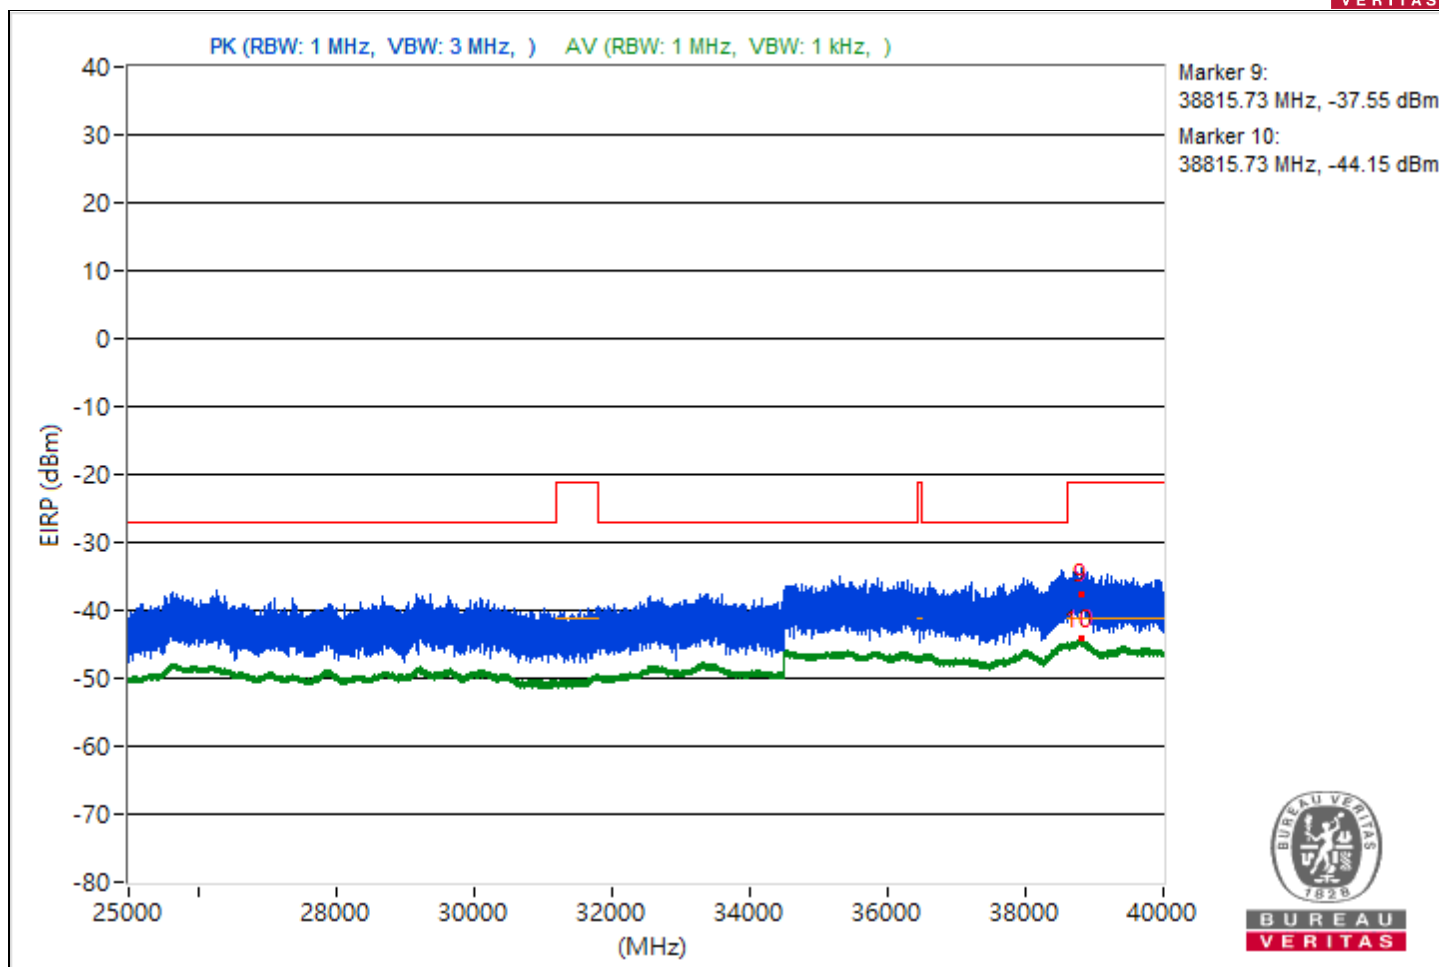


RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4660.22	53.28 PK	74	-20.72	-54.85	-58.7	11.38	-41.98
2	4660.22	47.29 AV	54	-6.71	-60.16	-67.01	11.38	-47.97
3	11648.89	56.01 PK	74	-17.99	-53.55	-53.74	11.38	-39.25
4	11648.89	49.85 AV	54	-4.15	-58.05	-62.77	11.38	-45.41
5	18988.4	50.64 PK	74	-23.36	-57.55	-61.23	11.38	-44.62
6	18988.4	44.21 AV	54	-9.79	-65.67	-65.23	11.38	-51.05
7	23848.2	52.73 PK	74	-21.27	-56.5	-57.38	11.38	-42.53
8	23848.2	46.3 AV	54	-7.7	-63.12	-63.59	11.38	-48.96
9	38785.24	57.84 PK	74	-16.16	-52.7	-51.07	11.38	-37.42
10	38785.24	50.78 AV	54	-3.22	-59.34	-58.45	11.38	-44.48

Note: Margin value = Emission Level - Limit value

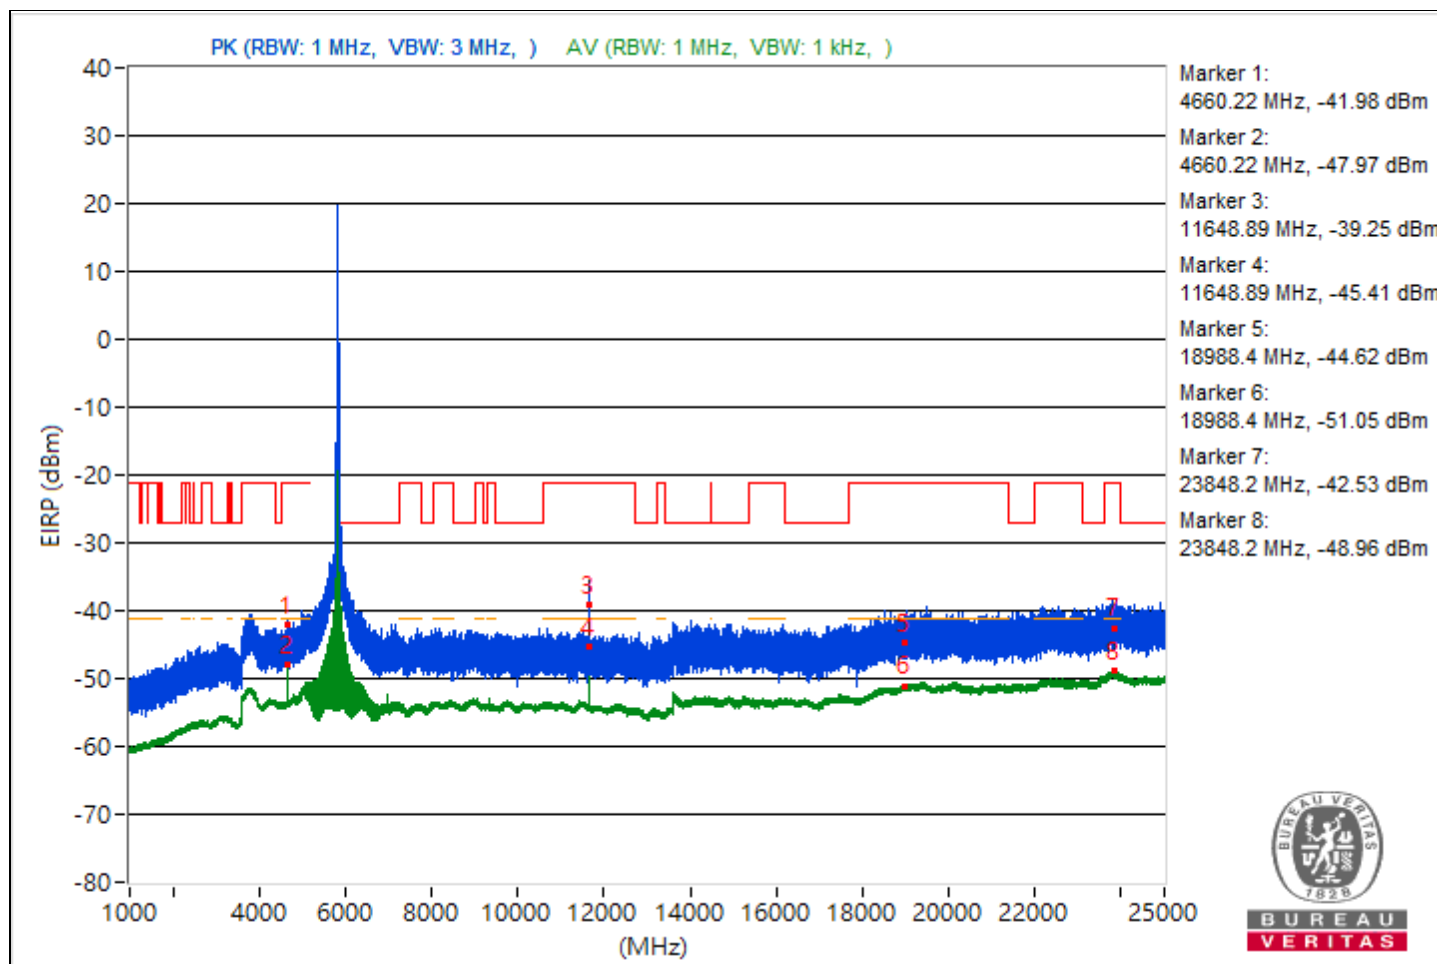

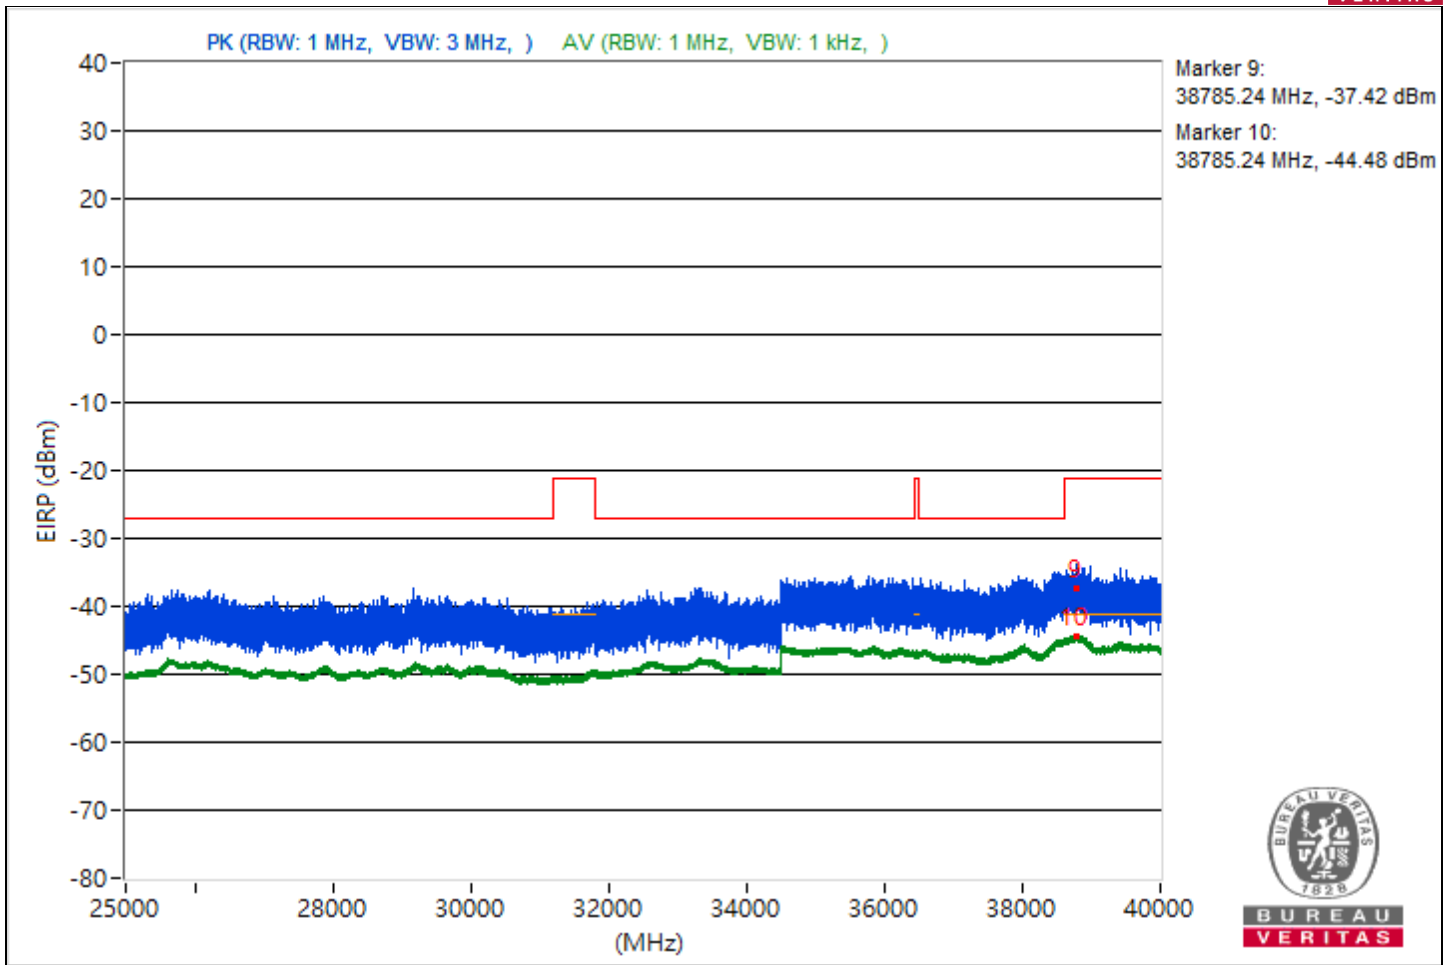



2S2T

RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5090.72	55.82 PK	74	-18.18	-51.82	-50	8.37	-39.44
2	5090.72	47.48 AV	54	-6.52	-58.59	-59.81	8.37	-47.78
3	8288	50.1 PK	74	-23.9	-54.77	-59.59	8.37	-45.16
4	8288	44.17 AV	54	-9.83	-60.26	-67.2	8.37	-51.09
5	18993.6	48.77 PK	74	-25.23	-58.77	-57.12	8.37	-46.49
6	18993.6	42.03 AV	54	-11.97	-64.6	-64.62	8.37	-53.23
7	23857.1	51.34 PK	74	-22.66	-55.31	-55.29	8.37	-43.92
8	23857.1	43.88 AV	54	-10.12	-63.06	-62.47	8.37	-51.38
9	38814.04	54.1 PK	74	-19.9	-51.15	-54.59	8.37	-41.16
10	38814.04	48.47 AV	54	-5.53	-58.69	-57.7	8.37	-46.79

Note: Margin value = Emission Level - Limit value

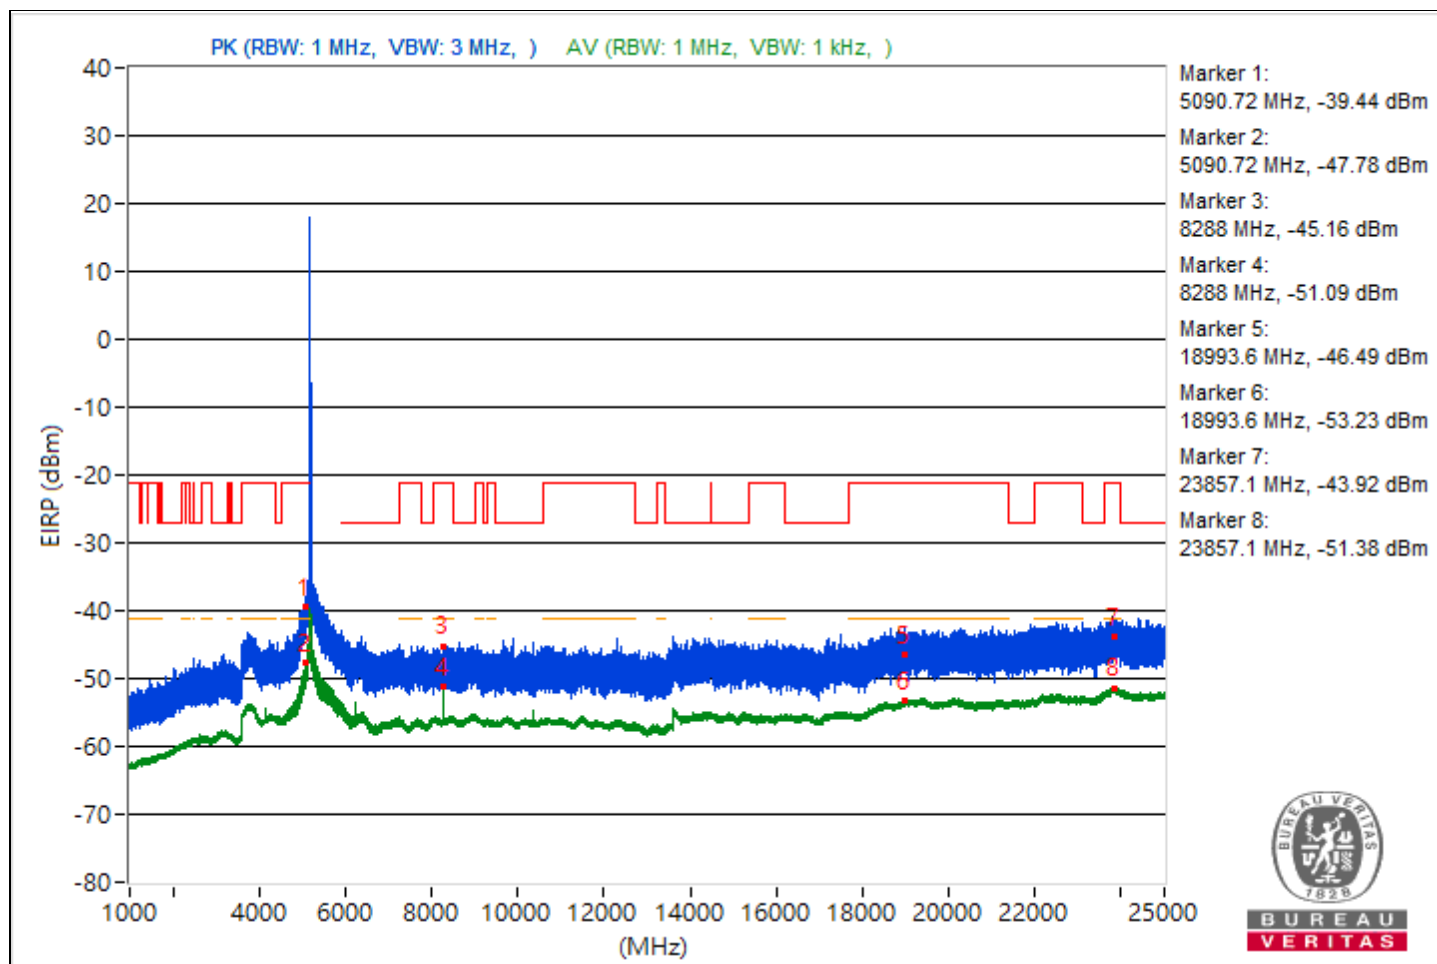


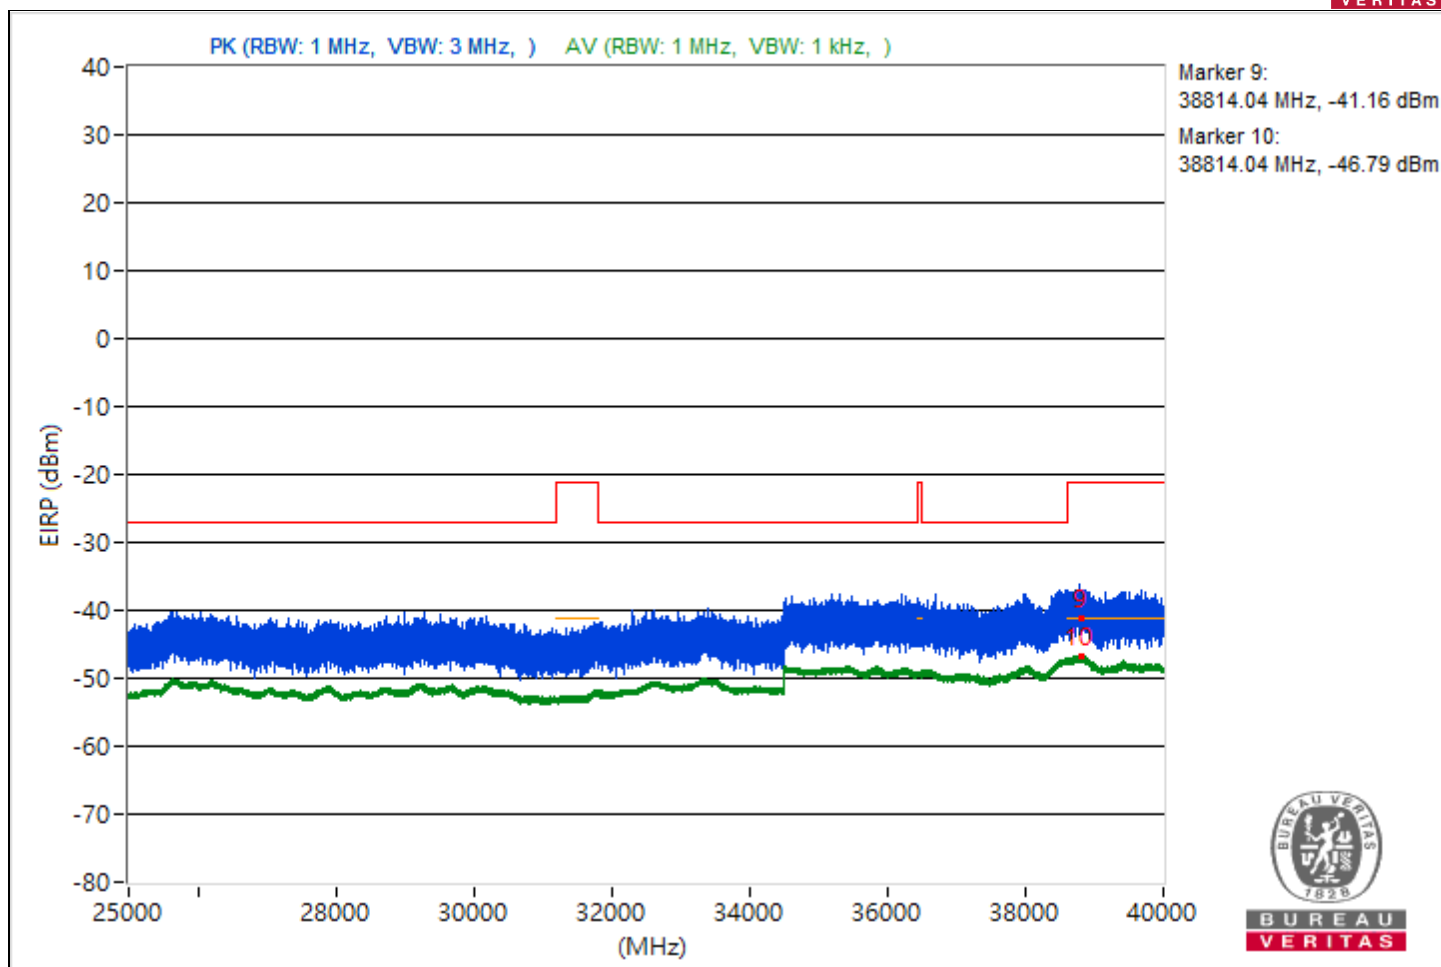


RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.74	54.63 PK	74	-19.37	-53.53	-50.88	8.37	-40.63
2	5099.74	47.1 AV	54	-6.9	-59.3	-59.79	8.37	-48.16
3	9016.71	47.91 PK	74	-26.09	-59.38	-58.17	8.37	-47.35
4	9016.71	39.92 AV	54	-14.08	-66.59	-66.85	8.37	-55.34
5	18933.1	48.17 PK	74	-25.83	-58.05	-58.94	8.37	-47.09
6	18933.1	41.88 AV	54	-12.12	-65.02	-64.51	8.37	-53.38
7	23805.6	50.74 PK	74	-23.26	-54.46	-58.09	8.37	-44.52
8	23805.6	43.81 AV	54	-10.19	-63.23	-62.46	8.37	-51.45
9	38811.02	56.14 PK	74	-17.86	-49.8	-51.33	8.37	-39.12
10	38811.02	48.66 AV	54	-5.34	-58.17	-57.8	8.37	-46.6

Note: Margin value = Emission Level - Limit value

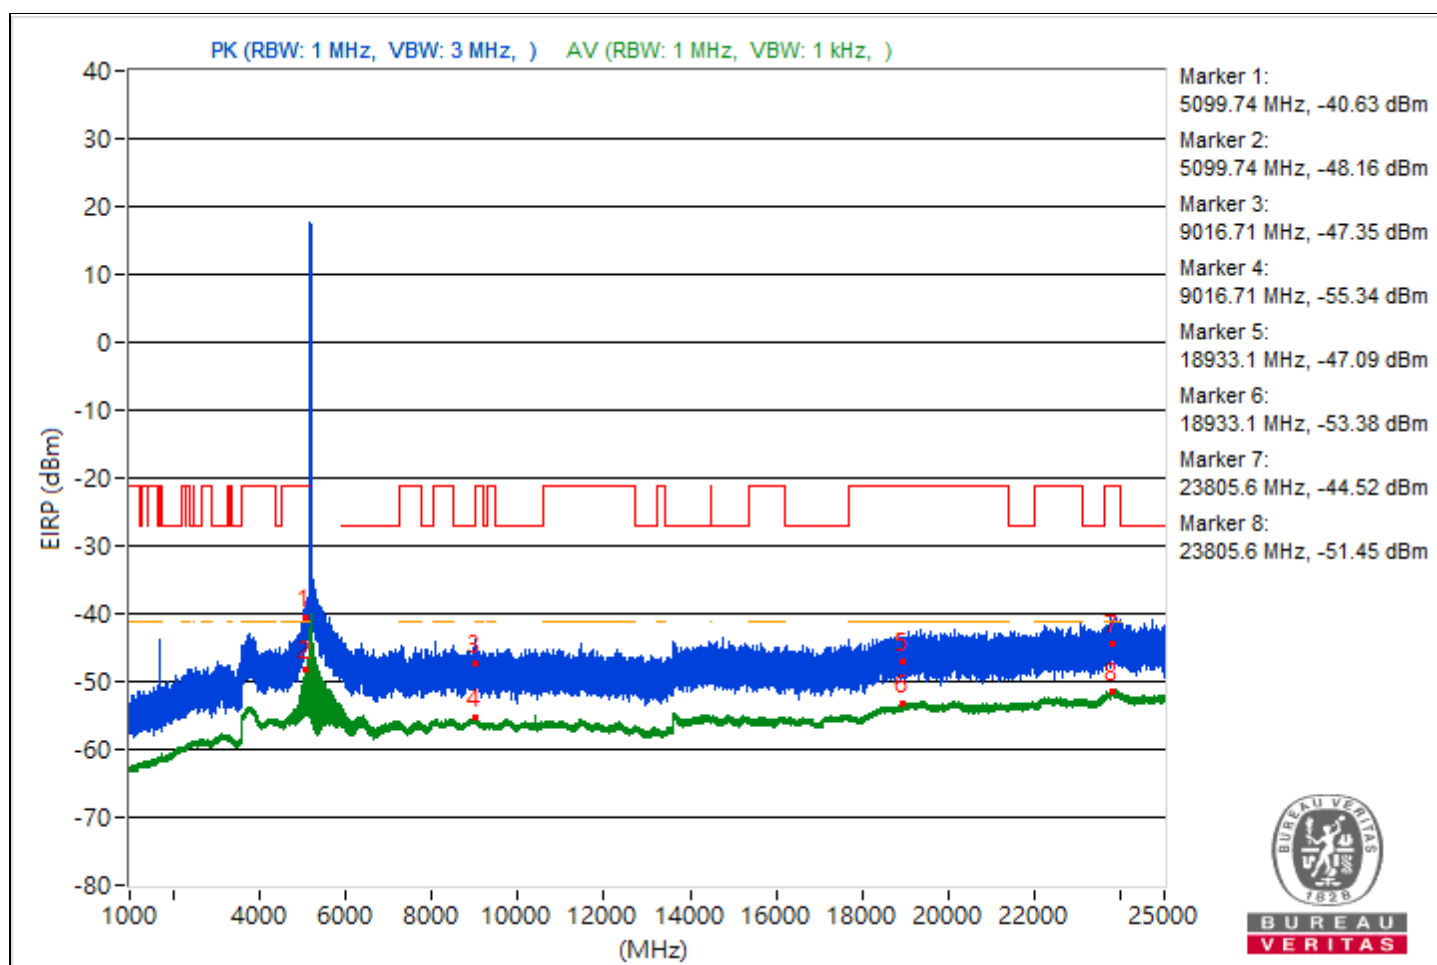


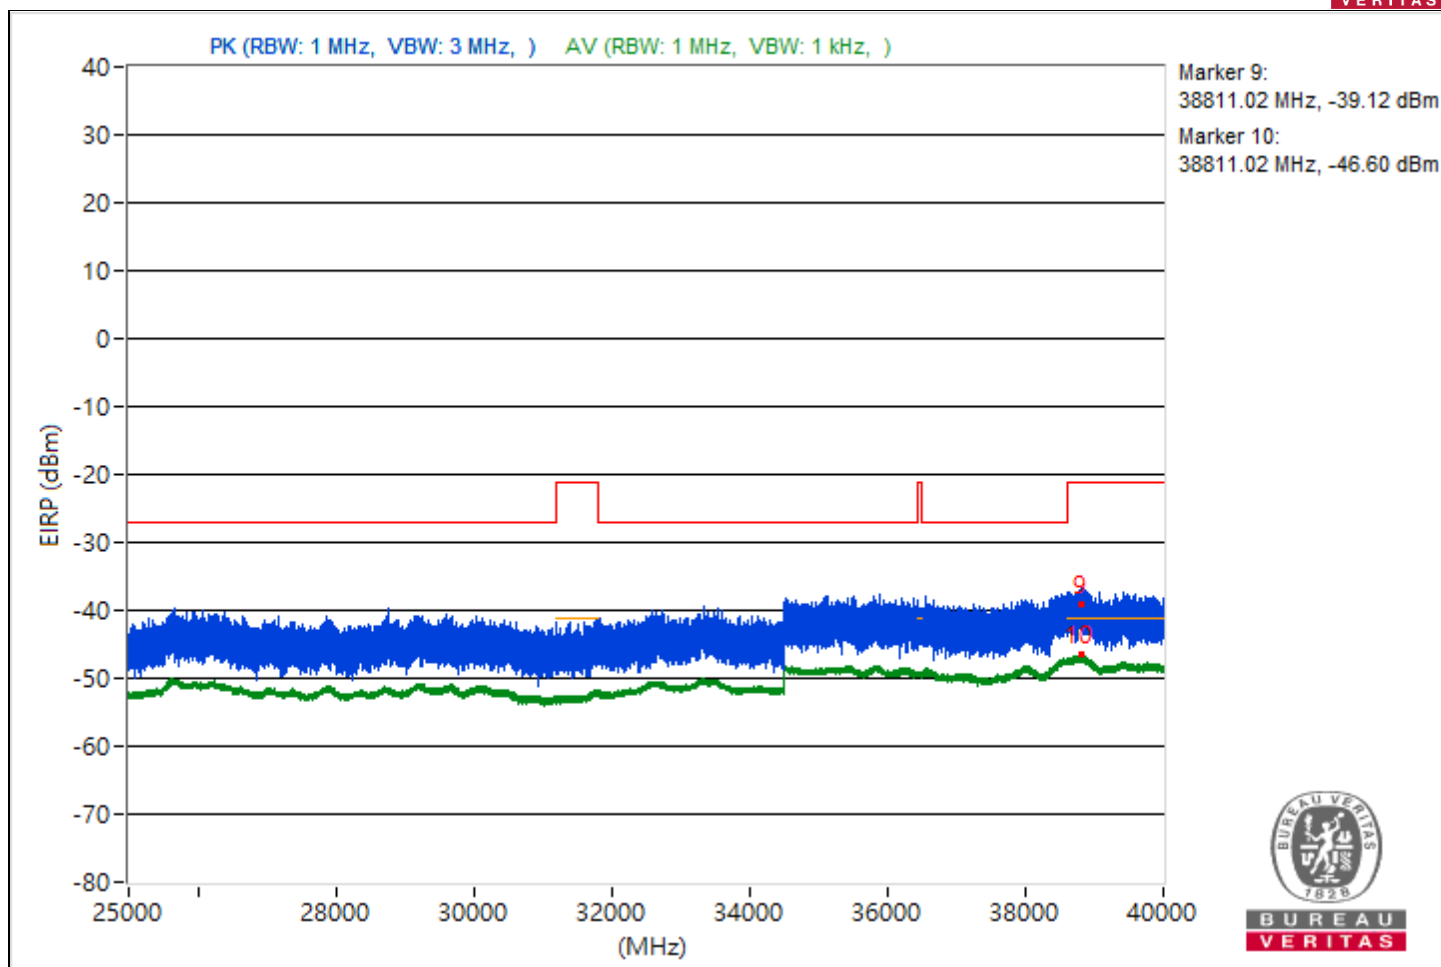


RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5094.77	54.22 PK	74	-19.78	-51.39	-53.76	8.37	-41.04
2	5094.77	46.16 AV	54	-7.84	-60.31	-60.66	8.37	-49.1
3	8384.36	46.51 PK	74	-27.49	-60.01	-60.26	8.37	-48.75
4	8384.36	39.88 AV	54	-14.12	-66.8	-66.72	8.37	-55.38
5	18908.4	49.39 PK	74	-24.61	-59.91	-55.61	8.37	-45.87
6	18908.4	41.89 AV	54	-12.11	-64.91	-64.59	8.37	-53.37
7	23853.9	51.13 PK	74	-22.87	-54.98	-56.11	8.37	-44.13
8	23853.9	43.82 AV	54	-10.18	-63.28	-62.41	8.37	-51.44
9	38780.62	55.58 PK	74	-18.42	-50.41	-51.82	8.37	-39.68
10	38780.62	48.59 AV	54	-5.41	-58.37	-57.74	8.37	-46.67

Note: Margin value = Emission Level - Limit value

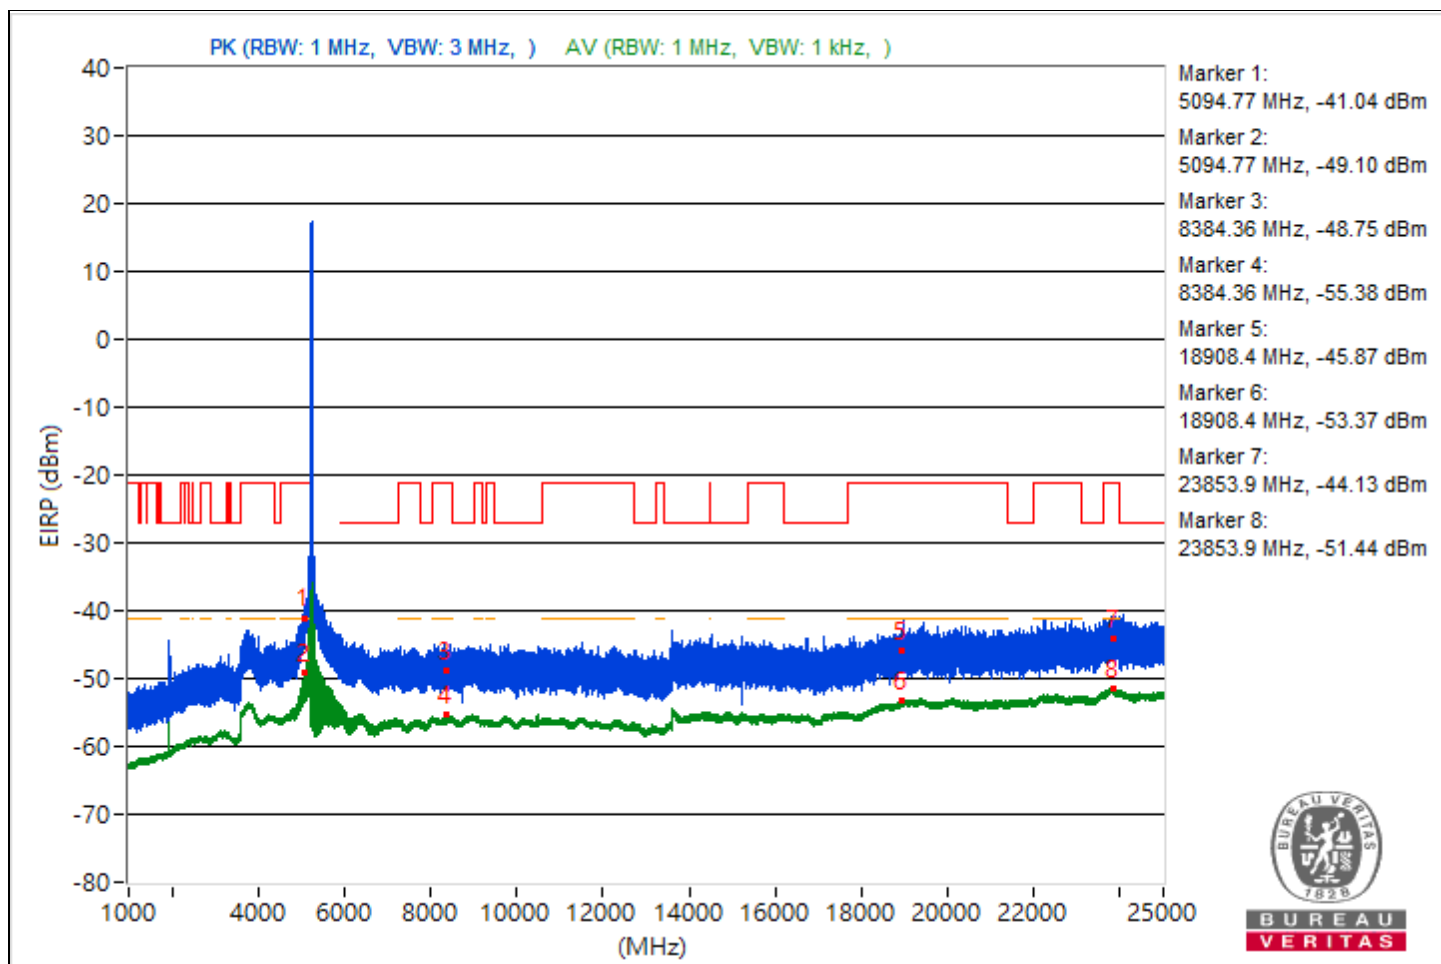


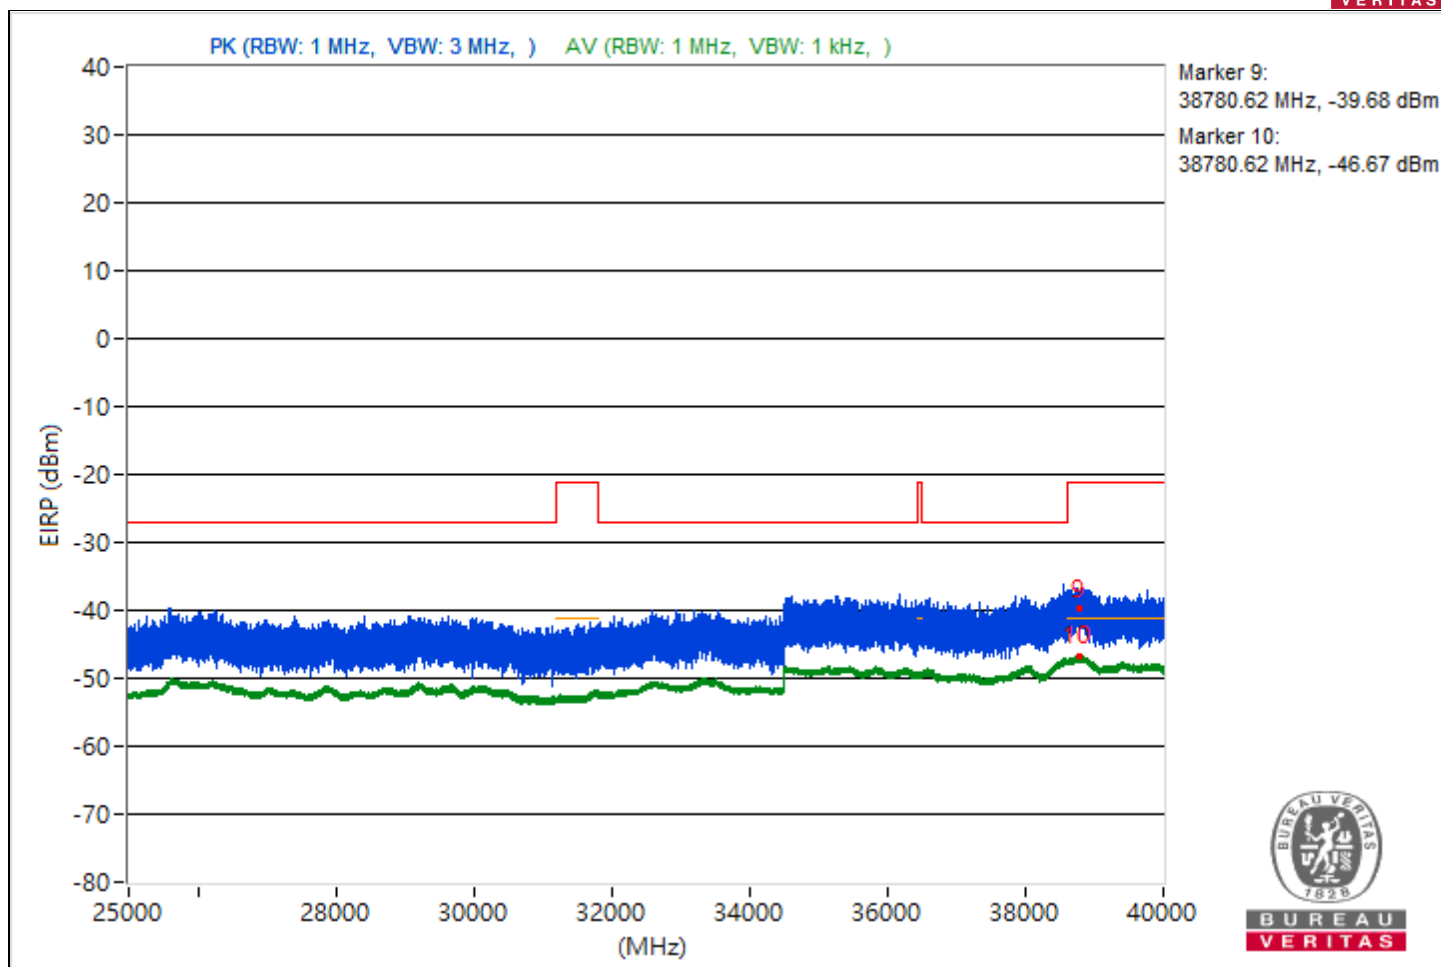


RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5098.03	52.72 PK	74	-21.28	-53.32	-54.62	8.37	-42.54
2	5098.03	46.32 AV	54	-7.68	-60.1	-60.56	8.37	-48.94
3	8415.91	47.37 PK	74	-26.63	-59.18	-59.37	8.37	-47.89
4	8415.91	40.07 AV	54	-13.93	-66.61	-66.53	8.37	-55.19
5	18999.1	49.51 PK	74	-24.49	-57.88	-56.5	8.37	-45.75
6	18999.1	41.88 AV	54	-12.12	-64.41	-65.15	8.37	-53.38
7	23774.3	52.85 PK	74	-21.15	-54.29	-53.34	8.37	-42.41
8	23774.3	44.01 AV	54	-9.99	-62.33	-62.95	8.37	-51.25
9	38790.04	54.97 PK	74	-19.03	-51.99	-51.36	8.37	-40.29
10	38790.04	48.64 AV	54	-5.36	-58.3	-57.73	8.37	-46.62

Note: Margin value = Emission Level - Limit value

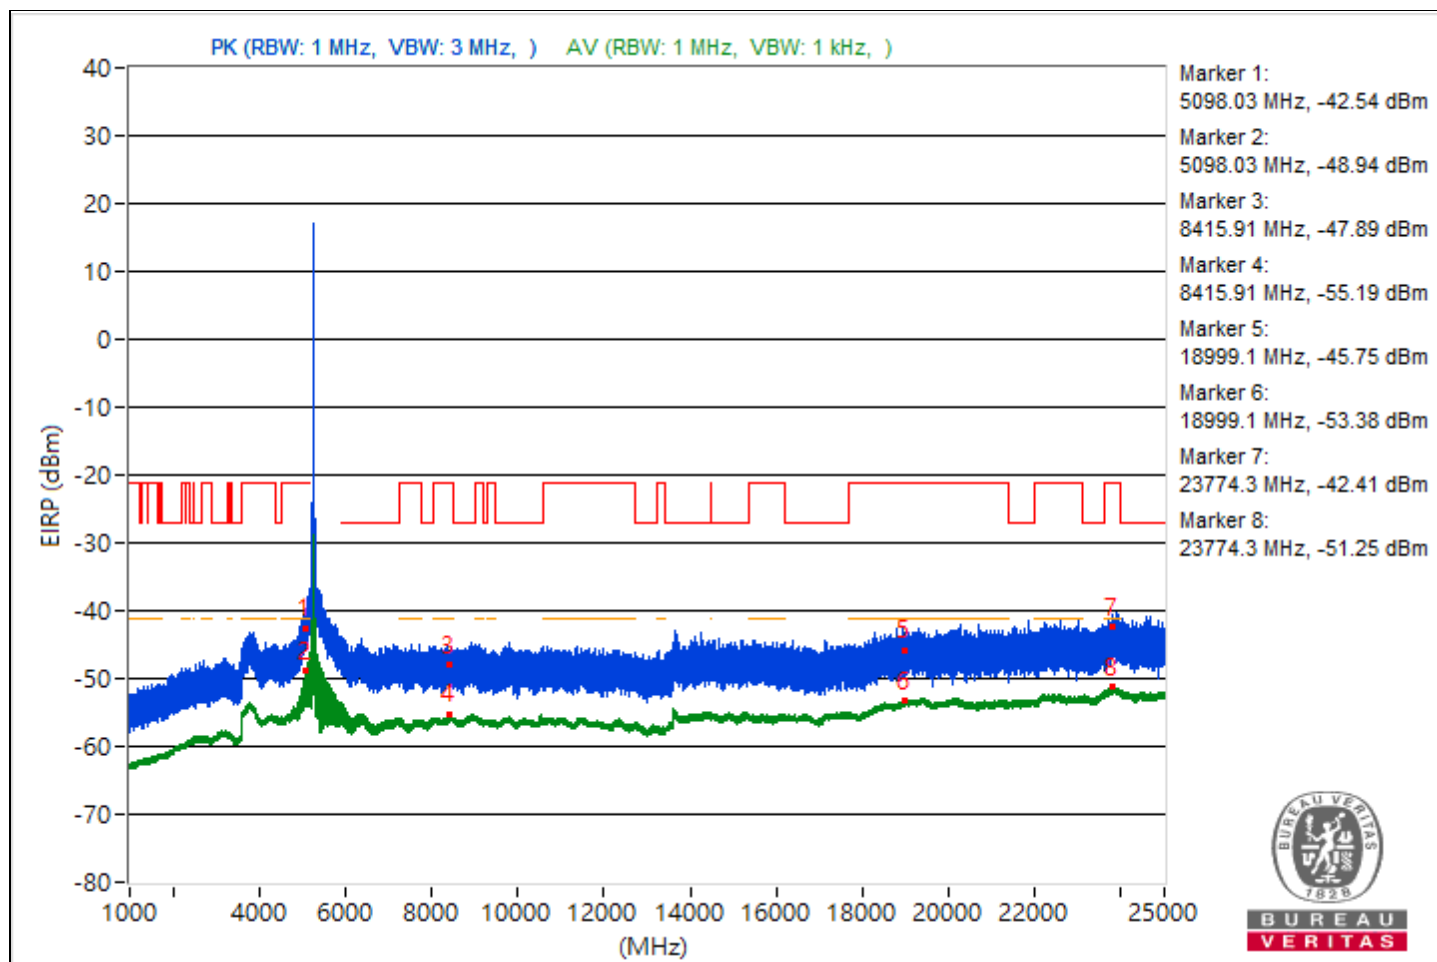


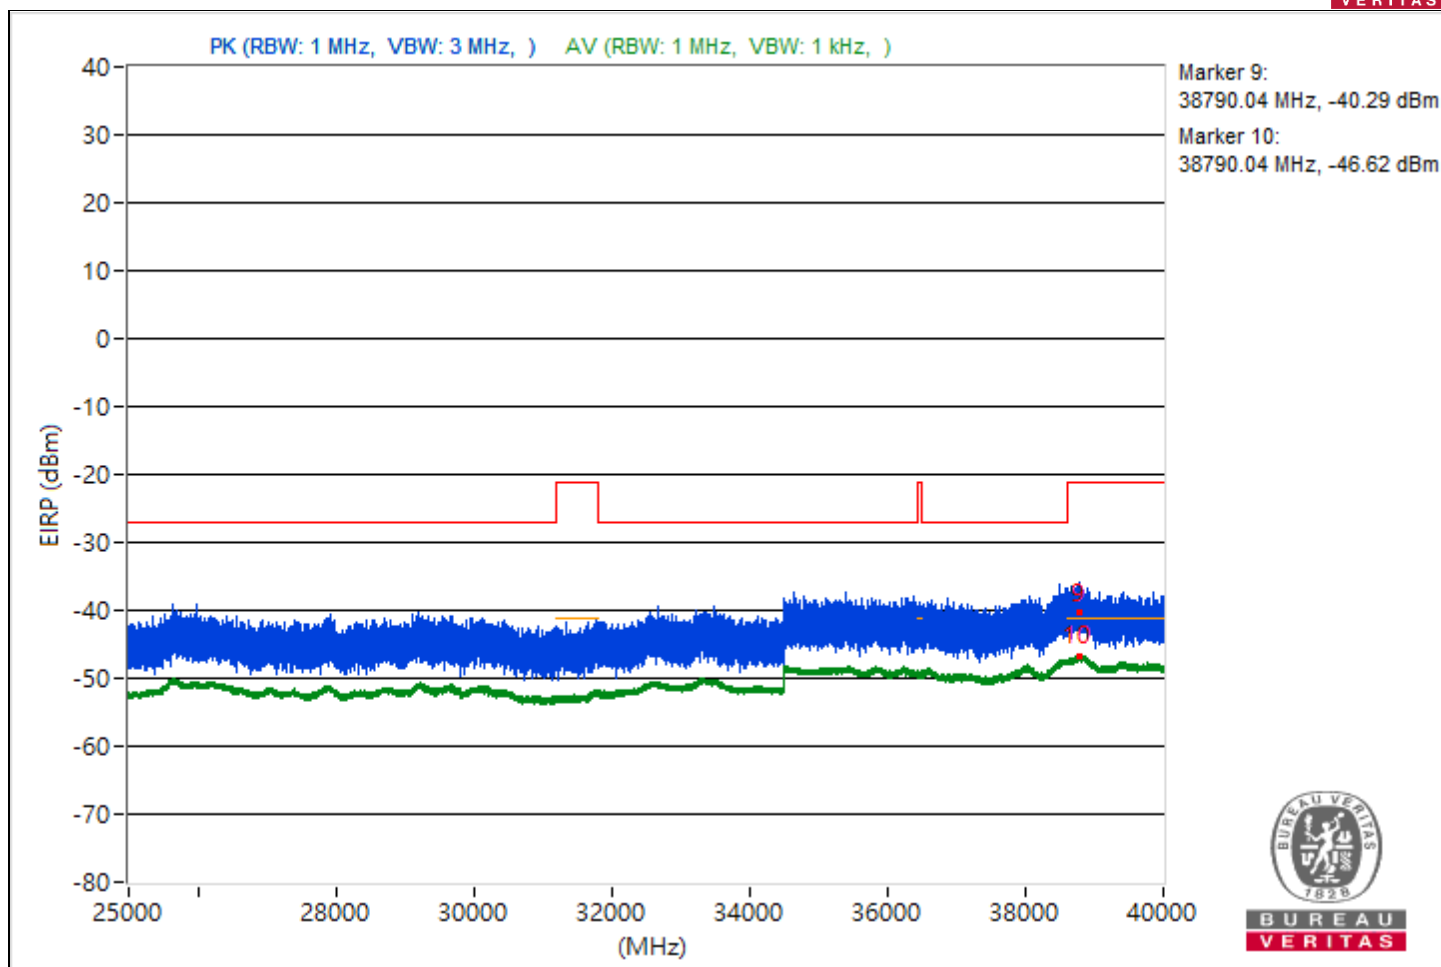


RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5096.09	52.47 PK	74	-21.53	-53.63	-54.78	8.37	-42.79
2	5096.09	45.56 AV	54	-8.44	-61.23	-60.93	8.37	-49.7
3	8480	46.12 PK	74	-27.88	-60.6	-60.45	8.37	-49.14
4	8480	39.78 AV	54	-14.22	-66.61	-67.12	8.37	-55.48
5	18988.2	48.36 PK	74	-25.64	-57.54	-59.17	8.37	-46.9
6	18988.2	41.73 AV	54	-12.27	-65.33	-64.53	8.37	-53.53
7	23773	51.35 PK	74	-22.65	-53.94	-57.25	8.37	-43.91
8	23773	44 AV	54	-10	-63.08	-62.25	8.37	-51.26
9	38774.13	56.09 PK	74	-17.91	-50.89	-50.24	8.37	-39.17
10	38774.13	48.62 AV	54	-5.38	-58.31	-57.76	8.37	-46.64

Note: Margin value = Emission Level - Limit value

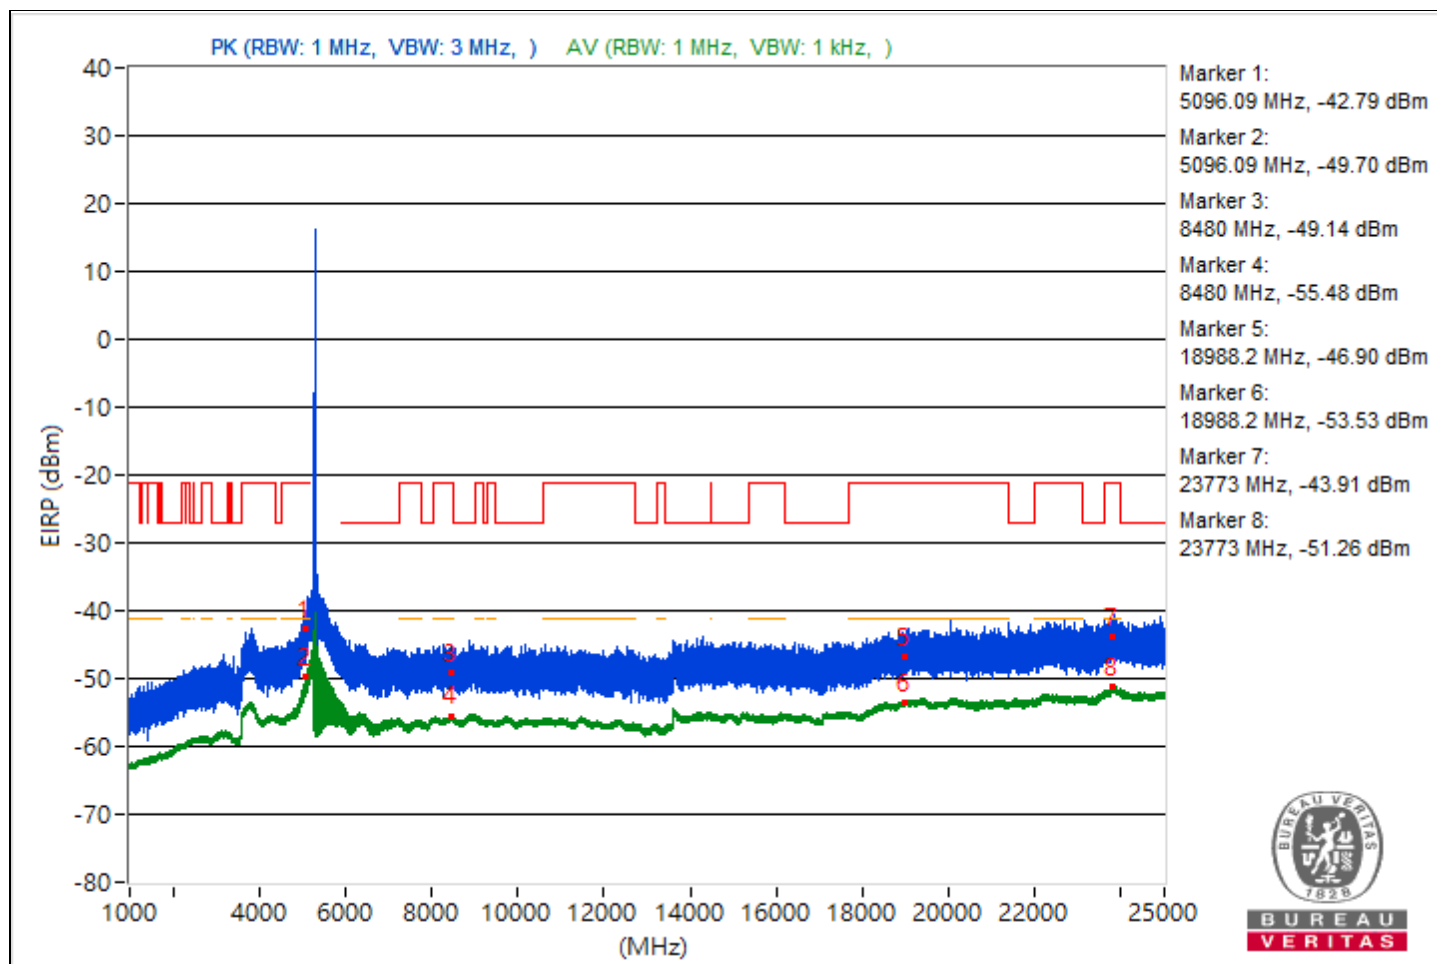


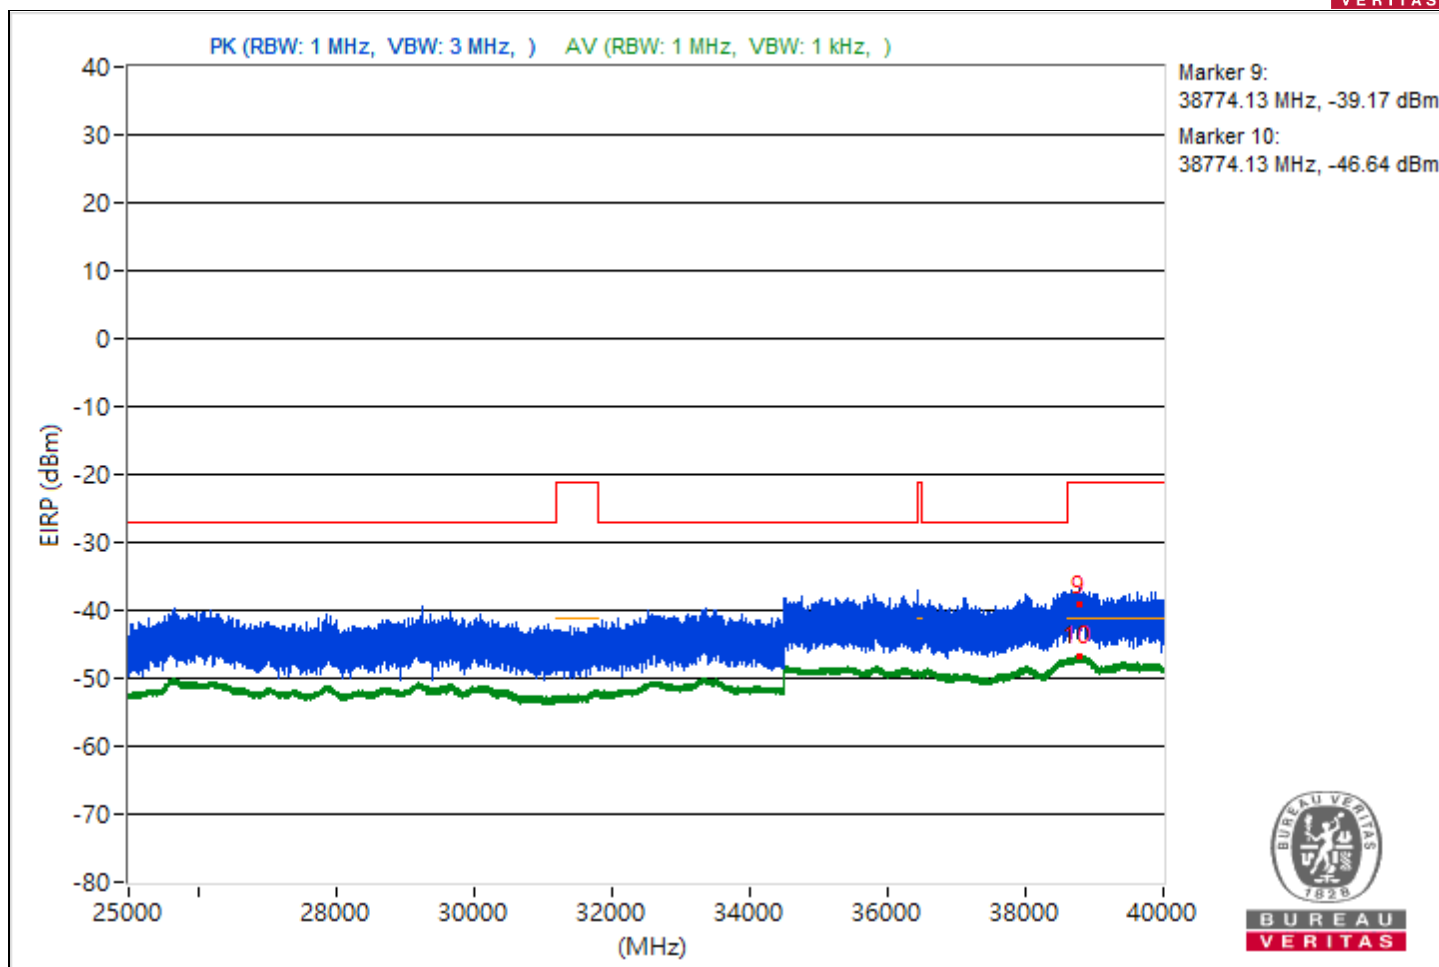


RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5093.29	54.55 PK	74	-19.45	-51.99	-52.19	8.37	-40.71
2	5093.29	45.56 AV	54	-8.44	-61.18	-60.99	8.37	-49.7
3	9035.11	48.19 PK	74	-25.81	-59.08	-57.9	8.37	-47.07
4	9035.11	39.61 AV	54	-14.39	-66.59	-67.52	8.37	-55.65
5	18998.6	49.8 PK	74	-24.2	-57.35	-56.38	8.37	-45.46
6	18998.6	41.91 AV	54	-12.09	-64.57	-64.9	8.37	-53.35
7	23847.9	49.74 PK	74	-24.26	-56.4	-57.46	8.37	-45.52
8	23847.9	43.85 AV	54	-10.15	-63.13	-62.47	8.37	-51.41
9	38753.24	55.34 PK	74	-18.66	-51.27	-51.34	8.37	-39.92
10	38753.24	48.56 AV	54	-5.44	-58.57	-57.64	8.37	-46.7

Note: Margin value = Emission Level - Limit value

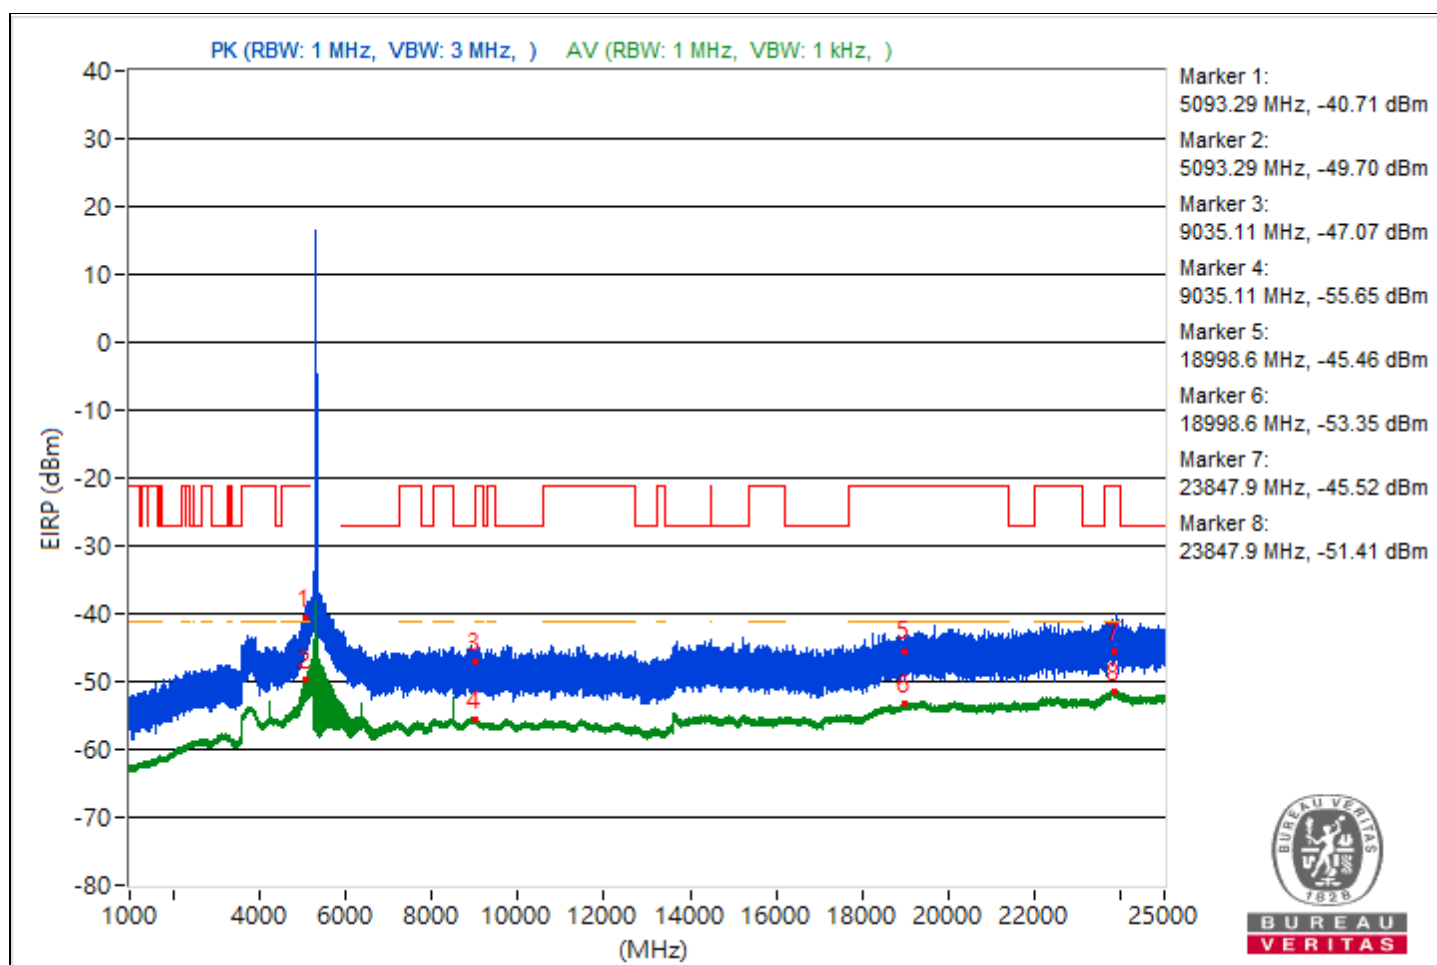


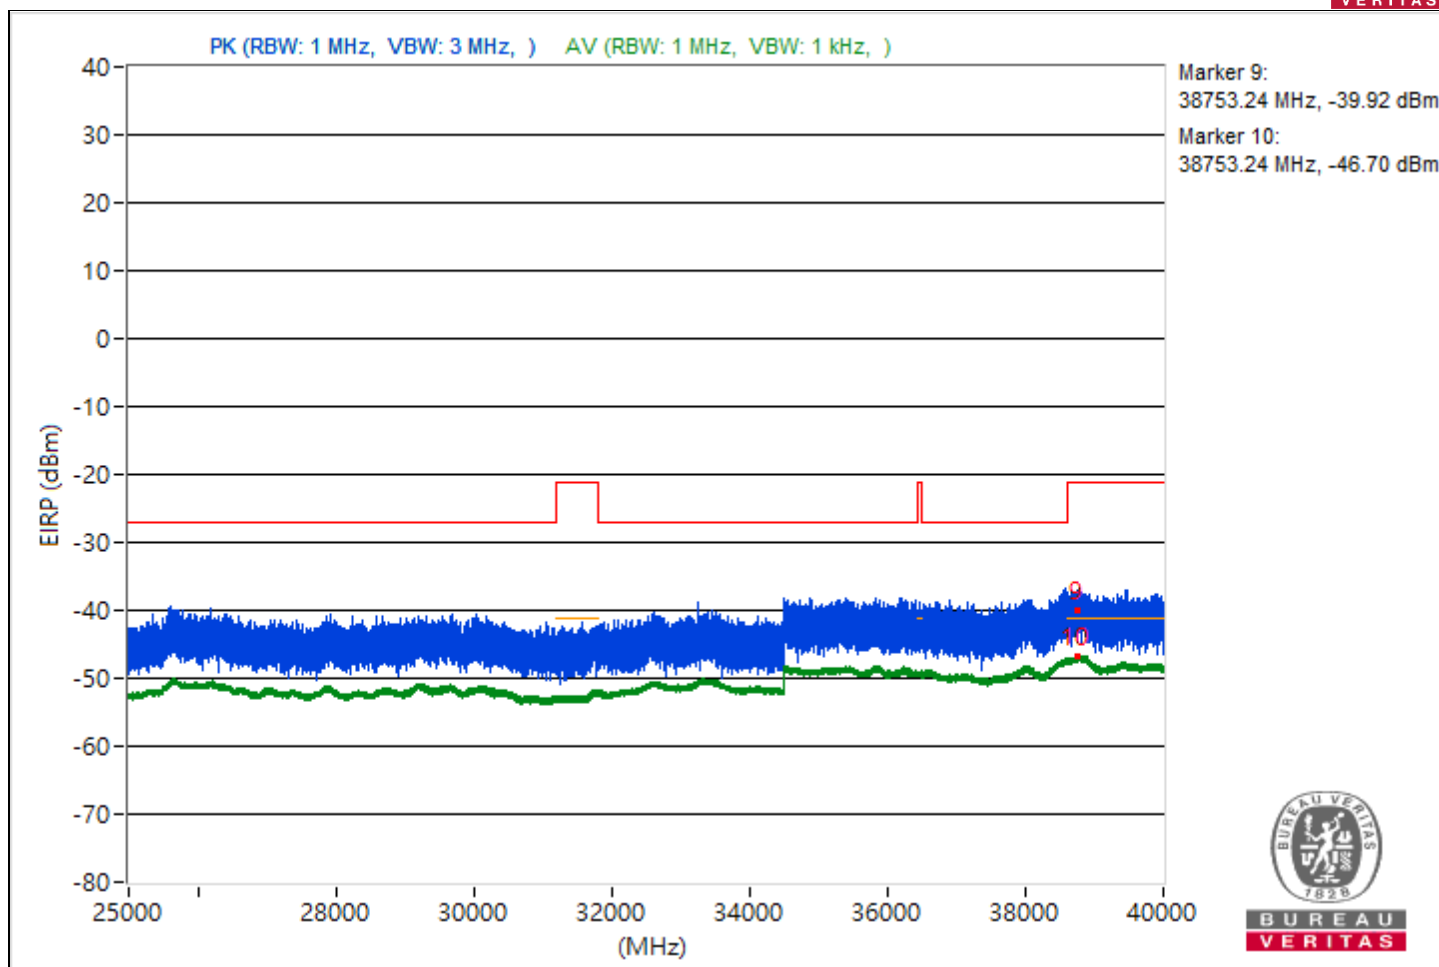


RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5090.41	50.86 PK	74	-23.14	-55.82	-55.74	8.37	-44.4
2	5090.41	44.11 AV	54	-9.89	-62.23	-62.84	8.37	-51.15
3	9019.29	47.22 PK	74	-26.78	-58.66	-60.34	8.37	-48.04
4	9019.29	39.77 AV	54	-14.23	-66.58	-67.18	8.37	-55.49
5	18997.5	49.05 PK	74	-24.95	-56.77	-58.59	8.37	-46.21
6	18997.5	41.86 AV	54	-12.14	-64.97	-64.61	8.37	-53.4
7	23774.1	51.49 PK	74	-22.51	-57.04	-53.84	8.37	-43.77
8	23774.1	43.95 AV	54	-10.05	-62.35	-63.07	8.37	-51.31
9	38772.27	55.7 PK	74	-18.3	-50.75	-51.14	8.37	-39.56
10	38772.27	48.6 AV	54	-5.4	-57.72	-58.4	8.37	-46.66

Note: Margin value = Emission Level - Limit value

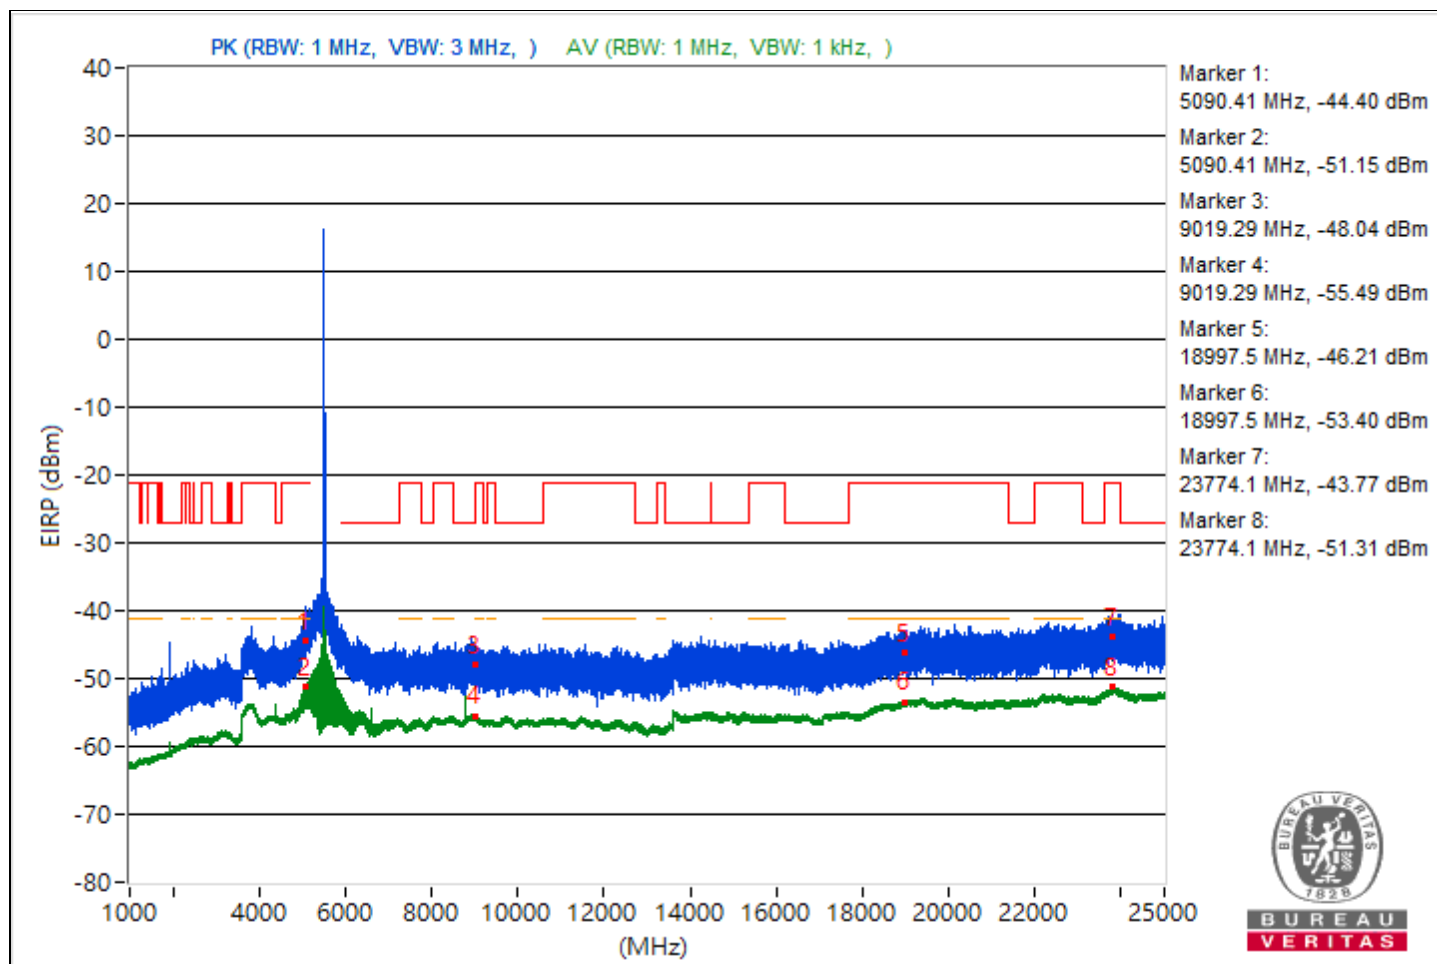


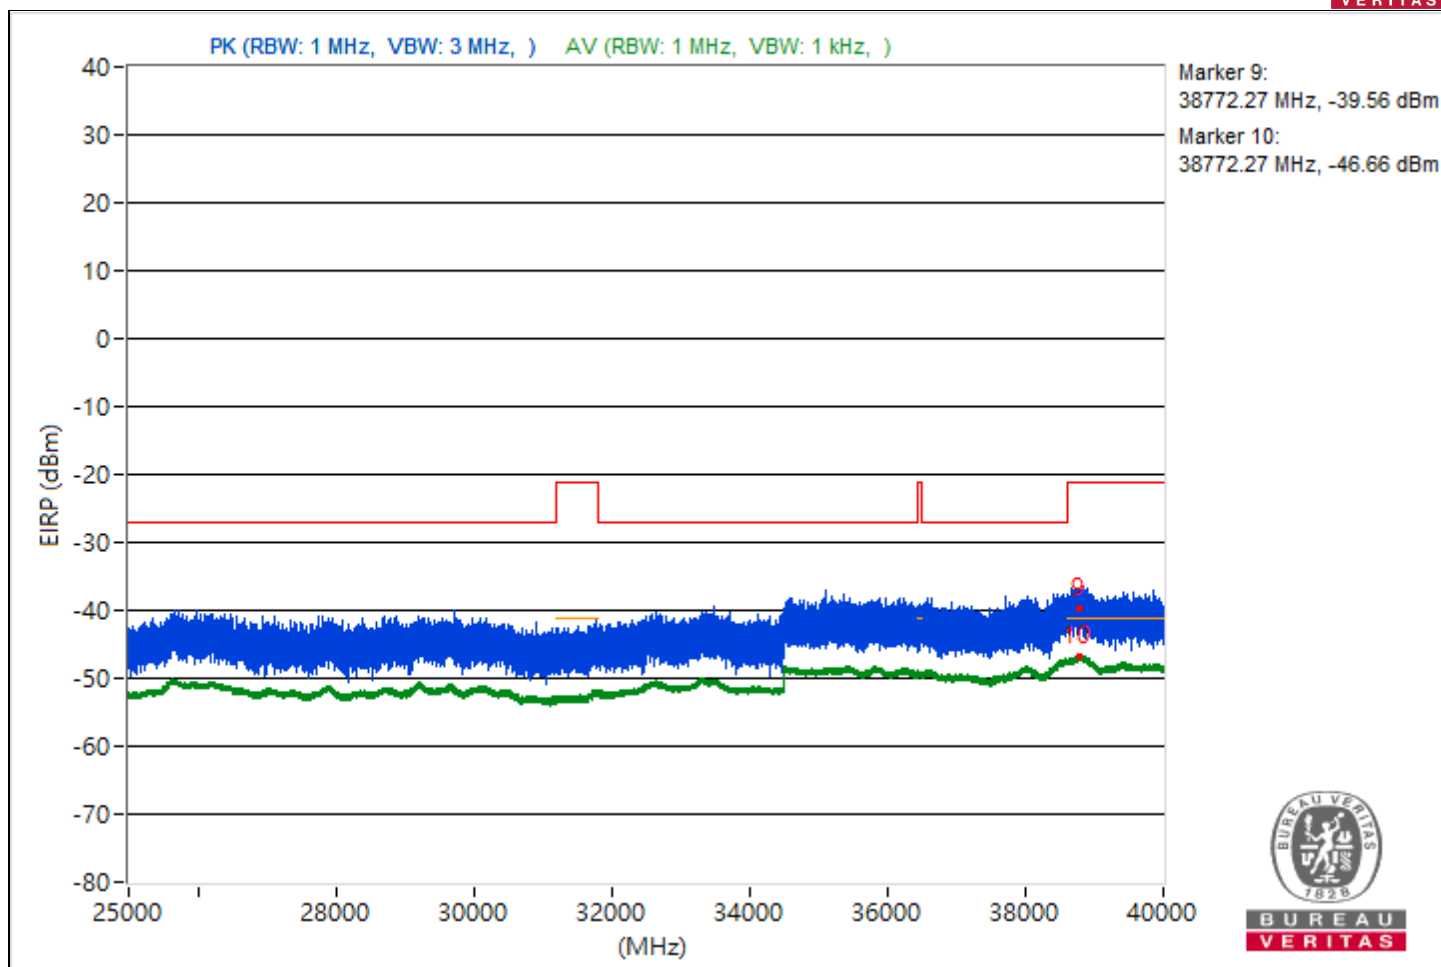


RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5092.67	50.38 PK	74	-23.62	-55.92	-56.62	8.37	-44.88
2	5092.67	43.4 AV	54	-10.6	-62.76	-63.79	8.37	-51.86
3	9048.27	46.94 PK	74	-27.06	-59.75	-59.66	8.37	-48.32
4	9048.27	39.69 AV	54	-14.31	-67.34	-66.6	8.37	-55.57
5	18993.7	49.87 PK	74	-24.13	-56.41	-57.17	8.37	-45.39
6	18993.7	41.91 AV	54	-12.09	-64.63	-64.83	8.37	-53.35
7	23847.4	50.64 PK	74	-23.36	-56.22	-55.78	8.37	-44.62
8	23847.4	43.89 AV	54	-10.11	-62.44	-63.07	8.37	-51.37
9	38792.18	55.78 PK	74	-18.22	-52.92	-49.46	8.37	-39.48
10	38792.18	48.73 AV	54	-5.27	-57.66	-58.16	8.37	-46.53

Note: Margin value = Emission Level - Limit value

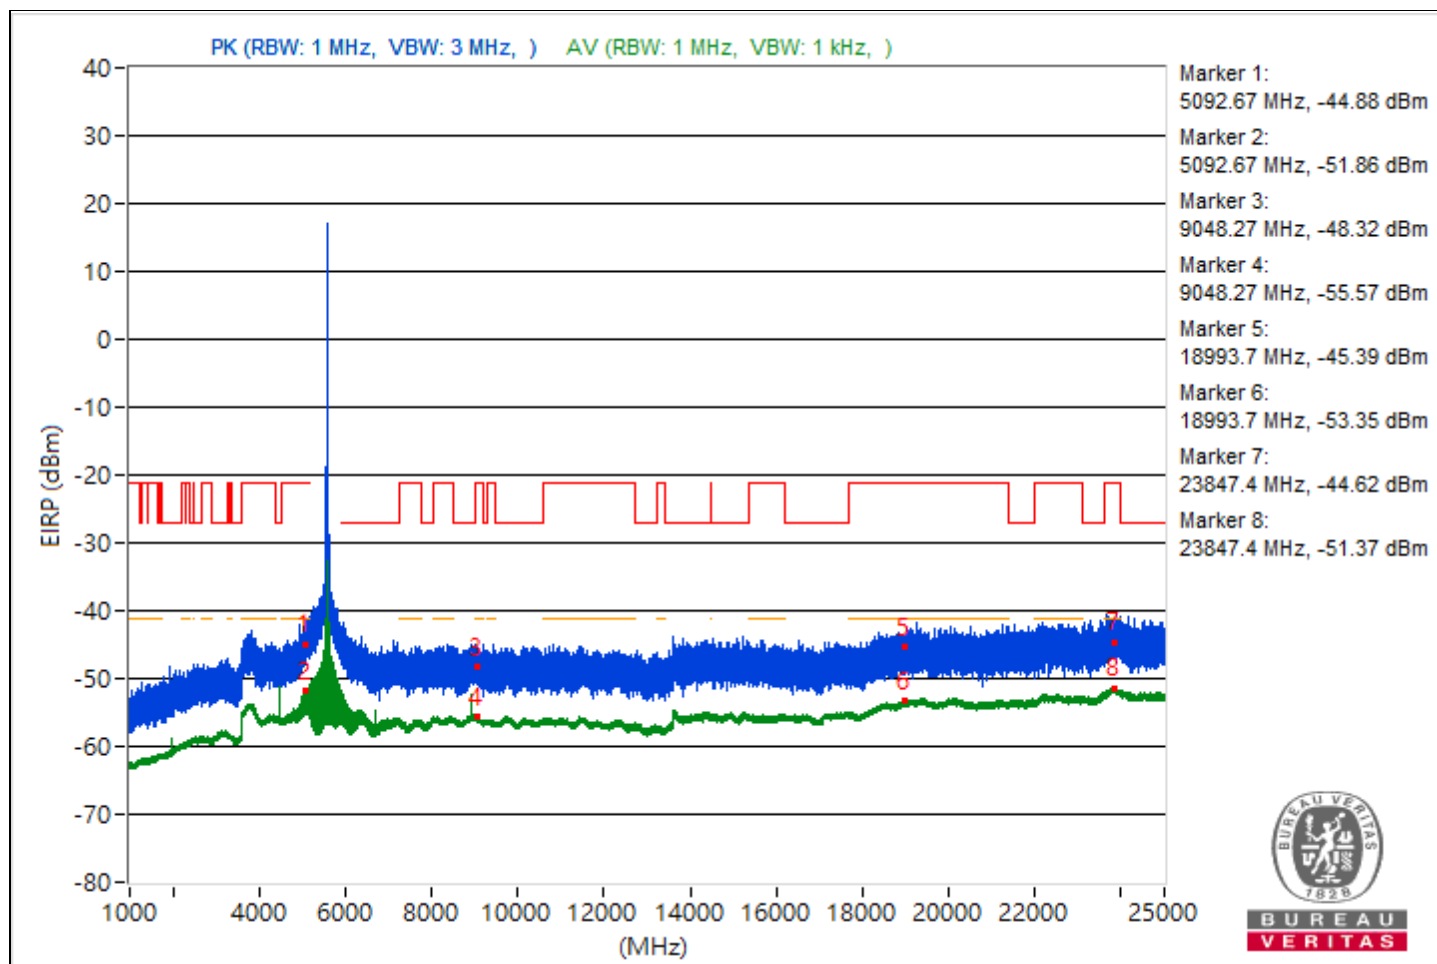


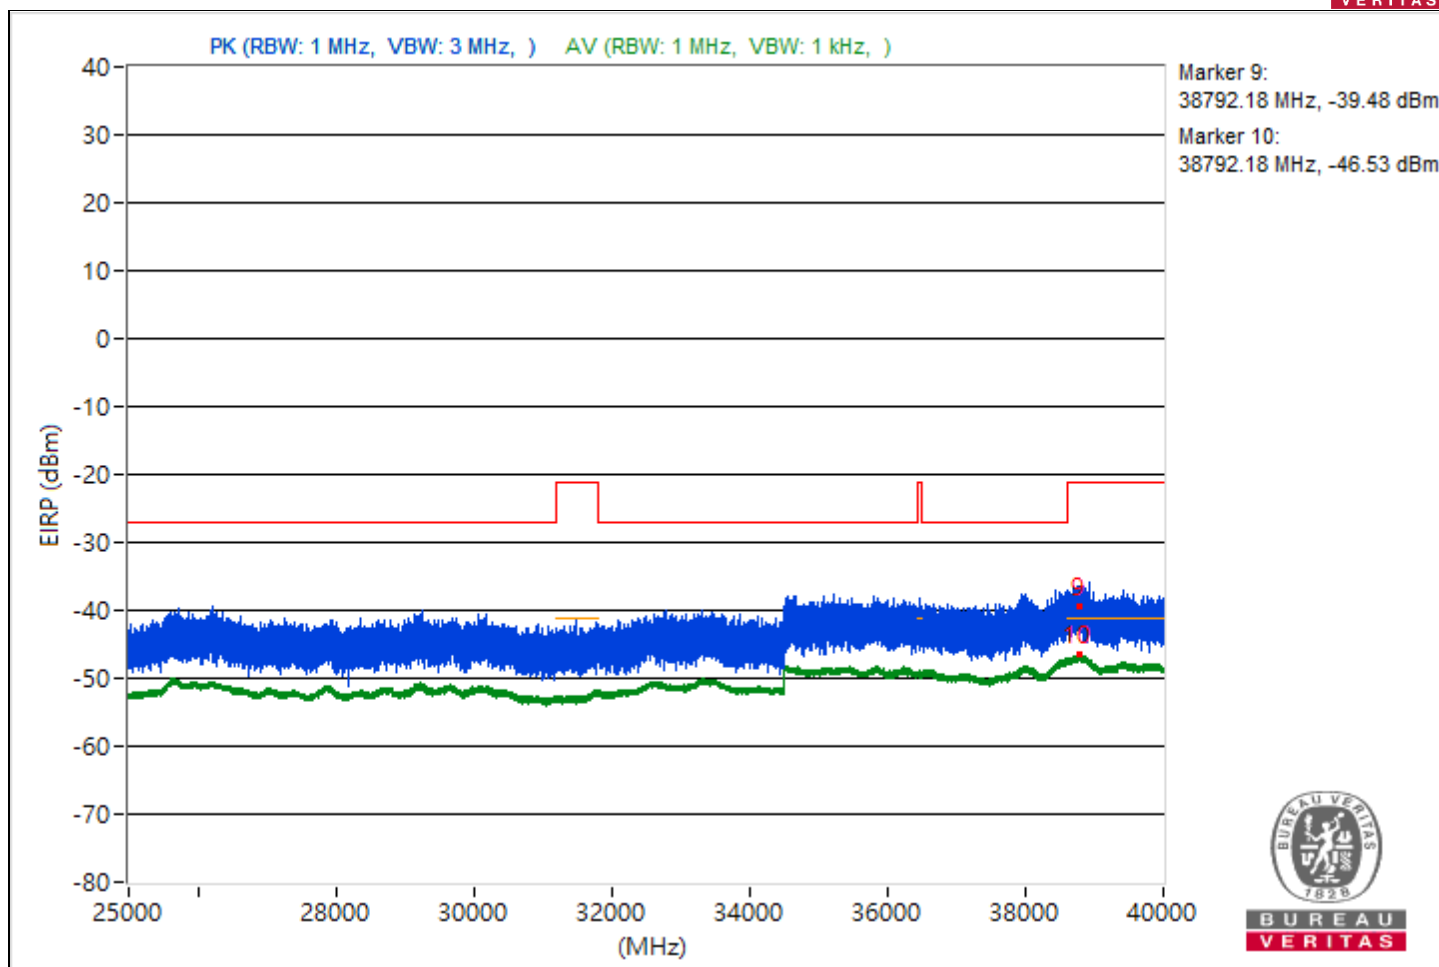


RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5083.1	49.46 PK	74	-24.54	-59.3	-55.76	8.37	-45.8
2	5083.1	41.95 AV	54	-12.05	-66.43	-63.45	8.37	-53.31
3	9120.09	49.67 PK	74	-24.33	-55.79	-58.59	8.37	-45.59
4	9120.09	43.1 AV	54	-10.9	-61.51	-67.51	8.37	-52.16
5	18983.7	47.51 PK	74	-26.49	-58.37	-60.06	8.37	-47.75
6	18983.7	41.93 AV	54	-12.07	-64.42	-65.01	8.37	-53.33
7	23784.3	50.66 PK	74	-23.34	-55.9	-56.05	8.37	-44.6
8	23784.3	44.12 AV	54	-9.88	-62.21	-62.86	8.37	-51.14
9	38812.27	55.54 PK	74	-18.46	-51.18	-51.02	8.37	-39.72
10	38812.27	48.64 AV	54	-5.36	-57.82	-58.18	8.37	-46.62

Note: Margin value = Emission Level - Limit value

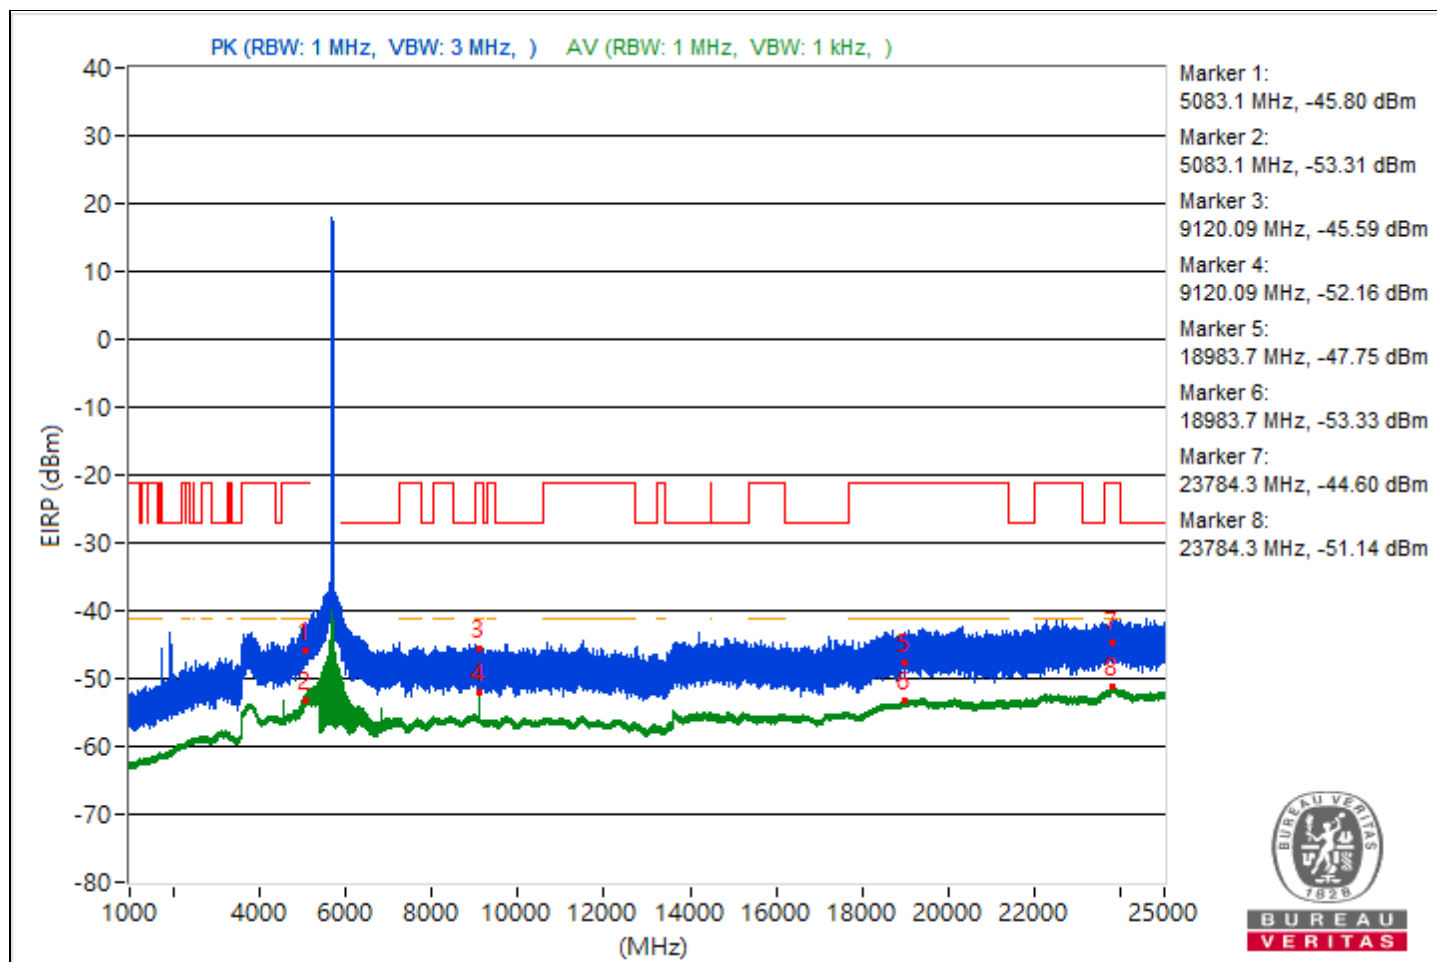


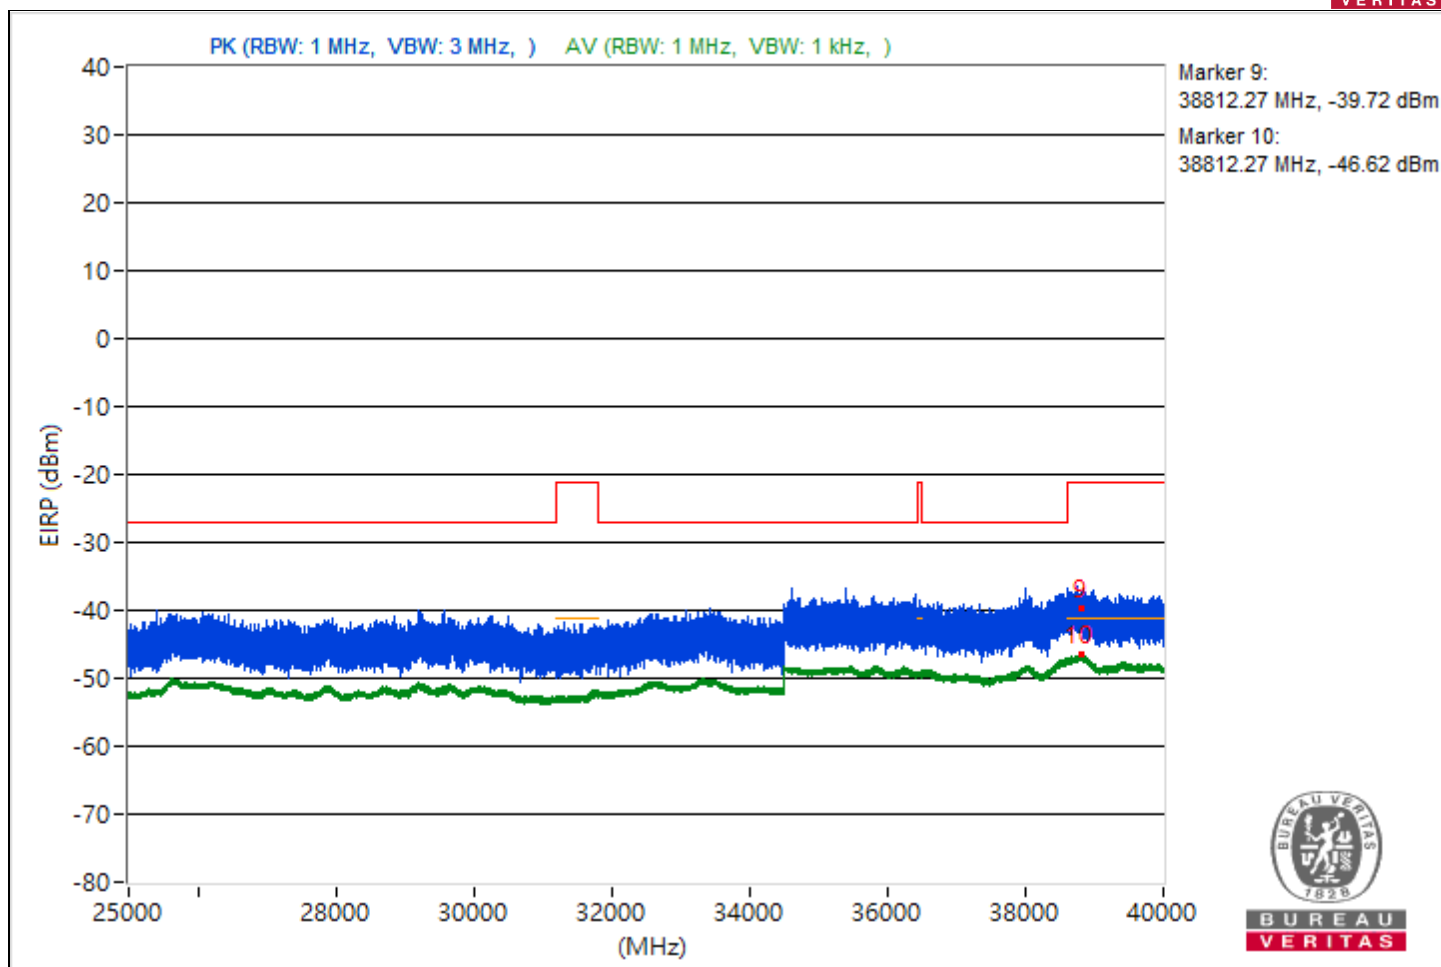


RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4576.3	50.73 PK	74	-23.27	-53.83	-60.04	8.37	-44.53
2	4576.3	43.93 AV	54	-10.07	-60.54	-67.22	8.37	-51.33
3	9029.33	48.14 PK	74	-25.86	-57.61	-59.62	8.37	-47.12
4	9029.33	39.78 AV	54	-14.22	-67.05	-66.68	8.37	-55.48
5	18968.5	47.78 PK	74	-26.22	-57.37	-61.13	8.37	-47.48
6	18968.5	41.87 AV	54	-12.13	-65.03	-64.54	8.37	-53.39
7	23823.3	50.61 PK	74	-23.39	-55.04	-57.32	8.37	-44.65
8	23823.3	44.03 AV	54	-9.97	-62.48	-62.75	8.37	-51.23
9	38776.36	55.09 PK	74	-18.91	-51.39	-51.71	8.37	-40.17
10	38776.36	48.69 AV	54	-5.31	-57.76	-58.15	8.37	-46.57

Note: Margin value = Emission Level - Limit value

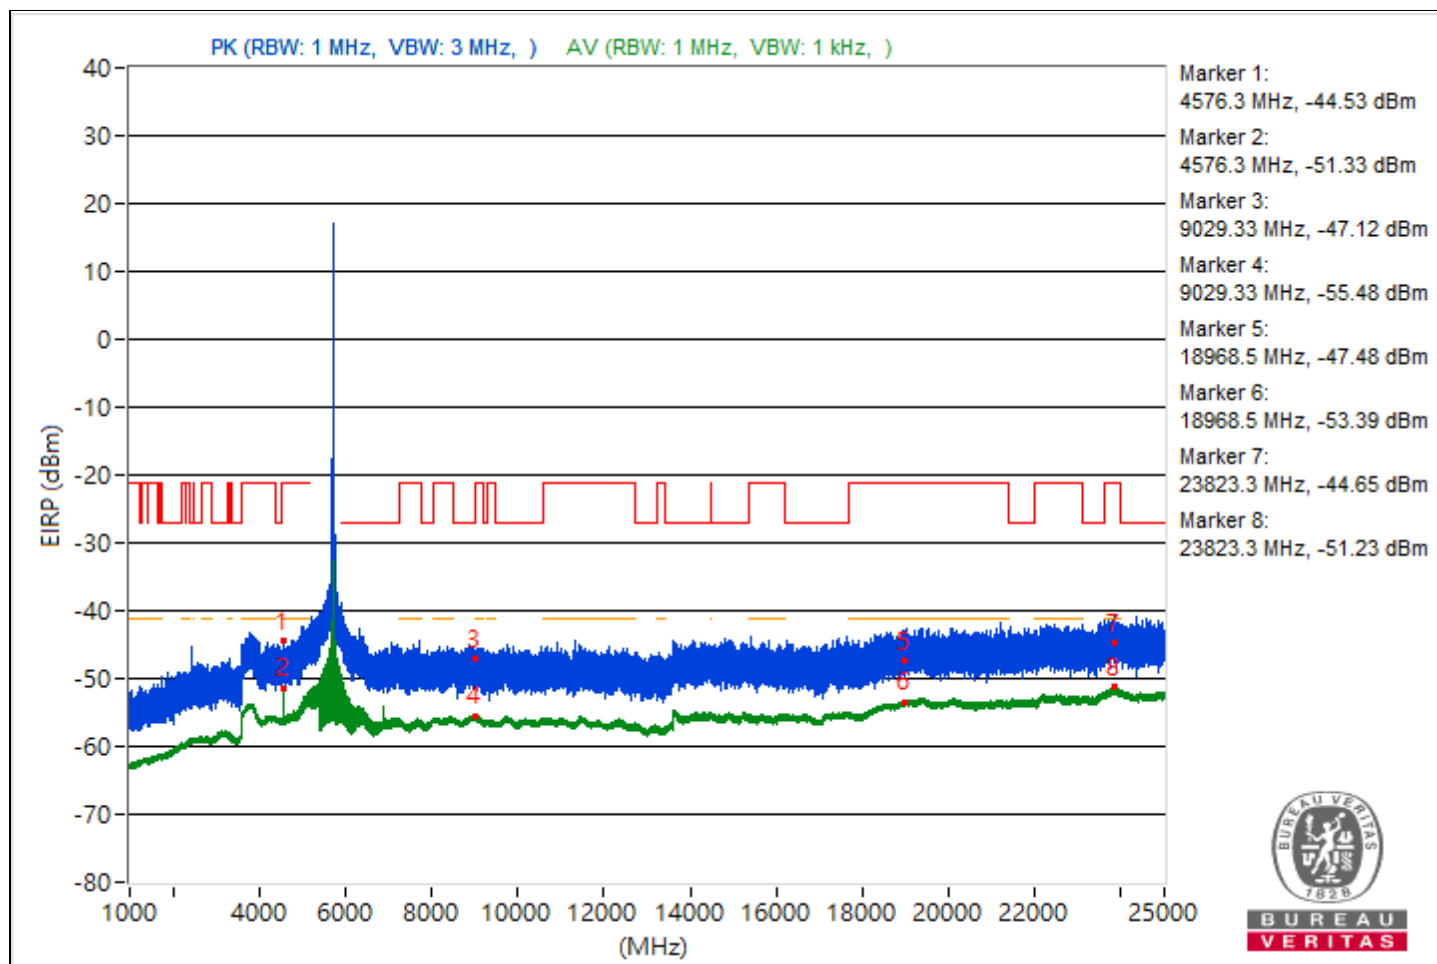


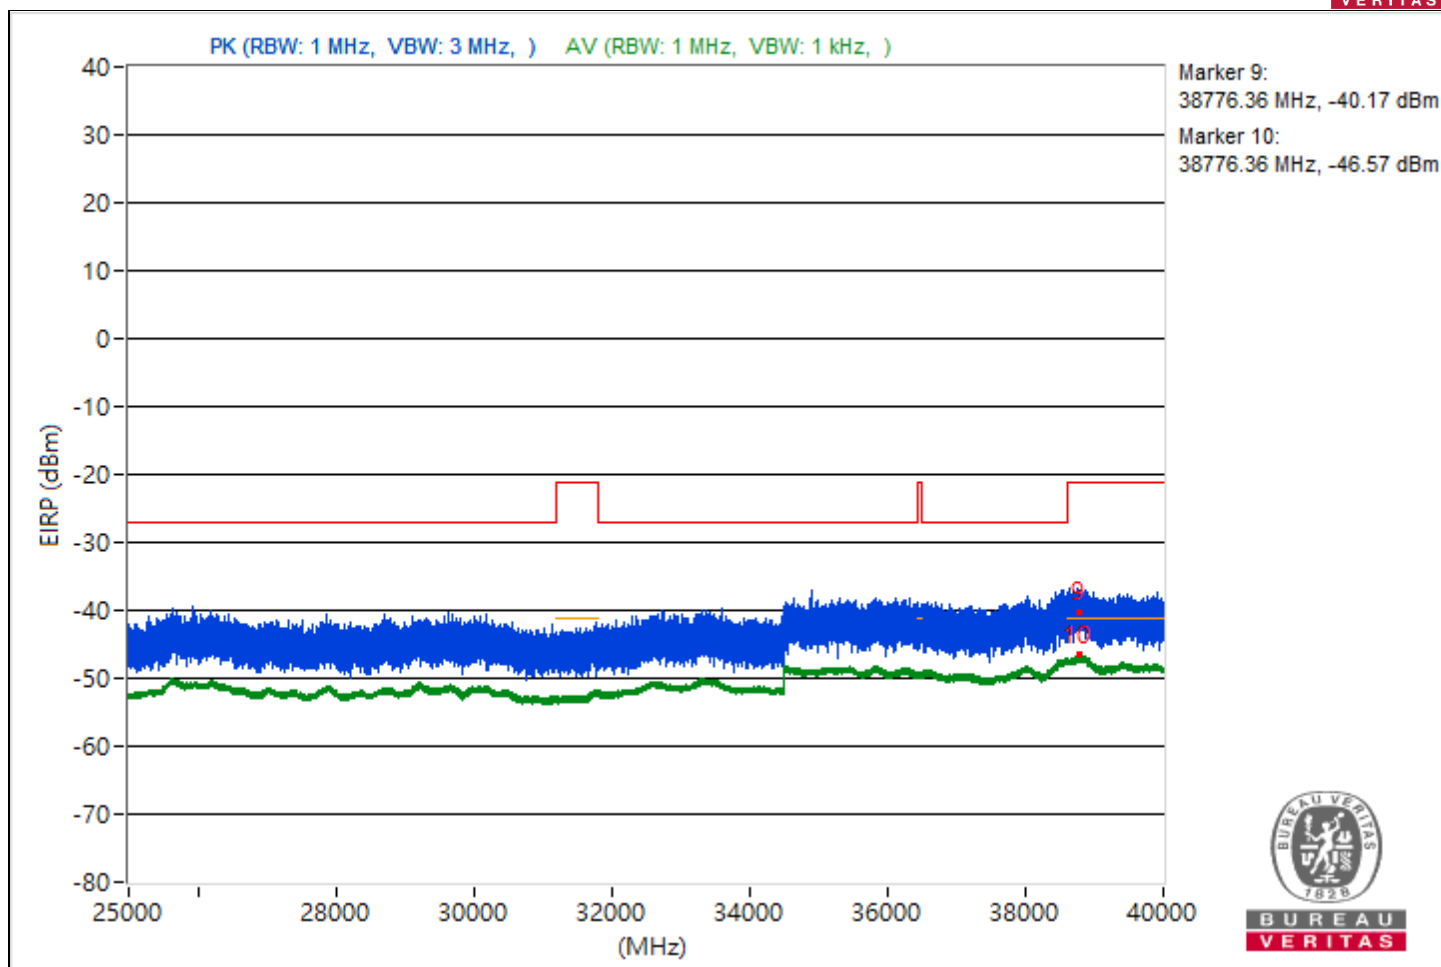


RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4595.98	48.89 PK	74	-25.11	-56.05	-60.61	8.37	-46.37
2	4595.98	43.91 AV	54	-10.09	-60.44	-67.9	8.37	-51.35
3	11489.96	56.69 PK	74	-17.31	-48.71	-51.69	8.37	-38.57
4	11489.96	47.58 AV	54	-6.42	-57.34	-61.95	8.37	-47.68
5	18992.6	49.24 PK	74	-24.76	-59	-56.23	8.37	-46.02
6	18992.6	42.11 AV	54	-11.89	-64.71	-64.36	8.37	-53.15
7	23856.2	50.34 PK	74	-23.66	-56.45	-56.16	8.37	-44.92
8	23856.2	43.86 AV	54	-10.14	-62.37	-63.23	8.37	-51.4
9	38786.93	52.93 PK	74	-21.07	-53.88	-53.56	8.37	-42.33
10	38786.93	48.62 AV	54	-5.38	-57.61	-58.48	8.37	-46.64

Note: Margin value = Emission Level - Limit value

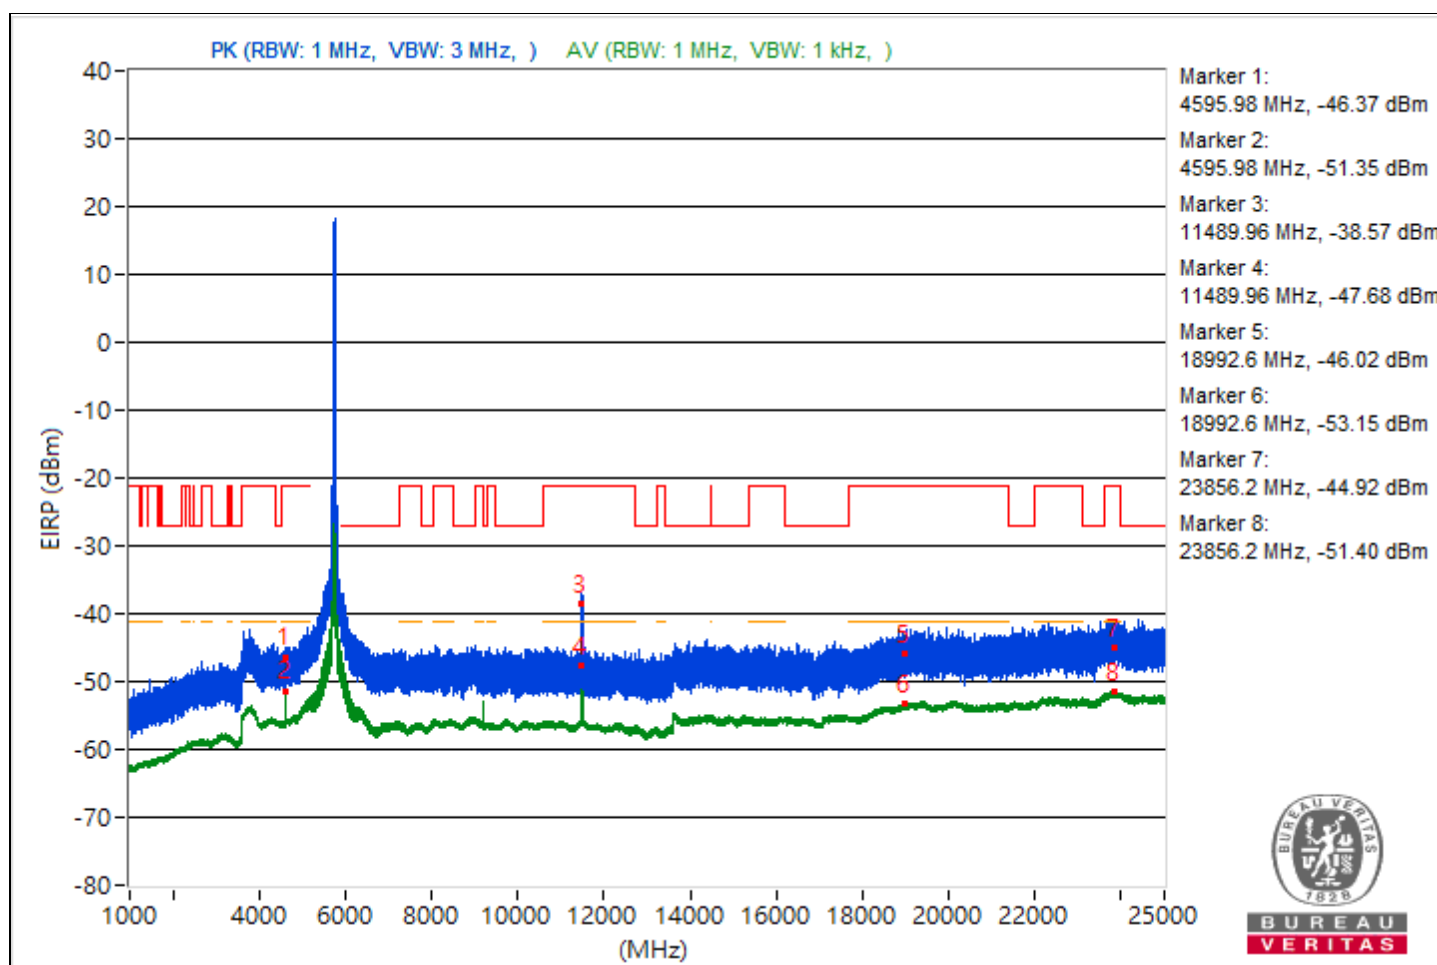


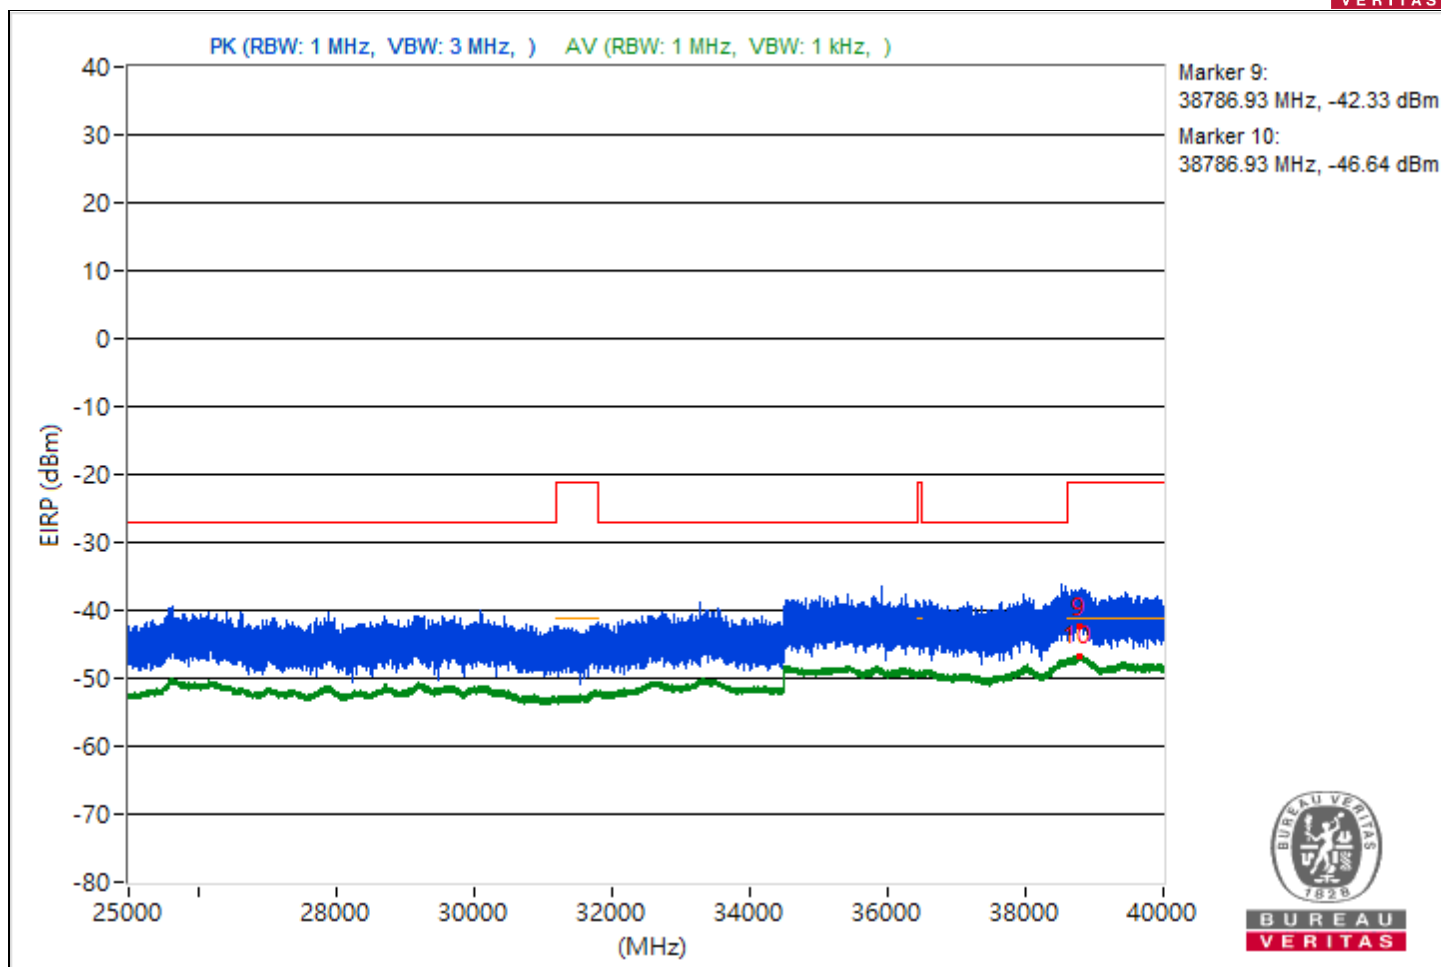


RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4628.02	50.57 PK	74	-23.43	-54.4	-58.84	8.37	-44.69
2	4628.02	44.65 AV	54	-9.35	-59.79	-66.71	8.37	-50.61
3	11569.33	53.84 PK	74	-20.16	-54.03	-51.85	8.37	-41.42
4	11569.33	47.41 AV	54	-6.59	-57.78	-61.45	8.37	-47.85
5	18987.7	50.7 PK	74	-23.3	-54.62	-57.83	8.37	-44.56
6	18987.7	41.97 AV	54	-12.03	-64.58	-64.76	8.37	-53.29
7	23851.9	50.28 PK	74	-23.72	-54.85	-58.69	8.37	-44.98
8	23851.9	43.96 AV	54	-10.04	-62.96	-62.41	8.37	-51.3
9	38804.27	54.11 PK	74	-19.89	-50.72	-55.71	8.37	-41.15
10	38804.27	48.56 AV	54	-5.44	-57.72	-58.47	8.37	-46.7

Note: Margin value = Emission Level - Limit value

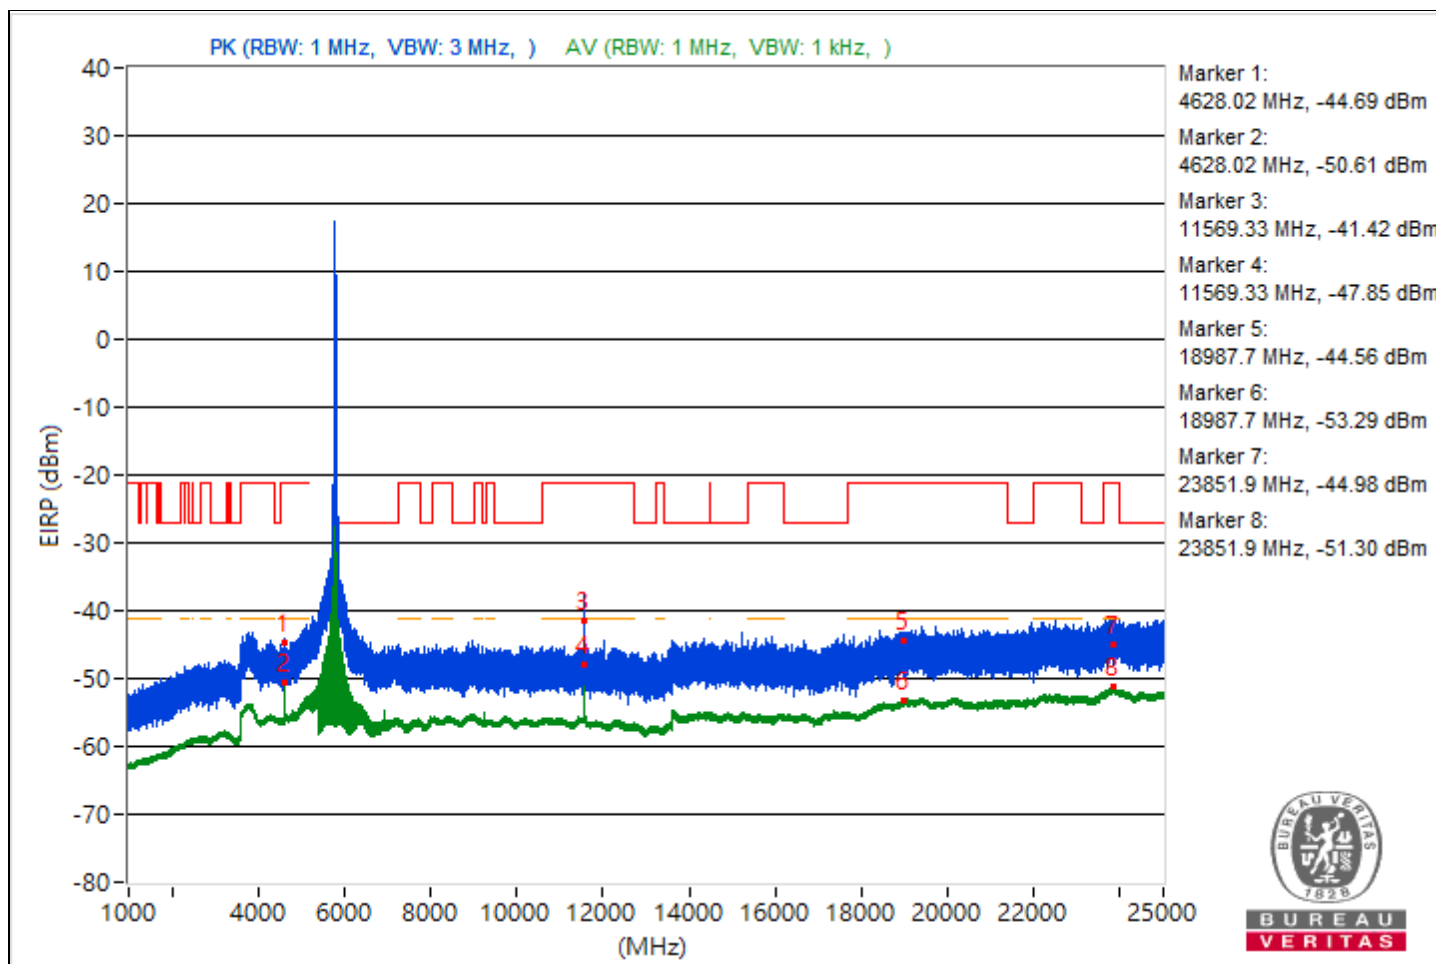


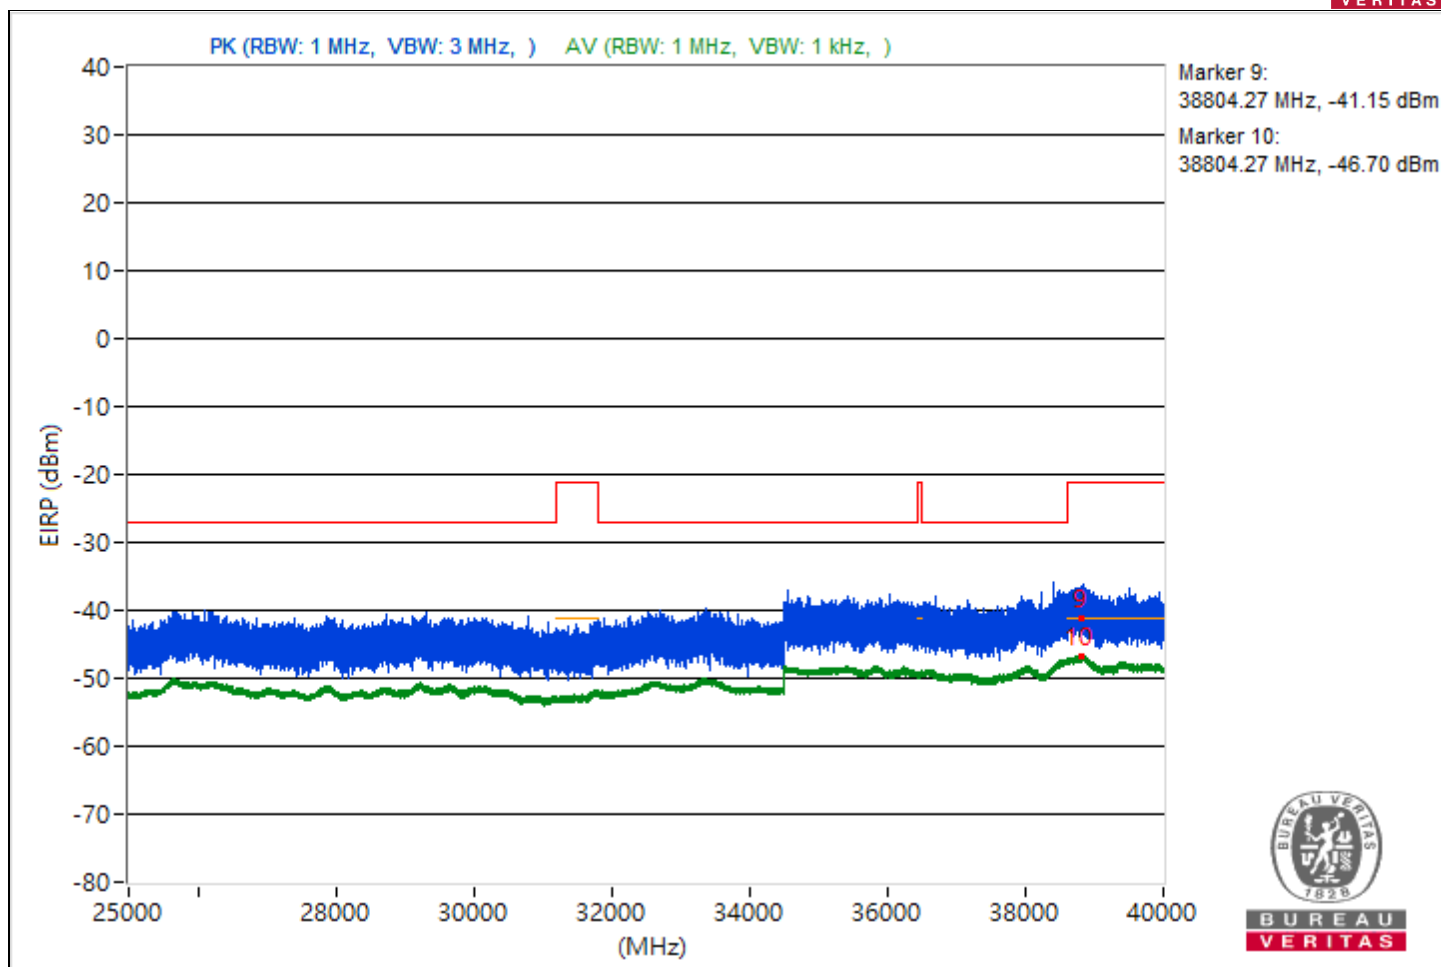


RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4659.91	50.27 PK	74	-23.73	-54.86	-58.73	8.37	-44.99
2	4659.91	45.55 AV	54	-8.45	-58.64	-67.26	8.37	-49.71
3	11650.4	53.14 PK	74	-20.86	-52.34	-55.08	8.37	-42.12
4	11650.4	46.96 AV	54	-7.04	-57.98	-62.52	8.37	-48.3
5	18984.7	47.94 PK	74	-26.06	-58.17	-59.31	8.37	-47.32
6	18984.7	41.86 AV	54	-12.14	-65.15	-64.44	8.37	-53.4
7	23839.2	51.08 PK	74	-22.92	-55.46	-55.66	8.37	-44.18
8	23839.2	44.01 AV	54	-9.99	-62.24	-63.06	8.37	-51.25
9	38774.04	54.21 PK	74	-19.79	-53.37	-51.66	8.37	-41.05
10	38774.04	48.7 AV	54	-5.3	-57.6	-58.31	8.37	-46.56

Note: Margin value = Emission Level - Limit value

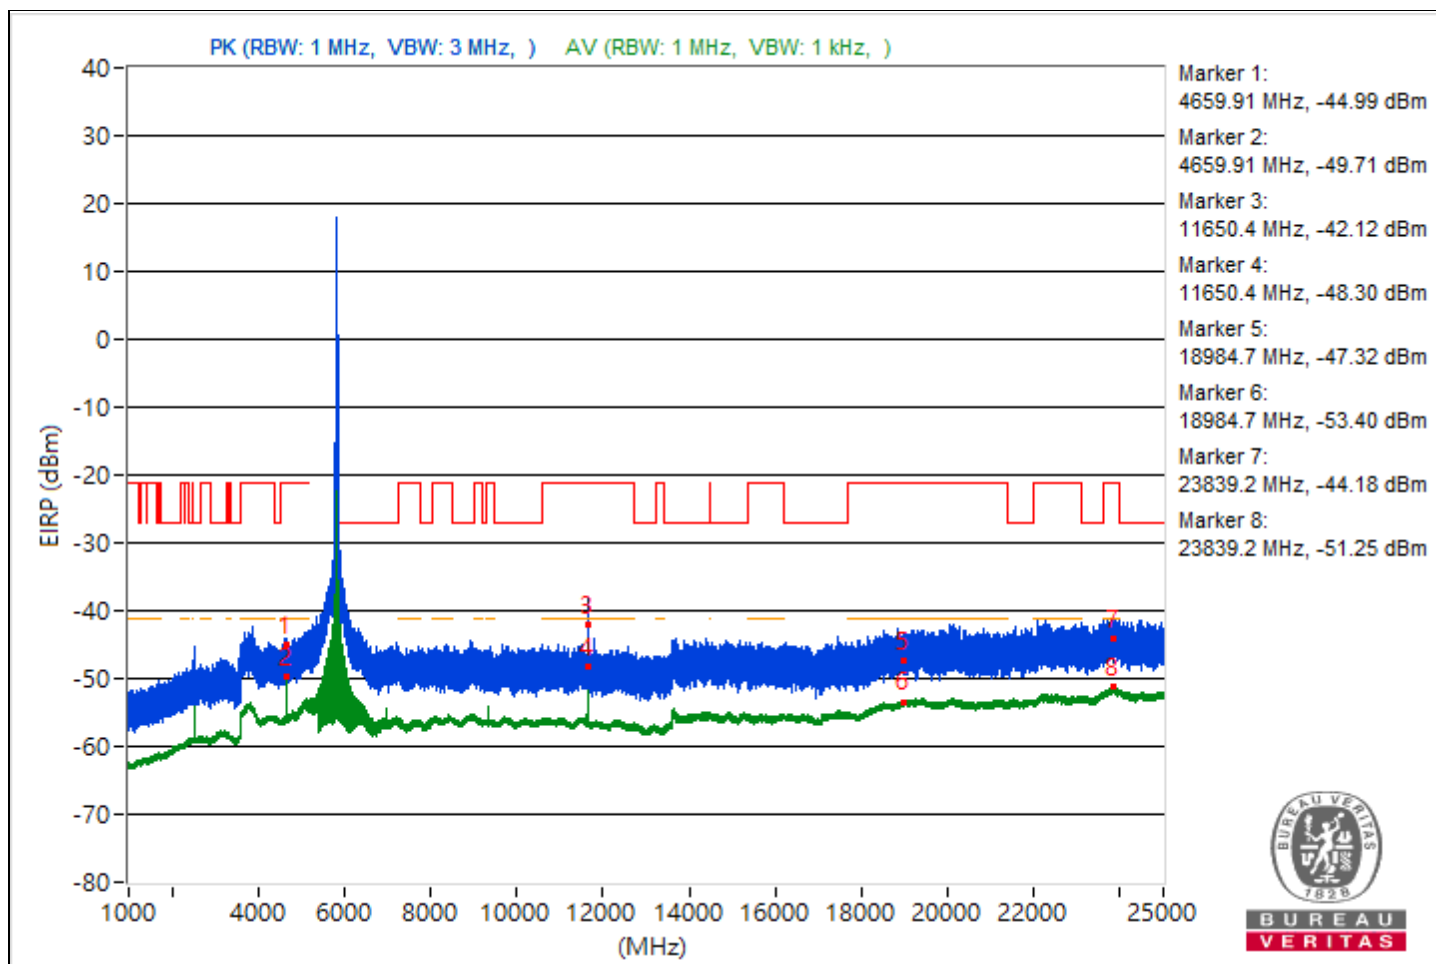


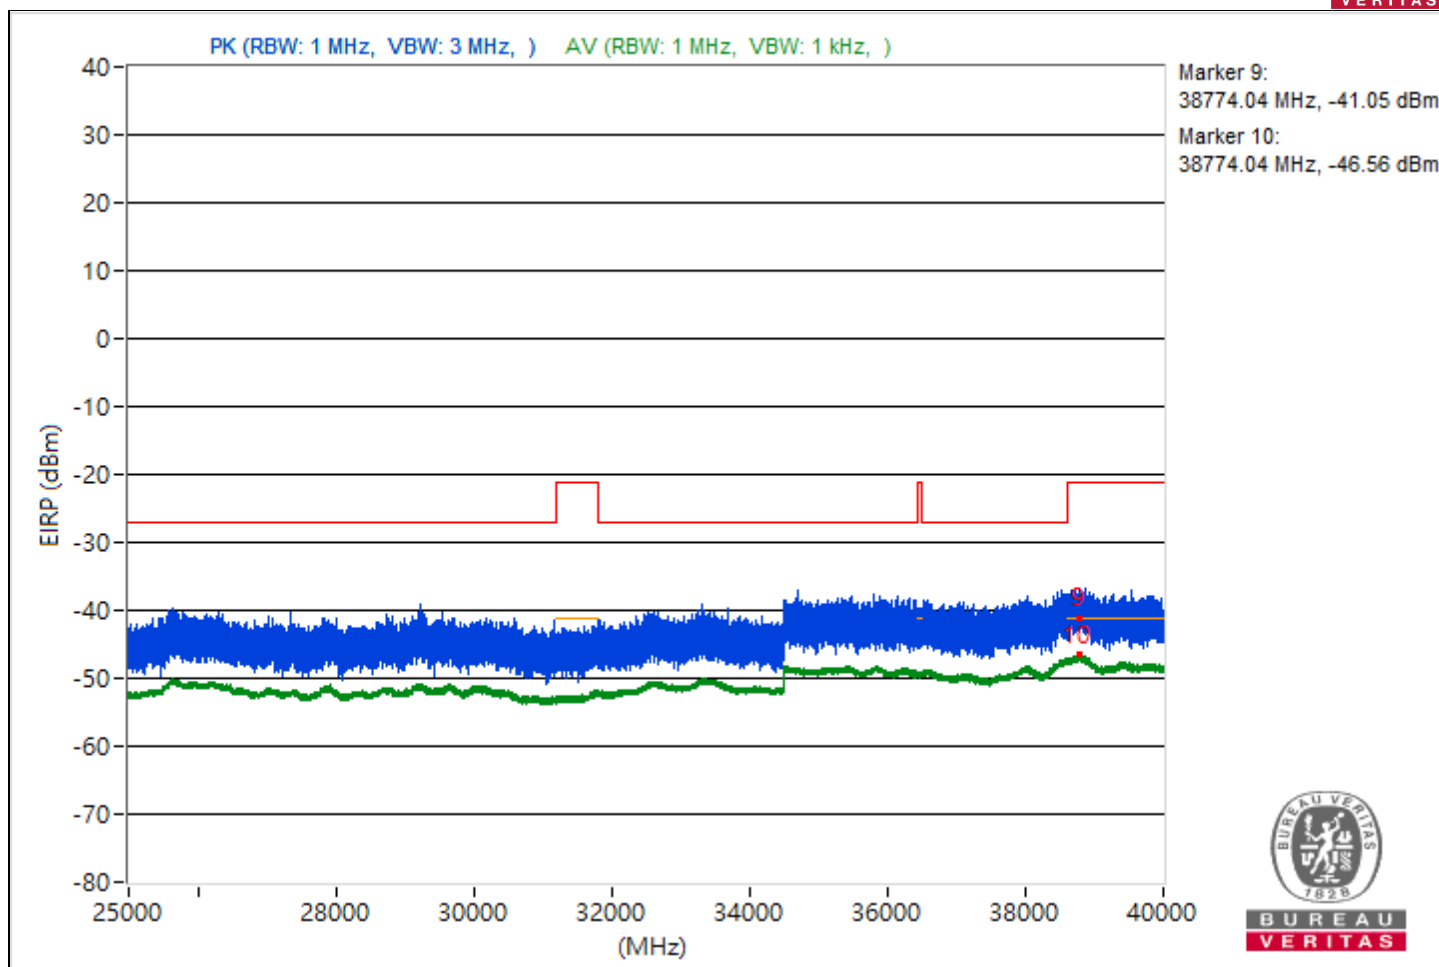


RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.43	53.38 PK	74	-20.62	-53.76	-52.82	8.37	-41.88
2	5099.43	47.84 AV	54	-6.16	-58.77	-58.83	8.37	-47.42
3	8304.09	48.5 PK	74	-25.5	-56.35	-61.26	8.37	-46.76
4	8304.09	43.31 AV	54	-10.69	-61.31	-67.25	8.37	-51.95
5	18977.9	50.12 PK	74	-23.88	-56.67	-56.37	8.37	-45.14
6	18977.9	41.8 AV	54	-12.2	-64.72	-64.97	8.37	-53.46
7	23829.5	49.2 PK	74	-24.8	-57.29	-57.59	8.37	-46.06
8	23829.5	43.65 AV	54	-10.35	-63.48	-62.55	8.37	-51.61
9	38781.42	55.98 PK	74	-18.02	-50.75	-50.56	8.37	-39.28
10	38781.42	48.21 AV	54	-5.79	-58.94	-57.98	8.37	-47.05

Note: Margin value = Emission Level - Limit value

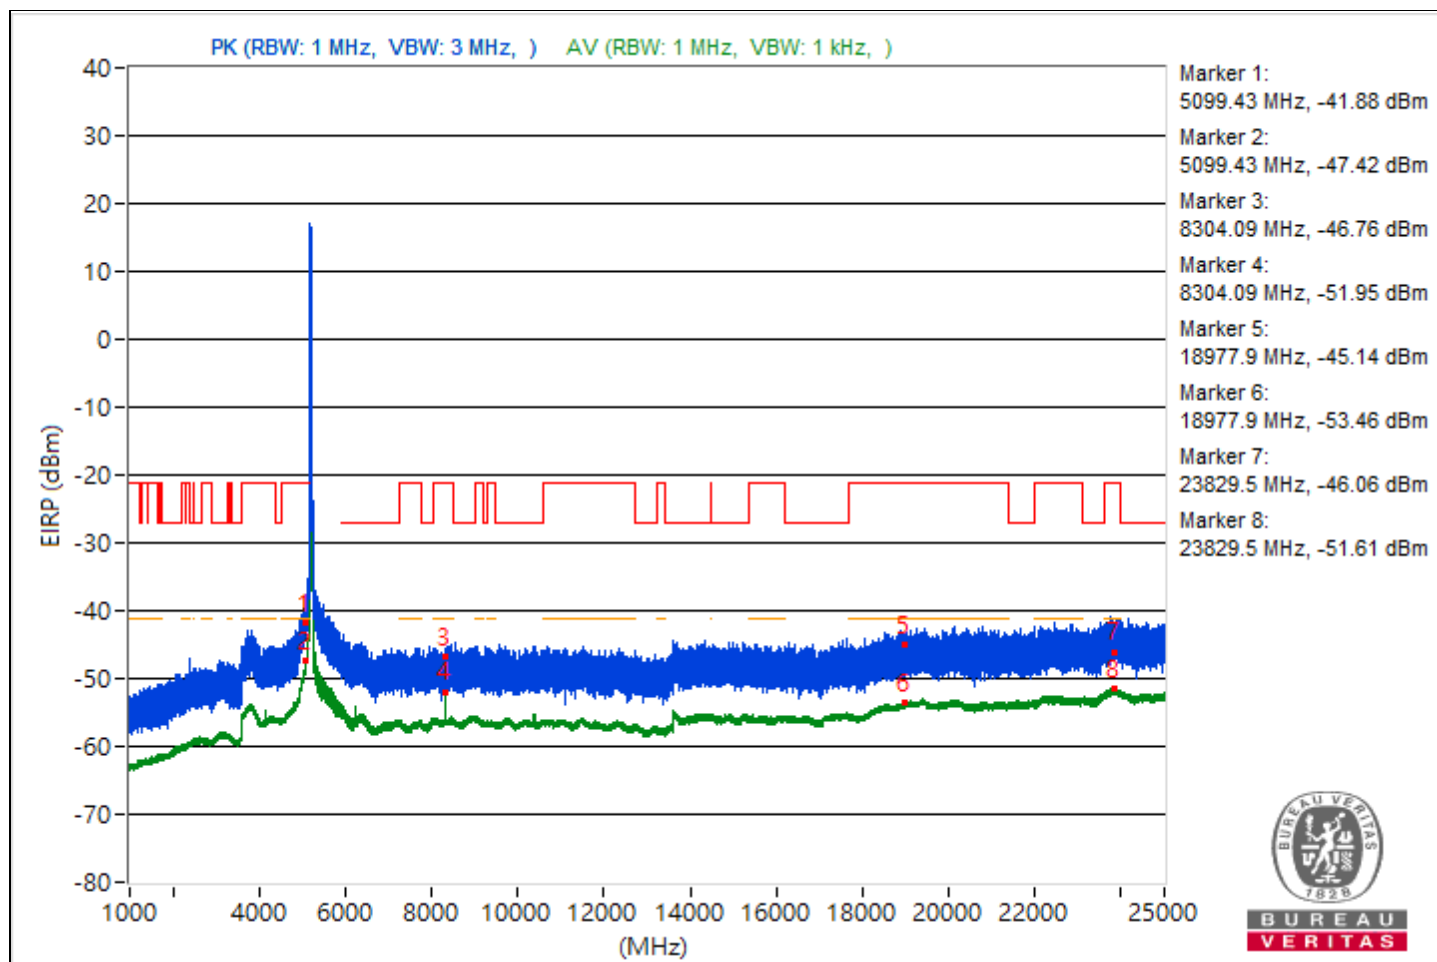


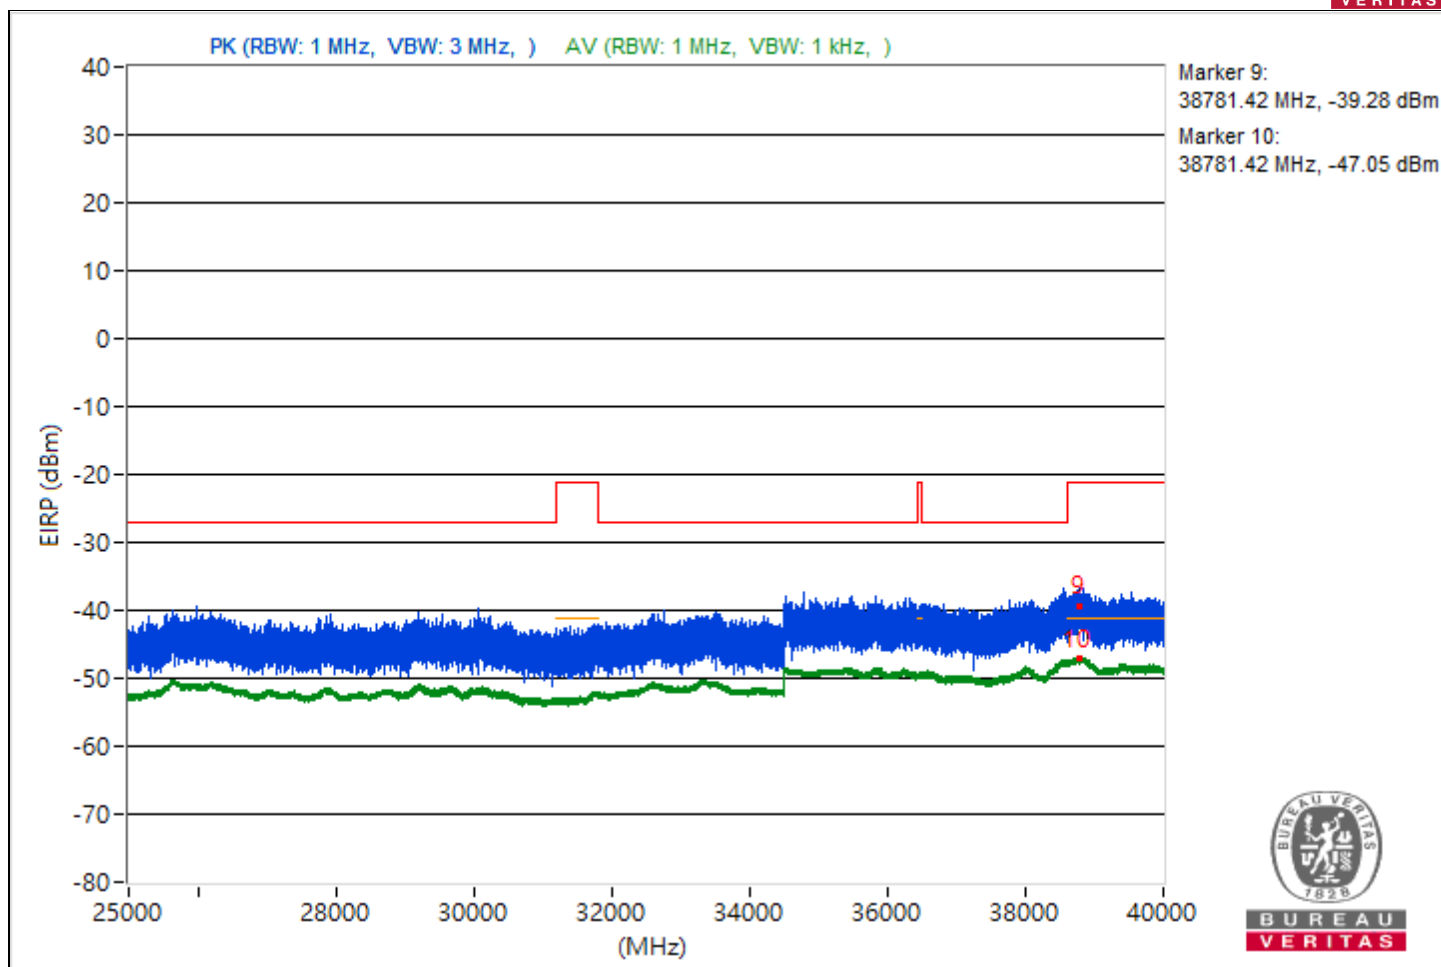


RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.74	54.01 PK	74	-19.99	-51.84	-53.6	8.37	-41.25
2	5099.74	47.06 AV	54	-6.94	-59.47	-59.69	8.37	-48.2
3	8368	48.69 PK	74	-25.31	-56.37	-60.46	8.37	-46.57
4	8368	43.53 AV	54	-10.47	-61.06	-67.12	8.37	-51.73
5	18988.6	49.47 PK	74	-24.53	-56.2	-58.43	8.37	-45.79
6	18988.6	41.61 AV	54	-12.39	-64.78	-65.31	8.37	-53.65
7	23792.1	51.23 PK	74	-22.77	-55.37	-55.45	8.37	-44.03
8	23792.1	43.73 AV	54	-10.27	-62.61	-63.23	8.37	-51.53
9	38806.76	56.15 PK	74	-17.85	-49.72	-51.43	8.37	-39.11
10	38806.76	48.3 AV	54	-5.7	-58.79	-57.93	8.37	-46.96

Note: Margin value = Emission Level - Limit value

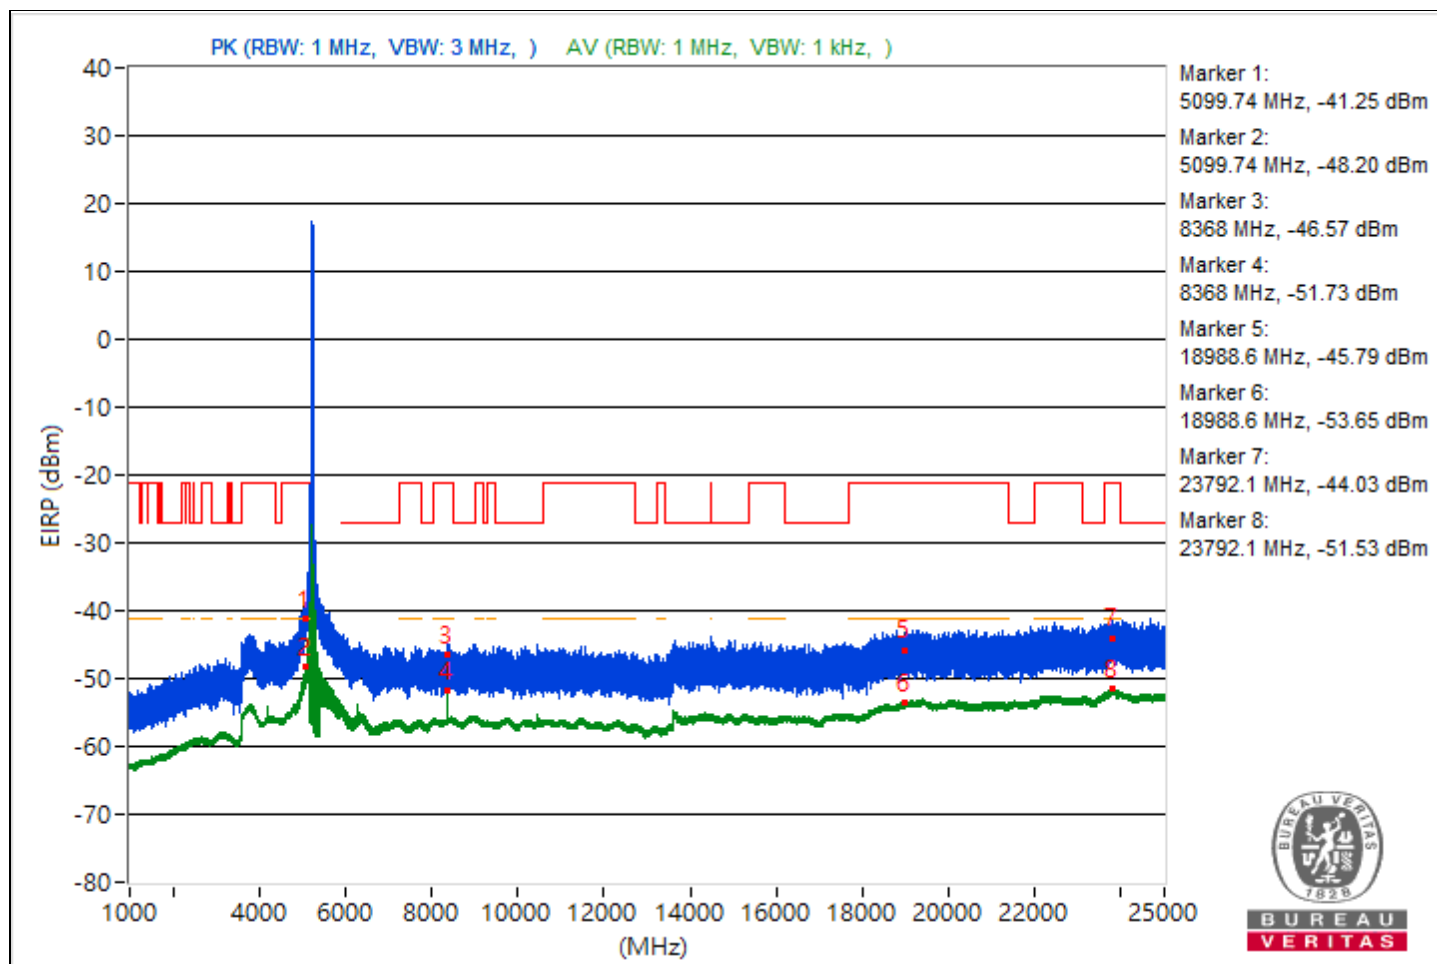


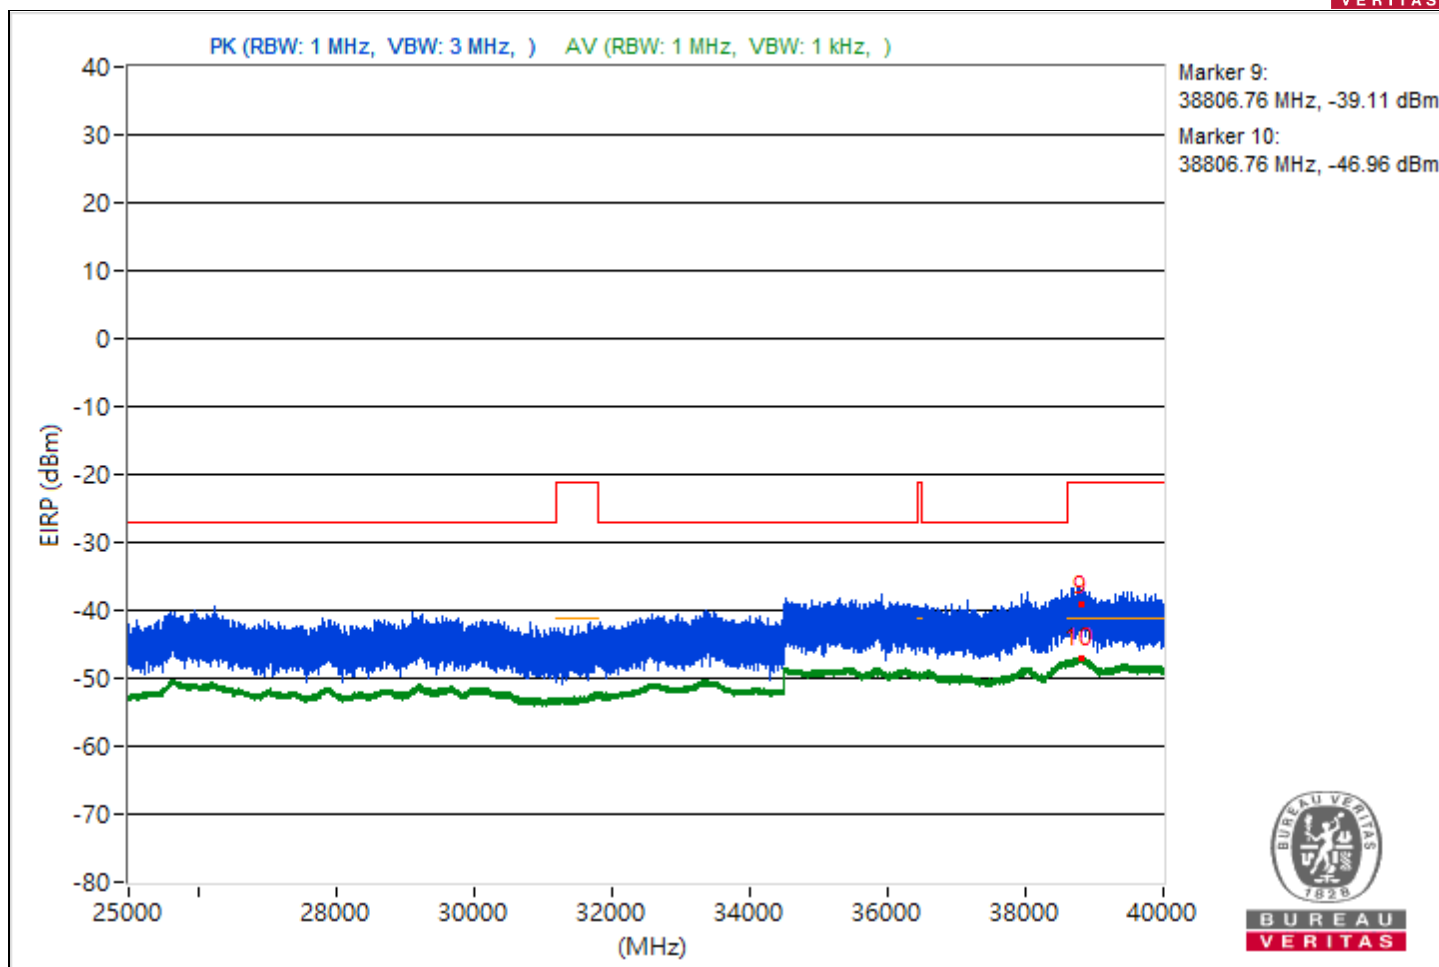


RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5095.23	53.95 PK	74	-20.05	-52.07	-53.43	8.37	-41.31
2	5095.23	46.37 AV	54	-7.63	-60.1	-60.46	8.37	-48.89
3	8432	49.46 PK	74	-24.54	-55.28	-60.65	8.37	-45.8
4	8432	43.53 AV	54	-10.47	-61.16	-66.76	8.37	-51.73
5	18992.7	47.41 PK	74	-26.59	-60.1	-58.5	8.37	-47.85
6	18992.7	41.7 AV	54	-12.3	-65.37	-64.55	8.37	-53.56
7	23825.3	50.21 PK	74	-23.79	-55.1	-58.35	8.37	-45.05
8	23825.3	43.62 AV	54	-10.38	-62.68	-63.39	8.37	-51.64
9	38827.11	55.42 PK	74	-18.58	-50.75	-51.75	8.37	-39.84
10	38827.11	48.3 AV	54	-5.7	-58	-58.71	8.37	-46.96

Note: Margin value = Emission Level - Limit value

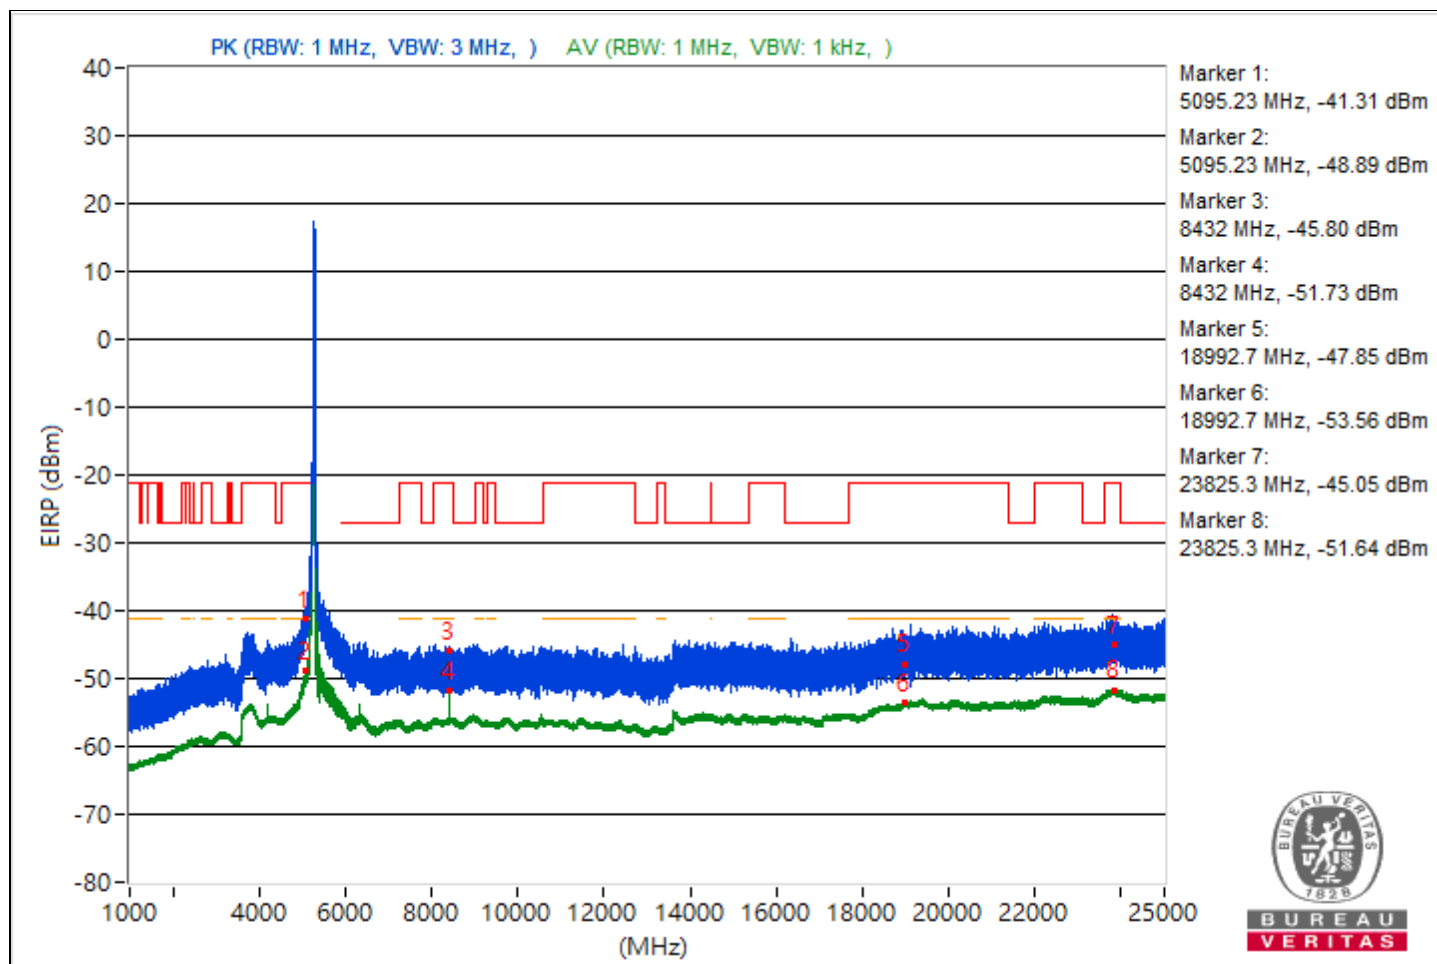


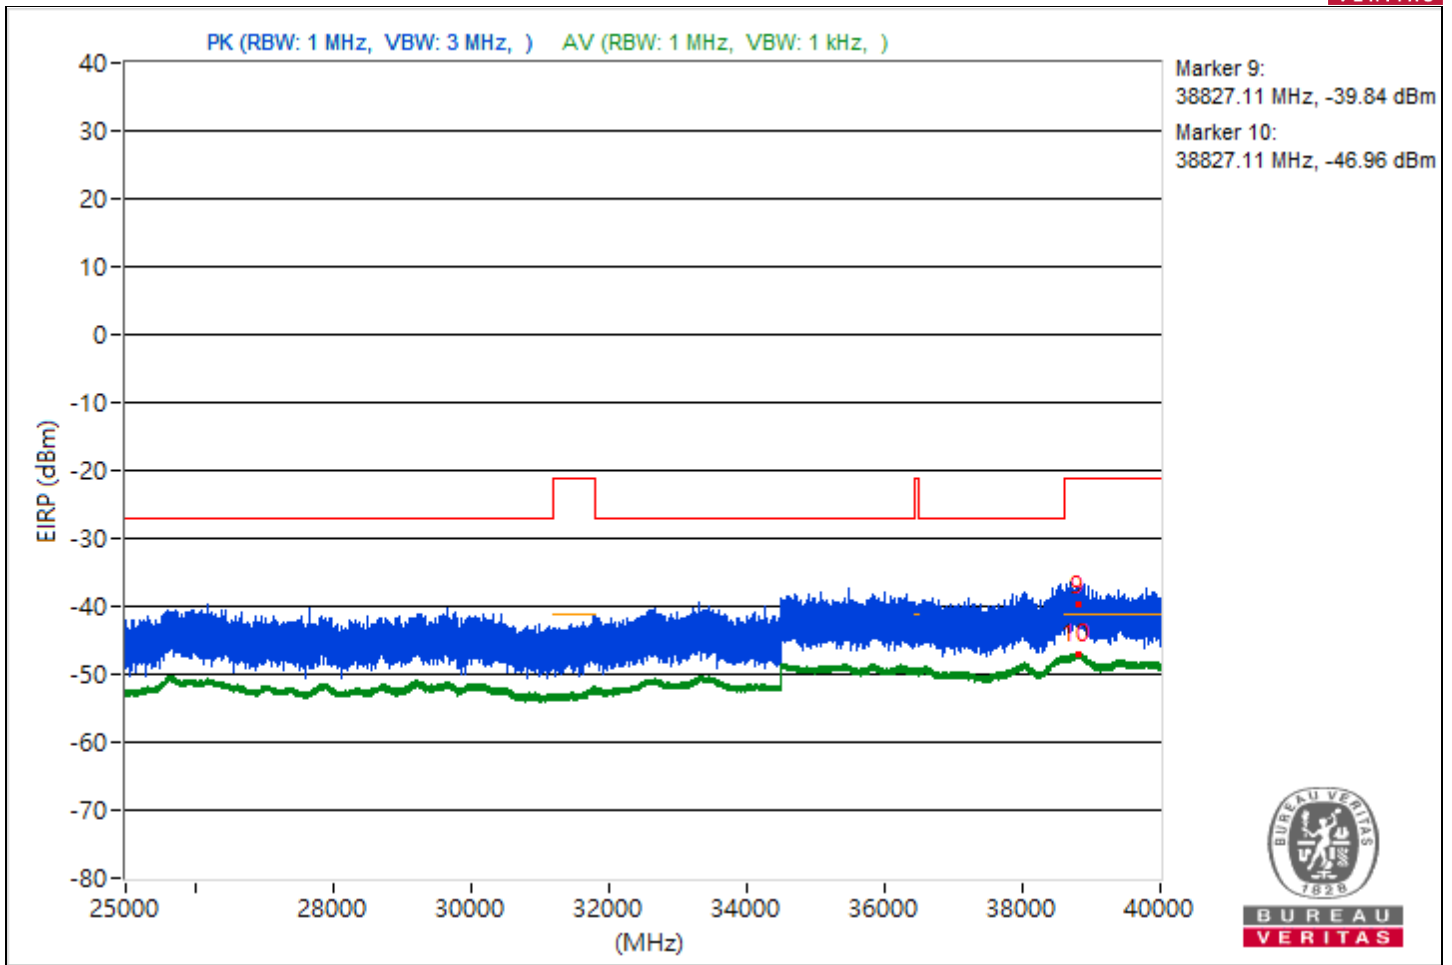


RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5097.64	51.76 PK	74	-22.24	-54.44	-55.36	8.37	-43.5
2	5097.64	45.68 AV	54	-8.32	-60.71	-61.23	8.37	-49.58
3	8496.09	49.89 PK	74	-24.11	-55.47	-58.56	8.37	-45.37
4	8496.09	42.85 AV	54	-11.15	-62.03	-66.77	8.37	-52.41
5	18987.5	47.81 PK	74	-26.19	-59.79	-58.04	8.37	-47.45
6	18987.5	41.83 AV	54	-12.17	-64.95	-64.68	8.37	-53.43
7	23784	49.9 PK	74	-24.1	-57.52	-56.08	8.37	-45.36
8	23784	43.78 AV	54	-10.22	-63.15	-62.58	8.37	-51.48
9	38775.02	54.06 PK	74	-19.94	-52.7	-52.46	8.37	-41.2
10	38775.02	48.36 AV	54	-5.64	-58.04	-58.53	8.37	-46.9

Note: Margin value = Emission Level - Limit value

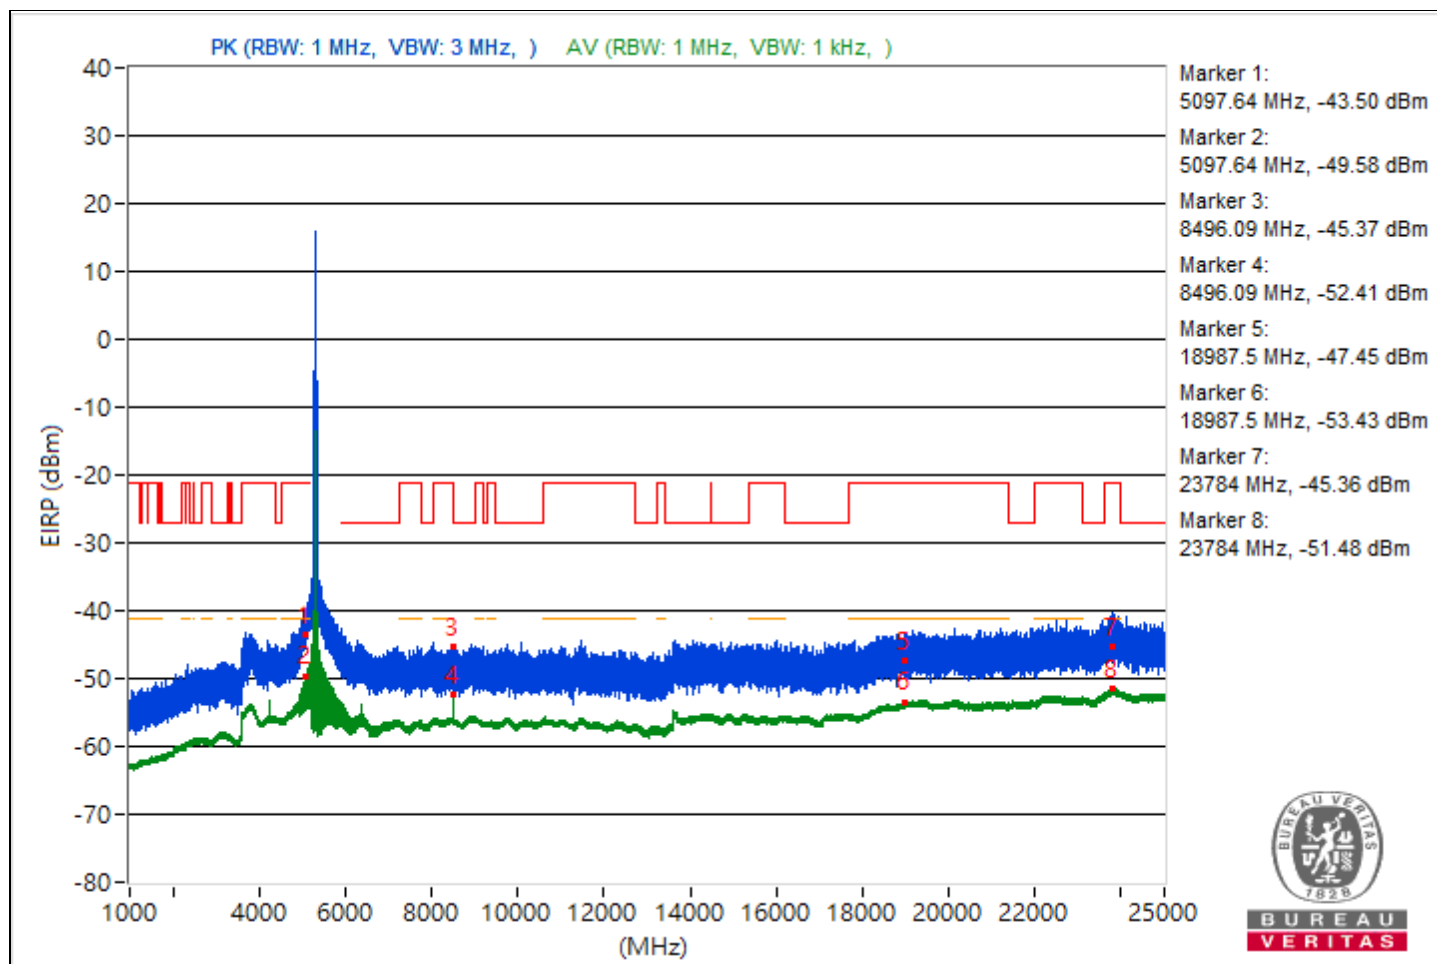


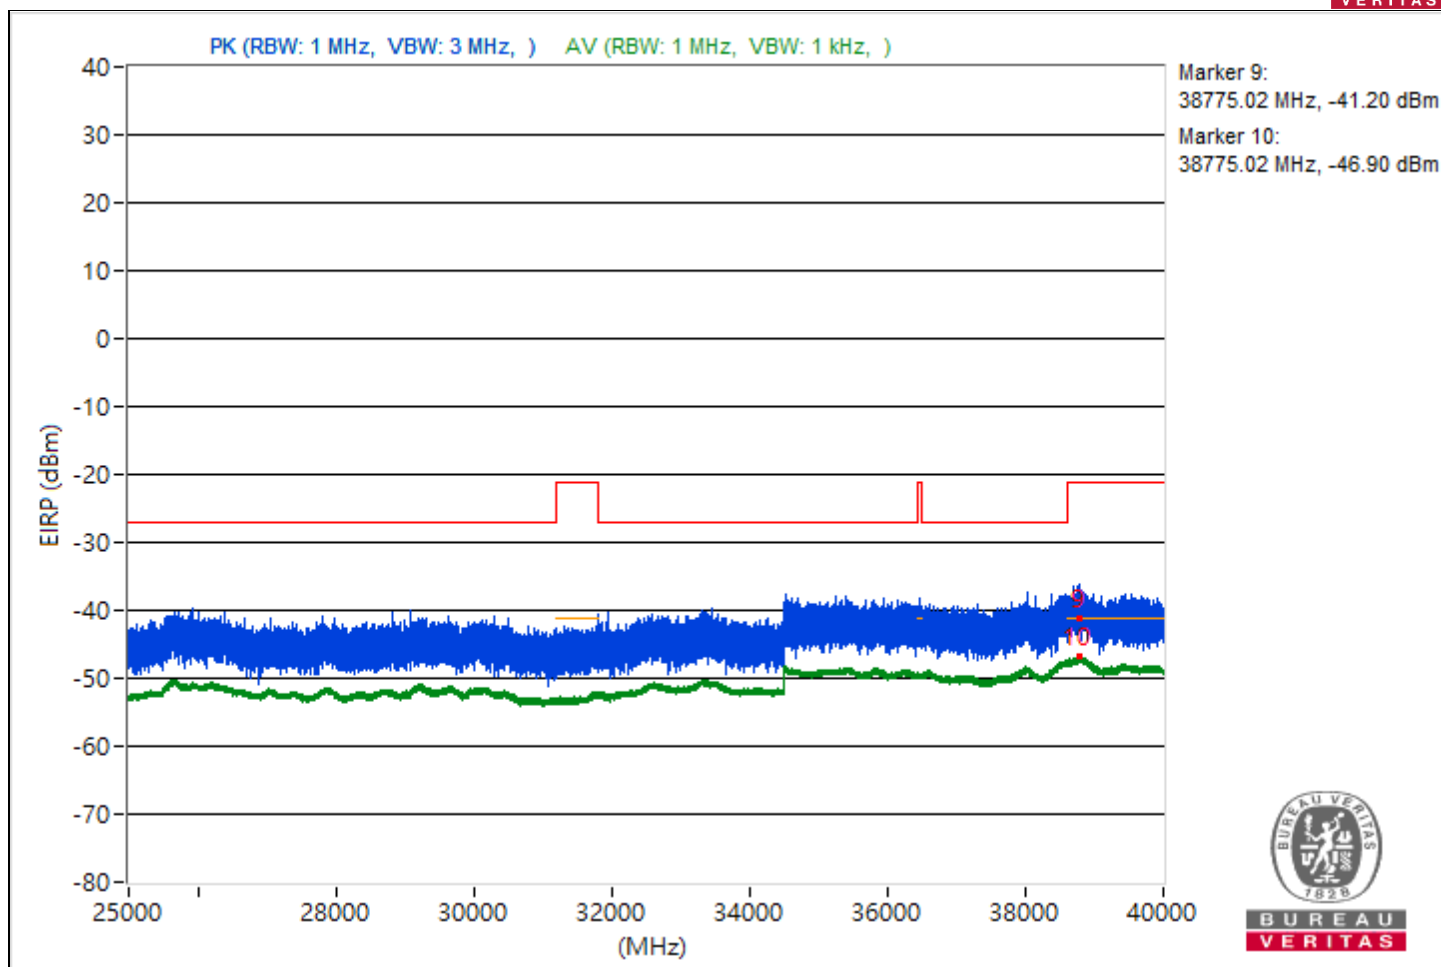


RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5092.74	50.12 PK	74	-23.88	-57.34	-55.84	8.37	-45.14
2	5092.74	43.58 AV	54	-10.42	-62.57	-63.62	8.37	-51.68
3	11024.18	47.08 PK	74	-26.92	-59.2	-59.95	8.37	-48.18
4	11024.18	39.6 AV	54	-14.4	-66.61	-67.51	8.37	-55.66
5	18955.5	48.21 PK	74	-25.79	-57.84	-59.11	8.37	-47.05
6	18955.5	41.62 AV	54	-12.38	-65.4	-64.68	8.37	-53.64
7	23772.7	50.15 PK	74	-23.85	-56.26	-56.73	8.37	-45.11
8	23772.7	43.86 AV	54	-10.14	-62.67	-62.9	8.37	-51.4
9	38809.69	53.05 PK	74	-20.95	-55.48	-52.28	8.37	-42.21
10	38809.69	48.45 AV	54	-5.55	-58.45	-57.96	8.37	-46.81

Note: Margin value = Emission Level - Limit value

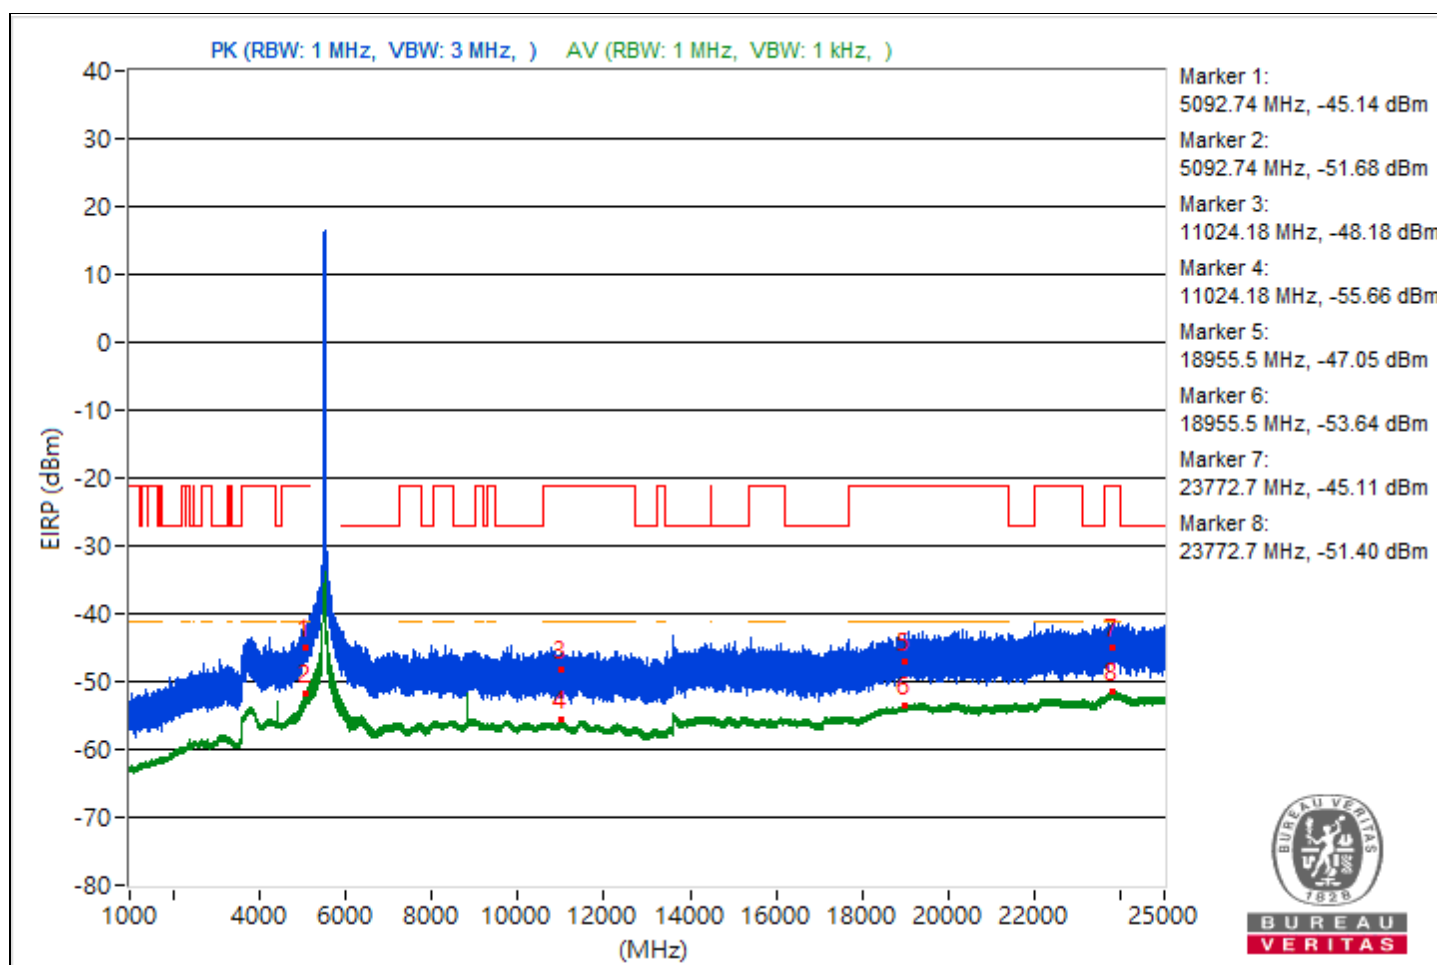


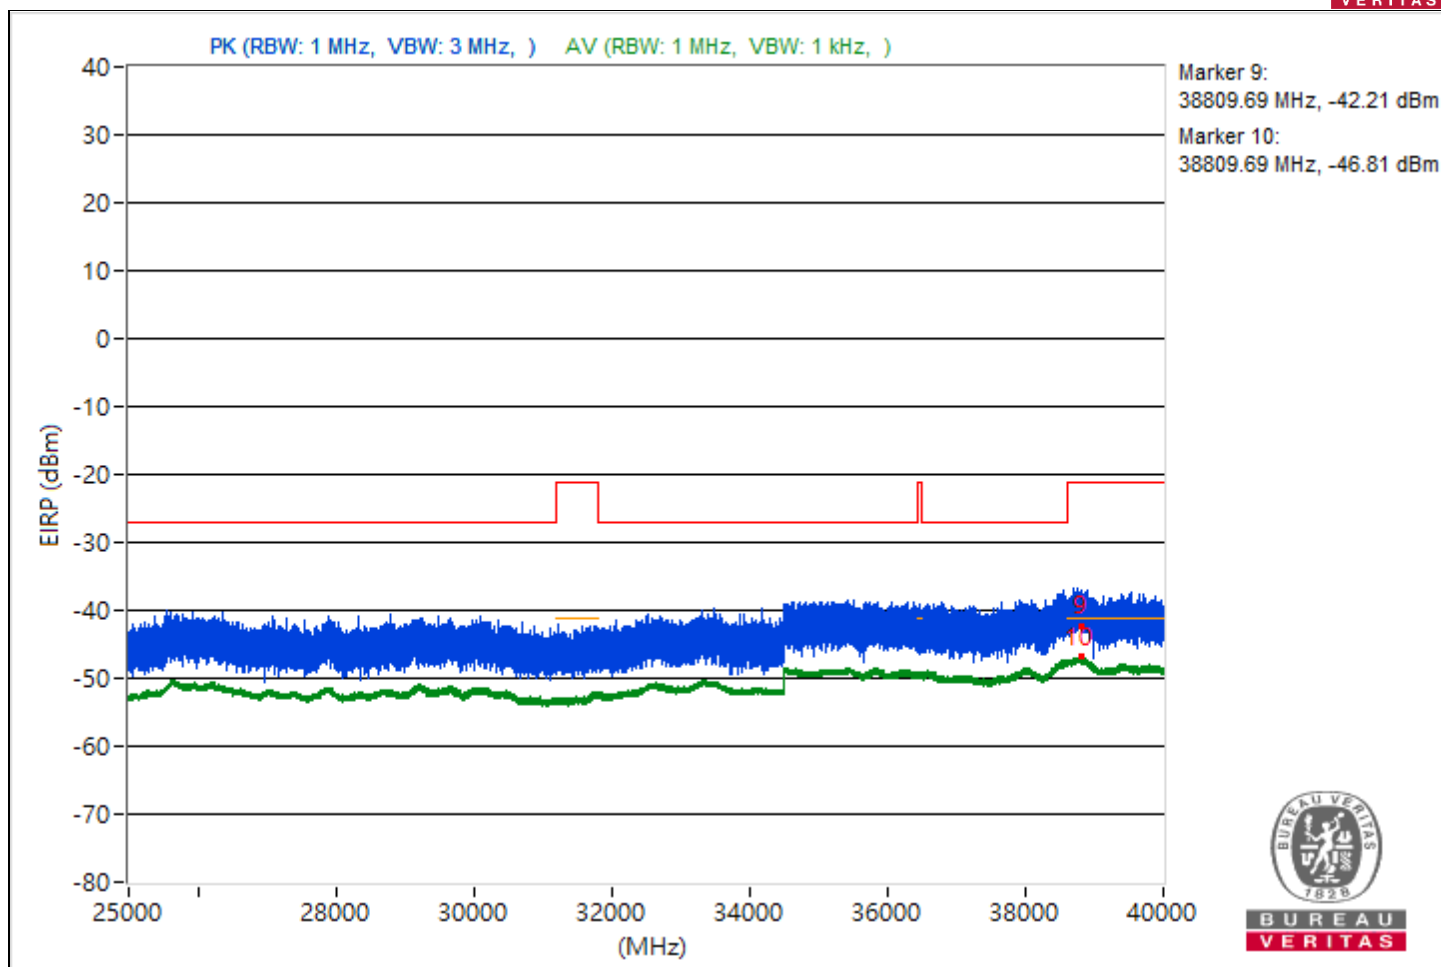


RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5095.16	52.52 PK	74	-21.48	-52.32	-57.23	8.37	-42.74
2	5095.16	43.48 AV	54	-10.52	-63.18	-63.14	8.37	-51.78
3	9025.16	45.63 PK	74	-28.37	-62.2	-60.07	8.37	-49.63
4	9025.16	39.5 AV	54	-14.5	-67.47	-66.84	8.37	-55.76
5	18980.6	47.5 PK	74	-26.5	-58.95	-59.35	8.37	-47.76
6	18980.6	41.61 AV	54	-12.39	-64.78	-65.29	8.37	-53.65
7	23794	49.55 PK	74	-24.45	-58.48	-56.04	8.37	-45.71
8	23794	43.72 AV	54	-10.28	-63.24	-62.63	8.37	-51.54
9	38784.71	53.77 PK	74	-20.23	-52.63	-53.13	8.37	-41.49
10	38784.71	48.4 AV	54	-5.6	-58.1	-58.39	8.37	-46.86

Note: Margin value = Emission Level - Limit value

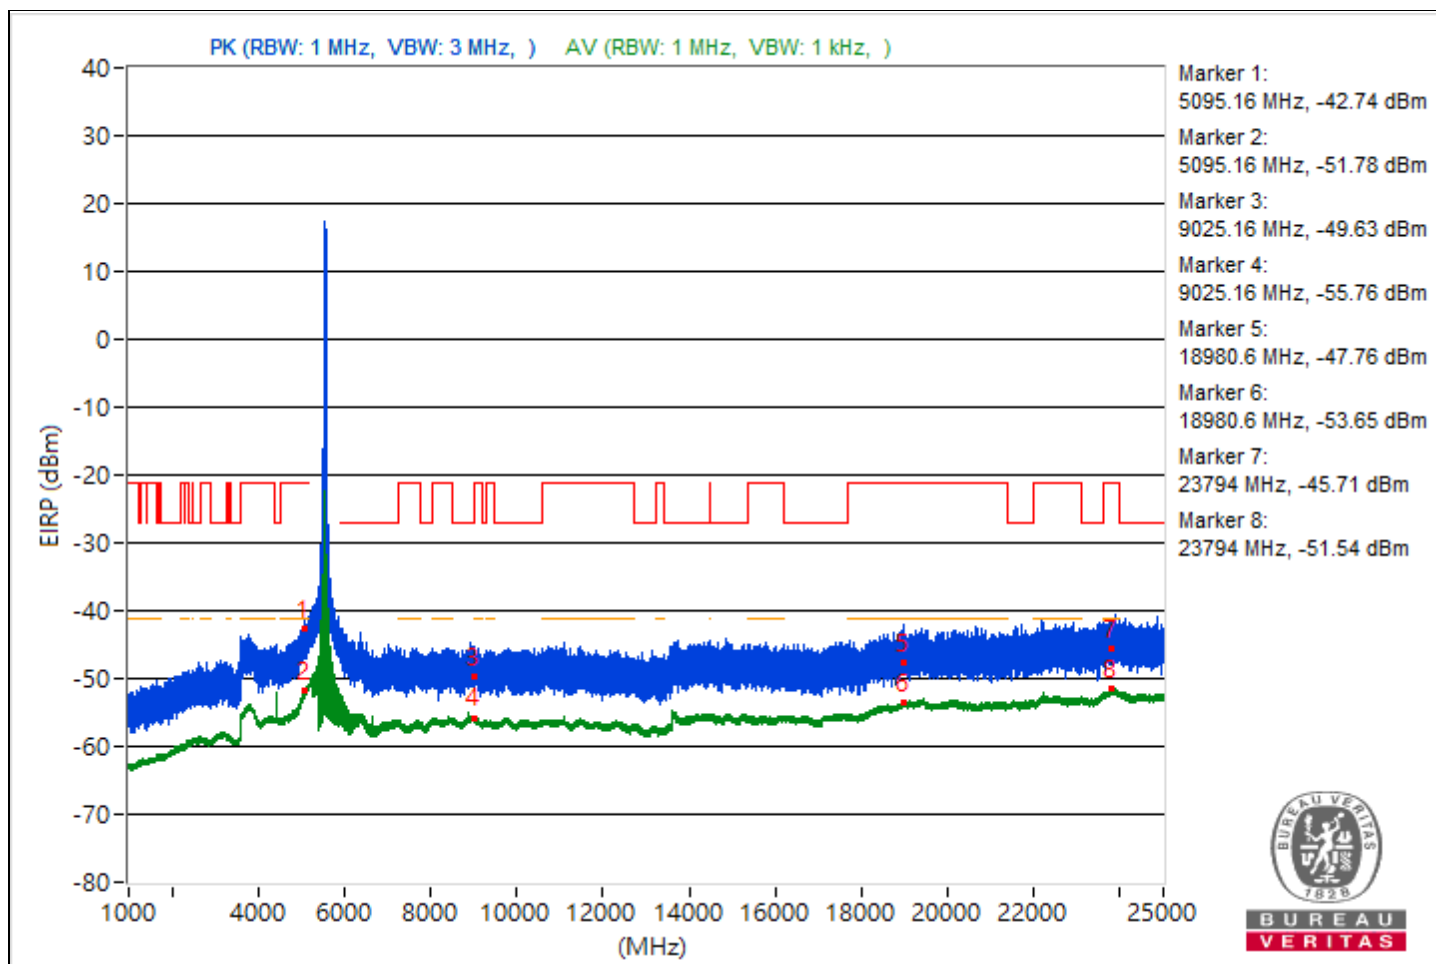


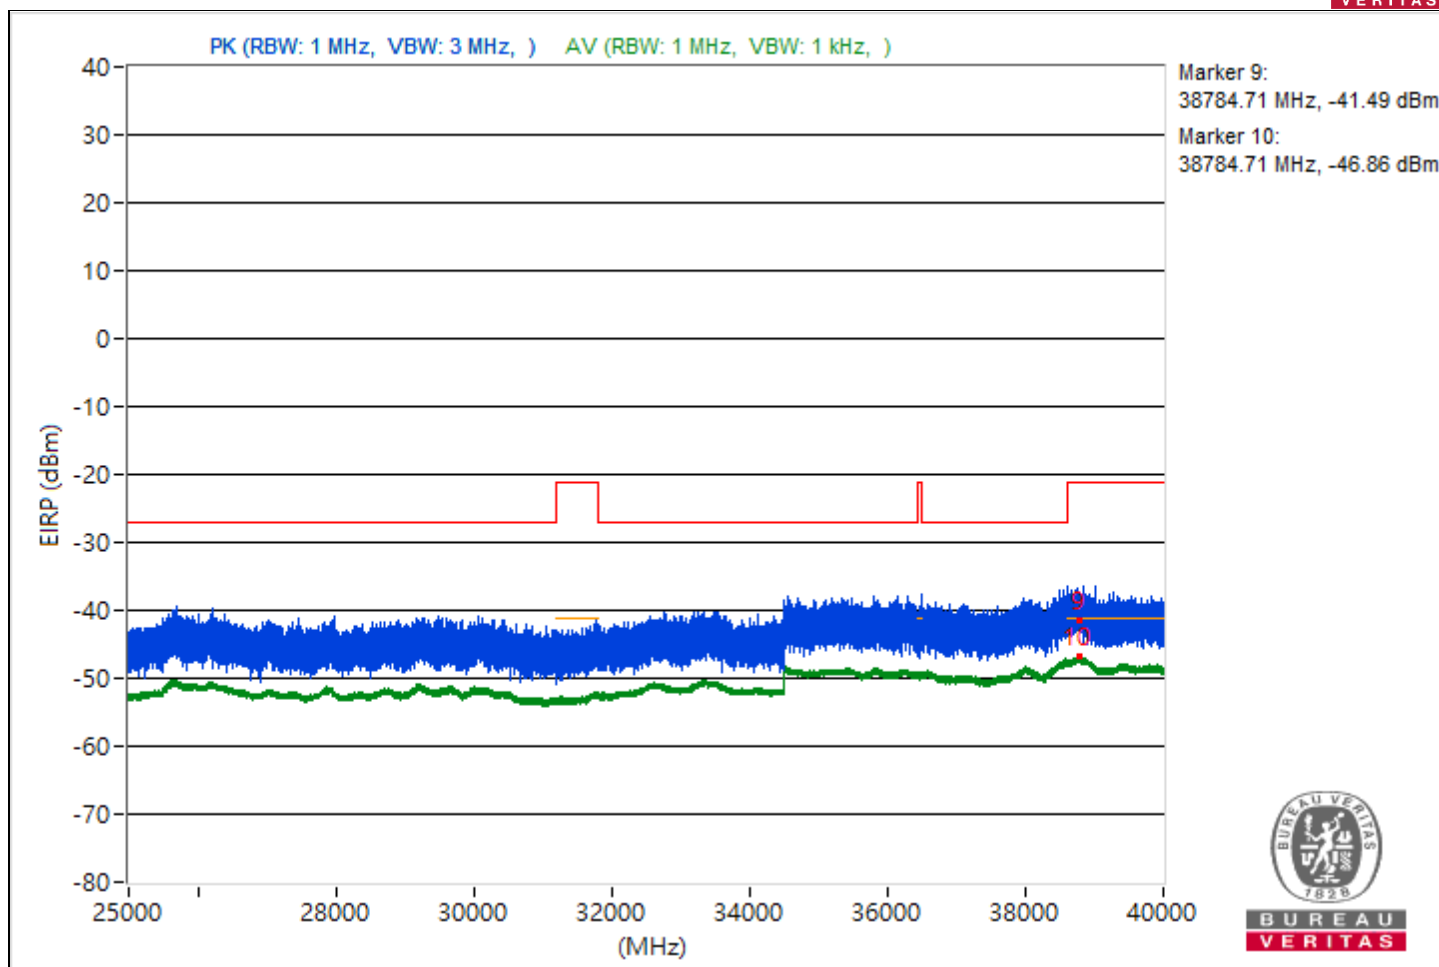


RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4535.93	51.25 PK	74	-22.75	-54.66	-56.27	8.37	-44.01
2	4535.93	44.13 AV	54	-9.87	-60.25	-67.52	8.37	-51.13
3	9071.91	48.29 PK	74	-25.71	-59.54	-57.42	8.37	-46.97
4	9071.91	39.54 AV	54	-14.46	-67.48	-66.74	8.37	-55.72
5	18996.4	48.8 PK	74	-25.2	-57.11	-58.71	8.37	-46.46
6	18996.4	41.77 AV	54	-12.23	-65.32	-64.46	8.37	-53.49
7	23826.4	51.53 PK	74	-22.47	-55.82	-54.49	8.37	-43.73
8	23826.4	43.62 AV	54	-10.38	-63.39	-62.68	8.37	-51.64
9	38803.2	52.86 PK	74	-21.14	-54.1	-53.49	8.37	-42.4
10	38803.2	48.29 AV	54	-5.71	-58.71	-58.03	8.37	-46.97

Note: Margin value = Emission Level - Limit value

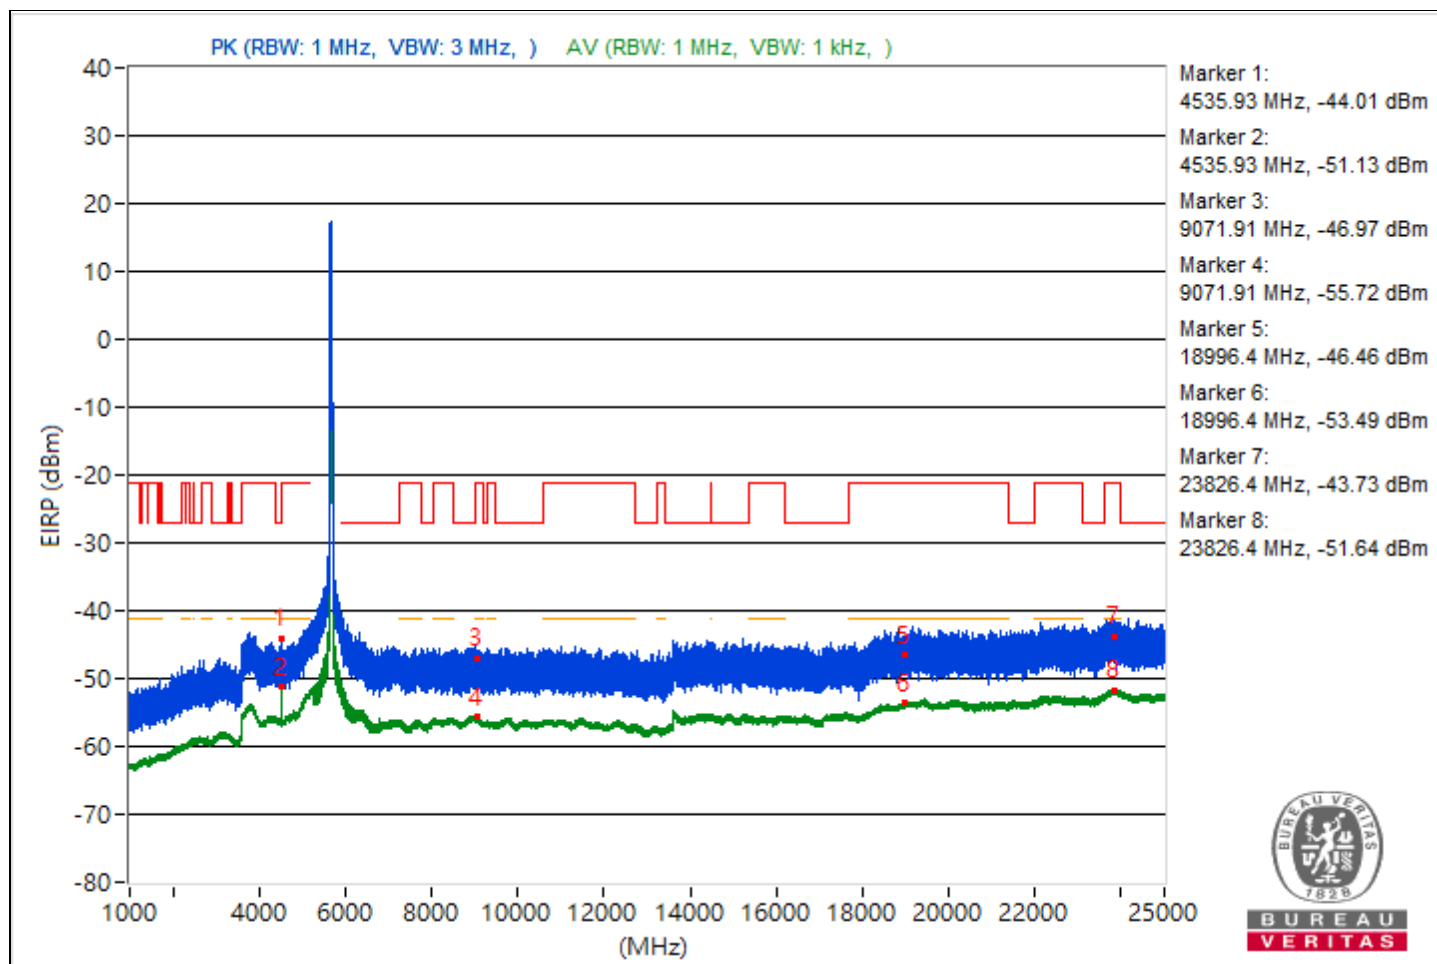


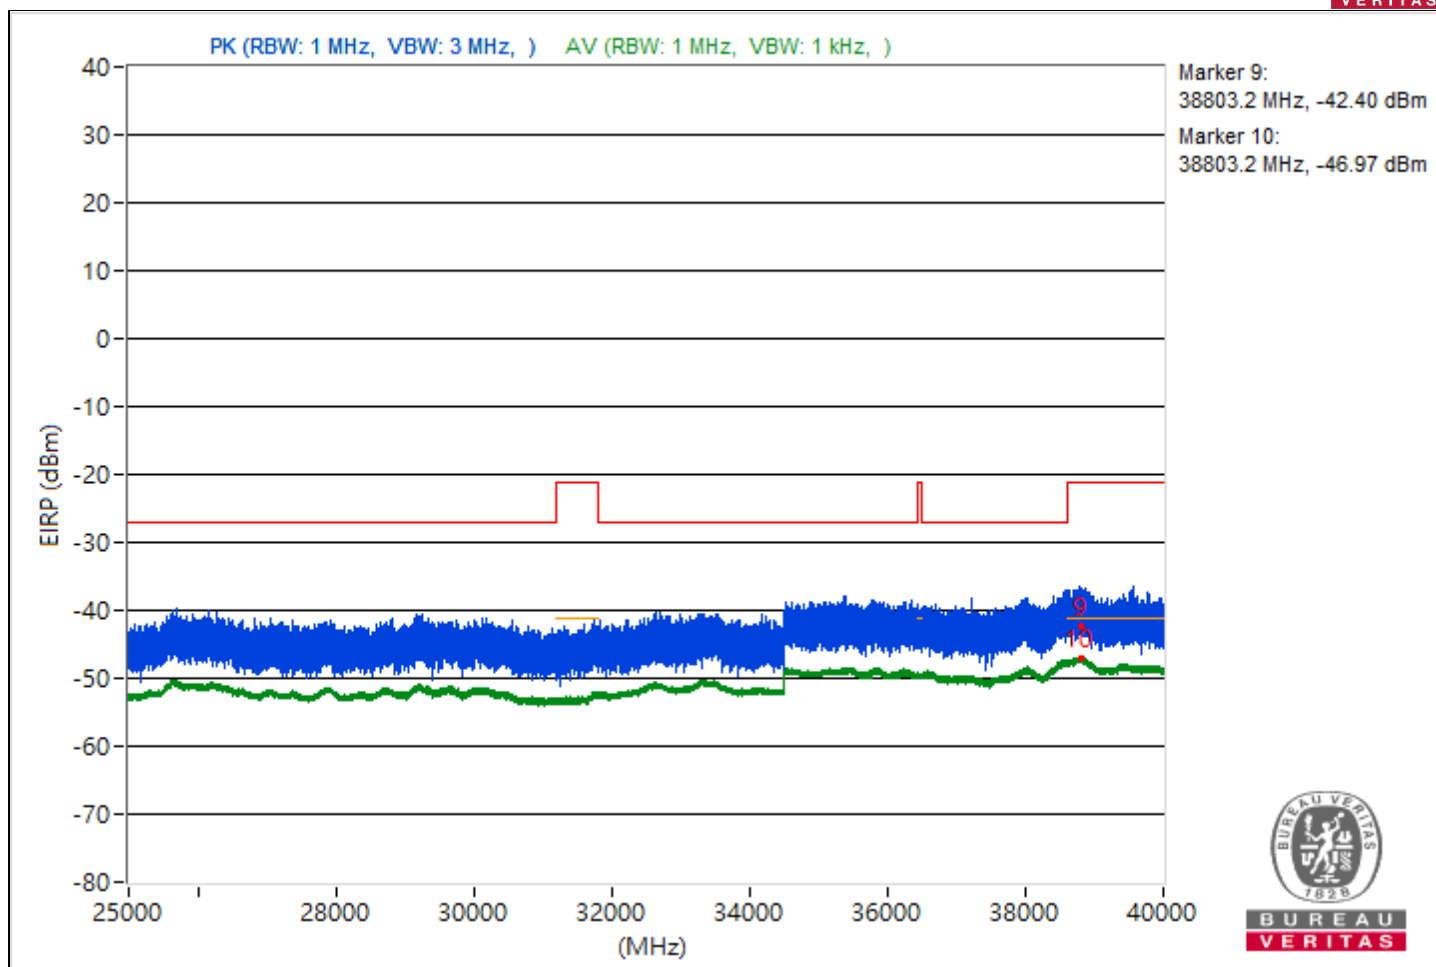


RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4568.06	50.28 PK	74	-23.72	-54.79	-58.83	8.37	-44.98
2	4568.06	45.57 AV	54	-8.43	-58.65	-67.02	8.37	-49.69
3	11424.53	47.42 PK	74	-26.58	-58.82	-59.66	8.37	-47.84
4	11424.53	39.9 AV	54	-14.1	-66.36	-67.17	8.37	-55.36
5	18979.6	48.12 PK	74	-25.88	-60.04	-57.39	8.37	-47.14
6	18979.6	41.74 AV	54	-12.26	-65.17	-64.65	8.37	-53.52
7	23776.6	49.17 PK	74	-24.83	-57.71	-57.25	8.37	-46.09
8	23776.6	43.79 AV	54	-10.21	-62.47	-63.26	8.37	-51.47
9	38822.4	55.16 PK	74	-18.84	-51.29	-51.68	8.37	-40.1
10	38822.4	48.36 AV	54	-5.64	-57.97	-58.61	8.37	-46.9

Note: Margin value = Emission Level - Limit value

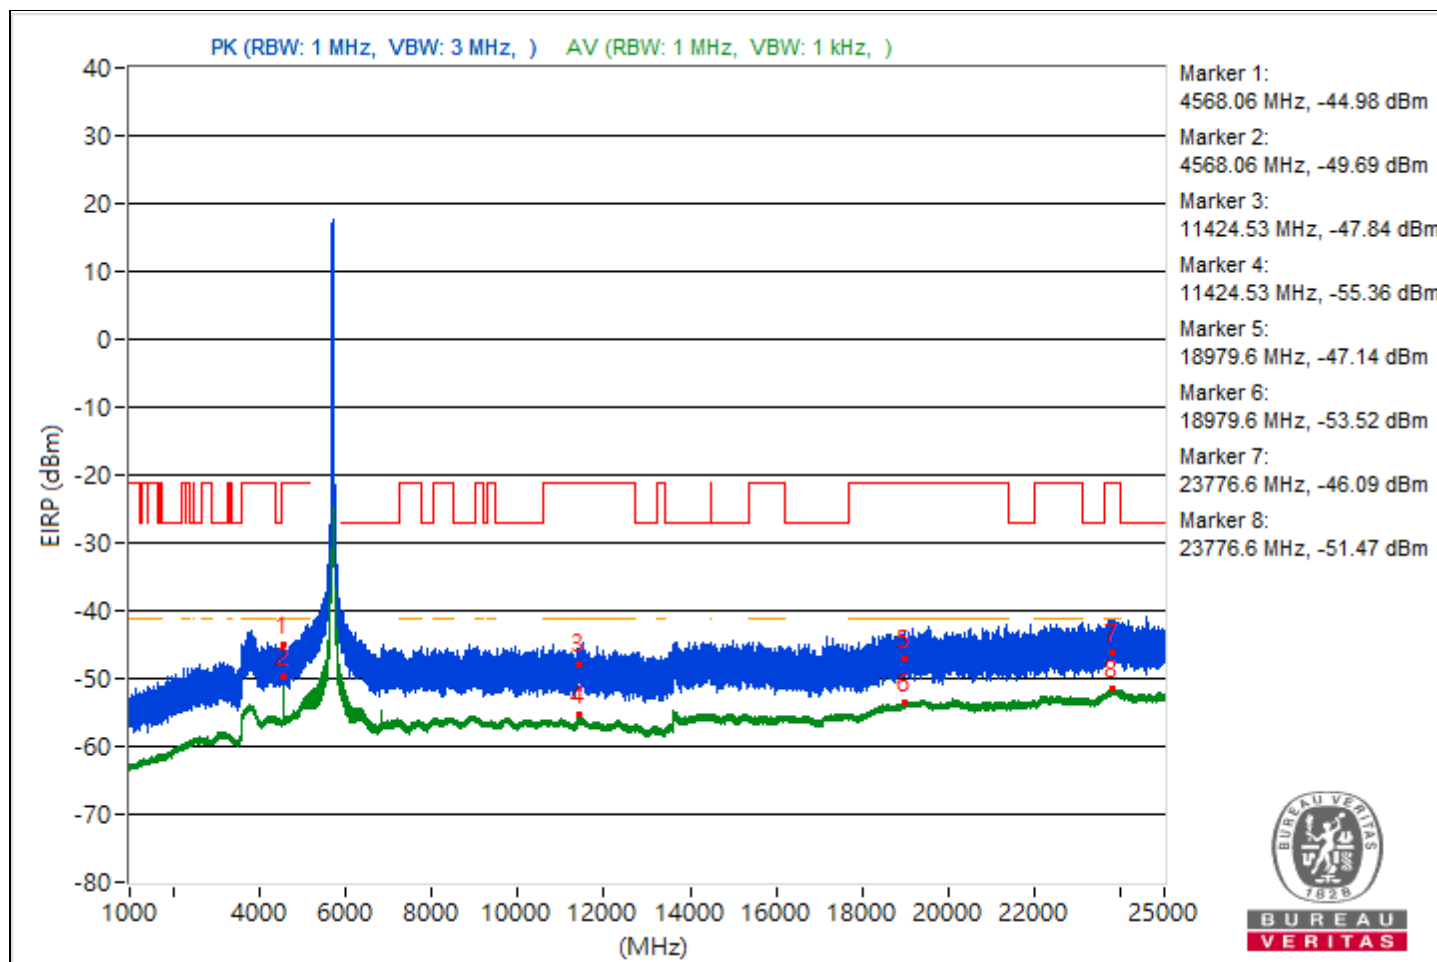


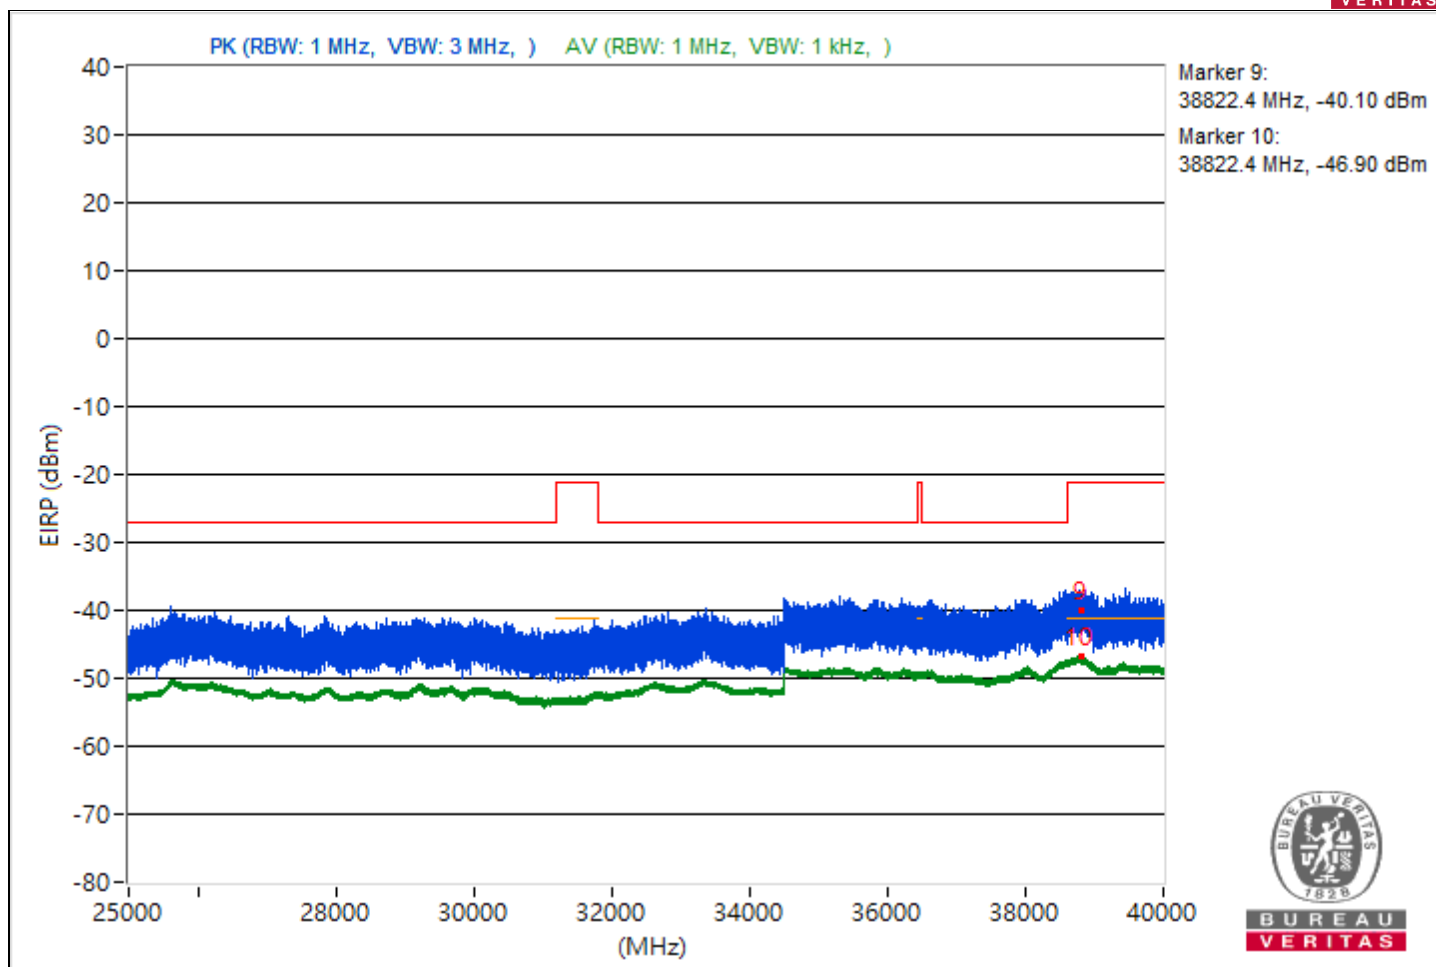


RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4603.99	49.34 PK	74	-24.66	-55.55	-60.28	8.37	-45.92
2	4603.99	43.57 AV	54	-10.43	-60.98	-67.28	8.37	-51.69
3	11514.31	49.94 PK	74	-24.06	-55.87	-57.72	8.37	-45.32
4	11514.31	43.7 AV	54	-10.3	-61.61	-64.86	8.37	-51.56
5	18948.3	50.05 PK	74	-23.95	-56.38	-56.81	8.37	-45.21
6	18948.3	41.75 AV	54	-12.25	-65.07	-64.73	8.37	-53.51
7	23823.4	51.36 PK	74	-22.64	-55.23	-55.32	8.37	-43.9
8	23823.4	43.6 AV	54	-10.4	-62.53	-63.62	8.37	-51.66
9	38831.73	55.42 PK	74	-18.58	-49.83	-53.27	8.37	-39.84
10	38831.73	48.4 AV	54	-5.6	-58.5	-57.99	8.37	-46.86

Note: Margin value = Emission Level - Limit value

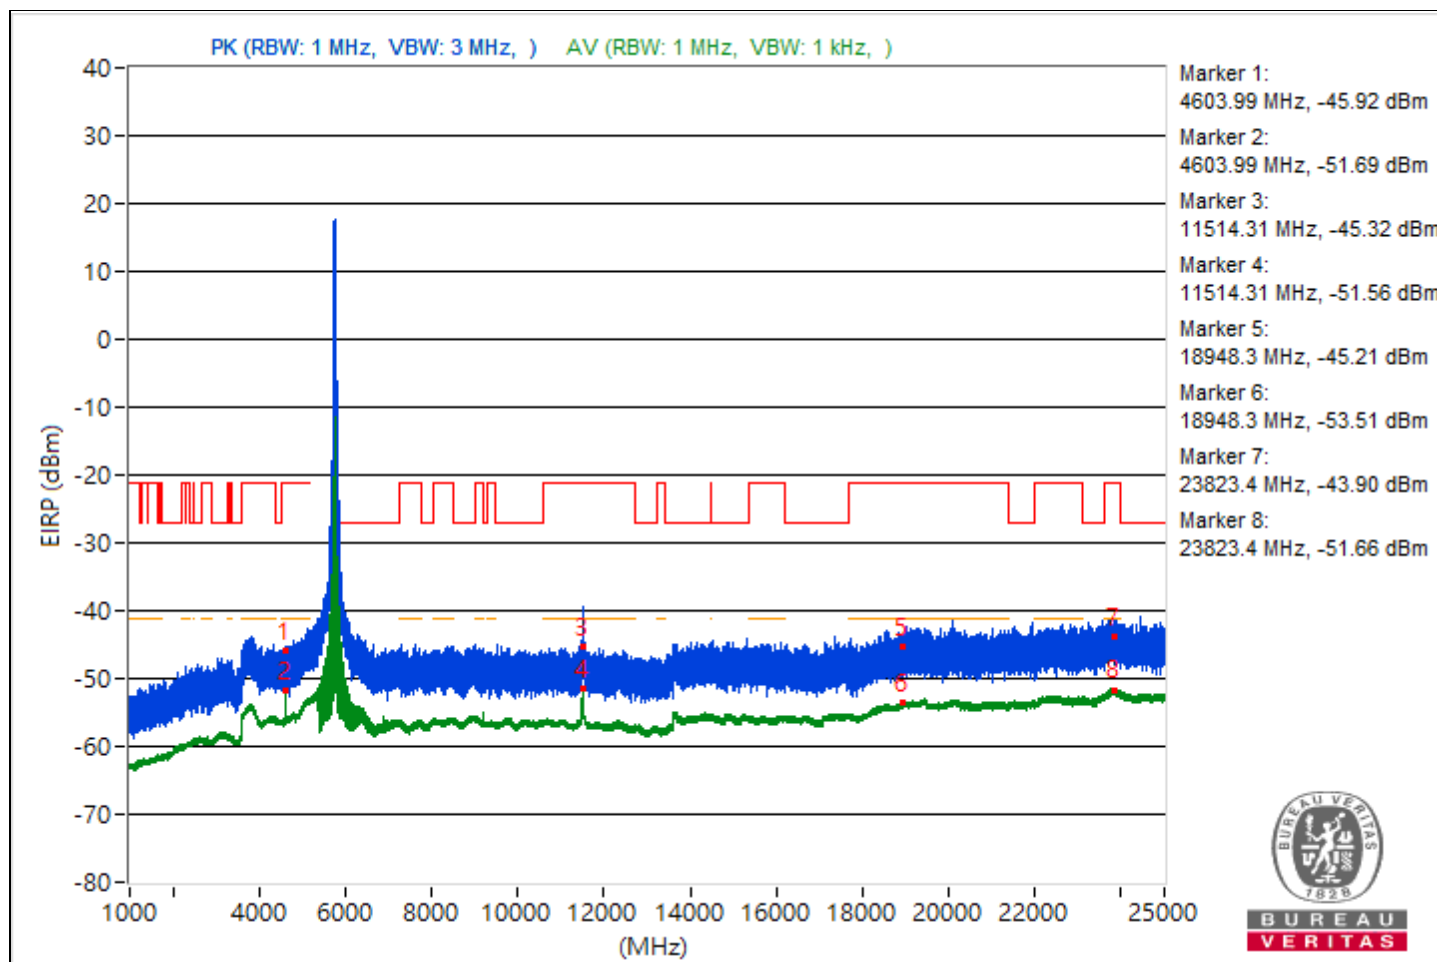


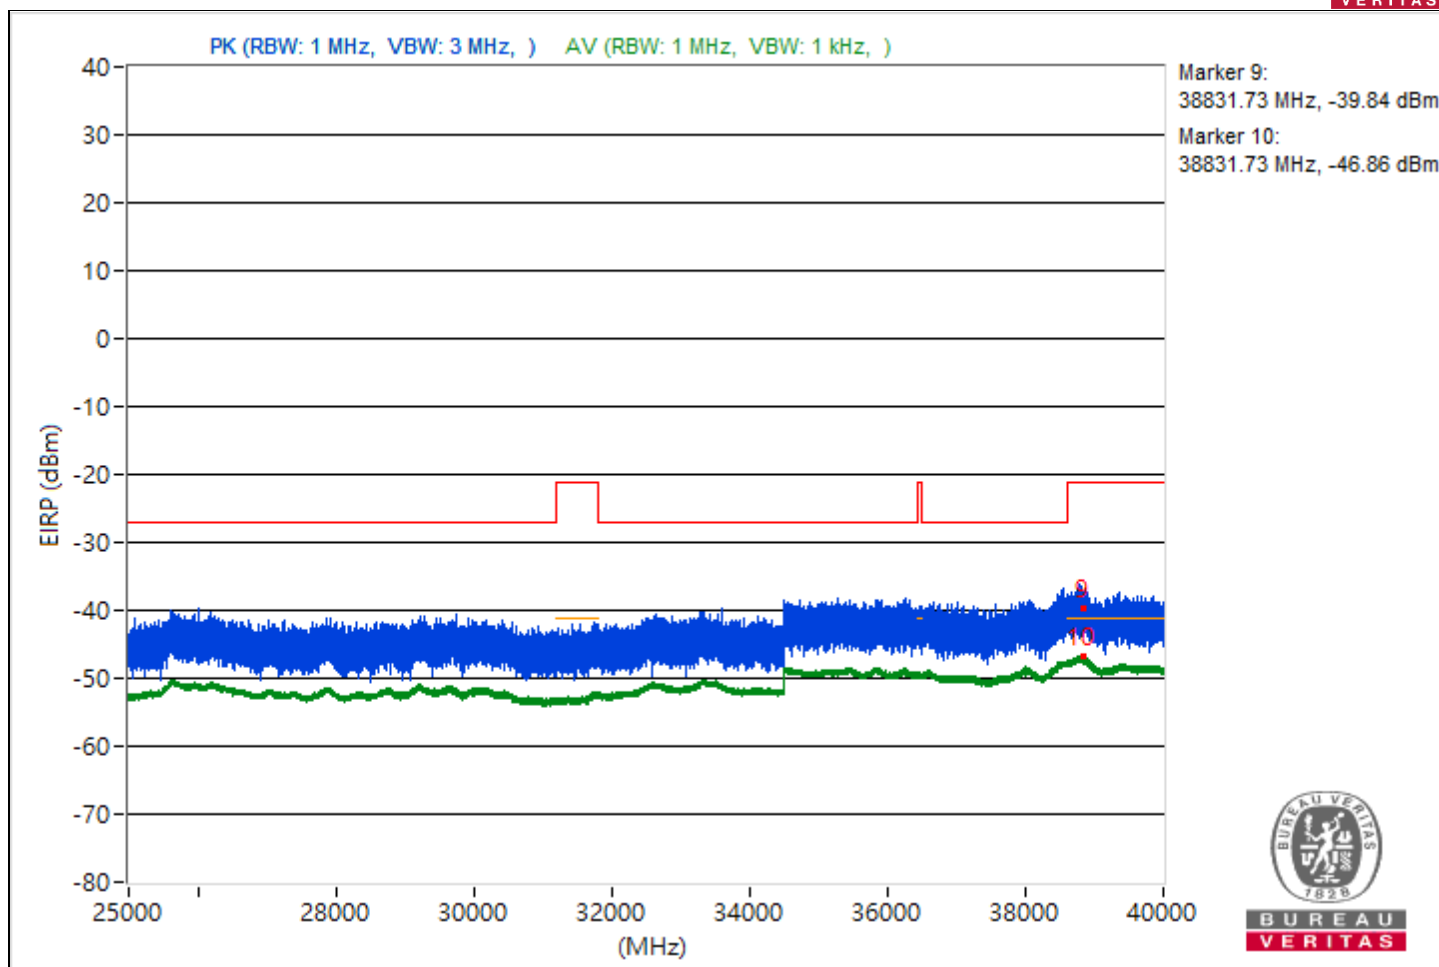


RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4635.96	49.97 PK	74	-24.03	-55.53	-58.2	8.37	-45.29
2	4635.96	45.27 AV	54	-8.73	-59	-66.93	8.37	-49.99
3	11588.62	49.89 PK	74	-24.11	-56.85	-56.66	8.37	-45.37
4	11588.62	43.86 AV	54	-10.14	-61.76	-64.11	8.37	-51.4
5	18997.6	46.54 PK	74	-27.46	-59.35	-61	8.37	-48.72
6	18997.6	41.82 AV	54	-12.18	-65.08	-64.57	8.37	-53.44
7	23887.2	50.29 PK	74	-23.71	-56.59	-56.12	8.37	-44.97
8	23887.2	43.67 AV	54	-10.33	-63.4	-62.59	8.37	-51.59
9	38782.04	56.09 PK	74	-17.91	-50.79	-50.31	8.37	-39.17
10	38782.04	48.38 AV	54	-5.62	-58.56	-57.98	8.37	-46.88

Note: Margin value = Emission Level - Limit value

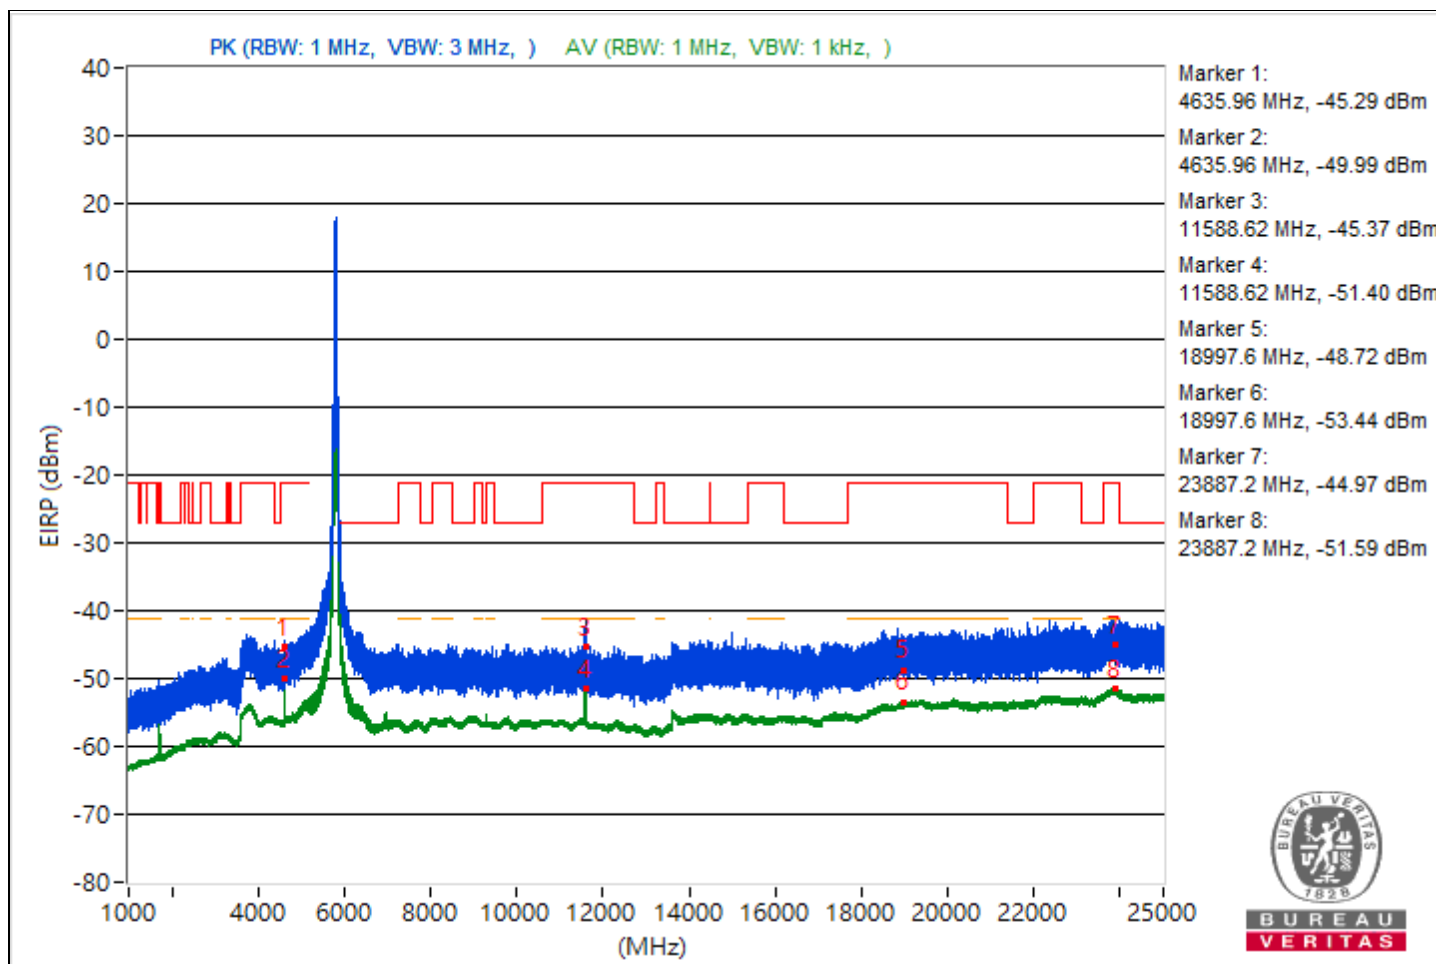


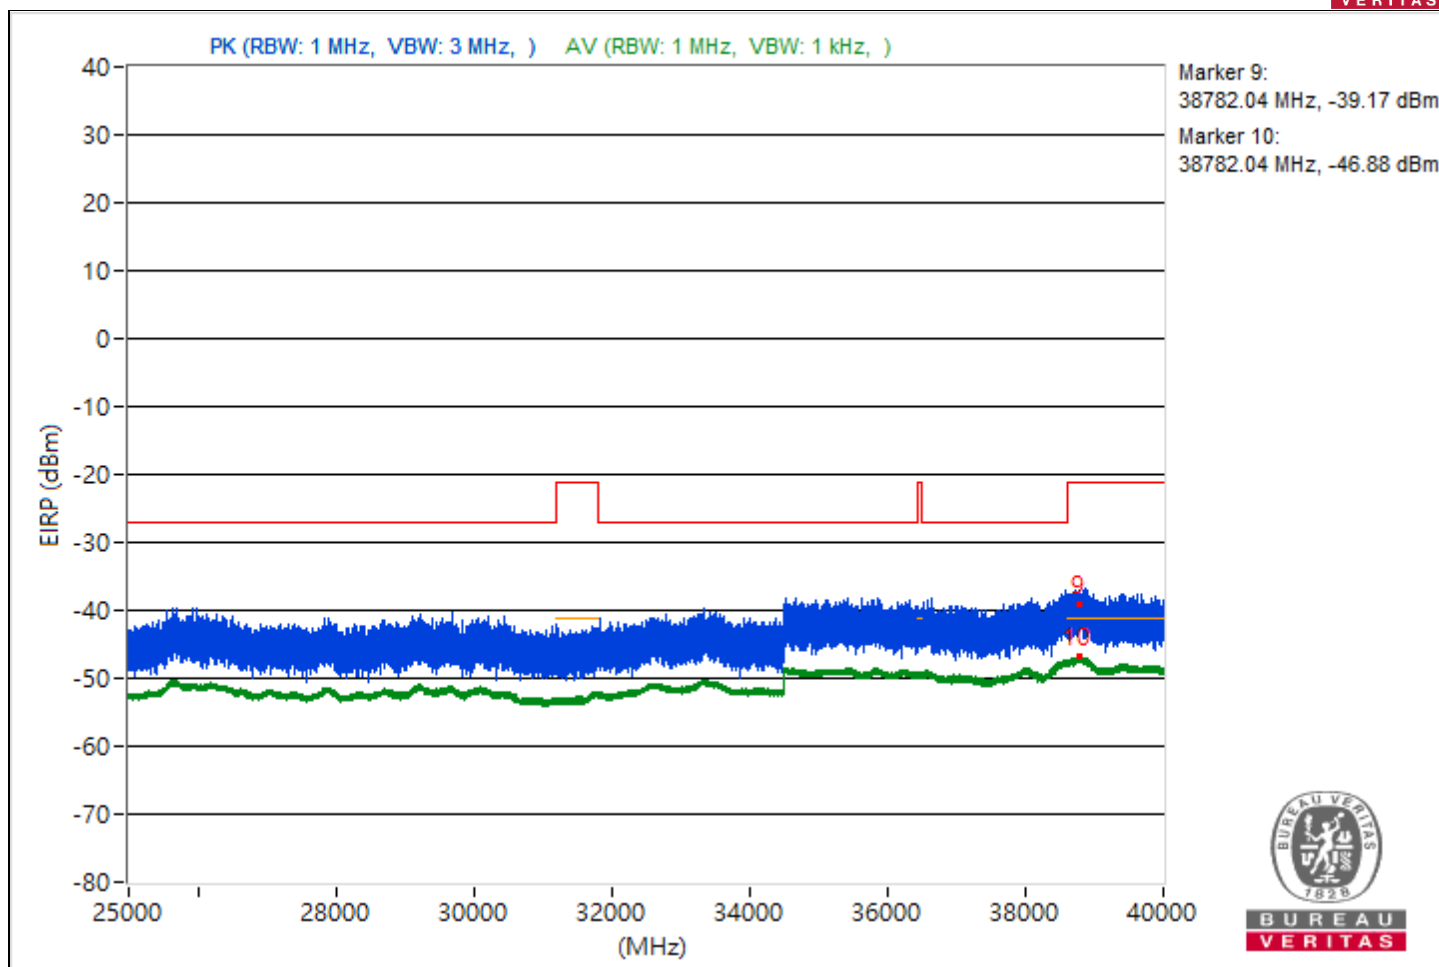


RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.36	55.81 PK	74	-18.19	-50.38	-51.34	8.37	-39.45
2	5099.36	48.16 AV	54	-5.84	-59.28	-57.8	8.37	-47.1
3	8335.82	49.03 PK	74	-24.97	-55.66	-61.24	8.37	-46.23
4	8335.82	43.53 AV	54	-10.47	-60.91	-67.77	8.37	-51.73
5	18995.7	48.4 PK	74	-25.6	-58.83	-57.72	8.37	-46.86
6	18995.7	41.57 AV	54	-12.43	-65.19	-64.95	8.37	-53.69
7	23820.7	51.66 PK	74	-22.34	-54.9	-55.06	8.37	-43.6
8	23820.7	43.56 AV	54	-10.44	-62.86	-63.3	8.37	-51.7
9	38864.89	54.93 PK	74	-19.07	-51.87	-51.56	8.37	-40.33
10	38864.89	48 AV	54	-6	-59.12	-58.21	8.37	-47.26

Note: Margin value = Emission Level - Limit value

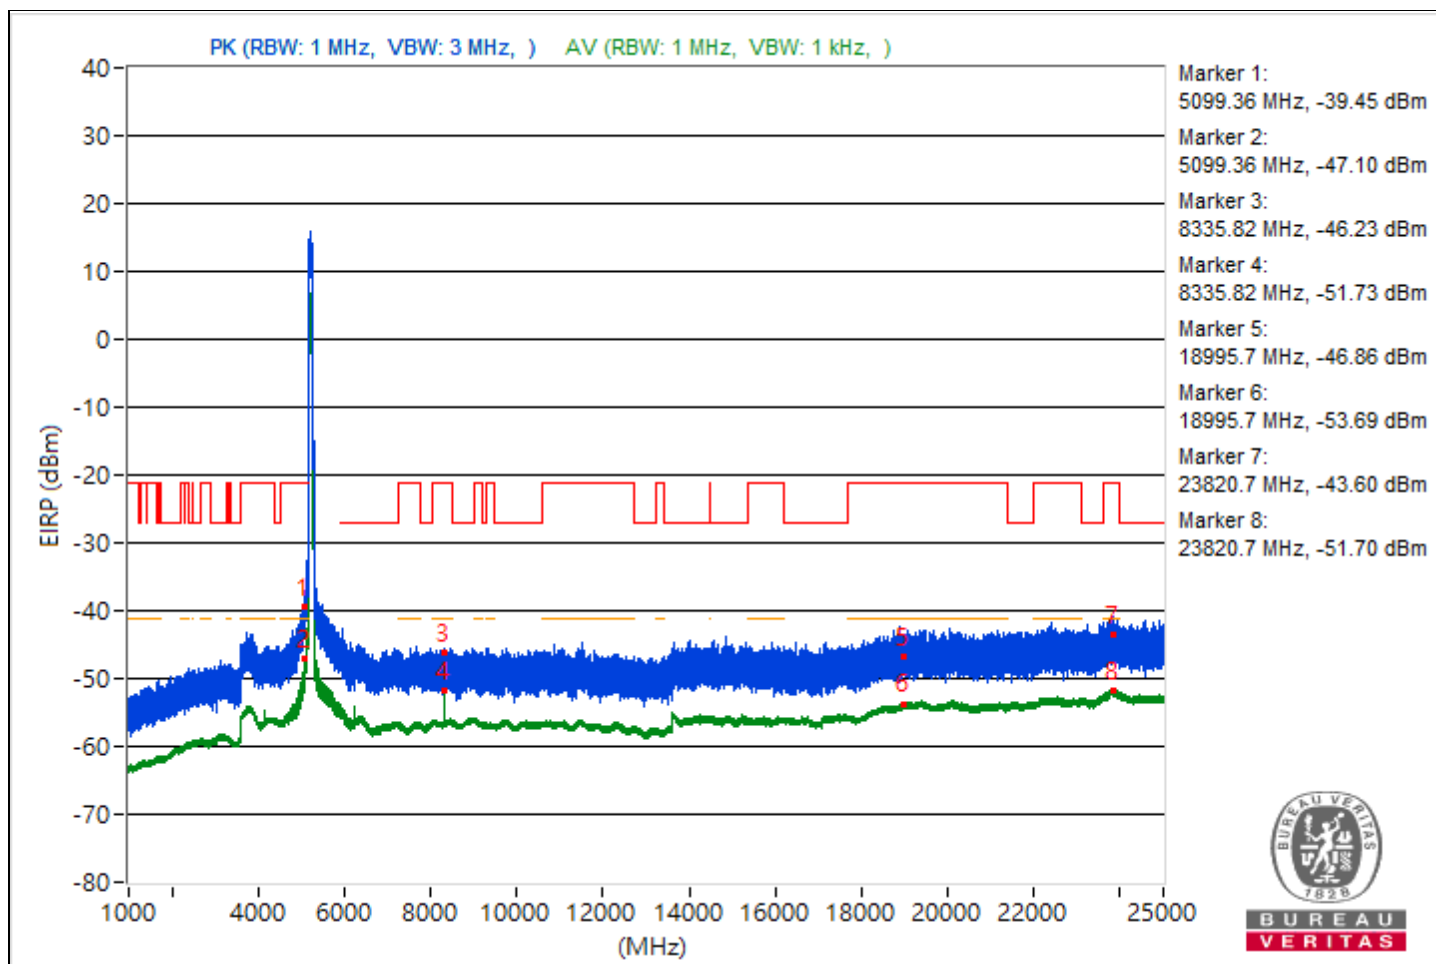


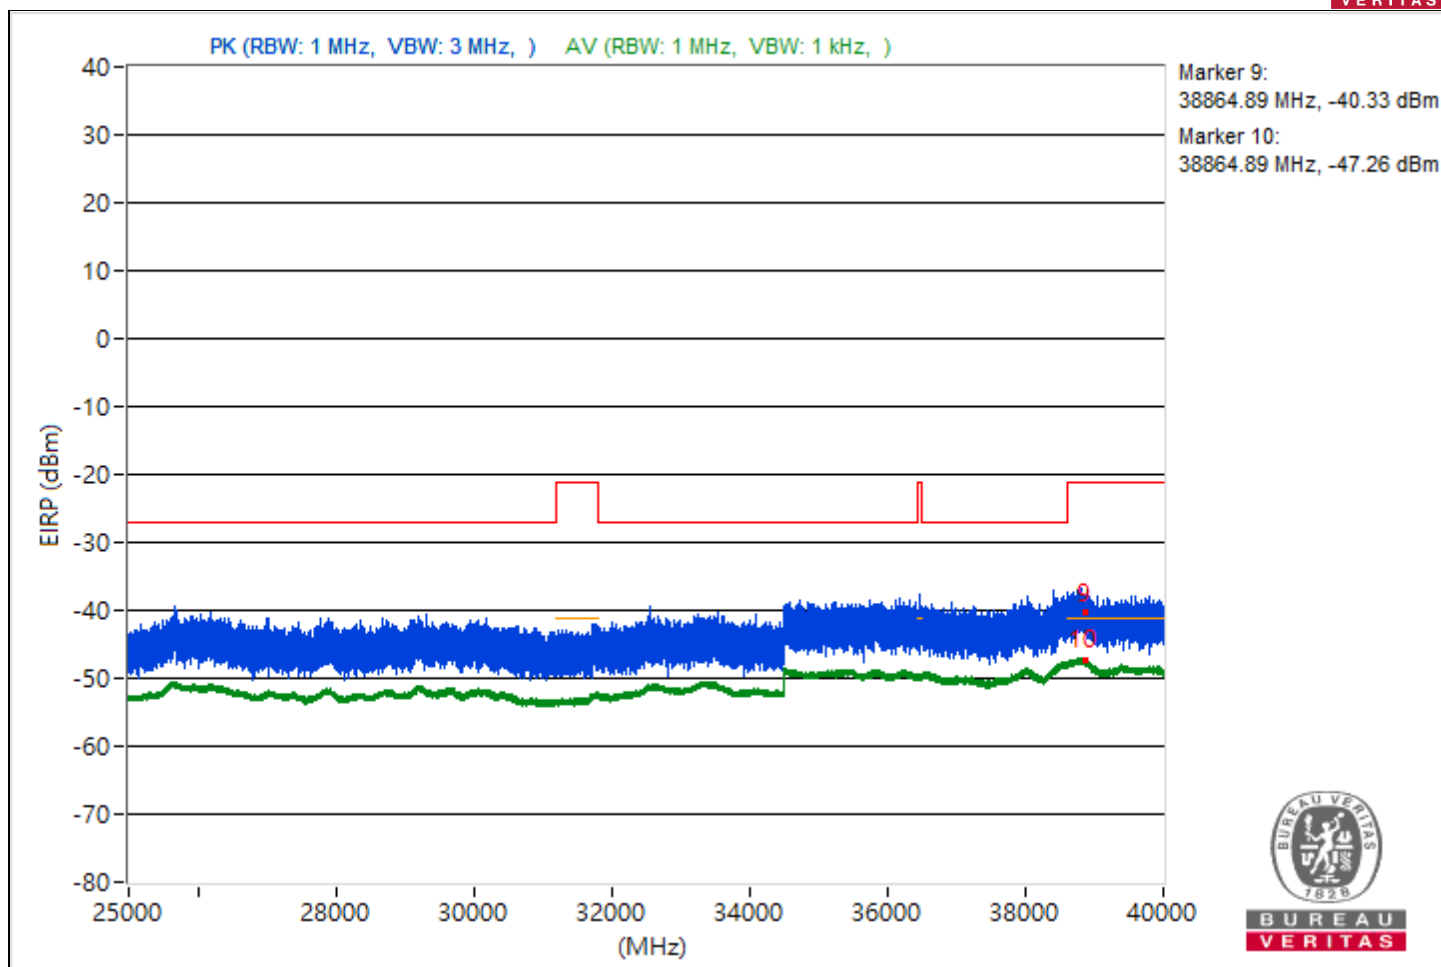


RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5092.98	52.1 PK	74	-21.9	-54.22	-54.89	8.37	-43.16
2	5092.98	45.55 AV	54	-8.45	-60.4	-61.91	8.37	-49.71
3	8463.91	47.38 PK	74	-26.62	-58.03	-60.97	8.37	-47.88
4	8463.91	43.12 AV	54	-10.88	-61.57	-67.18	8.37	-52.14
5	18973	48.11 PK	74	-25.89	-59.38	-57.82	8.37	-47.15
6	18973	41.49 AV	54	-12.51	-65.47	-64.84	8.37	-53.77
7	23786.1	49.79 PK	74	-24.21	-57.31	-56.44	8.37	-45.47
8	23786.1	43.61 AV	54	-10.39	-62.74	-63.34	8.37	-51.65
9	38775.82	54.66 PK	74	-19.34	-53.7	-50.76	8.37	-40.6
10	38775.82	48.12 AV	54	-5.88	-58.95	-58.13	8.37	-47.14

Note: Margin value = Emission Level - Limit value

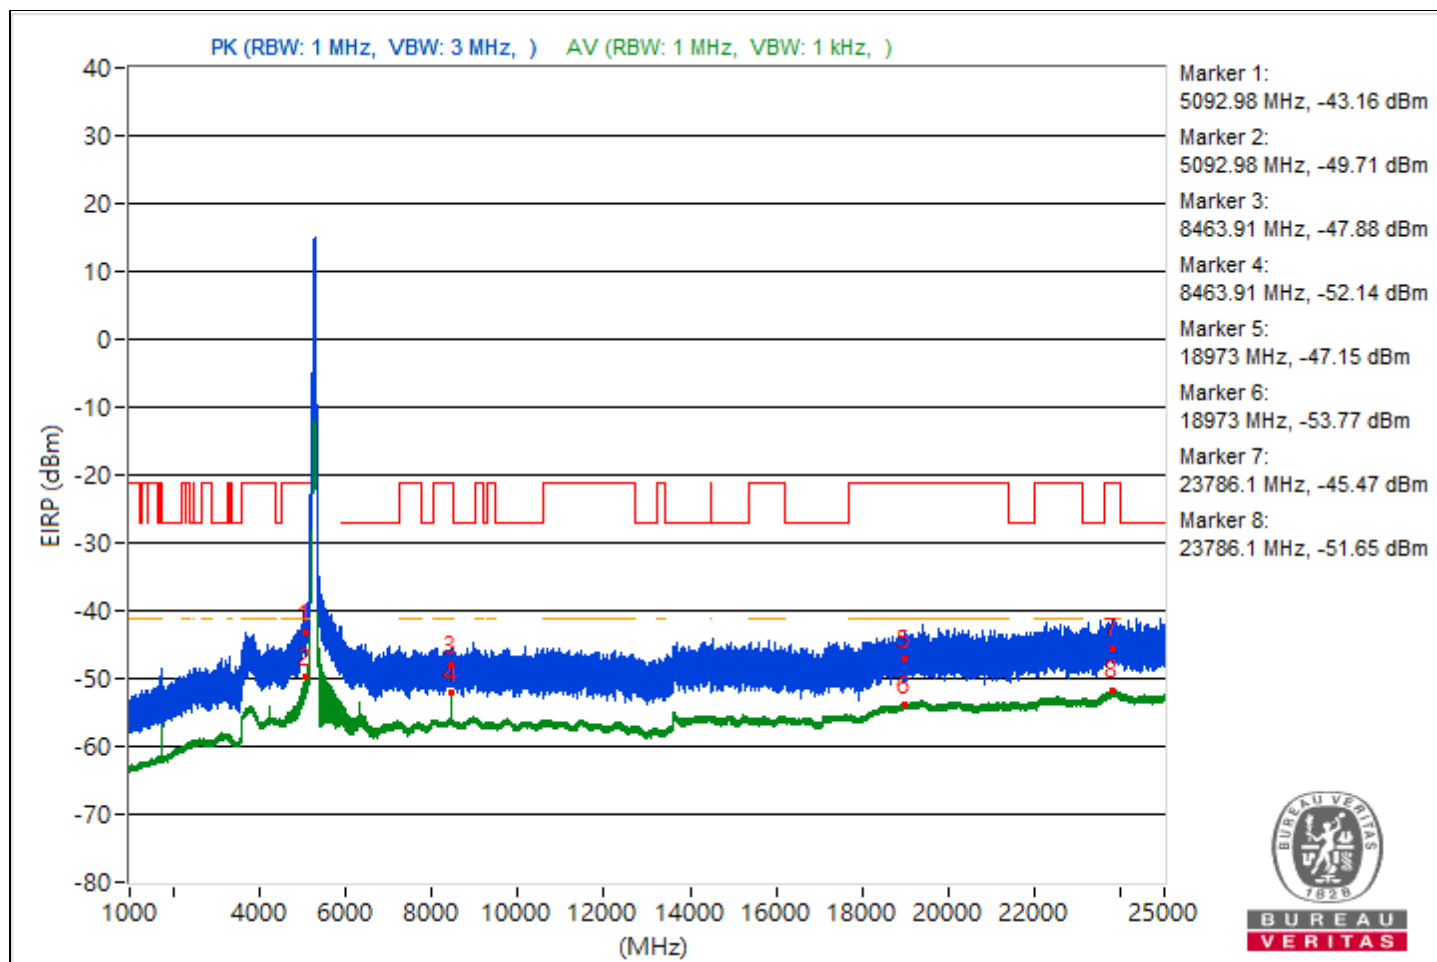


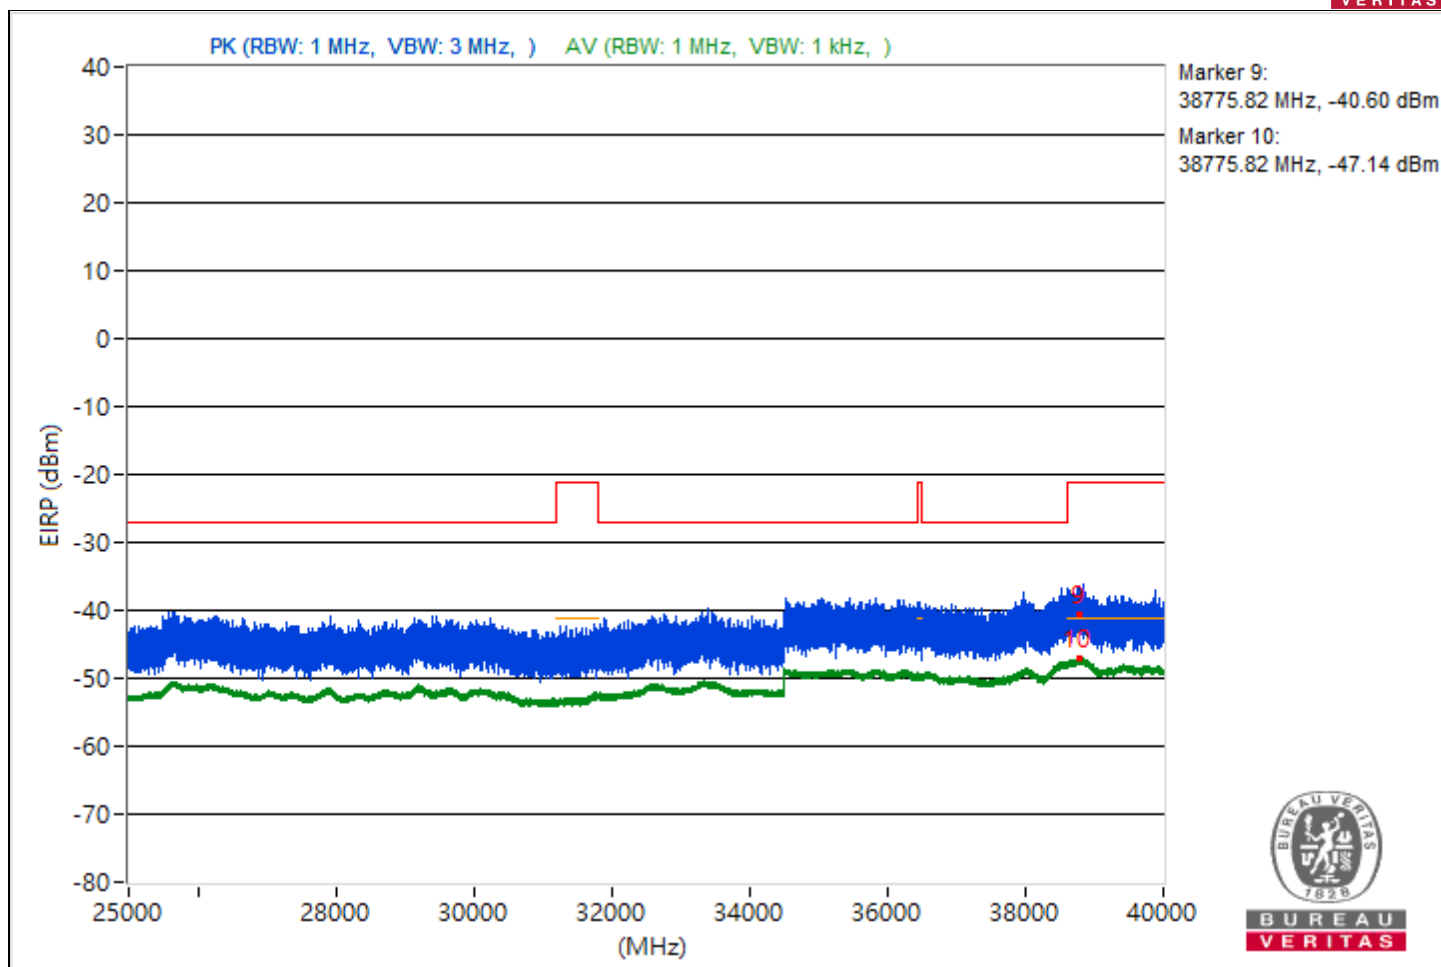


RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5097.72	48.7 PK	74	-25.3	-59.07	-57.04	8.37	-46.56
2	5097.72	43.25 AV	54	-10.75	-63.68	-63.13	8.37	-52.01
3	9017.24	47.28 PK	74	-26.72	-58.53	-60.4	8.37	-47.98
4	9017.24	39.43 AV	54	-14.57	-67.44	-67	8.37	-55.83
5	18998.6	49.69 PK	74	-24.31	-58.37	-55.88	8.37	-45.57
6	18998.6	41.76 AV	54	-12.24	-64.83	-64.94	8.37	-53.5
7	23828.3	48.93 PK	74	-25.07	-58.66	-56.93	8.37	-46.33
8	23828.3	43.55 AV	54	-10.45	-63.39	-62.81	8.37	-51.71
9	38783.29	54.46 PK	74	-19.54	-51.54	-52.94	8.37	-40.8
10	38783.29	48.33 AV	54	-5.67	-58.68	-57.98	8.37	-46.93

Note: Margin value = Emission Level - Limit value

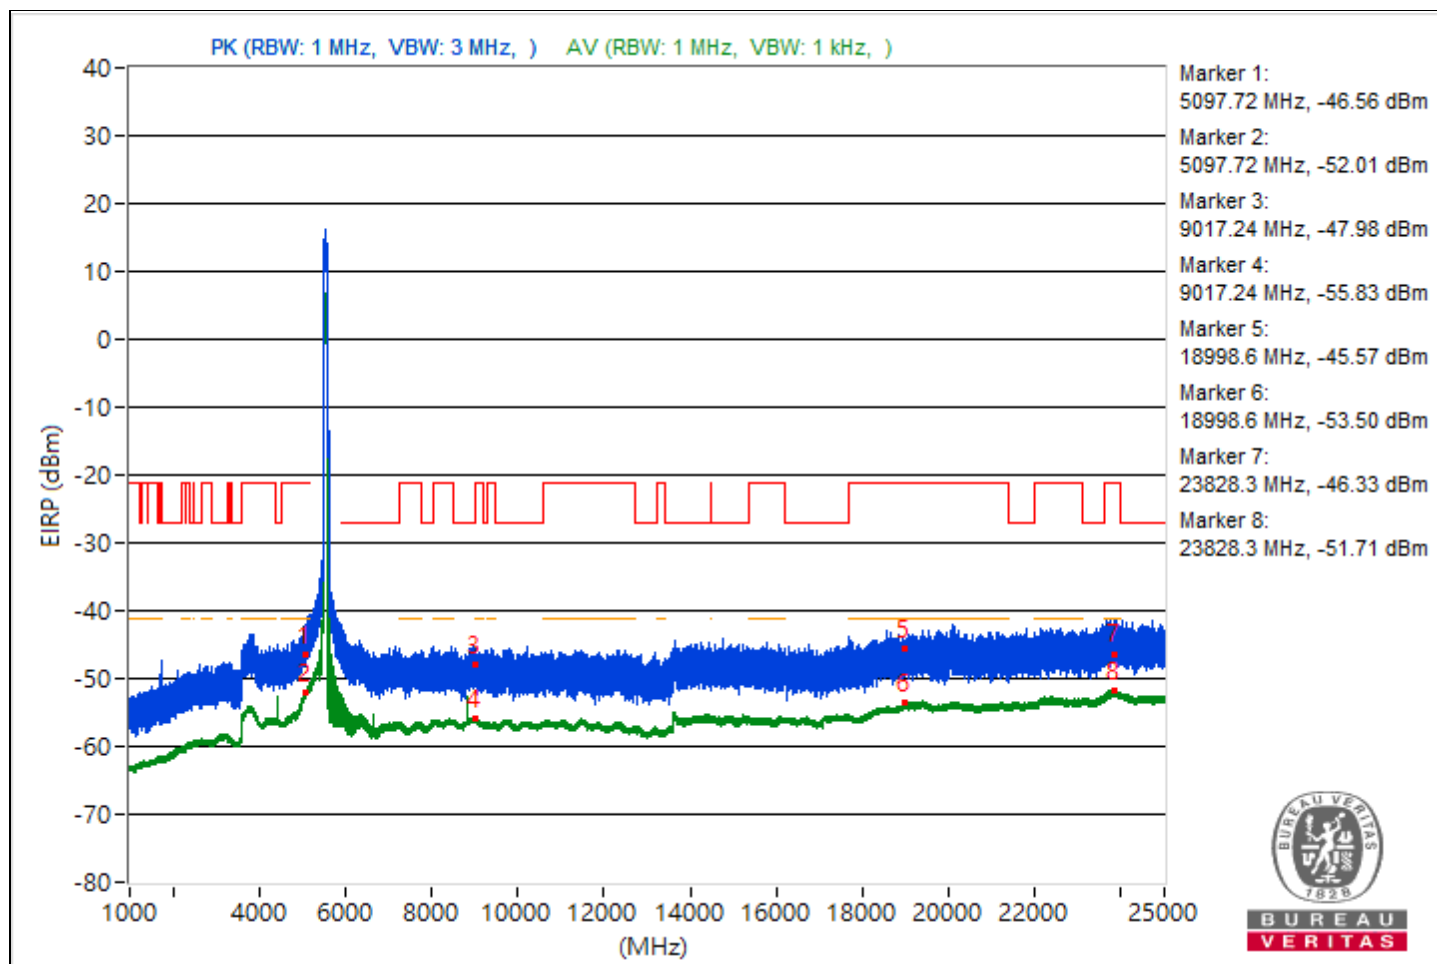


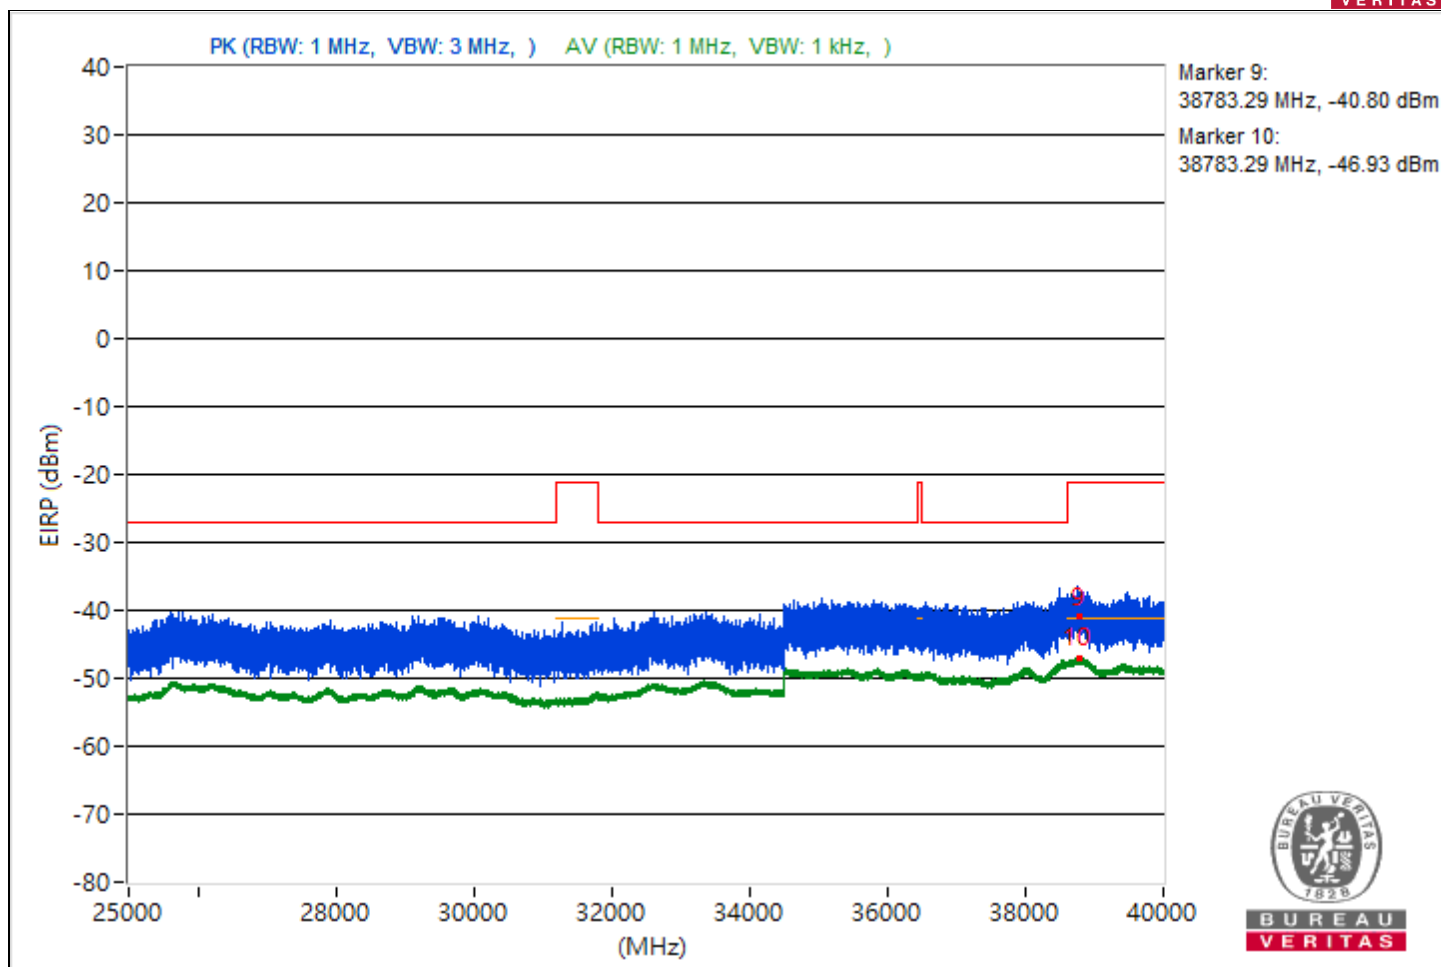


RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5079.37	50 PK	74	-24	-55.36	-58.45	8.37	-45.26
2	5079.37	42.89 AV	54	-11.11	-63.4	-64.14	8.37	-52.37
3	9017.42	46.62 PK	74	-27.38	-61.14	-59.12	8.37	-48.64
4	9017.42	39.46 AV	54	-14.54	-67.33	-67.05	8.37	-55.8
5	18991.1	47.24 PK	74	-26.76	-60.42	-58.58	8.37	-48.02
6	18991.1	41.5 AV	54	-12.5	-65.59	-64.73	8.37	-53.76
7	23827.6	51.64 PK	74	-22.36	-53.37	-57.64	8.37	-43.62
8	23827.6	43.52 AV	54	-10.48	-63.52	-62.76	8.37	-51.74
9	38784.27	53.91 PK	74	-20.09	-54.84	-51.32	8.37	-41.35
10	38784.27	48.19 AV	54	-5.81	-58.87	-58.06	8.37	-47.07

Note: Margin value = Emission Level - Limit value

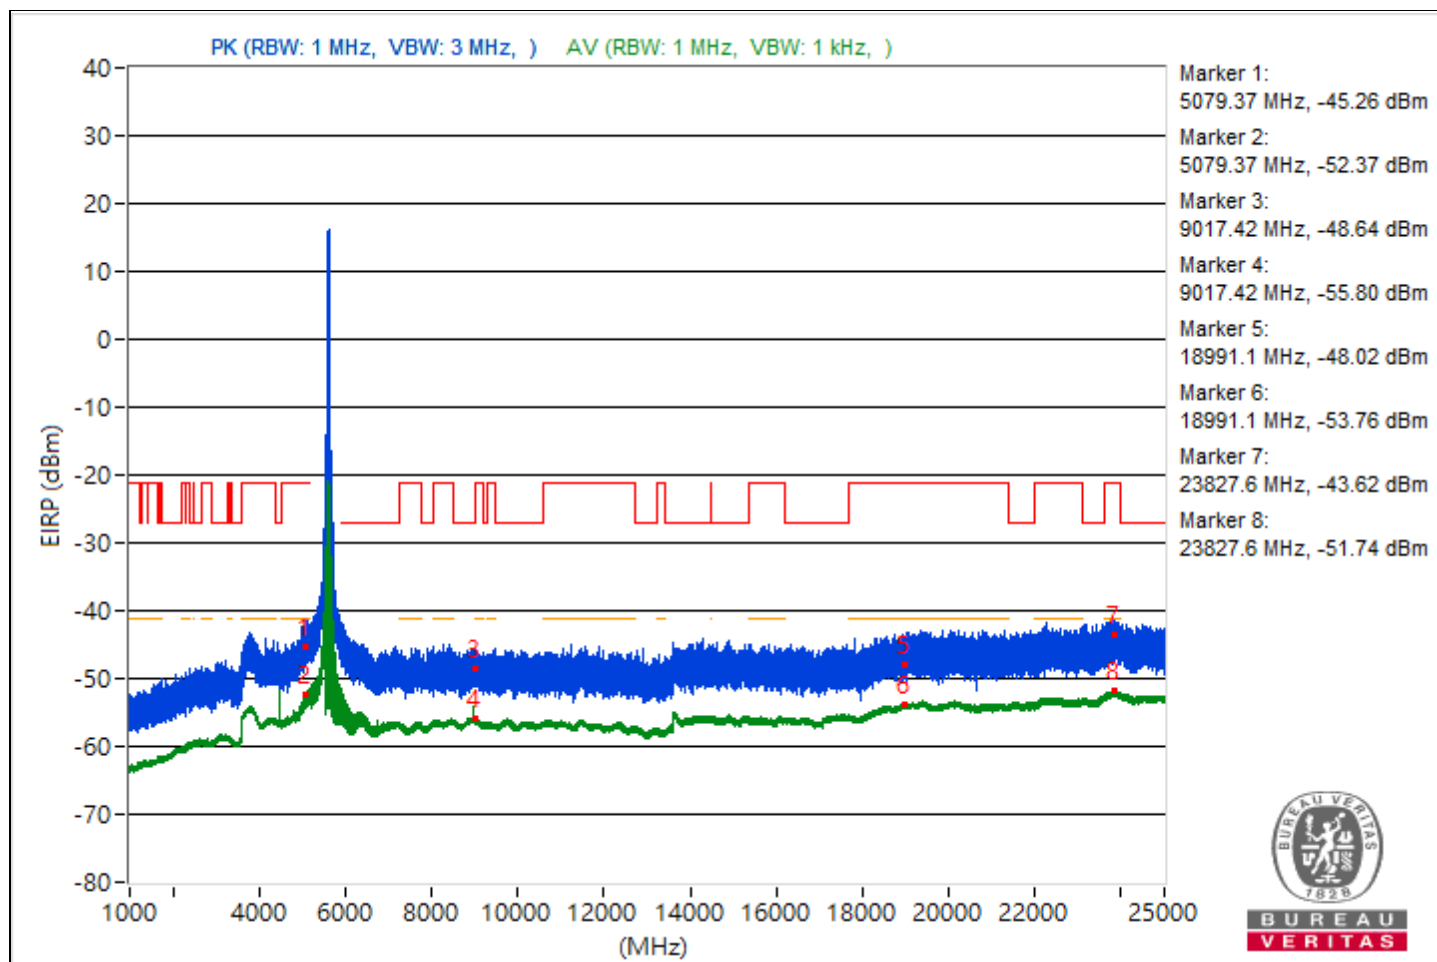


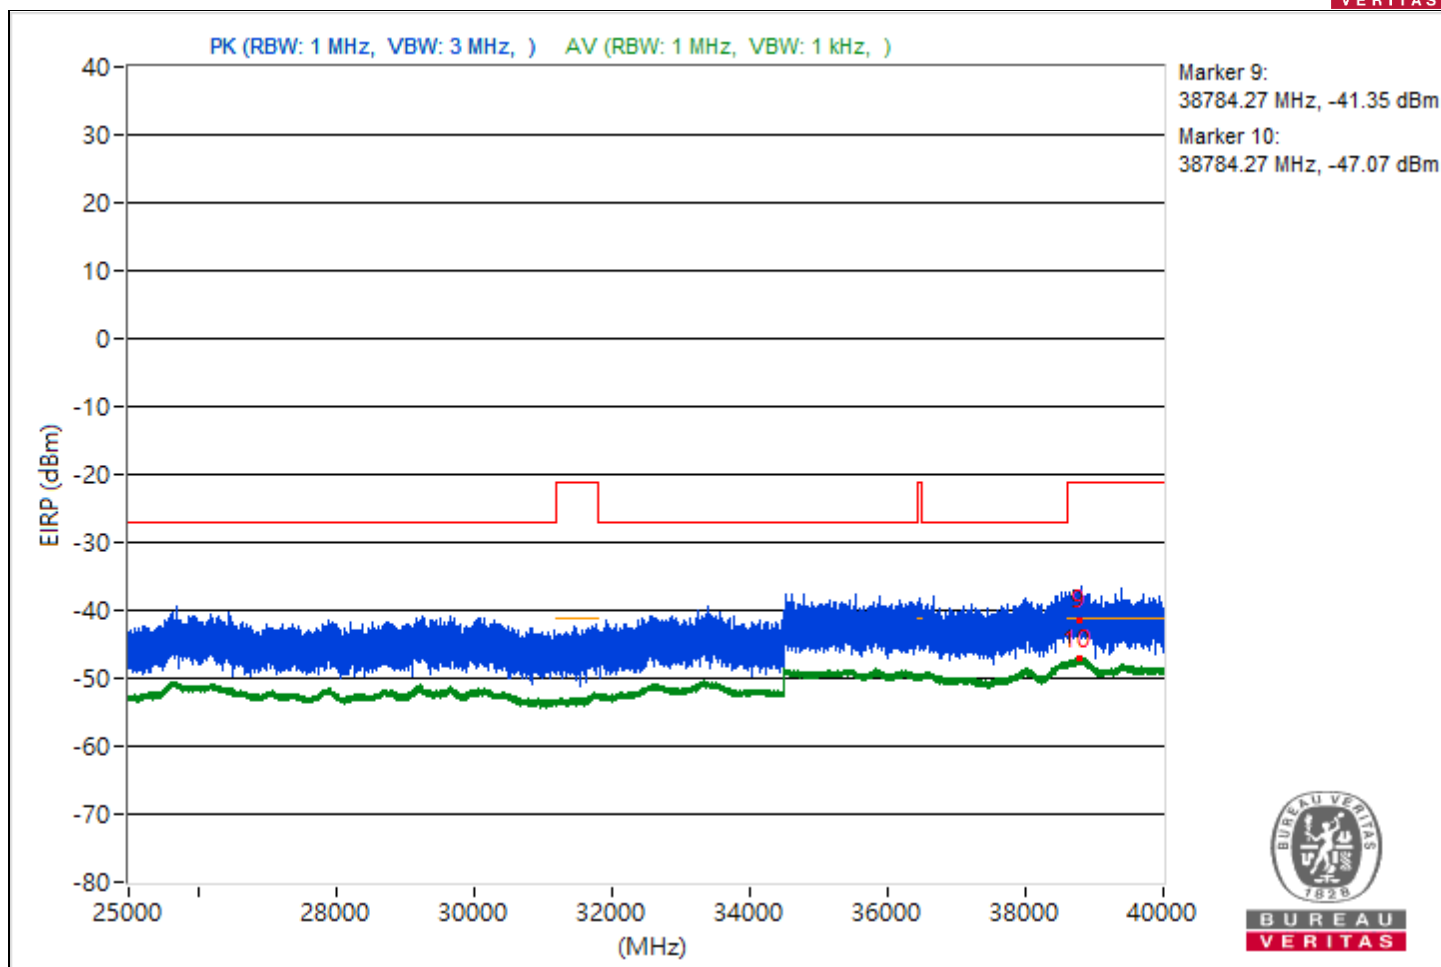


RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4551.96	49.34 PK	74	-24.66	-55.19	-61.58	8.37	-45.92
2	4551.96	44.33 AV	54	-9.67	-59.97	-67.74	8.37	-50.93
3	9103.56	46.96 PK	74	-27.04	-60.12	-59.28	8.37	-48.3
4	9103.56	41.46 AV	54	-12.54	-63.59	-67.72	8.37	-53.8
5	18876.3	48.57 PK	74	-25.43	-57.09	-59.34	8.37	-46.69
6	18876.3	41.55 AV	54	-12.45	-65.37	-64.82	8.37	-53.71
7	23787.8	51.08 PK	74	-22.92	-55.3	-55.84	8.37	-44.18
8	23787.8	43.6 AV	54	-10.4	-62.87	-63.23	8.37	-51.66
9	38802.13	55.3 PK	74	-18.7	-51.38	-51.3	8.37	-39.96
10	38802.13	48.11 AV	54	-5.89	-58.86	-58.22	8.37	-47.15

Note: Margin value = Emission Level - Limit value

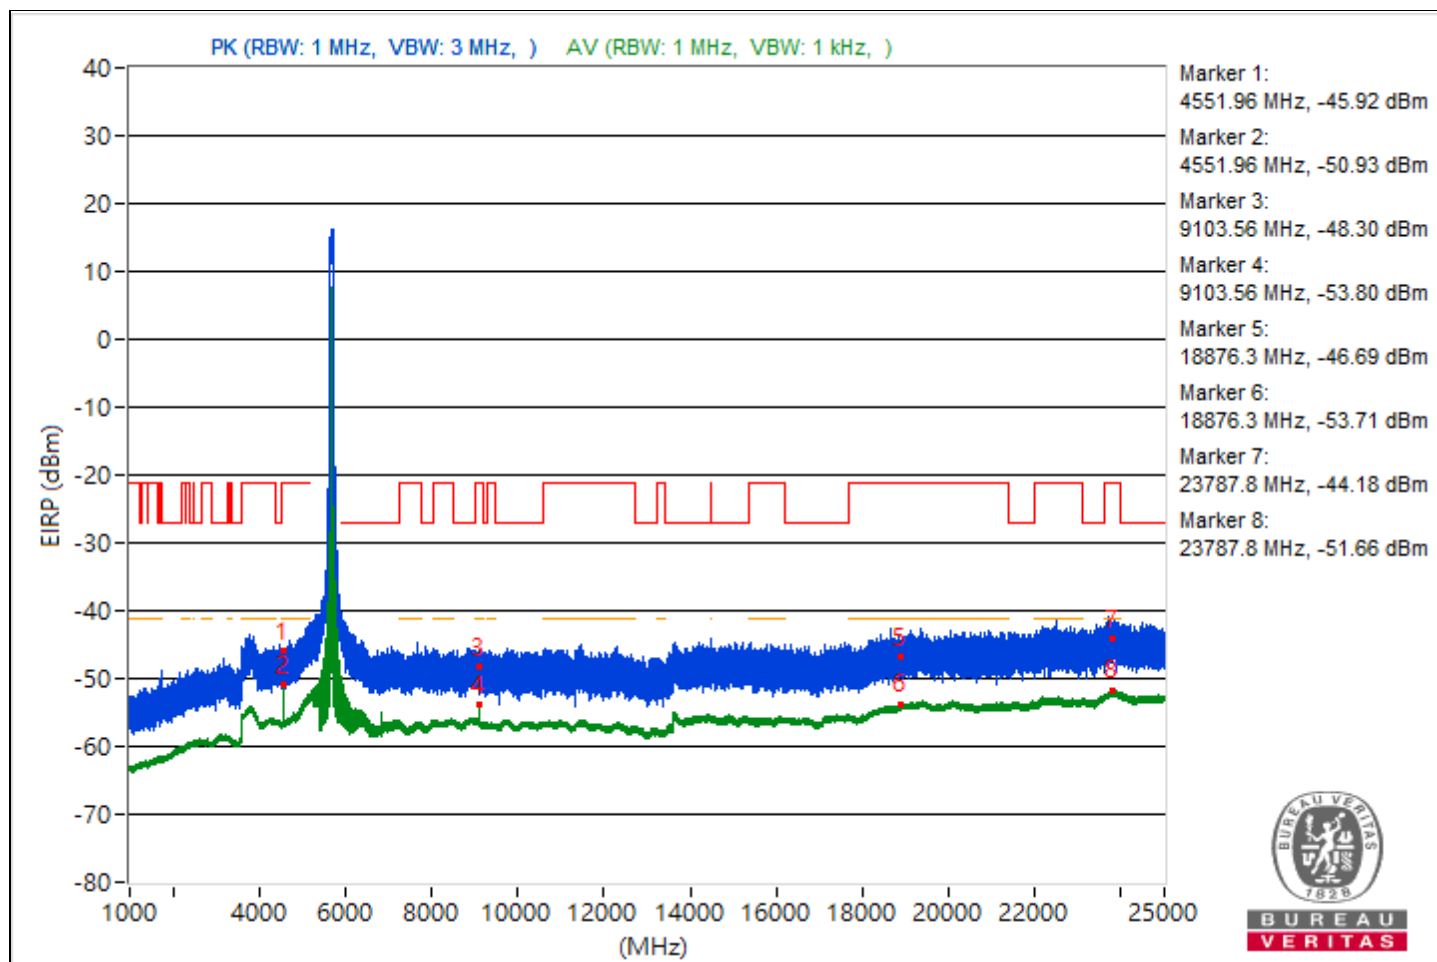


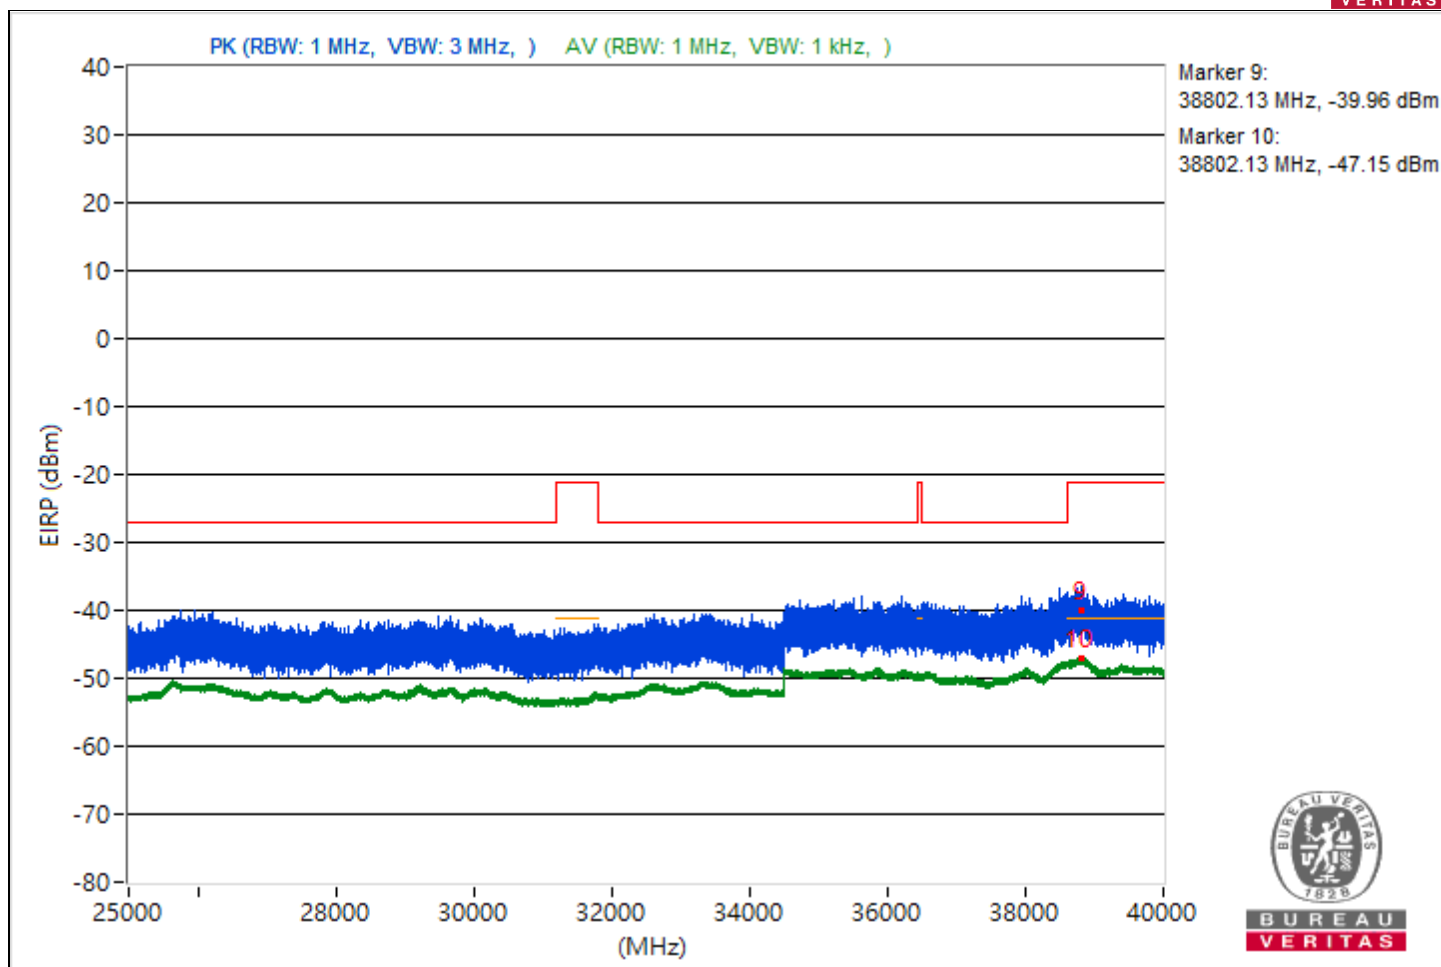


RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4620.01	49.91 PK	74	-24.09	-55.13	-59.3	8.37	-45.35
2	4620.01	43.54 AV	54	-10.46	-60.88	-67.9	8.37	-51.72
3	11557.33	47.13 PK	74	-26.87	-60.01	-59.05	8.37	-48.13
4	11557.33	40.26 AV	54	-13.74	-66.14	-66.63	8.37	-55
5	18982.4	49.64 PK	74	-24.36	-56.41	-57.69	8.37	-45.62
6	18982.4	41.21 AV	54	-12.79	-65.14	-65.74	8.37	-54.05
7	23837.4	50.71 PK	74	-23.29	-54.67	-57.71	8.37	-44.55
8	23837.4	43.5 AV	54	-10.5	-62.87	-63.44	8.37	-51.76
9	38800.09	54.68 PK	74	-19.32	-50.99	-53.22	8.37	-40.58
10	38800.09	48.01 AV	54	-5.99	-58.39	-58.88	8.37	-47.25

Note: Margin value = Emission Level - Limit value

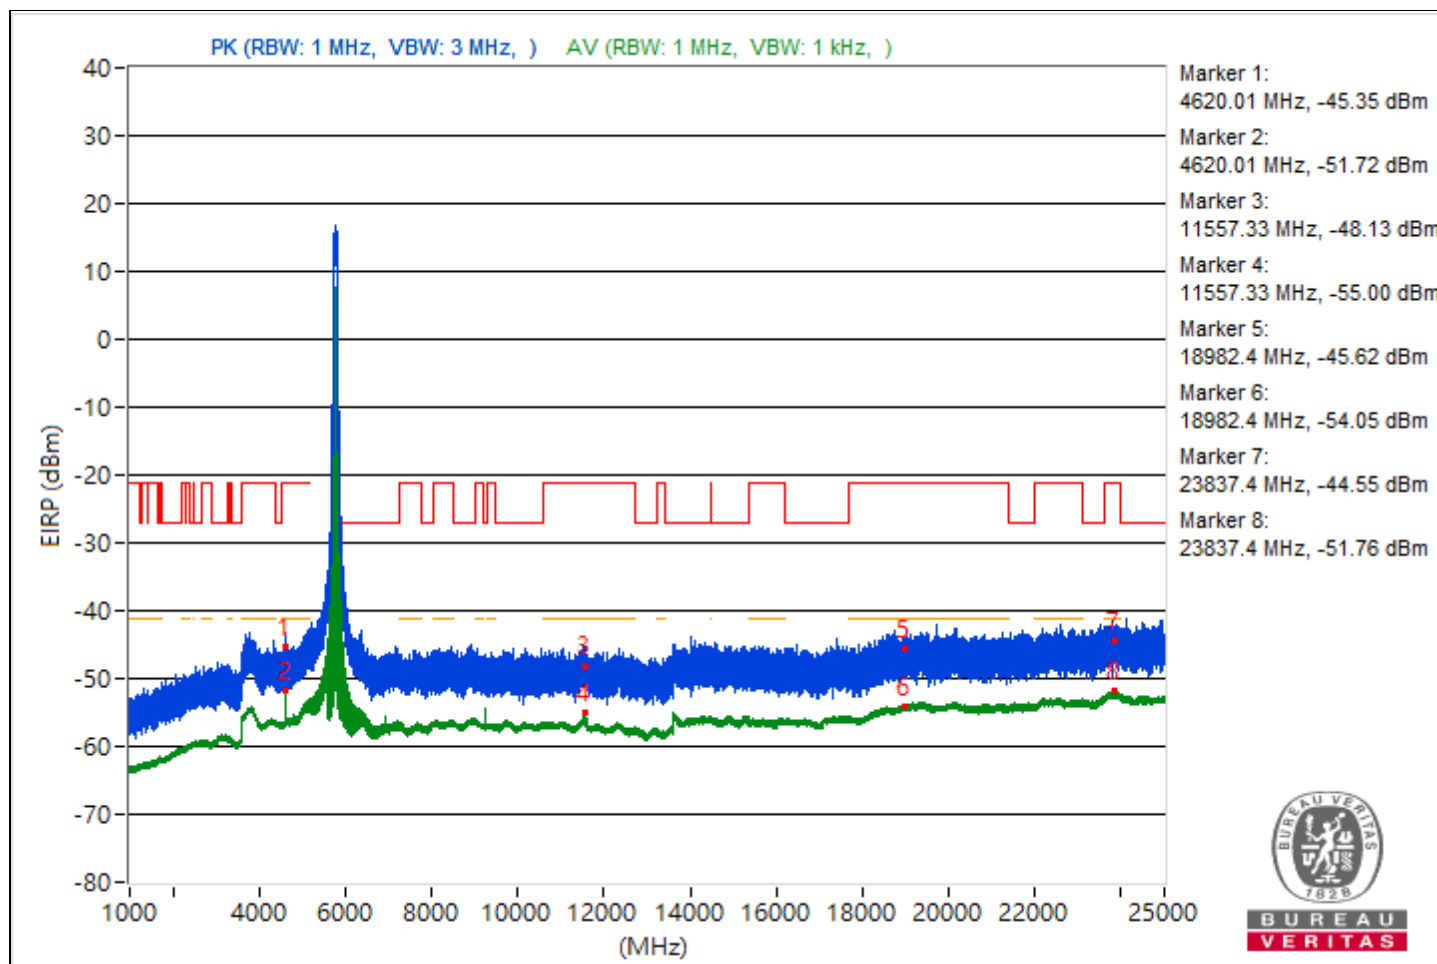


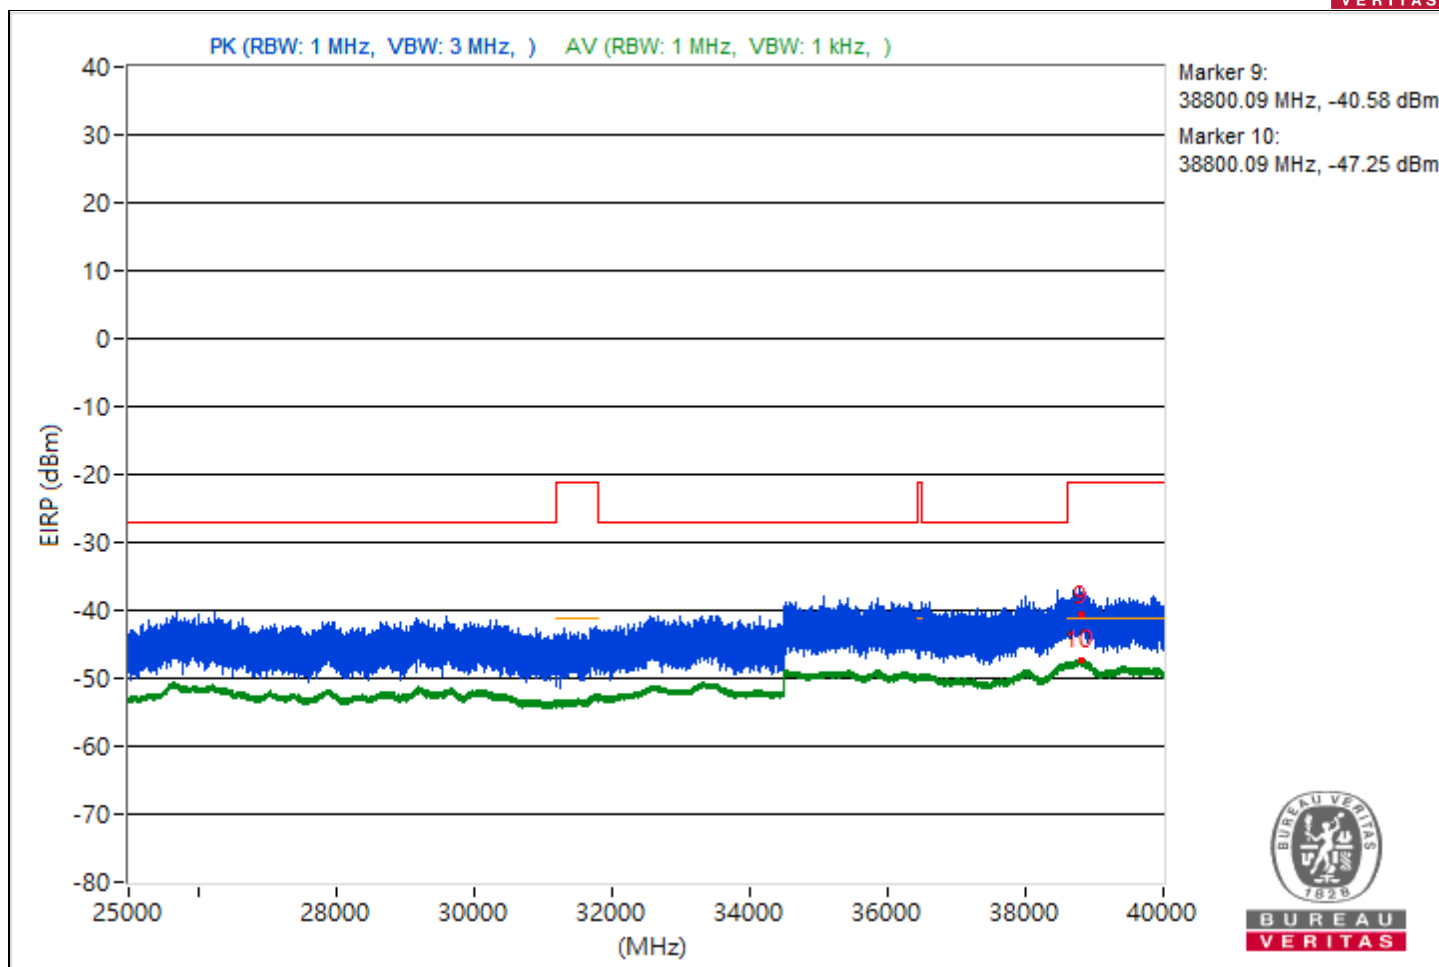


RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5094.22	56.9 PK	74	-17.1	-51.24	-48.63	8.37	-38.36
2	5094.22	50.51 AV	54	-3.49	-56.01	-56.25	8.37	-44.75
3	9020.98	46.37 PK	74	-27.63	-61.03	-59.61	8.37	-48.89
4	9020.98	39.32 AV	54	-14.68	-67.53	-67.12	8.37	-55.94
5	18999.4	48.68 PK	74	-25.32	-58.31	-57.64	8.37	-46.58
6	18999.4	41.51 AV	54	-12.49	-65.21	-65.05	8.37	-53.75
7	23797.7	48.89 PK	74	-25.11	-58.46	-57.14	8.37	-46.37
8	23797.7	43.35 AV	54	-10.65	-63.56	-63.04	8.37	-51.91
9	38826.31	54.66 PK	74	-19.34	-51.46	-52.56	8.37	-40.6
10	38826.31	48.03 AV	54	-5.97	-58.79	-58.43	8.37	-47.23

Note: Margin value = Emission Level - Limit value

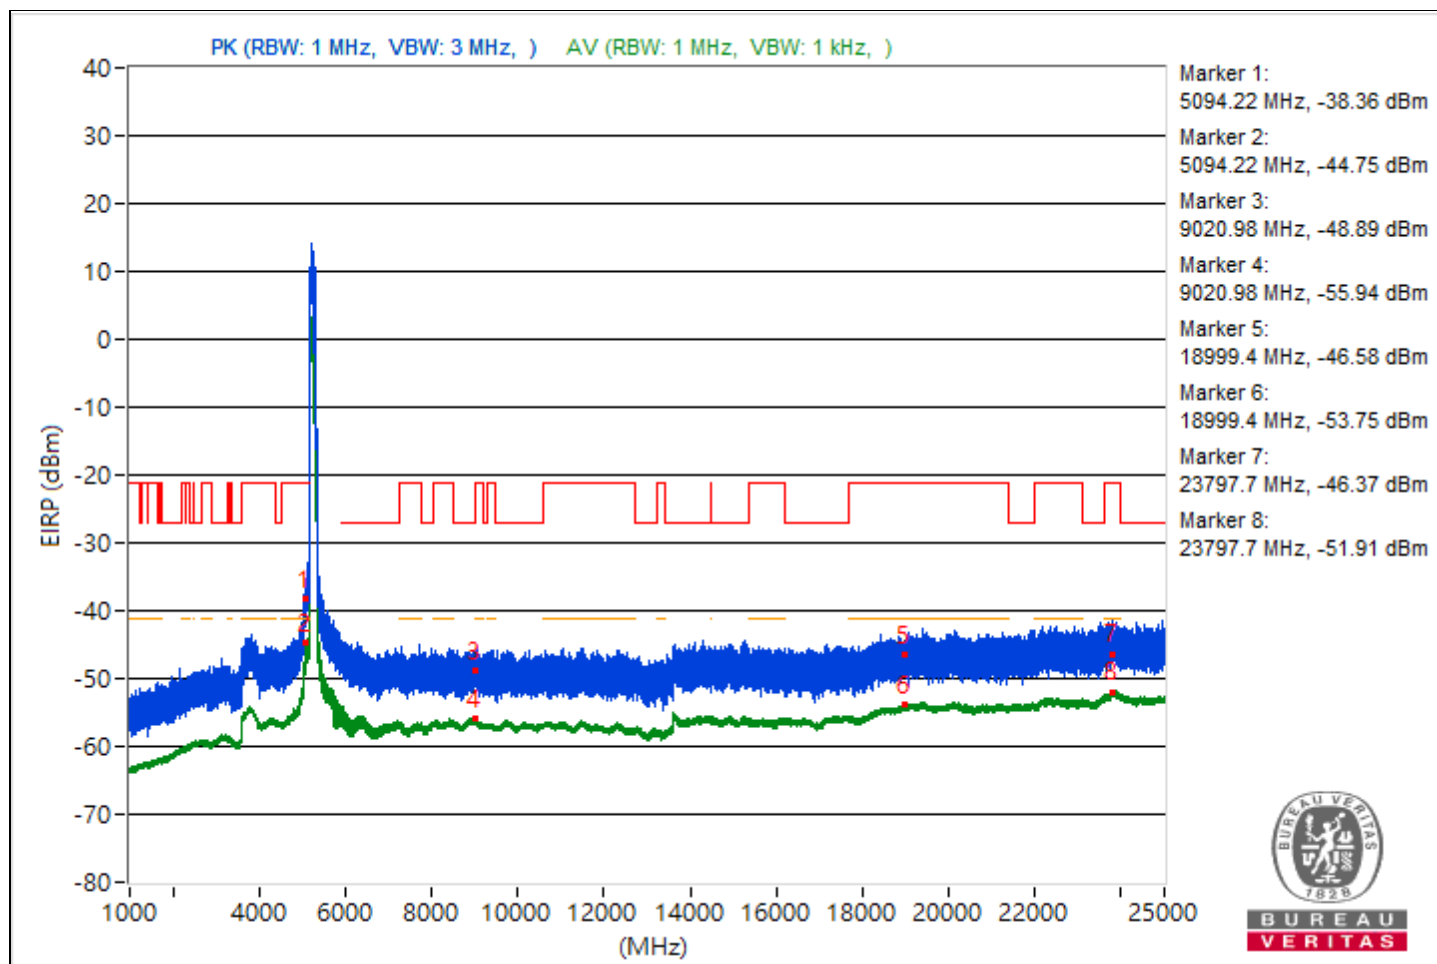


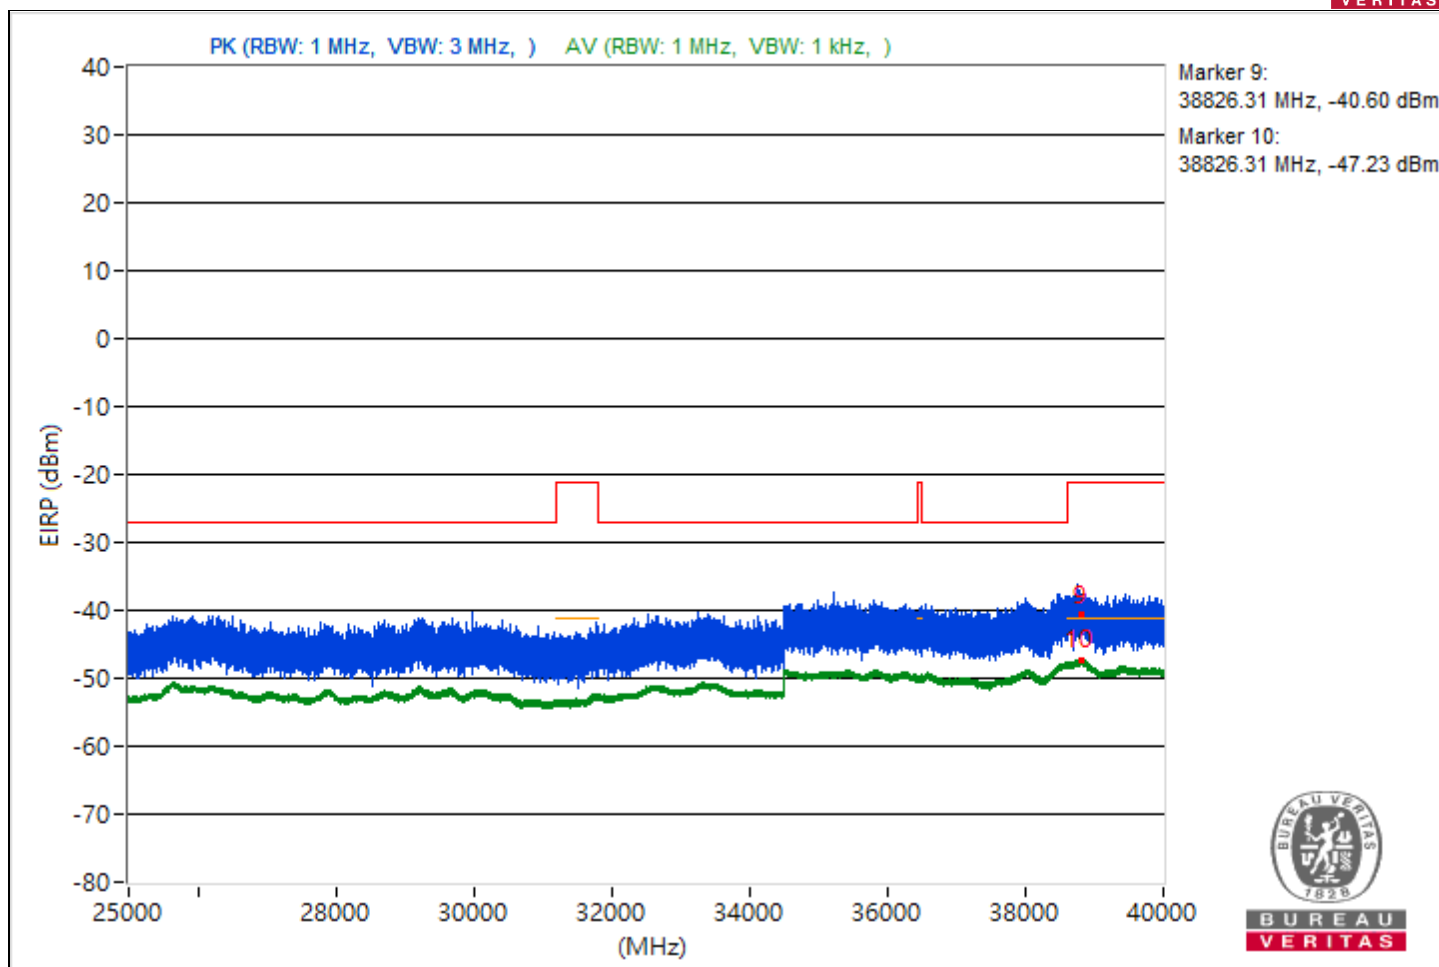


RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5095.62	50.09 PK	74	-23.91	-56.58	-56.52	8.37	-45.17
2	5095.62	43.09 AV	54	-10.91	-63.44	-63.66	8.37	-52.17
3	9015.91	45.85 PK	74	-28.15	-60.07	-61.65	8.37	-49.41
4	9015.91	39.32 AV	54	-14.68	-67.13	-67.52	8.37	-55.94
5	18944	48.74 PK	74	-25.26	-59.17	-56.92	8.37	-46.52
6	18944	41.2 AV	54	-12.8	-65.76	-65.15	8.37	-54.06
7	23836.1	51.61 PK	74	-22.39	-54.28	-55.93	8.37	-43.65
8	23836.1	43.44 AV	54	-10.56	-63.04	-63.37	8.37	-51.82
9	38818.93	54.14 PK	74	-19.86	-51.99	-53.07	8.37	-41.12
10	38818.93	47.99 AV	54	-6.01	-58.41	-58.91	8.37	-47.27

Note: Margin value = Emission Level - Limit value

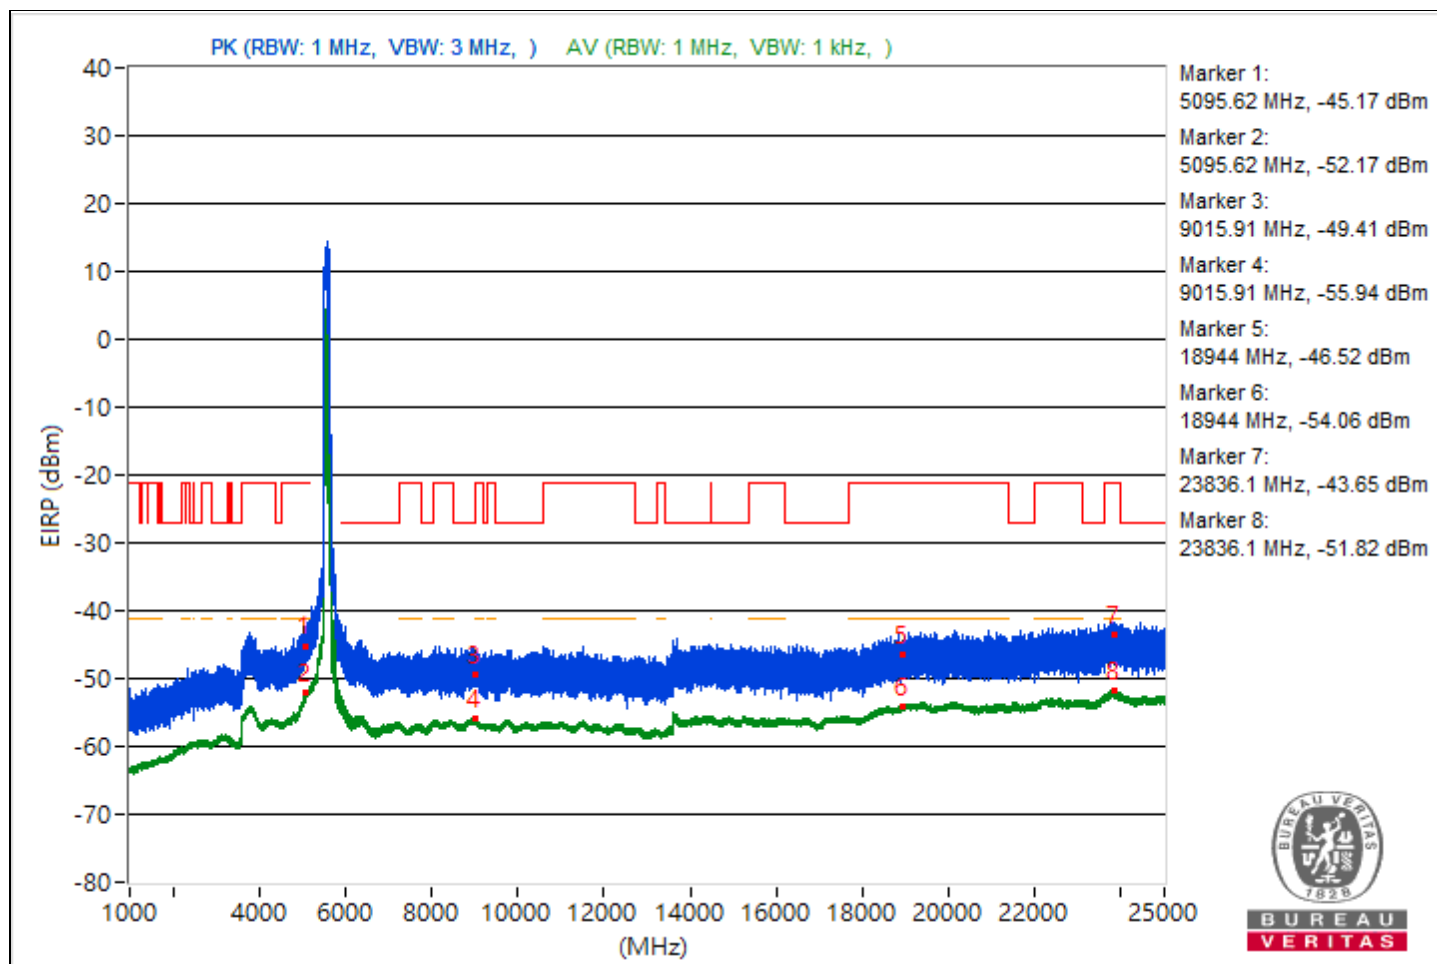


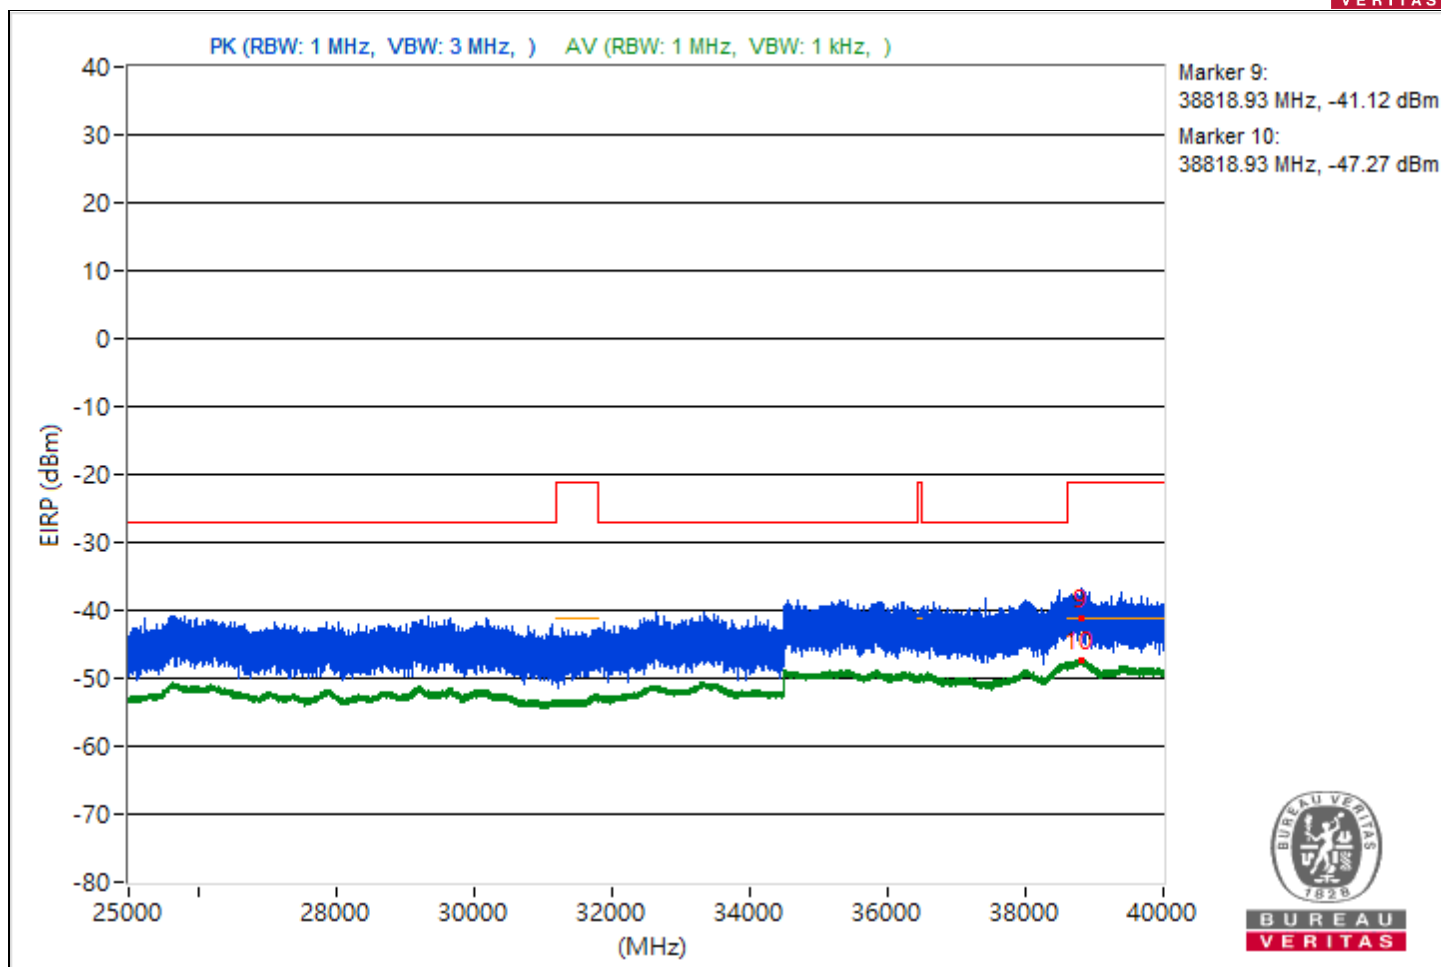


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5094.77	52.09 PK	74	-21.91	-54.04	-55.13	8.37	-43.17
2	5094.77	43.49 AV	54	-10.51	-62.88	-63.43	8.37	-51.77
3	8288.18	47.59 PK	74	-26.41	-58.08	-60.29	8.37	-47.67
4	8288.18	42.48 AV	54	-11.52	-62.14	-68.06	8.37	-52.78
5	18998.5	49.09 PK	74	-24.91	-56.18	-59.55	8.37	-46.17
6	18998.5	41.77 AV	54	-12.23	-65.32	-64.46	8.37	-53.49
7	23847.2	51.44 PK	74	-22.56	-55.82	-54.65	8.37	-43.82
8	23847.2	43.77 AV	54	-10.23	-63.24	-62.53	8.37	-51.49
9	38798.31	54.22 PK	74	-19.78	-52.27	-52.58	8.37	-41.04
10	38798.31	48.47 AV	54	-5.53	-58.5	-57.86	8.37	-46.79

Note: Margin value = Emission Level - Limit value

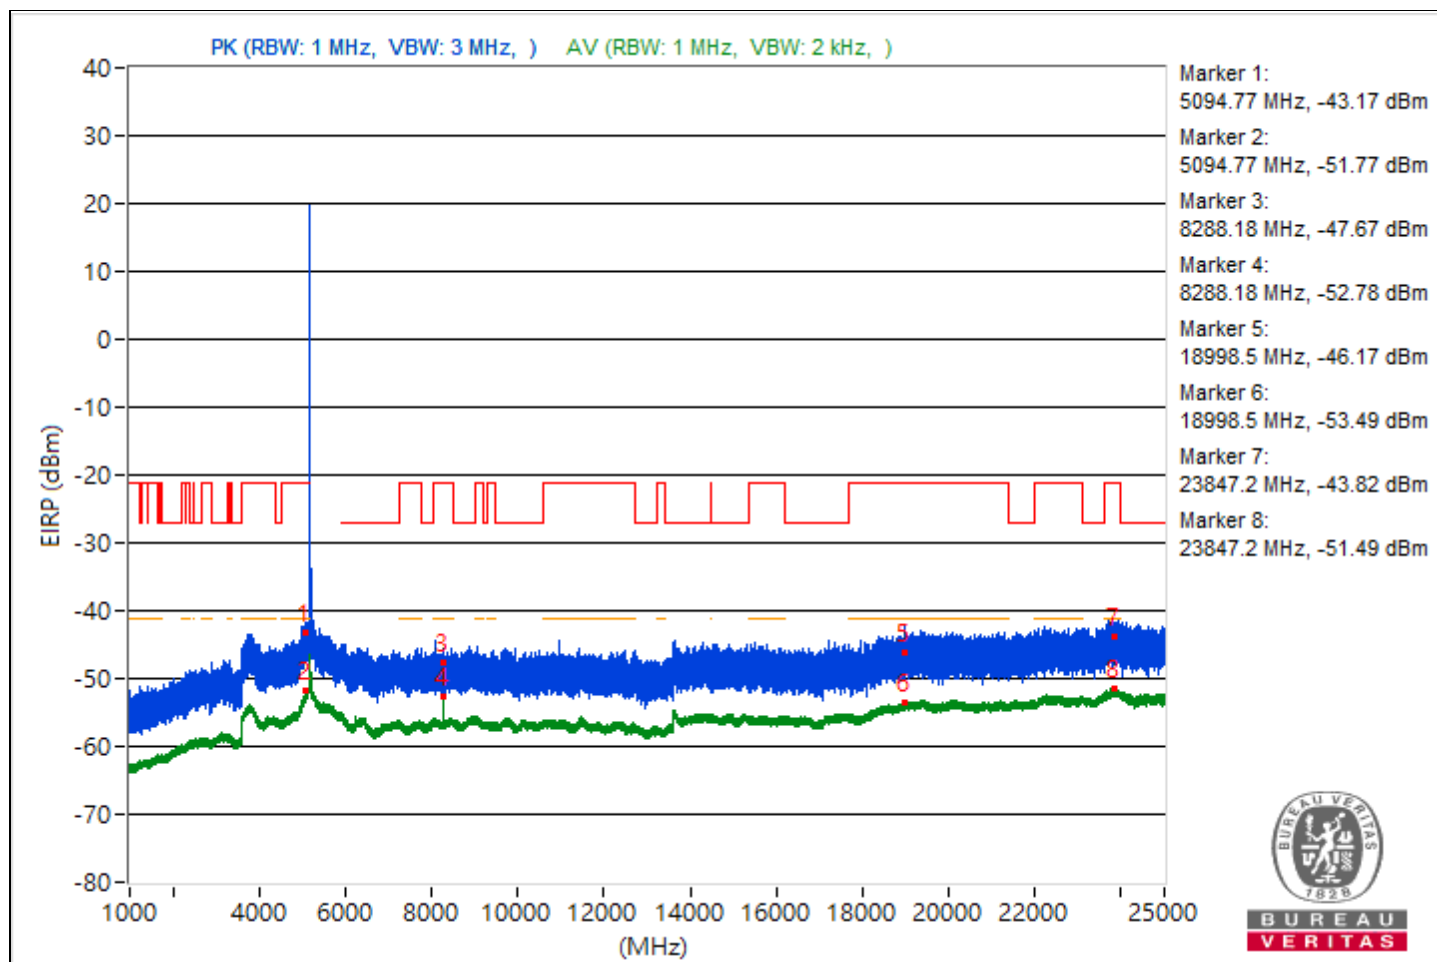


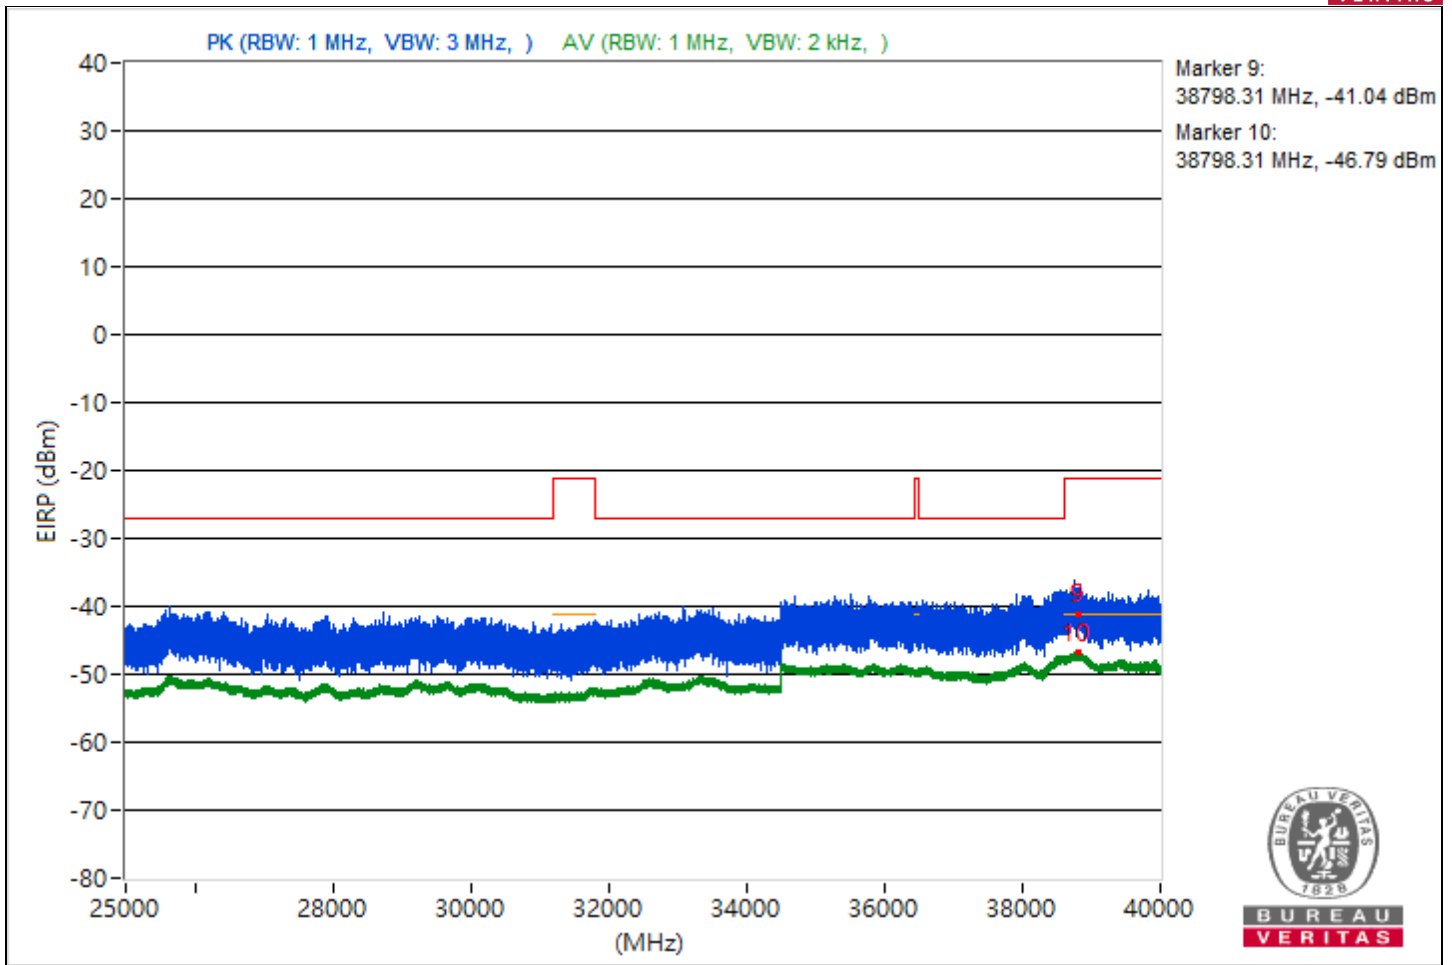



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5087.3	48.1 PK	74	-25.9	-57.8	-59.43	8.37	-47.16
2	5087.3	42.2 AV	54	-11.8	-64.44	-64.45	8.37	-53.06
3	8413.96	46.42 PK	74	-27.58	-61.85	-59.04	8.37	-48.84
4	8413.96	39.45 AV	54	-14.55	-66.94	-67.45	8.37	-55.81
5	18948.5	46.26 PK	74	-27.74	-61.12	-59.74	8.37	-49
6	18948.5	41.43 AV	54	-12.57	-65.77	-64.71	8.37	-53.83
7	23776.8	49.51 PK	74	-24.49	-56.89	-57.38	8.37	-45.75
8	23776.8	43.71 AV	54	-10.29	-63.22	-62.66	8.37	-51.55
9	38799.91	53.27 PK	74	-20.73	-52.55	-54.39	8.37	-41.99
10	38799.91	48.41 AV	54	-5.59	-58.49	-57.98	8.37	-46.85

Note: Margin value = Emission Level - Limit value

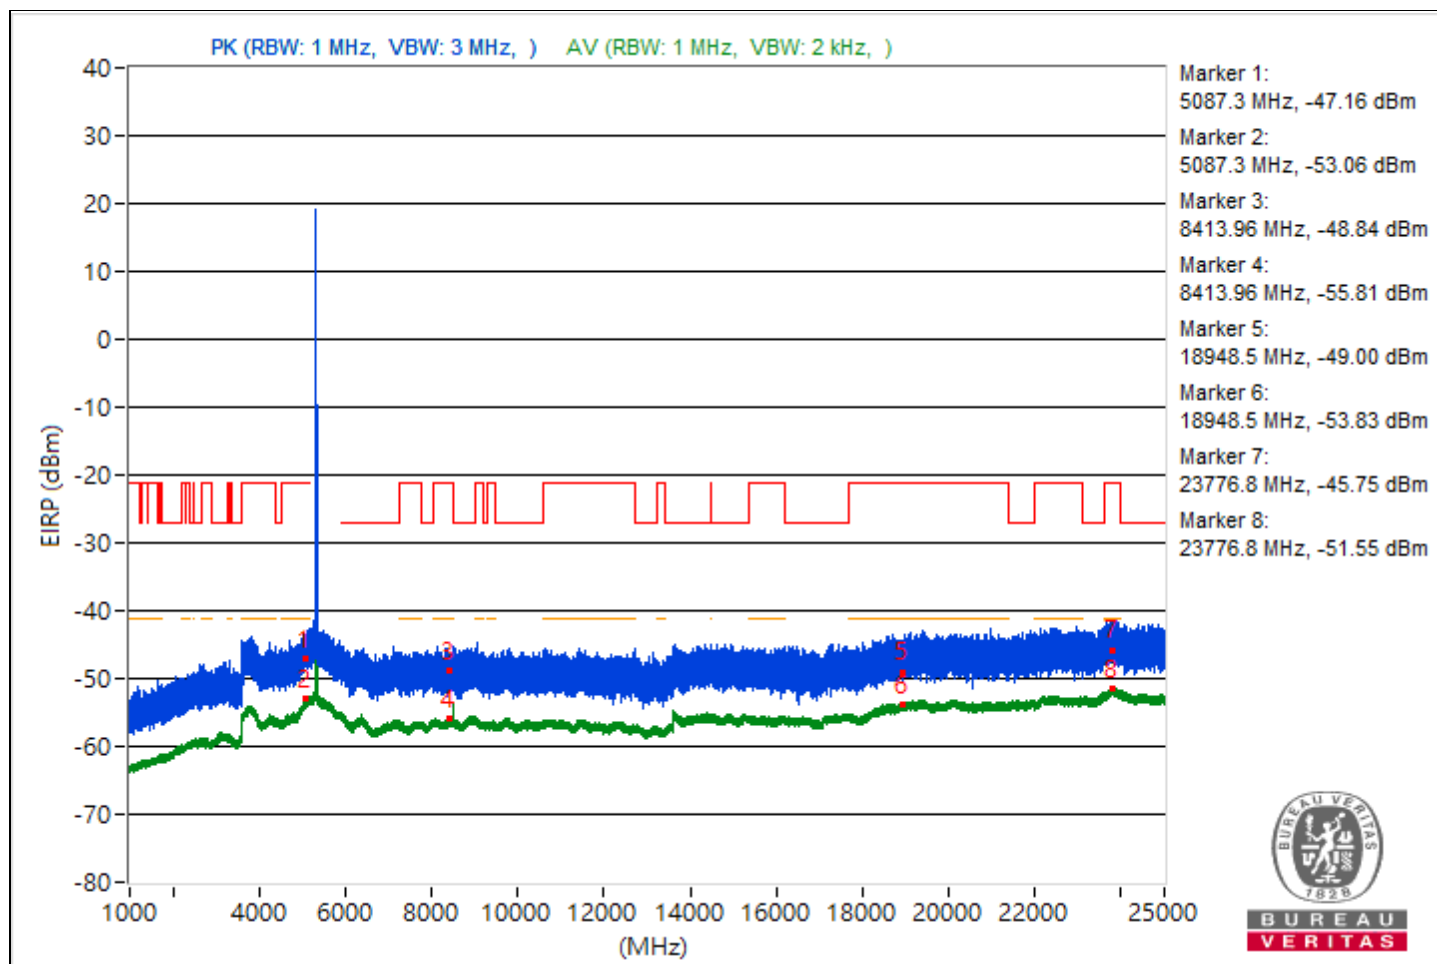

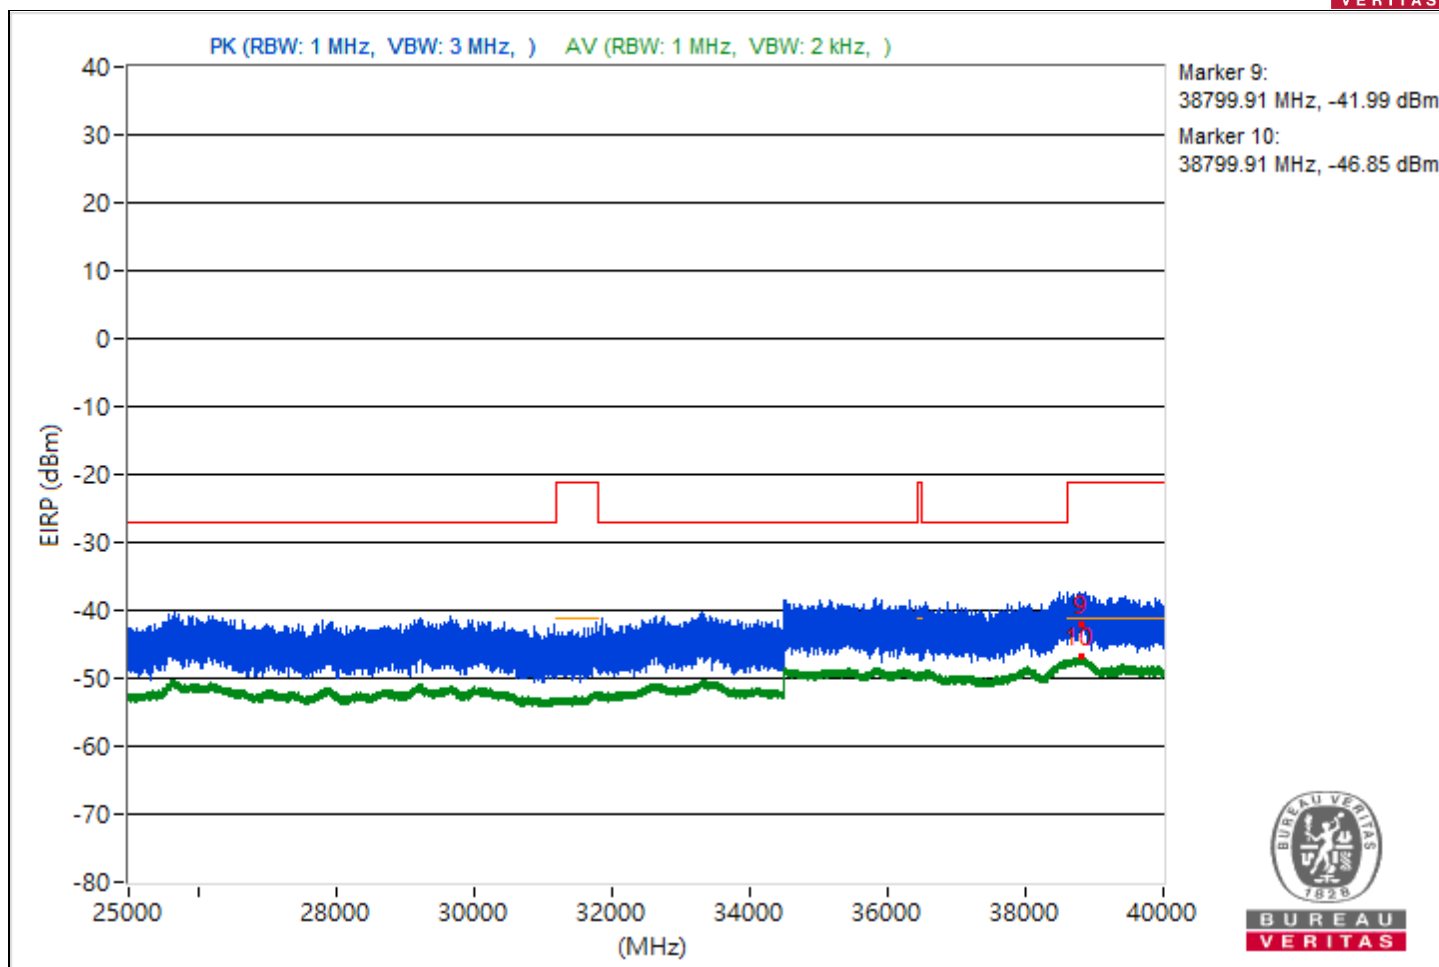


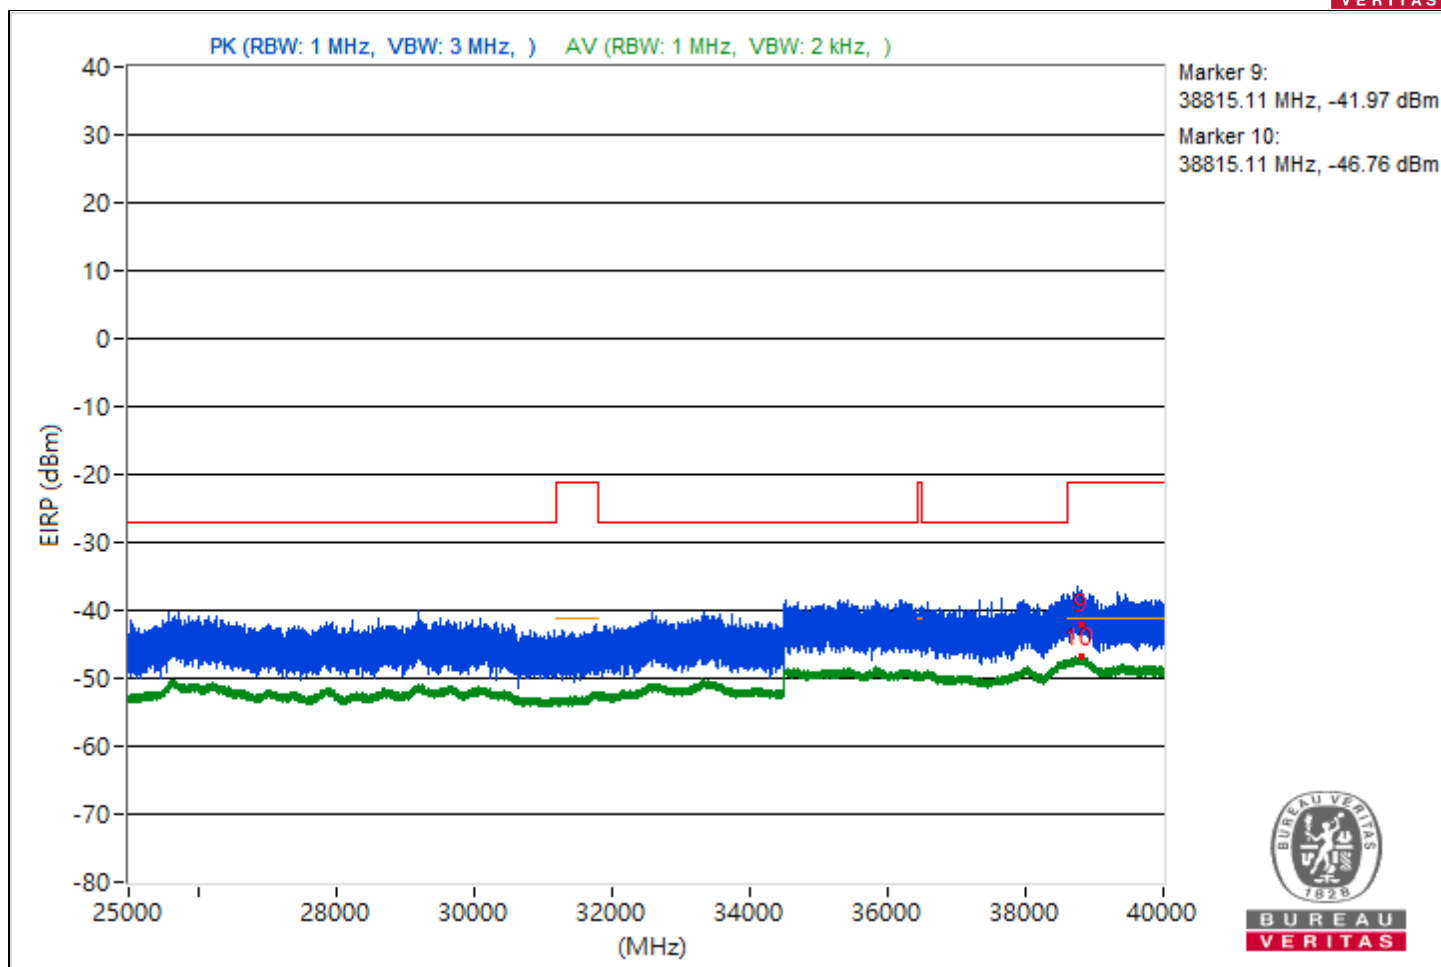


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3783.51	49.12 PK	74	-24.88	-59.08	-56.37	8.37	-46.14
2	3783.51	41.17 AV	54	-12.83	-66.05	-64.96	8.37	-54.09
3	9120.36	44.47 PK	74	-29.53	-62.21	-62.14	8.37	-50.79
4	9120.36	40.05 AV	54	-13.95	-65.54	-67.99	8.37	-55.21
5	18980.7	49.06 PK	74	-24.94	-57.45	-57.71	8.37	-46.2
6	18980.7	41.55 AV	54	-12.45	-64.71	-65.5	8.37	-53.71
7	23790.8	50.09 PK	74	-23.91	-56.2	-56.94	8.37	-45.17
8	23790.8	43.91 AV	54	-10.09	-63.21	-62.31	8.37	-51.35
9	38819.82	54.22 PK	74	-19.78	-51.17	-54.19	8.37	-41.04
10	38819.82	48.31 AV	54	-5.69	-57.91	-58.8	8.37	-46.95

Note: Margin value = Emission Level - Limit value

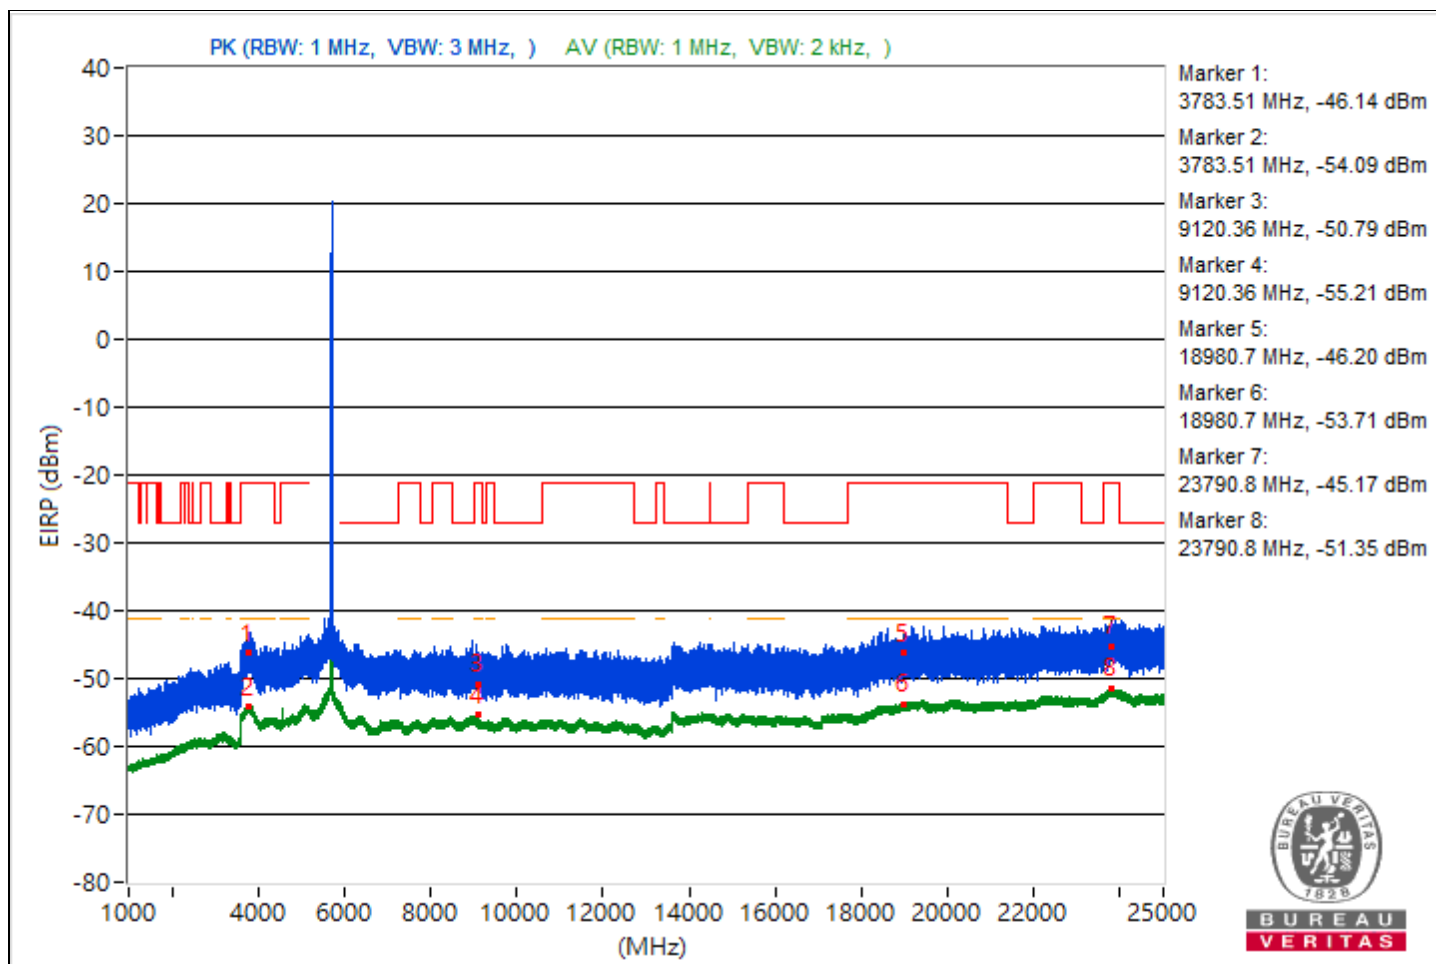


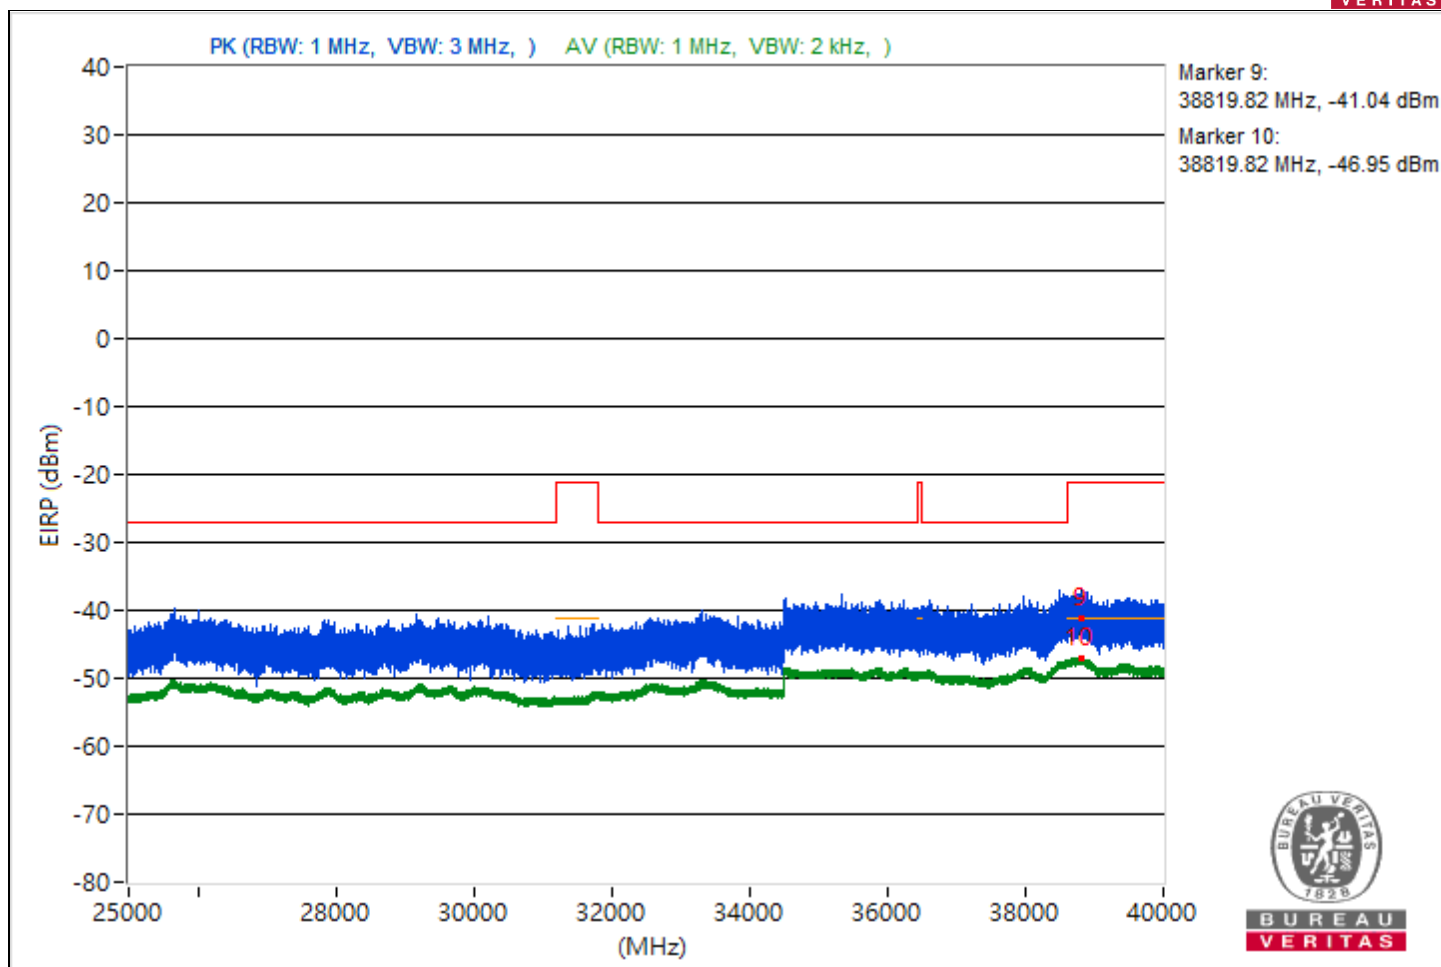


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4575.91	46.58 PK	74	-27.42	-59.22	-61.09	8.37	-48.68
2	4575.91	41.58 AV	54	-12.42	-63.3	-68.06	8.37	-53.68
3	9151.38	45.73 PK	74	-28.27	-62.3	-59.86	8.37	-49.53
4	9151.38	39.78 AV	54	-14.22	-66.38	-67.39	8.37	-55.48
5	18990.4	50.19 PK	74	-23.81	-55.75	-57.29	8.37	-45.07
6	18990.4	41.79 AV	54	-12.21	-64.94	-64.76	8.37	-53.47
7	23800.1	50.5 PK	74	-23.5	-57.87	-54.91	8.37	-44.76
8	23800.1	43.72 AV	54	-10.28	-62.67	-63.19	8.37	-51.54
9	38806.4	55.27 PK	74	-18.73	-53.44	-49.97	8.37	-39.99
10	38806.4	48.42 AV	54	-5.58	-57.83	-58.64	8.37	-46.84

Note: Margin value = Emission Level - Limit value

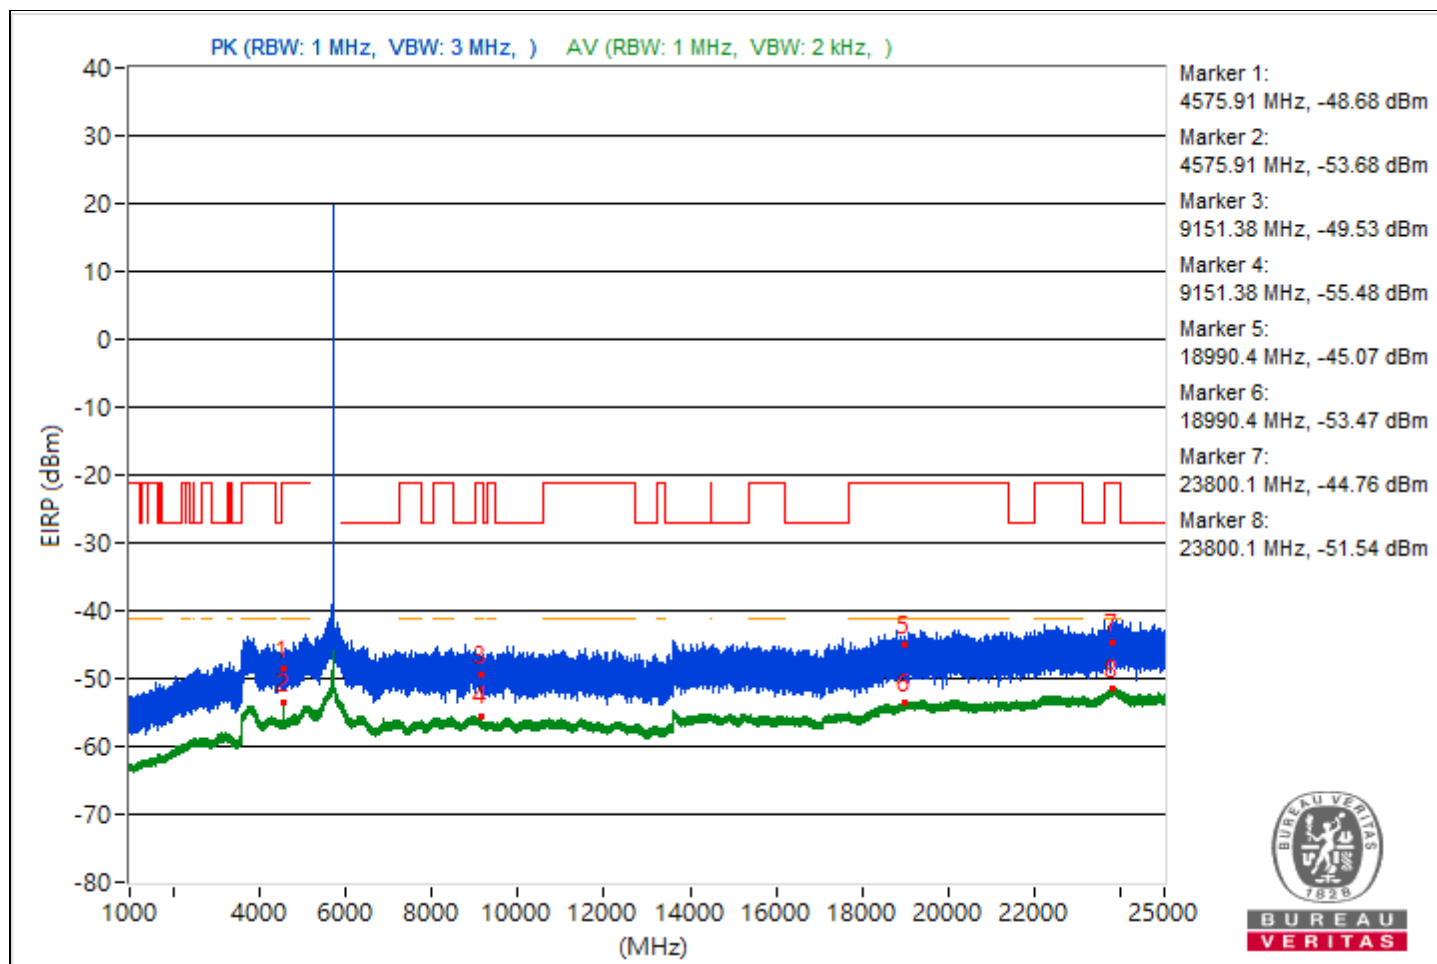


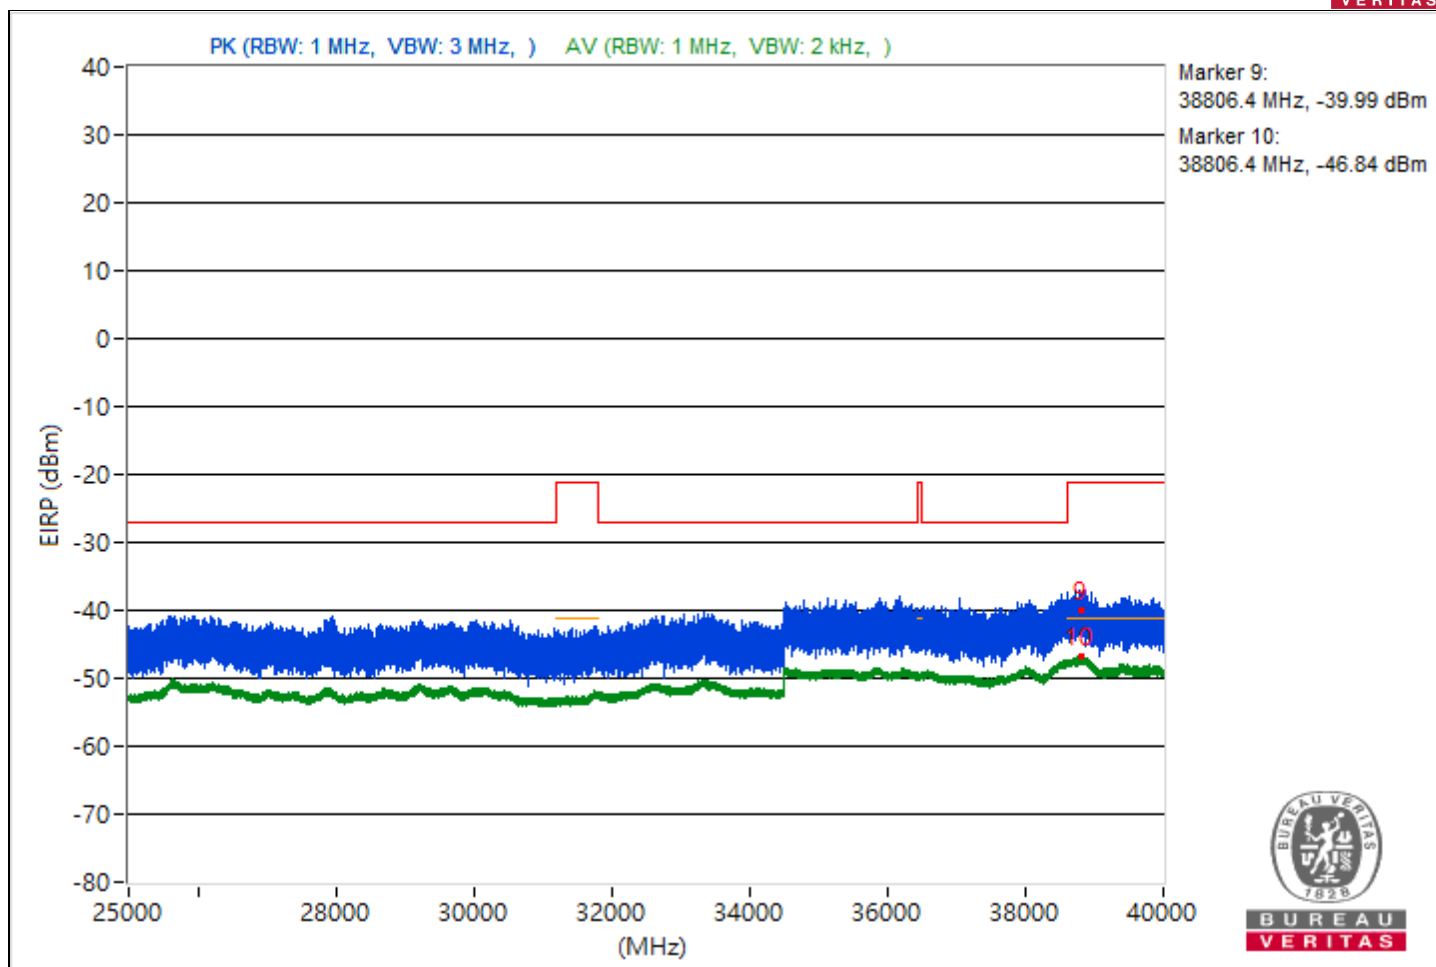


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4595.98	48.96 PK	74	-25.04	-56.18	-59.97	8.37	-46.3
2	4595.98	43.44 AV	54	-10.56	-61.06	-67.6	8.37	-51.82
3	11472.71	61.64 PK	74	-12.36	-44.43	-45.67	8.37	-33.62
4	11472.71	52.12 AV	54	-1.88	-52.87	-57.22	8.37	-43.14
5	18961.2	48.87 PK	74	-25.13	-58.47	-57.17	8.37	-46.39
6	18961.2	41.68 AV	54	-12.32	-65.33	-64.61	8.37	-53.58
7	23760.1	50.49 PK	74	-23.51	-56.28	-56.03	8.37	-44.77
8	23760.1	43.99 AV	54	-10.01	-62.71	-62.59	8.37	-51.27
9	38762.58	54 PK	74	-20	-51.19	-54.86	8.37	-41.26
10	38762.58	48.39 AV	54	-5.61	-58.01	-58.49	8.37	-46.87

Note: Margin value = Emission Level - Limit value

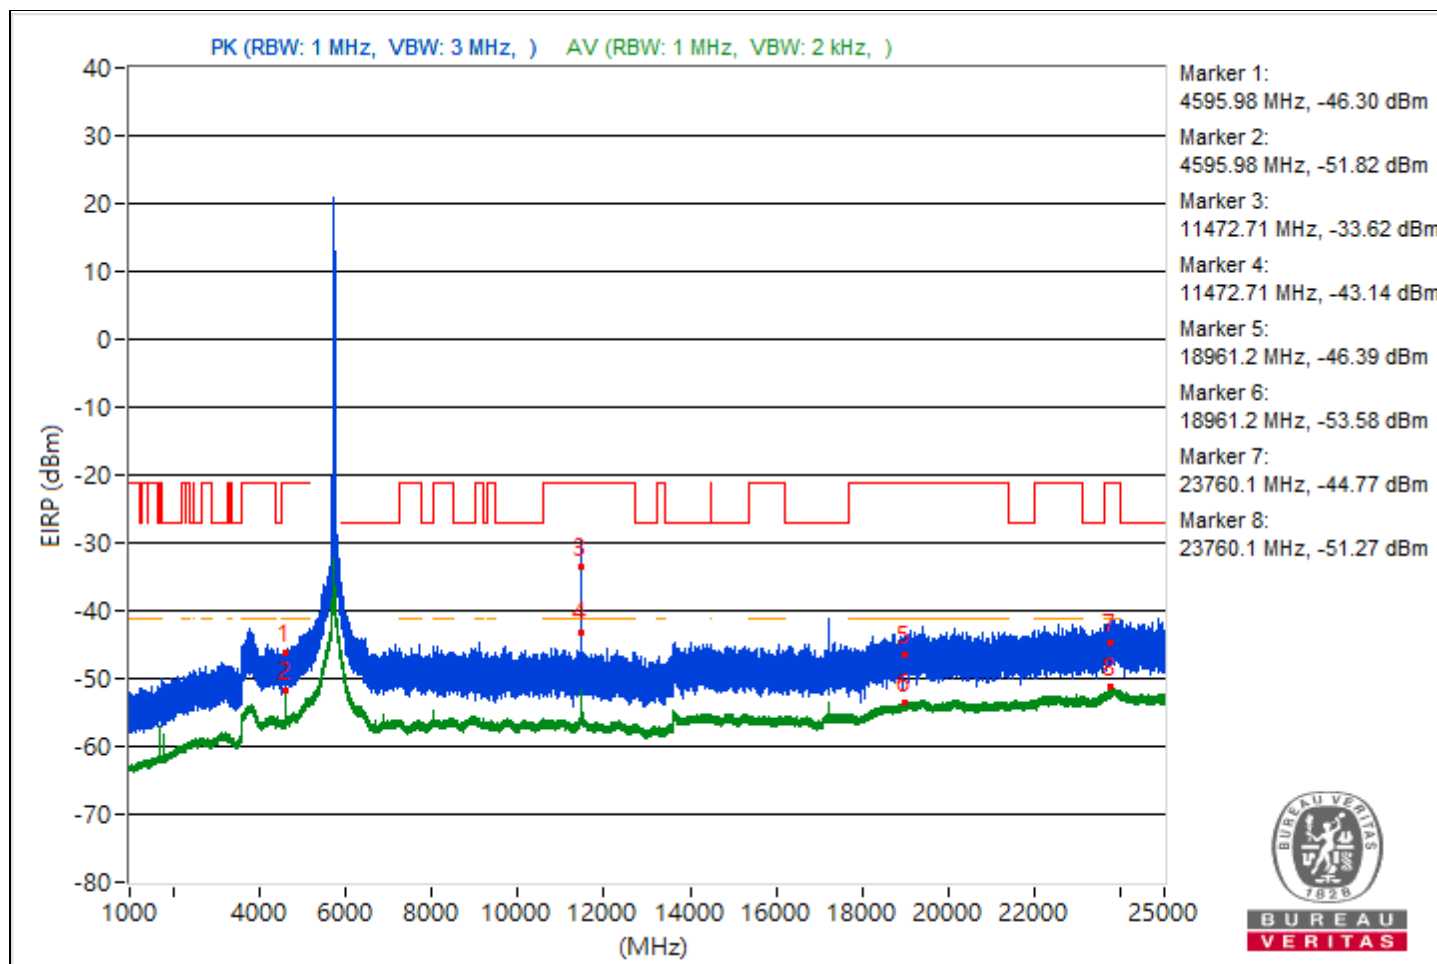


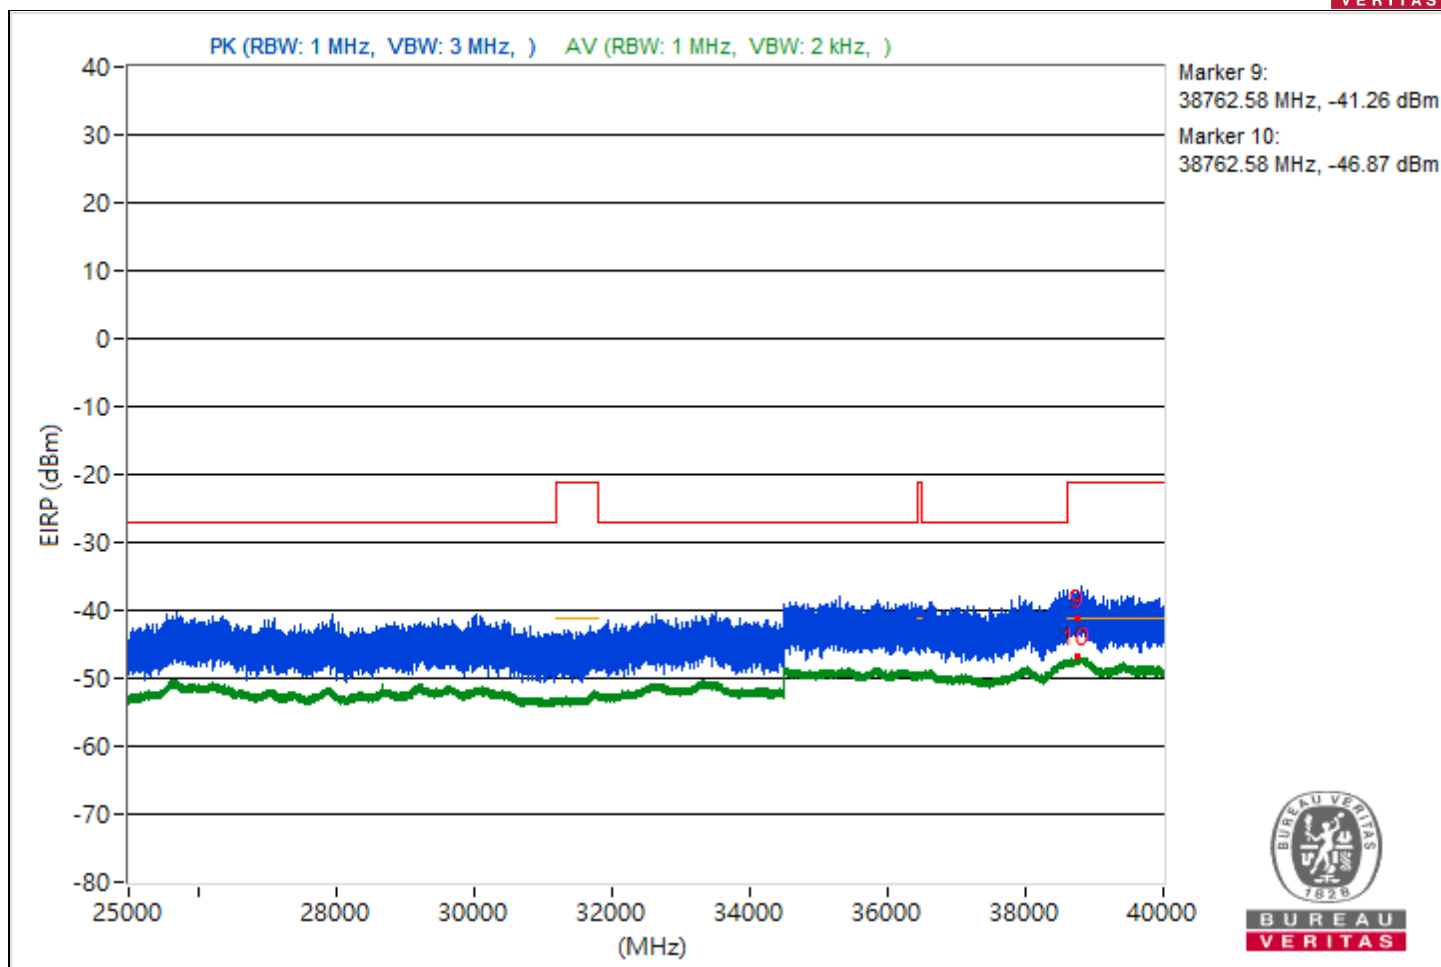


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4660.07	50.97 PK	74	-23.03	-54.14	-58.05	8.37	-44.29
2	4660.07	44.67 AV	54	-9.33	-59.74	-66.77	8.37	-50.59
3	11666.76	60.9 PK	74	-13.1	-43.59	-50.23	8.37	-34.36
4	11666.76	51.21 AV	54	-2.79	-53.94	-57.73	8.37	-44.05
5	18982.6	47.77 PK	74	-26.23	-57.98	-60	8.37	-47.49
6	18982.6	41.65 AV	54	-12.35	-64.78	-65.21	8.37	-53.61
7	23879.9	50.58 PK	74	-23.42	-57.09	-55.22	8.37	-44.68
8	23879.9	43.7 AV	54	-10.3	-63.46	-62.47	8.37	-51.56
9	38797.87	53.65 PK	74	-20.35	-52.41	-53.66	8.37	-41.61
10	38797.87	48.62 AV	54	-5.38	-58.61	-57.5	8.37	-46.64

Note: Margin value = Emission Level - Limit value

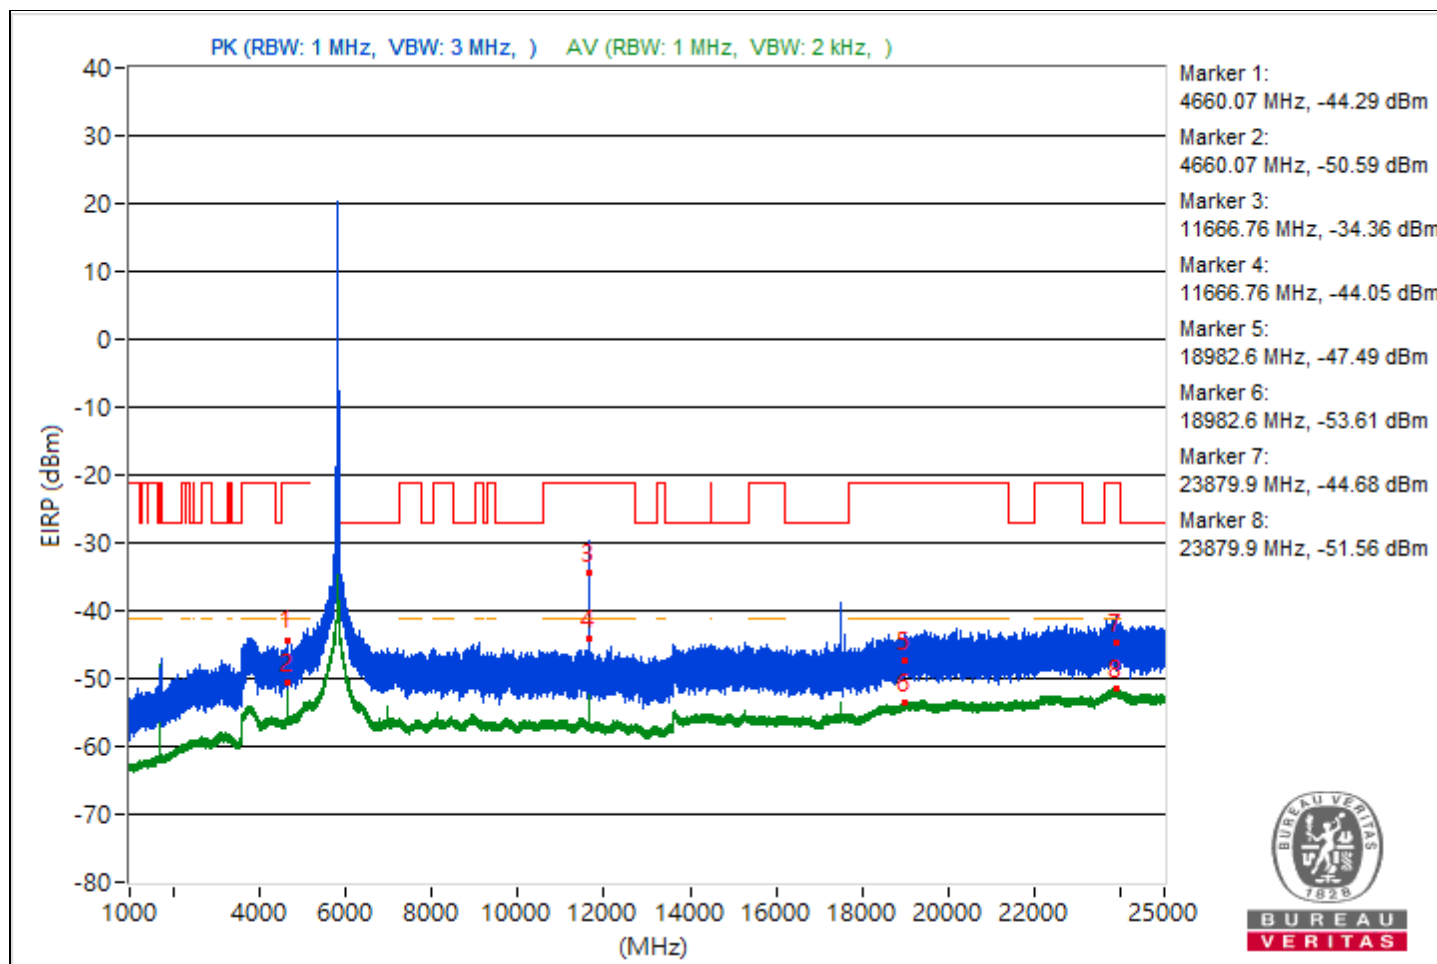


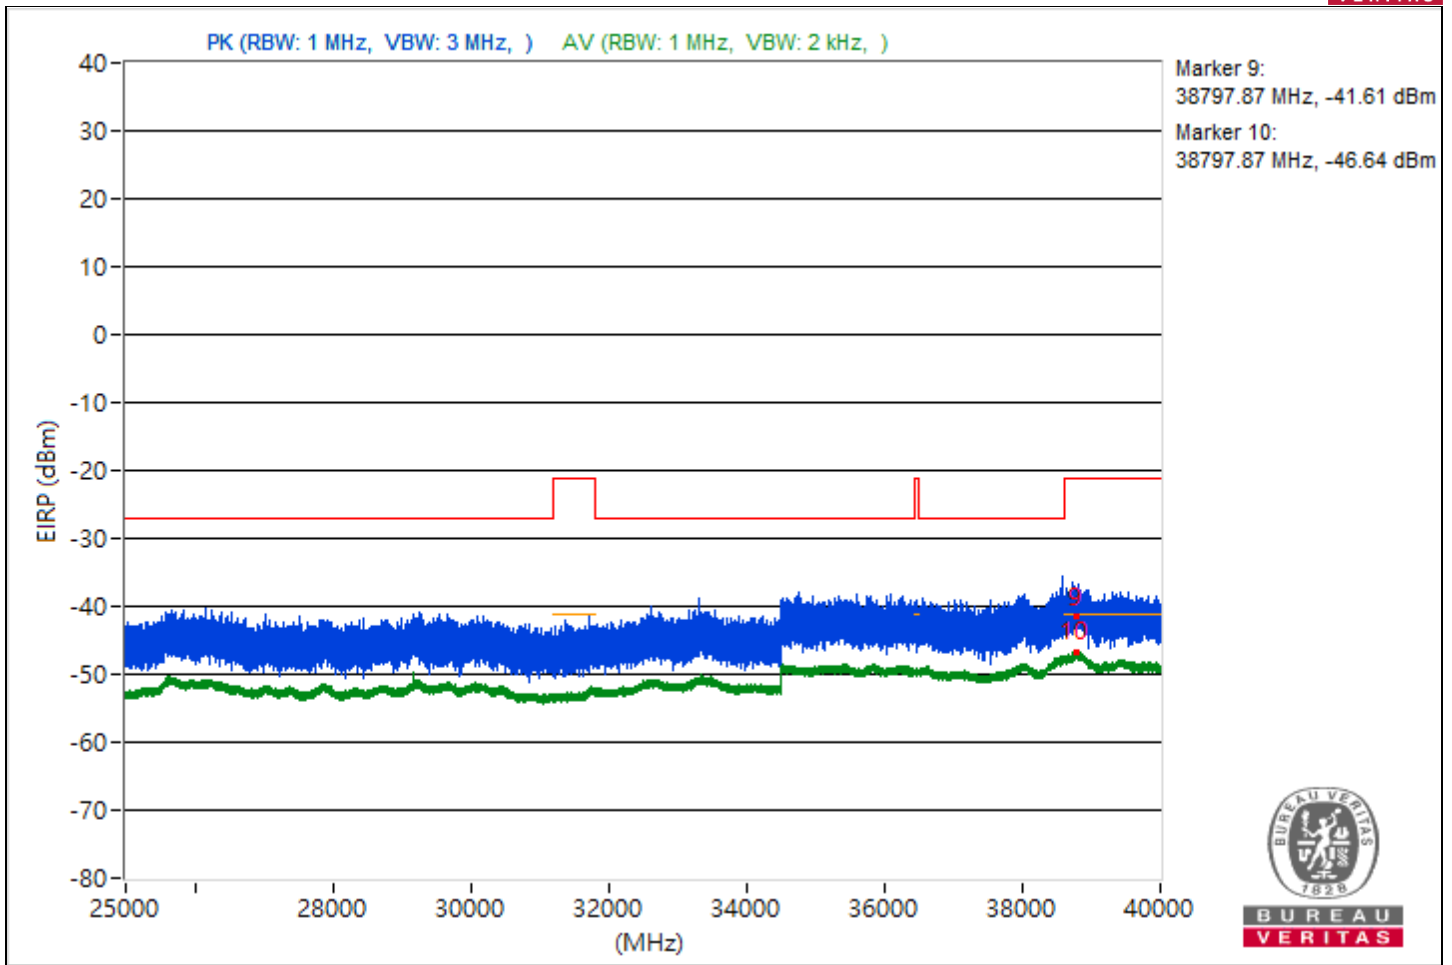


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5093.91	51.3 PK	74	-22.7	-55.52	-55.17	8.37	-43.96
2	5093.91	43.16 AV	54	-10.84	-63	-64.03	8.37	-52.1
3	8287.91	48.08 PK	74	-25.92	-58.76	-58.37	8.37	-47.18
4	8287.91	44.23 AV	54	-9.77	-62.67	-62.18	8.37	-51.03
5	18950.4	47.27 PK	74	-26.73	-59.42	-59.33	8.37	-47.99
6	18950.4	41.48 AV	54	-12.52	-65.68	-64.7	8.37	-53.78
7	23826	47.61 PK	74	-26.39	-59.99	-58.26	8.37	-47.65
8	23826	43.74 AV	54	-10.26	-62.49	-63.36	8.37	-51.52
9	38812.8	56.75 PK	74	-17.25	-48.65	-51.62	8.37	-38.51
10	38812.8	48.38 AV	54	-5.62	-57.95	-58.59	8.37	-46.88

Note: Margin value = Emission Level - Limit value

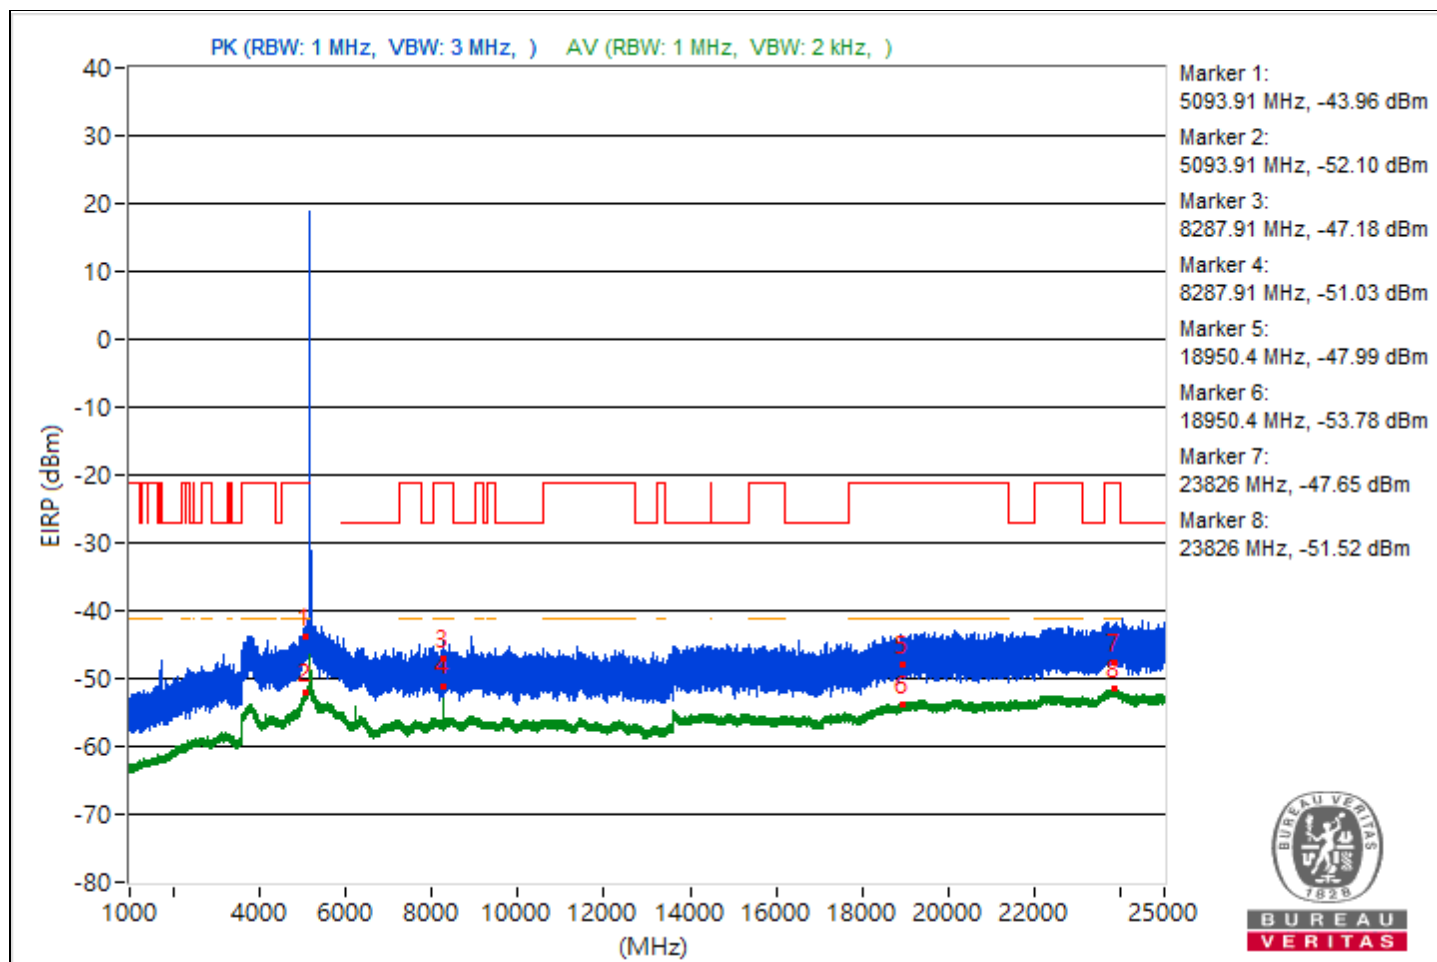


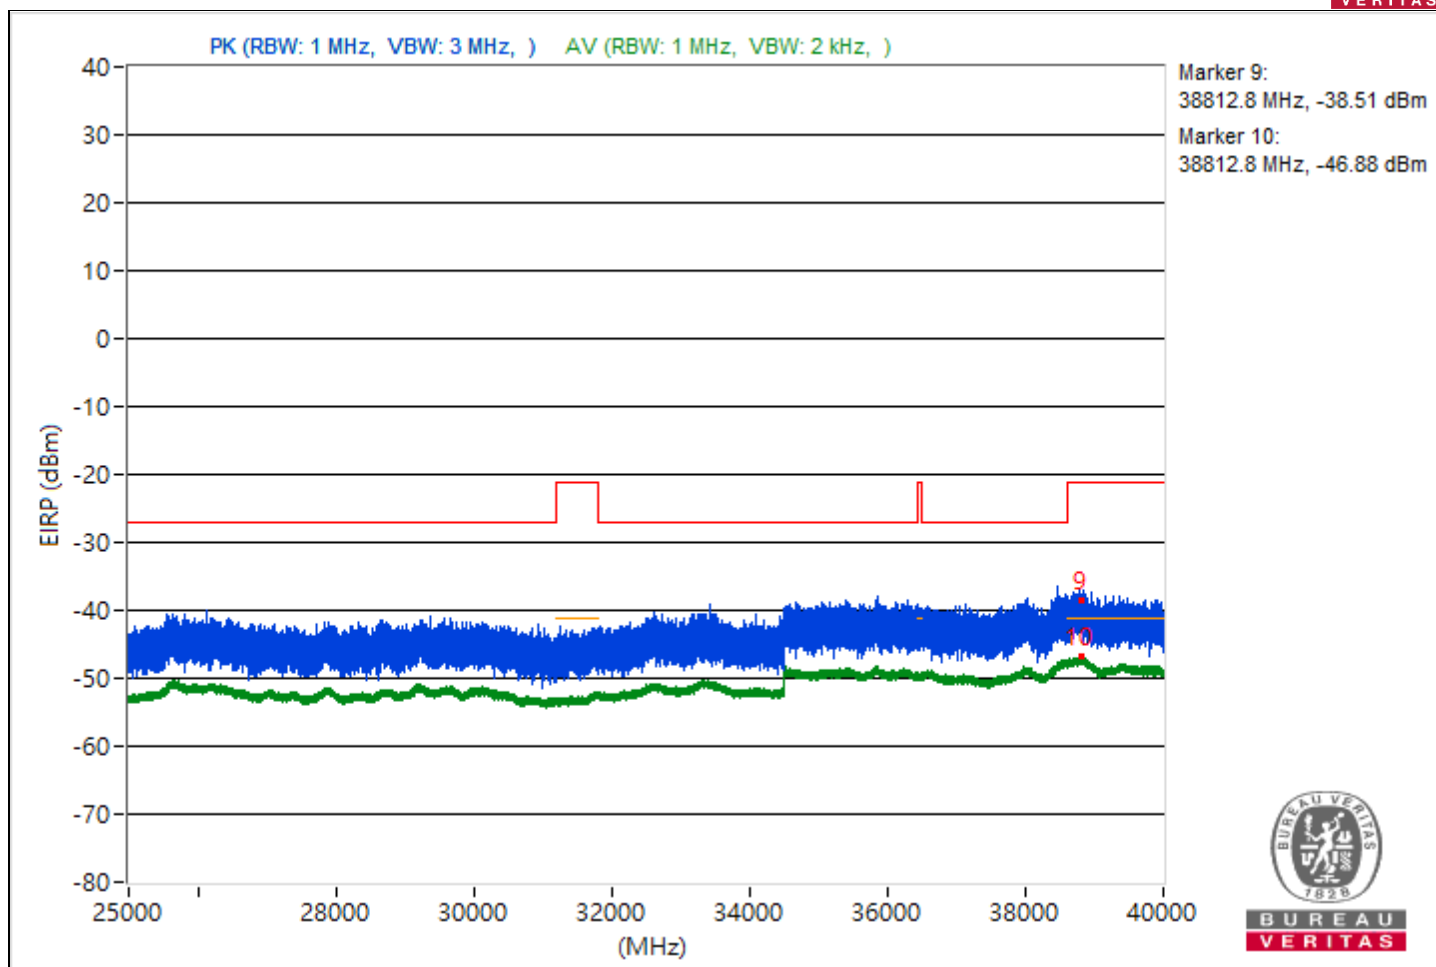


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.9	49.91 PK	74	-24.09	-55.29	-58.92	8.37	-45.35
2	5099.9	42.28 AV	54	-11.72	-63.93	-64.83	8.37	-52.98
3	9047.29	47.6 PK	74	-26.4	-60.18	-58.14	8.37	-47.66
4	9047.29	39.48 AV	54	-14.52	-67.77	-66.62	8.37	-55.78
5	18986.4	47.09 PK	74	-26.91	-58.25	-61.42	8.37	-48.17
6	18986.4	41.58 AV	54	-12.42	-65.58	-64.6	8.37	-53.68
7	23841.6	50.06 PK	74	-23.94	-56.86	-56.31	8.37	-45.2
8	23841.6	43.69 AV	54	-10.31	-62.63	-63.28	8.37	-51.57
9	38772.8	56.63 PK	74	-17.37	-50.51	-49.56	8.37	-38.63
10	38772.8	48.42 AV	54	-5.58	-58.62	-57.85	8.37	-46.84

Note: Margin value = Emission Level - Limit value

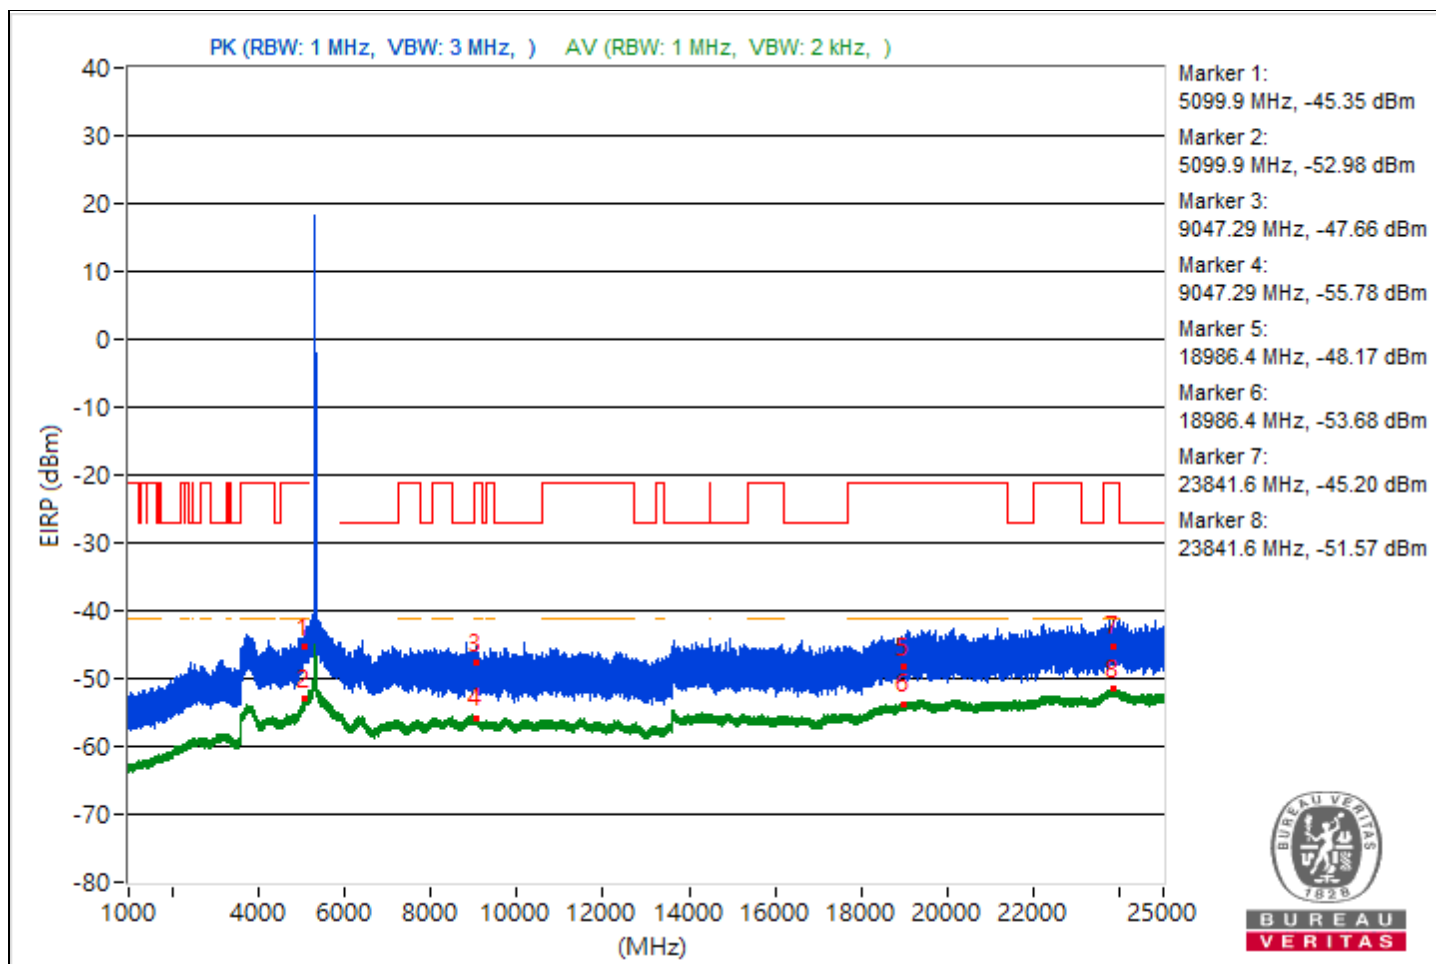


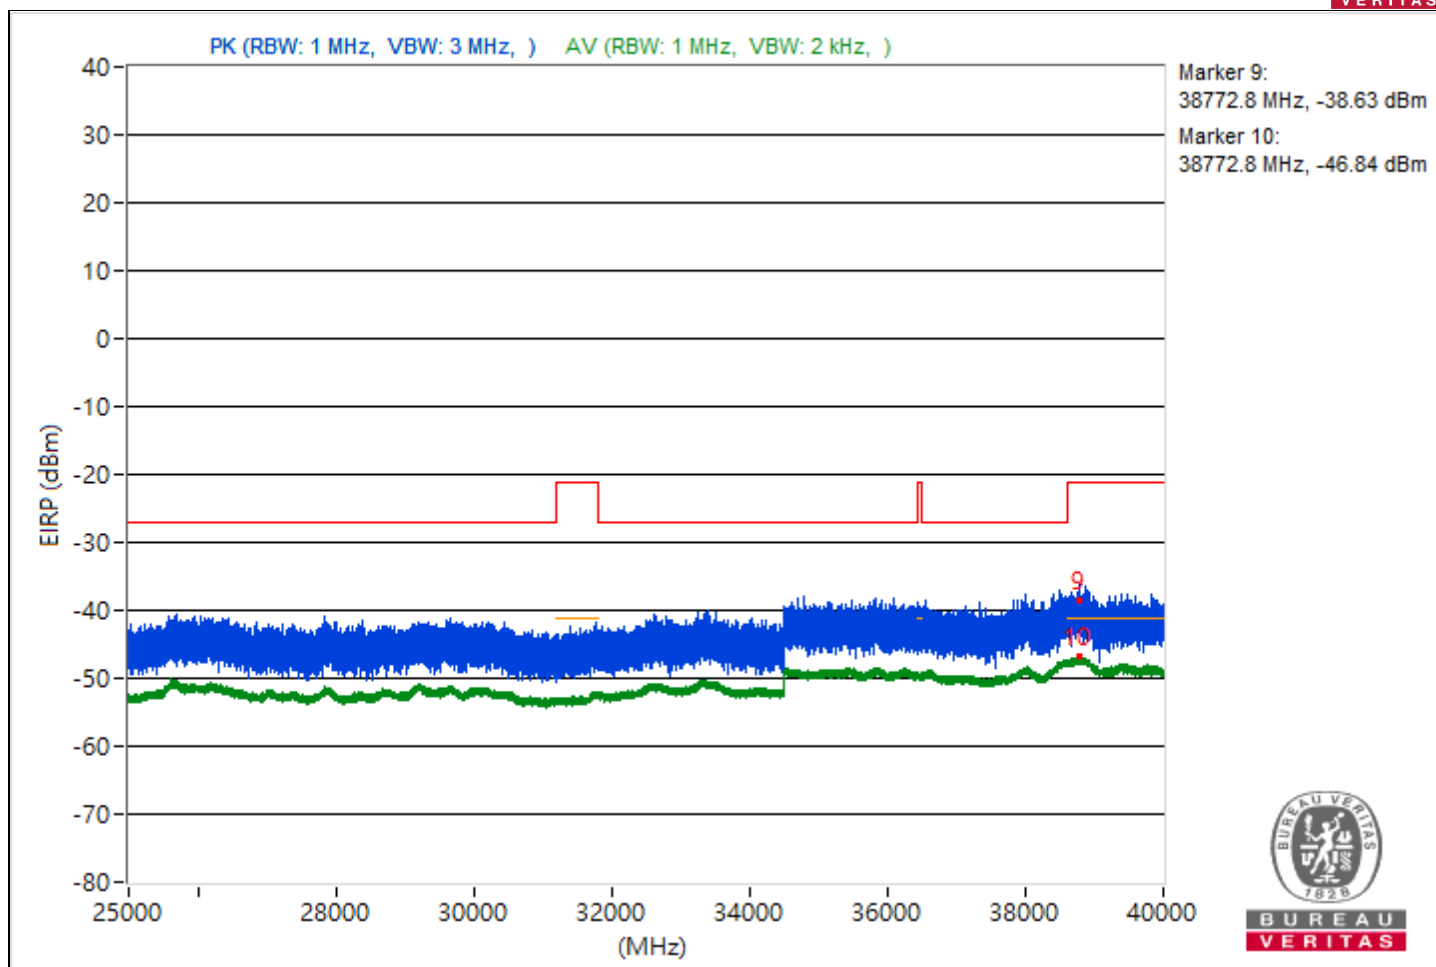


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	1718.82	40.27 PK	74	-33.73	-66.05	-66.71	8.37	-54.99
2	1718.82	48.8 AV	54	-5.2	-54.9	-73.34	8.37	-46.46
3	9000.18	47.34 PK	74	-26.66	-60.39	-58.42	8.37	-47.92
4	9000.18	39.52 AV	54	-14.48	-66.85	-67.41	8.37	-55.74
5	18971.6	47.51 PK	74	-26.49	-58.31	-60.14	8.37	-47.75
6	18971.6	41.53 AV	54	-12.47	-65.6	-64.67	8.37	-53.73
7	23799	52.6 PK	74	-21.4	-54.87	-53.35	8.37	-42.66
8	23799	43.78 AV	54	-10.22	-62.37	-63.41	8.37	-51.48
9	38783.56	55.67 PK	74	-18.33	-50.63	-51.35	8.37	-39.59
10	38783.56	48.33 AV	54	-5.67	-57.91	-58.75	8.37	-46.93

Note: Margin value = Emission Level - Limit value

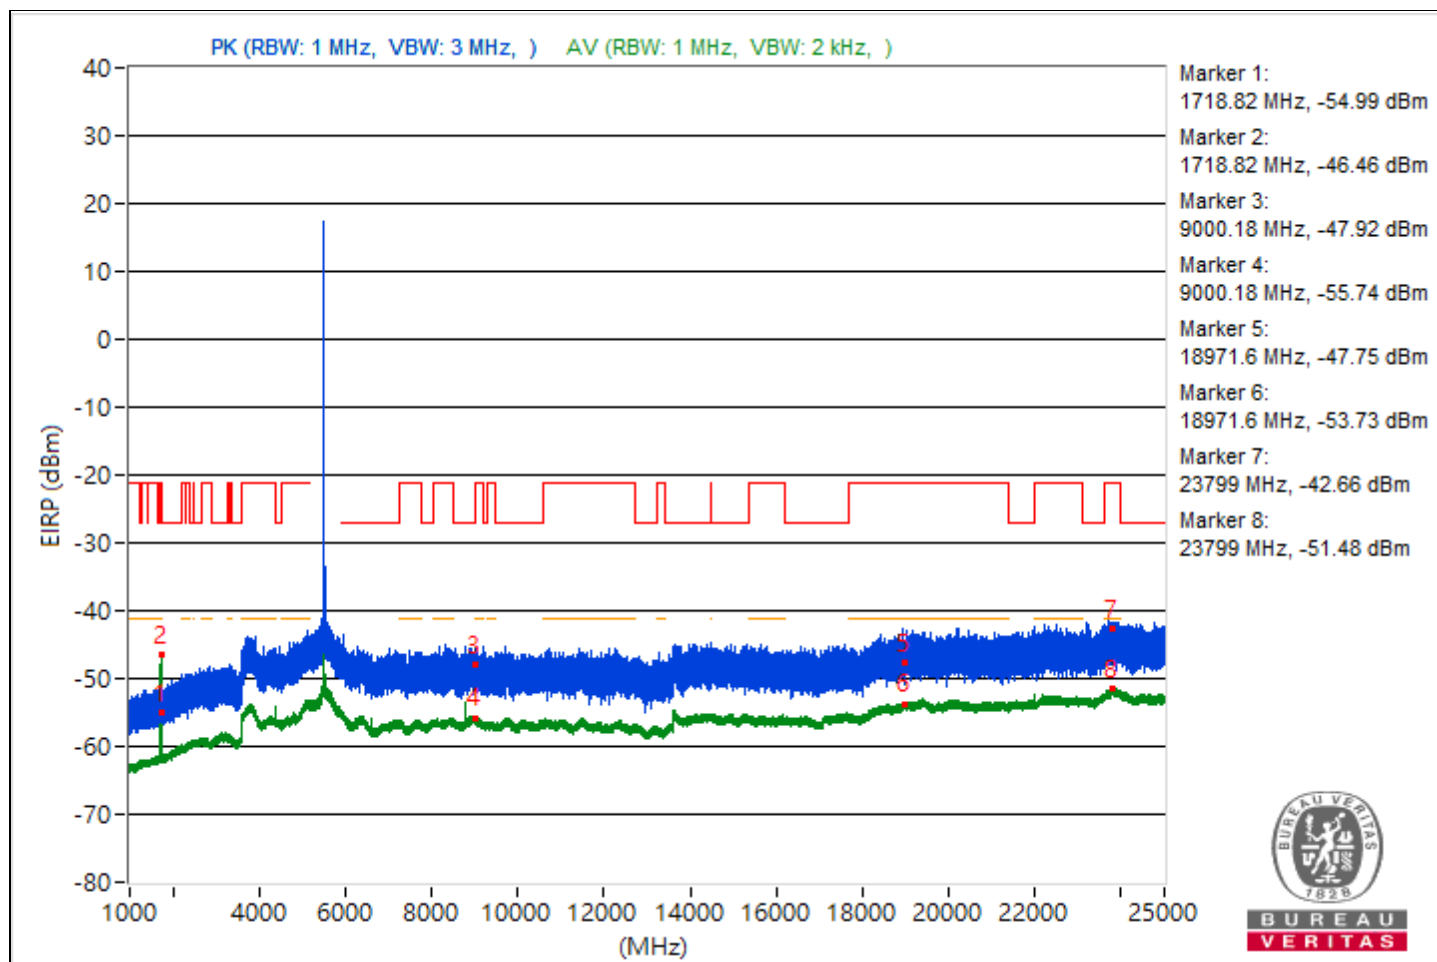


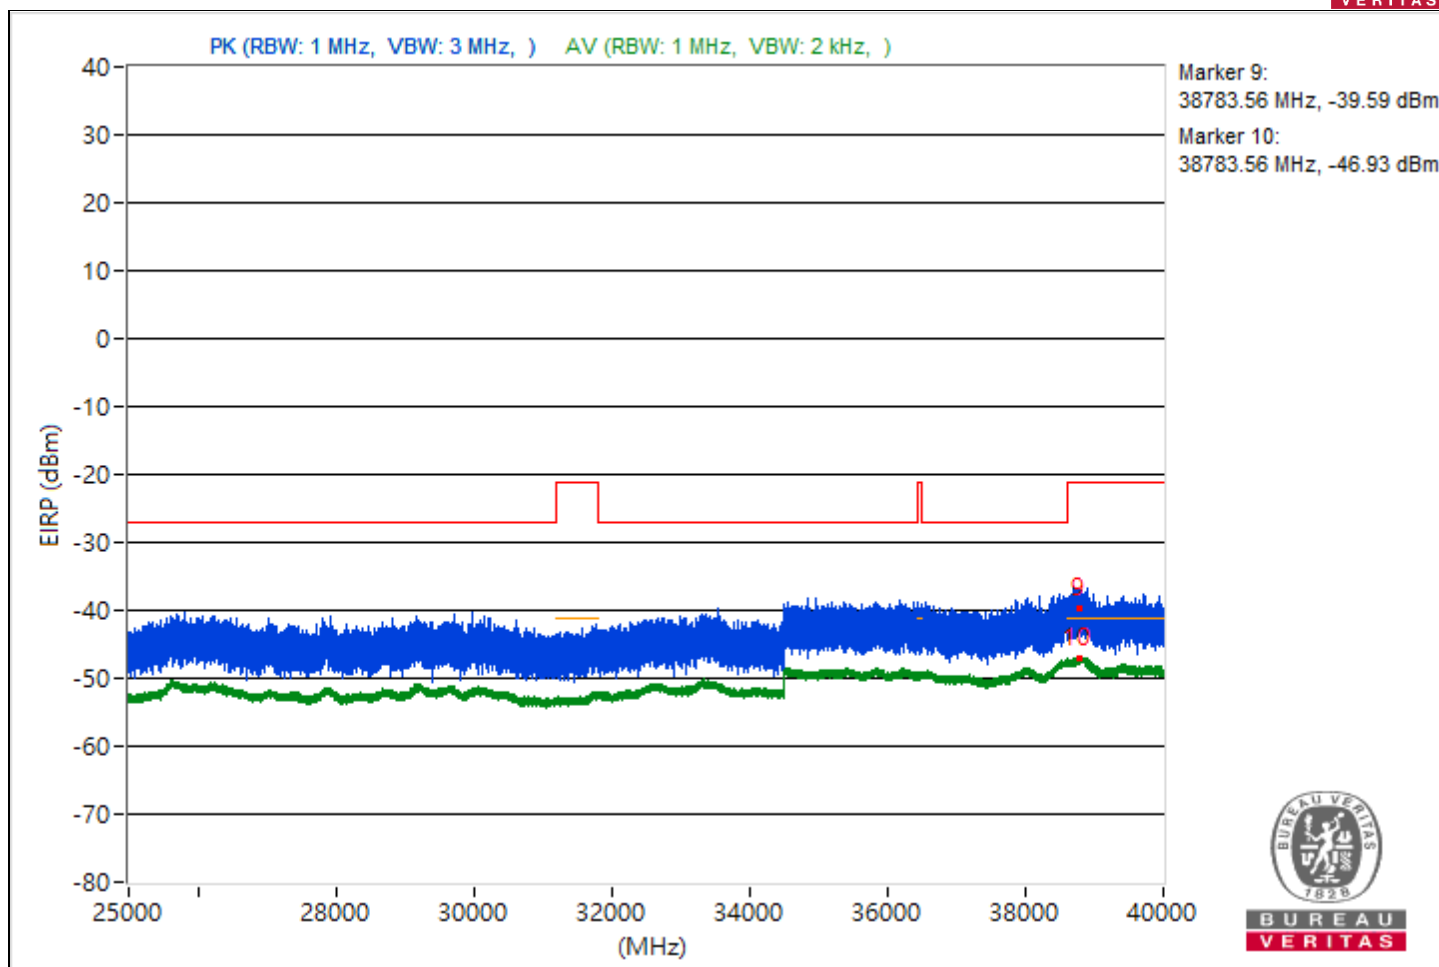


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3778.3	49.57 PK	74	-24.43	-57.6	-56.6	8.37	-45.69
2	3778.3	41.25 AV	54	-12.75	-64.71	-66.19	8.37	-54.01
3	8449.6	47.24 PK	74	-26.76	-59.47	-59.34	8.37	-48.02
4	8449.6	39.56 AV	54	-14.44	-66.84	-67.34	8.37	-55.7
5	18882	48.48 PK	74	-25.52	-57.35	-59.15	8.37	-46.78
6	18882	41.65 AV	54	-12.35	-65.26	-64.74	8.37	-53.61
7	23796.9	49.91 PK	74	-24.09	-55.63	-58.2	8.37	-45.35
8	23796.9	43.89 AV	54	-10.11	-62.4	-63.13	8.37	-51.37
9	38807.82	54.77 PK	74	-19.23	-50.51	-53.87	8.37	-40.49
10	38807.82	48.64 AV	54	-5.36	-57.88	-58.12	8.37	-46.62

Note: Margin value = Emission Level - Limit value

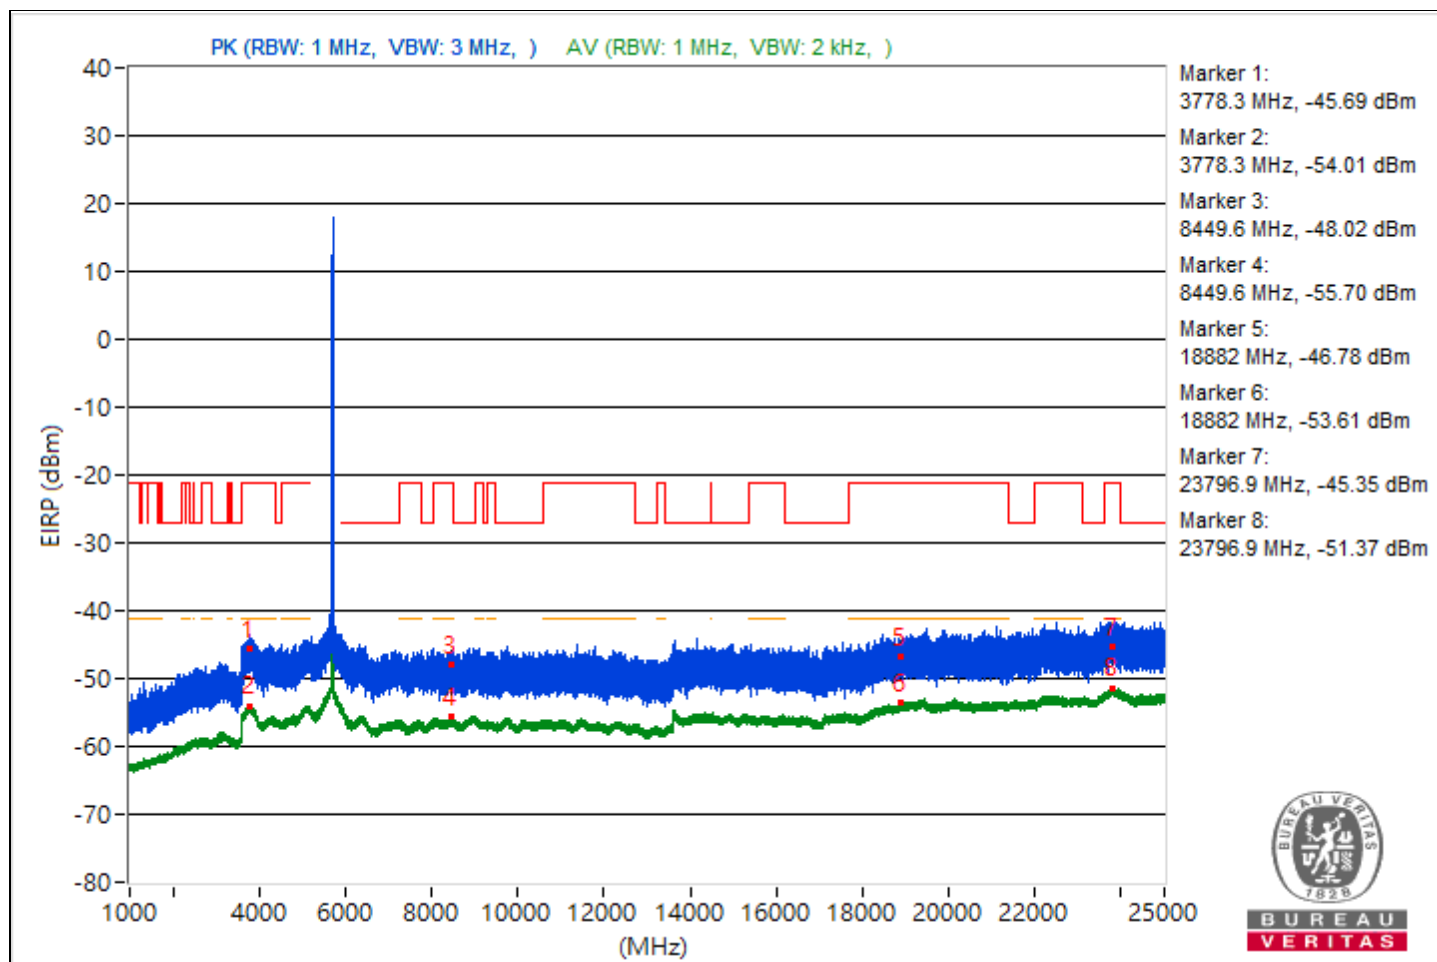


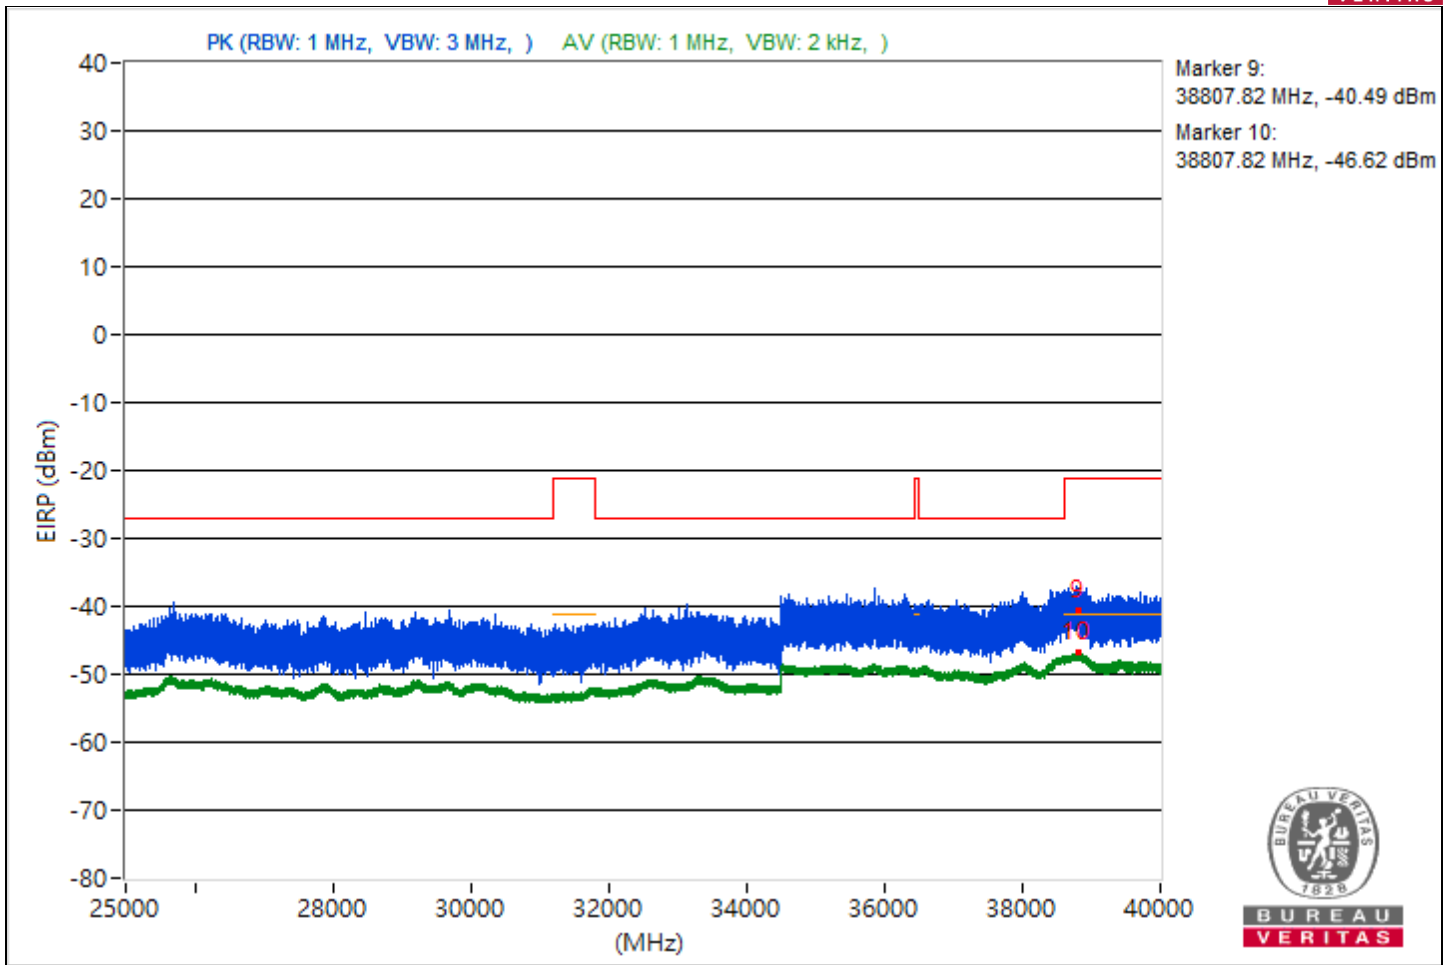


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3816.18	48.37 PK	74	-25.63	-59.39	-57.38	8.37	-46.89
2	3816.18	41.34 AV	54	-12.66	-65.67	-64.97	8.37	-53.92
3	9010.84	48.17 PK	74	-25.83	-60.79	-56.96	8.37	-47.09
4	9010.84	39.74 AV	54	-14.26	-67.28	-66.56	8.37	-55.52
5	18952	49.05 PK	74	-24.95	-56.99	-58.27	8.37	-46.21
6	18952	41.64 AV	54	-12.36	-64.71	-65.31	8.37	-53.62
7	23846.3	49.15 PK	74	-24.85	-58.3	-56.81	8.37	-46.11
8	23846.3	43.6 AV	54	-10.4	-62.52	-63.64	8.37	-51.66
9	38779.2	57.01 PK	74	-16.99	-49.14	-50.17	8.37	-38.25
10	38779.2	48.44 AV	54	-5.56	-58.05	-58.36	8.37	-46.82

Note: Margin value = Emission Level - Limit value

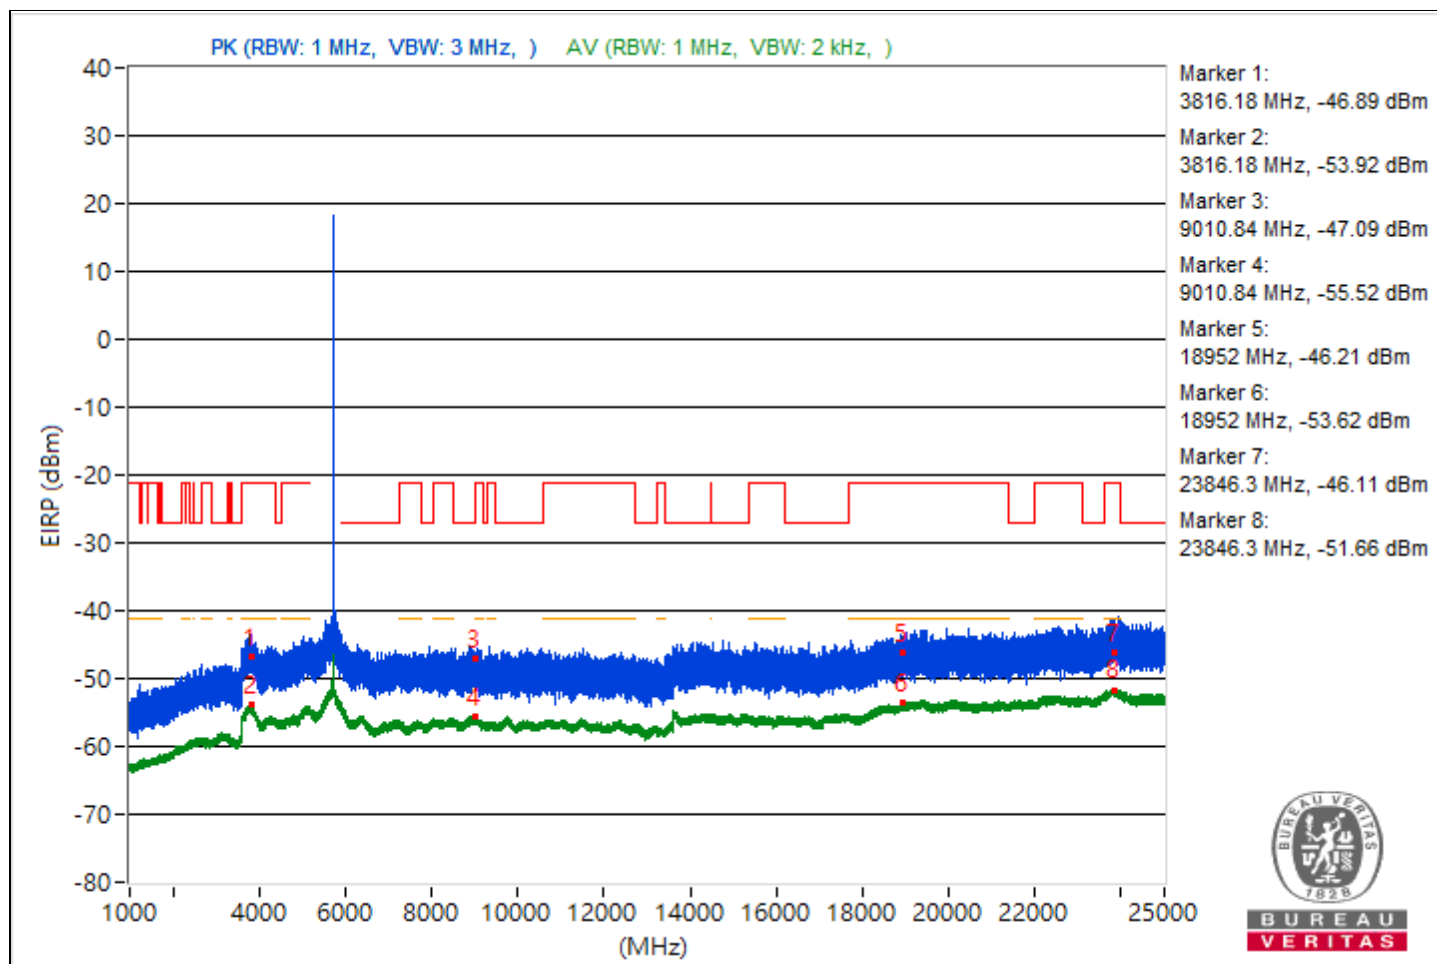


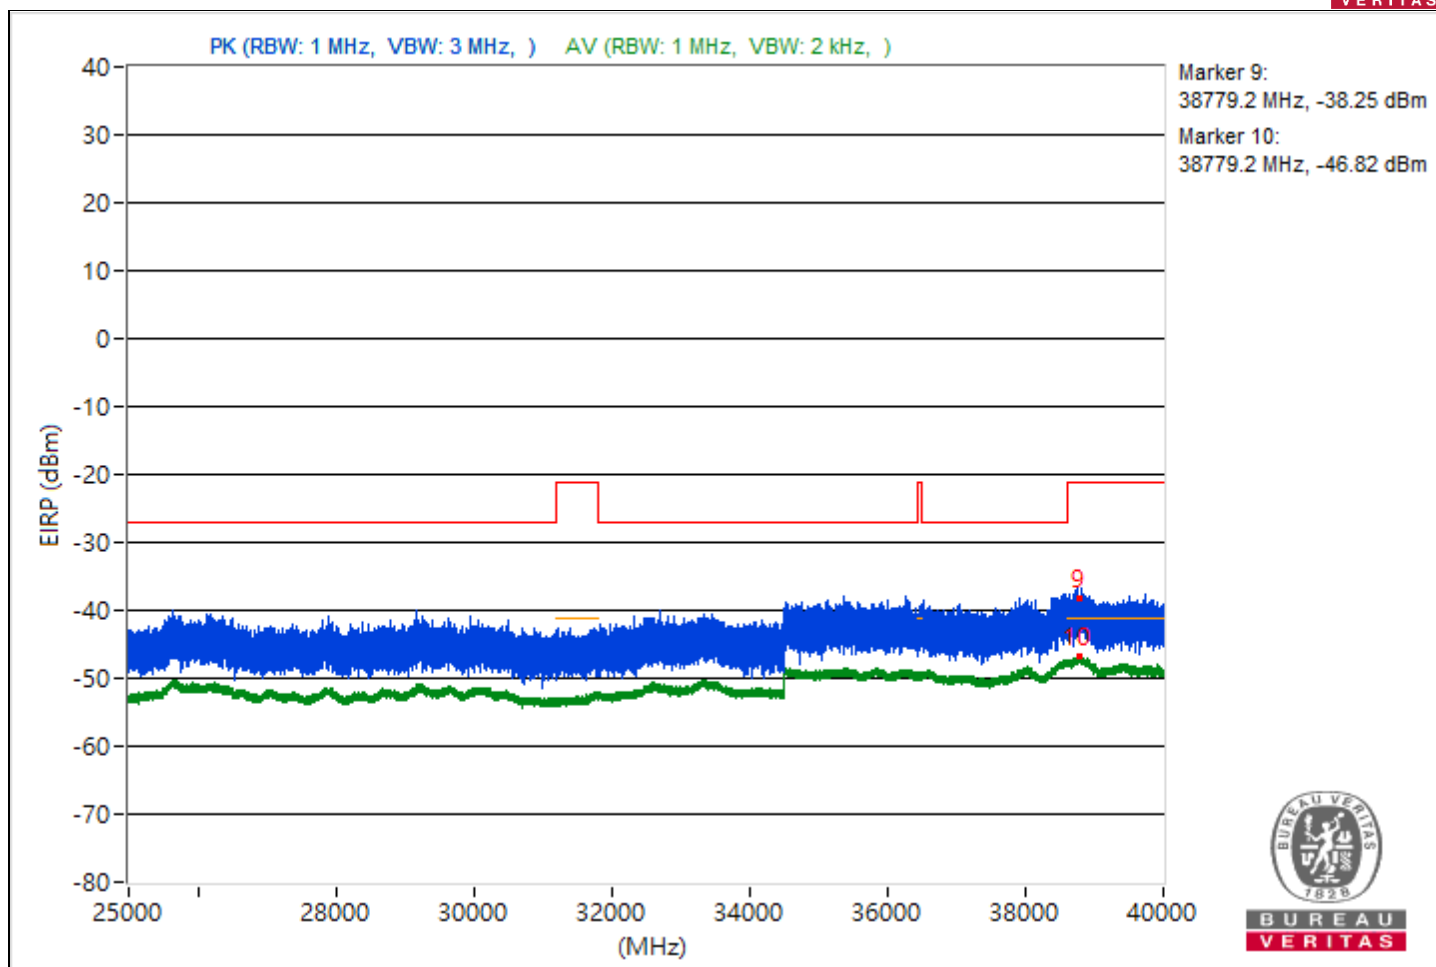


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4595.9	51.52 PK	74	-22.48	-54.46	-55.89	8.37	-43.74
2	4595.9	45.48 AV	54	-8.52	-61.36	-60.96	8.37	-49.78
3	11474.76	61.86 PK	74	-12.14	-46.37	-43.62	8.37	-33.4
4	11474.76	50.94 AV	54	-3.06	-56.9	-54.76	8.37	-44.32
5	18987	47.9 PK	74	-26.1	-58.43	-59.06	8.37	-47.36
6	18987	41.48 AV	54	-12.52	-65.7	-64.68	8.37	-53.78
7	23841.5	50.95 PK	74	-23.05	-57.01	-54.68	8.37	-44.31
8	23841.5	43.7 AV	54	-10.3	-63.25	-62.64	8.37	-51.56
9	38845.96	55.62 PK	74	-18.38	-52.46	-49.95	8.37	-39.64
10	38845.96	48.36 AV	54	-5.64	-57.81	-58.8	8.37	-46.9

Note: Margin value = Emission Level - Limit value

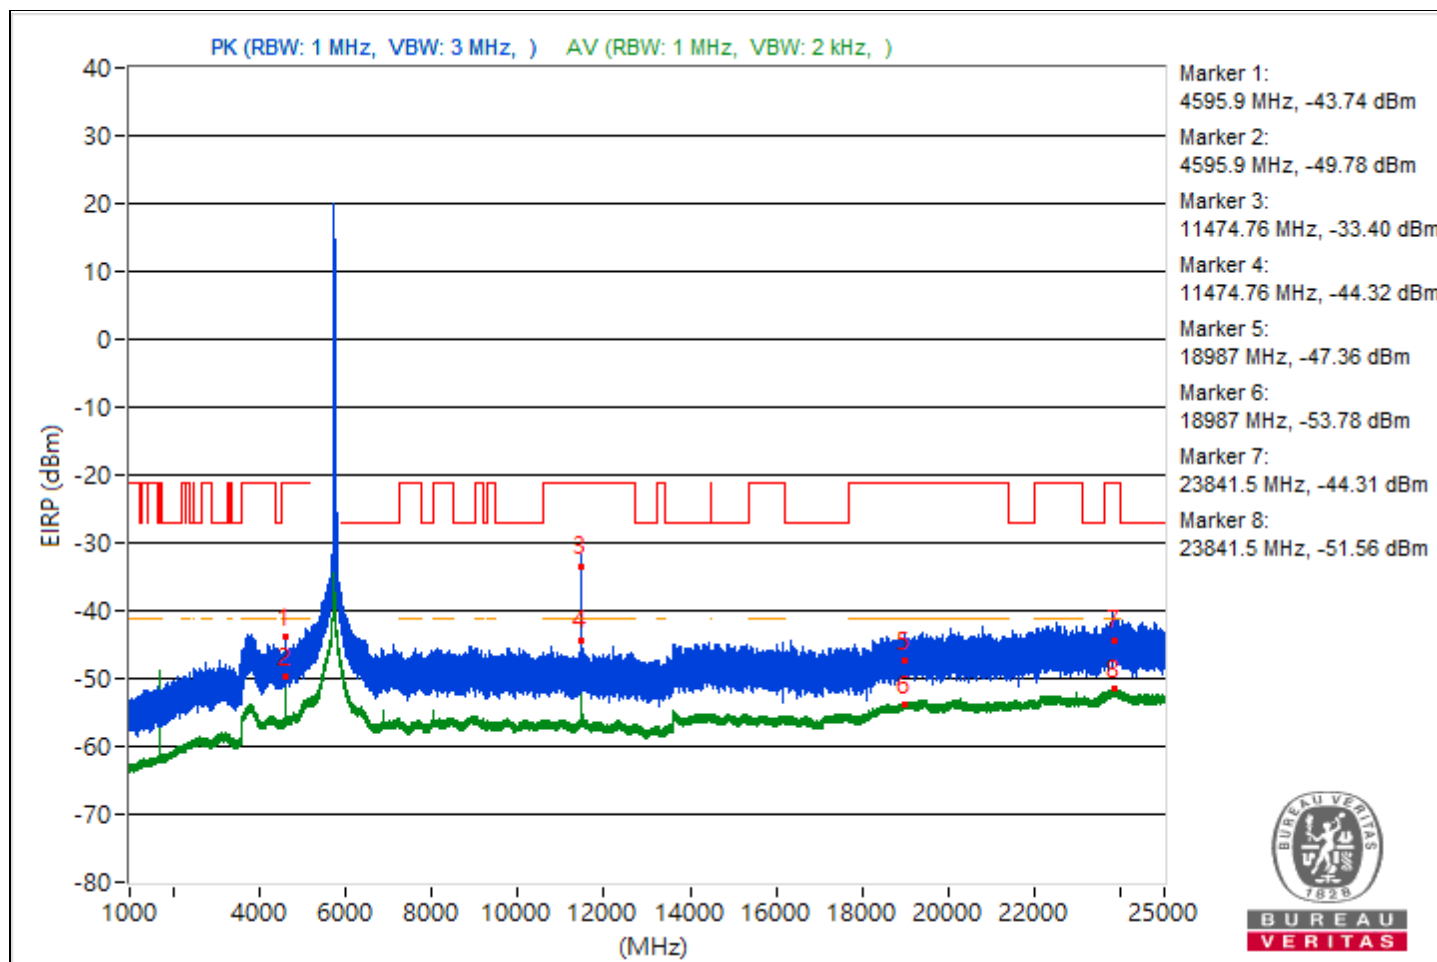


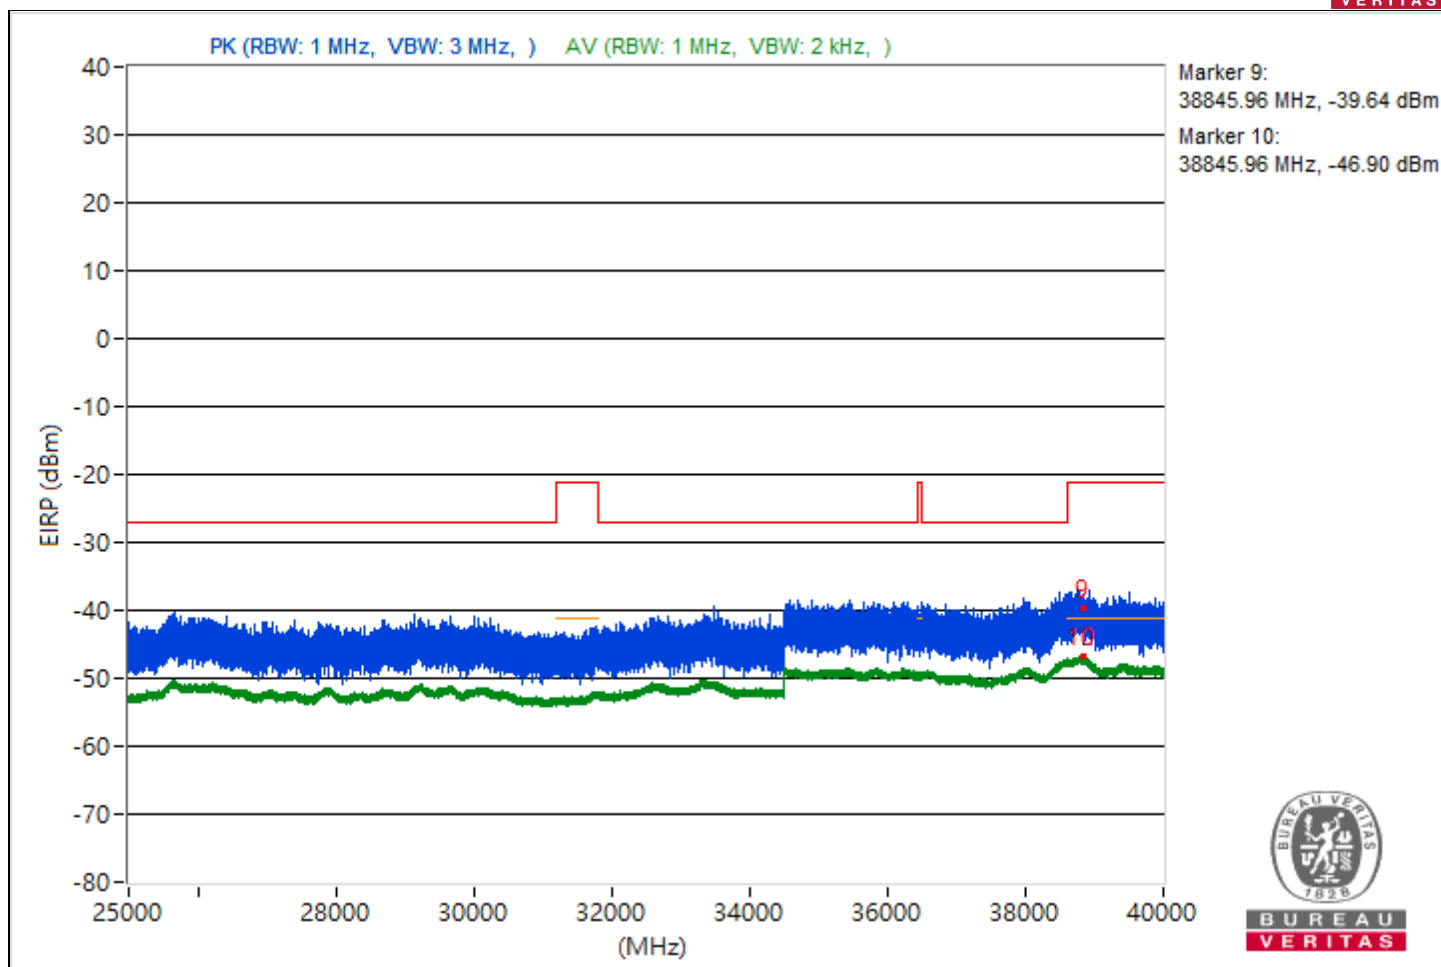


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.51	49.23 PK	74	-24.77	-58.49	-56.55	8.37	-46.03
2	5099.51	41.92 AV	54	-12.08	-64.95	-64.51	8.37	-53.34
3	11665.07	57.9 PK	74	-16.1	-47.53	-50.42	8.37	-37.36
4	11665.07	46.25 AV	54	-7.75	-61.04	-59.83	8.37	-49.01
5	18992.9	48.18 PK	74	-25.82	-57.98	-59.01	8.37	-47.08
6	18992.9	41.53 AV	54	-12.47	-64.64	-65.63	8.37	-53.73
7	23789.2	51.38 PK	74	-22.62	-57.02	-54.01	8.37	-43.88
8	23789.2	43.72 AV	54	-10.28	-62.73	-63.13	8.37	-51.54
9	38728.09	54.49 PK	74	-19.51	-50.73	-54.26	8.37	-40.77
10	38728.09	48.28 AV	54	-5.72	-58	-58.75	8.37	-46.98

Note: Margin value = Emission Level - Limit value

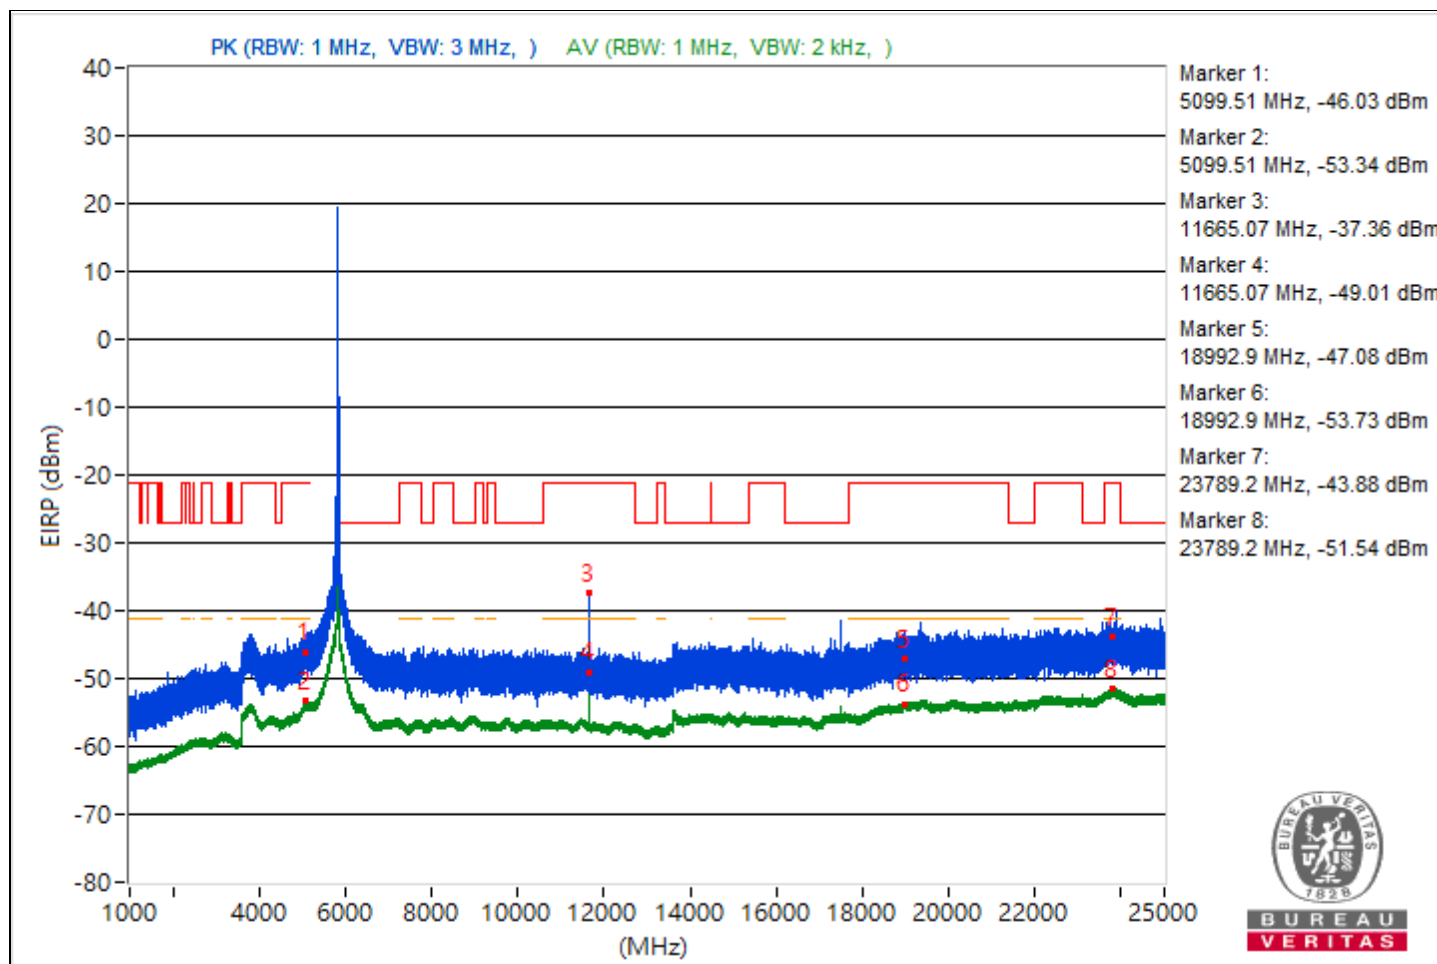


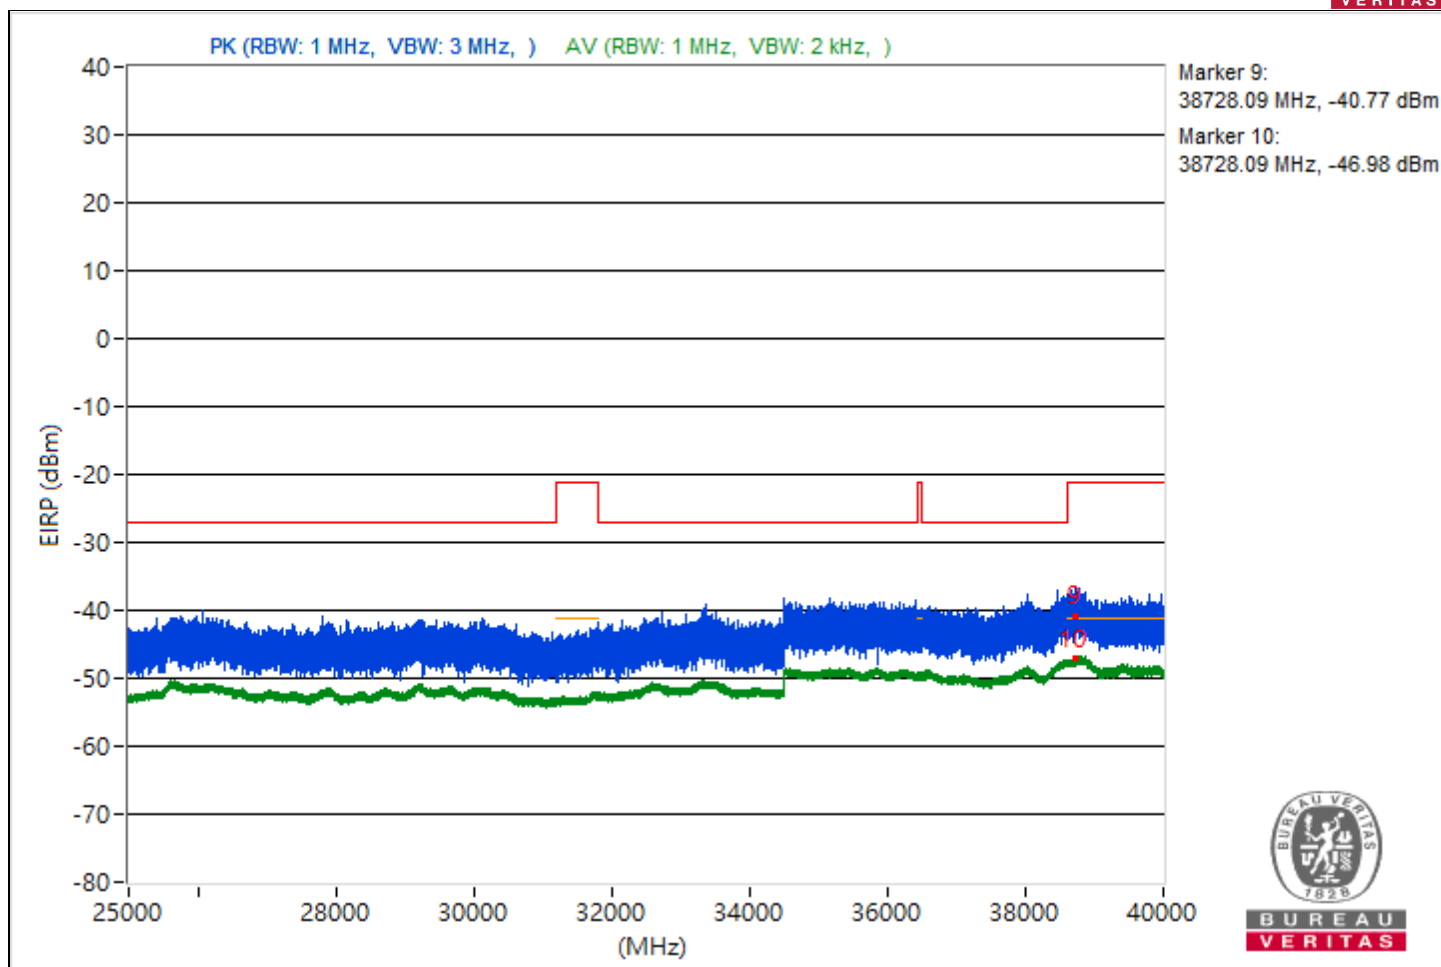


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5095.31	52.26 PK	74	-21.74	-54.48	-54.28	8.37	-43
2	5095.31	46.24 AV	54	-7.76	-60.02	-60.81	8.37	-49.02
3	8419.64	47.04 PK	74	-26.96	-58.99	-60.3	8.37	-48.22
4	8419.64	39.25 AV	54	-14.75	-67.93	-66.9	8.37	-56.01
5	18860	48.61 PK	74	-25.39	-57.62	-58.49	8.37	-46.65
6	18860	41.56 AV	54	-12.44	-65.75	-64.51	8.37	-53.7
7	23833	50.9 PK	74	-23.1	-55.27	-56.27	8.37	-44.36
8	23833	43.63 AV	54	-10.37	-62.65	-63.41	8.37	-51.63
9	38766.04	54.17 PK	74	-19.83	-52.79	-52.17	8.37	-41.09
10	38766.04	48.25 AV	54	-5.75	-58.76	-58.06	8.37	-47.01

Note: Margin value = Emission Level - Limit value

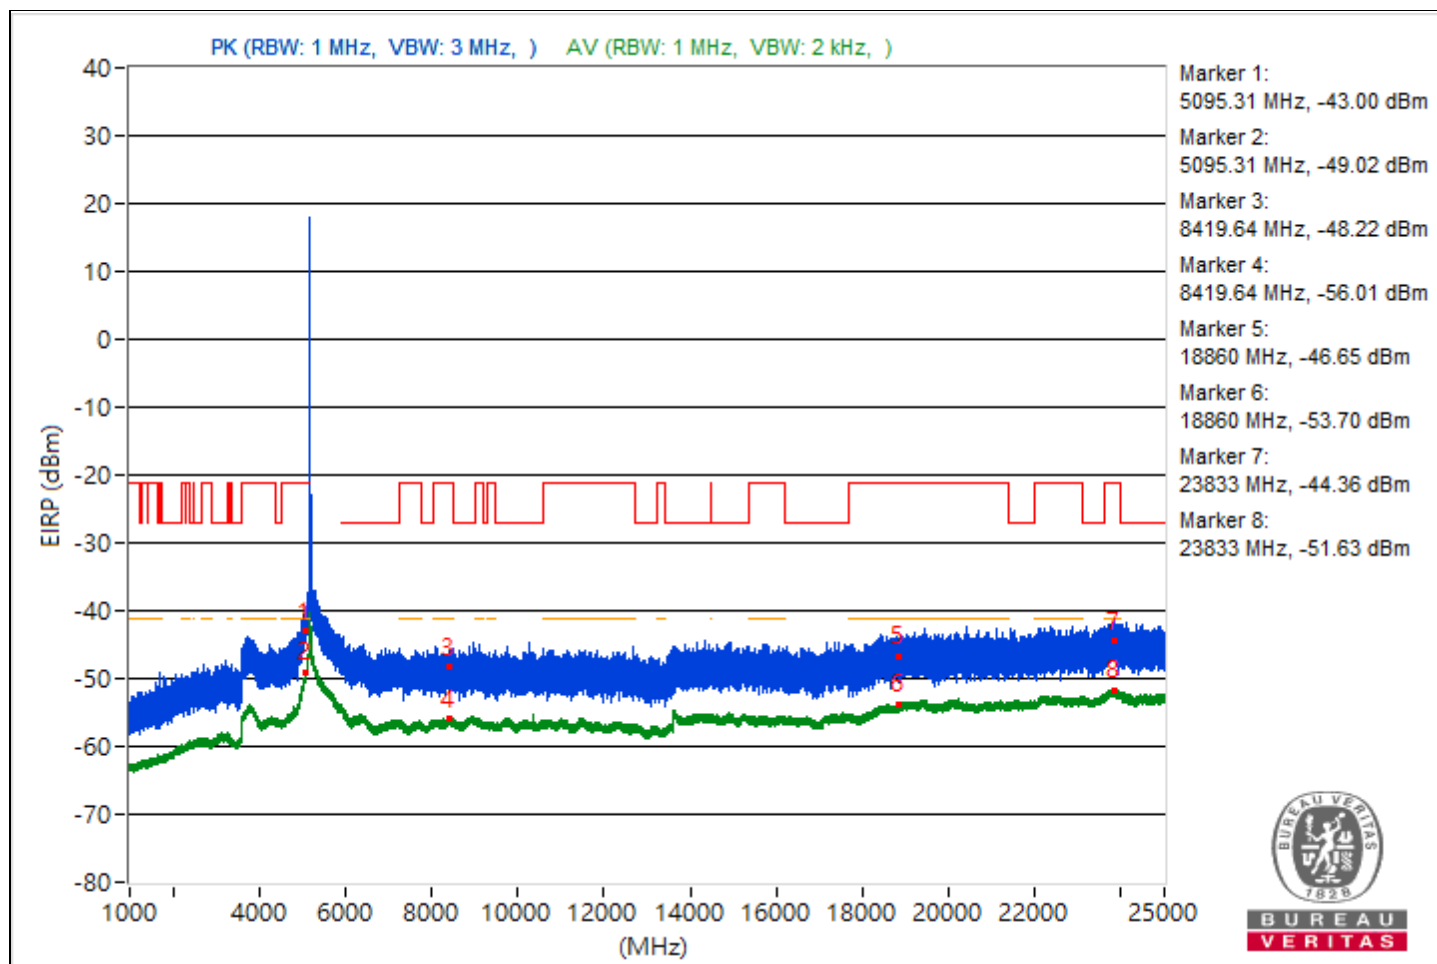


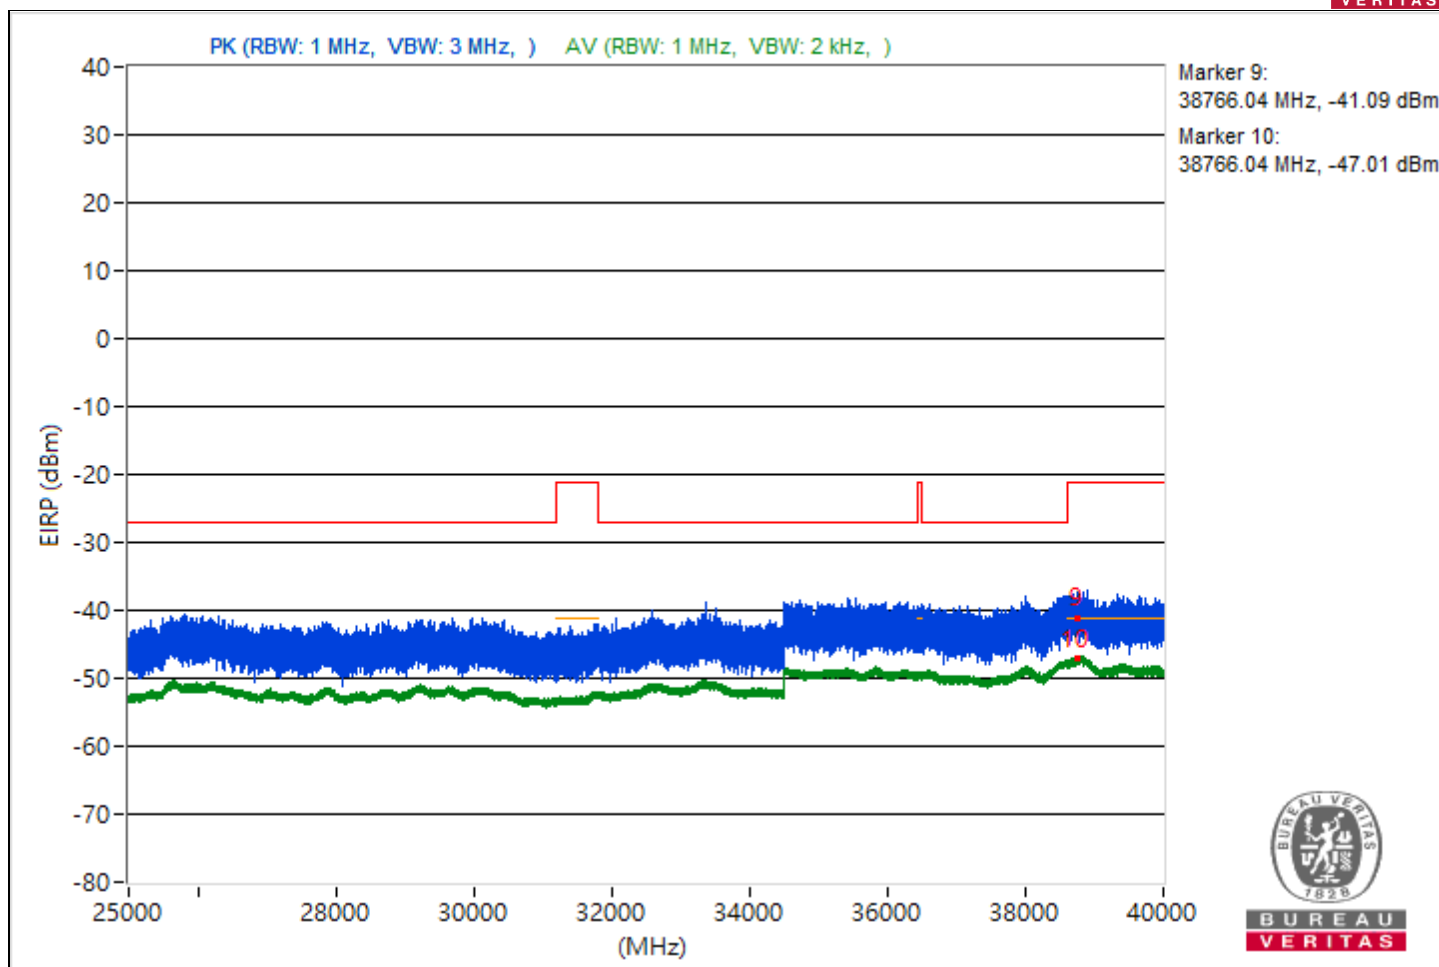


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5098.19	52.5 PK	74	-21.5	-54.37	-53.92	8.37	-42.76
2	5098.19	45.43 AV	54	-8.57	-61.52	-60.91	8.37	-49.83
3	8477.87	45.8 PK	74	-28.2	-62.27	-59.77	8.37	-49.46
4	8477.87	39.6 AV	54	-14.4	-66.77	-67.32	8.37	-55.66
5	18982	47.03 PK	74	-26.97	-59.98	-59.27	8.37	-48.23
6	18982	41.68 AV	54	-12.32	-64.65	-65.3	8.37	-53.58
7	23916.8	50.87 PK	74	-23.13	-56.12	-55.45	8.37	-44.39
8	23916.8	43.63 AV	54	-10.37	-63.49	-62.58	8.37	-51.63
9	38793.42	56.31 PK	74	-17.69	-49.67	-51.12	8.37	-38.95
10	38793.42	48.19 AV	54	-5.81	-58.03	-58.91	8.37	-47.07

Note: Margin value = Emission Level - Limit value

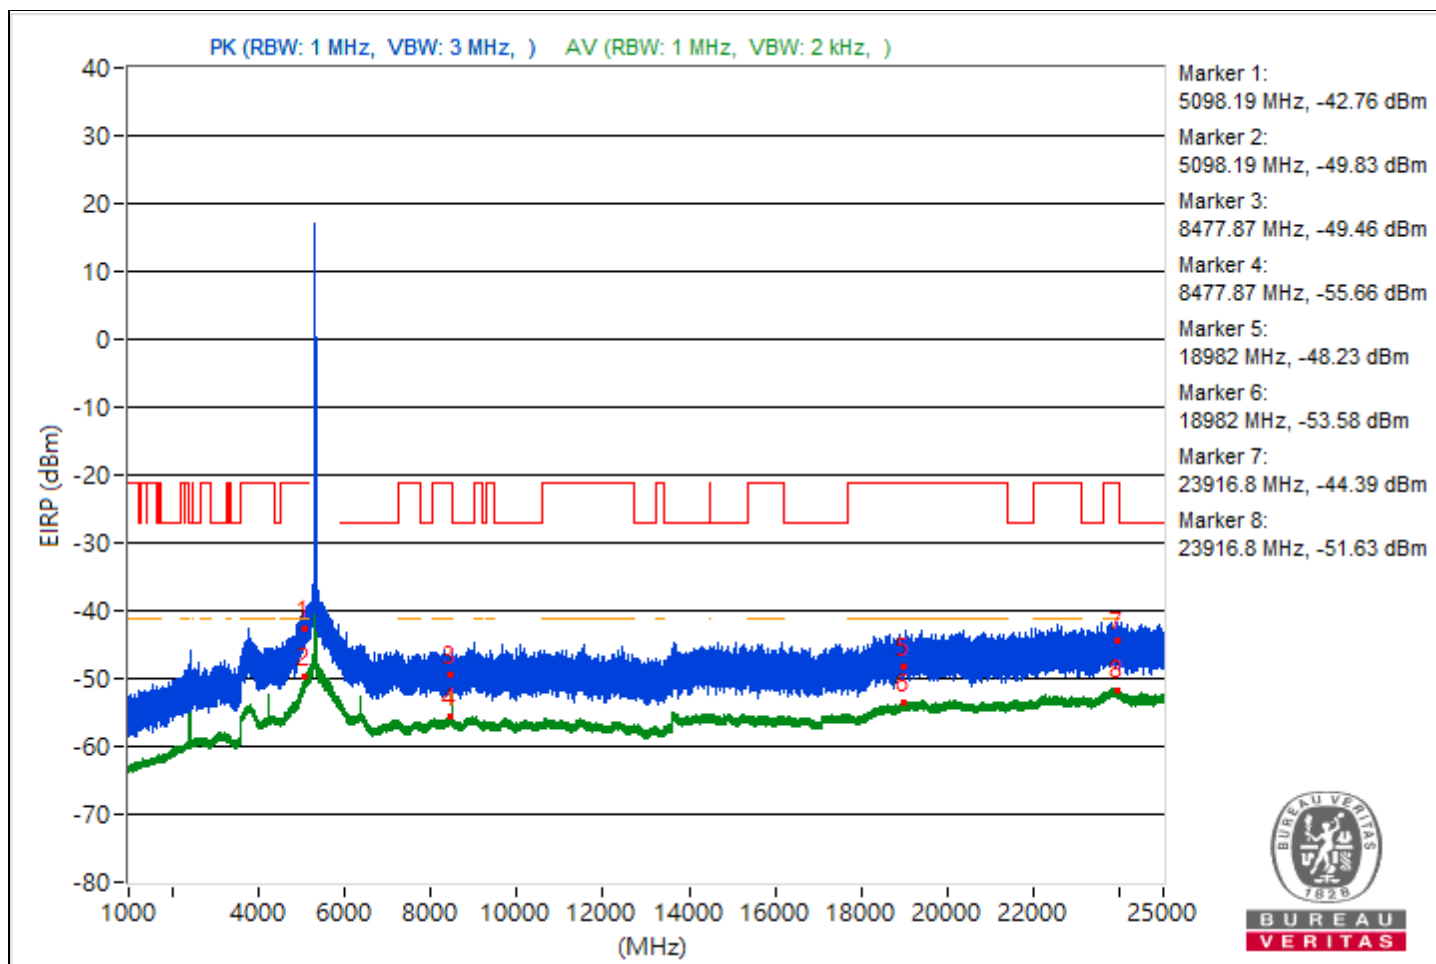


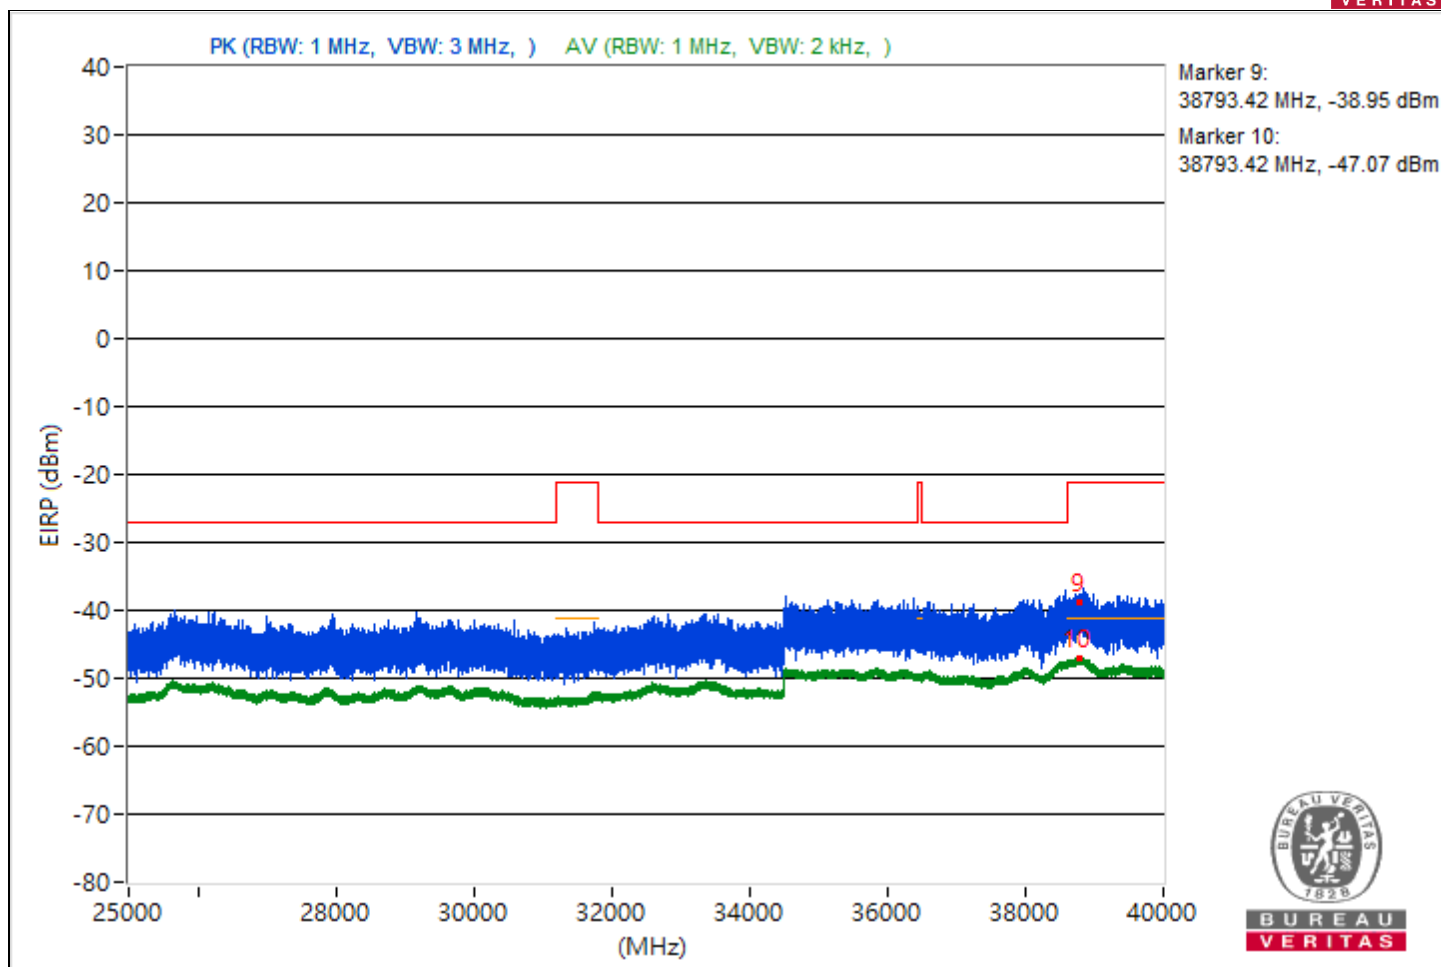


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5091.27	50.07 PK	74	-23.93	-57.12	-56.08	8.37	-45.19
2	5091.27	43.47 AV	54	-10.53	-62.75	-63.64	8.37	-51.79
3	9056.27	45.6 PK	74	-28.4	-62.24	-60.1	8.37	-49.66
4	9056.27	39.51 AV	54	-14.49	-66.71	-67.59	8.37	-55.75
5	18991.2	47.3 PK	74	-26.7	-58.78	-59.98	8.37	-47.96
6	18991.2	41.57 AV	54	-12.43	-64.7	-65.47	8.37	-53.69
7	23819.6	52.36 PK	74	-21.64	-53.28	-55.58	8.37	-42.9
8	23819.6	43.8 AV	54	-10.2	-63.19	-62.52	8.37	-51.46
9	38776.62	54.01 PK	74	-19.99	-52.45	-52.82	8.37	-41.25
10	38776.62	48.33 AV	54	-5.67	-58.65	-58	8.37	-46.93

Note: Margin value = Emission Level - Limit value

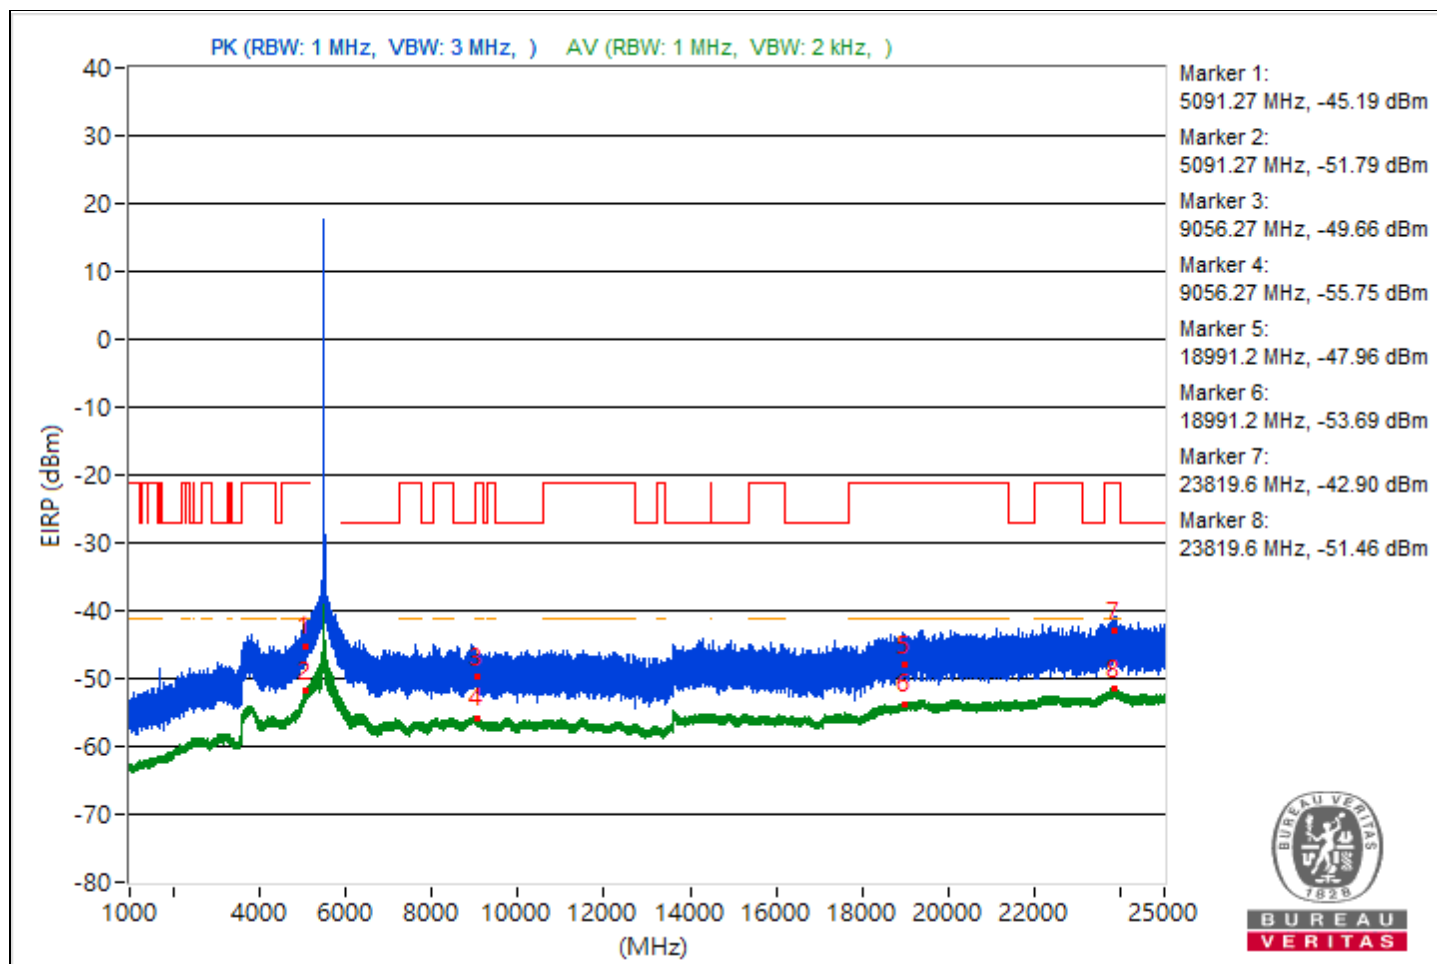


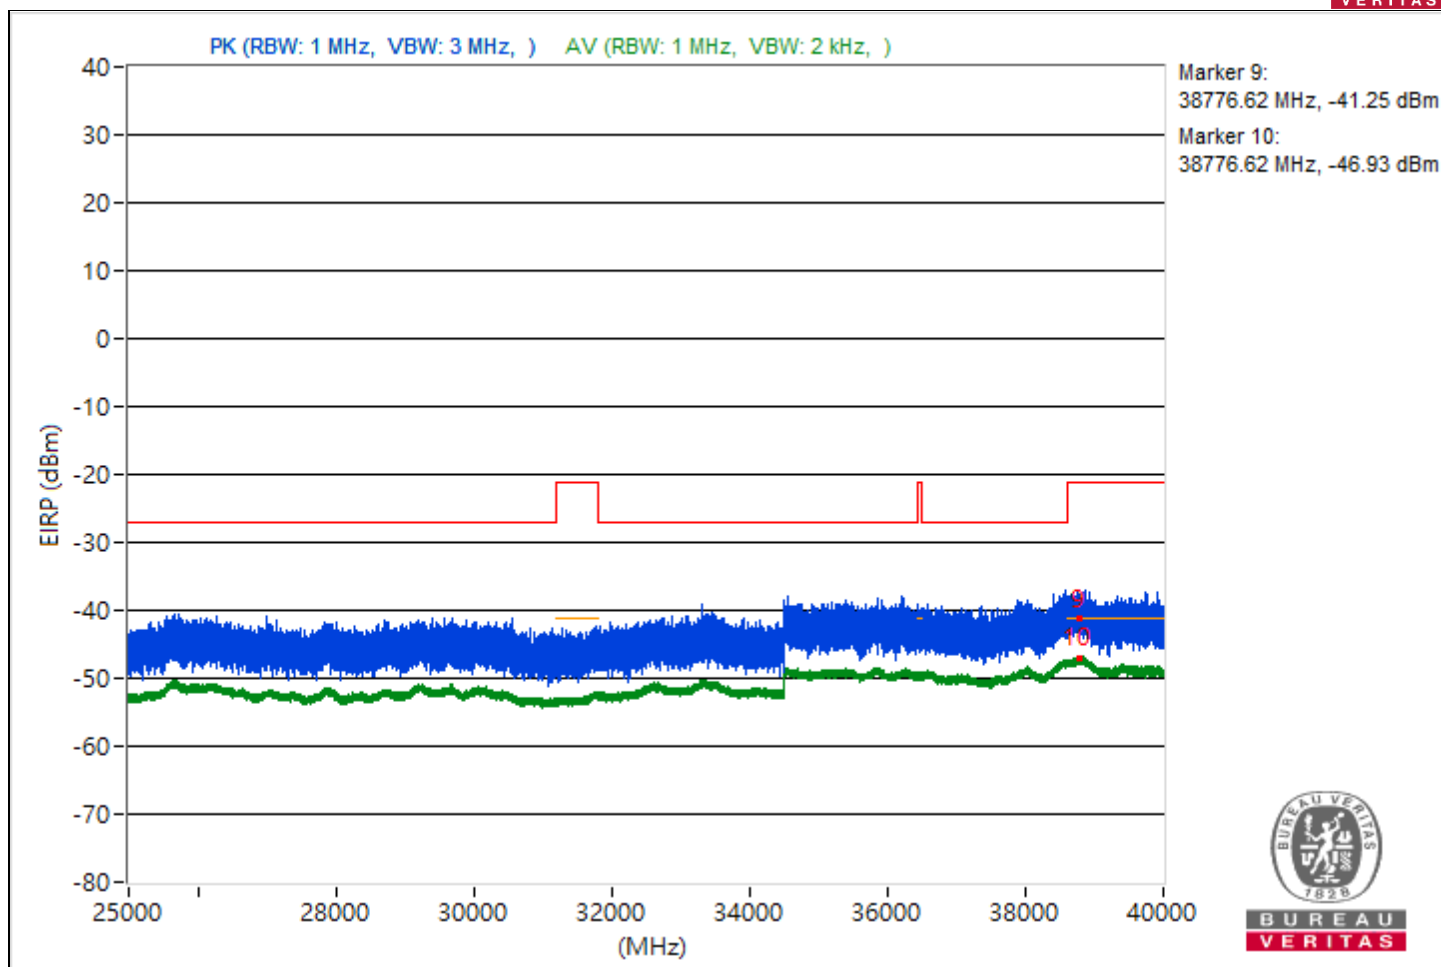


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4560.04	51.68 PK	74	-22.32	-55.36	-54.59	8.37	-43.58
2	4560.04	46.18 AV	54	-7.82	-60.49	-60.43	8.37	-49.08
3	9036.18	45.63 PK	74	-28.37	-60.11	-62.15	8.37	-49.63
4	9036.18	39.43 AV	54	-14.57	-67.71	-66.76	8.37	-55.83
5	18943.1	48.58 PK	74	-25.42	-59.14	-57.19	8.37	-46.68
6	18943.1	41.72 AV	54	-12.28	-64.72	-65.12	8.37	-53.54
7	23812.4	51.58 PK	74	-22.42	-54.61	-55.57	8.37	-43.68
8	23812.4	43.73 AV	54	-10.27	-63.43	-62.45	8.37	-51.53
9	38772.8	55.75 PK	74	-18.25	-50.35	-51.51	8.37	-39.51
10	38772.8	48.3 AV	54	-5.7	-58.67	-58.04	8.37	-46.96

Note: Margin value = Emission Level - Limit value

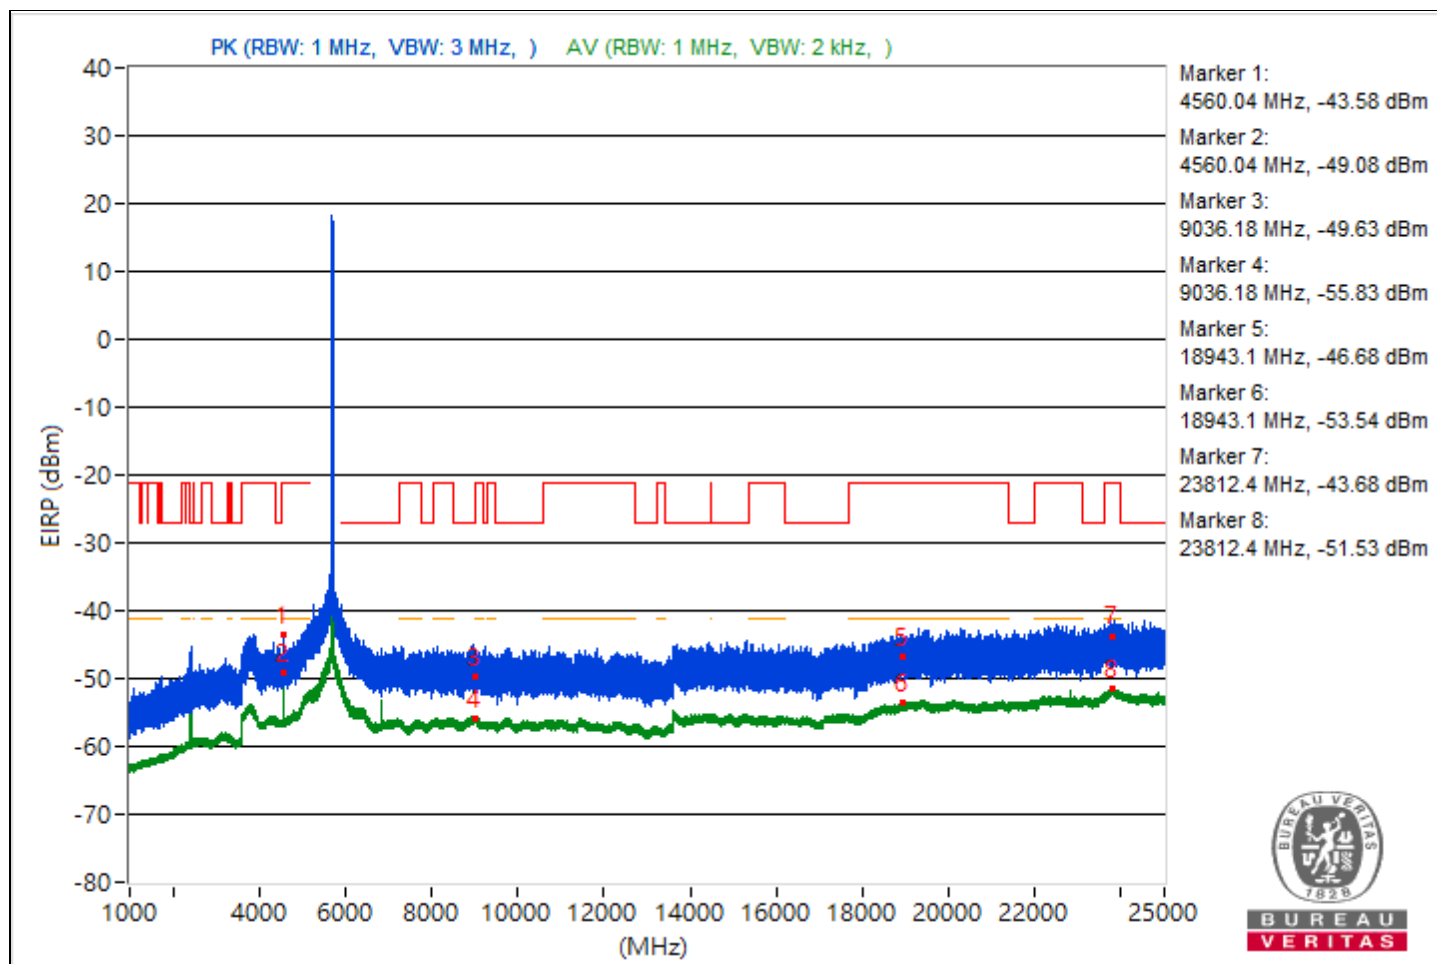


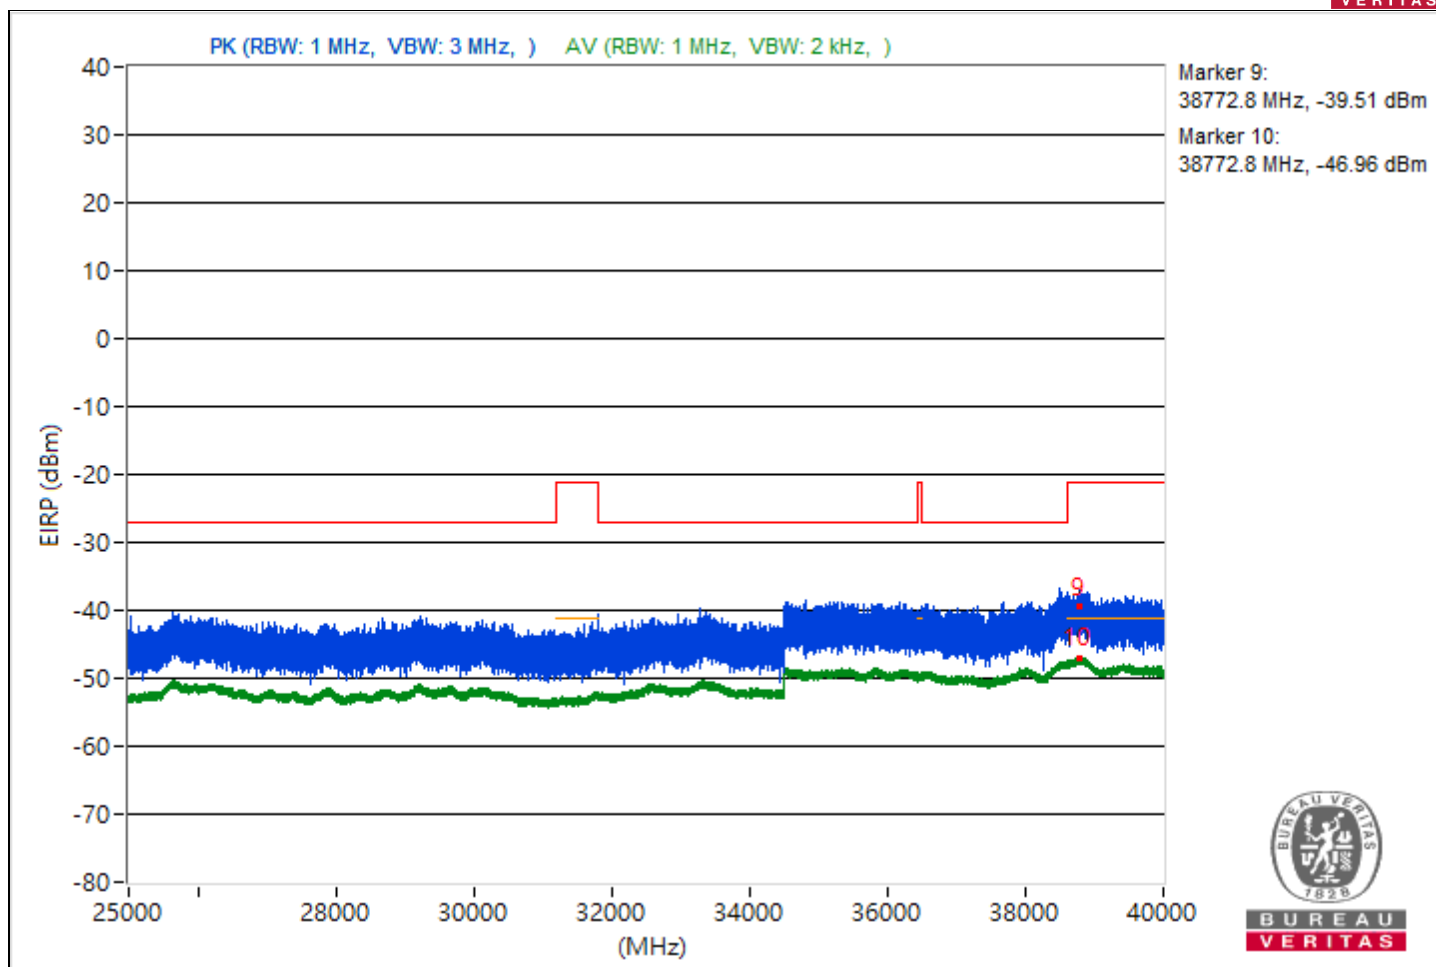


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4575.99	51.88 PK	74	-22.12	-54.45	-55.08	8.37	-43.38
2	4575.99	47.91 AV	54	-6.09	-58.71	-58.76	8.37	-47.35
3	9152	48.46 PK	74	-25.54	-57.98	-58.4	8.37	-46.8
4	9152	40.34 AV	54	-13.66	-67.5	-65.35	8.37	-54.92
5	18982.8	48.42 PK	74	-25.58	-57.23	-59.5	8.37	-46.84
6	18982.8	41.57 AV	54	-12.43	-64.63	-65.56	8.37	-53.69
7	23837.2	50.11 PK	74	-23.89	-55.76	-57.46	8.37	-45.15
8	23837.2	43.67 AV	54	-10.33	-62.67	-63.29	8.37	-51.59
9	38780.98	53.85 PK	74	-20.15	-51.76	-54.15	8.37	-41.41
10	38780.98	48.24 AV	54	-5.76	-58.82	-58.02	8.37	-47.02

Note: Margin value = Emission Level - Limit value

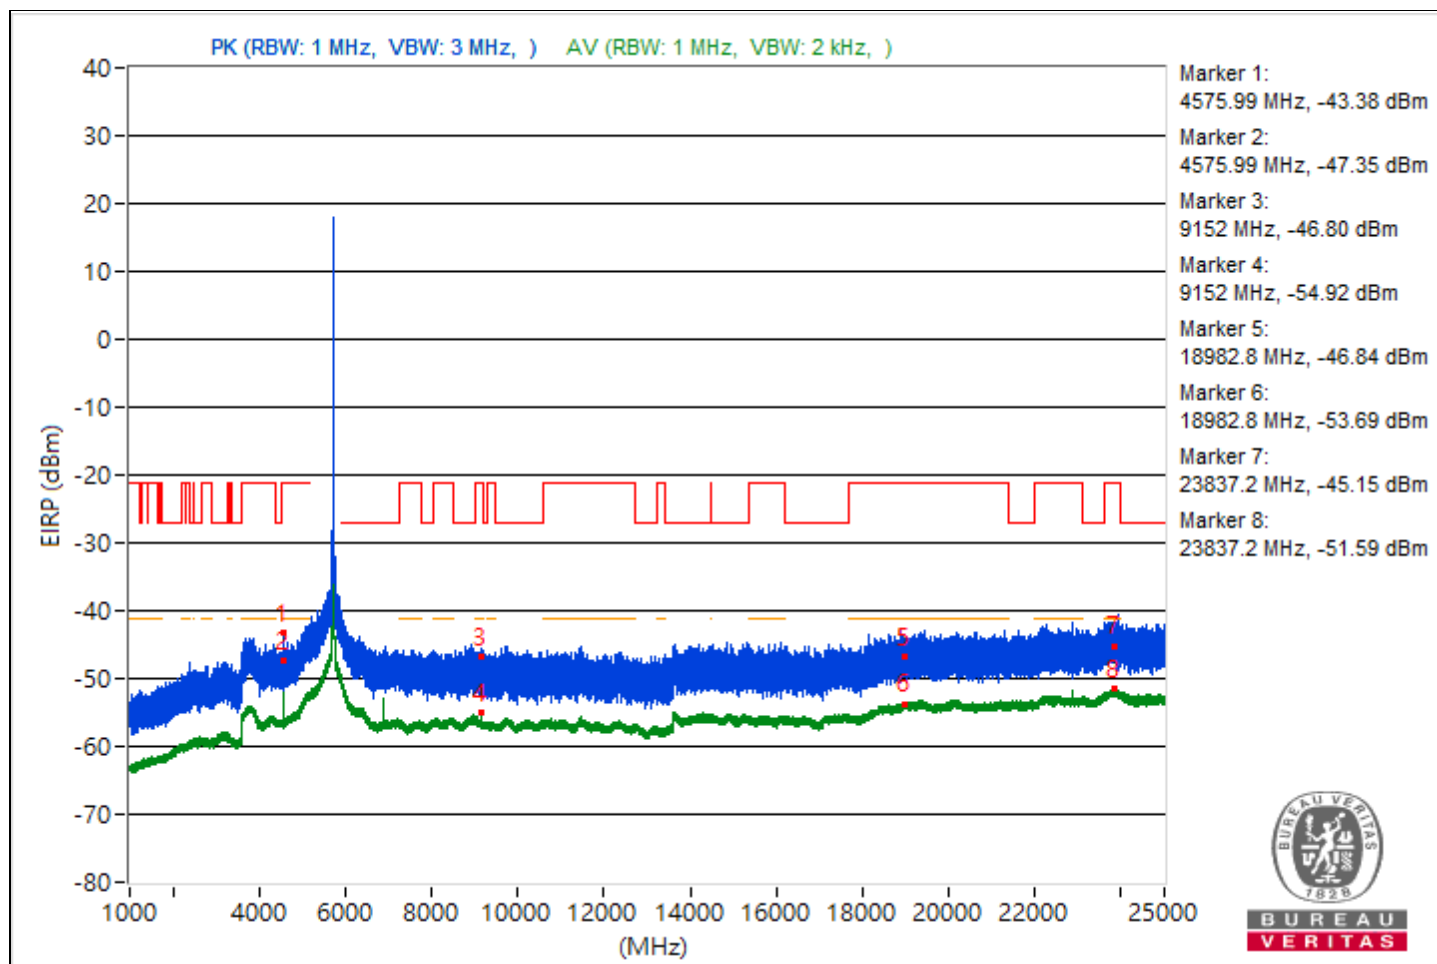


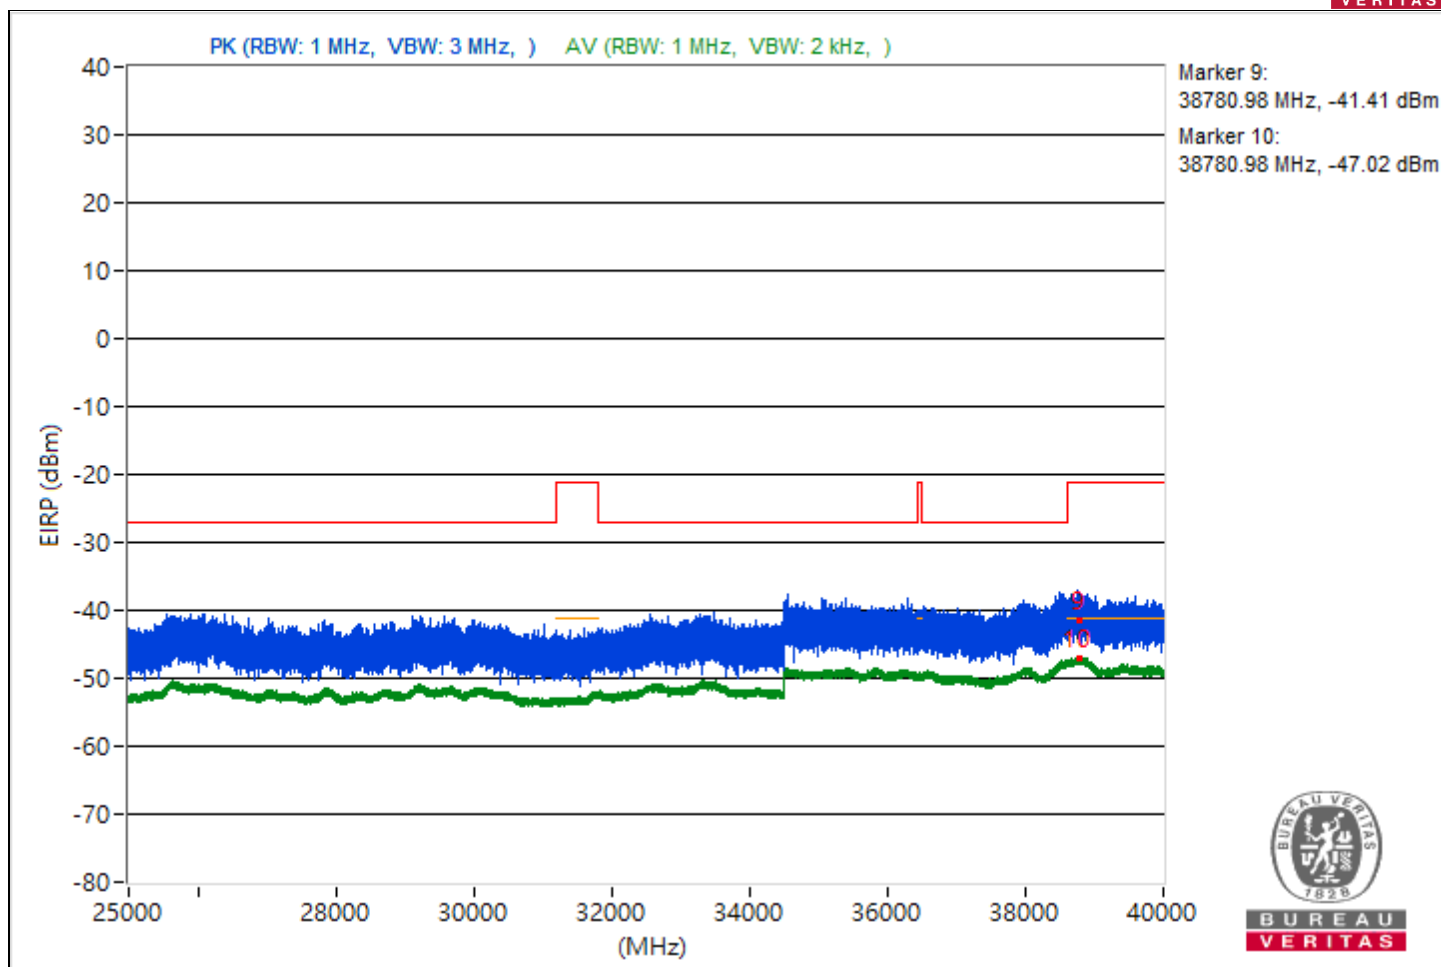


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5089.56	50.1 PK	74	-23.9	-56.76	-56.33	8.37	-45.16
2	5089.56	41.71 AV	54	-12.29	-64.59	-65.29	8.37	-53.55
3	11479.64	52.24 PK	74	-21.76	-56.46	-53	8.37	-43.02
4	11479.64	44.46 AV	54	-9.54	-61.91	-62.45	8.37	-50.8
5	18972.7	49.1 PK	74	-24.9	-57.4	-57.68	8.37	-46.16
6	18972.7	41.67 AV	54	-12.33	-64.64	-65.33	8.37	-53.59
7	23802.9	51.28 PK	74	-22.72	-57.13	-54.1	8.37	-43.98
8	23802.9	43.92 AV	54	-10.08	-62.9	-62.55	8.37	-51.34
9	38860.27	55.1 PK	74	-18.9	-50.78	-52.45	8.37	-40.16
10	38860.27	48.46 AV	54	-5.54	-58.58	-57.82	8.37	-46.8

Note: Margin value = Emission Level - Limit value

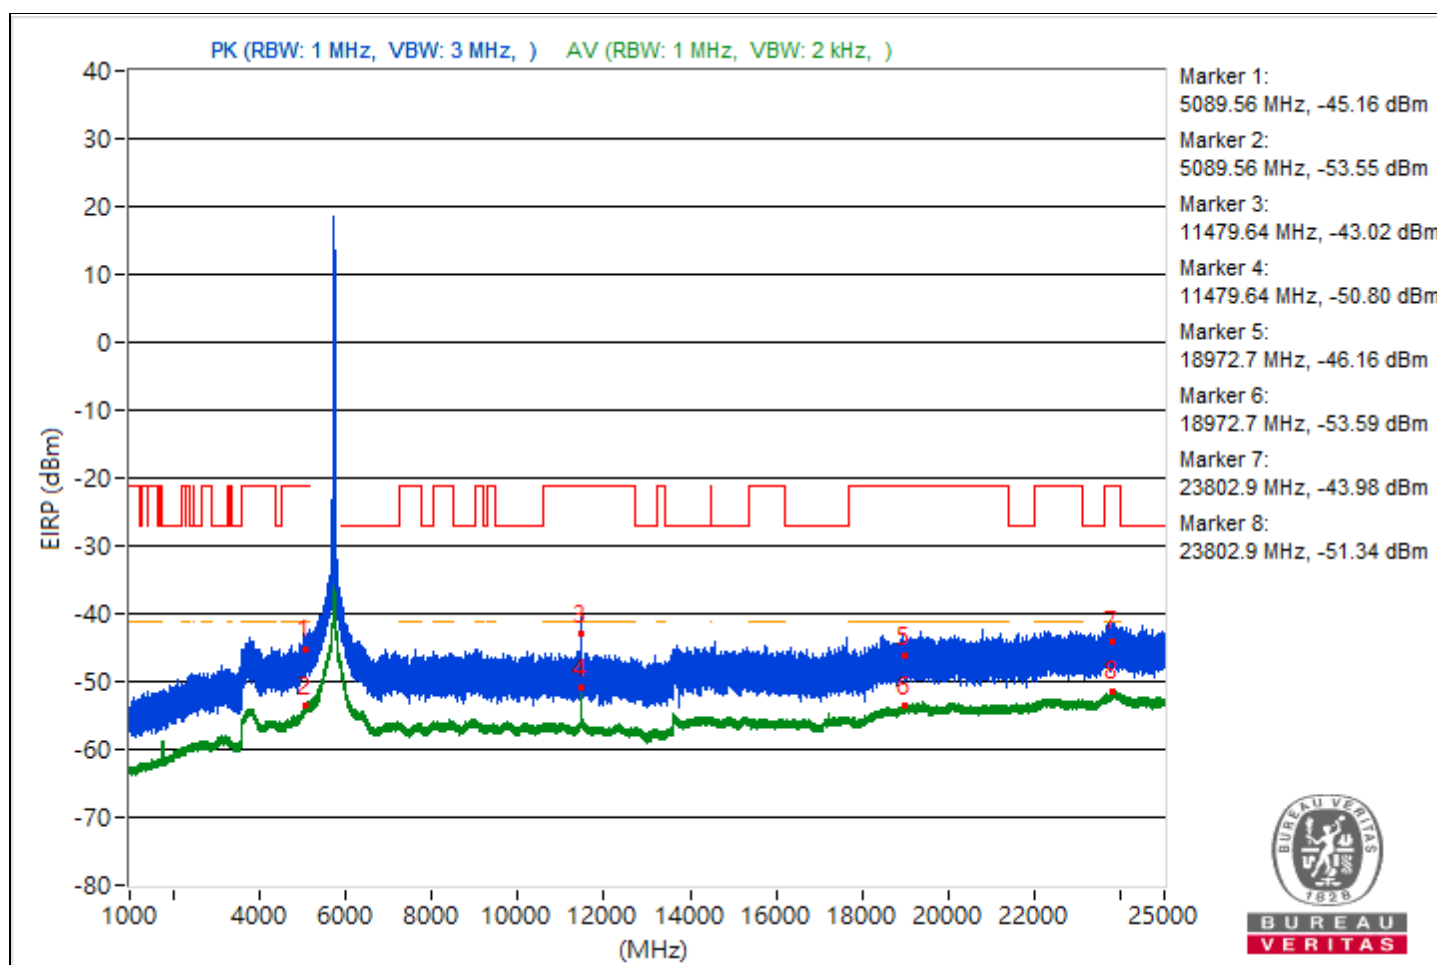


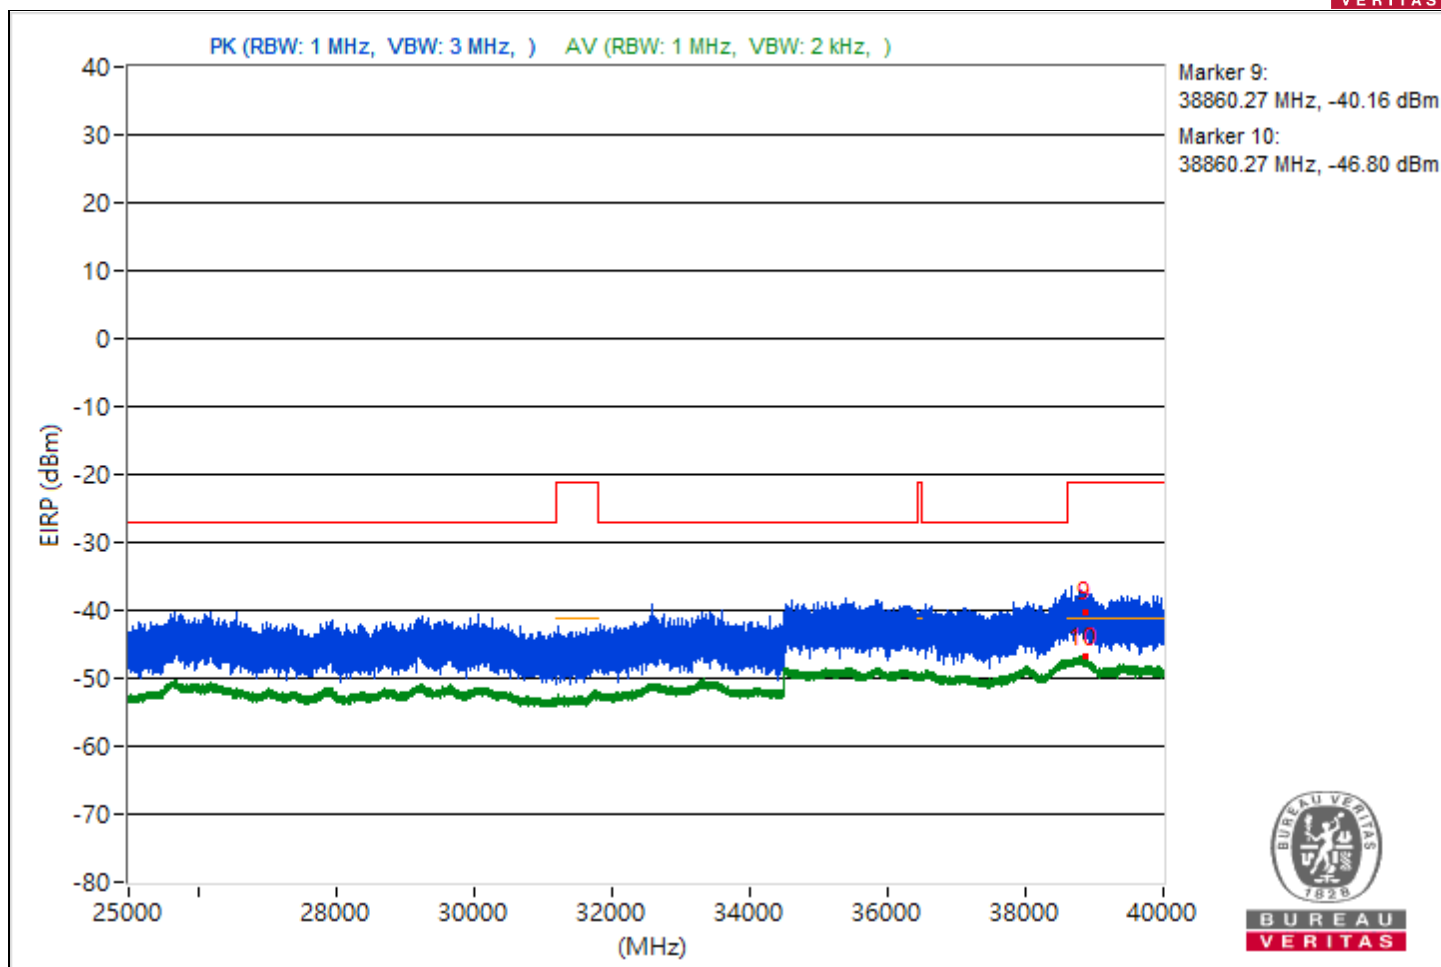


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4660.07	52.04 PK	74	-21.96	-54.96	-54.28	8.37	-43.22
2	4660.07	47.34 AV	54	-6.66	-59.31	-59.29	8.37	-47.92
3	11660.8	57.98 PK	74	-16.02	-47.84	-49.66	8.37	-37.28
4	11660.8	48.97 AV	54	-5.03	-57.77	-57.57	8.37	-46.29
5	18975	47.92 PK	74	-26.08	-58.79	-58.65	8.37	-47.34
6	18975	41.67 AV	54	-12.33	-65.29	-64.67	8.37	-53.59
7	23856.3	48.93 PK	74	-25.07	-58.14	-57.33	8.37	-46.33
8	23856.3	43.76 AV	54	-10.24	-63.12	-62.66	8.37	-51.5
9	38836.09	55.27 PK	74	-18.73	-51.92	-50.89	8.37	-39.99
10	38836.09	48.17 AV	54	-5.83	-57.99	-59.01	8.37	-47.09

Note: Margin value = Emission Level - Limit value

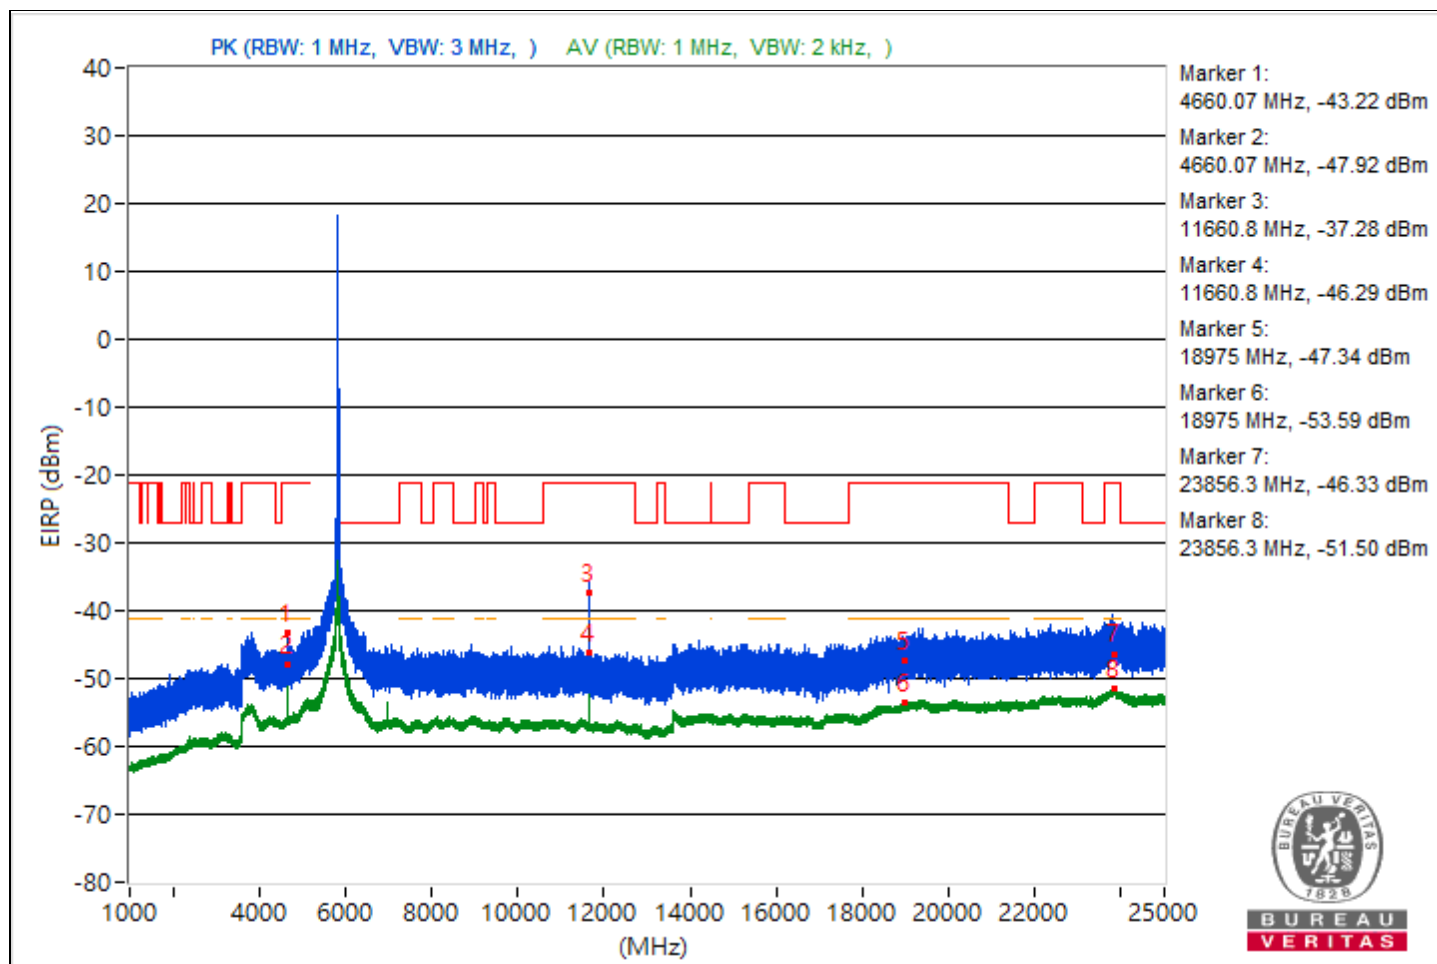


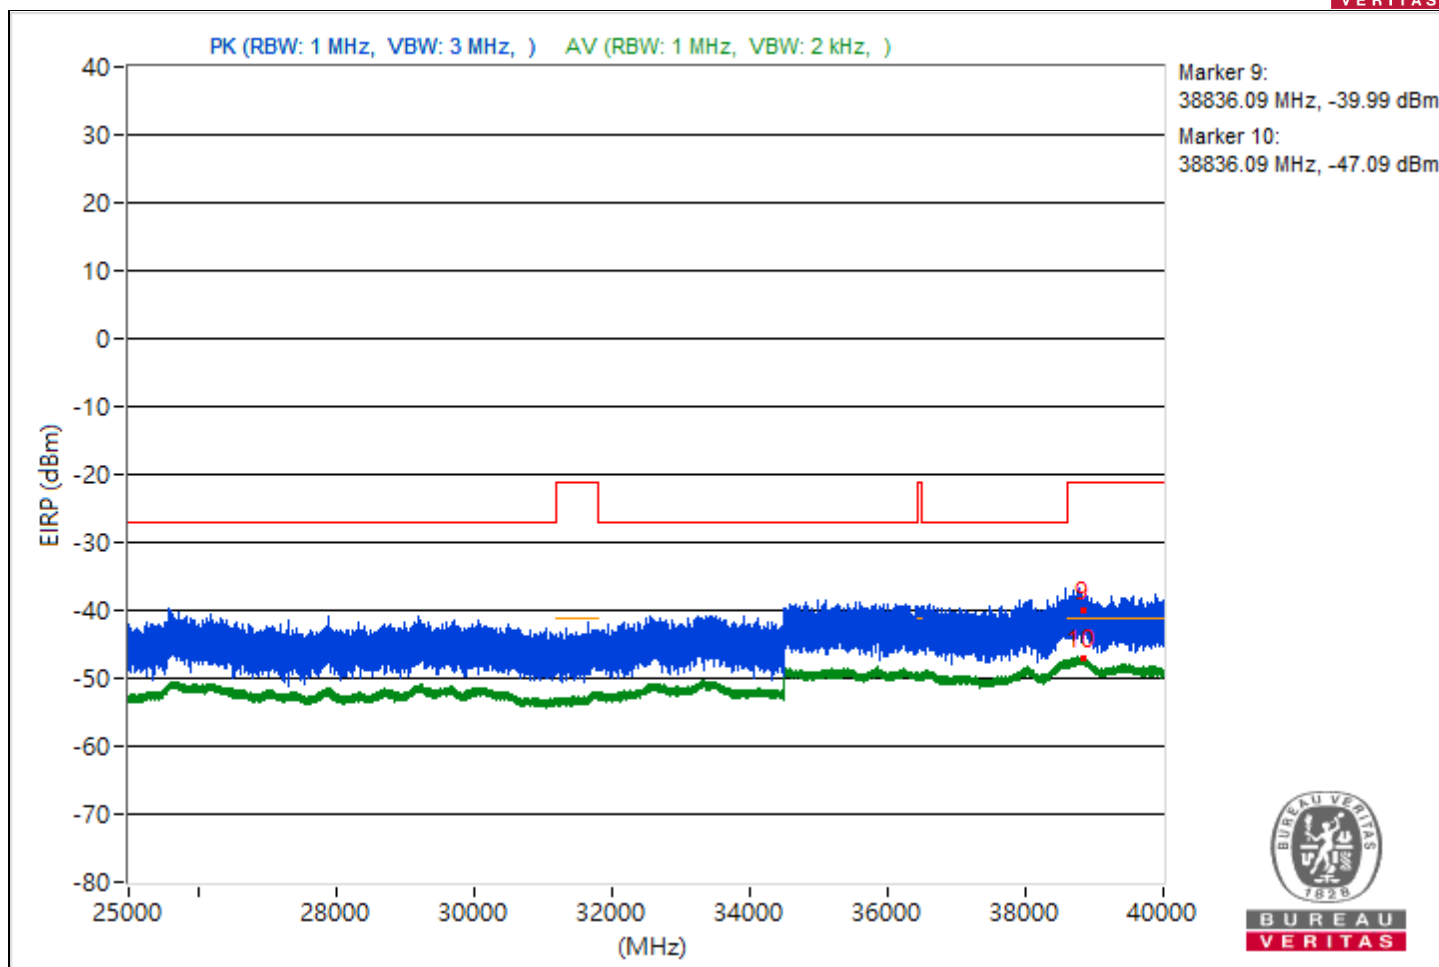


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.28	54.88 PK	74	-19.12	-50.61	-53.35	8.37	-40.38
2	5099.28	47.16 AV	54	-6.84	-59.78	-59.2	8.37	-48.1
3	8288.09	49.58 PK	74	-24.42	-56.14	-58.22	8.37	-45.68
4	8288.09	45.31 AV	54	-8.69	-61.39	-61.27	8.37	-49.95
5	18897.1	48.05 PK	74	-25.95	-60.49	-57.27	8.37	-47.21
6	18897.1	41.53 AV	54	-12.47	-64.62	-65.67	8.37	-53.73
7	23949.5	50.64 PK	74	-23.36	-57.24	-55.03	8.37	-44.62
8	23949.5	43.54 AV	54	-10.46	-63.49	-62.74	8.37	-51.72
9	38795.47	55.12 PK	74	-18.88	-51.55	-51.48	8.37	-40.14
10	38795.47	48.21 AV	54	-5.79	-58.88	-58.02	8.37	-47.05

Note: Margin value = Emission Level - Limit value

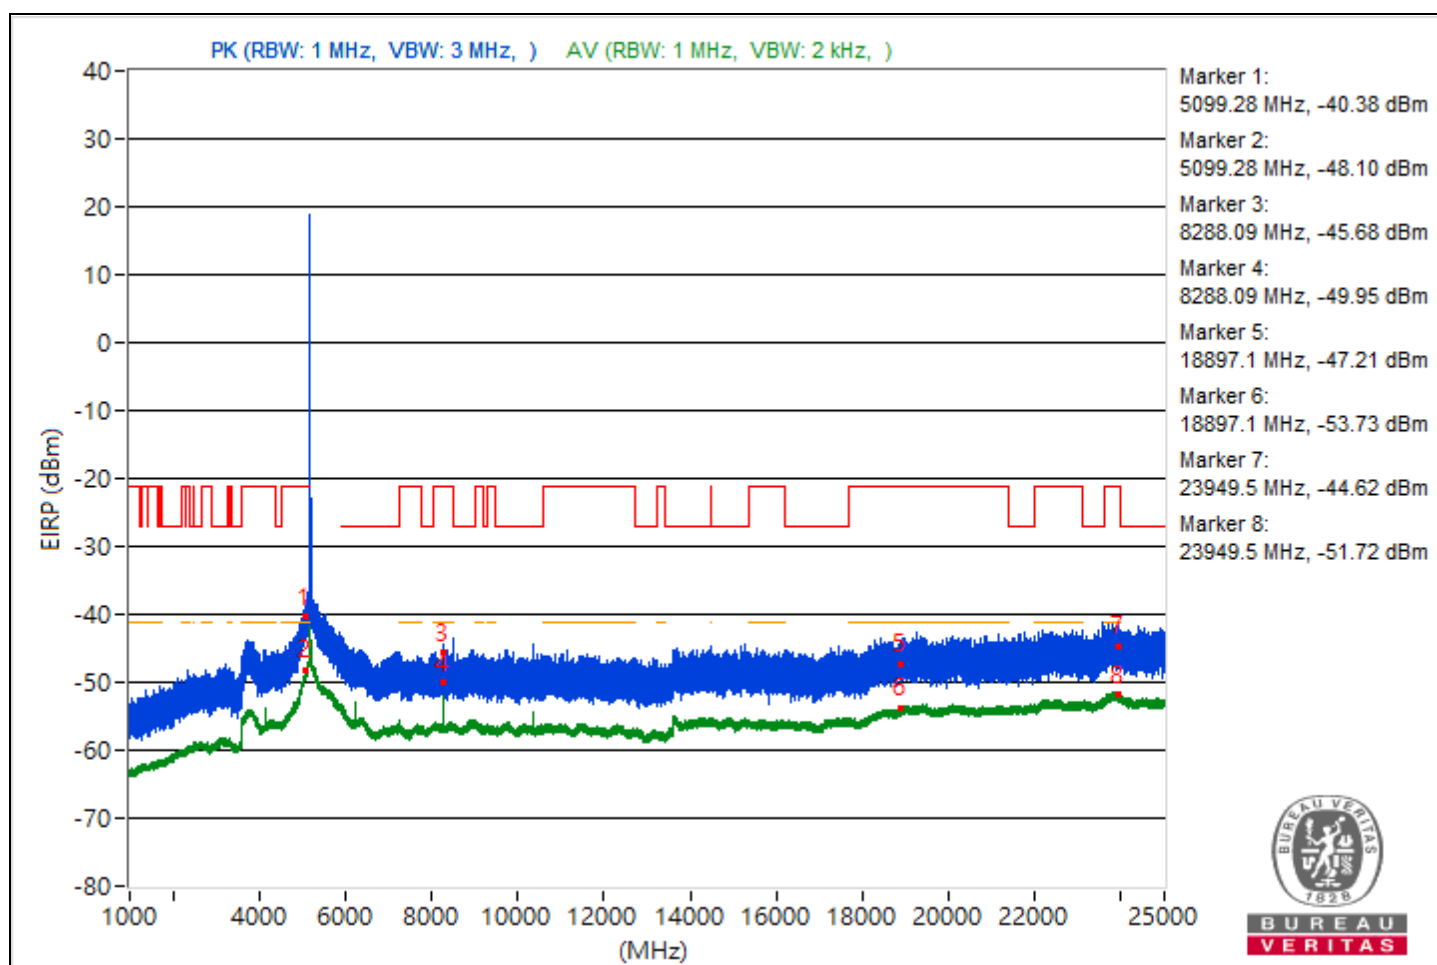


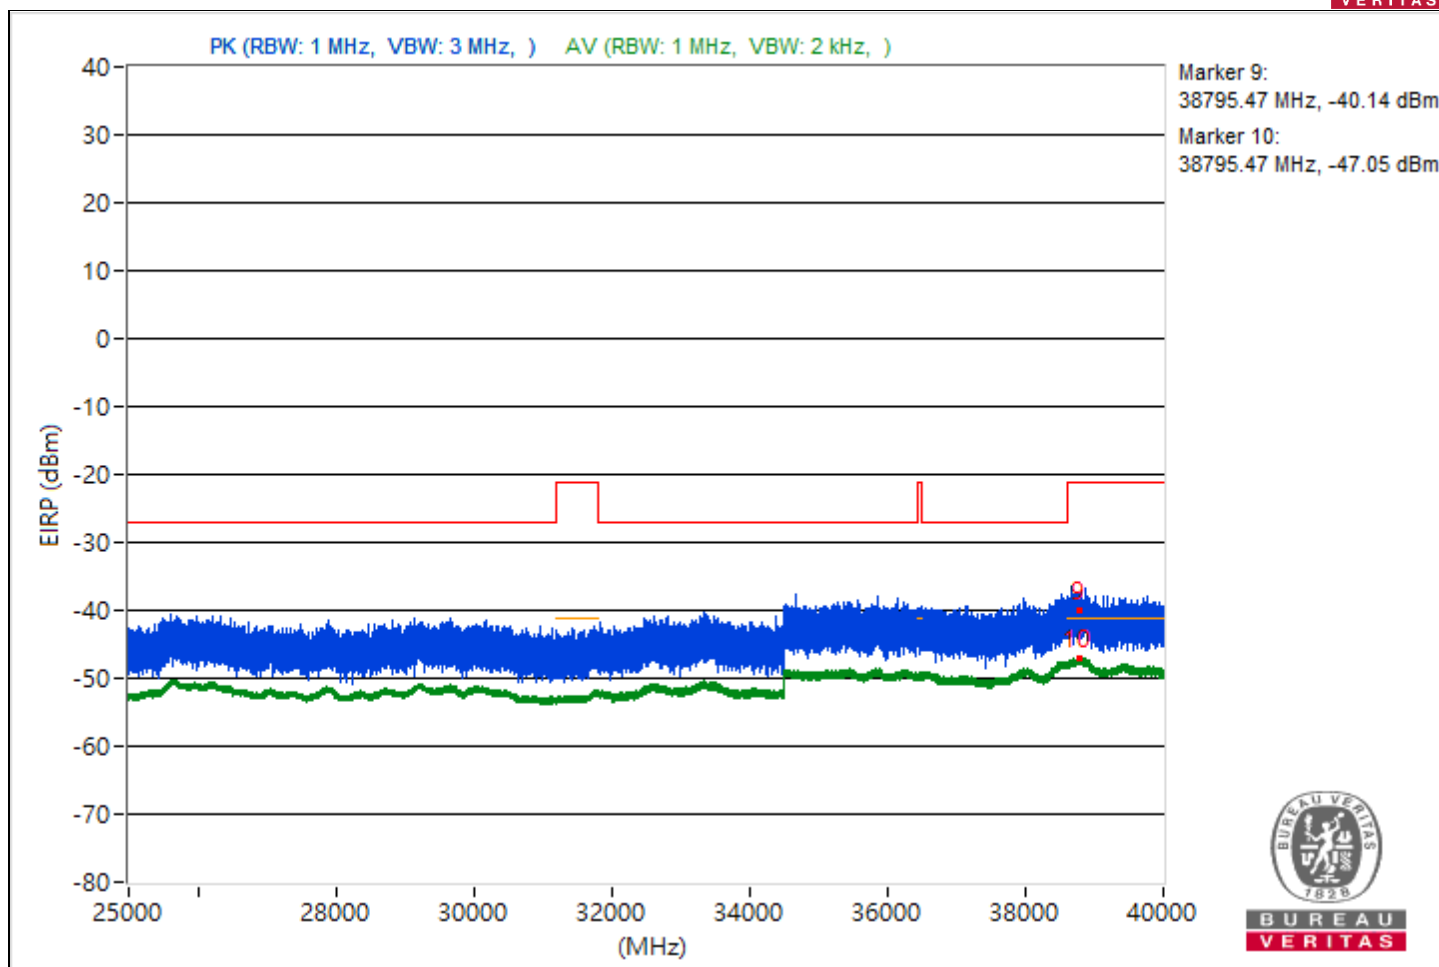


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.36	51.8 PK	74	-22.2	-54.05	-55.81	8.37	-43.46
2	5099.36	44.89 AV	54	-9.11	-61.84	-61.66	8.37	-50.37
3	9003.47	46.11 PK	74	-27.89	-60.3	-60.77	8.37	-49.15
4	9003.47	39.33 AV	54	-14.67	-67.97	-66.74	8.37	-55.93
5	18944.7	46.78 PK	74	-27.22	-60.56	-59.27	8.37	-48.48
6	18944.7	41.59 AV	54	-12.41	-65.26	-64.85	8.37	-53.67
7	23856	51.86 PK	74	-22.14	-54.72	-54.84	8.37	-43.4
8	23856	43.82 AV	54	-10.18	-63.33	-62.36	8.37	-51.44
9	38722.22	53.96 PK	74	-20.04	-52.47	-52.9	8.37	-41.3
10	38722.22	48.28 AV	54	-5.72	-58	-58.76	8.37	-46.98

Note: Margin value = Emission Level - Limit value

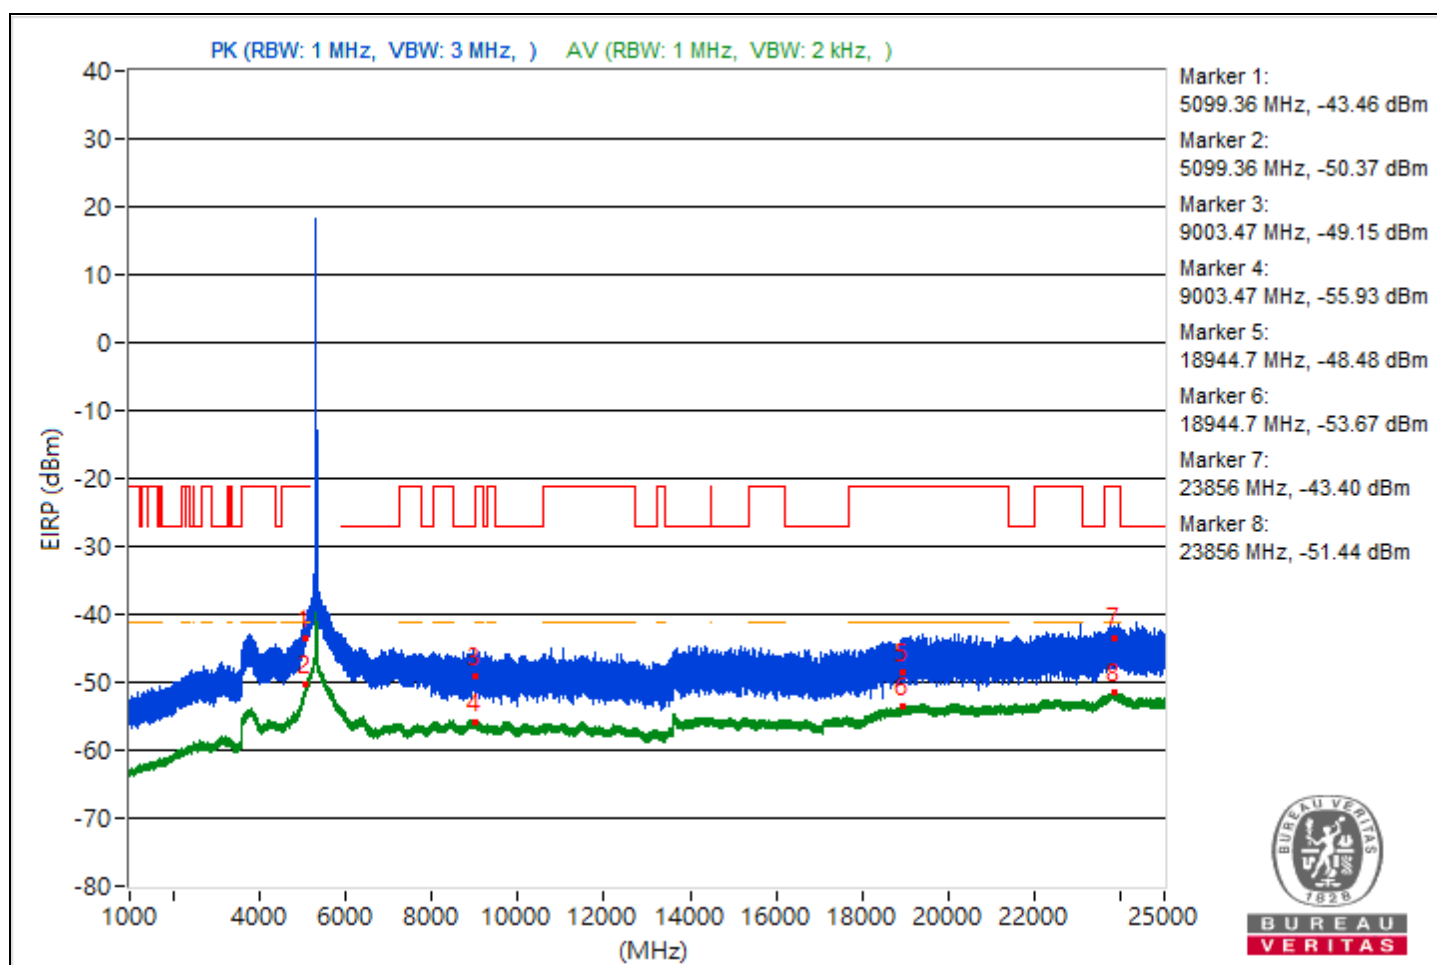

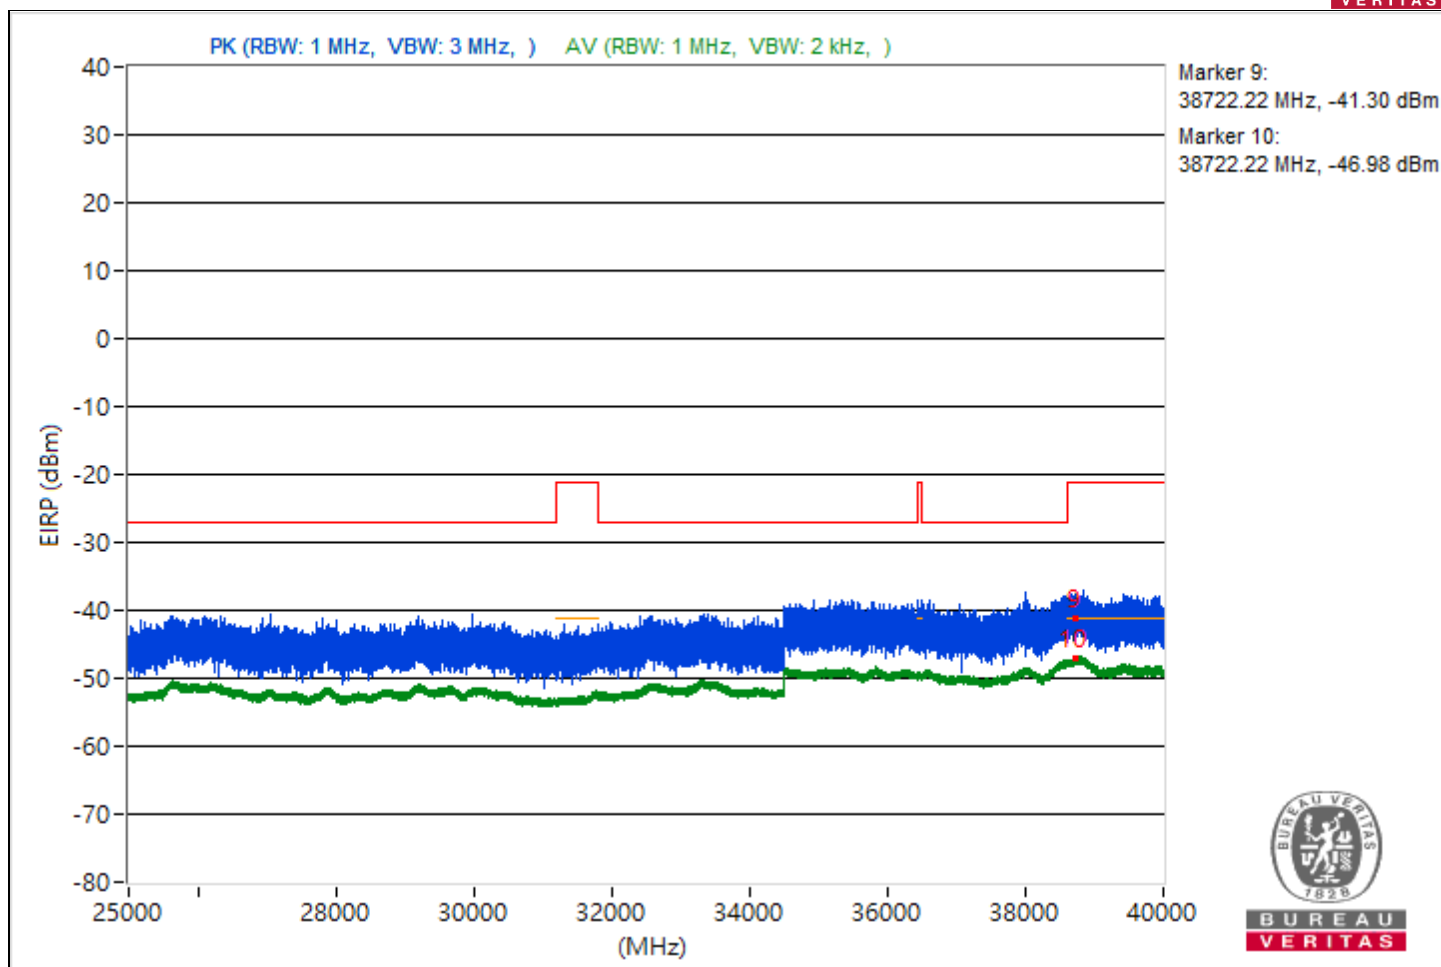



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5085.12	50.23 PK	74	-23.77	-55.94	-56.94	8.37	-45.03
2	5085.12	43.66 AV	54	-10.34	-62.41	-63.64	8.37	-51.6
3	9003.11	44.16 PK	74	-29.84	-62.66	-62.31	8.37	-51.1
4	9003.11	39.29 AV	54	-14.71	-68.09	-66.72	8.37	-55.97
5	18991.9	49.66 PK	74	-24.34	-57.47	-56.54	8.37	-45.6
6	18991.9	41.8 AV	54	-12.2	-64.97	-64.71	8.37	-53.46
7	23805.7	52 PK	74	-22	-55.45	-53.96	8.37	-43.26
8	23805.7	43.76 AV	54	-10.24	-63.13	-62.65	8.37	-51.5
9	38774.4	54.38 PK	74	-19.62	-50.33	-55.83	8.37	-40.88
10	38774.4	48.4 AV	54	-5.6	-58.42	-58.07	8.37	-46.86

Note: Margin value = Emission Level - Limit value

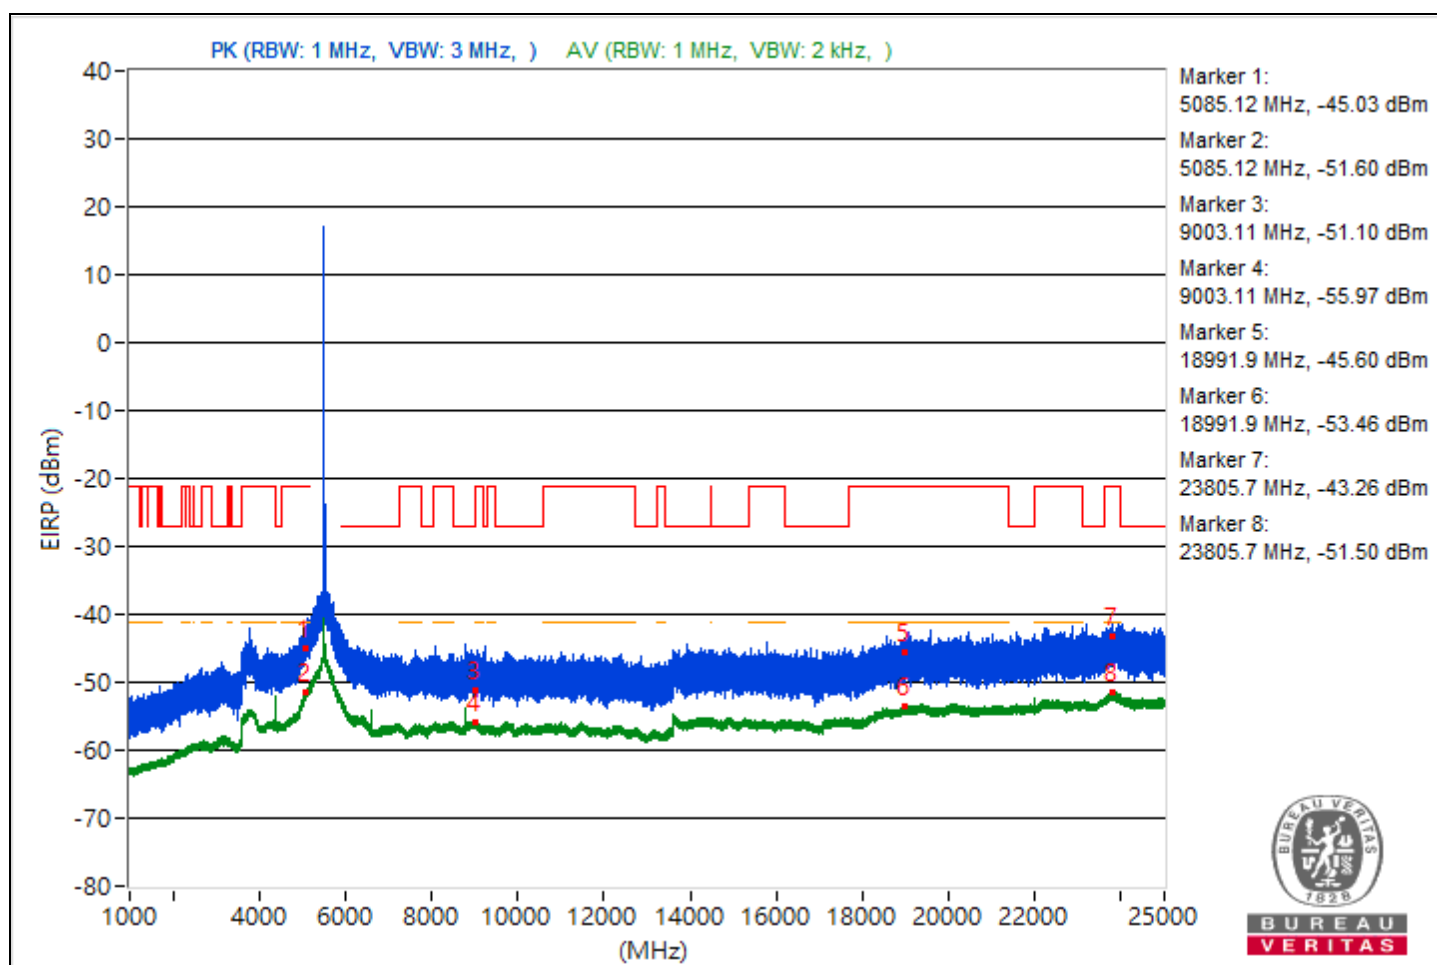


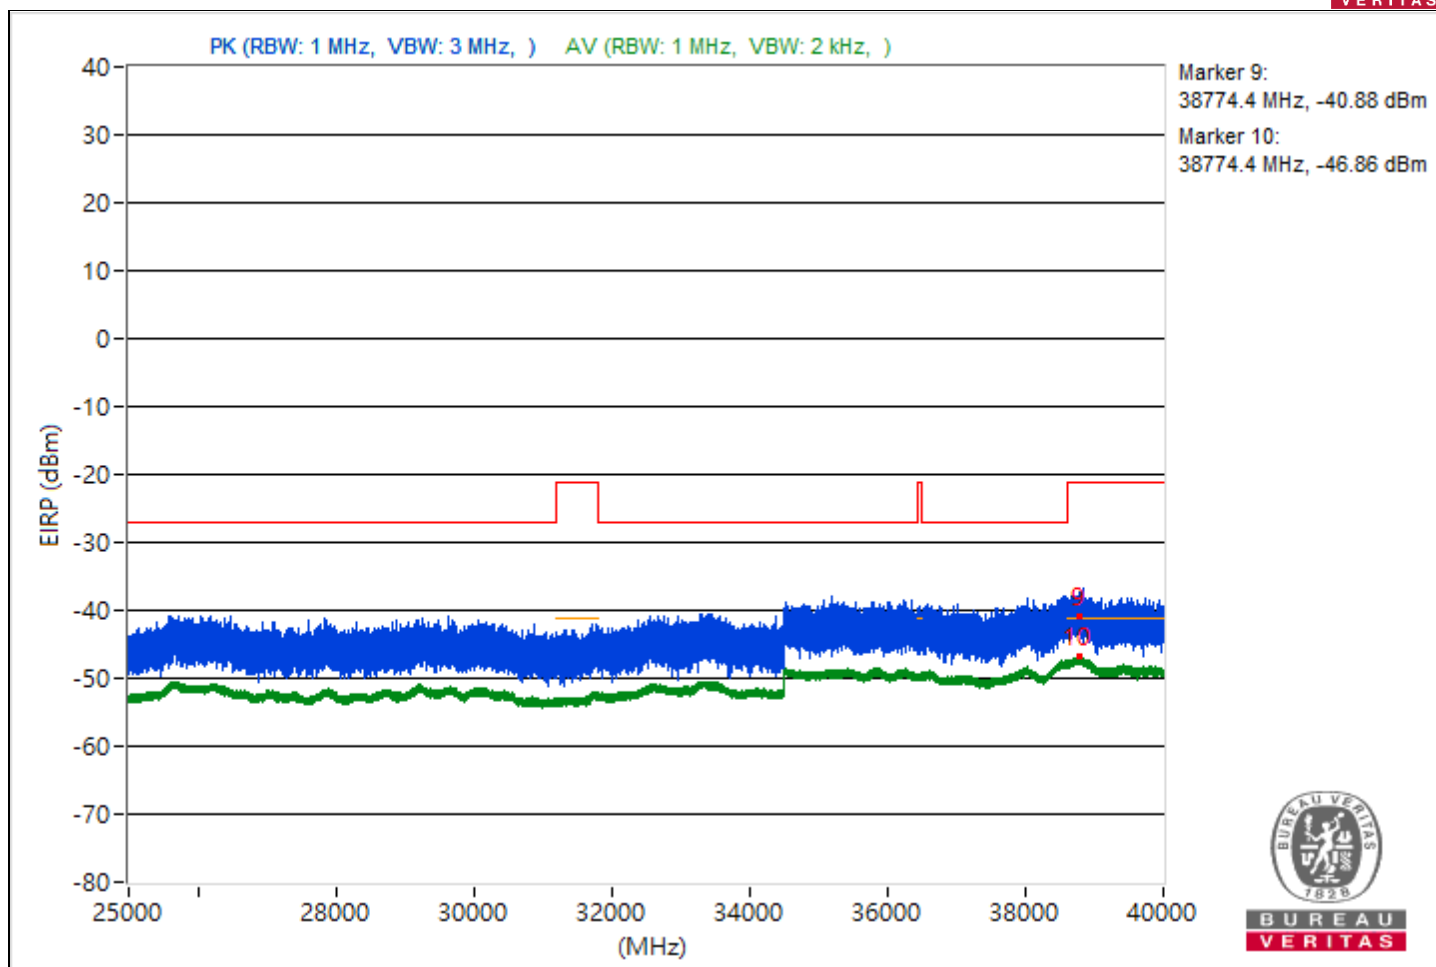


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.59	49.84 PK	74	-24.16	-57.33	-56.34	8.37	-45.42
2	5099.59	42.76 AV	54	-11.24	-63.59	-64.2	8.37	-52.5
3	9031.64	45.91 PK	74	-28.09	-61.6	-60.01	8.37	-49.35
4	9031.64	39.54 AV	54	-14.46	-67.88	-66.44	8.37	-55.72
5	18934.3	50.12 PK	74	-23.88	-58.19	-55.31	8.37	-45.14
6	18934.3	41.46 AV	54	-12.54	-64.76	-65.64	8.37	-53.8
7	23815.6	50.12 PK	74	-23.88	-56.77	-56.28	8.37	-45.14
8	23815.6	43.65 AV	54	-10.35	-63.65	-62.42	8.37	-51.61
9	38750.76	56.89 PK	74	-17.11	-50.94	-48.81	8.37	-38.37
10	38750.76	48.56 AV	54	-5.44	-57.77	-58.41	8.37	-46.7

Note: Margin value = Emission Level - Limit value

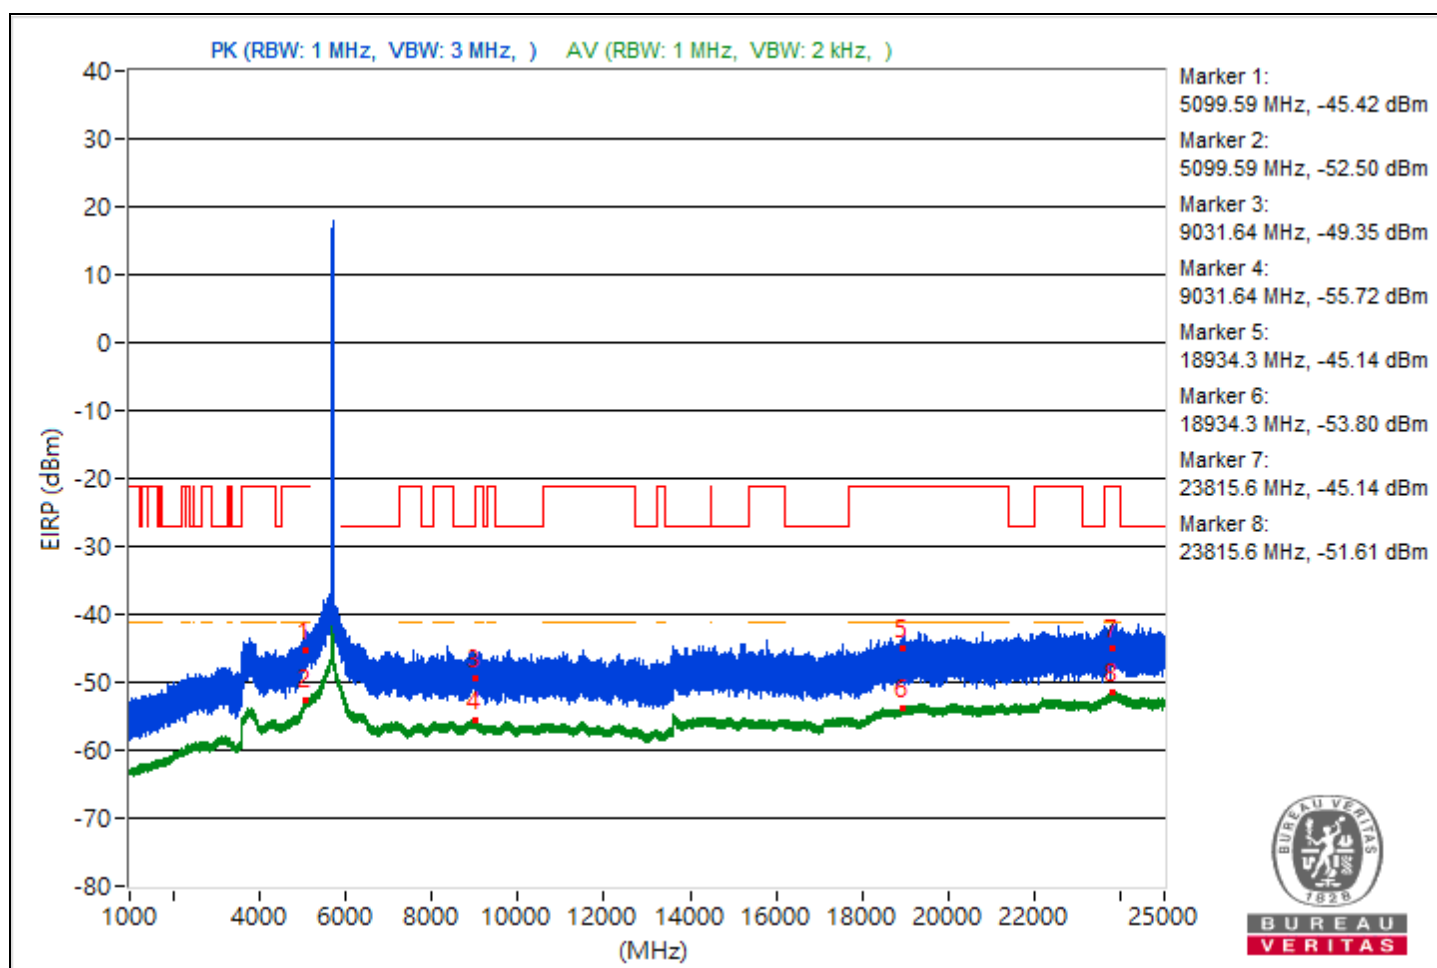

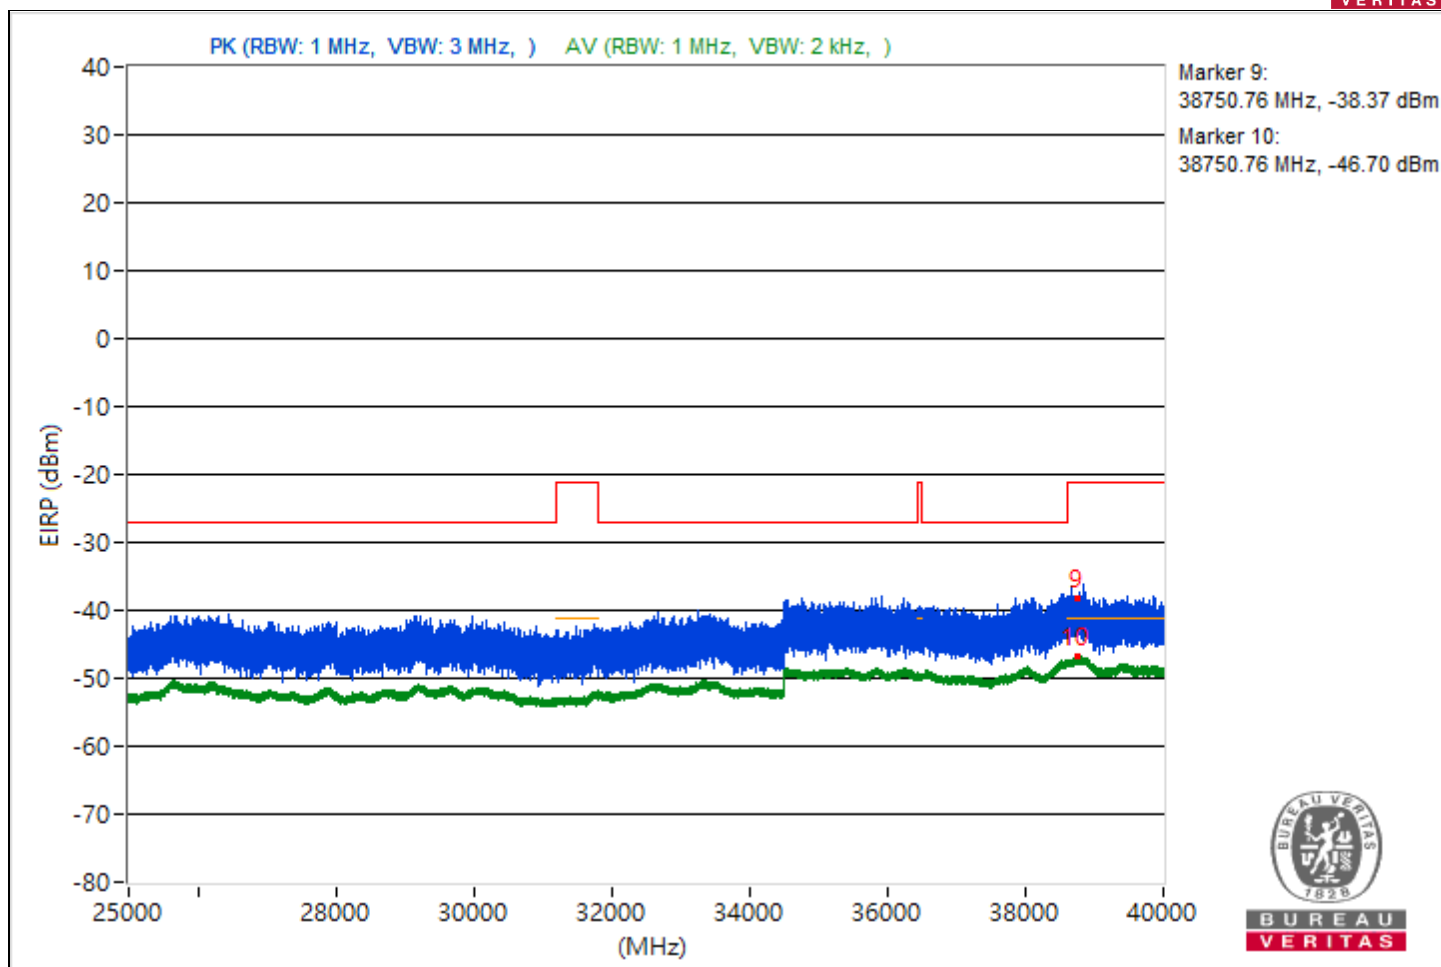



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5089.71	50.88 PK	74	-23.12	-57.23	-54.66	8.37	-44.38
2	5089.71	42.49 AV	54	-11.51	-64.45	-63.86	8.37	-52.77
3	9024.53	46.54 PK	74	-27.46	-60.35	-59.87	8.37	-48.72
4	9024.53	39.49 AV	54	-14.51	-67.46	-66.86	8.37	-55.77
5	18962.6	48.8 PK	74	-25.2	-57.68	-58	8.37	-46.46
6	18962.6	41.49 AV	54	-12.51	-64.67	-65.69	8.37	-53.77
7	23790.2	49.64 PK	74	-24.36	-57.62	-56.45	8.37	-45.62
8	23790.2	43.87 AV	54	-10.13	-62.55	-63.01	8.37	-51.39
9	38805.33	53.55 PK	74	-20.45	-53.5	-52.73	8.37	-41.71
10	38805.33	48.36 AV	54	-5.64	-57.97	-58.61	8.37	-46.9

Note: Margin value = Emission Level - Limit value

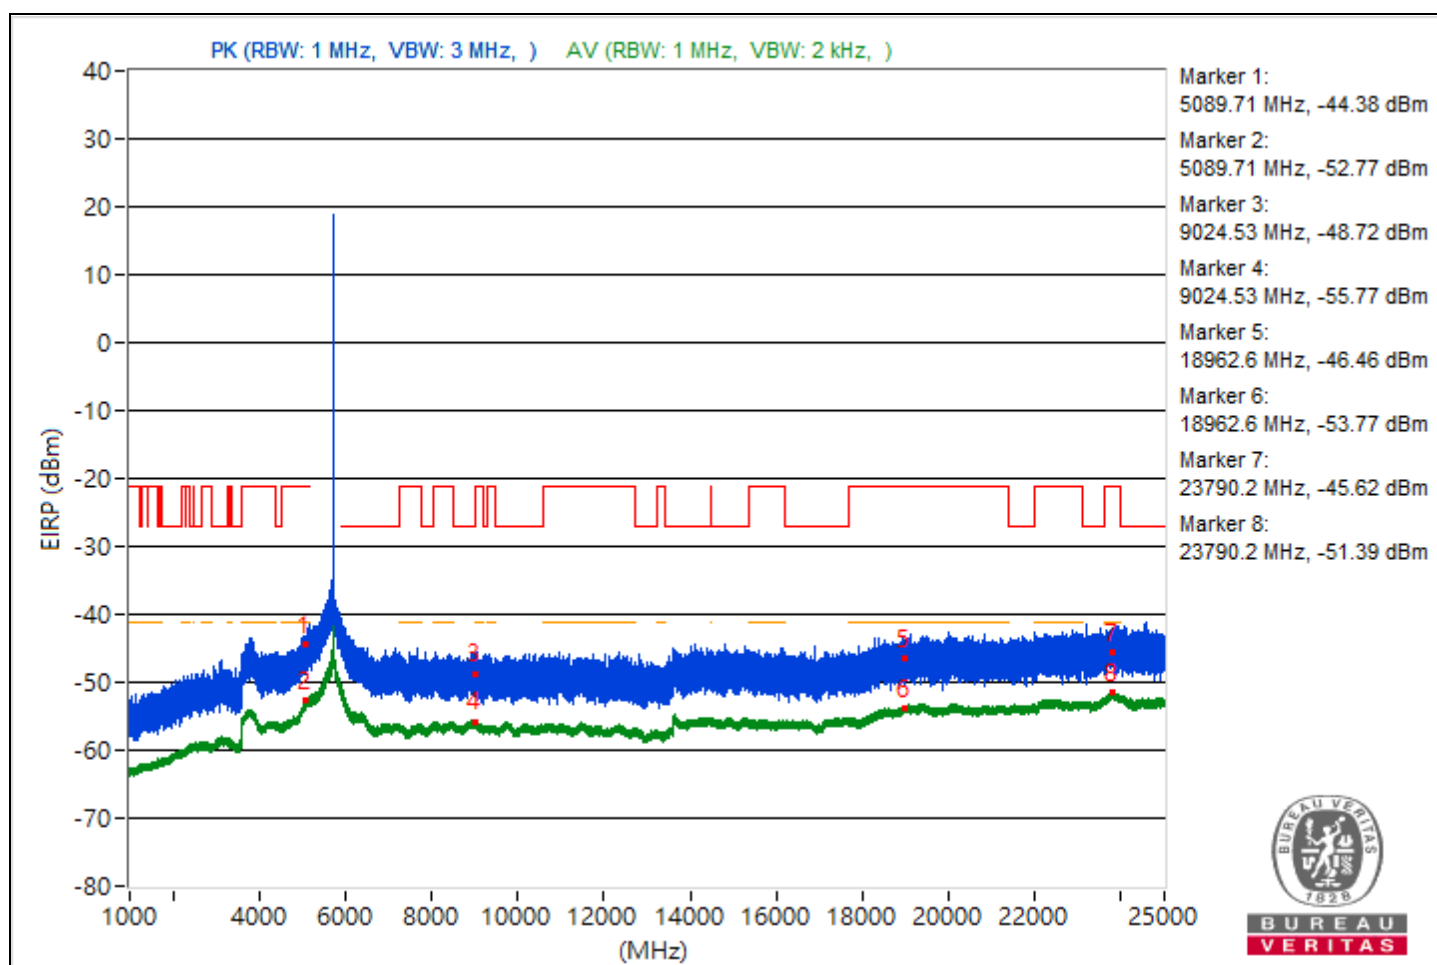


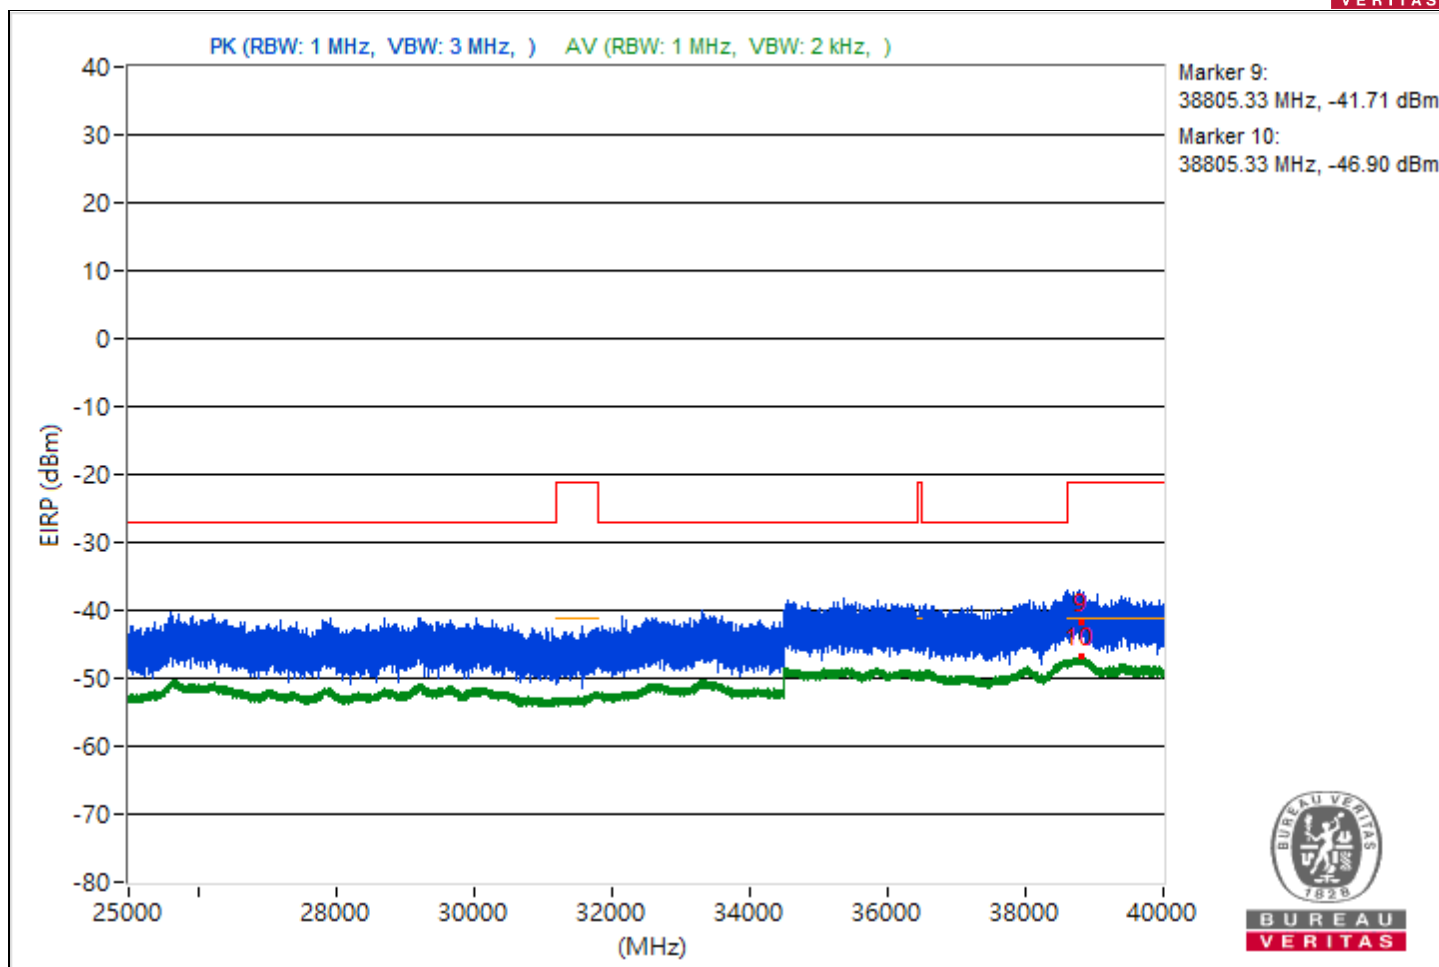


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4595.9	49.81 PK	74	-24.19	-56.21	-57.57	8.37	-45.45
2	4595.9	45.19 AV	54	-8.81	-61.5	-61.4	8.37	-50.07
3	11481.33	59.65 PK	74	-14.35	-45.68	-48.87	8.37	-35.61
4	11481.33	51.63 AV	54	-2.37	-55.4	-54.66	8.37	-43.63
5	18972.1	49.17 PK	74	-24.83	-56.93	-58.09	8.37	-46.09
6	18972.1	41.54 AV	54	-12.46	-64.69	-65.56	8.37	-53.72
7	23828.6	49.78 PK	74	-24.22	-57.22	-56.53	8.37	-45.48
8	23828.6	43.71 AV	54	-10.29	-63.24	-62.65	8.37	-51.55
9	38813.33	56.06 PK	74	-17.94	-53.56	-48.82	8.37	-39.2
10	38813.33	48.29 AV	54	-5.71	-58.7	-58.02	8.37	-46.97

Note: Margin value = Emission Level - Limit value

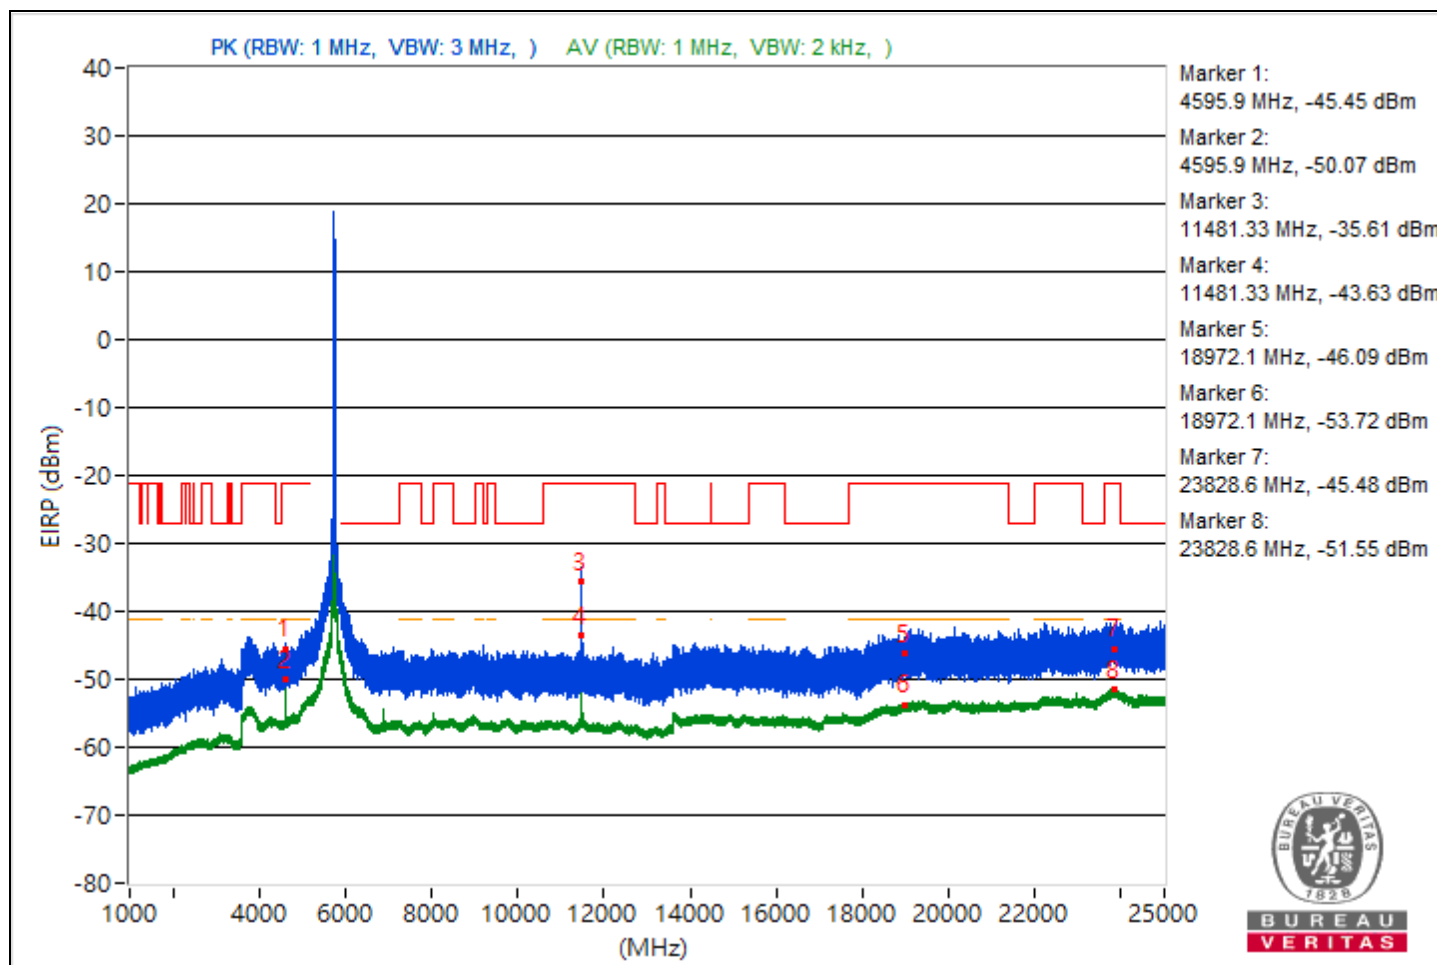


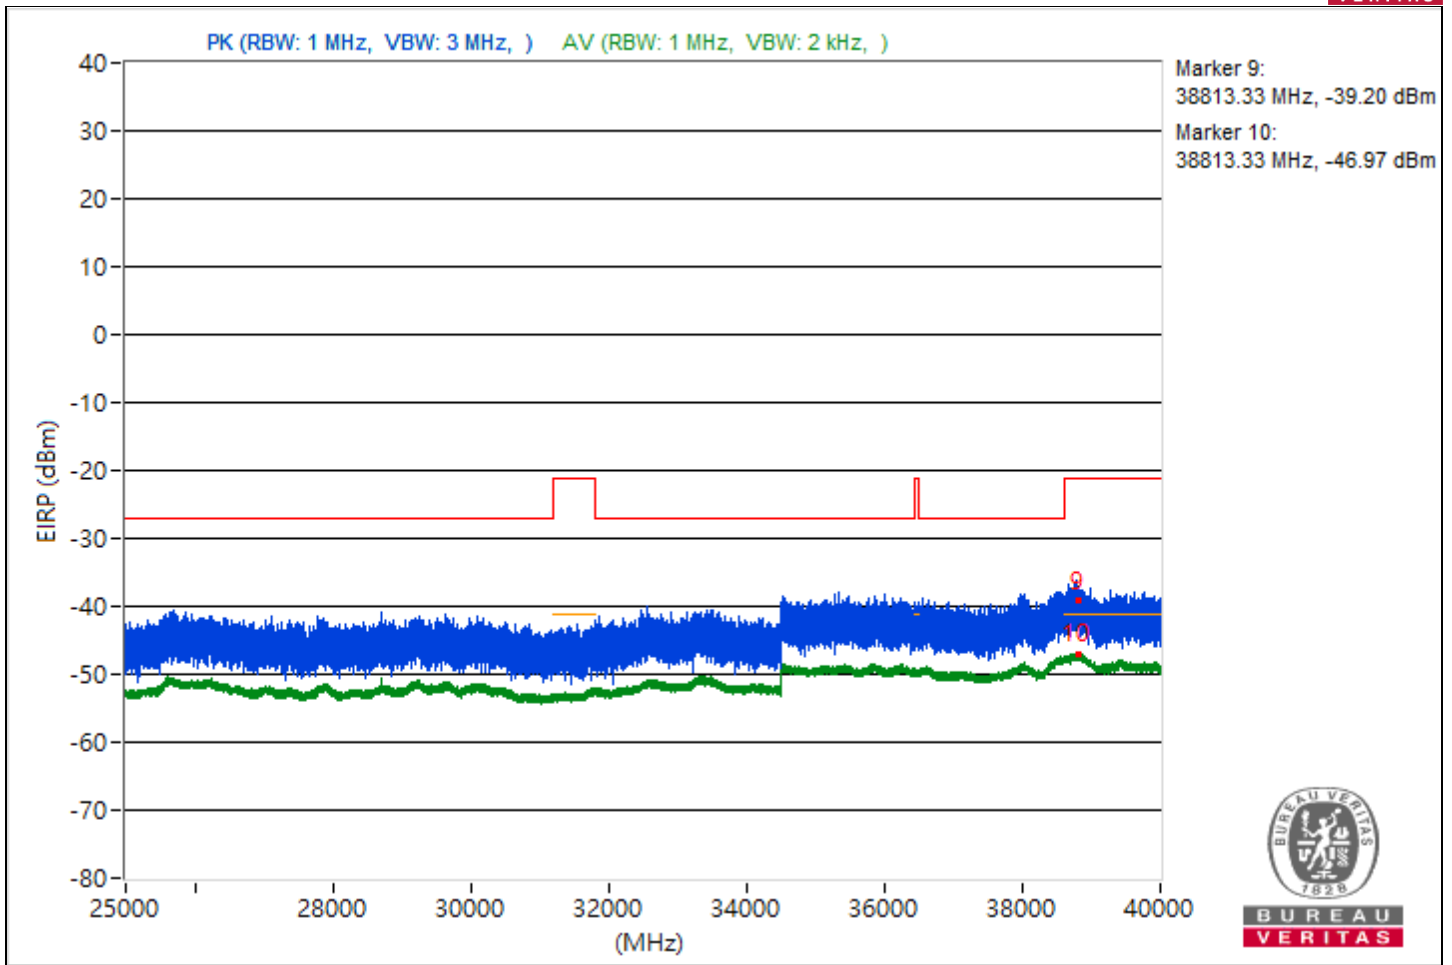


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5082.71	50.35 PK	74	-23.65	-57.35	-55.44	8.37	-44.91
2	5082.71	41.7 AV	54	-12.3	-65.36	-64.55	8.37	-53.56
3	11659.29	56.49 PK	74	-17.51	-51.39	-49.19	8.37	-38.77
4	11659.29	48.22 AV	54	-5.78	-58.41	-58.44	8.37	-47.04
5	18991.4	49.41 PK	74	-24.59	-56.84	-57.66	8.37	-45.85
6	18991.4	41.86 AV	54	-12.14	-64.47	-65.12	8.37	-53.4
7	23829.8	51.34 PK	74	-22.66	-54.94	-55.71	8.37	-43.92
8	23829.8	43.74 AV	54	-10.26	-63.45	-62.42	8.37	-51.52
9	38799.56	53.64 PK	74	-20.36	-52.11	-54.12	8.37	-41.62
10	38799.56	48.23 AV	54	-5.77	-58.02	-58.83	8.37	-47.03

Note: Margin value = Emission Level - Limit value

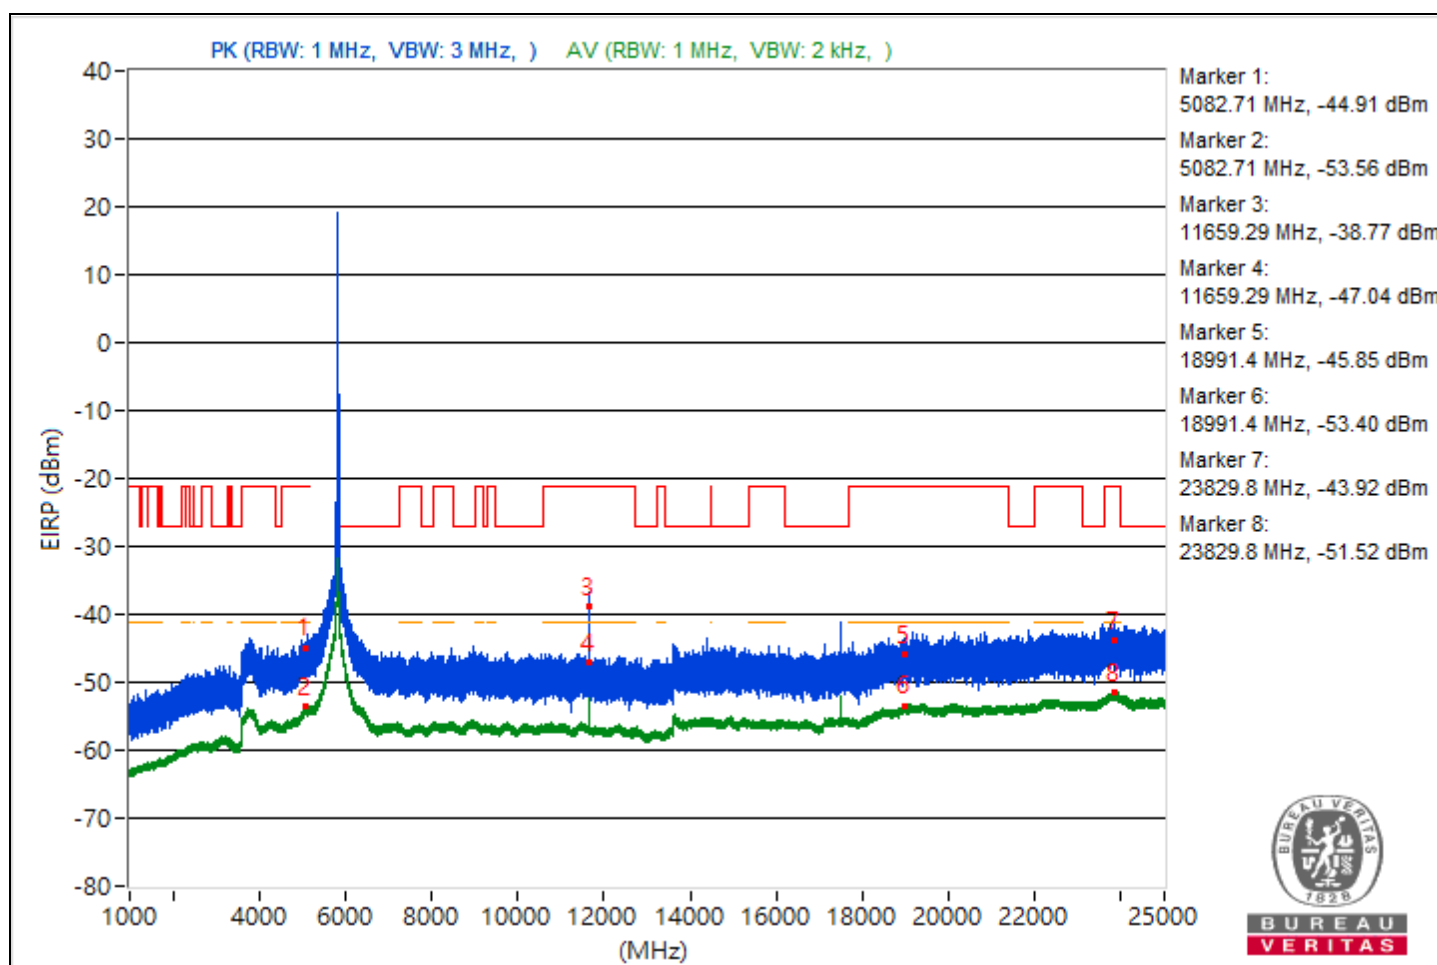

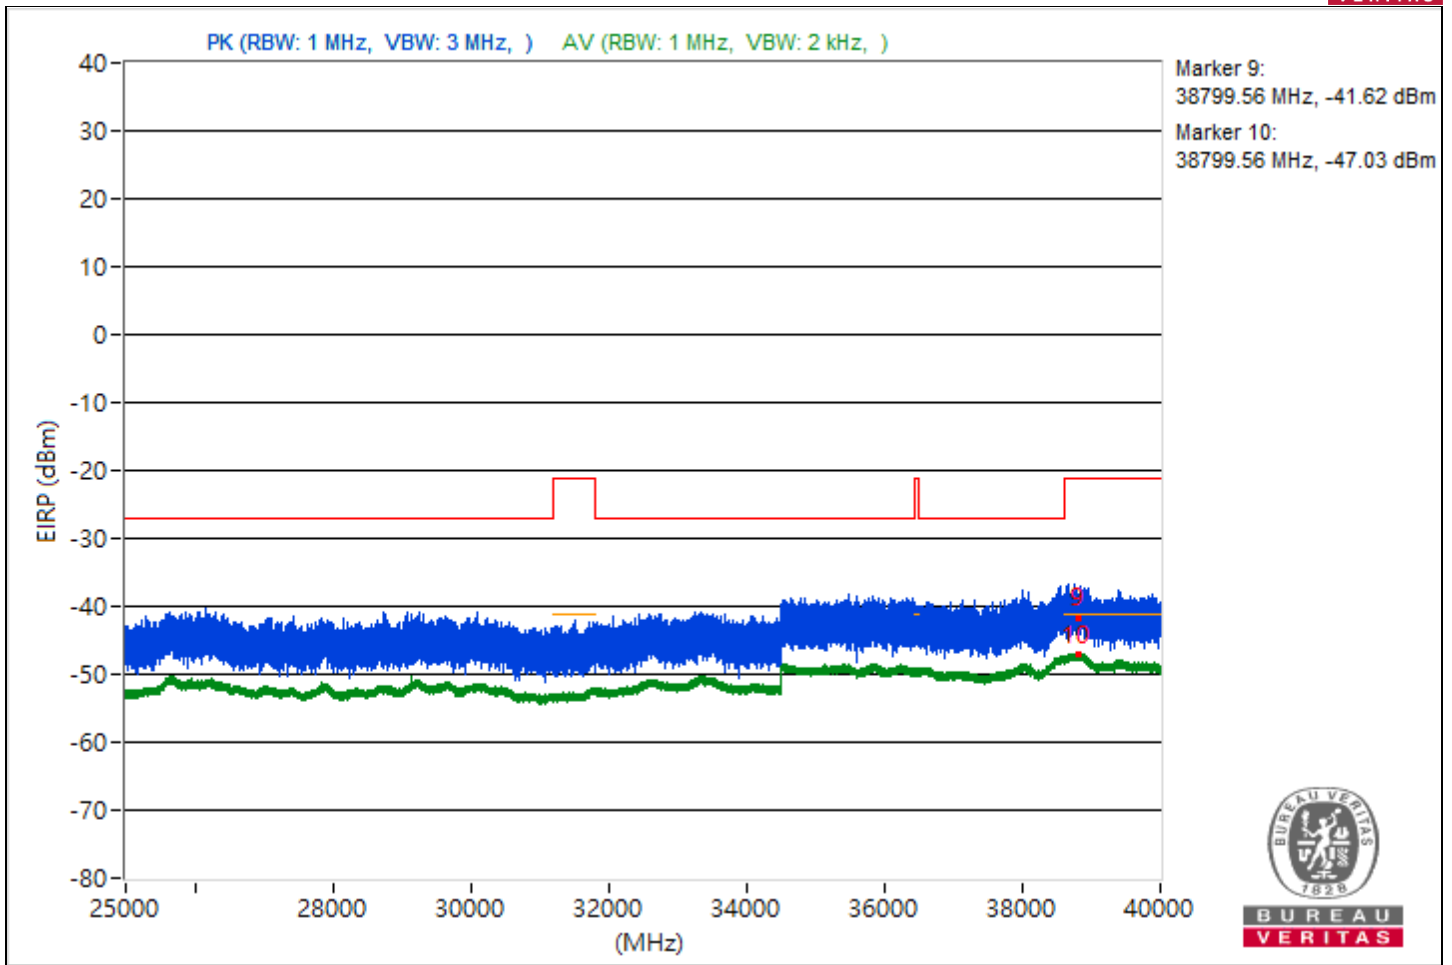



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5098.97	53.21 PK	74	-20.79	-53.13	-53.76	8.37	-42.05
2	5098.97	46.41 AV	54	-7.59	-59.69	-60.85	8.37	-48.85
3	9023.38	47.06 PK	74	-26.94	-60	-59.19	8.37	-48.2
4	9023.38	39.64 AV	54	-14.36	-67.16	-66.85	8.37	-55.62
5	18992.6	46.38 PK	74	-27.62	-60.52	-60.02	8.37	-48.88
6	18992.6	41.64 AV	54	-12.36	-64.63	-65.4	8.37	-53.62
7	23814	48.8 PK	74	-25.2	-57.66	-58.04	8.37	-46.46
8	23814	43.61 AV	54	-10.39	-62.72	-63.36	8.37	-51.65
9	38783.91	54.02 PK	74	-19.98	-53.7	-51.76	8.37	-41.24
10	38783.91	48.47 AV	54	-5.53	-57.96	-58.38	8.37	-46.79

Note: Margin value = Emission Level - Limit value

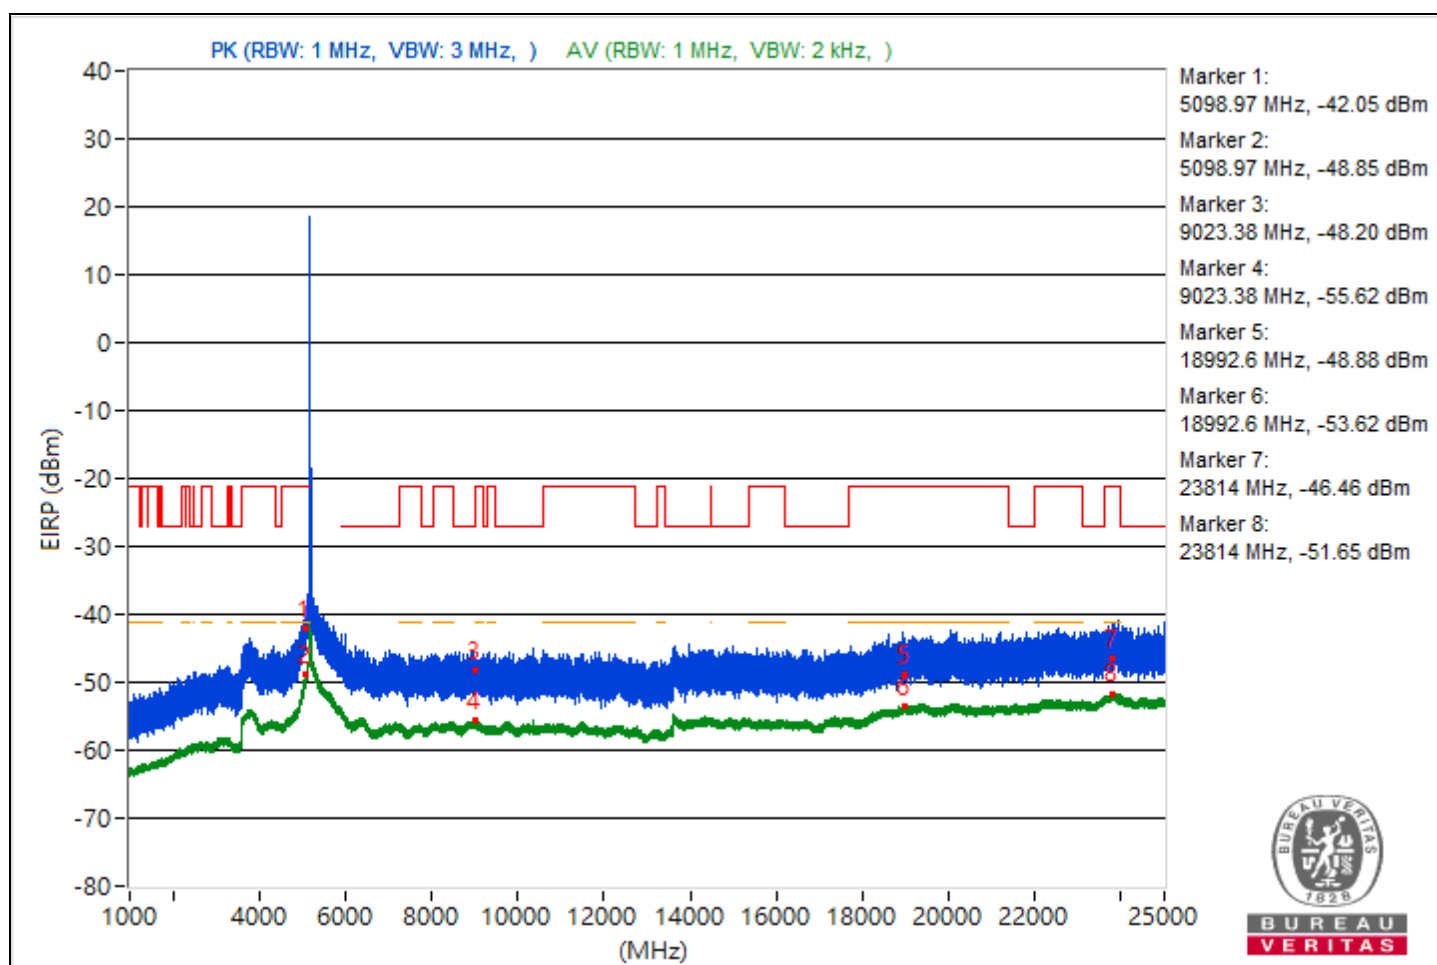


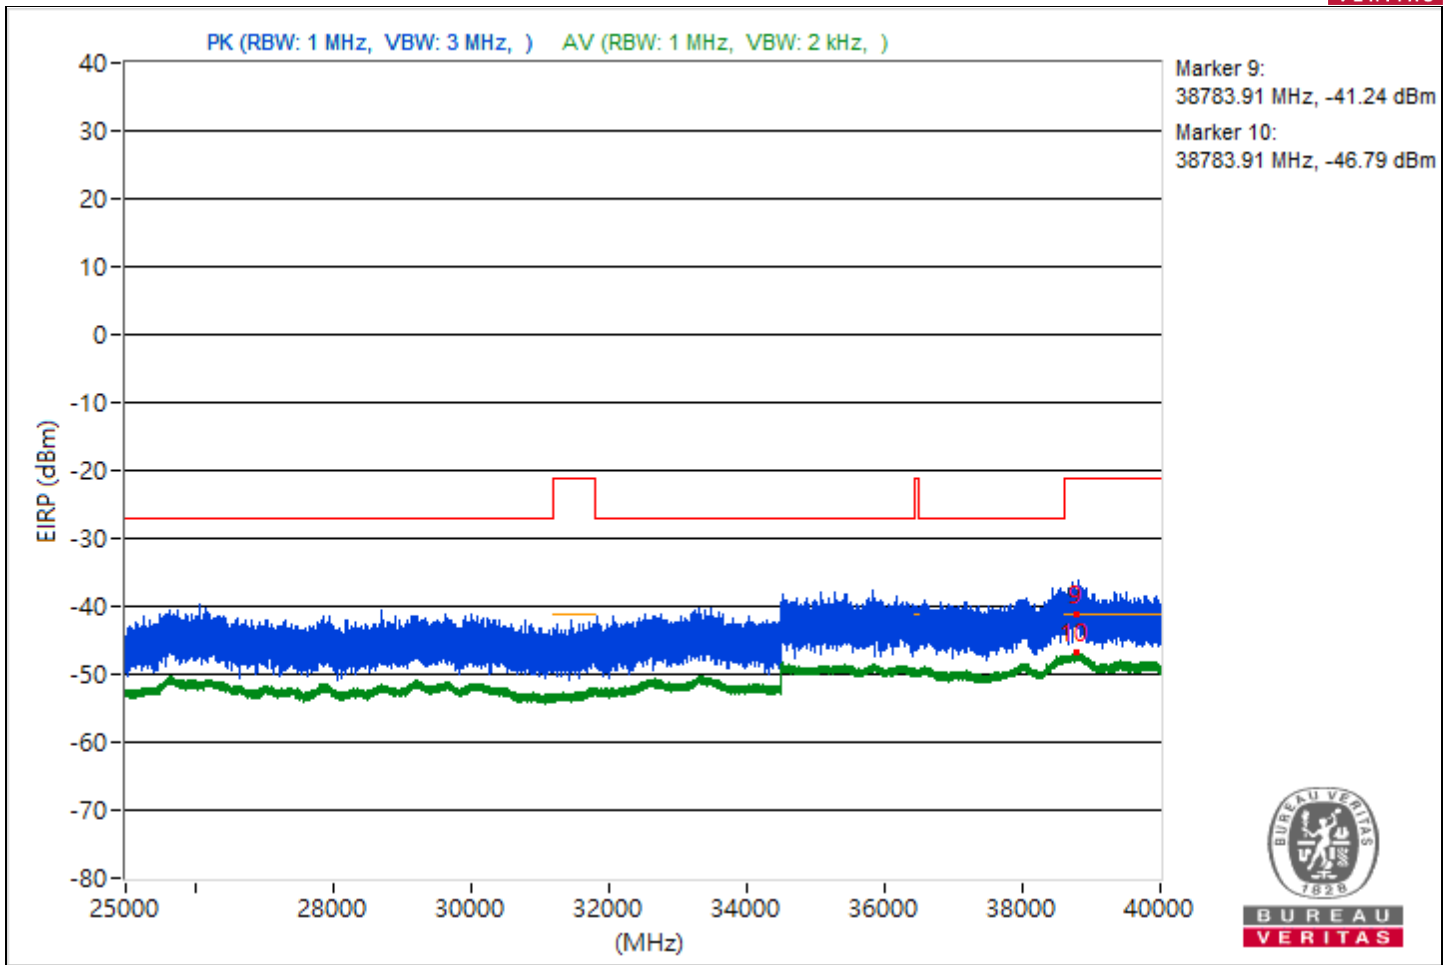


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5095.47	51.72 PK	74	-22.28	-54.9	-54.94	8.37	-43.54
2	5095.47	44.68 AV	54	-9.32	-61.44	-62.55	8.37	-50.58
3	9009.24	46.12 PK	74	-27.88	-60.24	-60.82	8.37	-49.14
4	9009.24	39.69 AV	54	-14.31	-66.53	-67.41	8.37	-55.57
5	18978.3	49.79 PK	74	-24.21	-57.51	-56.27	8.37	-45.47
6	18978.3	41.56 AV	54	-12.44	-65.52	-64.68	8.37	-53.7
7	23829.1	51.52 PK	74	-22.48	-56.57	-54.04	8.37	-43.74
8	23829.1	43.76 AV	54	-10.24	-63.08	-62.69	8.37	-51.5
9	38793.87	56.3 PK	74	-17.7	-49.31	-51.69	8.37	-38.96
10	38793.87	48.34 AV	54	-5.66	-57.77	-58.9	8.37	-46.92

Note: Margin value = Emission Level - Limit value

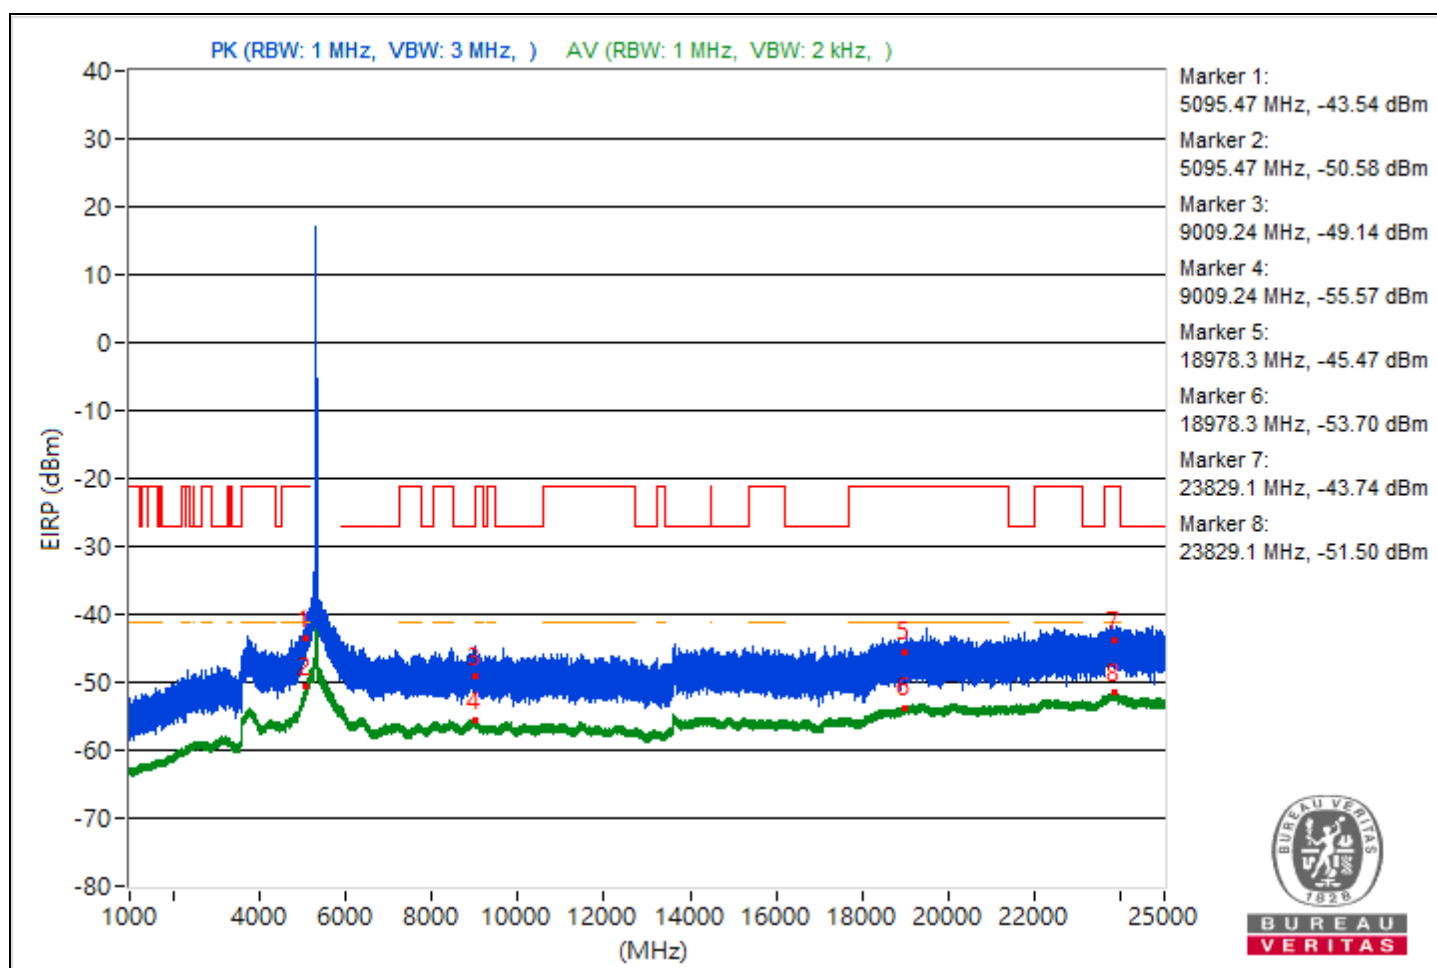


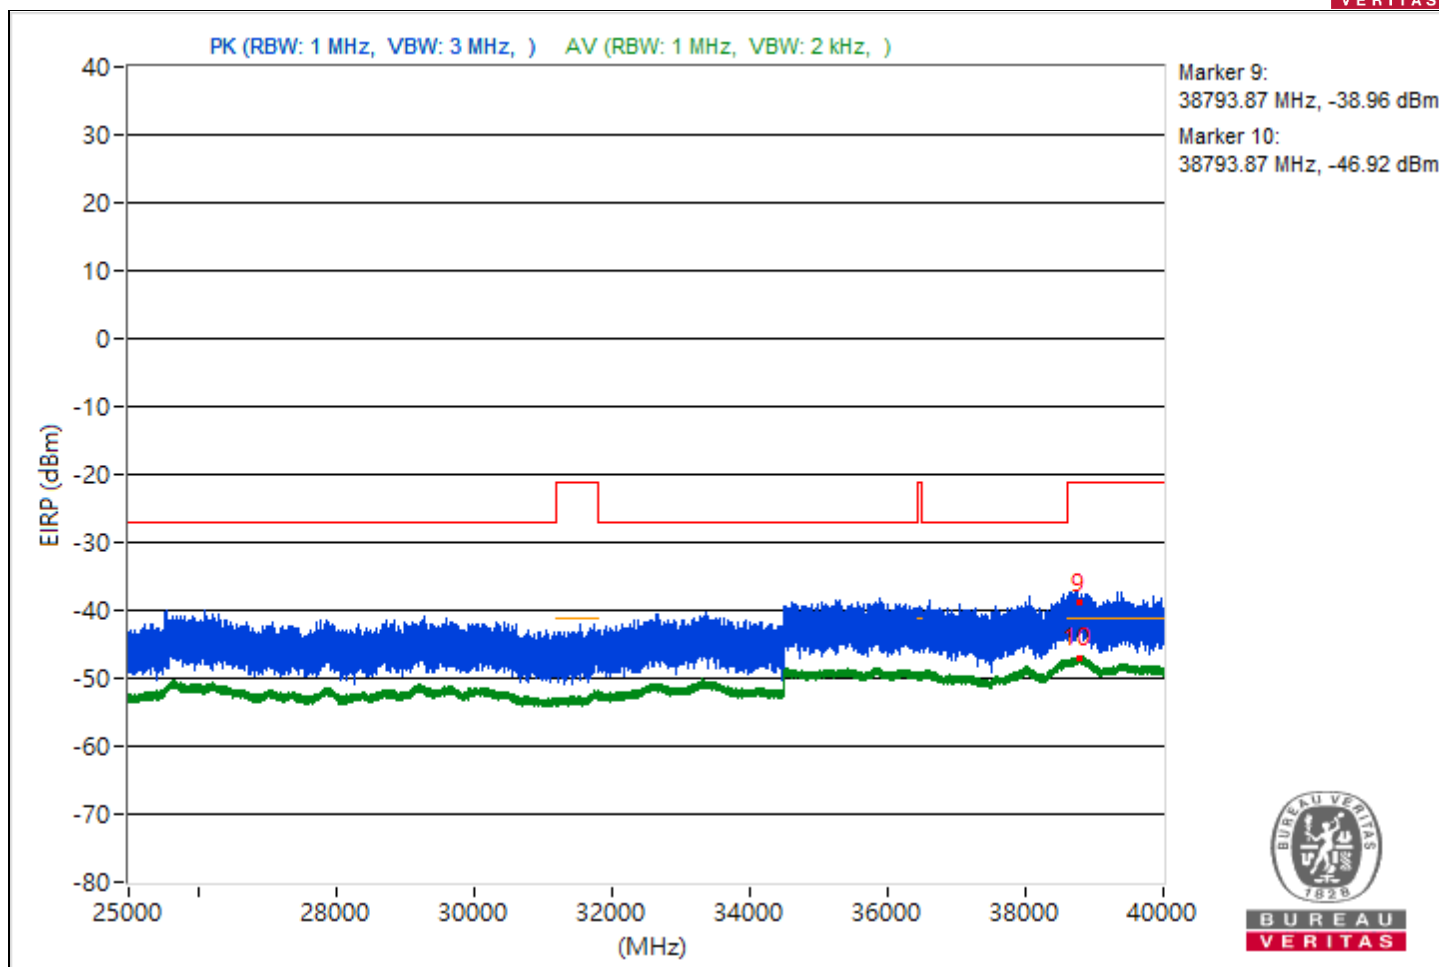


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5096.94	49.81 PK	74	-24.19	-56.85	-56.8	8.37	-45.45
2	5096.94	43.68 AV	54	-10.32	-62.65	-63.3	8.37	-51.58
3	9006.04	46.55 PK	74	-27.45	-60.25	-59.93	8.37	-48.71
4	9006.04	39.41 AV	54	-14.59	-66.95	-67.54	8.37	-55.85
5	18983.7	48.04 PK	74	-25.96	-58.1	-59.17	8.37	-47.22
6	18983.7	41.68 AV	54	-12.32	-65.49	-64.48	8.37	-53.58
7	23827.6	50.13 PK	74	-23.87	-55.88	-57.26	8.37	-45.13
8	23827.6	43.7 AV	54	-10.3	-63.56	-62.4	8.37	-51.56
9	38791.2	56.28 PK	74	-17.72	-50.64	-50.1	8.37	-38.98
10	38791.2	48.36 AV	54	-5.64	-57.84	-58.77	8.37	-46.9

Note: Margin value = Emission Level - Limit value

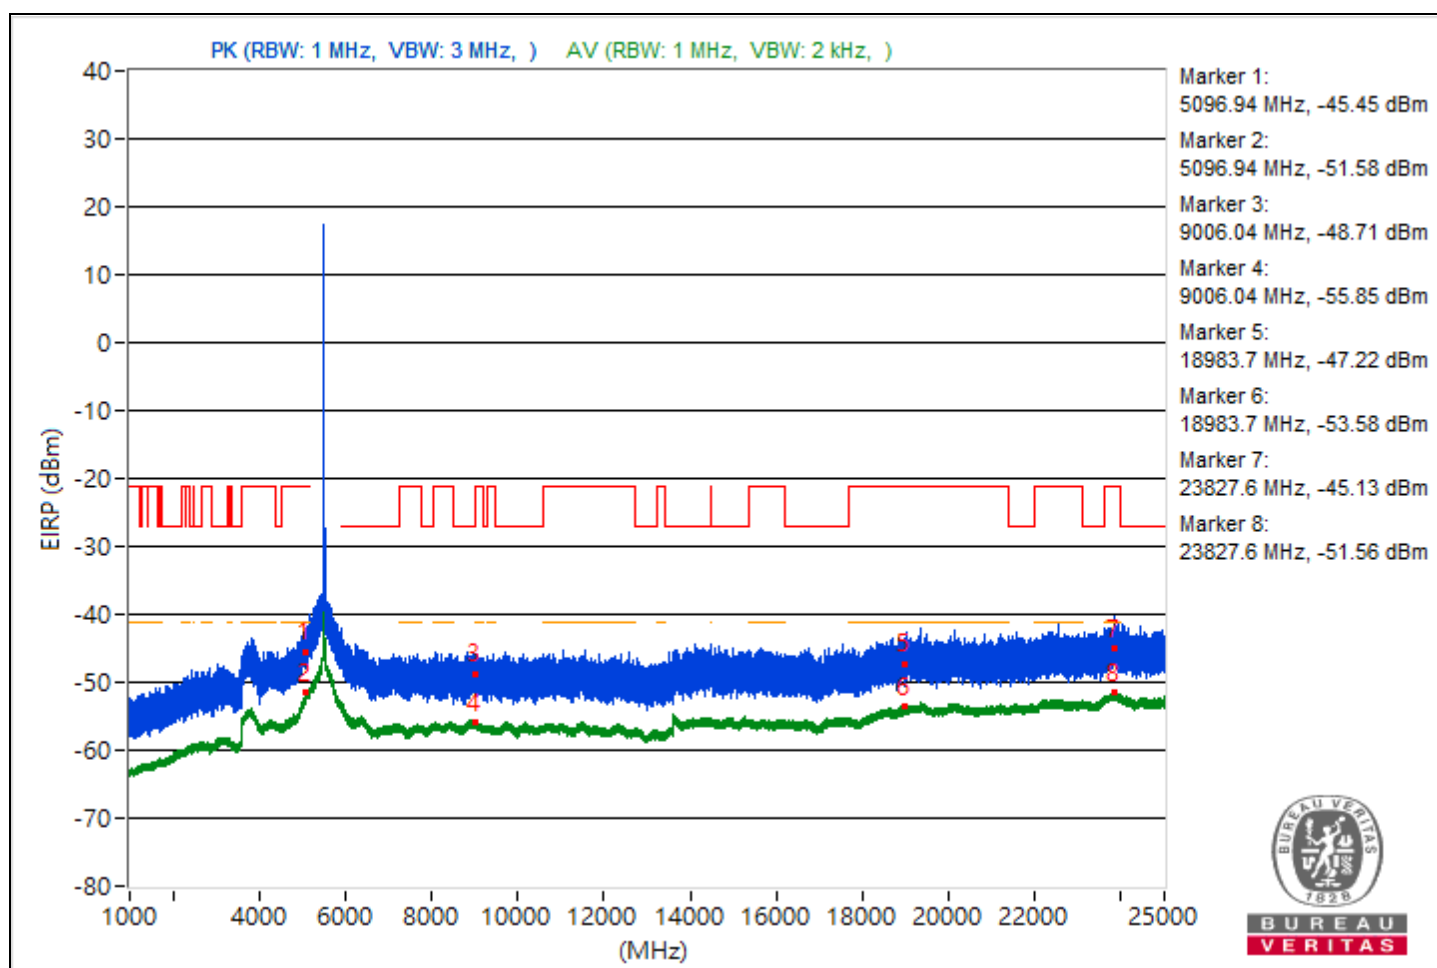

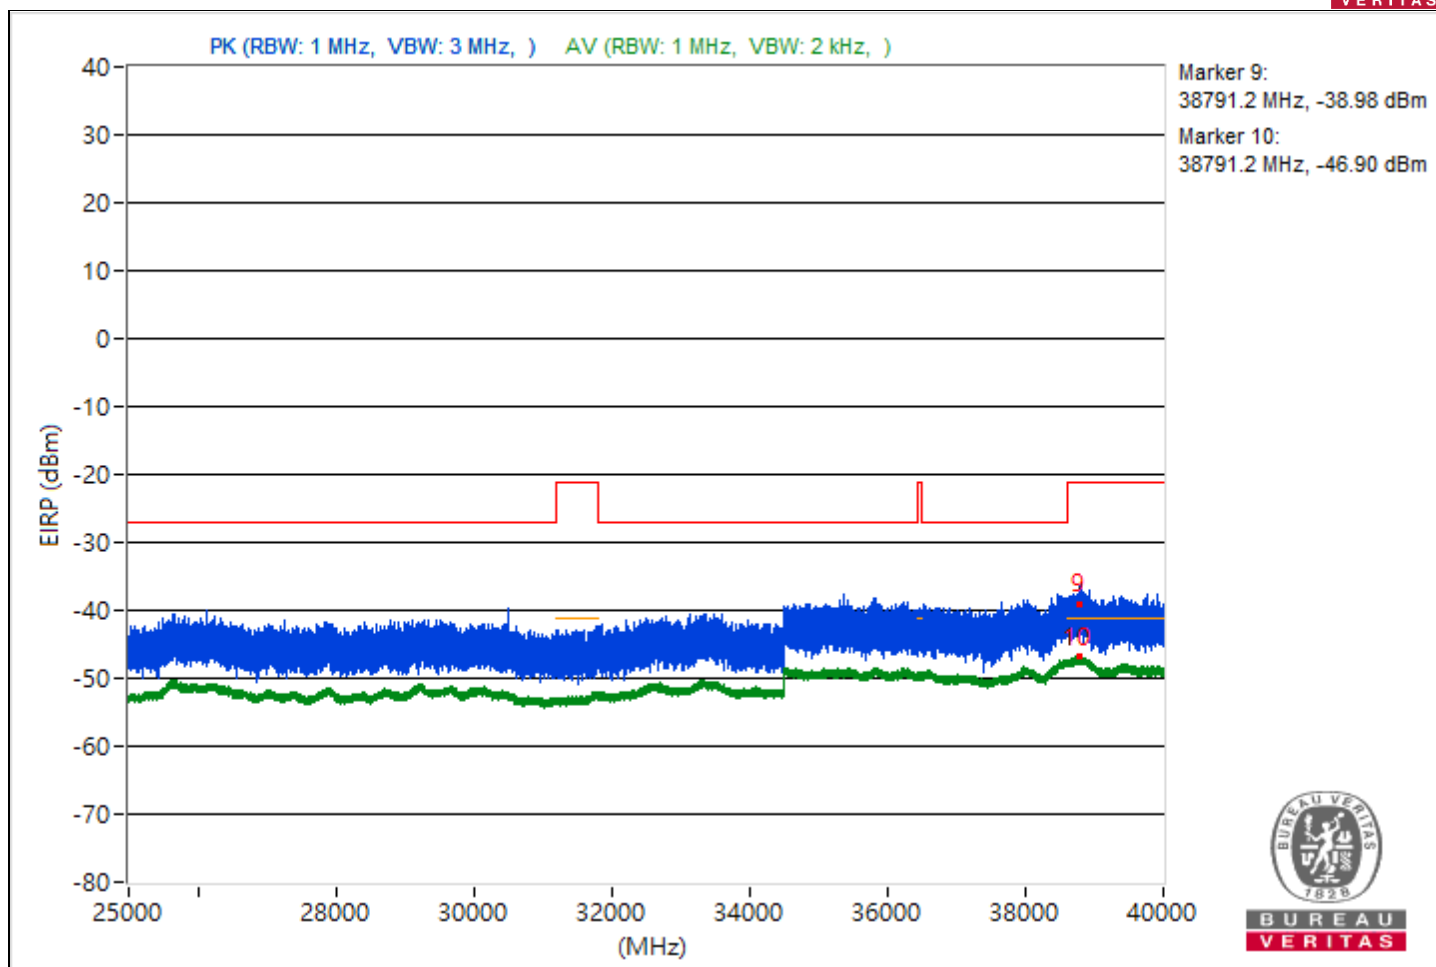



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5089.87	50.85 PK	74	-23.15	-54.92	-56.87	8.37	-44.41
2	5089.87	42.53 AV	54	-11.47	-64.66	-63.61	8.37	-52.73
3	9030.13	46.06 PK	74	-27.94	-59.64	-61.77	8.37	-49.2
4	9030.13	39.72 AV	54	-14.28	-67.03	-66.81	8.37	-55.54
5	18998.5	49.05 PK	74	-24.95	-56.27	-59.5	8.37	-46.21
6	18998.5	41.46 AV	54	-12.54	-65.65	-64.75	8.37	-53.8
7	23853.2	49.24 PK	74	-24.76	-57.03	-57.81	8.37	-46.02
8	23853.2	43.64 AV	54	-10.36	-62.59	-63.45	8.37	-51.62
9	38775.29	54.68 PK	74	-19.32	-50.93	-53.31	8.37	-40.58
10	38775.29	48.39 AV	54	-5.61	-57.83	-58.7	8.37	-46.87

Note: Margin value = Emission Level - Limit value

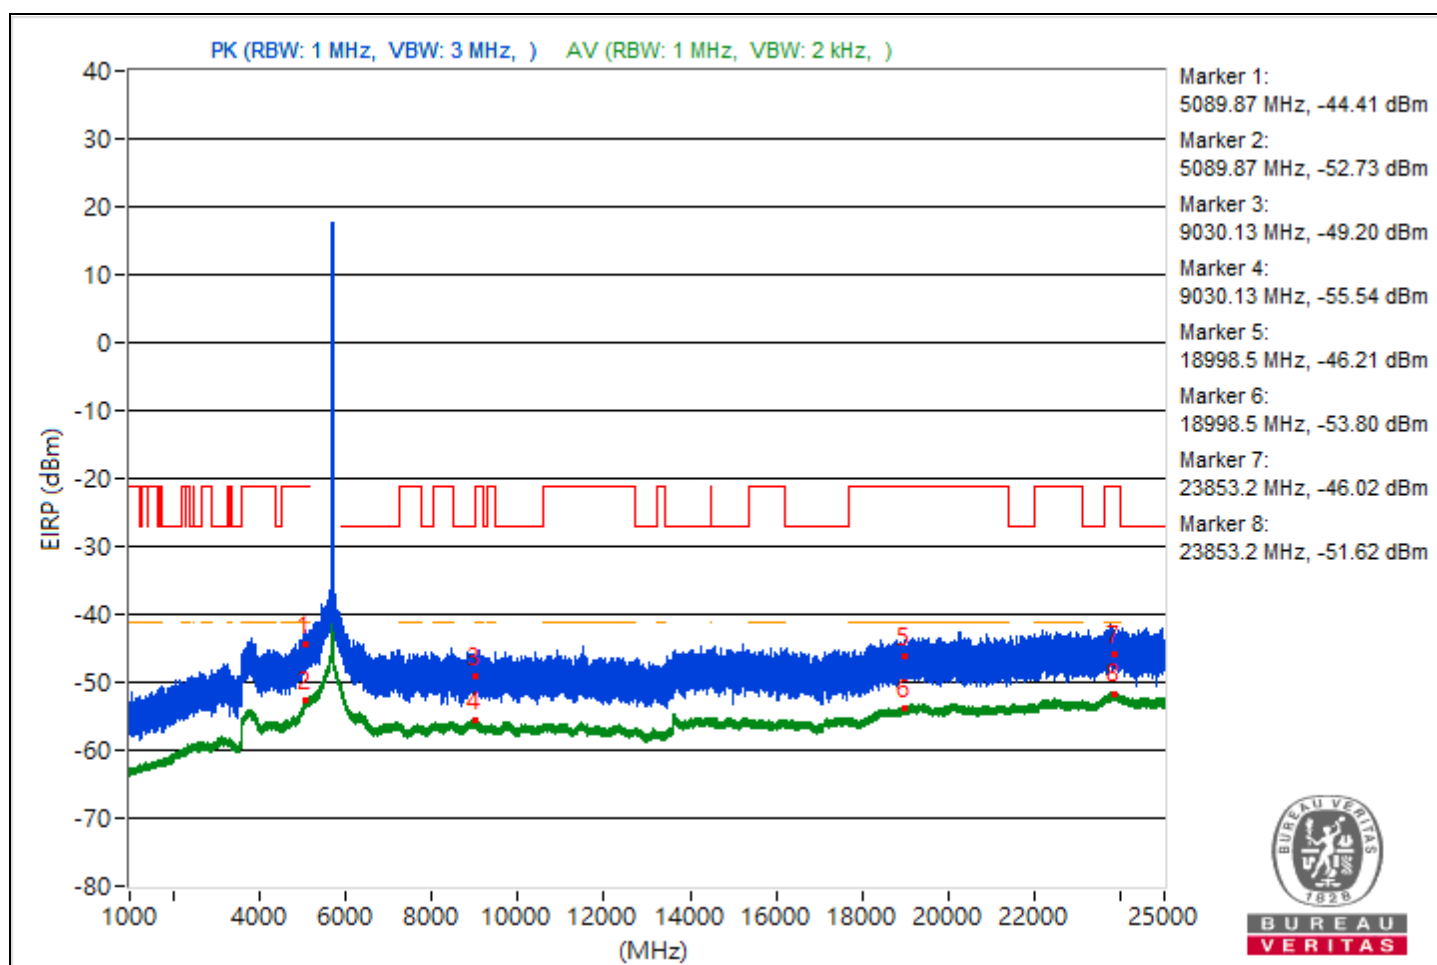


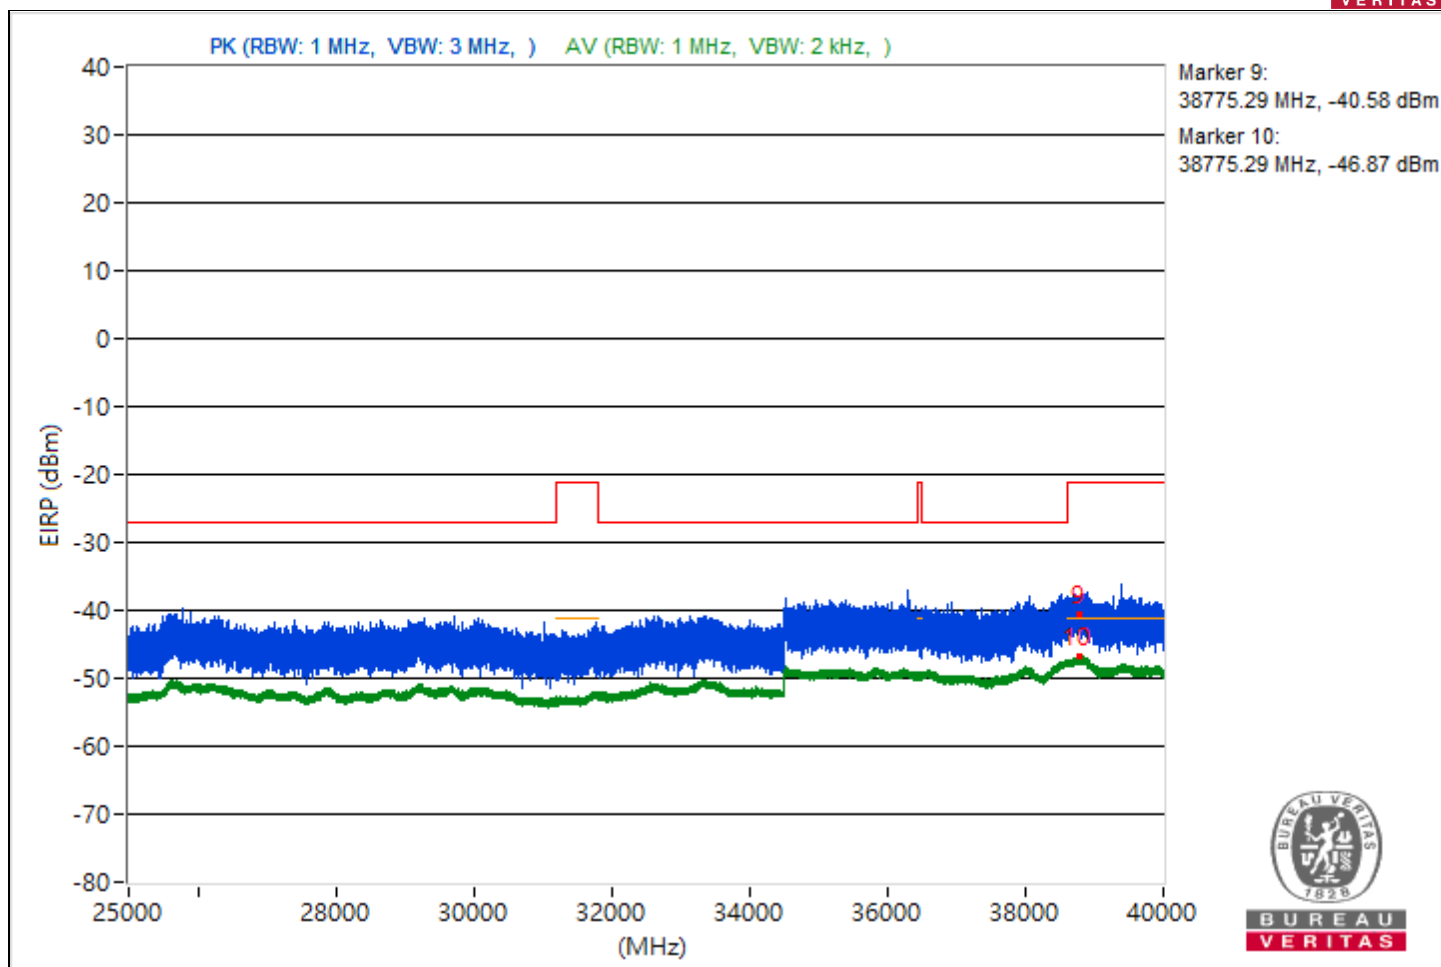


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5068.79	49.64 PK	74	-24.36	-57.98	-56.2	8.37	-45.62
2	5068.79	42.37 AV	54	-11.63	-64.57	-63.98	8.37	-52.89
3	9013.78	46.16 PK	74	-27.84	-62.21	-59.25	8.37	-49.1
4	9013.78	39.45 AV	54	-14.55	-66.9	-67.5	8.37	-55.81
5	18993.8	48.74 PK	74	-25.26	-56.94	-59.12	8.37	-46.52
6	18993.8	41.65 AV	54	-12.35	-65.47	-64.56	8.37	-53.61
7	23794	49.37 PK	74	-24.63	-59.02	-56.03	8.37	-45.89
8	23794	43.88 AV	54	-10.12	-62.55	-62.99	8.37	-51.38
9	38885.69	54.92 PK	74	-19.08	-53.12	-50.67	8.37	-40.34
10	38885.69	48.13 AV	54	-5.87	-59.06	-58.03	8.37	-47.13

Note: Margin value = Emission Level - Limit value

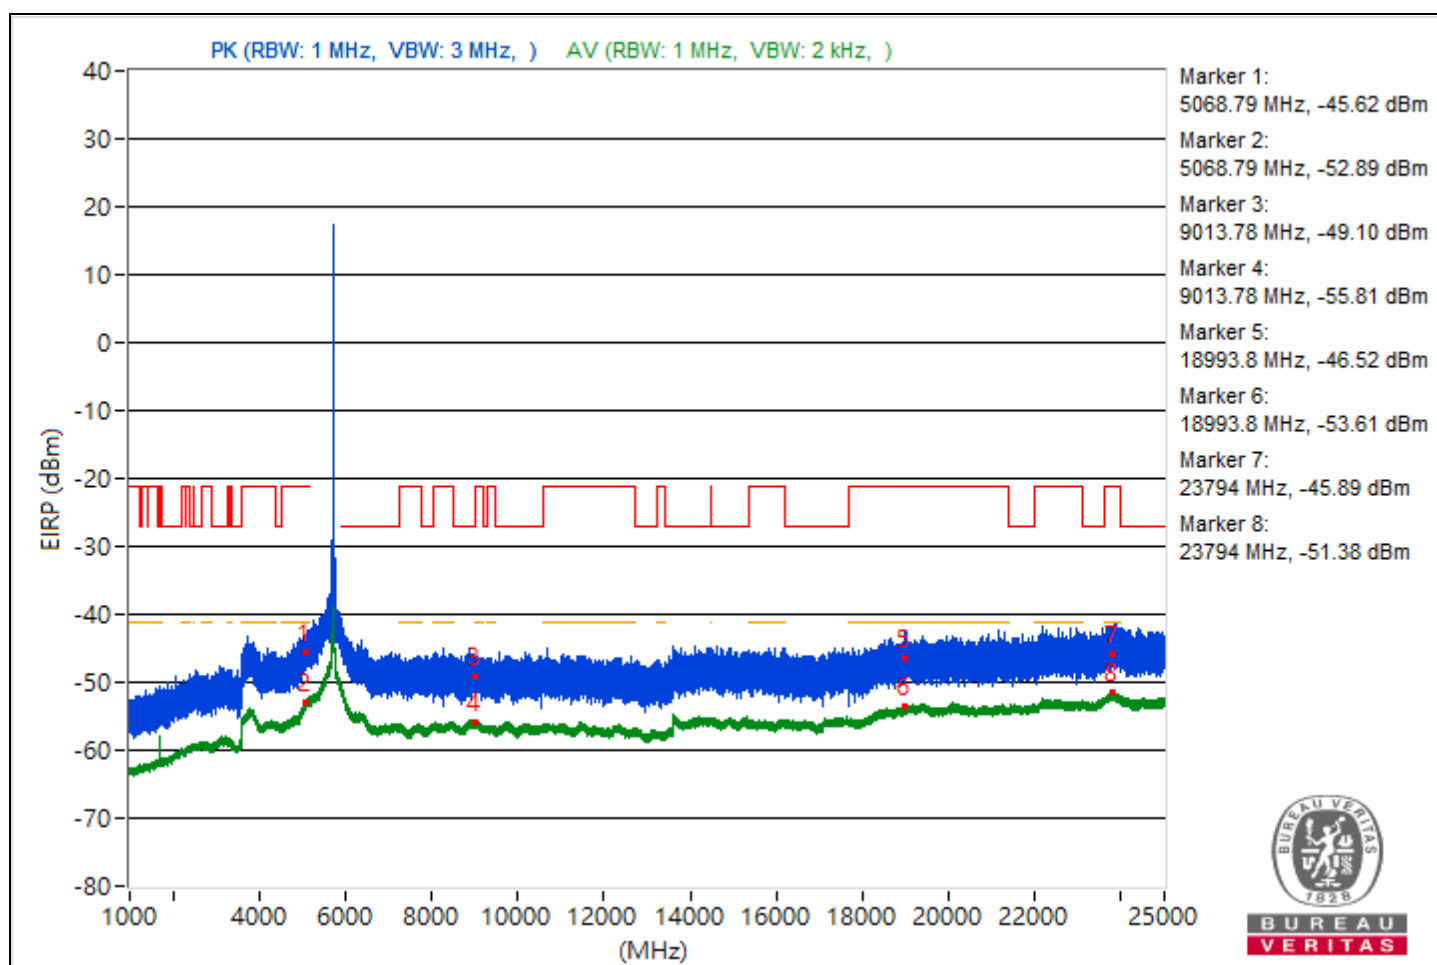


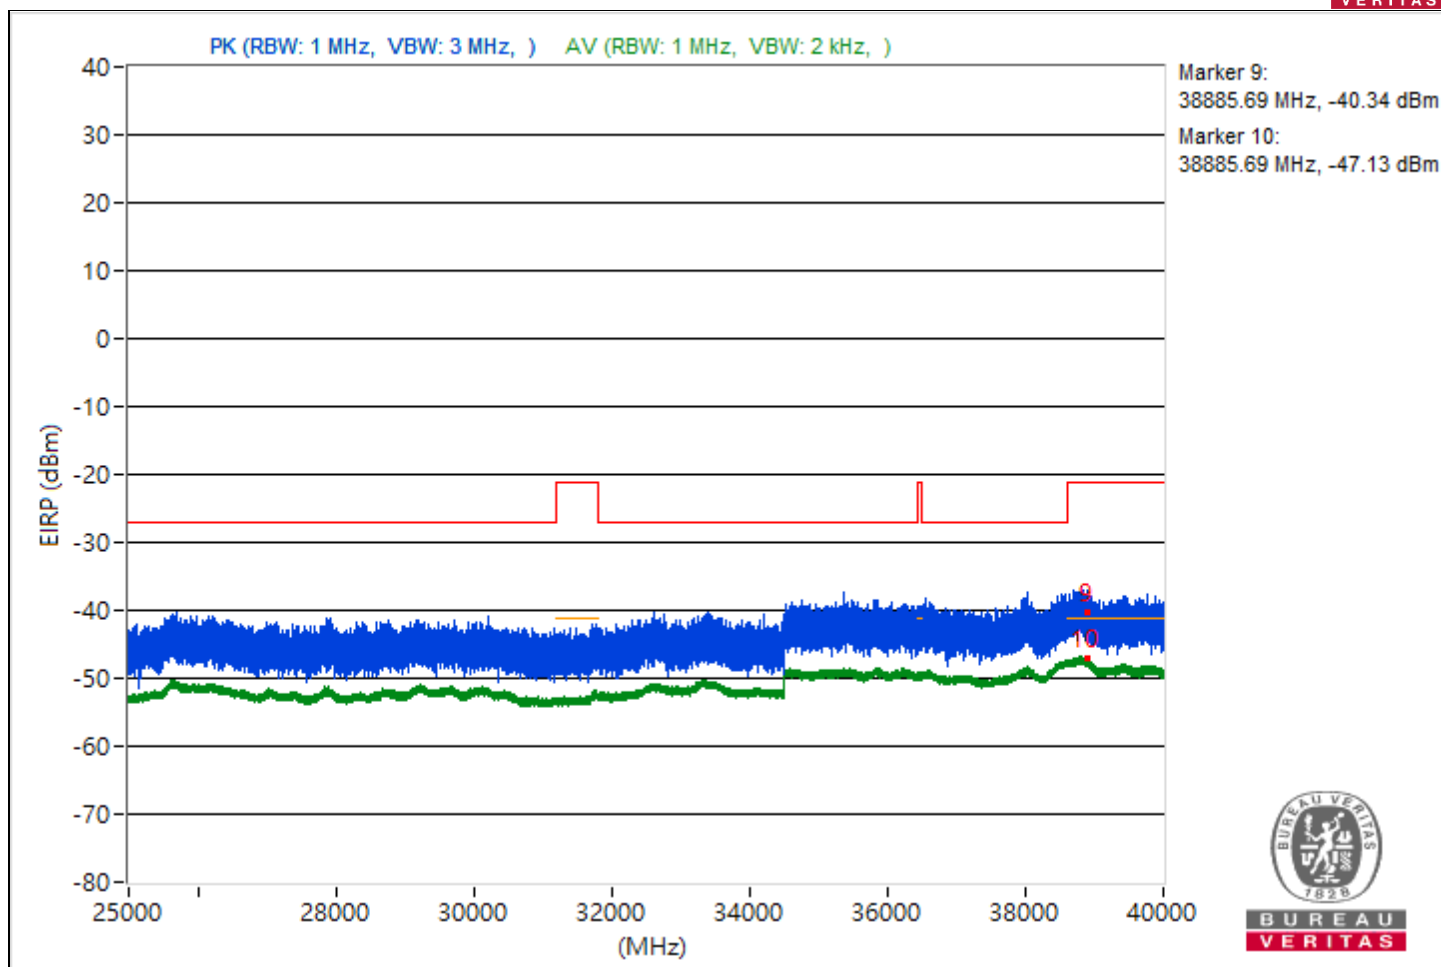


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5098.81	49.06 PK	74	-24.94	-57.61	-57.56	8.37	-46.2
2	5098.81	41.69 AV	54	-12.31	-65.44	-64.51	8.37	-53.57
3	11482.58	53.63 PK	74	-20.37	-51.67	-54.95	8.37	-41.63
4	11482.58	46.19 AV	54	-7.81	-60.27	-60.65	8.37	-49.07
5	18975.6	49.04 PK	74	-24.96	-58.56	-56.82	8.37	-46.22
6	18975.6	41.41 AV	54	-12.59	-65.78	-64.75	8.37	-53.85
7	23777.5	49.04 PK	74	-24.96	-57.46	-57.75	8.37	-46.22
8	23777.5	43.88 AV	54	-10.12	-63.32	-62.27	8.37	-51.38
9	38817.24	53.04 PK	74	-20.96	-53.44	-53.76	8.37	-42.22
10	38817.24	48.44 AV	54	-5.56	-57.96	-58.45	8.37	-46.82

Note: Margin value = Emission Level - Limit value

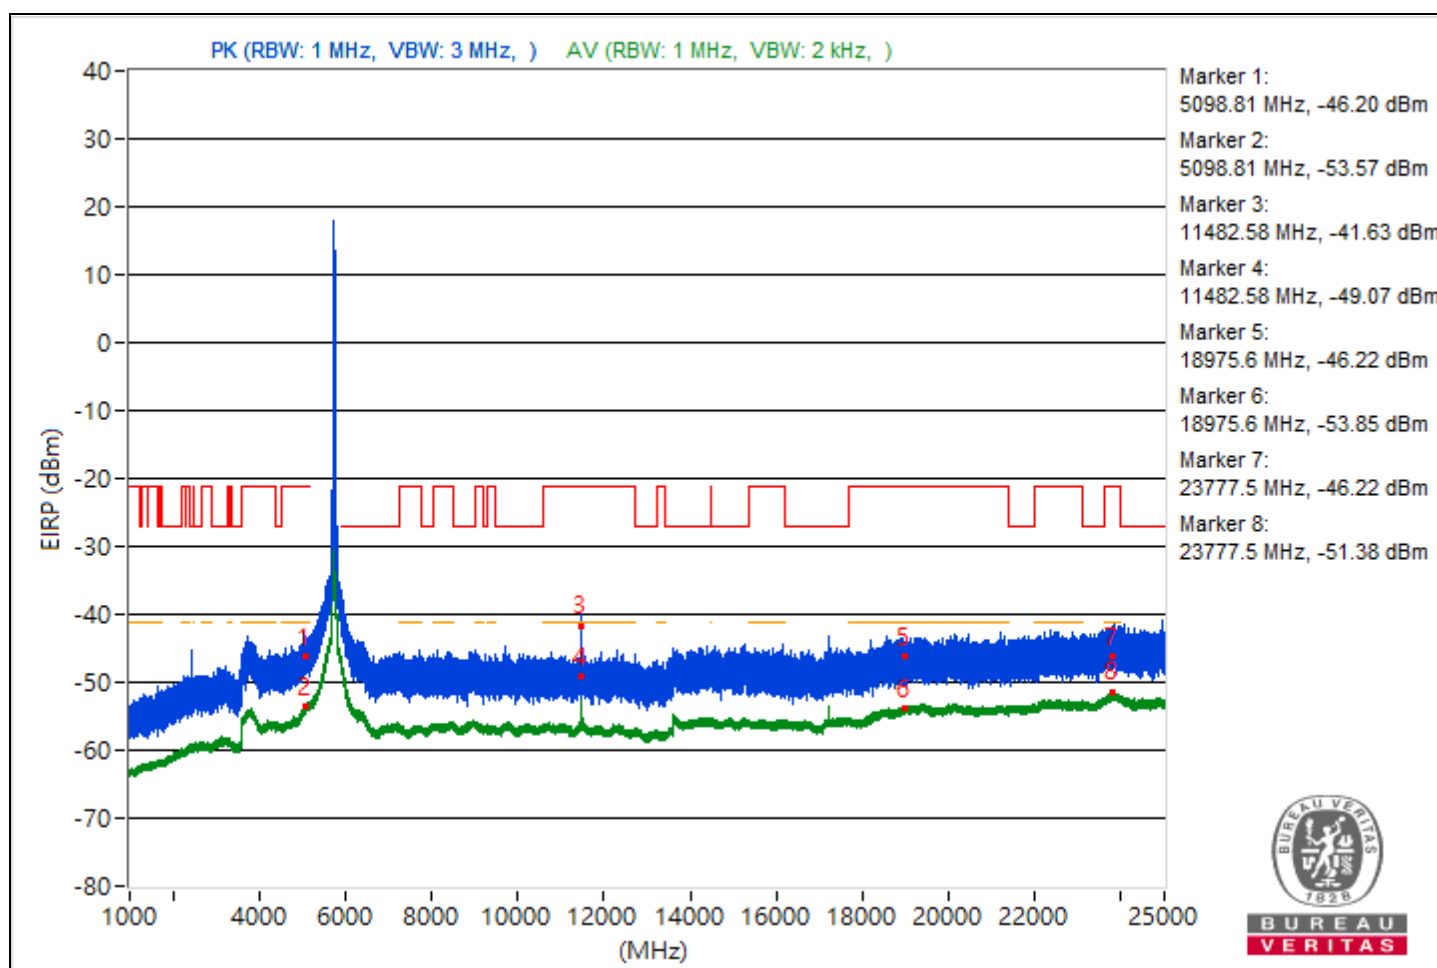


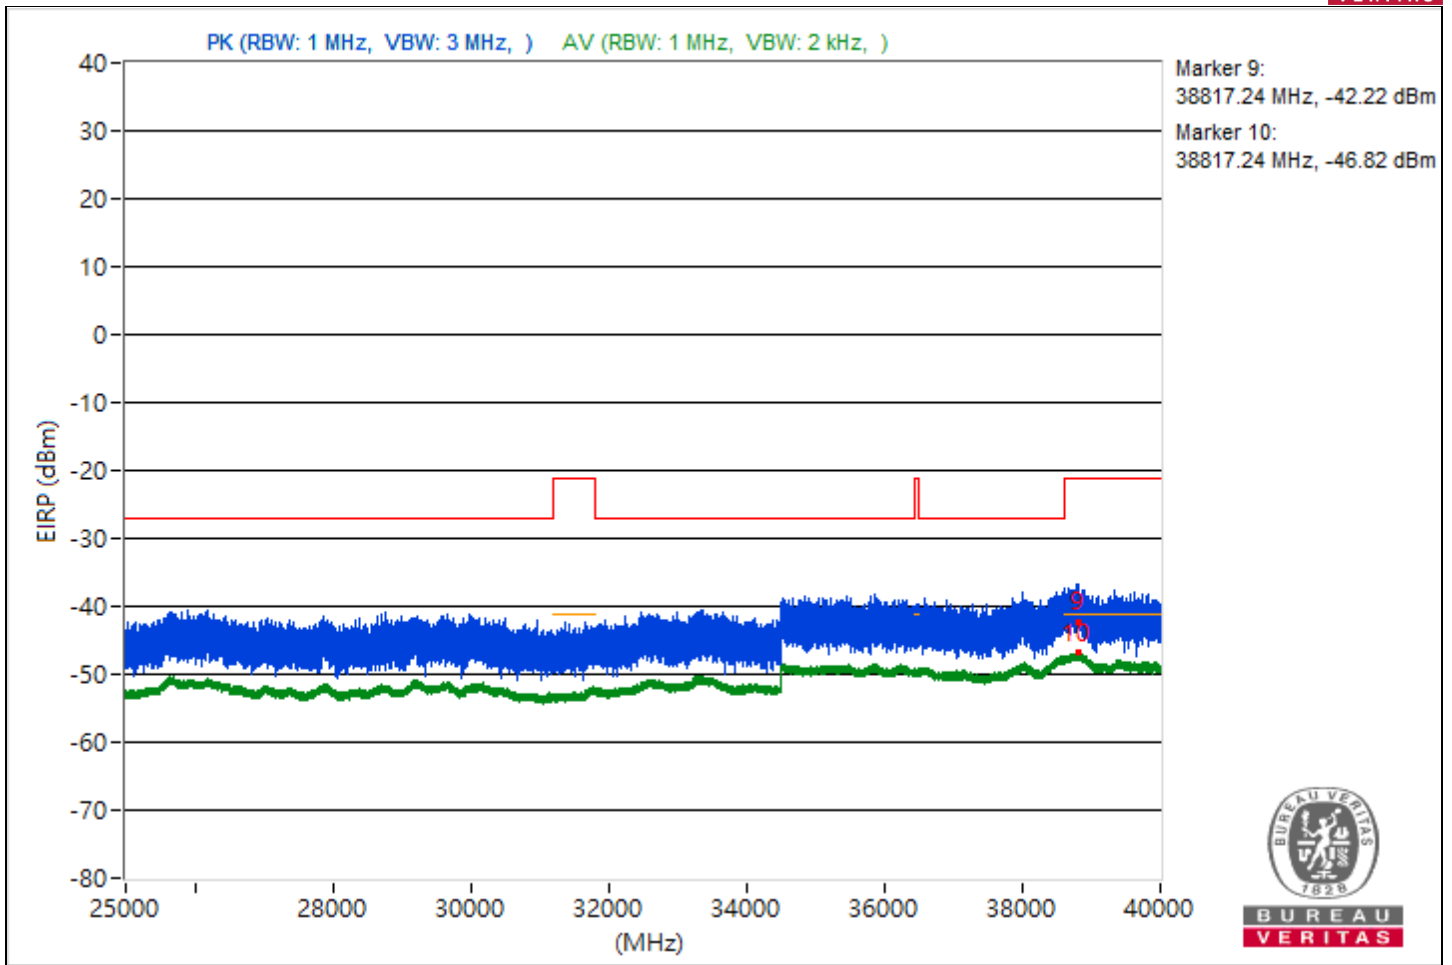


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.36	48.71 PK	74	-25.29	-57.13	-58.91	8.37	-46.55
2	5099.36	41.68 AV	54	-12.32	-65.28	-64.66	8.37	-53.58
3	11657.51	54.25 PK	74	-19.75	-52.17	-52.62	8.37	-41.01
4	11657.51	46.64 AV	54	-7.36	-59.48	-60.59	8.37	-48.62
5	18931.3	47.16 PK	74	-26.84	-58.12	-61.45	8.37	-48.1
6	18931.3	41.4 AV	54	-12.6	-64.78	-65.75	8.37	-53.86
7	23847.6	50.13 PK	74	-23.87	-56.67	-56.35	8.37	-45.13
8	23847.6	43.71 AV	54	-10.29	-62.59	-63.31	8.37	-51.55
9	38846.84	55.03 PK	74	-18.97	-51.32	-51.92	8.37	-40.23
10	38846.84	48.47 AV	54	-5.53	-57.7	-58.69	8.37	-46.79

Note: Margin value = Emission Level - Limit value

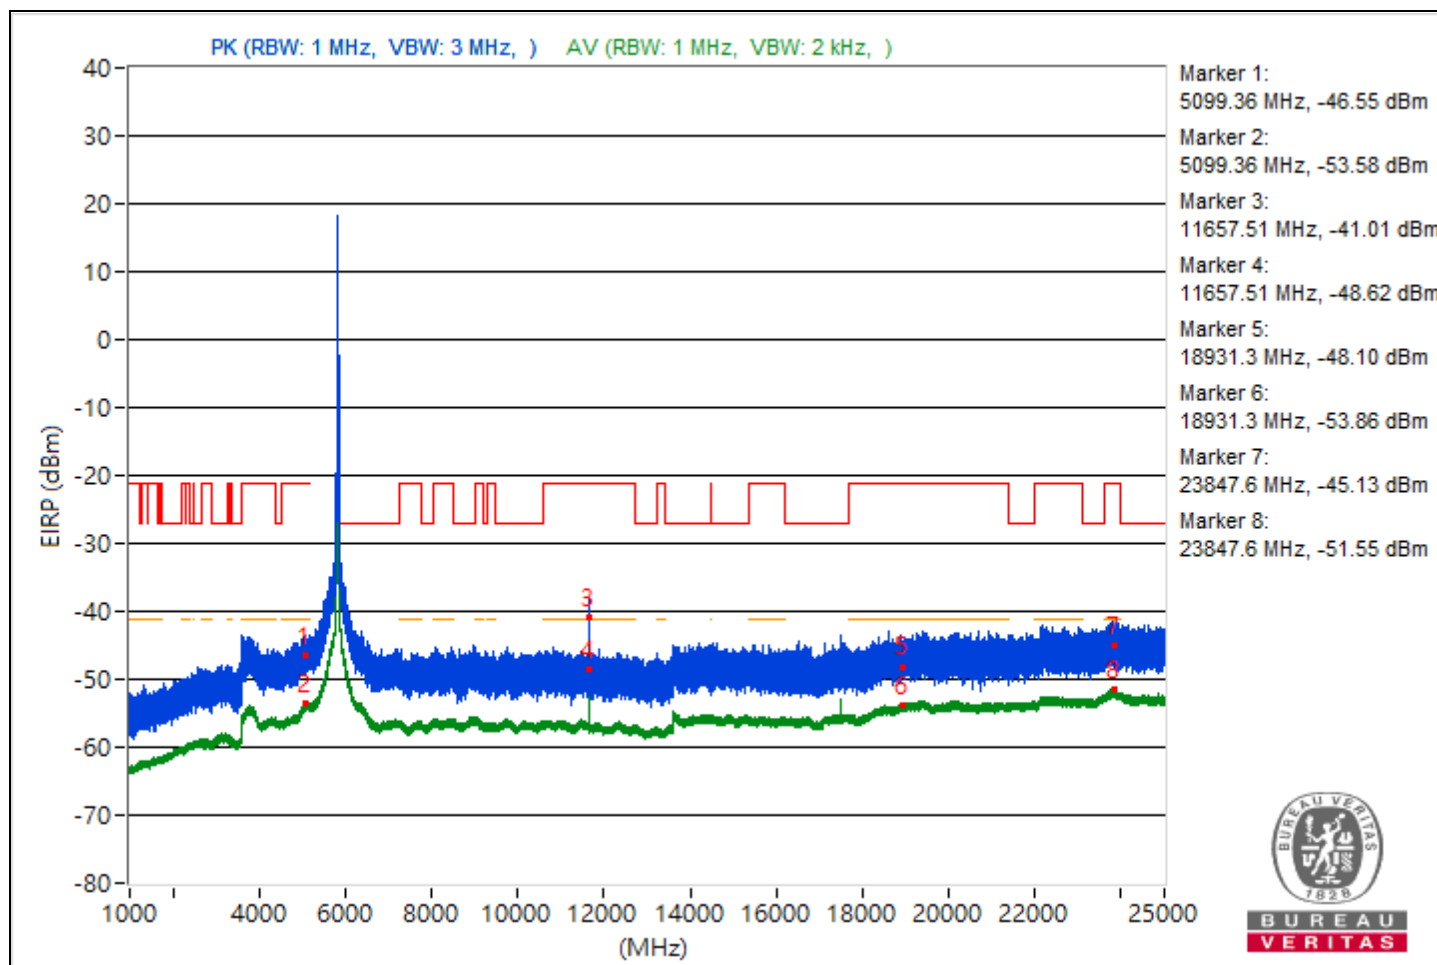

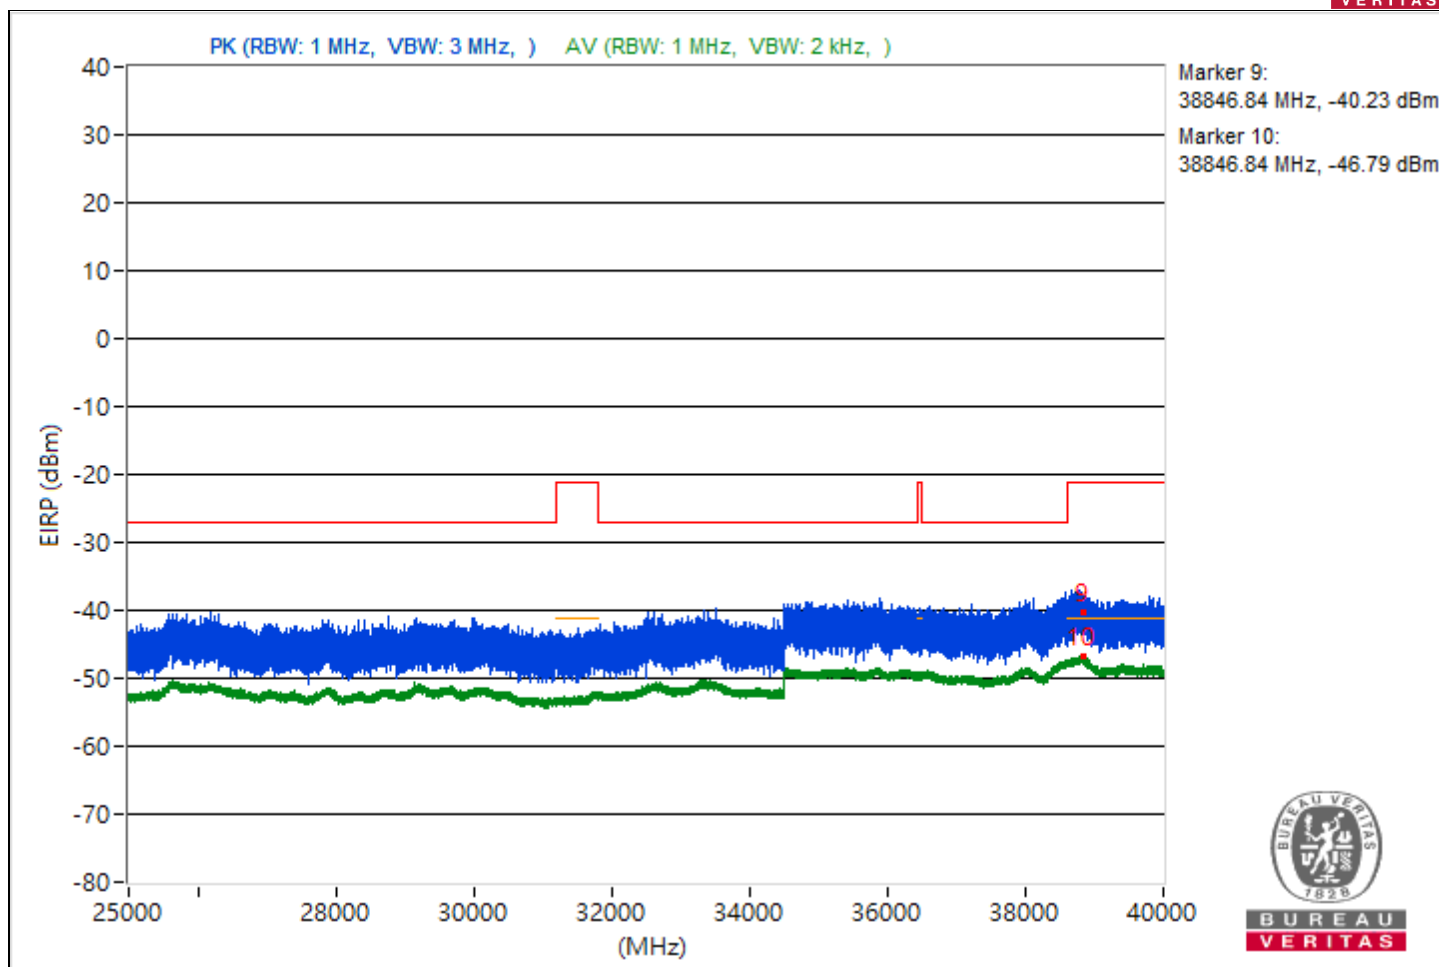



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5090.57	53.93 PK	74	-20.07	-52.7	-52.72	8.37	-41.33
2	5090.57	47.16 AV	54	-6.84	-58.91	-60.12	8.37	-48.1
3	8336	51.05 PK	74	-22.95	-54.65	-56.78	8.37	-44.21
4	8336	45.29 AV	54	-8.71	-61.23	-61.47	8.37	-49.97
5	18896	48.7 PK	74	-25.3	-58.28	-57.62	8.37	-46.56
6	18896	41.48 AV	54	-12.52	-64.82	-65.52	8.37	-53.78
7	23807.2	52.13 PK	74	-21.87	-53.3	-56.19	8.37	-43.13
8	23807.2	43.82 AV	54	-10.18	-62.45	-63.24	8.37	-51.44
9	38815.64	53.69 PK	74	-20.31	-51.9	-54.35	8.37	-41.57
10	38815.64	48.29 AV	54	-5.71	-58.85	-57.9	8.37	-46.97

Note: Margin value = Emission Level - Limit value

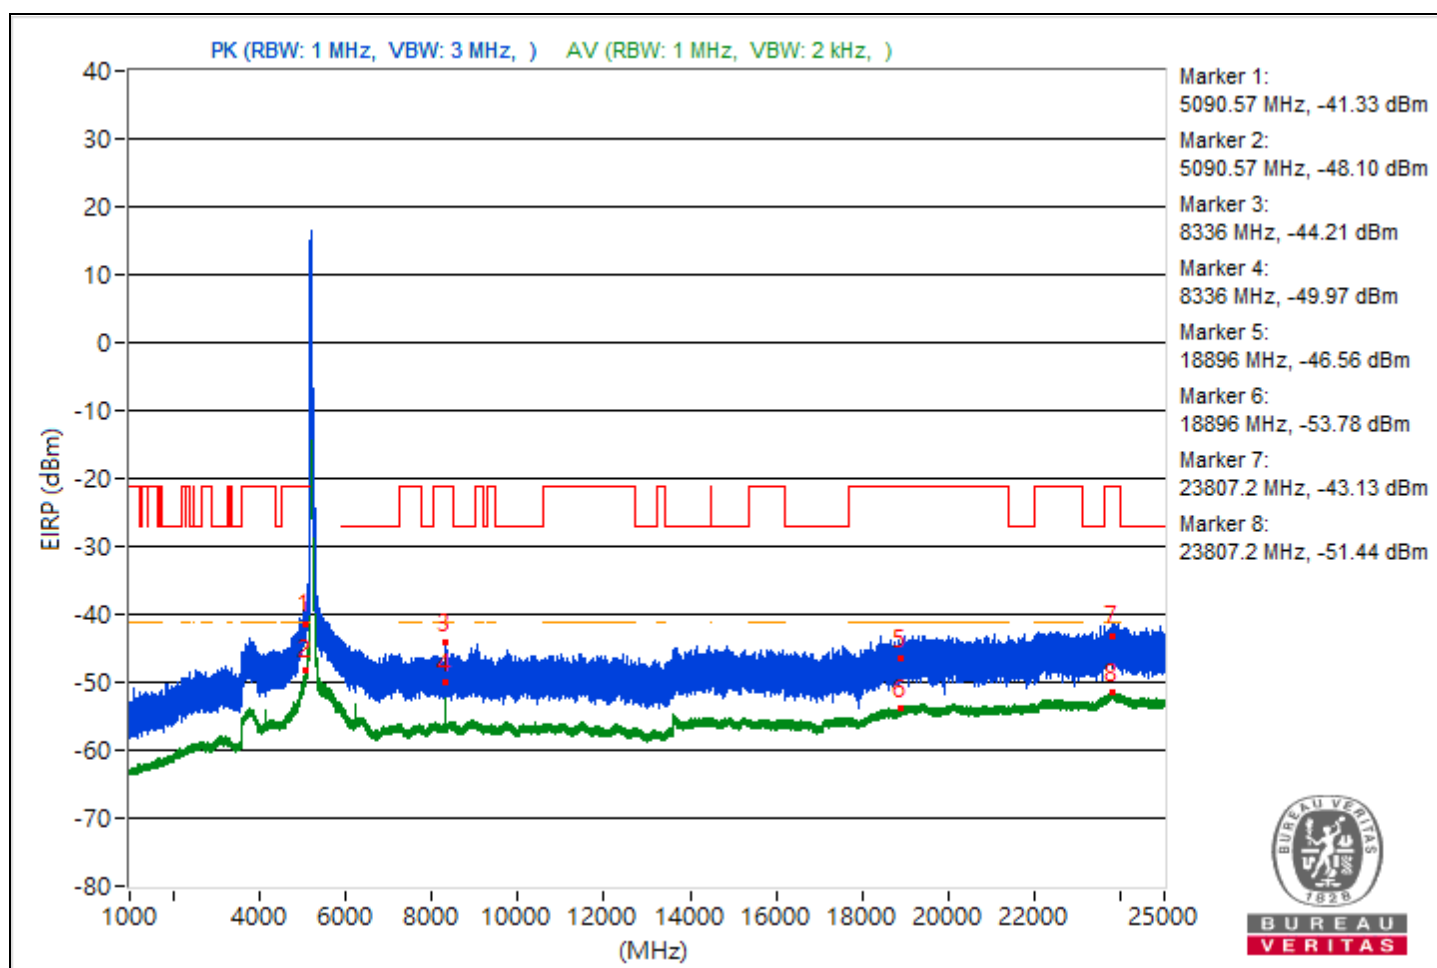


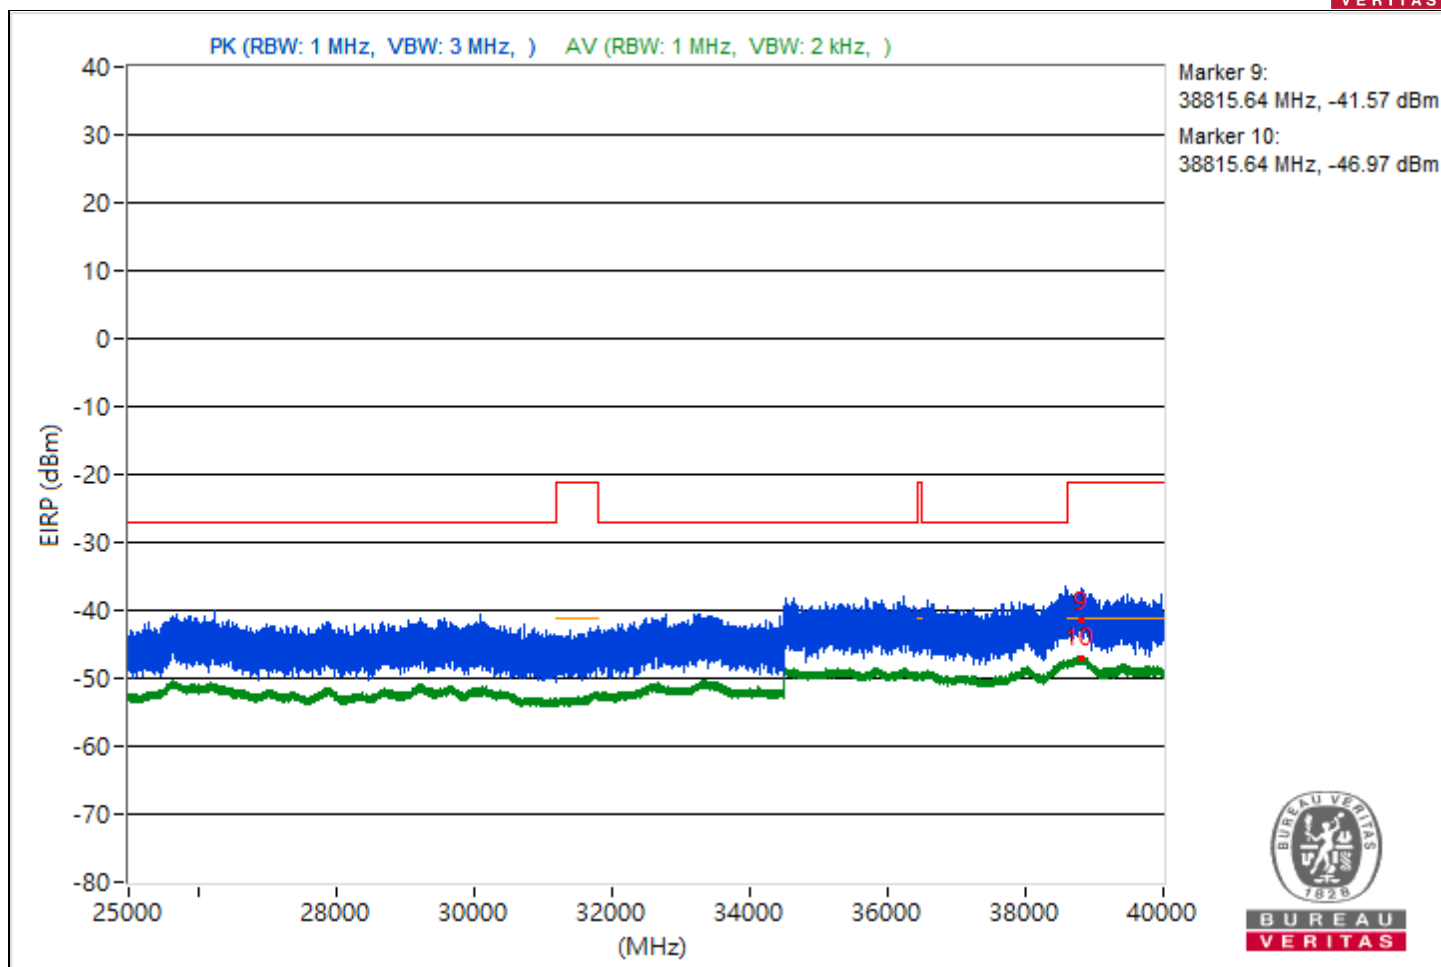


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5089.63	53.79 PK	74	-20.21	-52.24	-53.56	8.37	-41.47
2	5089.63	45.93 AV	54	-8.07	-60.43	-61.01	8.37	-49.33
3	8463.91	49.03 PK	74	-24.97	-57.65	-57.56	8.37	-46.23
4	8463.91	44.54 AV	54	-9.46	-62.12	-62.08	8.37	-50.72
5	18999	48.25 PK	74	-25.75	-58.1	-58.71	8.37	-47.01
6	18999	41.53 AV	54	-12.47	-64.66	-65.62	8.37	-53.73
7	23829.9	50.97 PK	74	-23.03	-55.56	-55.79	8.37	-44.29
8	23829.9	43.75 AV	54	-10.25	-62.67	-63.13	8.37	-51.51
9	38784.8	55.08 PK	74	-18.92	-50.96	-52.26	8.37	-40.18
10	38784.8	48.4 AV	54	-5.6	-57.85	-58.67	8.37	-46.86

Note: Margin value = Emission Level - Limit value

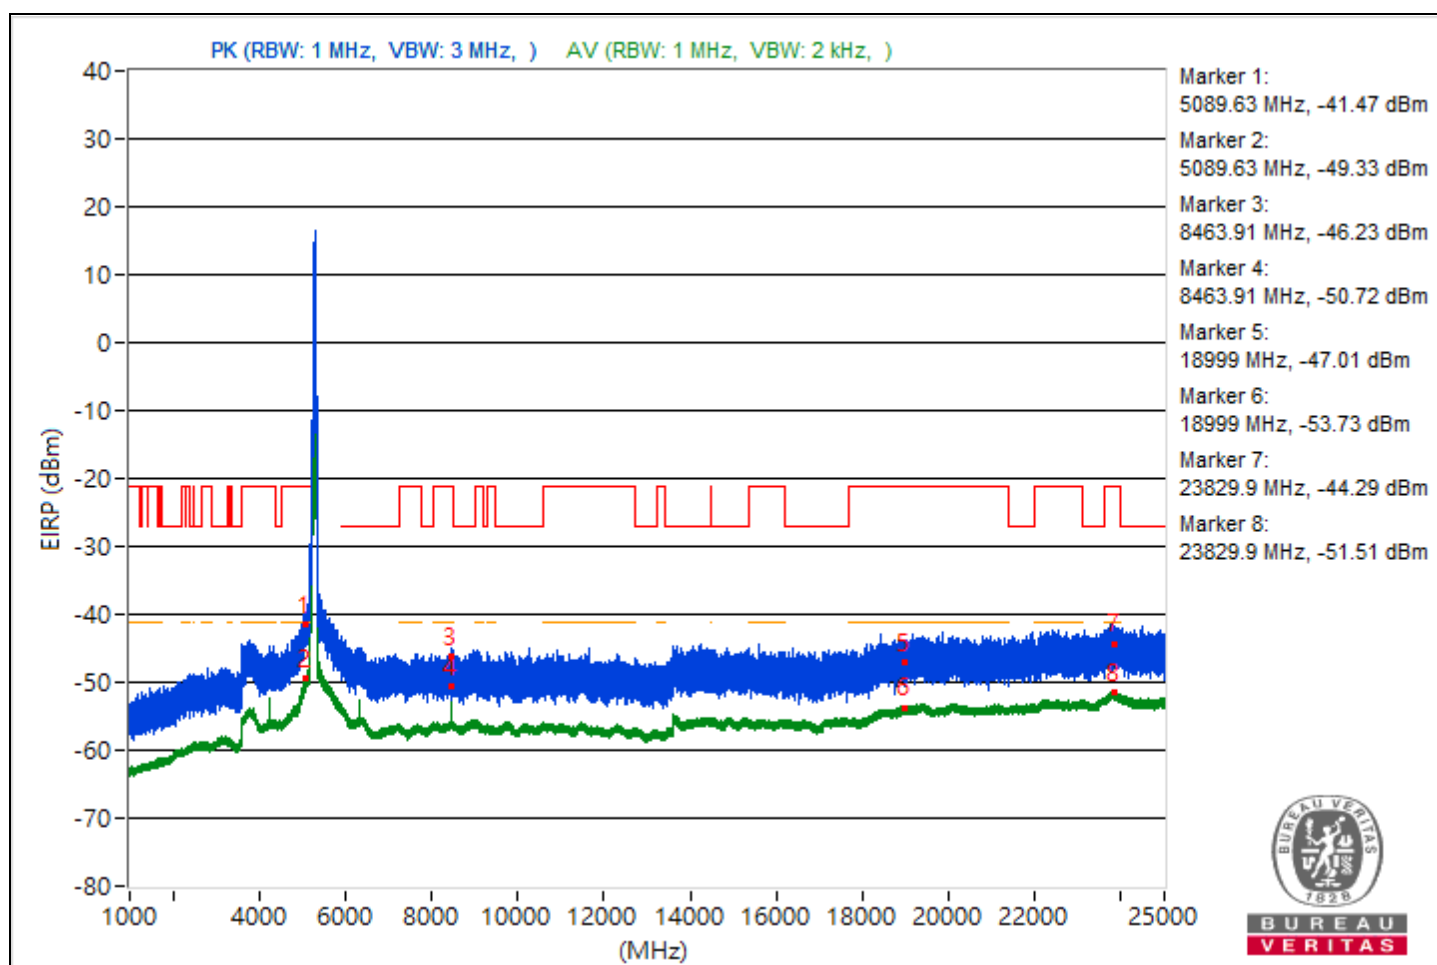

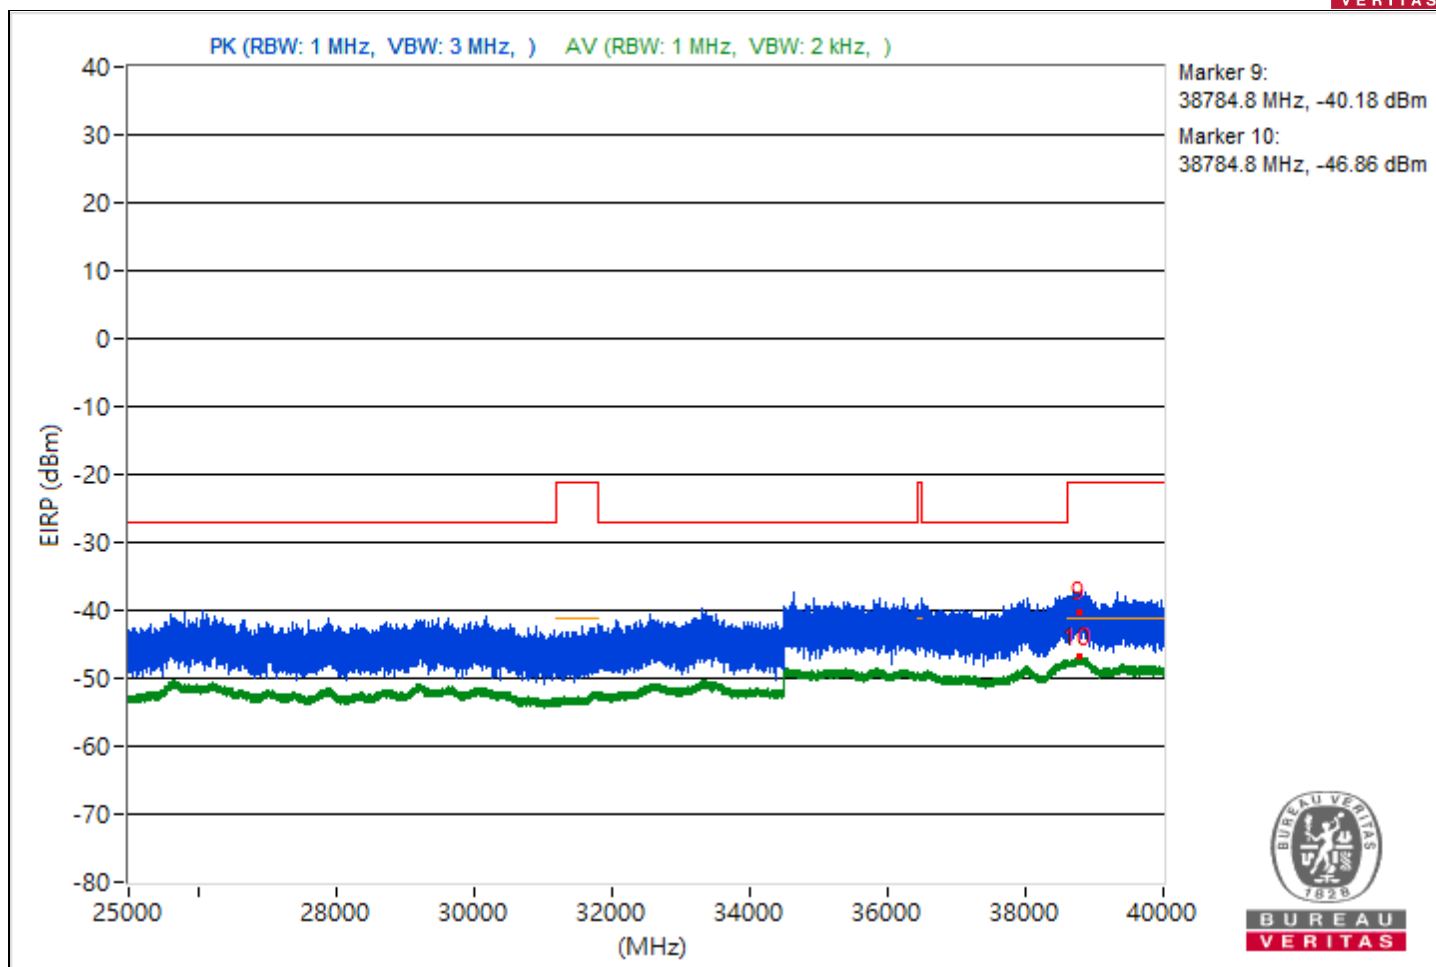



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5091.81	51.51 PK	74	-22.49	-54.78	-55.5	8.37	-43.75
2	5091.81	43.75 AV	54	-10.25	-62.62	-63.17	8.37	-51.51
3	9011.64	45.03 PK	74	-28.97	-61.6	-61.63	8.37	-50.23
4	9011.64	39.45 AV	54	-14.55	-67.67	-66.75	8.37	-55.81
5	18973.6	47.91 PK	74	-26.09	-57.92	-59.71	8.37	-47.35
6	18973.6	41.61 AV	54	-12.39	-64.76	-65.31	8.37	-53.65
7	22120	51.92 PK	74	-22.08	-55.67	-53.94	8.37	-43.34
8	22120	44.85 AV	54	-9.15	-61.98	-61.6	8.37	-50.41
9	38798.58	54.13 PK	74	-19.87	-53.61	-51.64	8.37	-41.13
10	38798.58	48.35 AV	54	-5.65	-57.99	-58.61	8.37	-46.91

Note: Margin value = Emission Level - Limit value

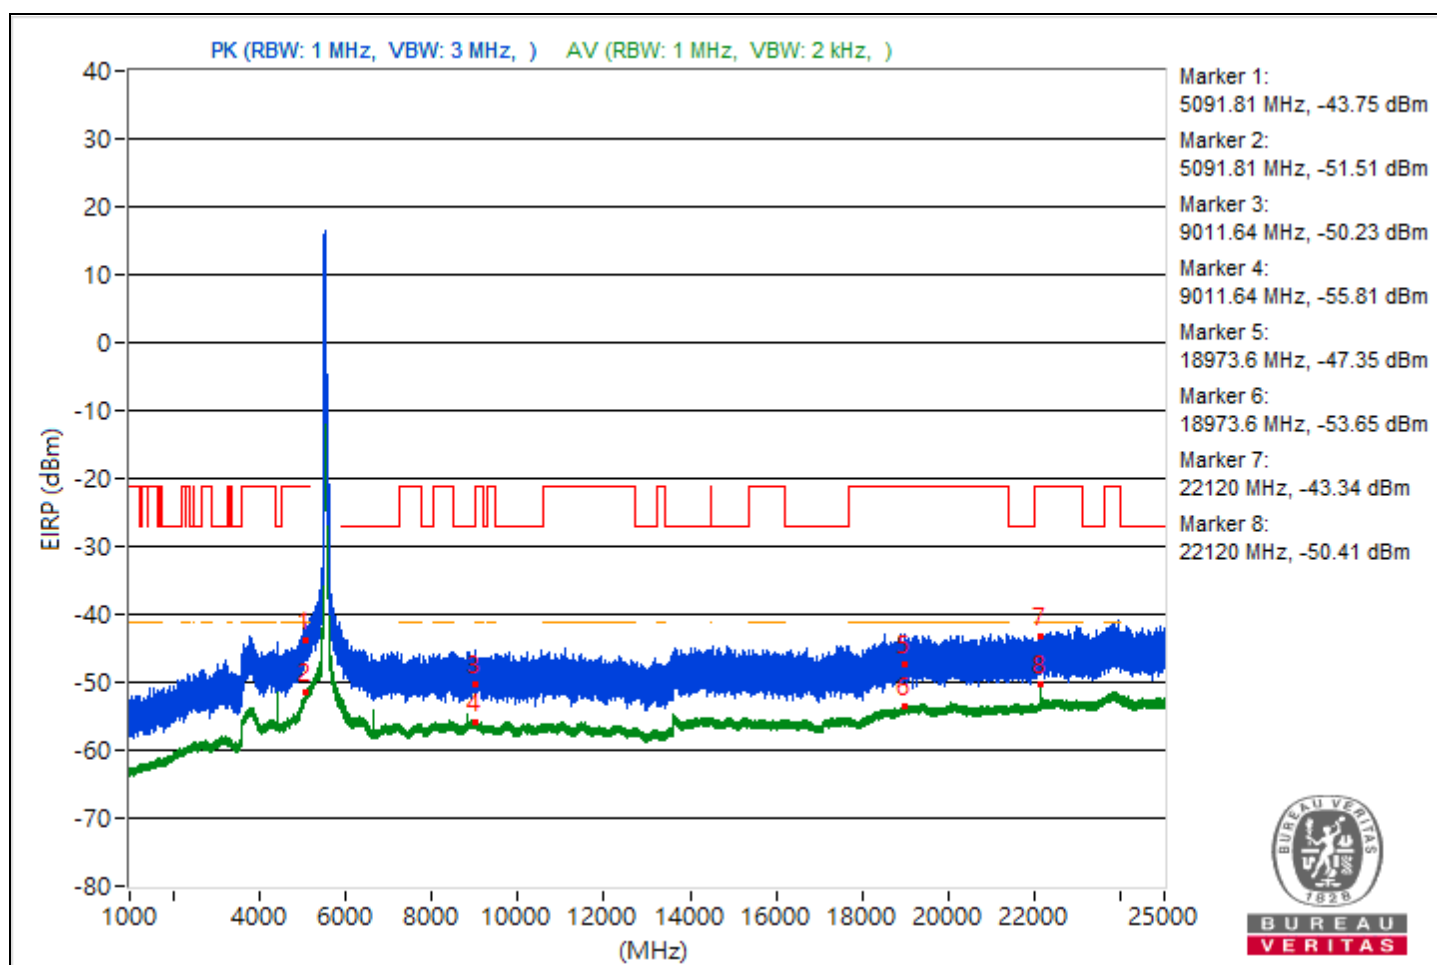

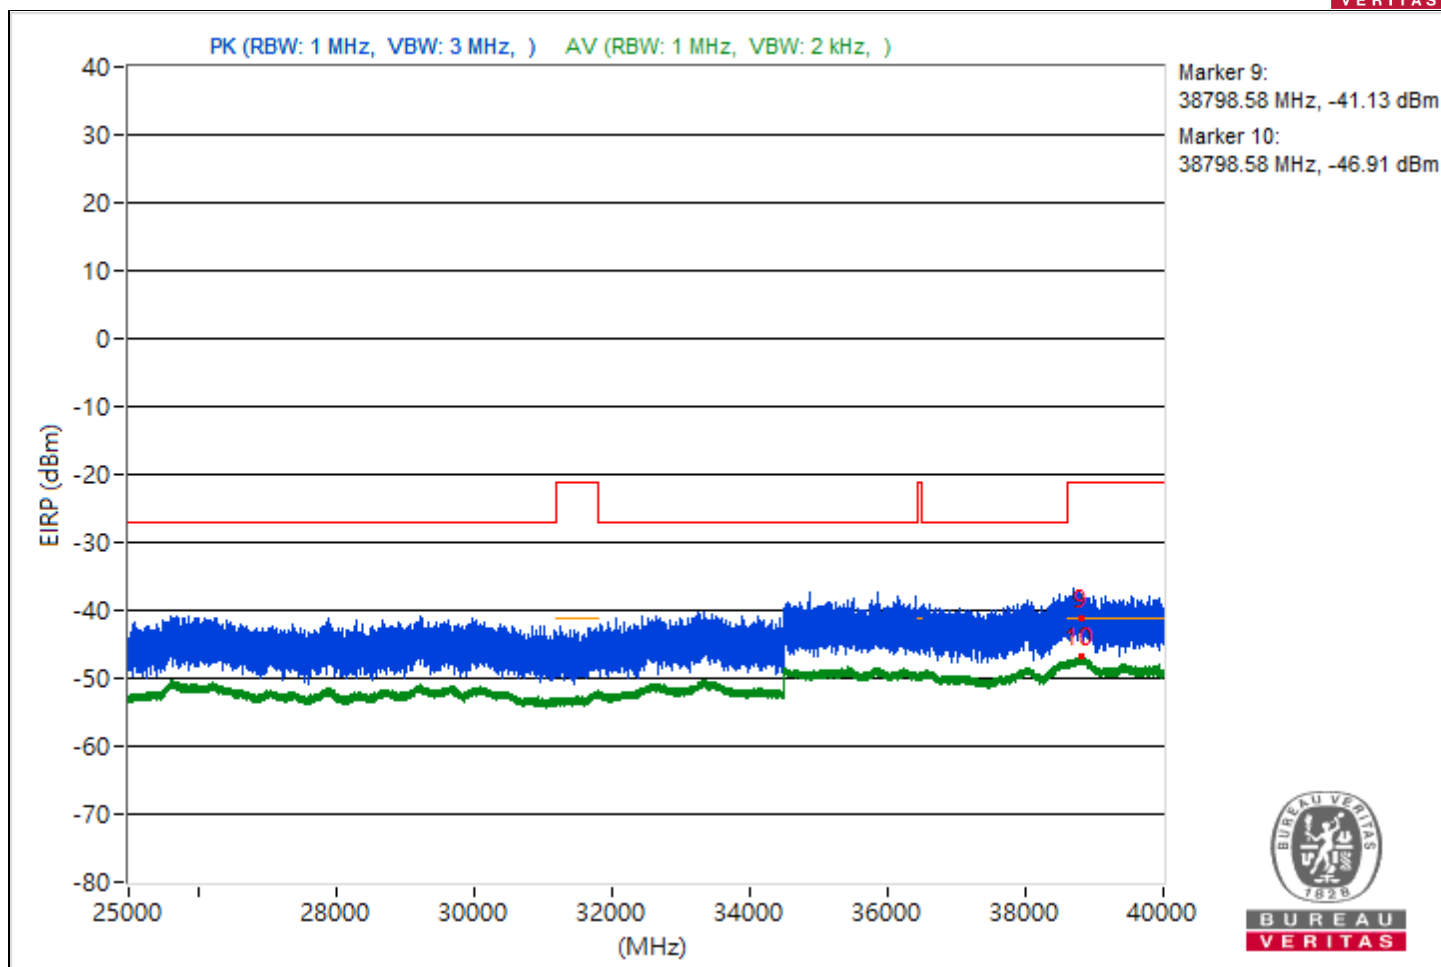



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4551.96	50.78 PK	74	-23.22	-56.93	-55	8.37	-44.48
2	4551.96	45.72 AV	54	-8.28	-60.83	-61.02	8.37	-49.54
3	9103.47	47.04 PK	74	-26.96	-58.64	-60.83	8.37	-48.22
4	9103.47	39.99 AV	54	-14.01	-67.34	-66.05	8.37	-55.27
5	18963	48.38 PK	74	-25.62	-58.67	-57.9	8.37	-46.88
6	18963	41.61 AV	54	-12.39	-64.64	-65.46	8.37	-53.65
7	23839.8	51.55 PK	74	-22.45	-57.13	-53.71	8.37	-43.71
8	23839.8	44.05 AV	54	-9.95	-63	-62.22	8.37	-51.21
9	38820.62	53.56 PK	74	-20.44	-51.76	-54.97	8.37	-41.7
10	38820.62	48.46 AV	54	-5.54	-57.84	-58.56	8.37	-46.8

Note: Margin value = Emission Level - Limit value

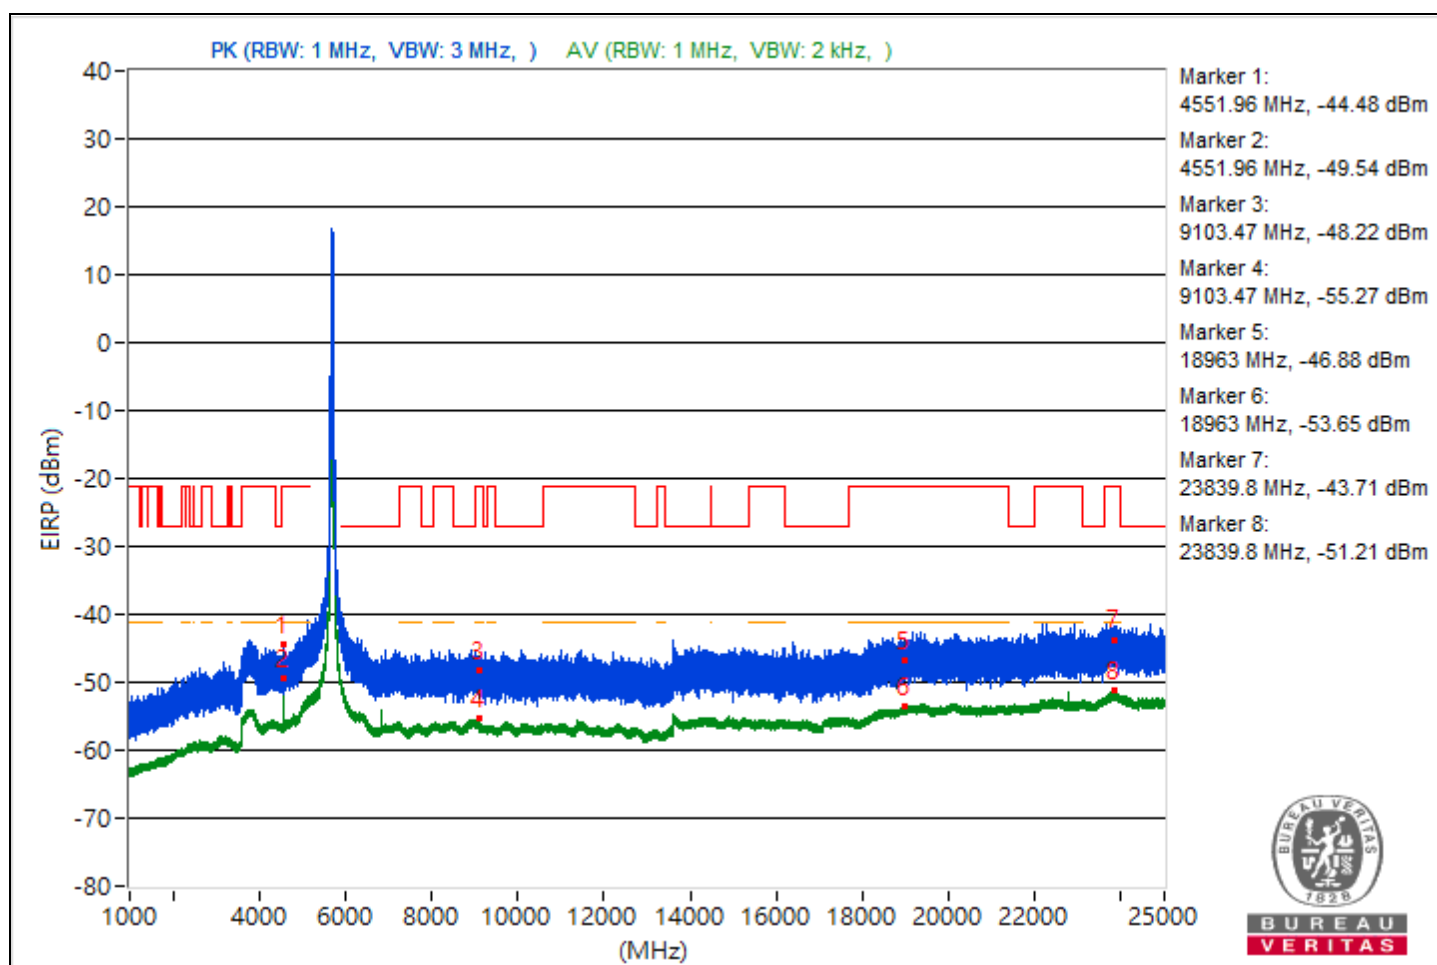

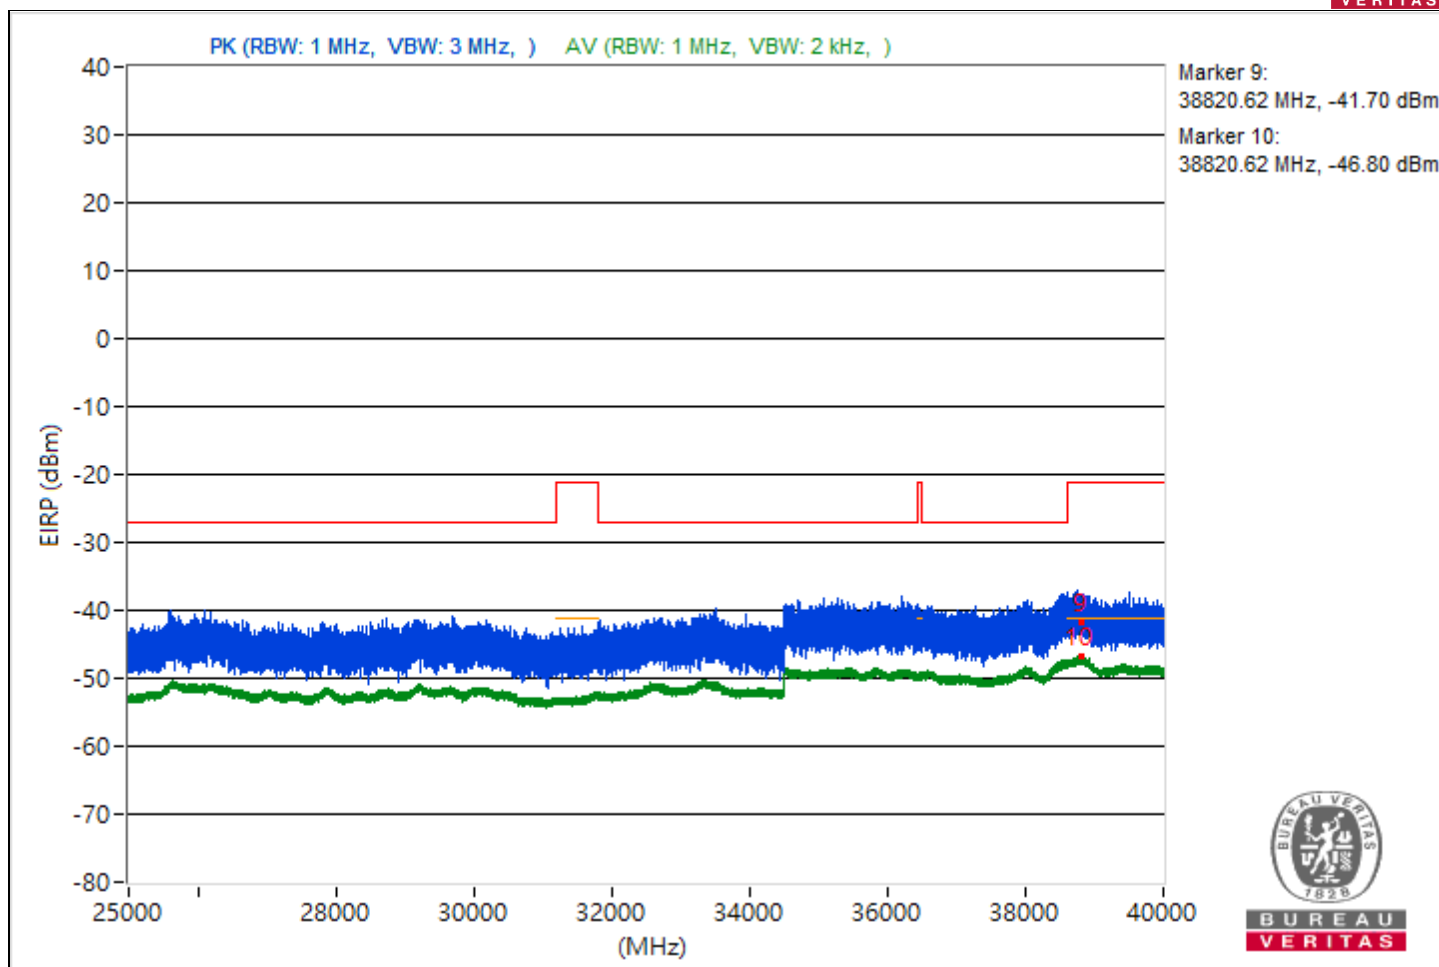



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4620.01	51.62 PK	74	-22.38	-54.73	-55.32	8.37	-43.64
2	4620.01	45.82 AV	54	-8.18	-60.81	-60.83	8.37	-49.44
3	11551.47	48.7 PK	74	-25.3	-59	-57.09	8.37	-46.56
4	11551.47	41.08 AV	54	-12.92	-65.02	-66.18	8.37	-54.18
5	18952.8	47.1 PK	74	-26.9	-60.25	-58.93	8.37	-48.16
6	18952.8	41.55 AV	54	-12.45	-65.41	-64.78	8.37	-53.71
7	23841.8	50.16 PK	74	-23.84	-56.64	-56.33	8.37	-45.1
8	23841.8	43.87 AV	54	-10.13	-62.86	-62.67	8.37	-51.39
9	38860.09	54.81 PK	74	-19.19	-51.76	-51.91	8.37	-40.45
10	38860.09	48.23 AV	54	-5.77	-57.92	-58.96	8.37	-47.03

Note: Margin value = Emission Level - Limit value

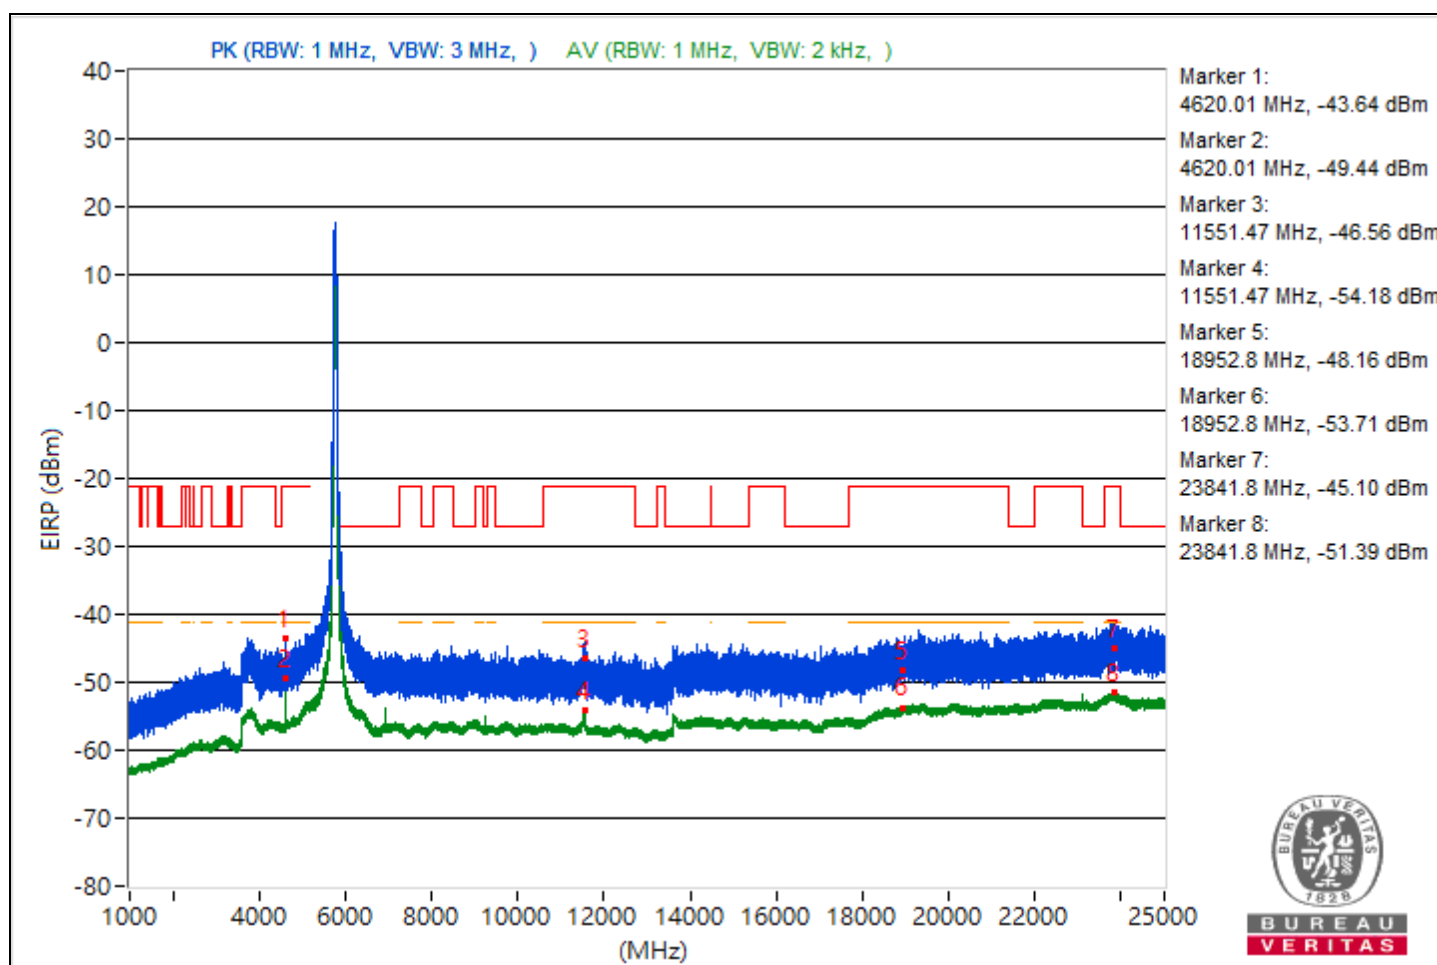

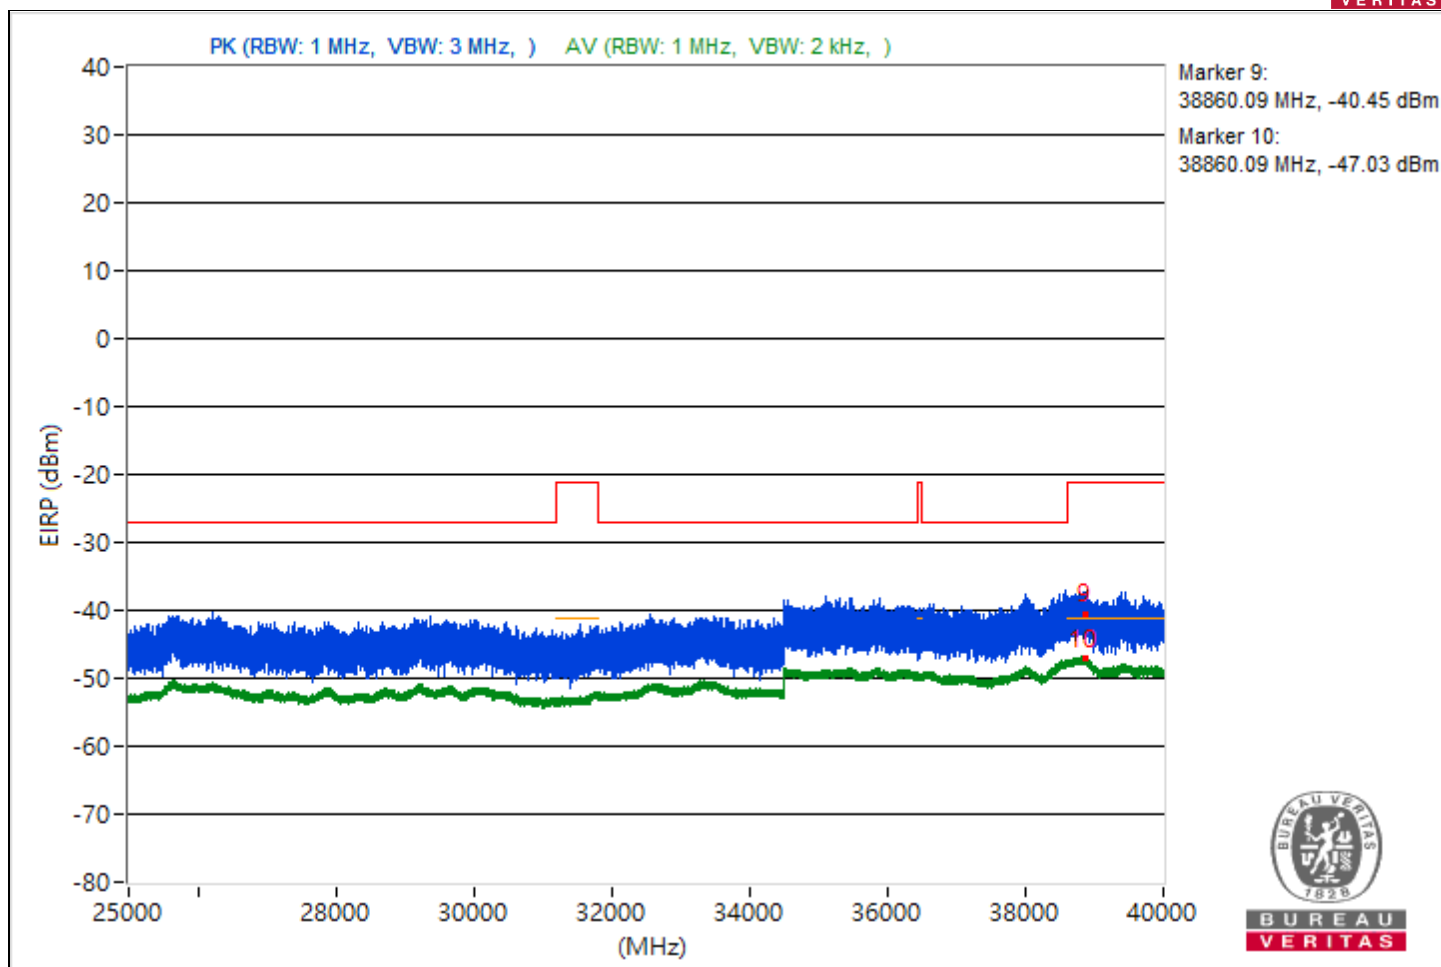



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.28	52.81 PK	74	-21.19	-53.33	-54.4	8.37	-42.45
2	5099.28	44.57 AV	54	-9.43	-62.56	-61.63	8.37	-50.69
3	8400.09	47.78 PK	74	-26.22	-57.49	-60.88	8.37	-47.48
4	8400.09	41.94 AV	54	-12.06	-62.89	-67.87	8.37	-53.32
5	18991.4	49.2 PK	74	-24.8	-58.65	-56.5	8.37	-46.06
6	18991.4	41.82 AV	54	-12.18	-64.97	-64.68	8.37	-53.44
7	23808.4	49.21 PK	74	-24.79	-57.4	-57.47	8.37	-46.05
8	23808.4	43.7 AV	54	-10.3	-63.56	-62.4	8.37	-51.56
9	38801.24	53.65 PK	74	-20.35	-52.49	-53.56	8.37	-41.61
10	38801.24	48.46 AV	54	-5.54	-58.58	-57.82	8.37	-46.8

Note: Margin value = Emission Level - Limit value

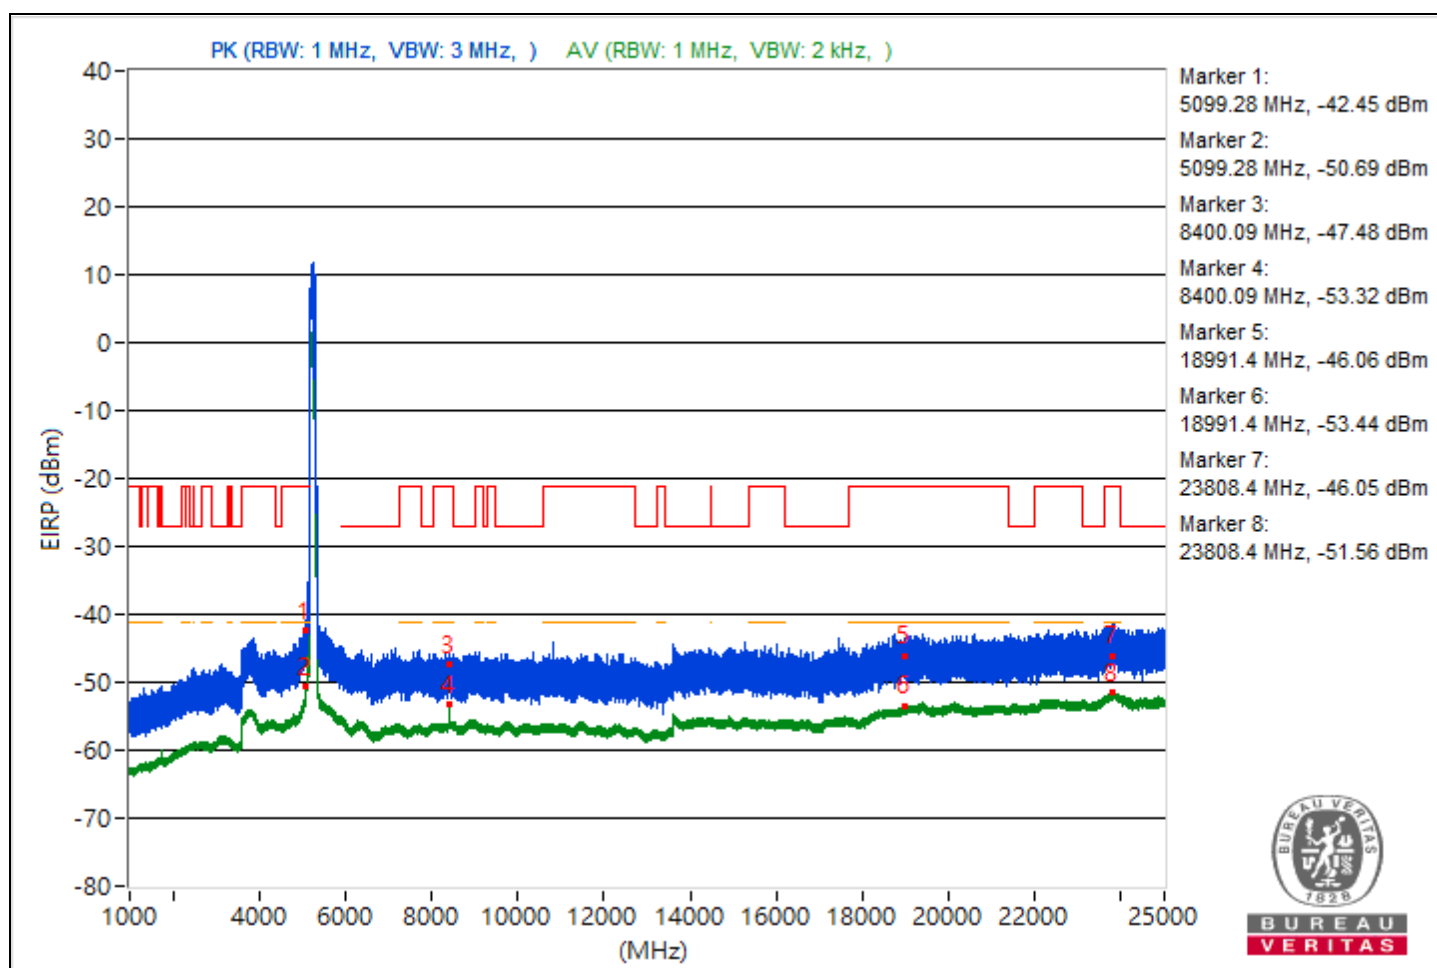

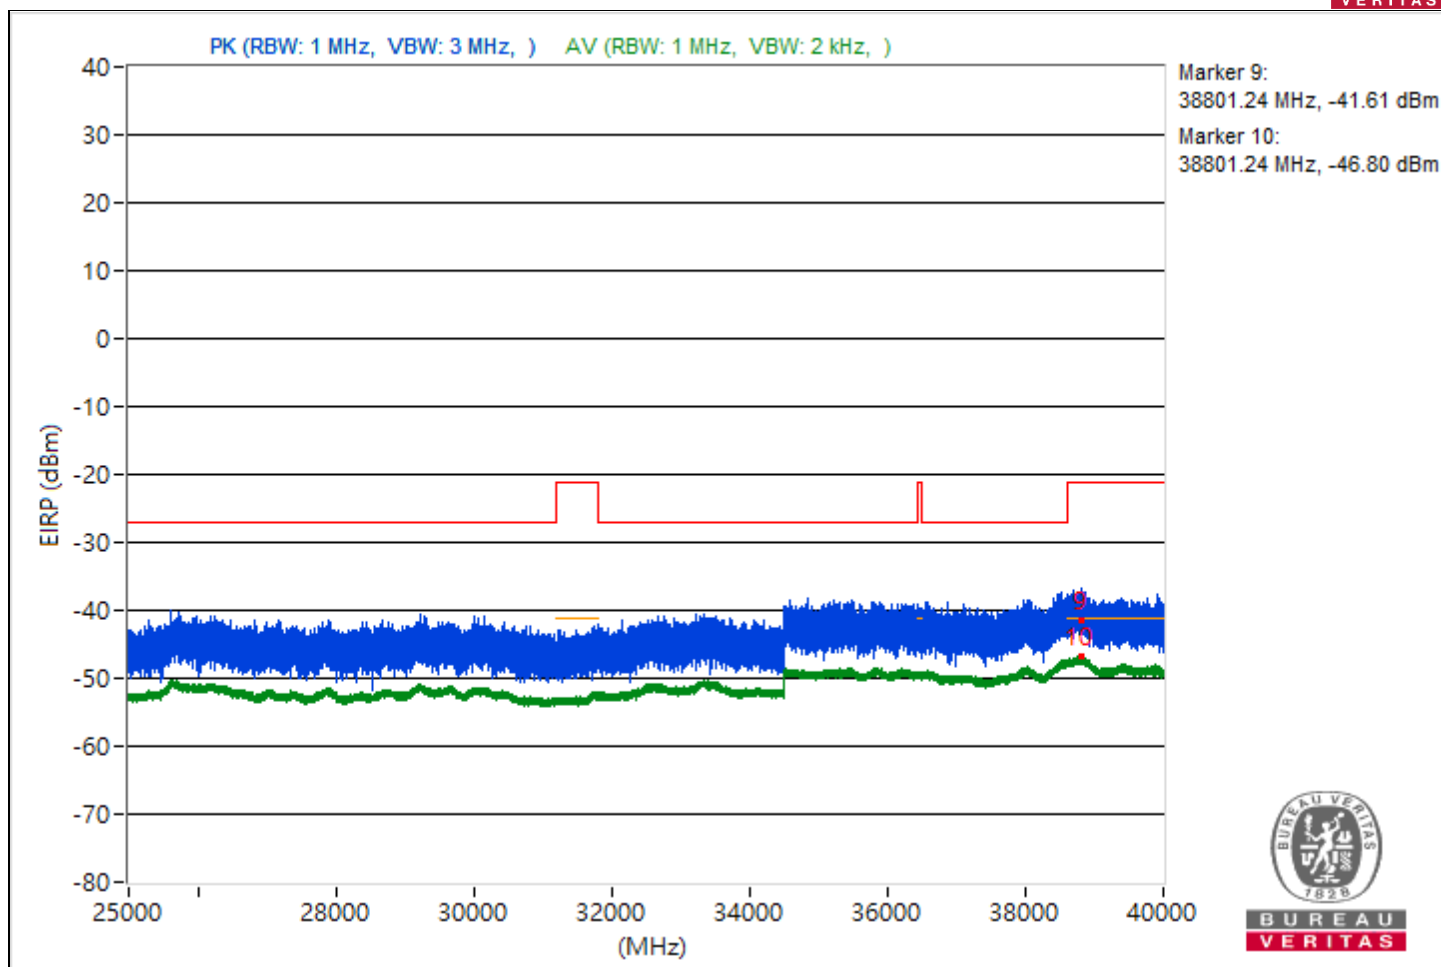



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5045.3	46.41 PK	74	-27.59	-60.18	-60.27	8.37	-48.85
2	5045.3	41.72 AV	54	-12.28	-64.48	-65.41	8.37	-53.54
3	9014.22	45.41 PK	74	-28.59	-60.73	-61.78	8.37	-49.85
4	9014.22	39.49 AV	54	-14.51	-66.68	-67.68	8.37	-55.77
5	18987.3	48.05 PK	74	-25.95	-61.43	-56.89	8.37	-47.21
6	18987.3	41.52 AV	54	-12.48	-65.85	-64.5	8.37	-53.74
7	23835.1	50.33 PK	74	-23.67	-56.54	-56.09	8.37	-44.93
8	23835.1	43.72 AV	54	-10.28	-63.31	-62.56	8.37	-51.54
9	38820.98	54.93 PK	74	-19.07	-49.89	-54.89	8.37	-40.33
10	38820.98	48.57 AV	54	-5.43	-57.65	-58.53	8.37	-46.69

Note: Margin value = Emission Level - Limit value

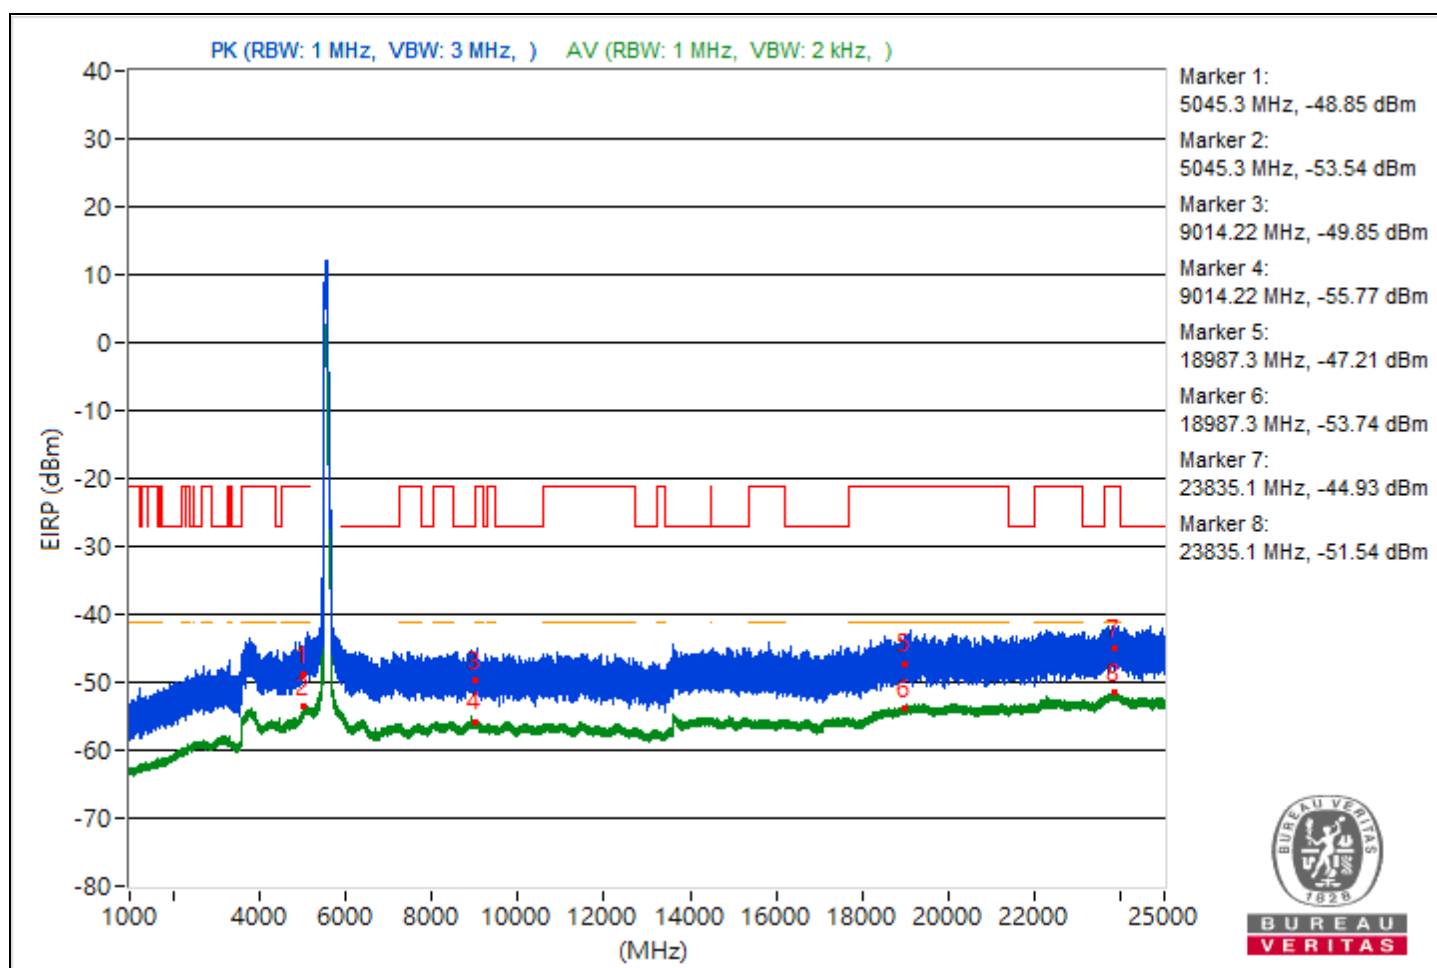


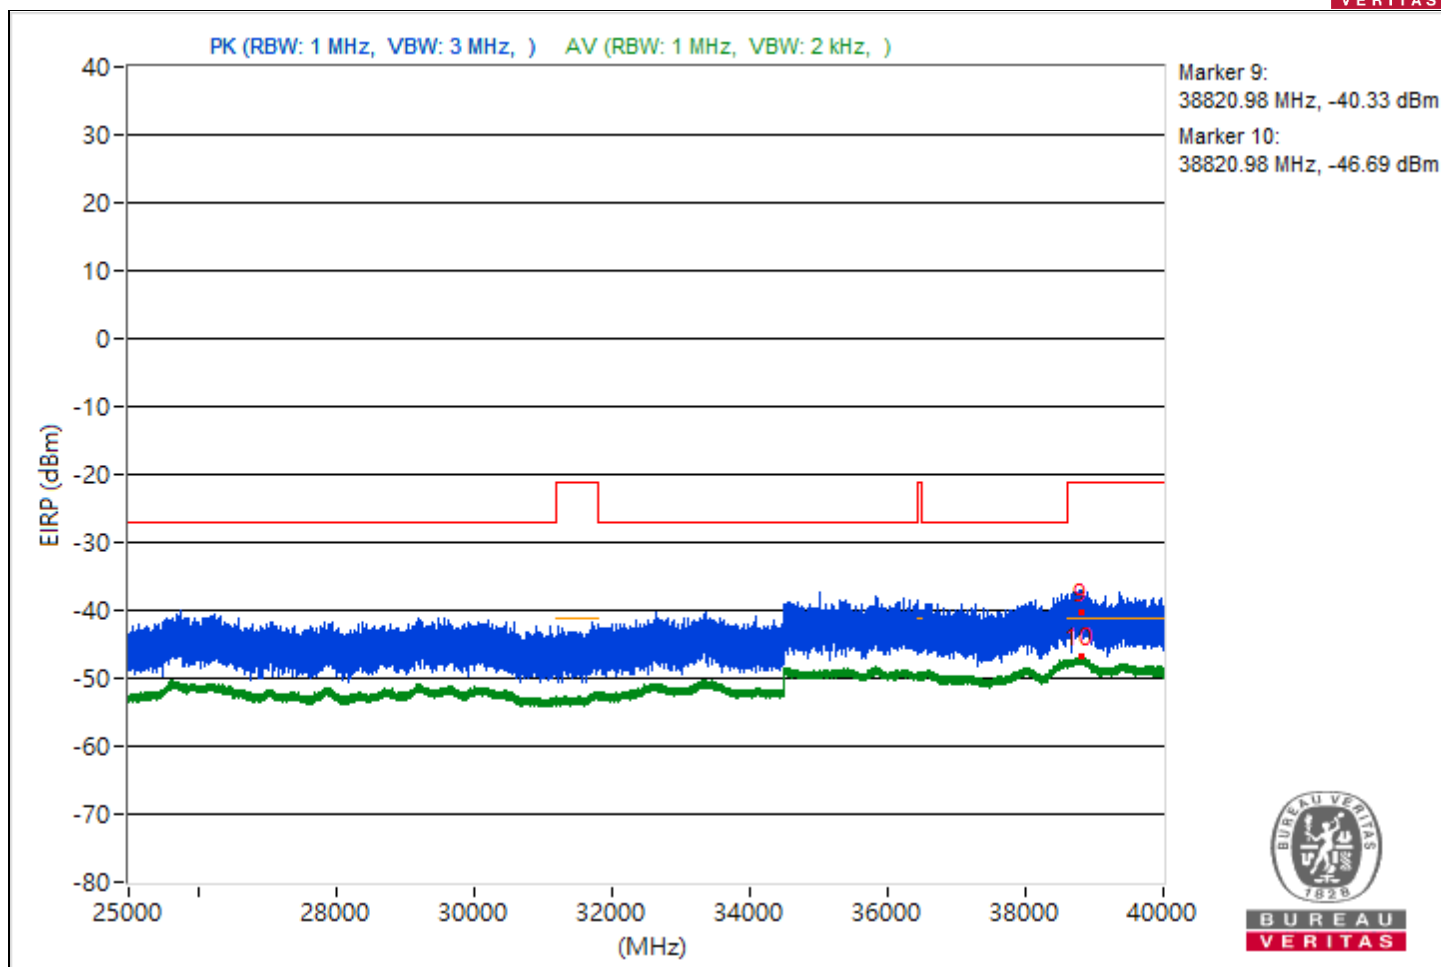


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.04	56.23 PK	74	-17.77	-50.23	-50.6	8.37	-39.03
2	5099.04	48.47 AV	54	-5.53	-57.9	-58.45	8.37	-46.79
3	8400.09	49.89 PK	74	-24.11	-56.93	-56.58	8.37	-45.37
4	8400.09	45.14 AV	54	-8.86	-61.49	-61.52	8.37	-50.12
5	18983.1	50.04 PK	74	-23.96	-56.07	-57.2	8.37	-45.22
6	18983.1	41.9 AV	54	-12.1	-64.5	-64.99	8.37	-53.36
7	23816.6	50.32 PK	74	-23.68	-54.53	-59.44	8.37	-44.94
8	23816.6	43.78 AV	54	-10.22	-62.38	-63.4	8.37	-51.48
9	38816.36	54.34 PK	74	-19.66	-51.78	-52.89	8.37	-40.92
10	38816.36	48.4 AV	54	-5.6	-57.9	-58.6	8.37	-46.86

Note: Margin value = Emission Level - Limit value

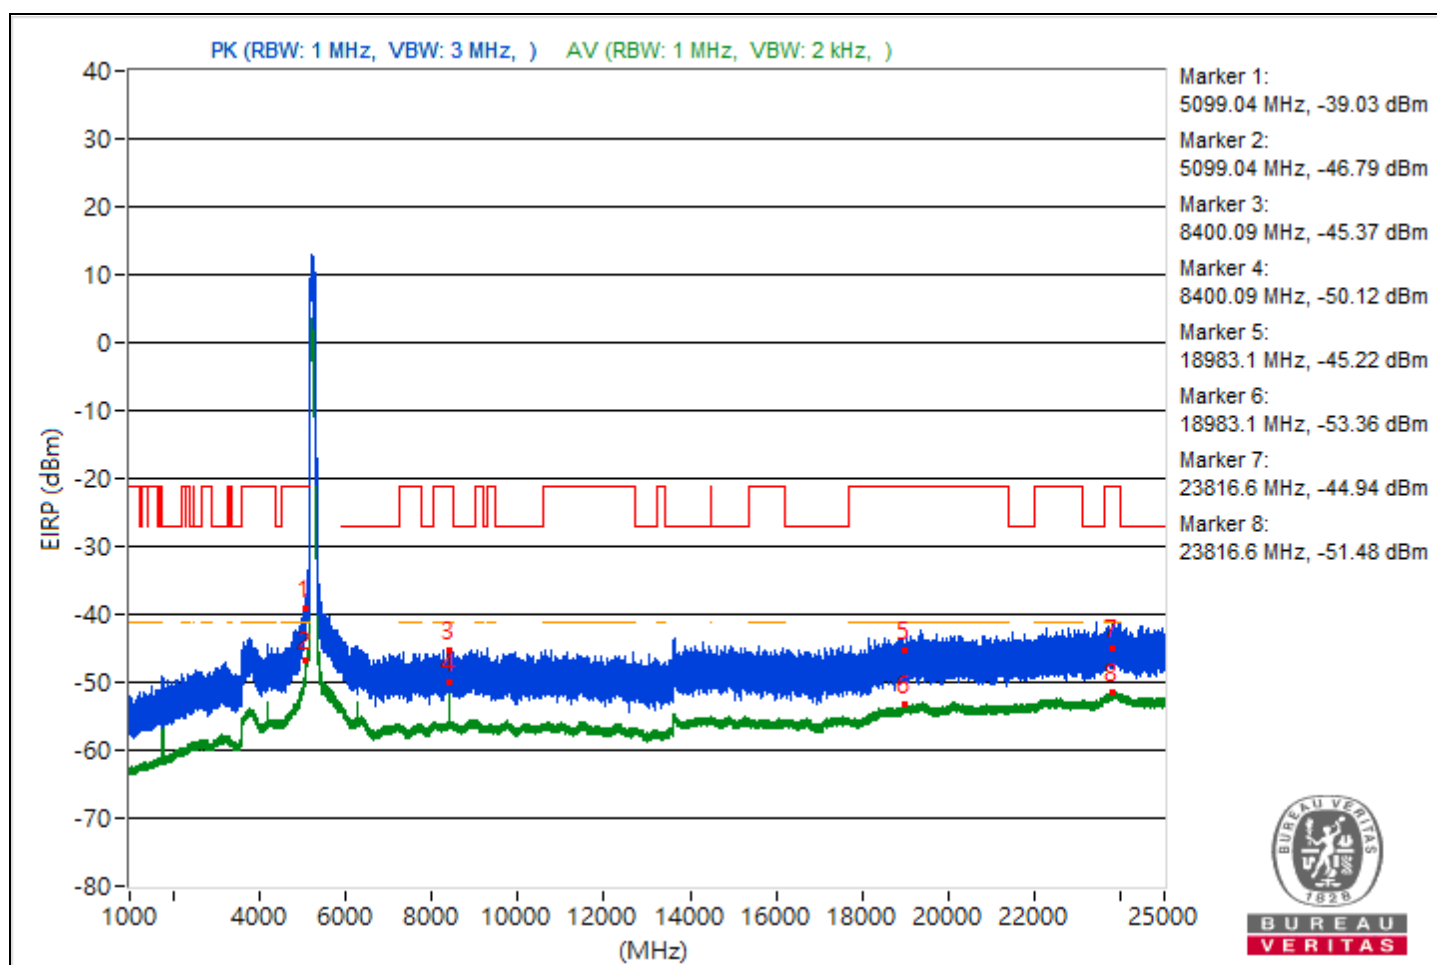


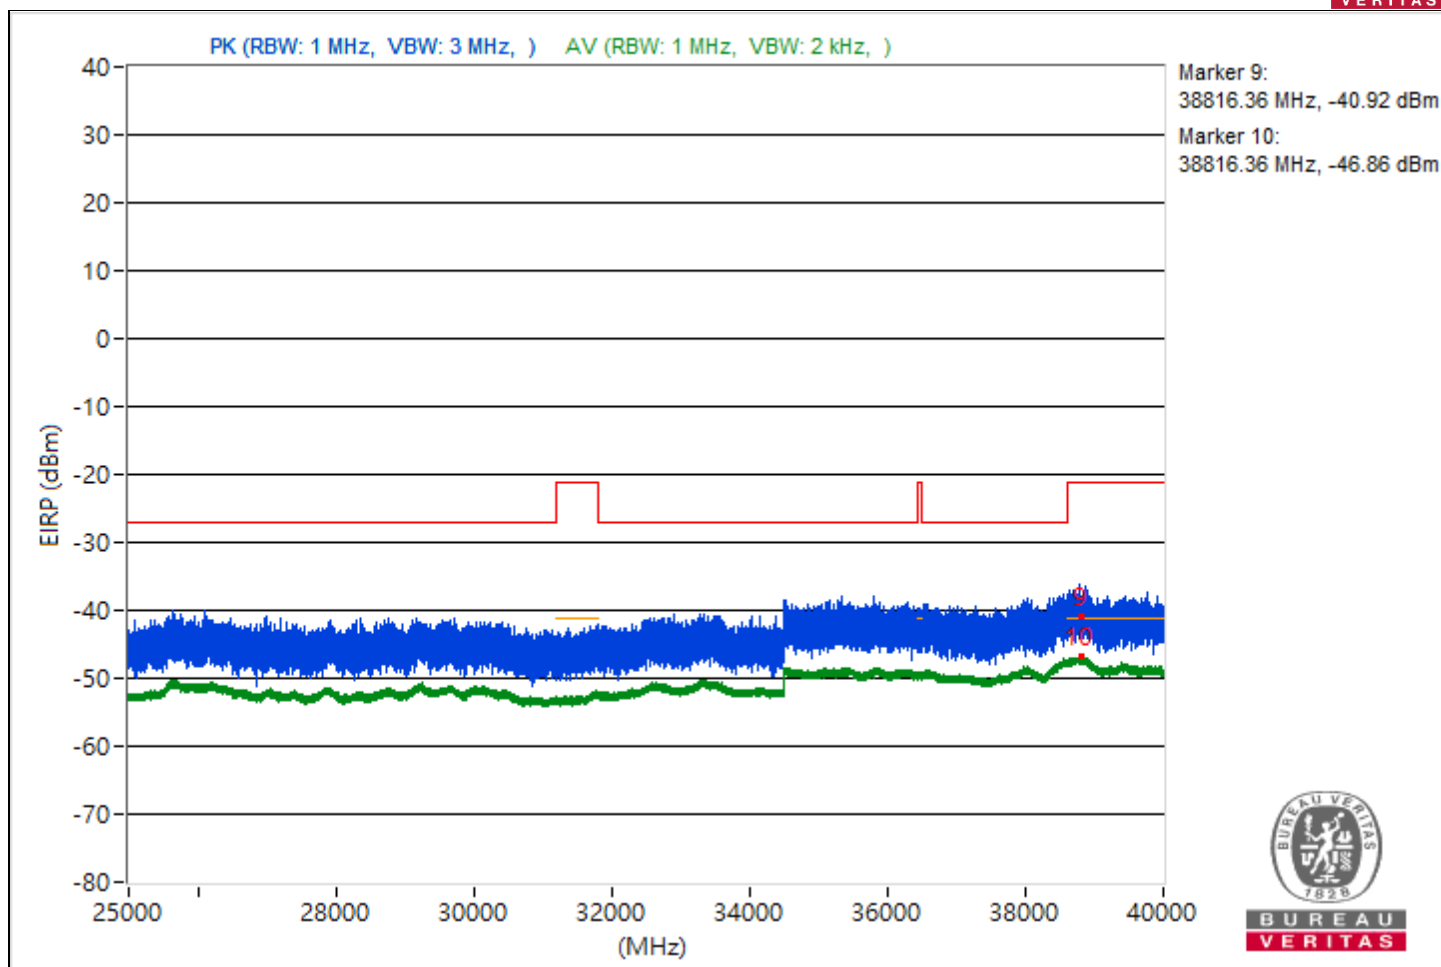


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5092.59	52.29 PK	74	-21.71	-55.33	-53.55	8.37	-42.97
2	5092.59	43.56 AV	54	-10.44	-62.68	-63.52	8.37	-51.7
3	9060.89	47.03 PK	74	-26.97	-62.21	-58	8.37	-48.23
4	9060.89	39.43 AV	54	-14.57	-66.75	-67.71	8.37	-55.83
5	18997.8	48.65 PK	74	-25.35	-58.18	-57.81	8.37	-46.61
6	18997.8	41.94 AV	54	-12.06	-64.44	-64.97	8.37	-53.32
7	22279.9	50.18 PK	74	-23.82	-56.82	-56.13	8.37	-45.08
8	22279.9	44.15 AV	54	-9.85	-62.88	-62.14	8.37	-51.11
9	38768.36	53.93 PK	74	-20.07	-52.63	-52.8	8.37	-41.33
10	38768.36	48.57 AV	54	-5.43	-57.85	-58.3	8.37	-46.69

Note: Margin value = Emission Level - Limit value

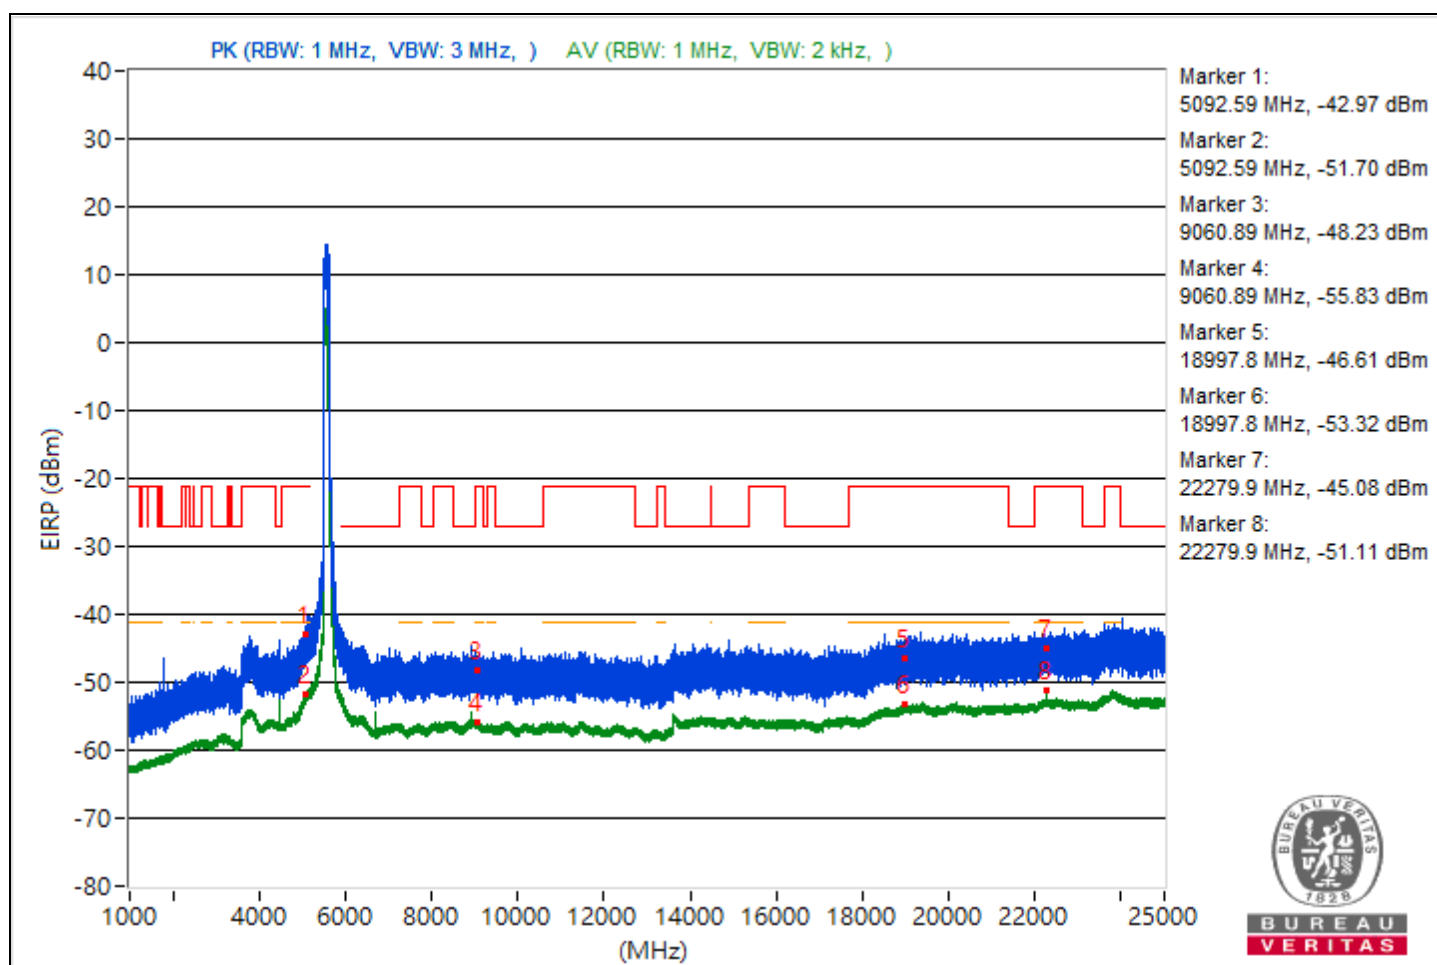

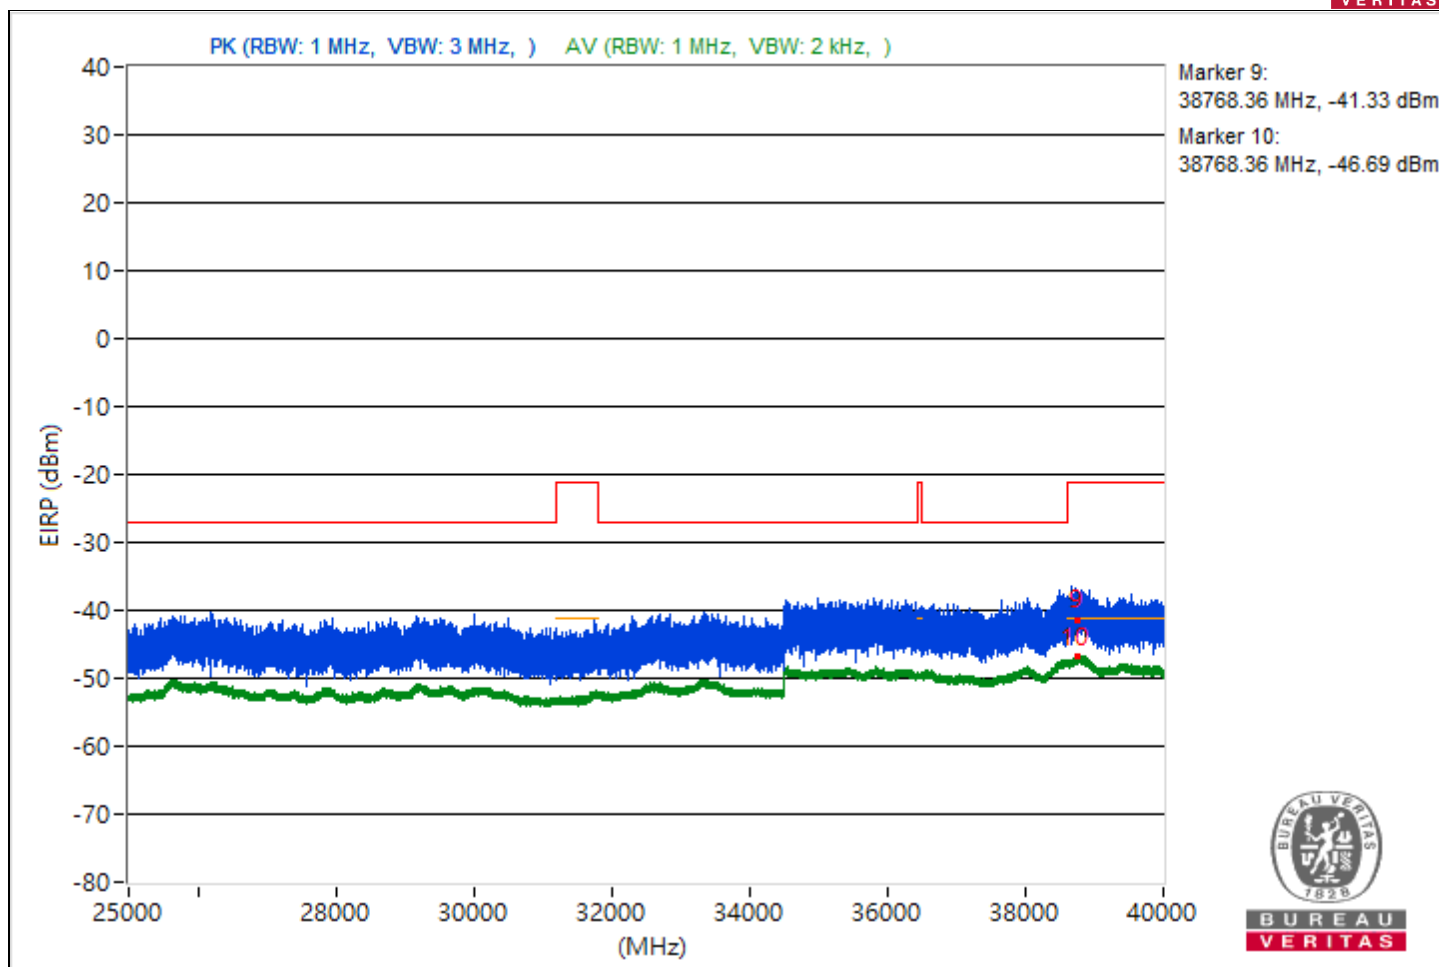

Conducted Band Edges


2TX

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5181.45	115.1 PK			5.55	5.34	11.38	19.84
2	*5181.45	106.58 AV			-3.22	-2.93	11.38	11.32
3	5149.93	60.61 PK	74	-13.39	-49.23	-48.86	11.38	-34.65
4	5149.93	51.8 AV	54	-2.2	-57.76	-57.95	11.38	-43.46

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

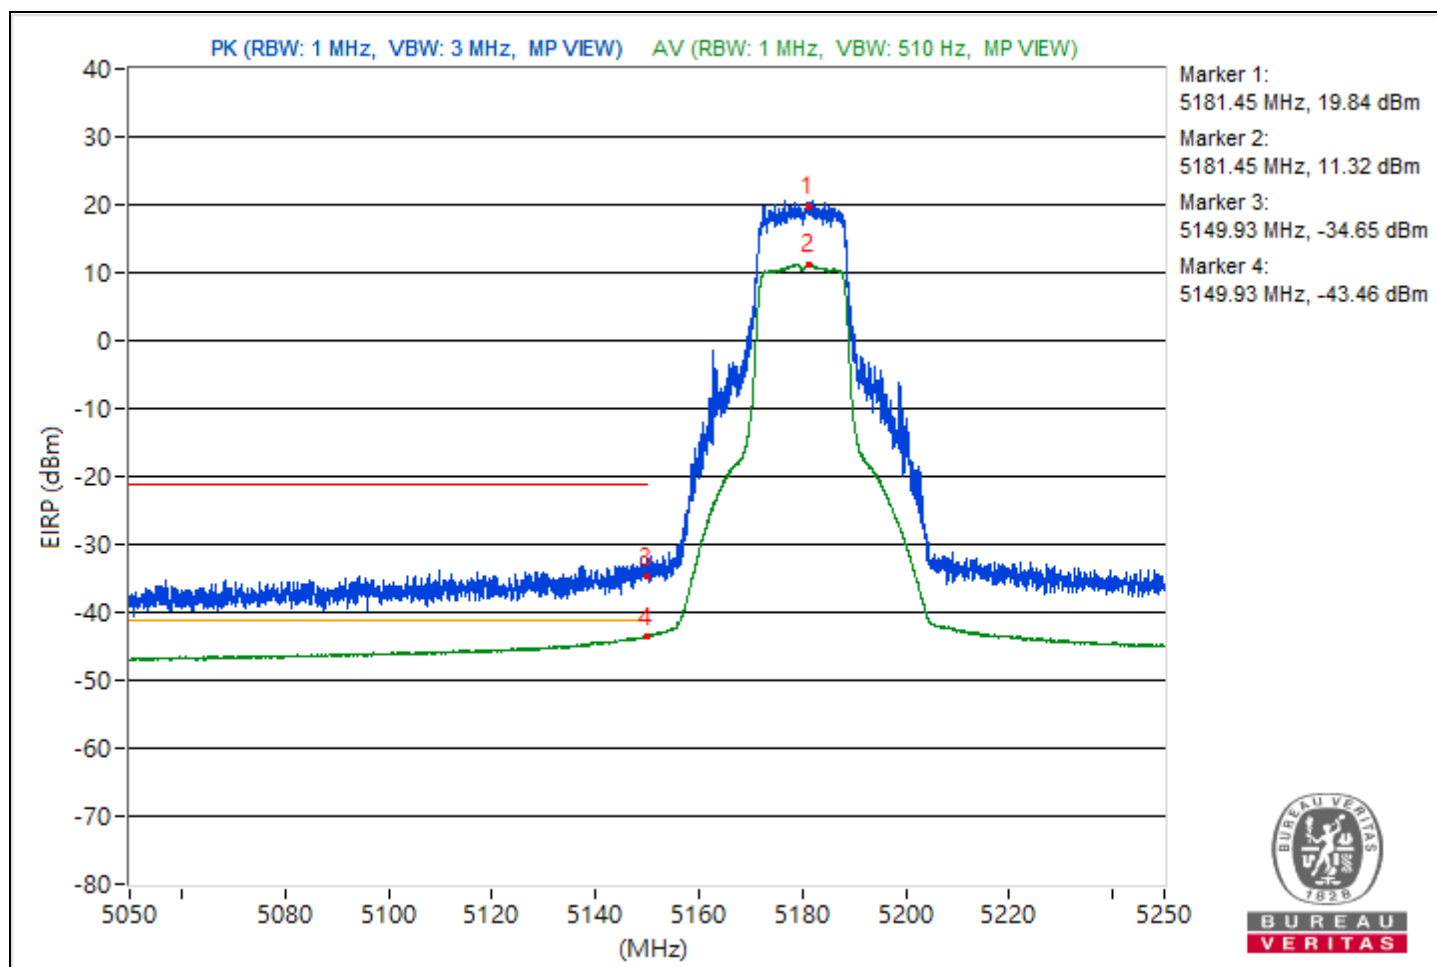


RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5199	113.36 PK			4.25	3.1	11.38	18.1
2	*5199	106.46 AV			-3	-3.38	11.38	11.2
3	5149.95	59.25 PK	74	-14.75	-49.42	-51.67	11.38	-36.01
4	5149.95	50.25 AV	54	-3.75	-59.62	-59.19	11.38	-45.01

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

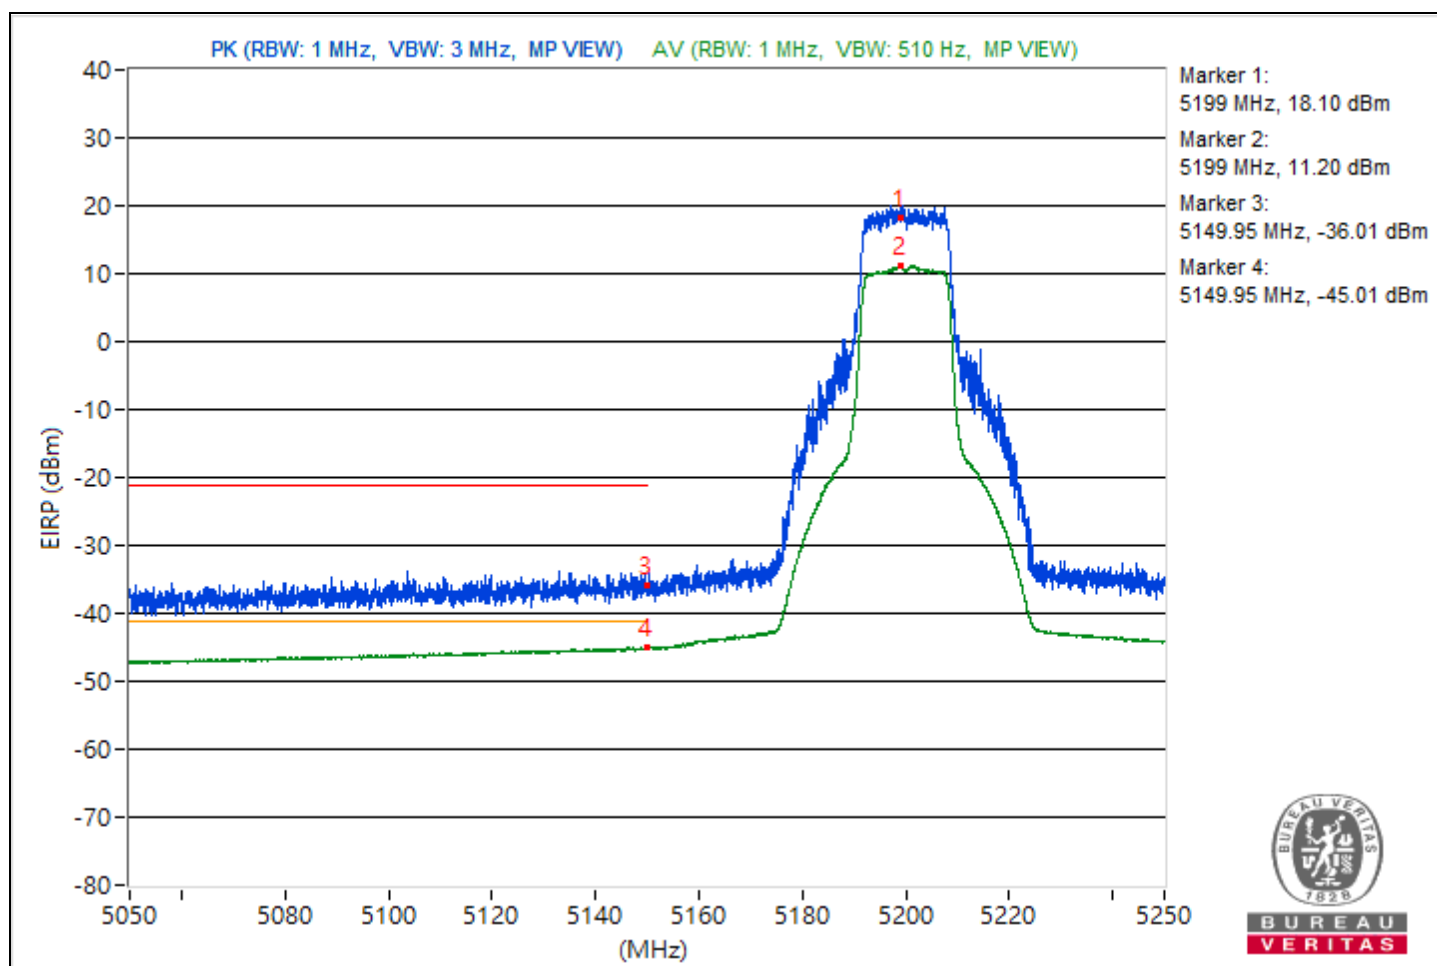


RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5241.2	113.93 PK			5.05	3.33	11.38	18.67
2	*5241.2	105.98 AV			-3.82	-3.53	11.38	10.72
3	5146.82	58.56 PK	74	-15.44	-51.55	-50.67	11.38	-36.7
4	5146.82	49.39 AV	54	-4.61	-60.44	-60.09	11.38	-45.87

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

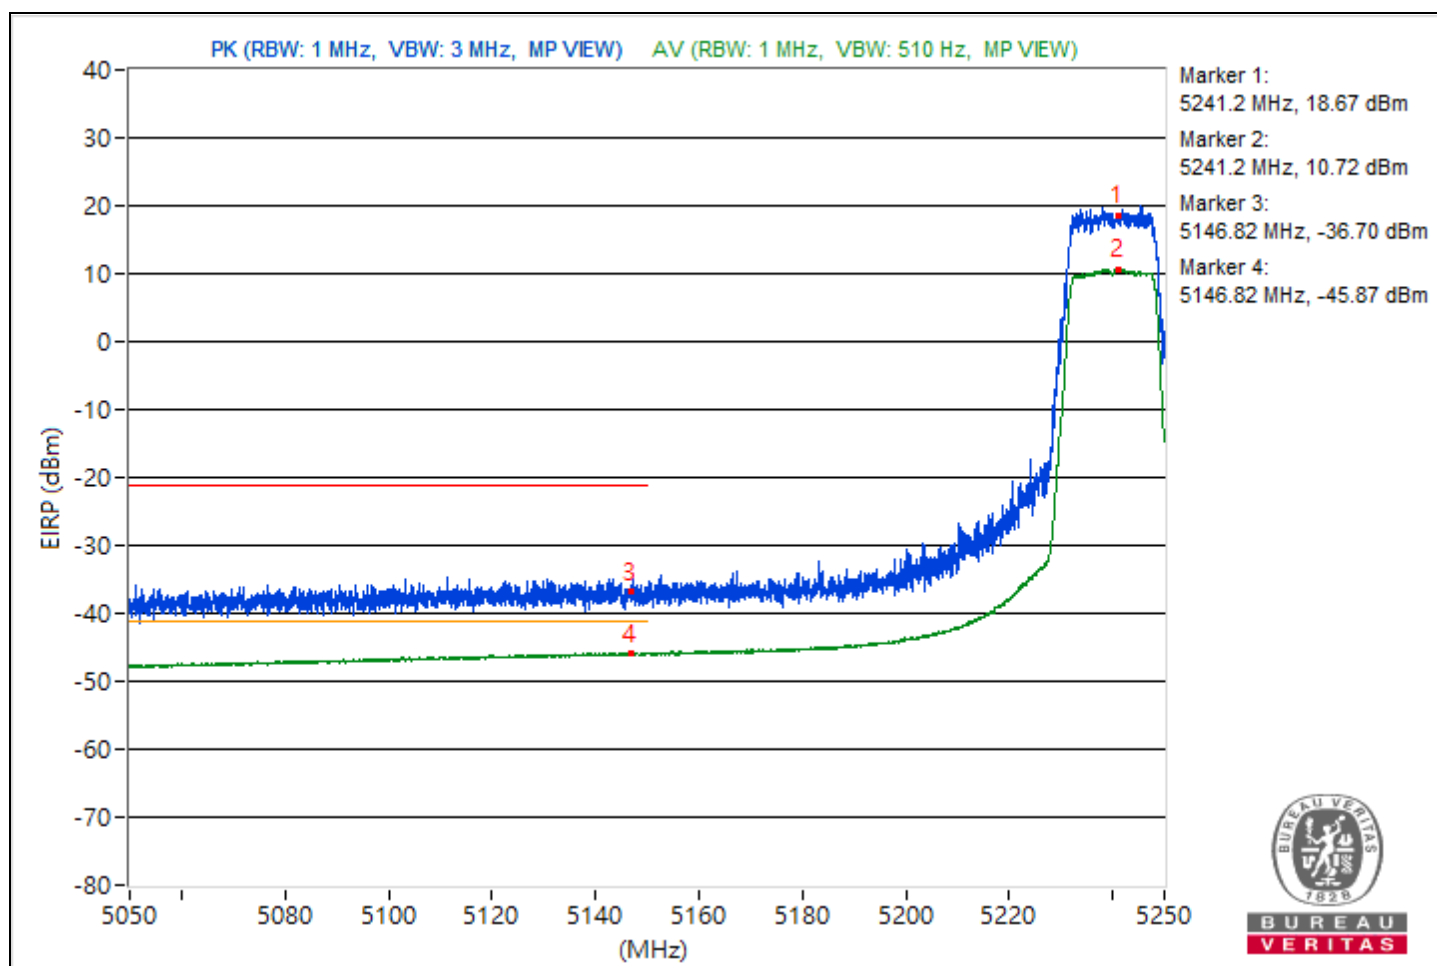


RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5261.07	114.83 PK			4.66	5.64	11.38	19.57
2	*5261.07	106.59 AV			-3.22	-2.92	11.38	11.33
3	5352.7	56.91 PK	74	-17.09	-54.27	-51.62	11.38	-38.35
4	5352.7	49.61 AV	54	-4.39	-60.28	-59.81	11.38	-45.65

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

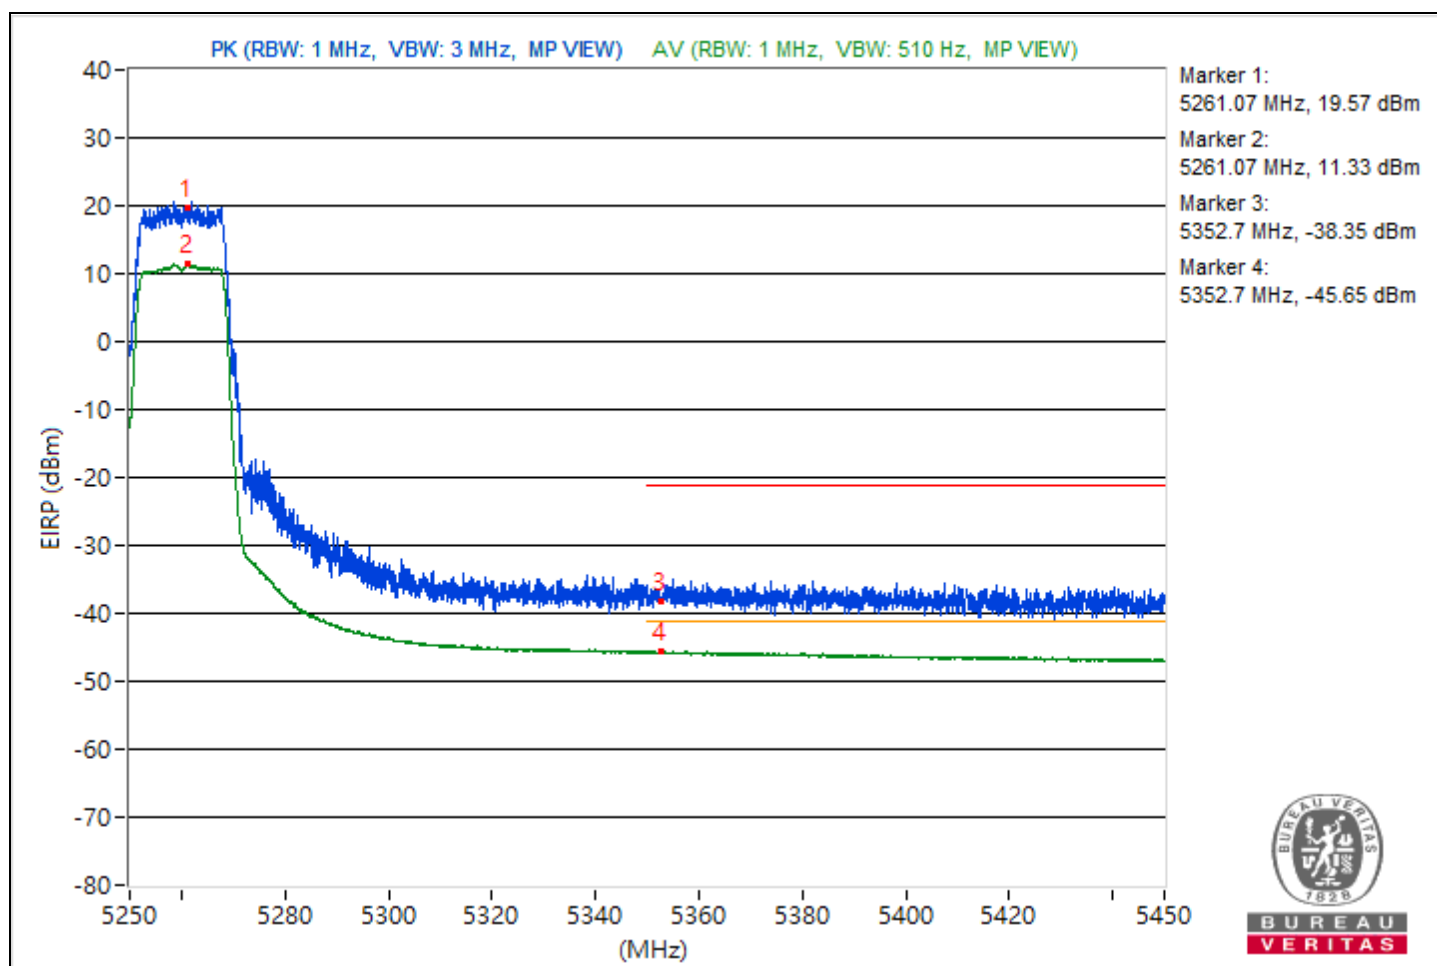


RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5298.82	113.96 PK			3.83	4.74	11.38	18.7
2	*5298.82	106.53 AV			-3.03	-3.22	11.38	11.27
3	5350.95	57.93 PK	74	-16.07	-52.49	-51.06	11.38	-37.33
4	5350.95	50.5 AV	54	-3.5	-59.5	-58.84	11.38	-44.76

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

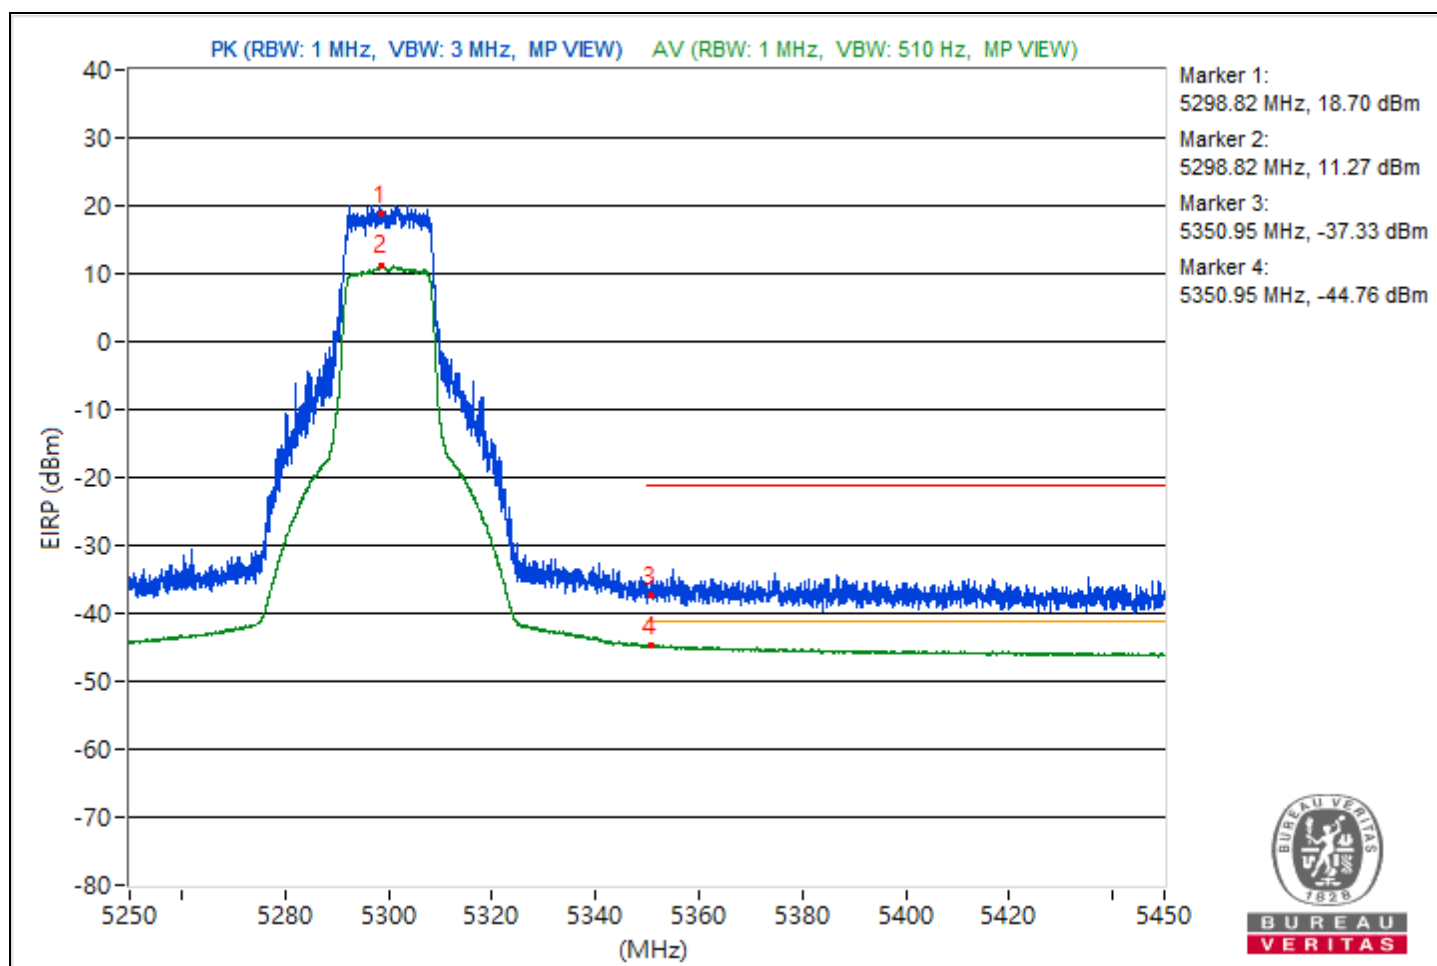


RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5321.43	114.36 PK			4.81	4.6	11.38	19.1
2	*5321.43	106.25 AV			-3.21	-3.61	11.38	10.99
3	5350.2	59.5 PK	74	-14.5	-51.73	-49	11.38	-35.76
4	5350.2	51.98 AV	54	-2.02	-58.16	-57.23	11.38	-43.28

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

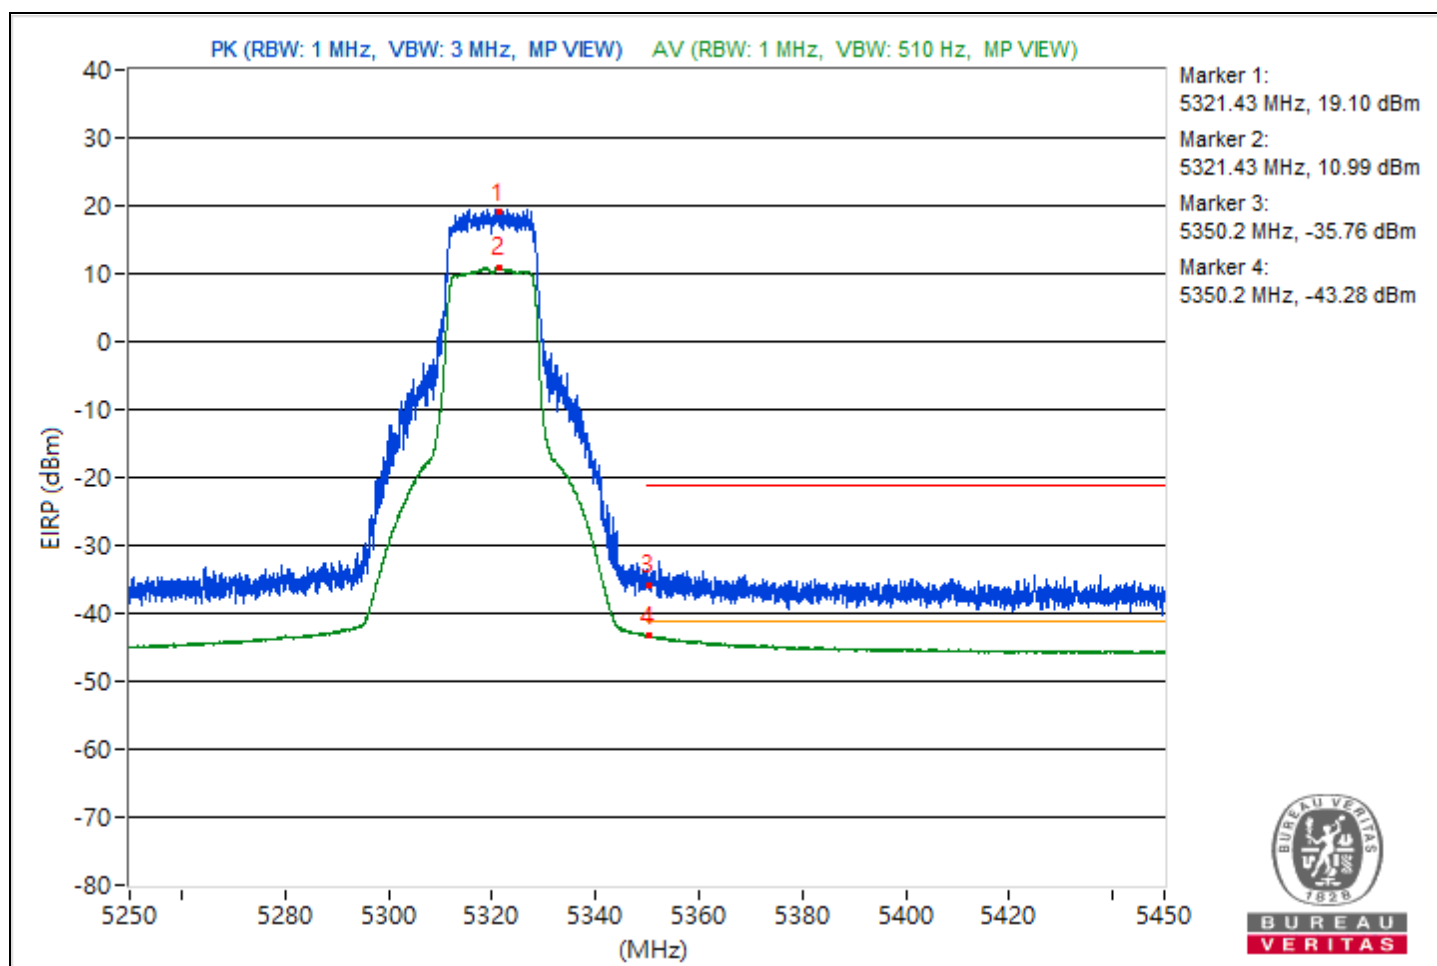


RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5506	115.48 PK			4.75	6.68	11.38	20.22
2	5425.5	62.18 PK	74	-11.82	-50.18	-45.82	11.38	-33.08
3	#5468.94	63.35 PK	68.26	-4.91	-50.35	-44.24	11.38	-31.91
4	*5501.09	106.56 AV			-3.04	-3.14	11.38	11.3
5	5459.97	51.78 AV	54	-2.22	-57.95	-57.79	11.38	-43.48

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

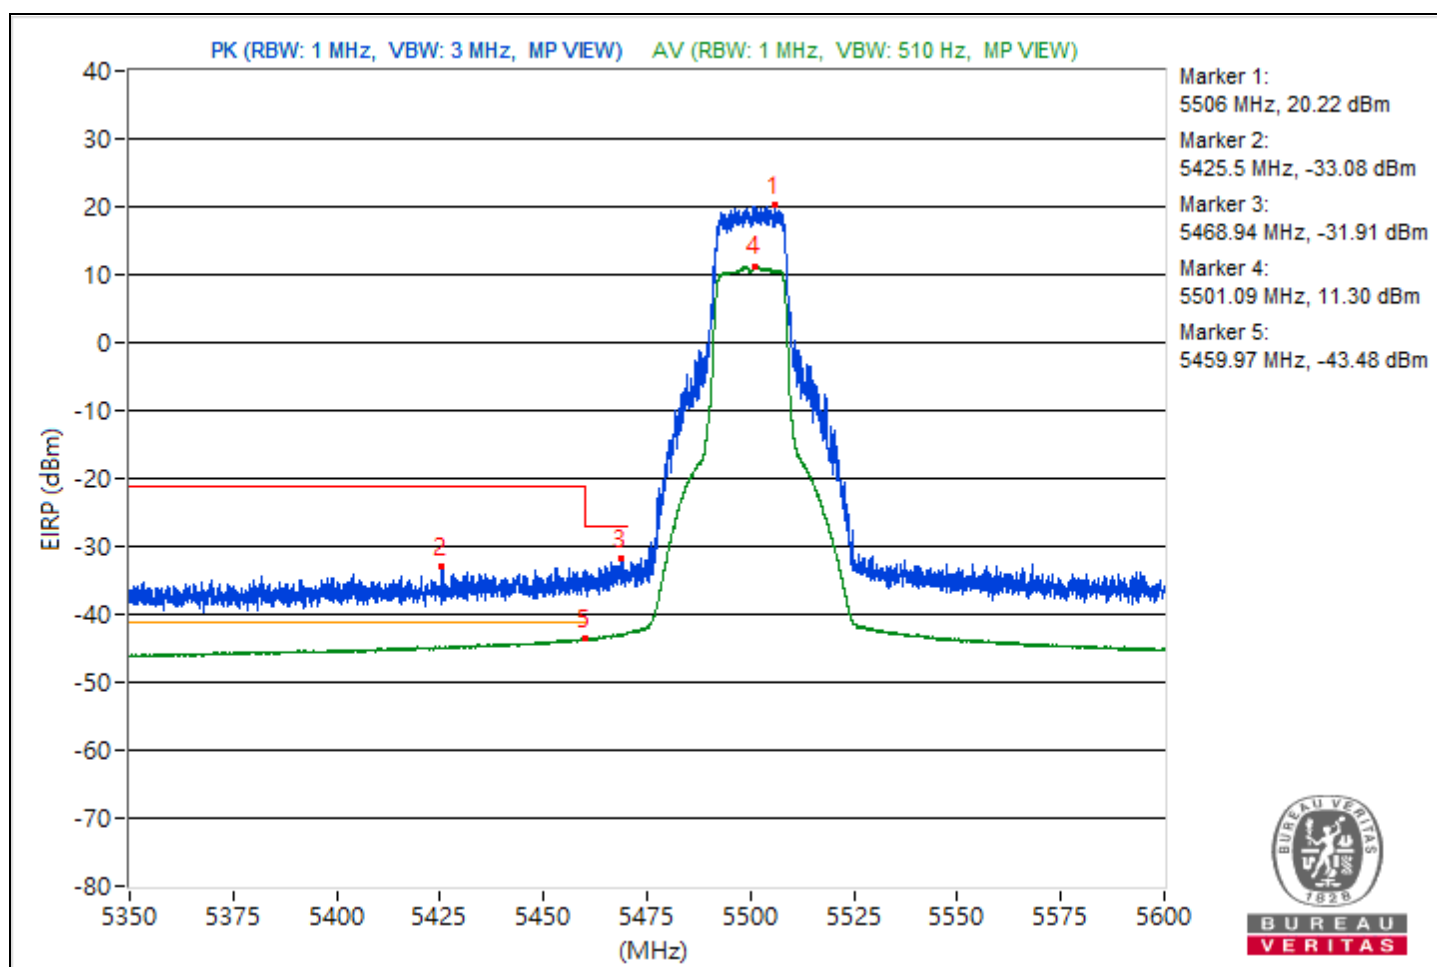


RF Mode	802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5578	116.26 PK			6.14	7.03	11.38	21
2	5451.94	60.72 PK	74	-13.28	-51.91	-47.18	11.38	-34.54
3	#5464.28	60.49 PK	68.26	-7.77	-52.02	-47.45	11.38	-34.77
4	*5579.03	106.94 AV			-2.7	-2.72	11.38	11.68
5	5459.41	50.09 AV	54	-3.91	-59.57	-59.55	11.38	-45.17

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

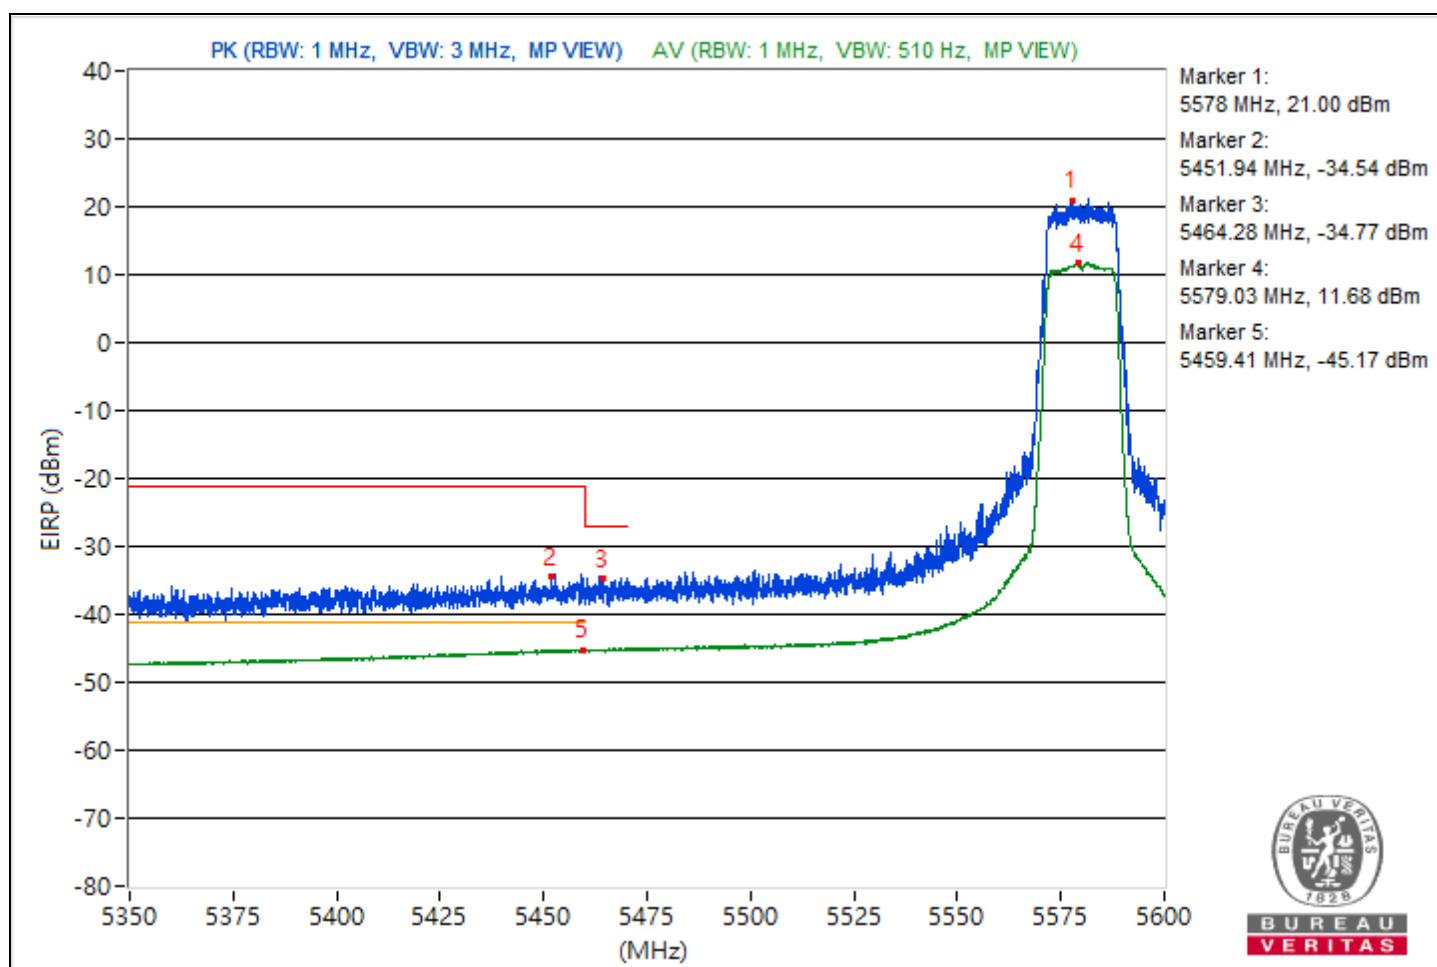


RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5699.25	115.54			7.35	3.69	11.38	20.28
2	#5725.57	63.28	68.26	-4.98	-45.24	-47.9	11.38	-31.98

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

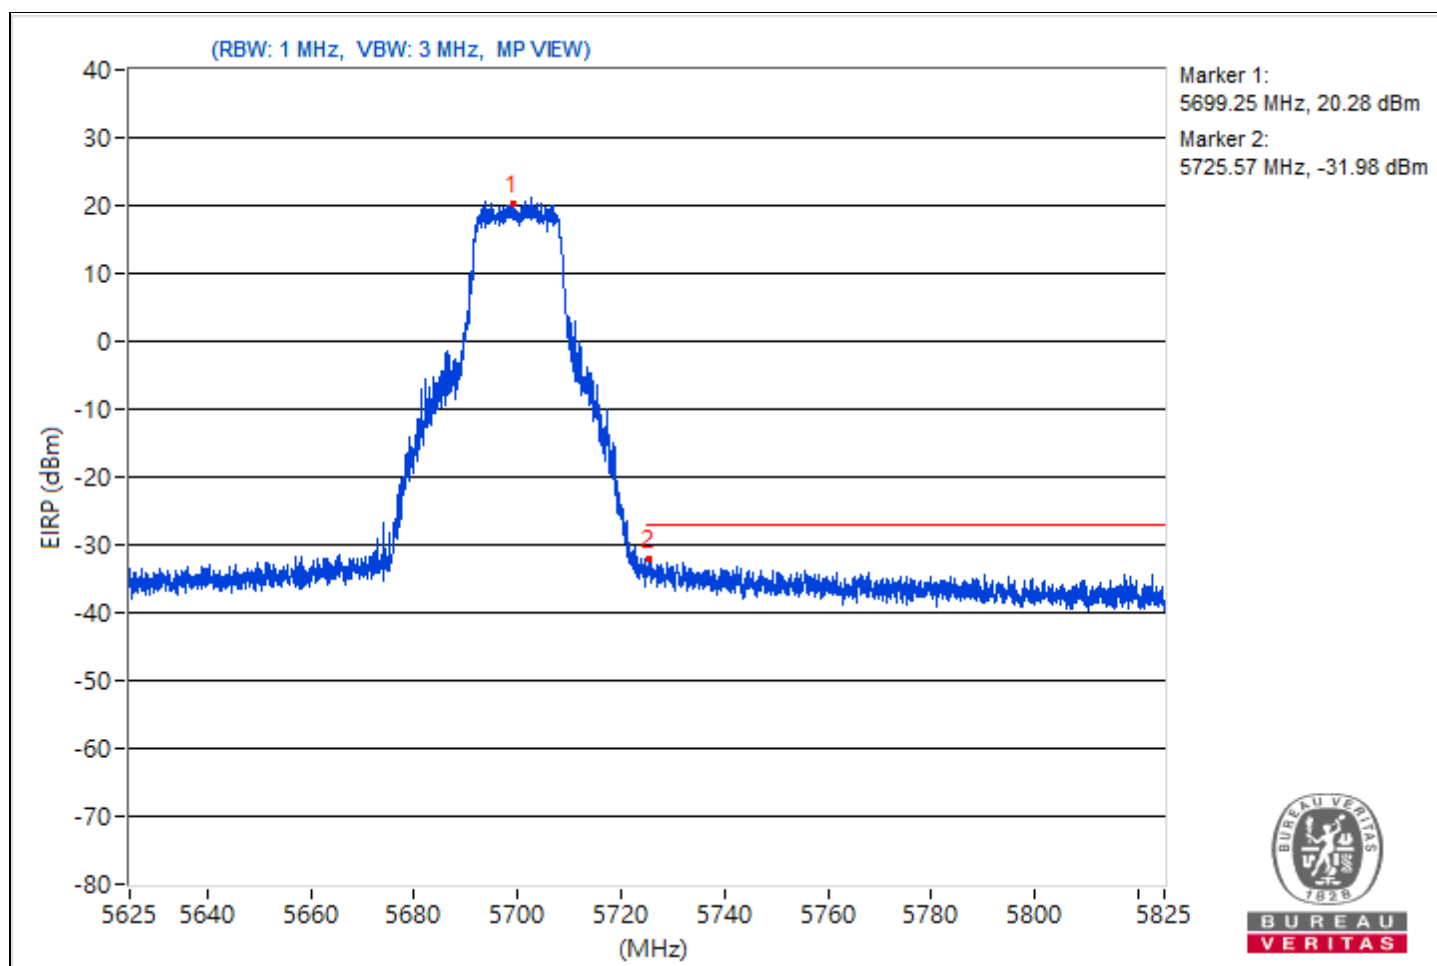


RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5724.41	116.01			3.9	7.92	11.38	20.75
2	#5860.73	60.9	68.26	-7.36	-47.37	-50.77	11.38	-34.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

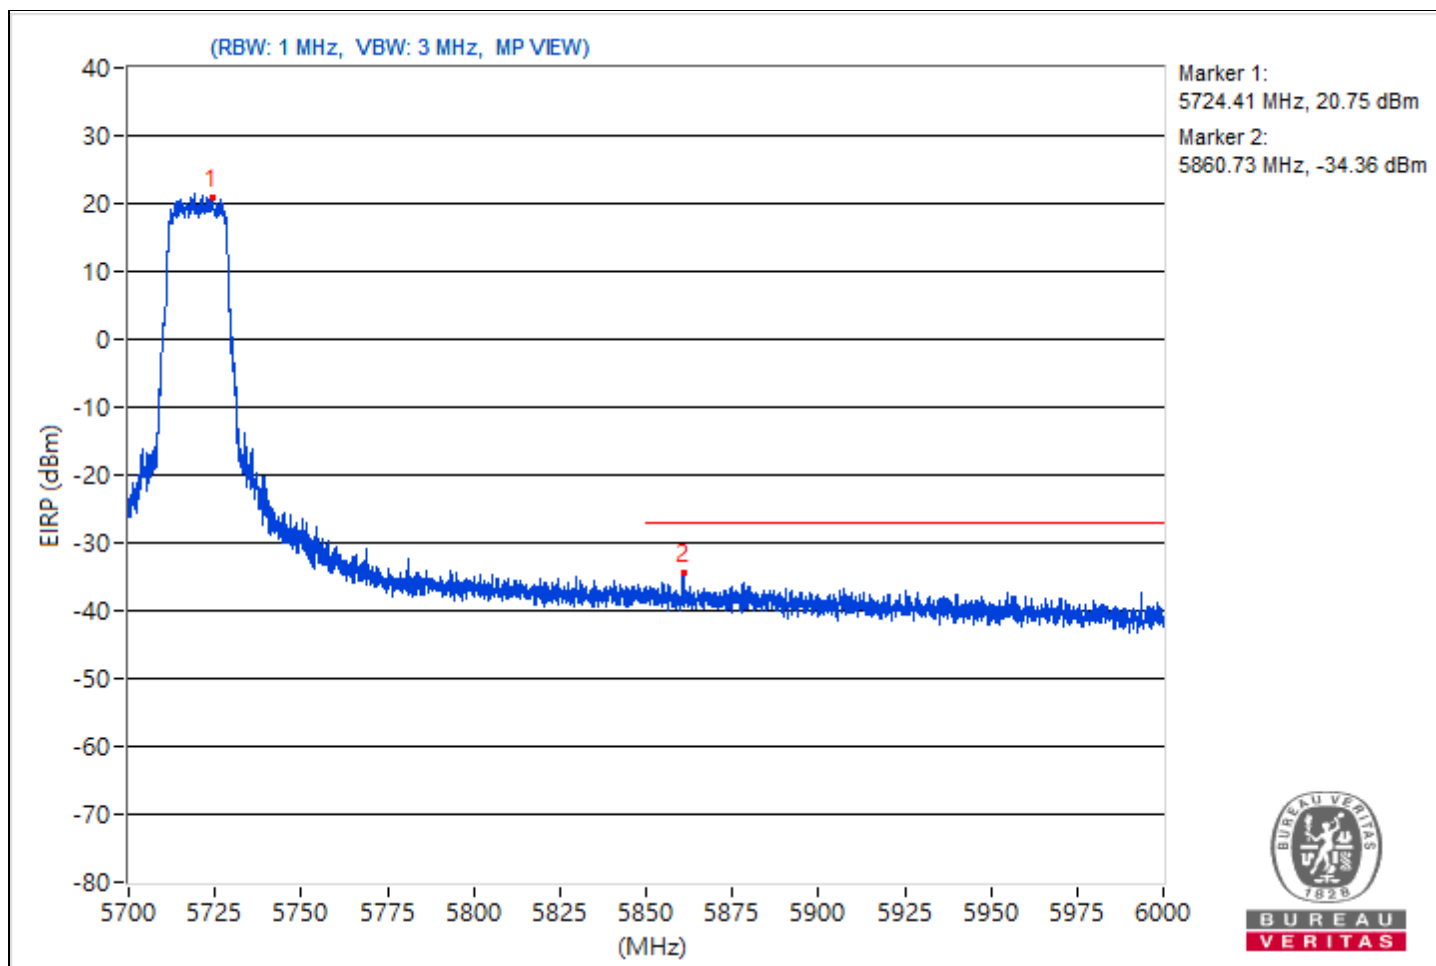


RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5741.9	117.72			8.86	7.1	11.38	22.46
2	#5646.07	64.59	68.26	-3.67	-43.96	-46.53	11.38	-30.67
3	#5649.99	65.2	68.26	-3.06	-44.44	-44.46	11.38	-30.06
4	#5718.15	85.49	110.34	-24.85	-24.36	-23.96	11.38	-9.77
5	#5722.66	91.4	116.93	-25.53	-21.91	-16.3	11.38	-3.86
6	#5854.83	62.22	111.24	-49.02	-47.2	-47.68	11.38	-33.04
7	#5873.36	63.4	105.72	-42.32	-46.8	-45.76	11.38	-31.86
8	#5922.4	60.82	70.18	-9.36	-47.81	-50.16	11.38	-34.44
9	#5930.83	60.89	68.26	-7.37	-47.99	-49.7	11.38	-34.37

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

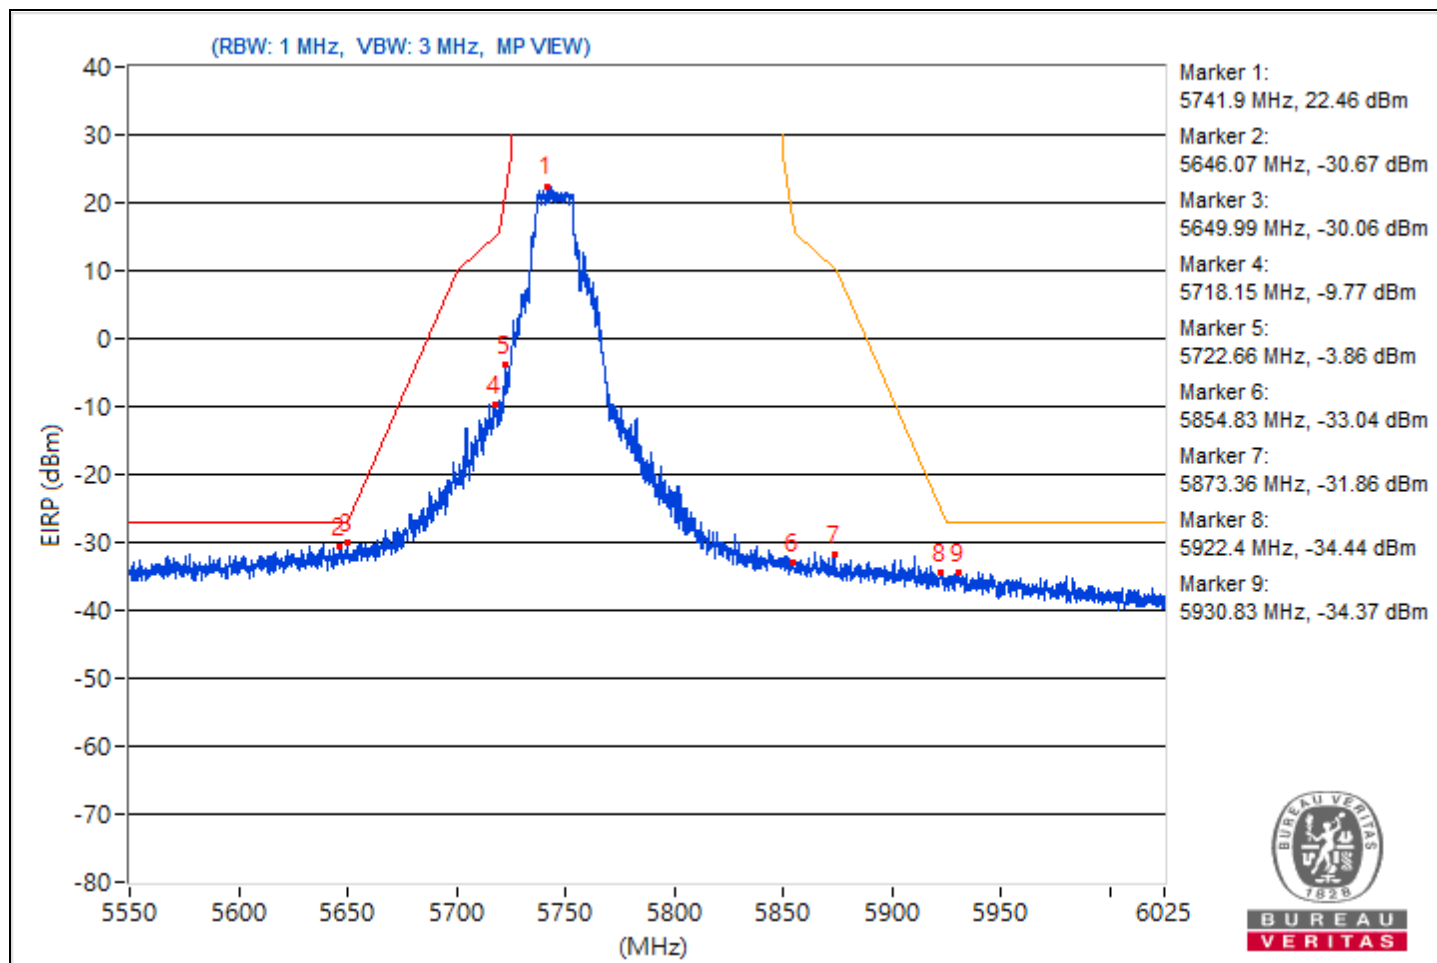


RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5791.54	118.29			7.46	9.57	11.38	23.03
2	#5647.26	64.48	68.26	-3.78	-43.31	-48.48	11.38	-30.78
3	#5651.53	64.36	69.39	-5.03	-45.46	-45.13	11.38	-30.9
4	#5704.85	69.26	106.62	-37.36	-38.91	-42.67	11.38	-26
5	#5720.05	71.46	110.97	-39.51	-39.47	-37.2	11.38	-23.8
6	#5854.71	69.28	111.52	-42.24	-40.27	-40.47	11.38	-25.98
7	#5865.76	67.23	107.85	-40.62	-42.9	-41.99	11.38	-28.03
8	#5922.04	63.16	70.45	-7.29	-44.84	-49.19	11.38	-32.1
9	#5938.31	63.41	68.26	-4.85	-44.41	-49.47	11.38	-31.85

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

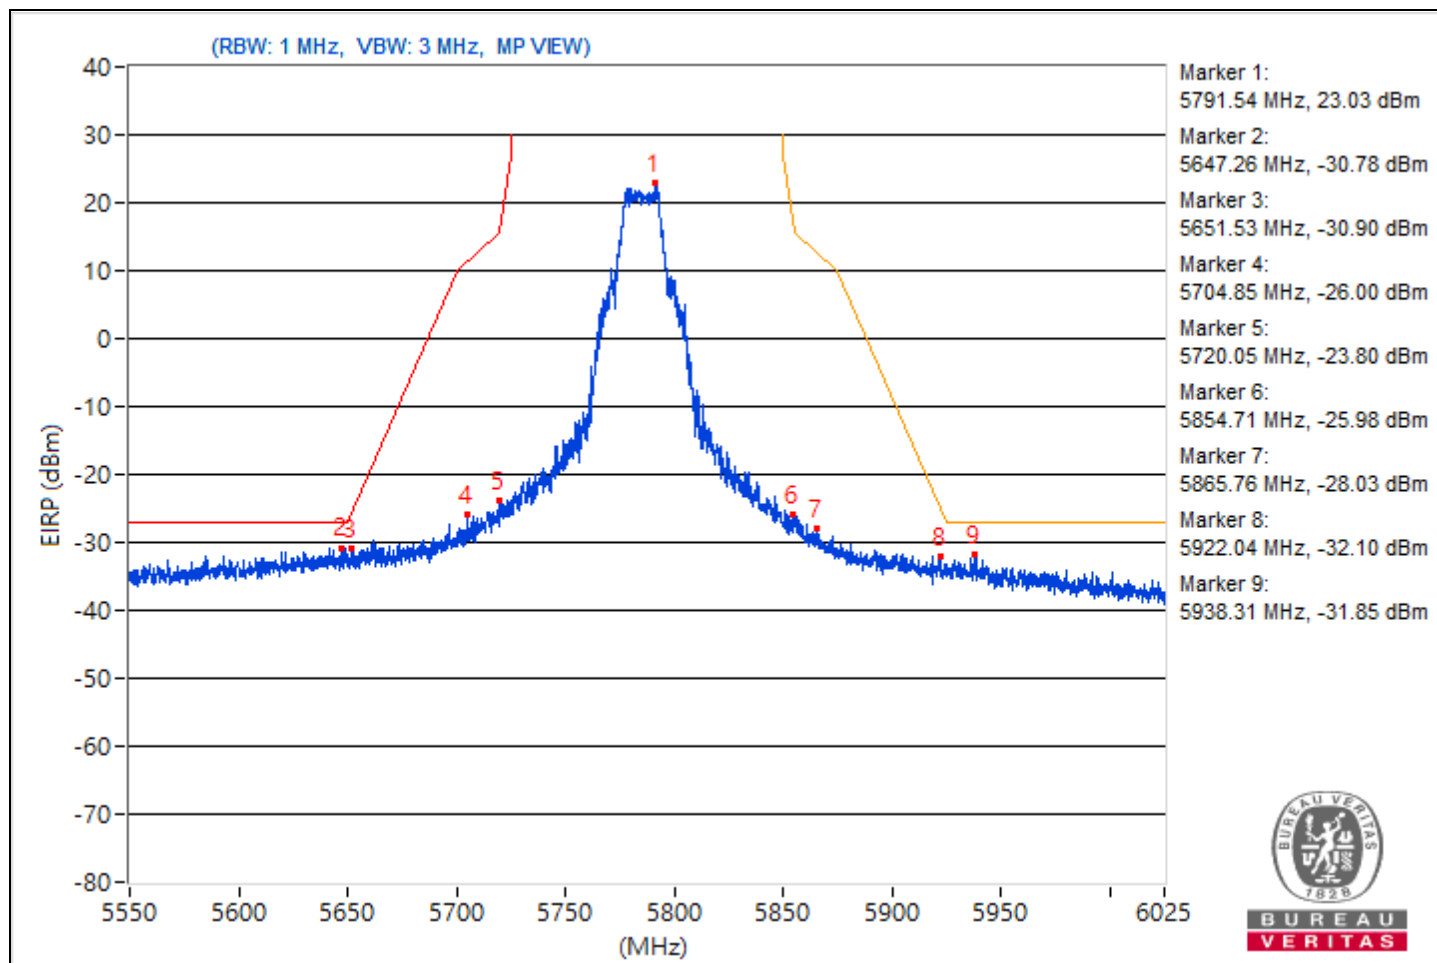


RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5832.27	117.36			7.27	8.1	11.38	22.1
2	#5643.22	62.84	68.26	-5.42	-45.5	-48.71	11.38	-32.42
3	#5650.23	62.41	68.43	-6.02	-47.76	-46.77	11.38	-32.85
4	#5701.64	64.02	105.72	-41.7	-46.89	-44.66	11.38	-31.24
5	#5720.05	63.71	110.97	-47.26	-45.8	-46.08	11.38	-31.55
6	#5854.71	86.51	111.52	-25.01	-21.81	-25.05	11.38	-8.75
7	#5855.31	88.34	110.77	-22.43	-19.74	-23.79	11.38	-6.92
8	#5922.87	64.6	69.83	-5.23	-43.84	-46.74	11.38	-30.66
9	#5926.91	64.37	68.26	-3.89	-44.21	-46.7	11.38	-30.89

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

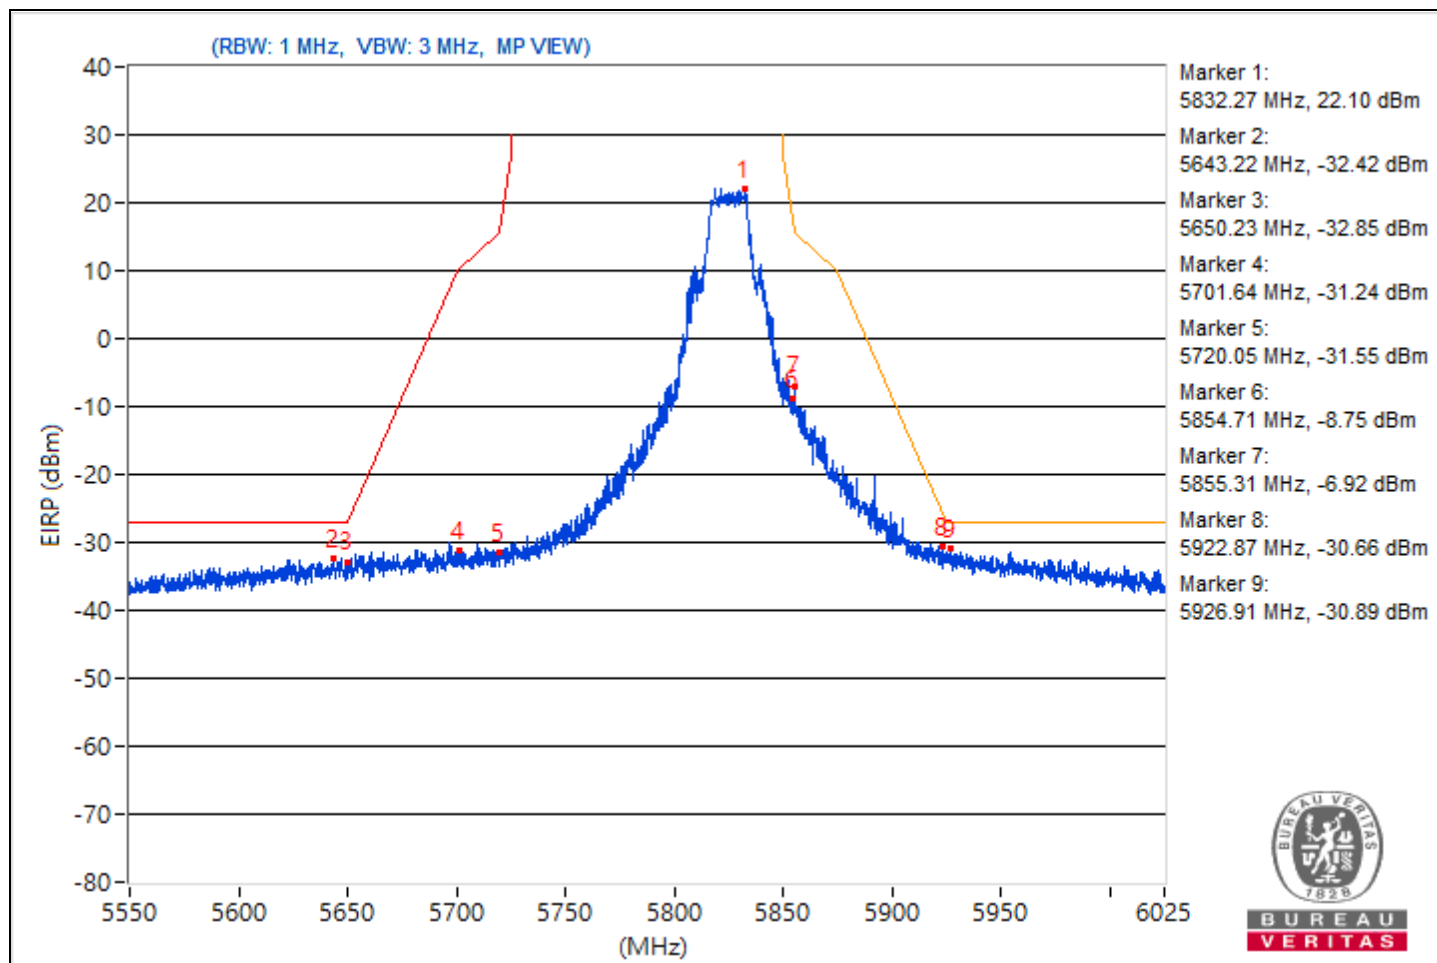


2S2T

RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5181.1	116.02 PK			9.37	9.38	8.37	20.76
2	*5181.1	109.8 AV			3.11	3.21	8.37	14.54
3	5149.95	61.36 PK	74	-12.64	-46.36	-44.42	8.37	-33.9
4	5149.95	52.89 AV	54	-1.11	-53.9	-53.6	8.37	-42.37

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

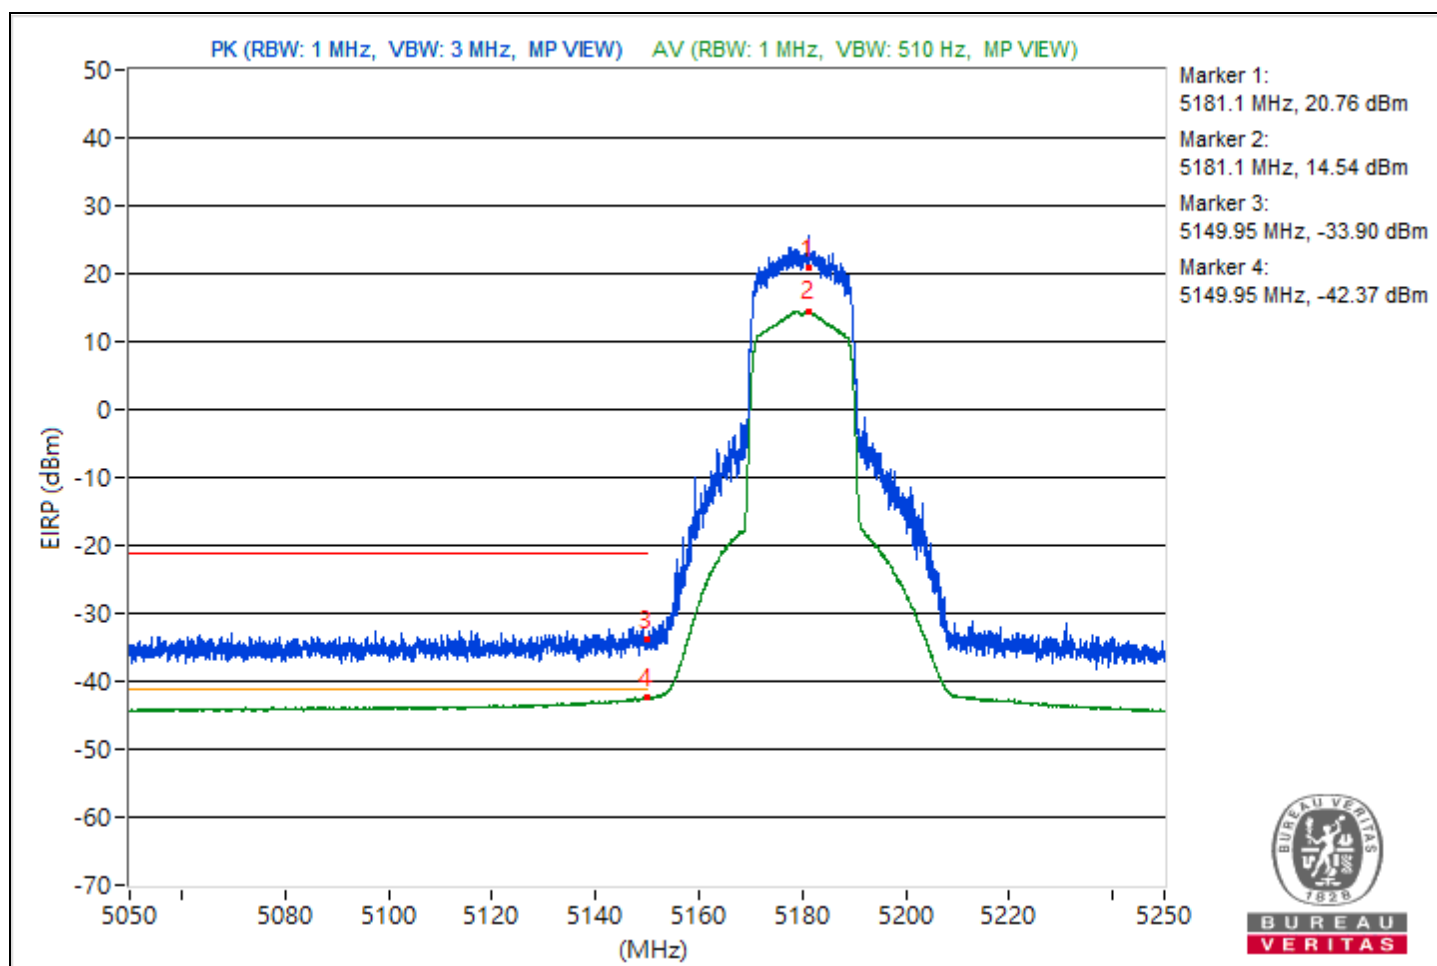


RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5200.98	118.33 PK			13.17	9.44	8.37	23.07
2	*5200.98	109.77 AV			3.17	3.08	8.37	14.51
3	5149.05	59.99 PK	74	-14.01	-47.02	-46.32	8.37	-35.27
4	5149.05	51.59 AV	54	-2.41	-54.77	-55.35	8.37	-43.67

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

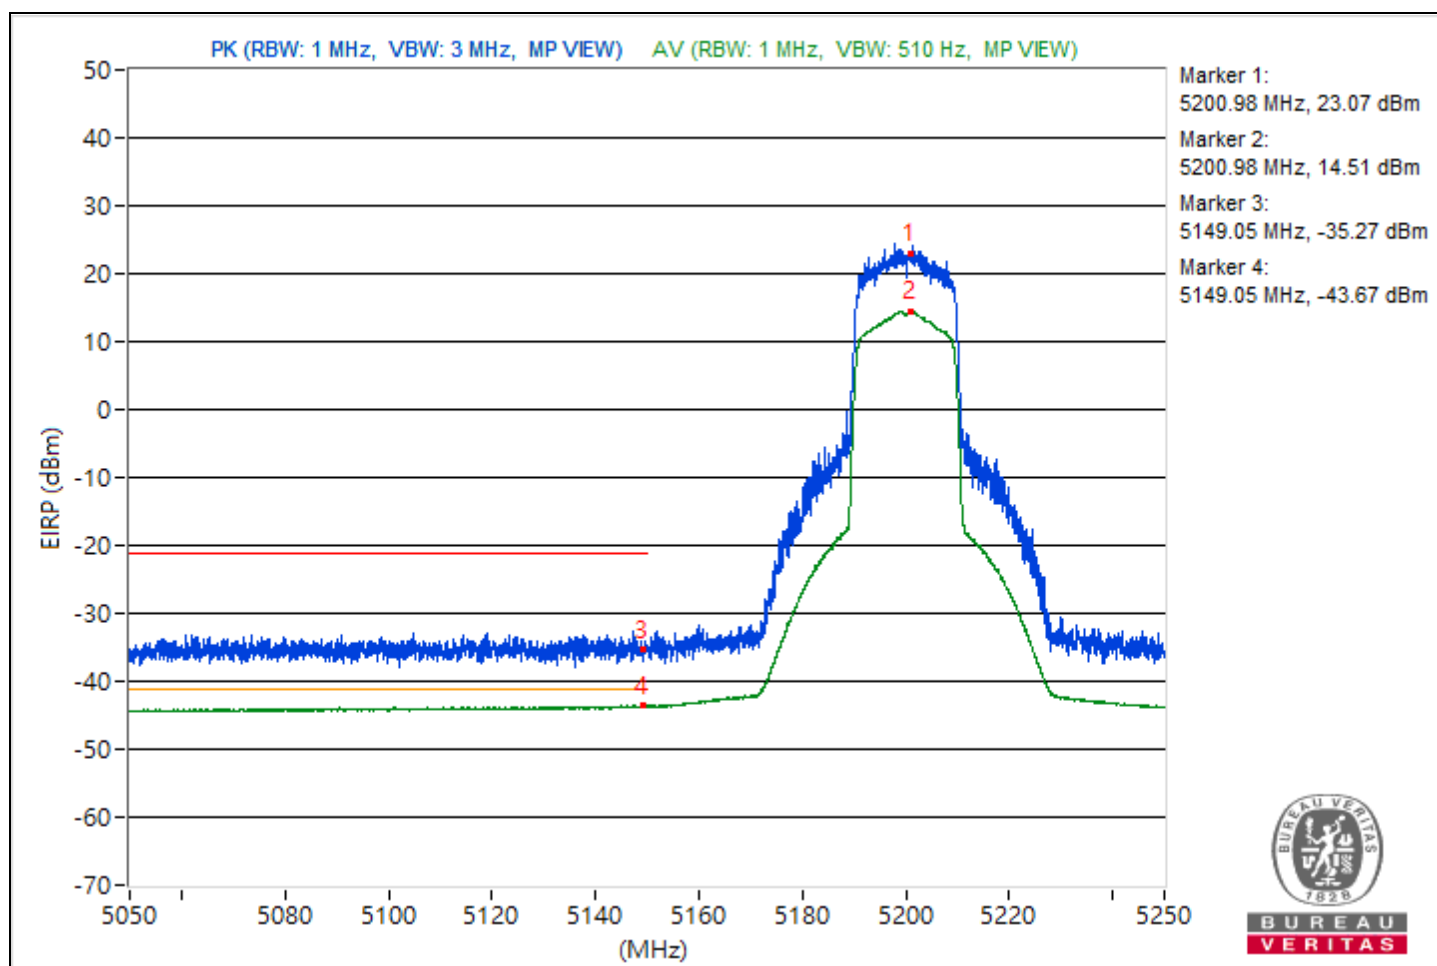


RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5239.15	117.87 PK			10.64	11.75	8.37	22.61
2	*5239.15	110.03 AV			3.17	3.59	8.37	14.77
3	5097.82	60.59 PK	74	-13.41	-44.67	-48.1	8.37	-34.67
4	5097.82	51.18 AV	54	-2.82	-55.18	-55.76	8.37	-44.08

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

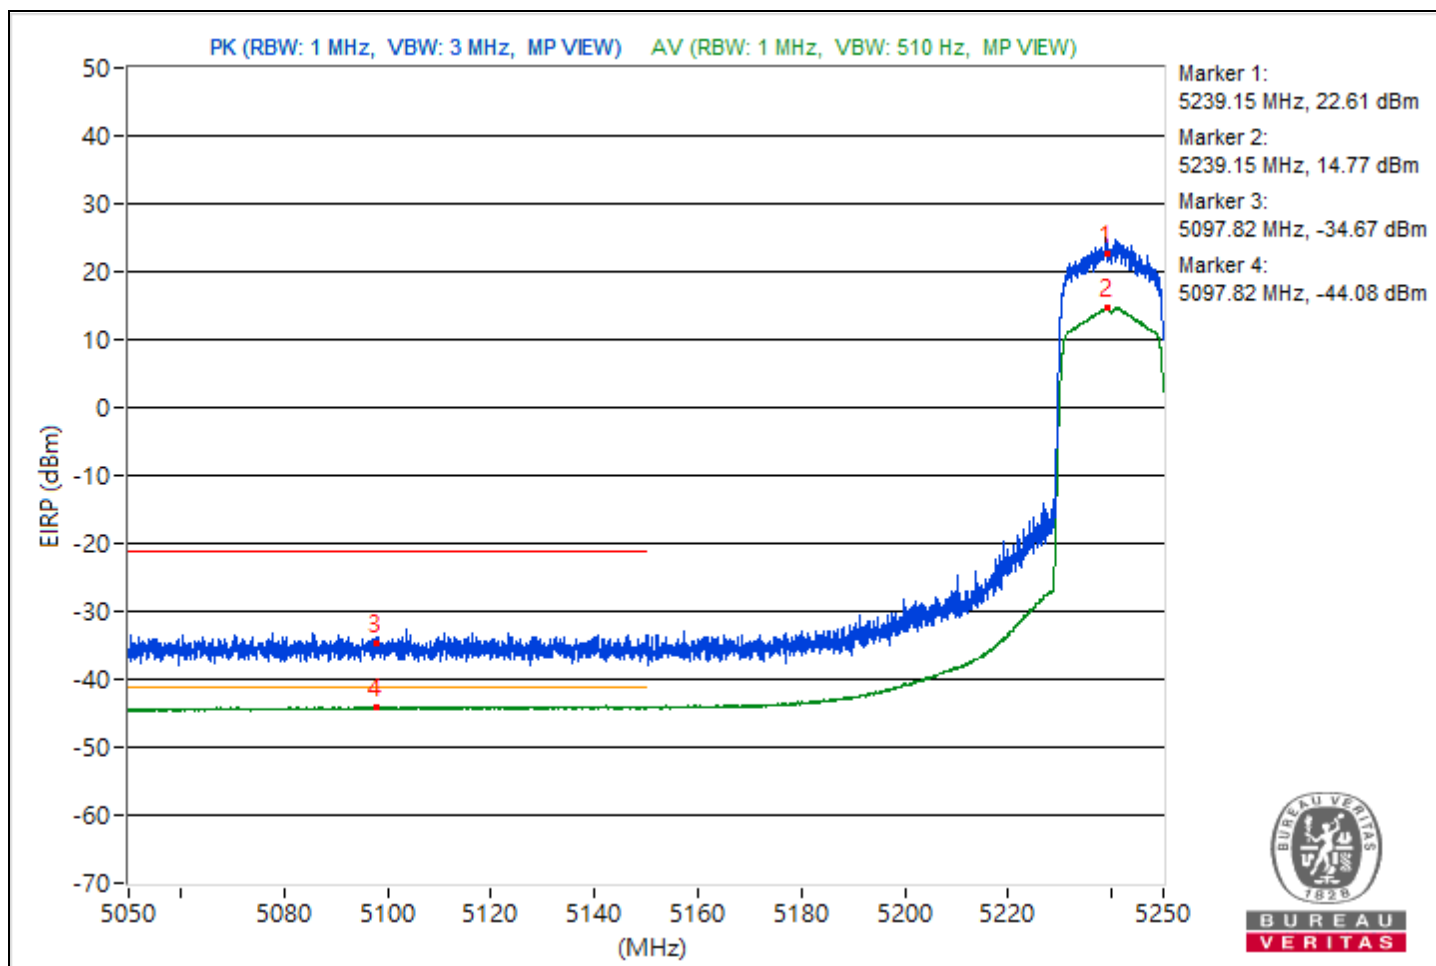


RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5261.18	117.63 PK			10.75	11.21	8.37	22.37
2	*5261.18	110.08 AV			3.41	3.46	8.37	14.82
3	5350.77	59.41 PK	74	-14.59	-47.51	-46.97	8.37	-35.85
4	5350.77	50.13 AV	54	-3.87	-56.6	-56.43	8.37	-45.13

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

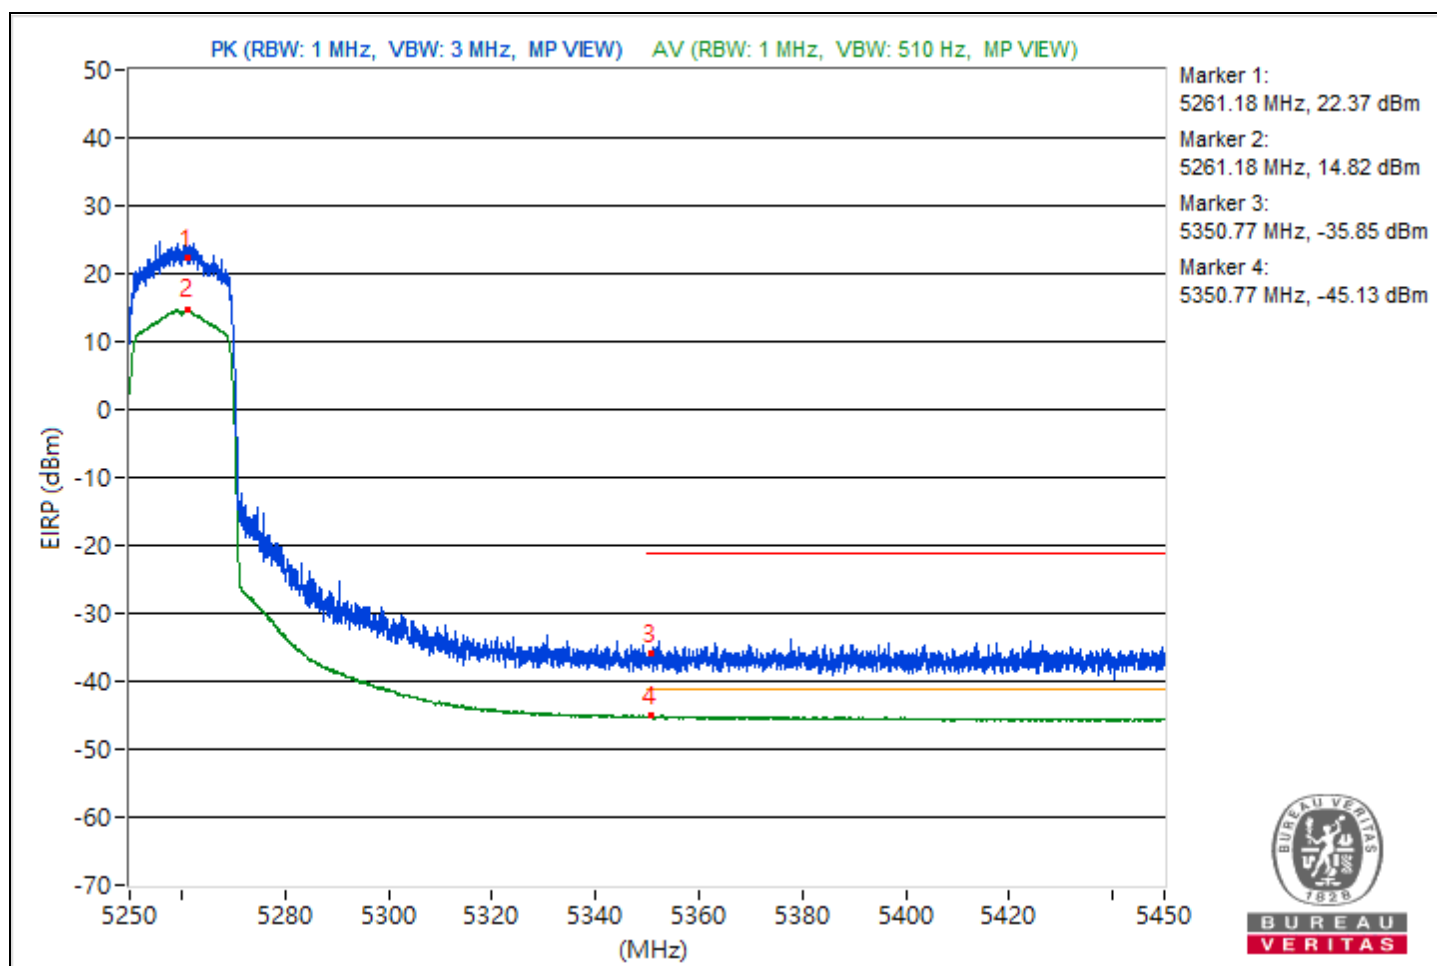


RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5298.98	117.18 PK			9.52	11.36	8.37	21.92
2	*5298.98	109.63 AV			3.04	2.94	8.37	14.37
3	5353.43	58.51 PK	74	-15.49	-47.7	-48.61	8.37	-36.75
4	5353.43	50.48 AV	54	-3.52	-56.28	-56.06	8.37	-44.78

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

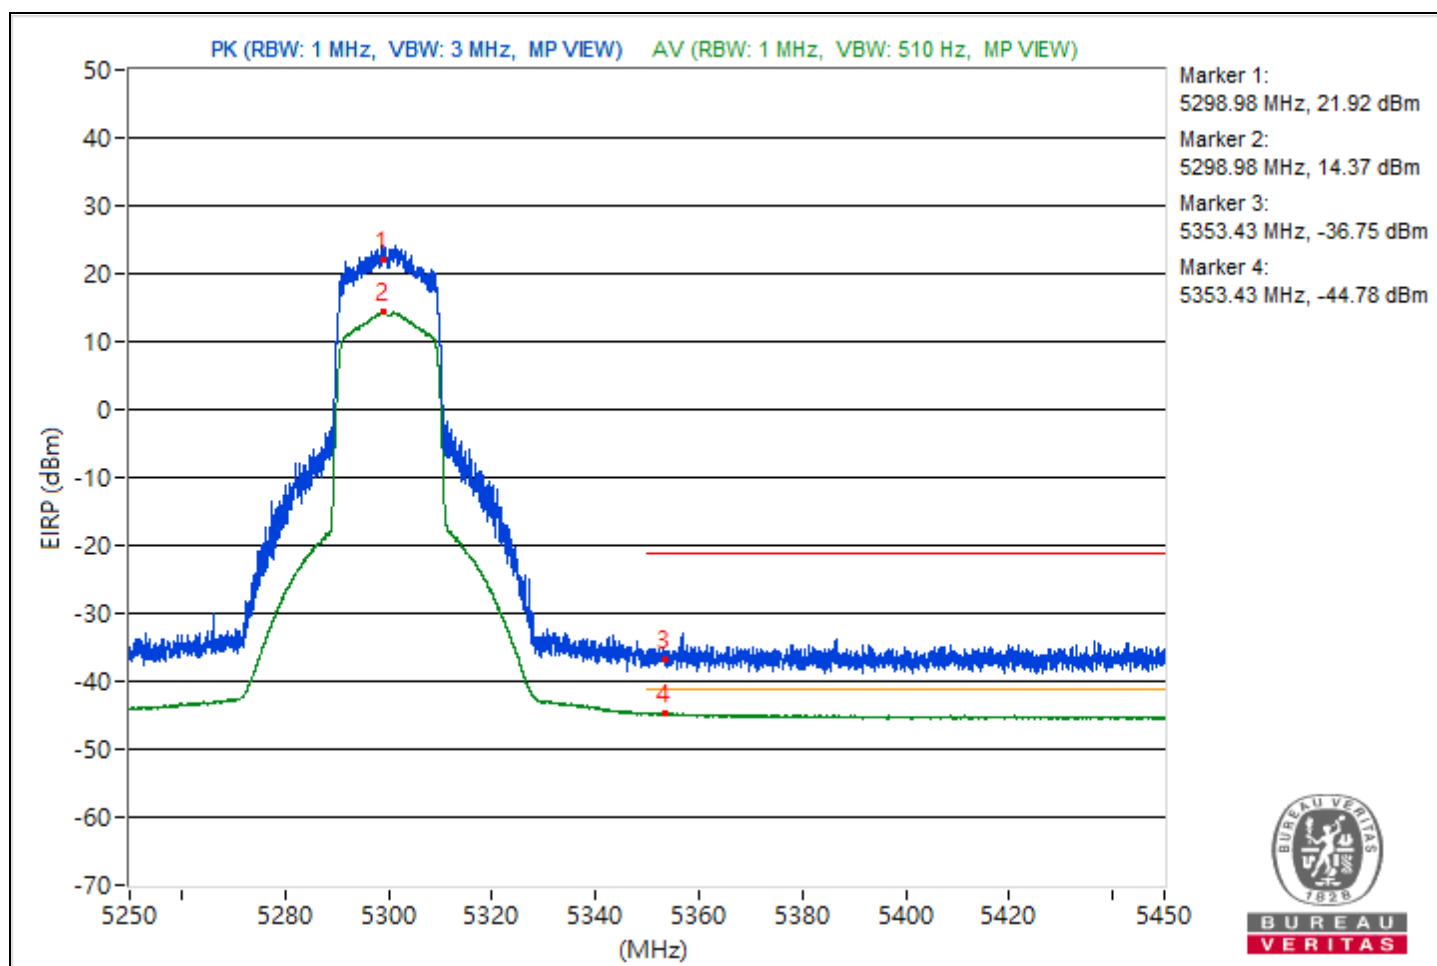


RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5318.93	116.76 PK			10.11	10.13	8.37	21.5
2	*5318.93	109.75 AV			3.24	2.97	8.37	14.49
3	5350.07	60.81 PK	74	-13.19	-44.99	-46.88	8.37	-34.45
4	5350.07	52 AV	54	-2	-54.44	-54.84	8.37	-43.26

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

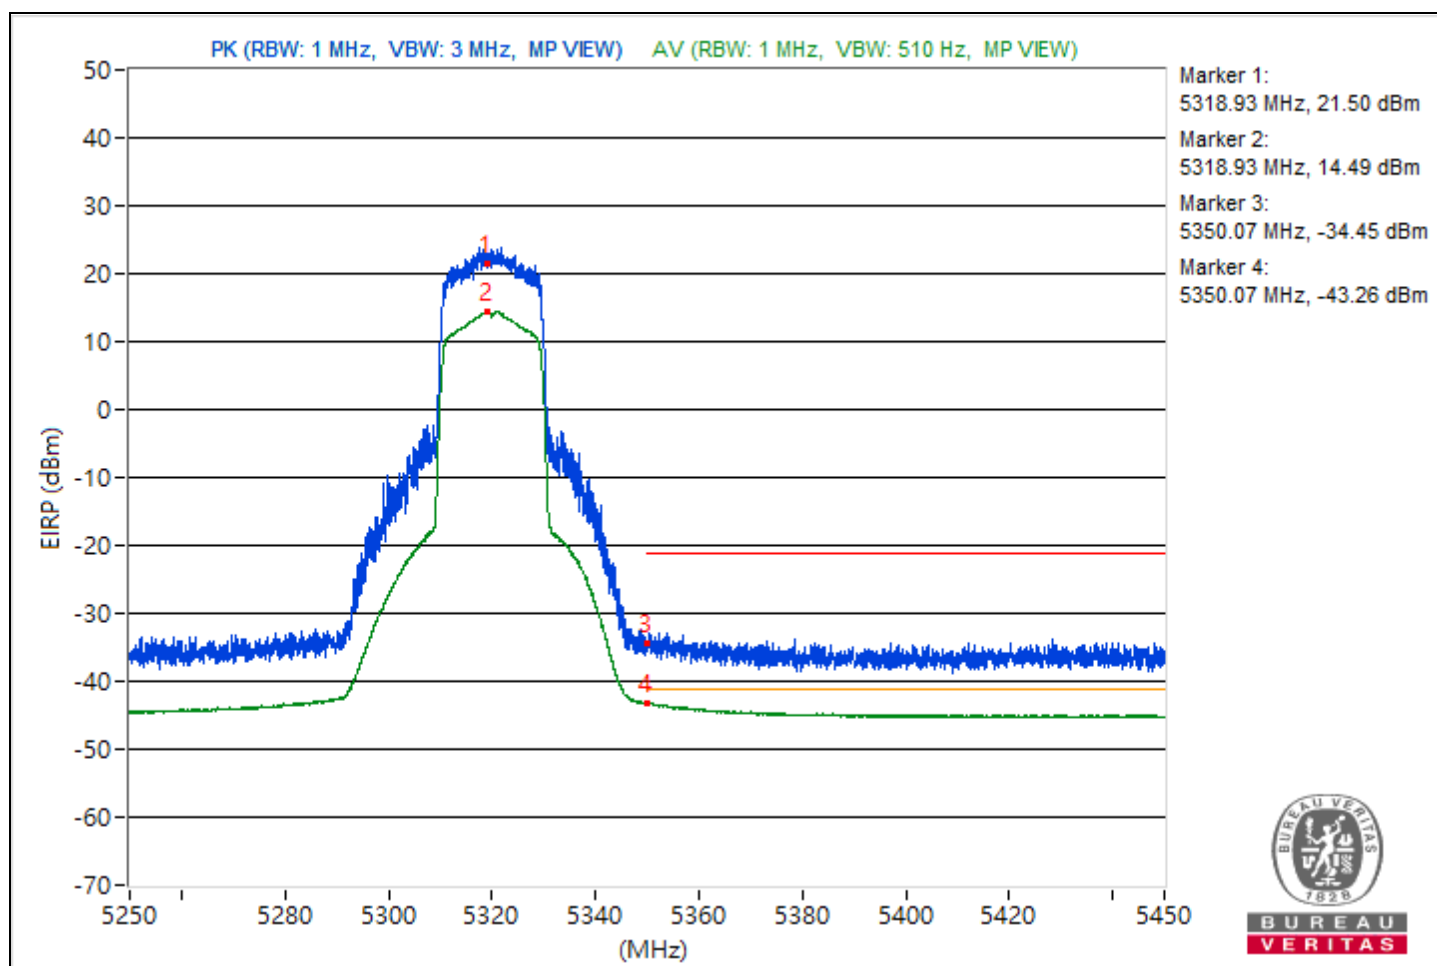


RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5500.78	119.52 PK			13.26	12.47	8.37	24.26
2	5452.12	62.21 PK	74	-11.79	-45.68	-43.47	8.37	-33.05
3	#5466.06	62.85 PK	68.26	-5.41	-44.87	-42.94	8.37	-32.41
4	*5498.87	109.35 AV			2.36	3.03	8.37	14.09
5	5459.97	51.48 AV	54	-2.52	-55.22	-55.1	8.37	-43.78

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

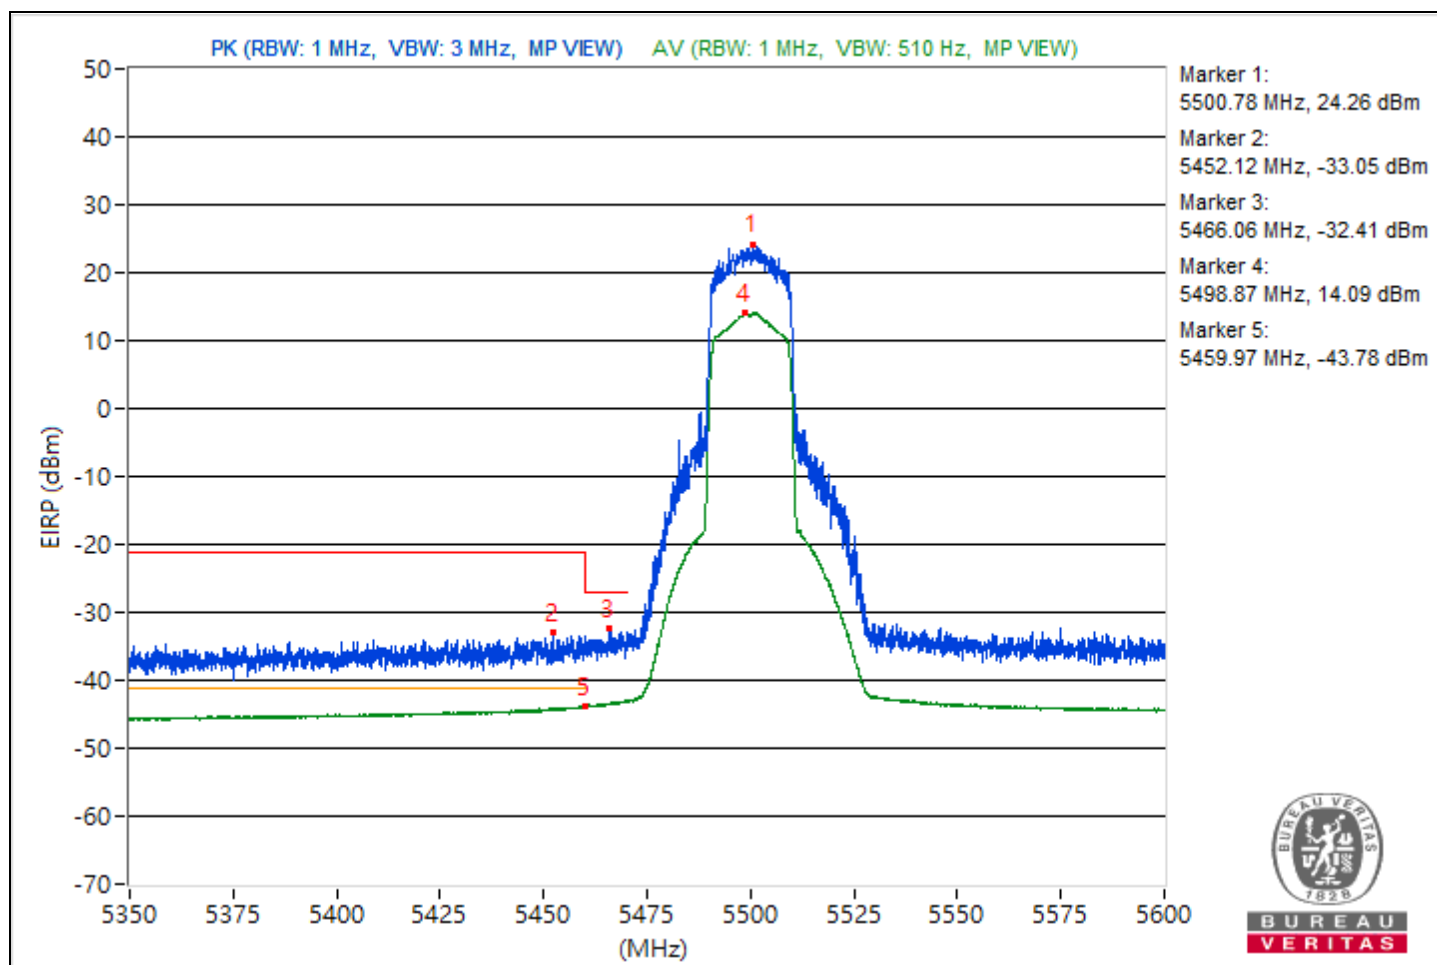


RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5581.12	119.68 PK			12.23	13.72	8.37	24.42
2	5438.19	61.32 PK	74	-12.68	-48.81	-43.41	8.37	-33.94
3	#5461.78	60.83 PK	68.26	-7.43	-49.54	-43.84	8.37	-34.43
4	*5579.06	109.89 AV			3.06	3.43	8.37	14.63
5	5456.12	50.34 AV	54	-3.66	-56.19	-56.42	8.37	-44.92

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

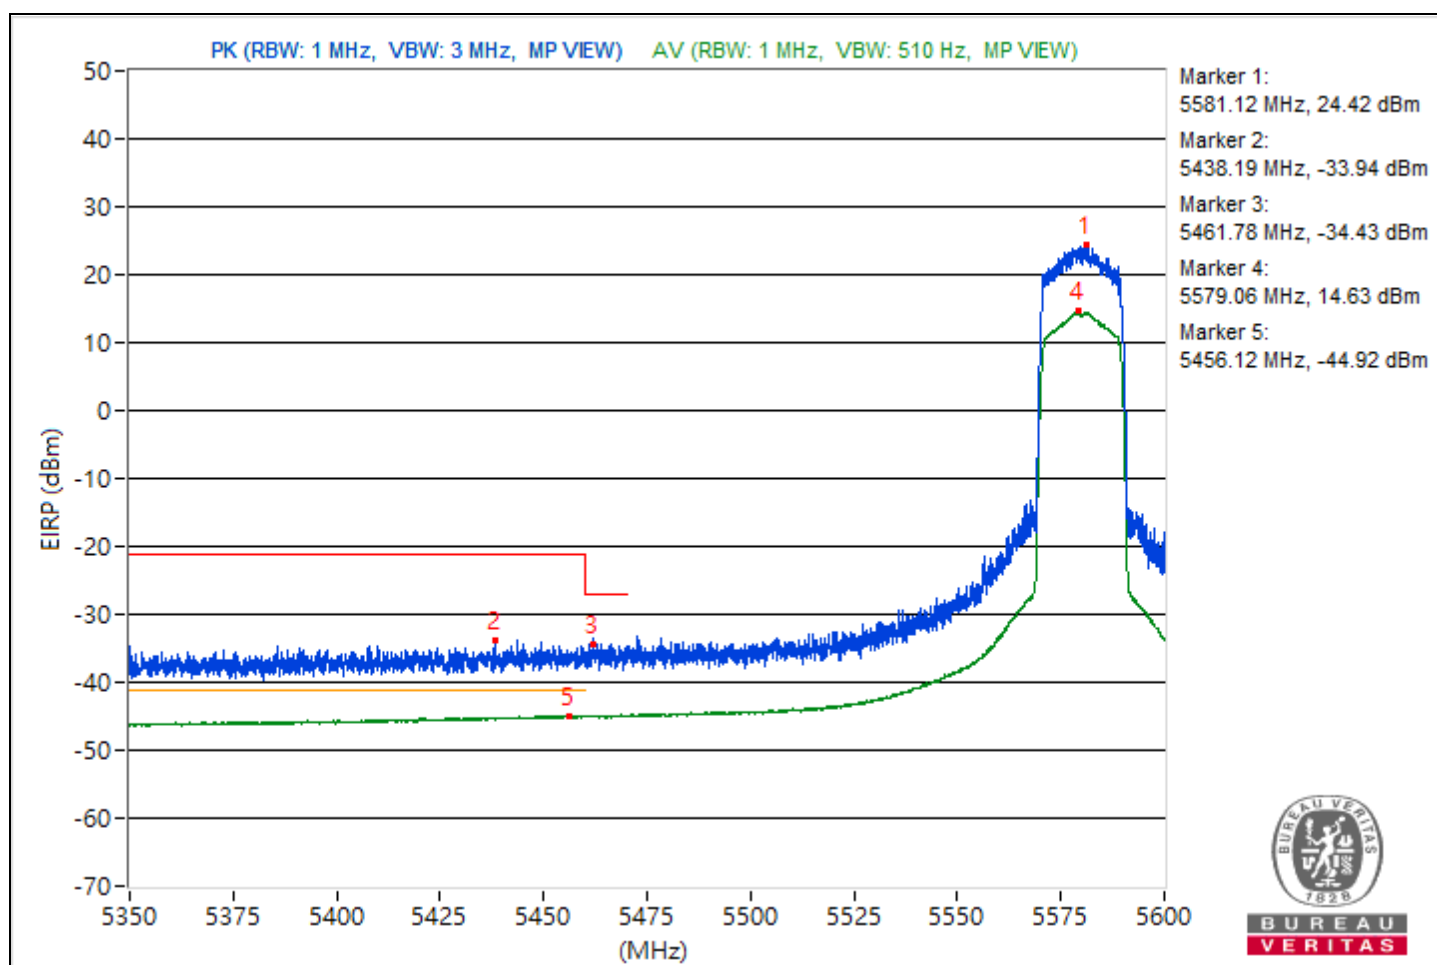


RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5701.27	121.02			14.25	14.5	8.37	25.76
2	#5726.93	64.46	68.26	-3.8	-40.67	-44.49	8.37	-30.8

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

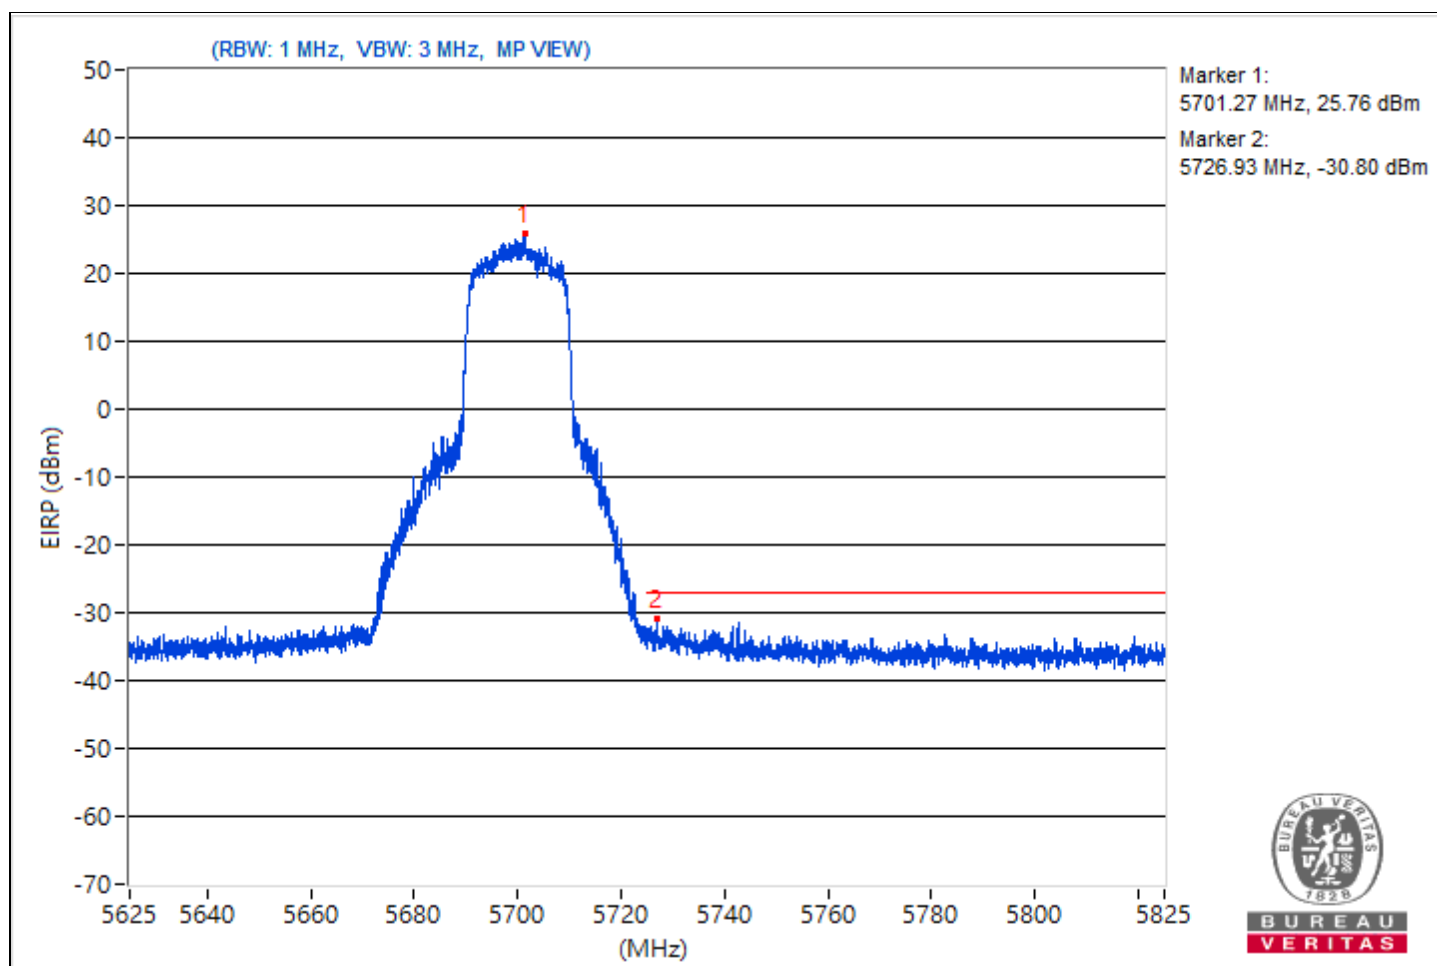


RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5721.11	120.76			15.11	12.83	8.37	25.5
2	#5852.77	60.95	68.26	-7.31	-43.9	-48.8	8.37	-34.31

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

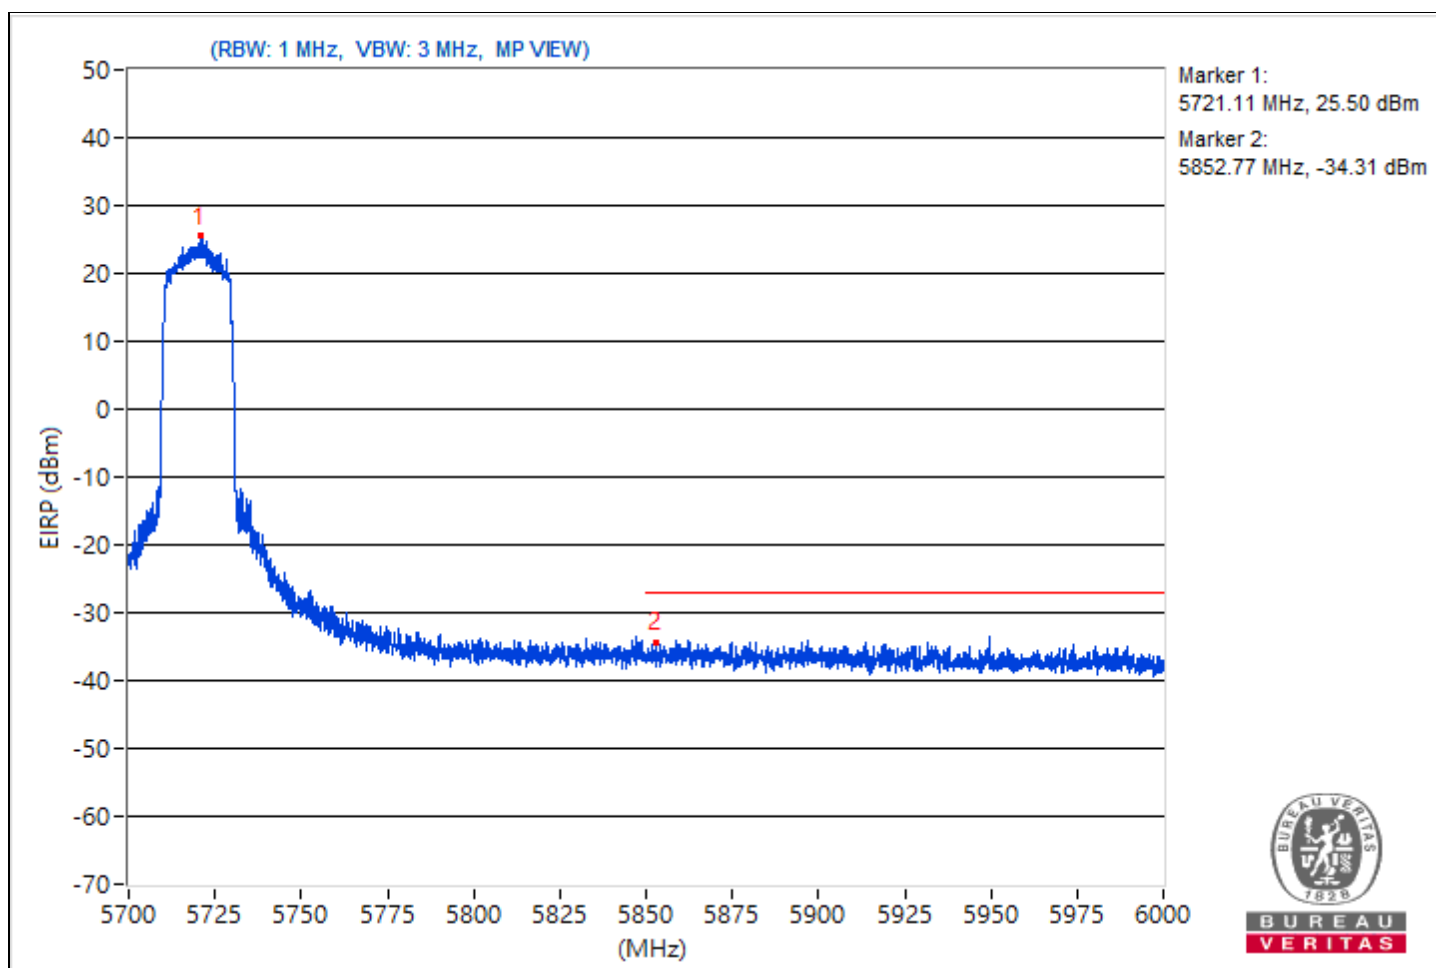


RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5743.68	126.84			19.83	20.54	8.37	31.58
2	#5622.79	63.6	68.26	-4.66	-44.44	-41.99	8.37	-31.66
3	#5650.58	63.38	68.69	-5.31	-43.33	-43.19	8.37	-31.88
4	#5719.69	86.62	110.77	-24.15	-19.13	-21.13	8.37	-8.64
5	#5724.44	94.49	120.99	-26.5	-9.63	-18.82	8.37	-0.77
6	#5854.83	62.24	111.24	-49	-44	-44.85	8.37	-33.02
7	#5873.12	61.55	105.79	-44.24	-46.2	-44.21	8.37	-33.71
8	#5924.54	60.54	68.6	-8.06	-45.48	-46.81	8.37	-34.72
9	#5952.8	61.97	68.26	-6.29	-43.91	-45.59	8.37	-33.29

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

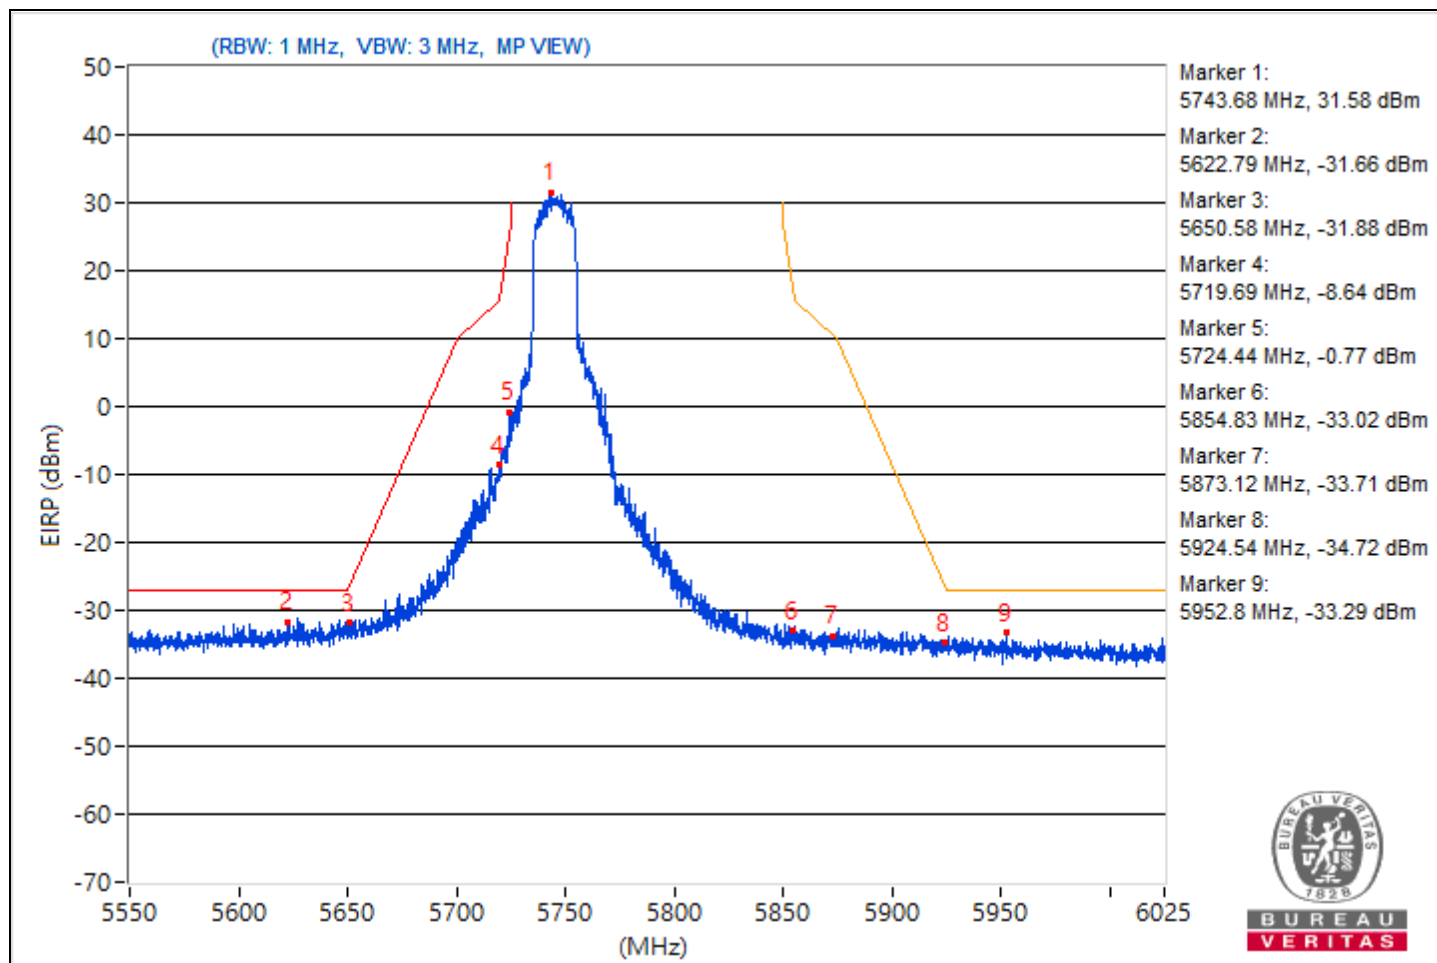


RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5787.62	126.81			20.95	19.21	8.37	31.55
2	#5647.97	64.96	68.26	-3.3	-40.69	-42.96	8.37	-30.3
3	#5649.99	62.42	68.26	-5.84	-45.31	-43.36	8.37	-32.84
4	#5706.99	65.39	107.22	-41.83	-40.05	-42.92	8.37	-29.87
5	#5720.17	66.62	111.24	-44.62	-39.7	-40.36	8.37	-28.64
6	#5854.59	66.33	111.79	-45.46	-39.5	-41.3	8.37	-28.93
7	#5871.46	64.68	106.25	-41.57	-42.88	-41.2	8.37	-30.58
8	#5922.28	61.88	70.27	-8.39	-43.74	-46.1	8.37	-33.38
9	#5976.43	62.55	68.26	-5.71	-42.9	-45.72	8.37	-32.71

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

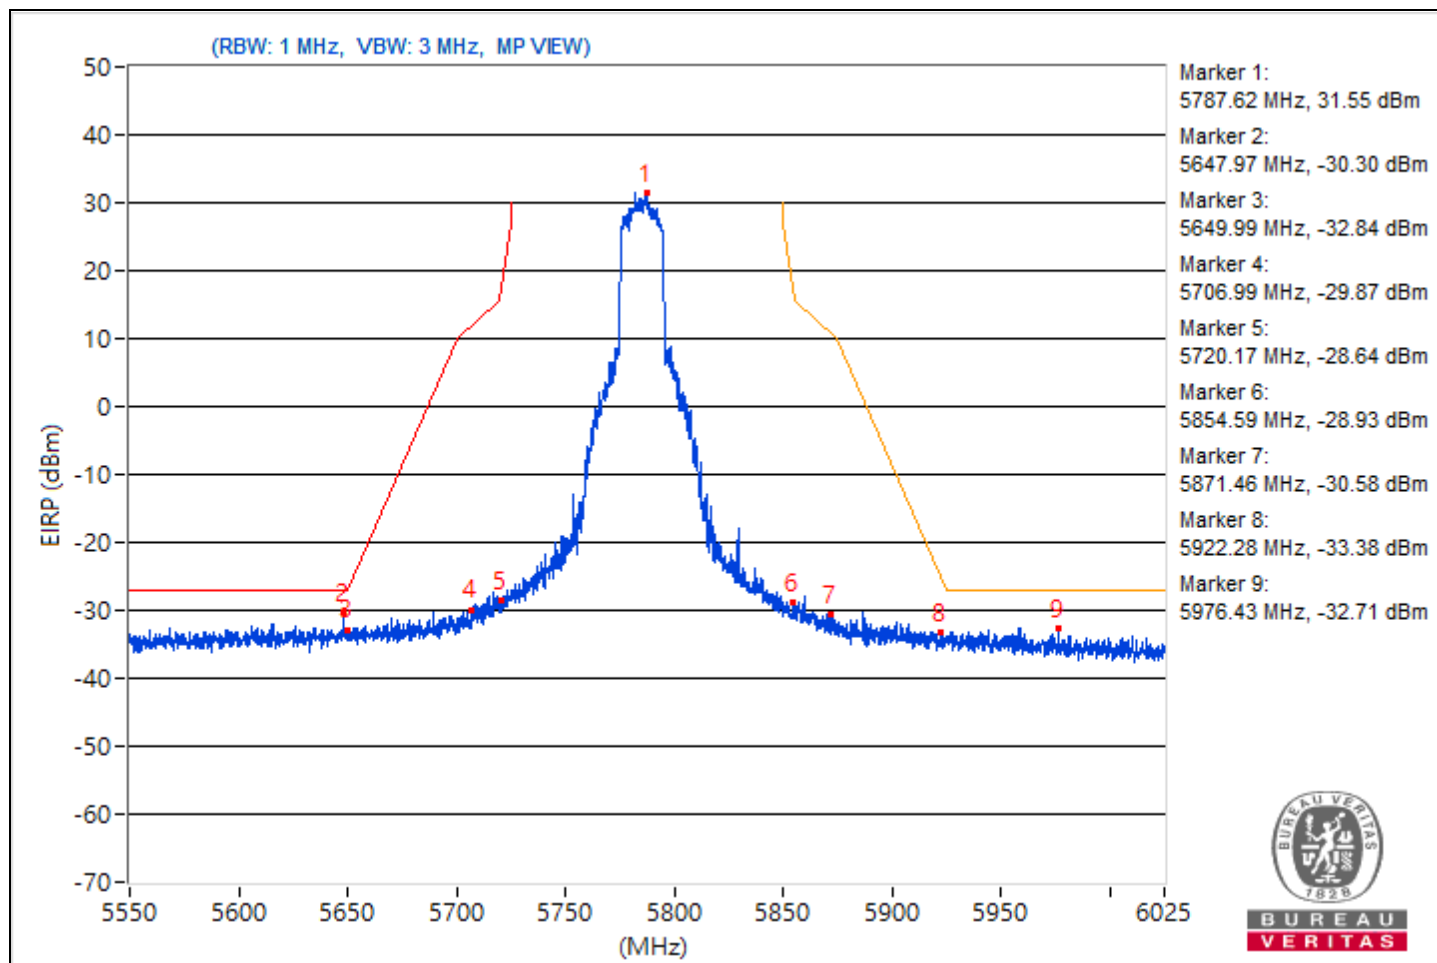


RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5826.09	126.66			19.37	20.57	8.37	31.4
2	#5618.4	61.68	68.26	-6.58	-43.52	-47.12	8.37	-33.58
3	#5649.99	61.58	68.26	-6.68	-43.9	-46.67	8.37	-33.68
4	#5701.41	62.38	105.65	-43.27	-45.24	-43.46	8.37	-32.88
5	#5720.05	61.95	110.97	-49.02	-45.03	-44.38	8.37	-33.31
6	#5854.12	85.75	112.87	-27.12	-20	-22.02	8.37	-9.51
7	#5855.07	85.28	110.84	-25.56	-19.48	-24.73	8.37	-9.98
8	#5924.42	62.84	68.69	-5.85	-43.77	-43.83	8.37	-32.42
9	#5939.62	63.39	68.26	-4.87	-41.52	-46.19	8.37	-31.87

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

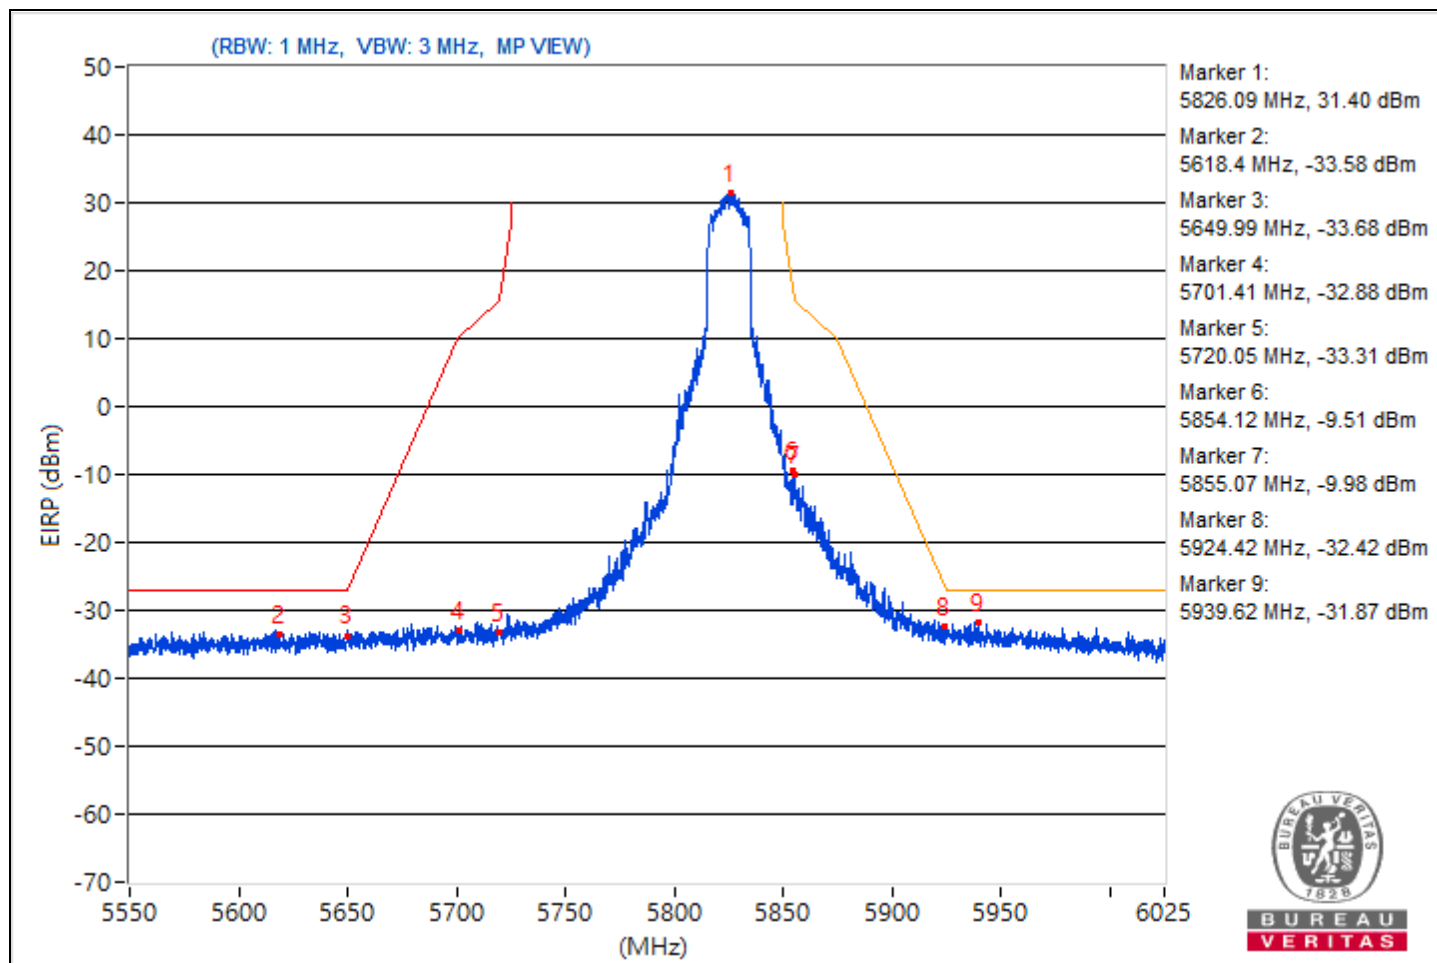


RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5188.62	116.76 PK			8.77	11.14	8.37	21.5
2	*5188.62	107.77 AV			1.15	1.11	8.37	12.51
3	5149.98	62.5 PK	74	-11.5	-44.5	-43.82	8.37	-32.76
4	5149.98	53.47 AV	54	-0.53	-52.93	-53.42	8.37	-41.79

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

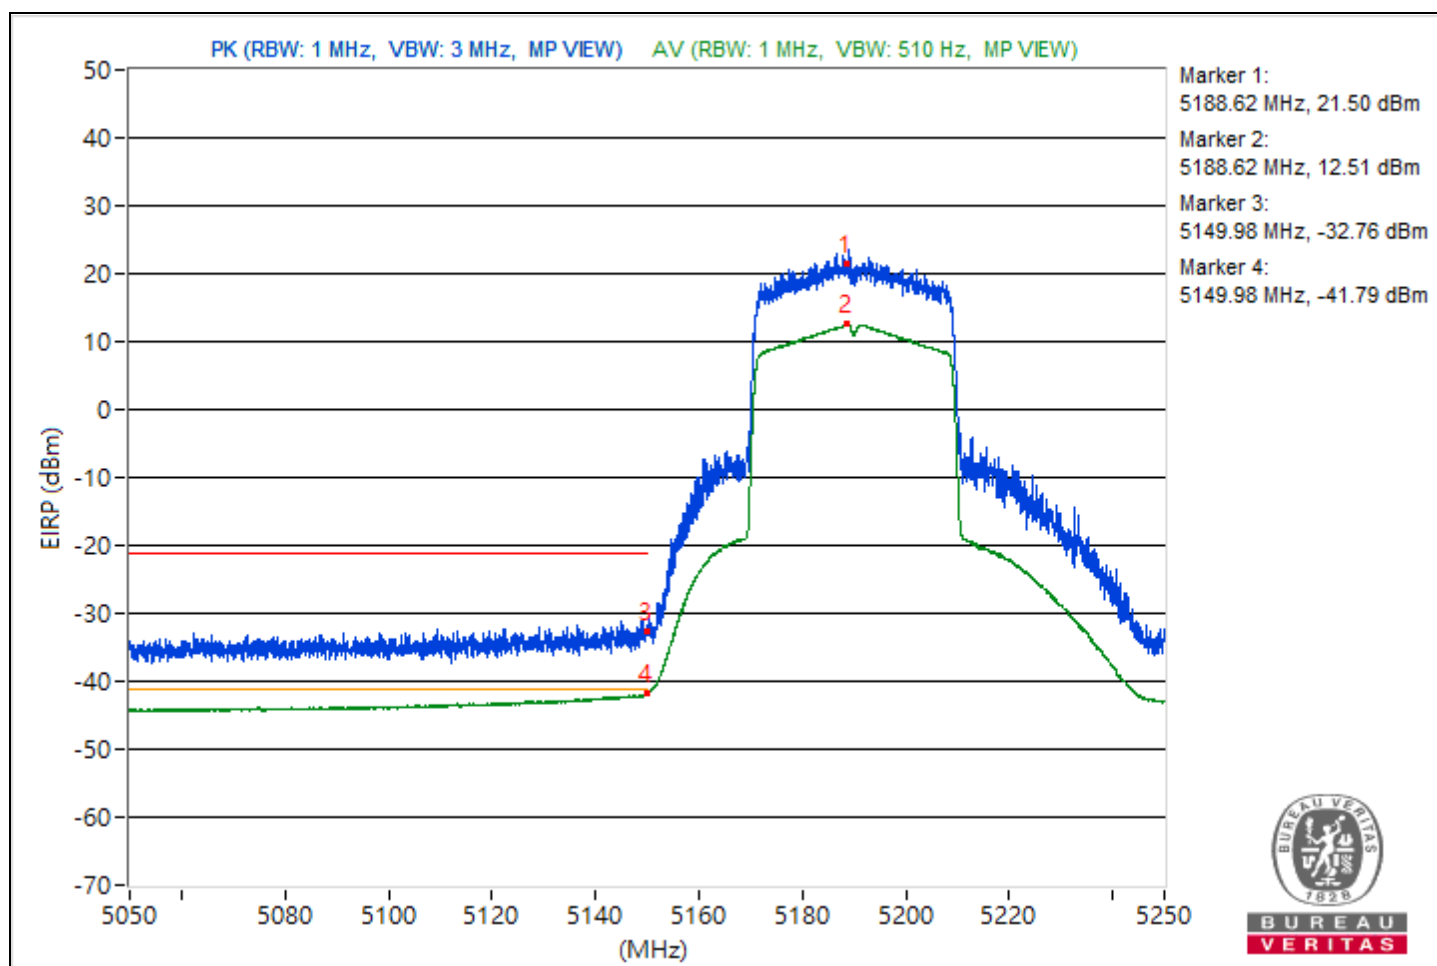


RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5228.68	116.78 PK			9.88	10.39	8.37	21.52
2	*5228.68	107.94 AV			1.28	1.32	8.37	12.68
3	5149.95	62.94 PK	74	-11.06	-43.6	-43.81	8.37	-32.32
4	5149.95	53.07 AV	54	-0.93	-53.39	-53.77	8.37	-42.19

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

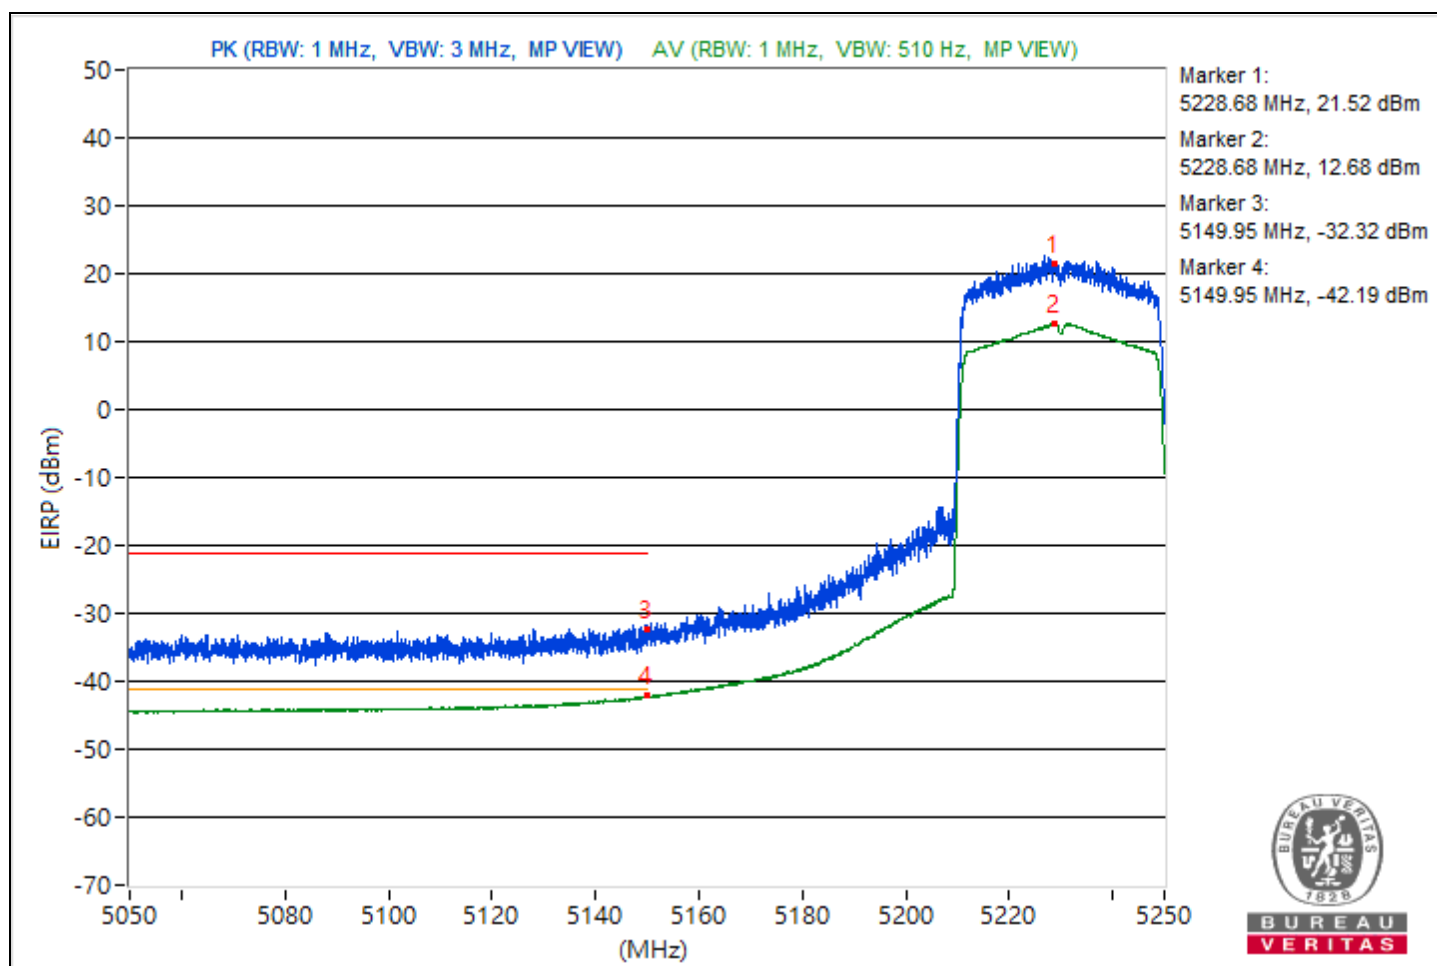


RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5271.37	116.57 PK			9.76	10.1	8.37	21.31
2	*5271.37	108.17 AV			1.58	1.47	8.37	12.91
3	5350	62.01 PK	74	-11.99	-45.73	-43.75	8.37	-33.25
4	5350	53.12 AV	54	-0.88	-53.46	-53.59	8.37	-42.14

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

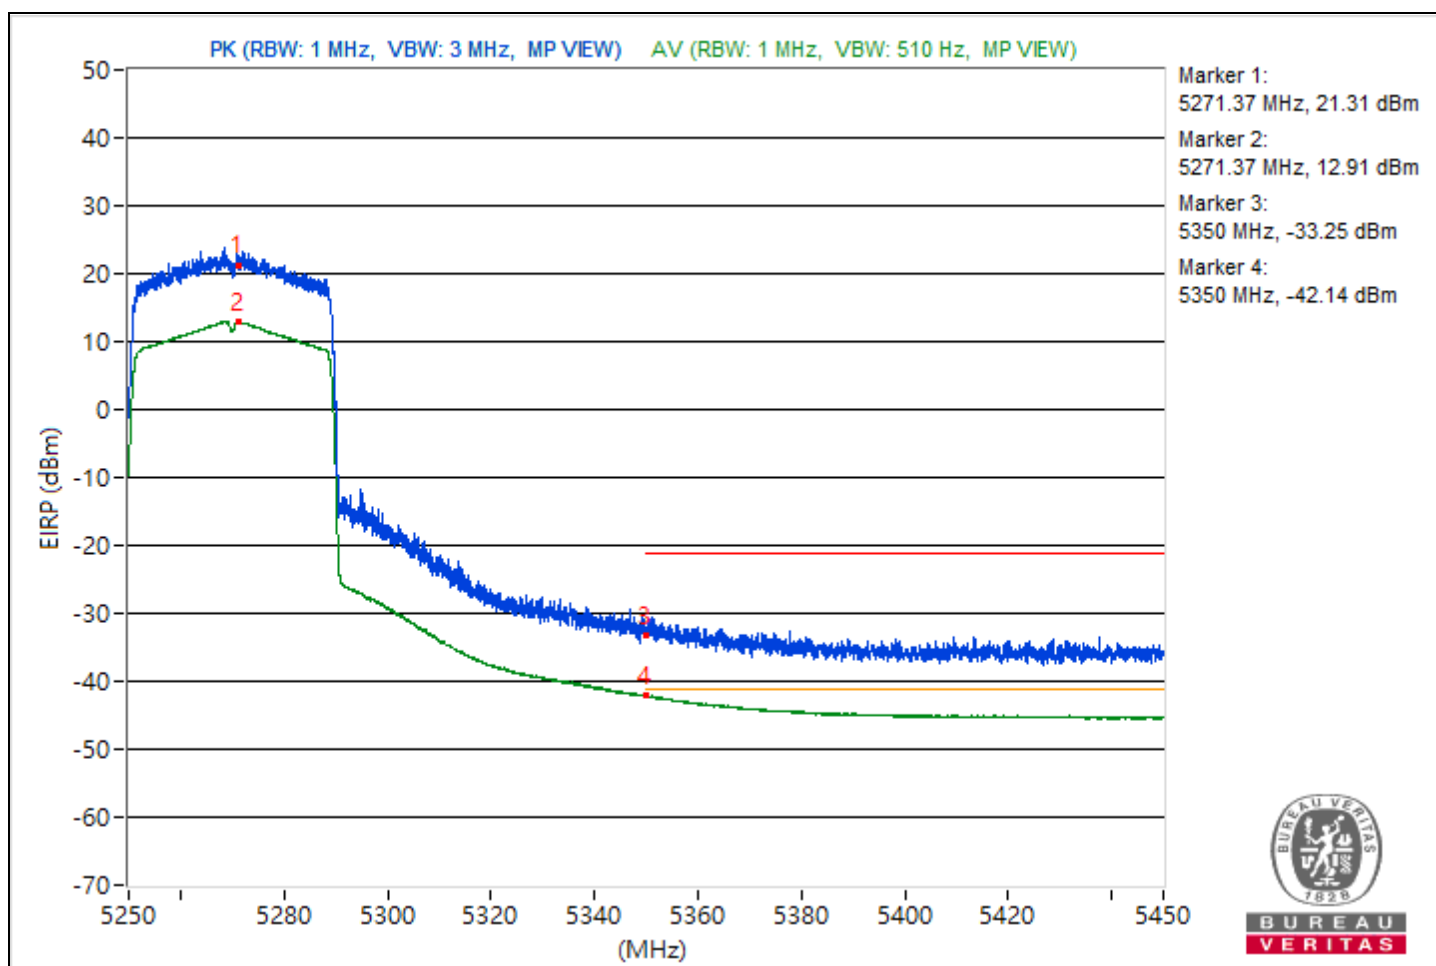


RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5308.32	116.7 PK			11.33	8.26	8.37	21.44
2	*5308.32	108.11 AV			0.65	2.15	8.37	12.85
3	5350	60.47 PK	74	-13.53	-45.81	-46.57	8.37	-34.79
4	5350	53.47 AV	54	-0.53	-53.02	-53.32	8.37	-41.79

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

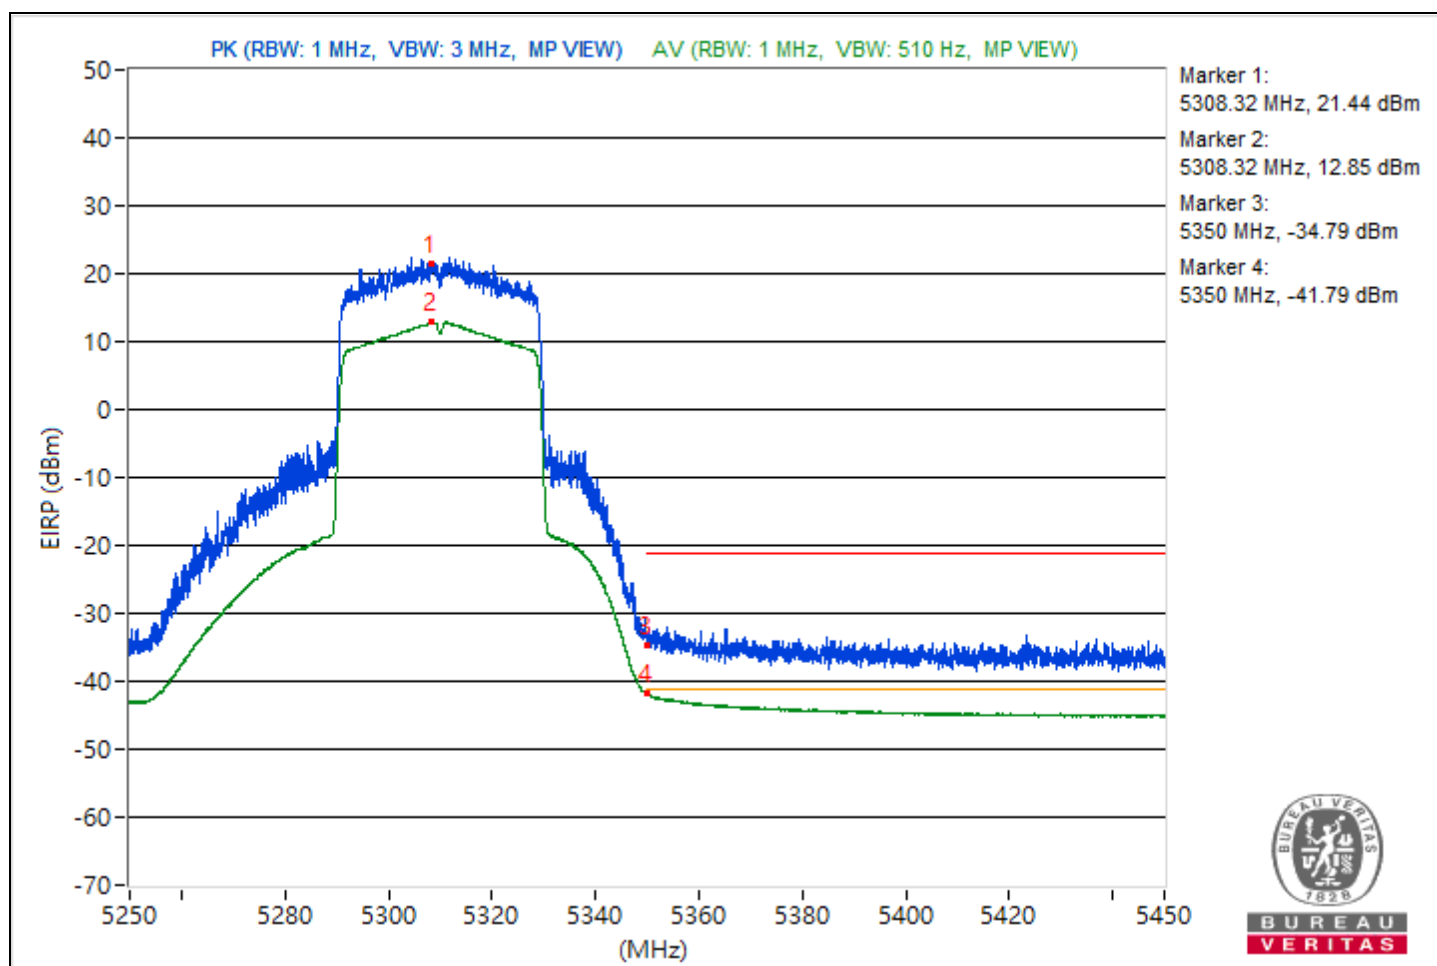


RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5511.59	120.11 PK			14.12	12.7	8.37	24.85
2	5458.97	64.17 PK	74	-9.83	-40.74	-45.39	8.37	-31.09
3	#5467.87	66.94 PK	68.26	-1.32	-37.64	-43.71	8.37	-28.32
4	*5508.5	110.19 AV			3.52	3.57	8.37	14.93
5	5459.06	53.3 AV	54	-0.7	-53.05	-53.66	8.37	-41.96

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

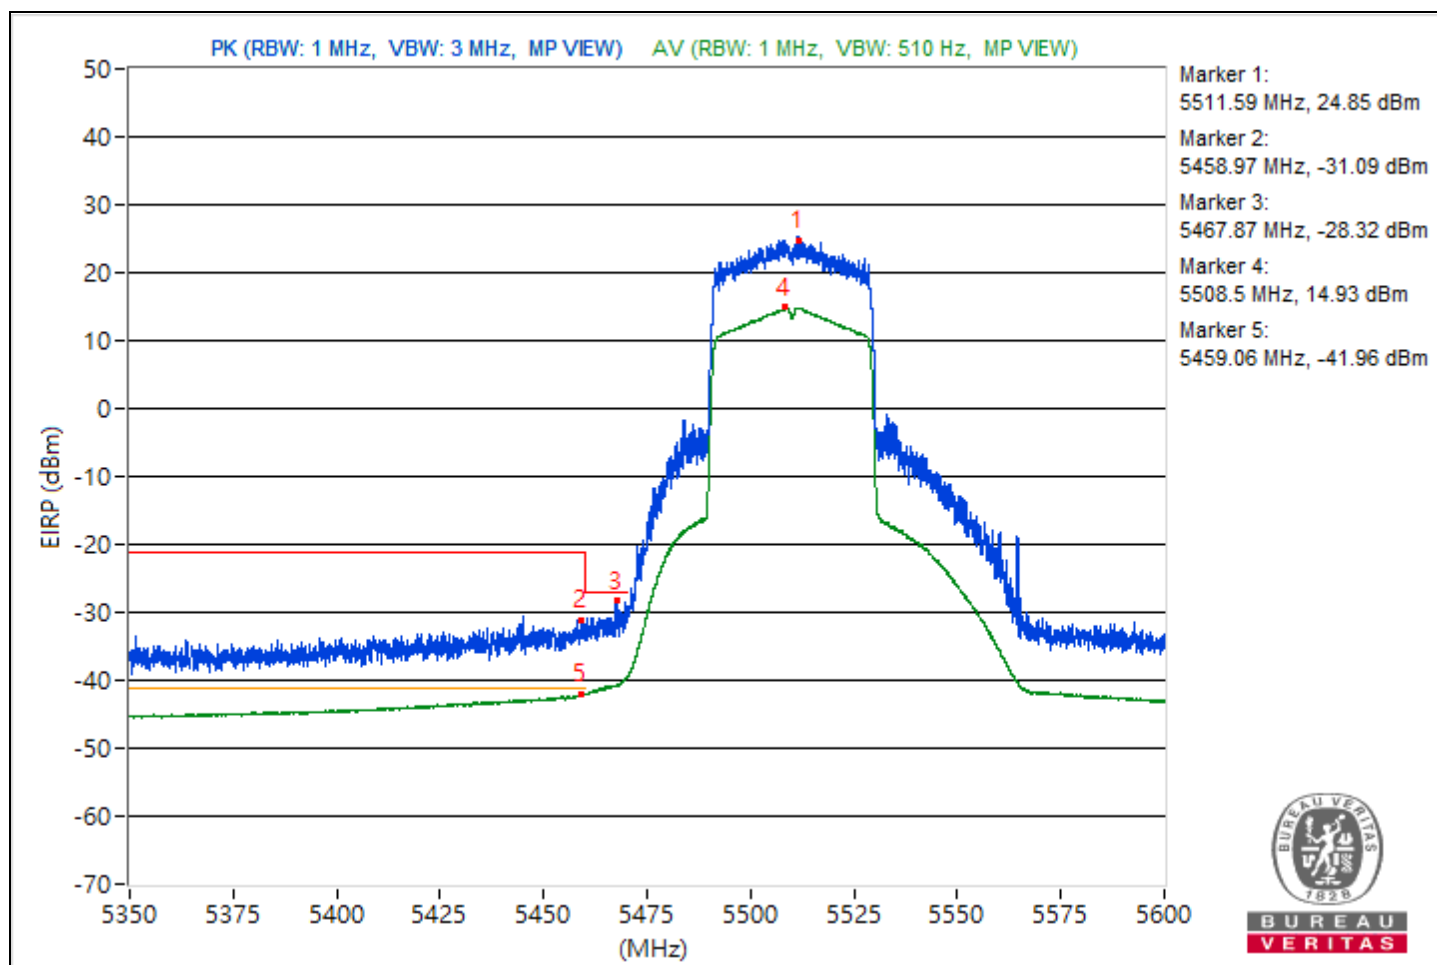


RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5548.78	120.56 PK			10.83	15.71	8.37	25.3
2	5458.97	64.5 PK	74	-9.5	-43.24	-41.27	8.37	-30.76
3	#5462	64.65 PK	68.26	-3.61	-44.72	-40.33	8.37	-30.61
4	*5551.62	109.07 AV			2.31	2.54	8.37	13.81
5	5459.44	53.49 AV	54	-0.51	-52.98	-53.34	8.37	-41.77

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

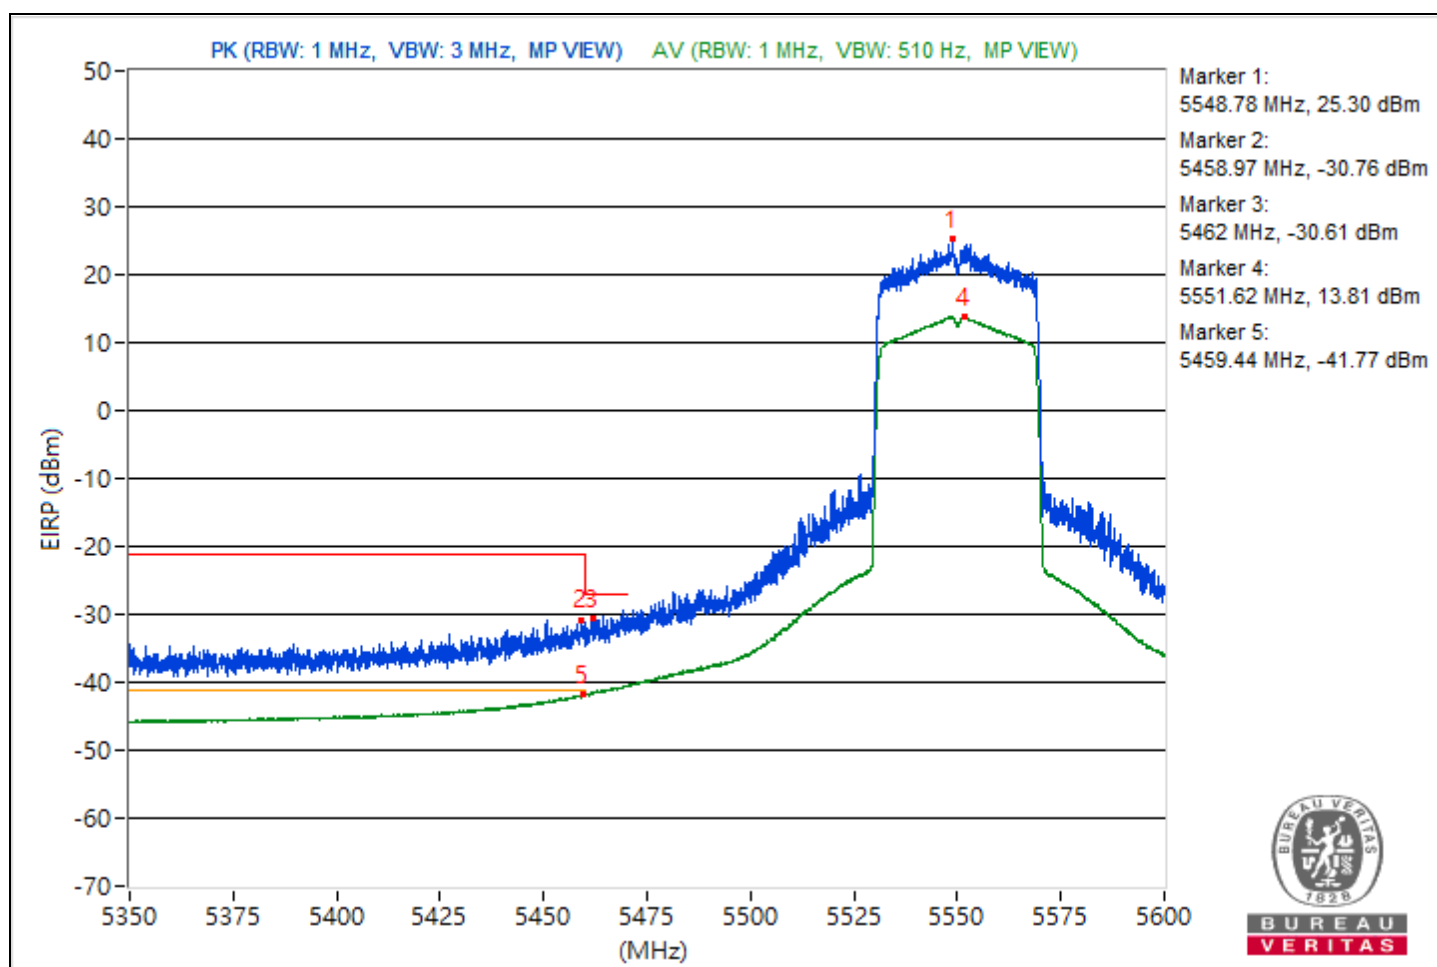


RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5667.82	120.26			12.71	14.36	8.37	25
2	#5725.48	62.66	68.26	-5.6	-46.44	-42.43	8.37	-32.6

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

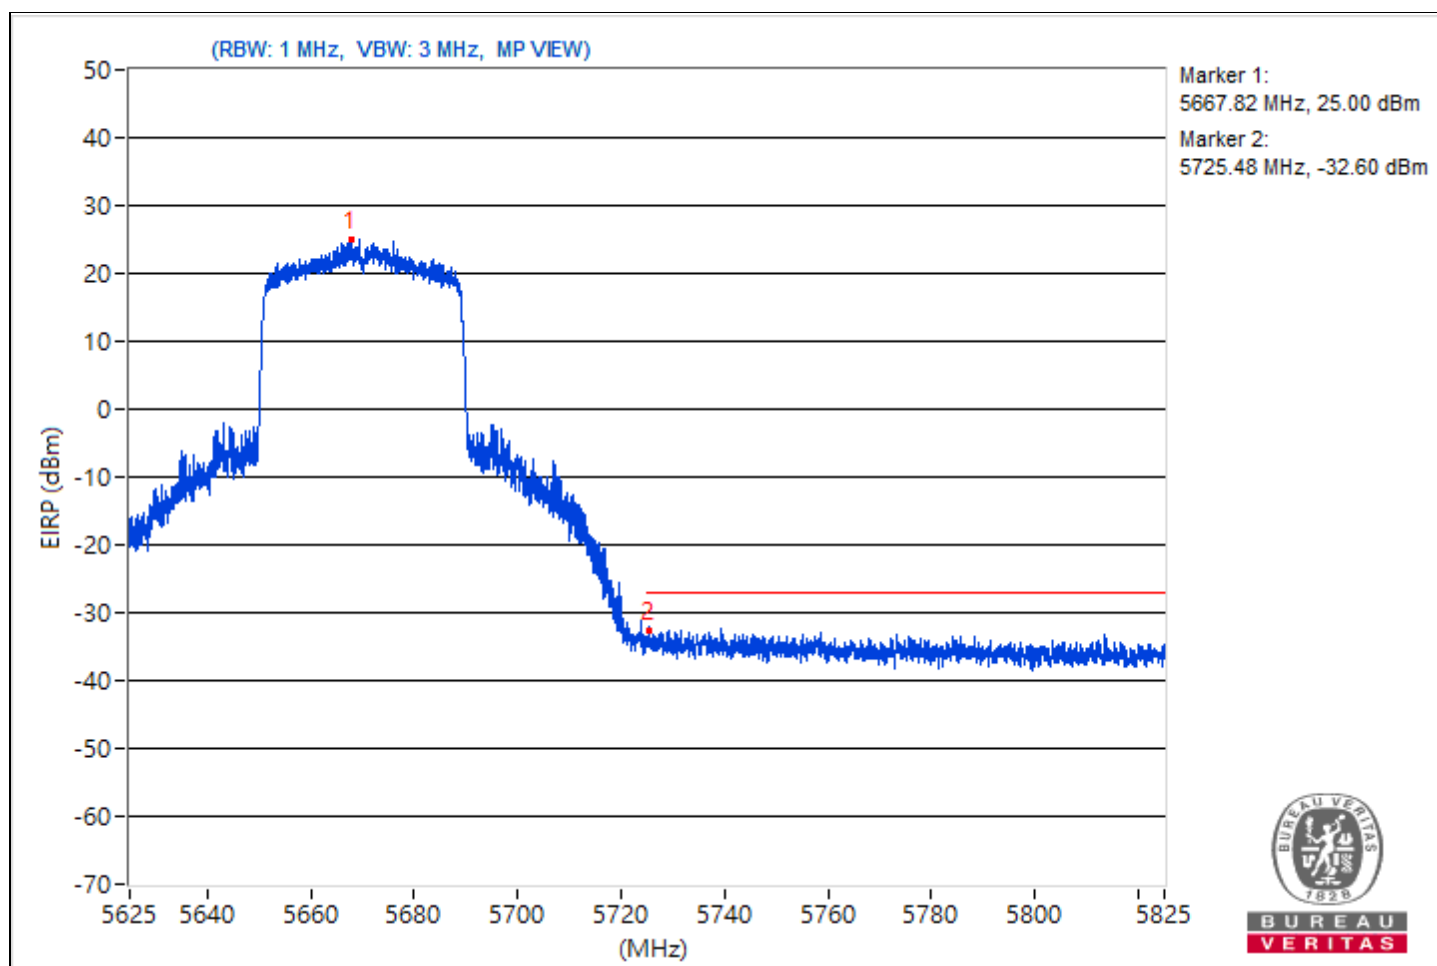


RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5713.24	119.76			11.03	14.53	8.37	24.5
2	#5894.51	61.22	68.26	-7.04	-46.38	-44.64	8.37	-34.04

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

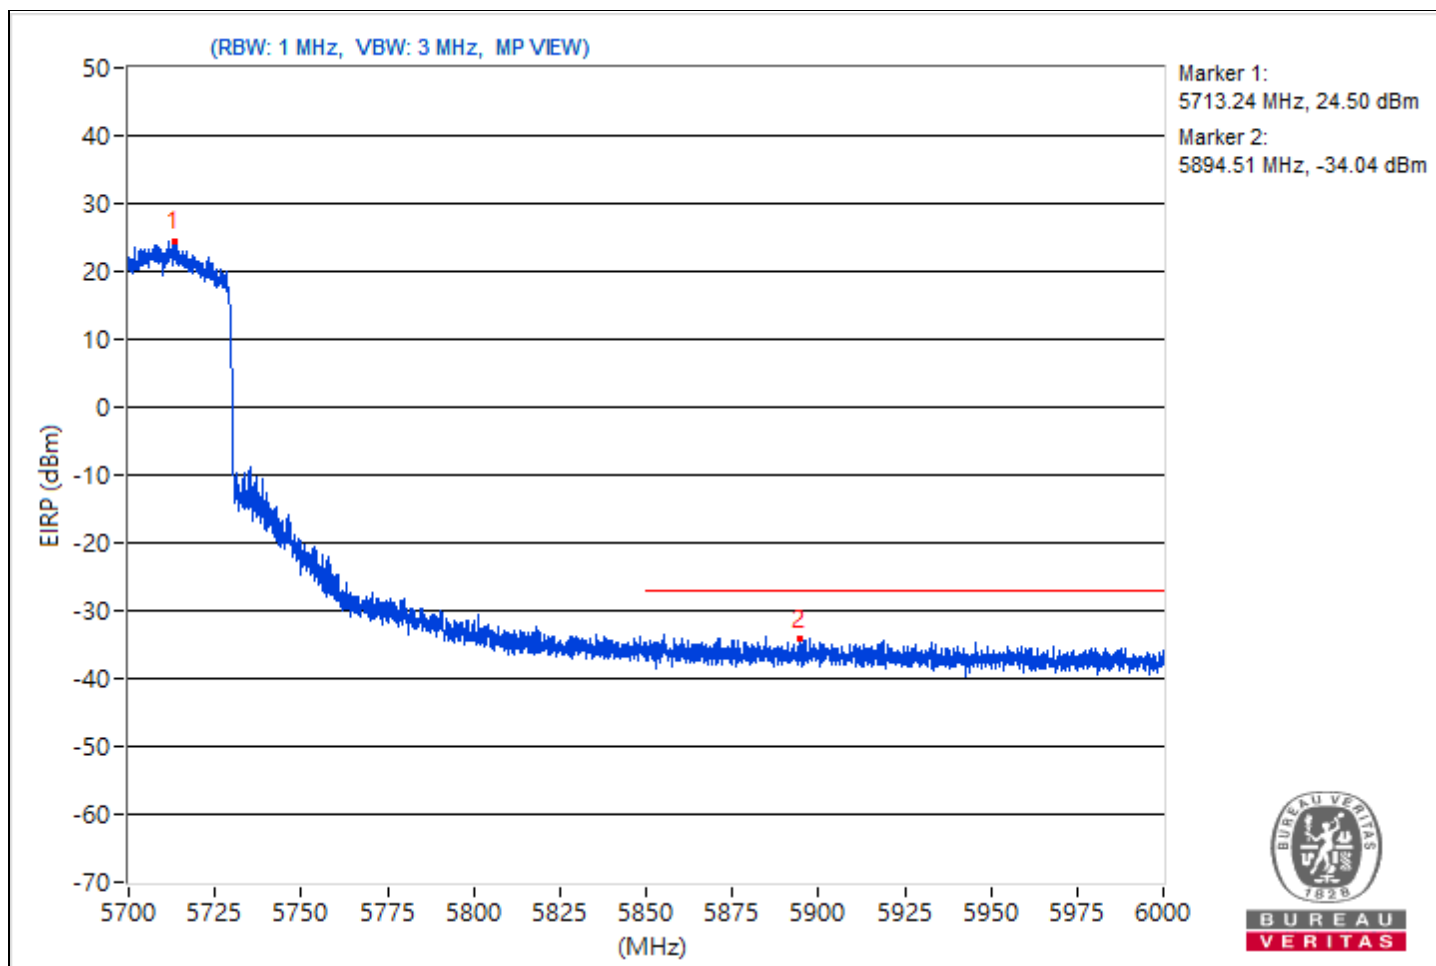


RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5759	123.83			15.55	18.37	8.37	28.57
2	#5649.39	65.95	68.26	-2.31	-42.35	-39.49	8.37	-29.31
3	#5650.23	64.26	68.43	-4.17	-42.2	-42.57	8.37	-31
4	#5716.13	90.13	109.78	-19.65	-16.02	-17.07	8.37	-5.13
5	#5721	87.7	113.14	-25.44	-20.75	-17.66	8.37	-7.56
6	#5854.83	67.17	111.24	-44.07	-40	-39.01	8.37	-28.09
7	#5869.79	66.42	106.72	-40.3	-38.38	-43.47	8.37	-28.84
8	#5920.14	63.58	71.85	-8.27	-47.36	-40.95	8.37	-31.68
9	#5935.58	61.98	68.26	-6.28	-43.32	-46.61	8.37	-33.28

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

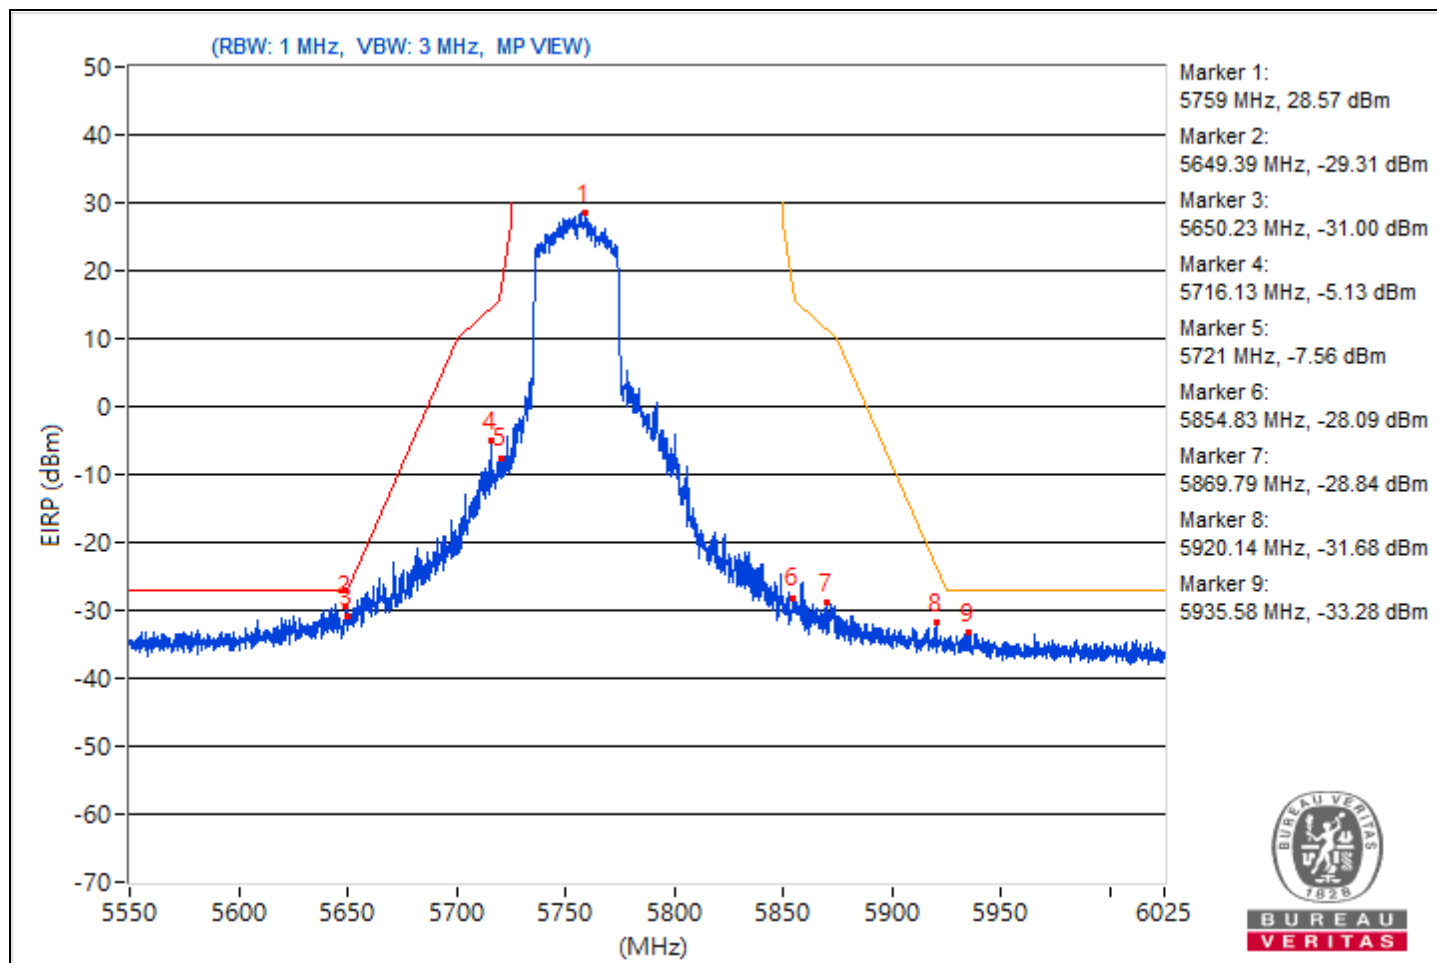


RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	21°C, 58% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5794.39	123.28			17.44	15.66	8.37	28.02
2	#5646.54	63.59	68.26	-4.67	-45.07	-41.69	8.37	-31.67
3	#5650.7	63.15	68.78	-5.63	-45.06	-42.34	8.37	-32.11
4	#5710.31	69.55	108.15	-38.6	-35.29	-40.23	8.37	-25.71
5	#5720.05	70.15	110.97	-40.82	-37.49	-35.68	8.37	-25.11
6	#5853.52	74.42	114.22	-39.8	-30.42	-35.33	8.37	-20.84
7	#5858.99	76.48	109.74	-33.26	-28.09	-34.26	8.37	-18.78
8	#5922.4	65.25	70.18	-4.93	-39.76	-44.05	8.37	-30.01
9	#5926.56	63.39	68.26	-4.87	-43.19	-43.31	8.37	-31.87

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

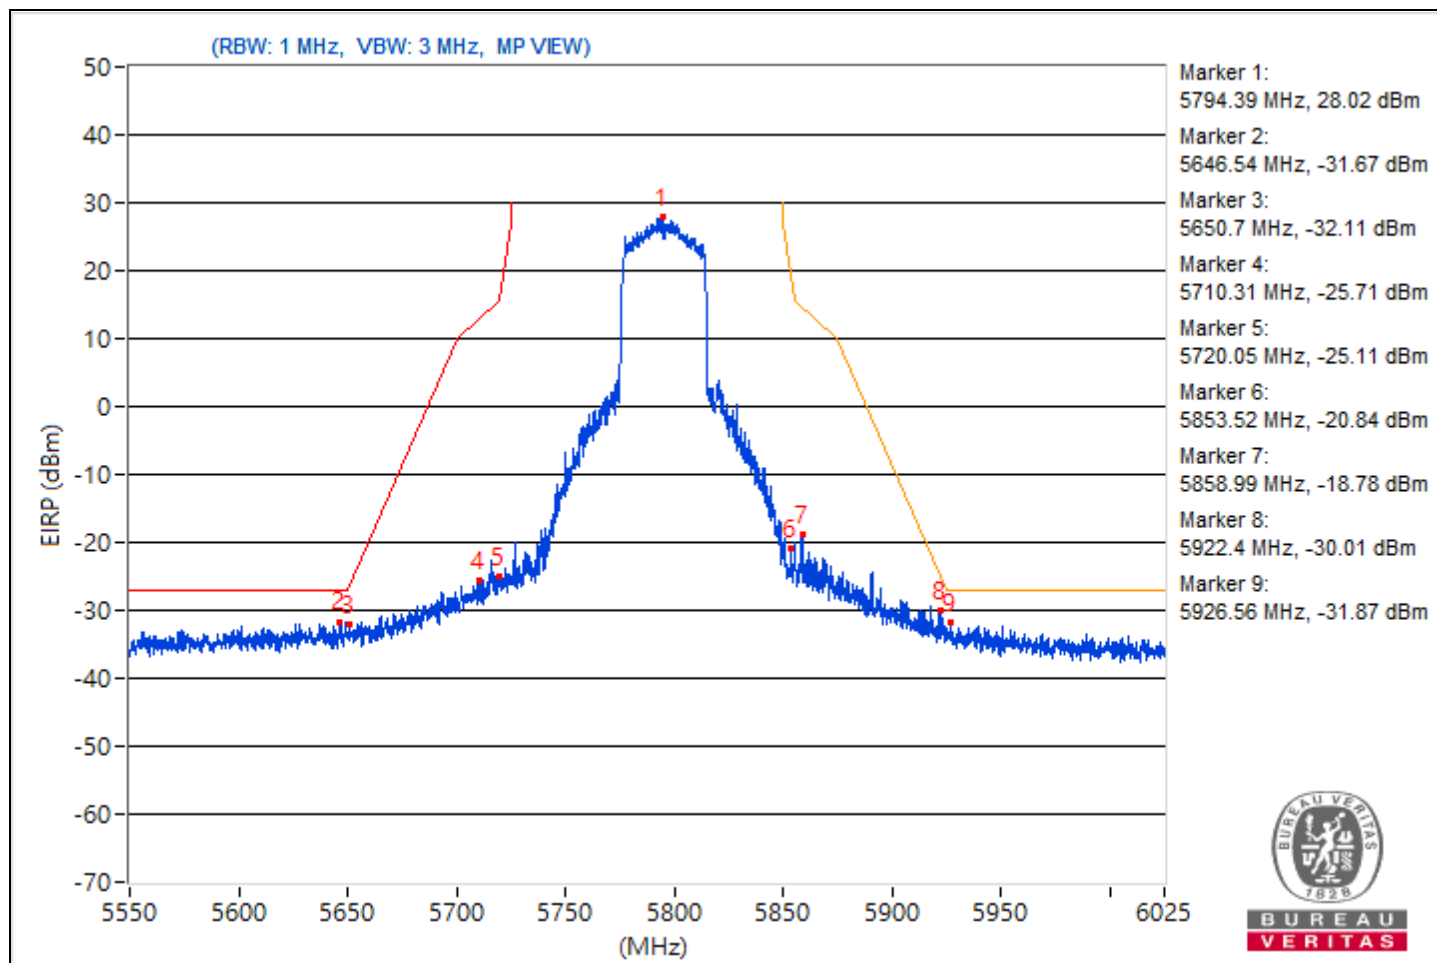


RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5211.32	111.02 PK			4.46	4.3	8.37	15.76
2	*5211.32	103.19 AV			-2.95	-4.02	8.37	7.93
3	5141.12	60.54 PK	74	-13.46	-45.57	-46.69	8.37	-34.72
4	5141.12	53.34 AV	54	-0.66	-54.26	-52.5	8.37	-41.92

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

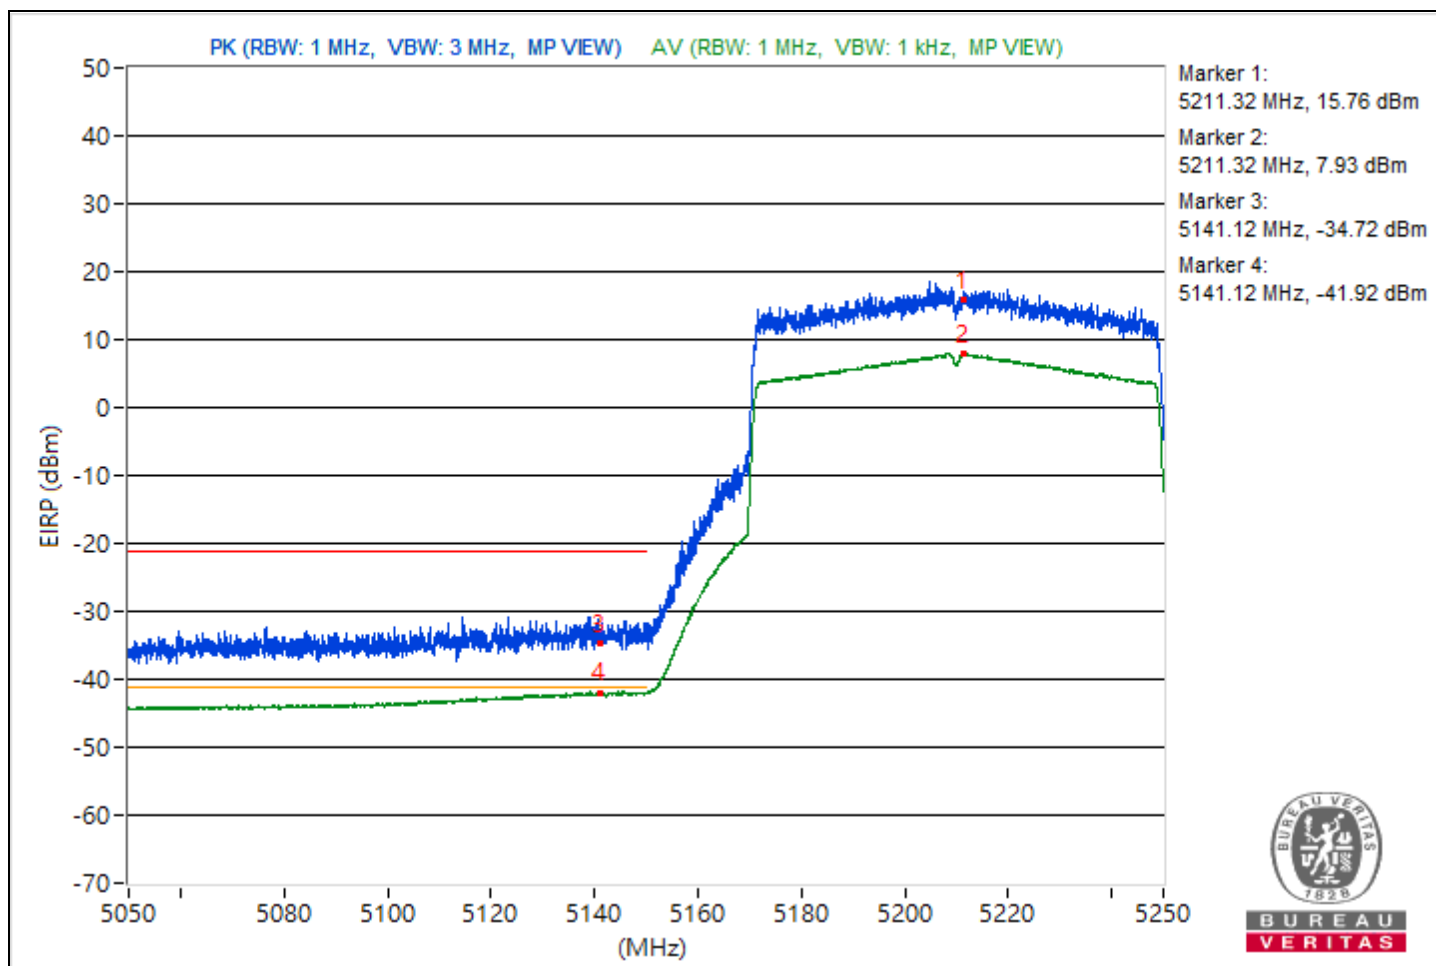


RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5287.93	112.78 PK			6.46	5.79	8.37	17.52
2	*5287.93	103.99 AV			-2.42	-2.9	8.37	8.73
3	5350.35	61.28 PK	74	-12.72	-45.96	-44.84	8.37	-33.98
4	5350.35	53.29 AV	54	-0.71	-53.17	-53.54	8.37	-41.97

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

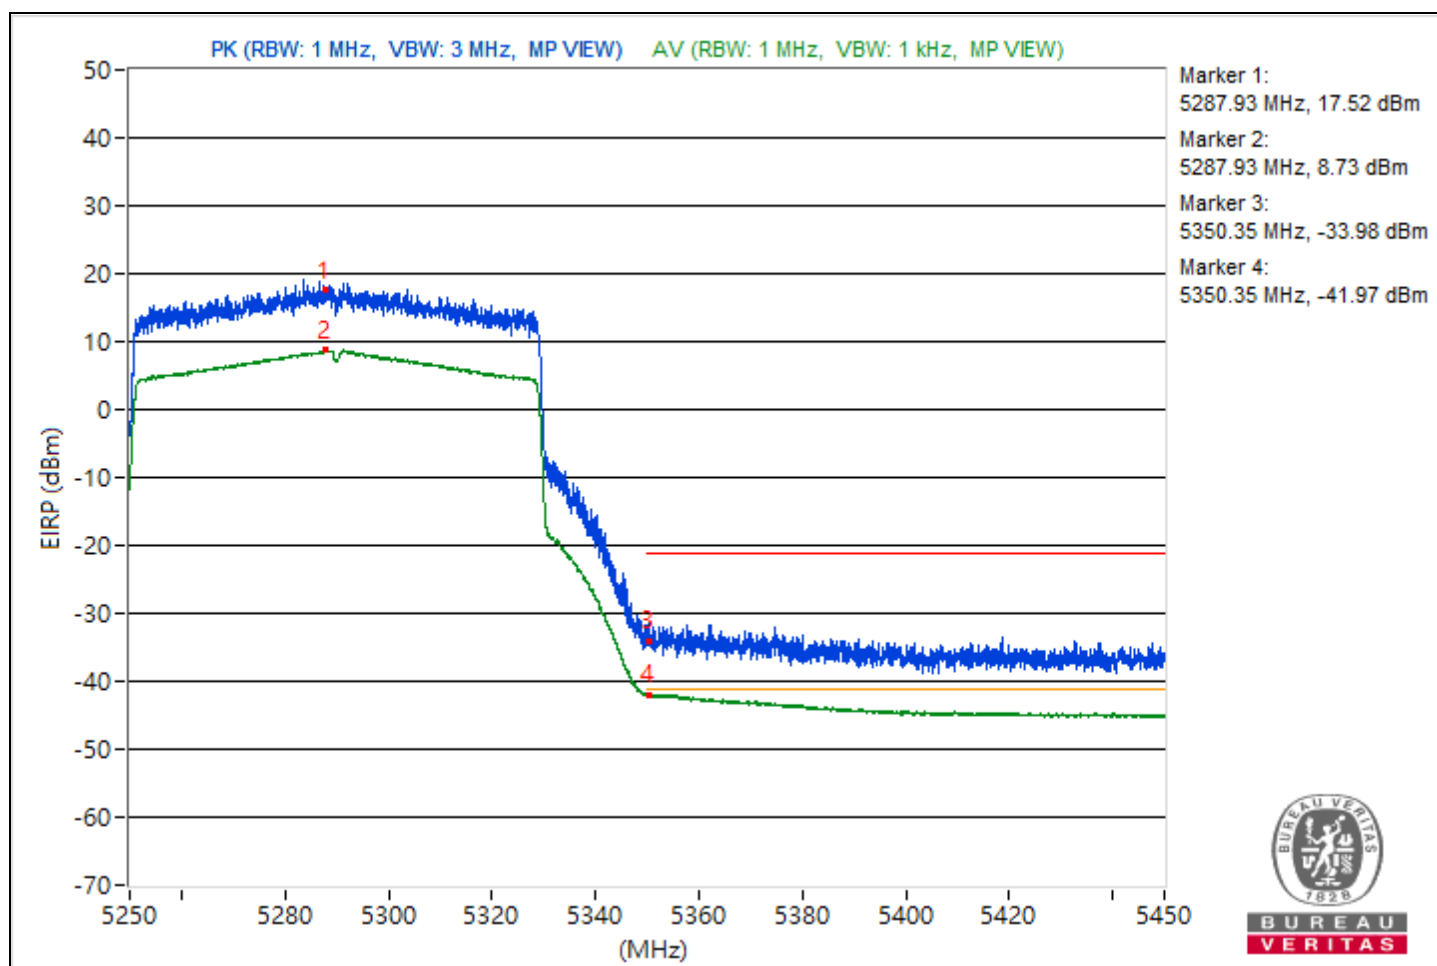


RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5526.53	116.84 PK			9.04	11.11	8.37	21.58
2	5458.75	64.29 PK	74	-9.71	-40.8	-44.81	8.37	-30.97
3	#5468.25	63.71 PK	68.26	-4.55	-43.01	-42.86	8.37	-31.55
4	*5531.03	105.8 AV			-1.22	-0.5	8.37	10.54
5	5458.16	53.17 AV	54	-0.83	-52.92	-54.11	8.37	-42.09

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

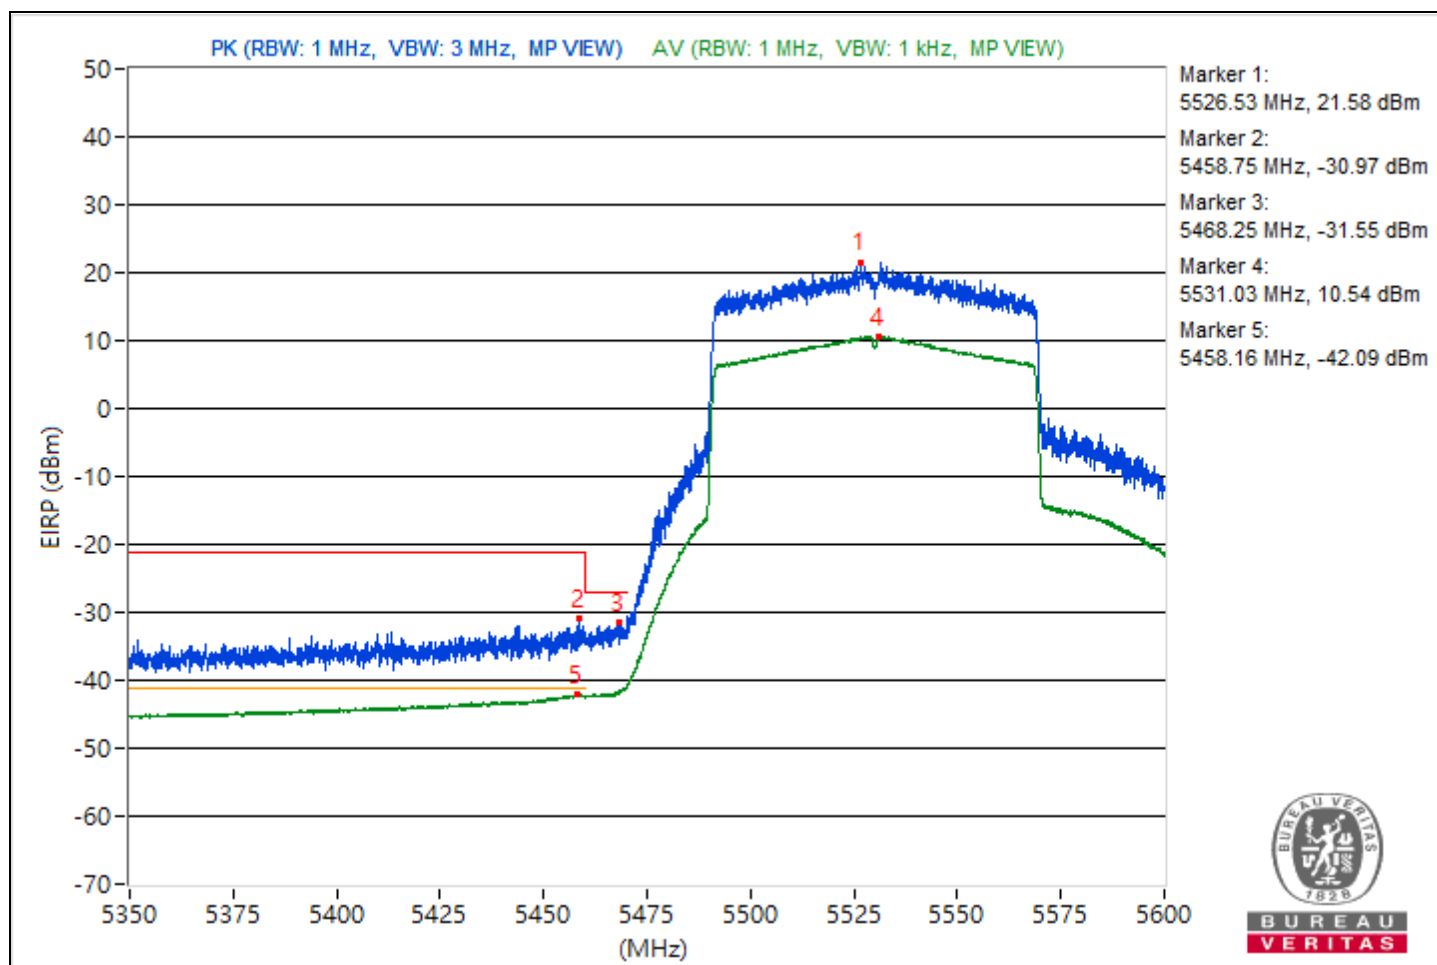


RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5599.97	115.18 PK			9.56	7.19	8.37	19.92
2	5459.75	62.24 PK	74	-11.76	-47.5	-42.61	8.37	-33.02
3	#5467.16	63.16 PK	68.26	-5.1	-43.04	-43.98	8.37	-32.1
4	*5599.62	105.34 AV			-1.21	-1.4	8.37	10.08
5	5459.75	51.62 AV	54	-2.38	-55.26	-54.8	8.37	-43.64

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

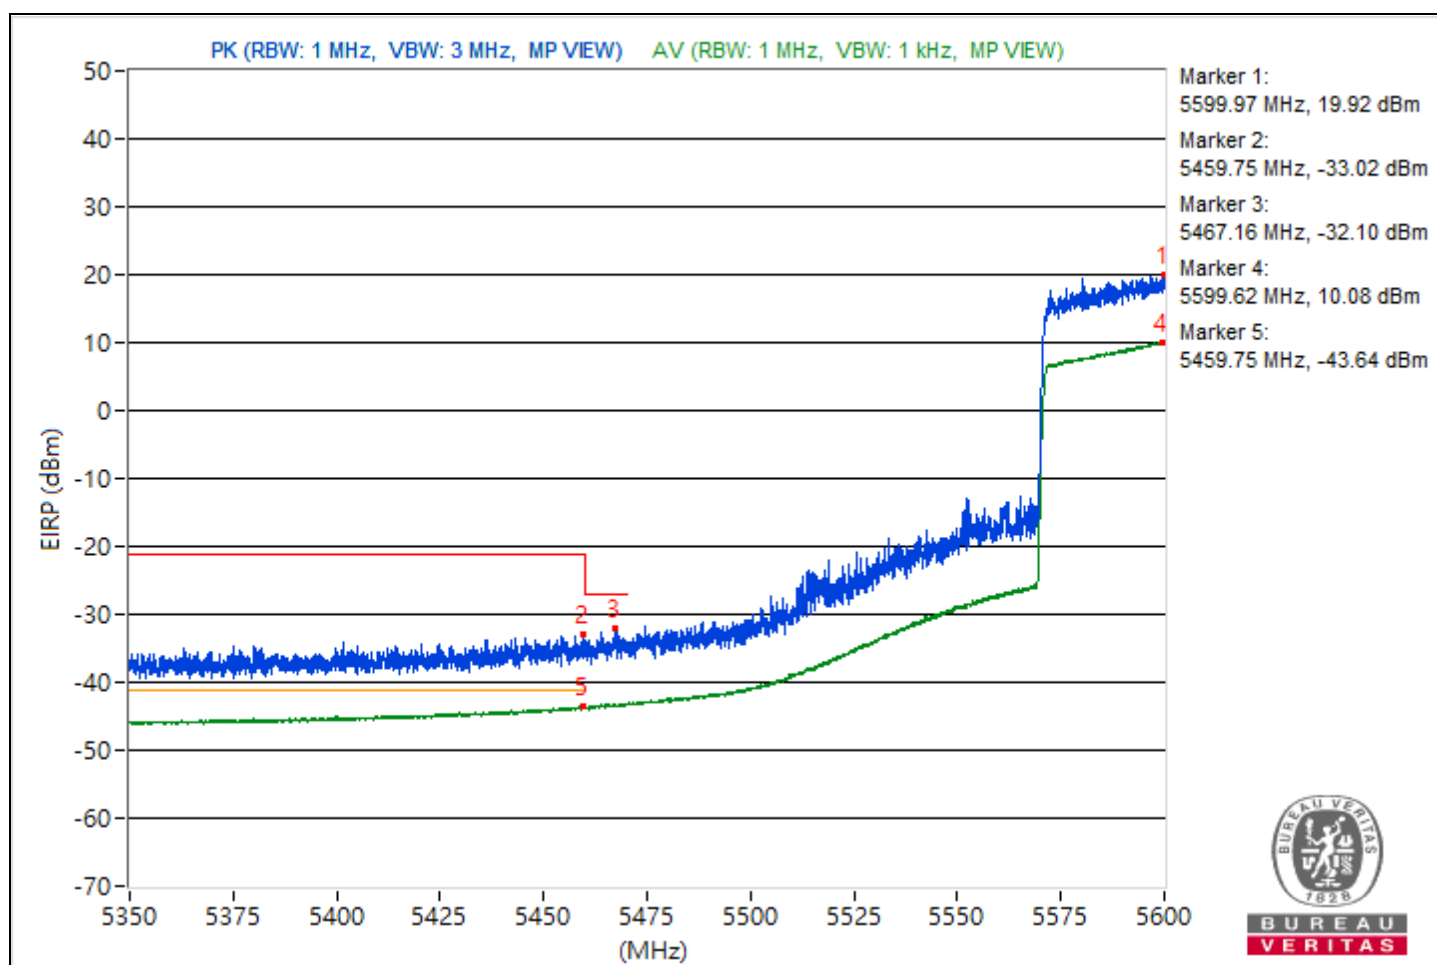


RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5701.31	116.69			11.38	8.14	8.37	21.43
2	#5861.4	61.51	68.26	-6.75	-43.83	-47	8.37	-33.75

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

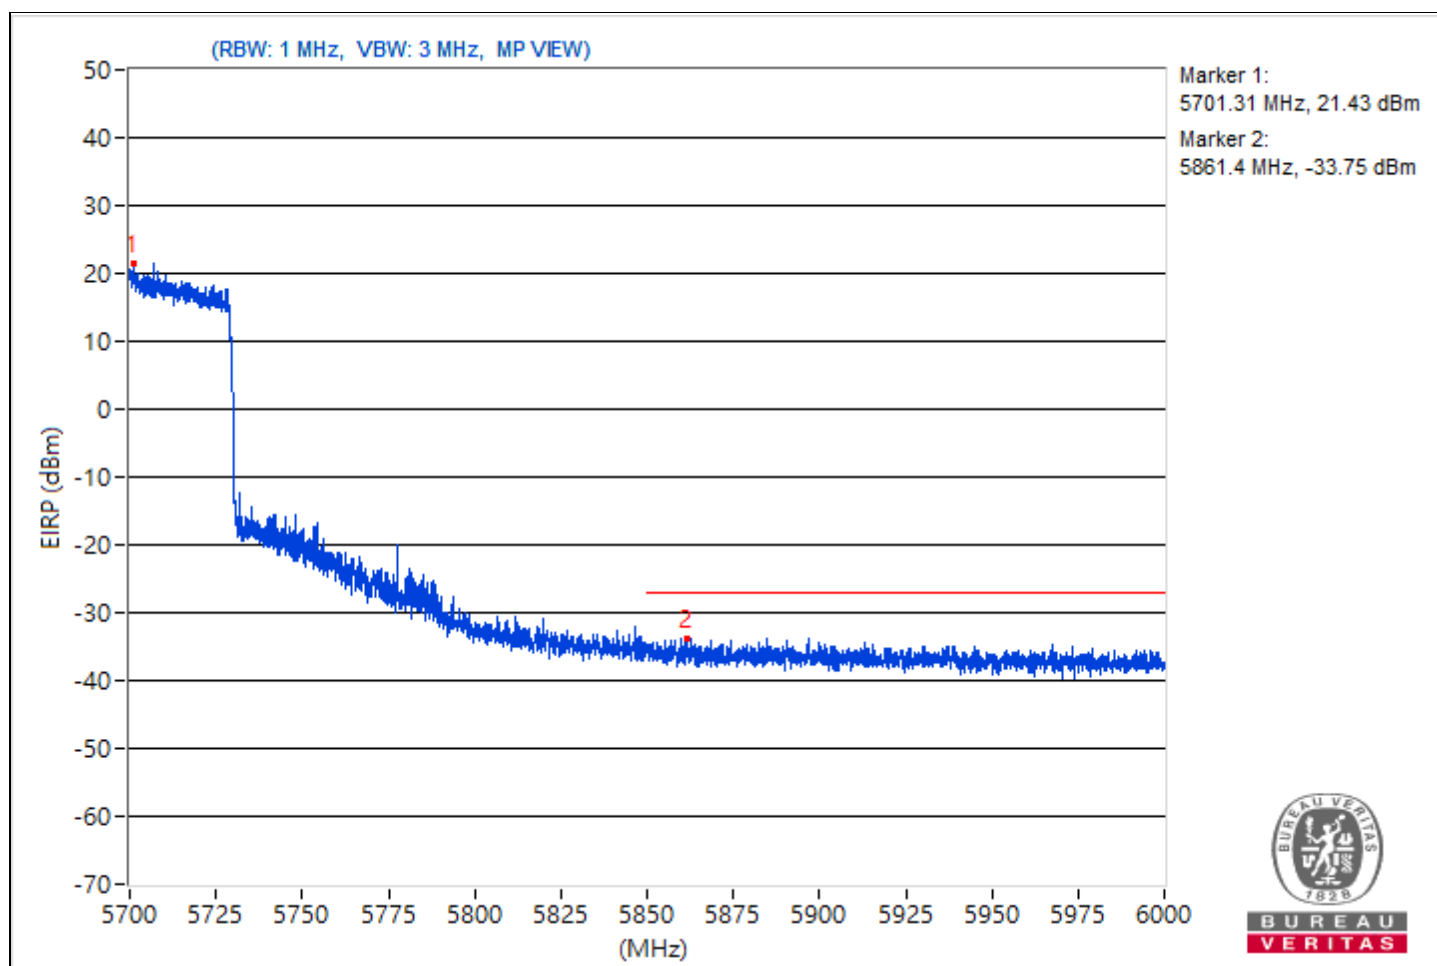


RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 64% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5772.3	118.19			13.48	8.02	8.37	22.93
2	#5623.03	66.51	68.26	-1.75	-37.96	-44.68	8.37	-28.75
3	#5650.34	65.4	68.51	-3.11	-41.99	-40.6	8.37	-29.86
4	#5717.79	86.57	110.24	-23.67	-20.06	-20.07	8.37	-8.69
5	#5720.52	85.29	112.06	-26.77	-20.06	-23.21	8.37	-9.97
6	#5854.71	78.03	111.52	-33.49	-28.51	-28.71	8.37	-17.23
7	#5860.53	79.37	109.31	-29.94	-26.62	-28.04	8.37	-15.89
8	#5923.71	65.21	69.22	-4.01	-39.39	-45.39	8.37	-30.05
9	#5926.56	64.73	68.26	-3.53	-41.66	-42.18	8.37	-30.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

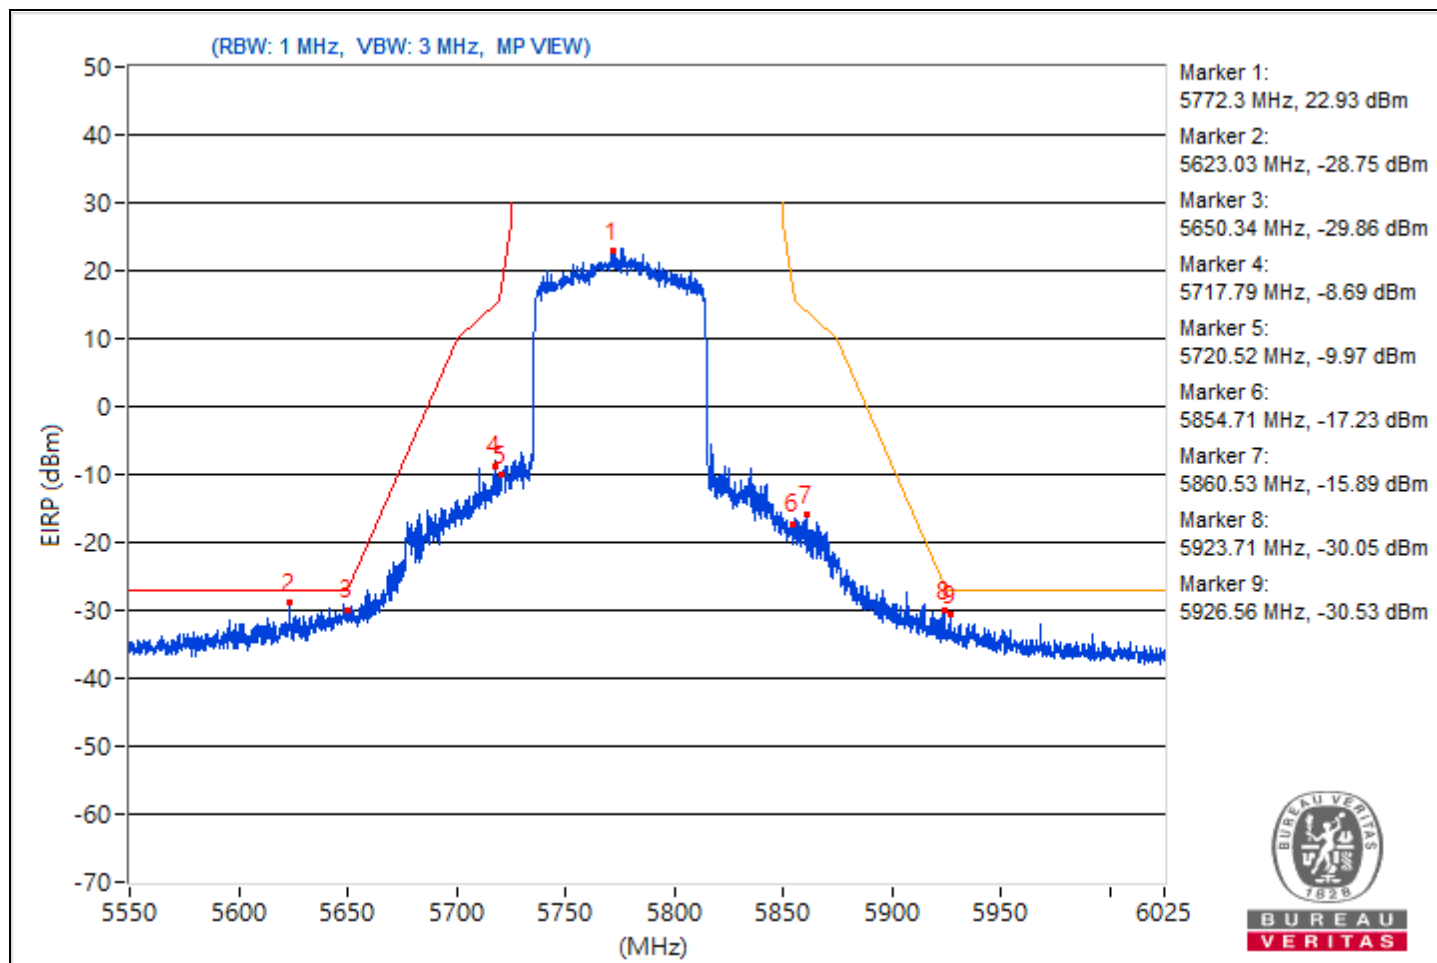


RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5246.6	108.62 PK			2.8	0.97	8.37	13.36
2	*5246.6	99.55 AV			-7.16	-7.02	8.37	4.29
3	5127.07	60.95 PK	74	-13.05	-46.4	-45.07	8.37	-34.31
4	5127.07	53.23 AV	54	-0.77	-53.96	-52.91	8.37	-42.03

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

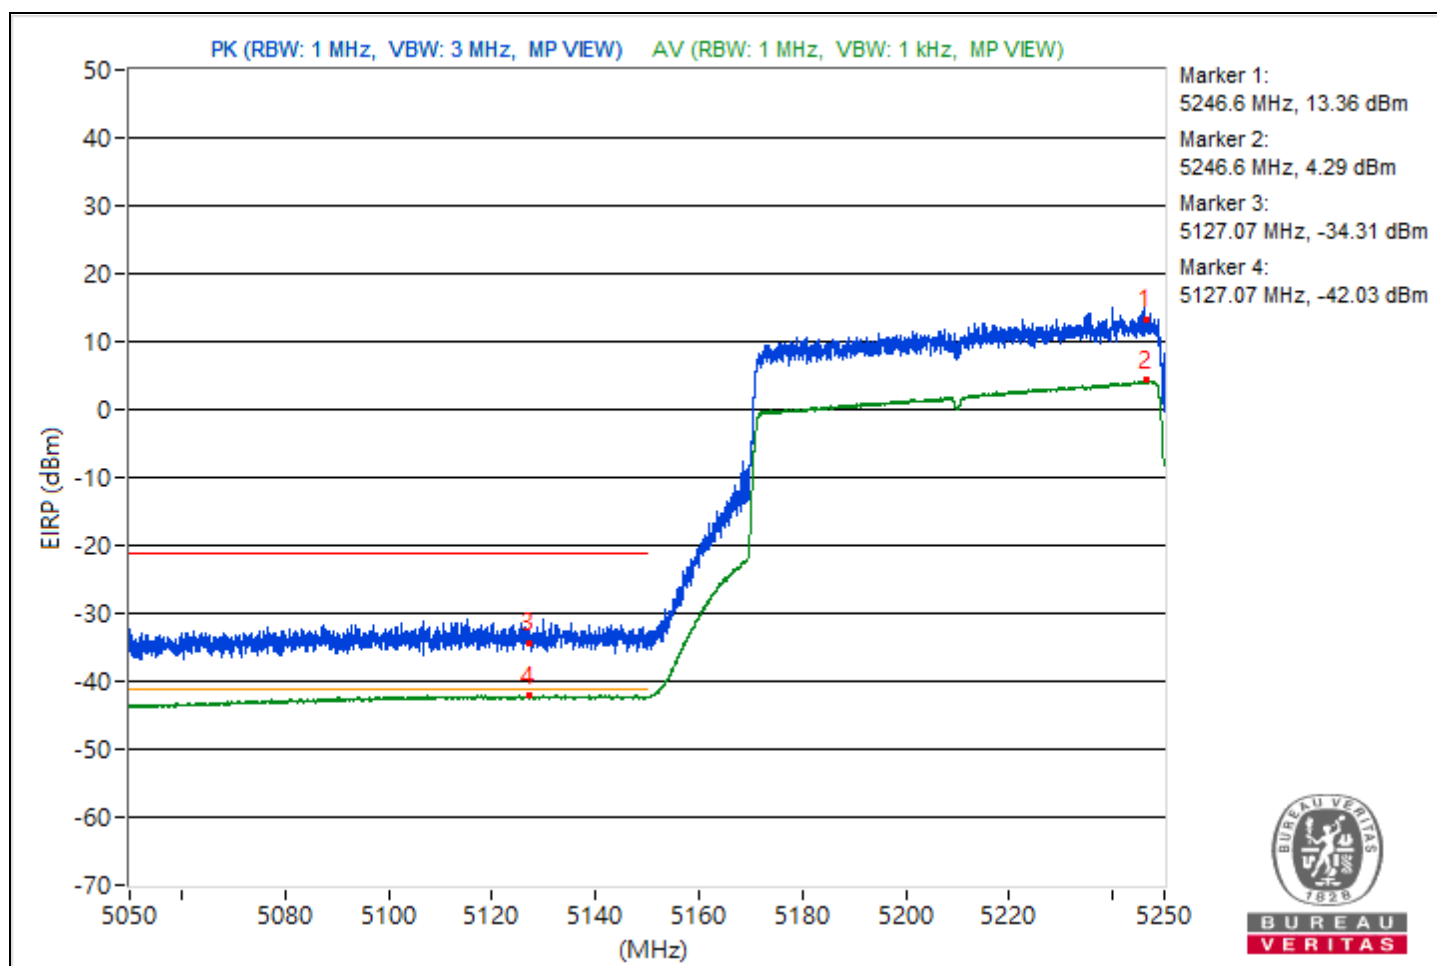


RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5253.07	107.55 PK			0.17	1.54	8.37	12.29
2	*5253.07	99.33 AV			-7.07	-7.57	8.37	4.07
3	5355.15	60.42 PK	74	-13.58	-46.91	-45.63	8.37	-34.84
4	5355.15	52.69 AV	54	-1.31	-54	-53.91	8.37	-42.57

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

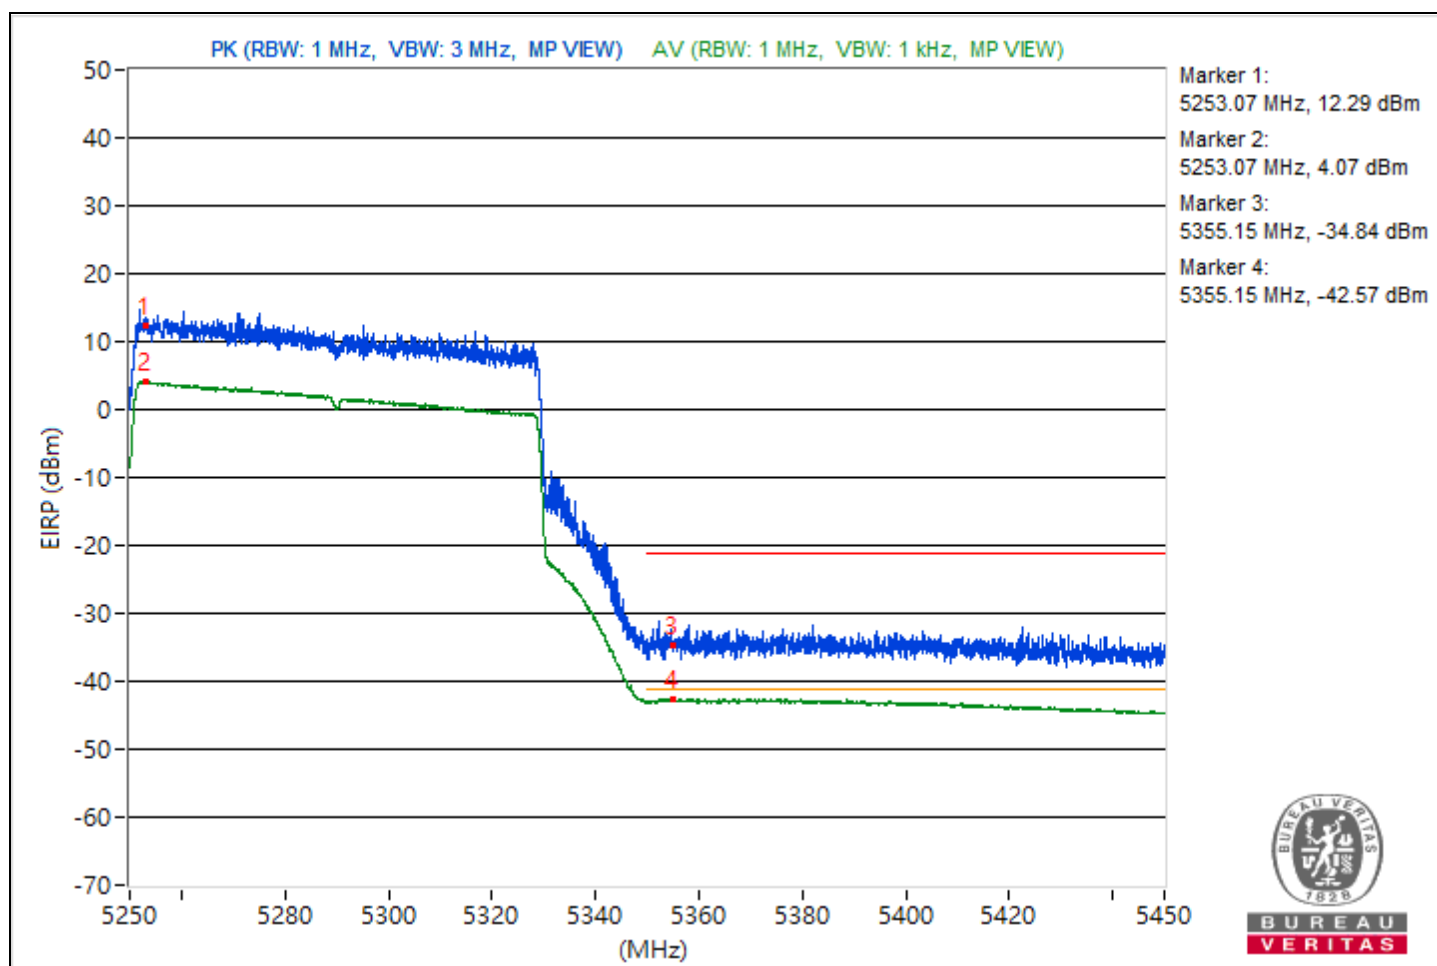


RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	22°C, 61% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5583.75	111.88 PK			3.25	6.6	8.37	16.62
2	5448.87	64.32 PK	74	-9.68	-44.97	-40.69	8.37	-30.94
3	#5468.22	63.46 PK	68.26	-4.8	-47.61	-41.03	8.37	-31.8
4	*5574.47	100.83 AV			-5.55	-6.1	8.37	5.57
5	5457.87	53.21 AV	54	-0.79	-53.18	-53.7	8.37	-42.05

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

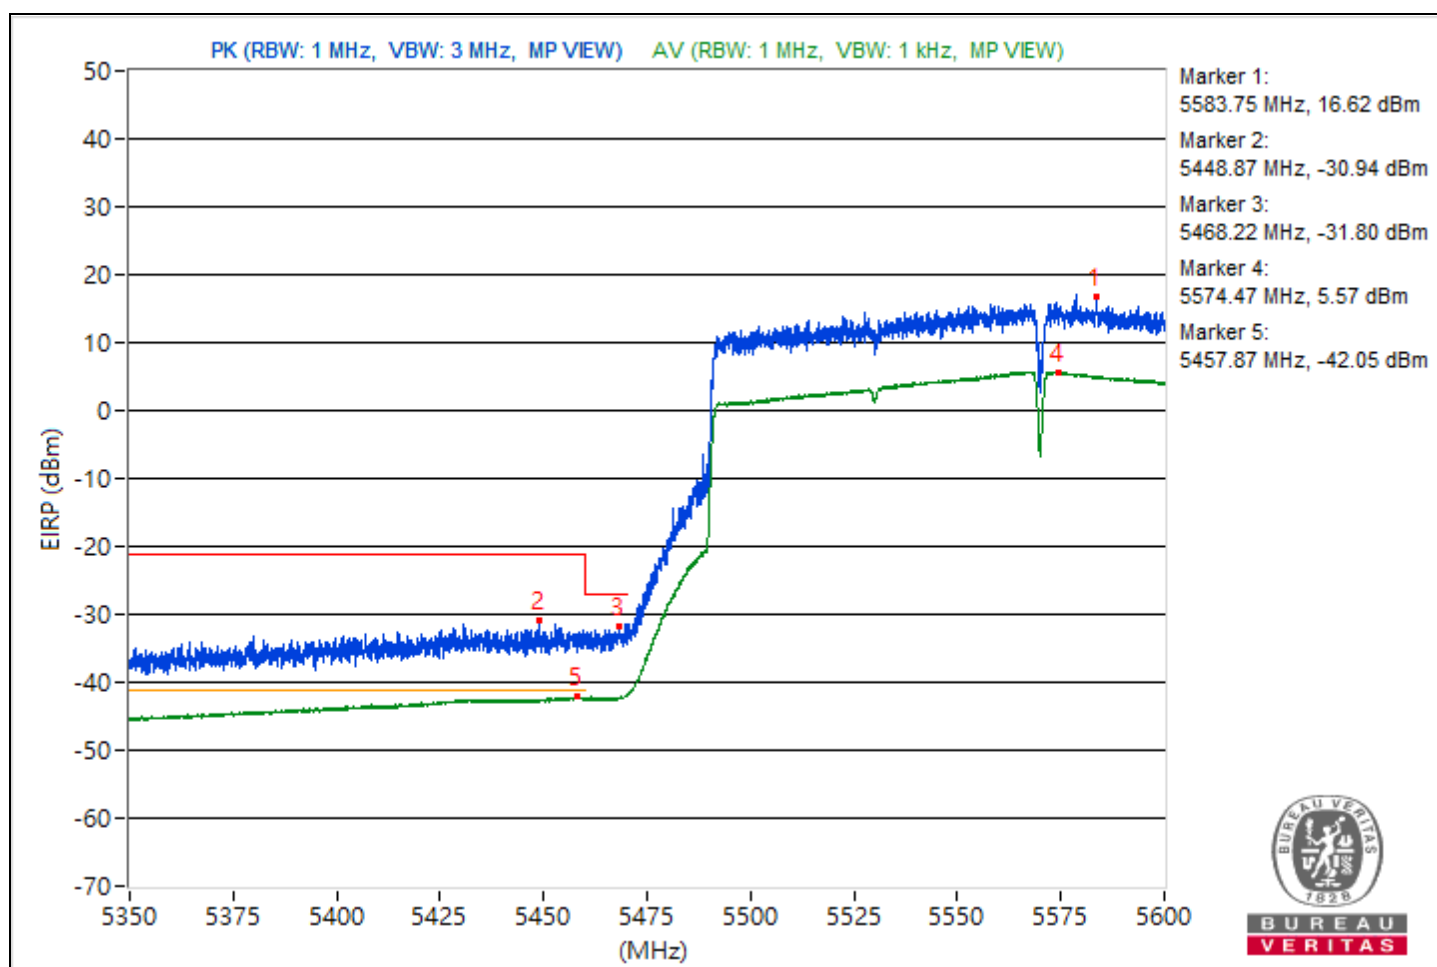


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5171.7	120.68 PK			12.91	14.93	8.37	25.42
2	*5171.7	112.32 AV			5.8	5.55	8.37	17.06
3	5111.25	61.1 PK	74	-12.9	-46.12	-45.02	8.37	-34.16
4	5111.25	51.33 AV	54	-2.67	-55.54	-55.09	8.37	-43.93

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

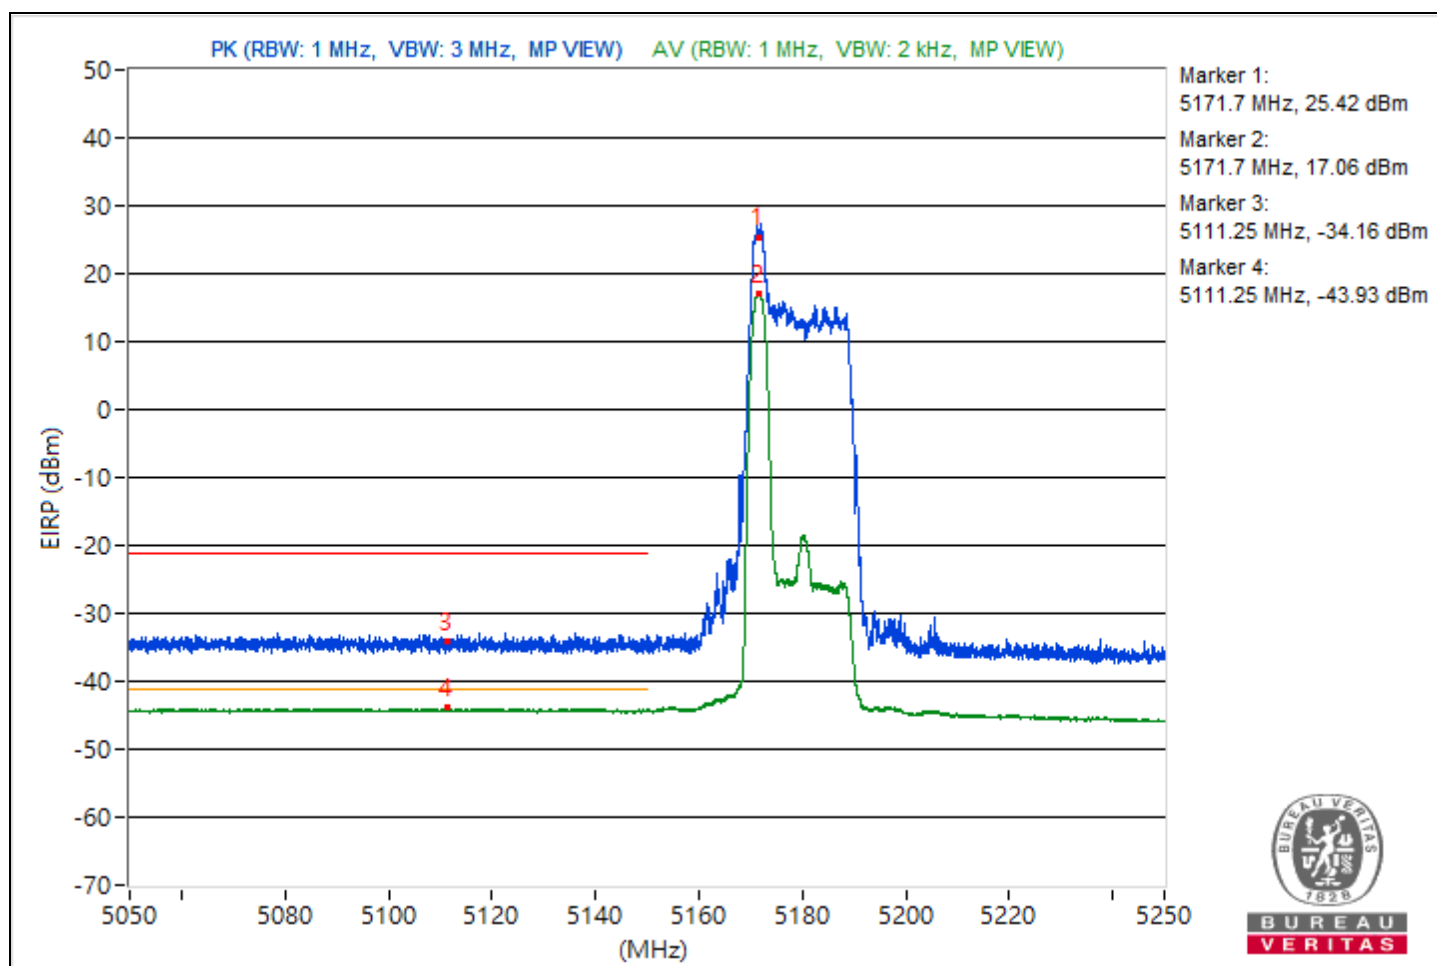


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5328.27	127.89 PK			21.66	20.81	8.37	32.63
2	*5328.27	119.08 AV			12.28	12.59	8.37	23.82
3	5361.68	61.59 PK	74	-12.41	-46.31	-44.08	8.37	-33.67
4	5361.68	51.94 AV	54	-2.06	-54.52	-54.9	8.37	-43.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

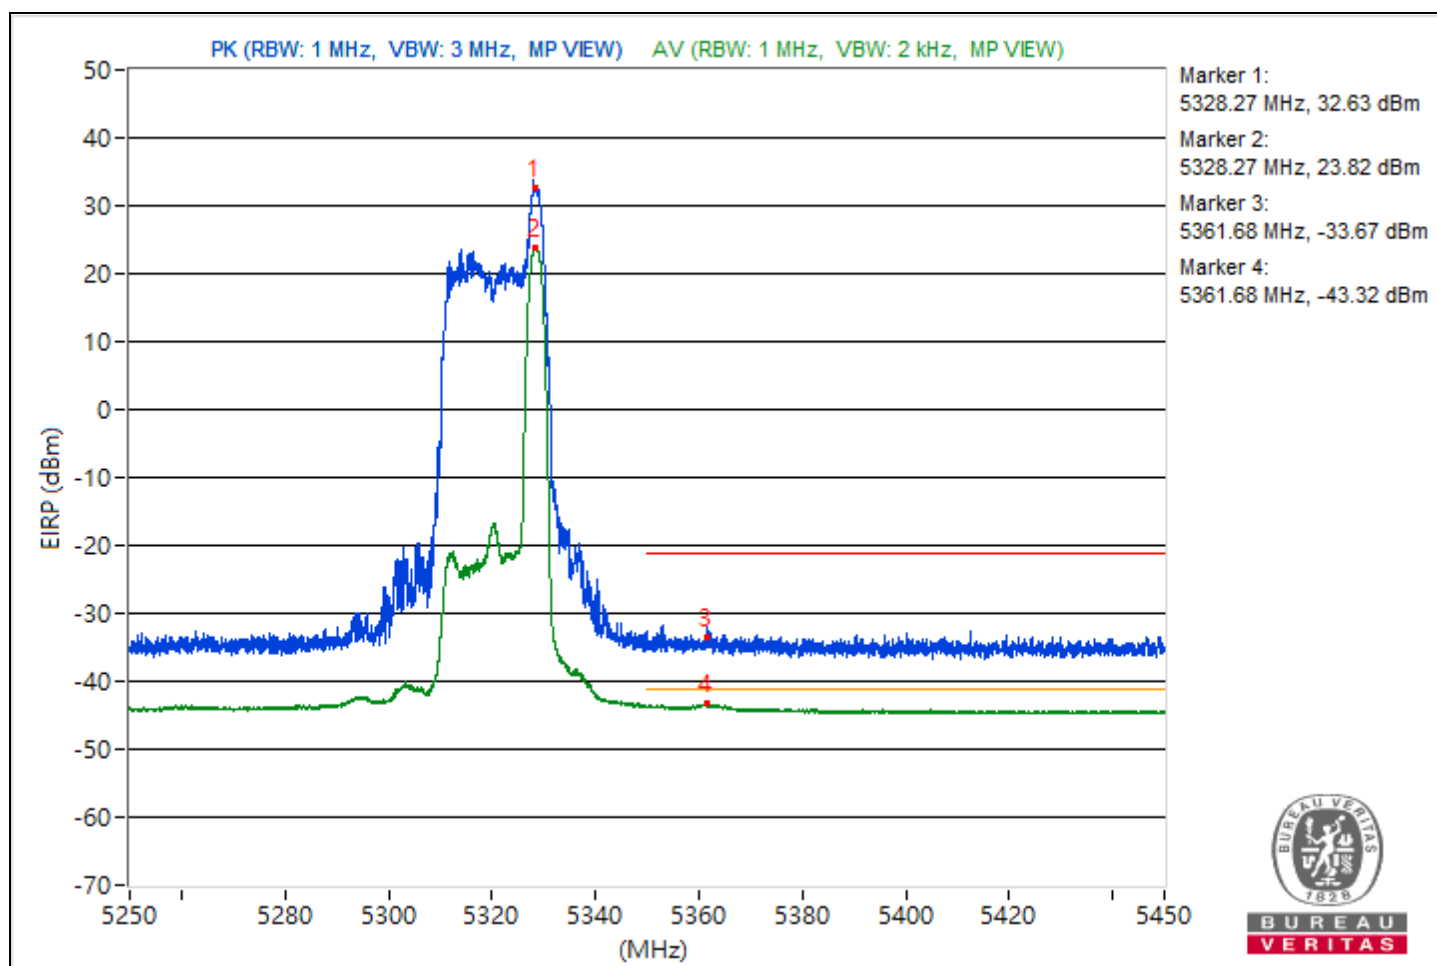


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5492.09	120.75 PK			14.65	13.5	8.37	25.49
2	5434.03	61.58 PK	74	-12.42	-46.01	-44.29	8.37	-33.68
3	#5469.59	60.5 PK	68.26	-7.76	-46.44	-45.86	8.37	-34.76
4	*5491.59	110.81 AV			4.28	4.06	8.37	15.55
5	5458.53	49.86 AV	54	-4.14	-57.08	-56.5	8.37	-45.4

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

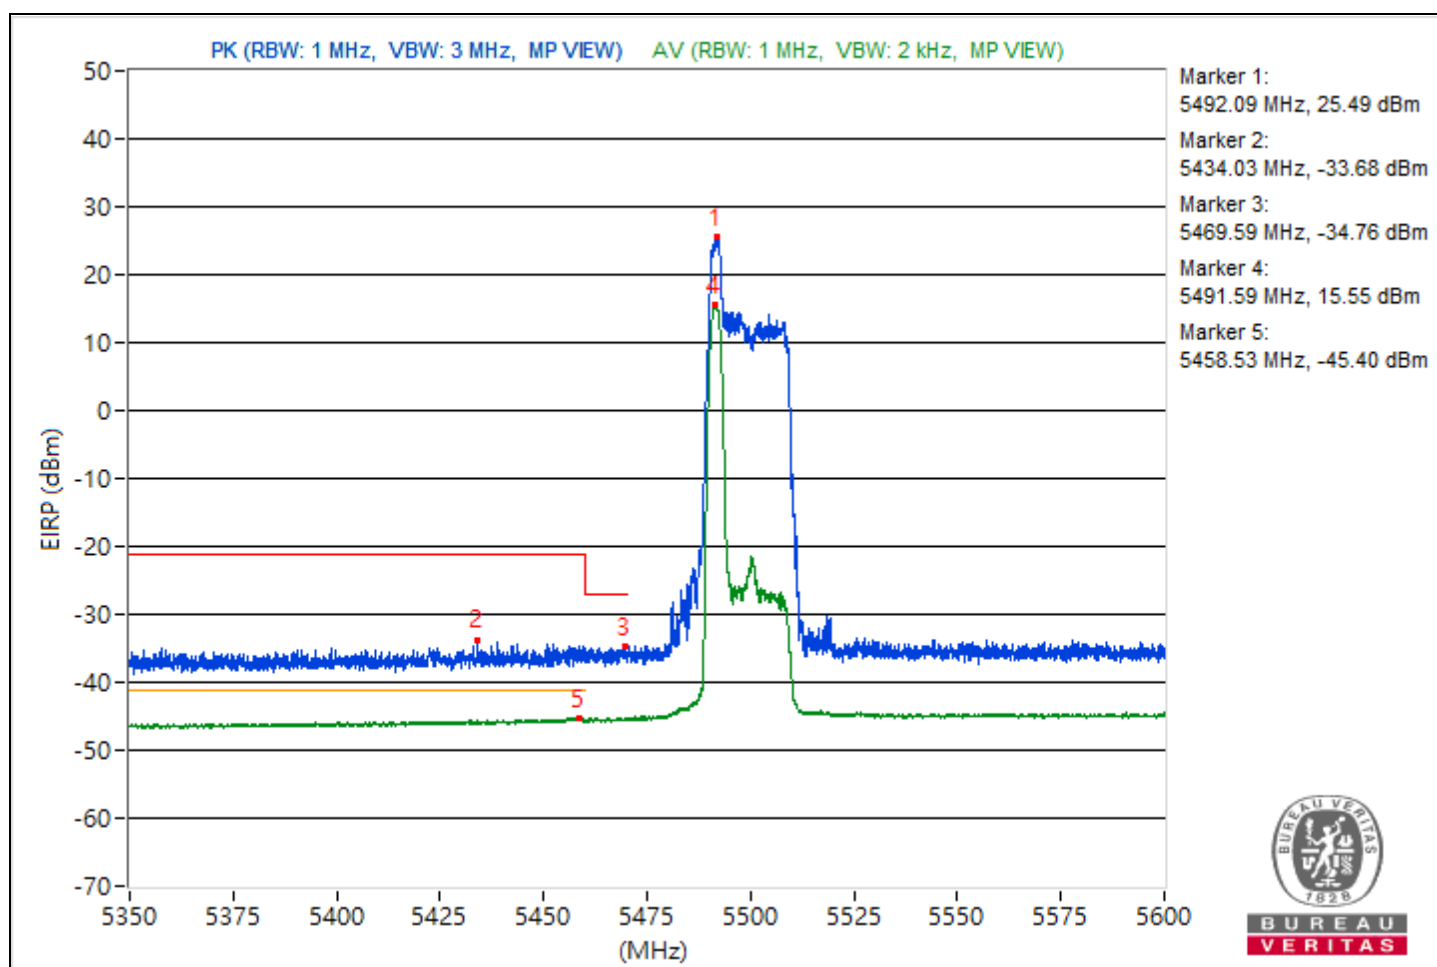


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5708.55	121.67			14.94	15.12	8.37	26.41
2	#5805.75	61.56	68.26	-6.7	-46.98	-43.76	8.37	-33.7

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

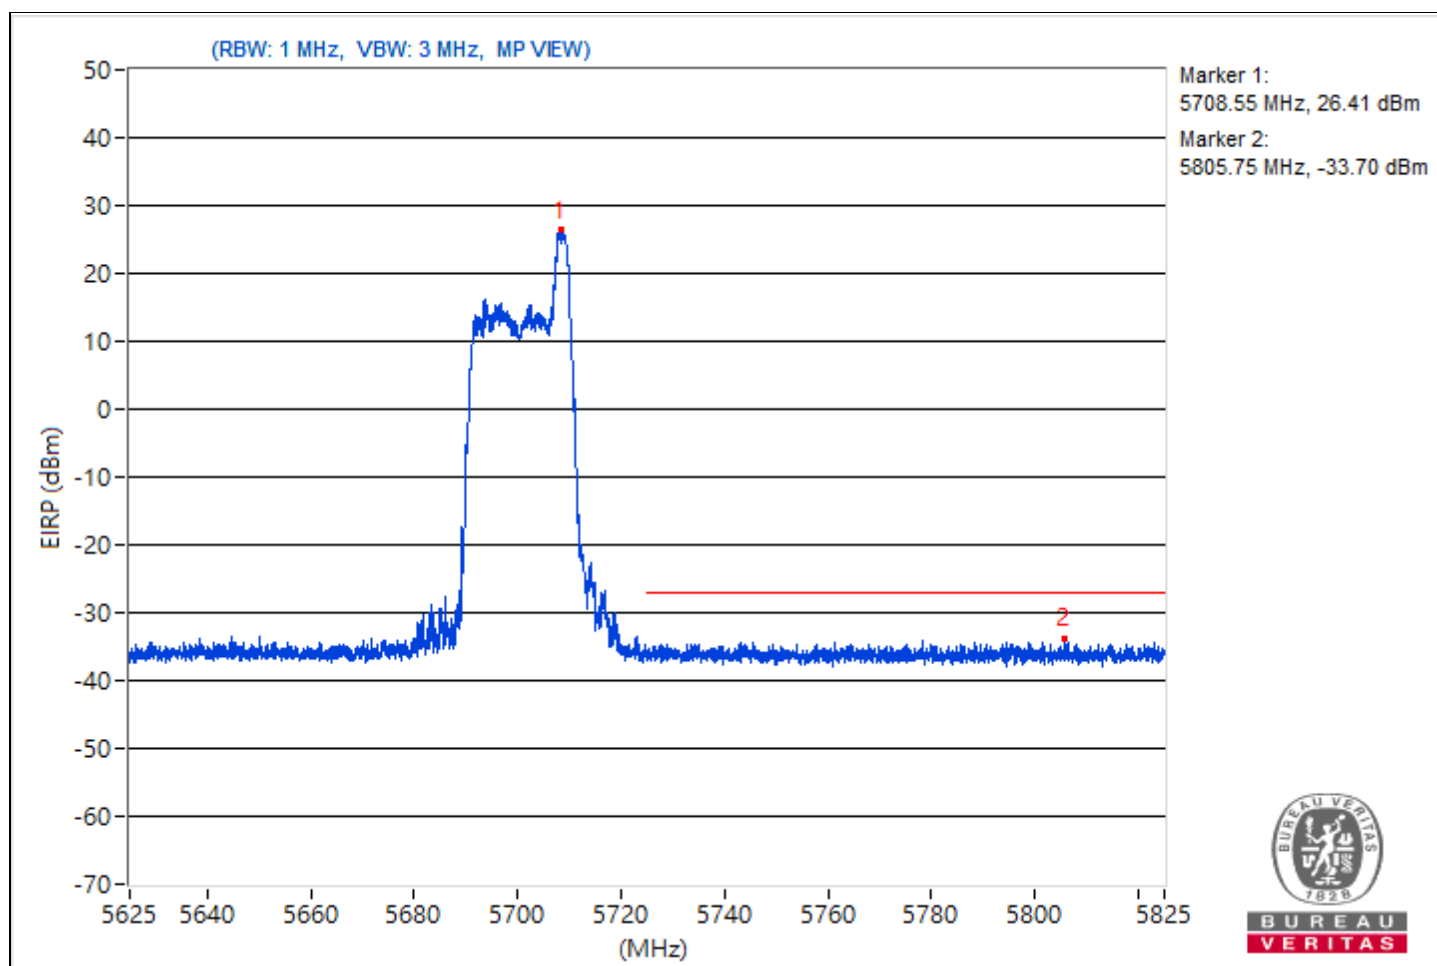


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5728.35	121.61			15.46	14.41	8.37	26.35
2	#5872.27	61.57	68.26	-6.69	-44.18	-46.19	8.37	-33.69

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

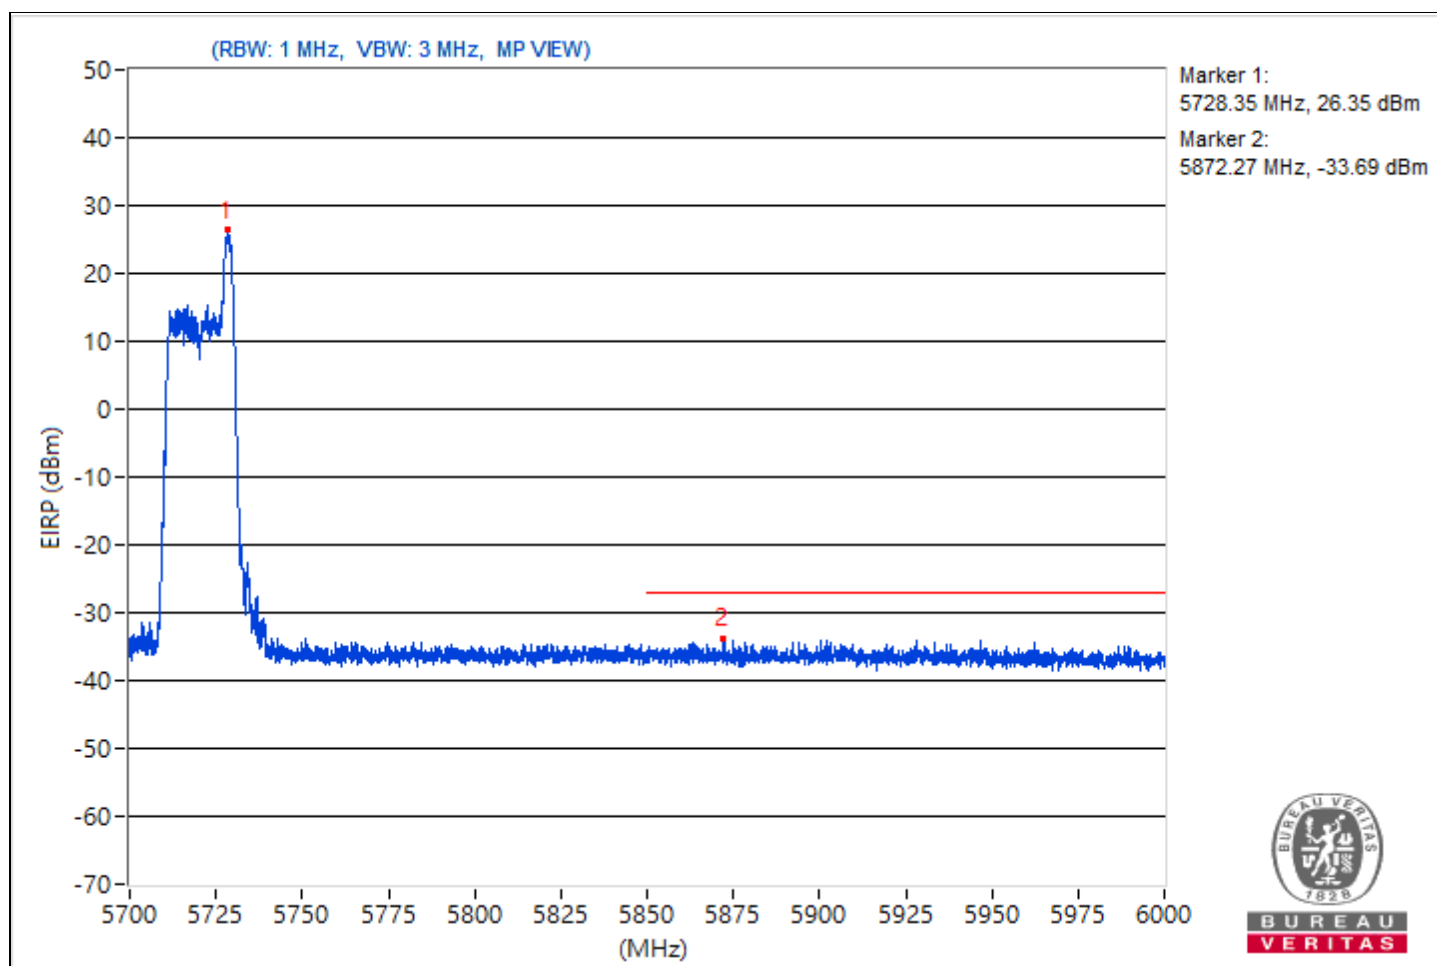


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5736.2	133.46			26.98	26.65	8.37	38.2
2	#5642.39	64.78	68.26	-3.48	-40.96	-43	8.37	-30.48
3	#5650.11	63.6	68.34	-4.74	-42.25	-44.01	8.37	-31.66
4	#5708.77	83.45	107.72	-24.27	-20.28	-36.48	8.37	-11.81
5	#5720.88	86.63	112.87	-26.24	-17.44	-27.16	8.37	-8.63
6	#5854.48	62.58	112.06	-49.48	-43.43	-44.81	8.37	-32.68
7	#5874.07	63.01	105.52	-42.51	-45.46	-42.36	8.37	-32.25
8	#5924.18	61.95	68.87	-6.92	-43.61	-46.13	8.37	-33.31
9	#5928.22	62.58	68.26	-5.68	-42.88	-45.69	8.37	-32.68

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

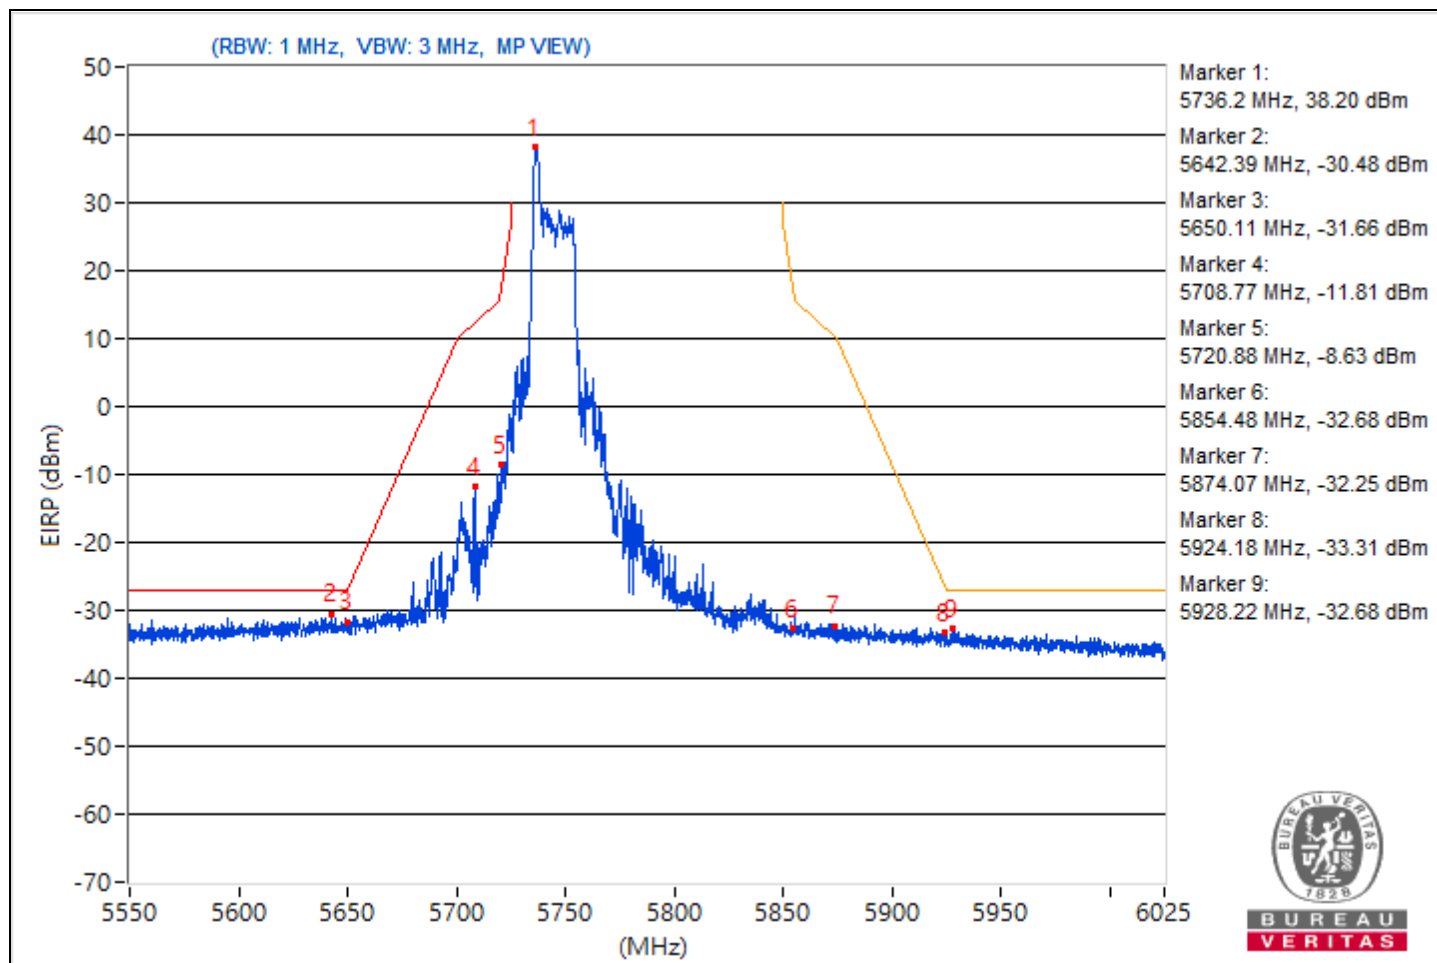


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5834.05	133.4			27.21	26.26	8.37	38.14
2	#5633.01	62.62	68.26	-5.64	-46.2	-42.58	8.37	-32.64
3	#5650.7	62.46	68.78	-6.32	-44.56	-43.82	8.37	-32.8
4	#5706.16	63.58	106.98	-43.4	-43.99	-42.3	8.37	-31.68
5	#5720.05	63.73	110.97	-47.24	-42.1	-43.89	8.37	-31.53
6	#5854.83	82.44	111.24	-28.8	-25.24	-23.36	8.37	-12.82
7	#5861.48	84.37	109.05	-24.68	-19.67	-29.7	8.37	-10.89
8	#5922.16	64.1	70.36	-6.26	-42.66	-42.42	8.37	-31.16
9	#5950.31	63.58	68.26	-4.68	-45.57	-41.48	8.37	-31.68

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

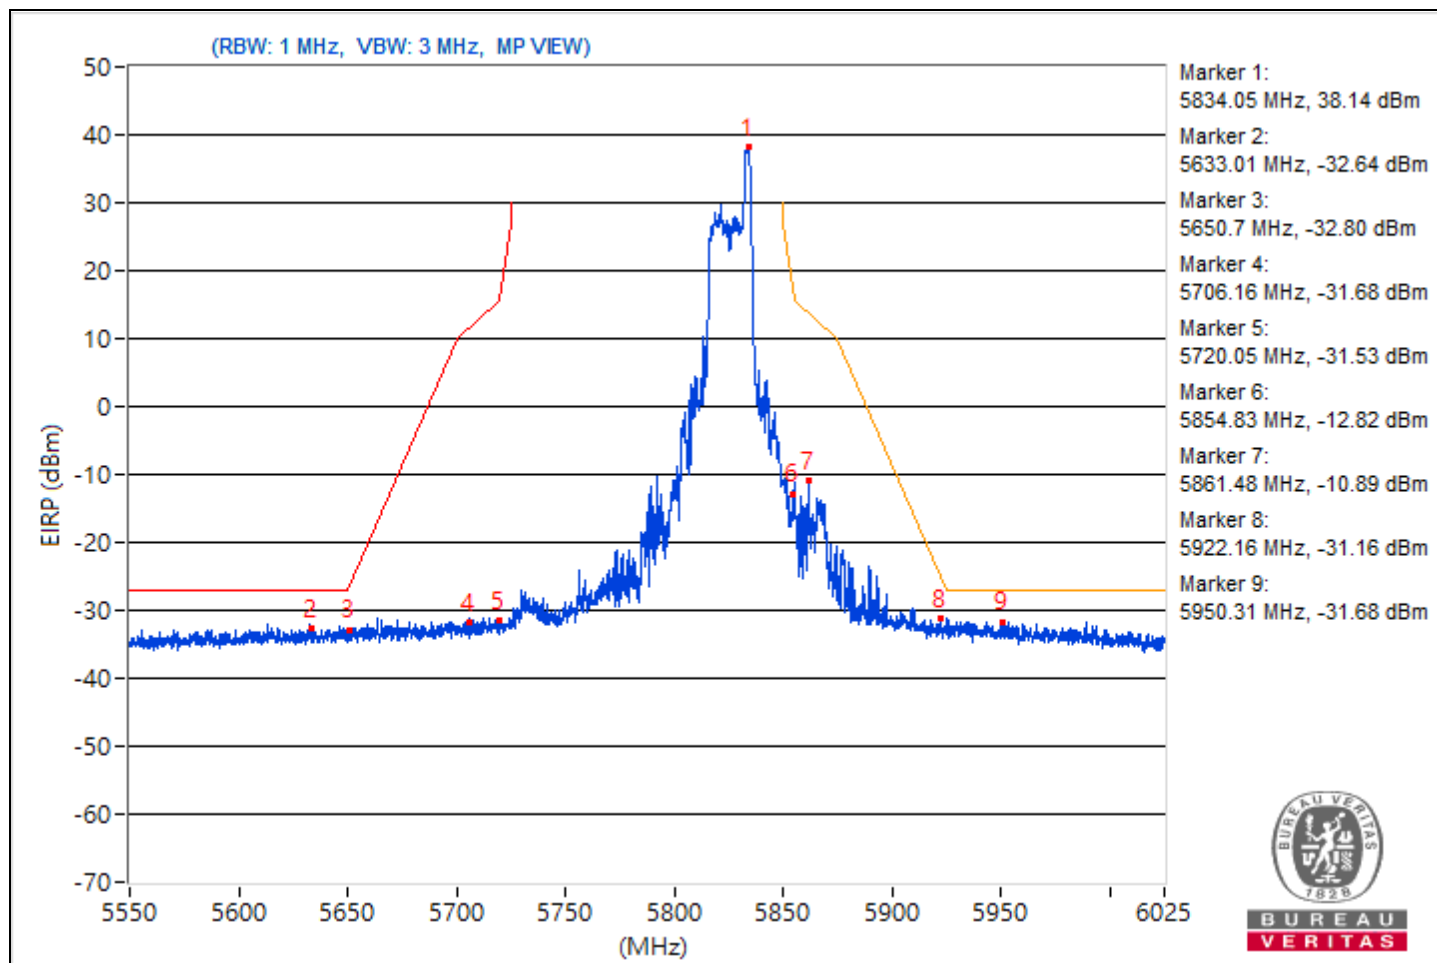


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5172.82	119.54 PK			13.39	12.36	8.37	24.28
2	*5172.82	111.2 AV			4.68	4.43	8.37	15.94
3	5086.5	60.73 PK	74	-13.27	-46.87	-45.12	8.37	-34.53
4	5086.5	51.23 AV	54	-2.77	-55.12	-55.72	8.37	-44.03

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

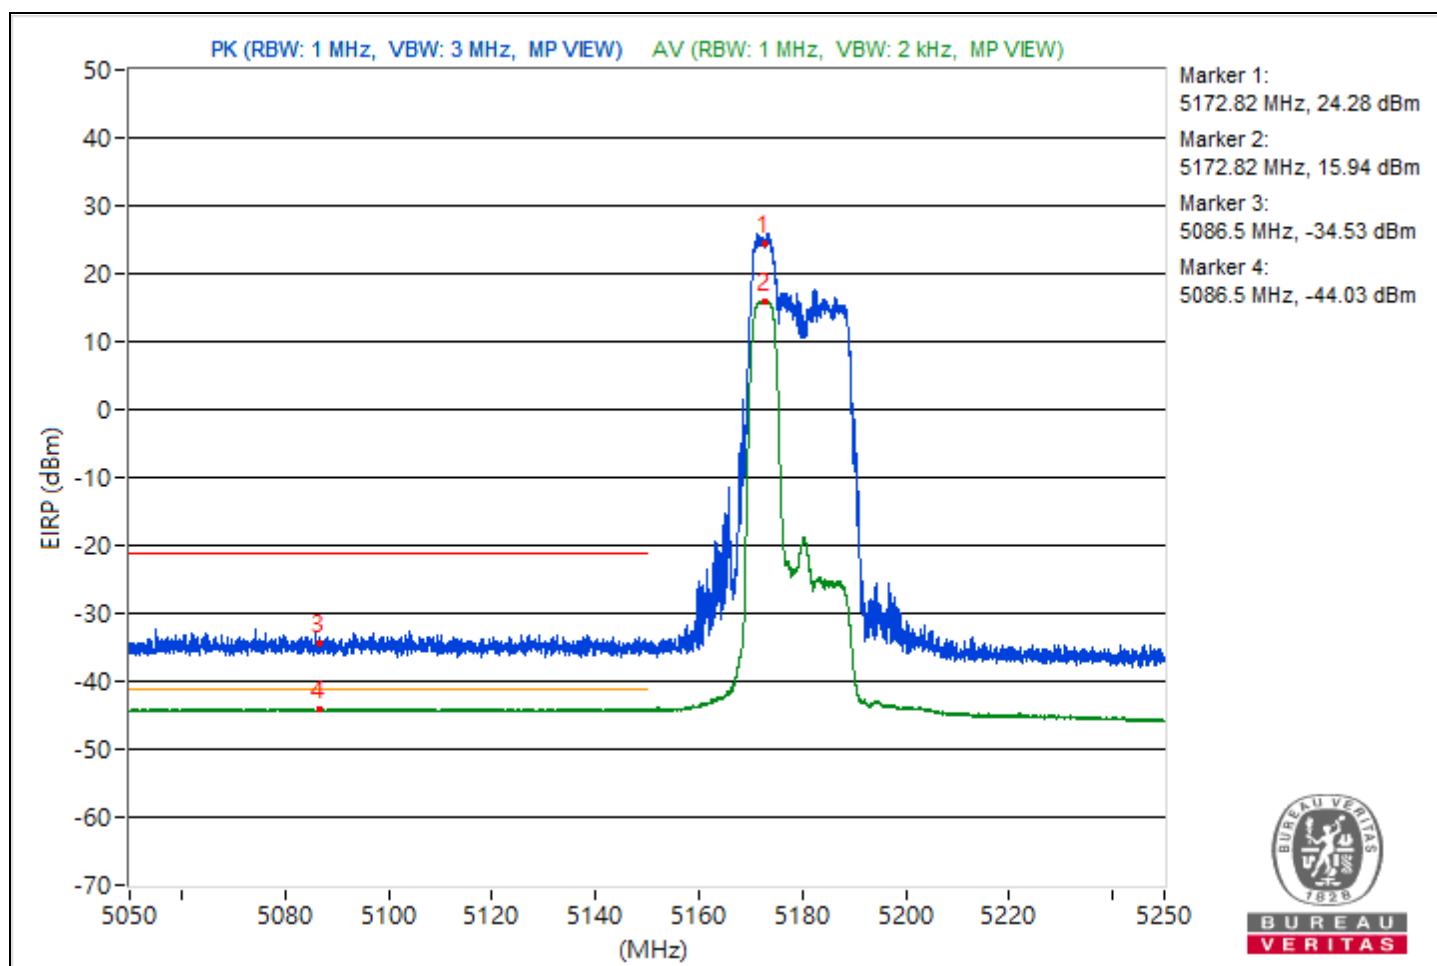


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5326.87	119.15 PK			13.22	11.66	8.37	23.89
2	*5326.87	110.71 AV			3.84	4.28	8.37	15.45
3	5357.65	57.65 PK	74	-16.35	-48.62	-49.4	8.37	-37.61
4	5357.65	49.59 AV	54	-4.41	-56.78	-57.34	8.37	-45.67

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

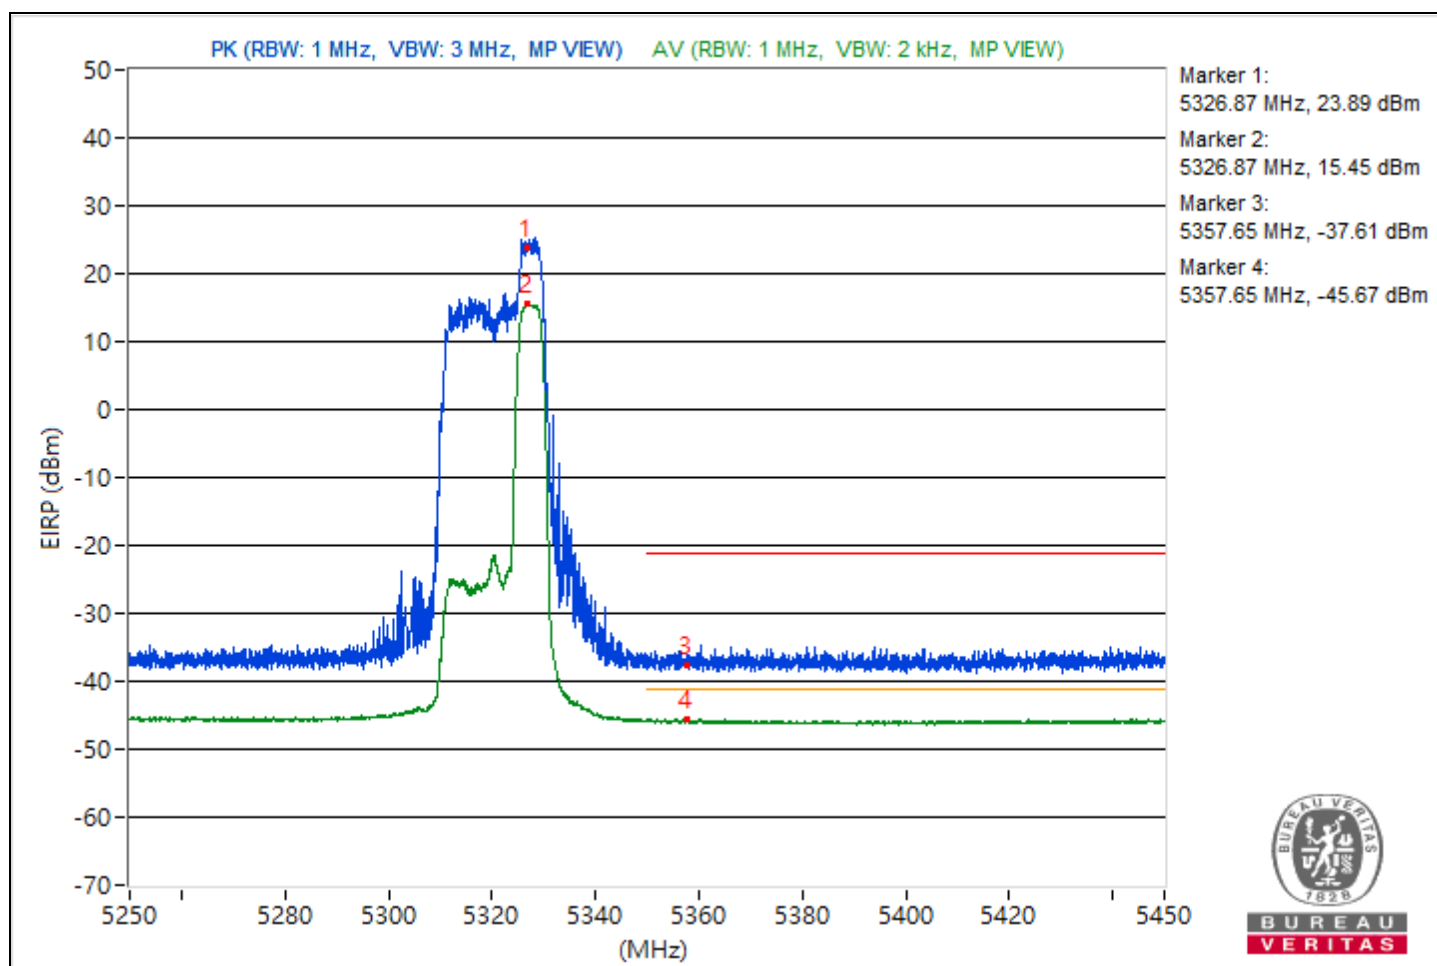


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5492.19	121.14 PK			15.48	13.23	8.37	25.88
2	5459.22	60.39 PK	74	-13.61	-47.41	-45.34	8.37	-34.87
3	#5469.31	61.23 PK	68.26	-7.03	-45.27	-45.56	8.37	-34.03
4	*5493.22	110.87 AV			4.34	4.12	8.37	15.61
5	5458.84	49.9 AV	54	-4.1	-56.85	-56.63	8.37	-45.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

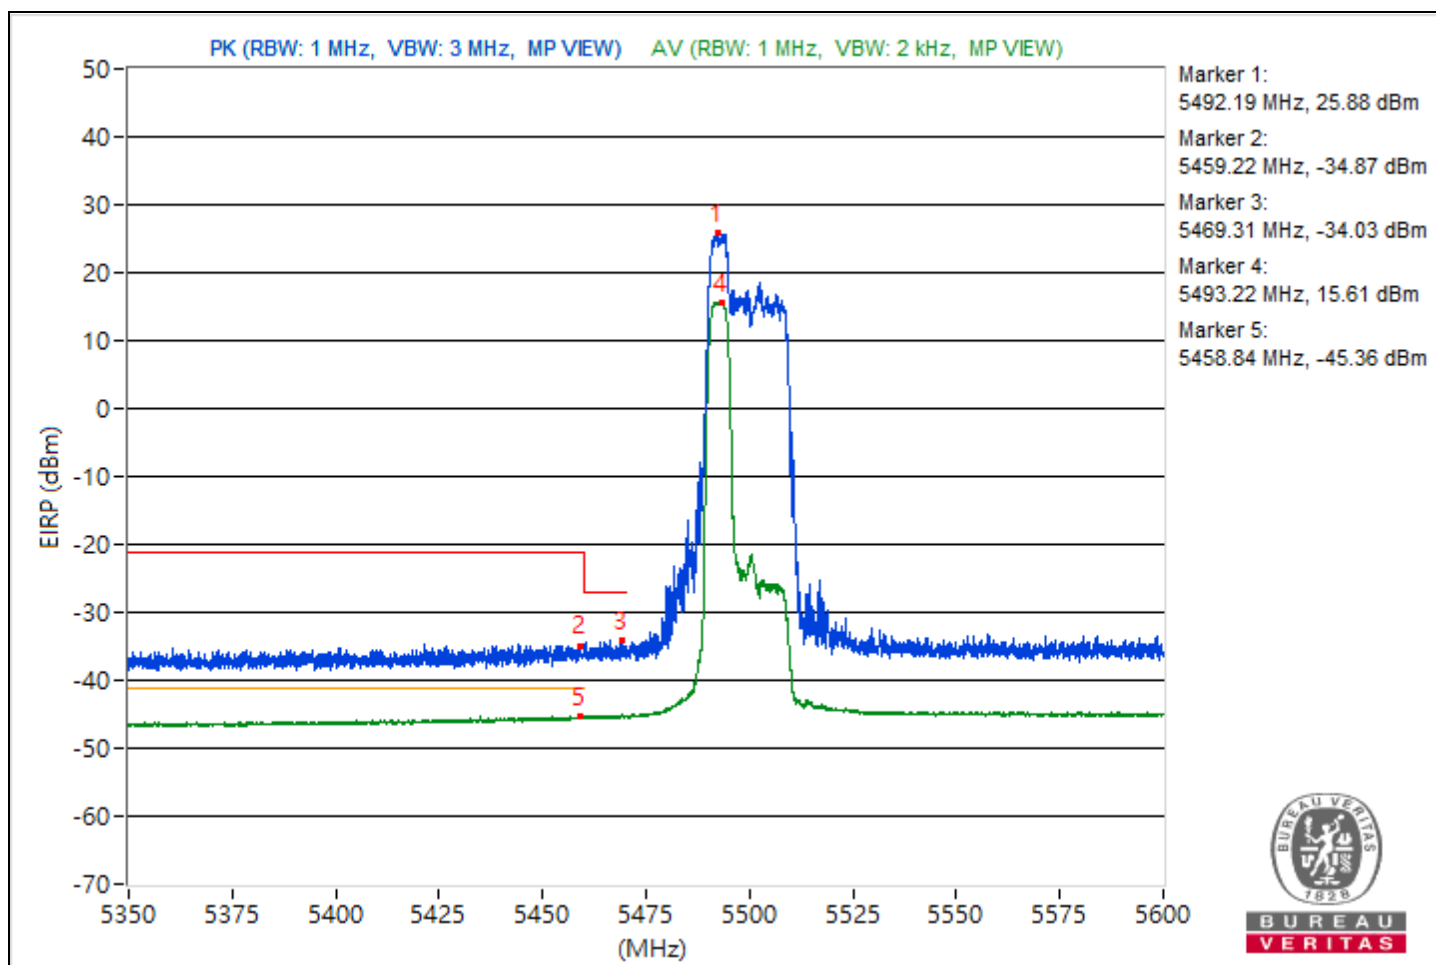


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5707.35	122.19			16.39	14.51	8.37	26.93
2	#5727.32	61.54	68.26	-6.72	-46.09	-44.29	8.37	-33.72

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

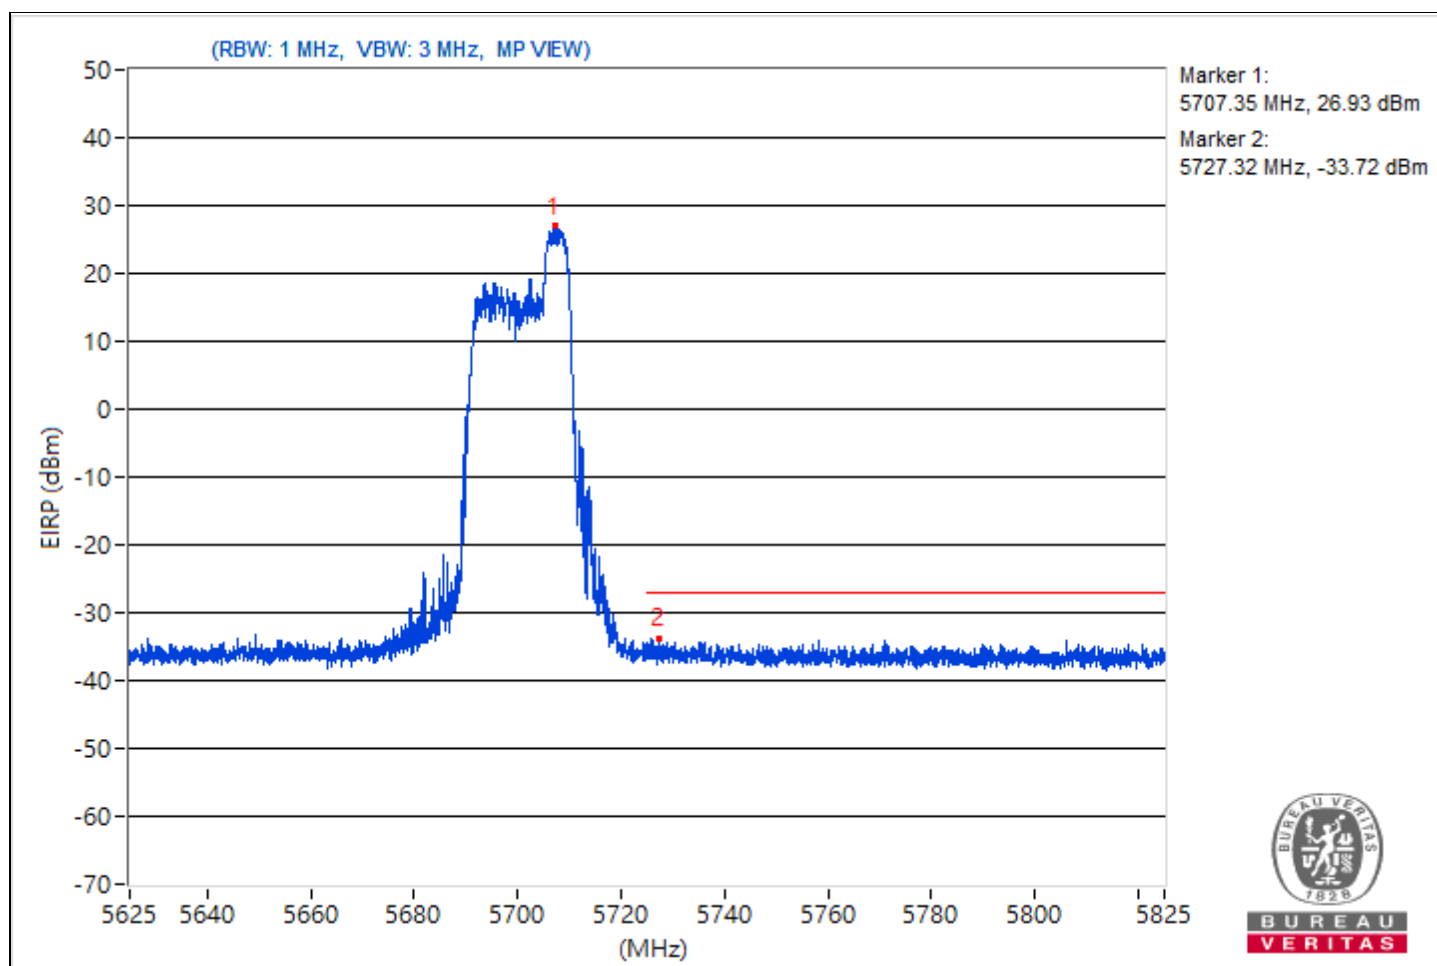


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5728.99	122.36			16.34	14.98	8.37	27.1
2	#5912.62	60.79	68.26	-7.47	-48.14	-44.36	8.37	-34.47

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

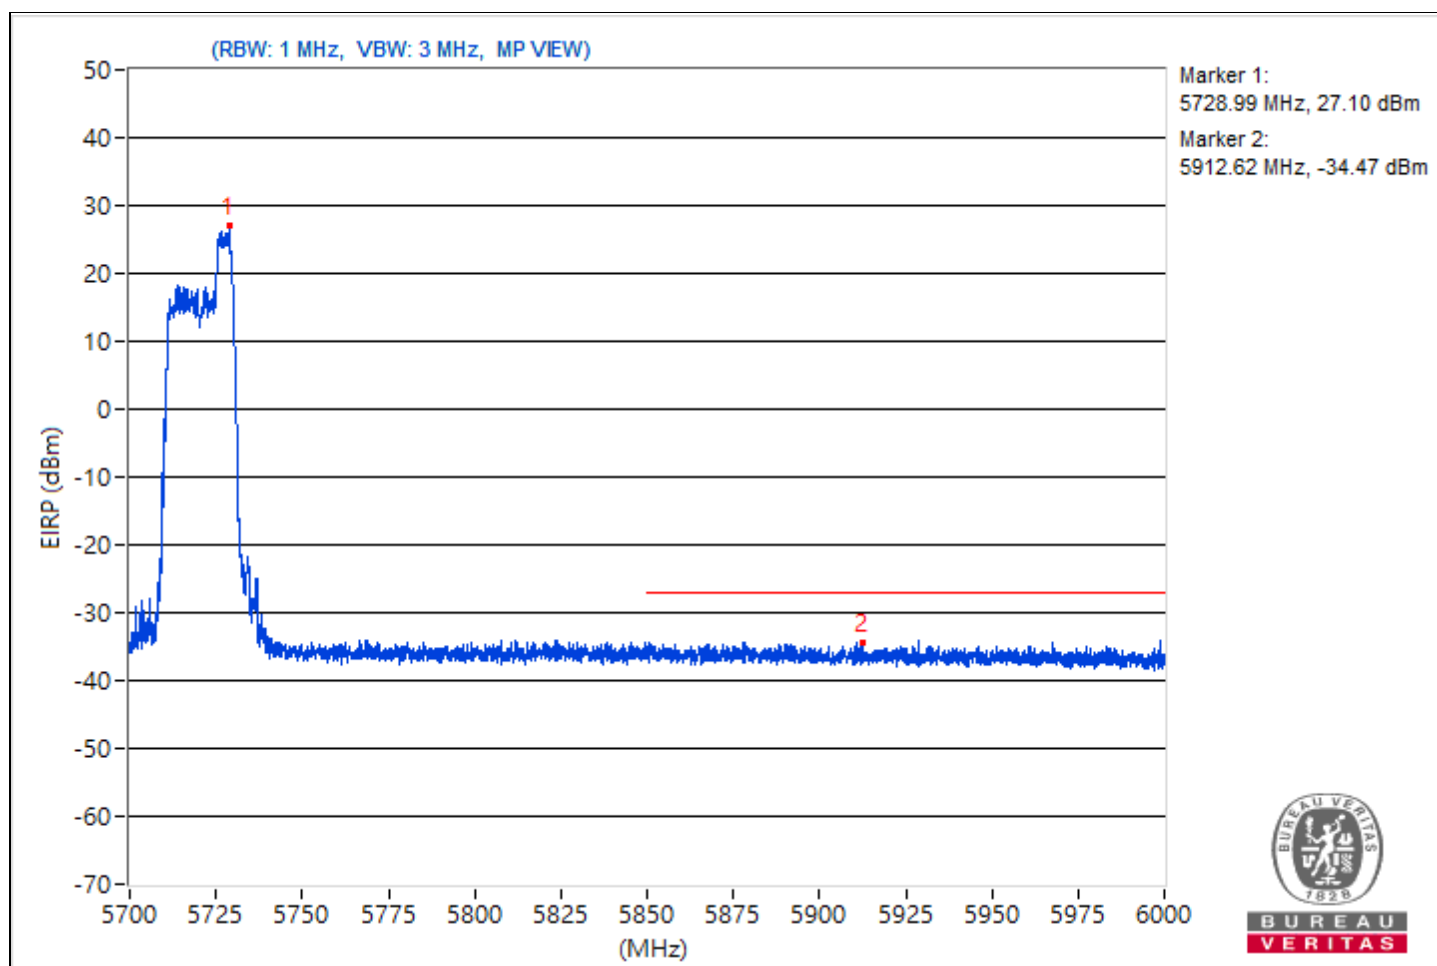


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5738.1	131.96			24.88	25.71	8.37	36.7
2	#5648.09	64.87	68.26	-3.39	-43.11	-40.74	8.37	-30.39
3	#5649.99	63.99	68.26	-4.27	-41.94	-43.51	8.37	-31.27
4	#5707.94	85.87	107.48	-21.61	-21.05	-20.51	8.37	-9.39
5	#5723.73	94.09	119.37	-25.28	-12.18	-12.94	8.37	-1.17
6	#5854.83	62.84	111.24	-48.4	-44.97	-42.89	8.37	-32.42
7	#5870.86	63.72	106.42	-42.7	-41.79	-44.46	8.37	-31.54
8	#5924.54	61.72	68.6	-6.88	-44.24	-45.74	8.37	-33.54
9	#5958.5	61.79	68.26	-6.47	-43.47	-46.89	8.37	-33.47

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

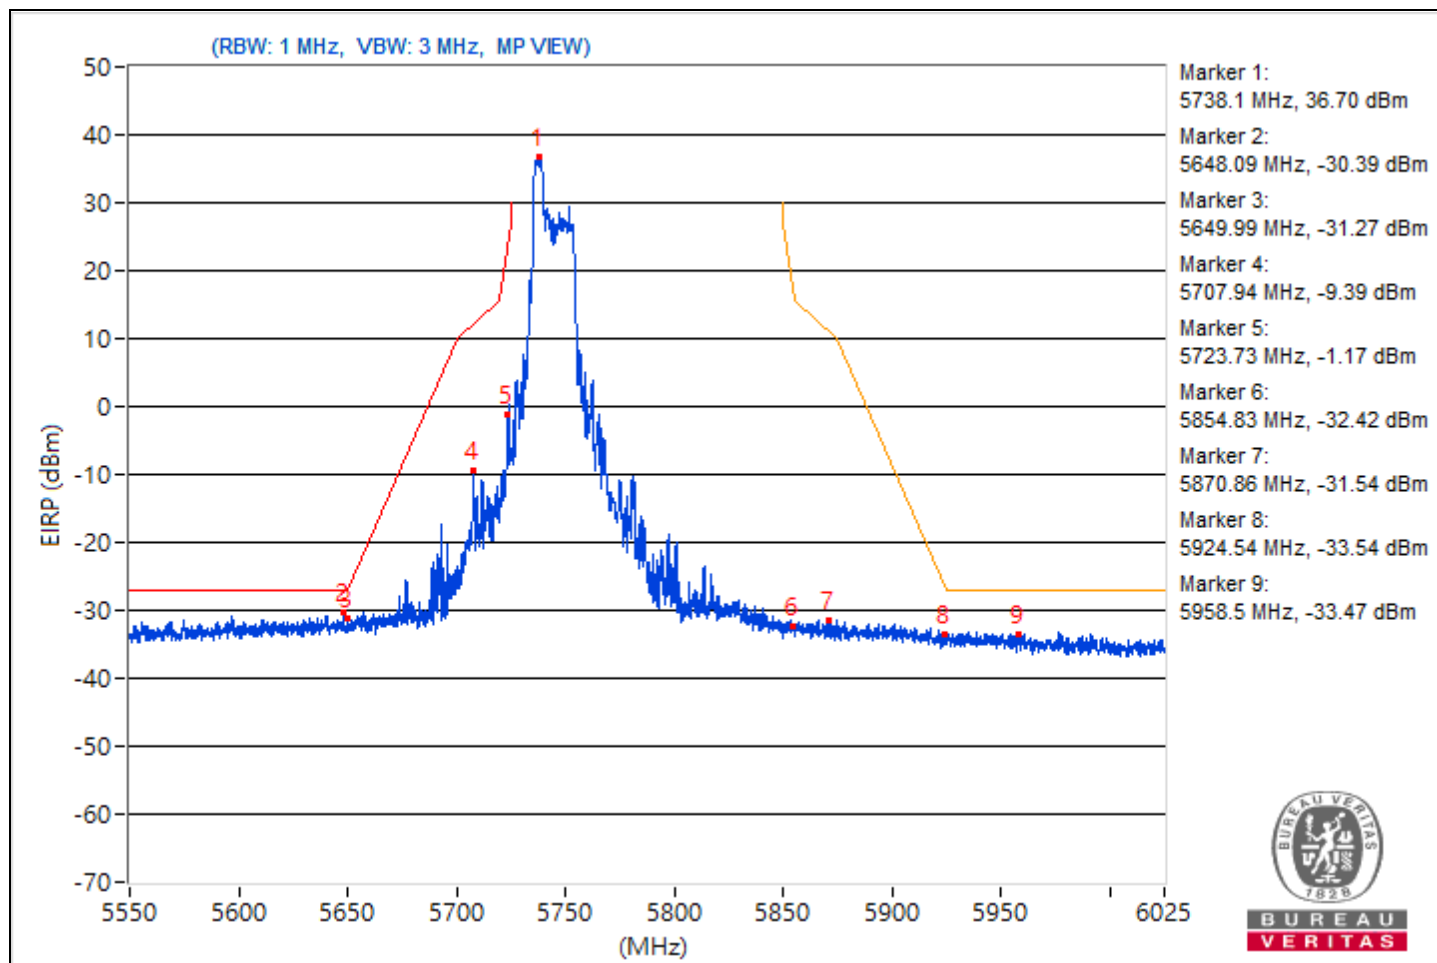


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5831.56	131.75			25.13	25.09	8.37	36.49
2	#5616.02	62.52	68.26	-5.74	-42.43	-46.93	8.37	-32.74
3	#5652.12	62.87	69.83	-6.96	-45.9	-42.34	8.37	-32.39
4	#5701.41	63.78	105.65	-41.87	-41.55	-44.73	8.37	-31.48
5	#5720.17	63.16	111.24	-48.08	-42.89	-44.17	8.37	-32.1
6	#5854.83	81.06	111.24	-30.18	-22.83	-34.97	8.37	-14.2
7	#5860.89	82.19	109.21	-27.02	-29.77	-22.14	8.37	-13.07
8	#5924.77	63.34	68.43	-5.09	-43.34	-43.26	8.37	-31.92
9	#5940.09	63.06	68.26	-5.2	-41.96	-46.2	8.37	-32.2

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

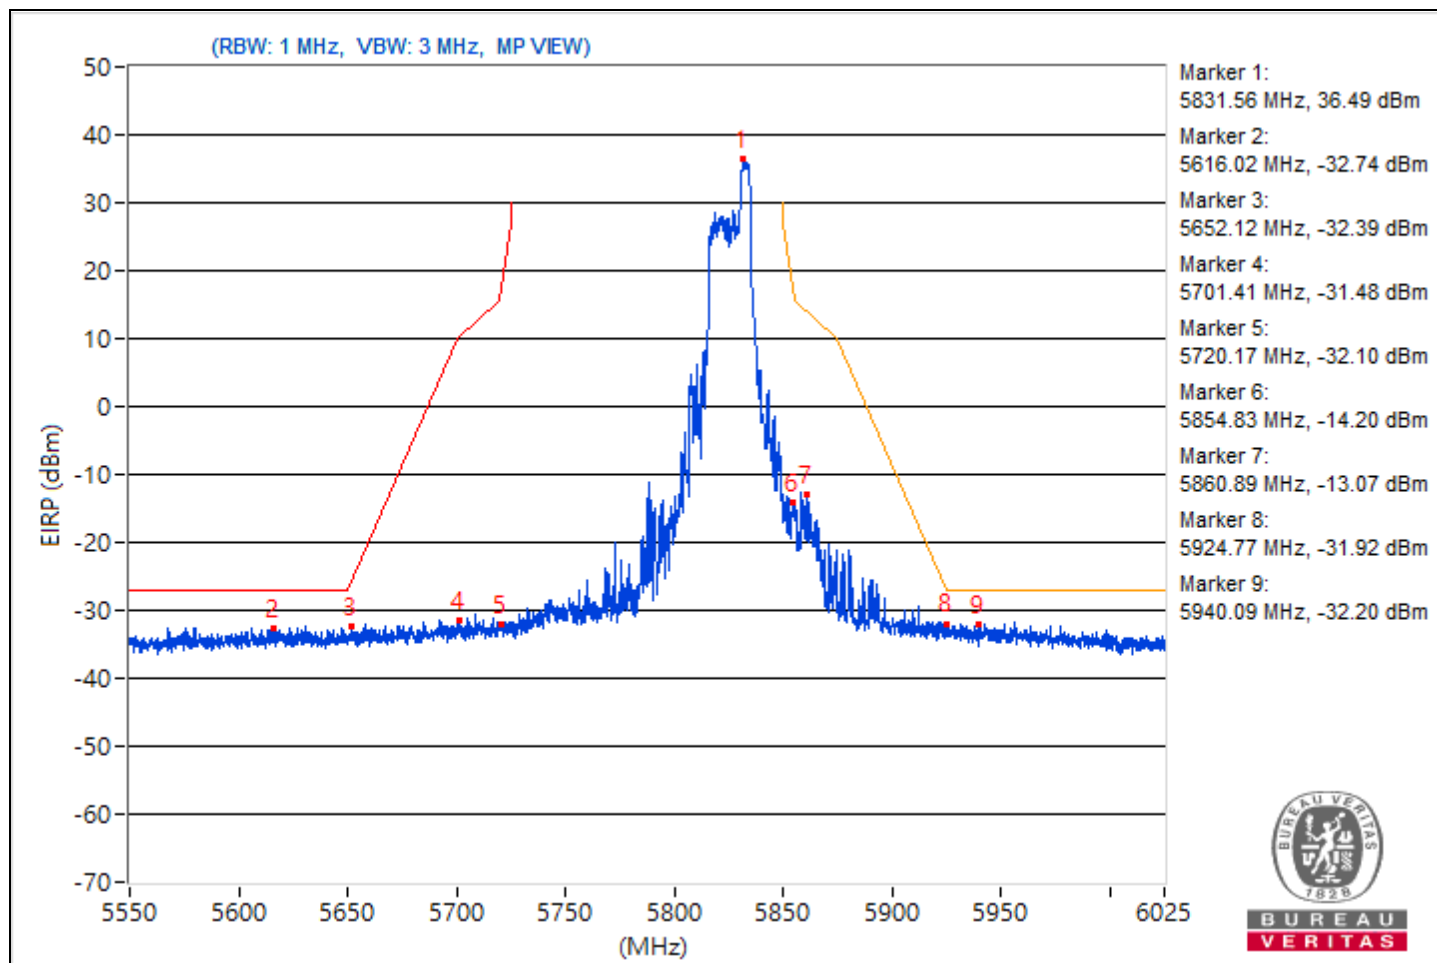


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5174.65	120.39 PK			13.51	13.97	8.37	25.13
2	*5174.65	111.26 AV			4.64	4.6	8.37	16
3	5148.8	61.34 PK	74	-12.66	-45.1	-45.52	8.37	-33.92
4	5148.8	52.55 AV	54	-1.45	-53.79	-54.41	8.37	-42.71

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

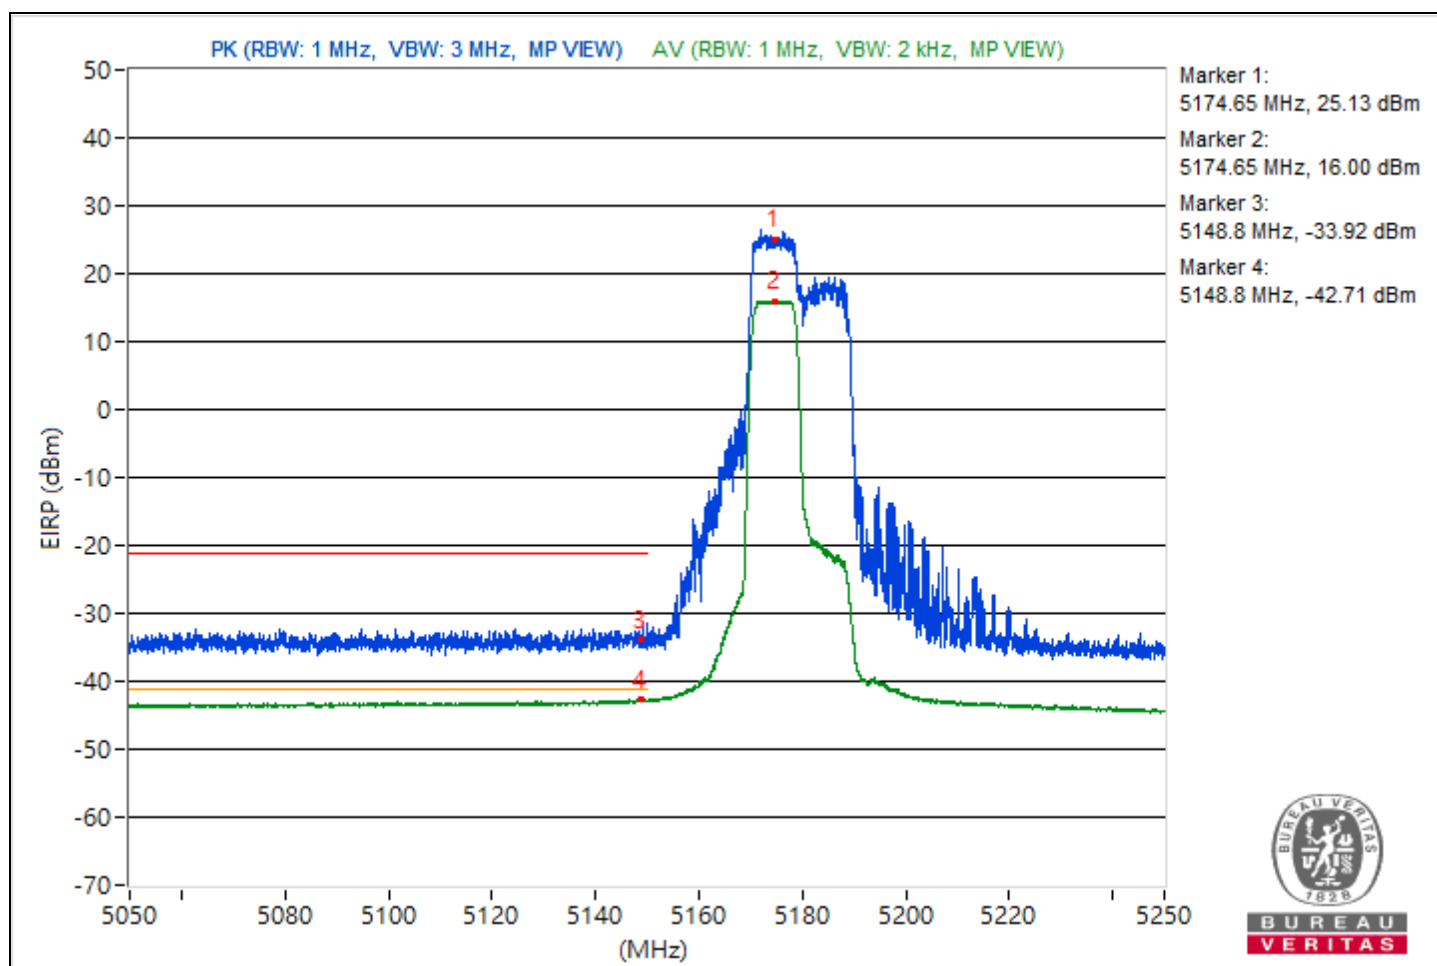


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5325.18	120.65 PK			15.18	12.41	8.37	25.39
2	*5325.18	111.17 AV			4.4	4.66	8.37	15.91
3	5350.45	60.89 PK	74	-13.11	-45.5	-46.01	8.37	-34.37
4	5350.45	51.48 AV	54	-2.52	-55.01	-55.32	8.37	-43.78

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

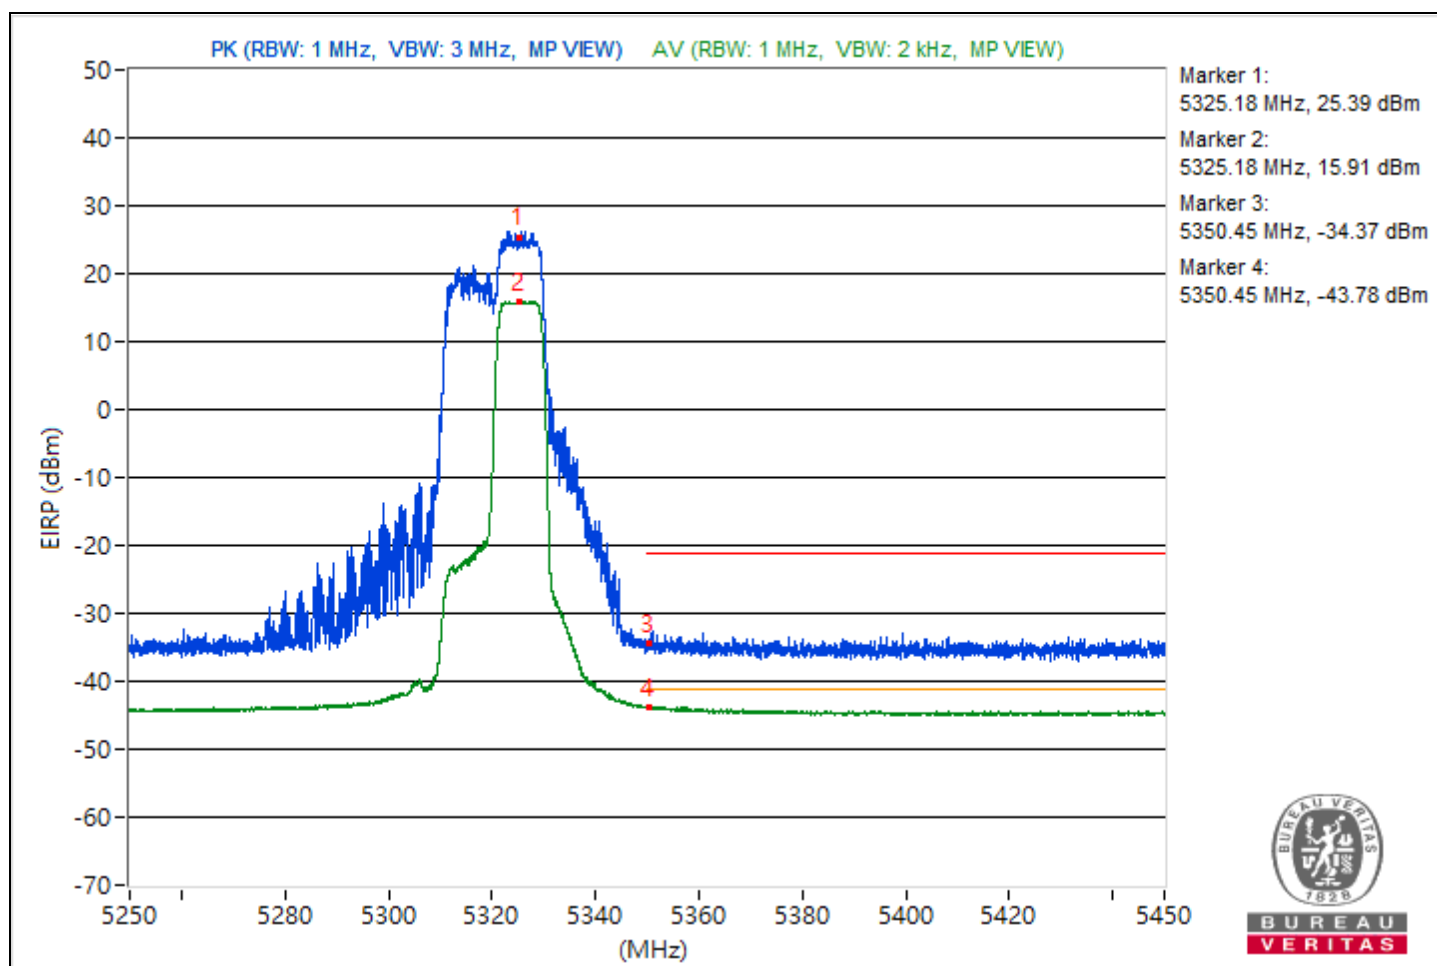


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5493.19	121.11 PK			12.96	15.59	8.37	25.85
2	5455.91	62.89 PK	74	-11.11	-45.08	-42.73	8.37	-32.37
3	#5461.62	62.64 PK	68.26	-5.62	-45.37	-42.96	8.37	-32.62
4	*5496.37	111.13 AV			4.56	4.4	8.37	15.87
5	5454.91	51.72 AV	54	-2.28	-55.11	-54.73	8.37	-43.54

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

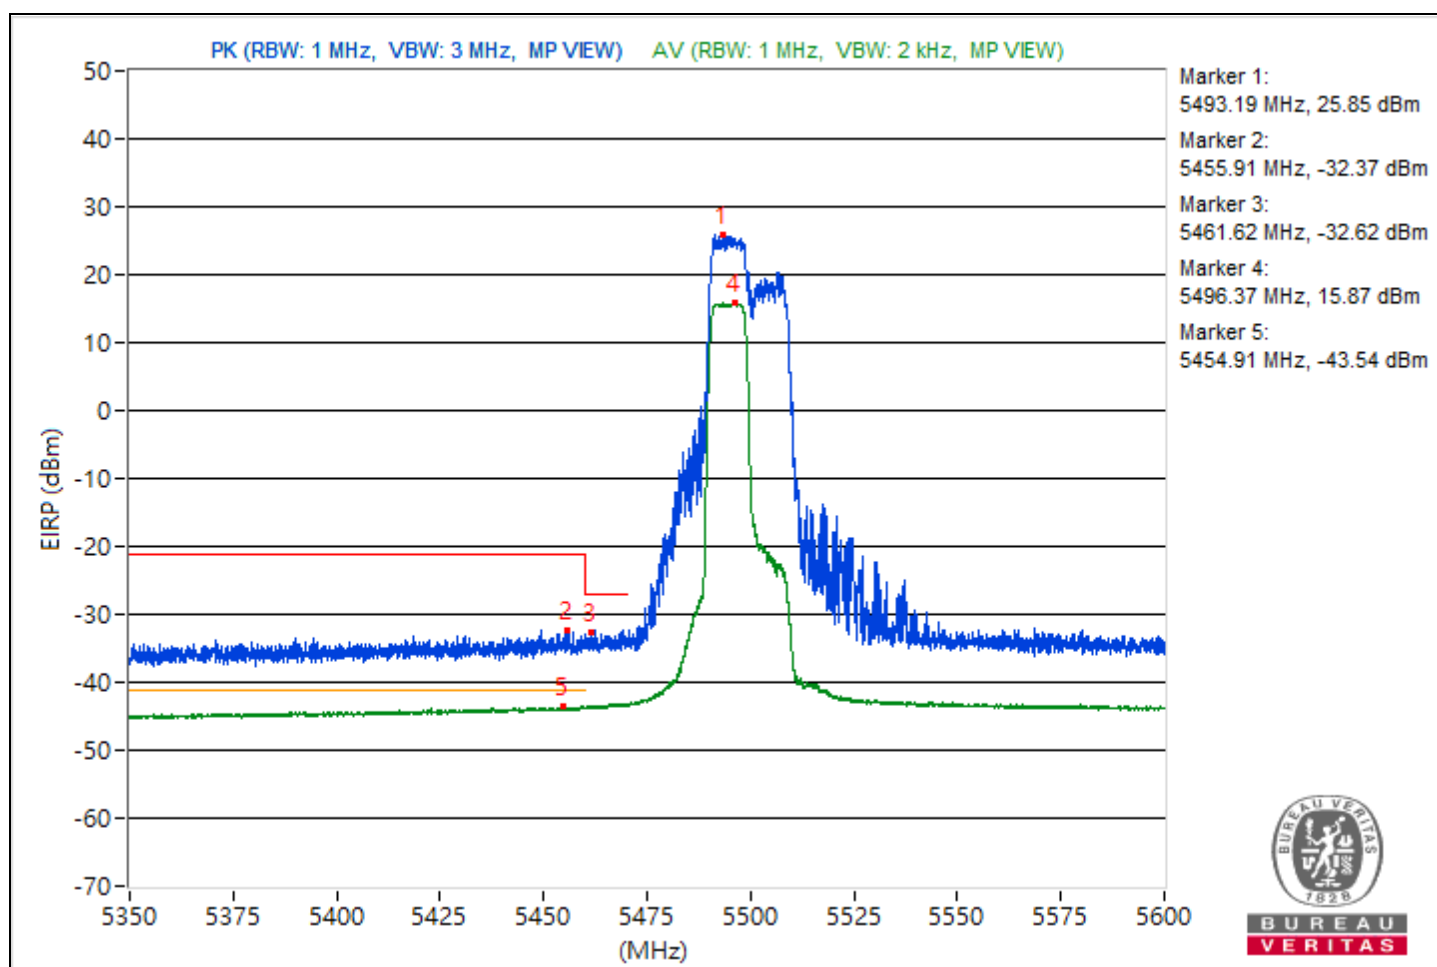


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5706.5	123.42			15.78	17.6	8.37	28.16
2	#5725.55	64.13	68.26	-4.13	-44.48	-41.16	8.37	-31.13

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

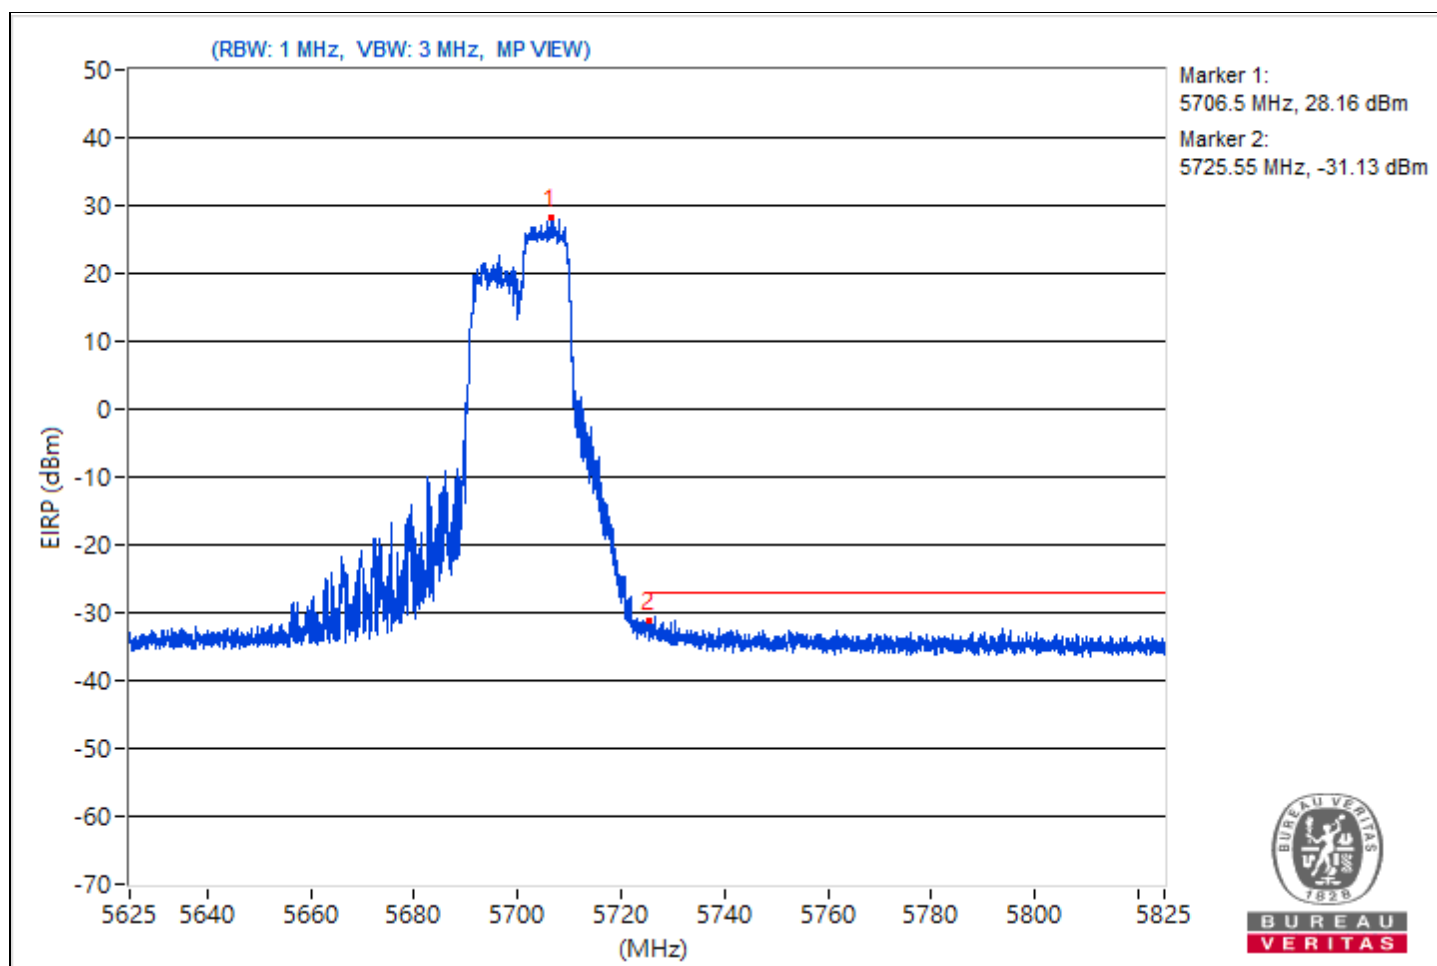


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5721.79	122			16.64	13.53	8.37	26.74
2	#5880.49	61.24	68.26	-7.02	-43.64	-48.42	8.37	-34.02

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

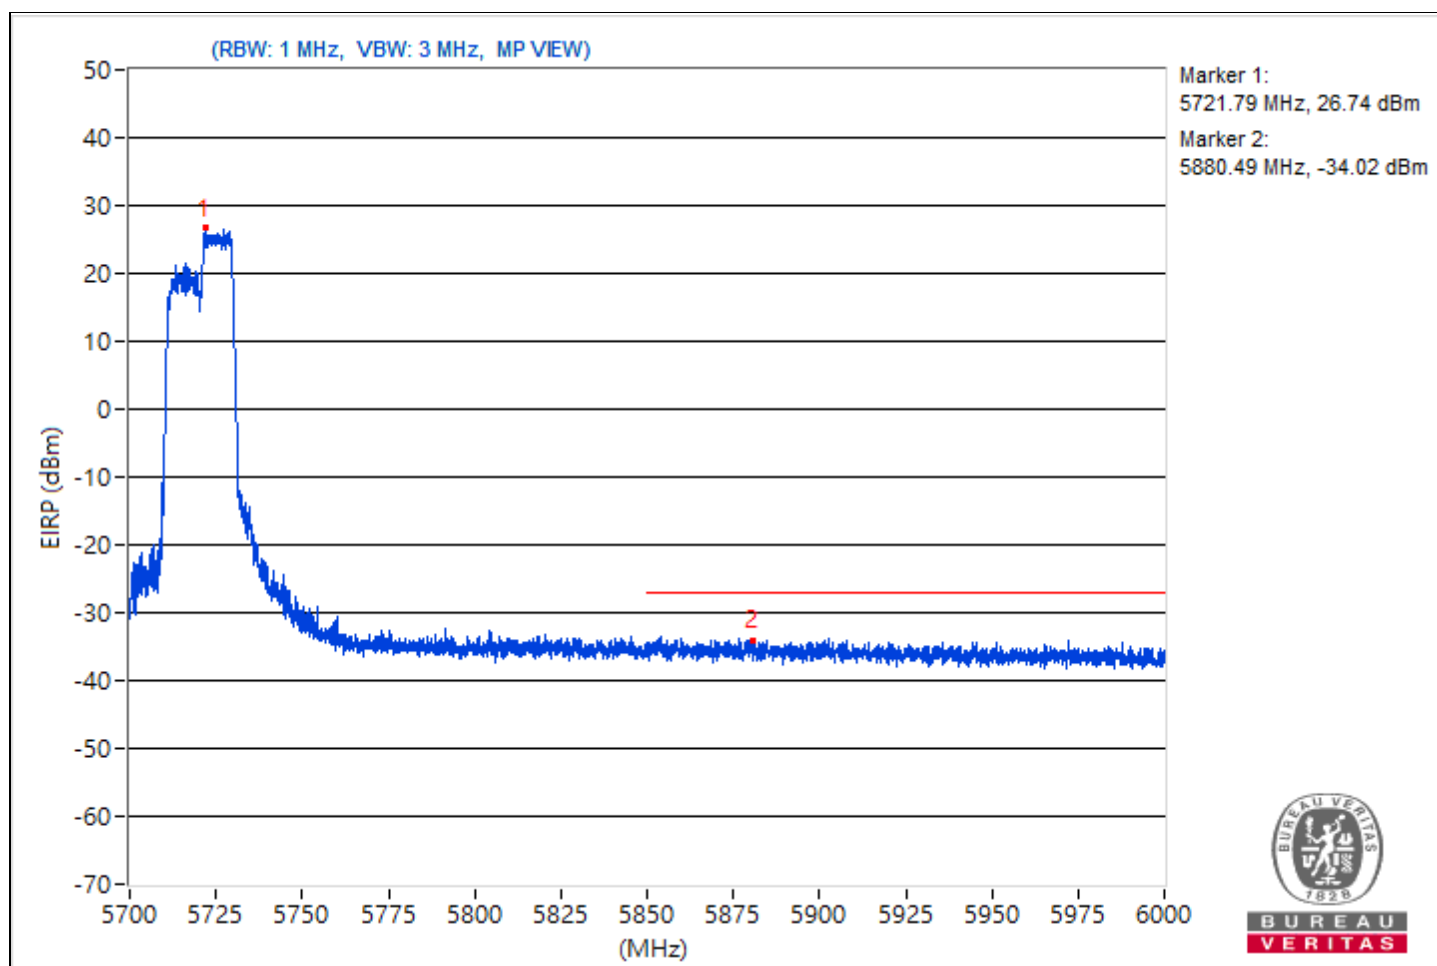


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5741.43	130.08			20.75	25.09	8.37	34.82
2	#5649.16	64.77	68.26	-3.49	-43.79	-40.55	8.37	-30.49
3	#5649.99	64.6	68.26	-3.66	-43.55	-40.93	8.37	-30.66
4	#5708.06	84.06	107.52	-23.46	-27.14	-20.41	8.37	-11.2
5	#5720.17	87.48	111.24	-23.76	-18.93	-19.41	8.37	-7.78
6	#5854.59	62.98	111.79	-48.81	-43.73	-43.59	8.37	-32.28
7	#5873.36	62.9	105.72	-42.82	-44.96	-42.79	8.37	-32.36
8	#5924.66	61.27	68.51	-7.24	-45.91	-44.9	8.37	-33.99
9	#5934.39	62.29	68.26	-5.97	-46.14	-43.09	8.37	-32.97

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

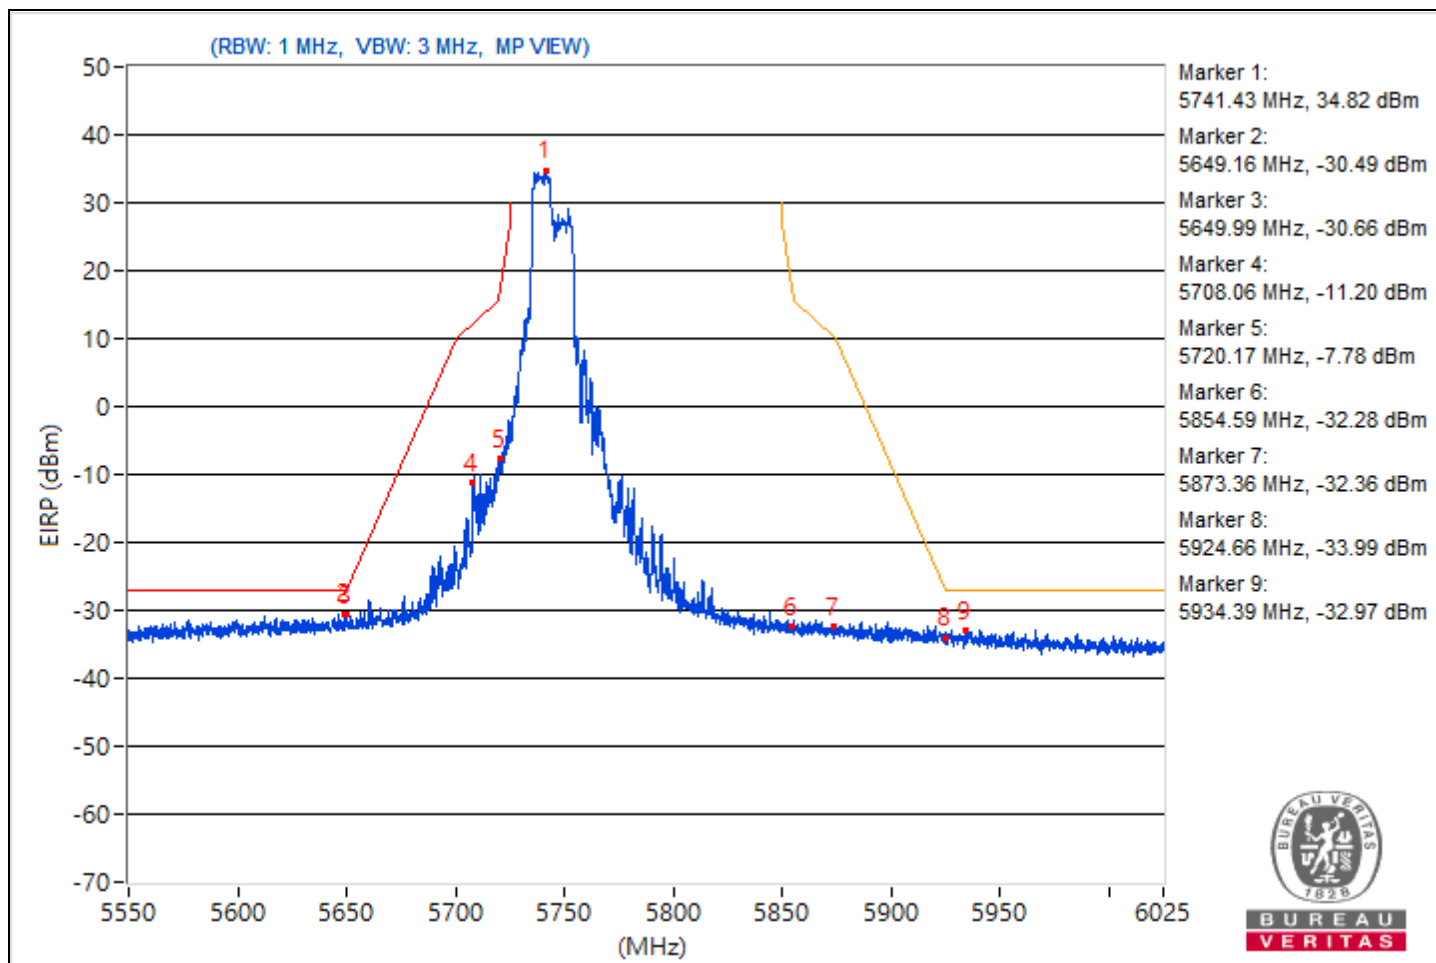


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5829.18	130.1			23.87	23.02	8.37	34.84
2	#5626.24	63.79	68.26	-4.47	-44.59	-41.61	8.37	-31.47
3	#5649.99	63.73	68.26	-4.53	-43.31	-42.55	8.37	-31.53
4	#5700.1	63.79	105.29	-41.5	-43.08	-42.64	8.37	-31.47
5	#5720.05	64.05	110.97	-46.92	-42.76	-42.44	8.37	-31.21
6	#5854.24	85.01	112.6	-27.59	-25.67	-19.58	8.37	-10.25
7	#5856.85	85.17	110.34	-25.17	-20.12	-23.46	8.37	-10.09
8	#5924.66	64.69	68.51	-3.82	-41.26	-42.77	8.37	-30.57
9	#5927.51	64.26	68.26	-4	-42.15	-42.62	8.37	-31

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

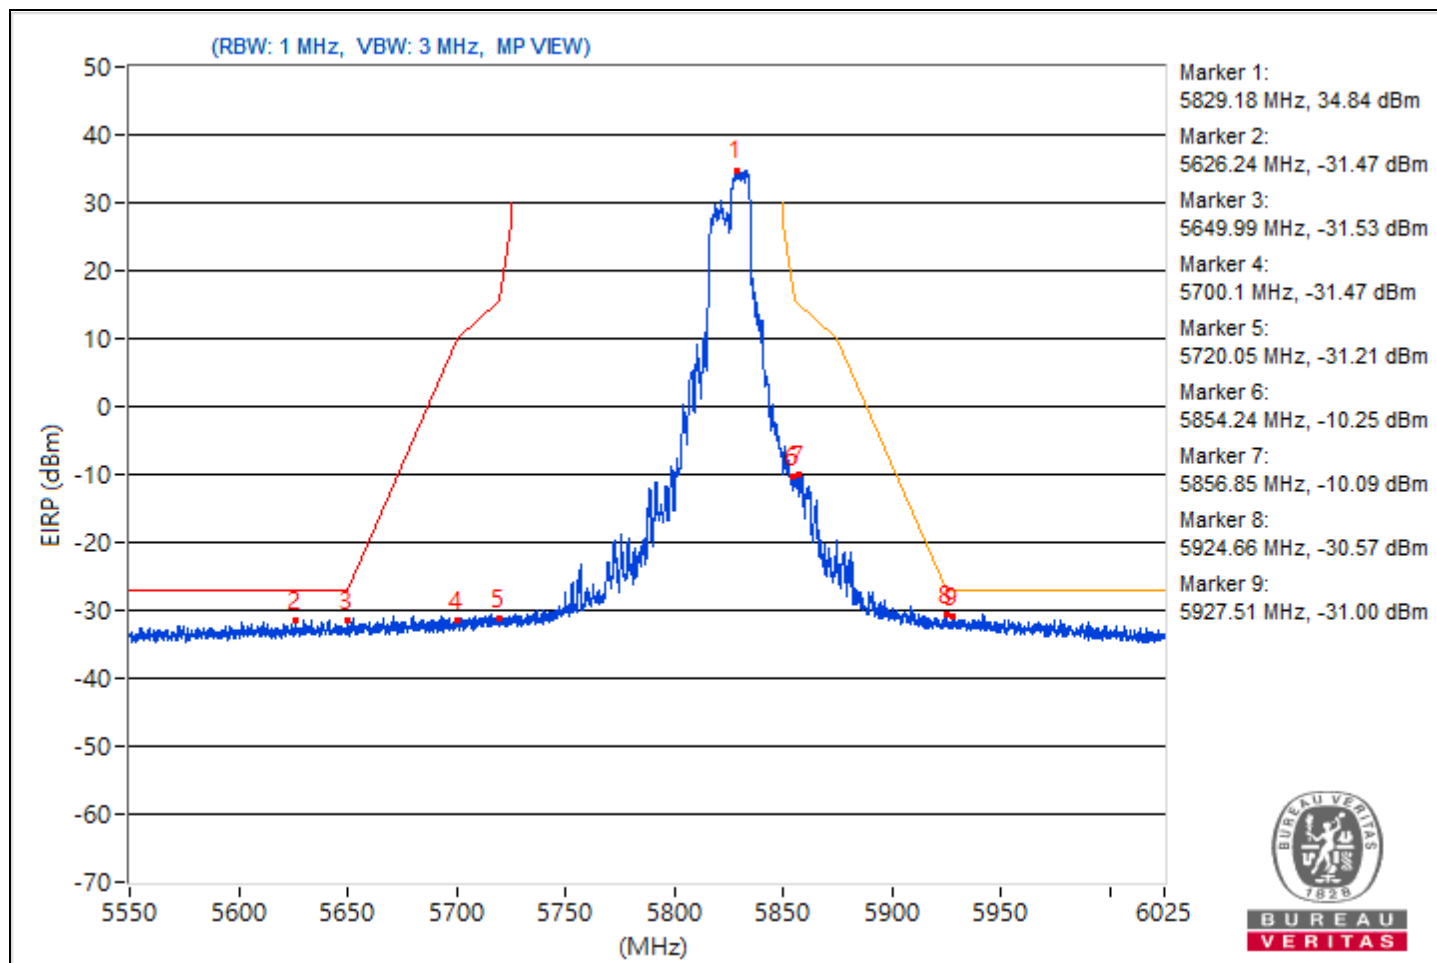


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5176	120.45 PK			14.13	13.46	8.37	25.19
2	*5176	111.8 AV			5.07	5.24	8.37	16.54
3	5144.62	61.53 PK	74	-12.47	-44.61	-45.67	8.37	-33.73
4	5144.62	52.37 AV	54	-1.63	-54.71	-53.88	8.37	-42.89

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

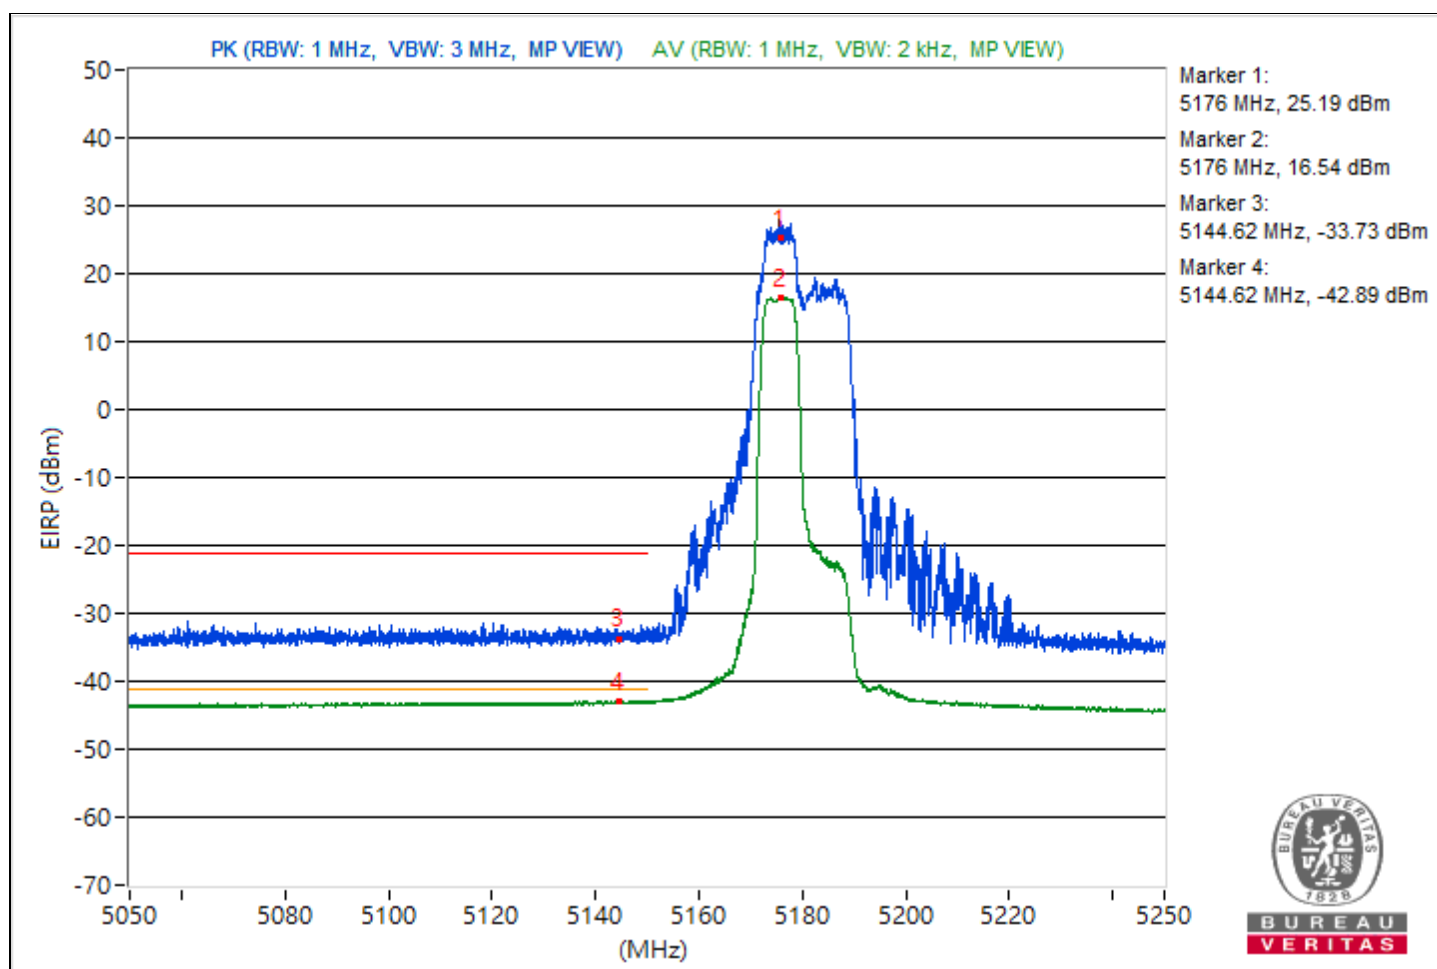


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5322.68	120.42 PK			13.75	13.82	8.37	25.16
2	*5322.68	111.4 AV			4.72	4.8	8.37	16.14
3	5350	59.46 PK	74	-14.54	-47.25	-47.11	8.37	-35.8
4	5350	51.39 AV	54	-2.61	-55.02	-55.5	8.37	-43.87

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

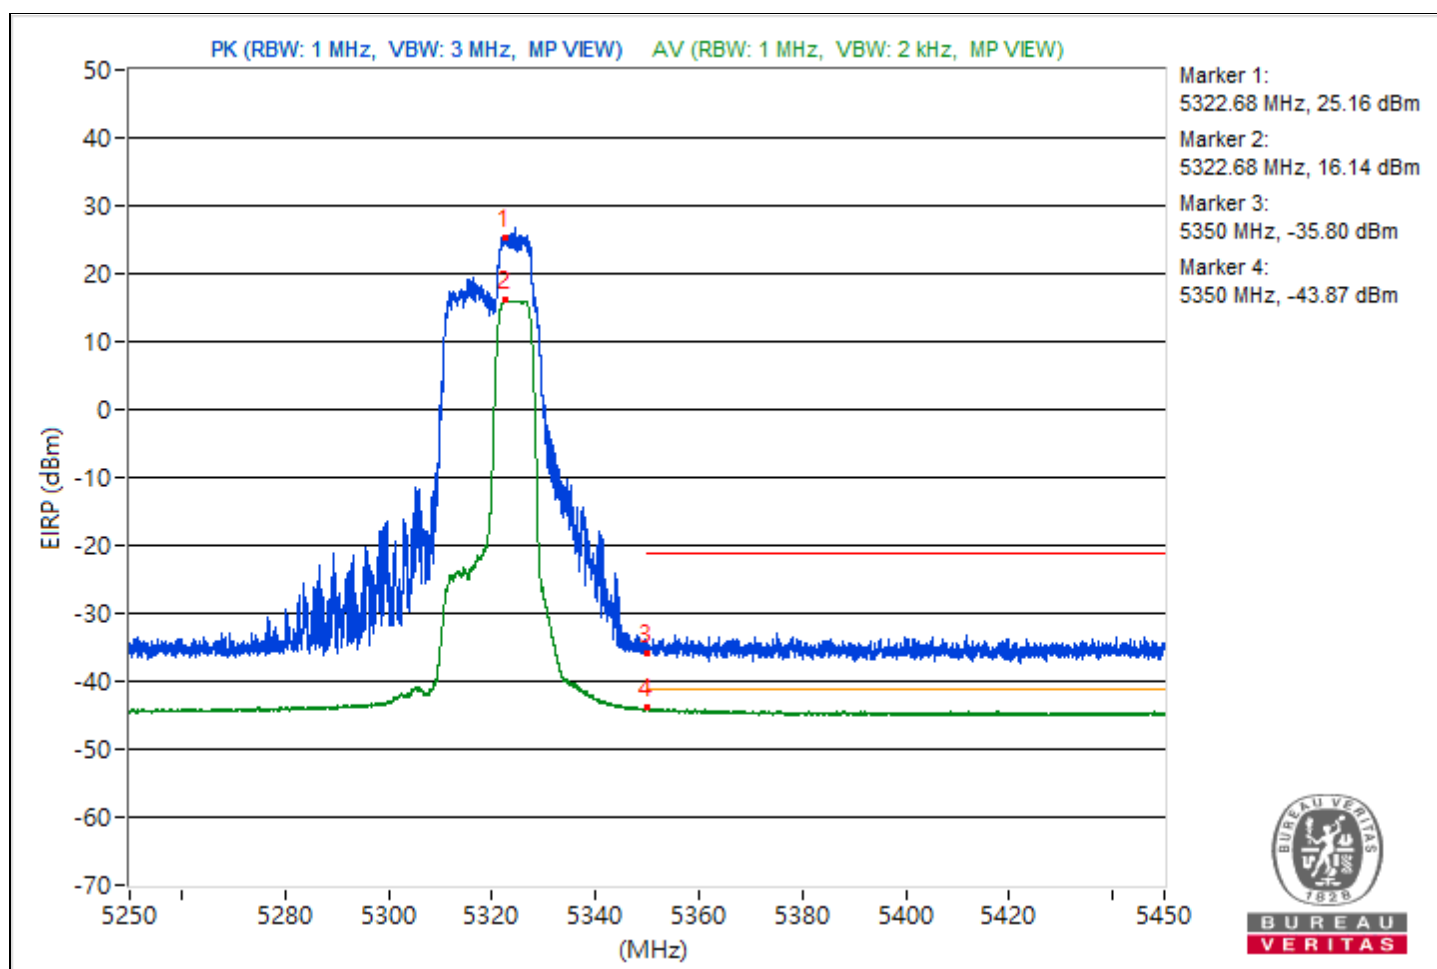


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5495.47	121.63 PK			13.01	16.34	8.37	26.37
2	5423.81	62.52 PK	74	-11.48	-46.03	-42.8	8.37	-32.74
3	#5469.28	62.38 PK	68.26	-5.88	-46.77	-42.68	8.37	-32.88
4	*5497.84	111.19 AV			4.67	4.42	8.37	15.93
5	5455.06	51.55 AV	54	-2.45	-54.94	-55.24	8.37	-43.71

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

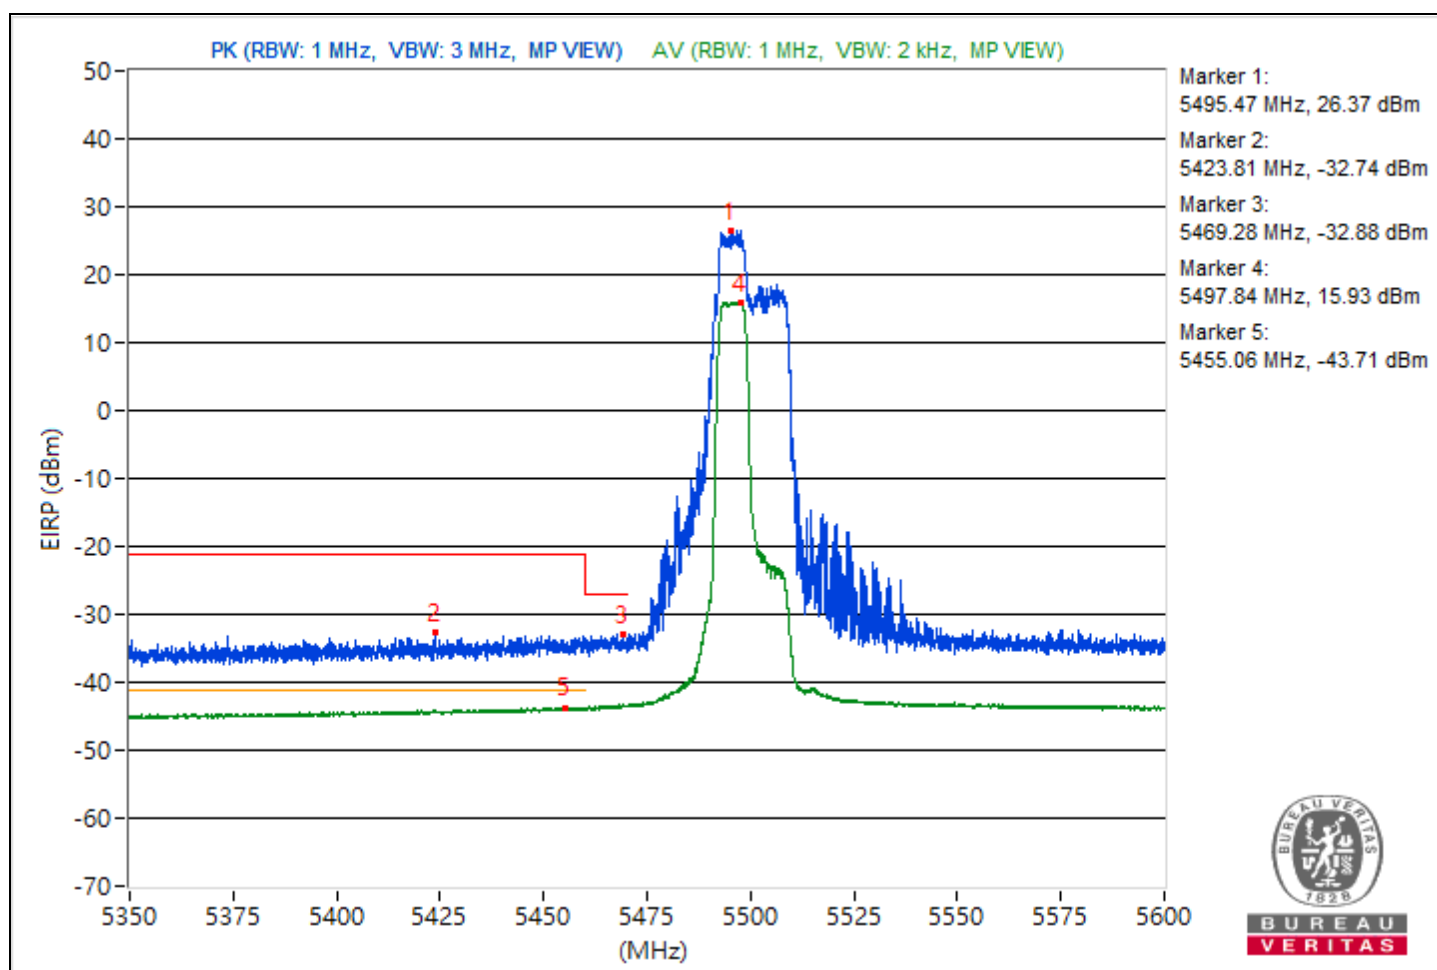


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5706.62	121.64			16.38	12.95	8.37	26.38
2	#5731.37	63.2	68.26	-5.06	-44.39	-42.66	8.37	-32.06

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

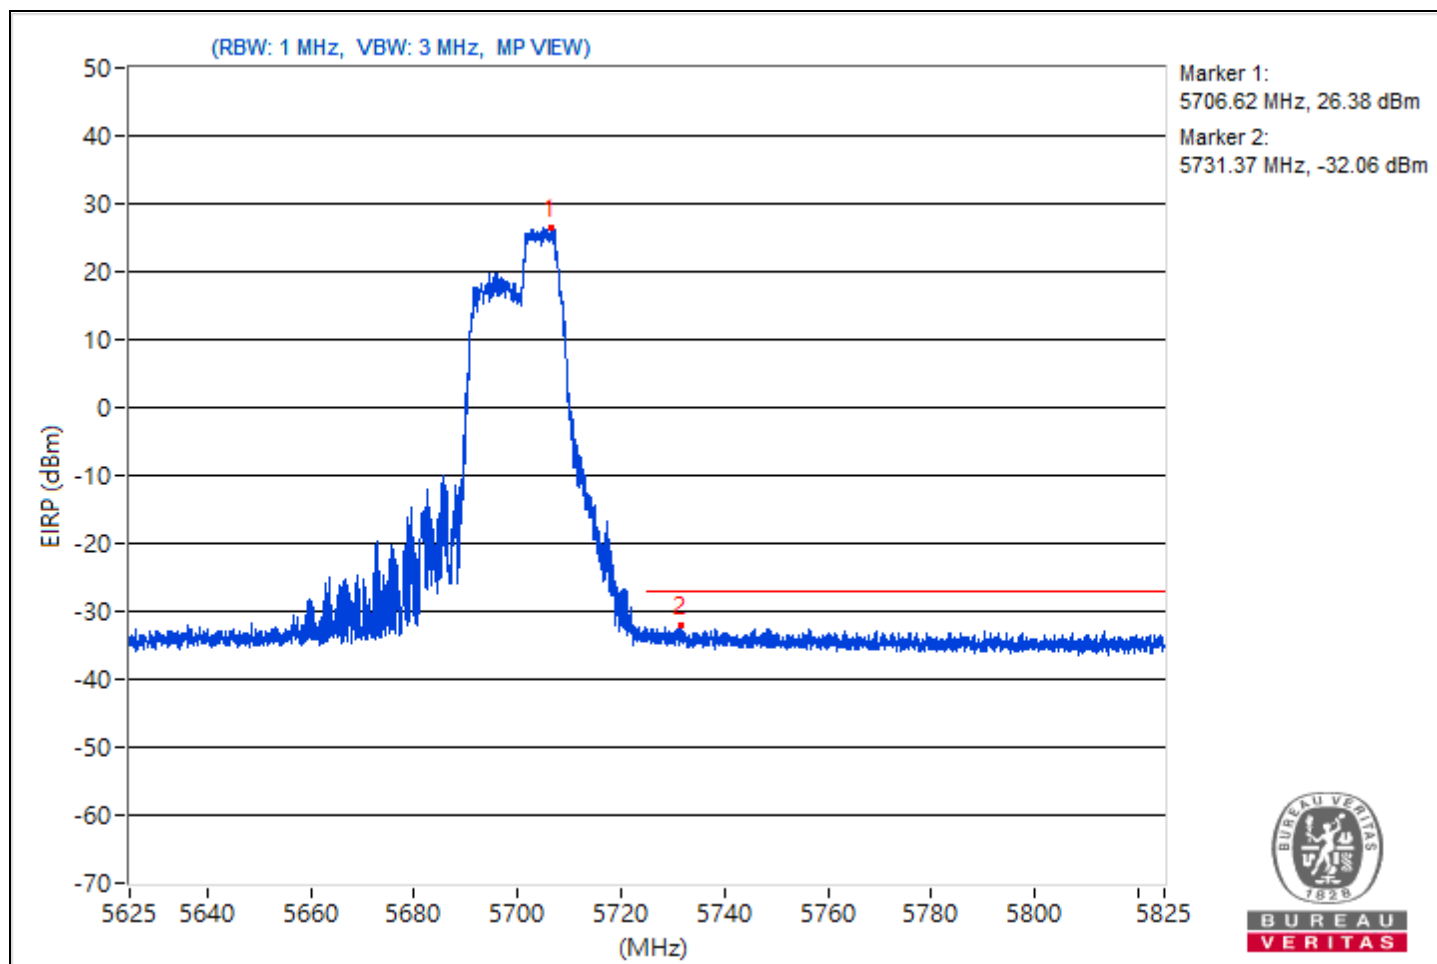


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5724.86	121.81			16.06	14.06	8.37	26.55
2	#5861.02	62.28	68.26	-5.98	-43.12	-46.11	8.37	-32.98

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

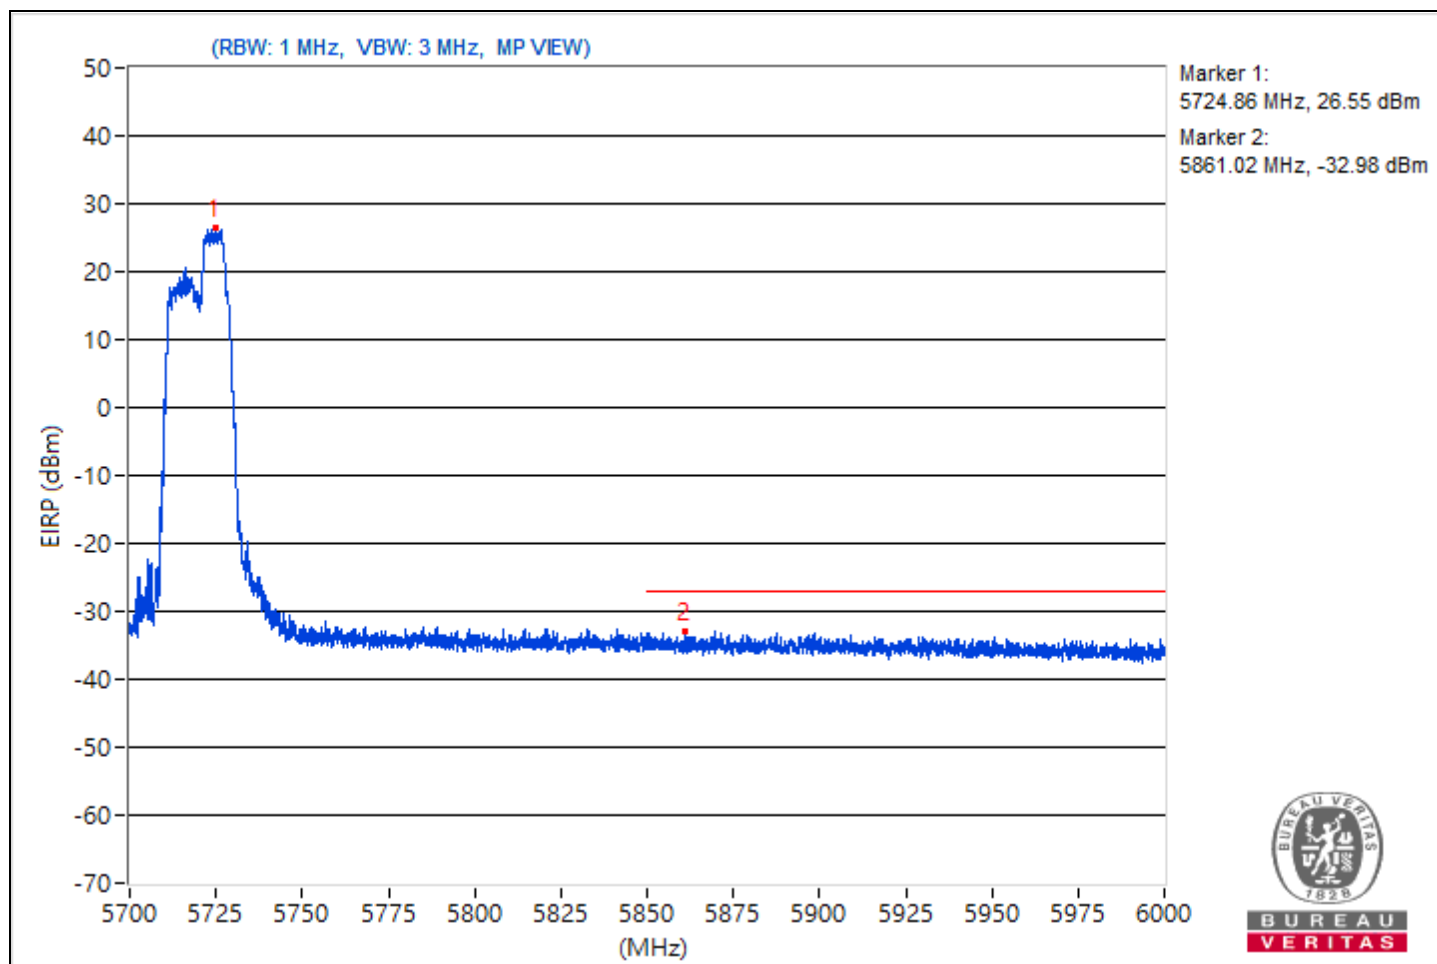


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5740.71	130.27			24.46	22.6	8.37	35.01
2	#5644.05	65.15	68.26	-3.11	-42.45	-40.7	8.37	-30.11
3	#5649.99	63.96	68.26	-4.3	-42.76	-42.6	8.37	-31.3
4	#5707.7	84.77	107.42	-22.65	-20.95	-23.04	8.37	-10.49
5	#5720.88	85.7	112.87	-27.17	-20.68	-21.23	8.37	-9.56
6	#5854.71	63.44	111.52	-48.08	-42.65	-43.83	8.37	-31.82
7	#5873.95	62.72	105.55	-42.83	-43.08	-44.96	8.37	-32.54
8	#5924.77	61.45	68.43	-6.98	-45.03	-45.35	8.37	-33.81
9	#5932.37	63.29	68.26	-4.97	-42.42	-44.53	8.37	-31.97

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

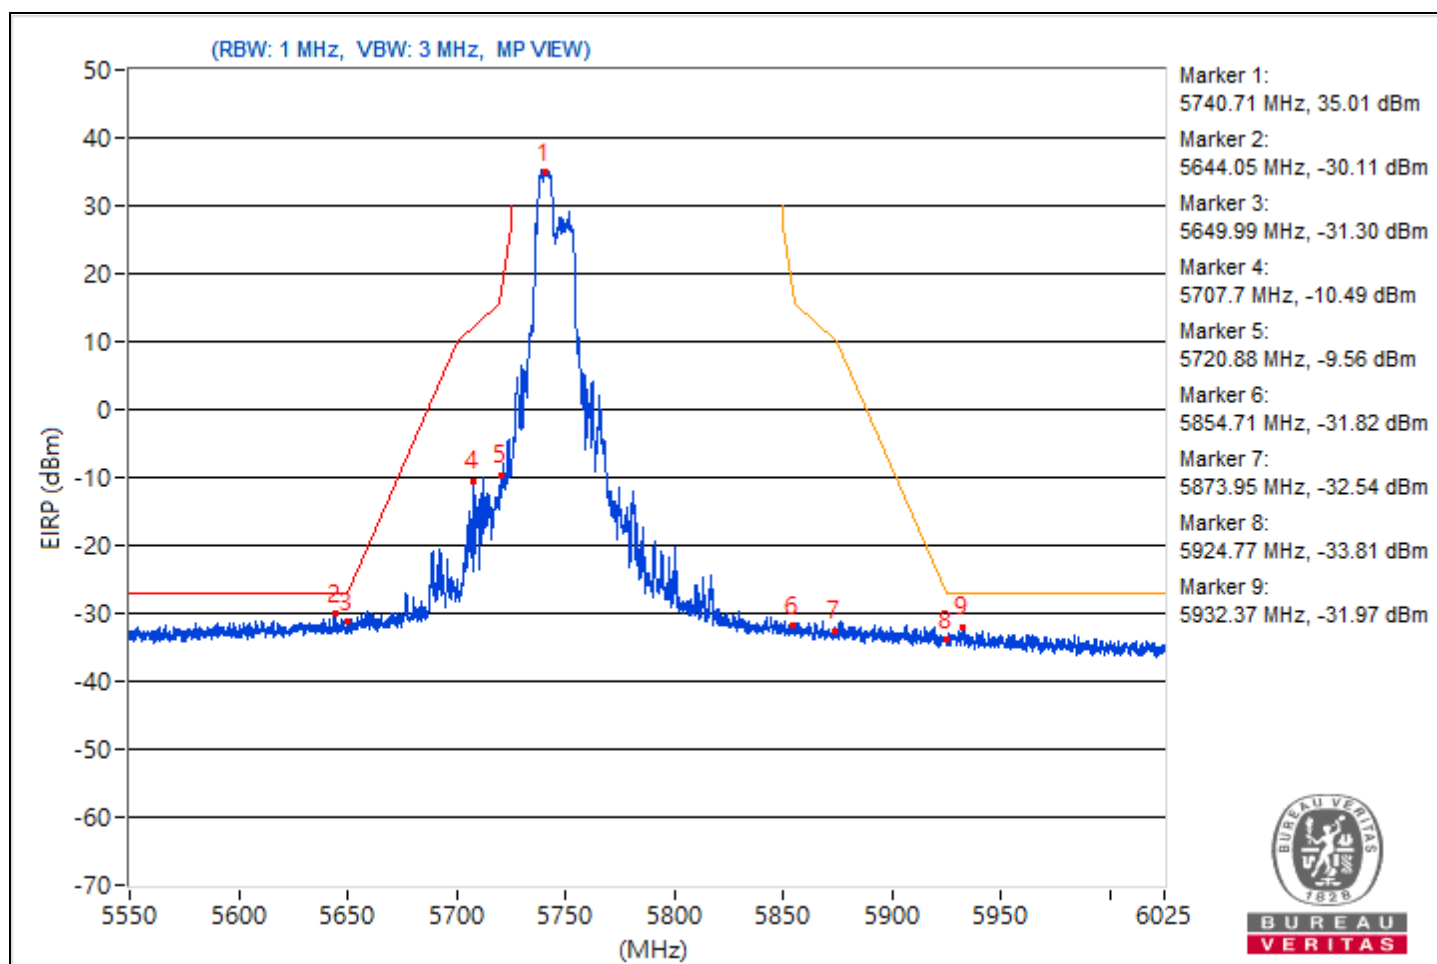


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5827.52	130.48			22.74	24.72	8.37	35.22
2	#5641.91	63.05	68.26	-5.21	-42.34	-45.37	8.37	-32.21
3	#5651.53	63.33	69.39	-6.06	-43.61	-43.04	8.37	-31.93
4	#5701.05	63.93	105.55	-41.62	-43.26	-42.22	8.37	-31.33
5	#5720.17	63.51	111.24	-47.73	-42.73	-43.56	8.37	-31.75
6	#5854.59	83.7	111.79	-28.09	-22.42	-23.54	8.37	-11.56
7	#5858.04	85.38	110.01	-24.63	-21.43	-21.1	8.37	-9.88
8	#5924.77	62.7	68.43	-5.73	-43.39	-44.56	8.37	-32.56
9	#5934.39	64.41	68.26	-3.85	-43.99	-40.99	8.37	-30.85

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

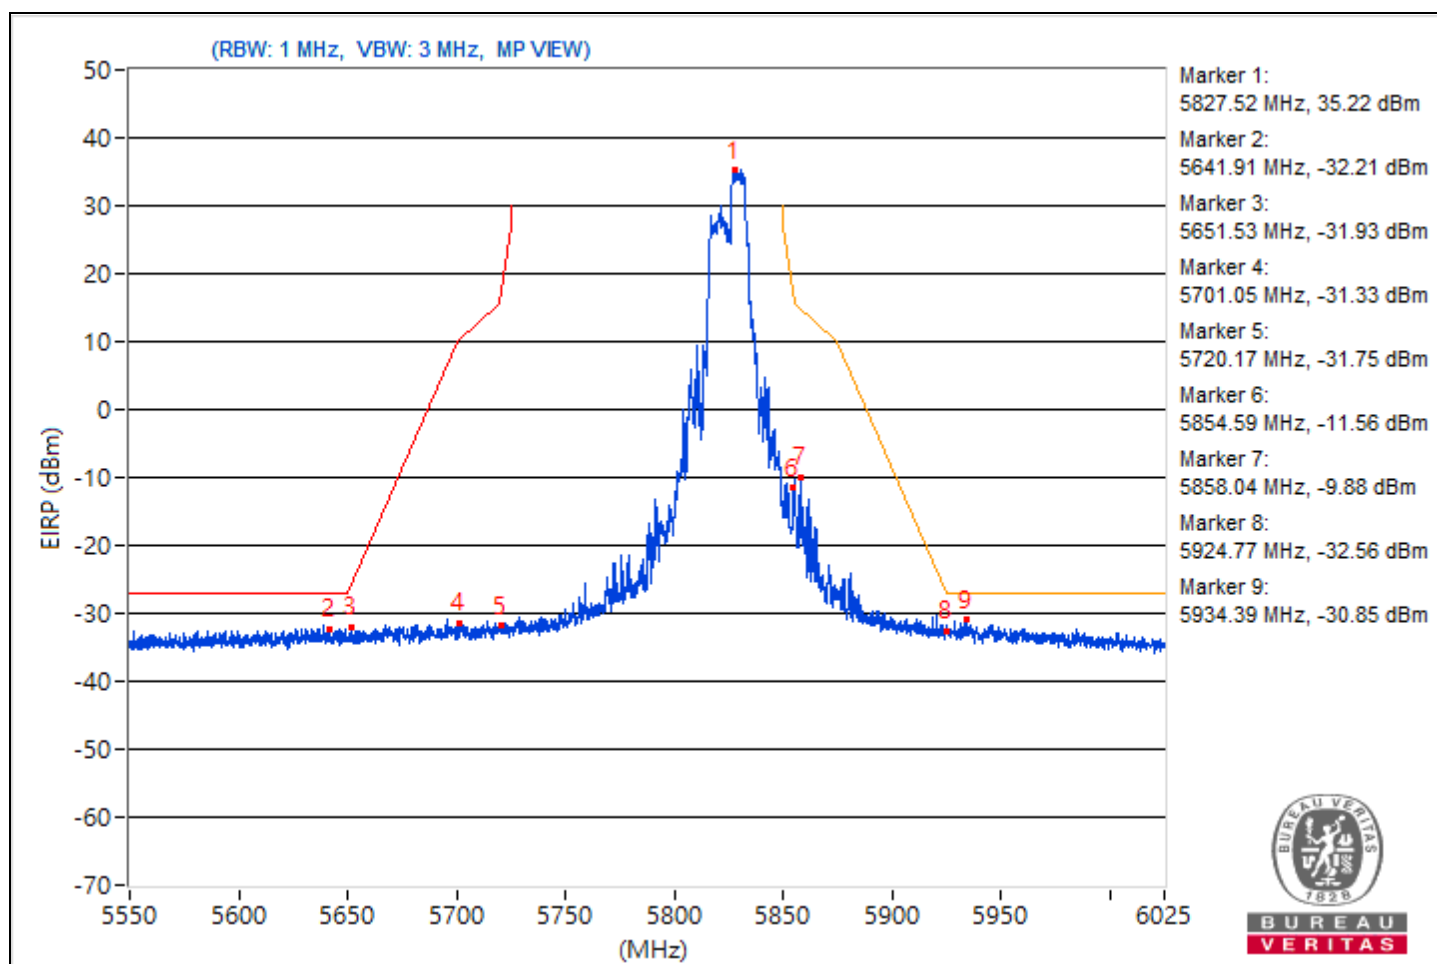


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5178.75	119.82 PK			13.22	13.14	8.37	24.56
2	*5178.75	111.22 AV			4.63	4.53	8.37	15.96
3	5149.57	61.55 PK	74	-12.45	-45.58	-44.65	8.37	-33.71
4	5149.57	53.12 AV	54	-0.88	-53.4	-53.65	8.37	-42.14

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

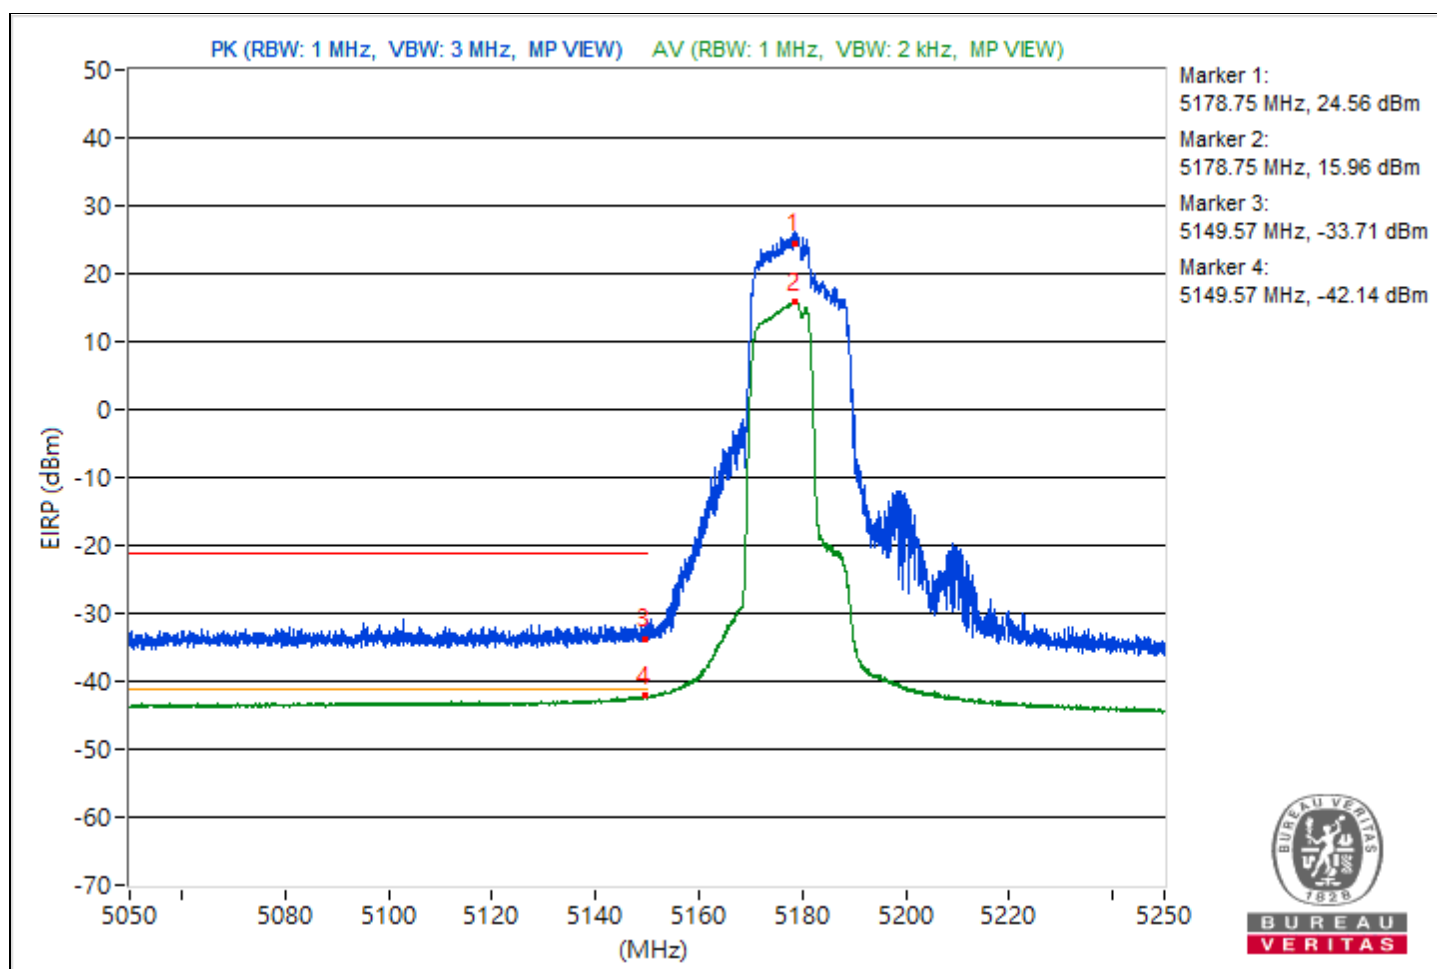


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5321.12	120.45 PK			15.17	11.82	8.37	25.19
2	*5321.12	110.31 AV			3.55	3.78	8.37	15.05
3	5351.12	60.52 PK	74	-13.48	-47	-45.39	8.37	-34.74
4	5351.12	51.53 AV	54	-2.47	-54.85	-55.39	8.37	-43.73

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

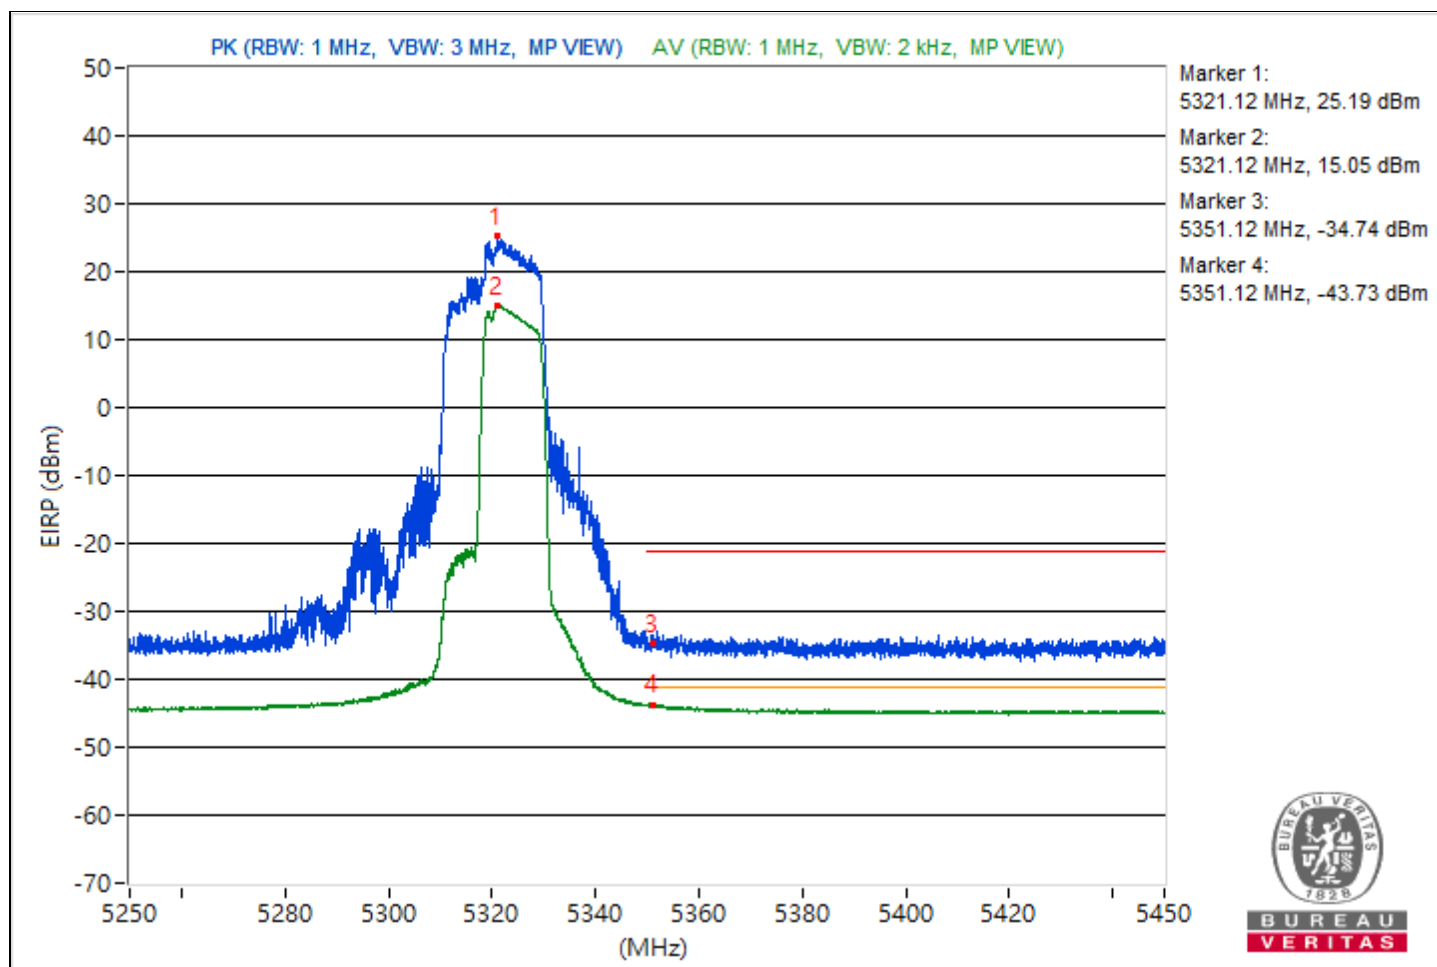


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5498.69	121.63 PK			12.91	16.39	8.37	26.37
2	5447.56	62.06 PK	74	-11.94	-43.17	-46.67	8.37	-33.2
3	#5464.69	62.18 PK	68.26	-6.08	-43.16	-46.34	8.37	-33.08
4	*5498.66	110.75 AV			4.1	4.13	8.37	15.49
5	5458.75	51.46 AV	54	-2.54	-55.4	-54.98	8.37	-43.8

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

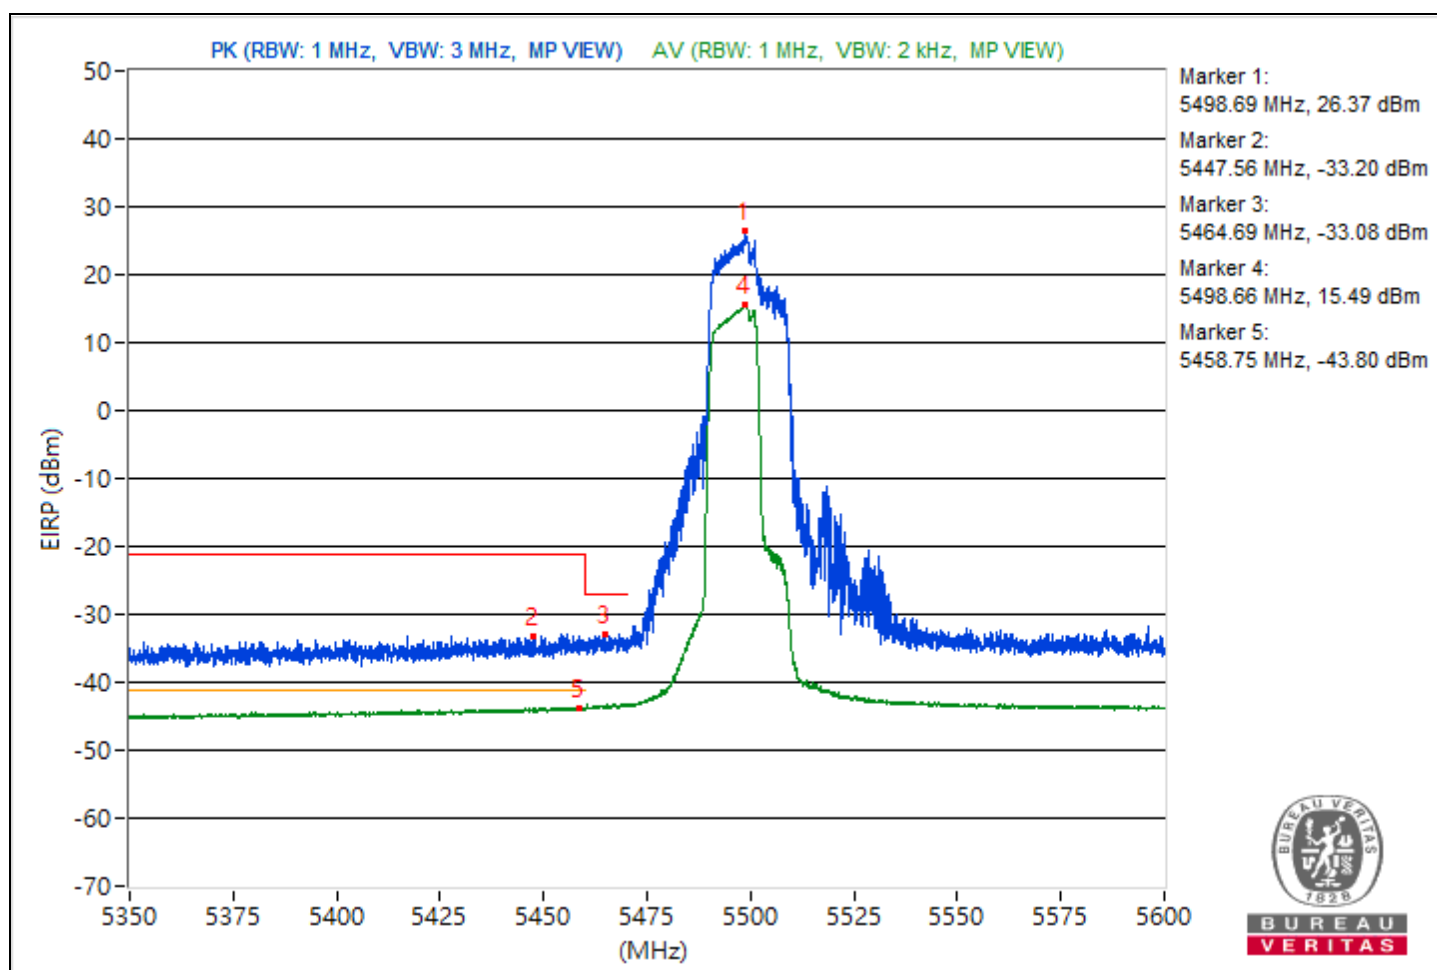


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5702.6	121.8			12.13	16.93	8.37	26.54
2	#5725.98	63.43	68.26	-4.83	-42.34	-44.3	8.37	-31.83

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

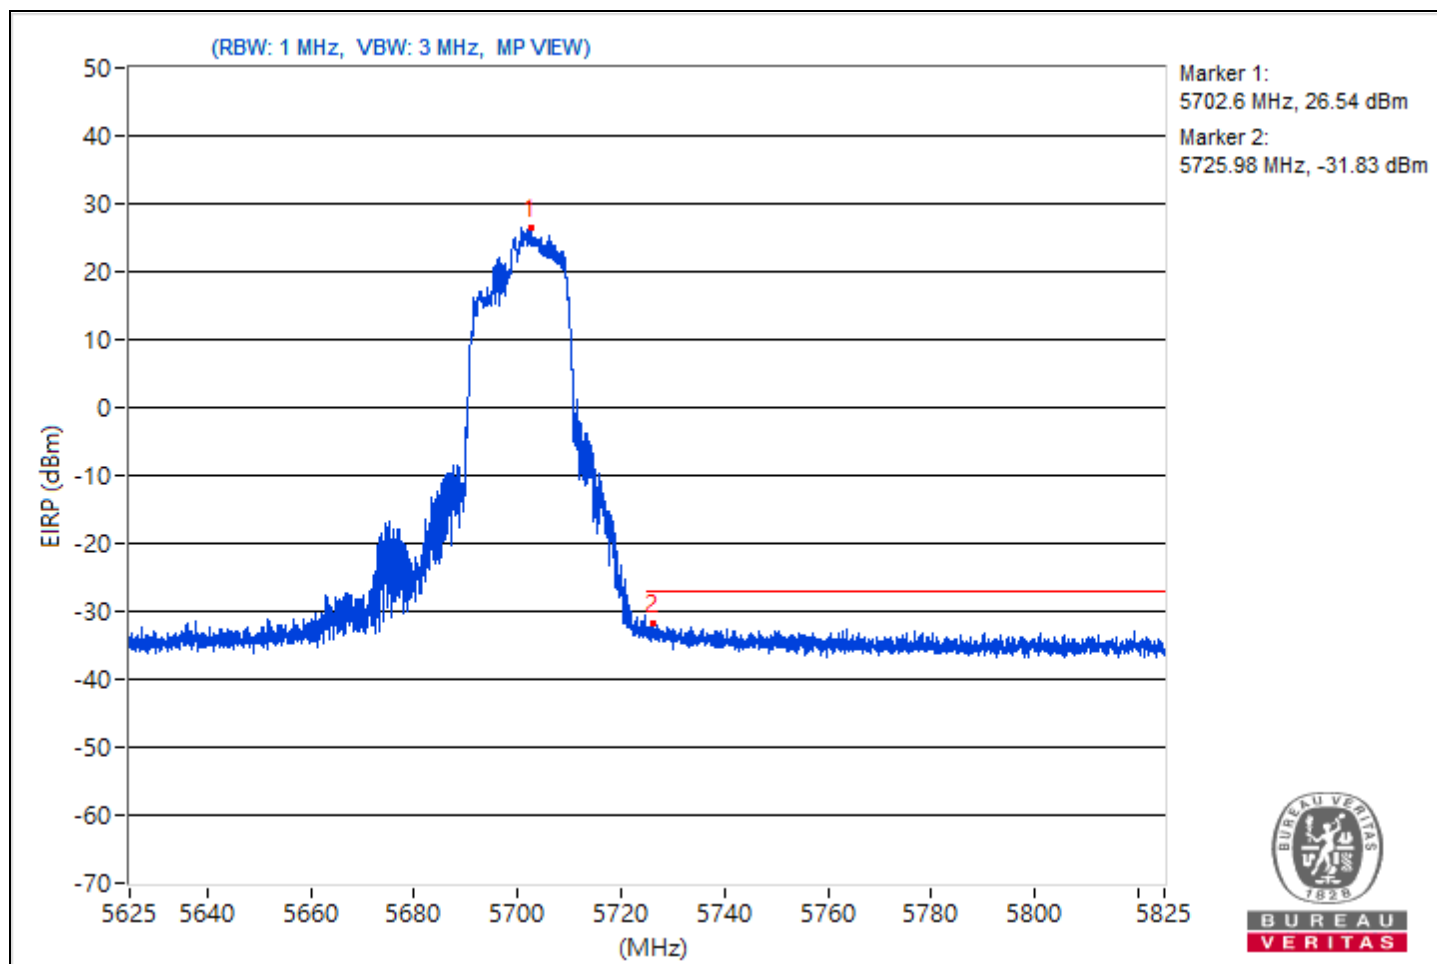


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5721.94	121.23			12.18	16.13	8.37	25.97
2	#5911.8	61.97	68.26	-6.29	-43.73	-45.87	8.37	-33.29

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

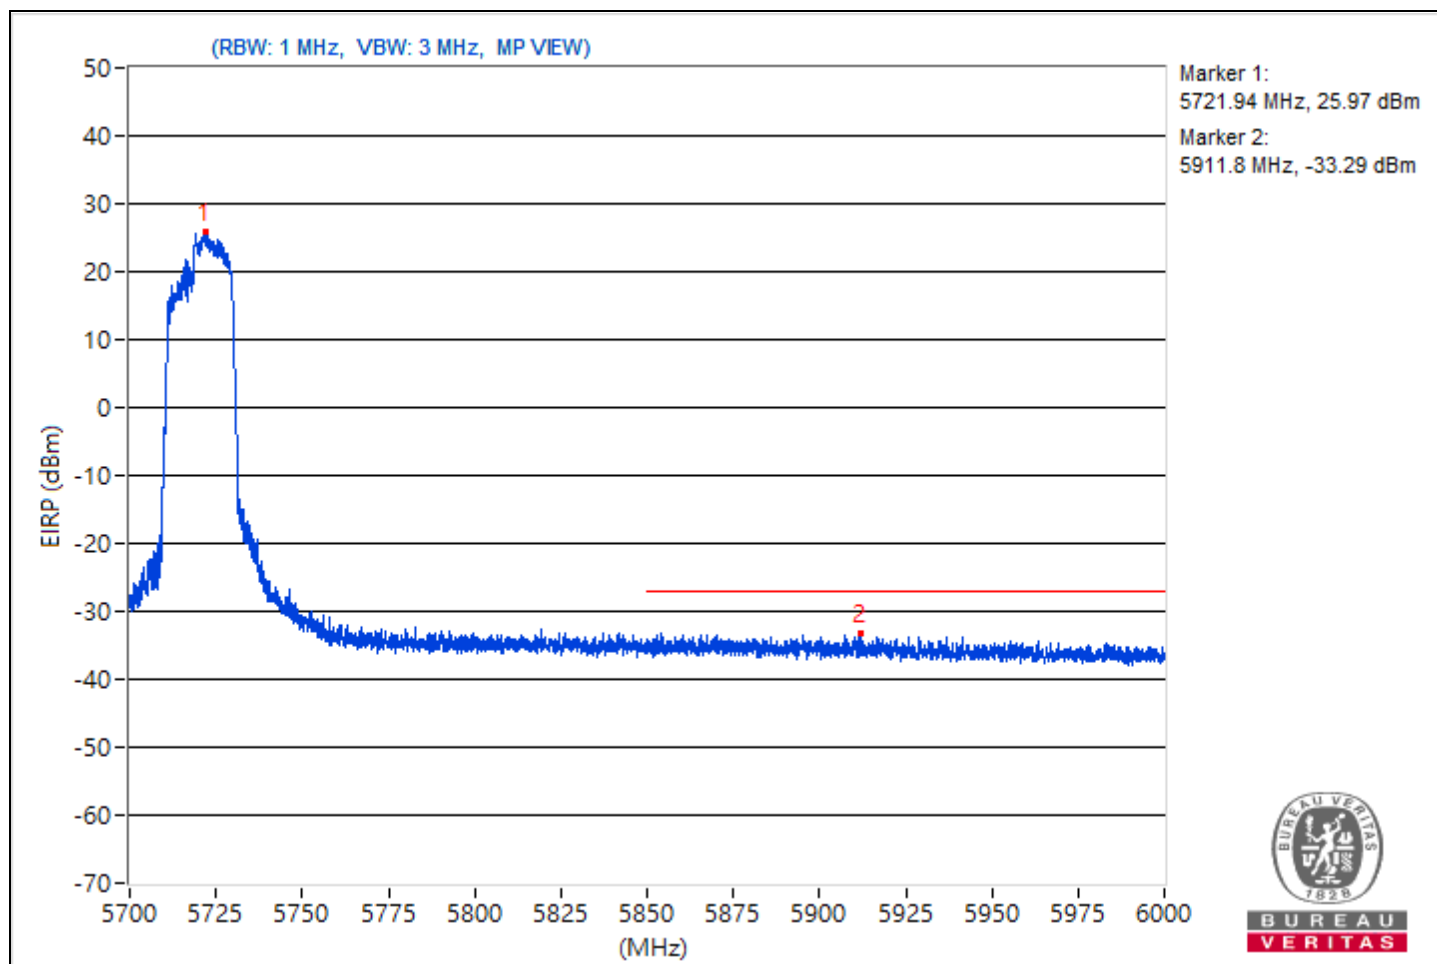


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5743.92	129.24			21.83	23.26	8.37	33.98
2	#5592.63	64.12	68.26	-4.14	-44.98	-40.96	8.37	-31.14
3	#5649.99	63.69	68.26	-4.57	-42.71	-43.22	8.37	-31.57
4	#5719.57	89.19	110.74	-21.55	-15.57	-20.83	8.37	-6.07
5	#5720.52	88.31	112.06	-23.75	-20.99	-16.69	8.37	-6.95
6	#5854.12	63.28	112.87	-49.59	-42.82	-43.98	8.37	-31.98
7	#5873.12	64.27	105.79	-41.52	-42.72	-42.05	8.37	-30.99
8	#5924.06	62.48	68.95	-6.47	-45.26	-43.28	8.37	-32.78
9	#5927.51	62.25	68.26	-6.01	-43.42	-45.64	8.37	-33.01

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

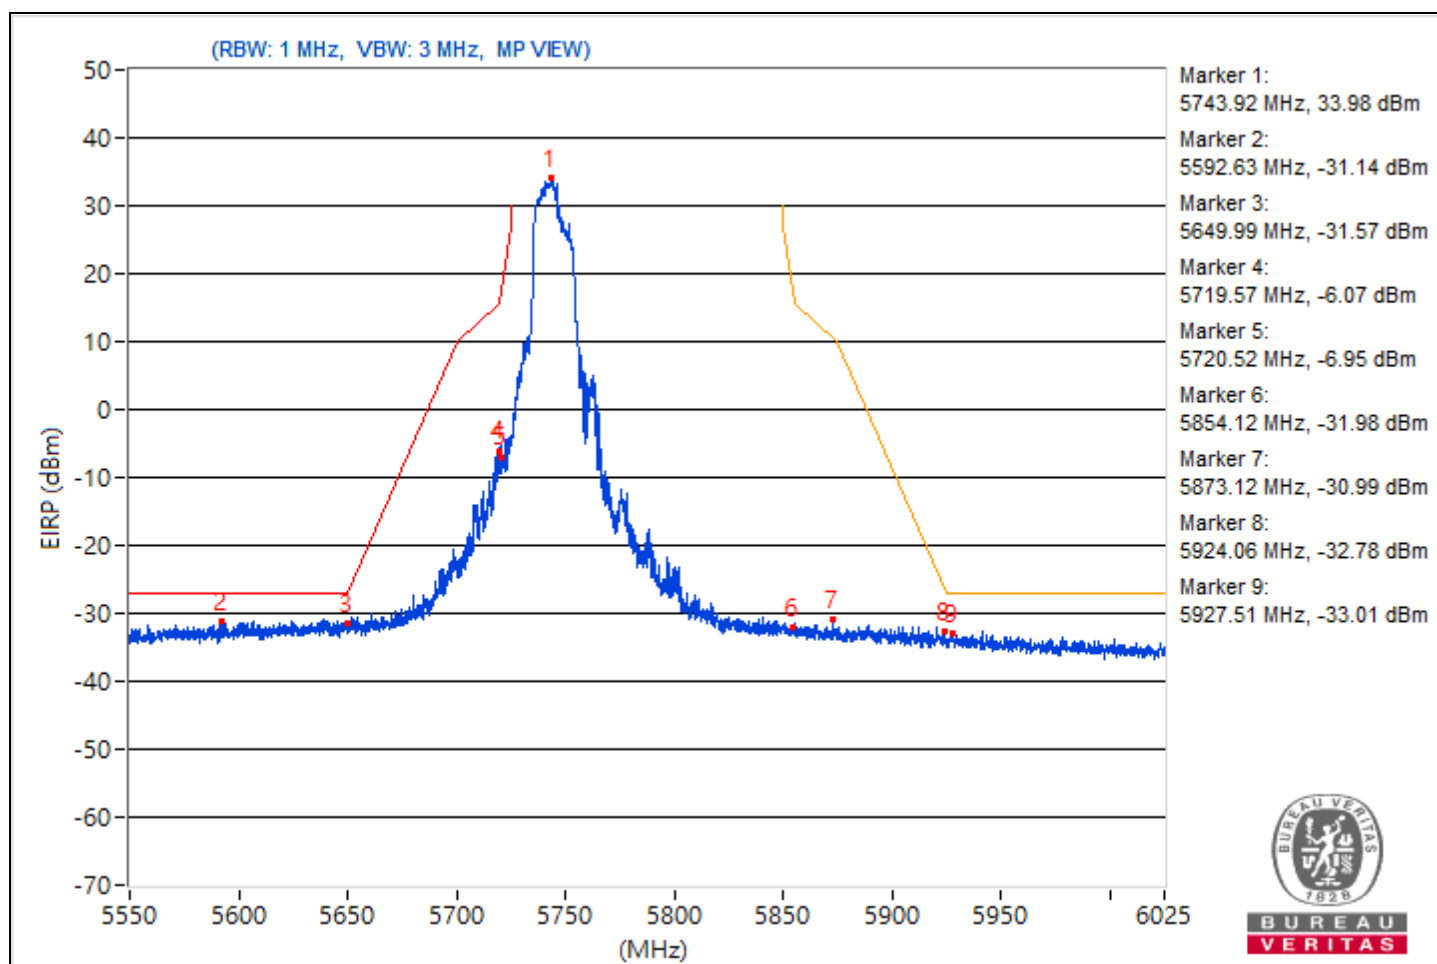


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5827.16	128.51			20.97	22.61	8.37	33.25
2	#5644.88	63.22	68.26	-5.04	-42.03	-45.46	8.37	-32.04
3	#5650.46	61.98	68.6	-6.62	-44.34	-45	8.37	-33.28
4	#5700.57	62.6	105.42	-42.82	-43.04	-45.36	8.37	-32.66
5	#5720.64	63.14	112.33	-49.19	-44.71	-42.56	8.37	-32.12
6	#5854.83	86.44	111.24	-24.8	-20.24	-20.16	8.37	-8.82
7	#5855.9	85.41	110.61	-25.2	-23.14	-19.9	8.37	-9.85
8	#5924.3	63.11	68.78	-5.67	-43.2	-43.89	8.37	-32.15
9	#5932.97	63.4	68.26	-4.86	-44.52	-42.25	8.37	-31.86

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

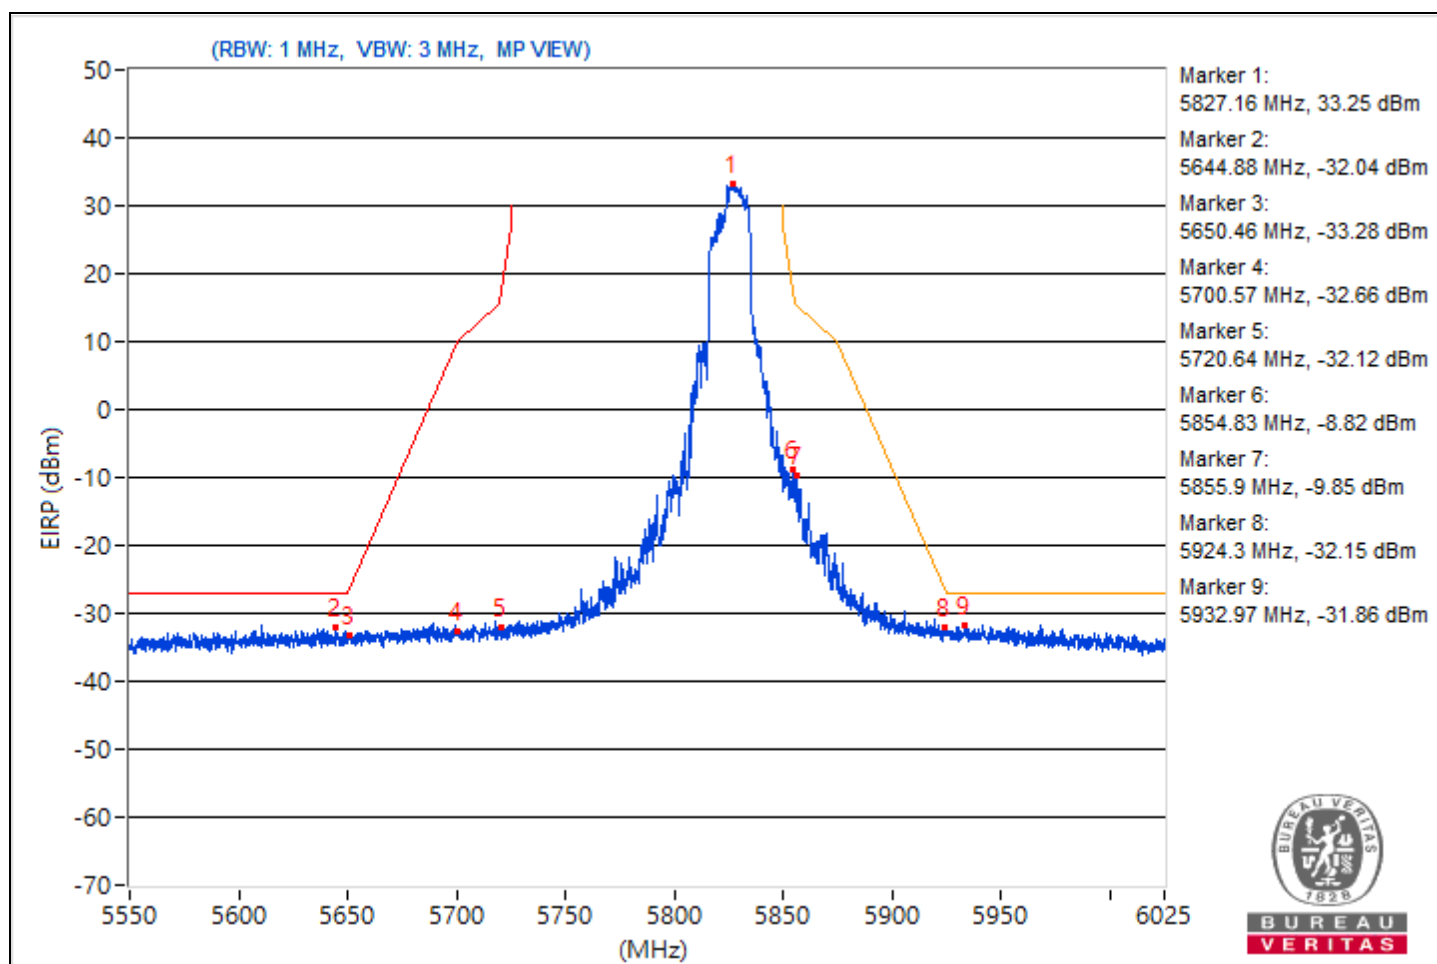


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	24°C, 64% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5208.02	110.56 PK			4.73	2.91	8.37	15.3
2	*5208.02	104.04 AV			-2.35	-2.87	8.37	8.78
3	5143.4	59.03 PK	74	-14.97	-49.21	-46.44	8.37	-36.23
4	5143.4	53.04 AV	54	-0.96	-55.03	-52.53	8.37	-42.22

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

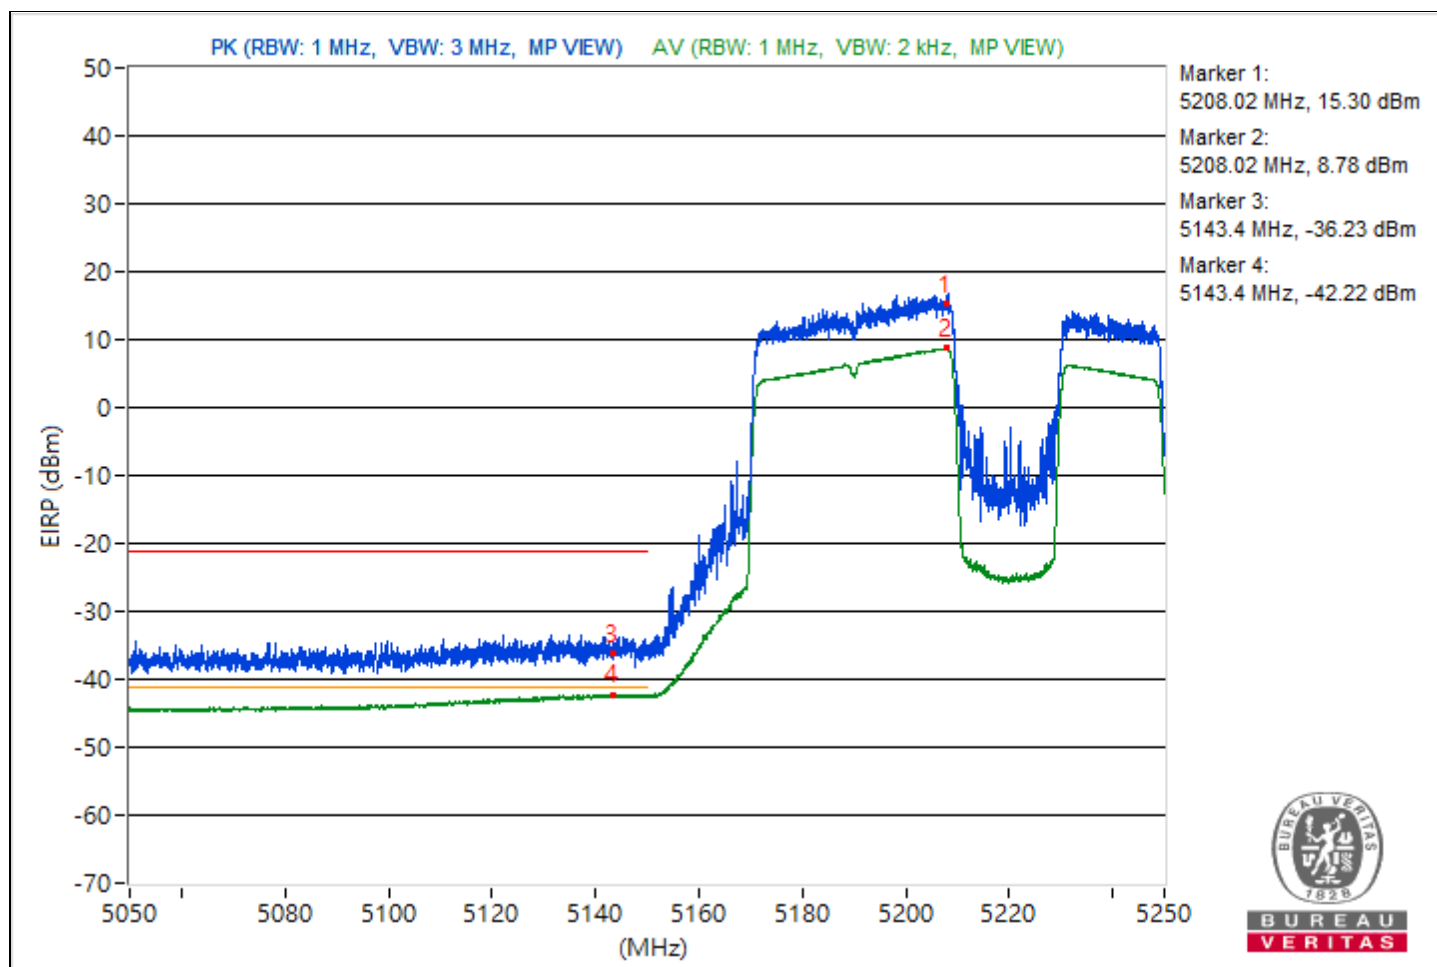


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	24°C, 64% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5292.6	111.99 PK			5.93	4.68	8.37	16.73
2	*5292.6	104.68 AV			-1.91	-2.01	8.37	9.42
3	5357.85	59.38 PK	74	-14.62	-47.32	-47.19	8.37	-35.88
4	5357.85	52.75 AV	54	-1.25	-54.53	-53.33	8.37	-42.51

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

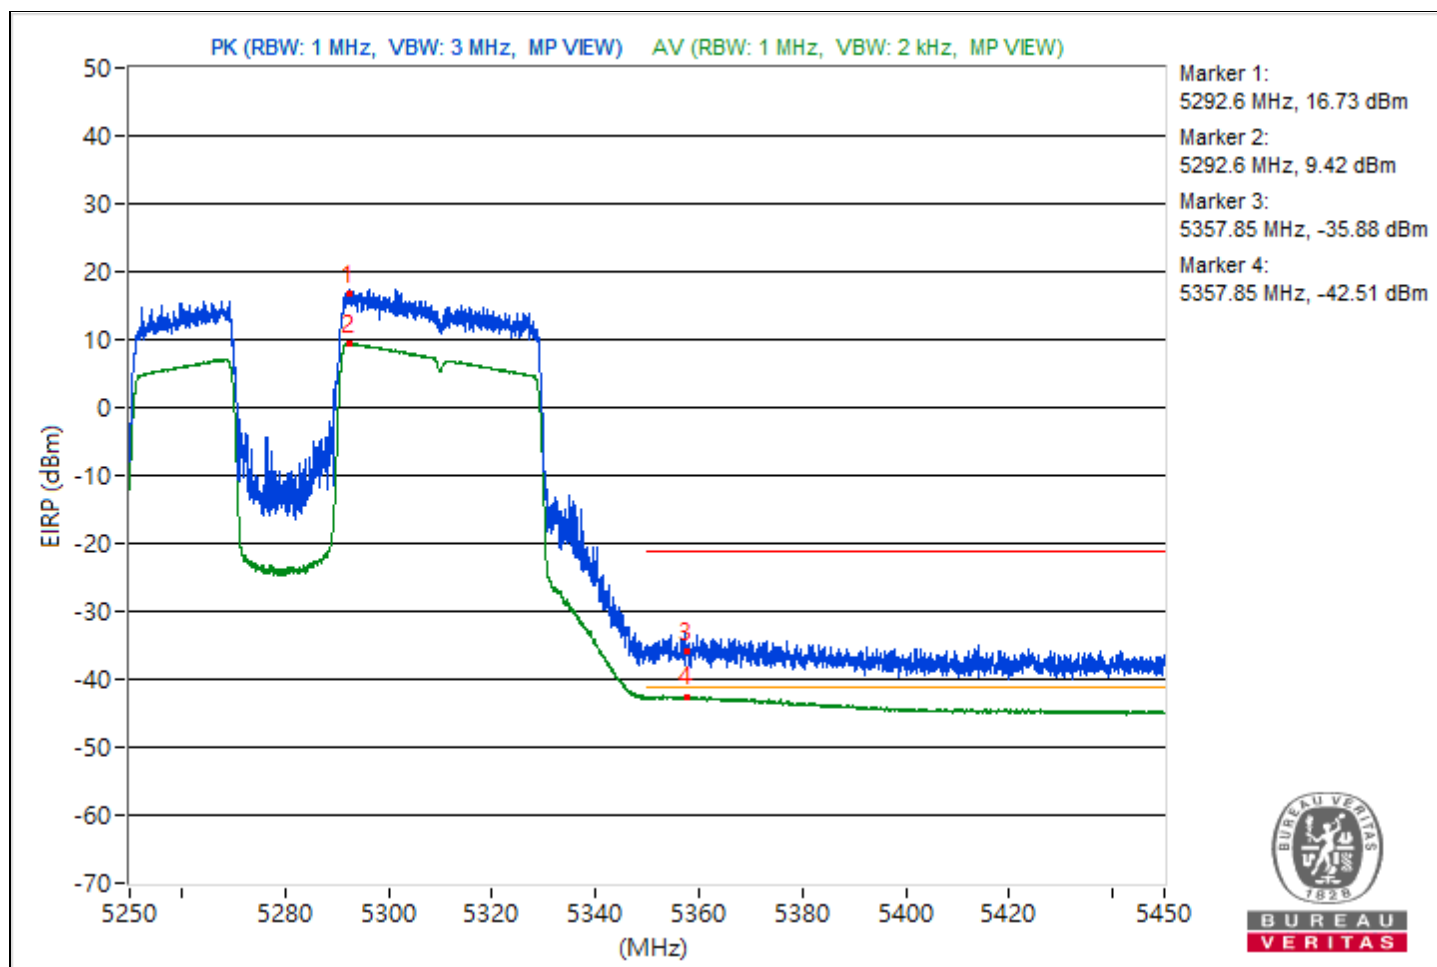


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	24°C, 64% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5523.91	115.18 PK			9.42	7.45	8.37	19.92
2	5459.91	63.05 PK	74	-10.95	-43.67	-43.51	8.37	-32.21
3	#5463.97	62.4 PK	68.26	-5.86	-46.05	-42.96	8.37	-32.86
4	*5527.91	106.35 AV			-0.26	-0.33	8.37	11.09
5	5458.06	53.06 AV	54	-0.94	-53.55	-53.6	8.37	-42.2

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

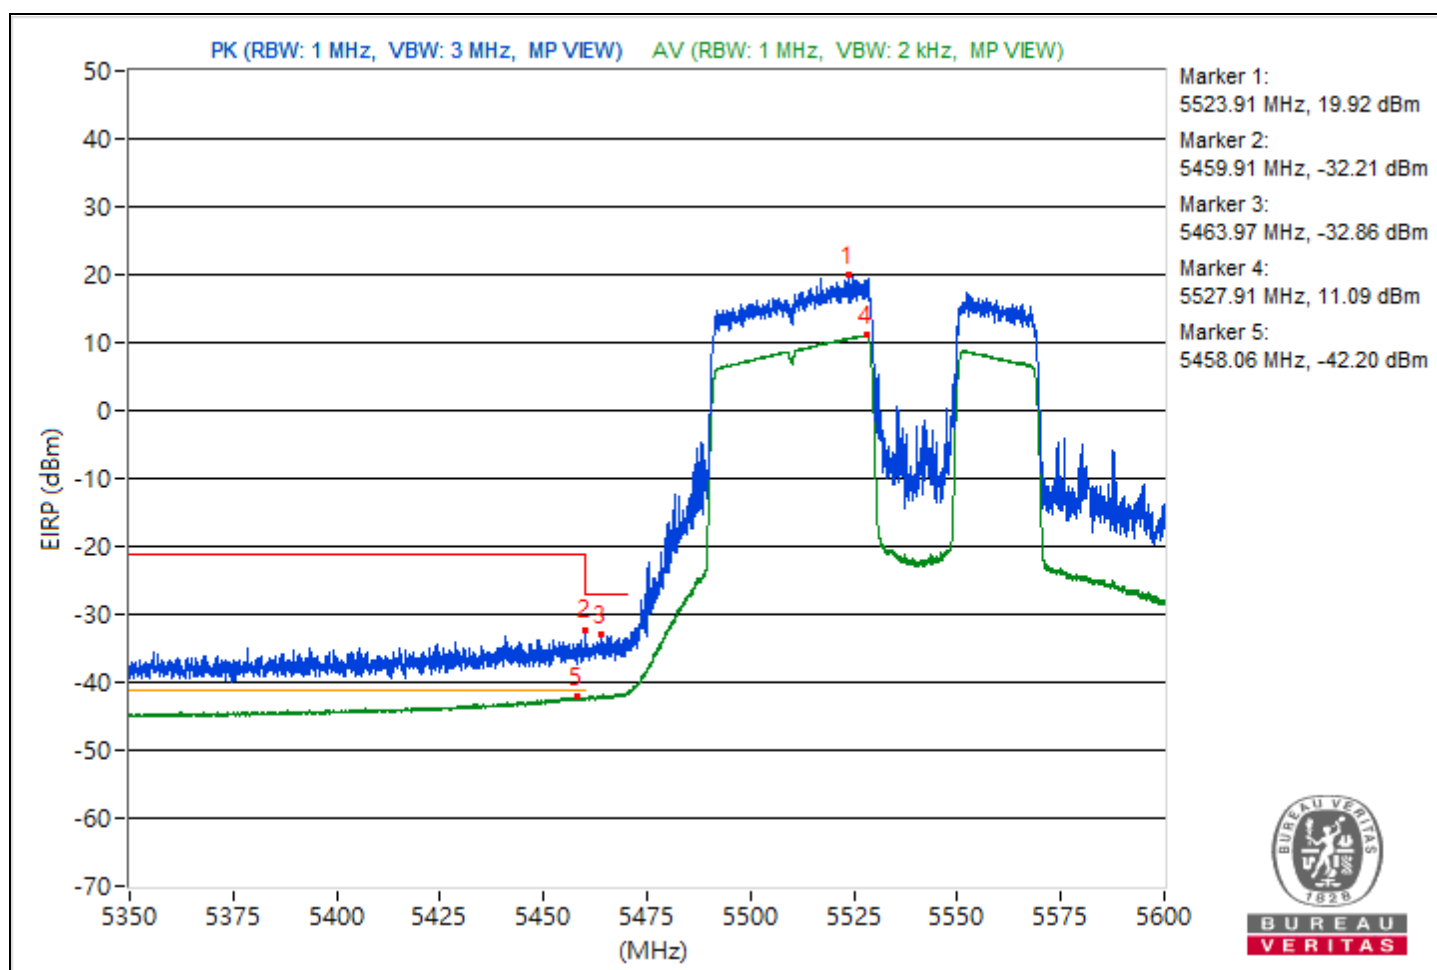


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5712.86	115.67			11.23	4.36	8.37	20.41
2	#5854.87	66.68	68.26	-1.58	-38.63	-41.88	8.37	-28.58

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

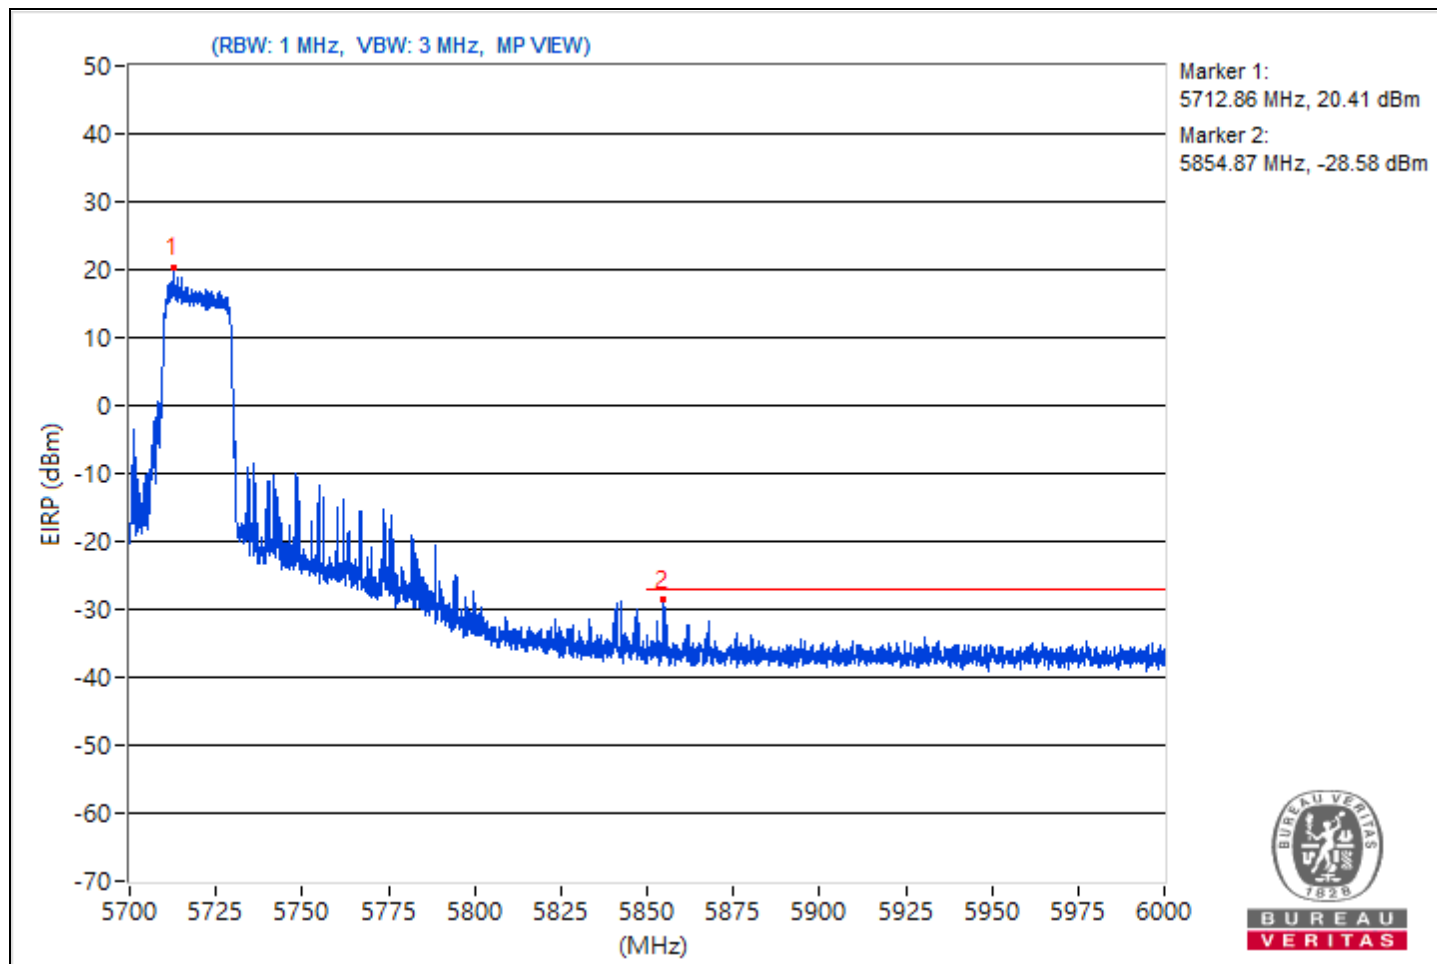


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5771.47	117.53			9.78	11.78	8.37	22.27
2	#5644.05	67.93	68.26	-0.33	-45.94	-36.13	8.37	-27.33
3	#5650.94	64.38	68.95	-4.57	-40.58	-45.04	8.37	-30.88
4	#5713.76	84.56	109.11	-24.55	-20.1	-25.82	8.37	-10.7
5	#5720.64	91.39	112.33	-20.94	-32.29	-12.28	8.37	-3.87
6	#5853.52	83.72	114.22	-30.5	-20.29	-30.66	8.37	-11.54
7	#5860.06	80.76	109.44	-28.68	-39.09	-22.97	8.37	-14.5
8	#5924.3	63.14	68.78	-5.64	-48.89	-41.17	8.37	-32.12
9	#5980.23	64.13	68.26	-4.13	-49.49	-39.96	8.37	-31.13

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

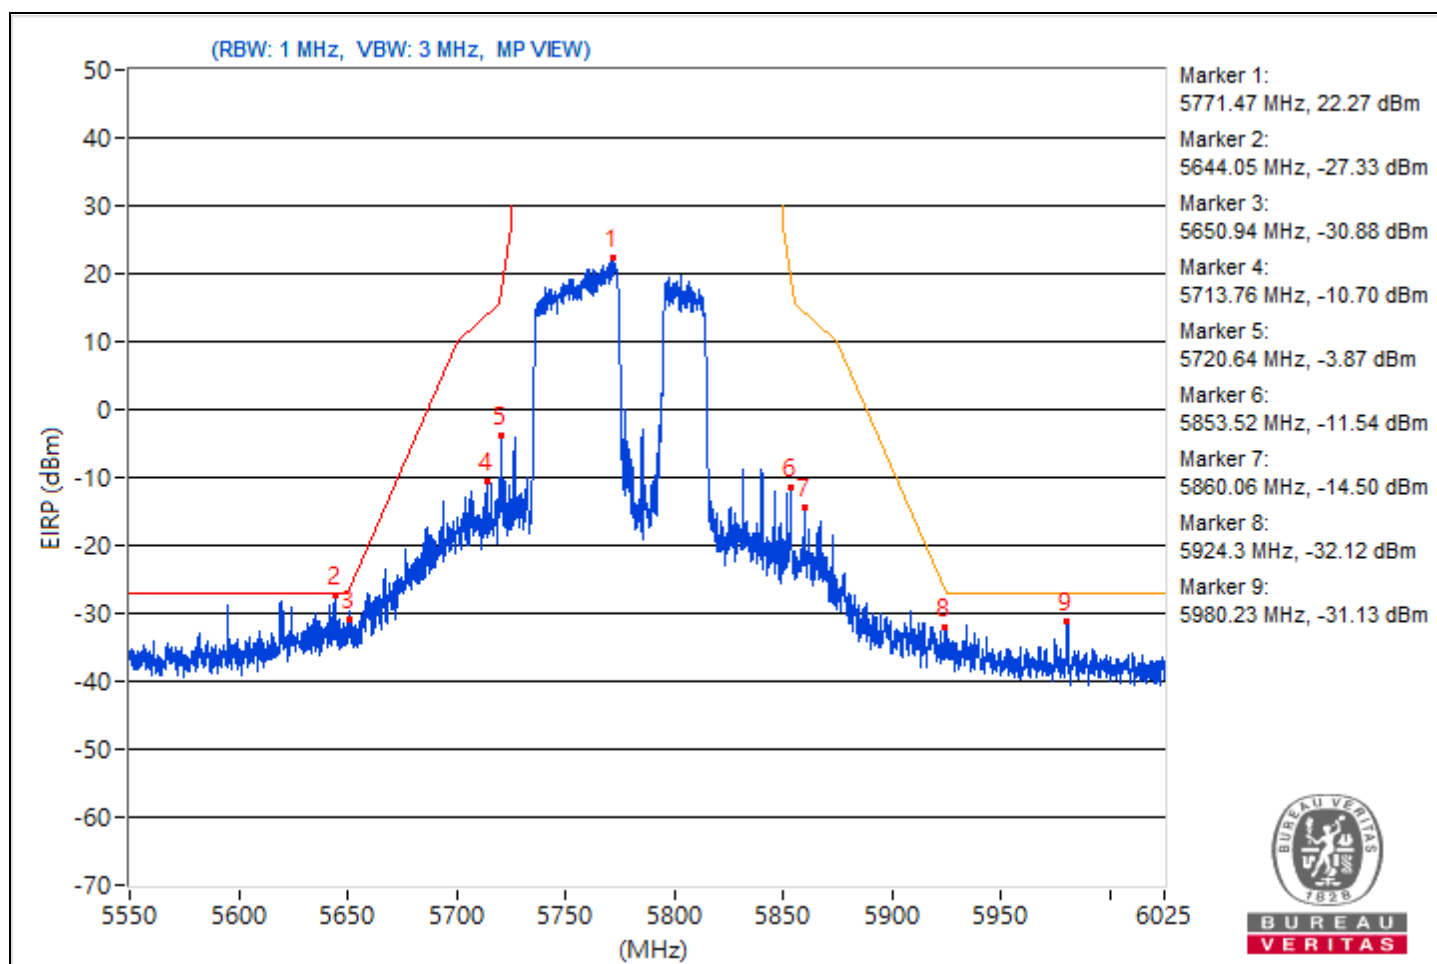


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5247.25	104.64 PK			-1.27	-2.89	8.37	9.38
2	*5247.25	96.88 AV			-9.12	-10.51	8.37	1.62
3	5127.25	62.26 PK	74	-11.74	-43.96	-44.84	8.37	-33
4	5127.25	53.41 AV	54	-0.59	-52.91	-53.57	8.37	-41.85

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

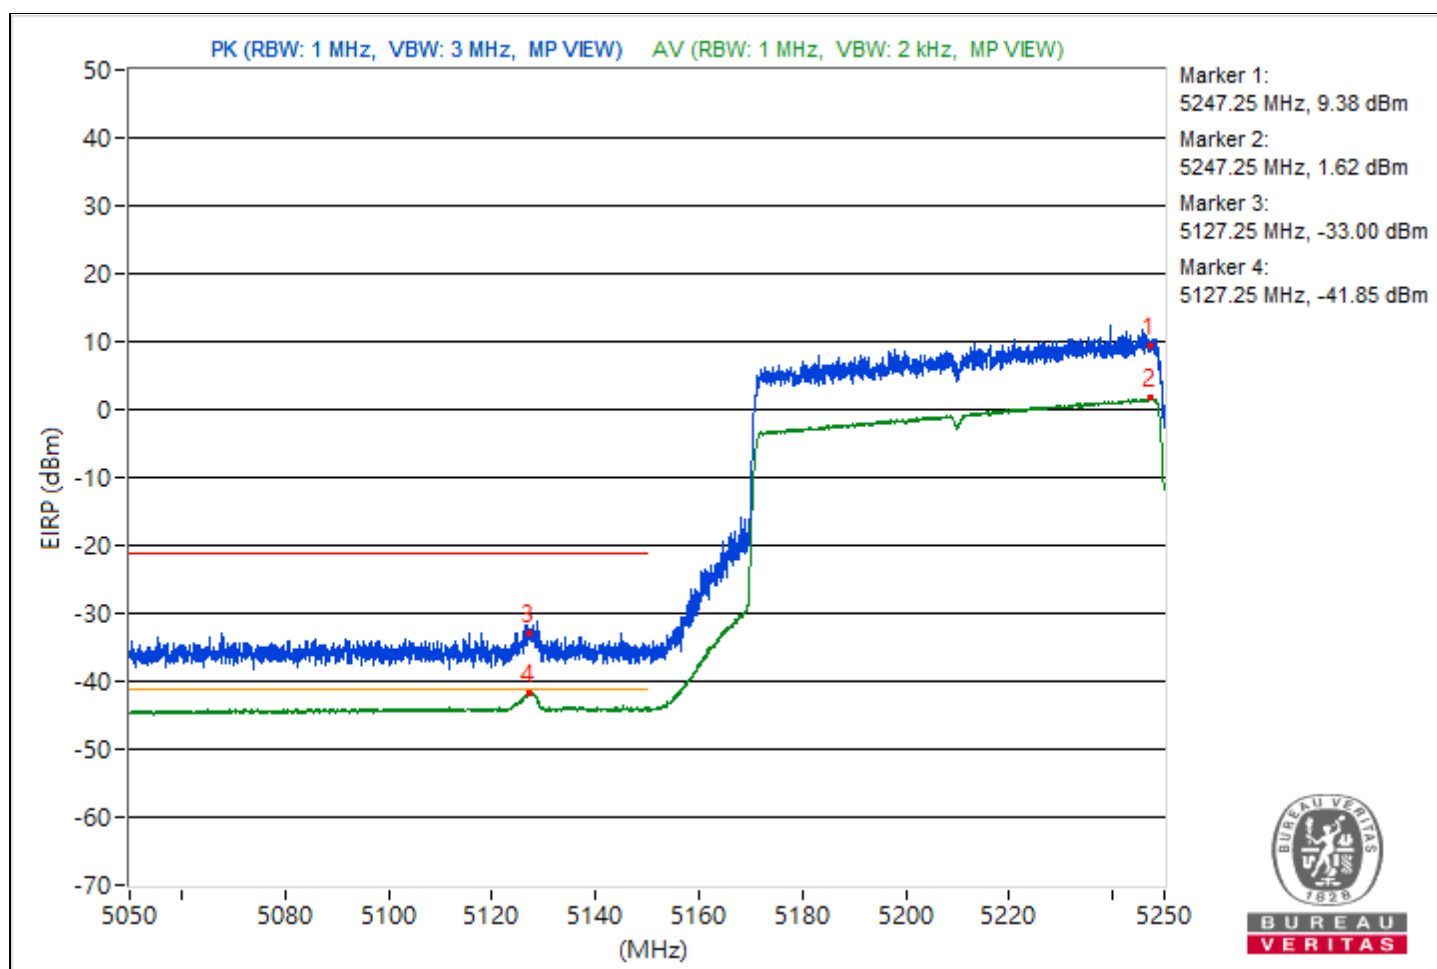


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5252.32	104.8 PK			-1.1	-2.75	8.37	9.54
2	*5252.32	96.69 AV			-9.26	-10.76	8.37	1.43
3	5356.35	57.44 PK	74	-16.56	-49.57	-48.86	8.37	-37.82
4	5356.35	49.29 AV	54	-4.71	-57.04	-57.68	8.37	-45.97

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

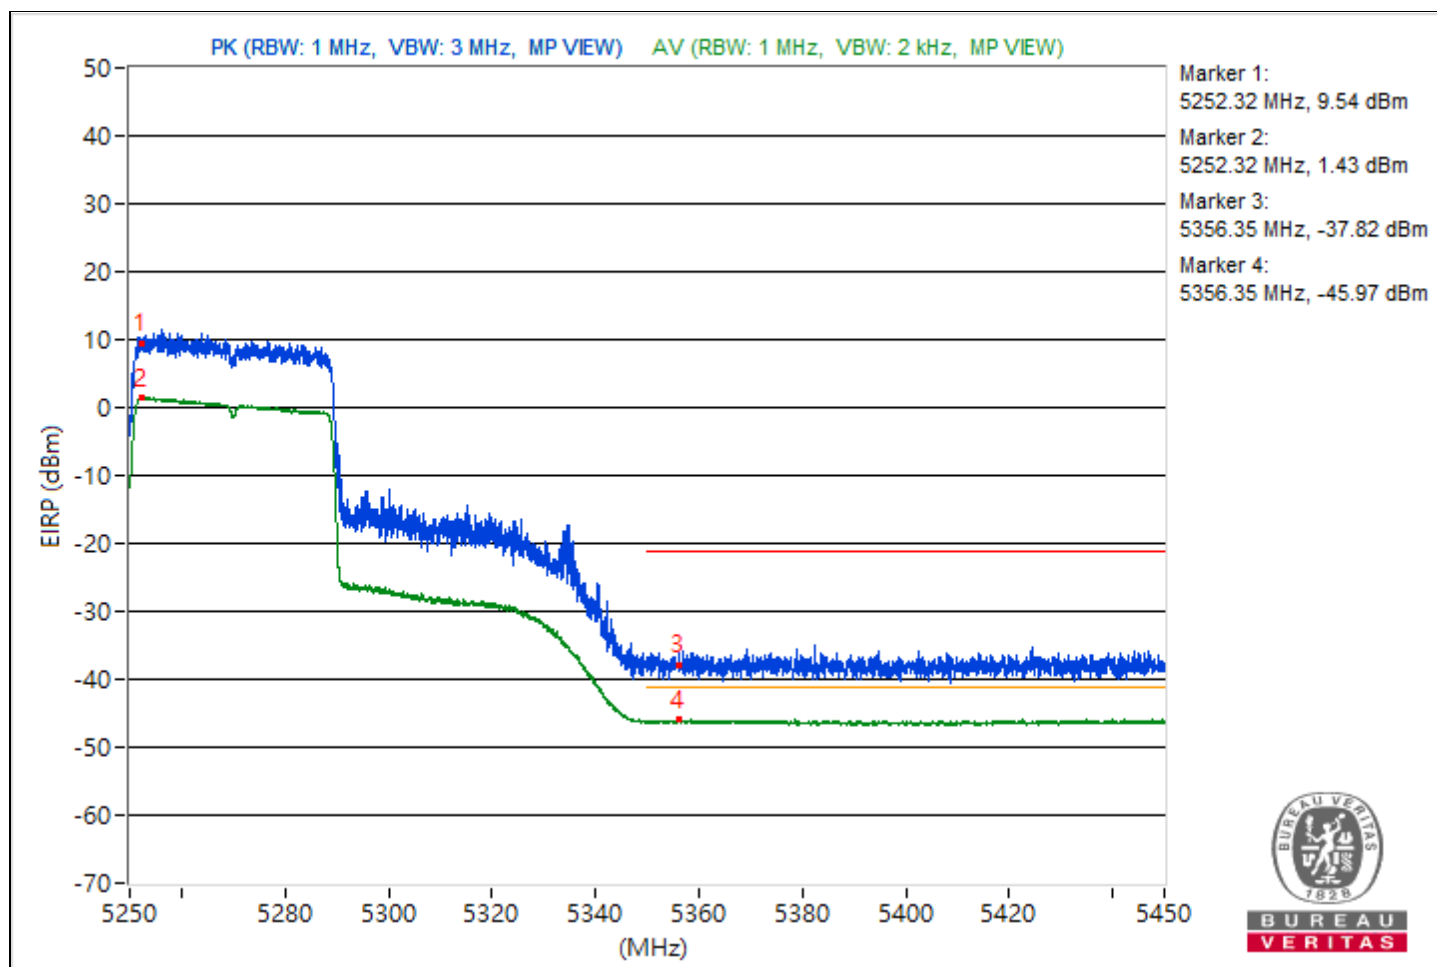


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5585.28	109.64 PK			3.03	2.98	8.37	14.38
2	5448.16	62.32 PK	74	-11.68	-46.4	-42.92	8.37	-32.94
3	#5469.72	60.69 PK	68.26	-7.57	-44.8	-47.52	8.37	-34.57
4	*5567.78	98.03 AV			-8.96	-8.28	8.37	2.77
5	5447.59	53.29 AV	54	-0.71	-53.24	-53.45	8.37	-41.97

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

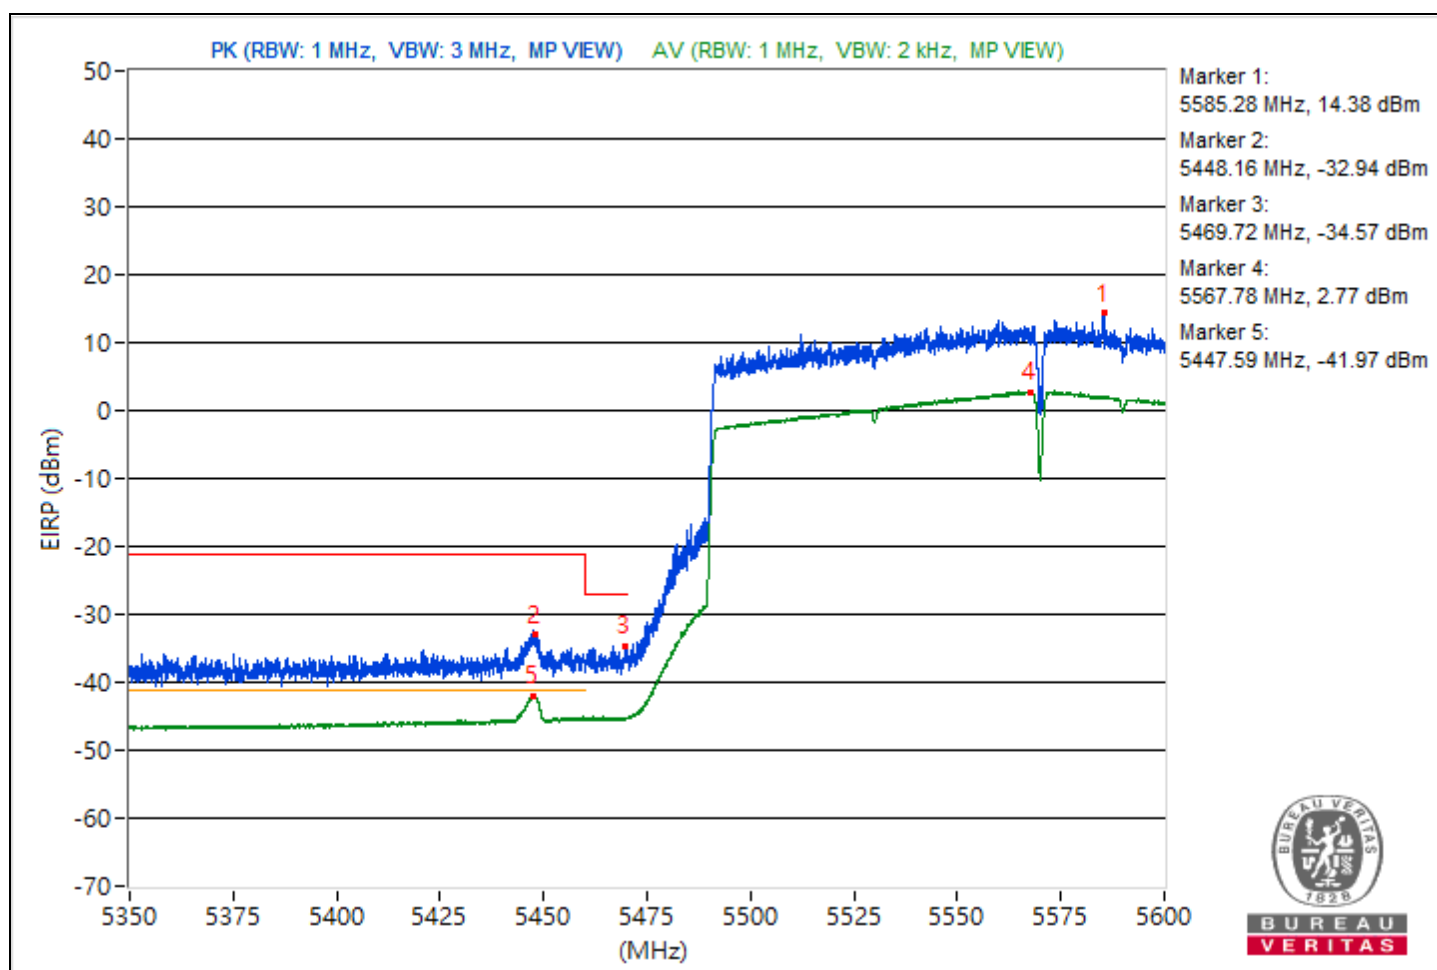


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5247.8	106.5 PK			-0.24	-0.04	8.37	11.24
2	*5247.8	99.42 AV			-6.82	-7.66	8.37	4.16
3	5146.75	62.15 PK	74	-11.85	-45.94	-43.41	8.37	-33.11
4	5146.75	53.12 AV	54	-0.88	-54.13	-52.99	8.37	-42.14

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

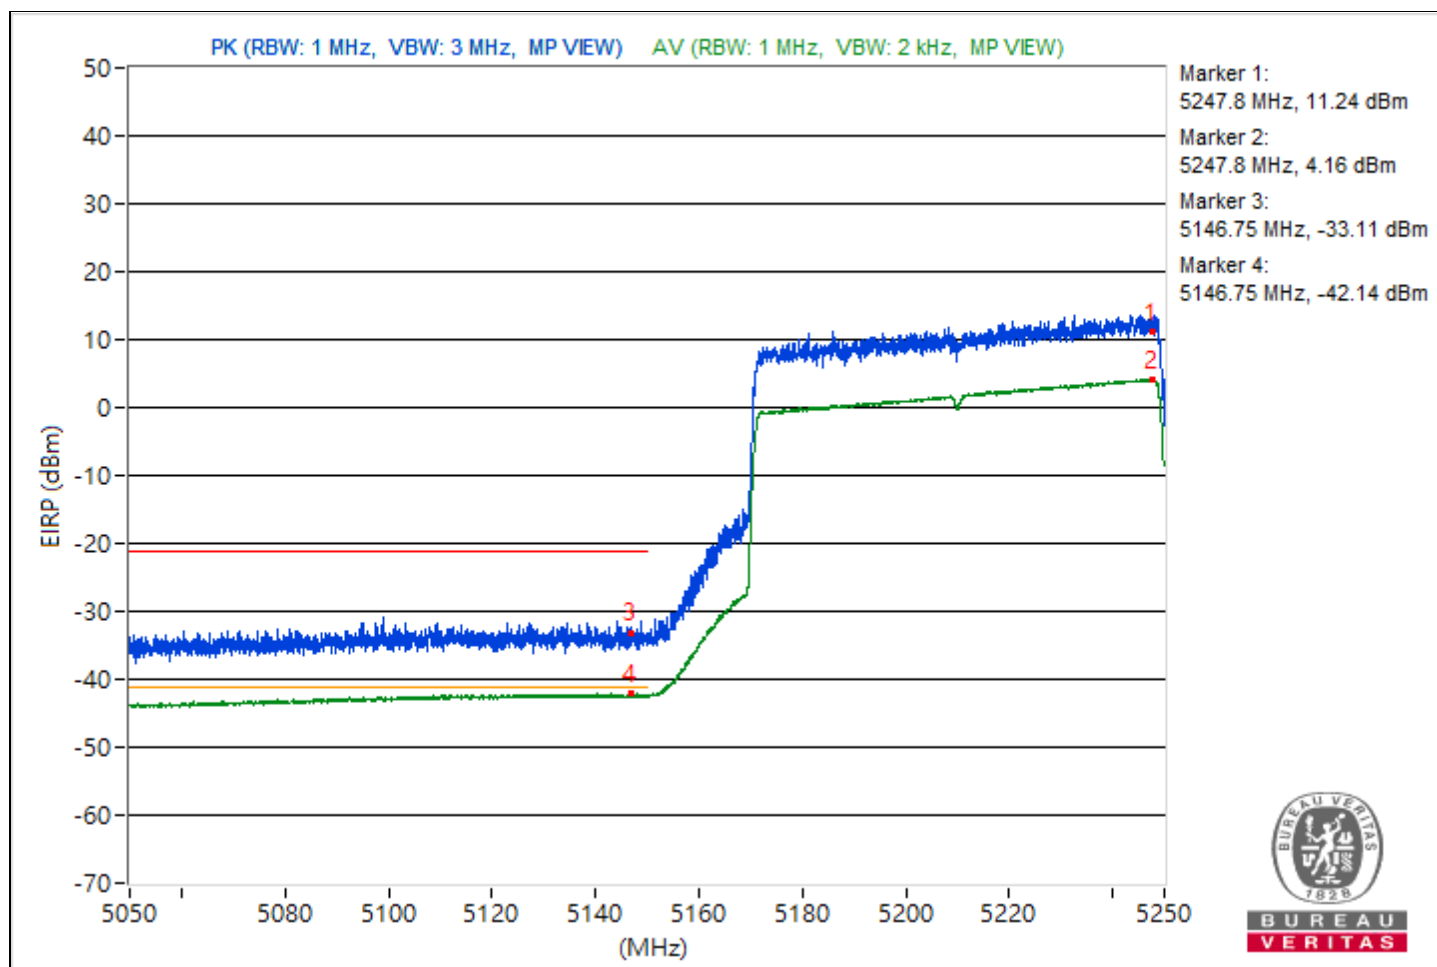


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5253.1	106.55 PK			0.55	-0.84	8.37	11.29
2	*5253.1	99.22 AV			-6.92	-8	8.37	3.96
3	5351.25	59.98 PK	74	-14.02	-45.92	-47.56	8.37	-35.28
4	5351.25	52.71 AV	54	-1.29	-54.18	-53.7	8.37	-42.55

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

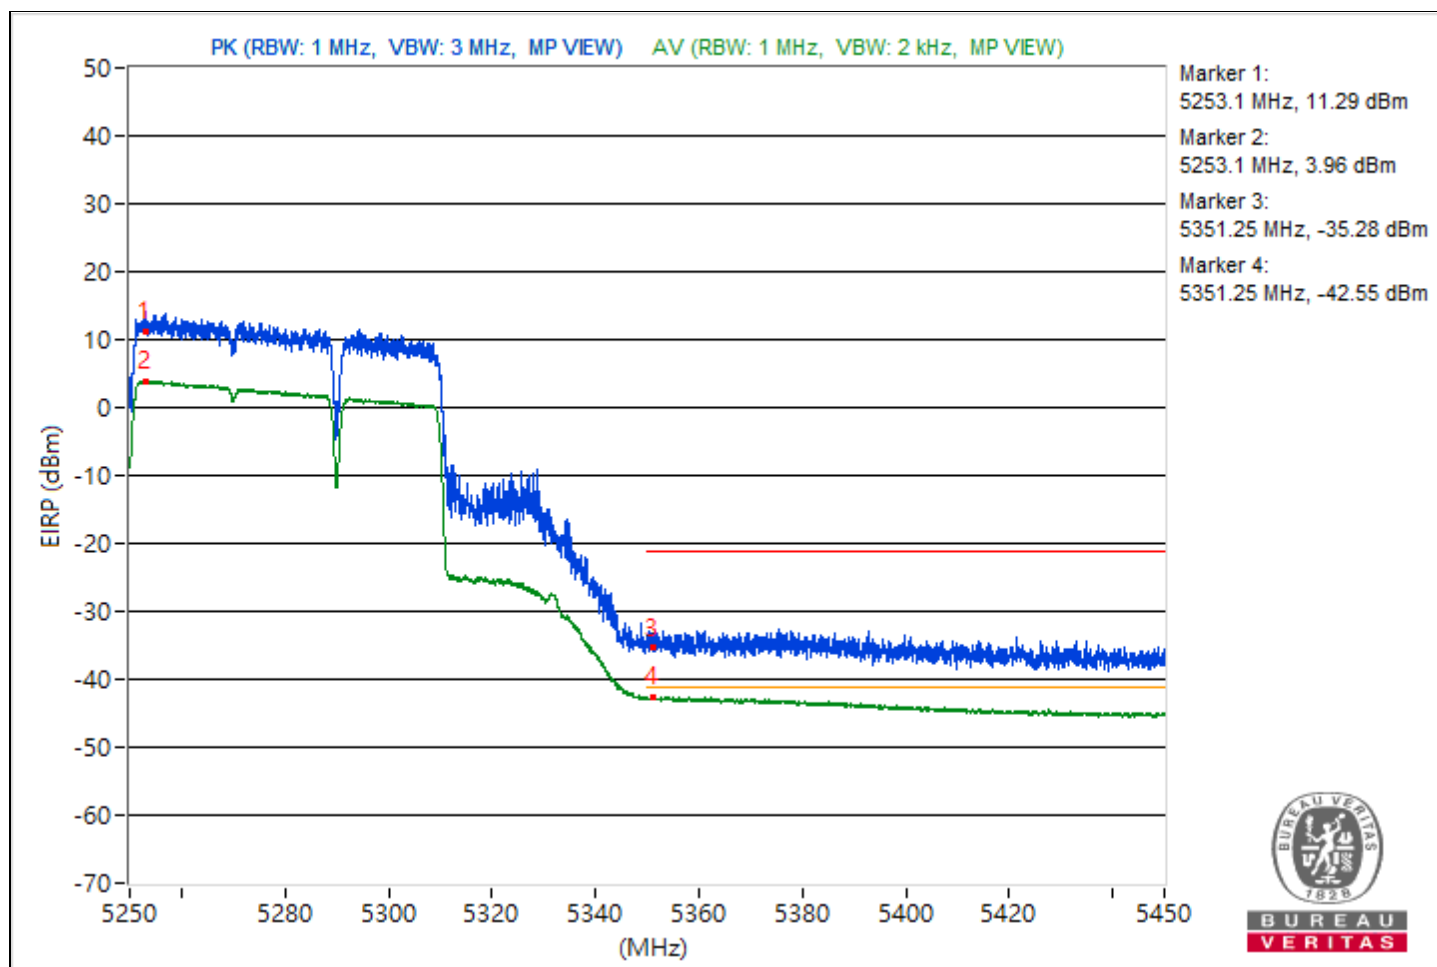


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5566.94	113.43 PK			4.59	8.24	8.37	18.17
2	5457.25	64.35 PK	74	-9.65	-43.14	-41.58	8.37	-30.91
3	#5464	63.89 PK	68.26	-4.37	-41.27	-45.01	8.37	-31.37
4	*5567.62	102.55 AV			-3.94	-4.24	8.37	7.29
5	5459.78	53.43 AV	54	-0.57	-53.32	-53.11	8.37	-41.83

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

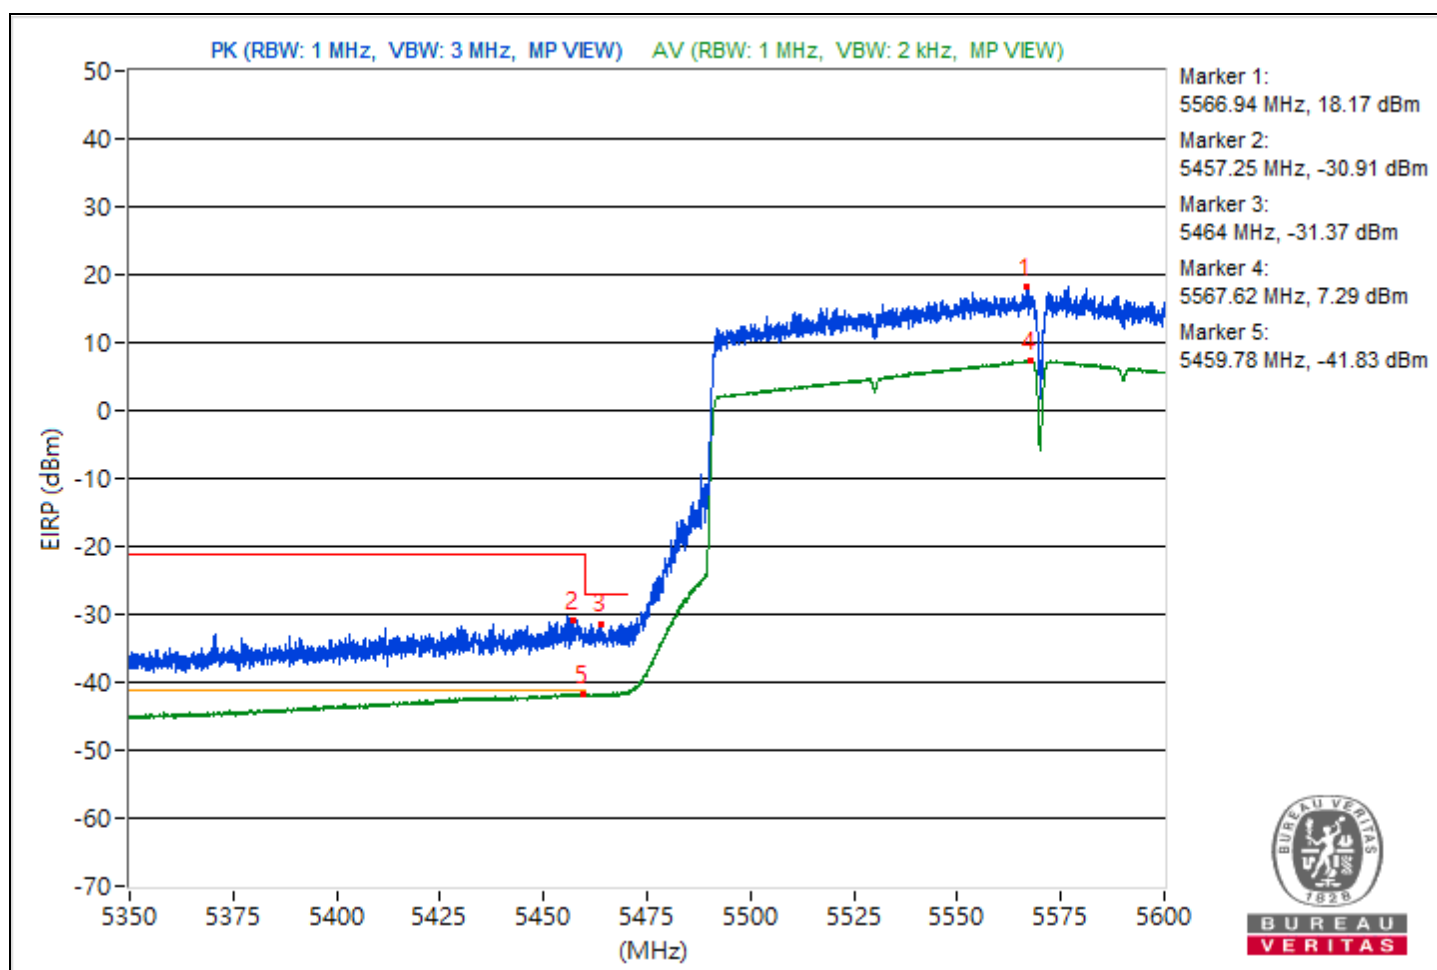

Mode B

1TX

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.4 PK	68.2	-18.8	3.52 H	62	38.8	10.6
2	15540.00	47.8 PK	74.0	-26.2	1.36 H	148	35.8	12.0
3	15540.00	35.8 AV	54.0	-18.2	1.36 H	148	23.8	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	52.6 PK	68.2	-15.6	2.04 V	173	42.0	10.6
2	15540.00	49.6 PK	74.0	-24.4	1.54 V	43	37.6	12.0
3	15540.00	37.1 AV	54.0	-16.9	1.54 V	43	25.1	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	50.1 PK	68.2	-18.1	3.58 H	78	39.2	10.9
2	15600.00	47.5 PK	74.0	-26.5	1.40 H	146	36.0	11.5
3	15600.00	35.7 AV	54.0	-18.3	1.40 H	146	24.2	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	52.9 PK	68.2	-15.3	2.09 V	183	42.0	10.9
2	15600.00	49.1 PK	74.0	-24.9	1.55 V	35	37.6	11.5
3	15600.00	36.7 AV	54.0	-17.3	1.55 V	35	25.2	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	49.4 PK	68.2	-18.8	3.54 H	66	38.5	10.9
2	15720.00	47.7 PK	74.0	-26.3	1.31 H	156	36.3	11.4
3	15720.00	35.6 AV	54.0	-18.4	1.31 H	156	24.2	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	52.1 PK	68.2	-16.1	2.07 V	163	41.2	10.9
2	15720.00	49.5 PK	74.0	-24.5	1.55 V	53	38.1	11.4
3	15720.00	37.3 AV	54.0	-16.7	1.55 V	53	25.9	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	50.1 PK	68.2	-18.1	3.51 H	49	39.2	10.9
2	15780.00	47.5 PK	74.0	-26.5	1.34 H	147	35.8	11.7
3	15780.00	35.7 AV	54.0	-18.3	1.34 H	147	24.0	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	52.8 PK	68.2	-15.4	2.09 V	182	41.9	10.9
2	15780.00	49.9 PK	74.0	-24.1	1.56 V	52	38.2	11.7
3	15780.00	37.3 AV	54.0	-16.7	1.56 V	52	25.6	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	48.5 PK	74.0	-25.5	3.62 H	51	37.8	10.7
2	10600.00	37.0 AV	54.0	-17.0	3.62 H	51	26.3	10.7
3	15900.00	48.0 PK	74.0	-26.0	1.44 H	156	36.0	12.0
4	15900.00	36.4 AV	54.0	-17.6	1.44 H	156	24.4	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	52.9 PK	74.0	-21.1	2.10 V	188	42.2	10.7
2	10600.00	41.6 AV	54.0	-12.4	2.10 V	188	30.9	10.7
3	15900.00	49.4 PK	74.0	-24.6	1.58 V	52	37.4	12.0
4	15900.00	36.7 AV	54.0	-17.3	1.58 V	52	24.7	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	47.9 PK	74.0	-26.1	3.68 H	58	37.2	10.7
2	10640.00	36.6 AV	54.0	-17.4	3.68 H	58	25.9	10.7
3	15960.00	47.3 PK	74.0	-26.7	1.39 H	158	35.0	12.3
4	15960.00	35.9 AV	54.0	-18.1	1.39 H	158	23.6	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	52.2 PK	74.0	-21.8	2.10 V	175	41.5	10.7
2	10640.00	40.7 AV	54.0	-13.3	2.10 V	175	30.0	10.7
3	15960.00	49.6 PK	74.0	-24.4	1.53 V	33	37.3	12.3
4	15960.00	37.1 AV	54.0	-16.9	1.53 V	33	24.8	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.8 PK	74.0	-25.2	3.65 H	40	37.5	11.3
2	11000.00	37.5 AV	54.0	-16.5	3.65 H	40	26.2	11.3
3	#16500.00	47.8 PK	68.2	-20.4	1.43 H	165	34.4	13.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	52.8 PK	74.0	-21.2	2.02 V	169	41.5	11.3
2	11000.00	41.3 AV	54.0	-12.7	2.02 V	169	30.0	11.3
3	#16500.00	49.8 PK	68.2	-18.4	1.56 V	40	36.4	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	48.2 PK	74.0	-25.8	3.65 H	42	36.9	11.3
2	11160.00	36.9 AV	54.0	-17.1	3.65 H	42	25.6	11.3
3	#16740.00	48.4 PK	68.2	-19.8	1.40 H	165	33.0	15.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	52.2 PK	74.0	-21.8	2.07 V	168	40.9	11.3
2	11160.00	41.0 AV	54.0	-13.0	2.07 V	168	29.7	11.3
3	#16740.00	49.3 PK	68.2	-18.9	1.56 V	47	33.9	15.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	47.9 PK	74.0	-26.1	3.56 H	47	36.0	11.9
2	11400.00	36.9 AV	54.0	-17.1	3.56 H	47	25.0	11.9
3	#17100.00	51.1 PK	68.2	-17.1	1.52 H	155	35.0	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	52.6 PK	74.0	-21.4	2.00 V	172	40.7	11.9
2	11400.00	41.2 AV	54.0	-12.8	2.00 V	172	29.3	11.9
3	#17100.00	50.0 PK	68.2	-18.2	1.59 V	37	33.9	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.9 PK	74.0	-25.1	3.61 H	49	37.0	11.9
2	11440.00	37.7 AV	54.0	-16.3	3.61 H	49	25.8	11.9
3	#17160.00	51.9 PK	68.2	-16.3	1.46 H	151	35.9	16.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	52.5 PK	74.0	-21.5	2.05 V	178	40.6	11.9
2	11440.00	41.3 AV	54.0	-12.7	2.05 V	178	29.4	11.9
3	#17160.00	49.2 PK	68.2	-19.0	1.57 V	28	33.2	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	48.3 PK	74.0	-25.7	3.59 H	50	36.5	11.8
2	11490.00	37.2 AV	54.0	-16.8	3.59 H	50	25.4	11.8
3	#17235.00	51.1 PK	68.2	-17.1	1.48 H	140	34.9	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	52.6 PK	74.0	-21.4	2.05 V	168	40.8	11.8
2	11490.00	40.9 AV	54.0	-13.1	2.05 V	168	29.1	11.8
3	#17235.00	50.0 PK	68.2	-18.2	1.54 V	42	33.8	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	49.3 PK	74.0	-24.7	3.55 H	28	38.0	11.3
2	11570.00	38.4 AV	54.0	-15.6	3.55 H	28	27.1	11.3
3	#17355.00	50.8 PK	68.2	-17.4	1.48 H	168	34.0	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	52.6 PK	74.0	-21.4	2.01 V	160	41.3	11.3
2	11570.00	41.4 AV	54.0	-12.6	2.01 V	160	30.1	11.3
3	#17355.00	49.5 PK	68.2	-18.7	1.55 V	57	32.7	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	48.6 PK	74.0	-25.4	3.55 H	66	37.4	11.2
2	11650.00	38.0 AV	54.0	-16.0	3.55 H	66	26.8	11.2
3	#17475.00	50.5 PK	68.2	-17.7	1.60 H	129	32.8	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.1 PK	74.0	-21.9	2.01 V	170	40.9	11.2
2	11650.00	40.9 AV	54.0	-13.1	2.01 V	170	29.7	11.2
3	#17475.00	49.3 PK	68.2	-18.9	1.54 V	28	31.6	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

1S1T

RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.3 PK	68.2	-18.9	3.58 H	106	38.7	10.6
2	15540.00	49.2 PK	74.0	-24.8	1.49 H	153	37.2	12.0
3	15540.00	37.0 AV	54.0	-17.0	1.49 H	153	25.0	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	51.5 PK	68.2	-16.7	2.00 V	235	40.9	10.6
2	15540.00	48.9 PK	74.0	-25.1	1.45 V	22	36.9	12.0
3	15540.00	37.0 AV	54.0	-17.0	1.45 V	22	25.0	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	49.3 PK	68.2	-18.9	3.63 H	121	38.4	10.9
2	15600.00	49.0 PK	74.0	-25.0	1.54 H	143	37.5	11.5
3	15600.00	36.8 AV	54.0	-17.2	1.54 H	143	25.3	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	51.5 PK	68.2	-16.7	2.05 V	231	40.6	10.9
2	15600.00	49.3 PK	74.0	-24.7	1.48 V	6	37.8	11.5
3	15600.00	37.4 AV	54.0	-16.6	1.48 V	6	25.9	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	49.6 PK	68.2	-18.6	3.61 H	94	38.7	10.9
2	15720.00	49.2 PK	74.0	-24.8	1.45 H	167	37.8	11.4
3	15720.00	37.2 AV	54.0	-16.8	1.45 H	167	25.8	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	50.7 PK	68.2	-17.5	2.05 V	238	39.8	10.9
2	15720.00	48.7 PK	74.0	-25.3	1.40 V	32	37.3	11.4
3	15720.00	37.0 AV	54.0	-17.0	1.40 V	32	25.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	54.1 PK	68.2	-14.1	3.64 H	96	43.2	10.9
2	15780.00	49.2 PK	74.0	-24.8	1.60 H	143	37.5	11.7
3	15780.00	36.7 AV	54.0	-17.3	1.60 H	143	25.0	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	52.2 PK	68.2	-16.0	1.98 V	222	41.3	10.9
2	15780.00	48.9 PK	74.0	-25.1	1.50 V	18	37.2	11.7
3	15780.00	36.7 AV	54.0	-17.3	1.50 V	18	25.0	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	54.3 PK	74.0	-19.7	3.65 H	100	43.6	10.7
2	10600.00	41.7 AV	54.0	-12.3	3.65 H	100	31.0	10.7
3	15900.00	49.4 PK	74.0	-24.6	1.62 H	145	37.4	12.0
4	15900.00	36.9 AV	54.0	-17.1	1.62 H	145	24.9	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	51.0 PK	74.0	-23.0	2.04 V	231	40.3	10.7
2	10600.00	39.6 AV	54.0	-14.4	2.04 V	231	28.9	10.7
3	15900.00	49.0 PK	74.0	-25.0	1.43 V	35	37.0	12.0
4	15900.00	37.1 AV	54.0	-16.9	1.43 V	35	25.1	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	54.1 PK	74.0	-19.9	3.70 H	95	43.4	10.7
2	10640.00	41.8 AV	54.0	-12.2	3.70 H	95	31.1	10.7
3	15960.00	49.4 PK	74.0	-24.6	1.66 H	142	37.1	12.3
4	15960.00	36.8 AV	54.0	-17.2	1.66 H	142	24.5	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	51.3 PK	74.0	-22.7	2.02 V	231	40.6	10.7
2	10640.00	40.0 AV	54.0	-14.0	2.02 V	231	29.3	10.7
3	15960.00	48.4 PK	74.0	-25.6	1.42 V	12	36.1	12.3
4	15960.00	36.7 AV	54.0	-17.3	1.42 V	12	24.4	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	54.0 PK	74.0	-20.0	3.58 H	84	42.7	11.3
2	11000.00	41.1 AV	54.0	-12.9	3.58 H	84	29.8	11.3
3	#16500.00	49.2 PK	68.2	-19.0	1.54 H	130	35.8	13.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	51.4 PK	74.0	-22.6	2.00 V	246	40.1	11.3
2	11000.00	39.8 AV	54.0	-14.2	2.00 V	246	28.5	11.3
3	#16500.00	48.5 PK	68.2	-19.7	1.44 V	26	35.1	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	54.1 PK	74.0	-19.9	3.68 H	109	42.8	11.3
2	11160.00	41.4 AV	54.0	-12.6	3.68 H	109	30.1	11.3
3	#16740.00	48.7 PK	68.2	-19.5	1.62 H	151	33.3	15.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	51.9 PK	74.0	-22.1	2.03 V	154	40.6	11.3
2	11160.00	40.9 AV	54.0	-13.1	2.03 V	154	29.6	11.3
3	#16740.00	48.1 PK	68.2	-20.1	1.50 V	12	32.7	15.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	54.1 PK	74.0	-19.9	3.63 H	109	42.2	11.9
2	11400.00	41.4 AV	54.0	-12.6	3.63 H	109	29.5	11.9
3	#17100.00	49.1 PK	68.2	-19.1	1.59 H	145	33.0	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	51.5 PK	74.0	-22.5	2.08 V	143	39.6	11.9
2	11400.00	40.5 AV	54.0	-13.5	2.08 V	143	28.6	11.9
3	#17100.00	48.3 PK	68.2	-19.9	1.55 V	15	32.2	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	53.6 PK	74.0	-20.4	3.65 H	100	41.7	11.9
2	11440.00	41.1 AV	54.0	-12.9	3.65 H	100	29.2	11.9
3	#17160.00	48.7 PK	68.2	-19.5	1.66 H	142	32.7	16.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	51.7 PK	74.0	-22.3	2.03 V	161	39.8	11.9
2	11440.00	40.6 AV	54.0	-13.4	2.03 V	161	28.7	11.9
3	#17160.00	48.2 PK	68.2	-20.0	1.48 V	7	32.2	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	54.0 PK	74.0	-20.0	3.67 H	106	42.2	11.8
2	11490.00	41.3 AV	54.0	-12.7	3.67 H	106	29.5	11.8
3	#17235.00	49.7 PK	68.2	-18.5	1.61 H	132	33.5	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	52.4 PK	74.0	-21.6	2.11 V	244	40.6	11.8
2	11490.00	42.1 AV	54.0	-11.9	2.11 V	244	30.3	11.8
3	#17235.00	51.2 PK	68.2	-17.0	1.47 V	22	35.0	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	54.1 PK	74.0	-19.9	3.63 H	102	42.8	11.3
2	11570.00	41.4 AV	54.0	-12.6	3.63 H	102	30.1	11.3
3	#17355.00	49.3 PK	68.2	-18.9	1.65 H	127	32.5	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	52.9 PK	74.0	-21.1	2.17 V	247	41.6	11.3
2	11570.00	42.3 AV	54.0	-11.7	2.17 V	247	31.0	11.3
3	#17355.00	51.4 PK	68.2	-16.8	1.44 V	13	34.6	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.8 PK	74.0	-20.2	3.60 H	93	42.6	11.2
2	11650.00	41.4 AV	54.0	-12.6	3.60 H	93	30.2	11.2
3	#17475.00	49.5 PK	68.2	-18.7	1.62 H	140	31.8	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.9 PK	74.0	-21.1	2.06 V	229	41.7	11.2
2	11650.00	42.6 AV	54.0	-11.4	2.06 V	229	31.4	11.2
3	#17475.00	51.3 PK	68.2	-16.9	1.51 V	28	33.6	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10380.00	49.3 PK	68.2	-18.9	3.48 H	99	38.5	10.8
2	15570.00	49.2 PK	74.0	-24.8	1.47 H	108	37.5	11.7
3	15570.00	38.0 AV	54.0	-16.0	1.47 H	108	26.3	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10380.00	49.3 PK	68.2	-18.9	1.83 V	276	38.5	10.8
2	15570.00	49.0 PK	74.0	-25.0	1.49 V	34	37.3	11.7
3	15570.00	36.8 AV	54.0	-17.2	1.49 V	34	25.1	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10460.00	50.0 PK	68.2	-18.2	3.53 H	42	39.0	11.0
2	15690.00	49.6 PK	74.0	-24.4	1.47 H	128	38.2	11.4
3	15690.00	38.0 AV	54.0	-16.0	1.47 H	128	26.6	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10460.00	49.6 PK	68.2	-18.6	1.89 V	285	38.6	11.0
2	15690.00	48.4 PK	74.0	-25.6	1.53 V	45	37.0	11.4
3	15690.00	36.4 AV	54.0	-17.6	1.53 V	45	25.0	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10540.00	50.8 PK	68.2	-17.4	3.49 H	65	39.9	10.9
2	15810.00	51.0 PK	74.0	-23.0	1.42 H	157	39.2	11.8
3	15810.00	40.0 AV	54.0	-14.0	1.42 H	157	28.2	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10540.00	49.5 PK	68.2	-18.7	1.81 V	272	38.6	10.9
2	15810.00	48.8 PK	74.0	-25.2	1.43 V	19	37.0	11.8
3	15810.00	36.6 AV	54.0	-17.4	1.43 V	19	24.8	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10620.00	50.2 PK	74.0	-23.8	3.54 H	48	39.5	10.7
2	10620.00	39.0 AV	54.0	-15.0	3.54 H	48	28.3	10.7
3	15930.00	50.8 PK	74.0	-23.2	1.46 H	148	38.6	12.2
4	15930.00	40.0 AV	54.0	-14.0	1.46 H	148	27.8	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10620.00	49.8 PK	74.0	-24.2	1.82 V	264	39.1	10.7
2	10620.00	38.0 AV	54.0	-16.0	1.82 V	264	27.3	10.7
3	15930.00	49.3 PK	74.0	-24.7	1.47 V	35	37.1	12.2
4	15930.00	37.1 AV	54.0	-16.9	1.47 V	35	24.9	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11020.00	50.8 PK	74.0	-23.2	3.43 H	72	39.5	11.3
2	11020.00	39.1 AV	54.0	-14.9	3.43 H	72	27.8	11.3
3	#16530.00	50.0 PK	68.2	-18.2	1.41 H	150	36.2	13.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11020.00	50.7 PK	74.0	-23.3	1.86 V	221	39.4	11.3
2	11020.00	38.8 AV	54.0	-15.2	1.86 V	221	27.5	11.3
3	#16530.00	48.9 PK	68.2	-19.3	1.59 V	17	35.1	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11100.00	51.1 PK	74.0	-22.9	3.46 H	67	39.7	11.4
2	11100.00	39.3 AV	54.0	-14.7	3.46 H	67	27.9	11.4
3	#16650.00	50.9 PK	68.2	-17.3	1.49 H	136	35.8	15.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11100.00	50.2 PK	74.0	-23.8	1.82 V	215	38.8	11.4
2	11100.00	38.1 AV	54.0	-15.9	1.82 V	215	26.7	11.4
3	#16650.00	48.6 PK	68.2	-19.6	1.59 V	36	33.5	15.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11340.00	50.8 PK	74.0	-23.2	3.52 H	48	39.2	11.6
2	11340.00	39.5 AV	54.0	-14.5	3.52 H	48	27.9	11.6
3	#17010.00	50.1 PK	68.2	-18.1	1.47 H	159	33.7	16.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11340.00	50.2 PK	74.0	-23.8	1.78 V	206	38.6	11.6
2	11340.00	38.3 AV	54.0	-15.7	1.78 V	206	26.7	11.6
3	#17010.00	48.6 PK	68.2	-19.6	1.57 V	35	32.2	16.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11420.00	50.9 PK	74.0	-23.1	3.50 H	50	39.0	11.9
2	11420.00	39.2 AV	54.0	-14.8	3.50 H	50	27.3	11.9
3	#17130.00	50.4 PK	68.2	-17.8	1.42 H	143	34.4	16.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11420.00	50.8 PK	74.0	-23.2	1.87 V	213	38.9	11.9
2	11420.00	38.5 AV	54.0	-15.5	1.87 V	213	26.6	11.9
3	#17130.00	48.9 PK	68.2	-19.3	1.55 V	22	32.9	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11510.00	51.2 PK	74.0	-22.8	3.52 H	42	39.5	11.7
2	11510.00	39.5 AV	54.0	-14.5	3.52 H	42	27.8	11.7
3	#17265.00	50.7 PK	68.2	-17.5	1.45 H	158	34.2	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11510.00	50.8 PK	74.0	-23.2	1.83 V	216	39.1	11.7
2	11510.00	38.4 AV	54.0	-15.6	1.83 V	216	26.7	11.7
3	#17265.00	48.0 PK	68.2	-20.2	1.54 V	49	31.5	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11590.00	51.1 PK	74.0	-22.9	3.50 H	36	39.8	11.3
2	11590.00	39.2 AV	54.0	-14.8	3.50 H	36	27.9	11.3
3	#17385.00	50.5 PK	68.2	-17.7	1.42 H	151	33.6	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11590.00	50.7 PK	74.0	-23.3	1.76 V	225	39.4	11.3
2	11590.00	38.4 AV	54.0	-15.6	1.76 V	225	27.1	11.3
3	#17385.00	48.2 PK	68.2	-20.0	1.60 V	42	31.3	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	50.1 PK	68.2	-18.1	3.76 H	67	39.1	11.0
2	15630.00	49.6 PK	74.0	-24.4	1.50 H	126	38.1	11.5
3	15630.00	38.7 AV	54.0	-15.3	1.50 H	126	27.2	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	50.3 PK	68.2	-17.9	1.88 V	220	39.3	11.0
2	15630.00	48.6 PK	74.0	-25.4	1.59 V	57	37.1	11.5
3	15630.00	36.5 AV	54.0	-17.5	1.59 V	57	25.0	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	50.4 PK	68.2	-17.8	3.80 H	70	39.5	10.9
2	15870.00	49.9 PK	74.0	-24.1	1.44 H	140	37.9	12.0
3	15870.00	38.7 AV	54.0	-15.3	1.44 H	140	26.7	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	50.8 PK	68.2	-17.4	1.86 V	218	39.9	10.9
2	15870.00	48.4 PK	74.0	-25.6	1.63 V	59	36.4	12.0
3	15870.00	36.0 AV	54.0	-18.0	1.63 V	59	24.0	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	50.3 PK	74.0	-23.7	3.76 H	68	39.1	11.2
2	11060.00	37.8 AV	54.0	-16.2	3.76 H	68	26.6	11.2
3	#16590.00	49.7 PK	68.2	-18.5	1.47 H	120	35.1	14.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	50.2 PK	74.0	-23.8	1.82 V	213	39.0	11.2
2	11060.00	38.8 AV	54.0	-15.2	1.82 V	213	27.6	11.2
3	#16590.00	48.9 PK	68.2	-19.3	1.60 V	50	34.3	14.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	50.2 PK	74.0	-23.8	3.75 H	69	39.0	11.2
2	11220.00	37.7 AV	54.0	-16.3	3.75 H	69	26.5	11.2
3	#16830.00	49.6 PK	68.2	-18.6	1.52 H	123	33.9	15.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	50.7 PK	74.0	-23.3	1.85 V	208	39.5	11.2
2	11220.00	39.5 AV	54.0	-14.5	1.85 V	208	28.3	11.2
3	#16830.00	48.3 PK	68.2	-19.9	1.60 V	58	32.6	15.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	49.7 PK	74.0	-24.3	3.74 H	77	37.9	11.8
2	11380.00	37.4 AV	54.0	-16.6	3.74 H	77	25.6	11.8
3	#17070.00	49.7 PK	68.2	-18.5	1.54 H	142	33.6	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	49.6 PK	74.0	-24.4	1.89 V	224	37.8	11.8
2	11380.00	38.7 AV	54.0	-15.3	1.89 V	224	26.9	11.8
3	#17070.00	48.4 PK	68.2	-19.8	1.54 V	73	32.3	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	50.1 PK	74.0	-23.9	3.74 H	71	38.6	11.5
2	11550.00	38.0 AV	54.0	-16.0	3.74 H	71	26.5	11.5
3	#17325.00	49.4 PK	68.2	-18.8	1.50 H	122	32.6	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	49.8 PK	74.0	-24.2	1.83 V	213	38.3	11.5
2	11550.00	38.9 AV	54.0	-15.1	1.83 V	213	27.4	11.5
3	#17325.00	48.1 PK	68.2	-20.1	1.57 V	61	31.3	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	50.7 PK	68.2	-17.5	3.80 H	71	39.8	10.9
2	15750.00	49.6 PK	74.0	-24.4	1.44 H	129	38.0	11.6
3	15750.00	38.5 AV	54.0	-15.5	1.44 H	129	26.9	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	48.8 PK	68.2	-19.4	2.02 V	223	37.9	10.9
2	15750.00	49.4 PK	74.0	-24.6	1.40 V	27	37.8	11.6
3	15750.00	37.2 AV	54.0	-16.8	1.40 V	27	25.6	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	50.0 PK	74.0	-24.0	3.81 H	83	38.7	11.3
2	11140.00	37.4 AV	54.0	-16.6	3.81 H	83	26.1	11.3
3	#16710.00	49.8 PK	68.2	-18.4	1.55 H	113	34.3	15.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	49.5 PK	74.0	-24.5	2.02 V	220	38.2	11.3
2	11140.00	36.9 AV	54.0	-17.1	2.02 V	220	25.6	11.3
3	#16710.00	49.0 PK	68.2	-19.2	1.58 V	61	33.5	15.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.5 PK	68.2	-18.7	3.54 H	41	38.9	10.6
2	15540.00	49.3 PK	74.0	-24.7	1.46 H	164	37.3	12.0
3	15540.00	36.6 AV	54.0	-17.4	1.46 H	164	24.6	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.9 PK	68.2	-18.3	2.21 V	247	39.3	10.6
2	15540.00	48.3 PK	74.0	-25.7	1.77 V	35	36.3	12.0
3	15540.00	37.7 AV	54.0	-16.3	1.77 V	35	25.7	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	51.1 PK	74.0	-22.9	3.56 H	40	40.4	10.7
2	10640.00	39.4 AV	54.0	-14.6	3.56 H	40	28.7	10.7
3	15960.00	49.5 PK	74.0	-24.5	1.45 H	175	37.2	12.3
4	15960.00	37.0 AV	54.0	-17.0	1.45 H	175	24.7	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	50.6 PK	74.0	-23.4	2.15 V	228	39.9	10.7
2	10640.00	37.6 AV	54.0	-16.4	2.15 V	228	26.9	10.7
3	15960.00	48.2 PK	74.0	-25.8	1.80 V	12	35.9	12.3
4	15960.00	37.1 AV	54.0	-16.9	1.80 V	12	24.8	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.5 PK	74.0	-24.5	3.50 H	31	38.2	11.3
2	11000.00	38.3 AV	54.0	-15.7	3.50 H	31	27.0	11.3
3	#16500.00	49.8 PK	68.2	-18.4	1.44 H	172	36.4	13.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	50.2 PK	74.0	-23.8	2.24 V	230	38.9	11.3
2	11000.00	37.3 AV	54.0	-16.7	2.24 V	230	26.0	11.3
3	#16500.00	48.6 PK	68.2	-19.6	1.70 V	0	35.2	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	50.5 PK	74.0	-23.5	3.54 H	37	38.6	11.9
2	11400.00	39.1 AV	54.0	-14.9	3.54 H	37	27.2	11.9
3	#17100.00	48.9 PK	68.2	-19.3	1.54 H	171	32.8	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	50.0 PK	74.0	-24.0	2.22 V	231	38.1	11.9
2	11400.00	37.1 AV	54.0	-16.9	2.22 V	231	25.2	11.9
3	#17100.00	48.3 PK	68.2	-19.9	1.77 V	20	32.2	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	53.7 PK	74.0	-20.3	3.55 H	34	41.8	11.9
2	11440.00	42.6 AV	54.0	-11.4	3.55 H	34	30.7	11.9
3	#17160.00	53.5 PK	68.2	-14.7	1.46 H	139	37.5	16.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	50.6 PK	74.0	-23.4	2.11 V	231	38.7	11.9
2	11440.00	37.7 AV	54.0	-16.3	2.11 V	231	25.8	11.9
3	#17160.00	47.5 PK	68.2	-20.7	1.83 V	1	31.5	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.1 PK	74.0	-20.9	3.58 H	65	41.3	11.8
2	11490.00	42.1 AV	54.0	-11.9	3.58 H	65	30.3	11.8
3	#17235.00	52.7 PK	68.2	-15.5	1.46 H	148	36.5	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	54.0 PK	74.0	-20.0	2.06 V	206	42.2	11.8
2	11490.00	43.8 AV	54.0	-10.2	2.06 V	206	32.0	11.8
3	#17235.00	53.0 PK	68.2	-15.2	1.70 V	36	36.8	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.0 PK	74.0	-21.0	3.50 H	36	41.8	11.2
2	11650.00	42.1 AV	54.0	-11.9	3.50 H	36	30.9	11.2
3	#17475.00	53.4 PK	68.2	-14.8	1.36 H	157	35.7	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	54.0 PK	74.0	-20.0	2.01 V	221	42.8	11.2
2	11650.00	43.9 AV	54.0	-10.1	2.01 V	221	32.7	11.2
3	#17475.00	54.0 PK	68.2	-14.2	1.76 V	55	36.3	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.5 PK	68.2	-19.7	3.52 H	36	37.9	10.6
2	15540.00	48.7 PK	74.0	-25.3	1.29 H	160	36.7	12.0
3	15540.00	36.0 AV	54.0	-18.0	1.29 H	160	24.0	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.1 PK	68.2	-19.1	2.01 V	219	38.5	10.6
2	15540.00	49.6 PK	74.0	-24.4	1.55 V	33	37.6	12.0
3	15540.00	36.6 AV	54.0	-17.4	1.55 V	33	24.6	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.5 PK	74.0	-25.5	3.54 H	35	37.8	10.7
2	10640.00	37.6 AV	54.0	-16.4	3.54 H	35	26.9	10.7
3	15960.00	48.6 PK	74.0	-25.4	1.29 H	156	36.3	12.3
4	15960.00	35.8 AV	54.0	-18.2	1.29 H	156	23.5	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.9 PK	74.0	-24.1	2.00 V	230	39.2	10.7
2	10640.00	37.7 AV	54.0	-16.3	2.00 V	230	27.0	10.7
3	15960.00	49.5 PK	74.0	-24.5	1.56 V	61	37.2	12.3
4	15960.00	36.5 AV	54.0	-17.5	1.56 V	61	24.2	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.7 PK	74.0	-25.3	3.60 H	37	37.4	11.3
2	11000.00	37.9 AV	54.0	-16.1	3.60 H	37	26.6	11.3
3	#16500.00	49.2 PK	68.2	-19.0	1.25 H	184	35.8	13.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.4 PK	74.0	-24.6	2.06 V	222	38.1	11.3
2	11000.00	37.7 AV	54.0	-16.3	2.06 V	222	26.4	11.3
3	#16500.00	48.7 PK	68.2	-19.5	1.55 V	46	35.3	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.6 PK	74.0	-25.4	3.57 H	52	36.7	11.9
2	11400.00	37.6 AV	54.0	-16.4	3.57 H	52	25.7	11.9
3	#17100.00	48.6 PK	68.2	-19.6	1.41 H	186	32.5	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.1 PK	74.0	-24.9	2.04 V	228	37.2	11.9
2	11400.00	37.6 AV	54.0	-16.4	2.04 V	228	25.7	11.9
3	#17100.00	49.6 PK	68.2	-18.6	1.50 V	41	33.5	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.2 PK	74.0	-24.8	3.60 H	23	37.3	11.9
2	11440.00	38.1 AV	54.0	-15.9	3.60 H	23	26.2	11.9
3	#17160.00	48.8 PK	68.2	-19.4	1.35 H	166	32.8	16.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	50.1 PK	74.0	-23.9	2.09 V	215	38.2	11.9
2	11440.00	37.8 AV	54.0	-16.2	2.09 V	215	25.9	11.9
3	#17160.00	50.7 PK	68.2	-17.5	1.41 V	38	34.7	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.3 PK	74.0	-20.7	3.41 H	48	41.5	11.8
2	11490.00	42.6 AV	54.0	-11.4	3.41 H	48	30.8	11.8
3	#17235.00	52.4 PK	68.2	-15.8	1.47 H	151	36.2	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.4 PK	74.0	-20.6	2.16 V	205	41.6	11.8
2	11490.00	42.8 AV	54.0	-11.2	2.16 V	205	31.0	11.8
3	#17235.00	53.9 PK	68.2	-14.3	1.68 V	30	37.7	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	54.0 PK	74.0	-20.0	3.45 H	47	42.8	11.2
2	11650.00	43.1 AV	54.0	-10.9	3.45 H	47	31.9	11.2
3	#17475.00	53.4 PK	68.2	-14.8	1.44 H	143	35.7	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.9 PK	74.0	-21.1	2.19 V	202	41.7	11.2
2	11650.00	42.5 AV	54.0	-11.5	2.19 V	202	31.3	11.2
3	#17475.00	53.5 PK	68.2	-14.7	1.65 V	28	35.8	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	50.0 PK	68.2	-18.2	3.29 H	49	39.4	10.6
2	15540.00	49.3 PK	74.0	-24.7	1.54 H	145	37.3	12.0
3	15540.00	36.6 AV	54.0	-17.4	1.54 H	145	24.6	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.6 PK	68.2	-19.6	2.11 V	228	38.0	10.6
2	15540.00	49.2 PK	74.0	-24.8	1.55 V	43	37.2	12.0
3	15540.00	37.2 AV	54.0	-16.8	1.55 V	43	25.2	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.6 PK	74.0	-24.4	3.44 H	91	38.9	10.7
2	10640.00	38.6 AV	54.0	-15.4	3.44 H	91	27.9	10.7
3	15960.00	47.8 PK	74.0	-26.2	1.56 H	183	35.5	12.3
4	15960.00	35.4 AV	54.0	-18.6	1.56 H	183	23.1	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.8 PK	74.0	-24.2	2.18 V	221	39.1	10.7
2	10640.00	38.3 AV	54.0	-15.7	2.18 V	221	27.6	10.7
3	15960.00	49.2 PK	74.0	-24.8	1.63 V	64	36.9	12.3
4	15960.00	37.5 AV	54.0	-16.5	1.63 V	64	25.2	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.9 PK	74.0	-25.1	3.50 H	83	37.6	11.3
2	11000.00	38.0 AV	54.0	-16.0	3.50 H	83	26.7	11.3
3	#16500.00	48.9 PK	68.2	-19.3	1.45 H	187	35.5	13.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.9 PK	74.0	-25.1	2.11 V	233	37.6	11.3
2	11000.00	37.7 AV	54.0	-16.3	2.11 V	233	26.4	11.3
3	#16500.00	50.1 PK	68.2	-18.1	1.51 V	41	36.7	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.8 PK	74.0	-25.2	3.48 H	111	36.9	11.9
2	11400.00	37.6 AV	54.0	-16.4	3.48 H	111	25.7	11.9
3	#17100.00	48.4 PK	68.2	-19.8	1.48 H	208	32.3	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.0 PK	74.0	-26.0	2.14 V	215	36.1	11.9
2	11400.00	36.7 AV	54.0	-17.3	2.14 V	215	24.8	11.9
3	#17100.00	49.0 PK	68.2	-19.2	1.55 V	64	32.9	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.7 PK	74.0	-24.3	3.43 H	87	37.8	11.9
2	11440.00	38.4 AV	54.0	-15.6	3.43 H	87	26.5	11.9
3	#17160.00	48.6 PK	68.2	-19.6	1.52 H	196	32.6	16.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.0 PK	74.0	-25.0	2.24 V	232	37.1	11.9
2	11440.00	37.6 AV	54.0	-16.4	2.24 V	232	25.7	11.9
3	#17160.00	49.6 PK	68.2	-18.6	1.60 V	54	33.6	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.5 PK	74.0	-20.5	3.49 H	49	41.7	11.8
2	11490.00	43.4 AV	54.0	-10.6	3.49 H	49	31.6	11.8
3	#17235.00	52.0 PK	68.2	-16.2	1.42 H	173	35.8	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	52.9 PK	74.0	-21.1	2.22 V	215	41.1	11.8
2	11490.00	42.0 AV	54.0	-12.0	2.22 V	215	30.2	11.8
3	#17235.00	55.0 PK	68.2	-13.2	1.66 V	15	38.8	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.9 PK	74.0	-21.1	3.44 H	62	41.7	11.2
2	11650.00	42.6 AV	54.0	-11.4	3.44 H	62	31.4	11.2
3	#17475.00	52.0 PK	68.2	-16.2	1.38 H	201	34.3	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.5 PK	74.0	-20.5	2.10 V	207	42.3	11.2
2	11650.00	42.8 AV	54.0	-11.2	2.10 V	207	31.6	11.2
3	#17475.00	55.3 PK	68.2	-12.9	1.61 V	34	37.6	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	50.0 PK	68.2	-18.2	3.51 H	58	39.4	10.6
2	15540.00	48.8 PK	74.0	-25.2	1.42 H	177	36.8	12.0
3	15540.00	35.9 AV	54.0	-18.1	1.42 H	177	23.9	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.2 PK	68.2	-19.0	1.94 V	227	38.6	10.6
2	15540.00	48.8 PK	74.0	-25.2	1.65 V	26	36.8	12.0
3	15540.00	36.4 AV	54.0	-17.6	1.65 V	26	24.4	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.5 PK	74.0	-24.5	3.56 H	39	38.8	10.7
2	10640.00	38.4 AV	54.0	-15.6	3.56 H	39	27.7	10.7
3	15960.00	49.0 PK	74.0	-25.0	1.42 H	189	36.7	12.3
4	15960.00	36.6 AV	54.0	-17.4	1.42 H	189	24.3	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.8 PK	74.0	-25.2	2.05 V	240	38.1	10.7
2	10640.00	38.0 AV	54.0	-16.0	2.05 V	240	27.3	10.7
3	15960.00	48.7 PK	74.0	-25.3	1.64 V	59	36.4	12.3
4	15960.00	36.8 AV	54.0	-17.2	1.64 V	59	24.5	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.2 PK	74.0	-24.8	3.47 H	24	37.9	11.3
2	11000.00	38.6 AV	54.0	-15.4	3.47 H	24	27.3	11.3
3	#16500.00	49.0 PK	68.2	-19.2	1.46 H	182	35.6	13.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.4 PK	74.0	-24.6	1.97 V	217	38.1	11.3
2	11000.00	38.3 AV	54.0	-15.7	1.97 V	217	27.0	11.3
3	#16500.00	47.7 PK	68.2	-20.5	1.75 V	42	34.3	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.3 PK	74.0	-24.7	3.50 H	20	37.4	11.9
2	11400.00	38.6 AV	54.0	-15.4	3.50 H	20	26.7	11.9
3	#17100.00	48.4 PK	68.2	-19.8	1.45 H	207	32.3	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.1 PK	74.0	-24.9	2.01 V	217	37.2	11.9
2	11400.00	37.9 AV	54.0	-16.1	2.01 V	217	26.0	11.9
3	#17100.00	49.3 PK	68.2	-18.9	1.61 V	37	33.2	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	51.6 PK	74.0	-22.4	3.48 H	51	39.7	11.9
2	11440.00	39.3 AV	54.0	-14.7	3.48 H	51	27.4	11.9
3	#17160.00	49.2 PK	68.2	-19.0	1.42 H	181	33.2	16.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	52.0 PK	74.0	-22.0	2.13 V	192	40.1	11.9
2	11440.00	42.1 AV	54.0	-11.9	2.13 V	192	30.2	11.9
3	#17160.00	53.3 PK	68.2	-14.9	1.71 V	36	37.3	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	51.8 PK	74.0	-22.2	3.53 H	76	40.0	11.8
2	11490.00	39.3 AV	54.0	-14.7	3.53 H	76	27.5	11.8
3	#17235.00	49.5 PK	68.2	-18.7	1.53 H	196	33.3	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	52.5 PK	74.0	-21.5	2.07 V	220	40.7	11.8
2	11490.00	42.3 AV	54.0	-11.7	2.07 V	220	30.5	11.8
3	#17235.00	53.2 PK	68.2	-15.0	1.61 V	25	37.0	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.4 PK	74.0	-21.6	3.48 H	58	41.2	11.2
2	11650.00	40.2 AV	54.0	-13.8	3.48 H	58	29.0	11.2
3	#17475.00	48.1 PK	68.2	-20.1	1.50 H	188	30.4	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.4 PK	74.0	-21.6	1.96 V	230	41.2	11.2
2	11650.00	42.6 AV	54.0	-11.4	1.96 V	230	31.4	11.2
3	#17475.00	53.4 PK	68.2	-14.8	1.63 V	19	35.7	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.5 PK	68.2	-19.7	3.52 H	79	37.9	10.6
2	15540.00	48.2 PK	74.0	-25.8	1.50 H	196	36.2	12.0
3	15540.00	36.3 AV	54.0	-17.7	1.50 H	196	24.3	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	47.9 PK	68.2	-20.3	1.96 V	197	37.3	10.6
2	15540.00	48.8 PK	74.0	-25.2	1.60 V	67	36.8	12.0
3	15540.00	36.1 AV	54.0	-17.9	1.60 V	67	24.1	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.3 PK	74.0	-25.7	3.53 H	68	37.6	10.7
2	10640.00	37.4 AV	54.0	-16.6	3.53 H	68	26.7	10.7
3	15960.00	48.2 PK	74.0	-25.8	1.41 H	186	35.9	12.3
4	15960.00	36.4 AV	54.0	-17.6	1.41 H	186	24.1	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.7 PK	74.0	-25.3	2.02 V	192	38.0	10.7
2	10640.00	37.2 AV	54.0	-16.8	2.02 V	192	26.5	10.7
3	15960.00	49.5 PK	74.0	-24.5	1.59 V	55	37.2	12.3
4	15960.00	36.3 AV	54.0	-17.7	1.59 V	55	24.0	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.5 PK	74.0	-25.5	3.50 H	65	37.2	11.3
2	11000.00	37.4 AV	54.0	-16.6	3.50 H	65	26.1	11.3
3	#16500.00	47.6 PK	68.2	-20.6	1.42 H	193	34.2	13.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.4 PK	74.0	-25.6	1.96 V	212	37.1	11.3
2	11000.00	36.9 AV	54.0	-17.1	1.96 V	212	25.6	11.3
3	#16500.00	50.1 PK	68.2	-18.1	1.62 V	33	36.7	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.9 PK	74.0	-25.1	3.63 H	82	37.0	11.9
2	11400.00	37.6 AV	54.0	-16.4	3.63 H	82	25.7	11.9
3	#17100.00	49.0 PK	68.2	-19.2	1.44 H	199	32.9	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.9 PK	74.0	-25.1	1.96 V	188	37.0	11.9
2	11400.00	37.0 AV	54.0	-17.0	1.96 V	188	25.1	11.9
3	#17100.00	49.4 PK	68.2	-18.8	1.53 V	70	33.3	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	51.3 PK	74.0	-22.7	3.46 H	64	39.4	11.9
2	11440.00	39.4 AV	54.0	-14.6	3.46 H	64	27.5	11.9
3	#17160.00	48.9 PK	68.2	-19.3	1.39 H	165	32.9	16.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	52.3 PK	74.0	-21.7	2.10 V	201	40.4	11.9
2	11440.00	39.8 AV	54.0	-14.2	2.10 V	201	27.9	11.9
3	#17160.00	49.4 PK	68.2	-18.8	1.54 V	45	33.4	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	52.3 PK	74.0	-21.7	3.50 H	72	40.5	11.8
2	11490.00	39.9 AV	54.0	-14.1	3.50 H	72	28.1	11.8
3	#17235.00	48.2 PK	68.2	-20.0	1.45 H	193	32.0	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	52.5 PK	74.0	-21.5	2.07 V	191	40.7	11.8
2	11490.00	42.3 AV	54.0	-11.7	2.07 V	191	30.5	11.8
3	#17235.00	53.5 PK	68.2	-14.7	1.79 V	15	37.3	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.0 PK	74.0	-22.0	3.40 H	70	40.8	11.2
2	11650.00	39.4 AV	54.0	-14.6	3.40 H	70	28.2	11.2
3	#17475.00	48.7 PK	68.2	-19.5	1.54 H	169	31.0	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	51.5 PK	74.0	-22.5	2.11 V	203	40.3	11.2
2	11650.00	41.6 AV	54.0	-12.4	2.11 V	203	30.4	11.2
3	#17475.00	53.2 PK	68.2	-15.0	1.75 V	14	35.5	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	50.1 PK	68.2	-18.1	3.48 H	50	39.1	11.0
2	15630.00	47.1 PK	74.0	-26.9	1.44 H	133	35.6	11.5
3	15630.00	35.3 AV	54.0	-18.7	1.44 H	133	23.8	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	48.2 PK	68.2	-20.0	2.12 V	243	37.2	11.0
2	15630.00	49.2 PK	74.0	-24.8	1.48 V	40	37.7	11.5
3	15630.00	36.4 AV	54.0	-17.6	1.48 V	40	24.9	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	49.0 PK	68.2	-19.2	3.44 H	44	38.1	10.9
2	15870.00	47.7 PK	74.0	-26.3	1.53 H	136	35.7	12.0
3	15870.00	36.3 AV	54.0	-17.7	1.53 H	136	24.3	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	48.7 PK	68.2	-19.5	2.14 V	205	37.8	10.9
2	15870.00	48.6 PK	74.0	-25.4	1.63 V	30	36.6	12.0
3	15870.00	36.3 AV	54.0	-17.7	1.63 V	30	24.3	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	50.3 PK	74.0	-23.7	3.45 H	49	39.1	11.2
2	11060.00	38.1 AV	54.0	-15.9	3.45 H	49	26.9	11.2
3	#16590.00	48.2 PK	68.2	-20.0	1.47 H	141	33.6	14.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	48.5 PK	74.0	-25.5	2.05 V	245	37.3	11.2
2	11060.00	37.4 AV	54.0	-16.6	2.05 V	245	26.2	11.2
3	#16590.00	49.0 PK	68.2	-19.2	1.54 V	38	34.4	14.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	52.5 PK	74.0	-21.5	3.55 H	54	40.7	11.8
2	11380.00	40.0 AV	54.0	-14.0	3.55 H	54	28.2	11.8
3	#17070.00	48.3 PK	68.2	-19.9	1.42 H	201	32.2	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	51.3 PK	74.0	-22.7	2.19 V	189	39.5	11.8
2	11380.00	38.7 AV	54.0	-15.3	2.19 V	189	26.9	11.8
3	#17070.00	48.2 PK	68.2	-20.0	1.65 V	25	32.1	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	52.0 PK	74.0	-22.0	3.64 H	65	40.5	11.5
2	11550.00	41.9 AV	54.0	-12.1	3.64 H	65	30.4	11.5
3	#17325.00	53.2 PK	68.2	-15.0	1.46 H	163	36.4	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	51.9 PK	74.0	-22.1	2.10 V	192	40.4	11.5
2	11550.00	41.9 AV	54.0	-12.1	2.10 V	192	30.4	11.5
3	#17325.00	53.4 PK	68.2	-14.8	1.76 V	59	36.6	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	49.1 PK	68.2	-19.1	3.46 H	41	38.2	10.9
2	15750.00	48.5 PK	74.0	-25.5	1.48 H	148	36.9	11.6
3	15750.00	35.7 AV	54.0	-18.3	1.48 H	148	24.1	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	47.9 PK	68.2	-20.3	2.01 V	193	37.0	10.9
2	15750.00	48.2 PK	74.0	-25.8	1.39 V	60	36.6	11.6
3	15750.00	36.1 AV	54.0	-17.9	1.39 V	60	24.5	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	50.0 PK	74.0	-24.0	3.36 H	49	38.7	11.3
2	11140.00	38.4 AV	54.0	-15.6	3.36 H	49	27.1	11.3
3	#16710.00	48.4 PK	68.2	-19.8	1.39 H	148	32.9	15.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	47.5 PK	74.0	-26.5	2.08 V	181	36.2	11.3
2	11140.00	35.9 AV	54.0	-18.1	2.08 V	181	24.6	11.3
3	#16710.00	49.5 PK	68.2	-18.7	1.39 V	47	34.0	15.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	48.4 PK	68.2	-19.8	3.50 H	71	37.5	10.9
2	15750.00	48.6 PK	74.0	-25.4	1.54 H	169	37.0	11.6
3	15750.00	36.6 AV	54.0	-17.4	1.54 H	169	25.0	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	48.4 PK	68.2	-19.8	3.50 V	58	37.5	10.9
2	15750.00	47.7 PK	74.0	-26.3	1.55 V	155	36.1	11.6
3	15750.00	35.2 AV	54.0	-18.8	1.55 V	155	23.6	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	47.9 PK	74.0	-26.1	3.56 H	65	36.6	11.3
2	11140.00	36.3 AV	54.0	-17.7	3.56 H	65	25.0	11.3
3	#16710.00	48.1 PK	68.2	-20.1	1.56 H	157	32.6	15.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	48.4 PK	74.0	-25.6	3.52 V	92	37.1	11.3
2	11140.00	37.5 AV	54.0	-16.5	3.52 V	92	26.2	11.3
3	#16710.00	46.9 PK	68.2	-21.3	1.54 V	166	31.4	15.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

Mode B

2TX

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.6 PK	68.2	-18.6	3.54 H	44	39.0	10.6
2	15540.00	48.3 PK	74.0	-25.7	1.33 H	175	36.3	12.0
3	15540.00	35.8 AV	54.0	-18.2	1.33 H	175	23.8	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	50.1 PK	68.2	-18.1	2.15 V	203	39.5	10.6
2	15540.00	48.7 PK	74.0	-25.3	1.54 V	97	36.7	12.0
3	15540.00	36.3 AV	54.0	-17.7	1.54 V	97	24.3	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	49.6 PK	68.2	-18.6	3.49 H	40	38.7	10.9
2	15600.00	47.9 PK	74.0	-26.1	1.36 H	178	36.4	11.5
3	15600.00	36.2 AV	54.0	-17.8	1.36 H	178	24.7	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	49.8 PK	68.2	-18.4	2.13 V	174	38.9	10.9
2	15600.00	49.3 PK	74.0	-24.7	1.62 V	45	37.8	11.5
3	15600.00	36.6 AV	54.0	-17.4	1.62 V	45	25.1	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	49.5 PK	68.2	-18.7	3.54 H	54	38.6	10.9
2	15720.00	47.7 PK	74.0	-26.3	1.46 H	173	36.3	11.4
3	15720.00	35.2 AV	54.0	-18.8	1.46 H	173	23.8	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	49.0 PK	68.2	-19.2	2.14 V	208	38.1	10.9
2	15720.00	49.1 PK	74.0	-24.9	1.55 V	45	37.7	11.4
3	15720.00	36.3 AV	54.0	-17.7	1.55 V	45	24.9	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	49.5 PK	68.2	-18.7	3.52 H	38	38.6	10.9
2	15780.00	47.8 PK	74.0	-26.2	1.34 H	181	36.1	11.7
3	15780.00	36.1 AV	54.0	-17.9	1.34 H	181	24.4	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	50.3 PK	68.2	-17.9	2.23 V	171	39.4	10.9
2	15780.00	48.8 PK	74.0	-25.2	1.48 V	94	37.1	11.7
3	15780.00	36.3 AV	54.0	-17.7	1.48 V	94	24.6	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	49.5 PK	74.0	-24.5	3.54 H	56	38.8	10.7
2	10600.00	37.8 AV	54.0	-16.2	3.54 H	56	27.1	10.7
3	15900.00	48.4 PK	74.0	-25.6	1.44 H	197	36.4	12.0
4	15900.00	36.5 AV	54.0	-17.5	1.44 H	197	24.5	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	48.9 PK	74.0	-25.1	2.08 V	213	38.2	10.7
2	10600.00	36.9 AV	54.0	-17.1	2.08 V	213	26.2	10.7
3	15900.00	50.0 PK	74.0	-24.0	1.55 V	90	38.0	12.0
4	15900.00	37.5 AV	54.0	-16.5	1.55 V	90	25.5	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.6 PK	74.0	-25.4	3.54 H	30	37.9	10.7
2	10640.00	37.9 AV	54.0	-16.1	3.54 H	30	27.2	10.7
3	15960.00	48.8 PK	74.0	-25.2	1.36 H	180	36.5	12.3
4	15960.00	36.9 AV	54.0	-17.1	1.36 H	180	24.6	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	50.5 PK	74.0	-23.5	2.23 V	185	39.8	10.7
2	10640.00	38.3 AV	54.0	-15.7	2.23 V	185	27.6	10.7
3	15960.00	49.0 PK	74.0	-25.0	1.66 V	89	36.7	12.3
4	15960.00	36.9 AV	54.0	-17.1	1.66 V	89	24.6	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.4 PK	74.0	-25.6	3.49 H	46	37.1	11.3
2	11000.00	37.7 AV	54.0	-16.3	3.49 H	46	26.4	11.3
3	#16500.00	47.9 PK	68.2	-20.3	1.42 H	182	34.5	13.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	50.0 PK	74.0	-24.0	2.08 V	184	38.7	11.3
2	11000.00	37.8 AV	54.0	-16.2	2.08 V	184	26.5	11.3
3	#16500.00	50.1 PK	68.2	-18.1	1.54 V	62	36.7	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	49.9 PK	74.0	-24.1	3.60 H	72	38.6	11.3
2	11160.00	38.6 AV	54.0	-15.4	3.60 H	72	27.3	11.3
3	#16740.00	47.4 PK	68.2	-20.8	1.36 H	172	32.0	15.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	50.6 PK	74.0	-23.4	2.09 V	174	39.3	11.3
2	11160.00	38.2 AV	54.0	-15.8	2.09 V	174	26.9	11.3
3	#16740.00	49.3 PK	68.2	-18.9	1.48 V	55	33.9	15.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.6 PK	74.0	-24.4	3.51 H	56	37.7	11.9
2	11400.00	38.1 AV	54.0	-15.9	3.51 H	56	26.2	11.9
3	#17100.00	47.7 PK	68.2	-20.5	1.32 H	150	31.6	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.8 PK	74.0	-24.2	2.14 V	177	37.9	11.9
2	11400.00	38.0 AV	54.0	-16.0	2.14 V	177	26.1	11.9
3	#17100.00	49.6 PK	68.2	-18.6	1.56 V	52	33.5	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.9 PK	74.0	-25.1	3.60 H	31	37.0	11.9
2	11440.00	38.0 AV	54.0	-16.0	3.60 H	31	26.1	11.9
3	#17160.00	48.7 PK	68.2	-19.5	1.43 H	143	32.7	16.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	50.0 PK	74.0	-24.0	2.13 V	195	38.1	11.9
2	11440.00	38.1 AV	54.0	-15.9	2.13 V	195	26.2	11.9
3	#17160.00	50.1 PK	68.2	-18.1	1.66 V	89	34.1	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	54.2 PK	74.0	-19.8	3.58 H	62	42.4	11.8
2	11490.00	42.9 AV	54.0	-11.1	3.58 H	62	31.1	11.8
3	#17235.00	52.4 PK	68.2	-15.8	1.41 H	199	36.2	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	52.6 PK	74.0	-21.4	2.14 V	195	40.8	11.8
2	11490.00	41.8 AV	54.0	-12.2	2.14 V	195	30.0	11.8
3	#17235.00	50.4 PK	68.2	-17.8	1.64 V	61	34.2	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	55.3 PK	74.0	-18.7	3.40 H	9	44.0	11.3
2	11570.00	44.6 AV	54.0	-9.4	3.40 H	9	33.3	11.3
3	#17355.00	53.2 PK	68.2	-15.0	1.25 H	210	36.4	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	53.7 PK	74.0	-20.3	2.15 V	209	42.4	11.3
2	11570.00	42.8 AV	54.0	-11.2	2.15 V	209	31.5	11.3
3	#17355.00	51.8 PK	68.2	-16.4	1.60 V	34	35.0	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	55.4 PK	74.0	-18.6	3.59 H	49	44.2	11.2
2	11650.00	44.2 AV	54.0	-9.8	3.59 H	49	33.0	11.2
3	#17475.00	51.3 PK	68.2	-16.9	1.44 H	204	33.6	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	54.3 PK	74.0	-19.7	2.03 V	204	43.1	11.2
2	11650.00	43.0 AV	54.0	-11.0	2.03 V	204	31.8	11.2
3	#17475.00	52.8 PK	68.2	-15.4	1.64 V	45	35.1	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

2S2T

RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.2 PK	68.2	-20.0	3.17 H	57	37.6	10.6
2	15540.00	48.4 PK	74.0	-25.6	1.41 H	141	36.4	12.0
3	15540.00	37.2 AV	54.0	-16.8	1.41 H	141	25.2	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.8 PK	68.2	-19.4	2.25 V	207	38.2	10.6
2	15540.00	48.0 PK	74.0	-26.0	1.49 V	88	36.0	12.0
3	15540.00	37.0 AV	54.0	-17.0	1.49 V	88	25.0	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	47.1 PK	68.2	-21.1	3.31 H	37	36.2	10.9
2	15600.00	48.8 PK	74.0	-25.2	1.40 H	143	37.3	11.5
3	15600.00	37.5 AV	54.0	-16.5	1.40 H	143	26.0	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	49.0 PK	68.2	-19.2	2.21 V	196	38.1	10.9
2	15600.00	48.8 PK	74.0	-25.2	1.46 V	80	37.3	11.5
3	15600.00	37.4 AV	54.0	-16.6	1.46 V	80	25.9	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	47.9 PK	68.2	-20.3	3.33 H	66	37.0	10.9
2	15720.00	48.8 PK	74.0	-25.2	1.47 H	121	37.4	11.4
3	15720.00	37.3 AV	54.0	-16.7	1.47 H	121	25.9	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	48.5 PK	68.2	-19.7	2.24 V	204	37.6	10.9
2	15720.00	48.2 PK	74.0	-25.8	1.61 V	77	36.8	11.4
3	15720.00	36.9 AV	54.0	-17.1	1.61 V	77	25.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	47.9 PK	68.2	-20.3	3.28 H	41	37.0	10.9
2	15780.00	47.6 PK	74.0	-26.4	1.53 H	141	35.9	11.7
3	15780.00	36.8 AV	54.0	-17.2	1.53 H	141	25.1	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	49.0 PK	68.2	-19.2	2.11 V	202	38.1	10.9
2	15780.00	48.8 PK	74.0	-25.2	1.54 V	39	37.1	11.7
3	15780.00	37.9 AV	54.0	-16.1	1.54 V	39	26.2	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	47.5 PK	74.0	-26.5	3.60 H	38	36.8	10.7
2	10600.00	37.1 AV	54.0	-16.9	3.60 H	38	26.4	10.7
3	15900.00	50.0 PK	74.0	-24.0	1.47 H	176	38.0	12.0
4	15900.00	38.3 AV	54.0	-15.7	1.47 H	176	26.3	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	49.0 PK	74.0	-25.0	2.24 V	189	38.3	10.7
2	10600.00	38.3 AV	54.0	-15.7	2.24 V	189	27.6	10.7
3	15900.00	48.9 PK	74.0	-25.1	1.54 V	24	36.9	12.0
4	15900.00	37.8 AV	54.0	-16.2	1.54 V	24	25.8	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.3 PK	74.0	-25.7	3.51 H	18	37.6	10.7
2	10640.00	37.4 AV	54.0	-16.6	3.51 H	18	26.7	10.7
3	15960.00	48.9 PK	74.0	-25.1	1.46 H	205	36.6	12.3
4	15960.00	37.2 AV	54.0	-16.8	1.46 H	205	24.9	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.3 PK	74.0	-25.7	2.19 V	194	37.6	10.7
2	10640.00	37.3 AV	54.0	-16.7	2.19 V	194	26.6	10.7
3	15960.00	50.1 PK	74.0	-23.9	1.65 V	53	37.8	12.3
4	15960.00	38.7 AV	54.0	-15.3	1.65 V	53	26.4	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.1 PK	74.0	-24.9	3.55 H	31	37.8	11.3
2	11000.00	37.6 AV	54.0	-16.4	3.55 H	31	26.3	11.3
3	#16500.00	48.8 PK	68.2	-19.4	1.39 H	180	35.4	13.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.1 PK	74.0	-24.9	2.15 V	217	37.8	11.3
2	11000.00	38.1 AV	54.0	-15.9	2.15 V	217	26.8	11.3
3	#16500.00	49.1 PK	68.2	-19.1	1.58 V	63	35.7	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	48.1 PK	74.0	-25.9	3.55 H	37	36.8	11.3
2	11160.00	37.7 AV	54.0	-16.3	3.55 H	37	26.4	11.3
3	#16740.00	49.3 PK	68.2	-18.9	1.38 H	179	33.9	15.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	50.2 PK	74.0	-23.8	2.16 V	210	38.9	11.3
2	11160.00	39.4 AV	54.0	-14.6	2.16 V	210	28.1	11.3
3	#16740.00	49.4 PK	68.2	-18.8	1.64 V	45	34.0	15.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.5 PK	74.0	-24.5	3.45 H	75	37.6	11.9
2	11400.00	38.2 AV	54.0	-15.8	3.45 H	75	26.3	11.9
3	#17100.00	48.7 PK	68.2	-19.5	1.31 H	163	32.6	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.7 PK	74.0	-25.3	2.14 V	183	36.8	11.9
2	11400.00	38.6 AV	54.0	-15.4	2.14 V	183	26.7	11.9
3	#17100.00	48.6 PK	68.2	-19.6	1.67 V	92	32.5	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.5 PK	74.0	-25.5	3.57 H	53	36.6	11.9
2	11440.00	37.7 AV	54.0	-16.3	3.57 H	53	25.8	11.9
3	#17160.00	49.6 PK	68.2	-18.6	1.47 H	194	33.6	16.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.6 PK	74.0	-25.4	2.04 V	232	36.7	11.9
2	11440.00	38.1 AV	54.0	-15.9	2.04 V	232	26.2	11.9
3	#17160.00	48.4 PK	68.2	-19.8	1.69 V	72	32.4	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	52.5 PK	74.0	-21.5	3.67 H	32	40.7	11.8
2	11490.00	42.9 AV	54.0	-11.1	3.67 H	32	31.1	11.8
3	#17235.00	50.2 PK	68.2	-18.0	1.59 H	202	34.0	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	52.5 PK	74.0	-21.5	2.20 V	177	40.7	11.8
2	11490.00	43.1 AV	54.0	-10.9	2.20 V	177	31.3	11.8
3	#17235.00	49.8 PK	68.2	-18.4	1.52 V	9	33.6	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	53.0 PK	74.0	-21.0	3.64 H	12	41.7	11.3
2	11570.00	43.5 AV	54.0	-10.5	3.64 H	12	32.2	11.3
3	#17355.00	49.3 PK	68.2	-18.9	1.62 H	193	32.5	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	51.8 PK	74.0	-22.2	2.12 V	195	40.5	11.3
2	11570.00	42.2 AV	54.0	-11.8	2.12 V	195	30.9	11.3
3	#17355.00	51.3 PK	68.2	-16.9	1.55 V	42	34.5	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.5 PK	74.0	-21.5	3.68 H	34	41.3	11.2
2	11650.00	43.2 AV	54.0	-10.8	3.68 H	34	32.0	11.2
3	#17475.00	49.9 PK	68.2	-18.3	1.53 H	223	32.2	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	50.6 PK	74.0	-23.4	2.30 V	175	39.4	11.2
2	11650.00	41.8 AV	54.0	-12.2	2.30 V	175	30.6	11.2
3	#17475.00	51.2 PK	68.2	-17.0	1.48 V	27	33.5	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10380.00	48.9 PK	68.2	-19.3	3.45 H	61	38.1	10.8
2	15570.00	50.0 PK	74.0	-24.0	1.37 H	137	38.3	11.7
3	15570.00	37.3 AV	54.0	-16.7	1.37 H	137	25.6	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10380.00	47.8 PK	68.2	-20.4	2.31 V	192	37.0	10.8
2	15570.00	48.6 PK	74.0	-25.4	1.67 V	74	36.9	11.7
3	15570.00	37.4 AV	54.0	-16.6	1.67 V	74	25.7	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10460.00	48.3 PK	68.2	-19.9	3.38 H	69	37.3	11.0
2	15690.00	50.1 PK	74.0	-23.9	1.46 H	145	38.7	11.4
3	15690.00	38.0 AV	54.0	-16.0	1.46 H	145	26.6	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10460.00	48.6 PK	68.2	-19.6	2.26 V	195	37.6	11.0
2	15690.00	48.9 PK	74.0	-25.1	1.64 V	99	37.5	11.4
3	15690.00	37.6 AV	54.0	-16.4	1.64 V	99	26.2	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10540.00	49.0 PK	68.2	-19.2	3.45 H	66	38.1	10.9
2	15810.00	50.3 PK	74.0	-23.7	1.43 H	147	38.5	11.8
3	15810.00	38.0 AV	54.0	-16.0	1.43 H	147	26.2	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10540.00	48.5 PK	68.2	-19.7	2.29 V	167	37.6	10.9
2	15810.00	49.4 PK	74.0	-24.6	1.64 V	63	37.6	11.8
3	15810.00	38.0 AV	54.0	-16.0	1.64 V	63	26.2	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10620.00	48.8 PK	74.0	-25.2	3.41 H	80	38.1	10.7
2	10620.00	37.6 AV	54.0	-16.4	3.41 H	80	26.9	10.7
3	15930.00	50.6 PK	74.0	-23.4	1.39 H	130	38.4	12.2
4	15930.00	38.4 AV	54.0	-15.6	1.39 H	130	26.2	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10620.00	49.7 PK	74.0	-24.3	2.09 V	229	39.0	10.7
2	10620.00	38.2 AV	54.0	-15.8	2.09 V	229	27.5	10.7
3	15930.00	49.8 PK	74.0	-24.2	1.56 V	41	37.6	12.2
4	15930.00	39.0 AV	54.0	-15.0	1.56 V	41	26.8	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11020.00	47.9 PK	74.0	-26.1	3.45 H	63	36.6	11.3
2	11020.00	36.3 AV	54.0	-17.7	3.45 H	63	25.0	11.3
3	#16530.00	49.2 PK	68.2	-19.0	1.50 H	137	35.4	13.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11020.00	49.1 PK	74.0	-24.9	2.20 V	228	37.8	11.3
2	11020.00	38.1 AV	54.0	-15.9	2.20 V	228	26.8	11.3
3	#16530.00	51.2 PK	68.2	-17.0	1.52 V	55	37.4	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11100.00	49.4 PK	74.0	-24.6	3.41 H	57	38.0	11.4
2	11100.00	37.6 AV	54.0	-16.4	3.41 H	57	26.2	11.4
3	#16650.00	49.4 PK	68.2	-18.8	1.48 H	158	34.3	15.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11100.00	49.0 PK	74.0	-25.0	2.09 V	211	37.6	11.4
2	11100.00	37.7 AV	54.0	-16.3	2.09 V	211	26.3	11.4
3	#16650.00	50.7 PK	68.2	-17.5	1.51 V	71	35.6	15.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11340.00	49.3 PK	74.0	-24.7	3.46 H	55	37.7	11.6
2	11340.00	37.4 AV	54.0	-16.6	3.46 H	55	25.8	11.6
3	#17010.00	50.6 PK	68.2	-17.6	1.47 H	147	34.2	16.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11340.00	49.8 PK	74.0	-24.2	2.03 V	223	38.2	11.6
2	11340.00	39.7 AV	54.0	-14.3	2.03 V	223	28.1	11.6
3	#17010.00	49.8 PK	68.2	-18.4	1.51 V	39	33.4	16.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11420.00	49.2 PK	74.0	-24.8	3.38 H	72	37.3	11.9
2	11420.00	37.5 AV	54.0	-16.5	3.38 H	72	25.6	11.9
3	#17130.00	50.1 PK	68.2	-18.1	1.39 H	157	34.1	16.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11420.00	51.6 PK	74.0	-22.4	2.14 V	202	39.7	11.9
2	11420.00	42.0 AV	54.0	-12.0	2.14 V	202	30.1	11.9
3	#17130.00	52.7 PK	68.2	-15.5	1.64 V	9	36.7	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11510.00	51.9 PK	74.0	-22.1	3.63 H	16	40.2	11.7
2	11510.00	42.5 AV	54.0	-11.5	3.63 H	16	30.8	11.7
3	#17265.00	52.5 PK	68.2	-15.7	1.55 H	170	36.0	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11510.00	51.5 PK	74.0	-22.5	2.13 V	158	39.8	11.7
2	11510.00	42.5 AV	54.0	-11.5	2.13 V	158	30.8	11.7
3	#17265.00	53.2 PK	68.2	-15.0	1.49 V	46	36.7	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11590.00	51.5 PK	74.0	-22.5	3.62 H	26	40.2	11.3
2	11590.00	42.8 AV	54.0	-11.2	3.62 H	26	31.5	11.3
3	#17385.00	51.8 PK	68.2	-16.4	1.58 H	183	34.9	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11590.00	50.1 PK	74.0	-23.9	2.22 V	200	38.8	11.3
2	11590.00	41.4 AV	54.0	-12.6	2.22 V	200	30.1	11.3
3	#17385.00	51.5 PK	68.2	-16.7	1.52 V	40	34.6	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	48.0 PK	68.2	-20.2	3.46 H	28	37.0	11.0
2	15630.00	49.0 PK	74.0	-25.0	1.28 H	124	37.5	11.5
3	15630.00	38.2 AV	54.0	-15.8	1.28 H	124	26.7	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	49.0 PK	68.2	-19.2	2.16 V	156	38.0	11.0
2	15630.00	49.3 PK	74.0	-24.7	1.53 V	43	37.8	11.5
3	15630.00	37.7 AV	54.0	-16.3	1.53 V	43	26.2	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	46.6 PK	68.2	-21.6	3.43 H	33	35.7	10.9
2	15870.00	49.8 PK	74.0	-24.2	1.33 H	142	37.8	12.0
3	15870.00	38.2 AV	54.0	-15.8	1.33 H	142	26.2	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	48.1 PK	68.2	-20.1	2.26 V	176	37.2	10.9
2	15870.00	49.7 PK	74.0	-24.3	1.59 V	47	37.7	12.0
3	15870.00	38.0 AV	54.0	-16.0	1.59 V	47	26.0	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	46.8 PK	74.0	-27.2	3.44 H	36	35.6	11.2
2	11060.00	35.6 AV	54.0	-18.4	3.44 H	36	24.4	11.2
3	#16590.00	49.5 PK	68.2	-18.7	1.42 H	144	34.9	14.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	48.6 PK	74.0	-25.4	2.12 V	191	37.4	11.2
2	11060.00	37.1 AV	54.0	-16.9	2.12 V	191	25.9	11.2
3	#16590.00	49.0 PK	68.2	-19.2	1.53 V	60	34.4	14.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	48.2 PK	74.0	-25.8	3.43 H	32	37.0	11.2
2	11220.00	37.1 AV	54.0	-16.9	3.43 H	32	25.9	11.2
3	#16830.00	48.9 PK	68.2	-19.3	1.37 H	138	33.2	15.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	48.9 PK	74.0	-25.1	2.15 V	174	37.7	11.2
2	11220.00	37.3 AV	54.0	-16.7	2.15 V	174	26.1	11.2
3	#16830.00	49.8 PK	68.2	-18.4	1.43 V	65	34.1	15.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	50.4 PK	74.0	-23.6	3.37 H	75	38.6	11.8
2	11380.00	41.5 AV	54.0	-12.5	3.37 H	75	29.7	11.8
3	#17070.00	51.0 PK	68.2	-17.2	1.56 H	190	34.9	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	52.3 PK	74.0	-21.7	2.08 V	219	40.5	11.8
2	11380.00	42.4 AV	54.0	-11.6	2.08 V	219	30.6	11.8
3	#17070.00	52.0 PK	68.2	-16.2	1.69 V	23	35.9	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	51.0 PK	74.0	-23.0	3.38 H	54	39.5	11.5
2	11550.00	42.3 AV	54.0	-11.7	3.38 H	54	30.8	11.5
3	#17325.00	51.8 PK	68.2	-16.4	1.40 H	236	35.0	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	52.6 PK	74.0	-21.4	2.15 V	227	41.1	11.5
2	11550.00	43.0 AV	54.0	-11.0	2.15 V	227	31.5	11.5
3	#17325.00	51.8 PK	68.2	-16.4	1.77 V	0	35.0	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	48.0 PK	68.2	-20.2	3.42 H	43	37.1	10.9
2	15750.00	50.3 PK	74.0	-23.7	1.35 H	191	38.7	11.6
3	15750.00	37.9 AV	54.0	-16.1	1.35 H	191	26.3	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	46.5 PK	68.2	-21.7	2.34 V	180	35.6	10.9
2	15750.00	48.6 PK	74.0	-25.4	1.49 V	81	37.0	11.6
3	15750.00	37.6 AV	54.0	-16.4	1.49 V	81	26.0	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	46.8 PK	74.0	-27.2	3.35 H	19	35.5	11.3
2	11140.00	36.6 AV	54.0	-17.4	3.35 H	19	25.3	11.3
3	#16710.00	50.5 PK	68.2	-17.7	1.34 H	181	35.0	15.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	46.6 PK	74.0	-27.4	2.29 V	172	35.3	11.3
2	11140.00	35.9 AV	54.0	-18.1	2.29 V	172	24.6	11.3
3	#16710.00	49.2 PK	68.2	-19.0	1.42 V	83	33.7	15.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.5 PK	68.2	-18.7	3.54 H	41	38.9	10.6
2	15540.00	49.3 PK	74.0	-24.7	1.46 H	164	37.3	12.0
3	15540.00	36.6 AV	54.0	-17.4	1.46 H	164	24.6	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.9 PK	68.2	-18.3	2.21 V	247	39.3	10.6
2	15540.00	48.3 PK	74.0	-25.7	1.77 V	35	36.3	12.0
3	15540.00	37.7 AV	54.0	-16.3	1.77 V	35	25.7	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	51.1 PK	74.0	-22.9	3.56 H	40	40.4	10.7
2	10640.00	39.4 AV	54.0	-14.6	3.56 H	40	28.7	10.7
3	15960.00	49.5 PK	74.0	-24.5	1.45 H	175	37.2	12.3
4	15960.00	37.0 AV	54.0	-17.0	1.45 H	175	24.7	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	50.6 PK	74.0	-23.4	2.15 V	228	39.9	10.7
2	10640.00	37.6 AV	54.0	-16.4	2.15 V	228	26.9	10.7
3	15960.00	48.2 PK	74.0	-25.8	1.80 V	12	35.9	12.3
4	15960.00	37.1 AV	54.0	-16.9	1.80 V	12	24.8	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.5 PK	74.0	-24.5	3.50 H	31	38.2	11.3
2	11000.00	38.3 AV	54.0	-15.7	3.50 H	31	27.0	11.3
3	#16500.00	49.8 PK	68.2	-18.4	1.44 H	172	36.4	13.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	50.2 PK	74.0	-23.8	2.24 V	230	38.9	11.3
2	11000.00	37.3 AV	54.0	-16.7	2.24 V	230	26.0	11.3
3	#16500.00	48.6 PK	68.2	-19.6	1.70 V	0	35.2	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	50.5 PK	74.0	-23.5	3.54 H	37	38.6	11.9
2	11400.00	39.1 AV	54.0	-14.9	3.54 H	37	27.2	11.9
3	#17100.00	48.9 PK	68.2	-19.3	1.54 H	171	32.8	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	50.0 PK	74.0	-24.0	2.22 V	231	38.1	11.9
2	11400.00	37.1 AV	54.0	-16.9	2.22 V	231	25.2	11.9
3	#17100.00	48.3 PK	68.2	-19.9	1.77 V	20	32.2	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	53.7 PK	74.0	-20.3	3.55 H	34	41.8	11.9
2	11440.00	42.6 AV	54.0	-11.4	3.55 H	34	30.7	11.9
3	#17160.00	53.5 PK	68.2	-14.7	1.46 H	139	37.5	16.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	50.6 PK	74.0	-23.4	2.11 V	231	38.7	11.9
2	11440.00	37.7 AV	54.0	-16.3	2.11 V	231	25.8	11.9
3	#17160.00	47.5 PK	68.2	-20.7	1.83 V	1	31.5	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.1 PK	74.0	-20.9	3.58 H	65	41.3	11.8
2	11490.00	42.1 AV	54.0	-11.9	3.58 H	65	30.3	11.8
3	#17235.00	52.7 PK	68.2	-15.5	1.46 H	148	36.5	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	54.0 PK	74.0	-20.0	2.06 V	206	42.2	11.8
2	11490.00	43.8 AV	54.0	-10.2	2.06 V	206	32.0	11.8
3	#17235.00	53.0 PK	68.2	-15.2	1.70 V	36	36.8	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.0 PK	74.0	-21.0	3.50 H	36	41.8	11.2
2	11650.00	42.1 AV	54.0	-11.9	3.50 H	36	30.9	11.2
3	#17475.00	53.4 PK	68.2	-14.8	1.36 H	157	35.7	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	54.0 PK	74.0	-20.0	2.01 V	221	42.8	11.2
2	11650.00	43.9 AV	54.0	-10.1	2.01 V	221	32.7	11.2
3	#17475.00	54.0 PK	68.2	-14.2	1.76 V	55	36.3	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.5 PK	68.2	-19.7	3.52 H	36	37.9	10.6
2	15540.00	48.7 PK	74.0	-25.3	1.29 H	160	36.7	12.0
3	15540.00	36.0 AV	54.0	-18.0	1.29 H	160	24.0	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.1 PK	68.2	-19.1	2.01 V	219	38.5	10.6
2	15540.00	49.6 PK	74.0	-24.4	1.55 V	33	37.6	12.0
3	15540.00	36.6 AV	54.0	-17.4	1.55 V	33	24.6	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.5 PK	74.0	-25.5	3.54 H	35	37.8	10.7
2	10640.00	37.6 AV	54.0	-16.4	3.54 H	35	26.9	10.7
3	15960.00	48.6 PK	74.0	-25.4	1.29 H	156	36.3	12.3
4	15960.00	35.8 AV	54.0	-18.2	1.29 H	156	23.5	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.9 PK	74.0	-24.1	2.00 V	230	39.2	10.7
2	10640.00	37.7 AV	54.0	-16.3	2.00 V	230	27.0	10.7
3	15960.00	49.5 PK	74.0	-24.5	1.56 V	61	37.2	12.3
4	15960.00	36.5 AV	54.0	-17.5	1.56 V	61	24.2	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.7 PK	74.0	-25.3	3.60 H	37	37.4	11.3
2	11000.00	37.9 AV	54.0	-16.1	3.60 H	37	26.6	11.3
3	#16500.00	49.2 PK	68.2	-19.0	1.25 H	184	35.8	13.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.4 PK	74.0	-24.6	2.06 V	222	38.1	11.3
2	11000.00	37.7 AV	54.0	-16.3	2.06 V	222	26.4	11.3
3	#16500.00	48.7 PK	68.2	-19.5	1.55 V	46	35.3	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.6 PK	74.0	-25.4	3.57 H	52	36.7	11.9
2	11400.00	37.6 AV	54.0	-16.4	3.57 H	52	25.7	11.9
3	#17100.00	48.6 PK	68.2	-19.6	1.41 H	186	32.5	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.1 PK	74.0	-24.9	2.04 V	228	37.2	11.9
2	11400.00	37.6 AV	54.0	-16.4	2.04 V	228	25.7	11.9
3	#17100.00	49.6 PK	68.2	-18.6	1.50 V	41	33.5	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.2 PK	74.0	-24.8	3.60 H	23	37.3	11.9
2	11440.00	38.1 AV	54.0	-15.9	3.60 H	23	26.2	11.9
3	#17160.00	48.8 PK	68.2	-19.4	1.35 H	166	32.8	16.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	50.1 PK	74.0	-23.9	2.09 V	215	38.2	11.9
2	11440.00	37.8 AV	54.0	-16.2	2.09 V	215	25.9	11.9
3	#17160.00	50.7 PK	68.2	-17.5	1.41 V	38	34.7	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.3 PK	74.0	-20.7	3.41 H	48	41.5	11.8
2	11490.00	42.6 AV	54.0	-11.4	3.41 H	48	30.8	11.8
3	#17235.00	52.4 PK	68.2	-15.8	1.47 H	151	36.2	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.4 PK	74.0	-20.6	2.16 V	205	41.6	11.8
2	11490.00	42.8 AV	54.0	-11.2	2.16 V	205	31.0	11.8
3	#17235.00	53.9 PK	68.2	-14.3	1.68 V	30	37.7	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	54.0 PK	74.0	-20.0	3.45 H	47	42.8	11.2
2	11650.00	43.1 AV	54.0	-10.9	3.45 H	47	31.9	11.2
3	#17475.00	53.4 PK	68.2	-14.8	1.44 H	143	35.7	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.9 PK	74.0	-21.1	2.19 V	202	41.7	11.2
2	11650.00	42.5 AV	54.0	-11.5	2.19 V	202	31.3	11.2
3	#17475.00	53.5 PK	68.2	-14.7	1.65 V	28	35.8	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	50.0 PK	68.2	-18.2	3.29 H	49	39.4	10.6
2	15540.00	49.3 PK	74.0	-24.7	1.54 H	145	37.3	12.0
3	15540.00	36.6 AV	54.0	-17.4	1.54 H	145	24.6	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.6 PK	68.2	-19.6	2.11 V	228	38.0	10.6
2	15540.00	49.2 PK	74.0	-24.8	1.55 V	43	37.2	12.0
3	15540.00	37.2 AV	54.0	-16.8	1.55 V	43	25.2	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.6 PK	74.0	-24.4	3.44 H	91	38.9	10.7
2	10640.00	38.6 AV	54.0	-15.4	3.44 H	91	27.9	10.7
3	15960.00	47.8 PK	74.0	-26.2	1.56 H	183	35.5	12.3
4	15960.00	35.4 AV	54.0	-18.6	1.56 H	183	23.1	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.8 PK	74.0	-24.2	2.18 V	221	39.1	10.7
2	10640.00	38.3 AV	54.0	-15.7	2.18 V	221	27.6	10.7
3	15960.00	49.2 PK	74.0	-24.8	1.63 V	64	36.9	12.3
4	15960.00	37.5 AV	54.0	-16.5	1.63 V	64	25.2	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.9 PK	74.0	-25.1	3.50 H	83	37.6	11.3
2	11000.00	38.0 AV	54.0	-16.0	3.50 H	83	26.7	11.3
3	#16500.00	48.9 PK	68.2	-19.3	1.45 H	187	35.5	13.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.9 PK	74.0	-25.1	2.11 V	233	37.6	11.3
2	11000.00	37.7 AV	54.0	-16.3	2.11 V	233	26.4	11.3
3	#16500.00	50.1 PK	68.2	-18.1	1.51 V	41	36.7	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.8 PK	74.0	-25.2	3.48 H	111	36.9	11.9
2	11400.00	37.6 AV	54.0	-16.4	3.48 H	111	25.7	11.9
3	#17100.00	48.4 PK	68.2	-19.8	1.48 H	208	32.3	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.0 PK	74.0	-26.0	2.14 V	215	36.1	11.9
2	11400.00	36.7 AV	54.0	-17.3	2.14 V	215	24.8	11.9
3	#17100.00	49.0 PK	68.2	-19.2	1.55 V	64	32.9	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.7 PK	74.0	-24.3	3.43 H	87	37.8	11.9
2	11440.00	38.4 AV	54.0	-15.6	3.43 H	87	26.5	11.9
3	#17160.00	48.6 PK	68.2	-19.6	1.52 H	196	32.6	16.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.0 PK	74.0	-25.0	2.24 V	232	37.1	11.9
2	11440.00	37.6 AV	54.0	-16.4	2.24 V	232	25.7	11.9
3	#17160.00	49.6 PK	68.2	-18.6	1.60 V	54	33.6	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.5 PK	74.0	-20.5	3.49 H	49	41.7	11.8
2	11490.00	43.4 AV	54.0	-10.6	3.49 H	49	31.6	11.8
3	#17235.00	52.0 PK	68.2	-16.2	1.42 H	173	35.8	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	52.9 PK	74.0	-21.1	2.22 V	215	41.1	11.8
2	11490.00	42.0 AV	54.0	-12.0	2.22 V	215	30.2	11.8
3	#17235.00	55.0 PK	68.2	-13.2	1.66 V	15	38.8	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.9 PK	74.0	-21.1	3.44 H	62	41.7	11.2
2	11650.00	42.6 AV	54.0	-11.4	3.44 H	62	31.4	11.2
3	#17475.00	52.0 PK	68.2	-16.2	1.38 H	201	34.3	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.5 PK	74.0	-20.5	2.10 V	207	42.3	11.2
2	11650.00	42.8 AV	54.0	-11.2	2.10 V	207	31.6	11.2
3	#17475.00	55.3 PK	68.2	-12.9	1.61 V	34	37.6	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	50.0 PK	68.2	-18.2	3.51 H	58	39.4	10.6
2	15540.00	48.8 PK	74.0	-25.2	1.42 H	177	36.8	12.0
3	15540.00	35.9 AV	54.0	-18.1	1.42 H	177	23.9	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.2 PK	68.2	-19.0	1.94 V	227	38.6	10.6
2	15540.00	48.8 PK	74.0	-25.2	1.65 V	26	36.8	12.0
3	15540.00	36.4 AV	54.0	-17.6	1.65 V	26	24.4	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.5 PK	74.0	-24.5	3.56 H	39	38.8	10.7
2	10640.00	38.4 AV	54.0	-15.6	3.56 H	39	27.7	10.7
3	15960.00	49.0 PK	74.0	-25.0	1.42 H	189	36.7	12.3
4	15960.00	36.6 AV	54.0	-17.4	1.42 H	189	24.3	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.8 PK	74.0	-25.2	2.05 V	240	38.1	10.7
2	10640.00	38.0 AV	54.0	-16.0	2.05 V	240	27.3	10.7
3	15960.00	48.7 PK	74.0	-25.3	1.64 V	59	36.4	12.3
4	15960.00	36.8 AV	54.0	-17.2	1.64 V	59	24.5	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.2 PK	74.0	-24.8	3.47 H	24	37.9	11.3
2	11000.00	38.6 AV	54.0	-15.4	3.47 H	24	27.3	11.3
3	#16500.00	49.0 PK	68.2	-19.2	1.46 H	182	35.6	13.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.4 PK	74.0	-24.6	1.97 V	217	38.1	11.3
2	11000.00	38.3 AV	54.0	-15.7	1.97 V	217	27.0	11.3
3	#16500.00	47.7 PK	68.2	-20.5	1.75 V	42	34.3	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.3 PK	74.0	-24.7	3.50 H	20	37.4	11.9
2	11400.00	38.6 AV	54.0	-15.4	3.50 H	20	26.7	11.9
3	#17100.00	48.4 PK	68.2	-19.8	1.45 H	207	32.3	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.1 PK	74.0	-24.9	2.01 V	217	37.2	11.9
2	11400.00	37.9 AV	54.0	-16.1	2.01 V	217	26.0	11.9
3	#17100.00	49.3 PK	68.2	-18.9	1.61 V	37	33.2	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	51.6 PK	74.0	-22.4	3.48 H	51	39.7	11.9
2	11440.00	39.3 AV	54.0	-14.7	3.48 H	51	27.4	11.9
3	#17160.00	49.2 PK	68.2	-19.0	1.42 H	181	33.2	16.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	52.0 PK	74.0	-22.0	2.13 V	192	40.1	11.9
2	11440.00	42.1 AV	54.0	-11.9	2.13 V	192	30.2	11.9
3	#17160.00	53.3 PK	68.2	-14.9	1.71 V	36	37.3	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	51.8 PK	74.0	-22.2	3.53 H	76	40.0	11.8
2	11490.00	39.3 AV	54.0	-14.7	3.53 H	76	27.5	11.8
3	#17235.00	49.5 PK	68.2	-18.7	1.53 H	196	33.3	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	52.5 PK	74.0	-21.5	2.07 V	220	40.7	11.8
2	11490.00	42.3 AV	54.0	-11.7	2.07 V	220	30.5	11.8
3	#17235.00	53.2 PK	68.2	-15.0	1.61 V	25	37.0	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.4 PK	74.0	-21.6	3.48 H	58	41.2	11.2
2	11650.00	40.2 AV	54.0	-13.8	3.48 H	58	29.0	11.2
3	#17475.00	48.1 PK	68.2	-20.1	1.50 H	188	30.4	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.4 PK	74.0	-21.6	1.96 V	230	41.2	11.2
2	11650.00	42.6 AV	54.0	-11.4	1.96 V	230	31.4	11.2
3	#17475.00	53.4 PK	68.2	-14.8	1.63 V	19	35.7	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.5 PK	68.2	-19.7	3.52 H	79	37.9	10.6
2	15540.00	48.2 PK	74.0	-25.8	1.50 H	196	36.2	12.0
3	15540.00	36.3 AV	54.0	-17.7	1.50 H	196	24.3	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	47.9 PK	68.2	-20.3	1.96 V	197	37.3	10.6
2	15540.00	48.8 PK	74.0	-25.2	1.60 V	67	36.8	12.0
3	15540.00	36.1 AV	54.0	-17.9	1.60 V	67	24.1	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.3 PK	74.0	-25.7	3.53 H	68	37.6	10.7
2	10640.00	37.4 AV	54.0	-16.6	3.53 H	68	26.7	10.7
3	15960.00	48.2 PK	74.0	-25.8	1.41 H	186	35.9	12.3
4	15960.00	36.4 AV	54.0	-17.6	1.41 H	186	24.1	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.7 PK	74.0	-25.3	2.02 V	192	38.0	10.7
2	10640.00	37.2 AV	54.0	-16.8	2.02 V	192	26.5	10.7
3	15960.00	49.5 PK	74.0	-24.5	1.59 V	55	37.2	12.3
4	15960.00	36.3 AV	54.0	-17.7	1.59 V	55	24.0	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.5 PK	74.0	-25.5	3.50 H	65	37.2	11.3
2	11000.00	37.4 AV	54.0	-16.6	3.50 H	65	26.1	11.3
3	#16500.00	47.6 PK	68.2	-20.6	1.42 H	193	34.2	13.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.4 PK	74.0	-25.6	1.96 V	212	37.1	11.3
2	11000.00	36.9 AV	54.0	-17.1	1.96 V	212	25.6	11.3
3	#16500.00	50.1 PK	68.2	-18.1	1.62 V	33	36.7	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.9 PK	74.0	-25.1	3.63 H	82	37.0	11.9
2	11400.00	37.6 AV	54.0	-16.4	3.63 H	82	25.7	11.9
3	#17100.00	49.0 PK	68.2	-19.2	1.44 H	199	32.9	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.9 PK	74.0	-25.1	1.96 V	188	37.0	11.9
2	11400.00	37.0 AV	54.0	-17.0	1.96 V	188	25.1	11.9
3	#17100.00	49.4 PK	68.2	-18.8	1.53 V	70	33.3	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	51.3 PK	74.0	-22.7	3.46 H	64	39.4	11.9
2	11440.00	39.4 AV	54.0	-14.6	3.46 H	64	27.5	11.9
3	#17160.00	48.9 PK	68.2	-19.3	1.39 H	165	32.9	16.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	52.3 PK	74.0	-21.7	2.10 V	201	40.4	11.9
2	11440.00	39.8 AV	54.0	-14.2	2.10 V	201	27.9	11.9
3	#17160.00	49.4 PK	68.2	-18.8	1.54 V	45	33.4	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	52.3 PK	74.0	-21.7	3.50 H	72	40.5	11.8
2	11490.00	39.9 AV	54.0	-14.1	3.50 H	72	28.1	11.8
3	#17235.00	48.2 PK	68.2	-20.0	1.45 H	193	32.0	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	52.5 PK	74.0	-21.5	2.07 V	191	40.7	11.8
2	11490.00	42.3 AV	54.0	-11.7	2.07 V	191	30.5	11.8
3	#17235.00	53.5 PK	68.2	-14.7	1.79 V	15	37.3	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.0 PK	74.0	-22.0	3.40 H	70	40.8	11.2
2	11650.00	39.4 AV	54.0	-14.6	3.40 H	70	28.2	11.2
3	#17475.00	48.7 PK	68.2	-19.5	1.54 H	169	31.0	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	51.5 PK	74.0	-22.5	2.11 V	203	40.3	11.2
2	11650.00	41.6 AV	54.0	-12.4	2.11 V	203	30.4	11.2
3	#17475.00	53.2 PK	68.2	-15.0	1.75 V	14	35.5	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	50.1 PK	68.2	-18.1	3.48 H	50	39.1	11.0
2	15630.00	47.1 PK	74.0	-26.9	1.44 H	133	35.6	11.5
3	15630.00	35.3 AV	54.0	-18.7	1.44 H	133	23.8	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	48.2 PK	68.2	-20.0	2.12 V	243	37.2	11.0
2	15630.00	49.2 PK	74.0	-24.8	1.48 V	40	37.7	11.5
3	15630.00	36.4 AV	54.0	-17.6	1.48 V	40	24.9	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	49.0 PK	68.2	-19.2	3.44 H	44	38.1	10.9
2	15870.00	47.7 PK	74.0	-26.3	1.53 H	136	35.7	12.0
3	15870.00	36.3 AV	54.0	-17.7	1.53 H	136	24.3	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	48.7 PK	68.2	-19.5	2.14 V	205	37.8	10.9
2	15870.00	48.6 PK	74.0	-25.4	1.63 V	30	36.6	12.0
3	15870.00	36.3 AV	54.0	-17.7	1.63 V	30	24.3	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	50.3 PK	74.0	-23.7	3.45 H	49	39.1	11.2
2	11060.00	38.1 AV	54.0	-15.9	3.45 H	49	26.9	11.2
3	#16590.00	48.2 PK	68.2	-20.0	1.47 H	141	33.6	14.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	48.5 PK	74.0	-25.5	2.05 V	245	37.3	11.2
2	11060.00	37.4 AV	54.0	-16.6	2.05 V	245	26.2	11.2
3	#16590.00	49.0 PK	68.2	-19.2	1.54 V	38	34.4	14.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	52.5 PK	74.0	-21.5	3.55 H	54	40.7	11.8
2	11380.00	40.0 AV	54.0	-14.0	3.55 H	54	28.2	11.8
3	#17070.00	48.3 PK	68.2	-19.9	1.42 H	201	32.2	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	51.3 PK	74.0	-22.7	2.19 V	189	39.5	11.8
2	11380.00	38.7 AV	54.0	-15.3	2.19 V	189	26.9	11.8
3	#17070.00	48.2 PK	68.2	-20.0	1.65 V	25	32.1	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	52.0 PK	74.0	-22.0	3.64 H	65	40.5	11.5
2	11550.00	41.9 AV	54.0	-12.1	3.64 H	65	30.4	11.5
3	#17325.00	53.2 PK	68.2	-15.0	1.46 H	163	36.4	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	51.9 PK	74.0	-22.1	2.10 V	192	40.4	11.5
2	11550.00	41.9 AV	54.0	-12.1	2.10 V	192	30.4	11.5
3	#17325.00	53.4 PK	68.2	-14.8	1.76 V	59	36.6	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	49.1 PK	68.2	-19.1	3.46 H	41	38.2	10.9
2	15750.00	48.5 PK	74.0	-25.5	1.48 H	148	36.9	11.6
3	15750.00	35.7 AV	54.0	-18.3	1.48 H	148	24.1	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	47.9 PK	68.2	-20.3	2.01 V	193	37.0	10.9
2	15750.00	48.2 PK	74.0	-25.8	1.39 V	60	36.6	11.6
3	15750.00	36.1 AV	54.0	-17.9	1.39 V	60	24.5	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	48.4 PK	74.0	-25.6	3.38 H	81	37.1	11.3
2	11140.00	37.6 AV	54.0	-16.4	3.38 H	81	26.3	11.3
3	#16710.00	47.1 PK	68.2	-21.1	1.59 H	130	31.6	15.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	48.7 PK	74.0	-25.3	1.96 V	172	37.4	11.3
2	11140.00	35.4 AV	54.0	-18.6	1.60 V	95	24.1	11.3
3	#16710.00	47.1 PK	68.2	-21.1	1.60 V	95	31.6	15.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	48.6 PK	68.2	-19.6	3.46 H	54	37.7	10.9
2	15750.00	48.9 PK	74.0	-25.1	1.42 H	149	37.3	11.6
3	15750.00	37.2 AV	54.0	-16.8	1.42 H	149	25.6	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	50.0 PK	68.2	-18.2	3.56 V	45	39.1	10.9
2	15750.00	48.6 PK	74.0	-25.4	1.46 V	158	37.0	11.6
3	15750.00	35.9 AV	54.0	-18.1	1.46 V	158	24.3	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	48.7 PK	74.0	-25.3	3.51 H	62	37.4	11.3
2	11140.00	37.5 AV	54.0	-16.5	3.51 H	62	26.2	11.3
3	#16710.00	49.5 PK	68.2	-18.7	1.40 H	135	34.0	15.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	49.8 PK	74.0	-24.2	3.60 V	45	38.5	11.3
2	11140.00	38.0 AV	54.0	-16.0	3.60 V	45	26.7	11.3
3	#16710.00	47.7 PK	68.2	-20.5	1.45 V	145	32.2	15.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---