



規格承認書

Specification for Approval

客 戶 : Tymphany

Customer

品 名 : DH200 Antenna

Part name

料 號 :

Part No.

ARY196-0383-034-H0 (BT)

ARY196-0383-035-H0 (WIFI-1)

ARY196-0383-036-H0 (WIFI-2)

客戶承認印 CUSTOMER APPROVED BY		
APPROVAL	CHIEF	SUPERVISOR
Approval No.		
Model		
Part No.		

CHIEF	SALES	CHIEF	ENGINEER
ROX	GRANT	ROX	WAH
Date: 2024.12.25		Date: 2024.12.25	
驊陸科技股份有限公司 WIESON TECHNOLOGIES CO., LTD.			

(SR-83-16)



**ITEM
PAGE**

INDEX

1.	THE SPECIFICATION LIST	1
2.	DRAWING.....	2-4
3.	PRODUCT SPECIFICATION.....	5-6
4.	TEST REPORT.....	7-29
5.	WIESON ISO APPROVAL.....	30


WIESON



				Approvals	
Rev	Date	Description	Edited by	Prepared :	WAH
01	2024/12/25	ISSUE	WAH	Checked :	FOUNTAIN
				Approved :	ROX
				Issued No :	01
				Sheet :	1 OF 30

HF Compliant

REV	DATE	DESCRIPTION	ECN NO.	NAME
A1	24.09.05	PROPOSAL		DAVID
A2	24.10.23	△ Foam ,Cable		DAVID
A3	24.10.29	△ Modify Print		DAVID
A4	24.12.13	△ Modify Layout		DAVID

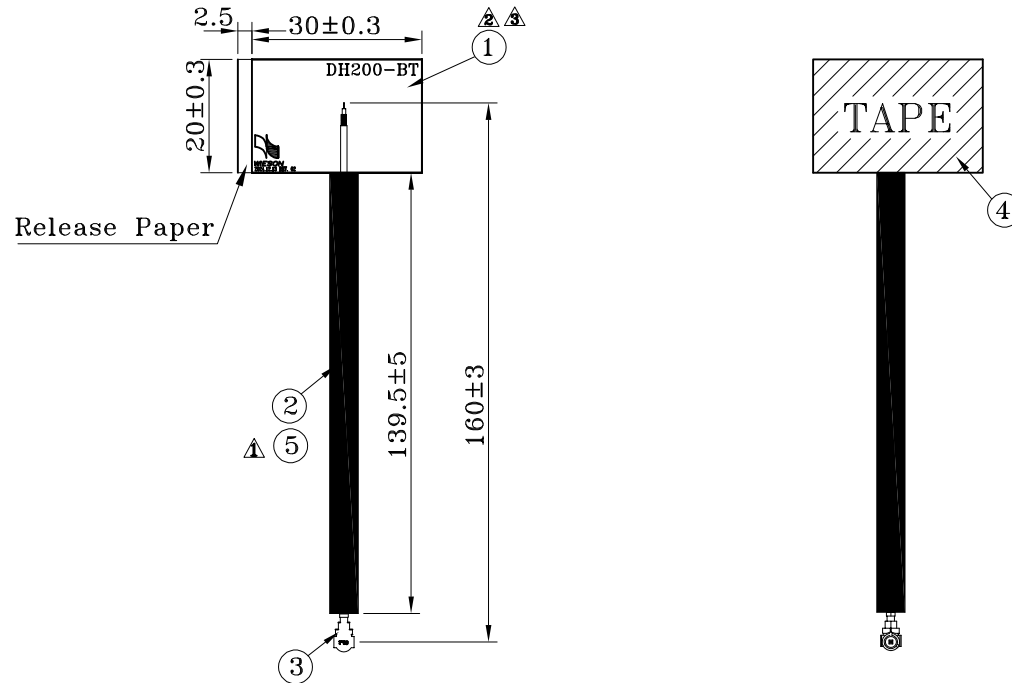


CUST NO.:

WIESON TECHNOLOGIES CO., LTD
PART NO.: ARY196-0383-034-H0

⑤	Foam	Size: 139.5 x 10 x 1mm △	1	TITLE: BT Antenna			
④	Tape	G9000 , Size:29.2 x 19.2mm	1				
③	MHF	I-PEX(I) Plug For 1.13mm Cable , Gold Plated	1	DRAWN BY	DAVID(WST)	DRAWING NO.	ARY196-0383-034-H0
②	Cable	1.13mm Normal Coaxial Cable , FEP White Jacket △	1	CHECKED BY		DRAWING SIZE	A4
①	PCB	FR-4 , Size: 30 x 20 x 0.8mm	1	APPROVED BY		UNIT	mm
NO.	ITEM	DESCRIPTION	QTY	SORTING NO.	WSC	PAGE	1 OF 1

HF Compliant

REV	DATE	DESCRIPTION	ECN NO.	NAME
A1	24.09.05	PROPOSAL		DAVID
A2	24.10.23	△ FOAM,Cable		DAVID
A3	24.10.29	△ Modify Print		DAVID
A4	24.12.13	△ Modify Layout		DAVID

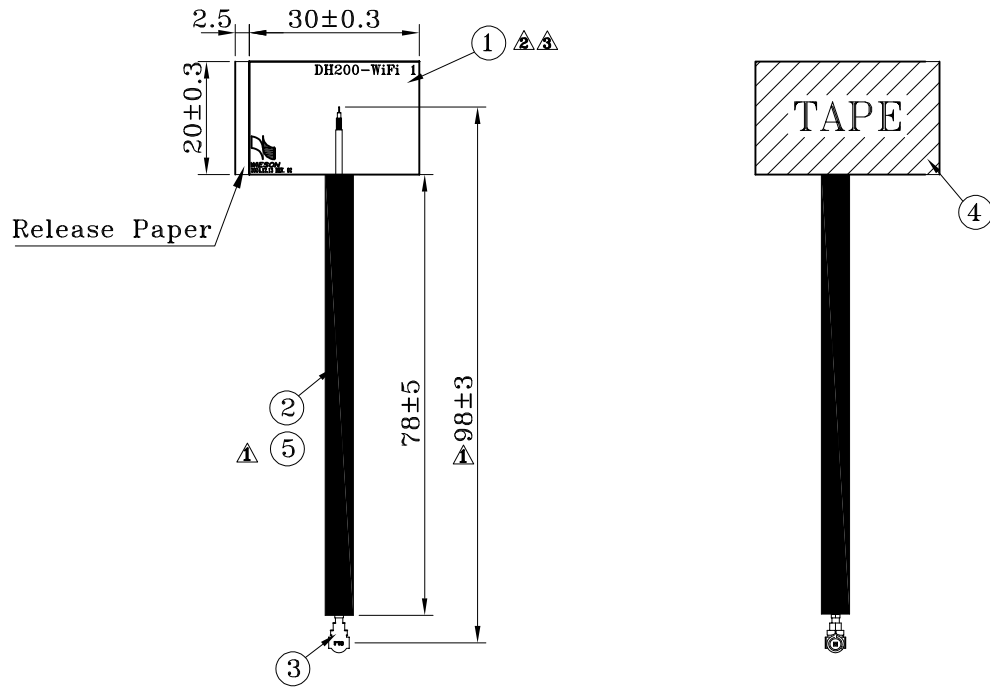

CUST NO.:

WIESON TECHNOLOGIES CO., LTD
WIESON


PART NO.:
ARY196-0383-035-H0

NO.	ITEM	DESCRIPTION	QTY	SORTING NO.
⑤	Foam	Size: 40 x 10 x 1mm△	1	
④	Tape	G9000 , Size:29.2 x 19.2mm	1	
③	MHF	I-PEX(I) Plug For 1.13mm Cable , Gold Plated	1	
②	Cable	1.13mm Normal Coaxial Cable , FEP Grey Jacket △	1	
①	PCB	FR-4 , Size: 30 x 20 x 0.8mm	1	

TITLE:		WiFi 1 Antenna		
DRAWN BY	DAVID(WST)	DRAWING NO.	ARY196-0383-035-H0	
CHECKED BY		DRAWING SIZE	A4	
APPROVED BY		UNIT	mm	
WSC		PAGE	1 OF 1	

HF Compliant

REV	DATE	DESCRIPTION	ECN NO.	NAME
A1	24.09.05	PROPOSAL		DAVID
A2	24.10.23	△ ADD FOAM		DAVID
A3	24.10.29	△ Modify Print		DAVID
A4	24.12.13	△ Modify Layout		DAVID

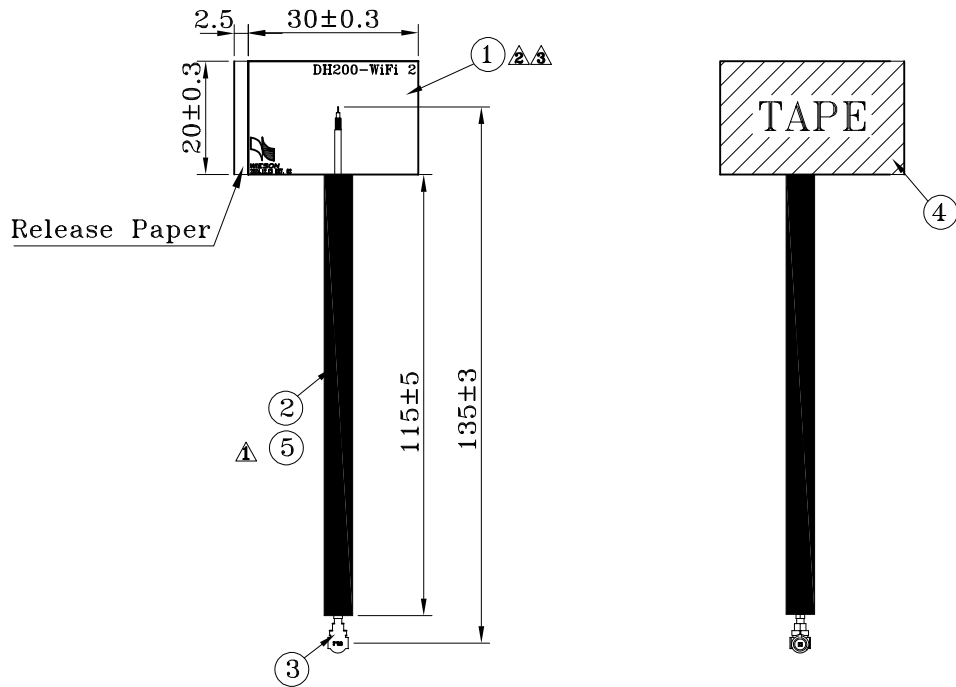

CUST NO.:

WIESON TECHNOLOGIES CO., LTD
WIESON

PART NO.:
ARY196-0383-036-H0

NO.	ITEM	DESCRIPTION	QTY	SORTING NO.
⑤	Foam	Size: 115 x 10 x 1mm △	1	
④	Tape	G9000 , Size:29.2 x 19.2mm	1	
③	MHF	I-PEX(I) Plug For 1.13mm Cable , Gold Plated	1	
②	Cable	1.13mm Normal Coaxial Cable , FEP Black Jacket	1	
①	PCB	FR-4 , Size: 30 x 20 x 0.8mm	1	

TITLE:		DRAWING NO.	DRAWING SIZE	
WiFi 2 Antenna		ARY196-0383-036-H0	A4	
DRAWN BY	DAVID(WST)	UNIT	mm	
CHECKED BY		PAGE	1 OF 1	
APPROVED BY				
WCS				

PRODUCT SPECIFICATION

Product name	BT Antenna(DH200)
Part number	ARY196-0383-034-H0
Frequency Range	2.4GHz-2.5GHz
Operating Temperature	-10℃ to 60℃
Storage with matching	-10℃ to 70℃
Impedance	50 Ohms
Polarization	Linear
Admitted Power	1W
Antenna type	PCB
Cable (Length)	∅1.13mm (160mm)
Connector	MHF I

Product name	WIFI-1 Antenna(DH200)		
Part number	ARY196-0383-035-H0		
Frequency Range	2.4GHz-2.5GHz	5.15GHz-5.85GHz	5.925GHz-7.125GHz
Operating Temperature	-10℃ to 60℃		
Storage with matching	-10℃ to 70℃		
Impedance	50 Ohms		
Polarization	Linear		
Admitted Power	1W		
Antenna type	PCB		
Cable (Length)	∅1.13mm (98mm)		
Connector	MHF I		

Product name	WIFI-2 Antenna(DH200)		
Part number	ARY196-0383-036-H0		
Frequency Range	2.4GHz-2.5GHz	5.15GHz-5.85GHz	5.925GHz-7.125GHz
Operating Temperature	-10℃ to 60℃		
Storage with matching	-10℃ to 70℃		
Impedance	50 Ohms		
Polarization	Linear		
Admitted Power	1W		
Antenna type	PCB		
Cable (Length)	∅1.13mm (135mm)		
Connector	MHF I		

Product name	BT Antenna(DH200)
Part number	ARY196-0383-034-H0
Frequency Range	2.4GHz-2.5GHz
Peak Gain (Max)	2.84
Efficiency	>50%

Product name	WIFI-1 (DH200)		
Part number	ARY196-0383-035-H0		
Frequency Range	2.4GHz-2.5GHz	5.15GHz-5.85GHz	5.925GHz-7.125GHz
Peak Gain (Max)	2.8	3.82	4.16
Efficiency	>50%	>50%	>50%

Product name	WIFI-2 (DH200)		
Part number	ARY196-0383-036-H0		
Frequency Range	2.4GHz-2.5GHz	5.15GHz-5.85GHz	5.925GHz-7.125GHz
Peak Gain (Max)	2.66	3.78	4.23
Efficiency	>50%	>50%	>50%



B&W DH200


Engineer : Aiden

Report date : 2024/11/27 REV.04



Executive Summary

- **Revision History**
- **Antenna Specification**
- **Antenna Placement**
- **Antenna Solution**
- **Antenna Measurement Vector Network Analyzer**
 - **S-Parameter Result**
 - **Isolation Result**
- **The Antenna Anechoic Chamber Measurement**
 - **Antenna Measurement Photo**
 - **Antenna Measurement**
 - **Peak Gain 、Efficiency Result**
 - **2D Antenna Pattern**
- **Conclusion & Recommendations**

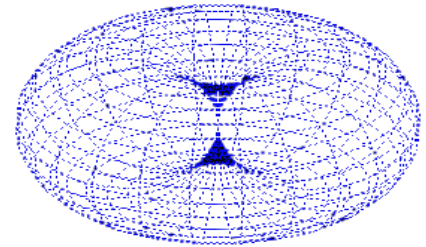

Revision History






Revision	Date	Engineer	Description
01	2024/08/28	Aiden	New release
02	2024/09/12	Aiden	Redesign antenna for DUT
03	2024/11/20	Aiden	Check antenna performance for DUT
04	2024/12/27	Aiden	Update the cable length

Antenna Specification



Item	Wi-Fi 1			Wi-Fi 2			BT
Operating Frequency	2400-2500	5150-5850	5925-7125	2400-2500	5150-5850	5925-7125	2400-2500
Return Loss	10 dB	10 dB	10 dB	10 dB	10 dB	10 dB	10 dB
Isolation	Wi-Fi to BT : 2400-2500>26.1 dB 5150-5850>25.7 dB 5925-7125>28.9 dB						
	Wi-Fi to Wi-Fi : 2400-2500>30.2 dB 5150-5850>28.7 dB 5925-7125>29.7 dB						
Material	PCB						
Peak Gain	2.8 dBi	3.82 dBi	4.16 dBi	2.66 dBi	3.78 dBi	4.23 dBi	2.84 dBi
Efficiency	55%(Max.)	60 %(Max.)	62 %(Max.)	56 %(Max.)	63 %(Max.)	62 %(Max.)	58 %(Max.)

Antenna Placement

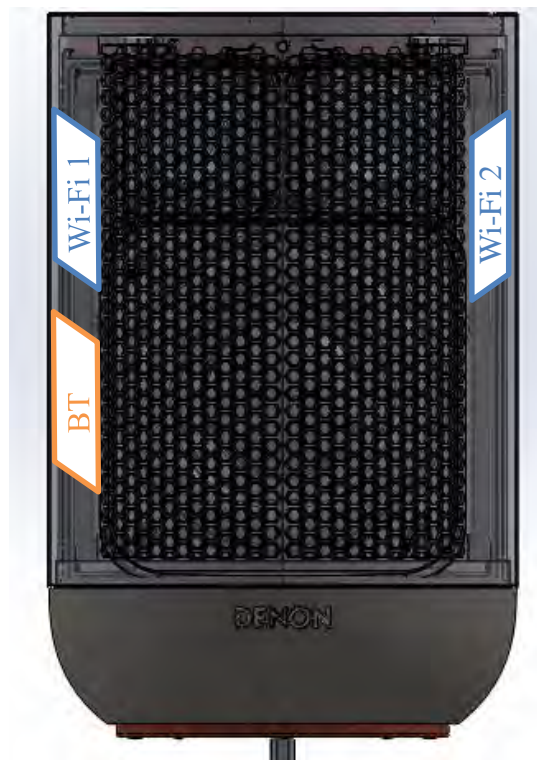

Ant	Cable length
Wi-Fi 1	98 mm
Wi-Fi 2	135 mm
BT	160 mm

Antenna Solution



ANT	ANT Type	Size(L*W*H)	Cable Type	Connector	Cable Loss(dB)		
					2.4G	5.6G	6.5G
Wi-Fi 1	PCB	30 mm*20 mm	98 mm/1.13 Normal	MHF I	0.77	0.95	1.02
Wi-Fi 2	PCB	30 mm*20 mm	135 mm/1.13 Normal	MHF I	0.86	1.13	1.13
BT	PCB	30 mm*20 mm	160 mm/1.13 Normal	MHF I	0.91	-	-


S-Parameter Result

Return Loss(dB)									
Freq.(MHz)	2400	2450	2500	5150	5600	5850	5925	6500	7125
ANT									
Wi-Fi 1	20.1	21.8	15.2	11.3	16.6	16.3	13.2	23.3	10.7
Wi-Fi 2	14	15.5	16.2	12.5	24.4	10.7	10.2	13.6	17.3
BT1	14.6	16.3	15.4	-	-	-	-	-	-

Isolation(dB)									
Freq.(MHz)	2400	2450	2500	5150	5600	5850	5925	6500	7125
ANT									
Wi-Fi1&Wi-Fi 2	-34	-31.8	-30.3	-33.7	-29.1	-30.5	-30.3	-34.6	-46.5
Wi-Fi1&BT	-25.9	-27.1	-26.9	-25.7	-29.3	-29	-28.9	-34	-29.2
Wi-Fi 2&BT	-30.1	-30.5	-31.9	-31.5	-29.6	-30.6	-31.5	-37.2	-36.5


S-Parameter Result

Wi-Fi1

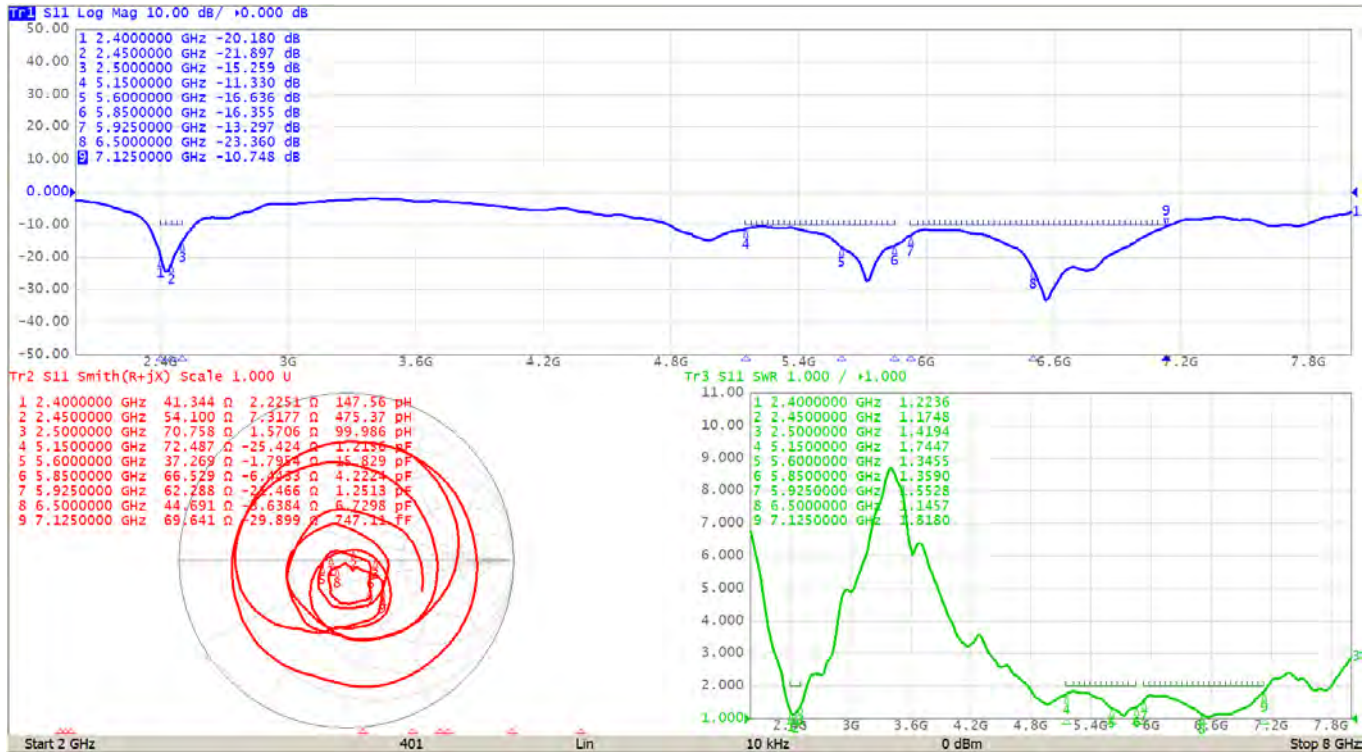


S-Parameter Result

Wi-Fi2

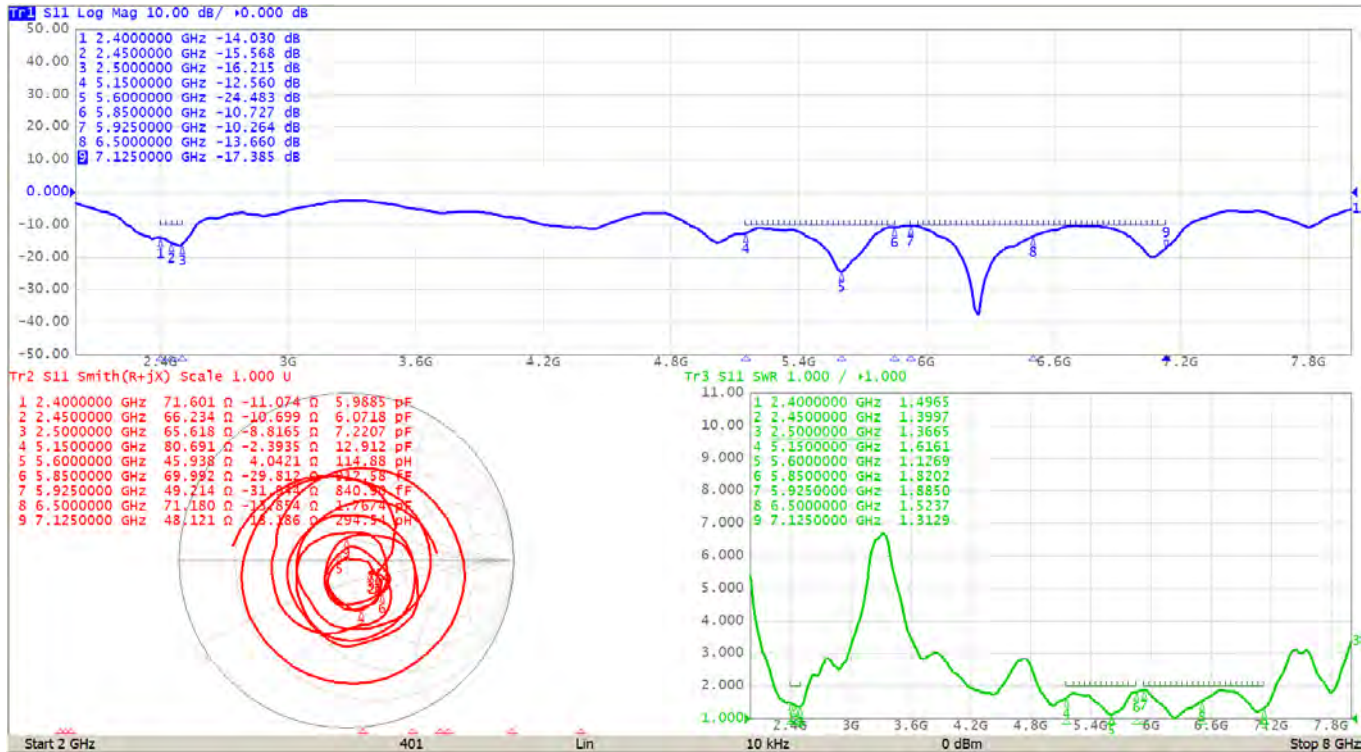


S-Parameter Result



BT

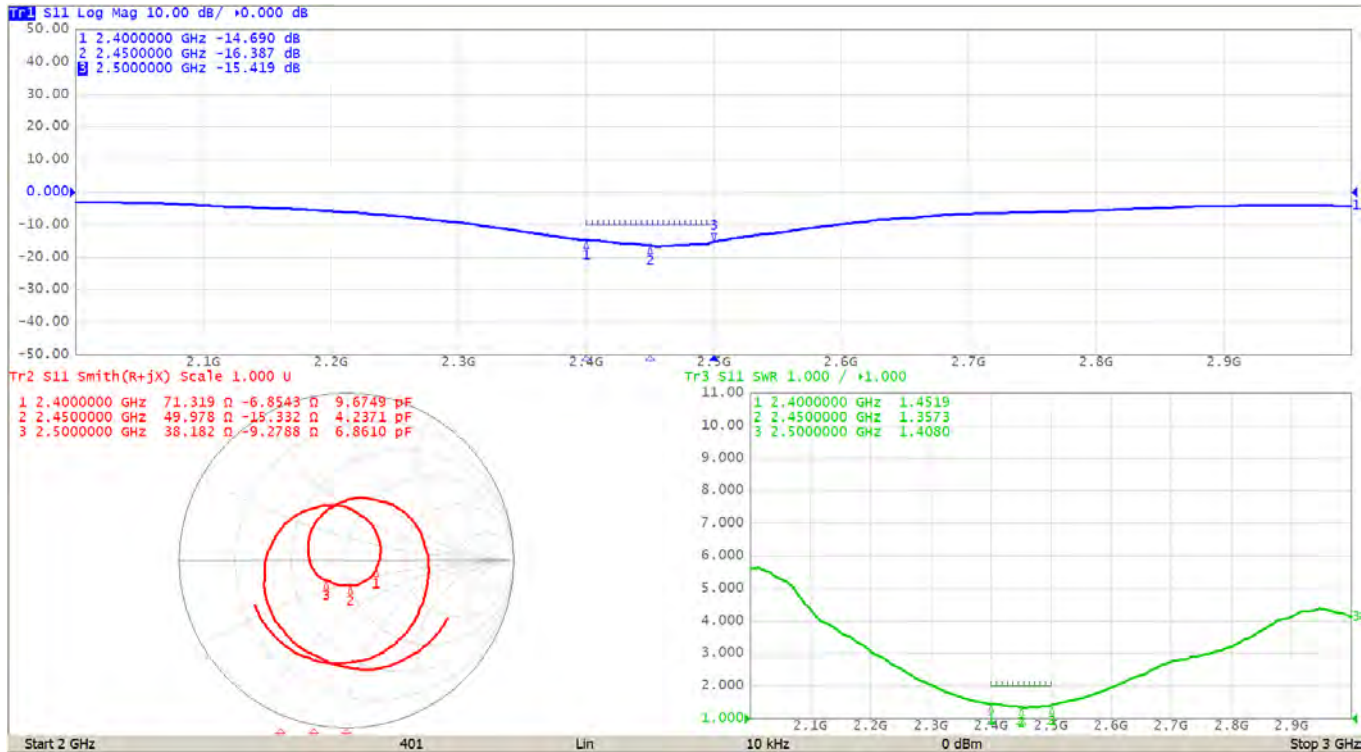

Isolation Result

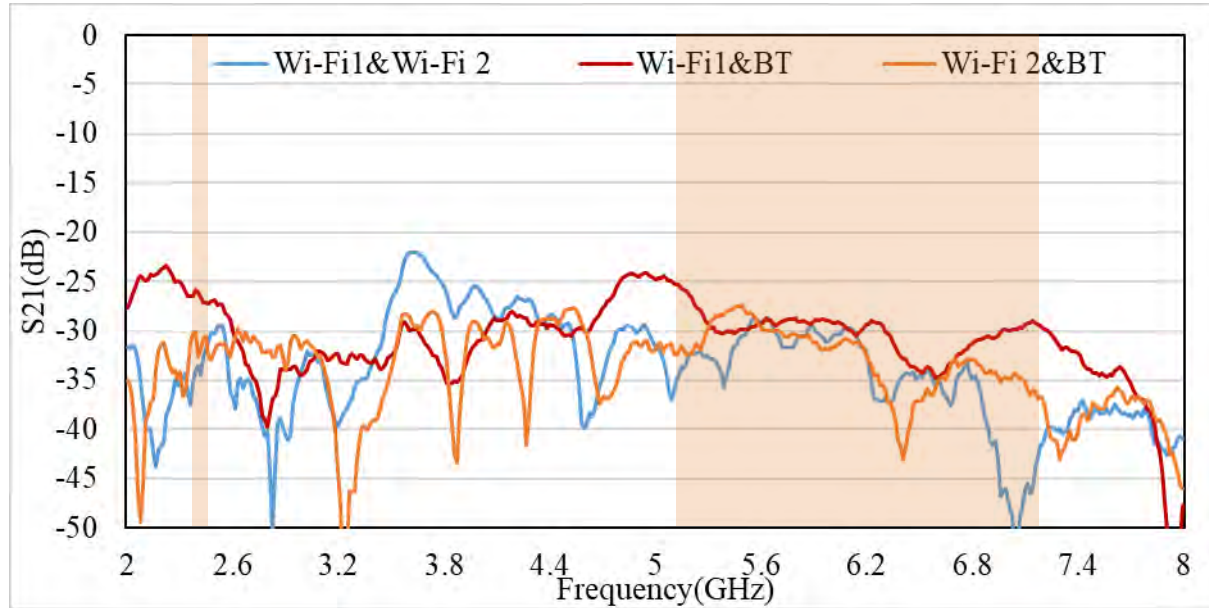

Chamber Measurement Photo

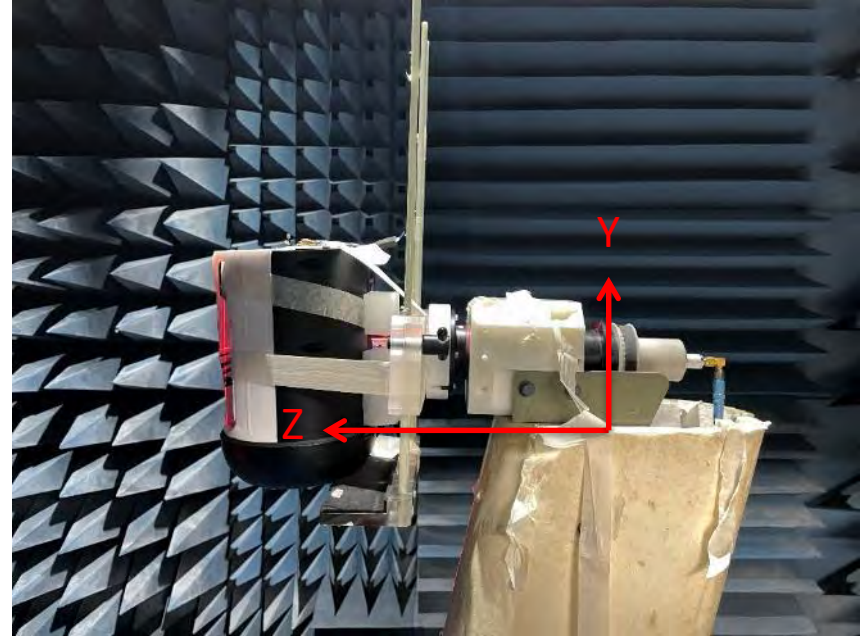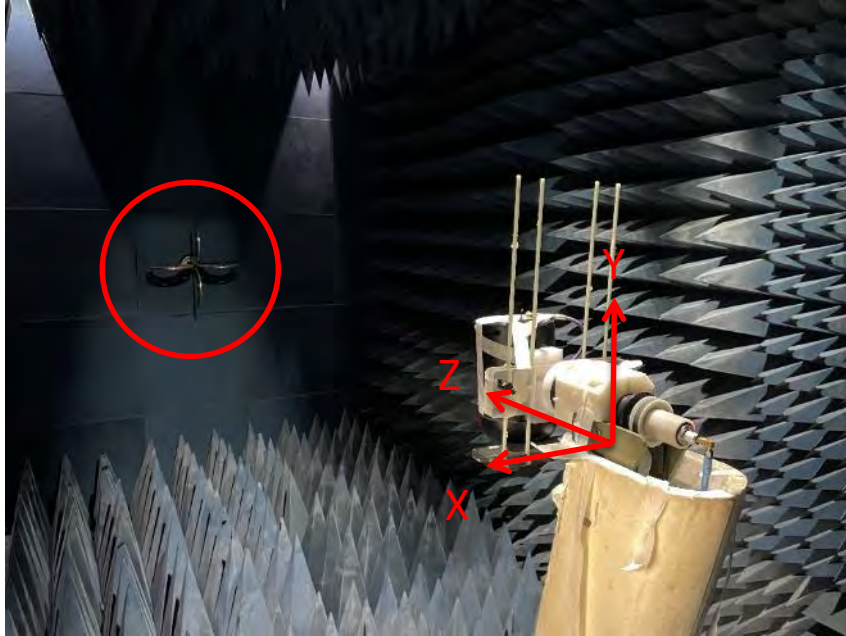

Peak Gain 、 Efficiency Result

Frequency(GHz)	Wi-Fi 1		Wi-Fi 2	
	Peak Gain (dBi)	Efficiency (%)	Peak Gain (dBi)	Efficiency (%)
2.4	2.42	51	2.2	53
2.45	2.8	55	2.66	56
2.5	2.69	53	2.53	54
5.15	3.13	52	3.09	55
5.25	3.04	51	3.2	56
5.35	3.27	53	3.4	58
5.47	3.35	54	3.58	59
5.6	3.54	57	3.72	63
5.725	3.82	60	3.78	59
5.785	3.54	57	3.48	58
5.85	3.46	56	3.47	56
5.925	3.4	55	3.8	56

Frequency(GHz)	Wi-Fi 1		Wi-Fi 2	
	Peak Gain (dBi)	Efficiency (%)	Peak Gain (dBi)	Efficiency (%)
6	3.51	56	3.81	58
6.125	3.65	56	3.93	59
6.225	3.82	58	4.23	62
6.325	3.94	59	4.08	60
6.425	3.95	59	3.92	57
6.525	4.07	61	3.69	54
6.625	4.16	62	3.66	53
6.725	3.99	59	3.5	52
6.875	3.58	53	3.68	54
6.925	3.4	51	3.85	54
7	3.19	49	3.5	53
7.125	3.18	49	3.96	57

Peak Gain 、 Efficiency Result


Frequency(GHz)	BT	
	Peak Gain (dBi)	Efficiency (%)
2.4	2.2	52
2.41	2.32	55
2.42	2.49	56
2.43	2.61	57
2.44	2.75	58
2.45	2.84	58
2.46	2.78	56
2.47	2.7	56
2.48	2.51	55
2.49	2.44	54
2.5	2.21	52

2D Antenna Pattern


Wi-Fi1

Frequency : 2450 MHz


XZ-plane

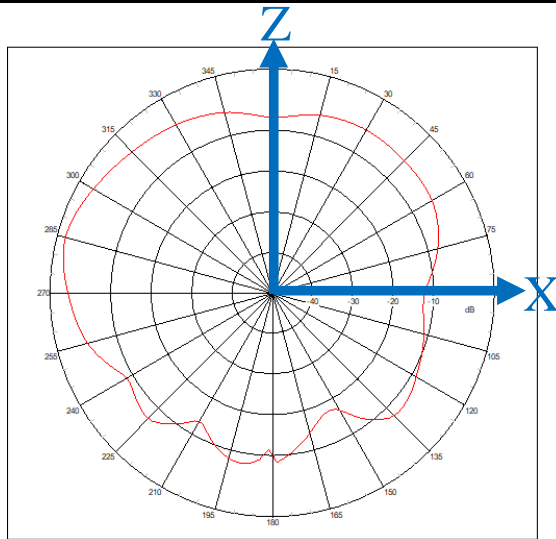

YZ-plane

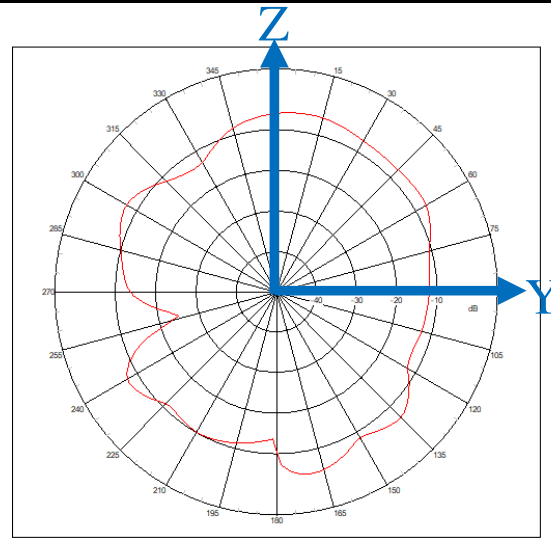

XY-plane

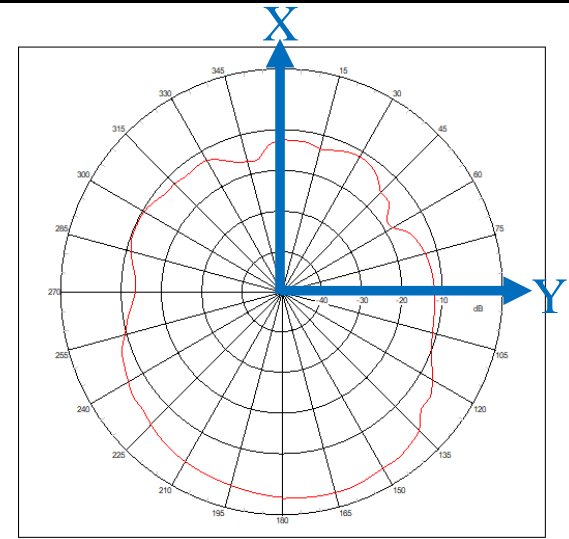

Far-field amplitude limits:

Max: 5dB


min: -50dB

2D Antenna Pattern


Wi-Fi1

Frequency : 5600 MHz


XZ-plane

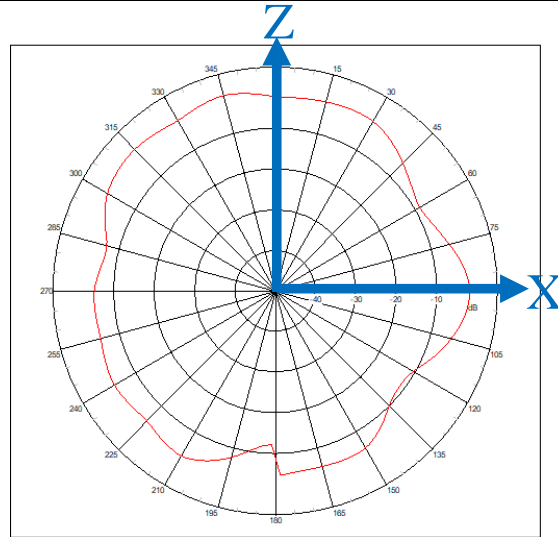

YZ-plane

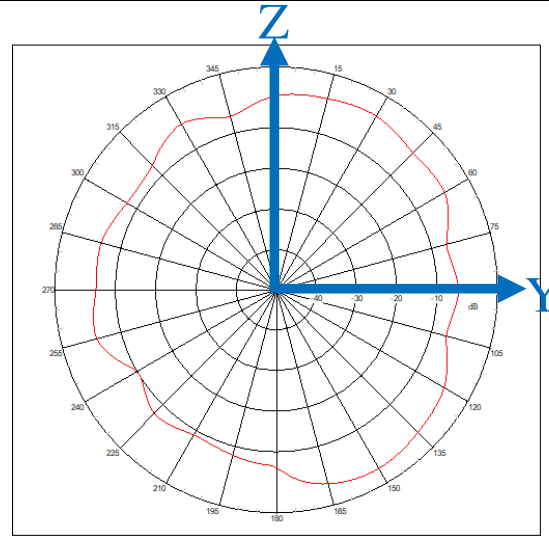

XY-plane

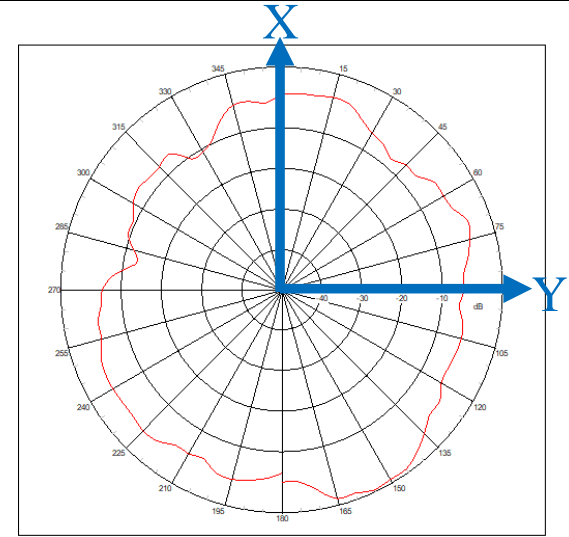

Far-field amplitude limits:

Max: 5dB


min: -50dB

2D Antenna Pattern


Wi-Fi1

Frequency : 6525 MHz


XZ-plane

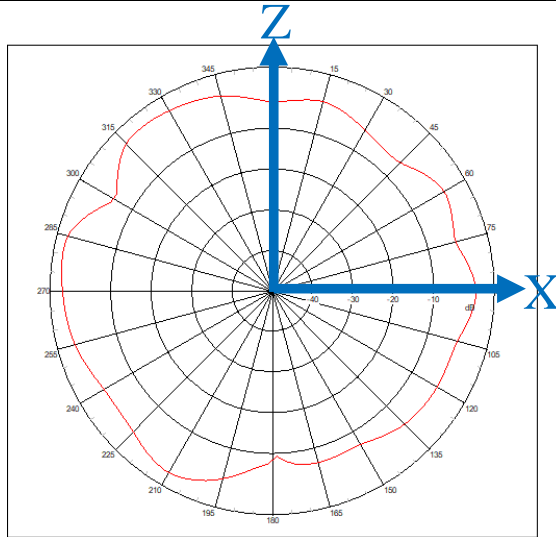

YZ-plane

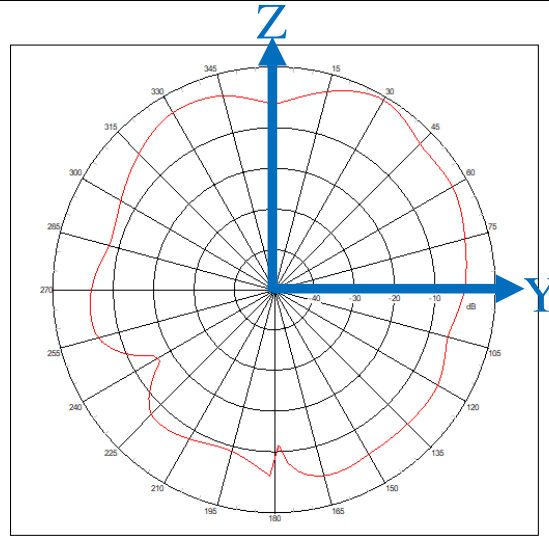

XY-plane

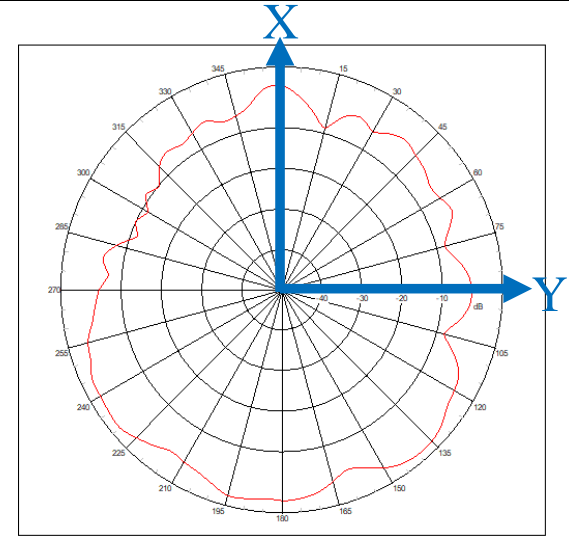

Far-field amplitude limits:

Max: 5dB


min: -50dB

2D Antenna Pattern


Wi-Fi2

Frequency : 2450 MHz


XZ-plane

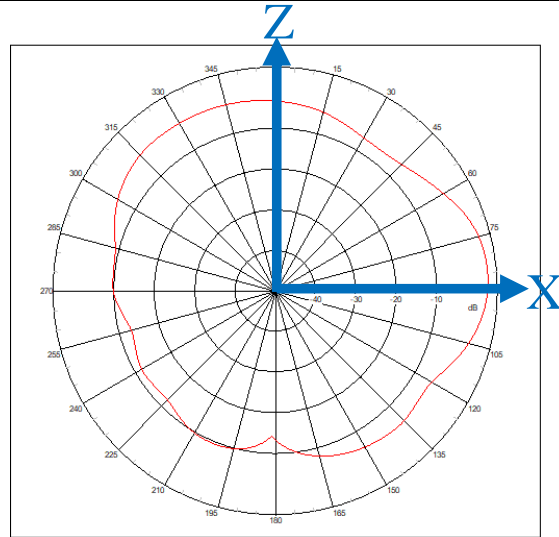

YZ-plane

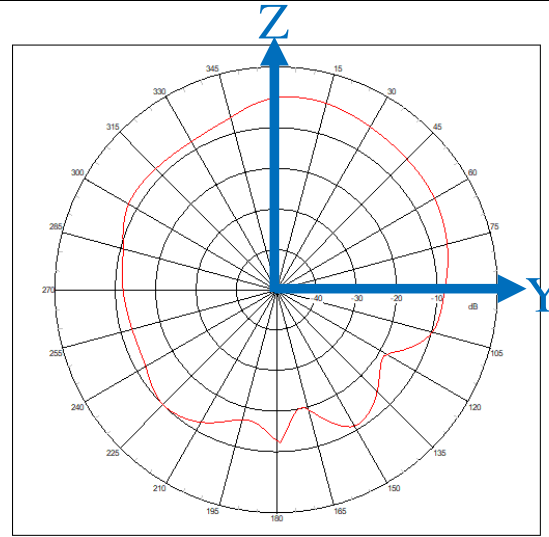

XY-plane

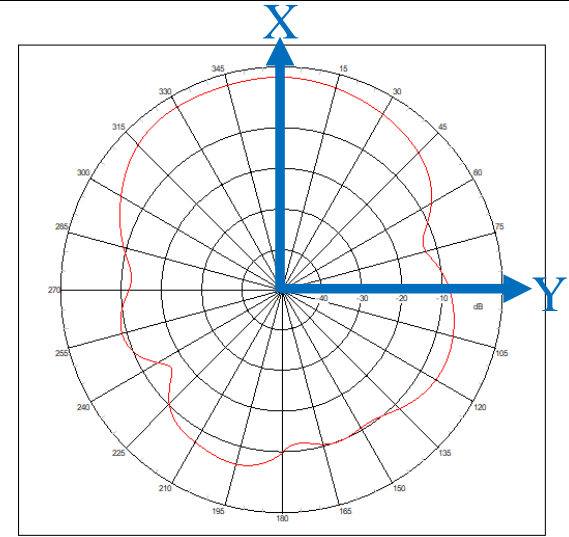

Far-field amplitude limits:

Max: 5dB


min: -50dB

2D Antenna Pattern


Wi-Fi2

Frequency : 5600 MHz


XZ-plane

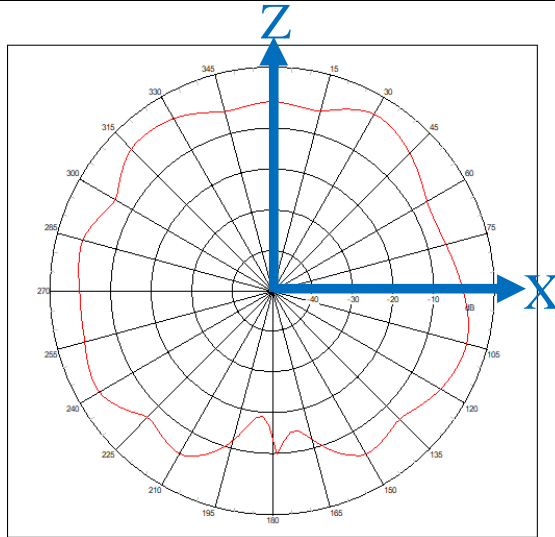

YZ-plane

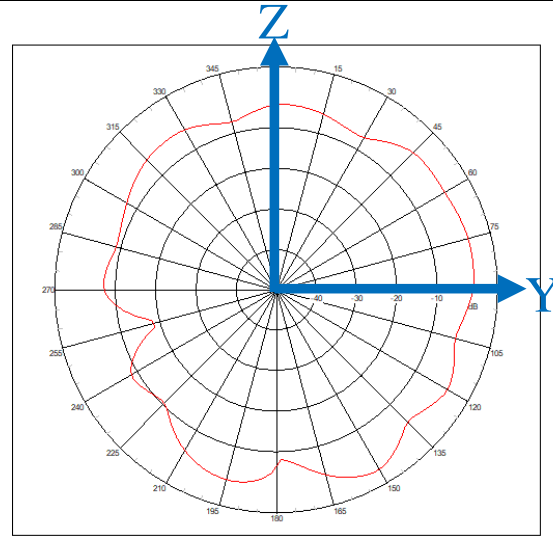

XY-plane

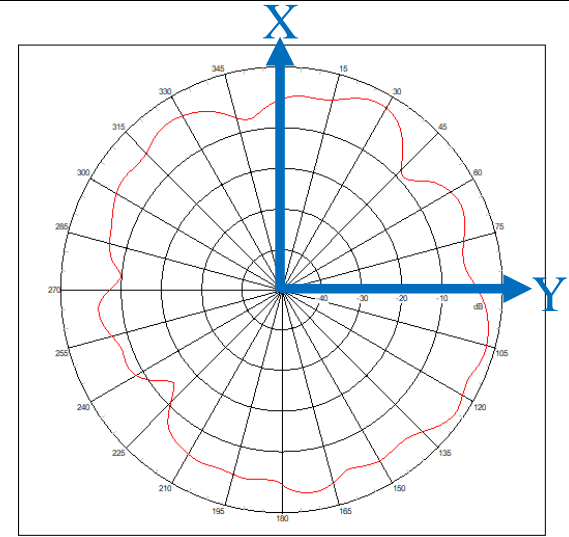

Far-field amplitude limits:

Max: 5dB


min: -50dB

2D Antenna Pattern


Wi-Fi2

Frequency : 6525 MHz


XZ-plane

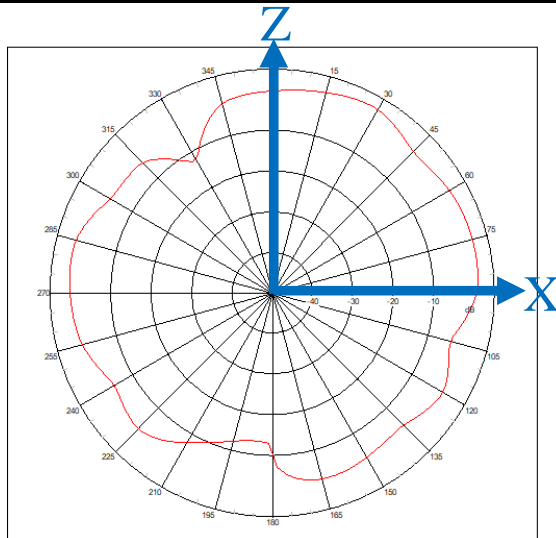

YZ-plane

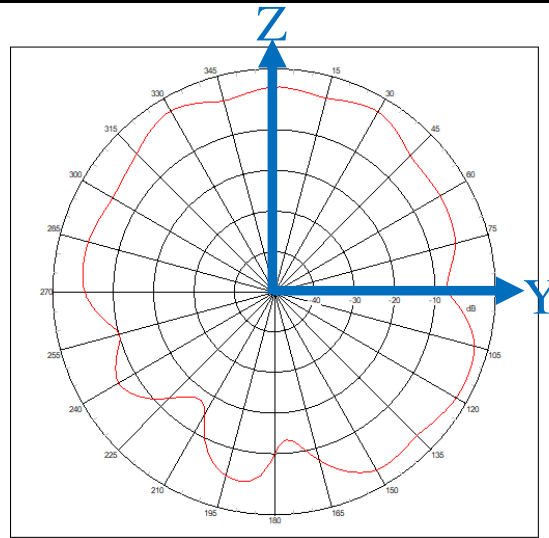

XY-plane

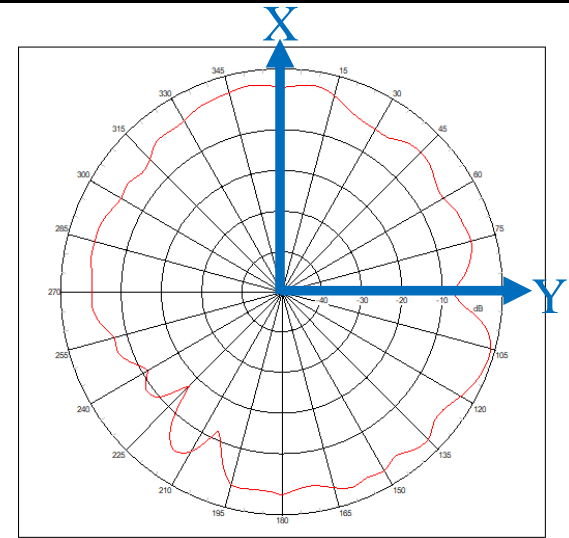

Far-field amplitude limits:

Max: 5dB


min: -50dB

2D Antenna Pattern


BT

Frequency : 2450 MHz


XZ-plane

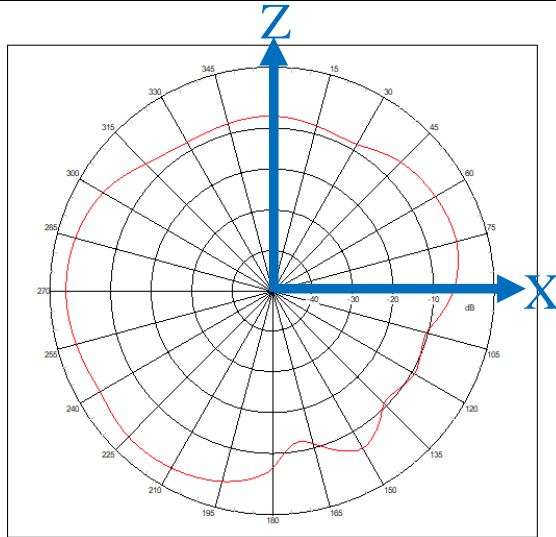

YZ-plane

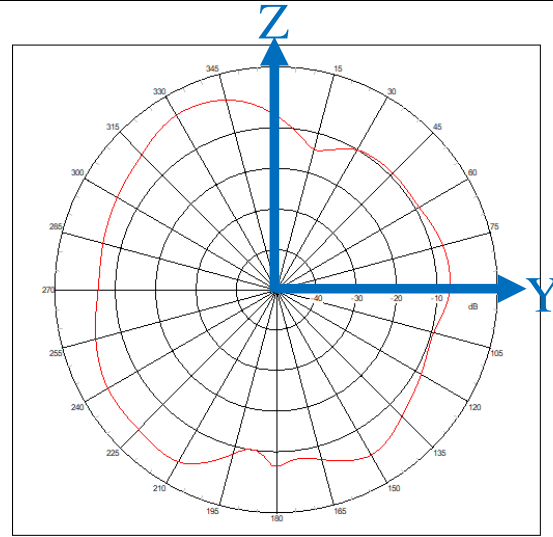

XY-plane

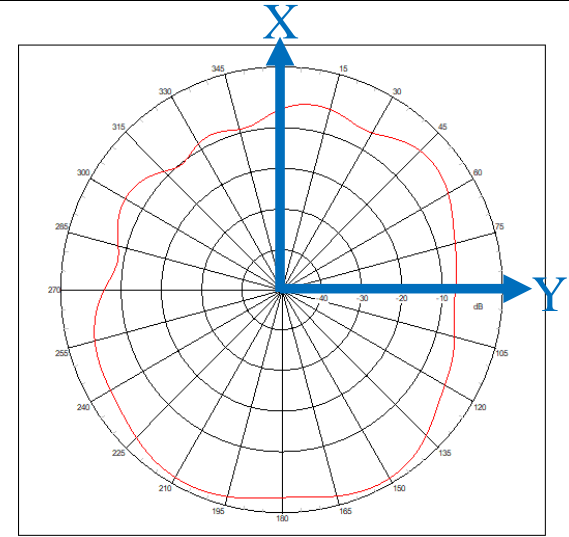

Far-field amplitude limits:

Max: 5dB

min: -50dB

Conclusion & Recommendations



- 目前整體天線效能如下：
 - Isolation : Wi-Fi to Wi-Fi > 28.7 dB ; Wi-Fi to BT > 25.7 dB
 - Peak Gain : 2.4G < 3 dBi ; 5G < 4 dBi ; 6G < 4.5 dBi
 - Efficiency : 2.4G/5G/6G > 50 %



創造完美連結

MAKING THE PERFECT CONNECTION

www.wieson.com



創造完美連結

MAKING THE PERFECT CONNECTION

www.wieson.com

CERTIFICATE

The quality management system of

Unified Social Credit Code: 914419006181620014

WIESON Technologies (Dongguan) Co., Ltd.

Registered Address: Xinbaowei Industrial Building, Huangang Industrial Zone, Houjie Town, Dongguan City | 523946 Guangdong | China
Operation Address: Xinbaowei Industrial Building, Huangang Industrial Zone, Houjie Town (Exclusion of A Building and 4F, B Building), Dongguan City | 523946 Guangdong | China

has been assessed and certified as meeting the requirements of:

ISO 9001:2015

for the following activities:

Design, Manufacture and Sales of Electronic and Automotive Connectors, Cables, Wire Harnesses, RF (Radio Frequency) and Antenna Products, Plastic Injection Parts, Stamping Parts, Plastic & Hardware Molds

This certificate is valid from 26/01/2024 until 25/01/2027

Issued: 26/01/2024

Certificate No CA00525-EN

This registration is subject to the company maintaining a Quality Management System to the above standard, which will be monitored by TÜV Saarland Certification.
The validity of this certificate may be verified on both CNCA's website (www.cnca.gov.cn) and the website of TÜV Saarland Certification (www.tuv-saar.cn).

Dipl. Wirtsch.-Ing. (FH) Thorsten Greiner, Managing Director
TÜV® Saarland Certification GmbH
Am TÜV 1 | 66280 Sulzbach/Saar | Germany
T +49 (0) 68 97 506 0 | cert@tuv-saar.com