

## TEST REPORT

<b>Product</b>	:	Marine Entertainment System
<b>Trade mark</b>	:	B&G, Simrad, Lowrance, JL Audio
<b>Model/Type reference</b>	:	SonicHub 2, MM80-HR
<b>Serial Number</b>	:	N/A
<b>Report Number</b>	:	EED32J00067901
<b>FCC ID</b>	:	RAYSHGEN2
<b>Date of Issue</b>	:	Jul. 10, 2017
<b>Test Standards</b>	:	47 CFR Part 15 Subpart C
<b>Test result</b>	:	PASS

Prepared for:

**Navico Auckland Limited**  
**44 Arrenway Drive, Rosedale, Auckland, New Zealand**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**

**TEL: +86-755-3368 3668**

**FAX: +86-755-3368 3385**



Approved by:

*Kevin Tang*

Reviewed by:

*Kevin Tan*

Sheek, Luo

Date:

Jul. 10, 2017

Sheek Luo

Lab supervisor

Check No.: 2496542141

## 2 Version

Version No.	Date	Description
00	Jul. 10, 2017	Original

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

Model No.: SonicHub 2, MM80-HR

This test report (Ref. No.: EED32J00067901) is only valid with the test report (Ref. No.: EED32H000844-1). According to the declaration from the applicant, two models were same RF module. Their electrical circuit design, layout, components used and internal wiring are identical. Apart from the removal of the VIDEO OUT terminal (which is not used in the MM80-HR) and associated update to the software.

Therefore in this report Radiated Spurious emissions below 1GHz was retested on model MM80-HR and shown the data in this report, other tests please refer to original report EED32H000844-1.

## 4 Content

<b>1 COVER PAGE</b> .....	1
<b>2 VERSION</b> .....	2
<b>3 TEST SUMMARY</b> .....	3
<b>4 CONTENT</b> .....	4
<b>5 TEST REQUIREMENT</b> .....	5
5.1 TEST SETUP.....	5
5.1.1 For Radiated Emissions test setup.....	5
5.2 TEST ENVIRONMENT.....	5
5.3 TEST CONDITION.....	5
<b>6 GENERAL INFORMATION</b> .....	6
6.1 CLIENT INFORMATION.....	6
6.2 GENERAL DESCRIPTION OF EUT.....	6
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	6
6.4 DESCRIPTION OF SUPPORT UNITS.....	7
6.5 TEST LOCATION.....	7
6.6 DEVIATION FROM STANDARDS.....	7
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	7
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	7
<b>7 EQUIPMENT LIST</b> .....	8
<b>8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b> .....	9
Appendix A): Radiated Spurious Emissions.....	10
<b>PHOTOGRAPHS OF TEST SETUP</b> .....	14
<b>PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b> .....	15

## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Radiated Emissions test setup

Radiated Emissions setup:

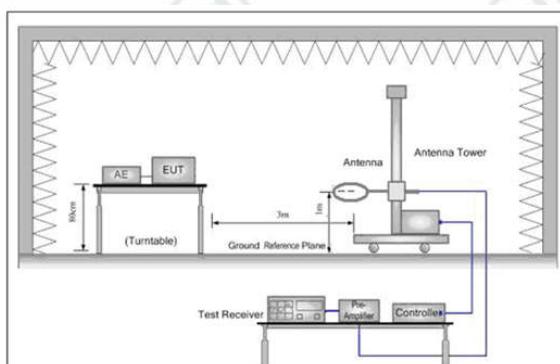


Figure 1. Below 30MHz

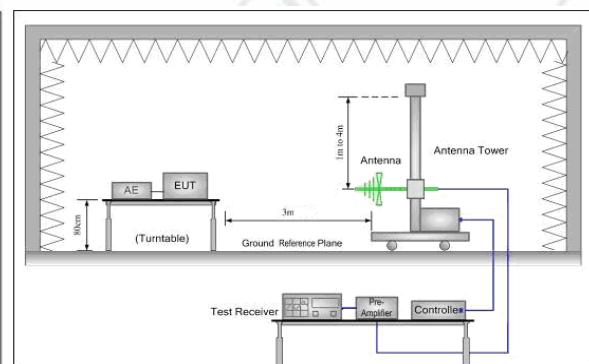


Figure 2. 30MHz to 1GHz

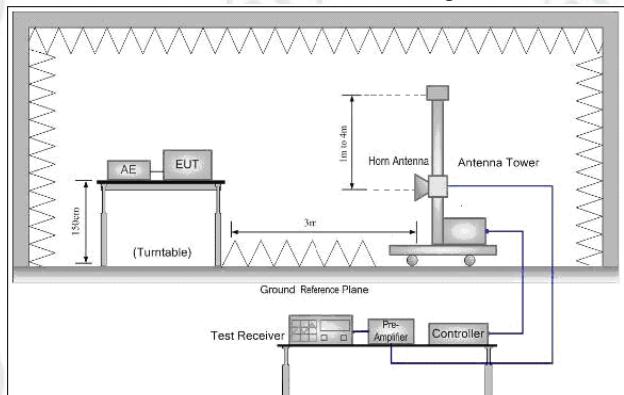


Figure 3. Above 1GHz

### 5.2 Test Environment

#### Operating Environment:

Temperature:	25°C
Humidity:	52% RH
Atmospheric Pressure:	1010mbar

### 5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/π/4DQPSK/ 8DPSK(DH1,DH3,DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel 79
		2402MHz	2441MHz	2480MHz
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.			

## 6 General Information

### 6.1 Client Information

Applicant:	Navico Auckland Limited
Address of Applicant:	44 Arrenway Drive, Rosedale, Auckland, New Zealand
Manufacturer:	SKYPINE ELECTRONICS (SHENZHEN) CO., LTD
Address of Manufacturer:	A1, A5 Building, No.6, Xinxing Industrial Park, Xinhe Village, Fuyong Town, Bao'an District, Shenzhen City, Guangdong Province, China
Factory:	SKYPINE ELECTRONICS (SHENZHEN) CO., LTD
Address of Factory:	A1, A5 Building, No.6, Xinxing Industrial Park, Xinhe Village, Fuyong Town, Bao'an District, Shenzhen City, Guangdong Province, China

### 6.2 General Description of EUT

Product Name:	Marine Entertainment System
Model No.:	SonicHub 2, MM80-HR
Trade Mark:	B&G, Simrad, Lowrance, JL Audio
EUT Supports Radios application:	BT4.0 Dual mode
Power Supply:	DC 12V
Sample Received Date:	May 15, 2017
Sample tested Date:	May 15, 2017 to Jul. 07, 2017

### 6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	3.0+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
EUT Function:	DVD PLAYER
Test power grade:	0(manufacturer declare)
Test software of EUT:	CSR BlueTest3(manufacturer declare)
Antenna Type:	Integral
Antenna Gain:	0dBi
Test Voltage:	DC 12V

#### Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz

9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

#### 6.4 Description of Support Units

The EUT has been tested independently.

#### 6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

#### 6.6 Deviation from Standards

None.

#### 6.7 Abnormalities from Standard Conditions

None.

#### 6.8 Other Information Requested by the Customer

None.

#### 6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

## 7 Equipment List

### 3M Semi/full-anechoic Chamber

Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-05-2016	06-05-2019
TRILOG Broadband Antenna	SCHWARZBEC K	VULB9163	9163-484	06-09-2017	06-08-2018
Microwave Preamplifier	Agilent	8449B	3008A02425	02-16-2017	02-15-2018
Horn Antenna	ETS-LINDGREN	3117	00057407	07-20-2015	07-18-2018
Loop Antenna	ETS	6502	00071730	07-30-2015	07-28-2017
Microwave Preamplifier	A.H.SYSTEMS	PAP-1840-60	6041.6042	06-30-2015	06-28-2018
Horn Antenna	A.H.SYSTEMS	SAS-574 374	---	06-30-2015	06-28-2018
Spectrum Analyzer	R&S	FSP40	100416	06-13-2017	06-12-2018
Receiver	R&S	ESCI	100435	06-14-2017	06-13-2018
Multi device Controller	maturo	NCD/070/10711 112	---	01-11-2017	01-10-2018
LISN	schwarzbeck	NNBM8125	81251547	06-13-2017	06-12-2018
LISN	schwarzbeck	NNBM8125	81251548	06-13-2017	06-12-2018
Signal Generator	Agilent	E4438C	MY45095744	03-14-2017	03-13-2018
Signal Generator	Keysight	E8257D	MY53401106	03-14-2017	03-13-2018
Temperature/ Humidity Indicator	TAYLOR	1451	1905	05-08-2017	05-07-2018
Cable line	Fulai(7M)	SF106	5219/6A	01-11-2017	01-10-2018
Cable line	Fulai(6M)	SF106	5220/6A	01-11-2017	01-10-2018
Cable line	Fulai(3M)	SF106	5216/6A	01-11-2017	01-10-2018
Cable line	Fulai(3M)	SF106	5217/6A	01-11-2017	01-10-2018
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-11-2017	01-10-2018
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-11-2017	01-10-2018

## 8 Radio Technical Requirements Specification

### Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix A)


## Appendix A): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark					
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak					
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average					
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak					
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak					
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average					
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak					
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak					
	Above 1GHz	Peak	1MHz	3MHz	Peak					
		Peak	1MHz	10Hz	Average					
Test Procedure:										
<b>Below 1GHz test procedure as below:</b>										
<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>										
<b>Above 1GHz test procedure as below:</b>										
<ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).</li> <li>Test the EUT in the lowest channel ,the middle channel ,the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>										
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m)	Remark	Measurement distance (m)					
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300					
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30					
	1.705MHz-30MHz	30	-	-	30					
	30MHz-88MHz	100	40.0	Quasi-peak	3					
	88MHz-216MHz	150	43.5	Quasi-peak	3					
	216MHz-960MHz	200	46.0	Quasi-peak	3					
	960MHz-1GHz	500	54.0	Quasi-peak	3					
	Above 1GHz	500	54.0	Average	3					
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.										

**Radiated Spurious Emissions test Data:  
Radiated Emission below 1GHz**


30MHz~1GHz (QP)

Test mode:	Transmitting	Horizontal
------------	--------------	------------

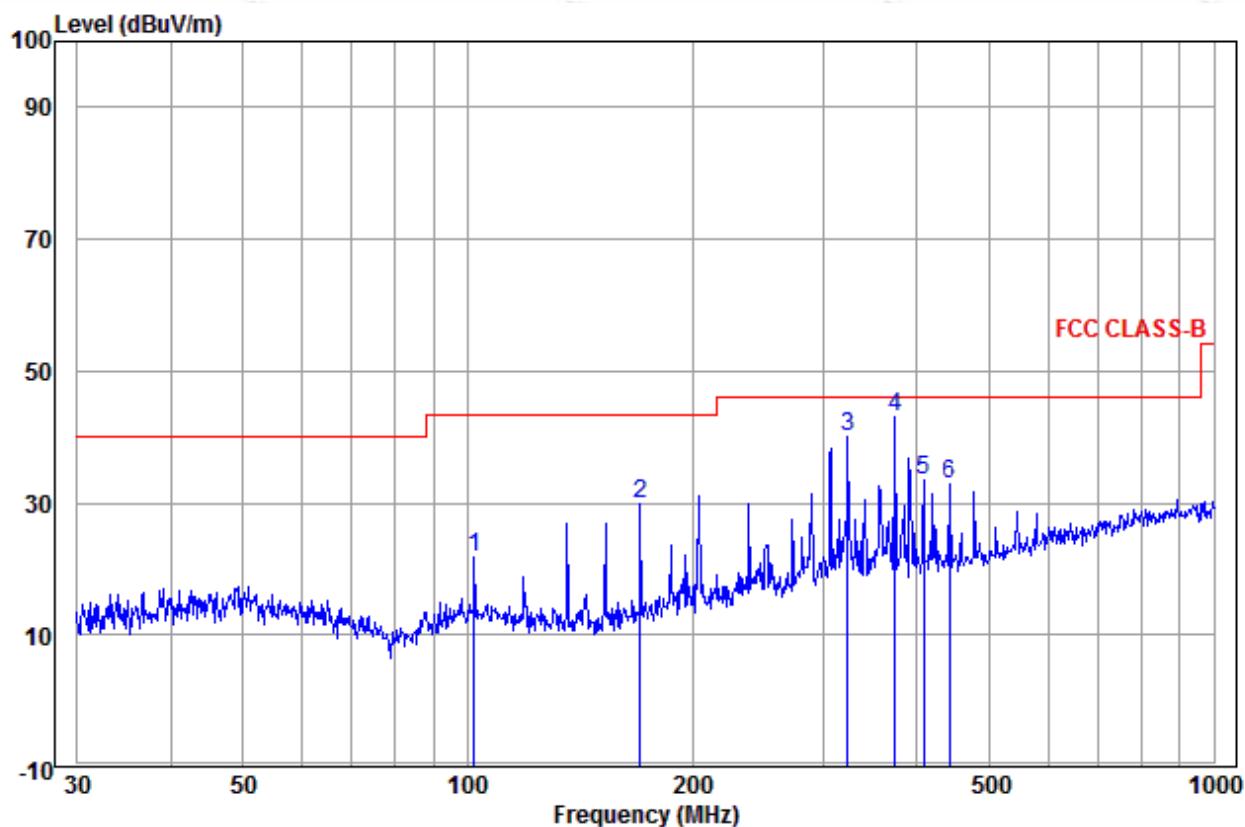

Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Limit Line	Over Limit	Over Limit Pol/Phase		Remark
							Pol/Phase		
1	102.001	10.94	0.59	10.25	21.78	43.50	-21.72	Horizontal	
2	170.195	9.20	0.83	19.88	29.91	43.50	-13.59	Horizontal	
3	323.320	13.99	1.19	24.99	40.17	46.00	-5.83	Horizontal	
4 pp	374.623	15.01	1.32	26.67	43.00	46.00	-3.00	Horizontal	
5	408.946	15.65	1.35	16.53	33.53	46.00	-12.47	Horizontal	
6	441.743	16.17	1.45	15.14	32.76	46.00	-13.24	Horizontal	

Test mode:	Transmitting	Vertical
------------	--------------	----------

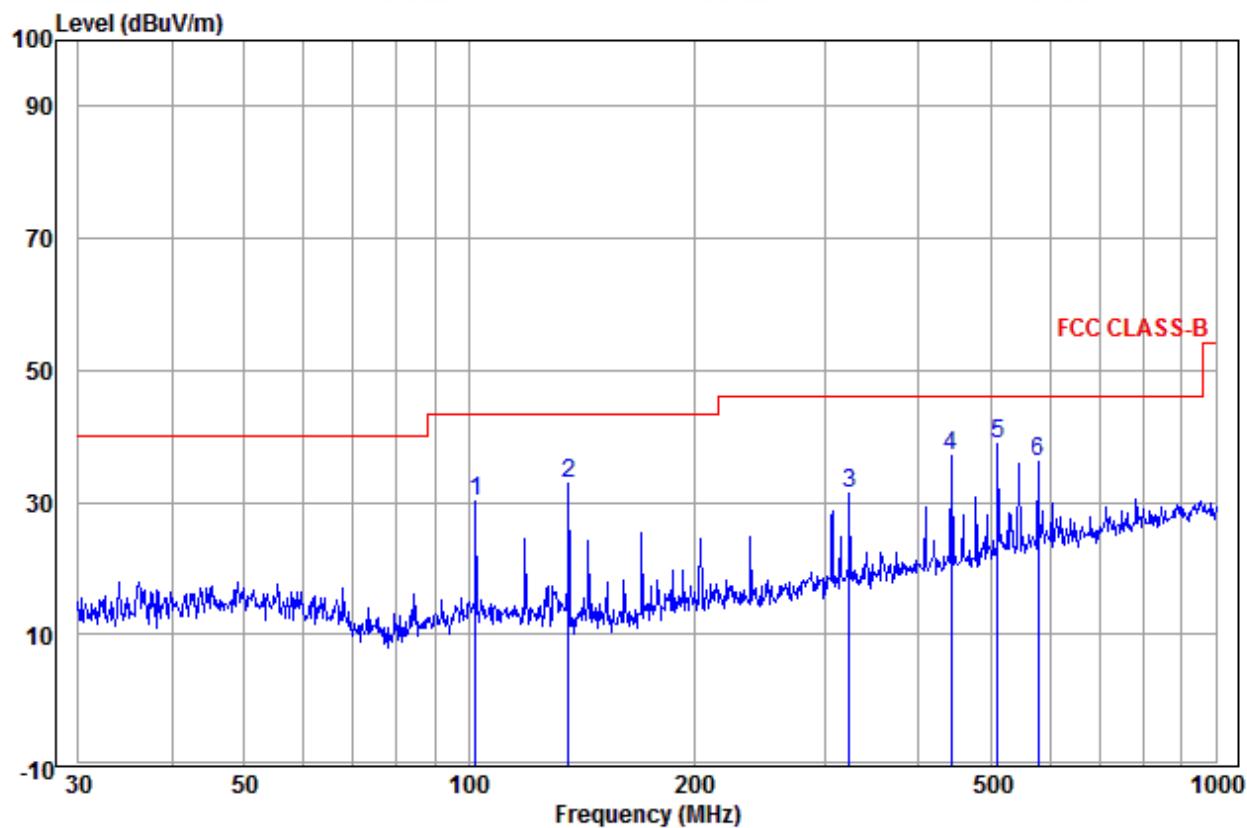

	Ant Freq	Cable Factor	Read Loss	Limit		Over Line	Limit Pol/Phase	Remark
				Level	Level			
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	102.001	10.94	0.59	18.55	30.08	43.50	-13.42	Vertical
2	135.982	8.60	0.61	23.75	32.96	43.50	-10.54	Vertical
3	323.320	13.99	1.19	16.04	31.22	46.00	-14.78	Vertical
4	441.743	16.17	1.45	19.37	36.99	46.00	-9.01	Vertical
5 pp	510.044	17.37	1.52	19.95	38.84	46.00	-7.16	Vertical
6	578.670	18.53	1.71	15.80	36.04	46.00	-9.96	Vertical

Note:

1) Through Pre-scan transmitting mode with all kind of modulation and all kind of data type, find the worse case is GFSK modulation type .

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading -Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor -Cable Factor

3) This test report (Ref. No.: EED32J00067901) is only valid with the test report (Ref. No.: EED32H000844-1).

According to the declaration from the applicant, two models were same RF module. Their electrical circuit design, layout, components used and internal wiring are identical. Apart from the removal of the VIDEO OUT terminal (which is not used in the MM80-HR) and associated update to the software. Therefore in this report only Radiated Spurious emissions below 1GHz was retested on model MM80-HR and shown the data in this report, other tests please refer to original report EED32H000844-1

4) Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

## PHOTOGRAPHS OF TEST SETUP

Test model No.: MM80-HR



**Radiated spurious emission Test Setup-1(Below 1GHz)**

## PHOTOGRAPHS OF EUT Constructional Details

Test model No.: MM80-HR



View of Product-1



View of Product-2




View of Product-3



View of Product-4




View of Product-5

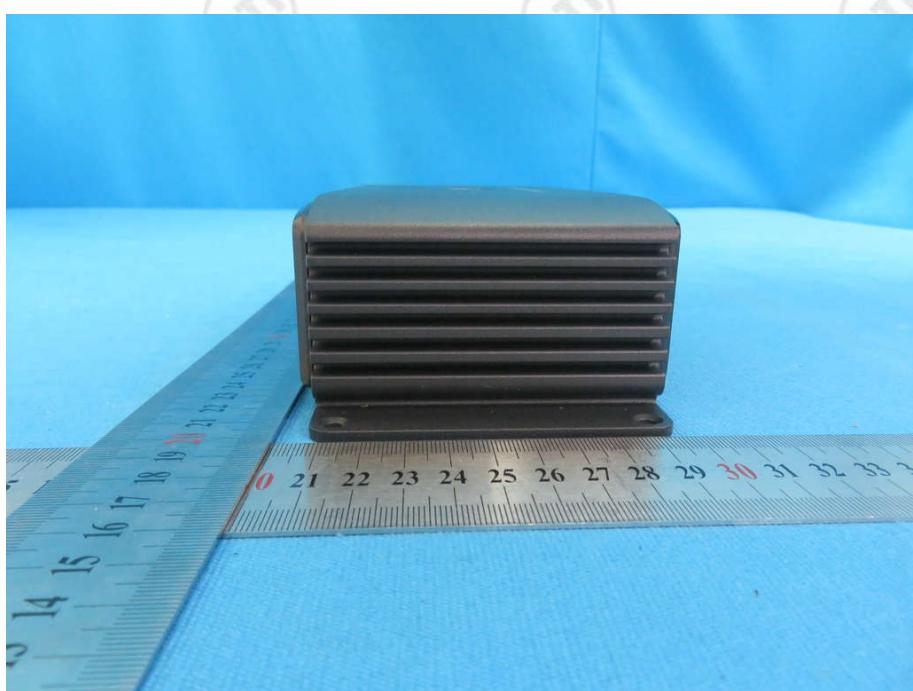


View of Product-6




View of Product-7

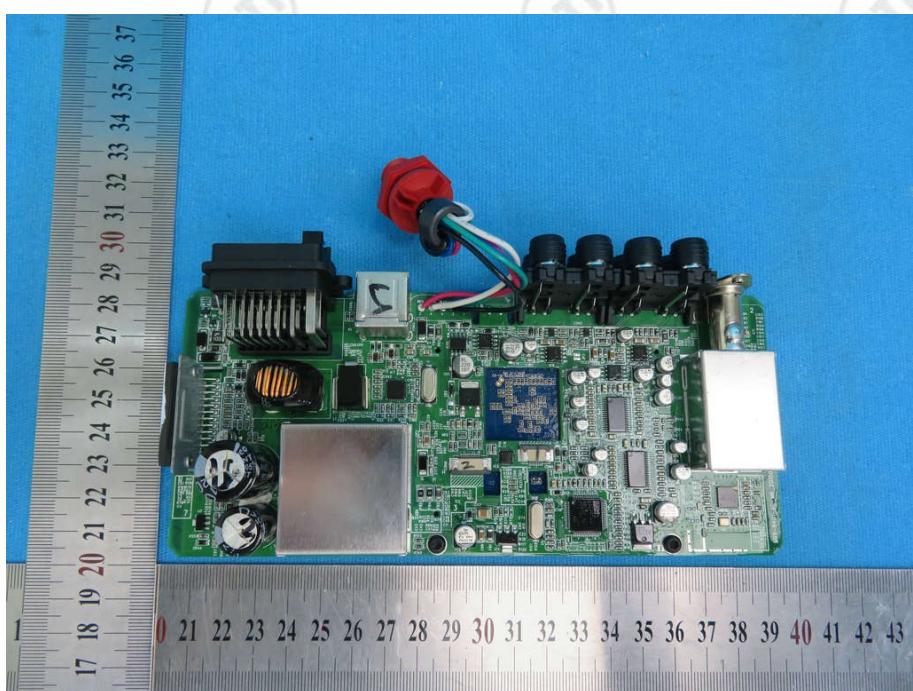


View of Product

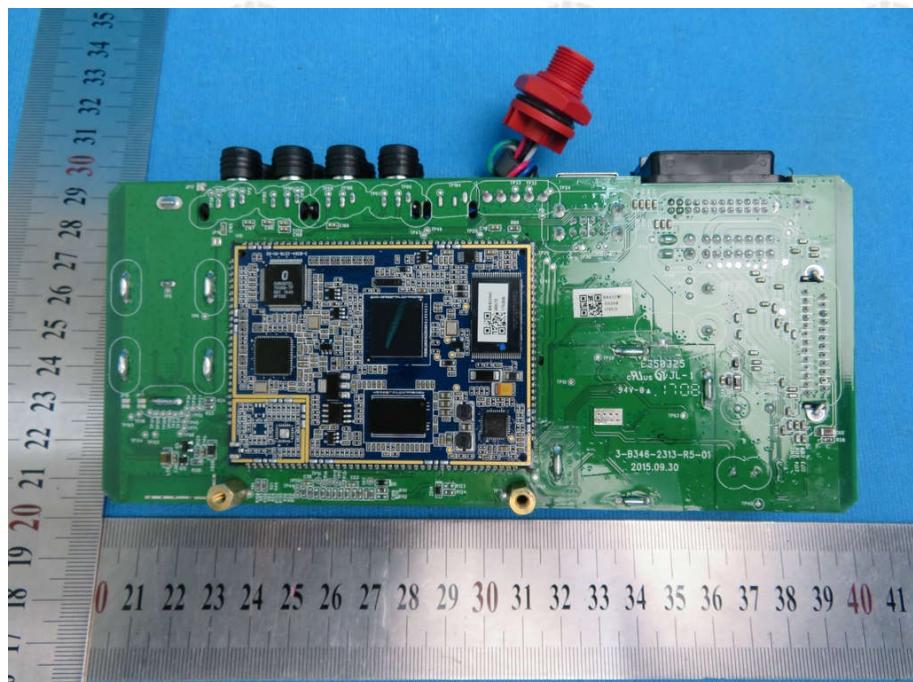


View of Product-9

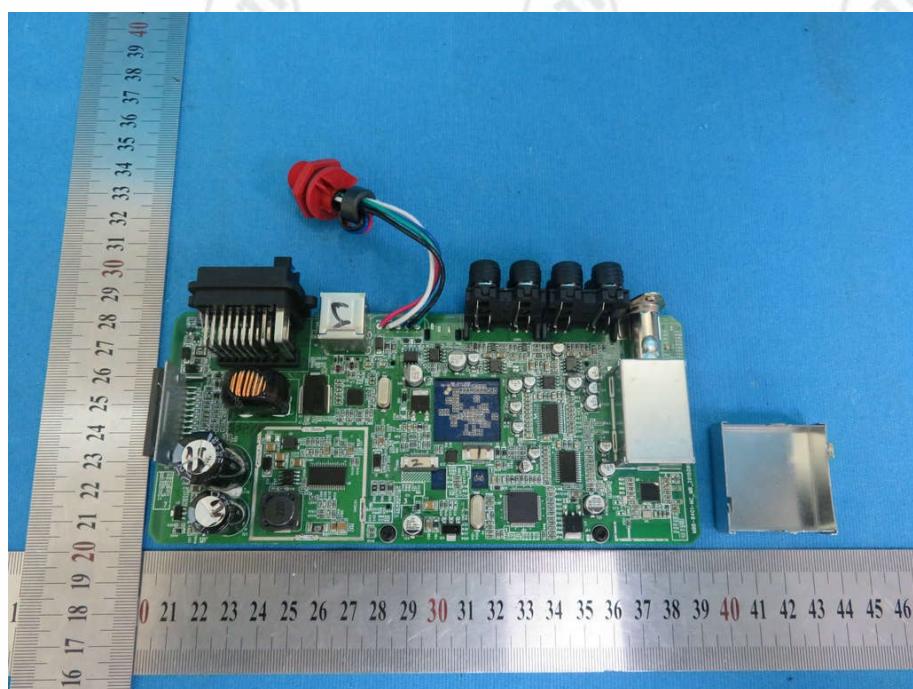

View of Product-10

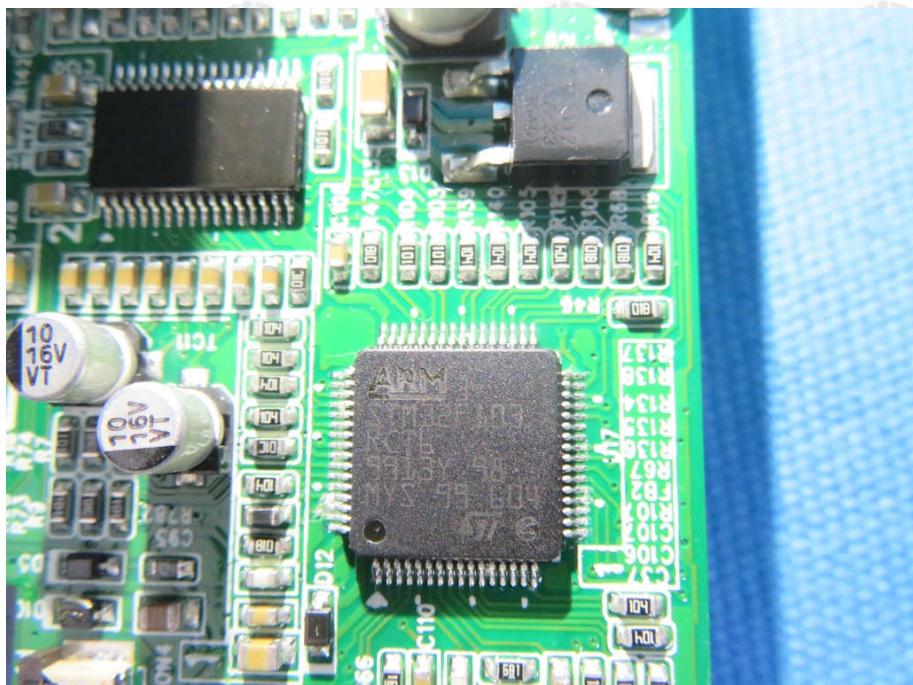

View of Product-11

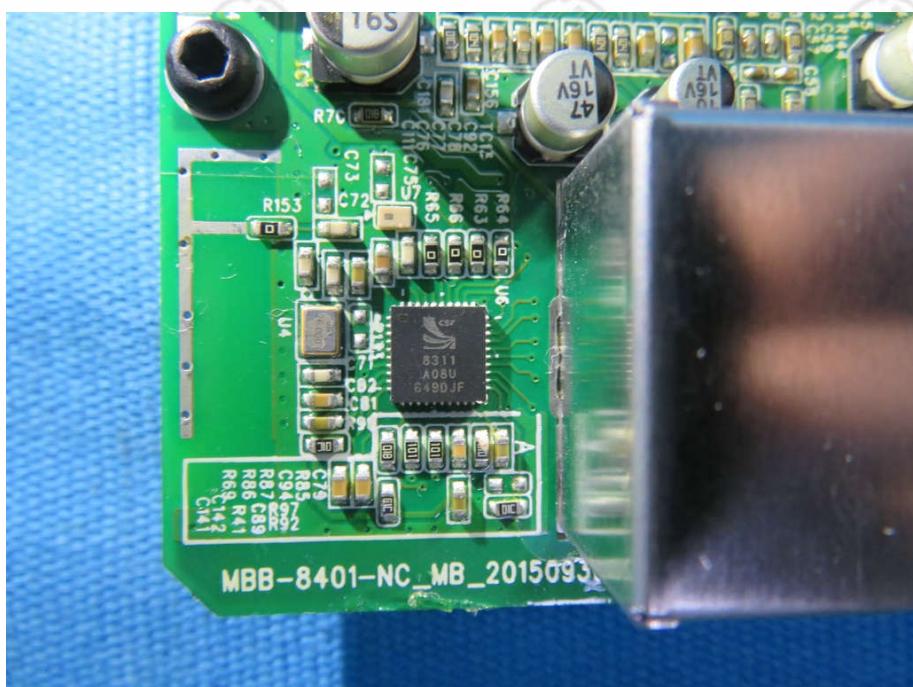

View of Product-12

\*\*\* End of Report \*\*\*

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.