




Test Mode : 1TX 11b CH06 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

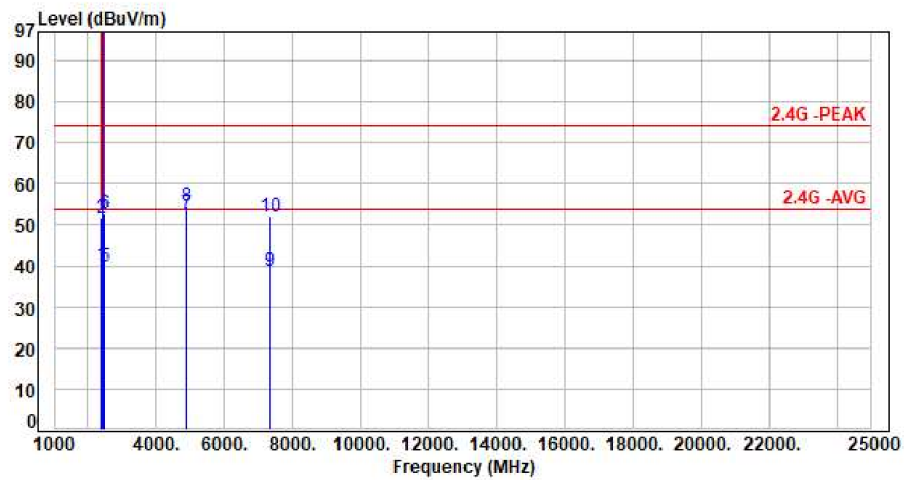


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	42.45	40.12	54.00	-13.88	Average	174	75	P
2	2390.00	-2.33	54.00	51.67	74.00	-22.33	Peak	174	75	P
3	2437.00	-2.17	104.84	102.67	200.00	-97.33	Average	174	75	P
4	2437.00	-2.17	106.10	103.93	200.00	-96.07	Peak	174	75	P
5	2483.50	-2.01	41.75	39.74	54.00	-14.26	Average	174	75	P
6	2483.50	-2.01	54.85	52.84	74.00	-21.16	Peak	174	75	P
7	4874.00	6.23	46.68	52.91	54.00	-1.09	Average	266	100	P
8	4874.00	6.23	48.50	54.73	74.00	-19.27	Peak	266	100	P
9	7311.00	11.33	27.32	38.65	54.00	-15.35	Average	100	157	P
10	7311.00	11.33	40.62	51.95	74.00	-22.05	Peak	100	157	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11b CH06 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

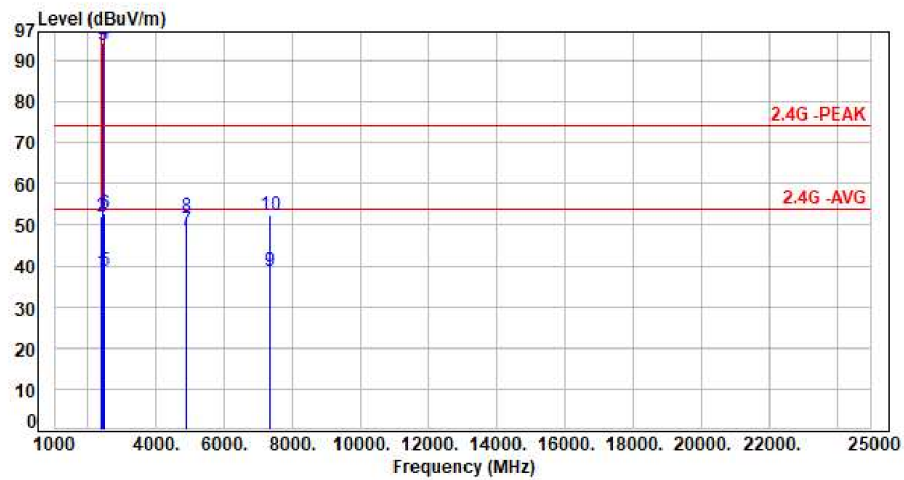


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	40.77	38.44	54.00	-15.56	Average	109	160	P
2	2390.00	-2.33	54.26	51.93	74.00	-22.07	Peak	109	160	P
3	2437.00	-2.17	95.71	93.54	200.00	-106.46	Average	109	160	P
4	2437.00	-2.17	96.75	94.58	200.00	-105.42	Peak	109	160	P
5	2483.50	-2.01	40.91	38.90	54.00	-15.10	Average	109	160	P
6	2483.50	-2.01	54.57	52.56	74.00	-21.44	Peak	109	160	P
7	4874.00	6.23	42.31	48.54	54.00	-5.46	Average	100	187	P
8	4874.00	6.23	45.68	51.91	74.00	-22.09	Peak	100	187	P
9	7311.00	11.33	27.51	38.84	54.00	-15.16	Average	100	118	P
10	7311.00	11.33	41.20	52.53	74.00	-21.47	Peak	100	118	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11b CH11 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

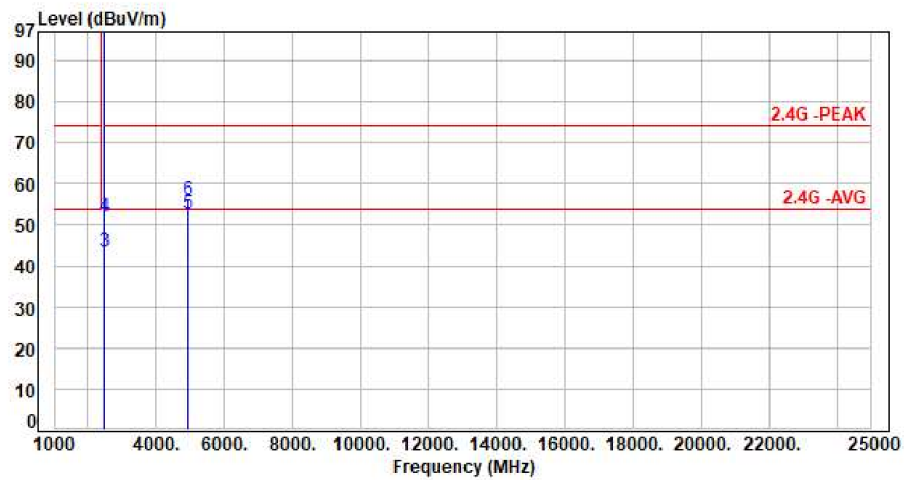

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.04	101.46	99.42	200.00	-100.58	Average	270	116	P
2	2462.00	-2.04	102.80	100.76	200.00	-99.24	Peak	270	116	P
3	2483.50	-2.01	45.52	43.51	54.00	-10.49	Average	270	116	P
4	2483.50	-2.01	53.89	51.88	74.00	-22.12	Peak	270	116	P
5	4924.00	6.40	46.33	52.73	54.00	-1.27	Average	206	47	P
6	4924.00	6.40	49.64	56.04	74.00	-17.96	Peak	206	47	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11b CH11 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

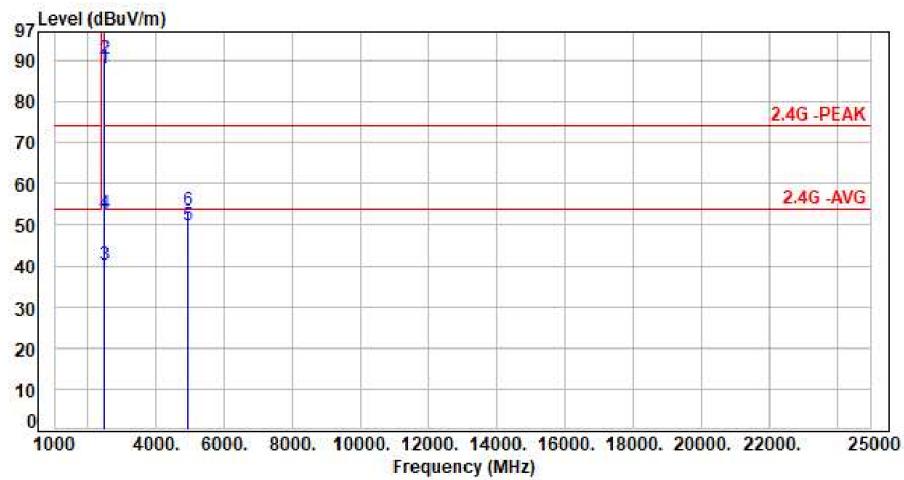

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.04	90.15	88.11	200.00	-111.89	Average	100	301	P
2	2462.00	-2.04	92.57	90.53	200.00	-109.47	Peak	100	301	P
3	2483.50	-2.01	42.14	40.13	54.00	-13.87	Average	100	301	P
4	2483.50	-2.01	54.71	52.70	74.00	-21.30	Peak	100	301	P
5	4924.00	6.40	43.28	49.68	54.00	-4.32	Average	100	189	P
6	4924.00	6.40	46.92	53.32	74.00	-20.68	Peak	100	189	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH01 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

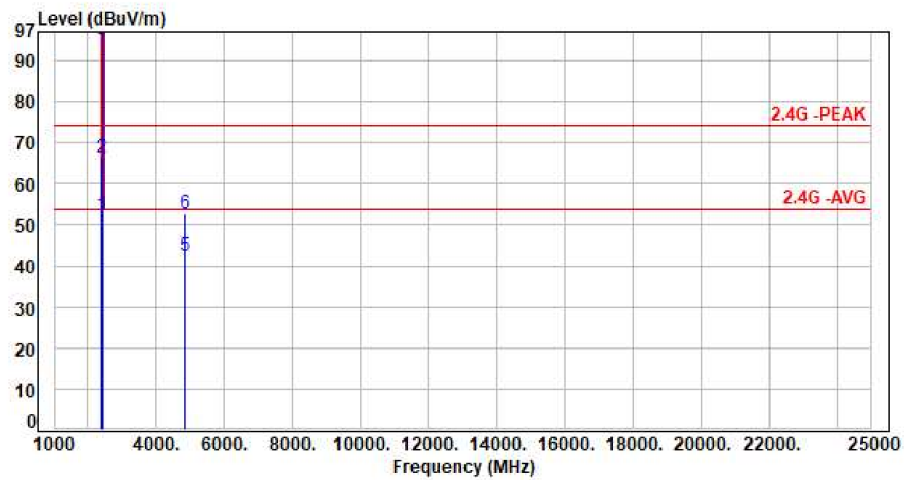

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	54.63	52.30	54.00	-1.70	Average	249	90	P
2	2390.00	-2.33	68.86	66.53	74.00	-7.47	Peak	249	90	P
3	2412.00	-2.29	97.61	95.32	200.00	-104.68	Average	249	90	P
4	2412.00	-2.29	107.33	105.04	200.00	-94.96	Peak	249	90	P
5	4824.00	6.08	36.35	42.43	54.00	-11.57	Average	100	112	P
6	4824.00	6.08	46.50	52.58	74.00	-21.42	Peak	100	112	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH01 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

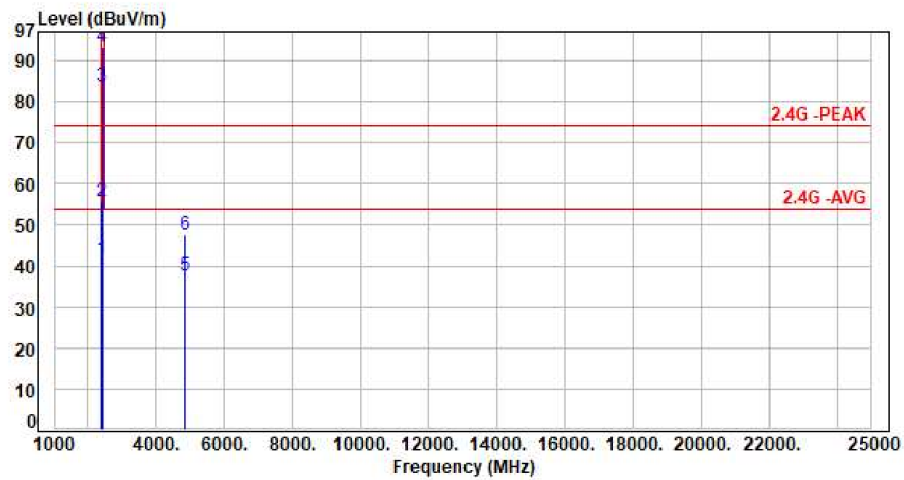

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	44.12	41.79	54.00	-12.21	Average	100	245	P
2	2390.00	-2.33	57.98	55.65	74.00	-18.35	Peak	100	245	P
3	2412.00	-2.29	86.19	83.90	200.00	-116.10	Average	100	245	P
4	2412.00	-2.29	95.48	93.19	200.00	-106.81	Peak	100	245	P
5	4824.00	6.08	31.44	37.52	54.00	-16.48	Average	100	181	P
6	4824.00	6.08	41.34	47.42	74.00	-26.58	Peak	100	181	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH06 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

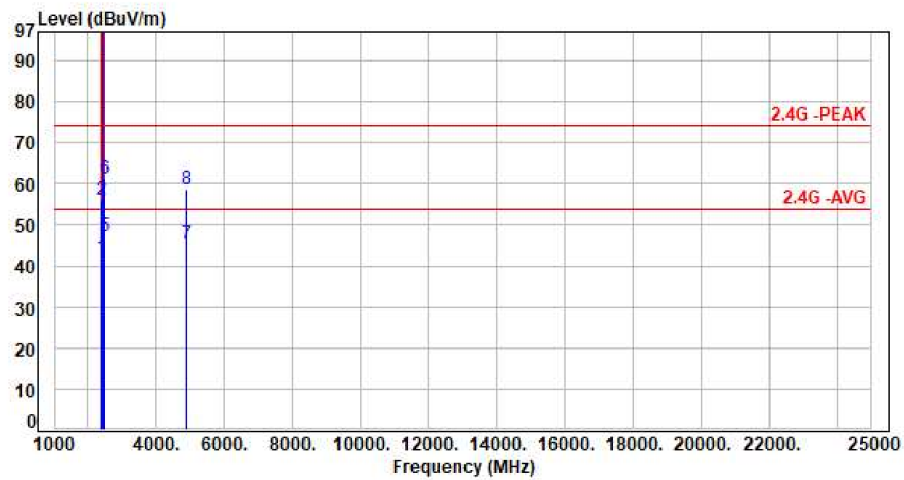


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	44.33	42.00	54.00	-12.00	Average	316	75	P
2	2390.00	-2.33	58.56	56.23	74.00	-17.77	Peak	316	75	P
3	2437.00	-2.17	103.40	101.23	200.00	-98.77	Average	316	75	P
4	2437.00	-2.17	113.07	110.90	200.00	-89.10	Peak	316	75	P
5	2483.50	-2.01	49.26	47.25	54.00	-6.75	Average	316	75	P
6	2483.50	-2.01	63.21	61.20	74.00	-12.80	Peak	316	75	P
7	4874.00	6.23	39.18	45.41	54.00	-8.59	Average	100	115	P
8	4874.00	6.23	52.39	58.62	74.00	-15.38	Peak	100	115	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH06 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

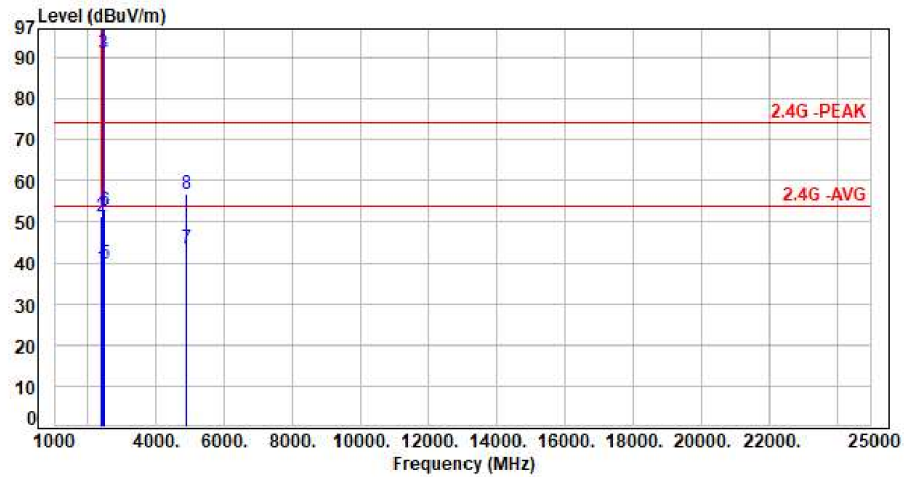


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	40.97	38.64	54.00	-15.36	Average	108	160	P
2	2390.00	-2.33	53.54	51.21	74.00	-22.79	Peak	108	160	P
3	2437.00	-2.17	93.18	91.01	200.00	-108.99	Average	108	160	P
4	2437.00	-2.17	103.15	100.98	200.00	-99.02	Peak	108	160	P
5	2483.50	-2.01	41.99	39.98	54.00	-14.02	Average	108	160	P
6	2483.50	-2.01	54.75	52.74	74.00	-21.26	Peak	108	160	P
7	4874.00	6.23	37.37	43.60	54.00	-10.40	Average	1181	160	P
8	4874.00	6.23	50.42	56.65	74.00	-17.35	Peak	1181	160	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH11 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

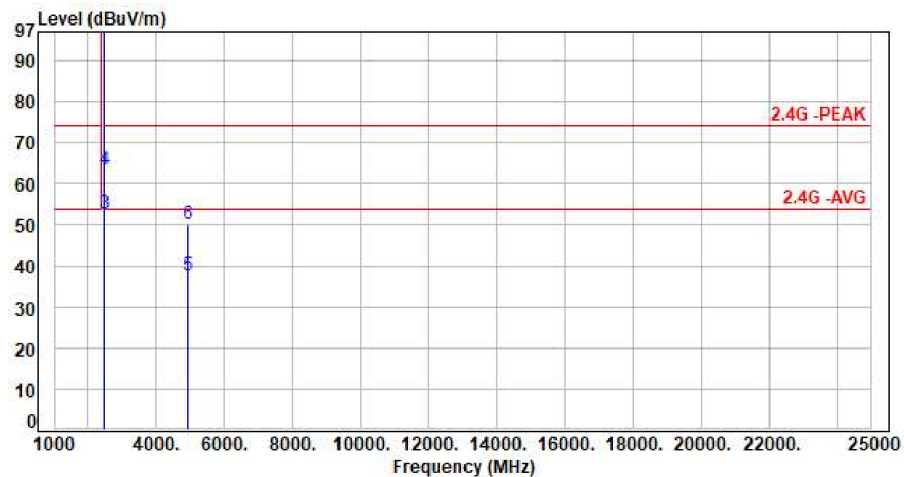

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.04	98.63	96.59	200.00	-103.41	Average	298	101	P
2	2462.00	-2.04	108.27	106.23	200.00	-93.77	Peak	298	101	P
3	2483.50	-2.01	54.67	52.66	54.00	-1.34	Average	298	101	P
4	2483.50	-2.01	65.62	63.61	74.00	-10.39	Peak	298	101	P
5	4924.00	6.40	31.18	37.58	54.00	-16.42	Average	100	360	P
6	4924.00	6.40	43.92	50.32	74.00	-23.68	Peak	100	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH11 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

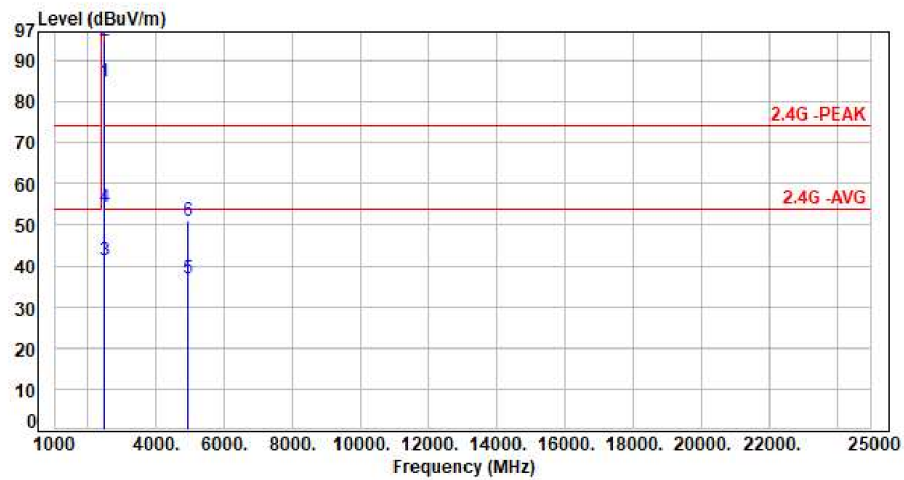

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.04	86.84	84.80	200.00	-115.20	Average	100	301	P
2	2462.00	-2.04	96.69	94.65	200.00	-105.35	Peak	100	301	P
3	2483.50	-2.01	43.34	41.33	54.00	-12.67	Average	100	301	P
4	2483.50	-2.01	56.31	54.30	74.00	-19.70	Peak	100	301	P
5	4924.00	6.40	30.58	36.98	54.00	-17.02	Average	100	250	P
6	4924.00	6.40	44.32	50.72	74.00	-23.28	Peak	100	250	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO ANT

Test Mode : 2TX 11n20 CH01 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

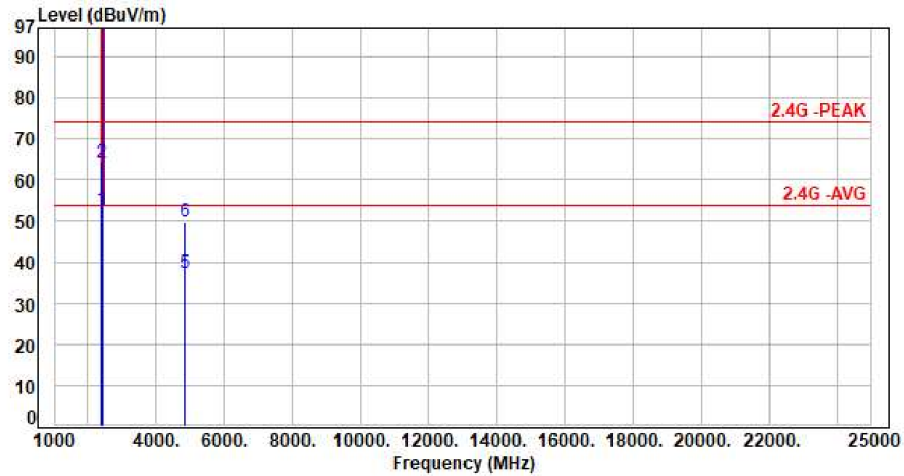

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	54.94	52.61	54.00	-1.39	Average	150	77	P
2	2390.00	-2.33	66.52	64.19	74.00	-9.81	Peak	150	77	P
3	2412.00	-2.29	102.87	100.58	200.00	-99.42	Average	150	77	P
4	2412.00	-2.29	112.03	109.74	200.00	-90.26	Peak	150	77	P
5	4824.00	6.08	31.06	37.14	54.00	-16.86	Average	100	71	P
6	4824.00	6.08	43.58	49.66	74.00	-24.34	Peak	100	71	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11n20 CH01 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

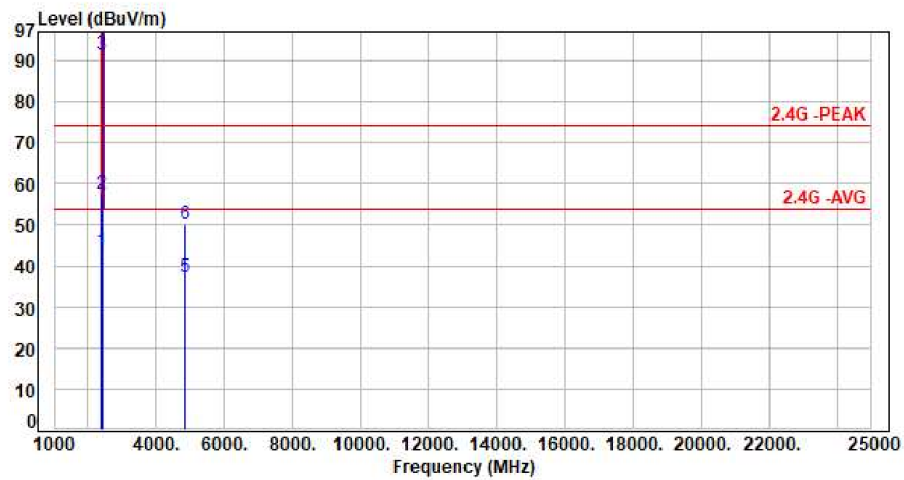

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	45.87	43.54	54.00	-10.46	Average	318	243	P
2	2390.00	-2.33	59.76	57.43	74.00	-16.57	Peak	318	243	P
3	2412.00	-2.29	93.81	91.52	200.00	-108.48	Average	318	243	P
4	2412.00	-2.29	103.14	100.85	200.00	-99.15	Peak	318	243	P
5	4824.00	6.08	31.26	37.34	54.00	-16.66	Average	100	190	P
6	4824.00	6.08	44.15	50.23	74.00	-23.77	Peak	100	190	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11n20 CH06 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

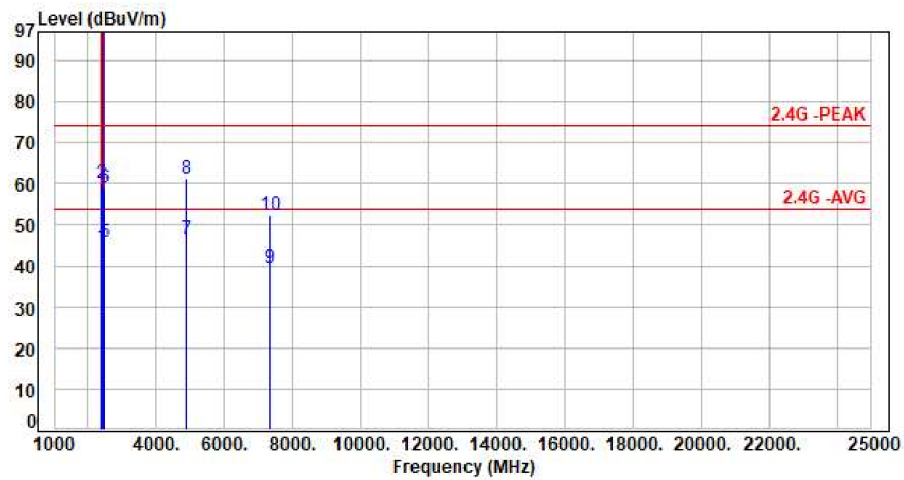

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	46.96	44.63	54.00	-9.37	Average	100	59	P
2	2390.00	-2.33	62.38	60.05	74.00	-13.95	Peak	100	59	P
3	2437.00	-2.17	109.23	107.06	200.00	-92.94	Average	100	59	P
4	2437.00	-2.17	119.17	117.00	200.00	-83.00	Peak	100	59	P
5	2483.50	-2.01	47.91	45.90	54.00	-8.10	Average	100	59	P
6	2483.50	-2.01	61.16	59.15	74.00	-14.85	Peak	100	59	P
7	4874.00	6.23	40.42	46.65	54.00	-7.35	Average	216	45	P
8	4874.00	6.23	55.08	61.31	74.00	-12.69	Peak	216	45	P
9	7311.00	11.33	28.24	39.57	54.00	-14.43	Average	100	184	P
10	7311.00	11.33	41.17	52.50	74.00	-21.50	Peak	100	184	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11n20 CH06 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

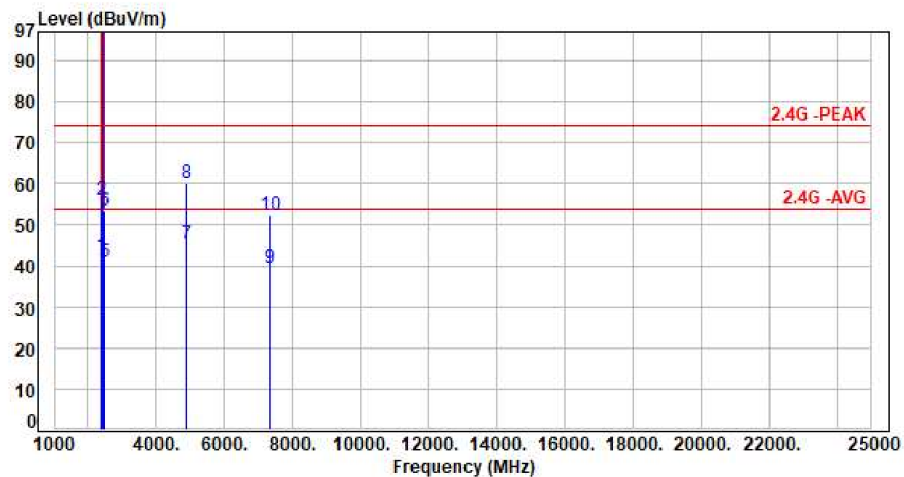


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	44.87	42.54	54.00	-11.46	Average	100	239	P
2	2390.00	-2.33	58.47	56.14	74.00	-17.86	Peak	100	239	P
3	2437.00	-2.17	100.22	98.05	200.00	-101.95	Average	100	239	P
4	2437.00	-2.17	110.44	108.27	200.00	-91.73	Peak	100	239	P
5	2483.50	-2.01	42.87	40.86	54.00	-13.14	Average	100	239	P
6	2483.50	-2.01	55.55	53.54	74.00	-20.46	Peak	100	239	P
7	4874.00	6.23	39.10	45.33	54.00	-8.67	Average	100	190	P
8	4874.00	6.23	53.77	60.00	74.00	-14.00	Peak	100	190	P
9	7311.00	11.33	28.29	39.62	54.00	-14.38	Average	100	185	P
10	7311.00	11.33	41.03	52.36	74.00	-21.64	Peak	100	185	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11n20 CH11 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

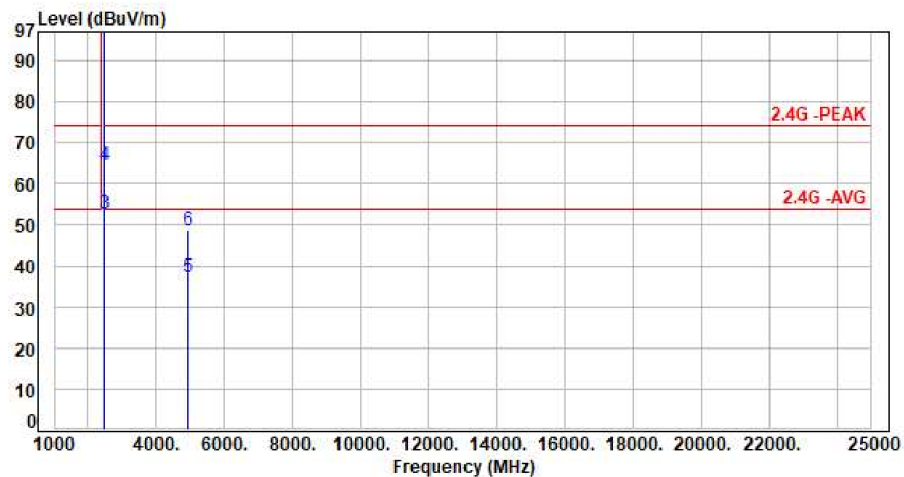

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.04	104.51	102.47	200.00	-97.53	Average	128	80	P
2	2462.00	-2.04	113.69	111.65	200.00	-88.35	Peak	128	80	P
3	2483.50	-2.01	54.60	52.59	54.00	-1.41	Average	128	80	P
4	2483.50	-2.01	66.67	64.66	74.00	-9.34	Peak	128	80	P
5	4924.00	6.40	30.71	37.11	54.00	-16.89	Average	100	40	P
6	4924.00	6.40	42.42	48.82	74.00	-25.18	Peak	100	40	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11n20 CH11 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

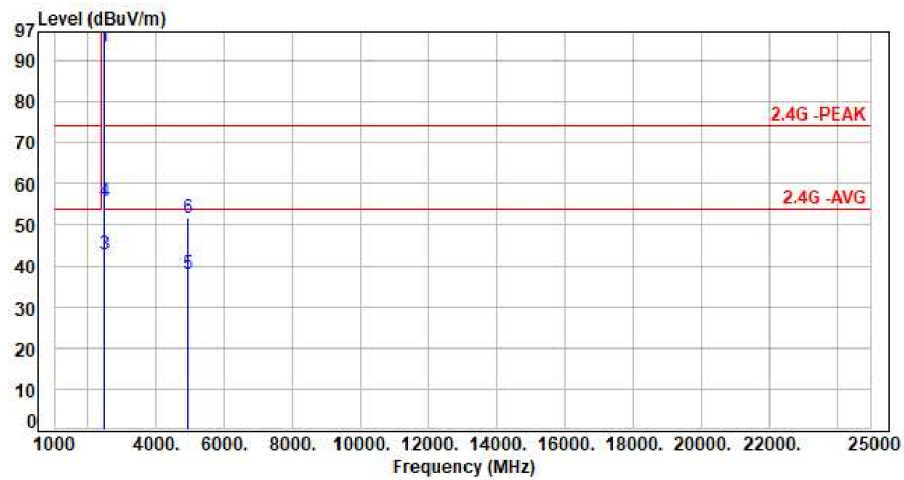

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.04	95.49	93.45	200.00	-106.55	Average	100	240	P
2	2462.00	-2.04	105.28	103.24	200.00	-96.76	Peak	100	240	P
3	2483.50	-2.01	44.68	42.67	54.00	-11.33	Average	100	240	P
4	2483.50	-2.01	57.71	55.70	74.00	-18.30	Peak	100	240	P
5	4924.00	6.40	31.41	37.81	54.00	-16.19	Average	100	196	P
6	4924.00	6.40	45.42	51.82	74.00	-22.18	Peak	100	196	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor