



## **FCC EVALUATION REPORT FOR CERTIFICATION**

**Manufacturer : DONGYANG Electronics Co., Ltd.**  
**760, Daemang-Re, Goa-Eub, Gumi-City**  
**Gyeongsangbuk-Do, Korea**  
**Attn : Mr. Ho-Seok Gwak, QA Manager**

**Date of Issue : February 18, 2005**  
**Test Report S/N : GETEC-E3-05-016**  
**Test Site : Gumi College EMC Center**

**FCC ID.**

**RCDXM120MCB**

**APPLICANT**

**DONGYANG Electronics Co., Ltd.**

**Rule Part(s) : FCC Part 15 Subpart C**  
**Equipment Class : Lower Power Communication Device Transmitter (DXX)**  
**EUT Type : FM Transmitter (built-in 12" Motorized combo)**  
**Model No. : XM-120MCB**

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,

**Jea-Woon Choi, Chief Engineer**  
**GUMI College EMC center**

**Tae-Sig Park, Technical Manager**  
**GUMI College EMC center**

## CONTENTS

1. SCOPE.....	3
2. INTRODUCTION .....	4
3. TEST CONDITIONS & EUT INFORMATION.....	5
3.1 DESCRIPTION OF EUT.....	5
3.2 SUPPORT EQUIPMENT USED .....	5
3.3 CABLE(S) .....	5
4. ANTENNA REQUIREMENT-§15.203.....	6
4.1 DESCRIPTION OF ANTENNA.....	6
5. DESCRIPTION OF TESTS.....	7
5.1 RADIATED EMISSION .....	7
5.2 CONDUCTED EMISSION .....	7
6. RADIATED EMISSION TEST .....	8
6.1 OPERATING ENVIRONMENT .....	8
6.2 TEST SET-UP.....	8
6.3 MEASUREMENT UNCERTAINTY .....	8
6.4 LIMIT .....	9
6.5 TEST EQUIPMENT USED .....	9
6.6 RADIATED EMISSION TEST DATA FOR THE FUNDAMENTAL FREQUENCY .....	10
6.7 RADIATED EMISSION TEST DATA FOR THE SPURIOUS FREQUENCY.....	10
7. OCCUPIED BANDWIDTH MEASUREMENT.....	12
7.1 OPERATING ENVIRONMENT .....	12
7.2 TEST SET-UP.....	12
7.3 LIMIT .....	12
7.4 TEST EQUIPMENT USED .....	12
7.5 TEST RESULT OF OCCUPIED BANDWIDTH.....	13
8. RECOMMENDATION & CONCLUSION.....	14
APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – TEST PLOTS OF OCCUPIED BANDWIDTH	
APPENDIX C – BLOCK DIAGRAM	
APPENDIX D – ID SAMPLE LABEL & LOCATION	
APPENDIX E – SCHEMATIC DIAGRAM	
APPENDIX F – TEST SET-UP PHOTOGRAPHS	
APPENDIX G – EXTERNAL PHOTOGRAPHS	
APPENDIX H – INTERNAL PHOTOGRAPHS	
APPENDIX I – USER’S MANUAL	
APPENDIX J – OPERATIONAL DESCRIPTION	

## 1. Scope

*Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.*

<b>Responsible Party</b>	<b>: DONGYANG Electronics Co., Ltd.</b>
<b>Contact Person</b>	<b>: Mr. Ho-Seok Gwak, Q.A Manager</b>
<b>Manufacturer</b>	<b>: DONGYANG Electronics Co., Ltd.</b> <b>760, Daemang-re, Goa-eub, Gumi-city, Gyeongsangbuk-do, Korea</b>

- **Equipment Class** Lower Power Communication Device Transmitter (DXX)
- **EUT Type** FM-Transmitter (Built in 12" Motorized combo)
- **Power Source** DC 12V
- **Model No.** XM-120MCB
- **Rule Part(s)** FCC Part 15, Subpart C, Section 15.239
- **Test Procedure(s)** ANSI C63.4 (1992)
- **Dates of Test** February 14 ~ 15, 2005
- **Place of Test** Gumi College EMC Center
- **Test Report No.** GETEC-E3-05-016

## 2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ASNI C63.4-1992) was used in determining radiated and conducted emissions emanating from **DONGYANG Electronics Co., Ltd. FM Transmitter (built-in 12" Motorized combo), FCC ID.: RCDXM120MCB**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-Dong, Gumi-City, Gyeongsangbuk-Do, Korea

This test site is one of the highest point of Gumi 1 college at about 200 kilometers away from Seoul city and 40 kilometers away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 on October 19, 1992

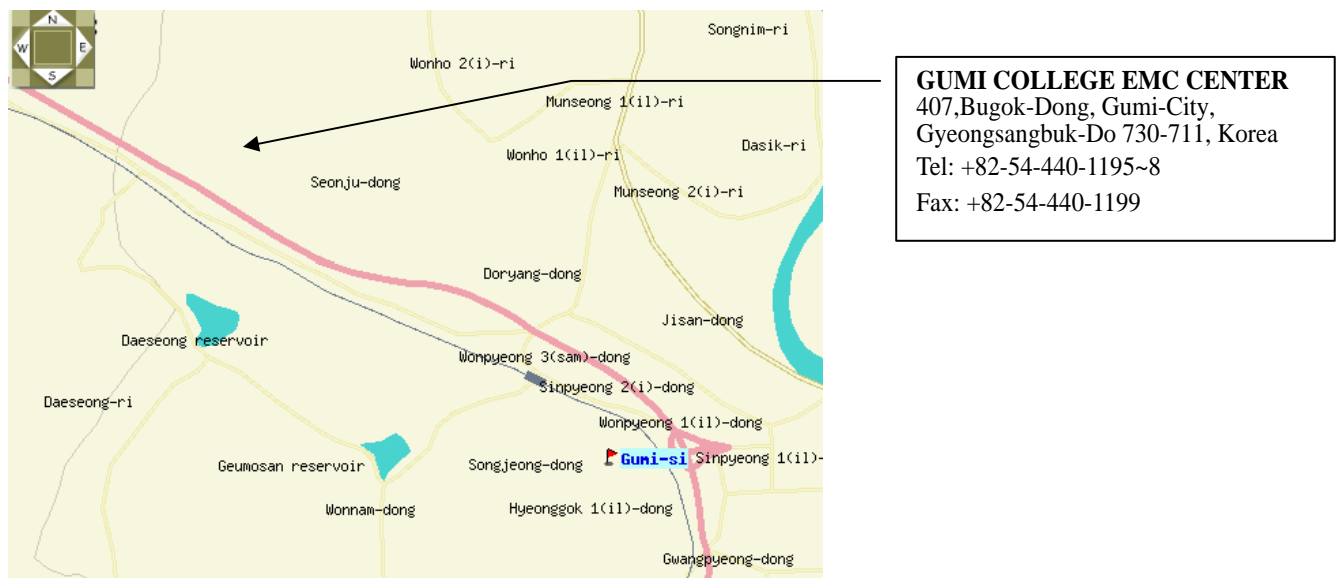


Fig 1. The map above shows the Gumi College in vicinity area.

### 3. Test Conditions & EUT Information

#### 3.1 Description of EUT

The Equipment Under Test (EUT) is the **DONGYANG Electronics Co., Ltd.**

**FM Transmitter (built-in 12" Motorized combo), Model No.: XM-120MCB**

It can transmit audio signal of AV equipments (DVD or TV) to FM Radio receiver in a car.

This EUT include AV equipments is utilized in a car exclusively.

<b>TX Frequency Range</b>	FM 88.2MHz – 89.2 MHz
<b>TX Frequency Step</b>	200 kHz
<b>Power Supply</b>	DC 12V
<b>Display Type</b>	<b>LTA120W01</b> (Samsung Inc.)
<b>DVD Loader</b>	<b>DSS-826</b> (DVS KOREA Co., Ltd.)
<b>Tuner</b>	<b>PTI-5NF15S</b> (PARTSNIC Co., Ltd.)

#### 3.2 Support Equipment used

<b>DC power supply</b>	Agilent 6544A S/N: MY40000116 FCC ID: DoC
<b>TV Signal Generator</b>	FLUKE 54200 S/N: 831011 FCC ID: DoC
<b>DVD Player</b>	Pioneer DV-525 S/N: UEYDoR390LL FCC ID: DoC

#### 3.3 Cable(s)

The EUT was tested with following cables

<b>Power cable</b>	2.5 m	Connected to the DC power supply
<b>AV output cable</b>	1.5m	Open
<b>Coaxial ANT cable</b>	10.0m	Connected to the EUT and TV signal generator

#### **4. Antenna Requirement-§15.203**

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

##### **4.1 Description of Antenna**

The **DONGYANG Electronics Co., Ltd. FM Transmitter (built-in 12" Motorized combo)** comply with the requirement of §15.203 with a built-in looped antenna permanently attached to the transmitter.

## 5. Description of tests

### 5.1 Radiated Emission

Preliminary measurements were conducted 3m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

The spectrum was scanned from 30 to 1000MHz using biconical log antenna (Schwarzbeck, VULB9160).

Final measurements were made outdoors at 3 m-test range using biconical antenna (R&S, HK116) and log-periodic antenna (R&S, HL223).

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. (ESCS30)

The detector function was set to Average mode and CISPR quasi-peak mode, the bandwidth of the receiver was set to 120KHz.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non-metallic 1.0×1.5 meter table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission. Each EME reported was calibrated using the R/S signal generator

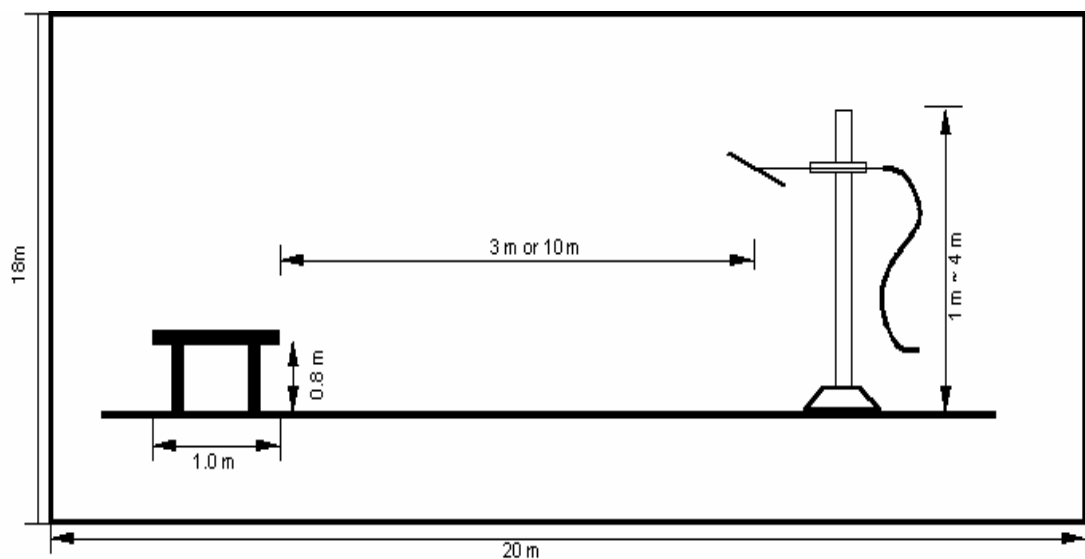


Fig 2. Dimensions of Open Site Test Area

### 5.2 Conducted Emission

This equipment is supplied DC power from the car battery. Therefore, no conducted limits apply for this equipment.

## 6. Radiated emission test

### 6.1 Operating environment

Temperature : -1 °C  
Relative humidity : 30 %

### 6.2 Test set-up

A preliminary scan with peak mode was performed in the semi anechoic chamber using the procedure in ANSI C63.4/1992 13.1.4.1 and found frequency for open area test site.

The formal radiated emission was measured at 3m-distance open area test site.

The EUT was placed on a non-conductive turntable approximately 0.8 meters above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

### 6.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

Contribution	Probability Distribution	Uncertainty (dB)			
		Biconical Ant.		Log-periodic Ant.	
		3m	10m	3m	10m
Ambient signal					
Antenna factor calibration	Normal (k=2)	1.00	1.00	1.00	1.00
Receiver specification	Rectangular	1.00	1.00	1.00	1.00
Antenna directivity	Rectangular	0.50	0.00	3.00	0.50
Antenna phase center variation	Rectangular	0.00	0.00	1.00	0.20
Antenna factor frequency interpolation	Rectangular	0.25	0.25	0.25	0.25
Measure distance variation	Rectangular	0.60	0.40	0.60	0.40
Site imperfections	Rectangular	2.83	-2.94	-1.96	-2.96
Mismatch					
Receiver VRC : $\Gamma_l = 0.09$	U-shaped	0.33	0.33	0.33	0.33
Antenna VRC : $\Gamma_g = 0.43$ (Bi) 0.23 (Lp)		-0.35	-0.35	-0.18	-0.18
Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$					
System repeatability	Std Deviation	0.07	0.05	0.06	0.10
Cable loss calibration	Normal (k=2)	0.20	0.20	0.20	0.20
Combined standard uncertainty $U_c(y)$	Normal	1.88	1.90	2.33	1.94
		-1.88	-1.90	-2.32	-1.93
Extended uncertainty U	Normal (k=2)	3.77	3.80	4.65	3.87
		-3.77	-3.80	-4.63	-3.85



**6.4 Limit**

Measurement Items Frequency (MHz)	Fundamental Frequency (Within the permitted 200kHz band) Average detector mode / dBuV/m (3m)	Spurious Frequency(Outside of the specified 200kHz) & Others Quasi-peak detector mode / dBuV/m(3m)
30 – 88	48	40
88 – 216		43.5
216 – 960		46
> 960		54

**6.5 Test equipment used**

Model Number	Manufacturer	Description	Serial Number	Calibrated Date
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 17. 2004
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 17. 2004
■ - HK116	Rohde & Schwarz	Biconical antenna	836239/007	12. 03. 2004
■ - HL223	Rohde & Schwarz	Log-periodic antenna	835998/004	11. 30. 2004
■ - HD100	HD GmbH	Position Controller	100/692/01	NCR
■ - DS415S	HD GmbH	Turntable	415/657/01	NCR
■ - MA240	HD GmbH	Antenna Mast	240/565/01	NCR

### 6.6 Radiated emission test data for the fundamental frequency (Within permitted 200kHz band)

- Test Date : February 14, 2005
- Reference standard : Part 15 Subpart C, Sec. 15.239(b)
- Operating condition : Transmit audio signal of DVD play mode
- Detector mode : Average detector mode
- Power Source : DC 12V

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
88.2	32.48	H	9.01	2.56	44.1	48.0	3.9
89.2	32.51	H	9.09	2.58	44.2	48.0	3.8

Note: "H": Horizontal, "V": Vertical

Remark: Measurements were performed 1 near top and 1 near bottom location in the frequency range operation according to ANSI C63.4/1992. Sec. 13.1.1

### 6.7 Radiated emission test data for the spurious frequency (Outside of the specified 200kHz band)

- Test Date : February 14, 2005
- Reference standard : Part 15 Subpart C, Sec. 15.239(c)
- Operating condition : Transmit audio signal
- Detector mode : CISPR Quasi-peak detector mode (6dB Bandwidth: 120kHz)
- Power Source : DC 12V

#### 6.7.1. Test frequency for 88.2MHz Harmonics

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
176.0	19.07	H	13.15	3.58	35.80	43.5	7.7
264.0	19.14	H	16.05	4.67	39.86	46.0	6.1
352.0	5.39	H	14.43	5.62	25.44	46.0	20.6
440.0	11.58	H	16.41	6.30	34.29	46.0	11.7
528.0	6.12	H	17.39	6.82	30.34	46.0	15.7
616.0	7.76	H	19.36	7.44	34.56	46.0	11.4
704.0	0.85	H	20.29	7.92	29.07	46.0	16.9
792.0	-2.85	H	21.21	8.45	26.81	46.0	19.2
880.0	5.22	H	21.94	8.98	36.14	46.0	9.9
968.0	2.47	H	23.17	9.58	35.22	54.0	18.8

Note: "H": Horizontal, "V": Vertical

## 6.7.2. Test frequency for 89.2 MHz Harmonics

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
178.4	15.75	13.19	13.19	3.59	32.5	43.5	11.0
267.6	18.83	16.24	16.24	4.71	39.8	46.0	6.2
356.8	6.90	14.56	14.56	5.67	27.1	46.0	18.9
446.0	8.65	16.51	16.51	6.33	31.5	46.0	14.5
535.2	7.00	17.32	17.32	6.88	31.2	46.0	14.8
624.4	7.36	19.35	19.35	7.46	34.2	46.0	11.8
713.6	0.37	20.54	20.54	7.98	28.9	46.0	17.1
802.8	0.32	21.17	21.17	8.52	30.0	46.0	16.0
892.0	1.80	22.17	22.17	9.05	33.0	46.0	13.0
981.2	-1.32	23.37	23.37	9.67	31.7	54.0	22.3

Note: "H": Horizontal, "V": Vertical

## 6.7.3. Test of the other frequency

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
45.33	23.84	V	9.75	1.91	35.5	40.0	4.5
53.03	13.11	V	9.02	2.03	24.2	40.0	15.8
67.98	16.95	V	8.42	2.18	27.6	40.0	12.5
165.88	20.72	H	12.99	3.53	37.2	43.5	6.3
186.65	22.57	H	13.33	3.70	39.6	43.5	3.9
226.69	21.77	H	15.11	4.22	41.1	46.0	4.9
313.35	22.70	H	13.30	5.23	41.2	46.0	4.8
317.37	20.33	H	13.42	5.27	39.0	46.0	7.0
350.15	19.77	H	14.37	5.60	39.7	46.0	6.3
404.91	12.45	H	15.83	6.12	34.4	46.0	11.6
408.94	19.18	H	15.88	6.14	41.2	46.0	4.8

Note: "H": Horizontal, "V": Vertical

## 7. Occupied Bandwidth Measurement

### 7.1 Operating environment

Temperature : 22 °C  
Relative humidity : 49 %

### 7.2 Test set-up

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The plot is taken at 20kHz/division frequency span, 10kHz resolution bandwidth and 5dB/division logarithmic display from an E7401A spectrum analyzer.

### 7.3 Limit

- - Within 200kHz wide centered on the operating frequency
- - The 200kHz band shall lie wholly within the frequency range of 88-108MHz

### 7.4 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Calibrated Date
■ -	E7401A	Agilent	Spectrum Analyzer	USA11101461	12. 17. 2004
■ -	HK116	Rohde & Schwarz	Biconical antenna	836239/007	12. 03. 2004

**7.5 Test result of occupied bandwidth**

- Test Date : February 15, 2005
- Reference standard : Part 15 Subpart C, Sec. 15.239(a)
- Operating condition : Transmit audio signal
- Spectrum resolution bandwidth(6dB) : 30 kHz
- Power Source : DC 12V

Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Result
88.2	82.16	200	Pass
89.2	81.04	200	Pass

Reference Level: The level of the highest amplitude signal observed from the transmitter at the fundamental frequency

Occupied Bandwidth: The bandwidth at -20dB with respect to the reference level.

## 8. Recommendation & conclusion

The data collected shows that the Gumi College EMC Center.

**DONGYANG Electronics Co., Ltd. FM Transmitter (built-in 12" Motorized combo) Model No.: XM-120MCB**  
was complies with §15.239 of the FCC Rules.