



Nemko

Nemko USA, Inc.
11696 Sorrento Valley Rd., Suite F
San Diego, CA 92121-1024
Phone (858) 755-5525 Fax (858) 452-1810



PART 15.249, SUBPART C

DECLARATION OF CONFORMANCE PROCEDURES
TEST REPORT

For The **IP Link 1000**

Model: **IP Link 1000**

PREPARED FOR:

Helicomm
1947 Camino Vida Roble, Suite 109
Carlsbad, Ca 92008

PREPARED ON MAY 28,2004

REPORT NUMBER 2004 024209 FCC – R1

PROJECT NUMBER: 2004 024209 FCC

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	2 of 37

DOCUMENT HISTORY

REVISION	DATE	COMMENTS
-	May 28th, 2004	Prepared By: Chip Fleury
-	May 28 th , 2004	Initial Release: Chip Fleury

NOTE: Nemko USA, Inc. hereby makes the following statements so as to conform to Chapter 10 (Test Reports) Requirements of ANSI C63.4 (1992) "Methods and Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz":

- The unit described in this report was received at Nemko USA, Inc.'s facilities on March 11, 2004. Testing was performed on the unit described in this report on March 11, 2004 to March 16, 2004.
- The Test Results reported herein apply only to the Unit actually tested, and to substantially identical Units.
- This report does not imply the endorsement of the Federal Communications Commission (FCC), NVLAP or any other government agency.

This Report is the property of Nemko USA, Inc., and shall not be reproduced, except in full, without prior written approval of Nemko USA, Inc. However, all ownership rights are hereby returned unconditionally to HME, and approval is hereby granted to HME and its employees and agents to reproduce all or part of this report for any legitimate business purpose without further reference to Nemko USA, Inc.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	3 of 37

TABLE OF CONTENTS

DOCUMENT HISTORY	2
CERTIFICATION	5
1. ADMINISTRATIVE DATA AND TEST SUMMARY	6
1.1.ADMINISTRATIVE DATA.....	6
1.2.TEST SUMMARY.....	6
2. SYSTEM CONFIGURATION	7
2.1.SYSTEM COMPONENTS AND POWER CABLES	7
2.2.DEVICE INTERCONNECTION AND I/O CABLES	7
2.3.DESIGN MODIFICATIONS FOR COMPLIANCE	8
2.4.DESIGN MODIFICATIONS FOR COMPLIANCE	8
3. DESCRIPTION OF TEST SITE AND EQUIPMENT	9
3.1.DESCRIPTION OF TEST SITE.....	9
4. DESCRIPTION OF TESTING METHODS	10
4.1.INTRODUCTION	10
4.2.CONFIGURATION AND METHODS OF MEASUREMENTS FOR CONDUCTED EMISSIONS.....	12
4.3.CONFIGURATION AND METHODS OF MEASUREMENTS FOR FREQUENCY IDENTIFICATION.....	14
4.4.CONFIGURATION AND METHODS OF MEASUREMENTS FOR RADIATED EMISSIONS	16
4.5.SPREAD SPECTRUM DEVICES	18
5. TEST RESULTS	19
5.1.CONDUCTED EMISSIONS TEST DATA	19
5.2.RADIATED EMISSIONS TEST DATA	21
5.3.CFR 47 PART 15C §15.249 TEST RESULTS.....	22
TEST SETUP DIAGRAMS	
Figure 1. General EUT Test Setup Diagram.....	11
Figure 2. Conducted Emissions Test Setup Diagram.....	13
Figure 3. Frequency ID of Radiated Emissions Test Setup Diagram.....	15
Figure 4. Radiated Emissions Test Setup Diagram.....	17

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	4 of 37

TEST CONFIGURATION PHOTOGRAPHS

Photograph 1. Conducted Emissions Test Configuration	24
Photograph 2. Radiated Emissions Test Configuration	25

APPENDICES

A. CONDUCTED & RADIATED EMISSIONS MEASUREMENT UNCERTAINTIES	26
B. NEMKO USA, INC.'S TEST EQUIPMENT & FACILITIES CALIBRATION PROGRAM.....	28
C. FCC AND NVLAP ACCREDITATION	30

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	5 of 37

CERTIFICATION

Nemko USA, Inc., an independent Electromagnetic Compatibility (EMC) Test Laboratory, produced this Test Report and performed the Radio Frequency Interference (RFI) testing and data evaluation contained herein.

Nemko USA, Inc.'s measurement facility is currently registered with the United States Federal Communications Commission (FCC) in accordance with the provisions of 47 United States Code (CFR) Part 2, Subpart I, Section 2.948(a). A current description of Nemko USA, Inc.'s measurement facility is on file with the FCC. Nemko USA Inc. has additionally satisfied the FCC that it complies with the requirements set forth in 47 CFR Part 2, Subpart I, Section 2.948(d) regarding the accreditation of EMC laboratories.

The RFI testing, test data collection and test data evaluation were accomplished in accordance with the ANSI C63.4-1992 Standard, and in accordance with the applicable sections of the FCC rules (47 CFR Parts 2 and 15). The testing was also accomplished in accordance with Industry Canada's ICES-003 standard for unintentional radiating device per EMCAB-3, Issue 3 (May 1998). The administrative summary of this test report provides a description of the test sample.

I hereby certify that the test data, test data evaluation, and equipment configurations used to compile this test report are a true and accurate representation of the test sample's radio frequency interference characteristics as of the test date(s), and, for the design of the test sample.



Ricky L. Hill

Manager of EMC Operations

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	6 of 37

1. ADMINISTRATIVE DATA AND TEST SUMMARY

1.1. Administrative Data

CLIENT: Helicomm
1947 Camino Vida Roble, Suite 109
Carlsbad, Ca 92008
760-918-0856
760-918-0338- fax

CONTACT: Leon Gateno

DATE (S) OF TEST: April 21, 2004

EQUIPMENT UNDER TEST (EUT): IP LINK
Model IP LINK 1000

Condition Upon Receipt Suitable for Test

TEST SPECIFICATION: FCC, Part 15.249, Subpart C, Output power and spurious emission. Class II permissive change adding additional antenna.

1.2. Test Summary

<i>Specification</i>	<i>Frequency Range</i>	<i>Compliance Status</i>
FCC, CFR 47, Section 15.207	0.15 MHz - 30.00 MHz	N/A
FCC, CFR 47, Section 15.209	30 MHz – 10 th Harmonic	PASS
FCC CFR 47, §15.249 Plus Bandedge	902 – 928 MHz	PASS

Testing was started at 30 MHz as there are no RF signals generated below this frequency.

Test Supervisor: Rocky Hill
R. L. Hill, Nemko USA, Inc.

Refer to the test results section for further details.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	7 of 37

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	8 of 37

2.SYSTEM CONFIGURATION

2.1. System Components and Power Cables

DEVICE	MANUFACTURER MODEL # SERIAL #	POWER CABLE
EUT - Wireless Base Station	Helicomm IP Link 1000 15E00778	Battery operated no Cable
EUT Power Supply	N/A	N/A
Support Equipment	N/A	N/A

2.2. Device Interconnection and I/O Cables

CONNECTION	I/O CABLE
N/A	N/A

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	9 of 37

2.3. Test Configuration

The IP LINK 1000 was set up to transmit at high power in 907.6, 915, and 917.7 MHz, representing transmission at low, mid and high frequencies. Test of each fundamental and all measurable harmonics was then performed during this evaluation. The intent of this testing was to show that the already granted device would still pass with an alternative antenna. Therefore testing is only for a class II permissive change.

The Wireless transmitter has remained the same so this testing is to confirm continued compliance with FCC part 15.249 spurious emissions and FCC part 209. Previous report is included in package.

Design Modifications for Compliance

Device: Wireless Transmitter

Model: IP LINK 1000

The following design modifications were made to the EUT during testing.

No design modifications were made to the EUT during testing.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	10 of 37

3. DESCRIPTION OF TEST SITE AND EQUIPMENT

3.1. Description of Test Site

The test site is located at 11696 Sorrento Valley Road, Suite F, San Diego, CA 92121. The site is physically located 18 miles Northwest of downtown San Diego. The general area is a valley 1.5 miles east of the Pacific Ocean. This particular part of the valley tends to minimize ambient levels, i.e. radio and TV broadcast stations and land mobile communications. The three and ten-meter Open Area Test Site (OATS) is located behind the office/lab building. It conforms to the normalized site attenuation limits and construction specifications as set in the EN 55022 (1987), CISPR 16 and 22 (1985) and ANSI C63.4-1992 documents. The OATS normalized site attenuation characteristics are verified for compliance every year.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	11 of 37

4. DESCRIPTION OF TESTING METHODS

4.1. Introduction

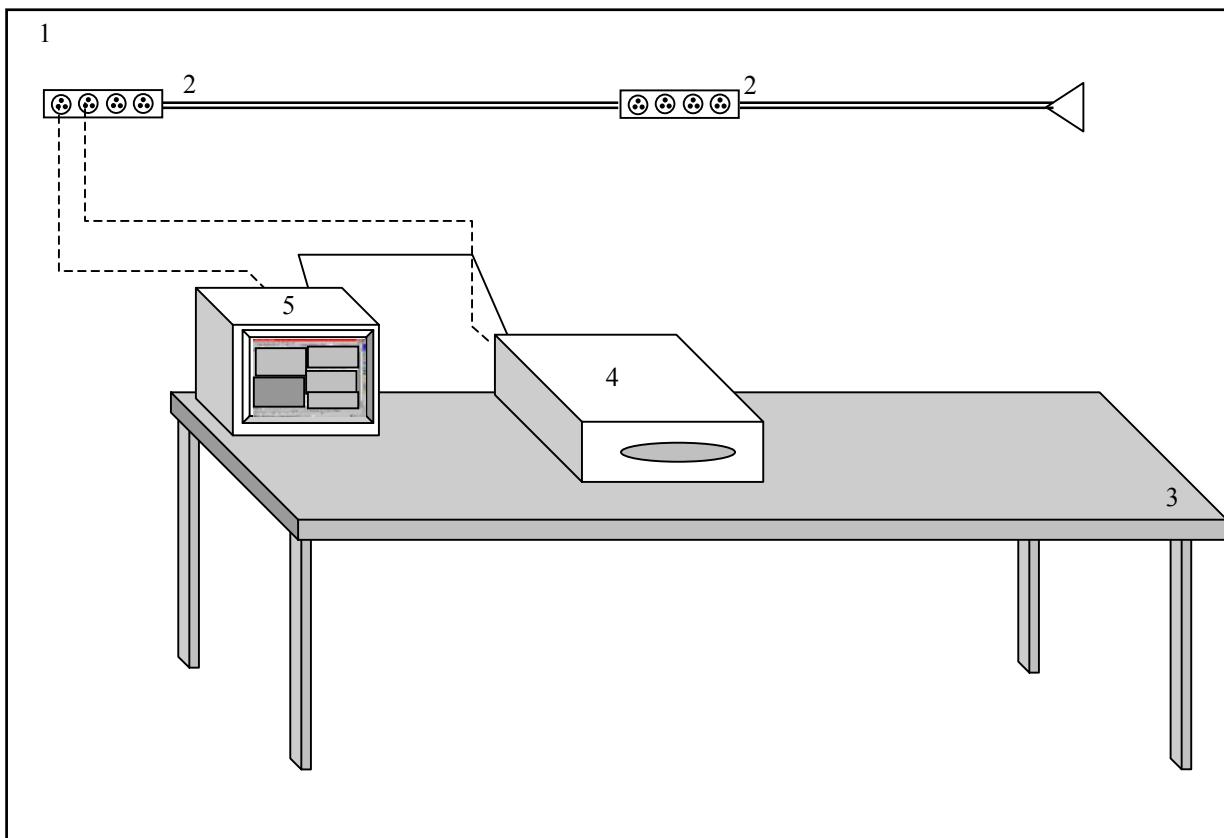
As required in 47 CFR, Parts 2 and 15, the methods employed to test the radiated and conducted emissions (as applicable) of the EUT are those contained within the American National Standards Institute (ANSI) document C63.4-1992, titled "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz." All applicable FCC Rule Sections that provide further guidance for performance of such testing are also observed.

For General Test Configuration please refer to Figure 1 on the following page.

Digital devices sold in Canada are required to comply with the Interference Causing Equipment Standard for Digital Apparatus, ICES-003. These test methods and limits are specified in the Canadian Standards Association's (CSA) Standard C108.8-M1983 (1-1-94 version) and are "essentially equivalent" with FCC, Part 15 and CISPR 22 (EN55022) rules for unintentional radiators per EMCAB-3, Issue 3 (May 1998). No further testing is required for compliance to ICES-003.

Nemko USA, Inc.	11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810		
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC - R1	12 of 37

Figure 1. General EUT Test Setup Diagram



NOT TO SCALE

CONFIGURATION LEGEND

1. Test Laboratory
2. AC Power for Peripheral Devices (120V, 60 cycles, single phase)
3. Non-Conducting tables 80 cm above ground plane
4. EUT: Wireless Base Station

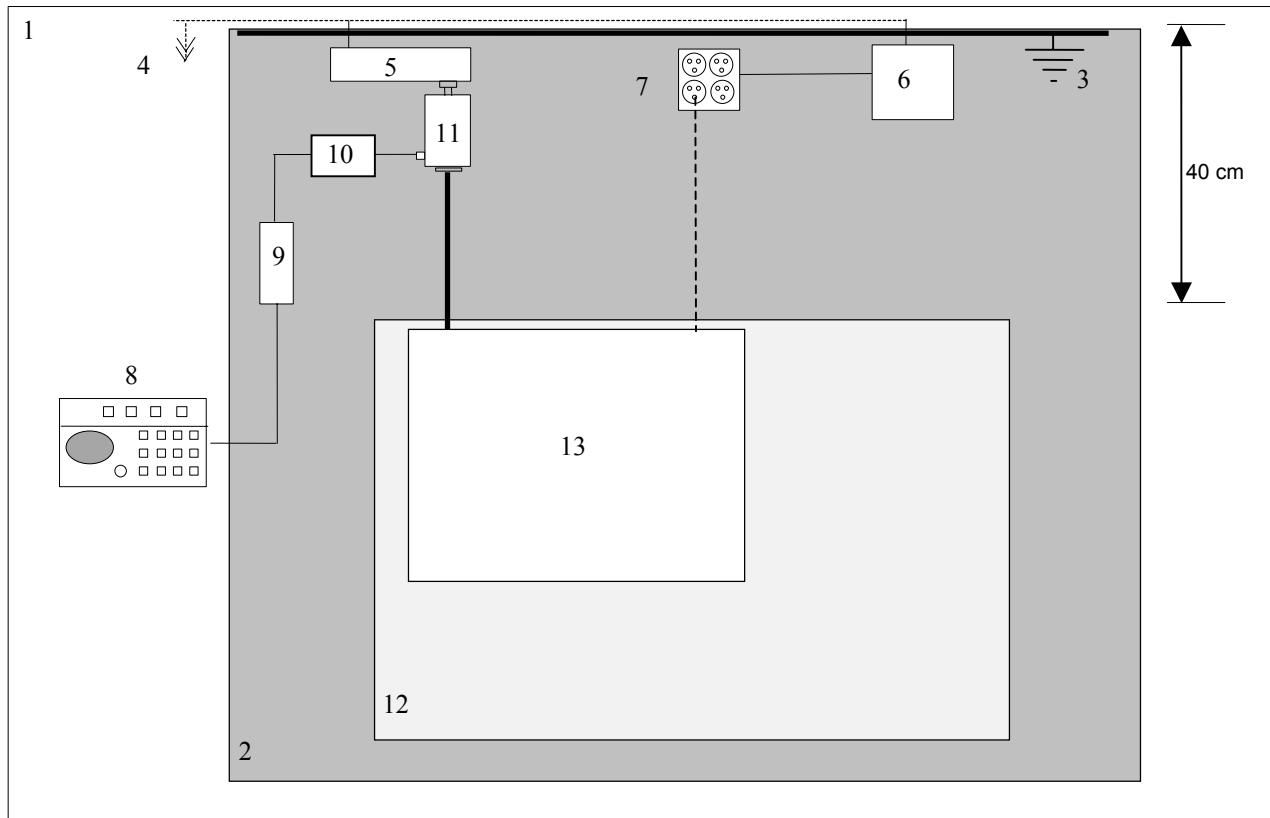
Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	13 of 37

4.2. Configuration and Methods of Measurements for Conducted Emissions

Section 7 of ANSI C63.4 determines the general configuration of the EUT and associated equipment, as well as the test platform for conducted emissions testing. Tabletop devices are placed on a non-conducting surface 80 centimeters above the ground plane floor and 40 centimeters from the ground plane wall. The EUT and associated system are configured to operate continuously, representing a “normally operating” mode. The EUT is powered via a Line Impedance Stabilization Network (LISN). The emissions are recorded using the required bandwidth of 9 kHz in the quasi-peak mode. The average amplitude is also observed employing a 10 kHz bandwidth to determine the presence of broadband RFI. When such interference is caused by broadband sources (as defined by the FCC and ANSI Rules), the deviation guidelines contained in Section 11.3.1 of ANSI C63.4 are employed, which allows a correction factor of 13 dB to be subtracted from the quasi-peak reading. The emission levels are then compared to the applicable FCC limits to determine compliance.

For Conducted Emissions Test Configuration please refer to Figure 2 on the following page.

DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC - R1	14 of 37

Figure 2. Conducted Emissions Test Setup Diagram*NOT TO SCALE***CONFIGURATION LEGEND**

1. Test Laboratory (6 X 6 meters)
2. Ground Plane (15 square meters)
3. Vertical Conducting Wall (Grounded through Ground Plane via 10' ground rod)
4. AC Power for Devices
5. Power Line Filter, Lindgren, 120 dB, 30 amp
6. Line Impedance Stabilization Network (LISN) for peripheral devices
7. Power Distribution Box for peripheral devices
8. Spectrum Analyzer with Quasi-Peak Adapter
9. High Pass Filter
10. Transient Limiter
11. LISN for EUT
12. Non-Conducting table 80 cm above ground plane
13. EUT: Wireless Base Station and Associated System

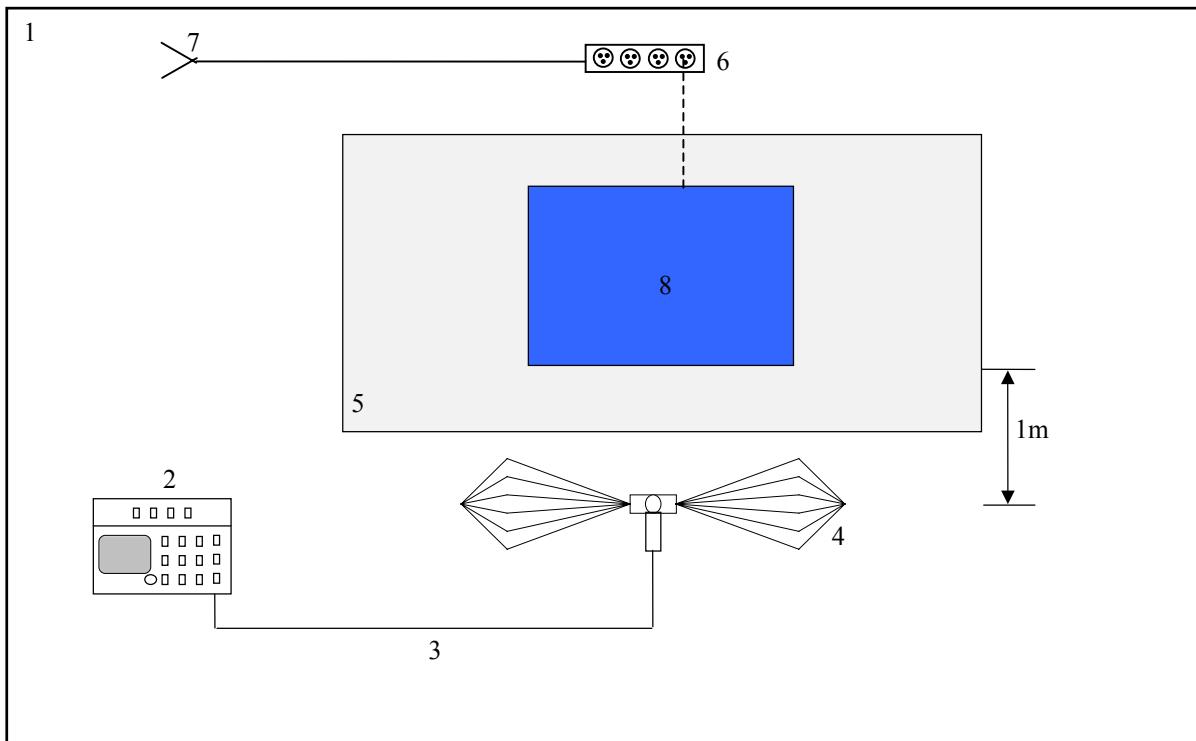
Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	15 of 37

4.3. Configuration and Methods of Measurements for Frequency Identification

When performing all testing of equipment, the actual emissions of the EUT are segregated from ambient signals present within the laboratory or the open-field test range. Preliminary testing is performed to ensure that ambient signals are sufficiently low to allow for proper observation of the emissions from the EUT. Incoming power lines are filtered using a 120 dB, 30-ampere; 115/208-volt filter to assist in reducing ambient signals for tests of levels of conducted emissions. Ambients within the laboratory are compared to those noted at the nearby open-field site to discriminate between signals produced from the EUT and ambient signals. In the event that a significant emission is produced by the EUT at a frequency which is also demonstrating significant ambient signals, the spectrum analyzer is placed in the peak mode, the bandwidth is narrowed, the EUT's signal is centered on the analyzer, the scan width is expanded to 50 kHz while monitoring the audio to ensure that only the EUT signal is present, the analyzer is switched to quasi-peak mode, and the level of the EUT signal is recorded.

For Frequency ID Test Configuration please refer to Figure 3 on the following page.

DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC - R1	16 of 37

Figure 3. Frequency ID of Radiated Emissions Test Setup Diagram*NOT TO SCALE***CONFIGURATION LEGEND**

1. Test Laboratory
2. Spectrum Analyzer with Quasi-Peak Adapter
3. Coax interconnect from Antenna to Spectrum Analyzer
4. Receive Antenna (basic relative position)
5. Non-Conducting table 80 cm above ground plane
6. Power strip for EUT and peripherals
7. AC power for devices
8. EUT Wireless Base Station and Associated System

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	17 of 37

4.4. Configuration and Methods of Measurements for Radiated Emissions

Section 8 of ANSI C63.4 determines the general configuration and procedures for measuring the radiated emissions of equipment under test. Initially, the primary emission frequencies are identified inside the test lab by positioning a broadband receive antenna one meter from the EUT to locate frequencies of significant radiation. Next, the EUT and associated system are placed on a turntable on a ten meter open area test site (registered with the FCC in accord with its Rules and ANSI C63.4) and the receive antenna is located at a distance of ten meters from the EUT.

The EUT and associated system are configured to operate continuously, representing a “normally operating” mode. All significant radiated emissions are recorded when maximum radiation on each frequency is observed, in accordance with part 8 of ANSI C63.4-1992 and Section 15.33 of the FCC Rules. To ensure that the maximum emission at each discrete frequency of interest is observed, the receive antenna is varied in height from one to four meters and rotated to horizontal and vertical polarities, and the turntable is also rotated to determine the worst emitting configuration. The numerical results of the test are included herein to demonstrate compliance.

The numerical results that are applied to the emissions limits are arrived at by the following method:

Example: $A = RR + CL + AF$

A = Amplitude dBuV/M

RR = Receiver Reading dBuV

CL = cable loss dB

AF = antenna factor dBm-1

Example Frequency = 110MHz

18.5 dBuV (spectrum analyzer reading)

±3.0 dB (cable loss @ frequency)

21.5 dBuV

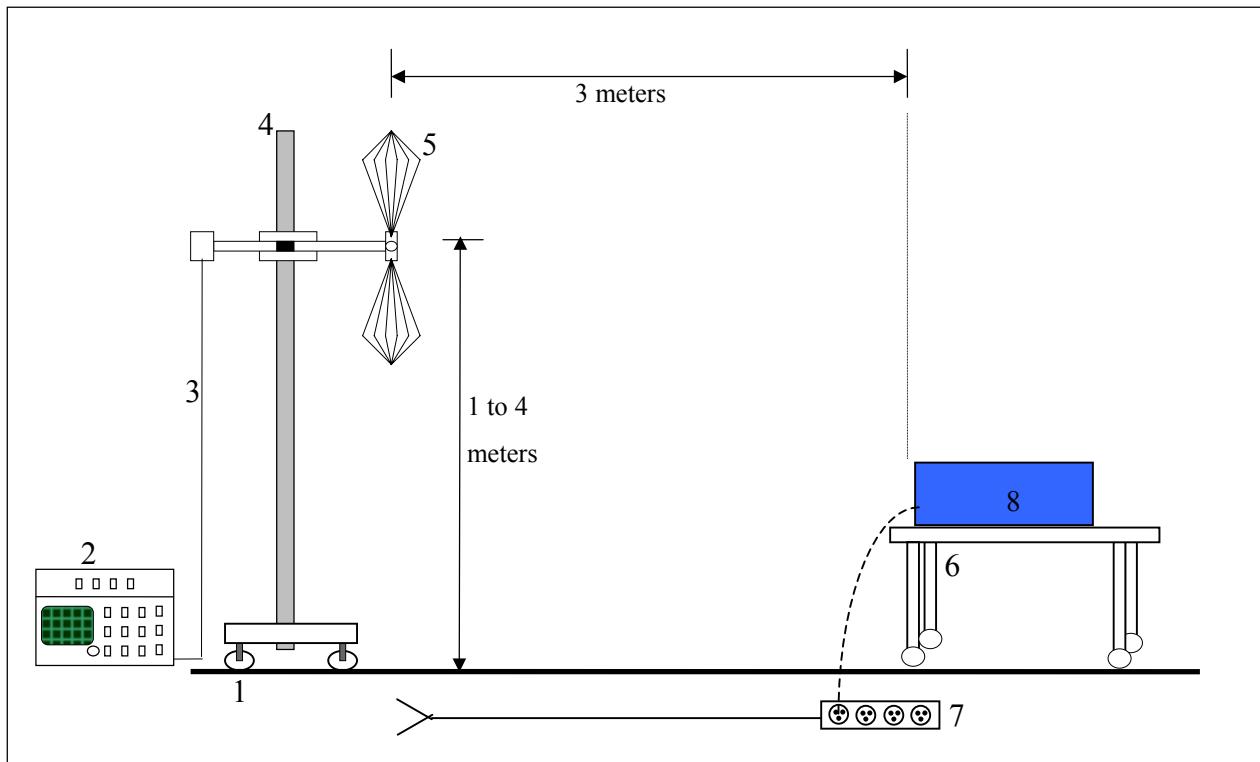
+15.4 dBm-1 (antenna factor @ frequency)

36.9 dBuV/M Final adjusted value

The final adjusted value is then compared to the appropriate emission limit to determine compliance.

For Radiated Emissions Test Configuration please refer to Figure 4 on the following page.

DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC - R1	18 of 37

Figure 4. Radiated Emissions Test Setup Diagram*NOT TO SCALE***CONFIGURATION LEGEND**

1. Ground plane (11 X 17 meters)
2. Spectrum Analyzer with Quasi-Peak Adapter
3. Coax interconnect from Receive Antenna to Spectrum Analyzer
4. Antenna Mast with motorized mounting assembly
5. Receive Antenna (basic relative position)
6. Non-Conducting table 80 cm above ground plane
7. AC power for devices
8. EUT: Wireless Base Station and Associated System

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	19 of 37

4.5. Operation in the 15.249 bands

In Addition to the general radiated emissions requirements described in FCC, Part 15B, Section 15.249 determines the configuration and procedures for measuring additional emissions of Intentional Radiating Devices.

Nemko USA, Inc.	11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810		
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	20 of 37

5. TEST RESULTS

5.1. Conducted Emissions Test Data

N/A

Nemko USA, Inc.	11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810		
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	21 of 37

5.2 Conducted Emissions Test Equipment

N/A

Nemko USA, Inc.	11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810		
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	22 of 37

5.3 Radiated Emissions Test Data –



NEMKO USA, Inc.

San Diego Headquarters:
11696 Sorrento Valley Rd.
San Diego, CA 92121
Tel: (858) 755-5525
Fax: (858) 452-1810

Nemko USA, Inc.	11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810		
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	2 of 37

CFR 47 Part 15c §15.249 Test Results

Testing was completed to the 10th harmonic. No harmonics other than noted above those shown in table below.



NEMKO USA, Inc.

San Diego Headquarters:
11696 Sorrento Valley Rd.
San Diego, CA 92121
Tel: (858) 755-5525
Fax: (858) 452-1810

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC - R1	2 of 37



NEMKO USA, Inc.

San Diego Headquarters:
11696 Sorrento Valley Rd.
San Diego, CA 92121
Tel: (858) 755-5525
Fax: (858) 452-1810

Radiated Emissions Data											
Complete	_____			Job # : <u>24-209-HEL</u>			Test # : _____				
Preliminary	_____			Page <u>1</u>			of <u>1</u>				
Client Name :	Helicomm										
EUT Name :	Wireless Interface										
EUT Model # :	IP LINK 1000										
EUT Part # :											
EUT Serial # :											
EUT Config. :	915.03MHZ, stand alone, continuous transmit mode.										
Specification :	<u>15.249</u>			Reference :							
Rod. Ant. #:	<u>NA</u>	Temp. (deg. C) :	_____			Date : <u>4/21/2004</u>					
Bicon Ant.#:	<u>116</u>	Humidity (%) :	_____			Time : <u>1:00pm</u>					
Log Ant.#:	<u>110</u>	EUT Voltage :	<u>1.5 VDC</u>			Staff : <u>Chip Fleury</u>					
DRG Ant. #	<u>529</u>	EUT Frequency :	_____			Photo ID: _____					
Dipole Ant.#:	<u>NA</u>	Phase:	_____			Peak Bandwidth: <u>1MHz</u>					
Cable#:	<u>Wireless</u>	Location:	<u>SOATS</u>			Video Bandwidth <u>1MHz</u>					
Preamp#:	<u>NA</u>	Distance:	<u>3m</u>								
Spec An.#:	<u>711</u>										
QP #:	<u>538</u>										
PreSelect#:	<u>NA</u>										
Meas. Freq. (MHz)	Ant. Pol. (H/V)	Atten. (dB)	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. limit (dBuV/m)	CR/SL Diff. (dB)	Pass Fail	Unc. Comment
915.03	V	0	67.1	23	3.7	0.0	93.8	94.0	0.2	Pass	No preamp
1830.06	V	0	25.2	25.5	2.8	0.0	53.5	54.0	0.5	Pass	No preamp
2745.1	H	0	11.3	29	3.3	0.0	43.6	54.0	-10.4	Pass	Preamp used
3660.04	V	0	9	32	4.8	0.0	45.8	54.0	-8.2	Pass	Preamp used
4575.17	V	0	11.9	32.8	6.5	0.0	51.2	84.4	-33.2	Pass	Preamp used

Testing was completed to the 10th harmonic. No harmonics other than noted above those shown in table above

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC - R1	2 of 37



NEMKO USA, Inc.

San Diego Headquarters:
11696 Sorrento Valley Rd.
San Diego, CA 92121
Tel: (858) 755-5525
Fax: (858) 452-1810

Radiated Emissions Data											
Complete	_____			Job #:	24-209-HEL		Test #:	_____			
Preliminary	_____						Page	1	of	1	
Client Name :	Helicomm										
EUT Name :	Wireless Interface										
EUT Model # :	IP LINK 1000										
EUT Part # :											
EUT Serial # :											
EUT Config. :	917.77MHZ, stand alone, continuous transmit mode.										
Specification :	15.249			Reference :							
Rod. Ant. #:	NA	Temp. (deg. C) :				Date :	4/21/2004				
Bicon Ant.#:	116	Humidity (%) :				Time :	1:00pm				
Log Ant.#:	110	EUT Voltage :	1.5 VDC			Staff :	Chip Fleury				
DRG Ant. #	529	EUT Frequency :				Photo ID:					
Dipole Ant. #:	NA	Phase:				Peak Bandwidth:	1MHz				
Cable#:	Wireless	Location:	SOATS			Video Bandwidth	1MHz				
Preamp#:	NA	Distance:	3m								
Spec An.#:	711										
QP #:	538										
PreSelect#:	NA										
Meas. Freq. (MHz)	Ant. Pol. (H/V)	Atten. (dB)	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. limit (dBuV/m)	CR/SL Diff. (dB)	Pass Fail	Unc. Comment
917.77	V	0	65.4	23	3.7	0.0	92.7	94.0	1.3	Pass	No preamp
1835.6	V	0	25	25.5	2.8	0.0	53.3	54.0	3.4	Pass	No preamp
2753.2	V	0	12	29	3.3	0.0	44.3	54.0	-9.7	Pass	Preamp used
3671.1	V	0	11.1	32	4.8	0.0	47.9	54.0	-6.1	Pass	Preamp used
928	V	0	5	23.2	4.0	0.0	32.2	46.0	-13.8	Pass	Bandedge measurement

Testing was completed to the 10th harmonic. No harmonics other than noted above .

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810			
DATE	DOCUMENT NAME		DOCUMENT #	PAGE	
May 28, 2004	Helicomm IP Link 1000 FCC Test Report		2004 024209 FCC - R1	3 of 37	

Radiated Emissions Test Equipment

Client	Helicomm	EUT Name	Wireless Transmitter		
PAN #	24-209-HEL	EUT Model	IP Link 1000		
Device Type	Model #	Asset #	Used	Cal Done	Cal Due
Pre-Amplifier					
Amplifier, HP	8447A	342			
Amplifier, Mini-Circuits	ZHL-1042J	819			
Amplifier, HP	8447A	166	X	Internal	Internal
Amplifier, HP	8447A	603			
Amplifier, HP	8449A	317			
Amplifier, Mini-Circuits	ZHL-1042J	630			
Amplifier, Mini-Circuits	ZHL-2	635	X	3/3/04	3/3/05
Antenna OATS #1 (North)					
Antenna, Biconical	3110	116	X	6/22/03	6/22/04
Antenna, Log Periodic	3146	110	X	7/21/03	7/21/04
Antenna, Ridged Guide	3115	752	X	7/05/03	7/05/04
Antenna, Loop	ALR-25M				
Antenna OATS #1 (South)					
Antenna, Biconical	EMCO				
Antenna, Log Periodic					
Antenna, Ridged Guide	3115				
Antenna, Loop	ALR-25M				
Spectrum Analyzer / Receiver					
Quasi-Peak Adapter, HP	85650A	533			
Spectrum Analyzer Display, HP	85662A	404			
Spectrum Analyzer, HP	8566B	104			
RF Preselector, HP	85650A	673			
Quasi-Peak Adapter, HP	85650A	438	X	9/10/03	3/10/04
Spectrum Analyzer Display, HP	85662A	534	X	9/25/03	3/25/04
Spectrum Analyzer, HP	8568B	107	X	9/25/03	3/25/04
Quasi-Peak Adapter, HP	85650A	676			
Spectrum Analyzer Display, HP	85662A	675			
Spectrum Analyzer, HP	8568B	674			
Quasi-Peak Adapter, HP	85650A	421			
Spectrum Analyzer Display, HP	85662A	534			
Spectrum Analyzer, HP	8568B	535			
Quasi-Peak Adapter, HP	85650A	538			
Spectrum Analyzer Display, HP	85662A	537			
Spectrum Analyzer, HP	8568B	711			
RF Preselector, HP	85685A	403			
Spectrum Analyzer, Advantest	R3261	523			

Nemko USA, Inc.	11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810		
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	4 of 37

5.2. CFR 47 Part 15C §15.249 Test Results

Testing was completed to the 10th harmonic. No harmonics other than noted above.

Nemko USA, Inc.	11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810		
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	5 of 37

Photograph 1. Conducted Emissions Test Configuration

N/A

Nemko USA, Inc.	11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810		
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC - R1	6 of 37

Photograph 2. Radiated Emissions Test Configuration



1. Double Ridged Guide Antenna
2. EUT: Wireless Transmitter

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	7 of 37

APPENDIX A

A. Conducted & Radiated Emissions Measurement Uncertainties

1. Introduction

ISO Standard 17025 and ANSI/NCSL Z540-1(1994) require that all measurements contained in a test report be “traceable”. “Traceability” is defined in the *International Vocabulary of Basic and General Terms in Metrology* (ISO: 1993) as: “the property of the result of a measurement... whereby it can be related to stated references, usually national or international standards, through an unbroken chain of comparisons, *all having stated uncertainties*”.

The purposes of this Appendix are to “state the *Measurement Uncertainties*” of the conducted emissions and radiated emissions measurements contained in Section 5 of this Test Report, and to provide a practical explanation of the meaning of these measurement uncertainties.

2. Statement of the Worst-Case Measurement Uncertainties for the Conducted and Radiated Emissions Measurements Contained in This Test Report

Table 1: Worst-Case Expanded Uncertainty "U" of Measurement for a k=2 Coverage Factor

Conducted Emissions Measurement Detection Systems	Applicable Frequency Range	"U" for a k=2 Coverage Factor
HP8568B Spectrum Analyzer with QPA and HP8447F Preamplifier	150 kHz - 30 MHz	+/- 3.0 dB
HP8566B Spectrum Analyzer with QPA and Preselector	9 kHz - 30 MHz	+/- 2.9 dB
Radiated Emissions Measurement Detection Systems	Applicable Frequency Range	"U" for a k=2 Coverage Factor
HP8568B Spectrum Analyzer with QPA & HP8447F Preamplifier	30 MHz - 200 MHz	+4.0 dB, -4.1 dB
HP8568B Spectrum Analyzer with QPA & HP8447F Preamplifier	200 MHz-1000 MHz	+/- 3.5 dB
HP8566B Spectrum Analyzer with QPA & Preselector	30 MHz - 200 MHz	+3.9 dB, -4.0 dB
HP8566B Spectrum Analyzer with QPA & Preselector	200 MHz-1000 MHz	+/- 3.4 dB
HP8566B Spectrum Analyzer with QPA & HP 8449A Preamplifier	1 GHz - 18 GHz	+2.5 dB, -2.6 dB
HP8566B Spectrum Analyzer with QPA & HP8449A Preamplifier	18 GHz - 40 GHz	+/- 3.4 dB

NOTES:

1. Applies to 3 and 10 meter measurement distances
2. Applies to all valid combinations of Transducers (i.e. LISNs, Line Voltage Probes, and Antennas, as appropriate)
3. Excludes the Repeatability of the EUT

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	8 of 37

3. Practical Explanation of the Meaning of the Conducted and Radiated Emissions Measurement Uncertainties

In general, a “Statement of Measurement Uncertainty” means that with a certain (specified) confidence level, the “true” value of a measurand will be between a (stated) upper bound and a (stated) lower bound.

In the specific case of EMC Measurements in this test report, the measurement uncertainties of the conducted emissions measurements and the radiated emissions measurements have been calculated in accordance with the method detailed in the following documents:

- *ISO Guide to the Expression of Uncertainty in Measurement* (ISO, 1993)
- *NIS 81:1994, The Treatment of Uncertainty in EMC Measurements* (NAMAS, 1994)
- *NIST Technical Note 1297(1994), Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Results* (NIST, 1994)

The calculation method used in these documents requires that the stated uncertainty of the measurements be expressed as *an “expanded uncertainty”, U, with a k=2 coverage factor*. The practical interpretation of this method of expressing measurement uncertainty is shown in the following example:

EXAMPLE: Assume that at 39.51 MHz, the (measured) radiated emissions level was equal to +26.5 dBuV/m, and that the +/- 2 standard deviations (i.e. 95% confidence level) measurement uncertainty was +/- 3.4 dB.

In the example above, the phrase “k = 2 Coverage Factor” simply means that the measurement uncertainty is stated to cover +/- 2 standard deviations (i.e. a 95% confidence interval) about the measurand. The measurand is the radiated emissions measurement of +26.5 dBuV/m at 39.51 MHz, and the 95% bounds for the uncertainty are -3.4 dB to + 3.4 dB. One can thus be 95% confident that the “true” value of the radiated emissions measurement is between +23.1 dBuV/m and +29.5 dBuV/m. *In effect, this means that in the above example there is only a 2.5% chance that the “true” radiated emissions value exceeds +29.5 dBuV/m.*

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	9 of 37

APPENDIX B

B. Nemko USA, Inc.'s Test Equipment & Facilities Calibration Program

Nemko USA, Inc. operates a comprehensive Periodic Calibration Program in order to ensure the validity of all test data. Nemko USA's Periodic Calibration Program is fully compliant to the requirements of NVLAP Policy Guide PG-1-1988, ANSI/NCSL Z540-1 (1994), ISO 10012-1 (1993-05-01), ISO Standard 17025, ISO-9000 and EN 45001. Nemko USA, Inc.'s calibrations program therefore meets or exceed the US national commercial and military requirements [N.B. ANSI/NCSL Z540-1 (1994) replaces MIL-STD-45662A].

Specifically, all of Nemko USA's *primary reference standard devices* (e.g. vector voltmeters, multimeters, attenuators and terminations, RF power meters and their detector heads, oscilloscope mainframes and plug-ins, spectrum analyzers, RF preselectors, quasi-peak adapters, interference analyzers, impulse generators, signal generators and pulse/function generators, field-strength meters and their detector heads, etc.) and certain *secondary standard devices* (e.g. RF Preamplifiers used in CISPR 11/22 and FCC Part 15/18 tests) are periodically recalibrated by:

- A Nemko USA-approved independent (third party) metrology laboratory that uses NIST-traceable standards and that is ISO Guide 25-accredited as a calibration laboratories by NIST; or,
- A Nemko USA-approved independent (third party) metrology laboratory that uses NIST-traceable standards and that is ISO Guide 25-accredited as a calibration laboratory by another accreditation body (such as A2LA) that is mutually recognized by NIST; or,
- A manufacturer of Measurement and Test Equipment (M&TE), if the manufacturer uses NIST-traceable standards and is ISO Guide 25-accredited as calibration laboratory either by NIST or by another accreditation body (such as A2LA) that is mutually recognized by NIST; or
- A manufacturer of M&TE (or by a Nemko USA-approved independent third party metrology laboratory) that is not ISO Guide 25-accredited. (In these cases, Nemko USA conducts an annual audit of the manufacturer or metrology laboratory for the purposes of proving traceability to NIST, ensuring that adequate and repeatable calibration procedures are being applied, and verifying conformity with the other requirements of ISO Guide 25).

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	10 of 37

In all cases, the entity performing the Calibration is required to furnish Nemko USA with a calibration test report and/or certificate of calibration, and a “calibration sticker” on each item of M&TE that is successfully calibrated.

Calibration intervals are normally one year, except when the manufacturer advises a shorter interval (e.g. the HP 8568B Spectrum Analyzer is recalibrated every six months) or if US Government directives or client requirements demand a shorter interval. Items of instrumentation/related equipment which fail during routine use, or which suffer visible mechanical damage (during use or while in transit), are sidelined pending repair and recalibration. (Repairs are carried out either in-house [if minor] or by a Nemko USA-approved independent [third party] metrology laboratory, or by the manufacturer of the item of M&TE).

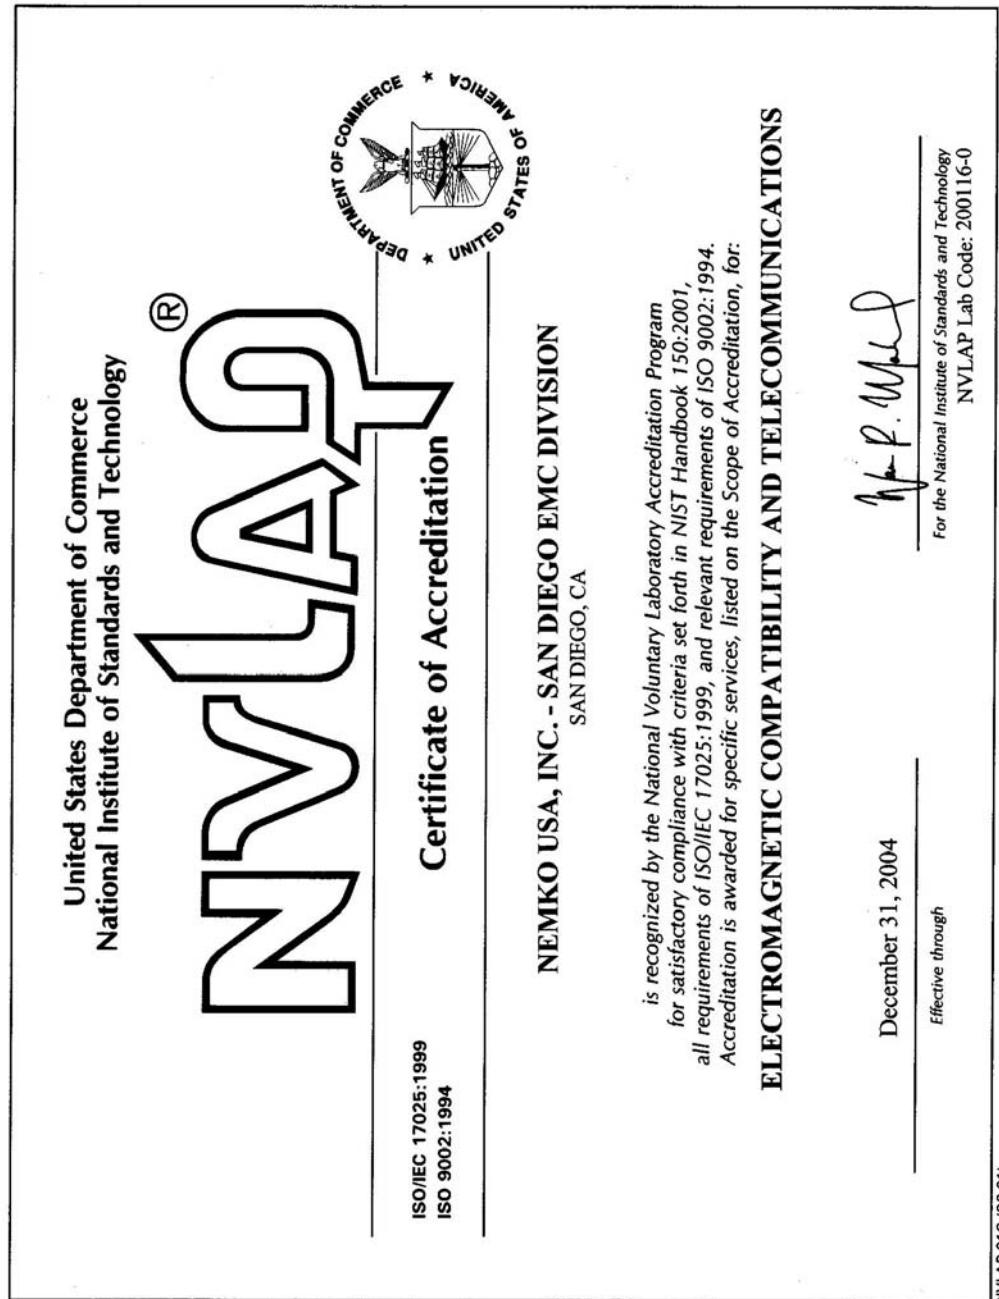
Each antenna used for CISPR 11 and CISPR 22 and FCC Part 15 and Part 18 radiated emissions testing (and for testing to the equivalent European Norms) is calibrated annually by either a NIST (or A2LA) ISO Standard 17025-Accredited third-party Antenna Calibration Laboratory or by the antenna's OEM if the OEM is NIST or A2LA ISO Standard 17025-accredited as an antenna calibration laboratory. The antenna calibrations are performed using the methods specified in Annex G.5 of CISPR 16-1(1993) or ANSI C63.5-1991, including the “Three-Antenna Method”. Certain other kinds of antennas (e.g. magnetic-shielded loop antennas) are calibrated annually by either a NIST (or A2LA) ISO Standard 17025-accredited third-party antenna calibration laboratory, or by the antenna's OEM if the OEM is NIST or A2LA ISO Standard 17025-accredited as an antenna calibration laboratory using the procedures specified in the latest version of SAE ARP-958.

In accordance with FCC and other regulations, Nemko USA recalibrates its suite of antennas used for radiated emissions tests on an annual basis. These calibrations are performed as a precursor to the FCC-required annual revalidation of the Normalized Site Attenuation properties of Nemko USA's Open Area Test Site. Nemko USA, Inc. uses the procedures given in both Subclause 16.6 and Annex G.2 of CISPR 16-1 (1993), and, ANSI C63.4-1992 when performing the normalized site attenuation measurements.

DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC - R1	11 of 37

APPENDIX C


C. FCC and NVLAP Accreditation




Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC - R1	12 of 37

 <i>National Institute of Standards and Technology</i>	<i>National Voluntary Laboratory Accreditation Program</i>
Scope of Accreditation	
<small>ISO/IEC 17025:1999 ISO 9002:1994</small>	
<small>DEPARTMENT OF COMMERCE UNITED STATES OF AMERICA</small>	
<small>Page: 1 of 3</small>	
ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS	
NVLAP LAB CODE 200116-0	
NEMKO USA, INC. - SAN DIEGO EMC DIVISION	
11696 Sorrento Valley Road, Suite F San Diego, CA 92121 Mr. Ricky Hill Phone: 858-755-5525 x207 Fax: 858-793-9914 E-Mail: rick.hill@nemko.com URL: http://www.nemko.com	
<i>NVLAP Code Designation / Description</i>	
Emissions Test Methods:	
12/CIS14 12/CIS14a 12/CIS14b 12/CIS14c 12/CIS22 12/CIS22a	CISPR 14-1 (March 30, 2000): Limits and Methods of Measurement of Radio interference Characteristics of Household Electrical Appliances, Portable Tools and Similiar Electrical Apparatus - Part 1: Emissions EN 55014-1 (1993) with Amendments A1 (1997) & A2 (1999) AS/NZS 1044 (1995) CNS 13783-1 IEC/CISPR 22 (1997) and EN 55022 (1998): Limits and methods of measurement of radio disturbance characteristics of information technology equipment IEC/CISPR 22 (1993): Limits and methods of measurement of radio disturbance characteristics of information technology equipment, Amendment 1 (1995) and Amendment 2 (1996)
<hr/> December 31, 2004	
<hr/> <i>Wm R. McQ</i>	
<hr/> <i>For the National Institute of Standards and Technology</i>	

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC - R1	13 of 37

 <i>National Institute of Standards and Technology</i>	NVLAP® <i>National Voluntary Laboratory Accreditation Program</i>	 Page: 2 of 3
Scope of Accreditation		
ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS		NVLAP LAB CODE 200116-0
NEMKO USA, INC. - SAN DIEGO EMC DIVISION		
NVLAP Code Designation / Description		
12/CIS22b	CNS 13438 (1997): Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment	
12/EM02a	IEC 61000-3-2, Edition 2.1 (2001-10), EN 61000-3-2 (2000), and AS/NZS 2279.1 (2000): Electromagnetic compatibility (EMC) Part 3-2: Limits - Limits for harmonic current emissions (equipment input current <= 16 A)	
12/EM03b	IEC 61000-3-3 (2002-03), edition 1.1: EMC - Part 3-3: Limits - Limitations of voltage changes, voltage fluctuations and flicker, in public low-voltage supply-systems, for equipment with rated current <=16 A per phase and not subject to conditional connections	
12/F18	FCC OST/MP-5 (1986): FCC Methods of Measurement of Radio Noise Emissions for ISM Equipment (cited in FCC Method 47 CFR Part 18 - Industrial, Scientific, and Medical Equipment)	
12/FCC15b	ANSI C63.4 (2001) with FCC Method - 47 CFR Part 15, Subpart B: Unintentional Radiators	
12/T51	AS/NZS CISPR 22 (2002) and AS/NZS 3548 (1997): Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment	
		
December 31, 2004		<i>For the National Institute of Standards and Technology</i>
<i>Effective through</i>		

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
May 28, 2004	Helicomm IP Link 1000 FCC Test Report	2004 024209 FCC – R1	14 of 37

 <small>National Institute of Standards and Technology</small>	Scope of Accreditation	<small>National Voluntary Laboratory Accreditation Program</small>
<small>ISO/IEC 17025:1999 ISO 9002:1994</small>		
<small>DEPARTMENT OF COMMERCE UNITED STATES OF AMERICA</small>		
<small>Page: 3 of 3</small>		
ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS		NVLAP LAB CODE 200116-0
NEMKO USA, INC. - SAN DIEGO EMC DIVISION		
NVLAP Code Designation / Description		
Immunity Test Methods:		
12/I01 IEC 61000-4-2, Edition 2.1 (2001) including Amds. 1 & 2 and EN 61000-4-2: Electrostatic Discharge Immunity Test	12/I02 IEC 61000-4-3 (2002) and EN 61000-4-3: Radiated Radio-Frequency Electromagnetic Field Immunity Test	12/I03 IEC 61000-4-4 (1995) + Amd. 1 (2000) & Amd. 2 (2001) and EN 61000-4-4: Electrical Fast Transient/Burst Immunity Test
12/I04 IEC 61000-4-5 (1995) + Amd. 1 (2000) and EN 61000-4-5: Surge Immunity Test	12/I05 IEC 61000-4-6, Edition 2.0 (2003) and EN 61000-4-6: Immunity to Conducted Disturbances, Induced by Radio-Frequency Fields	12/I06 IEC 61000-4-8, Edition 1.1 (2001) and EN 61000-4-8: Power Frequency Magnetic Field Immunity Test
12/I07 IEC 61000-4-11 (1994) + Amd. 1 (2000) and EN 61000-4-11: Voltage Dips, Short Interruptions and Voltage Variations Immunity Tests		
		
December 31, 2004		
Effective through		
For the National Institute of Standards and Technology		