

# TEST REPORT



Your Ref:

Date: 16 August 2004

Our Ref: 56S040642/01

Page: 1 of 36

DID: +65-6885 1448

Fax: +65-6777 6409

**NOTE:** This report is issued subject to PSB Corporation's "Terms and Conditions Governing Technical Services". The terms and conditions governing the issue of this report are set out as attached within this report.

FORMAL REPORT ON TESTING IN ACCORDANCE WITH  
FCC Parts 15B & C : 2004  
OF A  
WIRELESS PDA  
[ MODEL : R1000-AB10-200-00 ]  
[ FCC ID : RKS-R1001 ]

**TEST FACILITY**

Telecoms & EMC, Testing Group, PSB Corporation Pte Ltd  
1 Science Park Drive, Singapore 118221

**FCC REG. NO.**

90937 (3m & 10m OATS)  
99142 (10m Anechoic Chamber)  
871638 (5m Anechoic Chamber)

**IND. CANADA REG. NO.**

IC 4257 (10m Anechoic Chamber)

**PREPARED FOR**

Mr Foong Foo Kong  
Olympus Technologies Singapore Pte Ltd  
41 Science Park Road #04-10 The Germini  
Singapore Science Park 2  
Singapore 117610

Tel : +65 6870 2541      Fax : +65 6870 2548

**JOB NUMBER**

56S040642

**TEST PERIOD**

14 August 2004 – 15 August 2004

**PREPARED BY**

Lim Cher Hwee  
Engineer

**APPROVED BY**

Deng Jun Hong  
Assistance Vice President



LA-2001-0212-A  
LA-2001-0213-F  
LA-2001-0214-E  
LA-2001-0215-B  
LA-2001-0216-G  
LA-2001-0217-G

The results reported herein have been performed in accordance with the laboratory's terms of accreditation under the Singapore Accreditation Council - Singapore Laboratory Accreditation Scheme

---

**TABLE OF CONTENTS**

TEST SUMMARY

PRODUCT DESCRIPTION

SUPPORTING  
EQUIPMENT LIST

EUT OPERATING  
CONDITION

TEST RESULTS

ANNEX A	- TEST INSTRUMENTATION & GENERAL PROCEDURES
ANNEX B	- EUT PHOTOGRAPHS / DIAGRAMS
ANNEX C	- USER MANUAL, TECHNICAL DESCRIPTION, BLOCK & CIRCUIT DIAGRAMS
ANNEX D	- FCC LABEL & POSITION

**TEST SUMMARY**

The product was tested in accordance with the customer's specifications.

**Test Results Summary**

Test Standard	Description	Pass / Fail
FCC Part 15: 2004		
15.107, 15.207	Conducted Emissions	Pass
15.205	Radiated Emissions (Restricted Band Requirements)	Pass
15.109, 15.209	Radiated Emissions (Spurious Emissions)	Pass
15.247 (a)(1)	Carrier Frequency Separation	Pass
	Spectrum Bandwidth (20dB Bandwidth Measurement)	Pass
15.247 (a)(1)(iii)	Number of Hopping Frequencies	Pass
	Average Frequency Dwell Time	Pass
15.247 (b)(1)	Maximum Peak Power	Pass
15.247 (c)	RF Conducted Spurious Emissions & Band Edge Compliance at the Transmitter Antenna Terminal	Pass
15.247 (d)	Peak Power Spectral Density	Pass

**Notes**

- Three channels as listed below, which respectively represent the lower, middle and upper channels of the equipment under test (EUT) were chosen and tested. For each channel, the EUT was configured to operate in the Bluetooth test mode
 

Transmit Channel	Frequency (GHz)
Channel 0	2.402
Channel 39	2.441
Channel 78	2.480
- All the measurements in section 15.247 were done based on conducted measurements.
- The EUT is a Class B device when in non-transmitting state and meets the FCC Part15B Class B requirements.
- The Equipment Under Test (EUT), Wireless PDA is the worst case emissions unit from the series family as listed below. The unit under test shows the highest emissions. As the family units' circuits, PCB routing and components are identical to the worst case unit being tested, as such, the family units are deemed to meet the FCC requirements.

Models	Operating Systems	RAM	ROM
R1000-6610-100-zz	Linux	64MB	64MB
R1000-6A10-100-zz	Linux	64MB	128MB
R1000-6B10-100-zz	Linux	64MB	256MB
R1000-AA10-100-zz	Linux	128MB	128MB
R1000-AB10-100-zz	Linux	128MB	256MB
R1000-6610-200-zz	WinCE.net	64MB	64MB
R1000-6A10-200-zz	WinCE.net	64MB	128MB
R1000-6B10-200-zz	WinCE.net	64MB	256MB
R1000-AA10-200-zz	WinCE.net	128MB	128MB
R1000-AB10-200-zz	WinCE.net	128MB	256MB
R1000-AA10-3yy-zz	Windows Mobile	128MB	128MB
R1000-AB10-3yy-zz	Windows Mobile	128MB	256MB
R1000-6610-4yy-zz	Palm	64MB	64MB
R1000-6A10-4yy-zz	Palm	64MB	128MB
R1000-6B10-4yy-zz	Palm	64MB	256MB
MIG-380MS-0	WinCE.net	64MB	64MB
MIG-380MS-1	WinCE.net	128MB	128MB
MIG-380MS-2	WinCE.net	128MB	256MB
W380MS-0	WinCE.net	64MB	64MB
W380MS-1	WinCE.net	128MB	128MB
W380MS-2	WinCE.net	128MB	256MB

yy represents the language of instruction used where 00 represents English.

zz represents customization code where 00 represents standard model Olympus.

### Modifications

No modifications were done.

---

PRODUCT DESCRIPTION

Description	: The Equipment Under Test (EUT) is a <b>Wireless PDA</b> . The EUT is a PDA with Bluetooth capability.
Manufacturer	: Celestica Electronics (S) Pte Ltd 35 #03-01 Marsiling Industrial Estate Road 3 Singapore 739257
Model Number	: R1000-AB10-200-00
FCC ID	: RKS-R1001
Serial Number	: A0005F
Microprocessor	: MRDM-6828 Ver S1-0i
Operating / Transmitting Frequency	: 2.402GHz to 2.480GHz 79 channels. Starting at 2.402MHz with subsequent channel at 1MHz interval from the preceding channel.
Clock / Oscillator Frequency	: 4MHz (oscillator) 32.768kHz (real time clock)
Modulation	: Gaussian Frequency Shift Keying (GFSK) with BT = 0.5
Pulse Train Cycle	: 1.25ms / 3.75ms / 6.25ms / Continuos signal (in testing)
Port / Connectors	: 1 x communication port
Rated Input Power	: 5.0VDC 2.0A via an AC/DC adapter

## SUPPORTING EQUIPMENT DESCRIPTION

Equipment Description (Including Brand Name)	Model, Serial & FCC ID Number	Cable Description (List Length, Type & Purpose)
Fujitsu Laptop PC (use for radiated emissions test)	M/N: LBS6130-AH051E0B0 S/N: R4201406 FCC ID: DoC	Nil
Fujitsu Laptop PC AC/DC Adapter (use for radiated emissions test)	M/N: SEB80N2 S/N: 03Y12943B FCC ID: DoC	2.0m unshielded AC power cable 2.0m unshielded DC power cable
Kodak Printer (use for radiated emissions test)	M/N: Diconix 150PLus S/N: PKB9ZYG123 FCC ID: E75WG-EK150	2.0m shielded parallel (printer) cable
Kodak Printer AC/DC Adapter (use for radiated emissions test)	M/N: PSA-122 S/N: R2270001B9 FCC ID: DoC	2.0m unshielded AC power cable 1.5m unshielded DC power cable with ferrite loaded
Lapmate Mouse (use for radiated emissions test)	M/N: A0002614 S/N: Nil FCC ID: DoC	1.0m unshielded mouse cable
HP Keyboard (use for radiated emissions test)	M/N: SK-2502C S/N: M020506330 FCC ID: DoC	1.5m unshielded keyboard cable
NEC Laptop PC (use for all tests except radiated emissions test)	M/N: ADP-500MB S/N: 1186100011 FCC ID: DoC	Nil
NEC Laptop PC AC/DC Adapter (use for all tests except radiated emissions test)	M/N: ADP-50MB S/N: 9201421DA FCC ID: DoC	2.0m unshielded AC power cable 2.0m unshielded DC power cable with ferrite loaded
Seiko Smart Printer (use for all tests except radiated emissions test)	M/N: SLP-220 S/N: B011331000 FCC ID: DoC	2.0m unshielded AC power cable 1.5m shielded parallel (printer) cable
Compaq Mouse (use for all tests except radiated emissions test)	M/N: 4862A011 S/N: B04AB0H5BFX10NH FCC ID: DZL211029	2.0m unshielded mouse cable
IBM Keyboard (use for all tests except radiated emissions test)	M/N: KB-9910 S/N: 1088517 FCC ID: DoC	2.0m unshielded keyboard cable

**EUT OPERATING CONDITIONS**

The Wireless PDA was powered from 110V, 60Hz mains supply.

Tests	Description Of Operation
1. Conducted Emissions 2. Radiated Emissions 3. Carrier Frequency Separation 4. Spectrum Bandwidth (20dB Bandwidth Measurement) 5. Number Of Hopping Frequencies 6. Average Frequency Dwell Time 7. Maximum Peak Power 8. RF Conducted Spurious Emissions at the Transmitter Antenna Terminal 9. Band Edge Compliance at the Transmitter Antenna Terminal 10. Peak Power Spectral Density	<p>The EUT was exercised by operating in the following modes/configurations during the test</p> <p><b><u>1. Transmit Mode (Bluetooth Test Mode)</u></b></p> <p>The EUT was set to transmit at the maximum transmitting power continuously with frequency hopping on for the following tests:</p> <ul style="list-style-type: none"> <li>- Carrier Frequency Separation</li> <li>- Number of Hopping Frequency</li> <li>- Average Frequency Dwell Time</li> <li>- Band Edge at the Transmitting Antenna</li> </ul> <p>The EUT was set to transmit at the maximum transmitting power continuously with frequency hopping off for the following tests:</p> <ul style="list-style-type: none"> <li>- Conducted Emissions</li> <li>- Radiated Emissions</li> <li>- Spectrum Bandwidth (20dB Bandwidth Measurement)</li> <li>- Maximum Peak Power</li> <li>- RF Conducted Spurious Emissions at the Transmitter Antenna Terminal</li> <li>- Peak Power Spectral Density</li> </ul> <p><b><u>2. Non-Transmit Mode (EUT acts as an Unintentional Radiator)</u></b></p> <p>The EUT was set to continuously reading and writing files from the memory storage, printing scrolls of character 'H' to the LCD panel and data sinking with the connected host computer (laptop PC).</p>

**FCC Part 15B (15.107 & 15.207) Class B Conducted Emission Results**

Frequency (MHz)	Q-P Value (dB $\mu$ V)	Q-P Margin (dB)	AV Value (dB $\mu$ V)	AV Margin (dB)	Line	Channel
0.1569	49.9	-15.9	35.6	-20.2	Live	0
0.3157	36.2	-25.0	26.1	-25.1	Live	78
2.8571	28.7	-27.3	16.6	-29.4	Live	0
3.1831	29.7	-26.3	13.4	-32.7	Neutral	78
8.1114	37.1	-22.9	12.1	-37.9	Live	39
9.6404	33.4	-26.6	13.3	-36.7	Neutral	39

Tested by: DP

Notes :

1. Environmental Conditions      Temperature 24°C  
Relative Humidity 55%  
Atmospheric Pressure 1030mbar
2. All possible modes of operation were investigated from 150kHz to 30MHz. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
3. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
4. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  
9kHz - 30MHz  
RBW: 10kHz      VBW: 30kHz
5. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is  $\pm 2.4$ dB.



Conducted Emissions Setup (Front View)



Conducted Emissions Setup (Rear View)

**FCC Part 15 (15.109 & 15.209) Class B Radiated Emission (Spurious Emissions) Results**

Test Distance : 3m

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dB $\mu$ V/m)	Q-P Margin (dB)	Channel	Azimuth (Degrees)	Height (cm)	Polarisation (H/V)
30.6150	37.1	-2.9	39	20	100	V
52.6733	33.4	-6.6	0	306	100	V
122.4021	35.7	-7.8	0	237	100	V
319.9253	38.1	-7.9	78	47	100	H
505.7012	41.5	-4.5	39	56	100	H
585.3063	42.6	-3.4	0	109	100	V

Spurious Emissions above 1GHz

Frequency (GHz)	Peak Value (dB $\mu$ V/m)	Average Value (dB $\mu$ V/m)	Average Margin (dB)	Channel	Azimuth (Degrees)	Height (cm)	Pol (H/V)
1.1244	56.3	27.5	-26.5	39	89	100	H
1.2466	56.7	30.0	-24.0	39	108	100	V
1.2511	55.7	28.4	-25.6	0	312	100	H
1.8133	55.6	31.7	-22.3	78	341	100	H
1.9044	55.4	30.7	-23.3	78	177	100	H
2.2155	47.7	33.3	-20.7	39	256	100	H

Tested by: LCH

Notes :

1. Environmental Conditions Temperature 25°C  
Relative Humidity 58%  
Atmospheric Pressure 1030mbar
2. All possible modes of operation were investigated and only the worst case emissions were measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
3. Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.
4. A "ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
5. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  
30MHz - 1GHz  
RBW: 120kHz VBW: 1MHz  
>1GHz  
RBW: 1MHz VBW: 1MHz

---

**TEST RESULTS**

6. The peak emissions above 1GHz show compliance to the requirement stated in Section 15.35 (b).
7. The upper frequency of radiated emission investigations were according to requirements stated in Section 15.33 (a) for intentional radiators & Section 15.33 (b) for unintentional radiators.
8. The channel in the table refers to the transmit channel of the EUT.
9. Radiated Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz (QP only @ 3m & 10m) is  $\pm 4.3$ dB (for EUTs  $< 0.5m \times 0.5m \times 0.5m$ ).

**FCC Part 15C (15.205) Radiated Emissions (Restricted Band Requirements) Results**

Test Distance : 3m

Spurious Emissions (Restricted Band) ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dB $\mu$ V/m)	Q-P Margin (dB)	Channel	Azimuth (Degrees)	Height (cm)	Polarisation (H/V)
166.2510	37.2	-6.3	78	249	100	V
400.7000	40.6	-5.4	78	35	100	V
--	--	--	--	--	--	--
--	--	--	--	--	--	--
--	--	--	--	--	--	--
--	--	--	--	--	--	--

Spurious Emissions (Restricted Band) above 1GHz

Frequency (GHz)	Peak Value (dB $\mu$ V/m)	Average Value (dB $\mu$ V/m)	Average Margin (dB)	Channel	Azimuth (Degrees)	Height (cm)	Pol (H/V)
1.1133	55.4	27.3	-26.7	0	176	100	H
1.1155	57.5	26.3	-27.7	78	143	100	H
1.1755	57.6	28.0	-26.0	78	215	100	H
1.3155	55.7	28.3	-25.7	78	233	100	H
1.4999	53.8	34.2	-19.8	78	144	100	H
2.2155	47.8	33.3	-20.7	39	185	100	H

Tested by: LCH

Notes :

1. Environmental Conditions Temperature 25°C  
Relative Humidity 58%  
Atmospheric Pressure 1030mbar
2. All possible modes of operation were investigated and only the worst case emissions were measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
3. The "--" in the column indicates no emissions were found in the band of interest and showed compliance to the limits as specified in section 15.209. The emissions were merely the noise floor.
4. Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.
5. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
6. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  
30MHz - 1GHz  
RBW: 120kHz VBW: 1MHz  
>1GHz  
RBW: 1MHz VBW: 1MHz

---

**TEST RESULTS**

7. The peak emissions above 1GHz show compliance to the requirement stated in Section 15.35 (b).
8. The upper frequency of radiated emission investigations were according to requirements stated in Section 15.33 (a) for intentional radiators & Section 15.33 (b) for unintentional radiators.
9. The channel in the table refers to the transmit channel of the EUT.
10. Radiated Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz (QP only @ 3m & 10m) is  $\pm 4.3$ dB (for EUTs  $< 0.5m \times 0.5m \times 0.5m$ ).



Radiated Emissions Setup (Front View)



Radiated Emissions Setup (Rear View)

**FCC Part 15C (15.247(a)(1)) Carrier Frequency Separation Results**

The EUT shows compliance to the requirements of this section, which states the adjacent carrier frequencies must be separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.


Adjacent Channels	Channel Separation (MHz)
0 and 1 (2.402GHz and 2.403GHz)	1.035
38 and 39 (2.440GHz and 2.441GHz)	1.010
39 and 40 (2.441GHz and 2.442GHz)	1.020
77 and 78 (2.479GHz and 2.480GHz)	1.015

Please refer to the attached Plots 1 - 4 for details.

Tested by: DP


Notes :

1. <u>Environmental Conditions</u>	Temperature	24°C
	Relative Humidity	55%
	Atmospheric Pressure	1030mbar

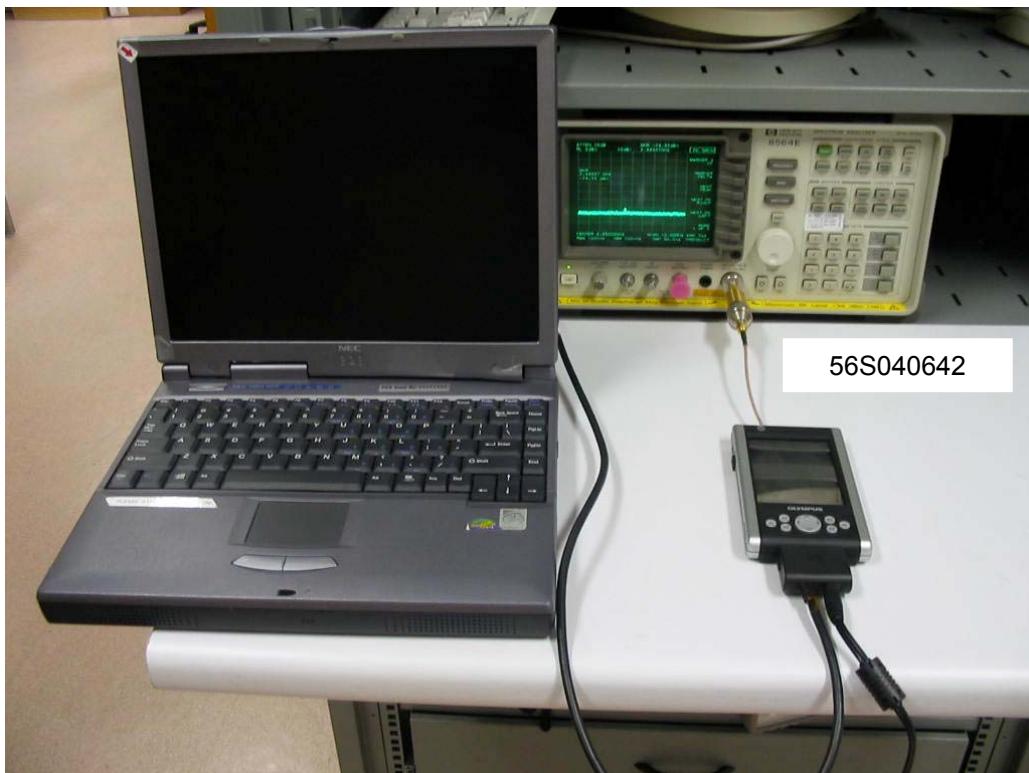


Carrier Frequency Separation Measurement Test Setup

## CARRIER FREQUENCY SEPARATION PLOTS

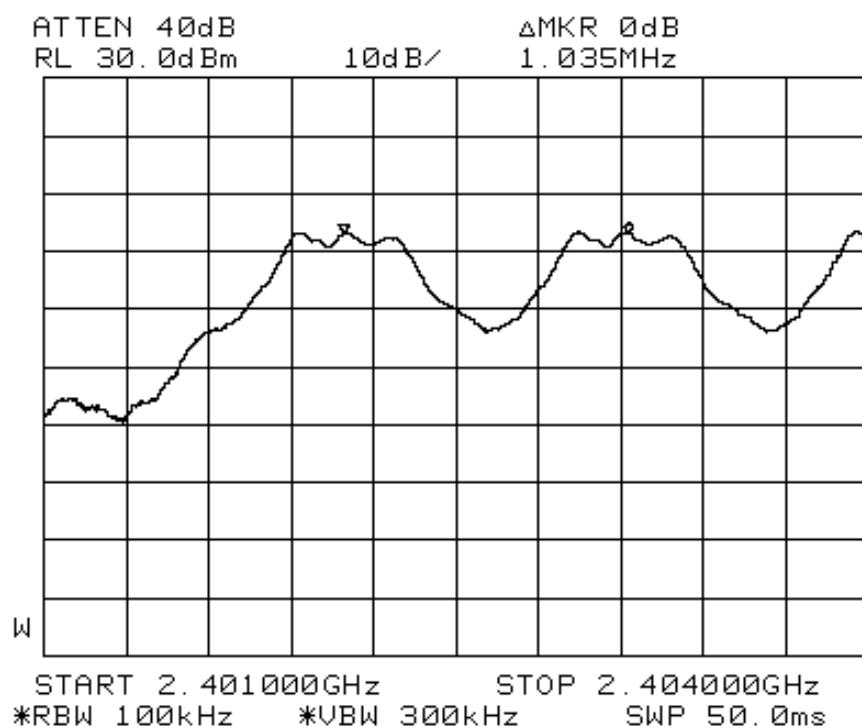


Plot 1- Channels 0 and 1 Separation

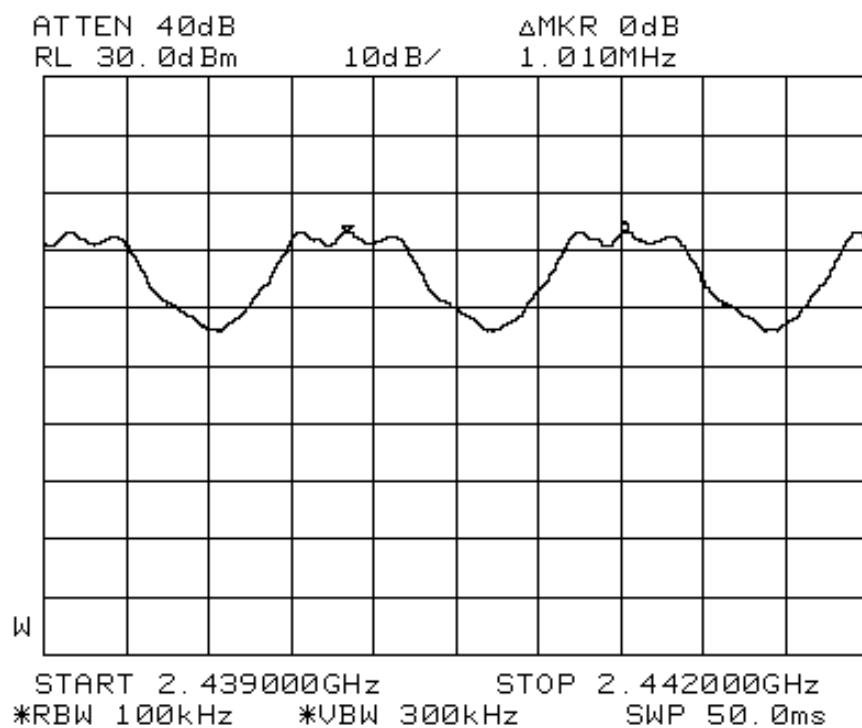


Plot 2 – Channels 38 and 39 Separation

## CARRIER FREQUENCY SEPARATION PLOTS

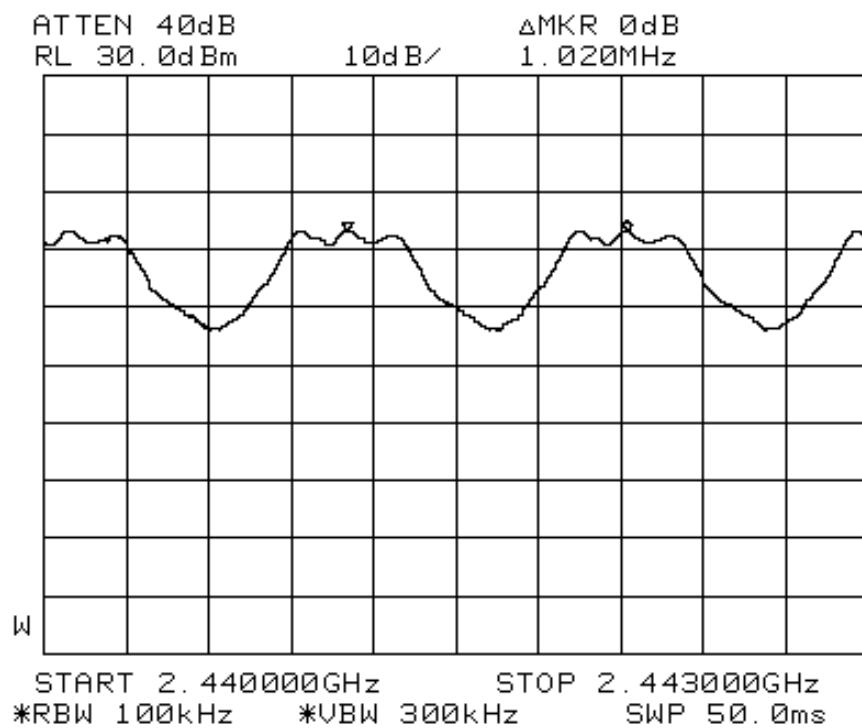

Plot 3 - Channel 39 &amp; 40 Separation

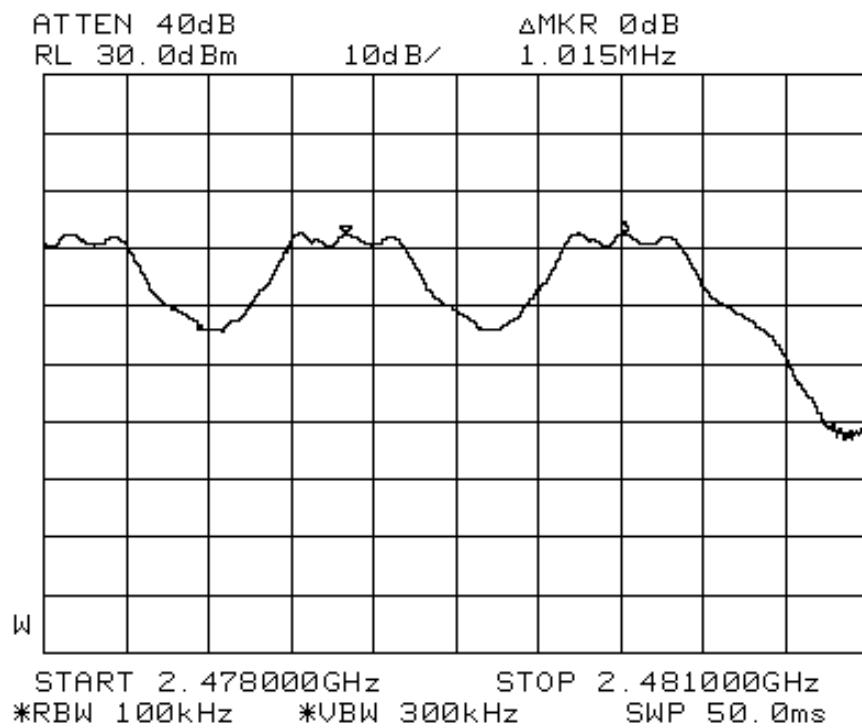

Plot 4 - Channel 77 and 78 Separation

## TEST RESULTS

**FCC Part 15C (15.247(a)(1)) Spectrum Bandwidth (20dB Bandwidth Measurement) Results**

The EUT shows compliance to the requirements of this section, which states that the 20dB bandwidth of the hopping channel shall be the channel frequency separation by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

Channel	Channel Frequency (GHz)	20dB Bandwidth (MHz)
0	2.402	0.843
39	2.441	0.860
78	2.480	0.857


Note: The EUT is a Bluetooth device, which supports no overlapping for each channel.

Please refer to attached Plots 5 - 7 for details.

Tested by: DP


Notes :

1.	<u>Environmental Conditions</u>	Temperature	24°C
		Relative Humidity	55%
		Atmospheric Pressure	1030mbar

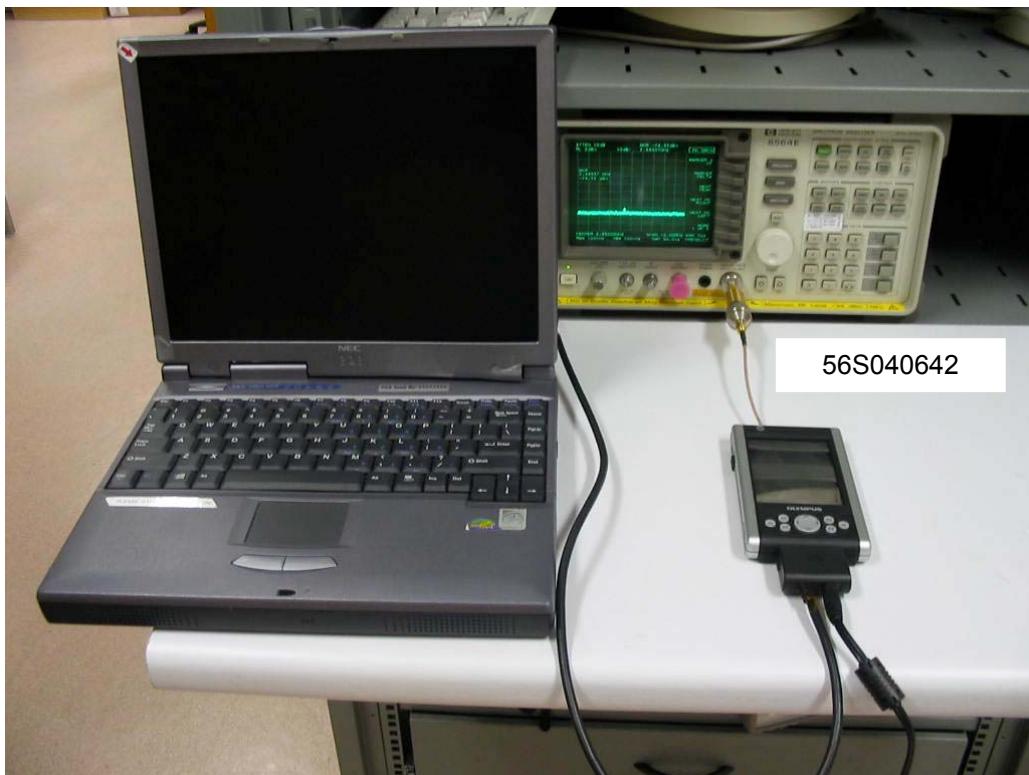


Spectrum Bandwidth Measurement Test Setup

## SPECTRUM BANDWIDTH (20DB BANDWIDTH MEASUREMENT) PLOTS

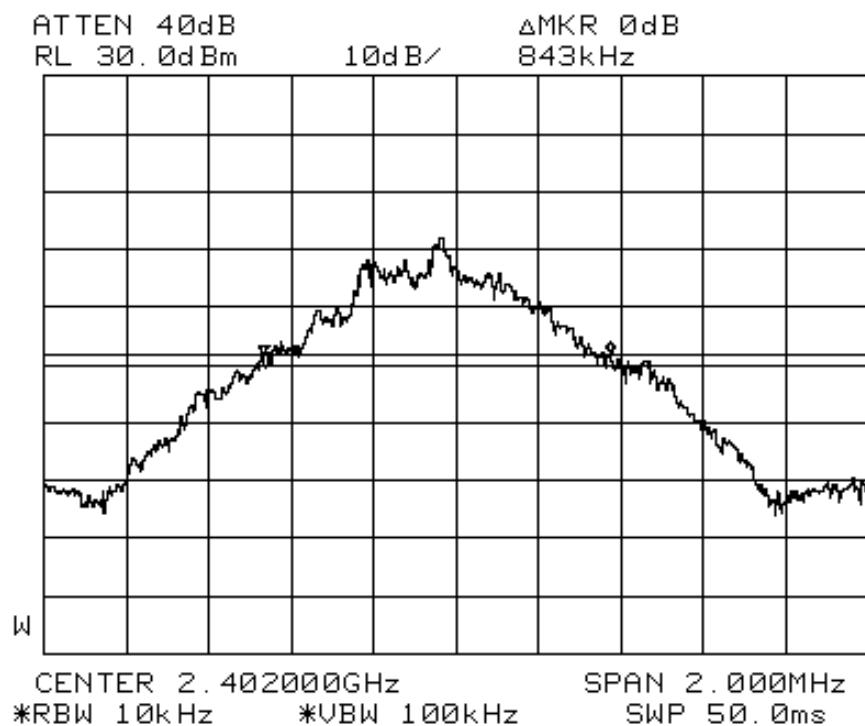


Plot 5 – Channel 0

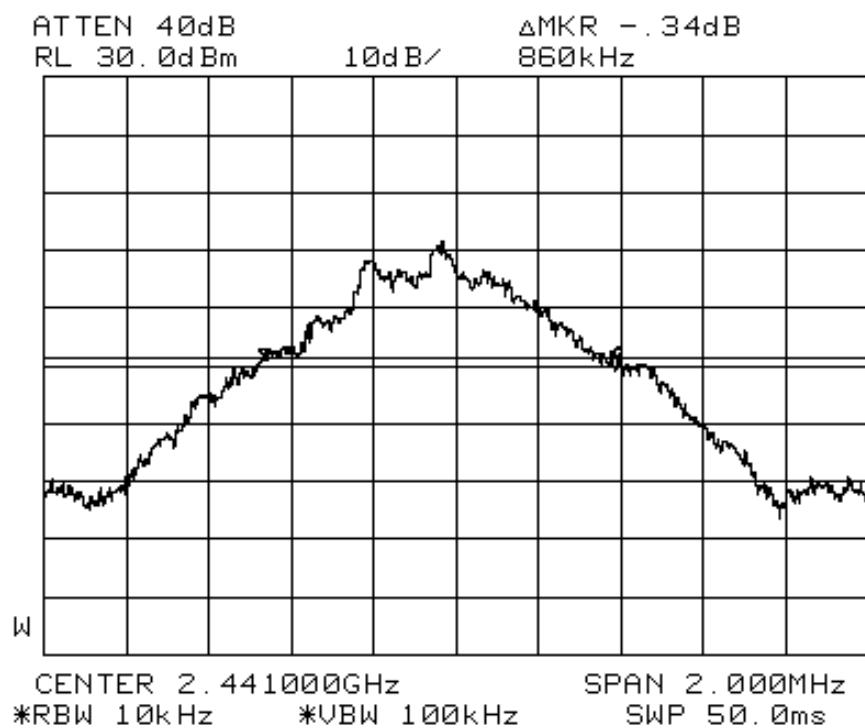

Plot 6 – Channel 39

## SPECTRUM BANDWIDTH (20DB BANDWIDTH MEASUREMENT) PLOTS

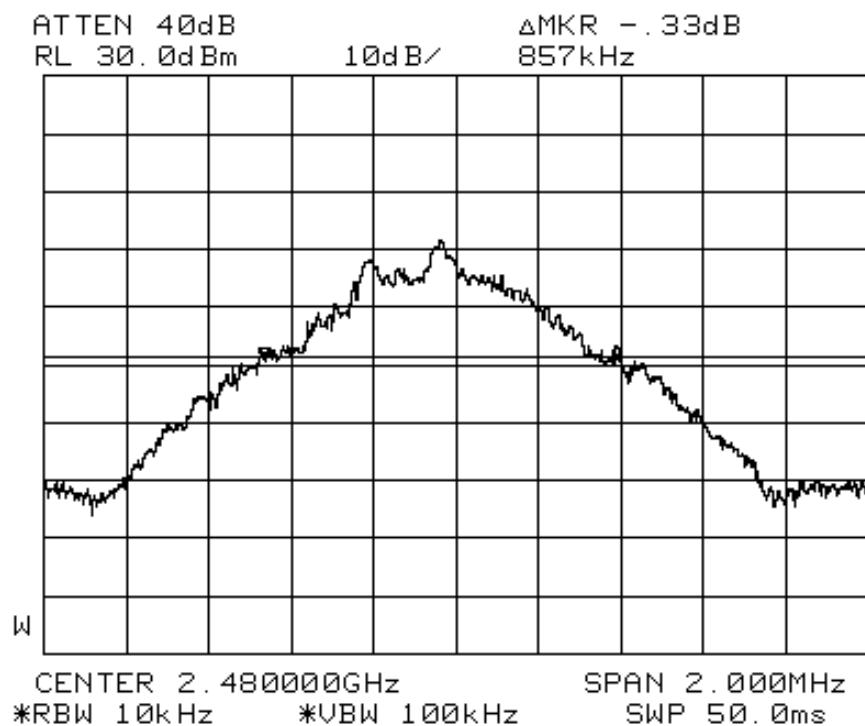

Plot 7 – Channel 78

**FCC Part 15C (15.247(a)(1)(iii)) Number of Hopping Frequencies Results**

The EUT shows compliance to the requirements of this section, which states the number of hopping frequencies shall be at least 75.


The EUT was found to have 79 hopping frequencies.

Please refer to the attached Plots 8 - 11 for details.

Tested by: DP



Notes :

1.	<u>Environmental Conditions</u>	Temperature	24°C
		Relative Humidity	55%
		Atmospheric Pressure	1030mbar

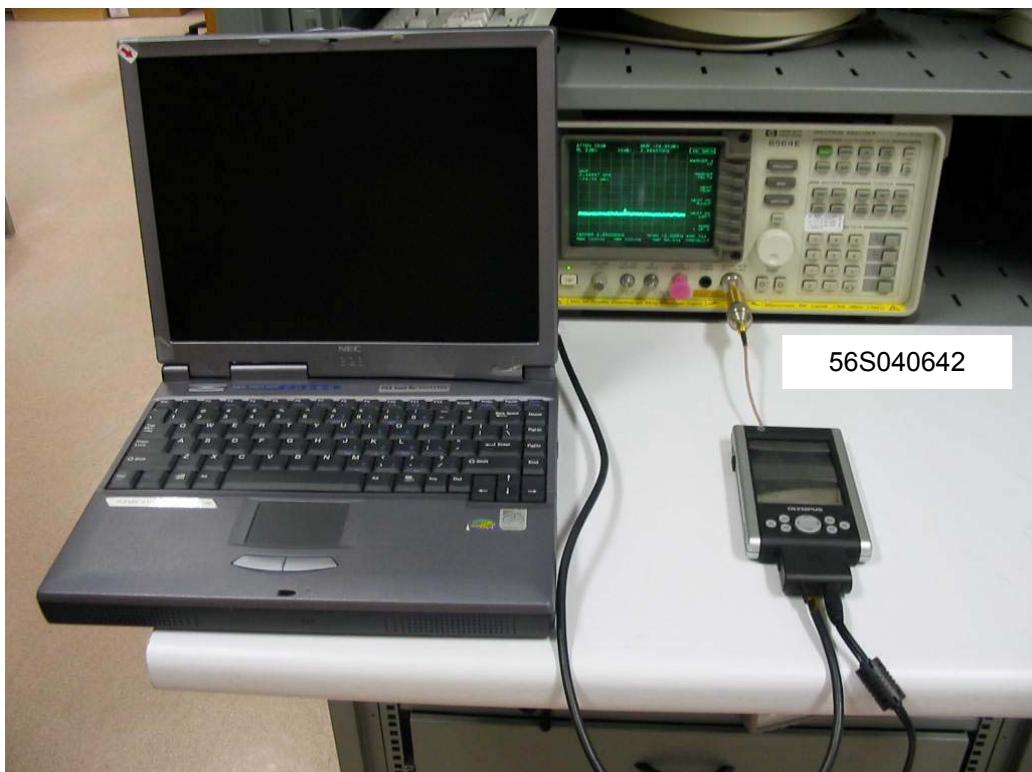


**Number of Hopping Frequencies Measurement Test Setup**


## NUMBER OF HOPPING FREQUENCIES PLOTS

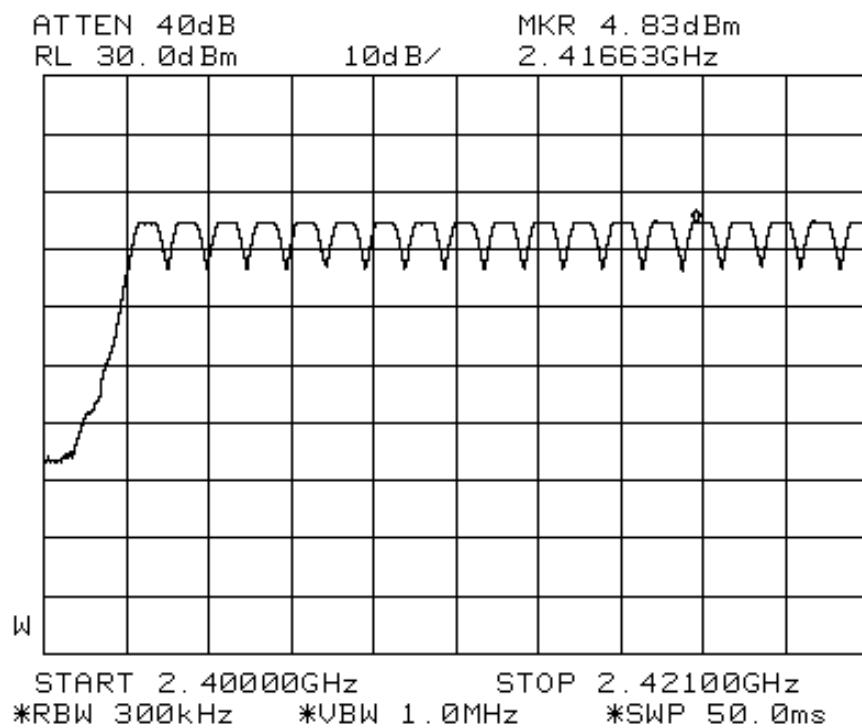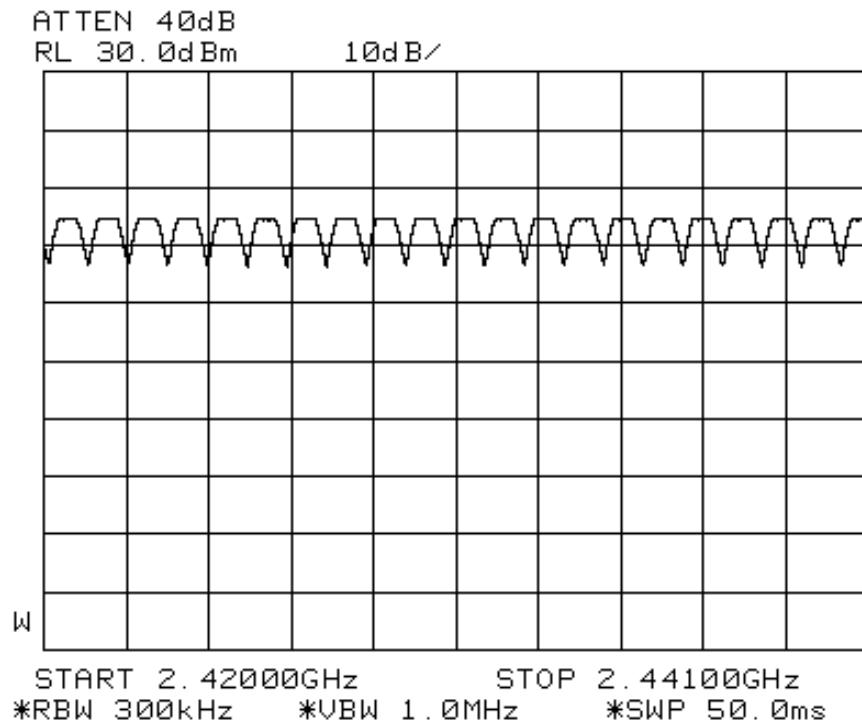Plot 8 - Channels 0 to 18Plot 9 - Channels 19 to 38

## NUMBER OF HOPPING FREQUENCIES PLOTS

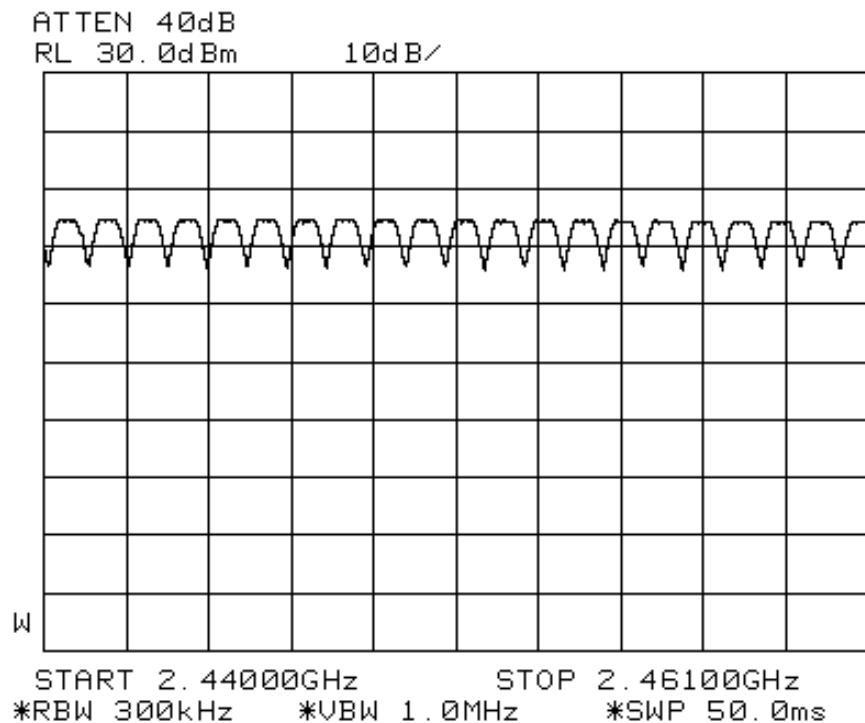

Plot 10 - Channels 39 to 58

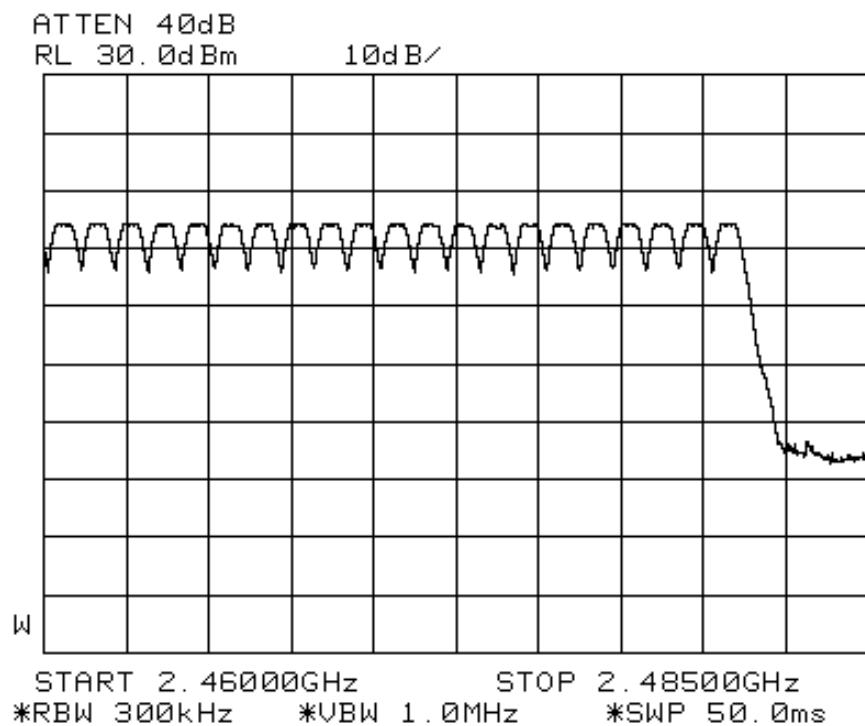

Plot 11 - Channels 59 to 78

## TEST RESULTS

## FCC Part 15C (15.247(a)(1)(iii)) Average Frequency Dwell Time Results

The EUT shows compliance to the requirements of this section, which states the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4second multiplied by the number of hopping channels employed.

EUT hopping rate = 1600 hops/s

Number of EUT hopping frequencies = 79 hops  
DH1packet was used as a transmission packet

Average Frequency Dwell Time = measured time slot length (l) x hopping rate (h) / number of hopping frequencies x 30 seconds period


Channel	Channel Frequency (GHz)	Measured Time Slot Length for DH1 Packet(μs)	Average Frequency Dwell Time (s)	Average Occupancy Limit (s)
0	2.402	0.625	0.3798	0.4
39	2.441	0.625	0.3798	0.4
78	2.480	0.625	0.3798	0.4

Please refer to the attached Plots 12 – 14 for details.

Tested by: DP


### Notes :

1.	<u>Environmental Conditions</u>	Temperature	24°C
		Relative Humidity	55%
		Atmospheric Pressure	1030mbar

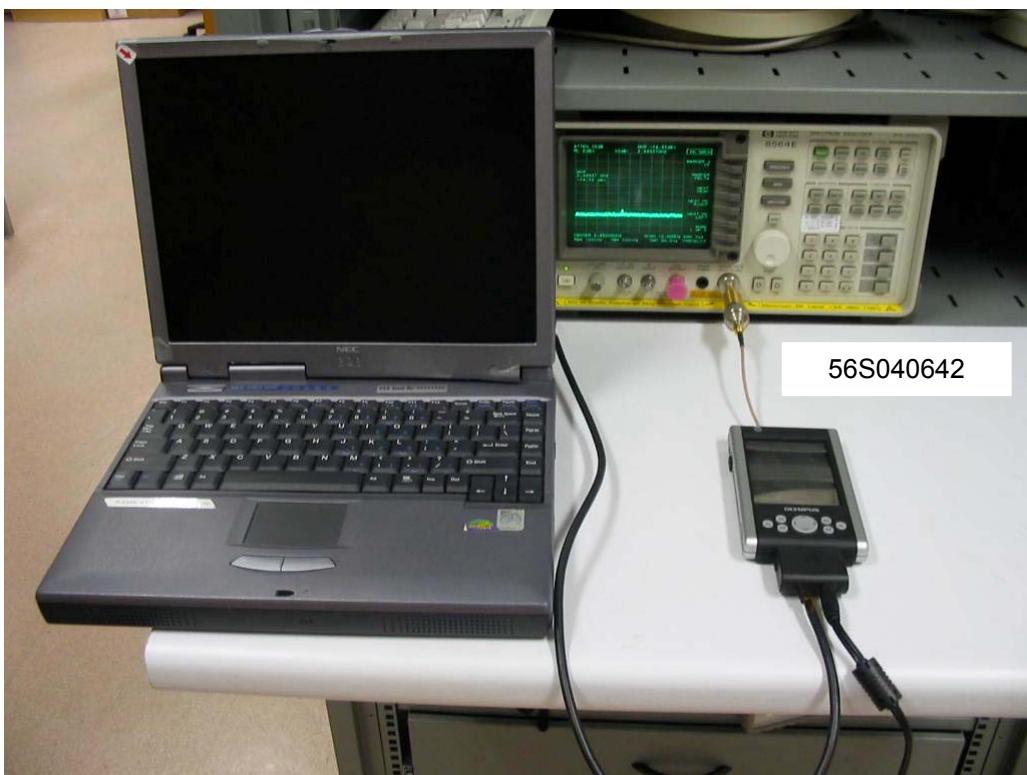


## Average Frequency Dwell Time Measurement Test Setup

## AVERAGE FREQUENCY DWELL TIME PLOTS

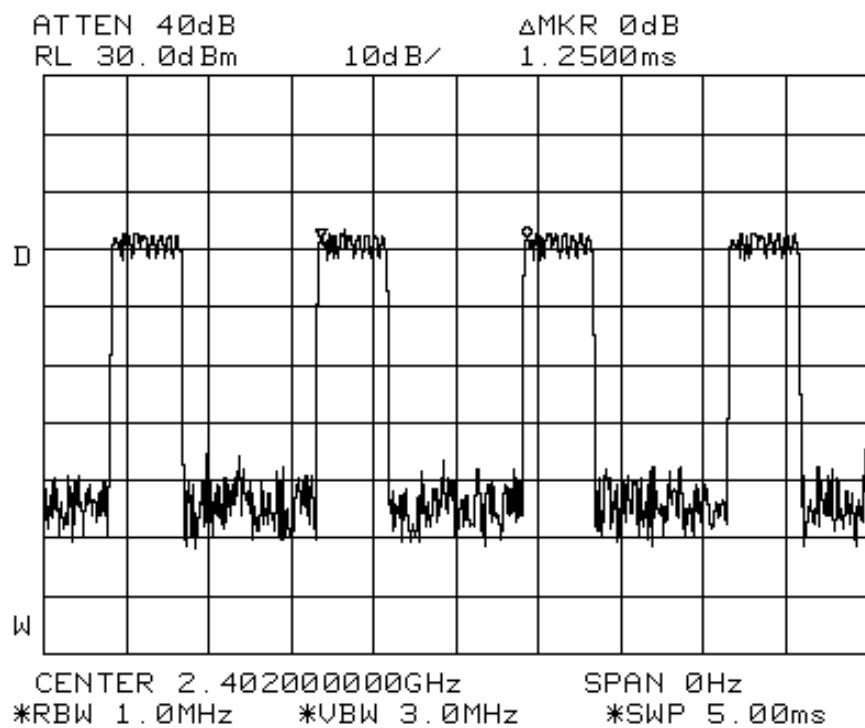


Plot 12 – Channel 0

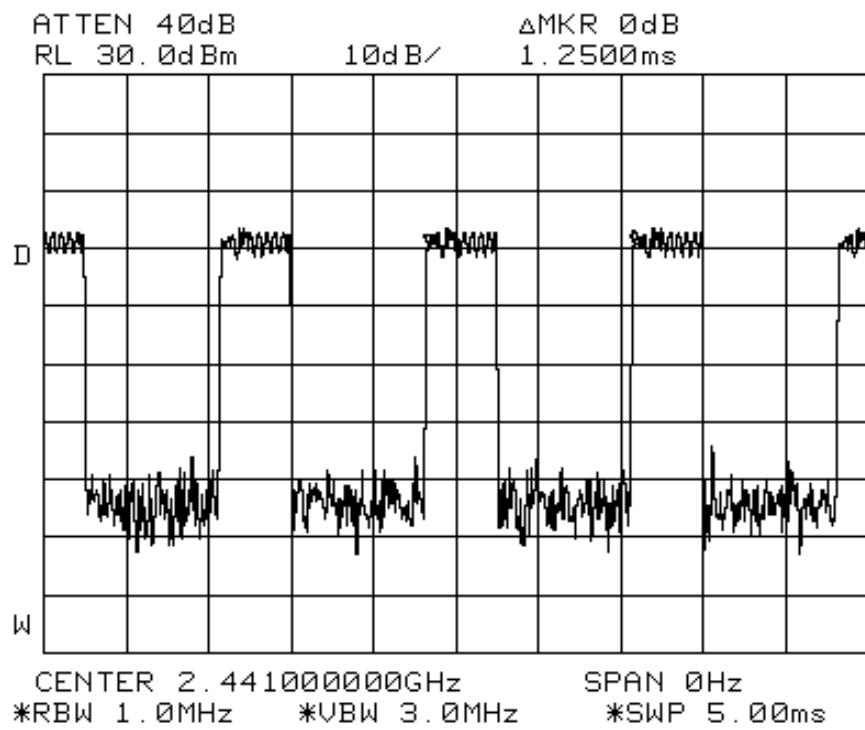

Plot 13 – Channel 39

## AVERAGE FREQUENCY DWELL TIME PLOTS

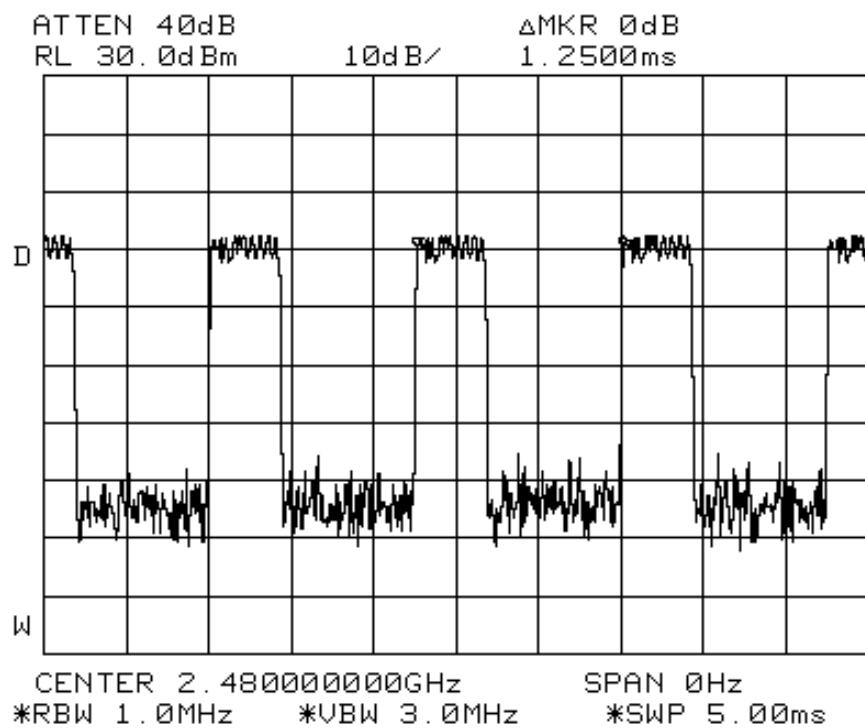

Plot 14 – Channel 78

**FCC Part 15C (15.247(b)(1)) Maximum Peak Power Results**

The EUT shows compliance to the requirements of this section, which states the peak power of an intentional radiator (EUT) shall not exceed 30dBm (1 Watt).

The maximum peak power for Channels 0, 39 and 78 at 2.402GHz, 2.441GHz and 2.480GHz respectively were investigated and found below 30dBm (1Watt).

Channel	Channel Frequency (GHz)	Maximum Peak Power (W)	Limit (W)
0	2.402	0.002089	1
39	2.441	0.002042	1
78	2.480	0.002108	1

Tested by: DP

Notes :

1. Environmental Conditions      Temperature 24°C  
Relative Humidity 55%  
Atmospheric Pressure 1030mbar
2. Power analyser of Universal Radio Communication Tester was used for power measurement with peak detection as mode of measurement. The power analyser mode supports a wideband power measurement ranging from 100kHz to 2700MHz.



**Maximum Peak Power Measurement Test Setup**

**TEST RESULTS****FCC Part 15C (15.247(c)) RF Conducted Spurious Emissions & Band Edge Compliance at the Transmitter Antenna Results**

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the RF power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.


The RF conducted spurious emissions were scanned from 10MHz to 25GHz for Channels 0, 39, and 78 with channel frequency at 2.402GHz, 2.441GHz and 2.480GHz respectively. No significant signal was found and they were below the specified limit. Please refer to the attached Plots 15 – 20 for details.

The conducted spurious at lower and upper band-edges (2.4000GHz and 2.4835GHz) were scanned. The spurious emissions at band-edges were found below the specified limit. Please refer to the attached Plots 21 – 22 for details.

Tested by: DP


Notes :

1.	<u>Environmental Conditions</u>	Temperature	24°C
		Relative Humidity	55%
		Atmospheric Pressure	1030mbar

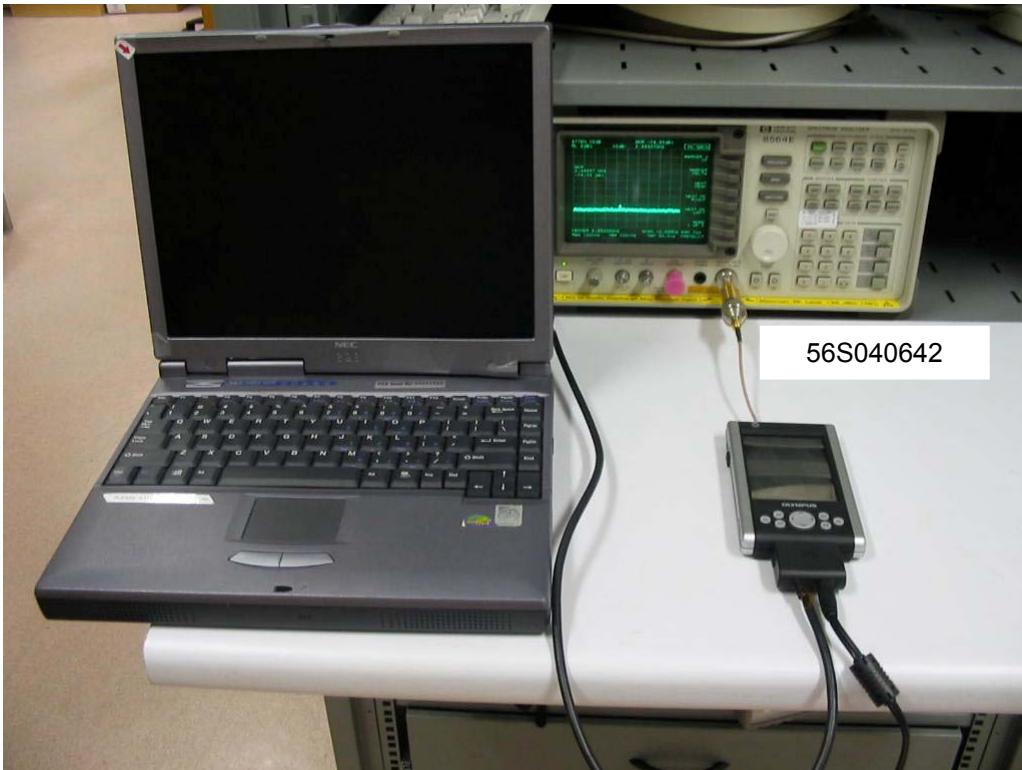


**RF Conducted Spurious & Band Edge Measurement Test Setup**

## RF CONDUCTED SPURIOUS EMISSIONS PLOTS

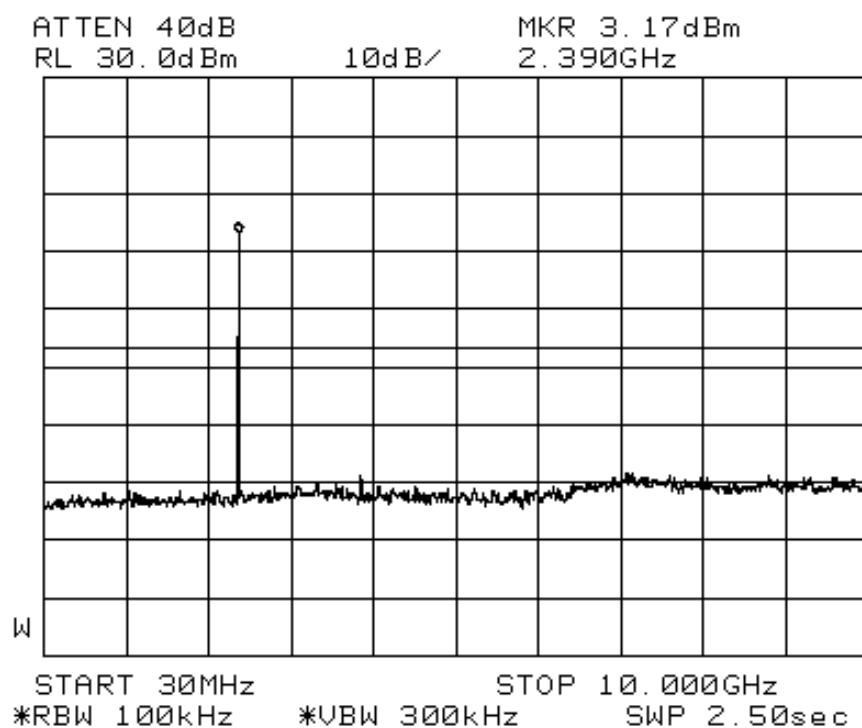


Plot 15 – Channel 0

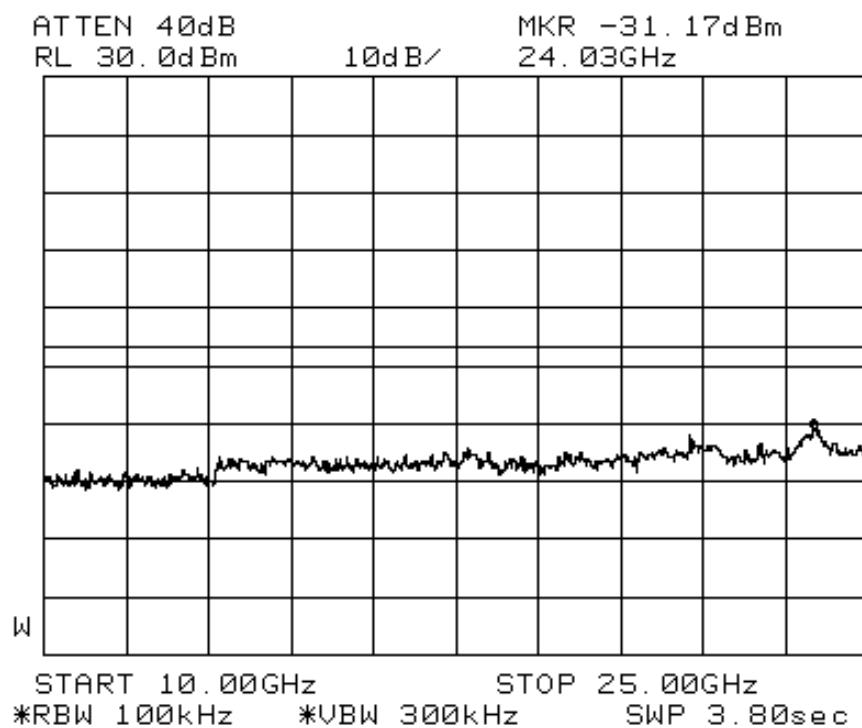


Plot 16 – Channel 0

## RF CONDUCTED SPURIOUS EMISSIONS PLOTS

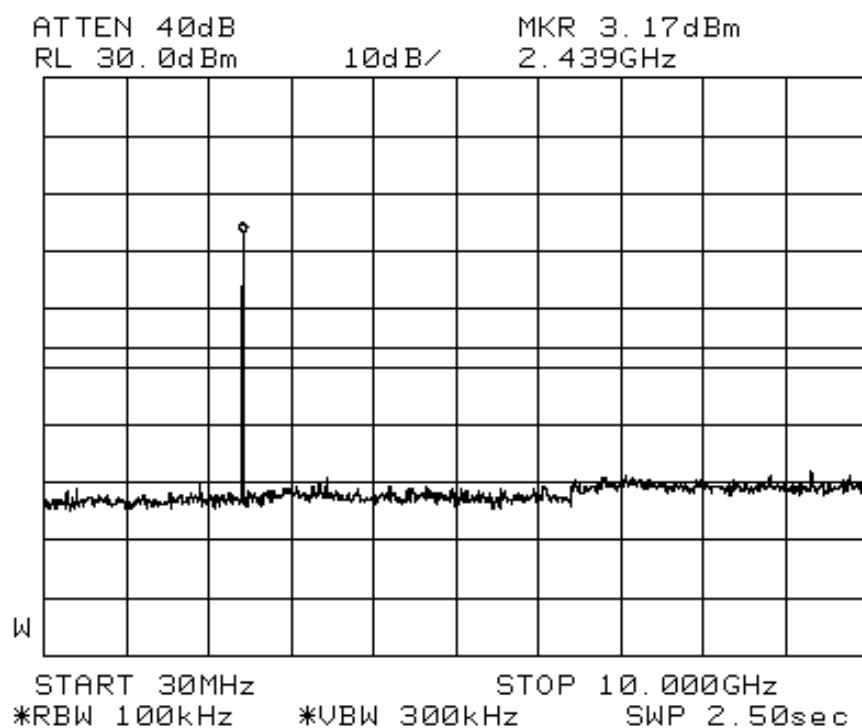


Plot 17 – Channel 39

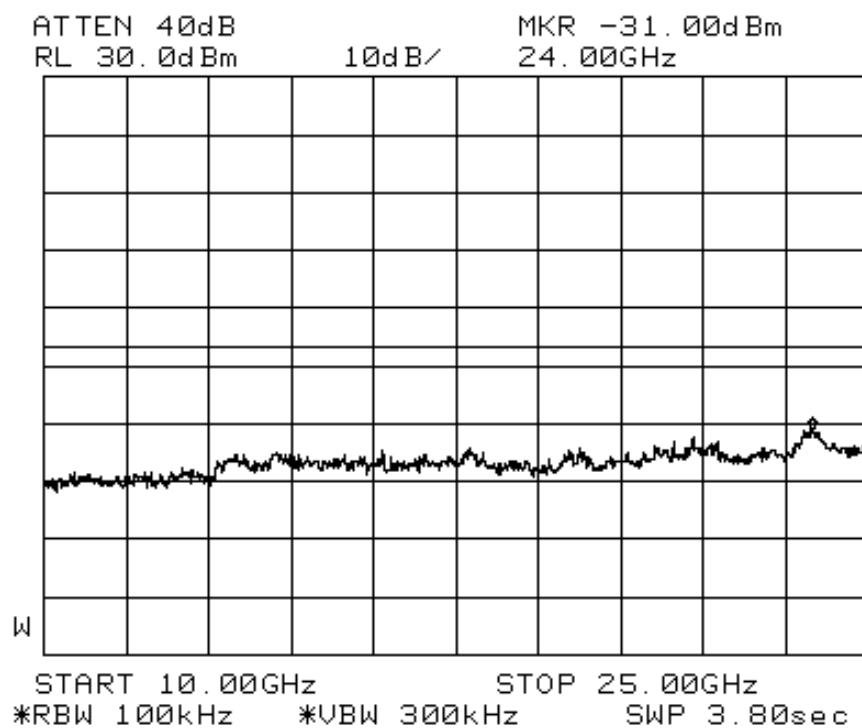


Plot 18 – Channel 39

## RF CONDUCTED SPURIOUS EMISSIONS PLOTS

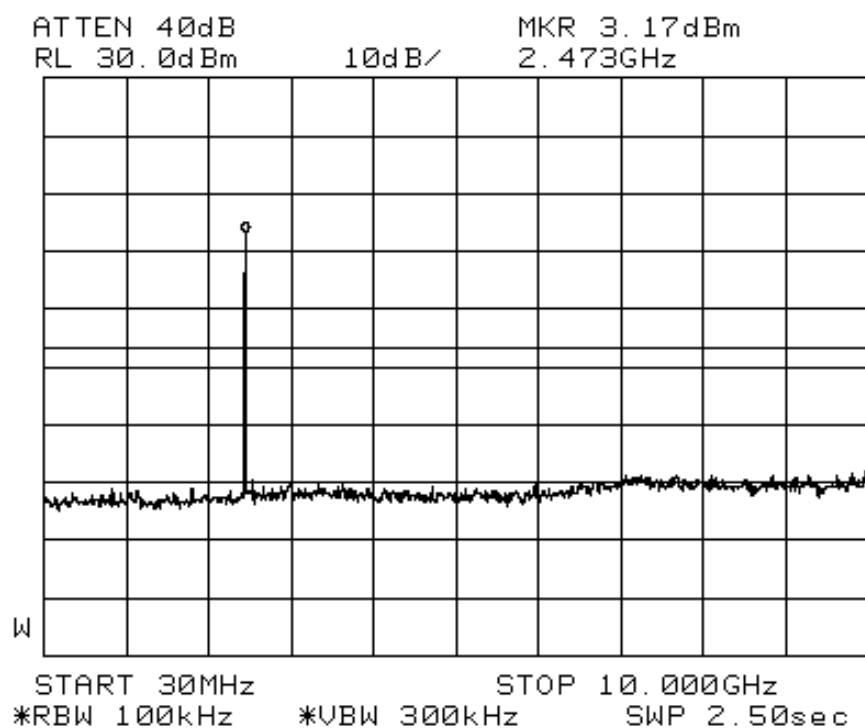


Plot 19 – Channel 78

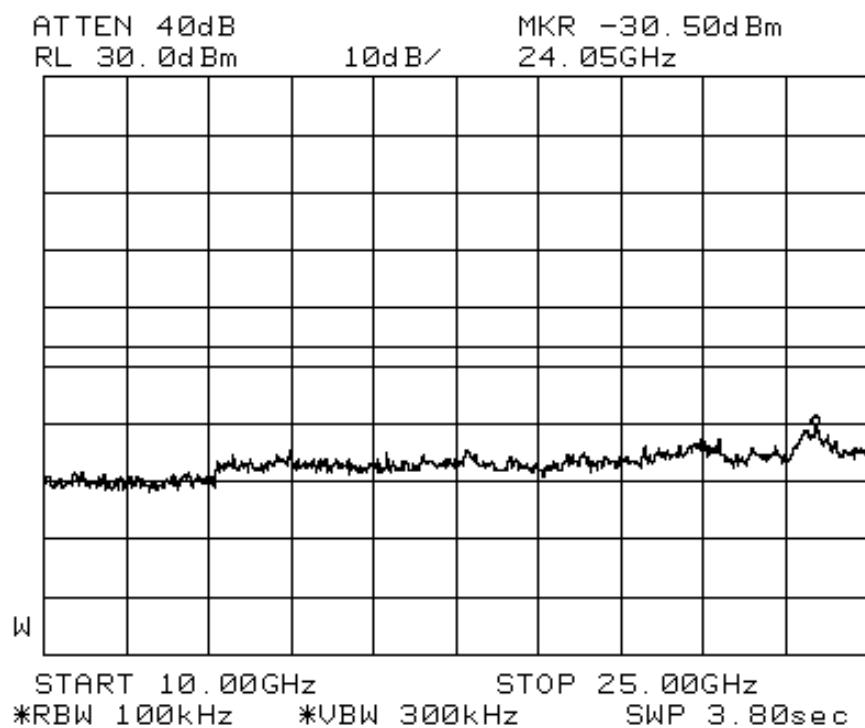


Plot 20 – Channel 78

## BAND EDGE COMPLIANCE PLOTS

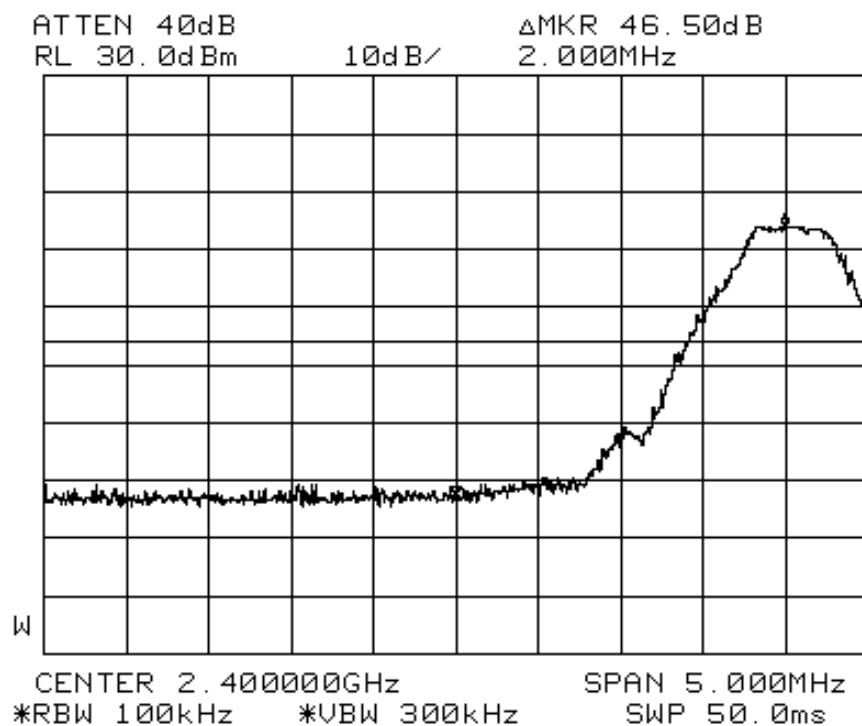

Plot 21 – Lower Band Edge at 2.40GHz

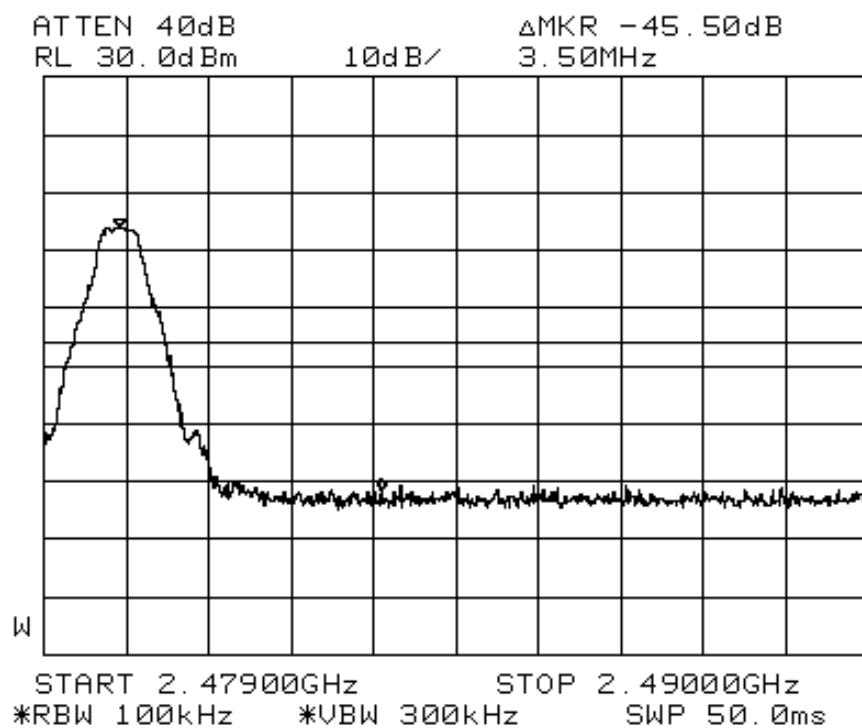

Plot 22 – Upper Band Edge at 2.4835GHz

**FCC Part 15C (15.247(d)) Peak Power Spectral Density Results**

The EUT shows compliance to the requirements of this section, which states the peak power spectral density of an intentional radiator (EUT) to the antenna shall not be greater than 8dBm (6.3mW) in any 3kHz band during any time interval of continuous transmission.


Channel	Channel Frequency (GHz)	Peak Power Spectral Density (mW)	Limit (mW)
0	2.402	0.2931	6.3
39	2.441	0.2931	6.3
78	2.480	0.2711	6.3

Please refer to the attached Plots 23 – 25 for details.

Tested by: DP


Notes :

1.	<u>Environmental Conditions</u>	Temperature	24°C
		Relative Humidity	55%
		Atmospheric Pressure	1030mbar

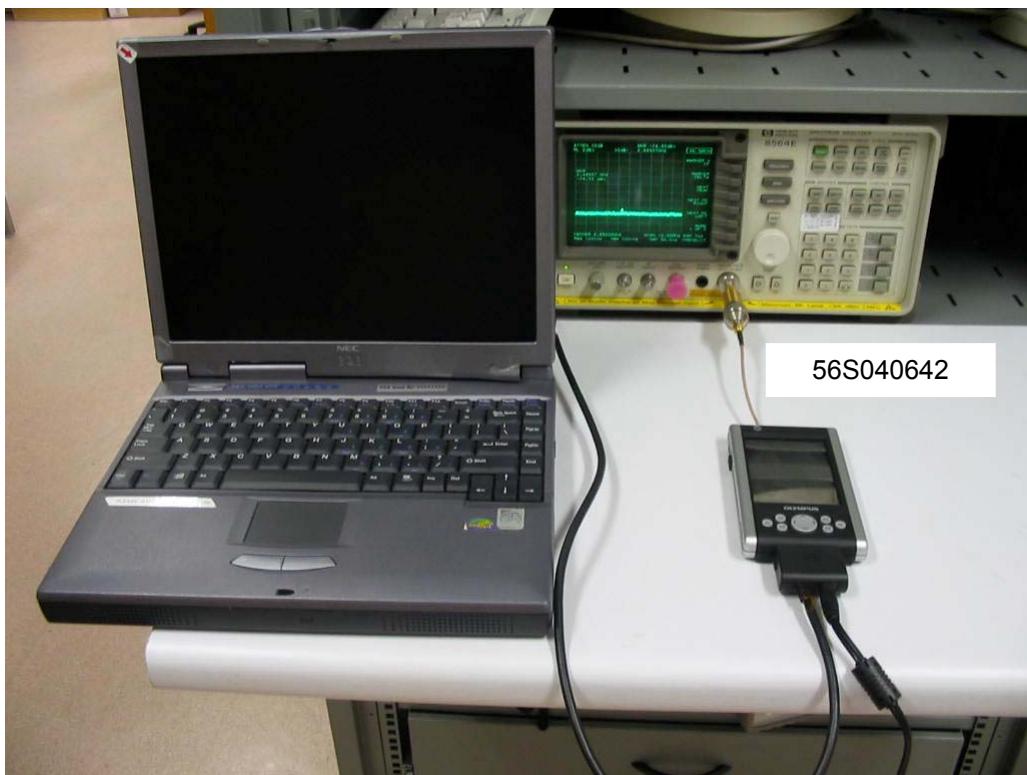


Peak Power Spectral Density Measurement Test Setup

## PEAK POWER SPECTRAL DENSITY PLOTS

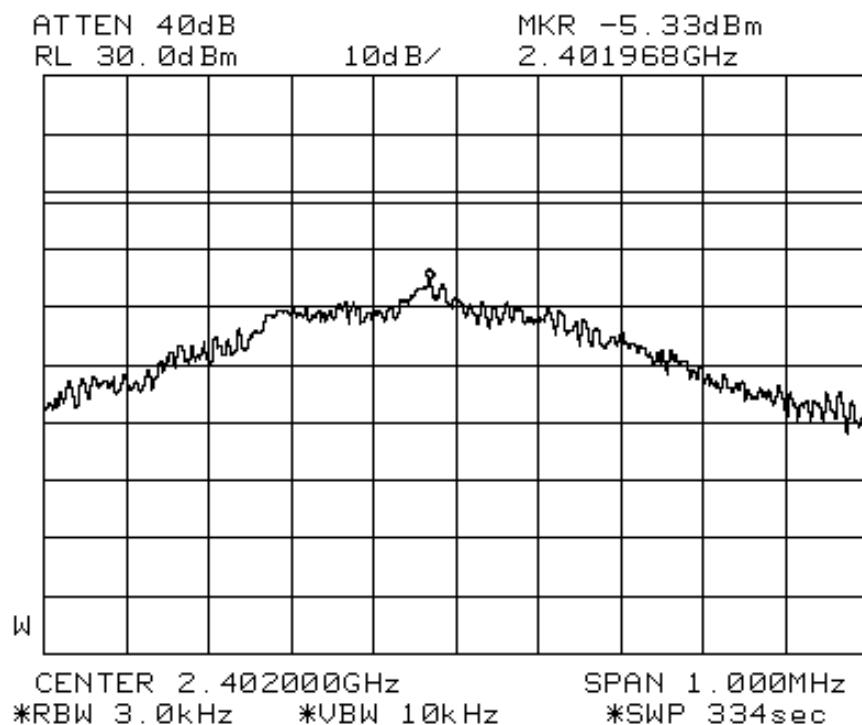


Plot 23 - Channel 0

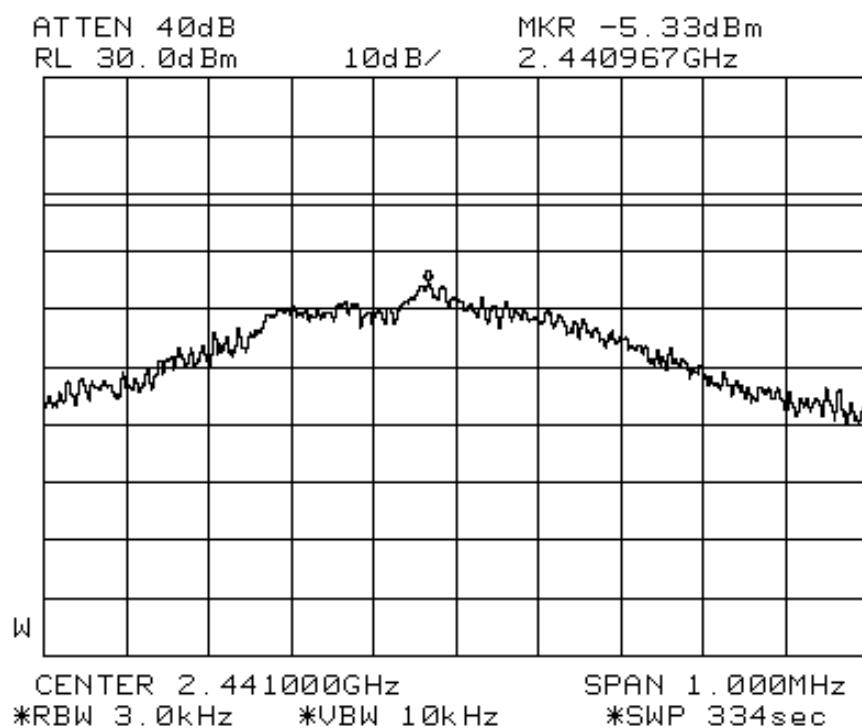

Plot 24 - Channel 39

## PEAK POWER SPECTRAL DENSITY PLOTS

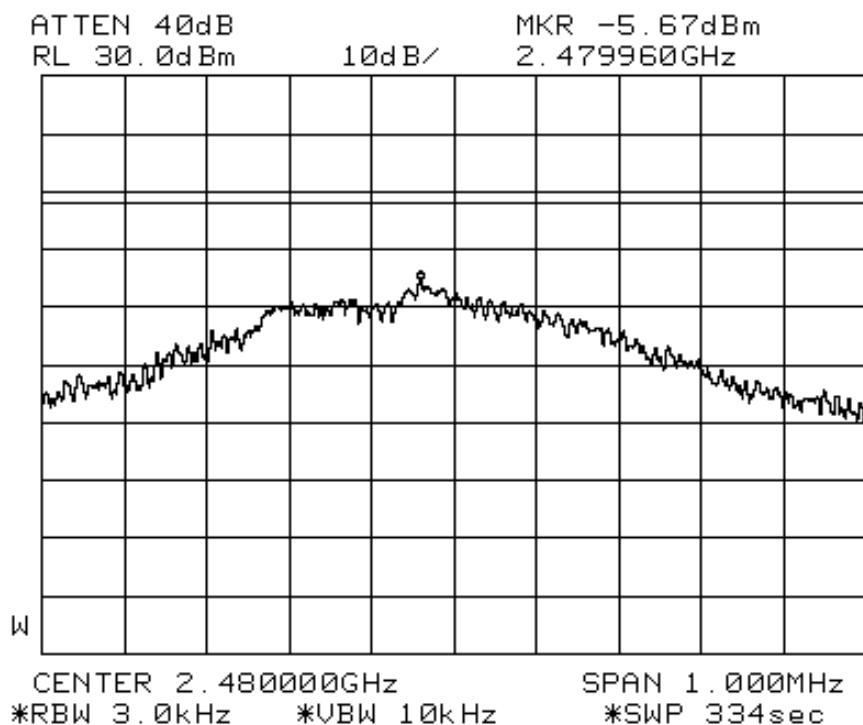

**This Report is issued under the following conditions:**

1. Results of the testing/calibration in the form of a report will be issued immediately after the service has been completed or terminated.
2. Unless otherwise requested, a report shall contain only technical results. Analysis and interpretation of the results and professional opinion and recommendations expressed thereupon, if required, shall be clearly indicated and additional fee paid for, by the Client.
3. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that PSB Corporation approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that PSB Corporation in any way "guarantees" the later performance of the product/equipment.
4. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. PSB Corporation therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
5. Additional copies of the report are available to the Client at an additional fee. No third party can obtain a copy of this report through PSB Corporation, unless the Client has authorised PSB Corporation in writing to do so.
6. PSB Corporation may at its sole discretion add to or amend the conditions of the report at the time of issue of the report and such report and such additions or amendments shall be binding on the Client.
7. All copyright in the report shall remain with PSB Corporation and the Client shall, upon payment of PSB Corporation's fees for the carrying out of the tests/calibrations, be granted a license to use or publish the report to the third parties subject to the terms and conditions herein, provided always that PSB Corporation may at its absolute discretion be entitled to impose such conditions on the license as it sees fit.
8. Nothing in this report shall be interpreted to mean that PSB Corporation has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
9. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to PSB Corporation or to the report or results furnished by PSB Corporation in any advertisements or sales promotion.

August 2003

**ANNEX A**

**TEST INSTRUMENTATION & GENERAL PROCEDURES**

**TEST INSTRUMENTATION & GENERAL PROCEDURES****ANNEX A****3m OATS Test Instrumentation  
(Conducted EMI)**

<u>Instrument</u>	<u>Model</u>	<u>S/No</u>	<u>Cal Due Date</u>	
R&S Test Receiver (9kHz-30MHz)	ESH3	862301/005	24 Jun 2005	<input checked="" type="checkbox"/>
R&S Pulse Limiter – PL1	ESH3-Z2	357.8810.52	07 Apr 2005	<input checked="" type="checkbox"/>
Schaffner Pulse Limiter – PL5	CFL 9206	1720	01 Apr 2005	<input checked="" type="checkbox"/>
EMCO LISN (for EUT) – LISN6	3825/2	9309-2127	20 May 2005	<input checked="" type="checkbox"/>

**3m Anechoic Chamber Test Instrumentation  
(Radiated Emissions)**

<u>Instrument</u>	<u>Model</u>	<u>S/No</u>	<u>Cal Due Date</u>	
R&S Test Receiver (20Hz – 26.5GHz) – ESMI1	ESMI	849182/003 848926/007	06 Apr 2005	<input checked="" type="checkbox"/>
HP Preamplifier (for ESMI3, 0.01-3GHz) – PA6	87405A	3950M00353	1 Apr 2005	<input checked="" type="checkbox"/>
MITEQ Preamplifier (0.1-26.5GHz) – PA11	NSP2650-N	728231	1 Apr 2005	<input checked="" type="checkbox"/>
Schaffner Biolog Antenna – BL5	CBL6143	5041	18 May 2005	<input checked="" type="checkbox"/>
EMCO Horn Antenna – H14	3115	0003-6087	22 May 2005	<input checked="" type="checkbox"/>
Micro-tronics Band-Stop Filter	BRM50701	017	1 Apr 2005	<input checked="" type="checkbox"/>

**RF Conducted Test Instrumentation**

**(Carrier Frequency Separation, Number Of Hopping Frequencies, Spectrum Bandwidth (20dB Bandwidth Measurement), Average Frequency Dwell Time, Maximum Peak Power, RF Conducted Spurious Emissions at the Transmitter Antenna Terminal, Band Edge Compliance at the Transmitter Antenna Terminal, Peak Power Density)**

<u>Instrument</u>	<u>Model</u>	<u>S/No</u>	<u>Cal Due Date</u>	
HP Spectrum Analyzer	8563E	3846A09953	16 Dec 2004	<input checked="" type="checkbox"/>
R&S Universal Radio Communication Tester	CMU 200	837587/068	22 Mar 2005	<input checked="" type="checkbox"/>

## CONDUCTED EMISSIONS TEST DESCRIPTION

## Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.
2. The power supply for the EUT was fed through a  $50\Omega/50\mu\text{H}$  EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another LISN.

## Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10kHz. Both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line.

## Sample Calculation Example

At 20 MHz limit =  $250 \mu\text{V} = 47.96 \text{ dB}\mu\text{V}$

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.2 dB

Q-P reading obtained directly from EMI Receiver =  $40 \text{ dB}\mu\text{V}$   
(Calibrated for system losses)

Therefore, Q-P margin =  $40 - 47.96 = -7.96$  i.e. **7.96 dB below limit**

**TEST INSTRUMENTATION & GENERAL PROCEDURES****ANNEX A****RADIATED EMISSIONS TEST DESCRIPTION (3m ANC)****Test Set-up**

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A prescan was carried out to find out the EUT highest emissions relative to the limit by rotating the EUT through three orthogonal axes to determine which attitude and equipment arrangement produces such emissions.
3. The final measurement was then carried out at the selected frequency points based on the highest emissions arrangement found from step 2. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
  - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
  - b. The EUT was then rotated to the direction that gave the maximum emission.
  - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
4. A Quasi-peak measurement was made for that frequency point if it was less than or equal to 1GHz. For frequency point that above 1GHz, both Peak and Average measurements were carried out.
5. Steps 3 and 4 were repeated for the next frequency point, until all selected frequency points were measured.
6. The frequency range covered was from 30MHz to 25GHz, using the Bi-log antenna for frequencies from 30MHz up to 3GHz, and the Horn antenna above 3GHz.

**Sample Calculation Example**

At 300 MHz

limit = 200  $\mu$ V/m = 46 dB $\mu$ V/m

Log-periodic antenna factor &amp; cable loss at 300 MHz = 18.511 dB

Q-P reading obtained directly from EMI Receiver = 40 dB $\mu$ V/m  
(Calibrated level including antenna factors & cable losses)

Therefore, Q-P margin = 40 - 46 = -6

i.e. **6 dB below limit**

**TEST INSTRUMENTATION & GENERAL PROCEDURES****ANNEX A****CARRIER FREQUENCY SEPARATION TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the Bluetooth test mode with hopping sequence on.
2. The start and stop frequencies of the spectrum analyser were set to 2.401GHz and 2.404GHz with frequency sweeping set to 50ms.
3. The spectrum analyser was set to max hold to capture the two adjacent transmitting frequencies within the span. The signal capturing was continuous until no further signals were detected.
4. The carrier frequency separation of the two adjacent transmitting / operating frequency was measured by finding the carrier frequency difference between the two adjacent channels.
5. The steps 2 to 4 were repeated with the following start and stop frequencies settings:
  - a. 2.439GHz to 2.442GHz
  - b. 2.440GHz to 2.443GHz
  - c. 2.478GHz to 2.481GHz

**TEST INSTRUMENTATION & GENERAL PROCEDURES****ANNEX A****SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 10kHz and 100kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the Bluetooth test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz).
2. The center frequency of the spectrum analyser was set to the transmitting frequency with the frequency span wide enough to capture the 20dB bandwidth of the transmitting frequency.
3. The spectrum analyser was set to max hold to capture the transmitting frequency. The signal capturing was continuous until no further changes were observed.
4. The peak of the transmitting frequency was detected with the marker peak function of the spectrum analyser. The frequencies below the 20dB peak frequency at lower ( $f_L$ ) and upper ( $f_H$ ) sides of the transmitting frequency were marked and measured by using the marker-delta function of the spectrum analyser.
6. The 20dB bandwidth of the transmitting frequency is the frequency difference between the marked lower and upper frequencies,  $| f_H - f_L |$ .
7. The steps 2 to 5 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

**NUMBER OF HOPPING FREQUENCIES TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
4. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 300kHz and 1000MHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the Bluetooth test mode with hopping sequence on.
2. The start and stop frequencies of the spectrum analyser were set to 2.40GHz and 2.421GHz with frequency sweeping set to 50ms.
3. The spectrum analyser was set to max hold to capture all the transmitting frequencies within the span. The signal capturing was continuous until all the transmitting frequencies were captured and no further signals were detected.
4. The numbers of transmitting frequencies were counted and recorded.
5. The steps 2 to 5 were repeated with the following start and stop frequencies settings:
  - a. 2.420GHz to 2.441GHz
  - b. 2.440GHz to 2.461GHz
  - c. 2.460GHz to 2.4835GHz
6. The total number of hopping frequencies is the sum of the number of the hopping frequencies found for each span.

**TEST INSTRUMENTATION & GENERAL PROCEDURES****ANNEX A****AVERAGE FREQUENCY DWELL TIME TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 1MHz and 3MHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the Bluetooth test mode, hopping sequence on.
2. The center frequency of the spectrum analyser was set to 2.402GHz with zero frequency span (spectrum analyser acts as an oscilloscope).
3. The sweep time of the spectrum analyser was adjusted until a stable signal can be seen on the spectrum analyser.
4. The duration (dwell time) of a packet was measured using the marker-delta function of the spectrum analyser. The average dwell time of the transmitting frequency was computed as below:

$$\text{Average Frequency Dwell Time} = \frac{\text{measured time slot length (l)} \times \text{hopping rate (h)}}{\text{number of hopping frequencies} \times 30 \text{ seconds period}}$$

$$\begin{aligned} \text{where EUT hopping rate} &= 1600 \text{ hops/s} \\ \text{Number of EUT hopping frequencies} &= 79 \text{ hops} \end{aligned}$$

5. The steps 2 to 4 were repeated with the center frequency of the spectrum analyser were set to 2.441GHz and 2.480GHz respectively.

**MAXIMUM PEAK POWER TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo..
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the Universal Radio Communication Tester, which was set into power analyser mode via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the Bluetooth test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz).
2. The maximum peak power of the transmitting frequency was detected and recorded.
3. The step 2 was repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

**TEST INSTRUMENTATION & GENERAL PROCEDURES****ANNEX A****RF CONDUCTED SPURIOUS EMISSIONS AT THE TRANSMITTER ANTENNA TERMINAL TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the Bluetooth test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz).
2. The start and stop frequencies of the spectrum analyser were set to 30MHz and 10GHz.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with frequency span was set from 10GHz to 25GHz.
5. The steps 2 to 4 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

**BAND EDGE COMPLIANCE AT THE TRANSMITTER ANTENNA TERMINAL TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the Bluetooth test mode, hopping sequence on.
2. The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the Bluetooth band, 2.40GHz and any spurious emissions at the band edge.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the Bluetooth band, 2.4835GHz and the any spurious emissions at the band-edge.

**PEAK POWER SPECTRAL DENSITY TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 3kHz and 10kHz.
5. All other supporting equipment were powered separately from another filtered mains.


**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the Bluetooth test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz).
2. The sweep time of the spectrum analyser was set to the value of the ratio of the frequency span divided by the RBW.
3. The peak power density of the transmitting frequency was detected and recorded.
4. The step 3 was repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

**ANNEX B**

**TEST PHOTOGRAPHS / DIAGRAMS**

## EUT PHOTOGRAPHS

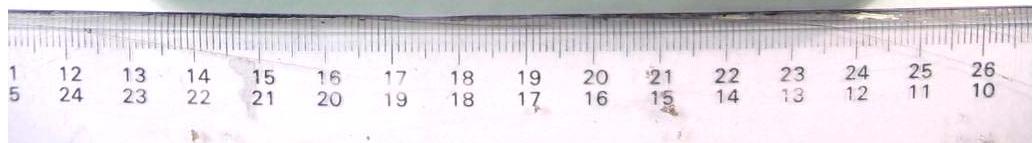

Front View



Rear View


**TEST PHOTOGRAPHS / DIAGRAMS**

**ANNEX B**

**EUT PHOTOGRAPHS**



Left View

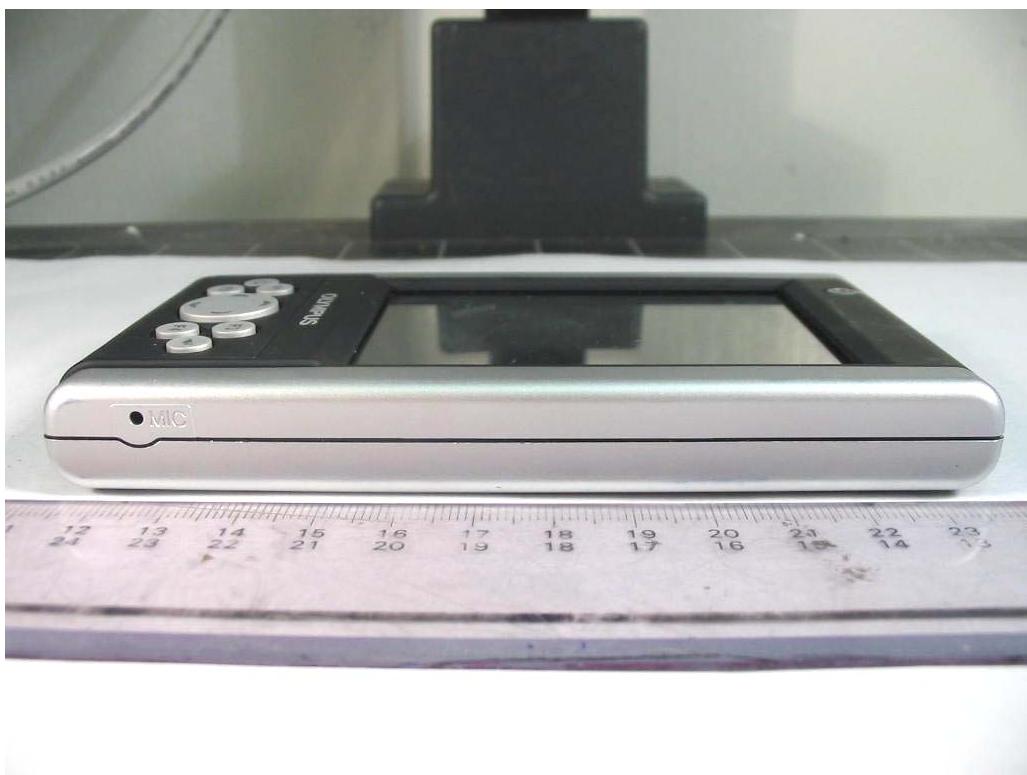


Right View

**TEST PHOTOGRAPHS / DIAGRAMS**

**ANNEX B**

**EUT PHOTOGRAPHS**

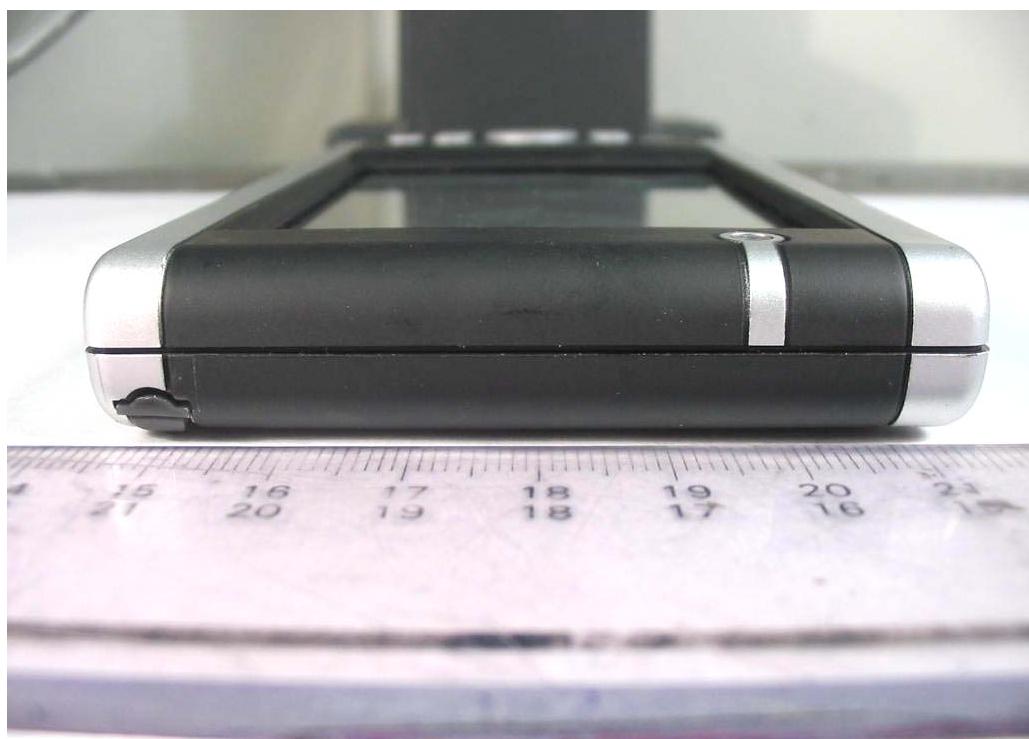

Top View



Bottom View

## TEST PHOTOGRAPHS / DIAGRAMS

## ANNEX B

## EUT PHOTOGRAPHS

EUT AC/DC Power Adapter Top ViewEUT AC/DC Power Adapter Bottom View

TEST PHOTOGRAPHS / DIAGRAMS

ANNEX B

EUT PHOTOGRAPHS



EUT Sync Cable Top View




EUT Sync Cable Bottom View

TEST PHOTOGRAPHS / DIAGRAMS

ANNEX B

EUT PHOTOGRAPHS

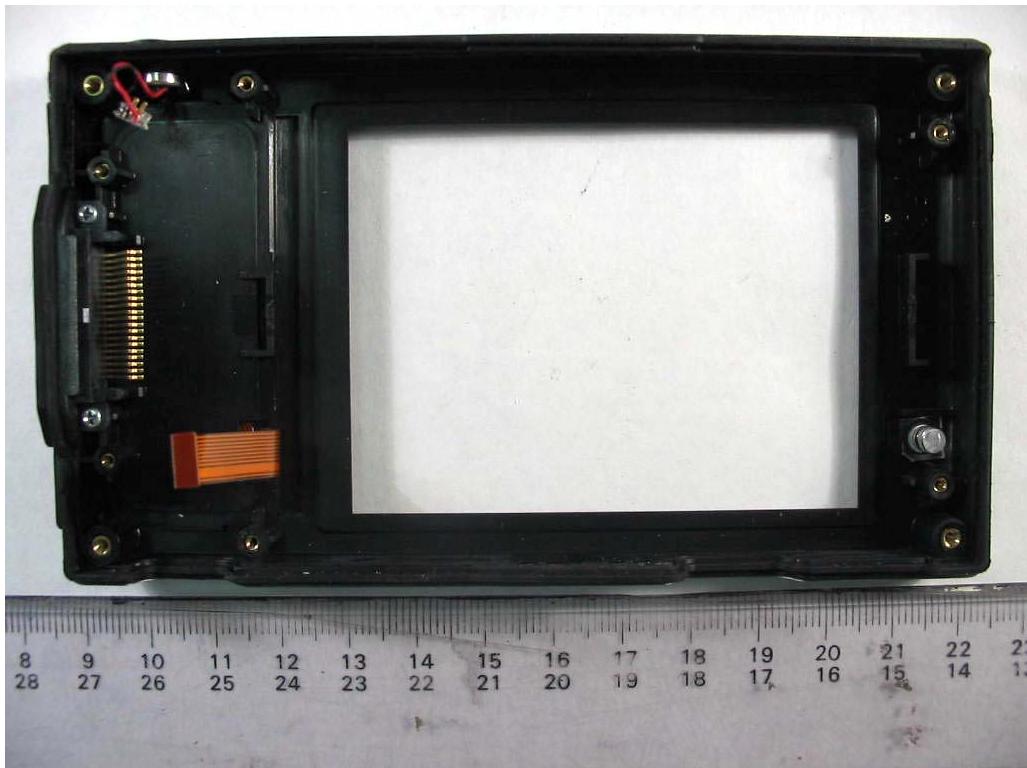

EUT Top Housing Internal View




EUT Bottom Housing Internal View

## TEST PHOTOGRAPHS / DIAGRAMS

## ANNEX B

## EUT PHOTOGRAPHS

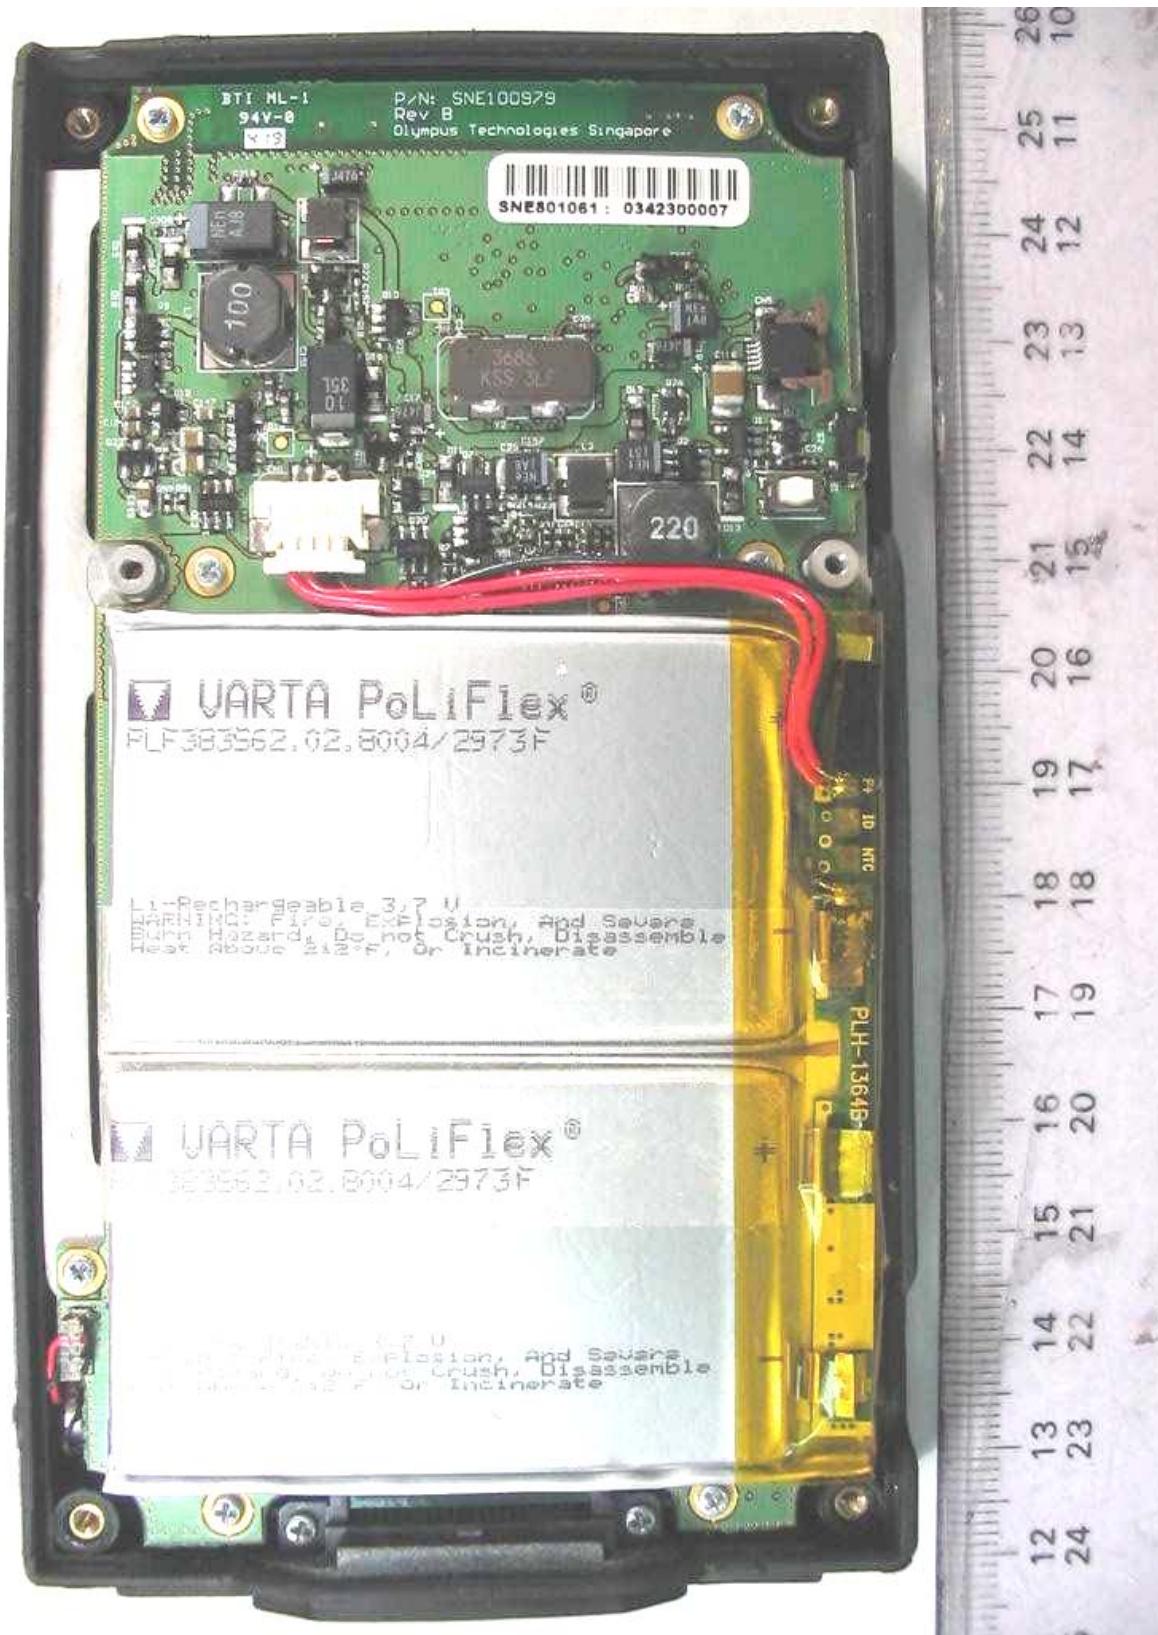


EUT Internal Overall View

## TEST PHOTOGRAPHS / DIAGRAMS

## ANNEX B

## EUT PHOTOGRAPHS

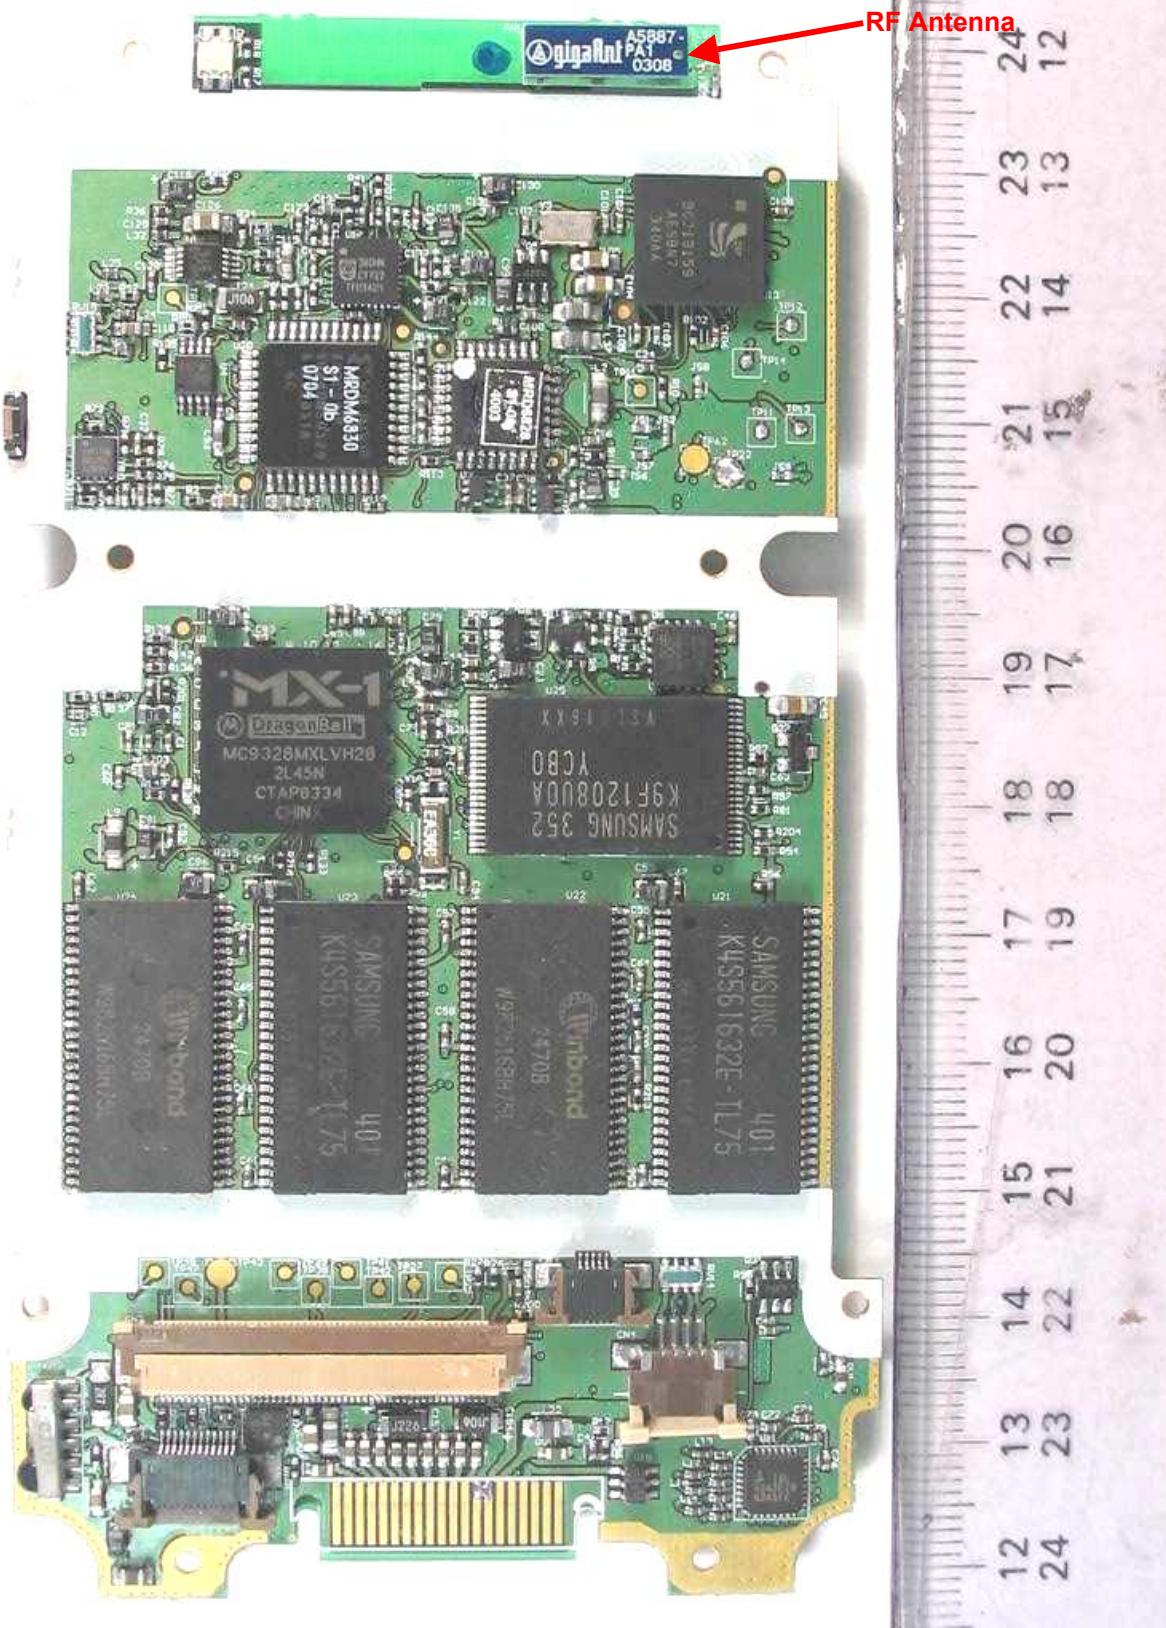


EUT PCB Top View

## TEST PHOTOGRAPHS / DIAGRAMS

## ANNEX B

## EUT PHOTOGRAPHS

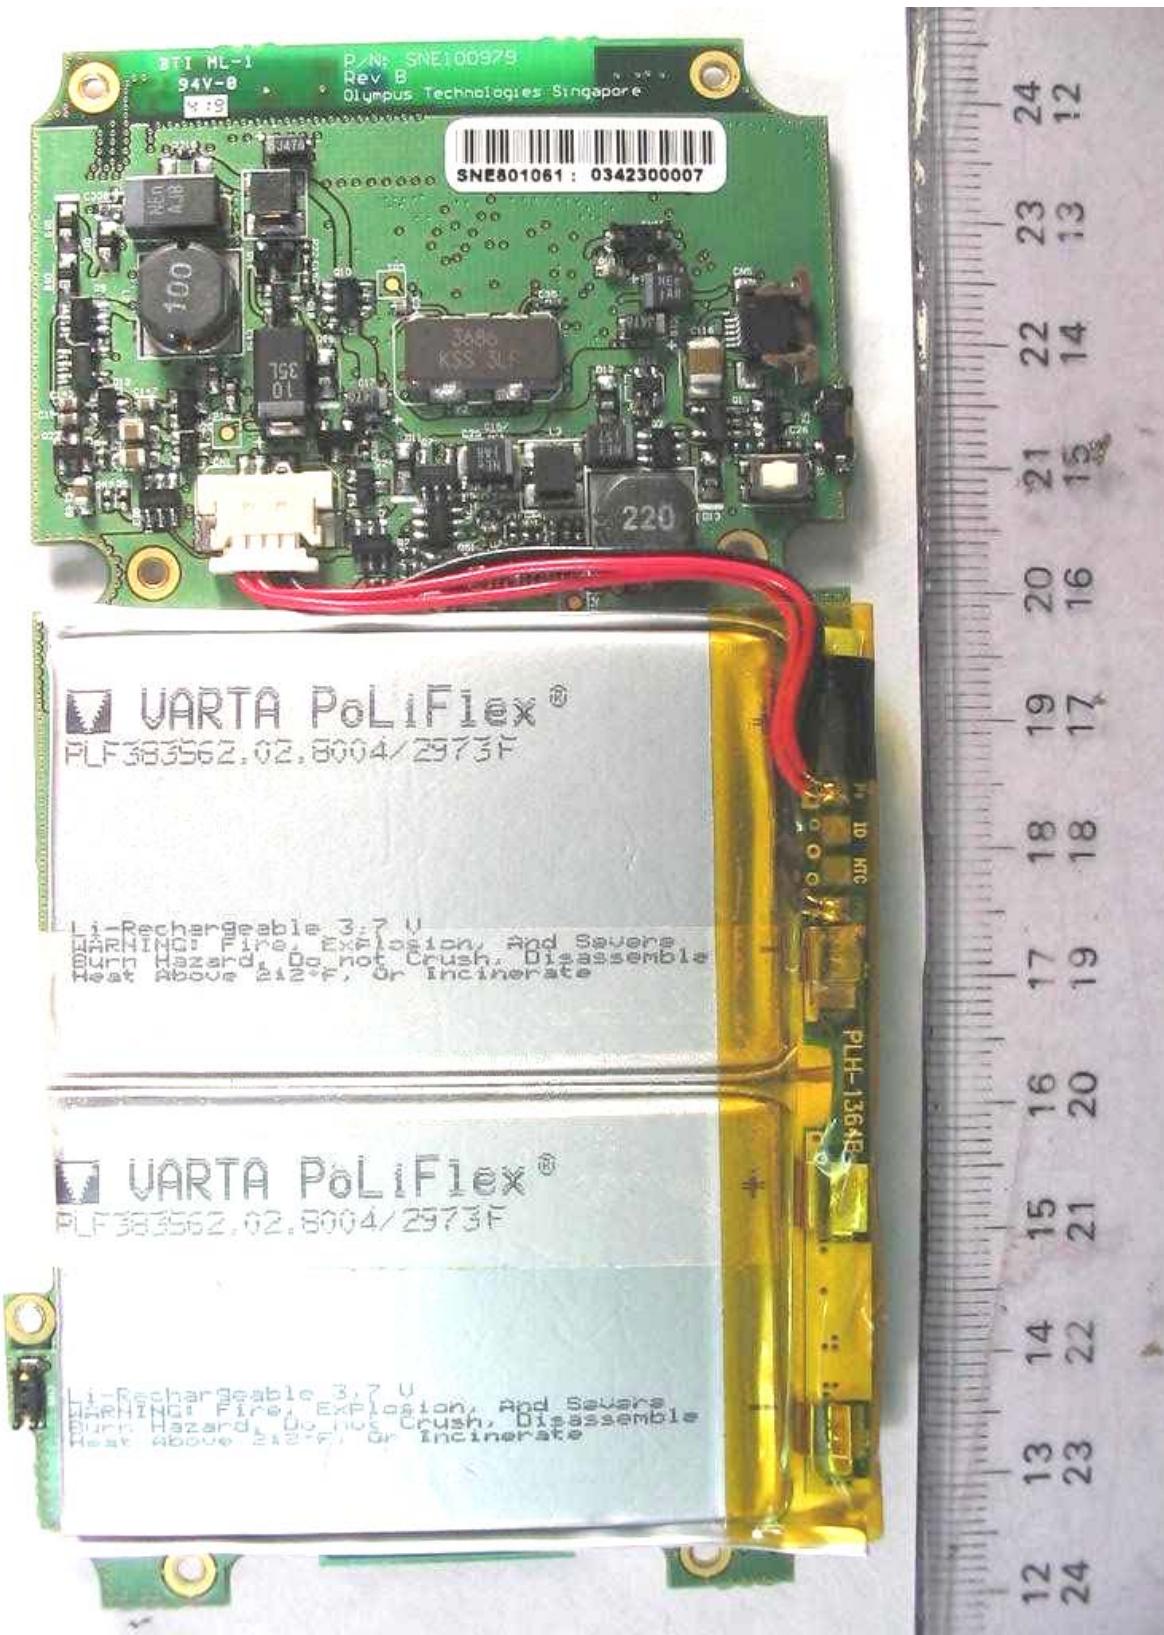


EUT PCB Bottom View with Rechargeable Battery Pack Connected

## TEST PHOTOGRAPHS / DIAGRAMS


## ANNEX B

## EUT PHOTOGRAPHS

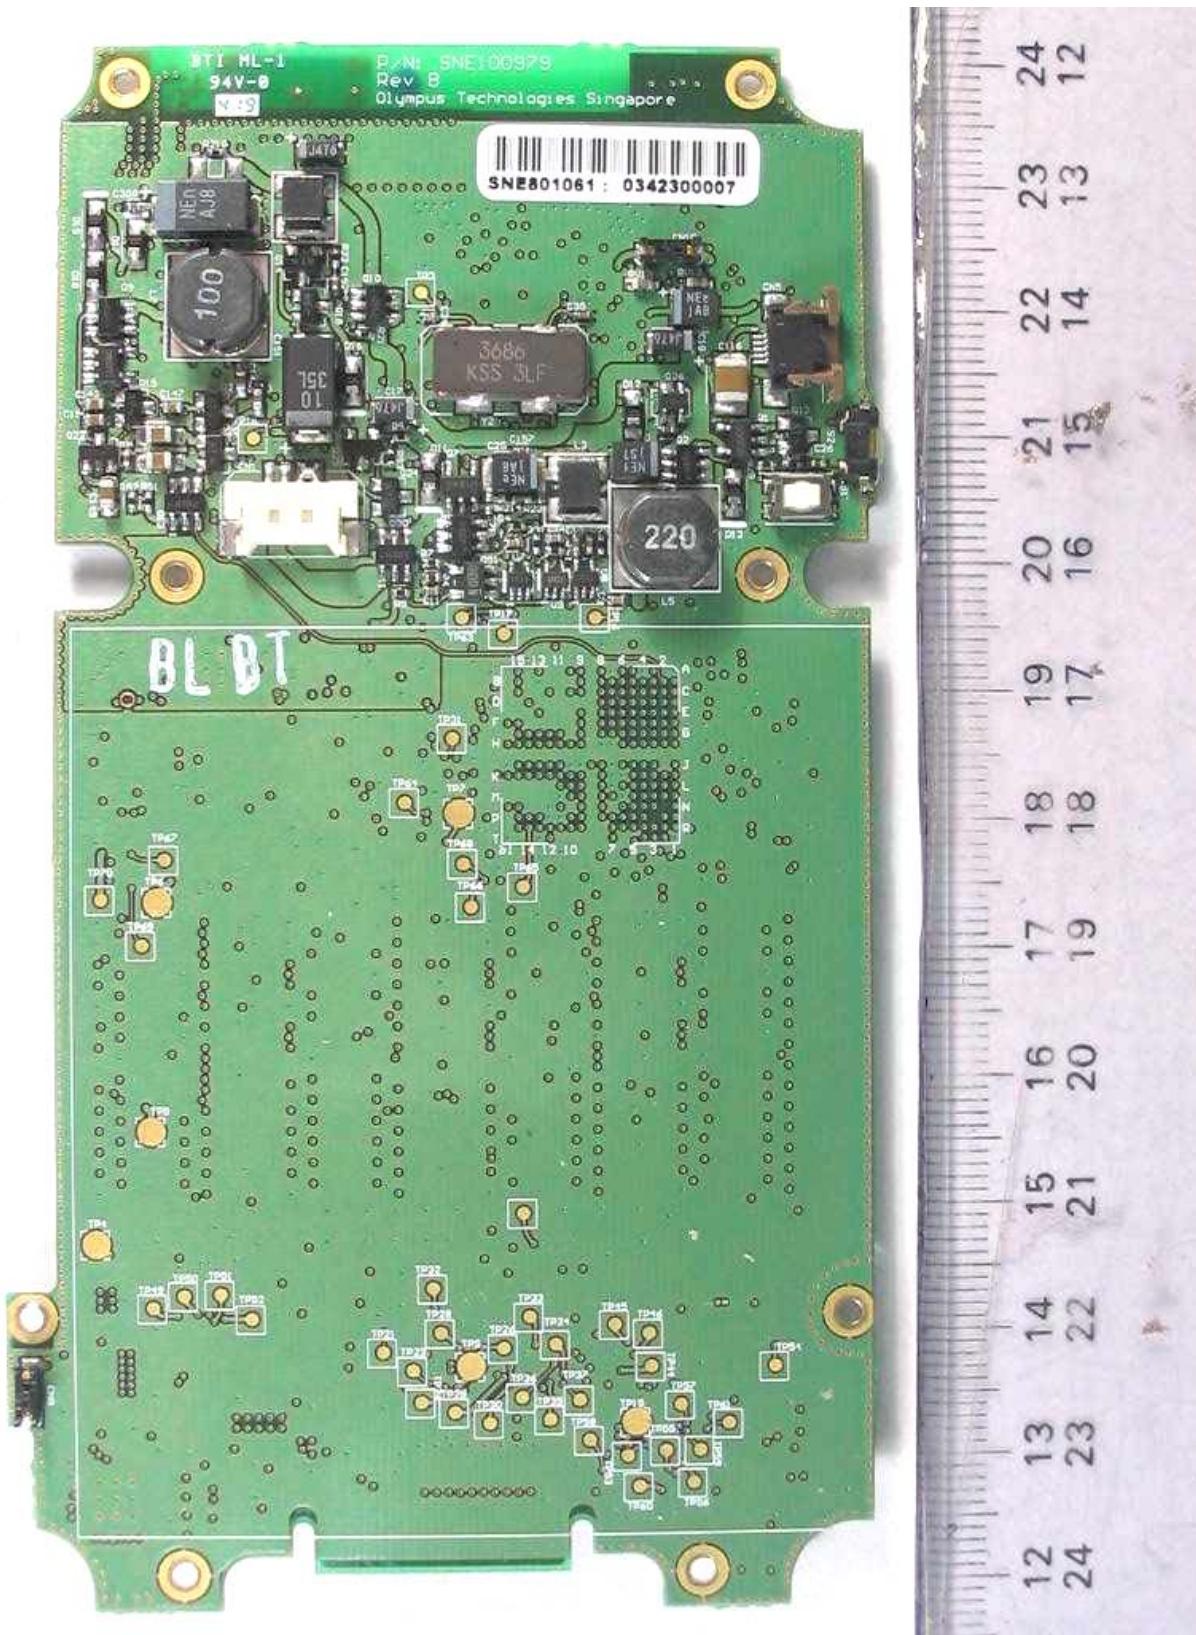


EUT PCB Bottom View with Rechargeable Battery Pack Removed

## **EUT PHOTOGRAPHS**

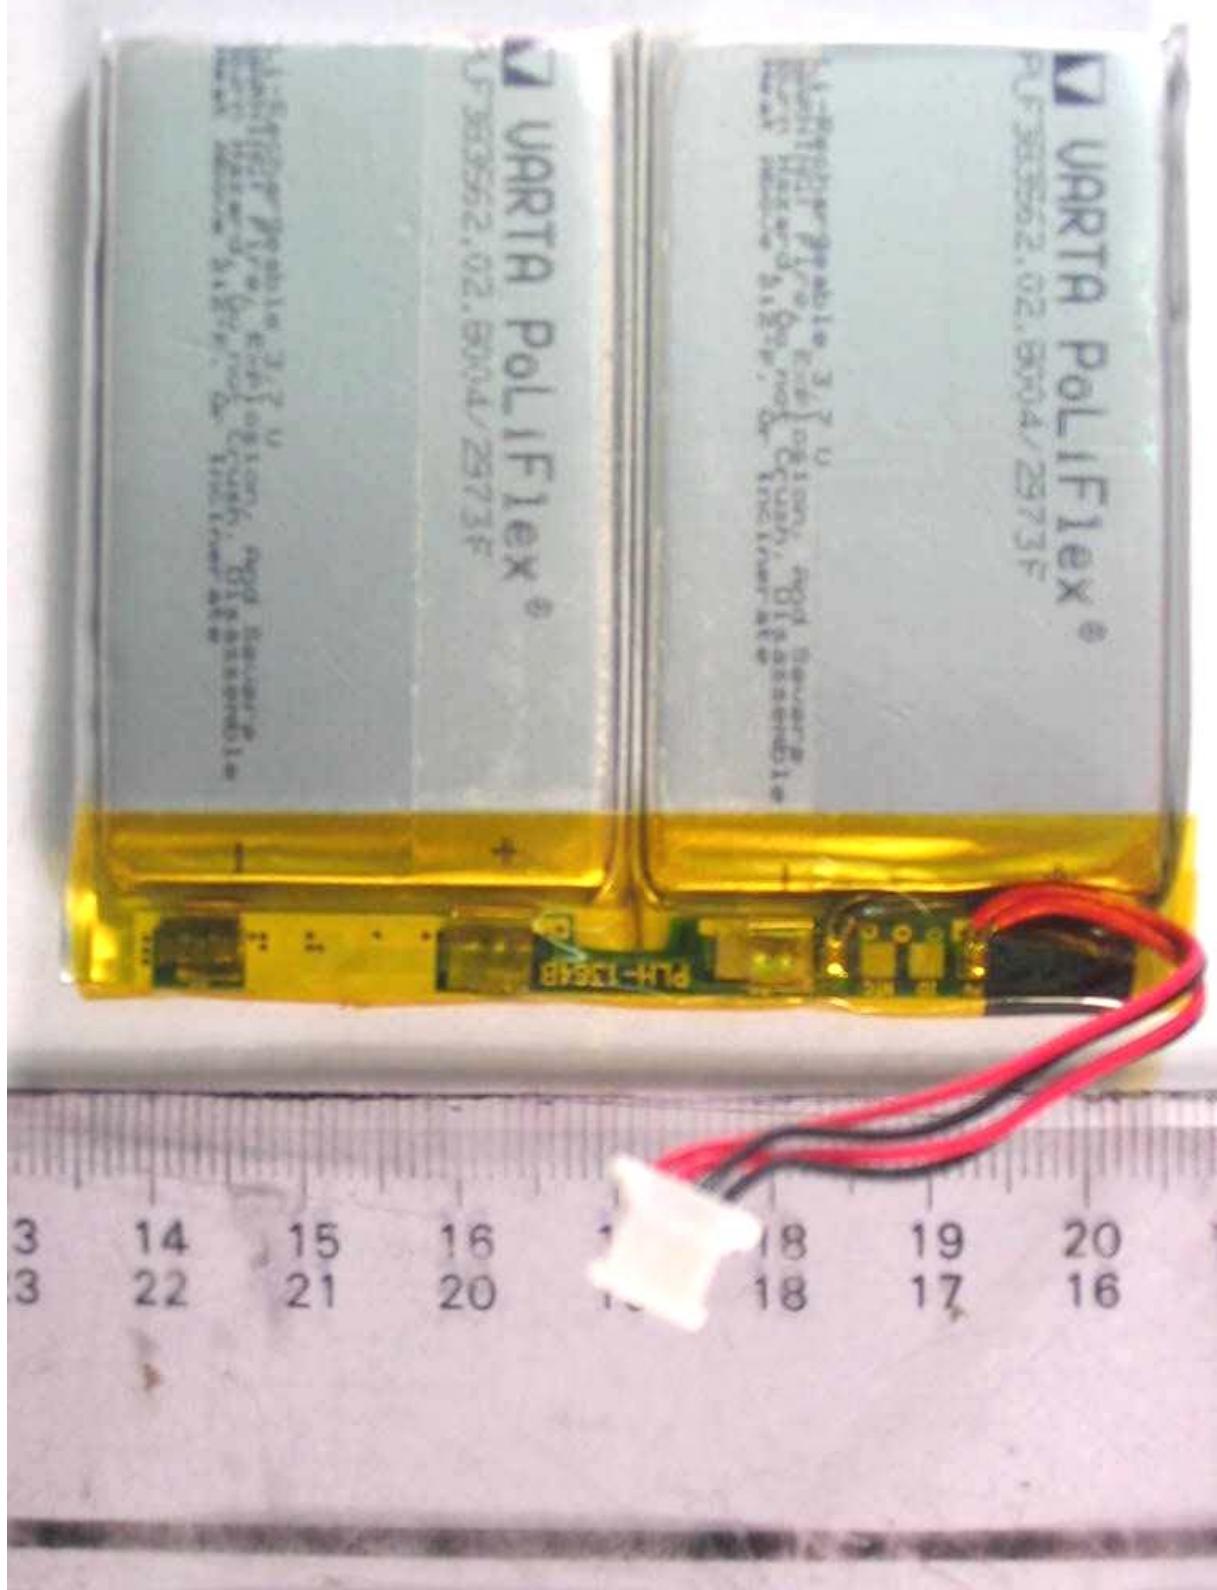

## EUT Rechargeable Battery Pack Front View

EUT PHOTOGRAPHS

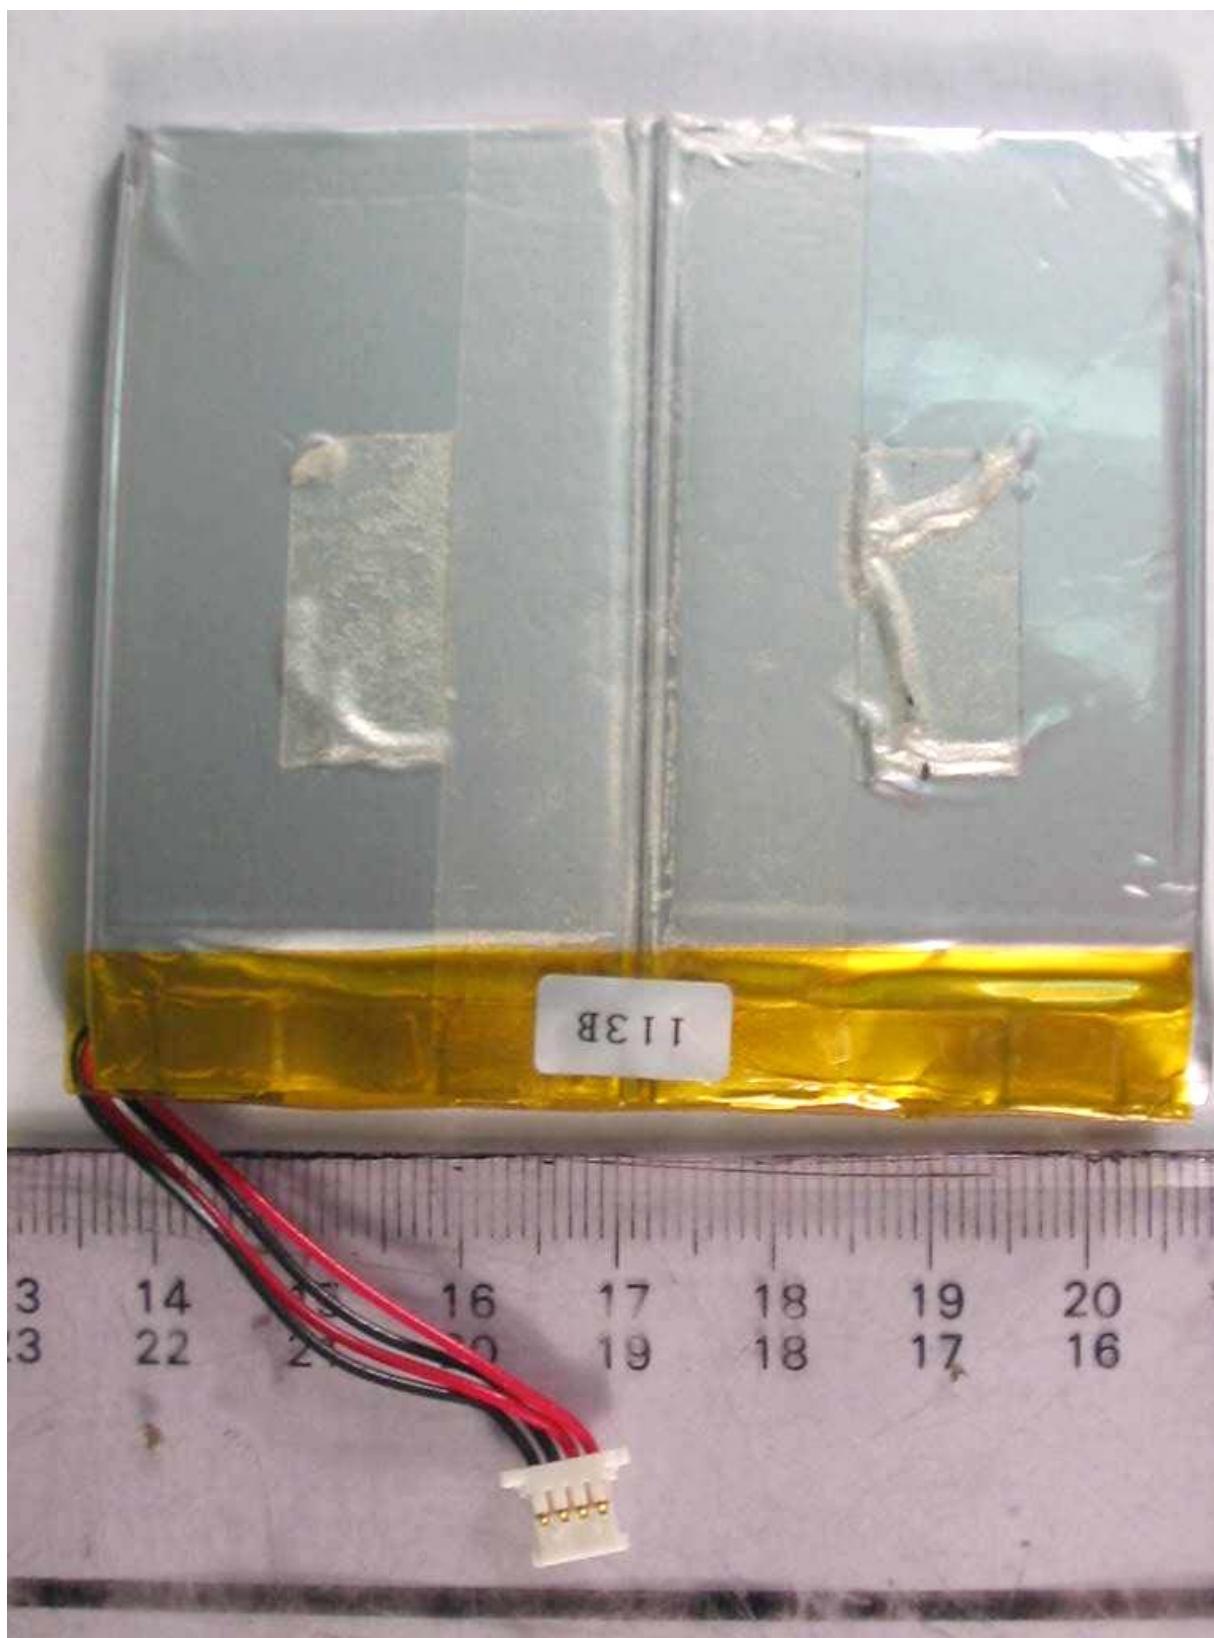


EUT Rechargeable Battery Pack Bottom View

**TEST PHOTOGRAPHS / DIAGRAMS**

**ANNEX B**

**EUT PHOTOGRAPHS**

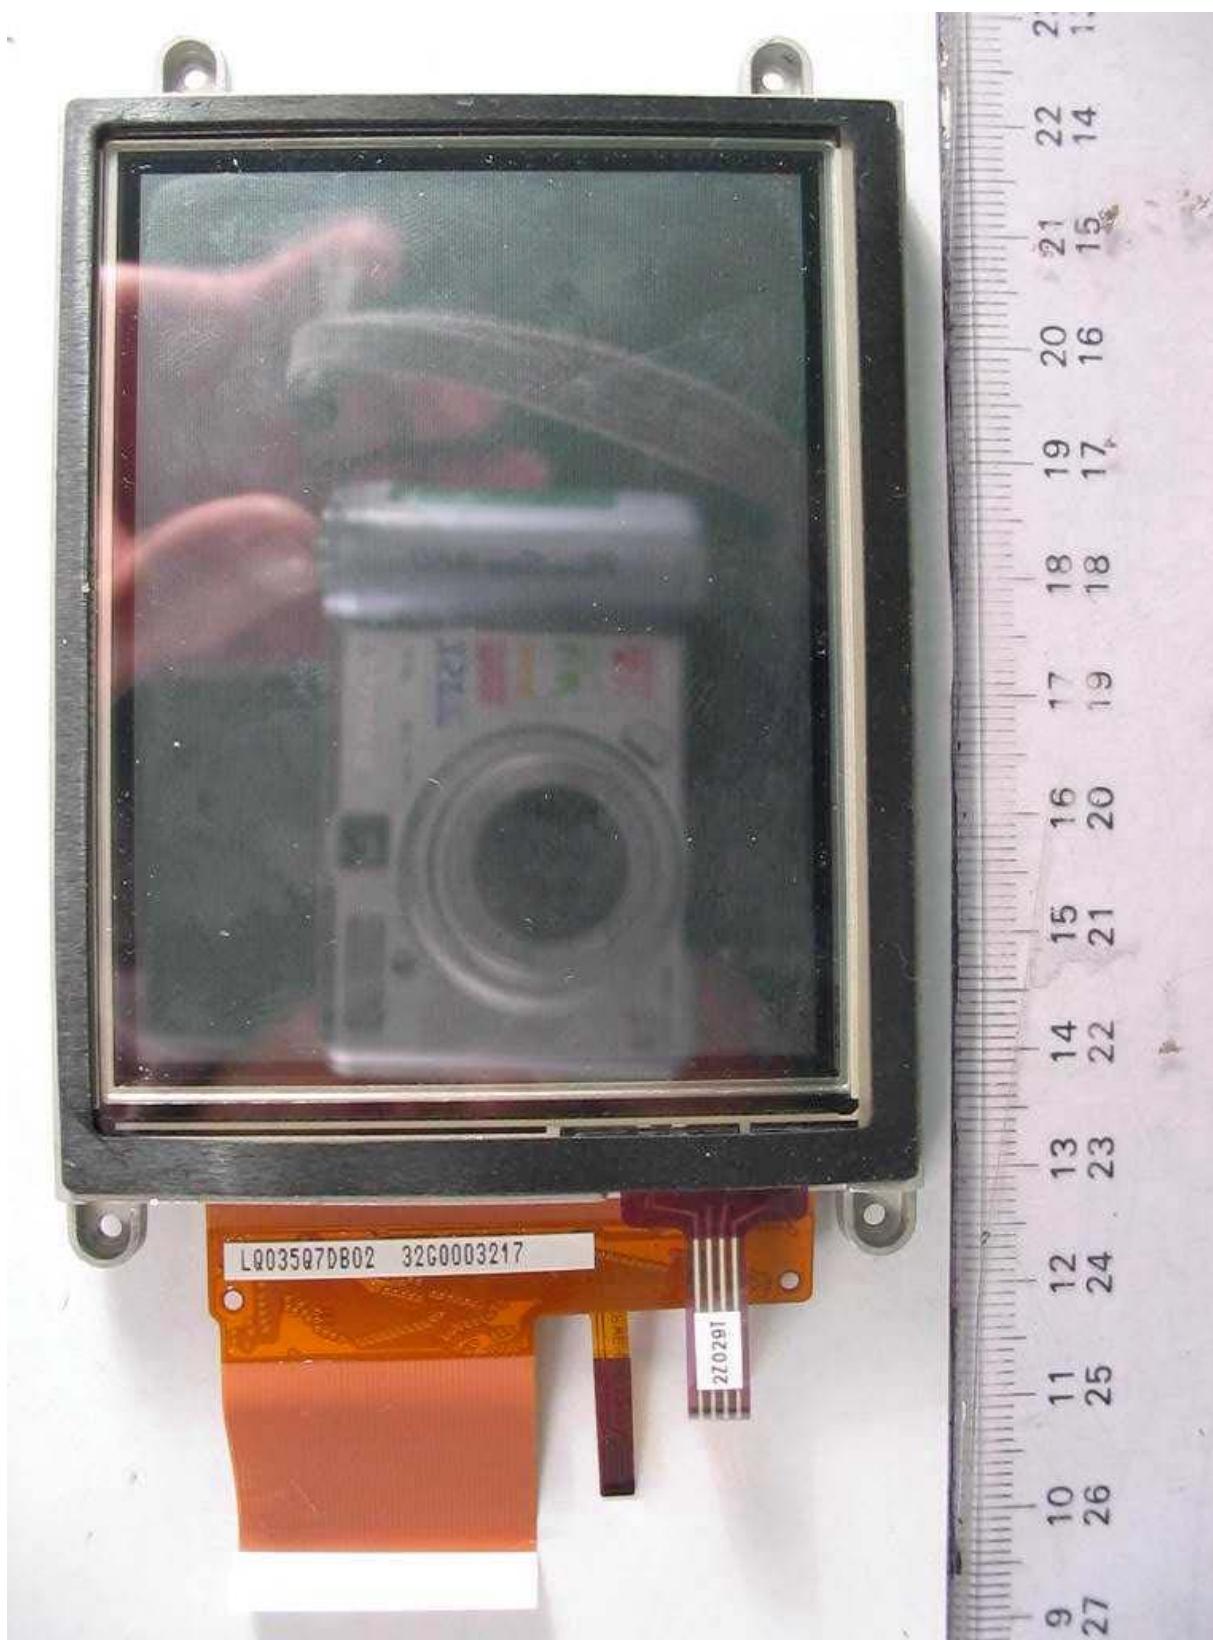


EUT LCD Module Front View

TEST PHOTOGRAPHS / DIAGRAMS


ANNEX B

EUT PHOTOGRAPHS

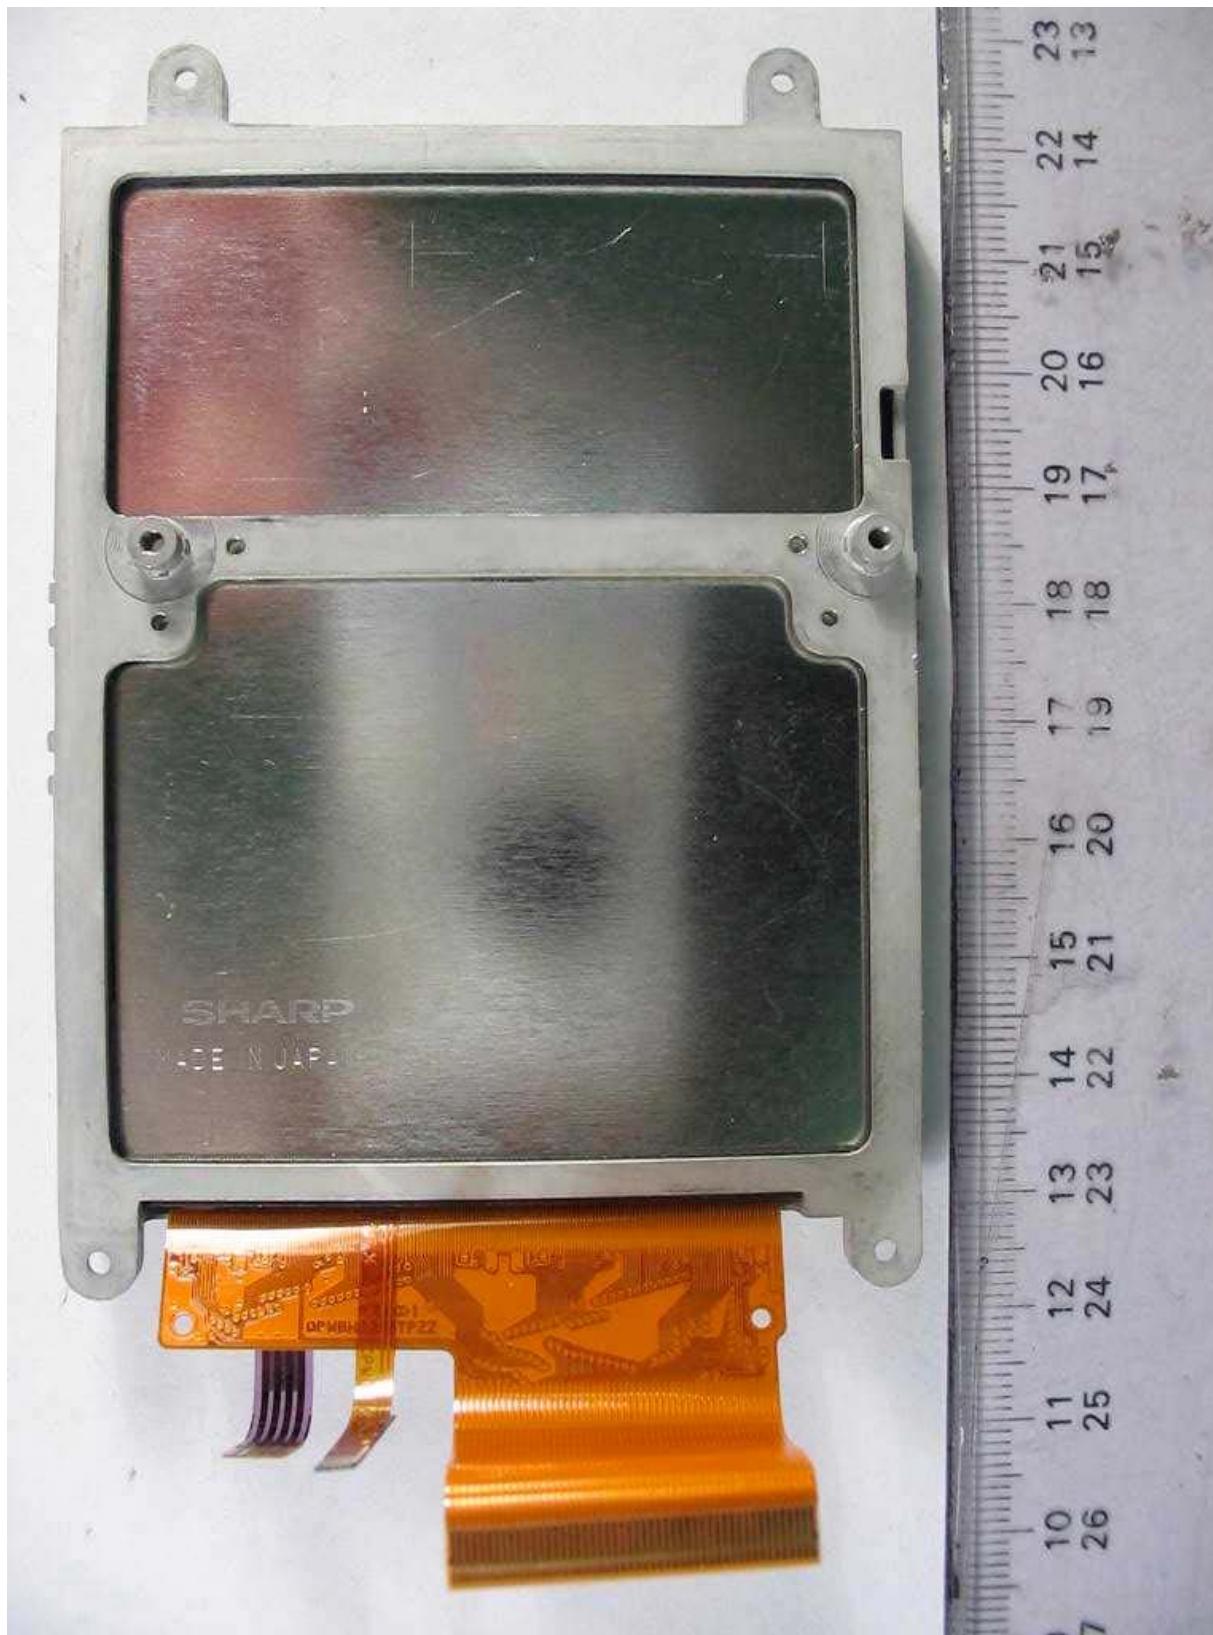

EUT LCD Module Rear View

EUT PHOTOGRAPHS

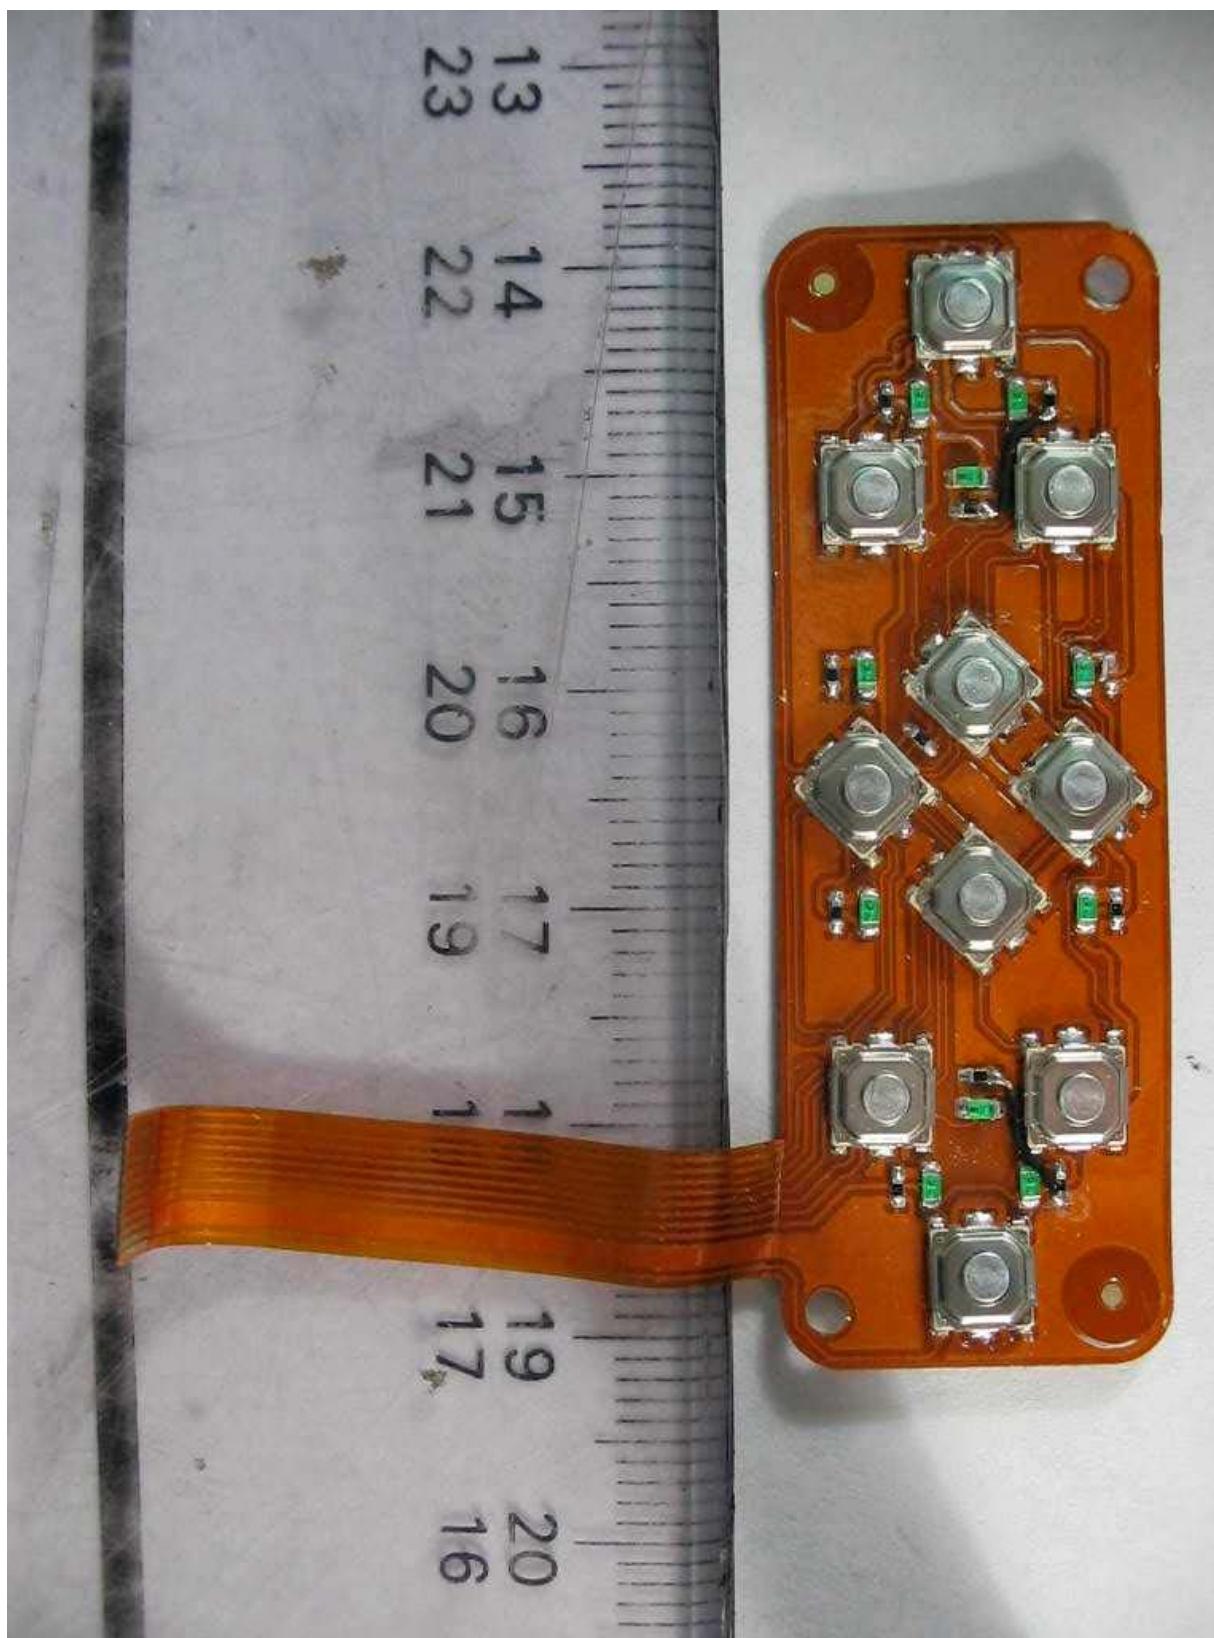

EUT Keypad Module Front View

EUT PHOTOGRAPHS



EUT Keypad Module Rear View

**ANNEX C**

**USER MANUAL  
TECHNICAL DESCRIPTION  
BLOCK & CIRCUIT DIAGRAMS**

(Please refer to attached copy)


**ANNEX D**

**FCC LABEL & POSITION**

Labelling requirements per Section 2.925 & 15.19

The label shown will be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.

Sample Label

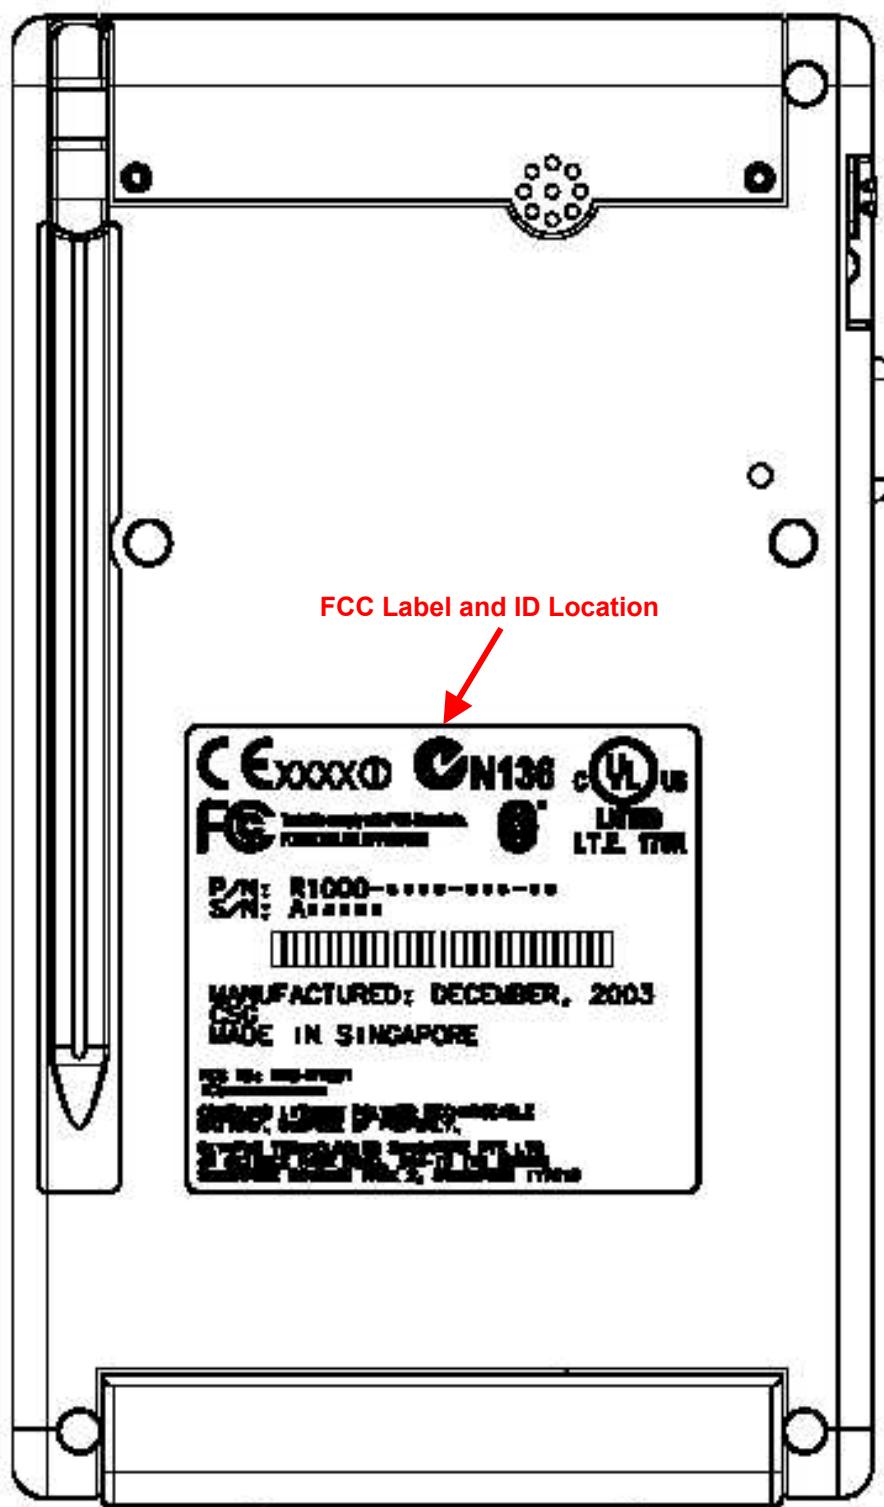

Physical Location of FCC Label on EUT