

FCC PART 15.247

TEST REPORT

For

Steelcase, Inc.

901 44th Street SE Grand Rapids Michigan 49508 United States

Tested Model: NGS01
FCC ID: ROMNGS01

Report Type: Original Report	Product Name: Panel
Report Number: RSC191231001-0B	
Date of Report Issue: 2020-01-16	
Reviewed By: Sula Huang	
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Chengdu) No.5040, Huilongwan Plaza, No. 1, Shawan Road, Jinniu District, Chengdu, Sichuan, China Tel: +86-28-65525123 Fax: +86-28-65525125 www.baclcorp.com

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data. This report cannot be reproduced except in full, without prior written approval of the company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
MEASUREMENT UNCERTAINTY	5
TEST METHODOLOGY	5
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE.....	7
SUPPORT EQUIPMENT LIST AND DETAILS	10
EXTERNAL I/O CABLE	10
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS.....	11
TEST EQUIPMENTS LIST.....	12
FCC §15.247 & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE	14
APPLICABLE STANDARD.....	14
FCC §15.203 - ANTENNA REQUIREMENT	15
APPLICABLE STANDARD.....	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD.....	16
EUT SETUP.....	16
EMI TEST RECEIVER SETUP	16
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
TEST DATA.....	17
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	22
APPLICABLE STANDARD.....	22
EUT SETUP.....	22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	23
TEST PROCEDURE	23
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	23
TEST DATA.....	23
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH	34
APPLICABLE STANDARD.....	34
TEST PROCEDURE	34
TEST DATA.....	35
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER	42
APPLICABLE STANDARD.....	42
TEST PROCEDURE	42
TEST DATA.....	43
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	44
APPLICABLE STANDARD.....	44
TEST PROCEDURE	44
TEST DATA.....	44

FCC §15.247(e) - POWER SPECTRAL DENSITY49
 APPLICABLE STANDARD.....49
 TEST PROCEDURE49
 TEST DATA50

FINAL

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Steelcase, Inc.
Product	Panel
Tested Model	NGS01
FCC ID	ROMNGS01
Frequency	2.4G Wi-Fi: 2412-2462MHz (802.11b/g/n20) Bluetooth LE: 2402-2480MHz
Modulation Type:	802.11b: DSSS 802.11g/n20: OFDM Bluetooth LE: GFSK
Voltage Range	DC 53V from Adapter(POE)
Measure approximately	217 mm (L) x 144 mm (W) x 30 mm (H)
Sample serial number	191231001/01 (assigned by the BACL, Chengdu)
Sample/EUT Status	The test sample was in good condition and received: 2019-12-31

Note: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Objective

This report is prepared on behalf of **Steelcase, Inc.** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15E NII submissions with FCC ID: ROMNGS01
FCC Part 15C DSS submissions with FCC ID: ROMNGS01

Measurement Uncertainty

Item			Uncertainty
AC power line conducted emission			2.24 dB
Radiated Emission(Field Strength)	30MHz-200MHz	H	4.47 dB
		V	4.73 dB
	200MHz-1GHz	H	4.87 dB
		V	5.93 dB
	1GHz-6GHz		4.51 dB
	6GHz-18GHz		4.49 dB
	18GHz-40GHz		5.48 dB

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the corresponding inclusion factor K when the inclusion probability is about 95%.

Test Methodology

All measurements contained in this report were conducted with:

1. ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
2. KDB558074 D01 DTS Meas Guidance v05r02.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Chengdu) to collect test data is located No.5040, Huilongwan Plaza, No. 1, Shawan Road, Jinniu District, Chengdu, Sichuan, China.

Bay Area Compliance Laboratories Corp. (Chengdu) lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4324.01) and the FCC designation No. CN1186 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured in testing mode, which was provided by manufacturer.

For Wi-Fi mode, 802.11b, 802.11g, and 802.11n-HT20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	-	-

EUT were tested with Channel 1, 6 and 11.

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
..	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software


The setting by the software built-in the device as following table:

Test Mode	Test Software Version	RF test tool		
802.11b	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	1Mbps	1Mbps	1Mbps
	Power Level	Default	Default	Default
802.11g	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	6Mbps	6Mbps	6Mbps
	Power Level	Default	Default	Default
802.11n-HT20	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level	Default	Default	Default
BLE	Test Frequency	2402MHz	2440MHz	2480MHz
	Data Rate	Default	Default	Default
	Power Level Setting	Default	Default	Default

Duty Cycle information is below:


Mode	T _{on}	T _p	Duty Cycle	Duty Cycle Factor(dB)
	(ms)	(ms)	(%)	
802.11b	8.44	8.46	99.76	0.01
802.11g	1.40	1.44	97.22	0.12
802.11n-HT20	1.31	1.34	97.76	0.10
BLE	0.39	0.63	62.08	2.07

802.11b

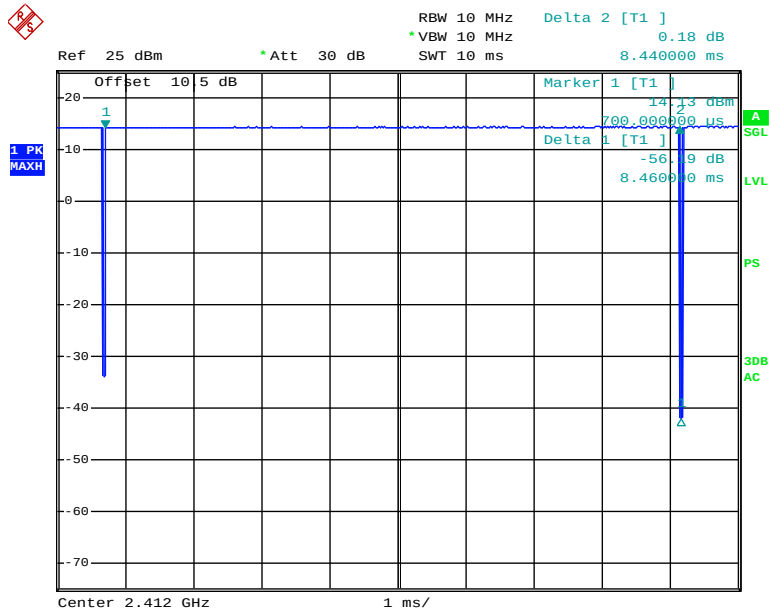


Date: 8. JAN. 2020 14:36:39

802.11g

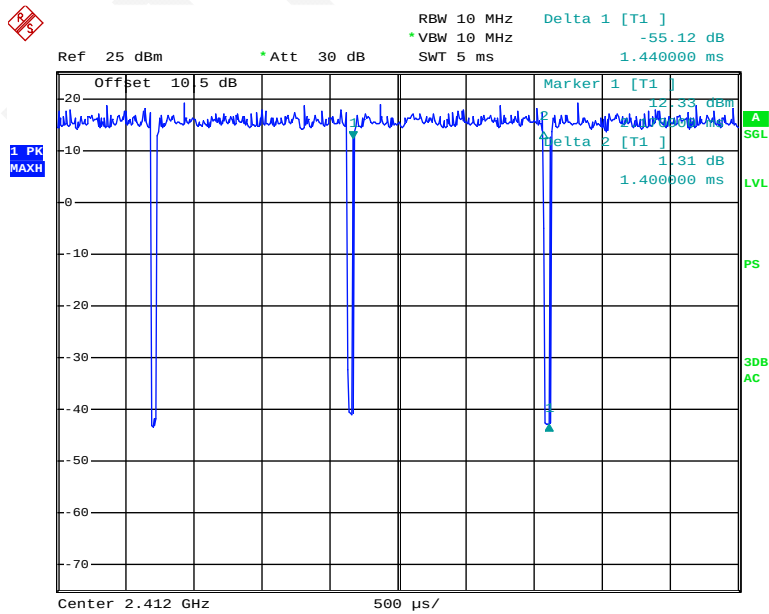


Date: 8. JAN. 2020 15:07:44

802.11n-HT20

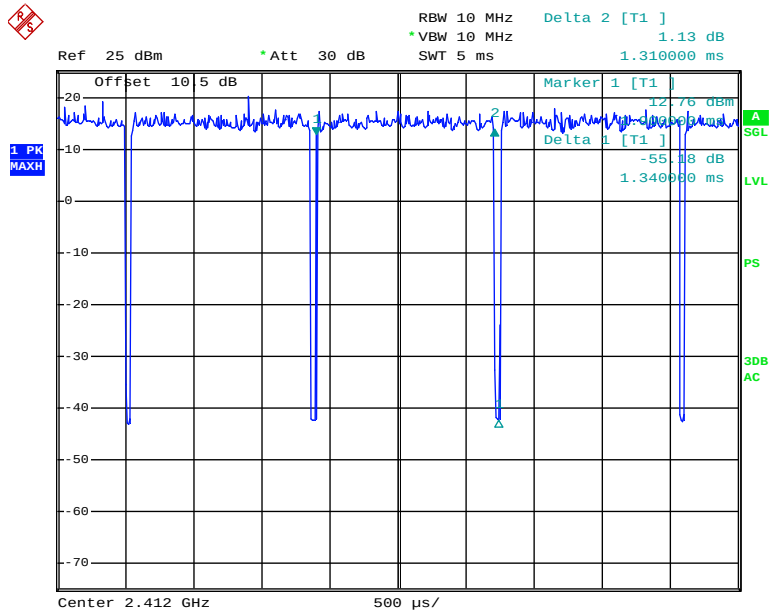

Date: 8.JAN.2020 15:09:39

BLE mode

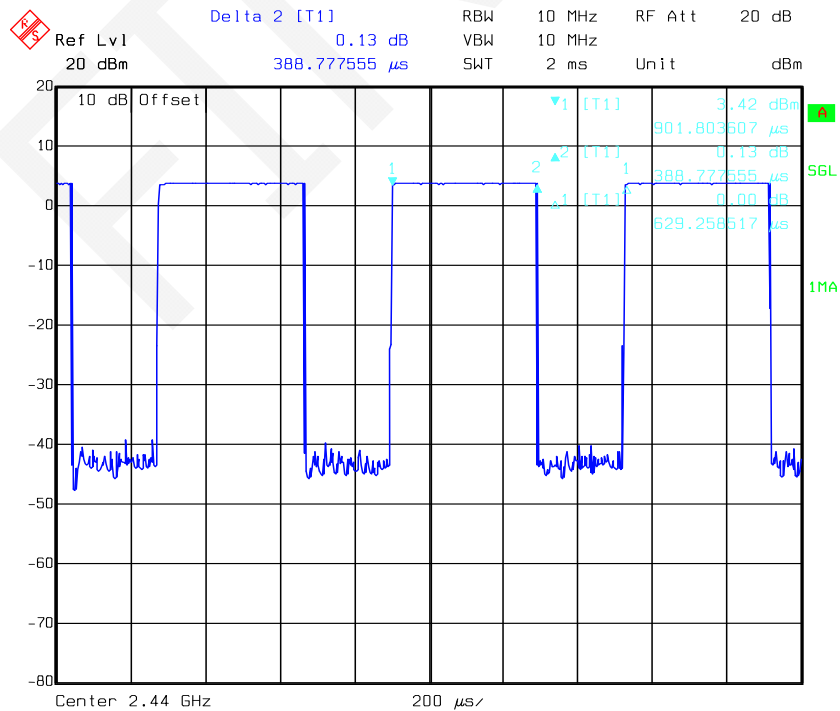

Date: 08.JAN.2020 11:30:24


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
GOSPELL	Adapter(POE)	G0545-530-060-PSE1000	N/A
DELL	Laptop	E6410	353854366585

External I/O Cable

Cable Description	Length (m)	From	To
Unshielded RJ45 Cable	1.5	Adapter(POE)	EUT
Unshielded RJ45 Cable	8.0	Adapter(POE)	Laptop

Block Diagram of Test Setup

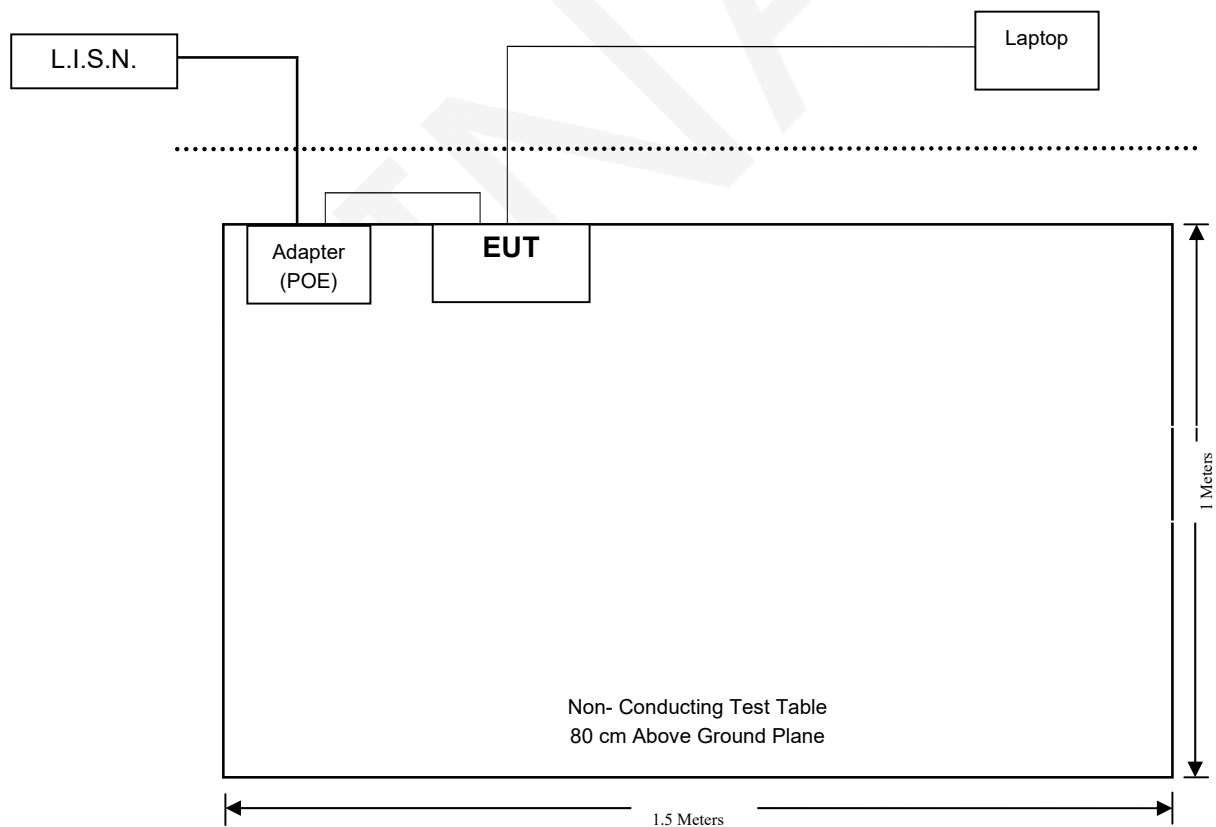

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 & §1.1310 & §2.1091	Maximum Permissible exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum conducted output power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

TEST EQUIPMENTS LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission					
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2019-04-15	2020-04-14
ROHDE&SCHWARZ	L.I.S.N.	ENV216	3560.6550.16	2019-02-25	2020-02-24
HP	RF Limiter	11947A	3107A01270	2019-10-18	2020-10-17
Micro-coax	Conducted Cable	L-E003	000003	2019-08-05	2020-08-04
Rohde & Schwarz	EMC32	EMC32	V 8.52.0	NCR	NCR
Radiated Emission					
EMCT	Semi-Anechoic Chamber	966	001	2017-05-18	2020-05-17
SONOMA INSTRUMENT	Amplifier	310 N	186684	2019-09-06	2020-09-05
SUNOL SCIENCES	Broadband Antenna	JB3	A121808	2017-05-19	2020-05-18
INMET	Attenuator	18N-6dB	N/A	2019-10-17	2020-10-16
Rohde & Schwarz	EMI Test Receiver	ESR3	102456	2019-04-15	2020-04-14
Rohde & Schwarz	Spectrum Analyzer	FSU26	200835	2019-04-15	2020-04-14
EMCO	Horn Antenna	3115	2192	2019-09-25	2021-09-24
A.H. Systems, Inc	Amplifier	PAM-0118P	467	2019-08-30	2020-08-29
EM Electronics	RF Pre-Amplifier	EM18G40	060725	2019-07-24	2020-07-23
Rohde & Schwarz	EMI Test Receiver	ESIB 40	100215	2019-04-15	2020-04-14
A.H. Systems, Inc	Horn Antenna	SAS-574	510	2019-09-02	2021-09-01
Sinoscite.,Co Ltd	Reject Band Filter	BSF 2402-2480MN	0898-005	2019-11-10	2020-11-09
MICRO-TRONICS	High Pass Filter	HPM50111	G216	2019-11-10	2020-11-09
Unknown	RF Cable (Below 1GHz)	L-E005	000005	2019-09-06	2020-09-05
Unknown	RF Cable (Below 1GHz)	T-E128	000128	2019-10-17	2020-10-16
MICRO-COAX	Flexible microwave cable	T-E237	233522-001	2019-07-19	2020-07-18
Unknown	RF Cable (Above 1GHz)	T-E069	000069	2019-07-24	2020-07-23
Micro-coax	RF Cable (Above 1GHz)	T-E209	MFR 64639 2310	2019-07-19	2020-07-18
Rohde & Schwarz	EMC32	EMC32	V9.10.00	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2019-04-15	2020-04-14
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2019-04-15	2020-04-14
Agilent	USB power sensor	U2021XA	MY53320008	2019-01-17	2020-01-16
WEINSCHL ENGINEERING	Attenuator	1A 10dB	AB1165	2019-08-05	2020-08-04
RF Superstore	DC Block	RF-530004	Unknown	2019-08-05	2020-08-04
Unknown	RF Cable	Unknown	000007	Each Time	Each Time

FCC §15.247 & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE

Applicable Standard

According to subpart 15.247 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Per 447498 D01 General RF Exposure Guidance v06, simultaneous transmission MPE test exclusion applies when the sum of the MPE for all simultaneous transmitting antennas incorporated in a host device, based on the calculated/estimated, numerically modeled or measured field strengths or power density, is ≤ 1.0.

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = PG/4\pi R^2$$

Where:

S = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
WiFi	2412-2462	2.0	1.58	22.0	158.49	20	0.050	1.0
	5180-5240	2.0	1.58	11.0	12.59	20	0.004	1.0
	5745-5825	2.0	1.58	6.0	3.98	20	0.001	1.0
BLE	2402-2480	2.0	1.58	5.0	3.16	20	0.001	1.0
BT3.0	2402-2480	2.0	1.58	9.0	7.94	20	0.002	1.0

Note: Wi-Fi & Bluetooth can't transmit simultaneously.

Result: The device meets FCC MPE at ≥20cm.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has one internal 2.4G/5G Wi-Fi/Bluetooth antenna, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna	Manufacturer	Model Number	Antenna Gain (Max)	Antenna Connector	Antenna Type
WLAN/ Bluetooth	ELECTRIC CONNECTOR TECHNOLOGY	81800U195	2dBi	IPEX	PCB


Result: Compliance

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

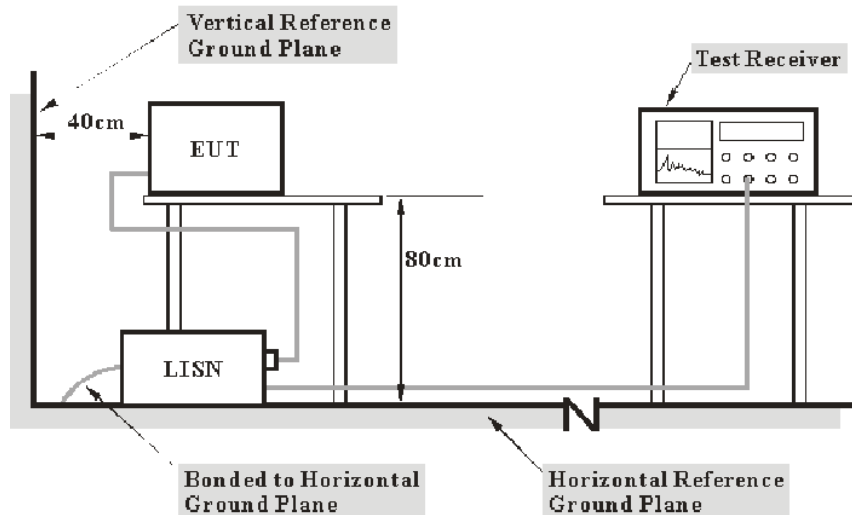

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first L.I.S.N.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Test Environment Conditions


Temperature:	21 °C
Relative Humidity:	61 %
ATM Pressure:	95.9 kPa

The testing was performed by Tian Maofan on 2020-01-09.

Test Mode: Transmitting

Wi-Fi Mode: (802.11g Low Channel)-Worst Case


AC120 V, 60 Hz, Line:

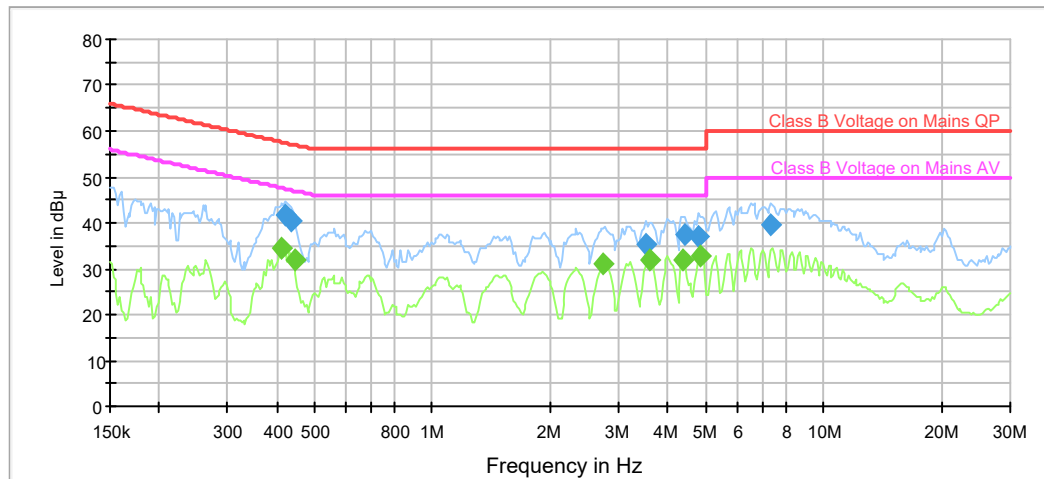

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.422196	41.7	200.0	9.000	L1	19.6	15.7	57.4
0.434989	40.3	200.0	9.000	L1	19.6	16.9	57.2
3.515338	35.2	200.0	9.000	L1	19.6	20.8	56.0
4.419352	37.6	200.0	9.000	L1	19.7	18.4	56.0
4.785525	36.8	200.0	9.000	L1	19.7	19.2	56.0
7.340890	39.4	200.0	9.000	L1	19.7	20.6	60.0

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.409780	34.3	200.0	9.000	L1	19.6	13.4	47.7
0.443733	31.7	200.0	9.000	L1	19.6	15.3	47.0
2.741149	31.0	200.0	9.000	L1	19.6	15.0	46.0
3.585996	31.9	200.0	9.000	L1	19.6	14.1	46.0
4.375596	32.1	200.0	9.000	L1	19.7	13.9	46.0
4.833381	32.7	200.0	9.000	L1	19.7	13.3	46.0

AC120 V, 60 Hz, Neutral:

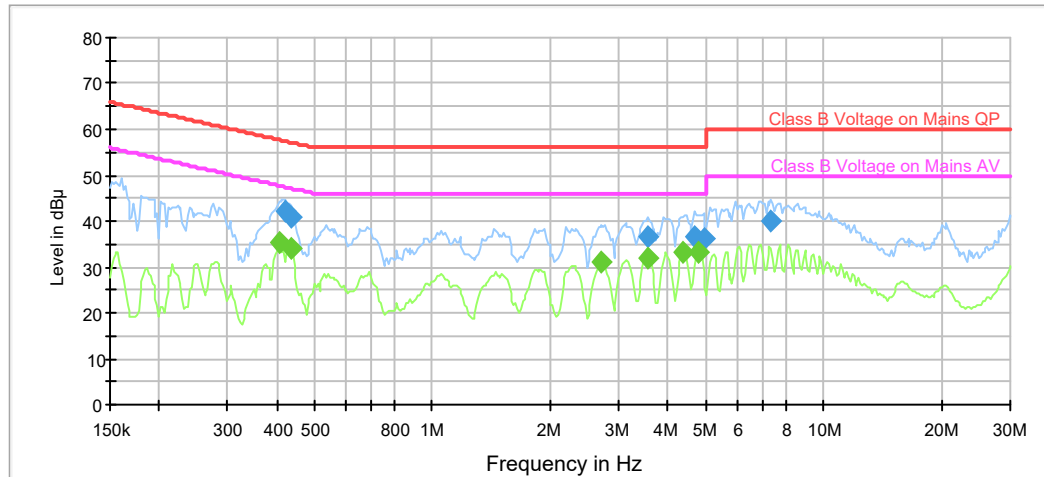


Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.422196	42.0	200.0	9.000	N	19.6	15.4	57.4
0.434989	40.8	200.0	9.000	N	19.6	16.4	57.2
3.550491	36.7	200.0	9.000	N	19.7	19.3	56.0
4.691232	36.7	200.0	9.000	N	19.7	19.3	56.0
4.930532	36.1	200.0	9.000	N	19.7	19.9	56.0
7.340890	39.9	200.0	9.000	N	19.8	20.1	60.0

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.405722	35.2	200.0	9.000	N	19.6	12.5	47.7
0.434989	34.1	200.0	9.000	N	19.6	13.1	47.2
2.714009	31.0	200.0	9.000	N	19.7	15.0	46.0
3.550491	32.1	200.0	9.000	N	19.7	13.9	46.0
4.375596	33.1	200.0	9.000	N	19.7	12.9	46.0
4.785525	33.3	200.0	9.000	N	19.7	12.7	46.0

BLE Mode: (Low channel)-worst case


AC120 V, 60 Hz, Line:

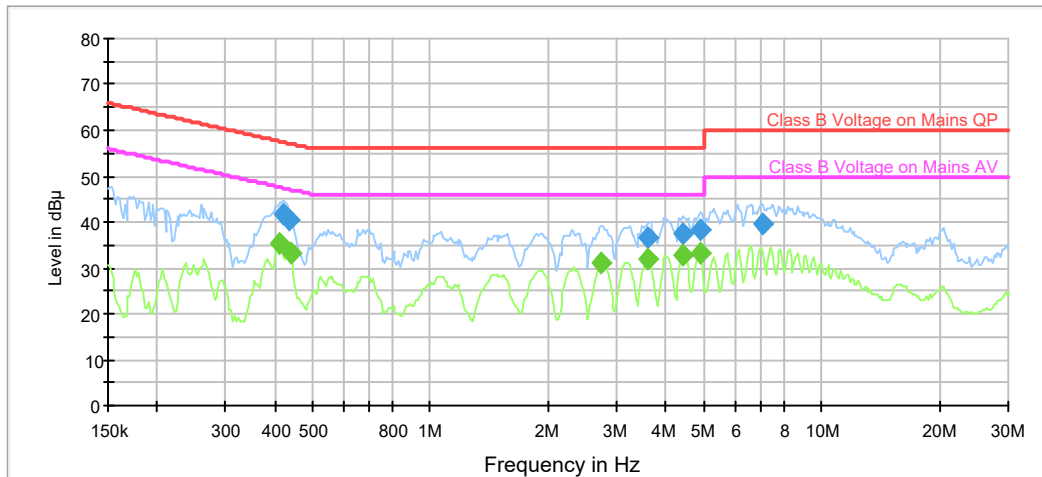

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.422196	41.6	200.0	9.000	L1	19.6	15.8	57.4
0.434989	40.4	200.0	9.000	L1	19.6	16.8	57.2
3.585996	36.6	200.0	9.000	L1	19.6	19.4	56.0
4.419352	37.6	200.0	9.000	L1	19.7	18.4	56.0
4.881714	38.2	200.0	9.000	L1	19.7	17.8	56.0
7.054451	39.4	200.0	9.000	L1	19.7	20.6	60.0

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.413877	35.4	200.0	9.000	L1	19.6	12.2	47.6
0.439339	33.4	200.0	9.000	L1	19.6	13.7	47.1
2.741149	30.9	200.0	9.000	L1	19.6	15.1	46.0
3.585996	31.9	200.0	9.000	L1	19.6	14.1	46.0
4.419352	32.8	200.0	9.000	L1	19.7	13.2	46.0
4.881714	33.1	200.0	9.000	L1	19.7	12.9	46.0

AC120 V, 60 Hz, Neutral:

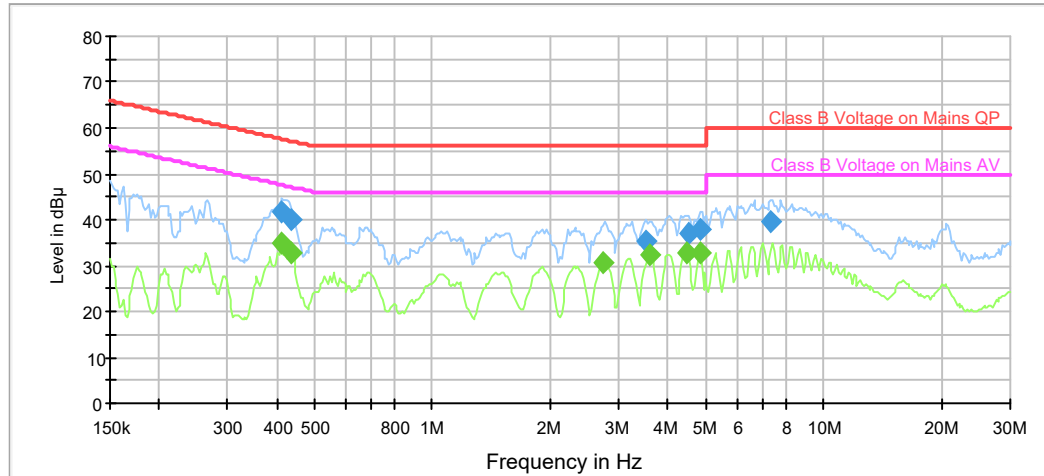

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.413877	41.9	200.0	9.000	N	19.6	15.7	57.6
0.434989	40.2	200.0	9.000	N	19.6	17.0	57.2
3.515338	35.3	200.0	9.000	N	19.7	20.7	56.0
4.508181	36.9	200.0	9.000	N	19.7	19.1	56.0
4.833381	37.9	200.0	9.000	N	19.7	18.1	56.0
7.340890	39.6	200.0	9.000	N	19.8	20.4	60.0

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.409780	34.9	200.0	9.000	N	19.6	12.8	47.7
0.434989	32.7	200.0	9.000	N	19.6	14.5	47.2
2.741149	30.8	200.0	9.000	N	19.7	15.2	46.0
3.585996	32.2	200.0	9.000	N	19.7	13.8	46.0
4.463546	32.9	200.0	9.000	N	19.7	13.1	46.0
4.833381	32.9	200.0	9.000	N	19.7	13.1	46.0

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
The corrected factor has been input into the transducer of the test software.
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1GHz:

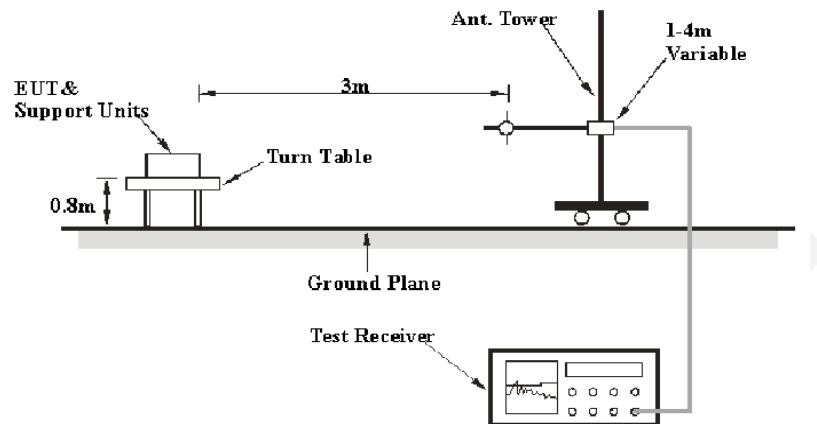

Above 1GHz:

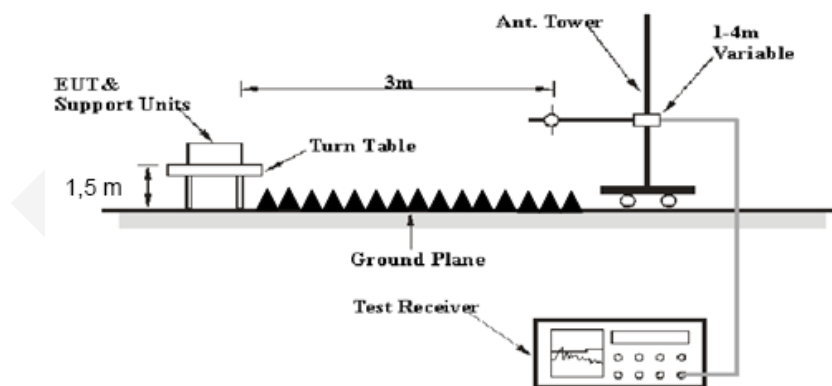

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Test Environment Conditions


Temperature:	21 °C
Relative Humidity:	49 %
ATM Pressure:	96.1 kPa

The testing was performed by Eric Xiao on 2020-01-10.

Test Mode: Transmitting

Wi-Fi Mode

30 MHz to 1 GHz: 802.11g_Low Channel

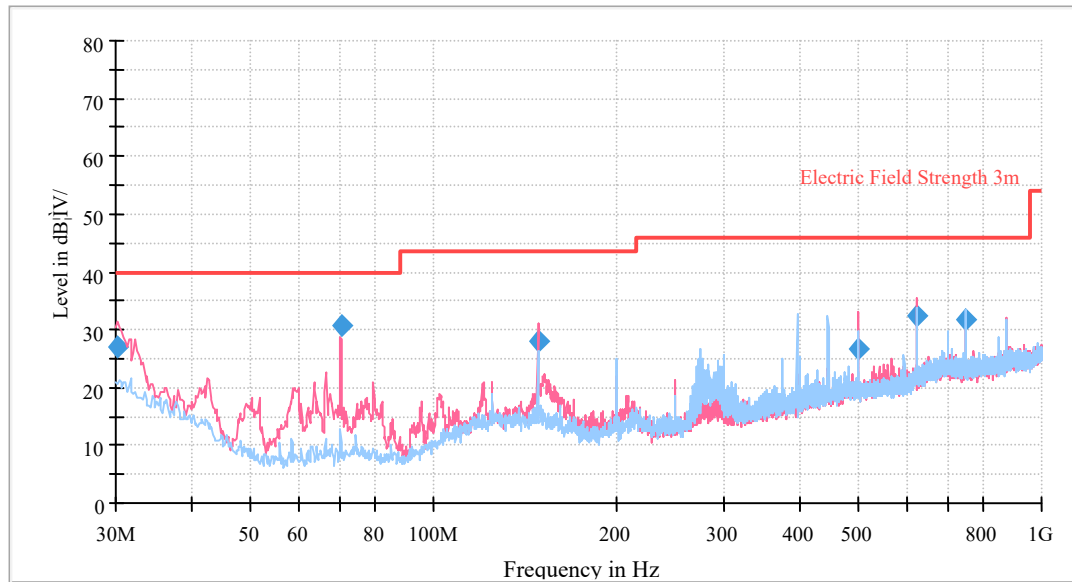

Frequency (MHz)	QuasiPeak (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.197351	27.07	40.00	12.93	200.0	120.000	103.0	V	13.0	-4.6
70.522700	30.72	40.00	9.28	200.0	120.000	106.0	V	2.0	-16.9
148.532800	27.88	43.50	15.62	200.0	120.000	122.0	V	23.0	-12.4
500.034700	26.74	46.00	19.26	200.0	120.000	105.0	V	206.0	-6.2
625.024100	32.46	46.00	13.54	200.0	120.000	104.0	V	237.0	-4.8
750.025700	31.80	46.00	14.20	200.0	120.000	103.0	H	197.0	-3.1

Above 1GHz

802.11b Mode

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Limit	Margin
	Reading	Measurement	Polar	Factor					
MHz	dBμV	PK/AV	H/V	dB(1/m)	dB	dB	dBμV/m	dBμV/m	dB
Frequency: 2412 MHz									
2412	71.81	PK	V	29.12	3.55	0.00	104.48	N/A	N/A
2412	67.54	AV	V	29.12	3.55	0.00	100.21	N/A	N/A
2390	28.73	PK	V	29.15	3.54	0.00	61.42	74.00	12.58
2390	16.01	AV	V	29.15	3.54	0.00	48.70	54.00	5.30
1980	46.69	PK	H	29.53	3.23	27.66	51.79	74.00	22.21
1980	32.15	AV	H	29.53	3.23	27.66	37.25	54.00	16.75
2230	43.69	PK	V	29.38	3.42	27.68	48.81	74.00	25.19
2230	27.05	AV	V	29.38	3.42	27.68	32.17	54.00	21.83
4824	31.36	PK	V	33.04	5.06	27.27	42.19	74.00	31.81
4824	22.15	AV	V	33.04	5.06	27.27	32.98	54.00	21.02
7236	27.36	PK	V	35.82	6.44	27.10	42.52	74.00	31.48
7236	20.13	AV	V	35.82	6.44	27.10	35.29	54.00	18.71
Frequency: 2437 MHz									
2437	71.53	PK	V	29.09	3.57	0.00	104.19	N/A	N/A
2437	66.69	AV	V	29.09	3.57	0.00	99.35	N/A	N/A
1980	46.02	PK	H	29.53	3.23	27.66	51.12	74.00	22.88
1980	32.62	AV	H	29.53	3.23	27.66	37.72	54.00	16.28
2230	43.25	PK	V	29.38	3.42	27.68	48.37	74.00	25.63
2230	27.95	AV	V	29.38	3.42	27.68	33.07	54.00	20.93
4874	32.24	AV	V	33.17	5.09	27.26	43.24	54.00	10.76
4874	21.99	PK	V	33.17	5.09	27.26	32.99	74.00	41.01
7311	27.68	AV	V	35.98	6.48	27.11	43.03	54.00	10.97
7311	20.47	AV	V	35.98	6.48	27.11	35.82	54.00	18.18
Frequency: 2462 MHz									
2462	72.14	PK	V	29.05	3.59	0.00	104.78	N/A	N/A
2462	66.27	AV	V	29.05	3.59	0.00	98.91	N/A	N/A
2483.5	27.77	PK	V	29.02	3.61	0.00	60.40	74.00	13.60
2483.5	16.85	AV	V	29.02	3.61	0.00	49.48	54.00	4.52
1980	46.63	PK	H	29.53	3.23	27.66	51.73	74.00	22.27
1980	33.13	AV	H	29.53	3.23	27.66	38.23	54.00	15.77
2230	43.78	PK	V	29.38	3.42	27.68	48.90	74.00	25.10
2230	26.59	AV	V	29.38	3.42	27.68	31.71	54.00	22.29
4924	31.8	PK	V	33.30	5.12	27.25	42.97	74.00	31.03
4924	21.36	AV	V	33.30	5.12	27.25	32.53	54.00	21.47
7386	28.23	PK	V	36.15	6.52	27.12	43.78	74.00	30.22
7386	20.24	AV	V	36.15	6.52	27.12	35.79	54.00	18.21

802.11g Mode

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Limit	Margin
	Reading	Measurement	Polar	Factor					
MHz	dBμV	PK/AV	H/V	dB(1/m)	dB	dB	dBμV/m	dBμV/m	dB
Frequency: 2412 MHz									
2412	73.27	PK	V	29.12	3.55	0.00	105.94	N/A	N/A
2412	64.12	AV	V	29.12	3.55	0.00	96.79	N/A	N/A
2390	32.38	PK	V	29.15	3.54	0.00	65.07	74.00	8.93
2390	16.66	AV	V	29.15	3.54	0.00	49.35	54.00	4.65
1980	46.03	PK	H	29.53	3.23	27.66	51.13	74.00	22.87
1980	32.46	AV	H	29.53	3.23	27.66	37.56	54.00	16.44
2230	44.33	PK	V	29.38	3.42	27.68	49.45	74.00	24.55
2230	27.49	AV	V	29.38	3.42	27.68	32.61	54.00	21.39
4824	31.06	PK	V	33.04	5.06	27.27	41.89	74.00	32.11
4824	22.97	AV	V	33.04	5.06	27.27	33.80	54.00	20.20
7236	26.45	PK	V	35.82	6.44	27.10	41.61	74.00	32.39
7236	19.45	AV	V	35.82	6.44	27.10	34.61	54.00	19.39
Frequency: 2437 MHz									
2437	73.08	PK	V	29.09	3.57	0.00	105.74	N/A	N/A
2437	64.13	AV	V	29.09	3.57	0.00	96.79	N/A	N/A
1980	47.18	PK	H	29.53	3.23	27.66	52.28	74.00	21.72
1980	32.35	AV	H	29.53	3.23	27.66	37.45	54.00	16.55
2230	43.71	PK	V	29.38	3.42	27.68	48.83	74.00	25.17
2230	27.76	AV	V	29.38	3.42	27.68	32.88	54.00	21.12
4874	30.56	PK	V	33.17	5.09	27.26	41.56	54.00	12.44
4874	22.07	AV	V	33.17	5.09	27.26	33.07	74.00	40.93
7311	27.78	PK	V	35.98	6.48	27.11	43.13	54.00	10.87
7311	20.18	AV	V	35.98	6.48	27.11	35.53	54.00	18.47
Frequency: 2462 MHz									
2462	73.51	PK	V	29.05	3.59	0.00	106.15	N/A	N/A
2462	64.32	AV	V	29.05	3.59	0.00	96.96	N/A	N/A
2483.5	28.36	PK	V	29.02	3.61	0.00	60.99	74.00	13.01
2483.5	17.51	AV	V	29.02	3.61	0.00	50.14	54.00	3.86
1980	45.78	PK	H	29.53	3.23	27.66	50.88	74.00	23.12
1980	31.47	AV	H	29.53	3.23	27.66	36.57	54.00	17.43
2230	44.6	PK	V	29.38	3.42	27.68	49.72	74.00	24.28
2230	26.29	AV	V	29.38	3.42	27.68	31.41	54.00	22.59
4924	32.01	PK	V	33.30	5.12	27.25	43.18	74.00	30.82
4924	22.84	AV	V	33.30	5.12	27.25	34.01	54.00	19.99
7386	27.36	PK	V	36.15	6.52	27.12	42.91	74.00	31.09
7386	20.58	AV	V	36.15	6.52	27.12	36.13	54.00	17.87

802.11n-HT20 Mode

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Limit	Margin
	Reading	Measurement	Polar	Factor					
MHz	dBμV	PK/AV	H/V	dB(1/m)	dB	dB	dBμV/m	dBμV/m	dB
Frequency: 2412 MHz									
2412	73.66	PK	V	29.12	3.55	0.00	106.33	N/A	N/A
2412	63.51	AV	V	29.12	3.55	0.00	96.18	N/A	N/A
2390	32.09	PK	V	29.15	3.54	0.00	64.78	74.00	9.22
2390	17.07	AV	V	29.15	3.54	0.00	49.76	54.00	4.24
1980	46.76	PK	H	29.53	3.23	27.66	51.86	74.00	22.14
1980	32.77	AV	H	29.53	3.23	27.66	37.87	54.00	16.13
2230	42.77	PK	V	29.38	3.42	27.68	47.89	74.00	26.11
2230	26.45	AV	V	29.38	3.42	27.68	31.57	54.00	22.43
4824	30.38	PK	V	33.04	5.06	27.27	41.21	74.00	32.79
4824	21.77	AV	V	33.04	5.06	27.27	32.60	54.00	21.40
7236	27.77	PK	V	35.82	6.44	27.10	42.93	74.00	31.07
7236	20.88	AV	V	35.82	6.44	27.10	36.04	54.00	17.96
Frequency: 2437 MHz									
2437	72.69	PK	V	29.09	3.57	0.00	105.35	N/A	N/A
2437	63.48	AV	V	29.09	3.57	0.00	96.14	N/A	N/A
1980	45.94	PK	H	29.53	3.23	27.66	51.04	74.00	22.96
1980	31.47	AV	H	29.53	3.23	27.66	36.57	54.00	17.43
2230	43.89	PK	V	29.38	3.42	27.68	49.01	74.00	24.99
2230	26.33	AV	V	29.38	3.42	27.68	31.45	54.00	22.55
4874	30.5	PK	V	33.17	5.09	27.26	41.50	54.00	12.50
4874	21.34	AV	V	33.17	5.09	27.26	32.34	74.00	41.66
7311	27.85	PK	V	35.98	6.48	27.11	43.20	54.00	10.80
7311	21.01	AV	V	35.98	6.48	27.11	36.36	54.00	17.64
Frequency: 2462 MHz									
2462	72.14	PK	V	29.05	3.59	0.00	104.78	N/A	N/A
2462	63.37	AV	V	29.05	3.59	0.00	96.01	N/A	N/A
2483.5	28.31	PK	V	29.02	3.61	0.00	60.94	74.00	13.06
2483.5	17.36	AV	V	29.02	3.61	0.00	49.99	54.00	4.01
1980	46.11	PK	H	29.53	3.23	27.66	51.21	74.00	22.79
1980	31.42	AV	H	29.53	3.23	27.66	36.52	54.00	17.48
2230	42.96	PK	V	29.38	3.42	27.68	48.08	74.00	25.92
2230	26.4	AV	V	29.38	3.42	27.68	31.52	54.00	22.48
4924	32.24	PK	V	33.30	5.12	27.25	43.41	74.00	30.59
4924	21.19	AV	V	33.30	5.12	27.25	32.36	54.00	21.64
7386	27.67	PK	V	36.15	6.52	27.12	43.22	74.00	30.78
7386	19.39	AV	V	36.15	6.52	27.12	34.94	54.00	19.06

Note:


Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor


Margin = Limit- Corr. Amplitude

Please refer to the below pre-scan plot of worst case:


802.11g Mode: Low Channel_Horizontal_1GHz-18GHz

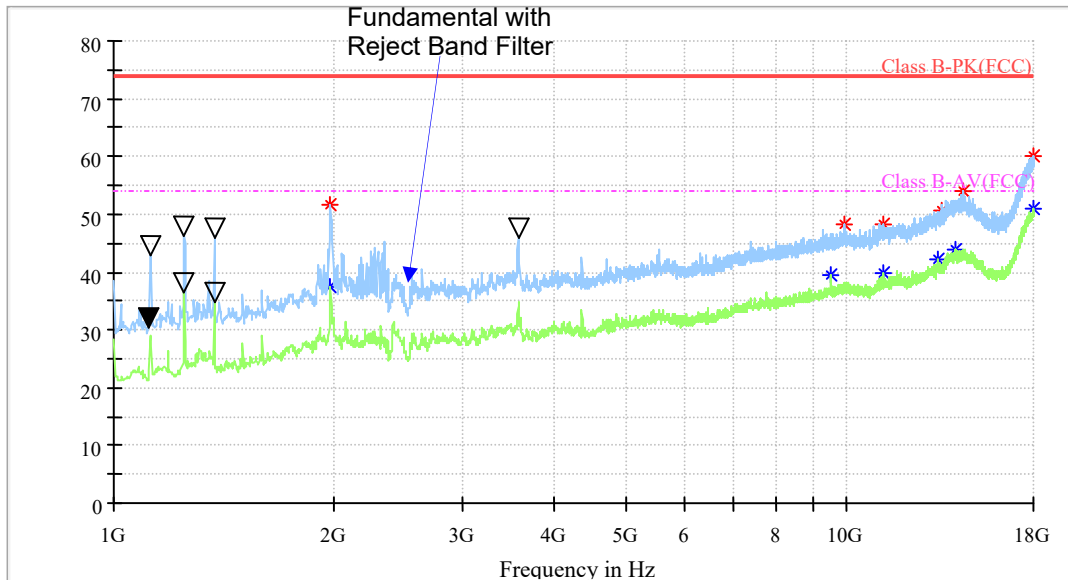


802.11g Mode: Low Channel_Vertical_1GHz-18GHz

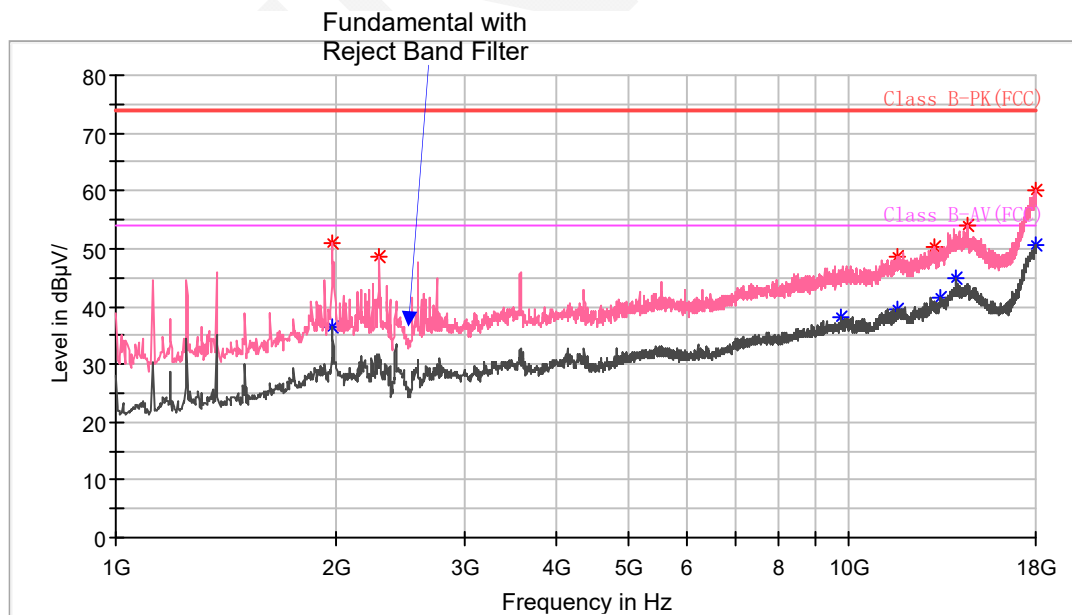

802.11g Mode: Low Channel_Horizontal_18 GHz-25 GHz

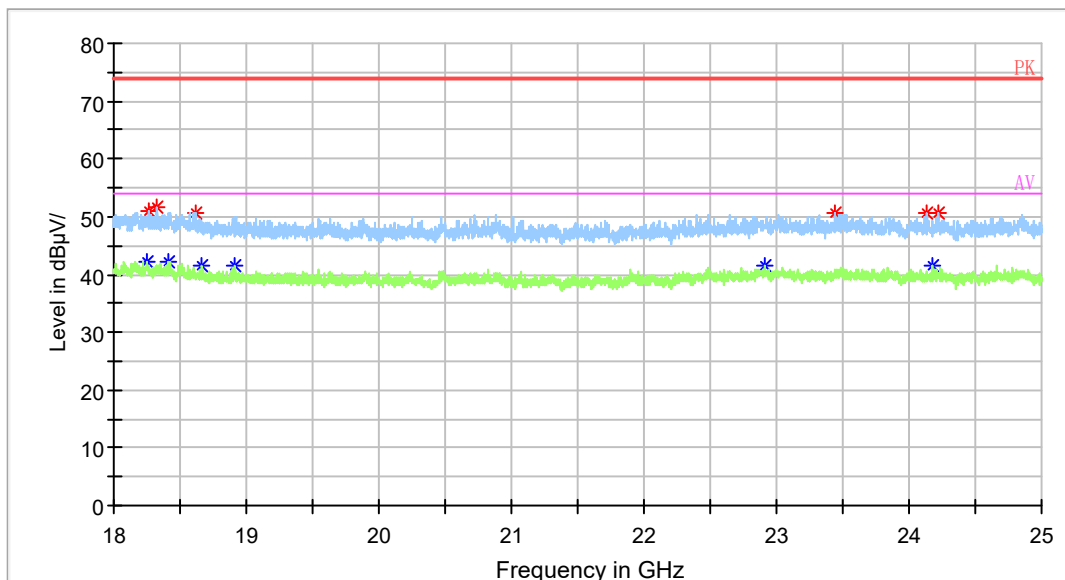


802.11g Mode: Low Channel_Vertical_18GHz-25 GHz

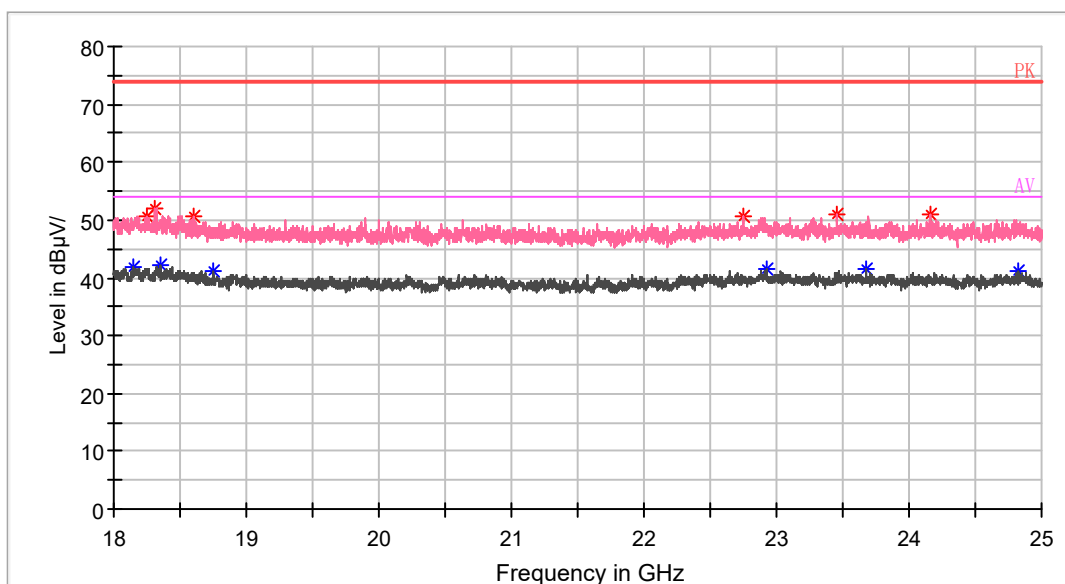

BLE Mode

30 MHz to 1 GHz-Middle channel-worst case

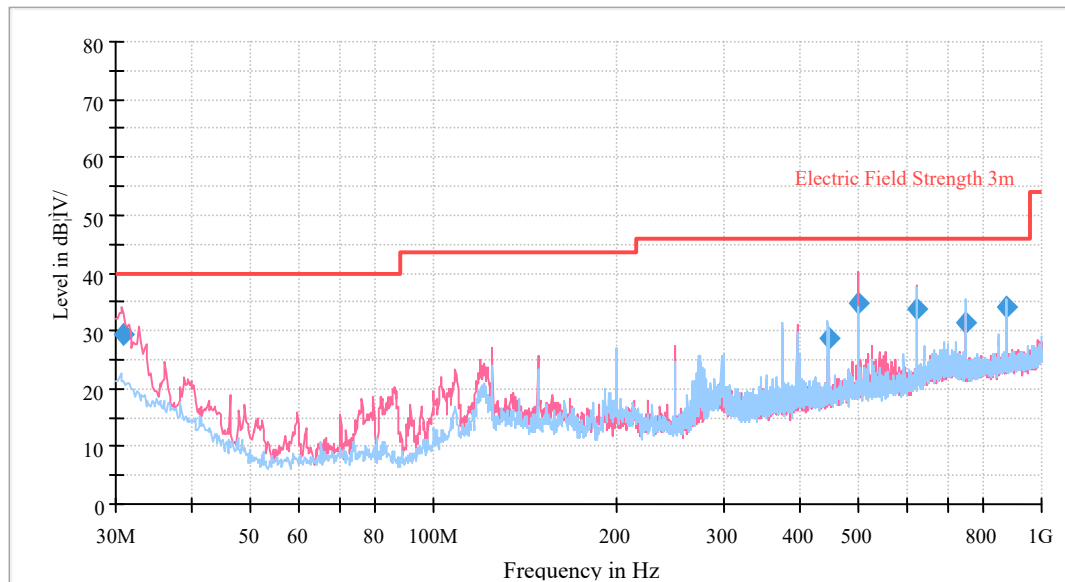

Frequency (MHz)	QuasiPeak (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.939078	29.50	40.00	10.50	200.0	120.000	105.0	V	183.0	-5.1
445.640100	28.81	46.00	17.19	200.0	120.000	104.0	H	20.0	-7.6
499.996900	34.92	46.00	11.08	200.0	120.000	119.0	V	172.0	-6.2
625.026800	33.68	46.00	12.32	200.0	120.000	105.0	V	78.0	-4.8
750.036800	31.50	46.00	14.50	200.0	120.000	102.0	H	1.0	-3.1
875.053200	33.98	46.00	12.02	200.0	120.000	103.0	H	306.0	-1.3

Above 1 GHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Limit	Margin
	Reading	Measurement	Polar	Factor					
MHz	dBµV	PK/AV	H/V	dB(1/m)	dB	dB	dBµV/m	dBµV/m	dB
Frequency: 2402 MHz									
2402	70.83	PK	V	28.71	3.55	0.00	103.09	N/A	N/A
2402	69.43	AV	V	28.71	3.55	0.00	101.69	N/A	N/A
2390	29.36	PK	V	28.67	3.54	0.00	61.57	74.00	12.43
2390	16.31	AV	V	28.67	3.54	0.00	48.52	54.00	5.48
1980	47.58	PK	H	27.40	3.23	27.66	50.55	74.00	23.45
1980	32.61	AV	H	27.40	3.23	27.66	35.58	54.00	18.42
2230	43.37	PK	V	28.19	3.42	27.68	47.30	74.00	26.70
2230	26.57	AV	V	28.19	3.42	27.68	30.50	54.00	23.50
4804	28.61	PK	V	33.85	5.05	27.27	40.24	74.00	33.76
4804	19.86	AV	V	33.85	5.05	27.27	31.49	54.00	22.51
7206	25.36	PK	V	36.39	6.43	27.10	41.08	74.00	32.92
7206	16.02	AV	V	36.39	6.43	27.10	31.74	54.00	22.26
Frequency: 2440 MHz									
2440	71.36	PK	V	28.82	3.58	0.00	103.76	N/A	N/A
2440	69.84	AV	V	28.82	3.58	0.00	102.24	N/A	N/A
1980	48.36	PK	H	27.40	3.23	27.66	51.33	74.00	22.67
1980	32.18	AV	H	27.40	3.23	27.66	35.15	54.00	18.85
2230	42.91	PK	V	28.19	3.42	27.68	46.84	74.00	27.16
2230	26.47	AV	V	28.19	3.42	27.68	30.40	54.00	23.60
4880	29.23	PK	V	34.06	5.09	27.26	41.12	74.00	32.88
4880	18.93	AV	V	34.06	5.09	27.26	30.82	54.00	23.18
7320	25.78	PK	V	36.55	6.49	27.11	41.71	74.00	32.29
7320	15.07	AV	V	36.55	6.49	27.11	31.00	54.00	23.00
Frequency: 2480 MHz									
2480	70.17	PK	V	28.94	3.61	0.00	102.72	N/A	N/A
2480	69.81	AV	V	28.94	3.61	0.00	102.36	N/A	N/A
2483.5	28.16	PK	V	28.95	3.61	0.00	60.72	74.00	13.28
2483.5	17.36	AV	V	28.95	3.61	0.00	49.92	54.00	4.08
1980	48.25	PK	H	27.40	3.23	27.66	51.22	74.00	22.78
1980	31.63	AV	H	27.40	3.23	27.66	34.60	54.00	19.40
2230	44.27	PK	V	28.19	3.42	27.68	48.20	74.00	25.80
2230	26.63	AV	V	28.19	3.42	27.68	30.56	54.00	23.44
4960	29.31	PK	V	34.29	5.14	27.24	41.50	74.00	32.50
4960	19.13	AV	V	34.29	5.14	27.24	31.32	54.00	22.68
7440	25.85	PK	V	36.72	6.55	27.13	41.99	74.00	32.01
7440	15.26	AV	V	36.72	6.55	27.13	31.40	54.00	22.60

Note:


Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor


Margin = Limit- Corr. Amplitude

Please refer to the below pre-scan plot of worst case:


High Channel_Horizontal_1GHz-18GHz

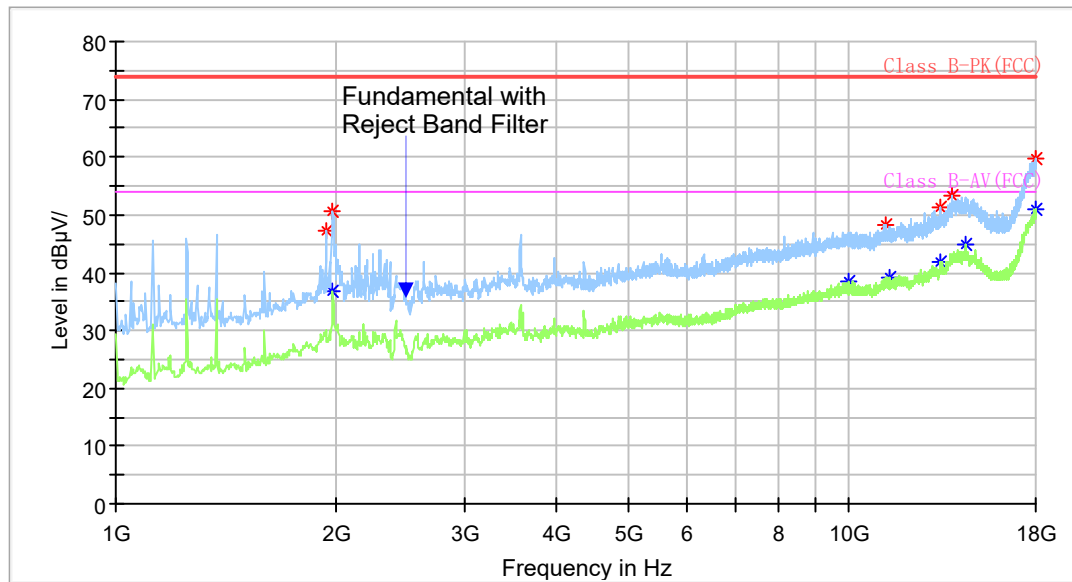


High Channel_Vertical_1GHz-18GHz

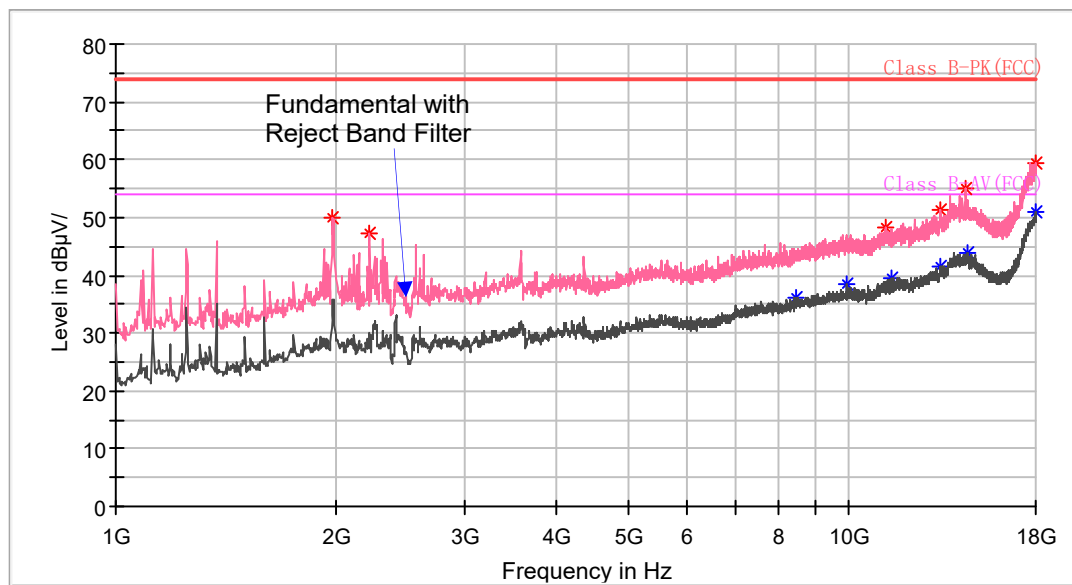

High Channel_Horizontal_18GHz-25GHz

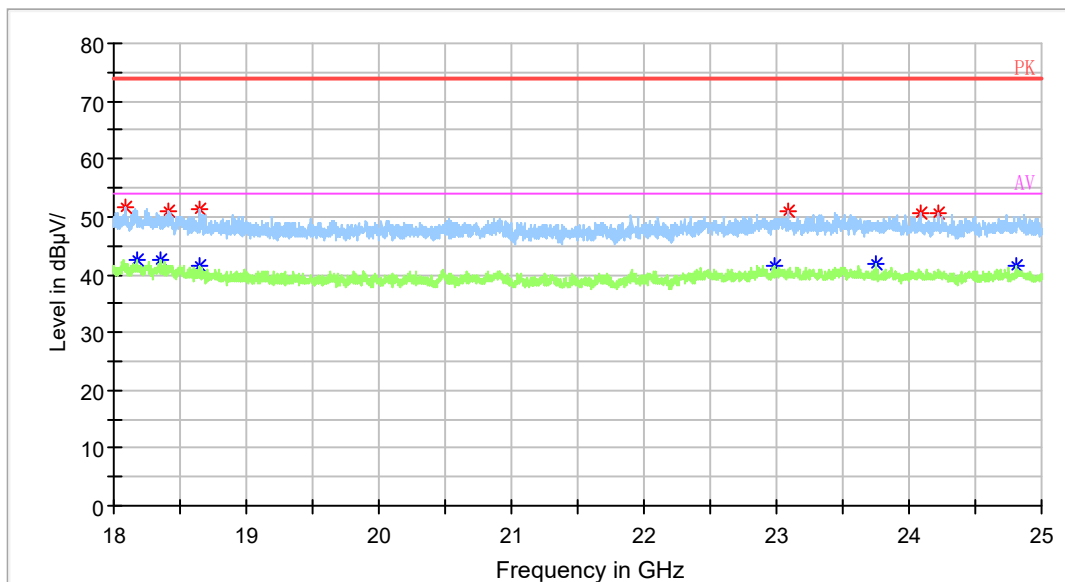

High Channel_Vertical_18GHz-25GHz

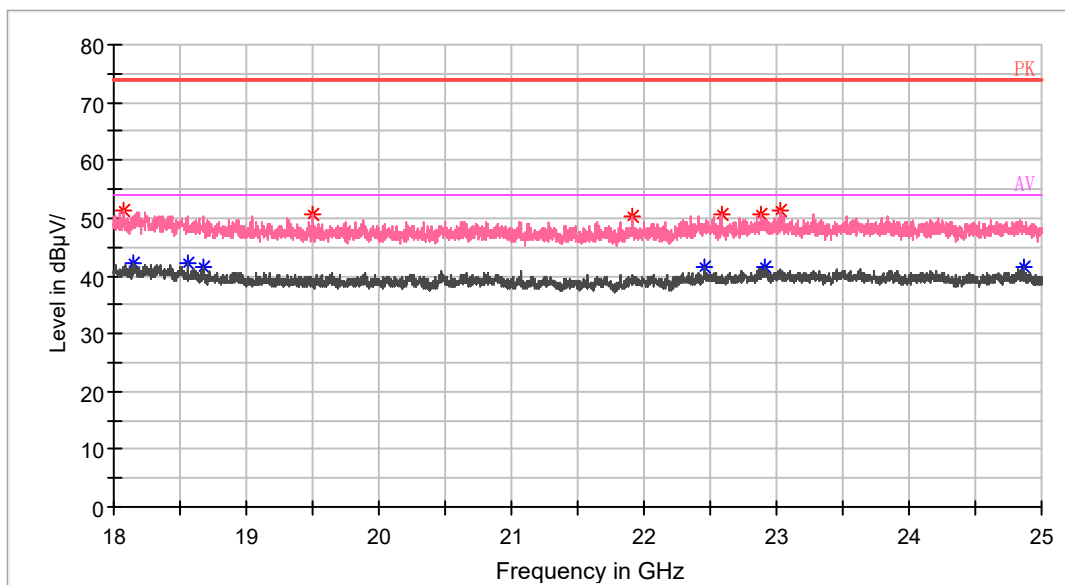


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	19 °C
Relative Humidity:	63 %
ATM Pressure:	96.1 kPa


The testing was performed by Tian Maofan on 2020-01-07.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.


Mode	Channel	Frequency(MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	8.00	≥0.50
	Middle	2437	8.48	≥0.50
	High	2462	8.00	≥0.50
802.11g	Low	2412	16.40	≥0.50
	Middle	2437	16.32	≥0.50
	High	2462	16.32	≥0.50
802.11n- HT20	Low	2412	17.60	≥0.50
	Middle	2437	17.60	≥0.50
	High	2462	17.12	≥0.50
BLE	Low	2402	0.72	≥0.50
	Middle	2440	0.72	≥0.50
	High	2480	0.71	≥0.50

Wi-Fi mode, 802.11b Low Channel

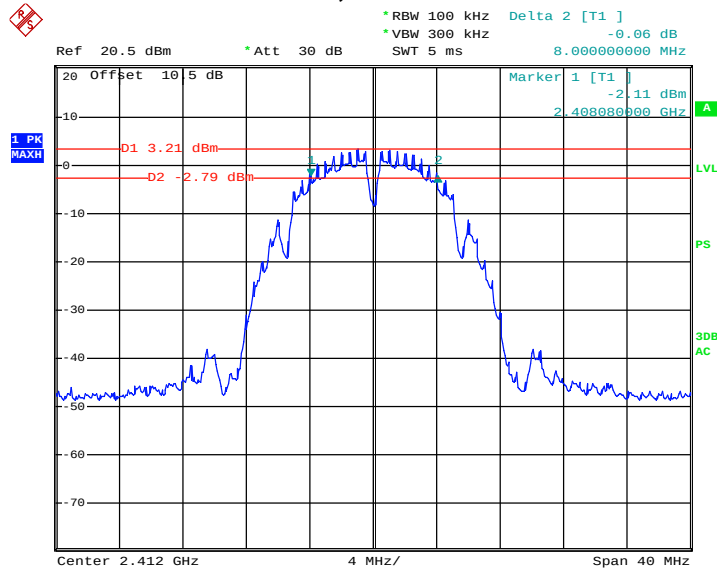


Date: 7.JAN.2020 13:46:06

Wi-Fi mode, 802.11b Middle Channel

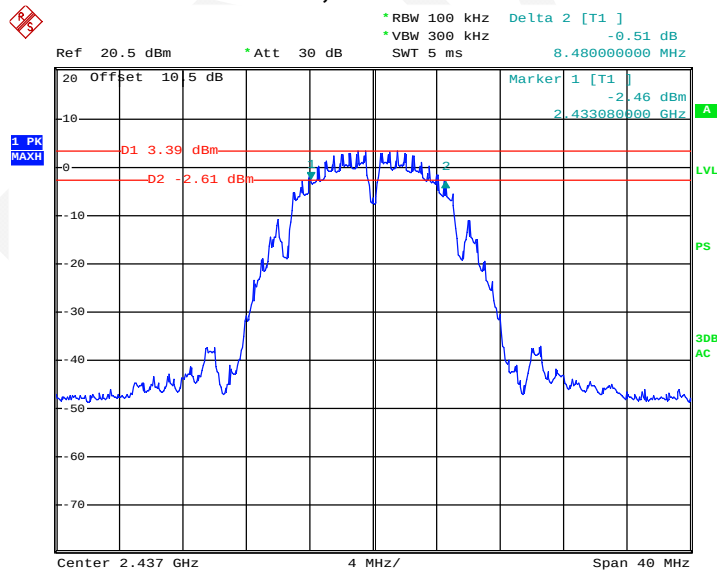


Date: 7.JAN.2020 13:50:51

Wi-Fi mode, 802.11b High Channel

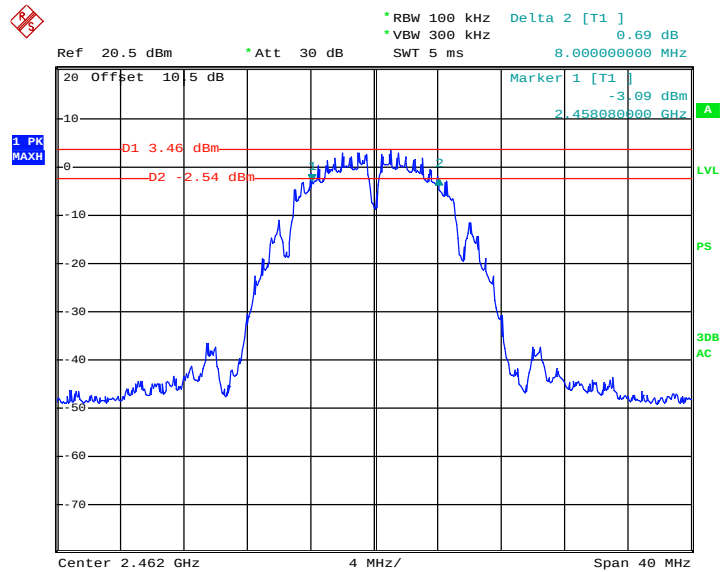


Date: 7.JAN.2020 13:52:54

Wi-Fi mode, 802.11g Low Channel

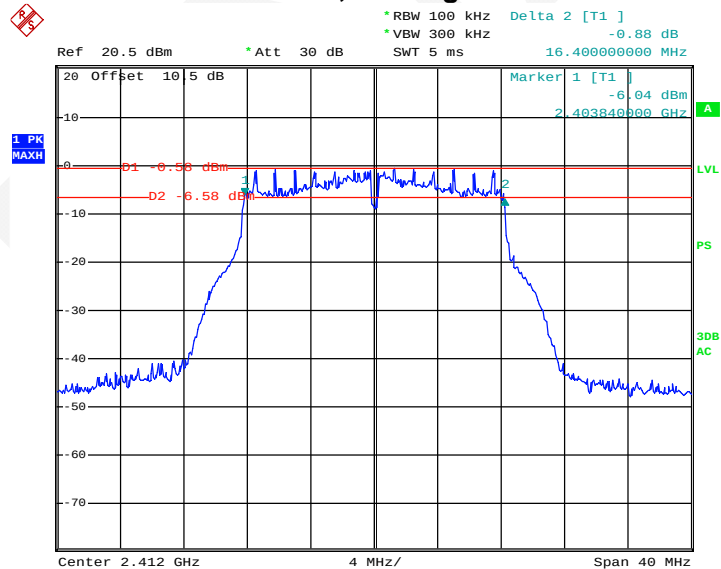


Date: 7.JAN.2020 13:55:46

Wi-Fi mode, 802.11g Middle Channel

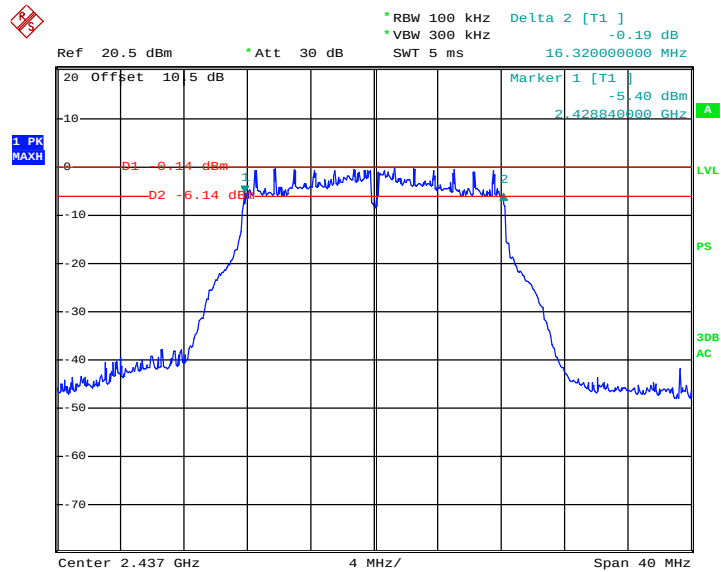


Date: 7.JAN.2020 13:58:10

Wi-Fi mode, 802.11g High Channel

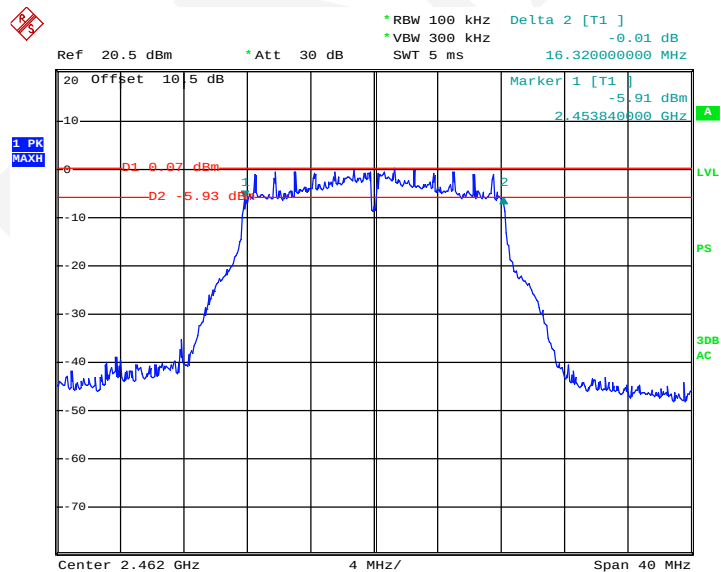


Date: 7.JAN.2020 14:00:49

Wi-Fi mode, 802.11n-HT20 Low Channel

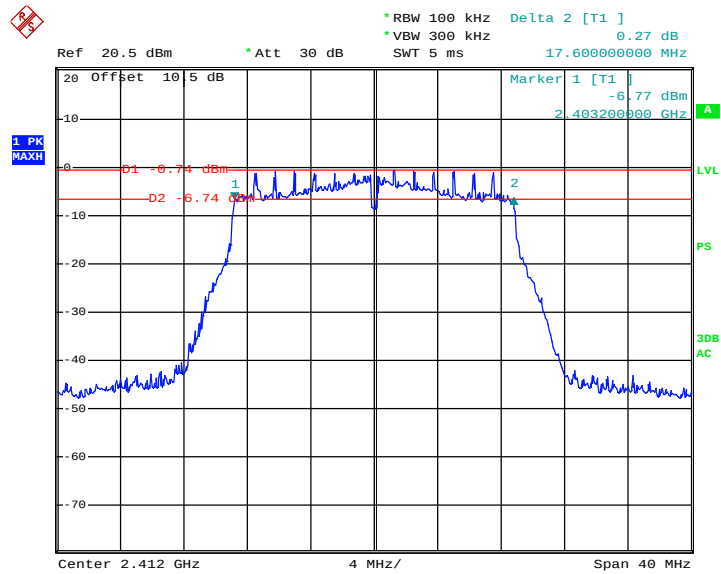


Date: 7.JAN.2020 14:03:09

Wi-Fi mode, 802.11n-HT20 Middle Channel

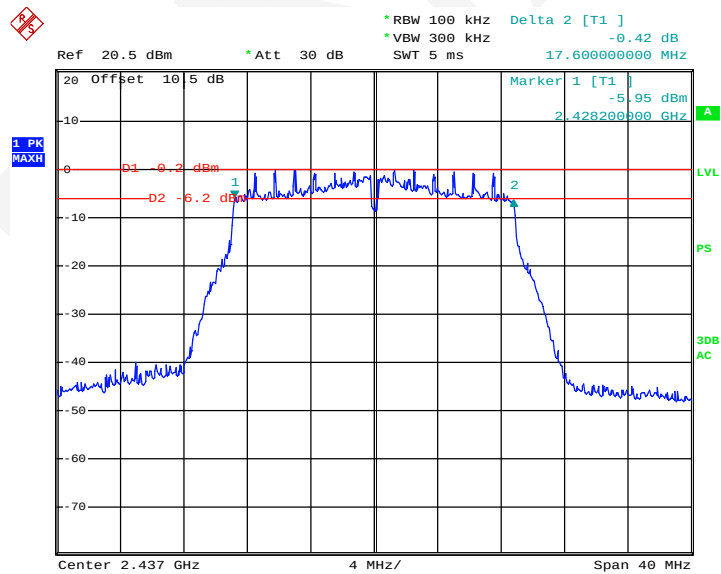


Date: 7.JAN.2020 14:04:54

Wi-Fi mode, 802.11n-HT20 High Channel

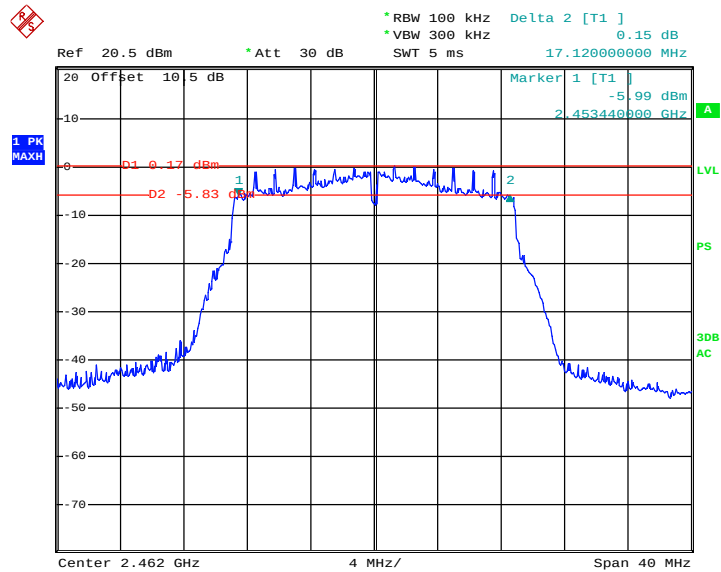


Date: 7.JAN.2020 14:07:45


BLE mode, Low Channel

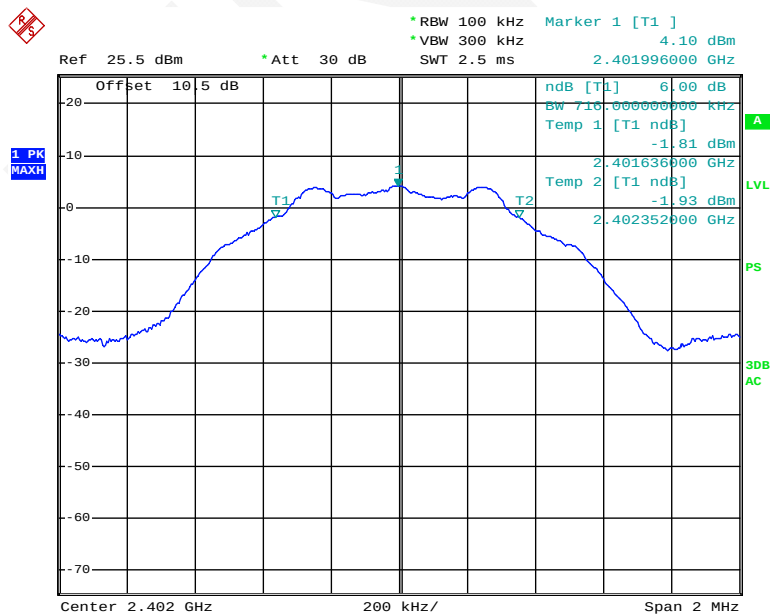

Date: 7.JAN.2020 17:11:30

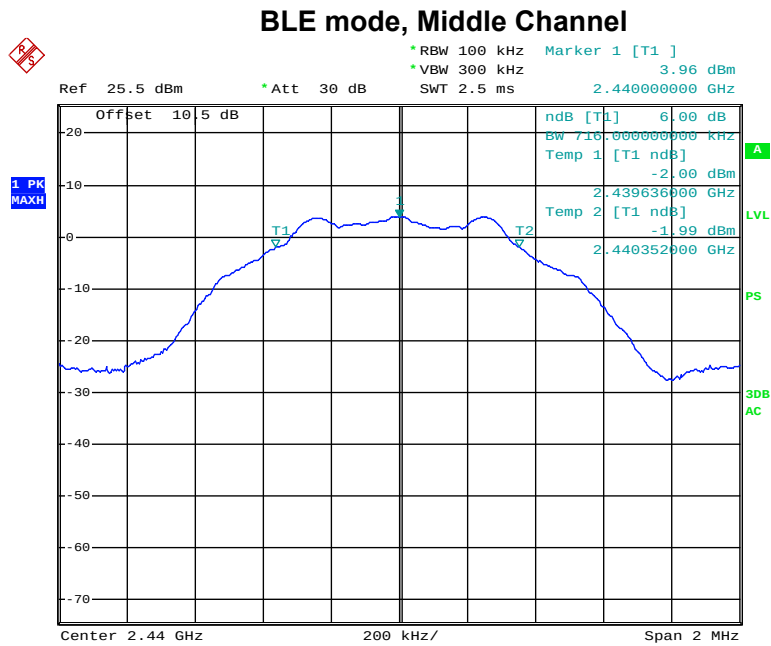

Date: 7.JAN.2020 17:12:04

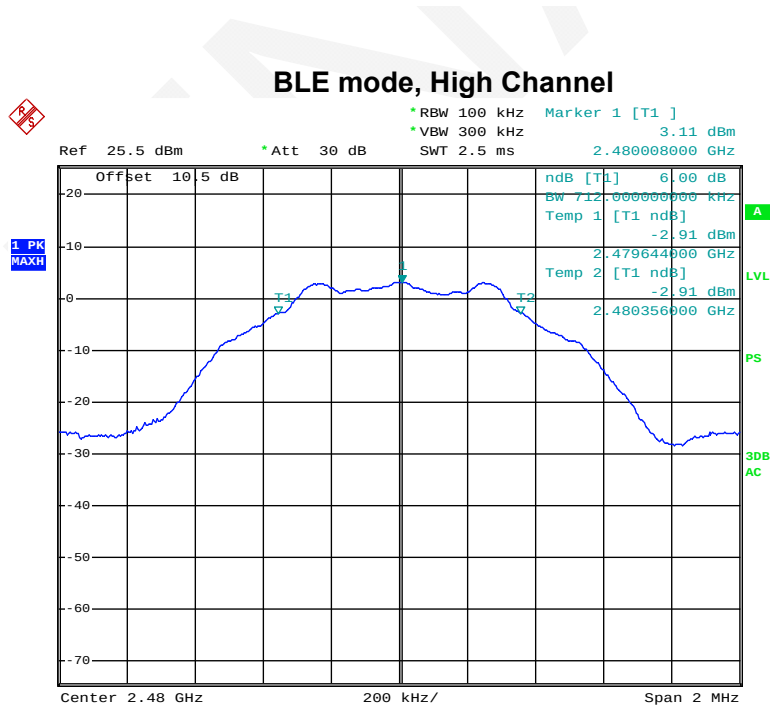

Date: 7.JAN.2020 17:12:32

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	19 °C
Relative Humidity:	63 %
ATM Pressure:	96.1 kPa

The testing was performed by Tian Maofan on 2020-01-07.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table.

Mode	Channel	Frequency (MHz)	Max Peak Conducted Output Power (dBm)	Limit (dBm)
802.11b	Low	2412	13.96	30
	Middle	2437	14.16	30
	High	2462	14.24	30
802.11g	Low	2412	21.63	30
	Middle	2437	21.02	30
	High	2462	21.47	30
802.11n-HT20	Low	2412	19.94	30
	Middle	2437	20.11	30
	High	2462	20.41	30

Mode	Channel	Frequency (MHz)	Max Peak Conducted Output Power (dBm)	Limit (dBm)
BLE	Low	2402	4.85	30
	Middle	2440	4.82	30
	High	2480	4.03	30

Note: The duty cycle factor was calculated in result.

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	19 °C
Relative Humidity:	61 %
ATM Pressure:	95.9 kPa


The testing was performed by Tian Maofan on 2020-01-08.

Test mode: Transmitting

Test Result: Compliance. Please refer to following plots.


Wi-Fi mode

802.11b: Band Edge, Left Side

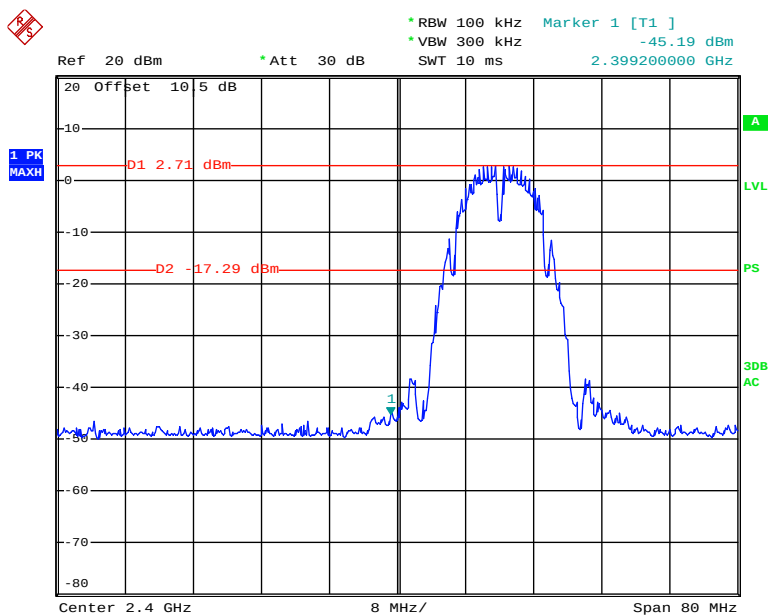


Date: 8. JAN. 2020 12:06:36

802.11b: Band Edge, Right Side

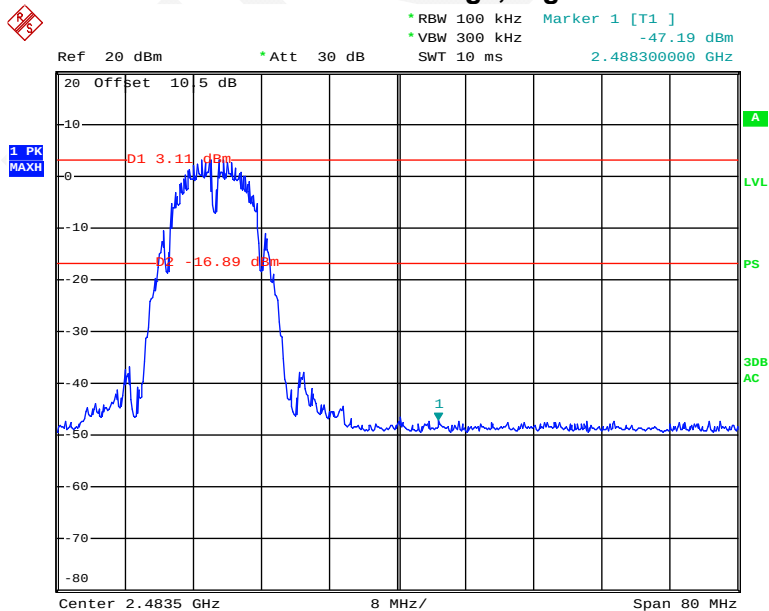


Date: 8. JAN. 2020 12:12:48

802.11g: Band Edge, Left Side

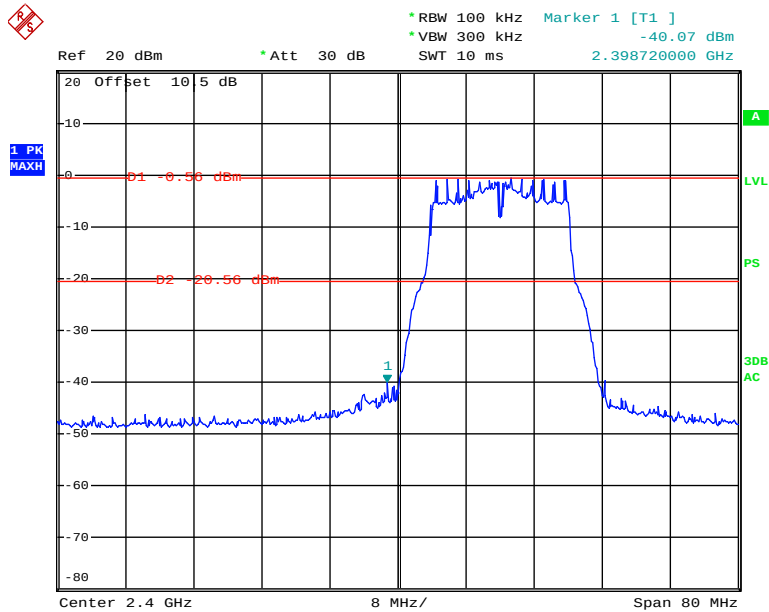


Date: 8.JAN.2020 12:05:05

802.11g: Band Edge, Right Side

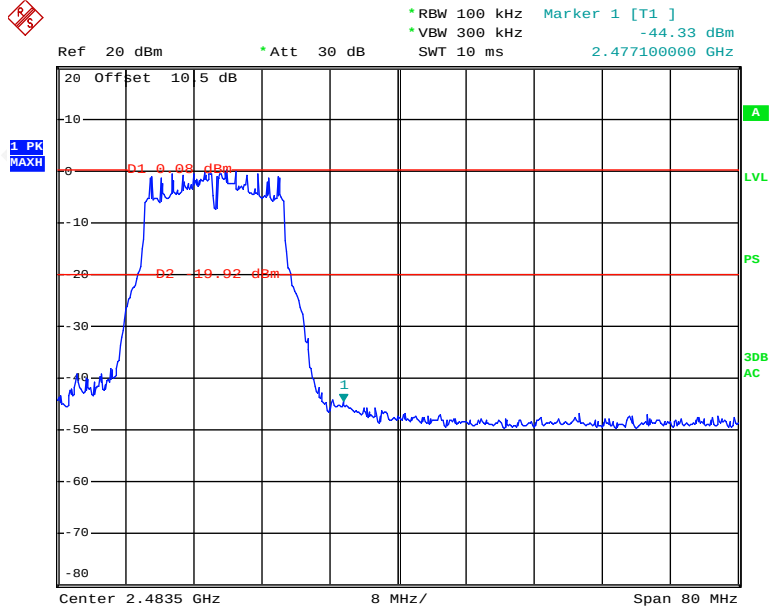


Date: 8.JAN.2020 12:10:57

802.11n-HT20 Band Edge, Left Side

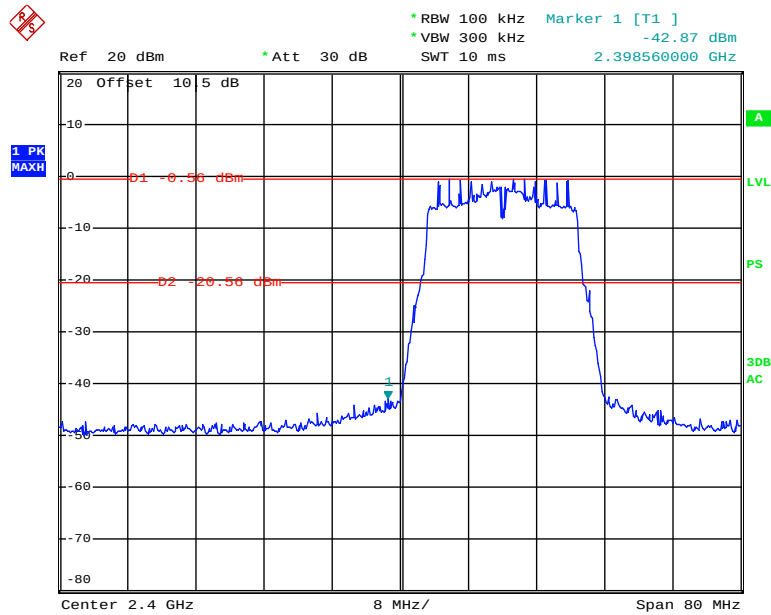

Date: 8.JAN.2020 12:07:47


802.11n-HT20 Band Edge, Right Side

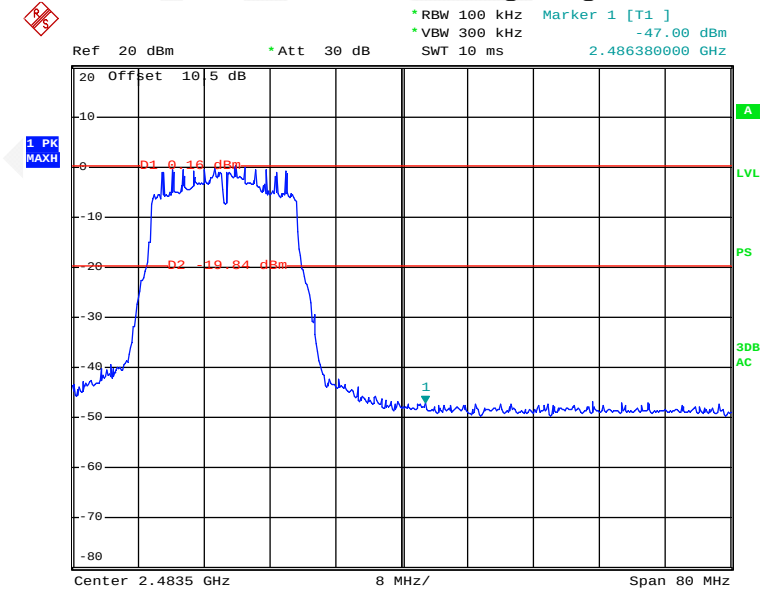

Date: 8.JAN.2020 12:09:25


BLE mode

Band Edge, Left Side

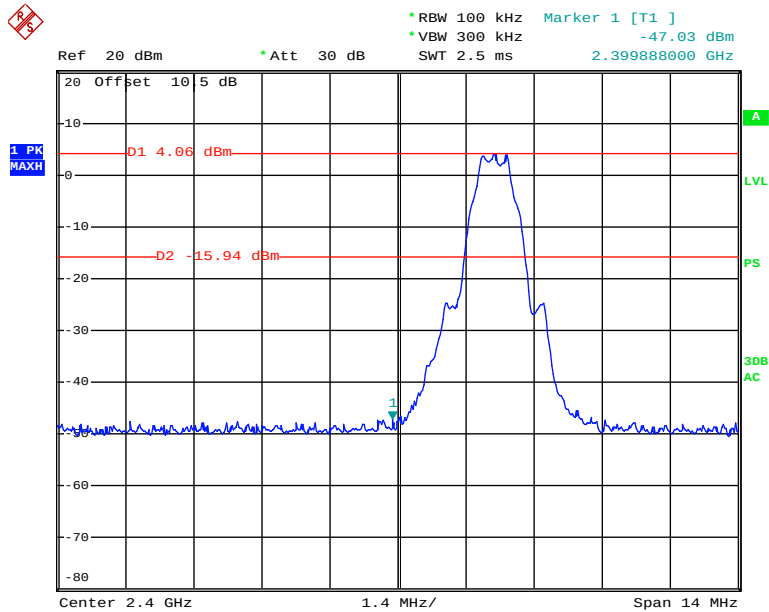

Date: 8.JAN.2020 14:25:31

Band Edge, Right Side

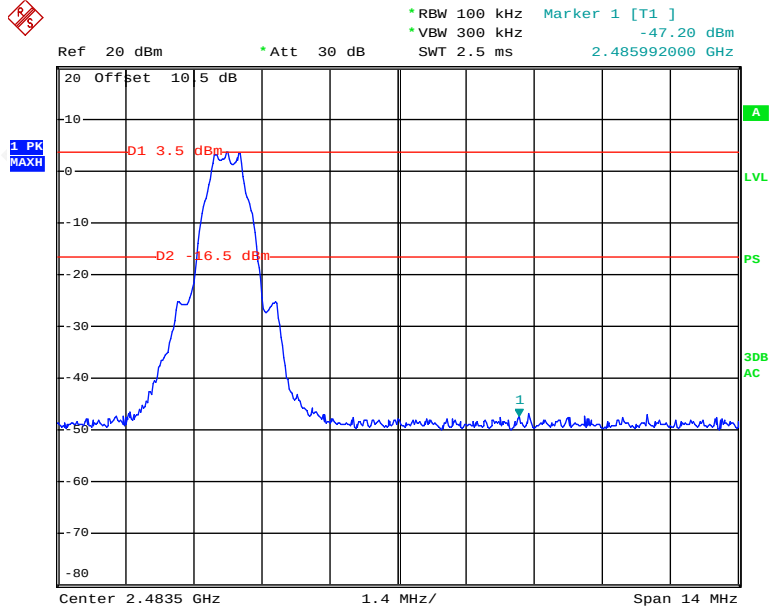

Date: 8.JAN.2020 14:22:45

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	20 °C
Relative Humidity:	52 %
ATM Pressure:	96.1 kPa

The testing was performed by Tian Maofan on 2020-01-08.

Test Mode: Transmitting


Test Result: Compliance. Please refer to the following table and plots

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	Low	2412	-11.62	≤8
	Middle	2437	-10.52	≤8
	High	2462	-11.74	≤8
802.11g	Low	2412	-13.04	≤8
	Middle	2437	-12.71	≤8
	High	2462	-11.69	≤8
802.11n-HT20	Low	2412	-13.33	≤8
	Middle	2437	-13.04	≤8
	High	2462	-11.85	≤8

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
BLE	Low	2402	-9.97	≤8
	Middle	2440	-9.99	≤8
	High	2480	-10.76	≤8


Wi-Fi mode

Power Spectral Density, 802.11b Low Channel

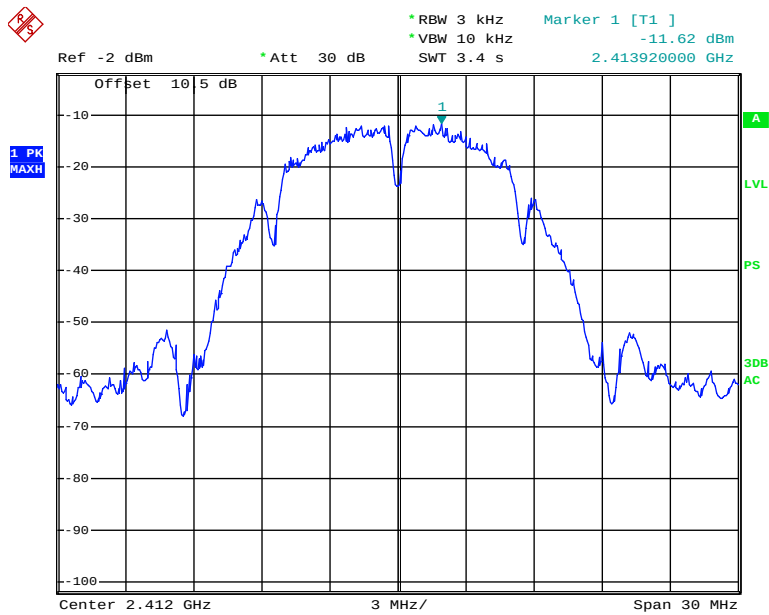


Date: 8.JAN.2020 15:15:00

Power Spectral Density, 802.11b Middle Channel

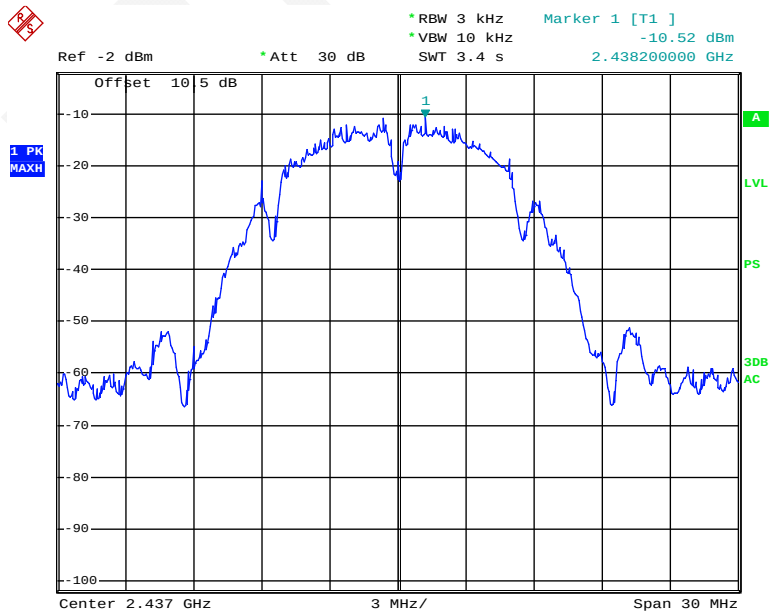


Date: 8.JAN.2020 15:16:50

Power Spectral Density, 802.11b High Channel

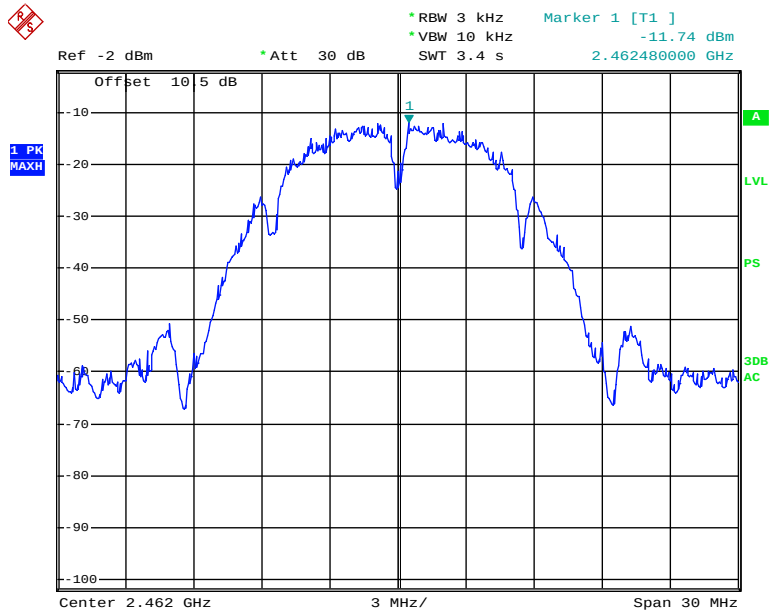


Date: 8.JAN.2020 15:17:55


Power Spectral Density, 802.11g Low Channel

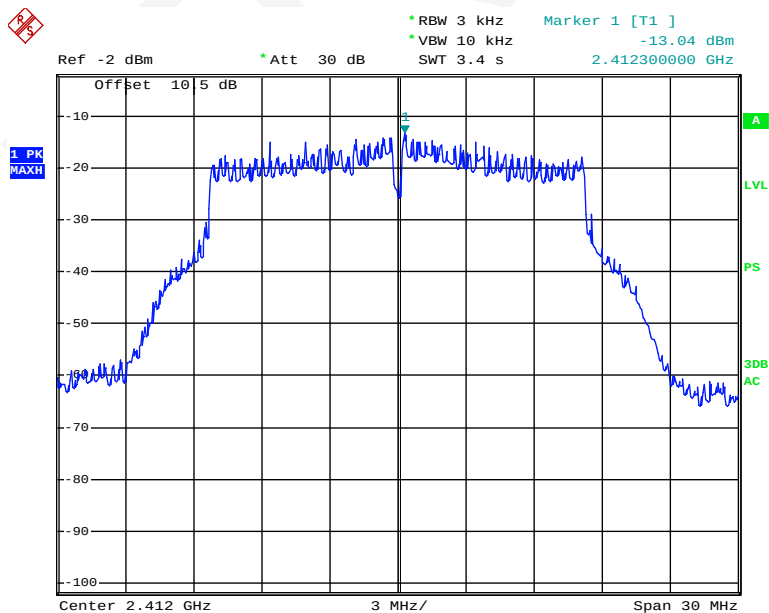

Date: 8.JAN.2020 15:21:11

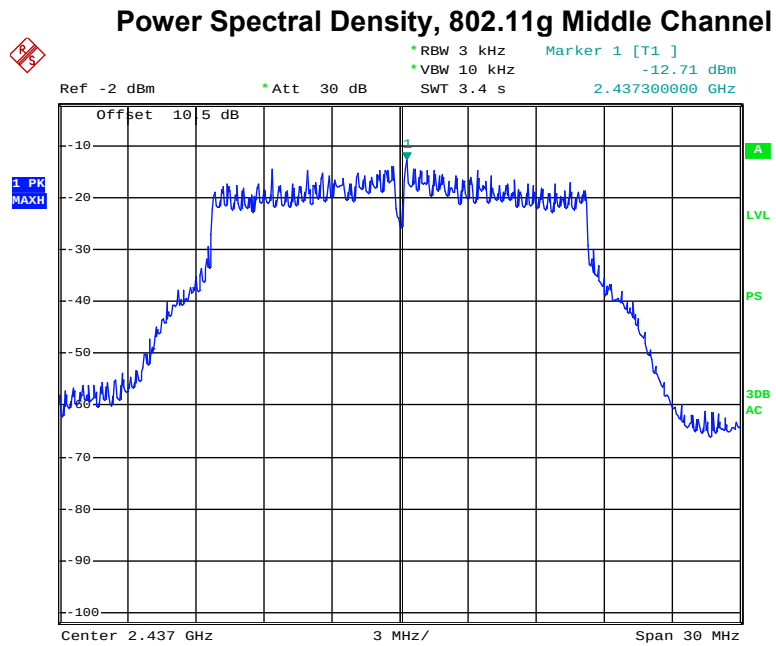


Date: 8.JAN.2020 15:20:02

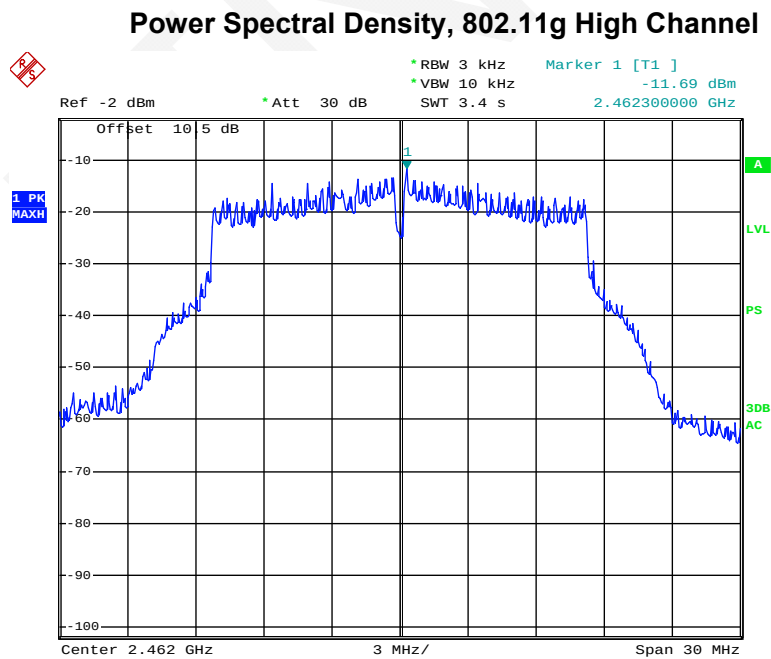


Date: 8.JAN.2020 15:19:00

Power Spectral Density, 802.11n-HT20 Low Channel

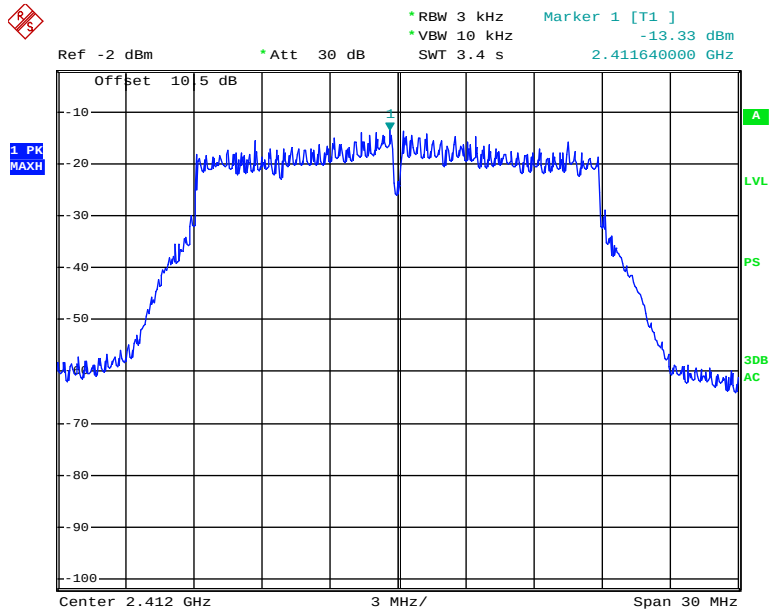


Date: 8.JAN.2020 15:22:26

Power Spectral Density, 802.11n-HT20 Middle Channel

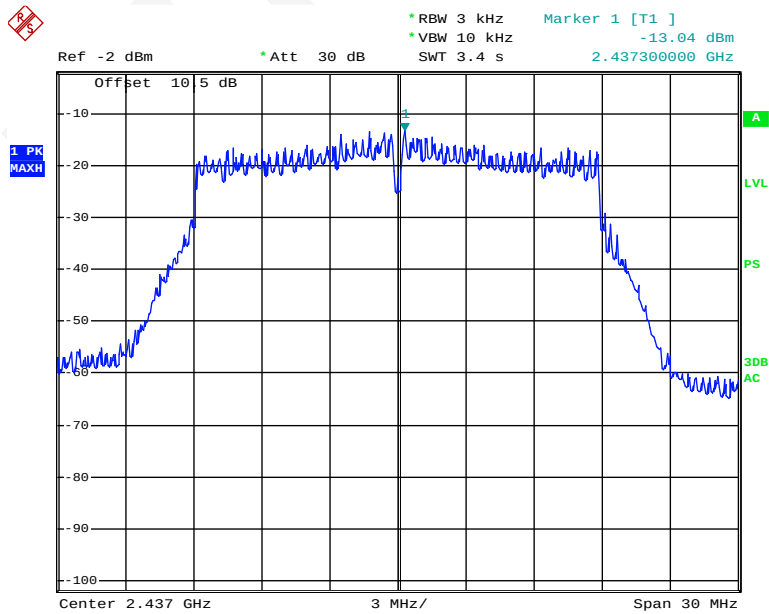

Date: 8.JAN.2020 15:23:32


Power Spectral Density, 802.11n-HT20 High Channel

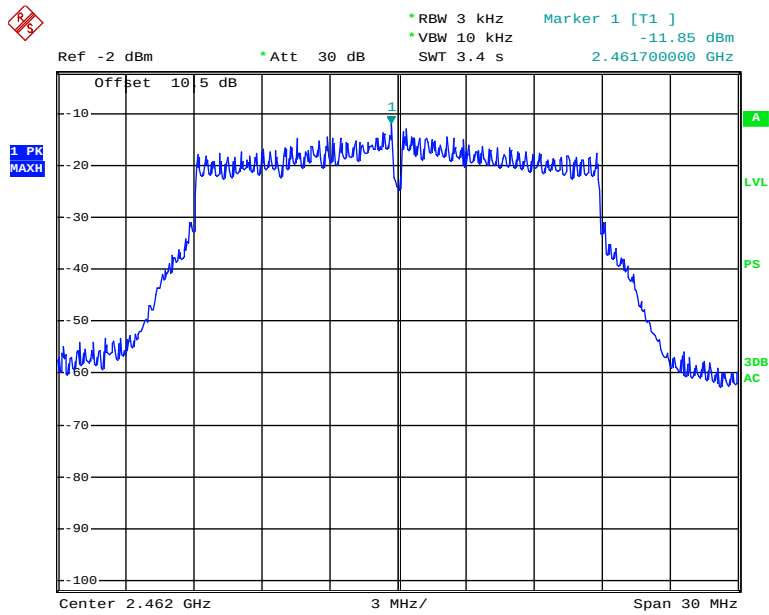


Date: 8. JAN. 2020 15:25:29

BLE mode


Power Spectral Density, Low Channel

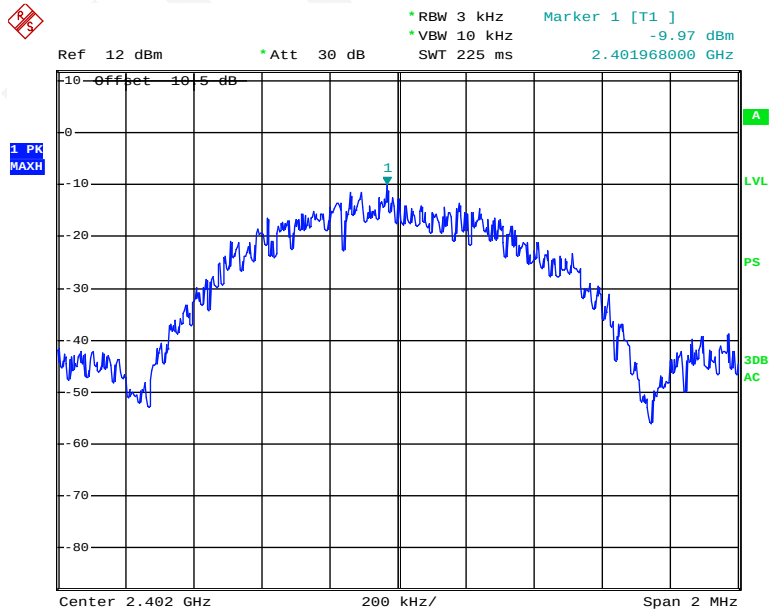

Date: 8. JAN. 2020 15:56:31

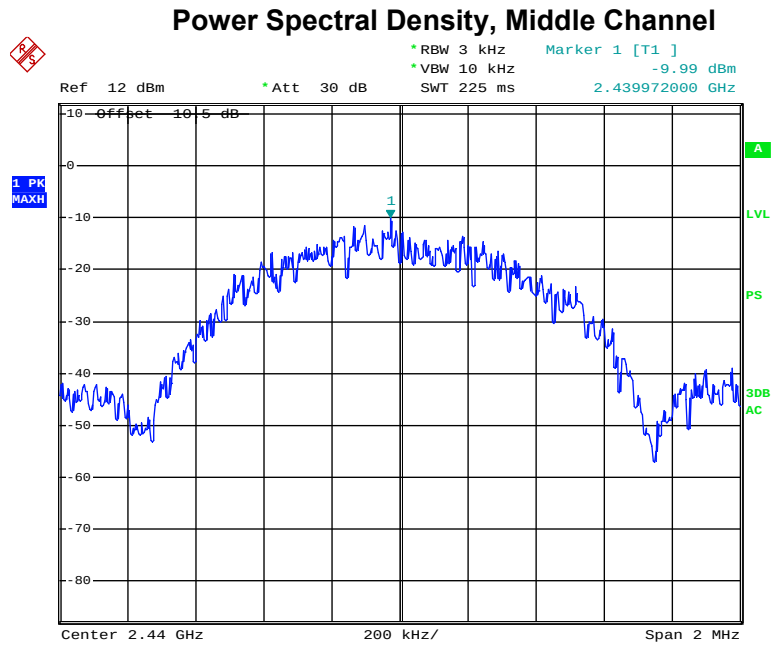

Date: 8.JAN.2020 15:57:23

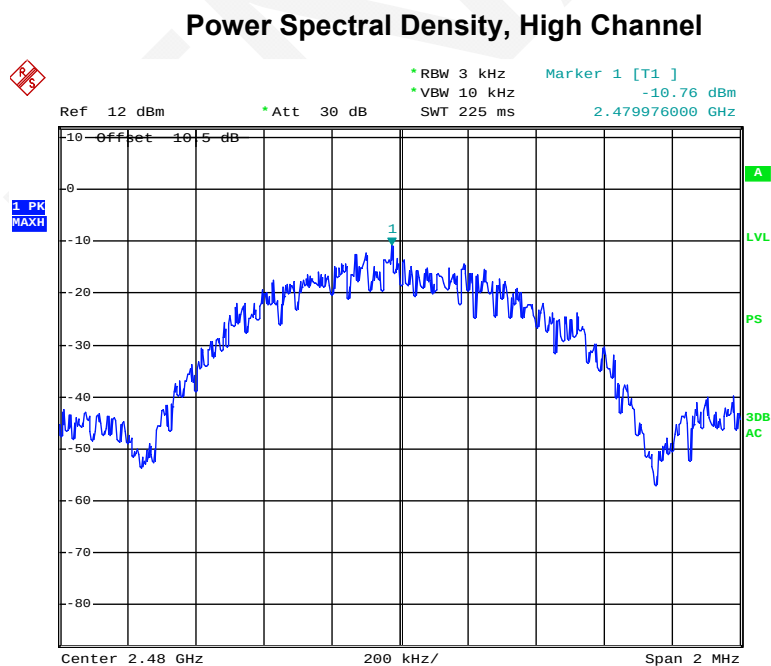

Date: 8.JAN.2020 15:58:00

END OF REPORT