



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822
Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>



Dates of Tests: April 17 ~ May 10, 2007
Test Report S/N: LR500200704C
Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.

RQKSMARTREGUN

APPLICANT

SAMMI Information Systems Co., Ltd.

FCC Classification	:	Part 15 Low Power Communication Device Transmitter
Manufacturing Description	:	RFID Reader
Manufacturer	:	SAMMI Information Systems Co., Ltd.
Model name	:	Smart RF GUN
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.225 Subpart C; ANSI C-63.4-2003
Frequency Range	:	13.56MHz
RF power	:	ANT-1: 72.18dBuV/m @ 3m ANT-2: 67.56dBuV/m @ 3m
Data of issue	:	May 10, 2007

This test report is issued under the authority of:

The test was supervised by:

Dong -Min JUNG, Technical Manager

Kyung-Taek LEE, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. This report must not be used by the applicant to claim product endorsement by any agency.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION'S	3
2. INFORMATION'S ABOUT TEST ITEM	4
3. TEST REPORT	5
3.1 SUMMARY OF TESTS	5
3.2 TECHNICAL CHARACTERISTICS TEST	6
3.2.1 ELECTRIC FIELD STRENGTH	6
3.2.1.1 FUNDAMENTAL EMISSION	7
3.2.1.2 OUTSIDE the EMISSION	8
3.2.1.3 SPURIOUS EMISSION	9
3.2.2 20dB BANDWIDTH	11
3.2.3 FREQUENCY TOLERANCE	13
3.2.4 RADIATED EMISSIONS	15
3.2.5 AC CONDUCTED EMISSIONS	18
 APPENDIX	
APPENDIX TEST EQUIPMENT USED FOR TESTS	23

1. General information's

1-1 Test Performed

Company name : LTA Co., Ltd.
Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
Web site : <http://www.ltalab.com>
E-mail : chahn@ltalab.com
Telephone : +82-31-323-6008
Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2007-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2007-07-13	EMC accredited Lab.
FCC	U.S.A	610755	2008-03-28	FCC filing
VCCI	JAPAN	R2133, C2307	2008-06-22	VCCI registration
IC	CANADA	IC5799	2008-04-23	IC filing

2. Information's about test item

2-1 Client

Company name : SAMMI Information Systems Co., Ltd.
 Address : 496, wonchun-dong, yeongtong-ku, suwon, kyung ki-do, Korea
 Tel / Fax : +82-31-217-8252 / +82-31-217-8254

2-2 Manufacturer

Company name : SAMMI Information Systems Co., Ltd.
 Address : 7-9FL., Seo Jo Bldg, 103-5, Galwor-Dond, Yong San-Ku, Seoul, Korea

2-3 Equipment Under Test (EUT)

Trade name : RFID Reader
 Model name : Smart RF GUN
 Serial number : Identical prototype
 Date of receipt : April 09, 2007
 EUT condition : Pre-production, not damaged
 Antenna type - 1 : Loop Antenna with MMCX R/A male connector
 (M/N: SMANTH10 Size: 80*80)
 Antenna type - 2 : Loop Antenna with MMCX R/A male connector
 (M/N: SMM_SKT_ANT_ES2 Size: 42*53.9)
 Frequency Range : 13.56 MHz
 RF output power : ANT-1: 72.18dBuV/m @ 3m ANT-2: 67.56dBuV/m @ 3m
 Type of Equipment : Hand potable
 Temperature range : -20℃ ~ 55℃
 Power Source : Adaptor: 100-240VAC/1.5A, 5VDC/3A
 Battery: Rechargeable Lithium Ion Battery 2200 mAh 3.7VDC

2-4 Tested frequency

	LOW	MID	HIGH
Frequency (MHz)	-	13.56	-

2-5 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
PDA	Smart Compact	N/A	SAMMI
-	-	-	-

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Test Condition	Tested ANT Type	Status (note 1)
15.225(a)	Electric Field Strength - Fundamental Emission	Radiated	ANT-1 and ANT-2	C
15.225(b) (c)	Electric Field Strength - Outside the Band			C
15.225(d)	Electric Field Strength - Spurious Emission			C
15.225(c)	20 dB Bandwidth			C
15.225(d)	Frequency Tolerance			C
15.209	Radiated Emission			C
15.207 /15.107	AC Conducted Emissions	Line Conducted	ANT-1 and ANT-2	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: ANT-1 → M/N: SMANTH10 ANT-2→ M/N: SMM_SKT_ANT_ES2

Note 3: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

FCC Parts 15.225; ANSI C-63.4-2003

3.2 Transmitter requirements

3.2.1 Electric Field Strength

Procedure: About the Fundamental Emission, Outside the Band and Spurious Emission

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3m.

→ From 9kHz to 30MHz at distance 3m

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for each antenna angle 0deg., 45deg. and 90deg.

→ From 30MHz to 1000MHz at distance 3m

The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

Bandwidth settings per frequency range;

	From 9kHz to 150kHz	From 150kHz to 30MHz	From 30MHz to 1000MHz
IF Bandwidth	200Hz	9kHz	120kHz

Part 15 Section 15.31 (f)(2) (9kHz ~ 30MHz)

9kHz ~ 490kHz [Limit at 3m] = [Limit at 300m]-40log(3[m]/300[m])

490kHz ~ 30MHz [Limit at 3m] = [Limit at 30m]-40log(3[m]/30[m])

3.2.1.1 Electric Field Strength - Fundamental Emission

Test method : Part 15.225(a)
 Tx Frequency : 13.56 MHz
 Result : **Complies**

Measurement data:

ANT-1

Freq (MHz)	Pol.	Reading (dB μ V/m)	T.F (dB)	Field Strength @3m (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
13.56	H	78.90	-6.87	72.03	124	51.97
13.56	V	79.05	-6.87	72.18	124	51.82

ANT-2

Freq (MHz)	Pol.	Reading (dB μ V/m)	T.F (dB)	Field Strength @3m (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
13.56	H	71.54	-6.87	64.67	124	59.33
13.56	V	74.43	-6.87	67.56	124	56.44

-- Note 1--

Field strength of 13.553MHz to 13.567MHz Limit@3m = 84dB μ V/m + 40log30m/3m
 = 124dB μ V/m

-- Note 2--

T.F(Total Factor) = Antenna Factor + Cable Loss – Amp Gain


Field Strength @3m = Reading + T.F

3.2.1.2 Electric Field Strength - Outside the Allocated Band


Test method : Part 15.225(b) (c)
 Tx Frequency : 13.56 MHz
 Result : **Complies**

Measurement Data:

ANT-1

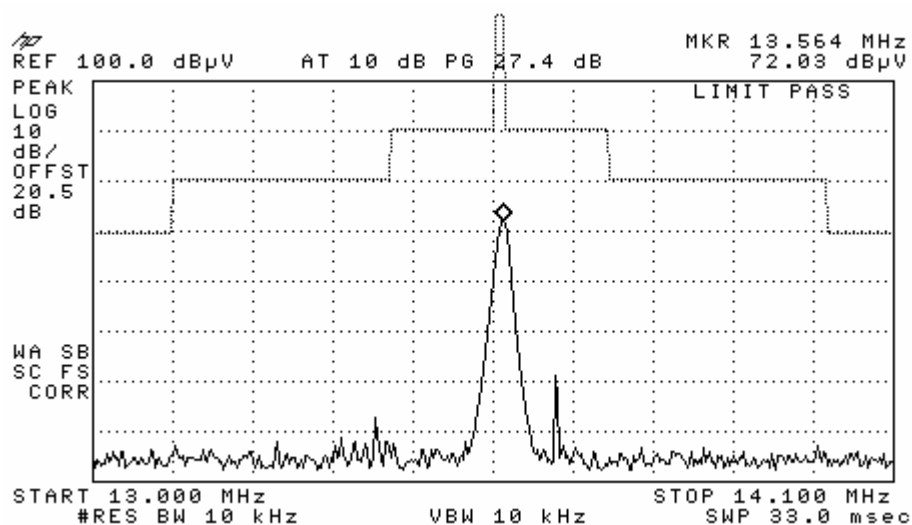

ANT-2

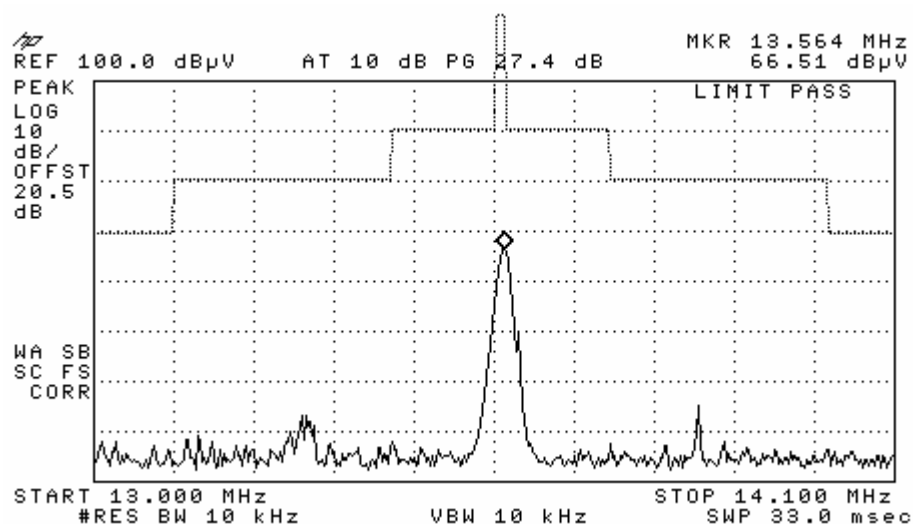

3.2.1.3 Electric Field Strength – Spurious Emission

Test method : Part 15.225(d)
 Tx Frequency : 13.56 MHz
 Result : **Complies**

Measurement Data:

ANT-1

Freq (MHz)	Pol.	Reading (dBμV/m)	T.F (dB)	Field Strength @3m (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
40.69	V	49.68	-13.52	36.16	40.00	3.84
54.25	V	39.85	-13.59	26.26	40.00	13.74
67.81	V	50.29	-14.29	36.00	40.00	4.00
81.37	V	50.27	-17.32	32.95	40.00	7.05
94.93	V	46.88	-16.28	30.60	43.50	12.90
108.49	V	52.22	-14.90	37.32	43.50	6.18
122.05	V	53.80	-13.57	40.23	43.50	3.27
135.61	V	49.29	-12.75	36.54	43.50	6.96
149.17	V	41.80	-11.97	29.83	43.50	13.67
162.73	V	48.62	-12.06	36.56	43.50	6.94
176.29	V	49.30	-12.80	36.50	43.50	7.00
189.85	V	52.10	-14.41	37.69	43.50	5.81
203.41	V	55.30	-15.08	40.22	43.50	3.28
216.97	V	51.45	-14.66	36.79	46.00	9.21
230.53	V	49.33	-13.94	35.39	46.00	10.61
244.09	V	47.13	-13.25	33.88	46.00	12.12
257.65	V	49.30	-12.89	36.41	46.00	9.59

-- Note 1--

T.F(Total Factor) = Antenna Factor + Cable Loss – Amp Gain

Field Strength @3m = Reading + T.F

-- Note 2--

No other emissions were detected at a level greater than 20dB below limit.

Measurement Data:

ANT-2

Freq (MHz)	Pol.	Reading (dBμV/m)	T.F (dB)	Field Strength @3m (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
40.69	V	48.90	-13.52	35.4	40.00	4.62
54.25	V	45.78	-13.59	32.2	40.00	7.81
67.81	V	40.52	-14.29	26.2	40.00	13.77
203.41	V	50.37	-15.08	35.3	43.50	8.21
230.53	V	48.12	-13.94	34.2	46.00	11.82
-	-	-	-	-	-	-

-- Note 1--

T.F(Total Factor) = Antenna Factor + Cable Loss –Amp Gain

Field Strength @3m = Reading + T.F

-- Note 2--

No other emissions were detected at a level greater than 20dB below limit.

3.2.2 20 dB Bandwidth

Procedure:

The measurement was performed in the antenna height to gain the maximum of Electric field strength.

Test method : Part 15.225(c)
Tx Frequency : 13.56 MHz
Result : **Complies**

The spectrum analyzer is set to:


Center frequency = 13.56MHz

RBW = 10 kHz

VBW = 10 kHz (VBW ≥ RBW)


Measurement Data:

ANT-1

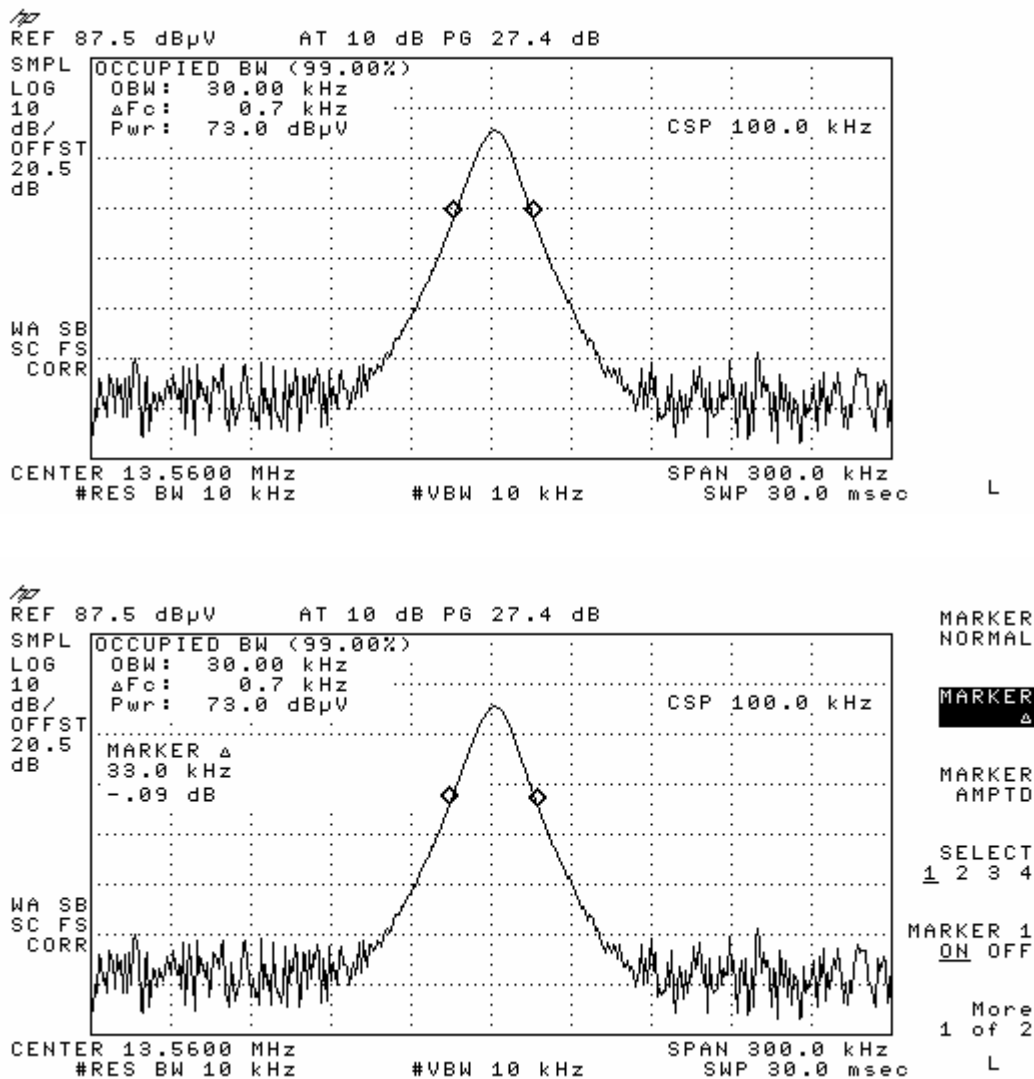

Measurement Data:

ANT-2

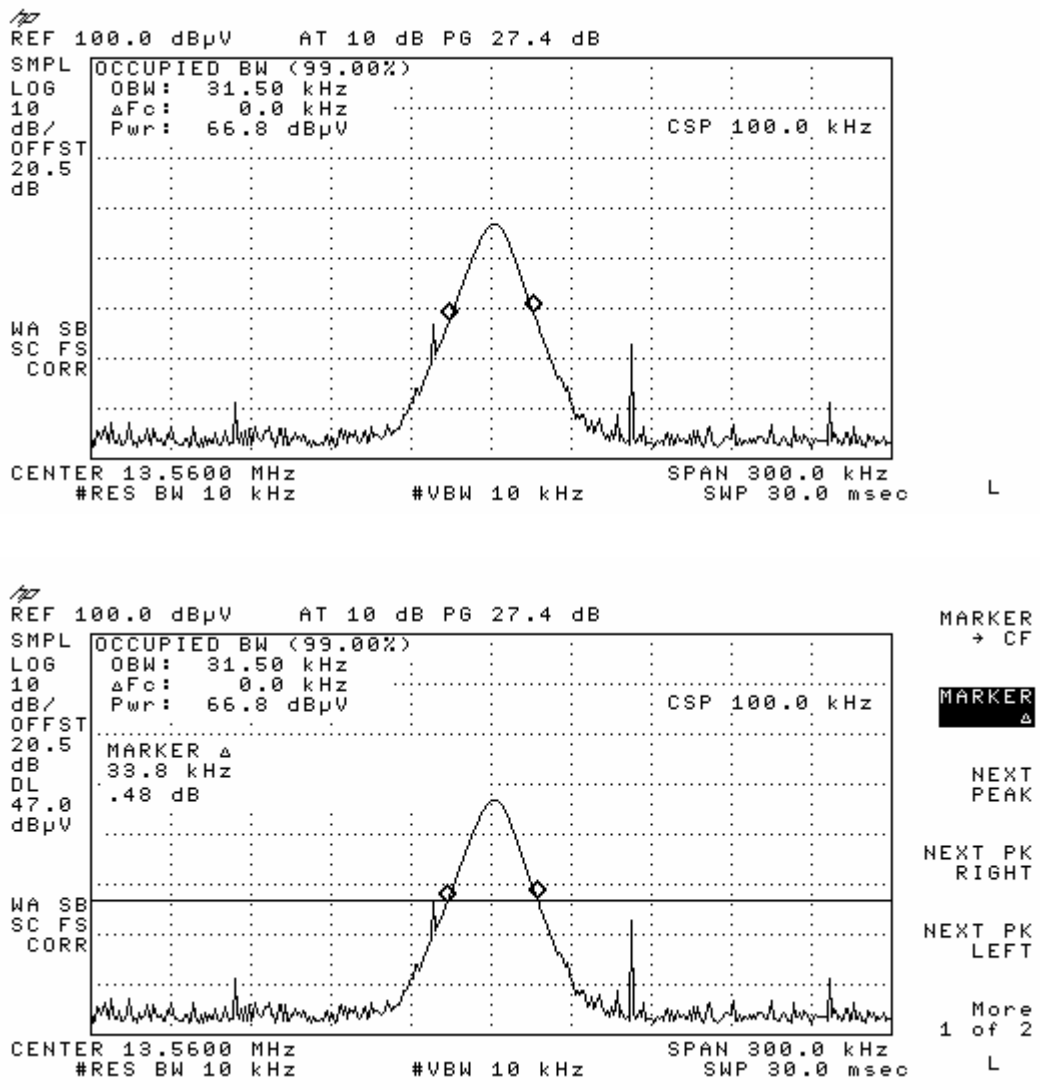

3.2.3 Frequency Tolerance

Procedure:


The temperature test was started after the temperature stabilization time of 30 minutes.

Test method : Part 15.225(d)
 Tx Frequency : 13.56 MHz
 Result : **Complies**

Measurement Data:


OPERATING FREQUENCY: 13,560,185 Hz
 Freq. Tolerance Limit: ± 0.01% %

VOLTAGE (%)	POWER (V)	TEMP (°C)	FREQ (Hz)	Deviation (%)
100	3.7	-20	13,560,135	0.000369
100		-10	13,560,150	0.000258
100		0	13,560,180	0.000037
100		10	13,560,170	0.000111
100		20	13,560,185	0.000000
100		30	13,560,190	-0.000037
100		40	13,560,220	-0.000258
100		50	13,560,255	-0.000516
85	3.2	20	13,560,180	0.000037
115	4.2	20	13,560,170	0.000111

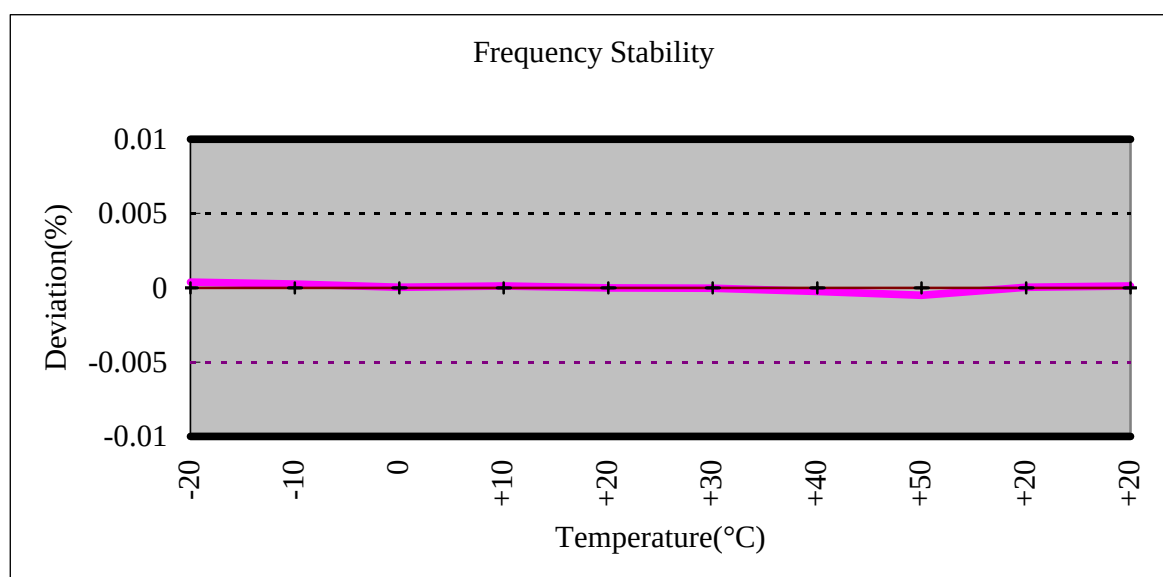

Measurement Data:**OPERATING FREQUENCY:** 13,560,230 **Hz****Freq. Tolerance Limit:** $\pm 0.01\%$ **%**

VOLTAGE (%)	POWER (V)	TEMP (°C)	FREQ (Hz)	Deviation (%)
100	3.7	-20	13,560,145	0.000627
100		-10	13,560,165	0.000479
100		0	13,560,160	0.000516
100		10	13,560,185	0.000332
100		20	13,560,230	0.000000
100		30	13,560,210	0.000147
100		40	13,560,220	0.000074
100		50	13,560,190	0.000295
85	3.2	20	13,560,225	0.000037
115	4.2	20	13,560,230	0.000000

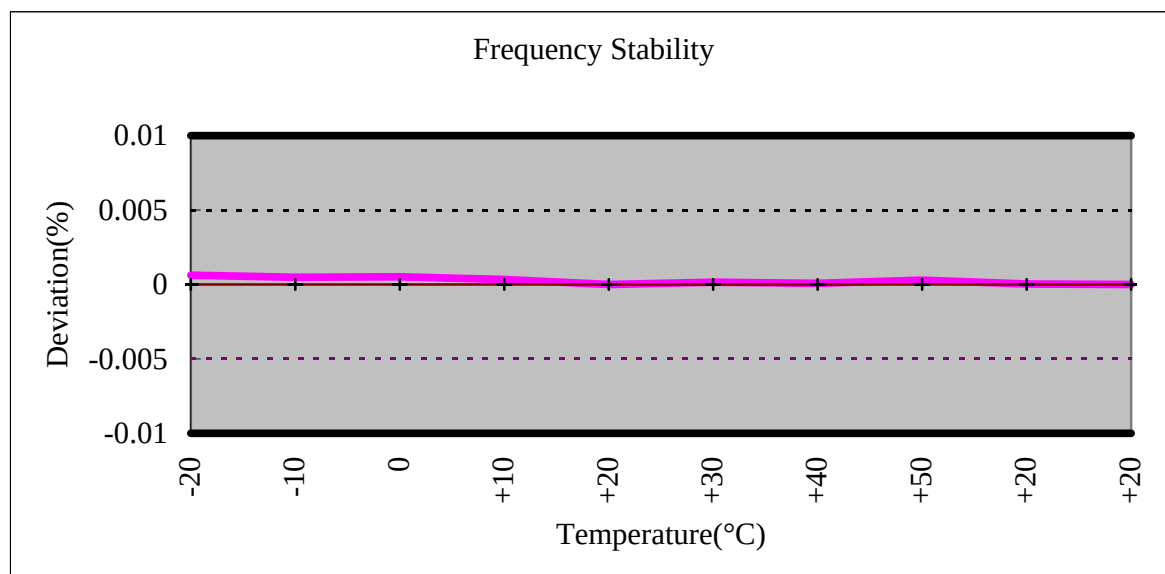

3.2.4 Radiated Emission

Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10th harmonic.

RBW = 100 kHz (30MHz ~ 1 GHz)

VBW $\geq$ RBW

= 1 MHz (1 GHz ~ 10th harmonic)

Trace = max hold

Sweep = auto

Measurement Data:

→ Refer to the Next Page

→ No other emissions were detected at a level greater than 10dB below limit.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz.


However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data: ANT - 2



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: Smart RF GUN
TEST MODE:
Temp Humi : 28 / 31
Tested by: B. S. KIM

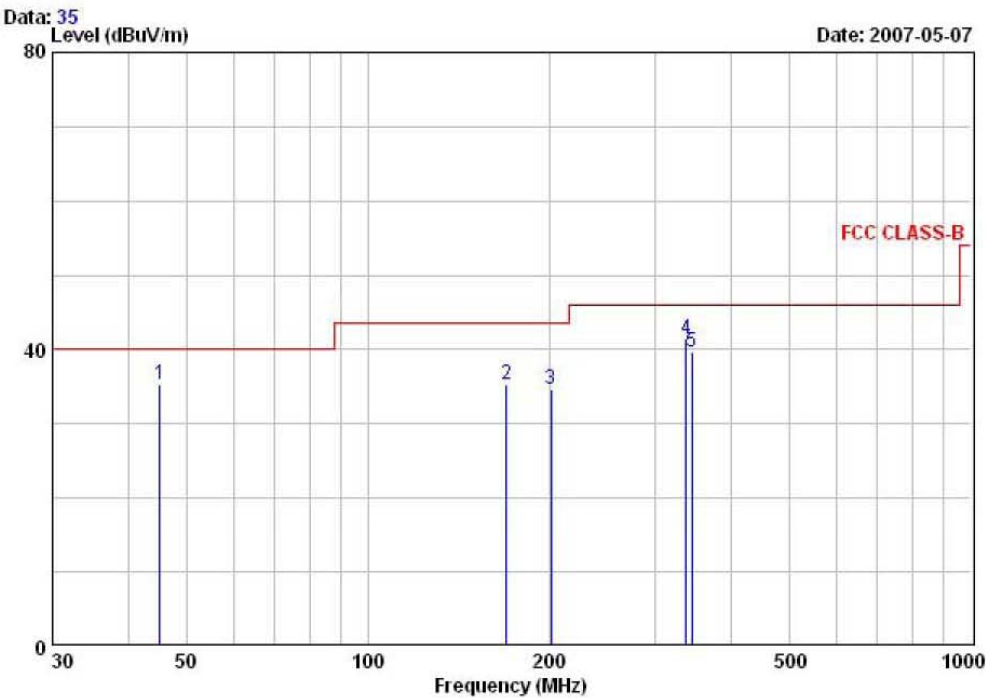

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QK dBuV/m	dBuV/m	dB	cm	deg	
1	45.15	48.00	-12.62	35.38	40.00	4.62	100	245 VERTICAL
2	169.55	45.80	-10.59	35.21	43.50	8.29	312	48 HORIZONTAL
3	201.13	47.80	-13.18	34.62	43.50	8.88	100	345 VERTICAL
4	337.12	50.10	-8.59	41.51	46.00	4.49	321	54 HORIZONTAL
5	344.16	48.10	-8.49	39.61	46.00	6.39	312	57 HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.2.5 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: Complies

- See next pages for actual measured spectrum plots.
- No other emissions were detected at a level greater than 10dB below limit.

Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50


* Decreases with the logarithm of the frequency

AC Conducted Emissions – ANT-1 - Line



243 Jubug-ni, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-323-6008
Fax:+82-31-323-6010

EUT / Model No.	: Smart RF GUN	Phase	: LINE
Test Mode	: TX + Charging mode / ANT 1 Type	Test Power	: 120 / 60
Temp./Humi.	: 21 / 55	Test Engineer	: B.S.KIM

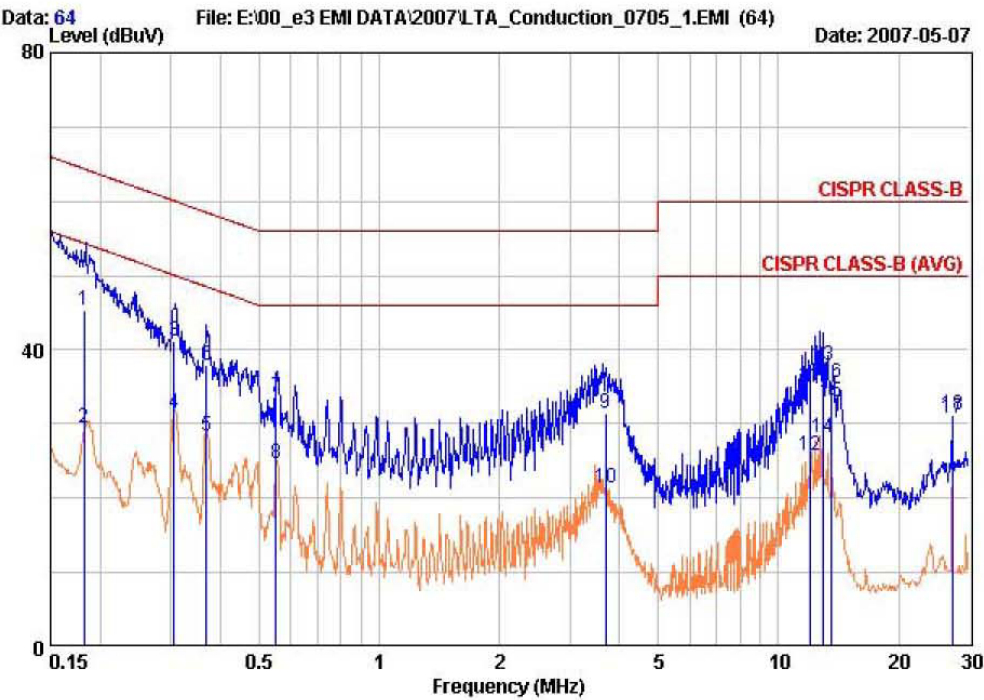

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
0.182	45.10	29.10	0.33	45.43	29.43	64.39	54.39	18.97	24.97
0.306	40.90	31.20	0.29	41.19	31.49	60.08	50.08	18.89	18.59
0.368	37.60	28.00	0.35	37.95	28.35	58.55	48.55	20.59	20.19
0.551	33.30	24.30	0.29	33.59	24.59	56.00	46.00	22.41	21.41
3.689	30.90	20.80	0.49	31.39	21.29	56.00	46.00	24.61	24.71
12.050	34.00	24.80	1.01	35.01	25.81	60.00	50.00	24.99	24.19
12.910	36.90	27.00	1.06	37.96	28.06	60.00	50.00	22.04	21.94
13.560	34.50	31.90	1.09	35.59	32.99	60.00	50.00	24.41	17.01
27.200	29.30	28.90	1.80	31.10	30.70	60.00	50.00	28.90	19.30

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss


Note: The measurement data of 13.56MHz is retested with a dummy load(50ohm).

AC Conducted Emissions - ANT-1 - Neutral



243 Jubug-ni, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-323-6008
Fax:+82-31-323-6010

EUT / Model No. : Smart RF GUN	Phase : NEUTRAL
Test Mode : TX + Charging mode	Test Power : 120 / 60
Temp./Humi. : 21 / 55	Test Engineer : B.S.KIM

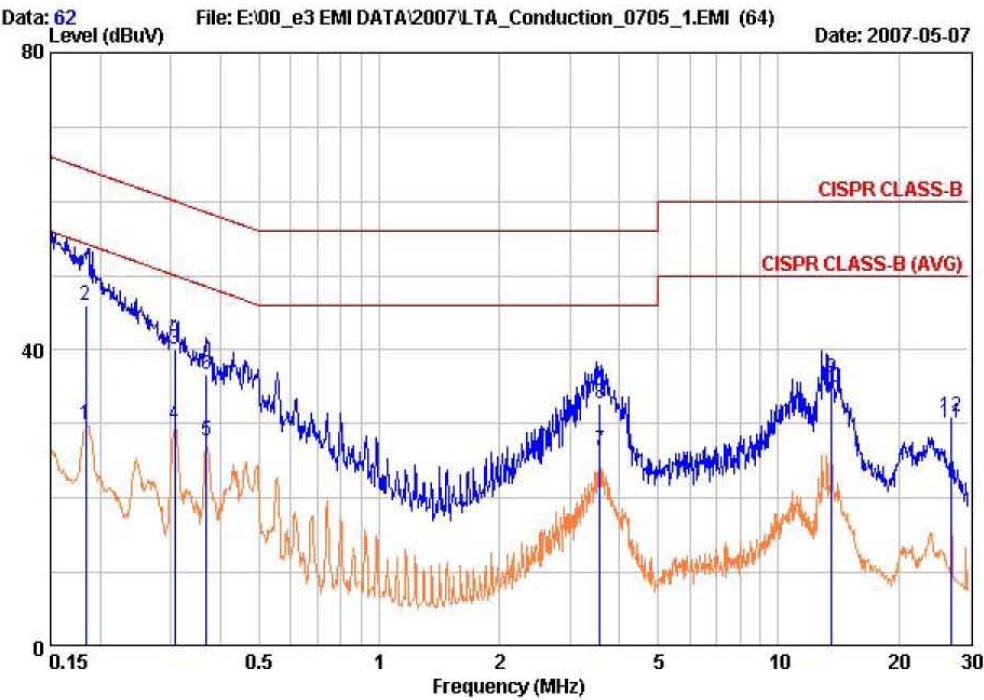

Freq MHz	RD		C.F	Result		Limit		Margin	
	QP dBuV	AV dBuV		QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dB	AV dB
0.184	45.60	29.60	0.31	45.91	29.91	64.30	54.30	18.40	24.40
0.308	39.90	29.60	0.29	40.19	29.89	60.02	50.02	19.84	20.14
0.369	36.30	27.30	0.35	36.65	27.65	58.52	48.52	21.87	20.87
3.576	32.30	26.00	0.48	32.78	26.48	56.00	46.00	23.22	19.52
13.560	35.20	33.90	1.04	36.24	34.94	60.00	50.00	23.76	15.06
27.120	29.30	28.40	1.60	30.90	30.00	60.00	50.00	29.10	20.00

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss


Note: The measurement data of 13.56MHz is retested with a dummy load(50ohm).

AC Conducted Emissions – ANT-2 - Line



243 Jubug-ni, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-323-6008
Fax:+82-31-323-6010

EUT / Model No.	: Smart RF GUN	Phase	: LINE
Test Mode	: TX + Charging mode / ANT 2 Type	Test Power	: 120 / 60
Temp./Humi.	: 24 / 39	Test Engineer	: B.S.KIM

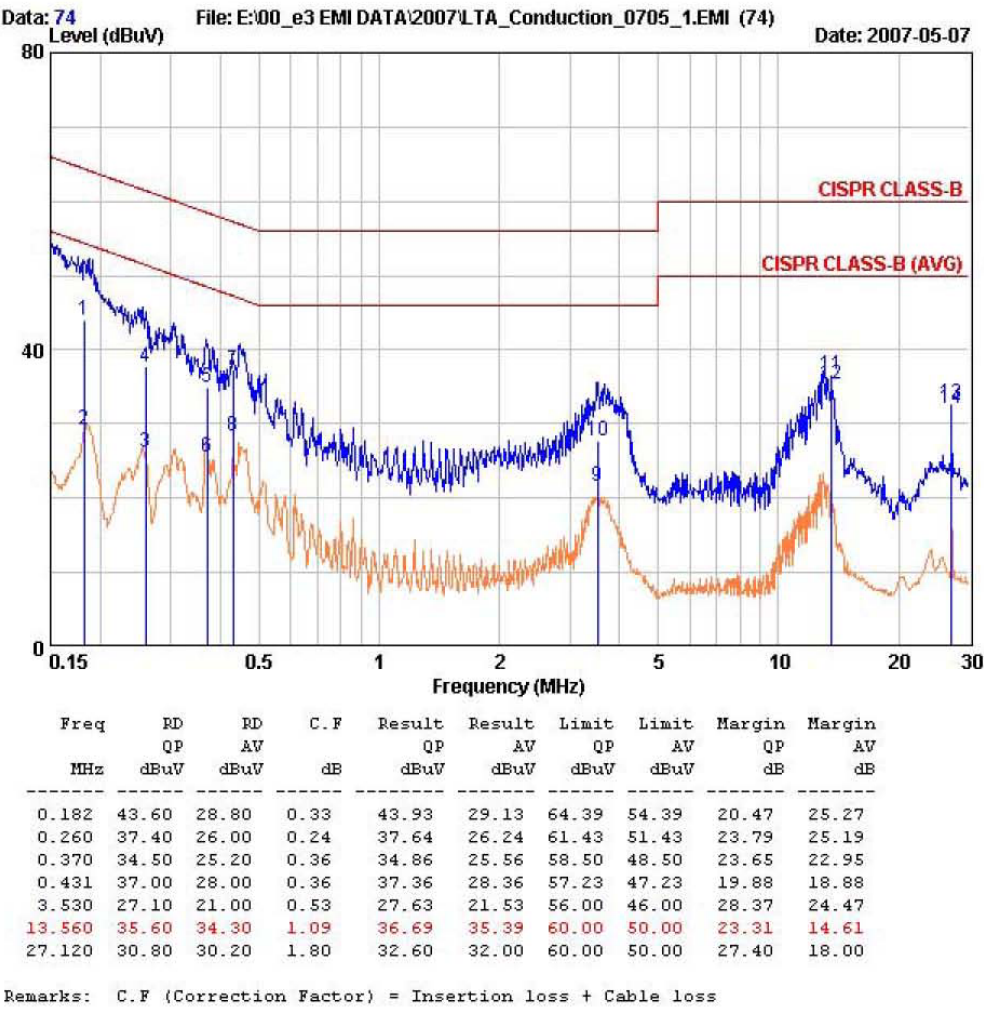


Note: The measurement data of 13.56MHz is retested with a dummy load(50ohm).

AC Conducted Emissions – ANT-2 - Neutral



243 Jubug-ni, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-323-6008
Fax:+82-31-323-6010

EUT / Model No.	: Smart RF GUN	Phase	: NEUTRAL
Test Mode	: TX + Charging mode / ANT 2 Type	Test Power	: 120 / 60
Temp./Humi.	: 24 / 39	Test Engineer	: B.S.KIM

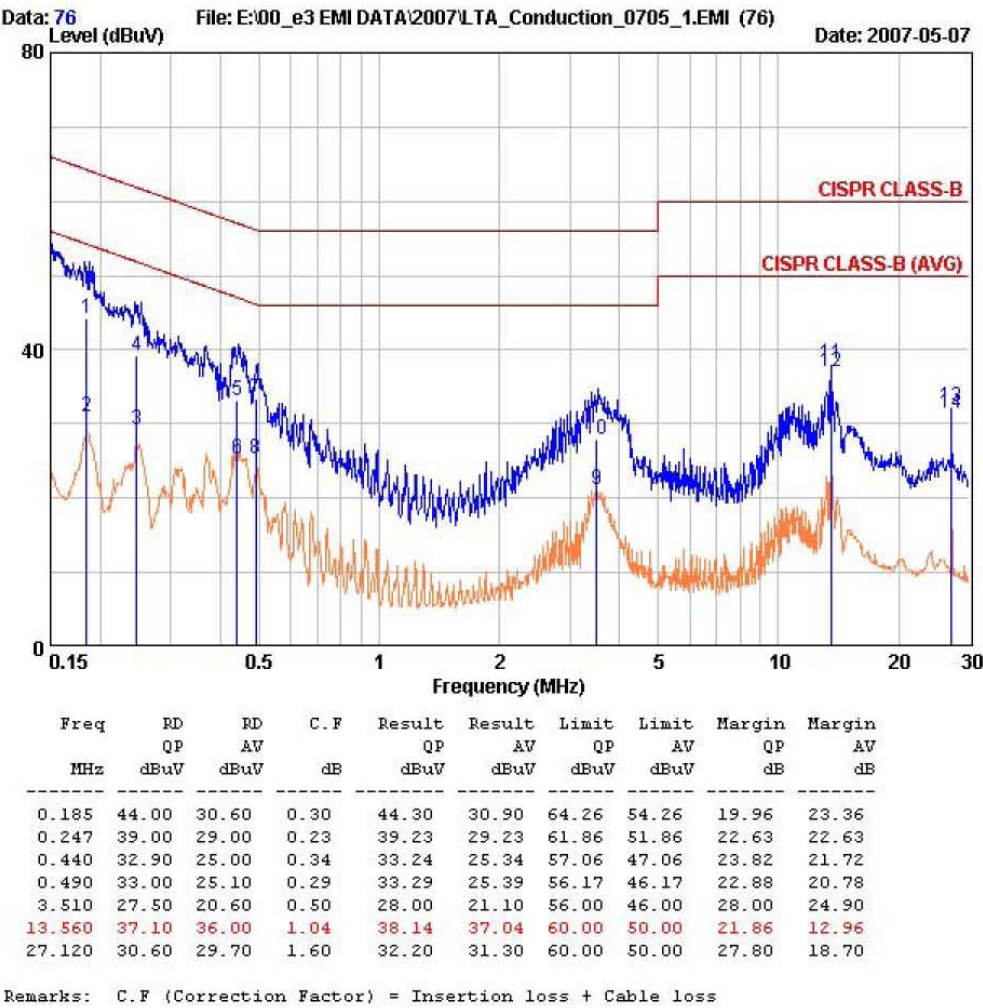

Note: The measurement data of 13.56MHz is retested with a dummy load(50ohm).

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Next Cal. Date
1	Spectrum Analyzer	8594E	3649A03649	HP	Apr-08
2	Signal Generater	8648C	3623A02597	HP	Apr-08
3	Attenuator (3dB)	8491A	37822	HP	Nov-07
4	Attenuator (10dB)	8491A	63196	HP	Nov-07
5	EMI Test Receiver	ESVD	843748/001	R&S	Jan-08
6	LISN	KNW-407	8-1430-1	Kyoritsu	Jan-08
7	Two-Line V-Network	ESH3-Z5	893045/017	R&S	Jan-08
8	RF Amplifier	8447D	2949A02670	HP	Jan-08
9	RF Amplifier	8447D	2439A09058	HP	Jan-08
10	RF Amplifier	8449B	3008A02126	HP	Apr-09
11	Test Receiver	ESHS10	828404009	R&S	Jan-08
12	TRILOG Antenna	VULB 9160	9160-3212	SCHWARZBECK	Jul-07
13	Log.-Per. Antenna	VULP 9118	9118 A 401	SCHWARZBECK	Apr-09
14	Biconical Antenna	BBA 9106	VHA 9103-2315	SCHWARZBECK	Apr-09
15	Horn Antenna	3115	00055005	ETS LINDGREN	Mar-09
16	Horn Antenna	BBHA 9120D	0499	Schwarzbeck	Jun-07
17	Dipole Antenna	VHA9103	2116	Schwarzbeck	Nov-07
18	Dipole Antenna	VHA9103	2117	Schwarzbeck	Nov-07
19	Dipole Antenna	UHA9105	2261	Schwarzbeck	Nov-07
20	Dipole Antenna	UHA9105	2262	Schwarzbeck	Nov-07
21	Spectrum Analyzer	8591E	3649A05888	HP	Jan-08
22	Spectrum Analyzer	8563E	3425A02505	HP	Apr-08
23	Hygro-Thermograph	THB-36	0041557-01	ISUZU	Feb-08
24	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	Jun-07
25	RF Switch	MP59B	6200414971	ANRITSU	Jun-07
26	RF Switch	MP59B	6200438565	ANRITSU	Jun-07
27	Power Divider	11636A	6243	HP	Nov-07
28	DC Power Supply	6622A	3448A03079	HP	Oct-07
29	Attenuator (30dB)	11636A	6243	HP	Nov-07
30	Frequency Counter	5342A	2826A12411	HP	Apr-08
31	Power Meter	EPM-441A	GB32481702	HP	Apr-08
32	Power Sensor	8481A	2702A64048	HP	Apr-08
33	Audio Analyzer	8903B	3729A18901	HP	Nov-07
34	Modulation Analyzer	8901B	3749A05878	HP	Nov-07
35	TEMP & HUMIDITY Chamber	YJ-500	L05022	JinYoung Tech	Oct-07
36	LOOP-ANTENNA	FMZB 1516	151602/94	SCHWARZBECK	Mar-09