

承 認 書
SPECIFICATION FOR APPROVAL

客 戶
CUSTOMER

明泰科技股份有限公司

日 期
DATE

2006 / 08 / 09

品 名
DESCRIPTION

Mini 1.13 Cable Assembly (L=80)(K5A)
With RP-SMA Bulkhead Jack & MHF

客 戶 料 號
CUSTOMER P/N

505960079610G

成 品 編 號
Part NO.

THW0796A
(符合環保材)



萬旭電業股份有限公司

WANSHIH ELECTRONIC CO., LTD.

台北縣五股鄉五工六路 72 號 3 樓

3F 72 WU KONG 6TH RD., WU KU INDUSTRIAL DISTRICT

TAIPEI HSIEN, TAIWAN, R.O.C.


TEL : (02) 22988066 (5 LINE) FAX : (02)22981102

Table of Contents

Table of Contents	1
Specification	2
Drawing	3
Cable Assembly Electrical Characteristic	
Return Loss	4
V.S.W.R	5
Attenuation	6
Material Sheet	
Mini 1.13 Coaxial Cable	7-9
RP-SMA Bulkhead Jack	10
MHF Connector	11-14
EMI Sleeve Core	15-17

SPECIFICATION

1. Description : Mini 1.13 Cable Assembly
with RP-SMA Bulkhead Jack & MHF
2. Customer : 明泰科技股份有限公司
3. Part No. : THW0796A
4. Coaxial Length : 80 mm (see Drawing)
5. Electrical Characteristics
 - Operating Frequency : 1~6 GHz
 - Impedance : 50 Ohm nominal
 - Attenuation. : -2.0dB Max.
6. Mechanical Characteristics
 - Connector : RP-SMA Bulkhead Jack
: MHF
7. Raw Material
 - Coaxial Cable : Mini 1.13
 - Core : K5A RH4*10*2

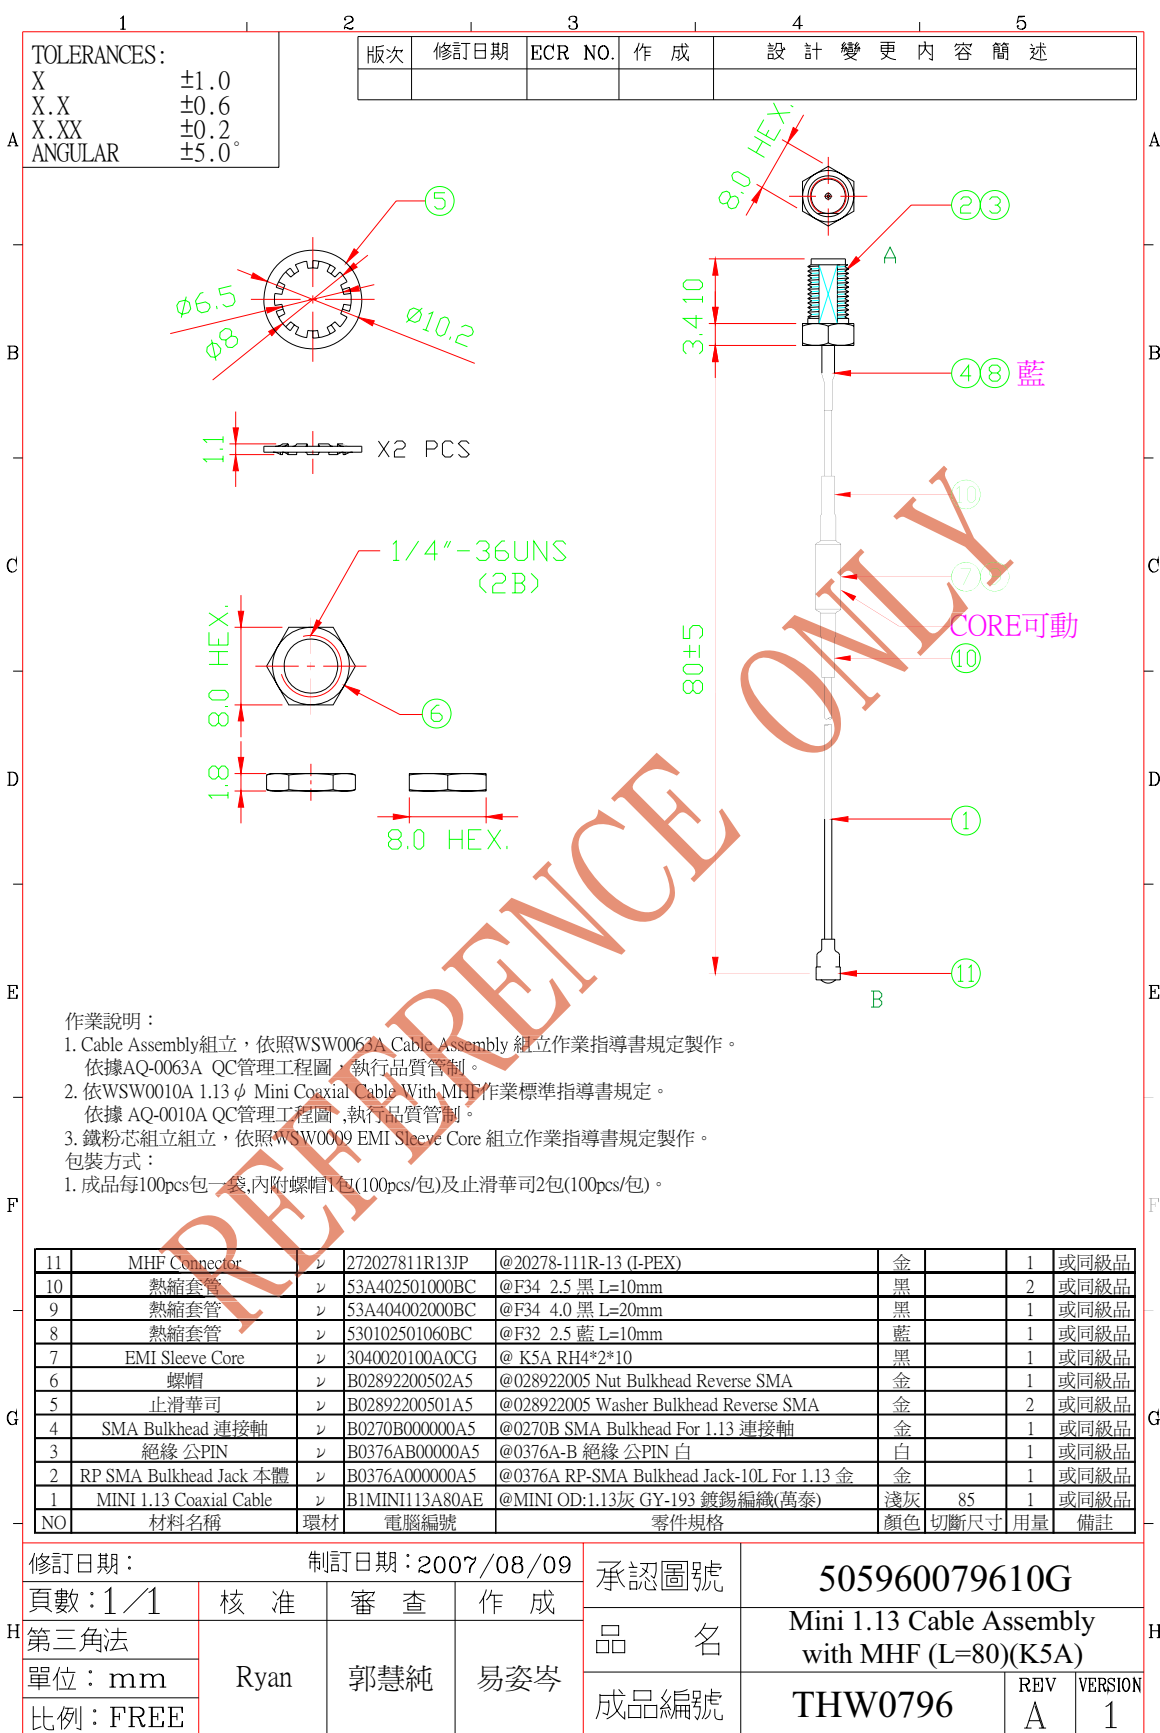


萬旭電業股份有限公司

50文件編號: FMT-0513-D7


Electrical Characteristic

Return Loss

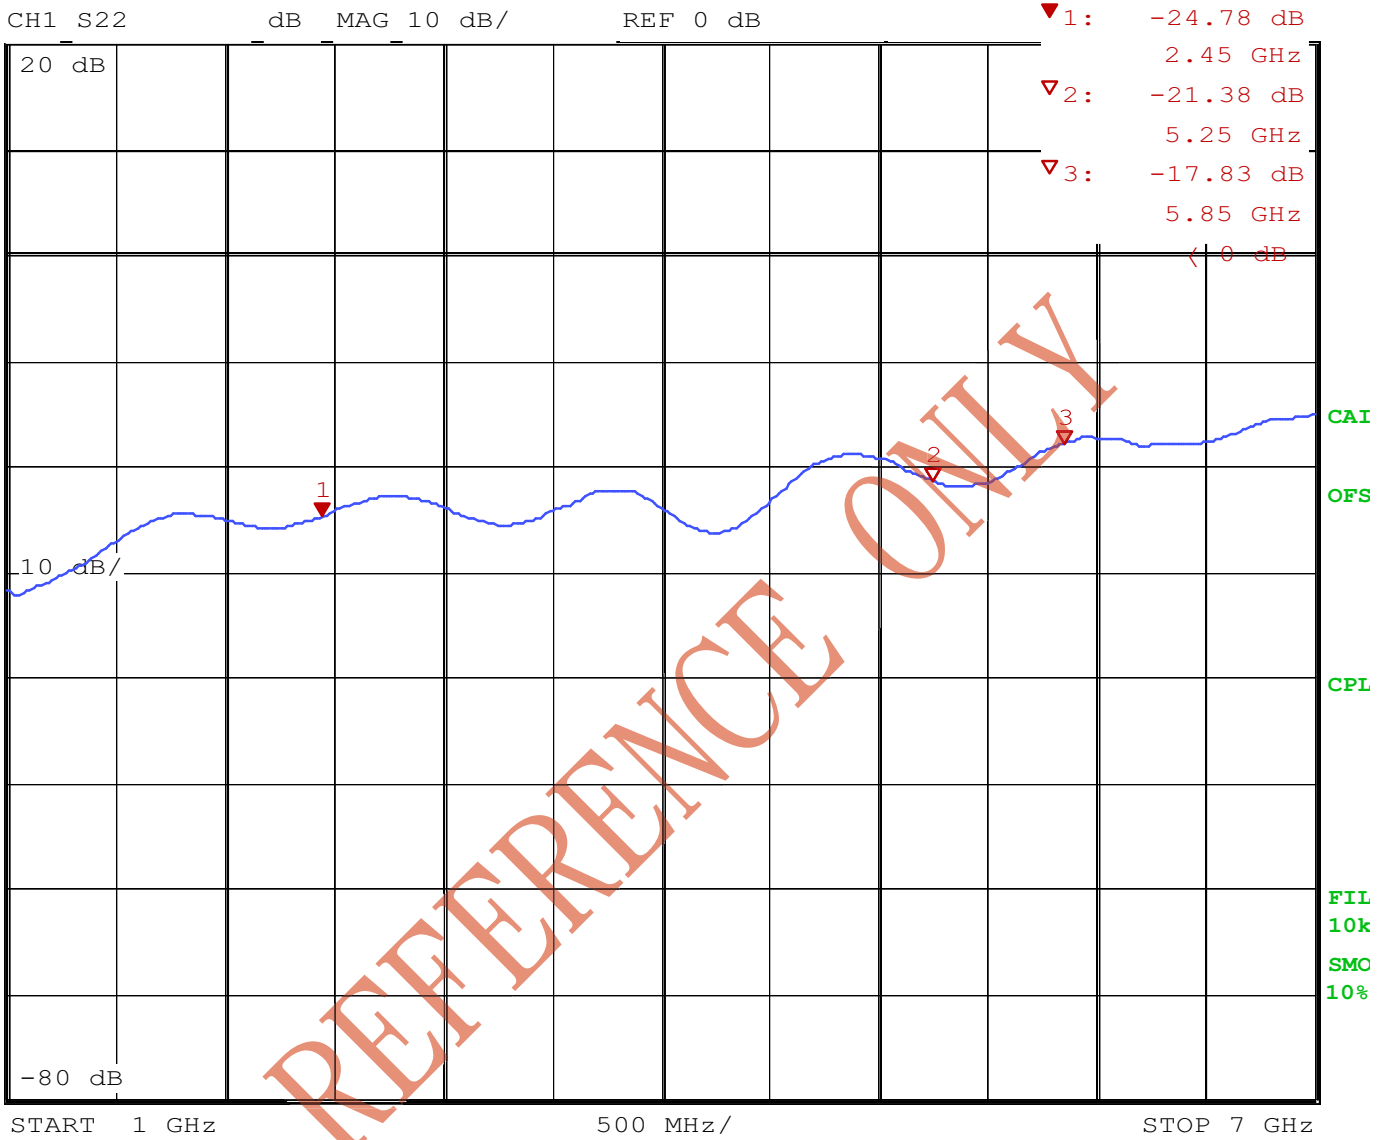


Electrical Characteristic

V.S.W.R

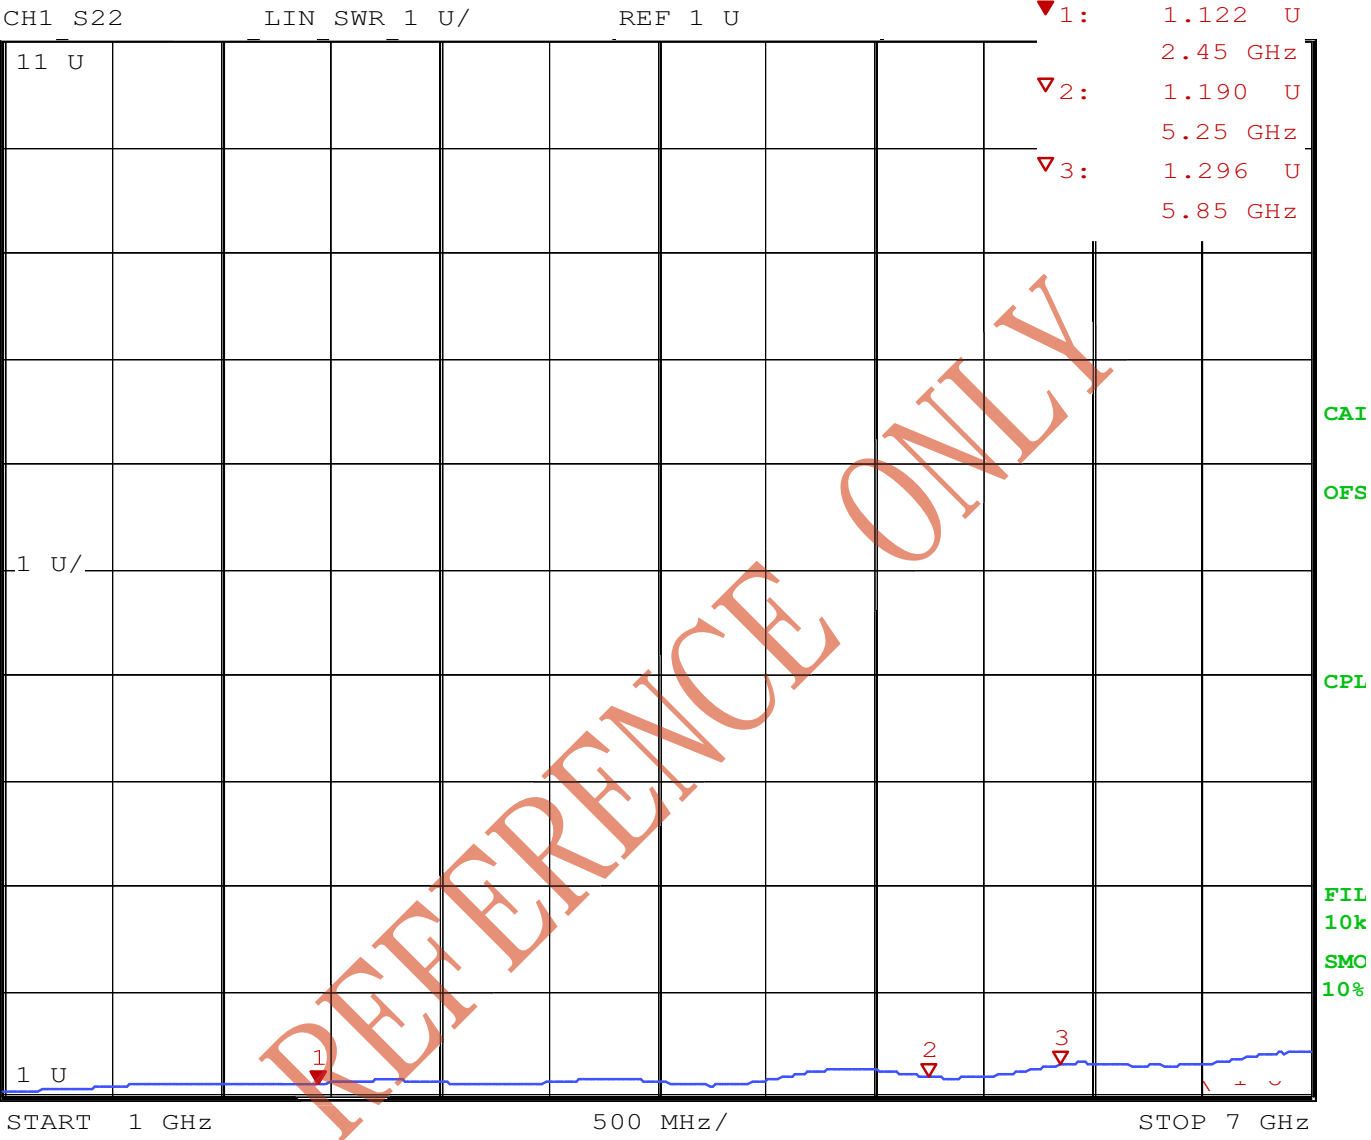

Electrical Characteristic

Attenuation

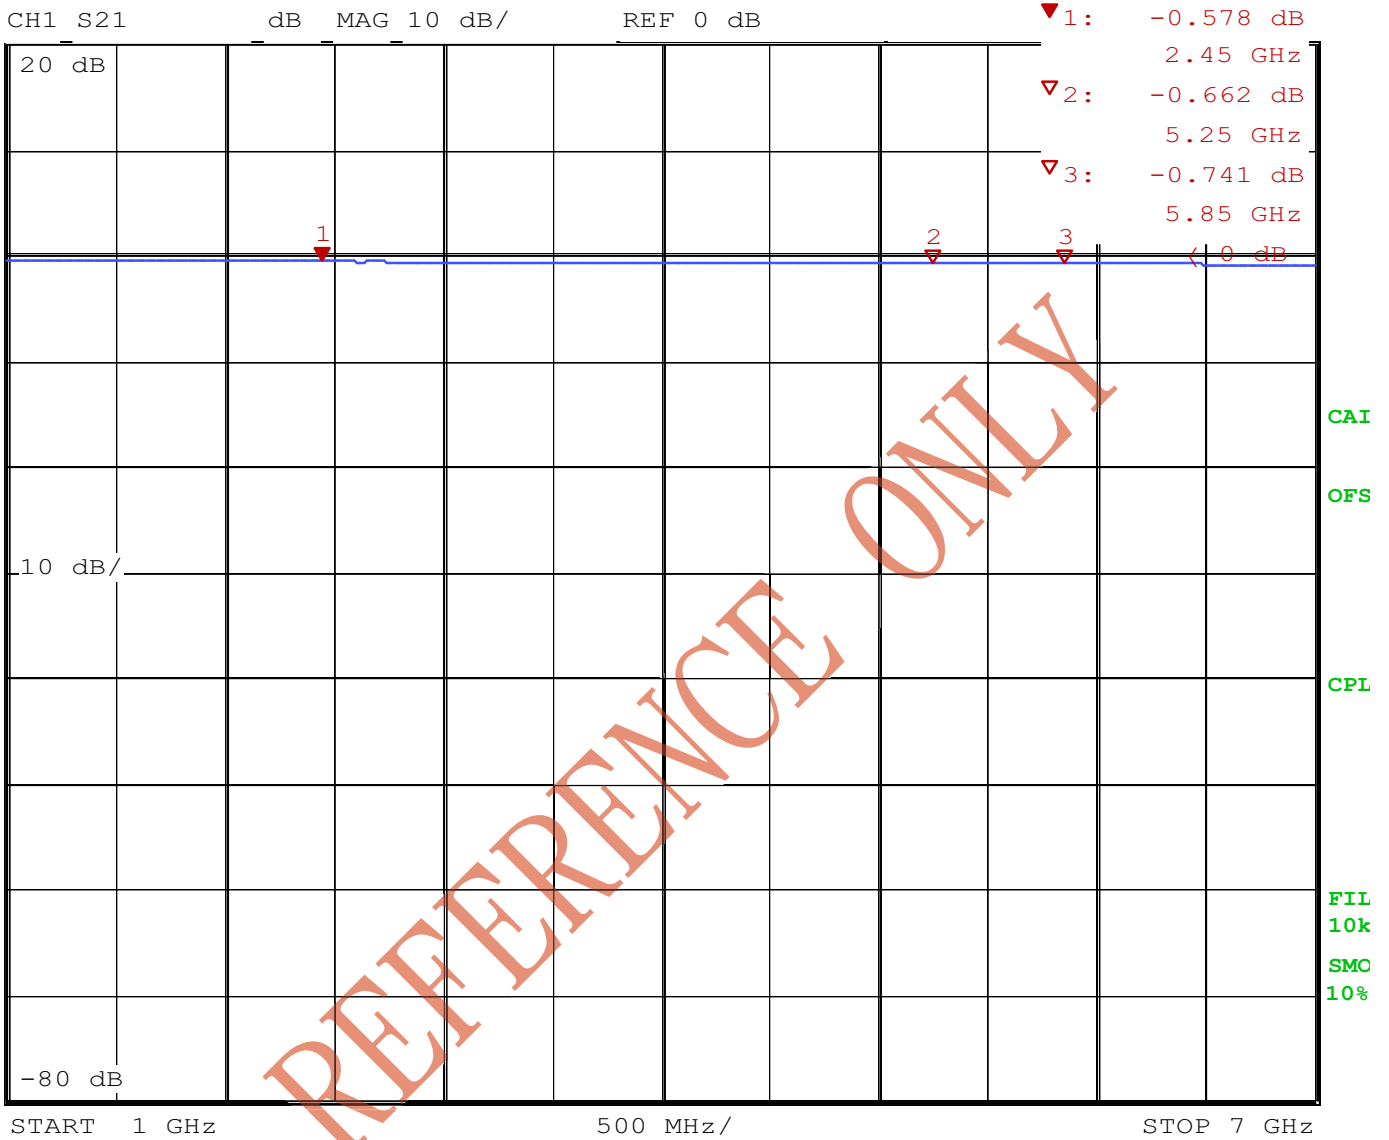

Material Data Sheet

Mini-1.13 Coaxial Cable

SPECIFICATION FOR APPROVAL

DOCUMENT: A3132TS001

STYLE : COAXIAL CABLE
105°C 30V

SIZE: 32AWG×1C
BRAID : TS

RECOGNIZED: UL 1979



WONDERFUL HI-TECH CO.,LTD.

OFFICE : 72WU KONG 6TH ROAD,
WU KU IND. DISTRICT
TAIPEI HSIEN,TAIWAN


TEL : (02)22988033
FAX : (02)22988031-2

FACTORY : 17 PEI YUAN ROAD,
CHUNG-LI IND. PARK
TAIWAN, R.O.C.

TEL : (03)4527777
FAX : (03)4517214



WONDERFUL HI-TECH CO., LTD. SPECIFICATION

STYLE	105℃ 30V UL 1979	DOCUMENT NO : A3132TS001
SIZE	32AWG	ESTABLISHED DATE: 2005/05/11
STANDARD :		
Conductor	Size	AWG 32
	Material	----- Silver Cover Copper
	Conductors No.	----- 7
	Conductors Size	mm 0.080
	O.D.	mm 0.240
Insulation	Average Thickness	mm 0.22
	Diameter	mm 0.68 ± 0.02
	Material	----- FEP
	Color	----- Clear
Braid	Material	----- Tinned Copper
	Construction	mm 16 / 4 / 0.050
	Coverage	% 90
Jacket	Average Thickness	mm 0.13
	Diameter	mm 1.13 ± 0.05
	Material	----- FEP
	Color	----- According to custom
Marking	Non	
Drawing		

AK001/210X297/1.0

PAGE : 1

EDITION : 1.1

MAKER : C.Y.CHEN

CONFIRM : S.N.WONG

APPROVAL : W.J.WANG



WONDERFUL HI-TECH CO., LTD. SPECIFICATION

Electrical & Physical Properties						
Item		32AWG				
Rating Temp Voltage		105°C 30V				
Conductor Resistance		545 OHM/KM/20°C MAX.				
Insulation Resistance		1000 MEGA OHM/KM MIN.				
Dielectric Strength		AC 500 V/Minute				
Spark Test		2.5 KV				
Insulation	Unaged	Tensile Strength	2500 PSI MIN.(1.36 Kg / m m²)			
		Elongation	200% MIN.			
	Aged	Tensile Strength	UNAGED MIN. 75%(168HRS×232°C)			
		Elongation	UNAGED MIN. 75%(168HRS×232°C)			
Jacket	Unaged	Tensile Strength	2500 PSI MIN.(1.76 Kg / m m²)			
		Elongation	200% MIN.			
	Aged	Tensile Strength	UNAGED MIN.75%(168HRS×232°C)			
		Elongation	UNAGED MIN.75%(168HRS×232°C)			
Nom. Impedance		50 ± 3 Ohms				
Nom. Capacitance		96 ± 3 pF/m				
Nom. Vel. of Prop.		69%				
VSWR Test (0 – 6 GHZ)		Less 1.3				
Flame Test		VW-1 OK				
Attenuation (dB/1m)	2.0GHZ	2.4GHZ	2.5GHZ	5.0GHZ	6.0 GHZ	
	2.80	3.10	3.15	4.85	5.20	

AK001/210X297/1.0

PAGE : 2

EDITION : 1.1


MAKER : C.Y.CHEN

CONFIRM : S.N.WONG

APPROVAL : W.J.WANG

Material Data Sheet

RP-SMA Bulkhead Jack

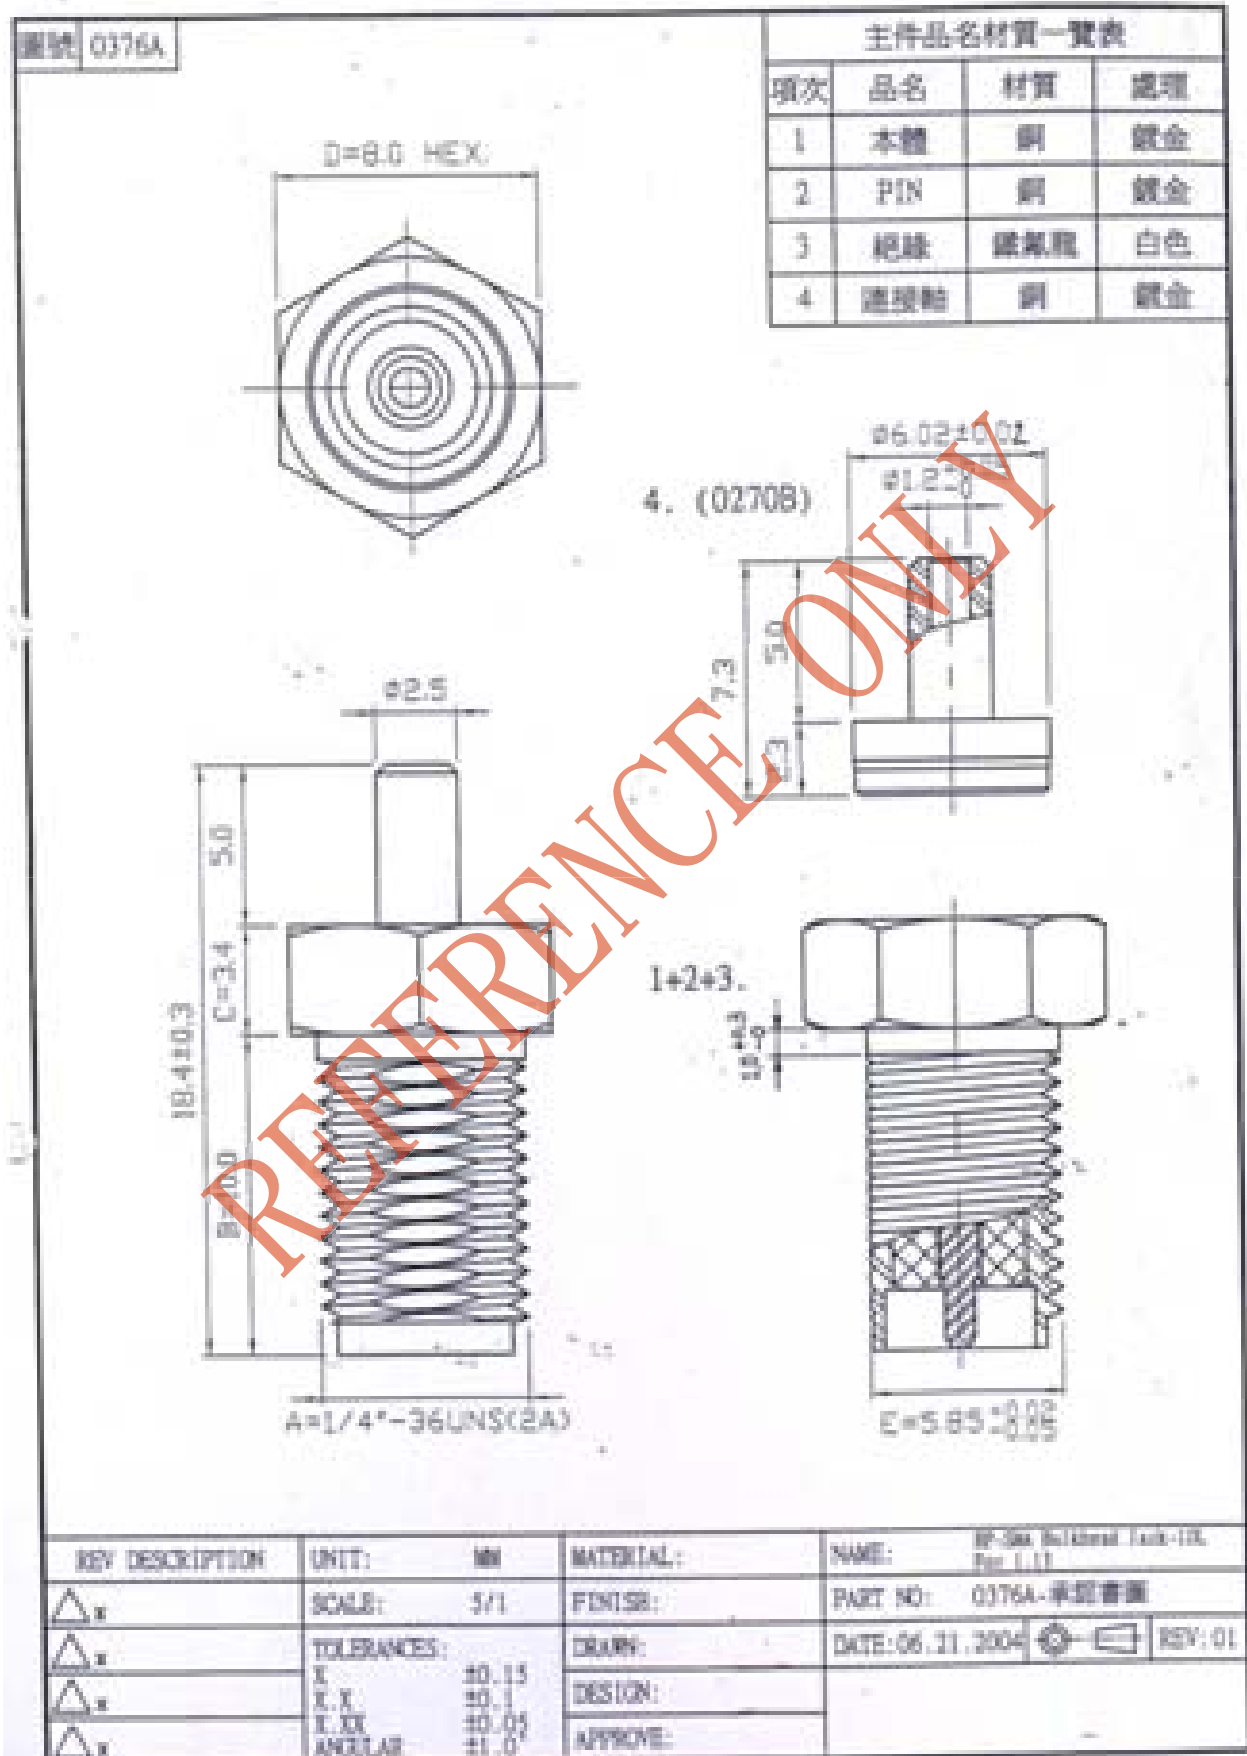

MHF Connector

[illegible]

5-2 コネクタ除去時

1. Material
(1) Housing : PBT , UL94V-0
(2) Contact
 phosphor bronze
 gold plating $0.1\mu\text{m}$ MIN.
 over nickel $1.27\mu\text{m}$ MIN.
(3) Ground contact
 phosphor bronze
 gold plating $0.05\mu\text{m}$ MIN.
 over nickel $1.27\mu\text{m}$ MIN.
2. Packing : reel
3. Mating partner part No.
 : 20279-001E-01
4. Permissible load of cable at mating

1. 材料

(1) ハウジング：PBT，UL94V-0

(2) コンタクト

り内径
金メッキ0.1 μm MIN.
下層ニッケル1.27 μm MIN.

(3) グランドコンタクト


り内径
金メッキ0.05 μm MIN.
一層ニッケル1.27 μm MIN.

2. 加工工程

3. 部品検査工程表 No.

2027-Q07E-01


4. コネクタの寸法に於ける公差は、JIS規格に準拠する。

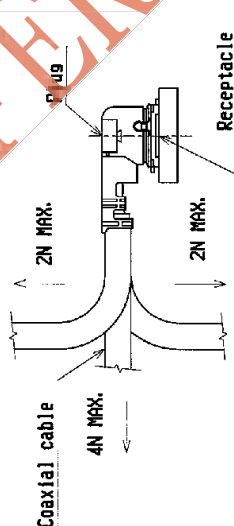


5-1 Mating. Please mate the connector straightly to vertical direction as much as possible, adjusting the mating axis of plug and receptacle. As excessive slant angle mating may break the connector, please don't do it.

5-1 コネクタ挿入時
PlugとReceptacleのからみ合を合わせ、
できるだけ垂直に挿入して下さい。
適切な斜め挿入は行わないで下さい。
コネクタ破損の原因となりますので、
再挿は行わないで下さい。

(1) In case of unmatting by pulling tool.
Please use the pulling tool as the following direction and please pull plug to vertical direction as di-
as possible.

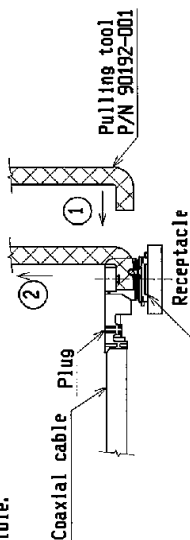

(2) In case of unmatting directly by hand
Please catch the catching area of plug, and please pull plug to vertical direction as directly as possible.

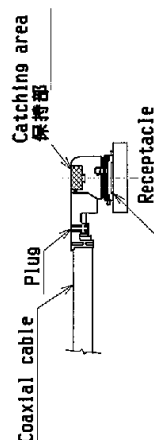

5-3 Crimp over standards of
outer conductor

Standards: Less than 10% from total numbers of outer conductor
(Numbers of outer conductor's crimp over from outer conductor's barrel)

5-4 caution about Heat shrinkage tubes

Please be careful not to melt housing when using heat shrinkage tubes. It will become cause of open circuit.

5. This is 'Pb-free' connector.

2) 手で直接引き抜く場合
下図の保持部をつかみ、できる
だけ垂直に引き抜いて下さい。

3-3 外部環境はみ出し重

外部導体は出し量規定
: 外部導体トータル本数
①10%以下
(外部導体パレんの外に
はみ出した量)

3-4 熱収縮チューブについて

[illegible]

・本コネクタは、Pb-free。
である

GENERAL TOLERANCE	
6 MAX.	±0.2
6 OVER MAX. 30	±0.3
30 OVER MAX. 120	±0.5
ANGLE	±2°

[illegible]

FORM REV-4

Material Data Sheet

EMI Sleeve Core

SPECIFICATION FOR APPROVAL

CUSTOMER: 萬旭電業股份有限公司		C/S P/N:		DATE: 2003/10/9
ITEM: KSA RH 4X2X10		REF NO:10-13-040020100-0		
(1) DIMENSION (Unit: mm)		A	4.00	+0.20
		C	2.00	+0.15
		D	10.00	+0.40
		(2) ELECTRICAL REQUIREMENTS:		TOLERANCE:
		TEST FREQ		
		TEST FREQ		
Z	35	-0	TEST FREQ	25 kHz
Z	60	-0	TEST FREQ	100 kHz
		TEST FREQ		
COIL DATA	Q _{min}		TEST FREQ	
	L _{min}		TEST FREQ	
Winding 0.65 Φ X 63 mm T.C.W 1 TS				
(3) TEST INSTRUMENTS				
1. IMPEDANCE ANALYZER: HP4191A				
DRAWN	CHECKED	APPROVED	ISSUE NO.	
DATE	DATE	DATE	WC-RH-030	

佳真股份有限公司
CORE-TECH CORPORATION

TEL: 03-4861211
FAX: 03-4861210

INSPECTION DATA

ISSUE NO: WC-RH-039

CUSTOMER	萬旭電業股份有限公司			DATE	2003/10/9		Quantity	0 pcs					
PART NO.	10-13-040020100-0												
ITEM	K5A RH 4X2X10												
COIL SPEC	0.85 Φ I 63 mm T.C.W I TS												
COIL DATA	Q0= C0= (PF)												
TEST FREQ	F0= Hz Ft= 25,100 MHz												
TEMPERATURE	28 °C	Humidity	87 %										
ELECTRIC CHARG.				DIMENSION (Unit: mm)									
	L	Q	Z(25)	Z(100)	A	B	C	D	E	F	G	H	I
SP			35.00	60.00	4.00		2.00	10.00					
+					0.20		0.15	0.40					
-			0	0	0.20		0.15	0.40					
1			45.00	82.00	3.96		2.02	9.95					
2			47.00	84.00	3.93		2.03	9.98					
3			46.00	82.00	3.92		2.04	9.96					
4			47.00	82.00	3.94		2.03	9.98					
5			45.00	81.00	3.95		2.08	9.96					
6			46.00	80.00	3.93		2.05	10.00					
7			46.00	81.00	3.95		2.03	10.02					
8			46.00	81.00	3.93		2.07	9.95					
9			46.00	80.00	3.92		2.09	9.93					
10			45.00	82.00	3.96		2.05	9.97					
X			45.90	81.50	3.94		2.05	9.97					
R			2.00	4.00	0.05		0.07	0.09					
TEST INSTRUMENTS													
1. IMPEDANCE ANALYZER: HP4191A													
INSP No:													
REMARK:	Inspected		Checked		Approved								

CORE-TECH CORPORATION


TEL: 03-4861211
FAX: 03-4861210

Z-F RESPONSE

K5A RH 4X2X10

1. TEST INSTRUMENT: HP4191A

2. WINDING: 0.65 Φ X63 mm T.C. ∇ ITS

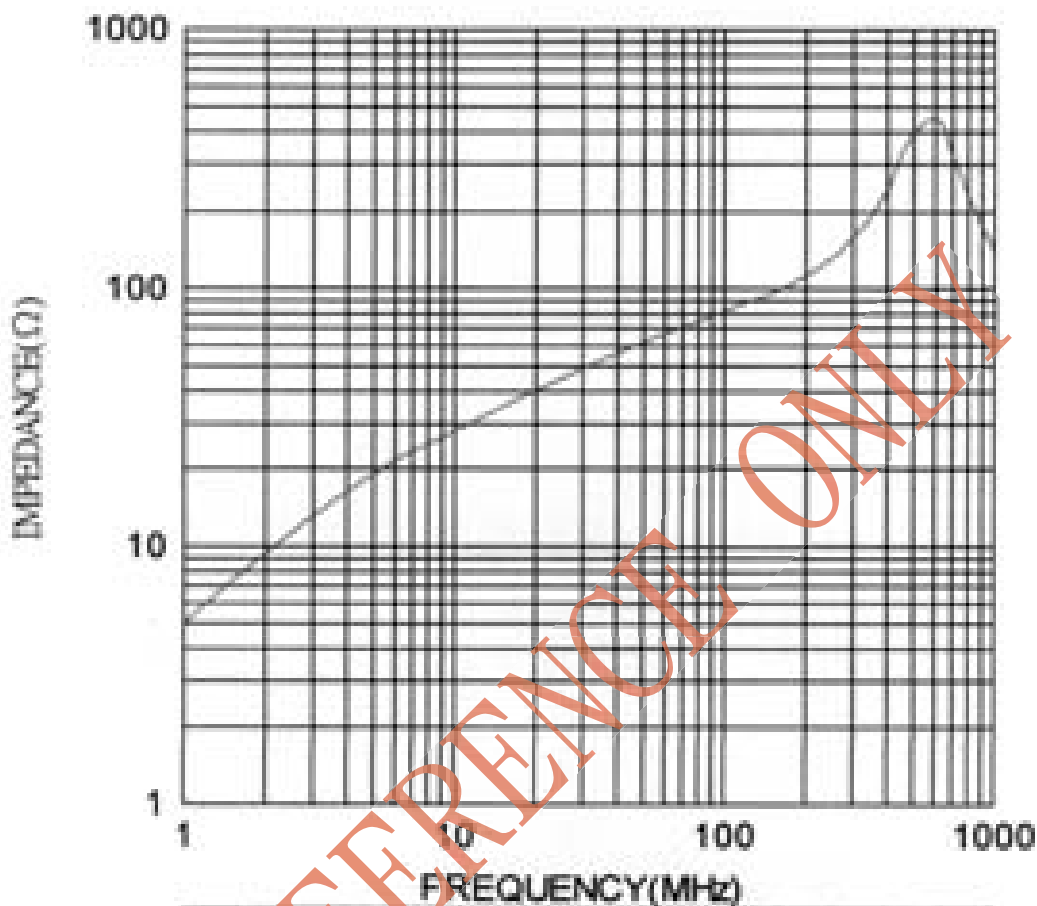

	1	5	10	25	50	100	200	300	400	500	600	700	800	900	1000
Z—	5	15	25	45	62	82	113	160	244	392	452	322	229	176	141

(DATA BETWEEN 500MHz AND 1000MHz ARE FOR REFERENCE ONLY)

CORE-TECH CORPORATION

<http://www.coretechweb.com.tw>

E-mail: coretech@ptsl.seed.net.tw

TEL: 03-4861211 FAX: 03-4861210

零組件承認/申請報告書

編號： E24694

2006/08/10

Alpha P/N： 505960079510G		申請者：		主管：	
零組件品名： ANT CABLE Mini 1.13 L=150mm					
零組件品名：					
原製造廠商： 電			原廠編號： SHW0795A1		
代理商： 電					
聯絡人：			電話： 02-2298-8066#323		
應用機種：					
COMMENTS：					
結果 號 原廠 號 號E pp 審核 Pa NO： N/A 日期： 2006/08/03 12:00:38 承辦者： 2006/08/03 18:14:21					
結果	合格	審核	2006/08/03 18:14:21		

☒ 電子零件類 ☐ 機構類 ☐ 包材類 ☐ 其它

ROHS: ☒ 符合 ☐ 不符合

申請日期: 94 年 11 月 22 日 申請人: 林致協

料 號: EW9000151000R 品 名: 線材 RF 萬旭 SHW0795A1

零件規格: 灰 15cm 包覆有鐵心 RSMA-MHF1.13mm ☐ 第二來源材料

使用機種: NFS-302H 製造/供應廠商: 萬旭/萬旭

測試結果:	
☒ 電子: Test, OK.	測試人: 林致協
☐ 機構:	測試人:
☐ 包材:	測試人:
☐ 其它:	測試人:
檢驗重點標式: NA	
包裝方式及外銷標識: NA	
注意事項(關鍵特性): NA	
抽換承認書或承認樣必須給資材部會簽 意見: _____ 簽名: _____	

結論:

☒ 接受 ☐ 有條件接受 ☐ 退回 原因: _____

主管簽核: 許仁榮 承認者: 林致協

2005/11/22

承辦者: 蔡維好

承 認 書
SPECIFICATION FOR APPROVAL

客 戶
CUSTOMER

尙亞科技股份有限公司

日 期
DATE

94 年 11 月 17 日

品 名
DESCRIPTION

Mini 1.13 Cable Assembly (L=151)
With RP-SMA Bulkhead Jack & MHF

客 戶 料 號
CUSTOMER P/N

EW9000151000R

成 品 編 號
Part NO.

SHW0795A1



萬旭電業股份有限公司

WANSHIH ELECTRONIC CO., LTD.

台北縣五股鄉五工六路 72 號 3 樓

3F 72 WU KONG 6TH RD., WU KU INDUSTRIAL DISTRICT

TAIPEI HSIEN, TAIWAN, R.O.C.


TEL : (02) 22988066 (5 LINE) FAX : (02)22981102

Table of Contents

Table of Contents	1
Specification	2
Drawing	3
Cable Assembly Electrical Characteristic	
Return Loss	4
V.S.W.R	5
Attenuation	6
Material Sheet	
Mini 1.13 Coaxial Cable	7-12
RP-SMA Bulkhead Jack	12-16
MHF Connector	17-31
EMI Sleeve Core	32-36
Heat Shrink Tube	37-42

SPECIFICATION


1. Description : Mini 1.13 Cable Assembly
with RP-SMA Bulkhead Jack & MHF
2. Customer : 尚亞科技股份有限公司
3. Part No. : SHW0795A1
4. Coaxial Length : 151 mm (see Drawing)
5. Electrical Characteristics
 - Operating Frequency : 1~6 GHz
 - Impedance : 50 Ohm nominal
 - Attenuation. : -2.6dB Max.
6. Mechanical Characteristics
 - Connector : RP-SMA Bulkhead Jack
: MHF
7. Raw Material
 - Coaxial Cable : Mini 1.13
 - Core : K5A RH 4*10*2

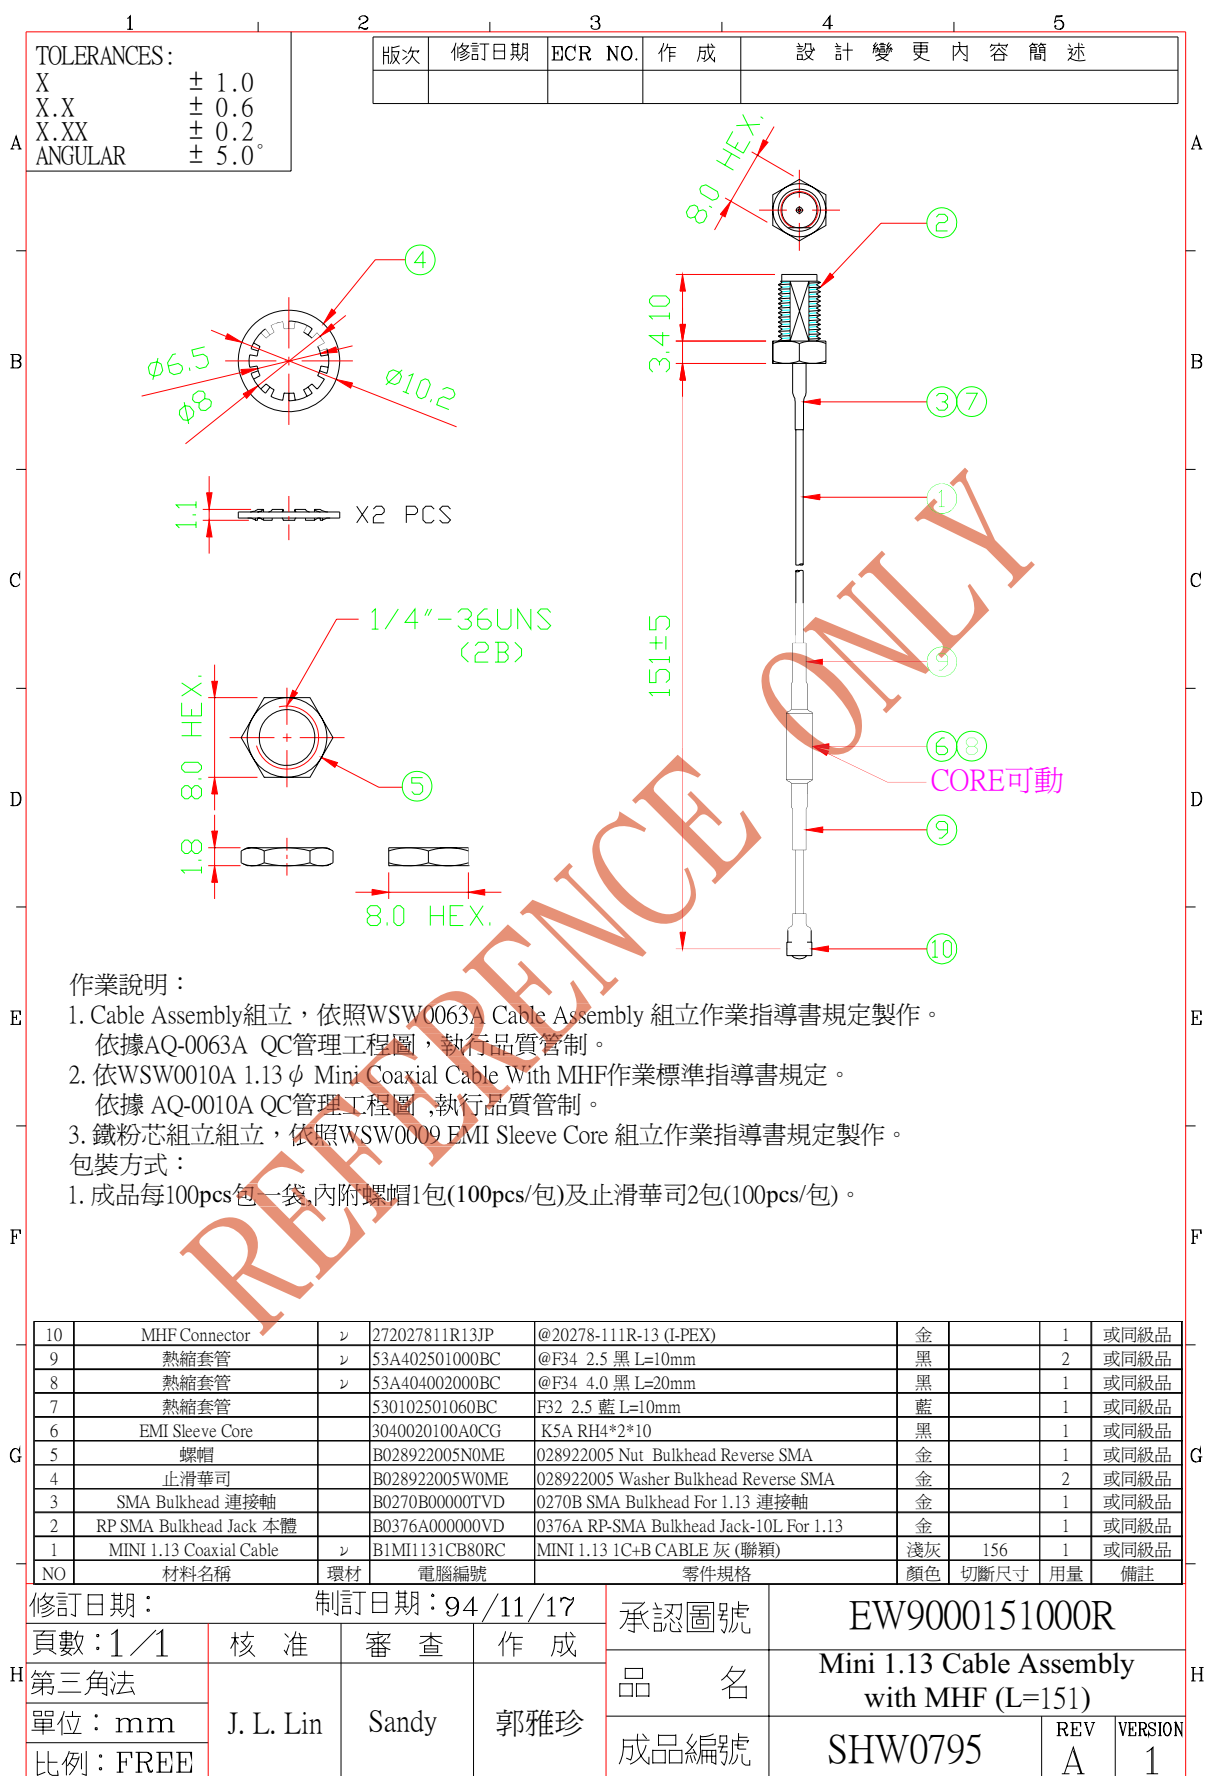

萬旭電業股份有限公司 50 文件編號：FMT-0513-C7

Electrical Characteristic

Return Loss

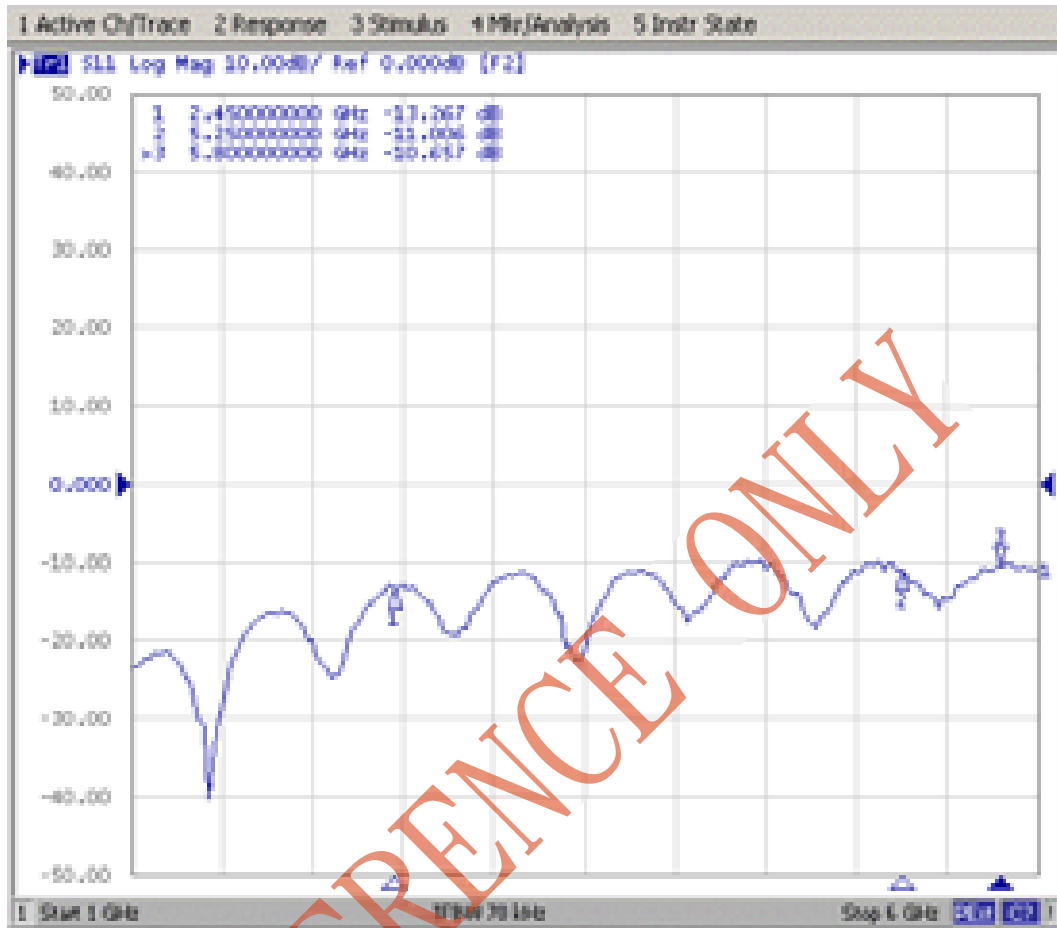


V.S.W.R



Electrical Characteristic

Attenuation

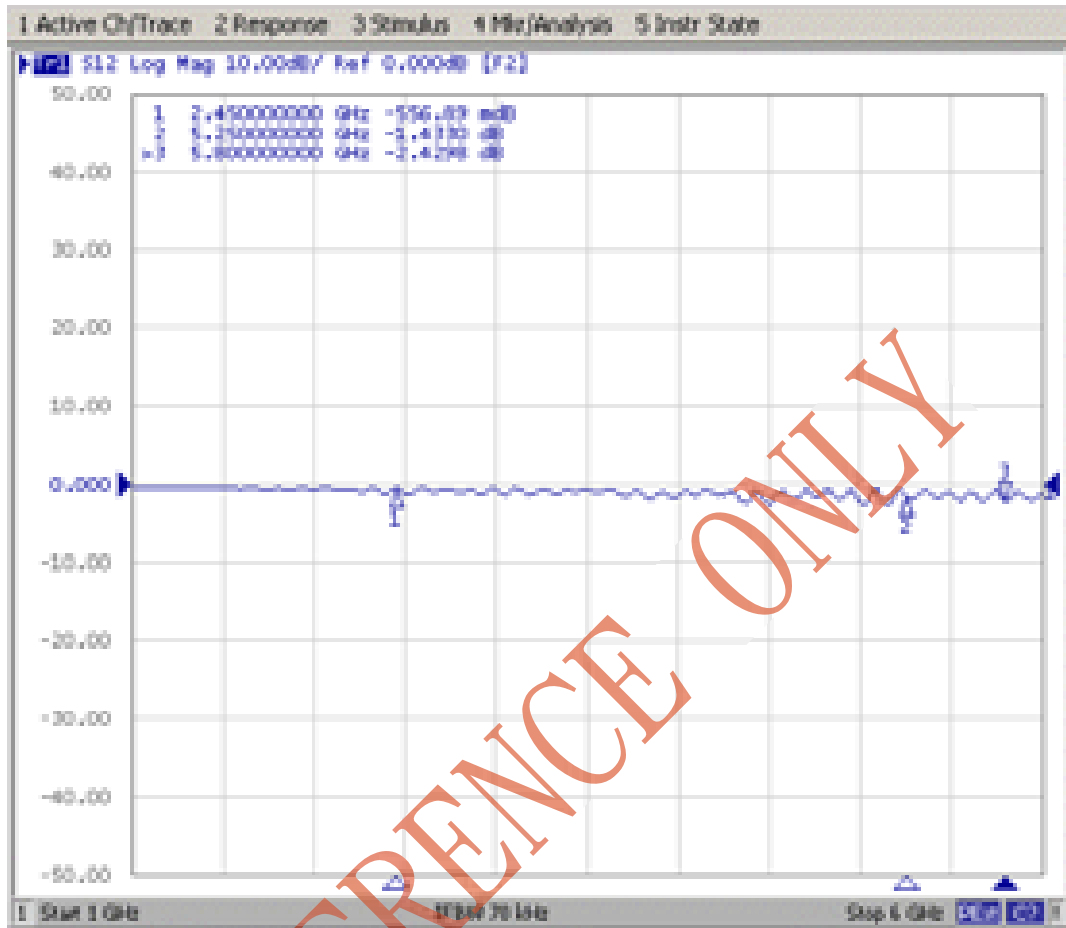

Material Data Sheet

Mini-1.13 Coaxial Cable

COPARTNER WIRE& CABLE MFG.CORP

SPECIFICATION

Xintang Road 688, Changling Industrial Area, Xin tian Village, Fuyong County,
Baoan District of Shenzhen, Guangdong, China
TEL: 86-755-2731-2988, 2731-2746 FAX: 86-755-2731-2738

CUSTOMER: KK

STYLE: COAXIAL CABLE

SPEC.: 1C*32AWG+B

PART NO.: 3970132002

CUSTOMER CODE: _____

DATE : 2004/7/23


REVISION: A

TOTAL PAGES: 3

COPARTNER SIGNATURE	CUSTOMER APP CUSTOMER P.N.
PREPARED BY : LXY	CHECKED BY:
CHECKED BY:	APPROVED BY:
APPROVED BY :	DATE:


CABLE CONSTRUCTION(電纜結構):

ITEM(結構項目)		SPECIFICATION(規格說明)
CONDUCTOR 導體	AWG(線規)	32AWG
	MATERIAL(材質)	SC
	COND SIZE(尺寸)	7/0.08±0.008 mm
INSULATION 絕緣體	MIN.AWGTHICK(最小厚度)	0.13 mm
	MATERIAL(材質)	PFA
	O.D(外径)	0.66±0.03 mm
ALMYLAR 絕箔	NO.(張數)	1C
	COVERAGE(遮蔽率)	/
	OVERLAP(重疊率)	/
MYLAR 麥拉	COVERAGE(遮蔽率)	/
	OVERLAP(重疊率)	/
DRAIN 地線	AWG(線規)	/
	MATERIAL(材質)	/
	SIZE(尺寸)	/
BRAID 編織 COPPER	MATERIAL(材質)	TINNED COPPER
	SIZE(尺寸)	16x40.85±0.008 mm
	COVERAGE(遮蔽率)	90%MIN
COVERING 被覆體	MIN.AWGTHICK(最小厚度)	/
	MATERIAL(材質)	/
	O.D(外径)	/
FILLER 填充	NO.(張數)	/
	MATERIAL(材質)	/
LAYER 層合	DIRECTION(股向)	/
	PITCH(股距)	/
	COVERAGE(遮蔽率)	/
FOAMED PP TAPE 發泡 PP 帶	OVERLAP(重疊率)	/
	COVERAGE(遮蔽率)	/
	OVERLAP(重疊率)	/
ALMYLAR 絕箔	COVERAGE(遮蔽率)	/
	OVERLAP(重疊率)	/
	OVERLAP(重疊率)	/
PAPER 紙	COVERAGE(遮蔽率)	/
	OVERLAP(重疊率)	/
	OVERLAP(重疊率)	/
DRAIN 地線	AWG(線規)	/
	MATERIAL(材質)	/
	SIZE(尺寸)	/
BRAID(編織) COPPER	MATERIAL(材質)	/
	SIZE(尺寸)	/
	SIZE(尺寸)	/
SPIRAL(纏繞) COPPER	MATERIAL(材質)	/
	SIZE(尺寸)	/
	SIZE(尺寸)	/
JACKET 被覆體	MIN.AWGTHICK(最小厚度)	0.10 mm
	MATERIAL(材質)	FEP
	COLOUR(顏色)	GRAY
	O.D(外径)	1.13±0.10 mm
MARKING 印字	MARKING 印字	/

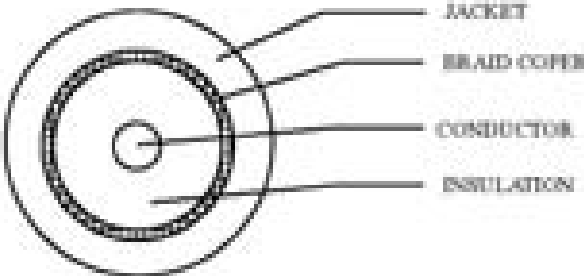CONSTRUCTION(構造)	
	
COLOR CODE(顏色代碼)	
NATURAL	
PHYSICAL PROPERTY & TRANSMISSION PERFORMANCE SPECIFICATIONS	
Electric Characters(電氣特性) 1. Conductor Resistance: at 20℃ MAX 32AWG: 58Ω/km 2. Insulation Resistance: 305MΩ·km min at 20℃ > 500V 3. Dielectric Strength: AC 500V/1minute 4. Impedance test (normal) : 50±2 Ω @ TDR 5. Attenuation (normal): at 0.9GHz 1.82dB/M at 1.5GHz 2.37dB/M at 1.9GHz 2.76dB/M at 2.4GHz 3.05dB/M at 3GHz 3.43dB/M at 4GHz 3.94dB/M at 5GHz 4.45dB/M at 5.8GHz 4.88dB/M at 6GHz 5.16dB/M	
Physical Characters of jacket (物理特性) 1. Tensile Strength: Unaged: 250PSI min Aged: 75% min 2. Elongation: Unaged: 200% min Aged: 75%	

Material Data Sheet

RP-SMA Bulkhead Jack

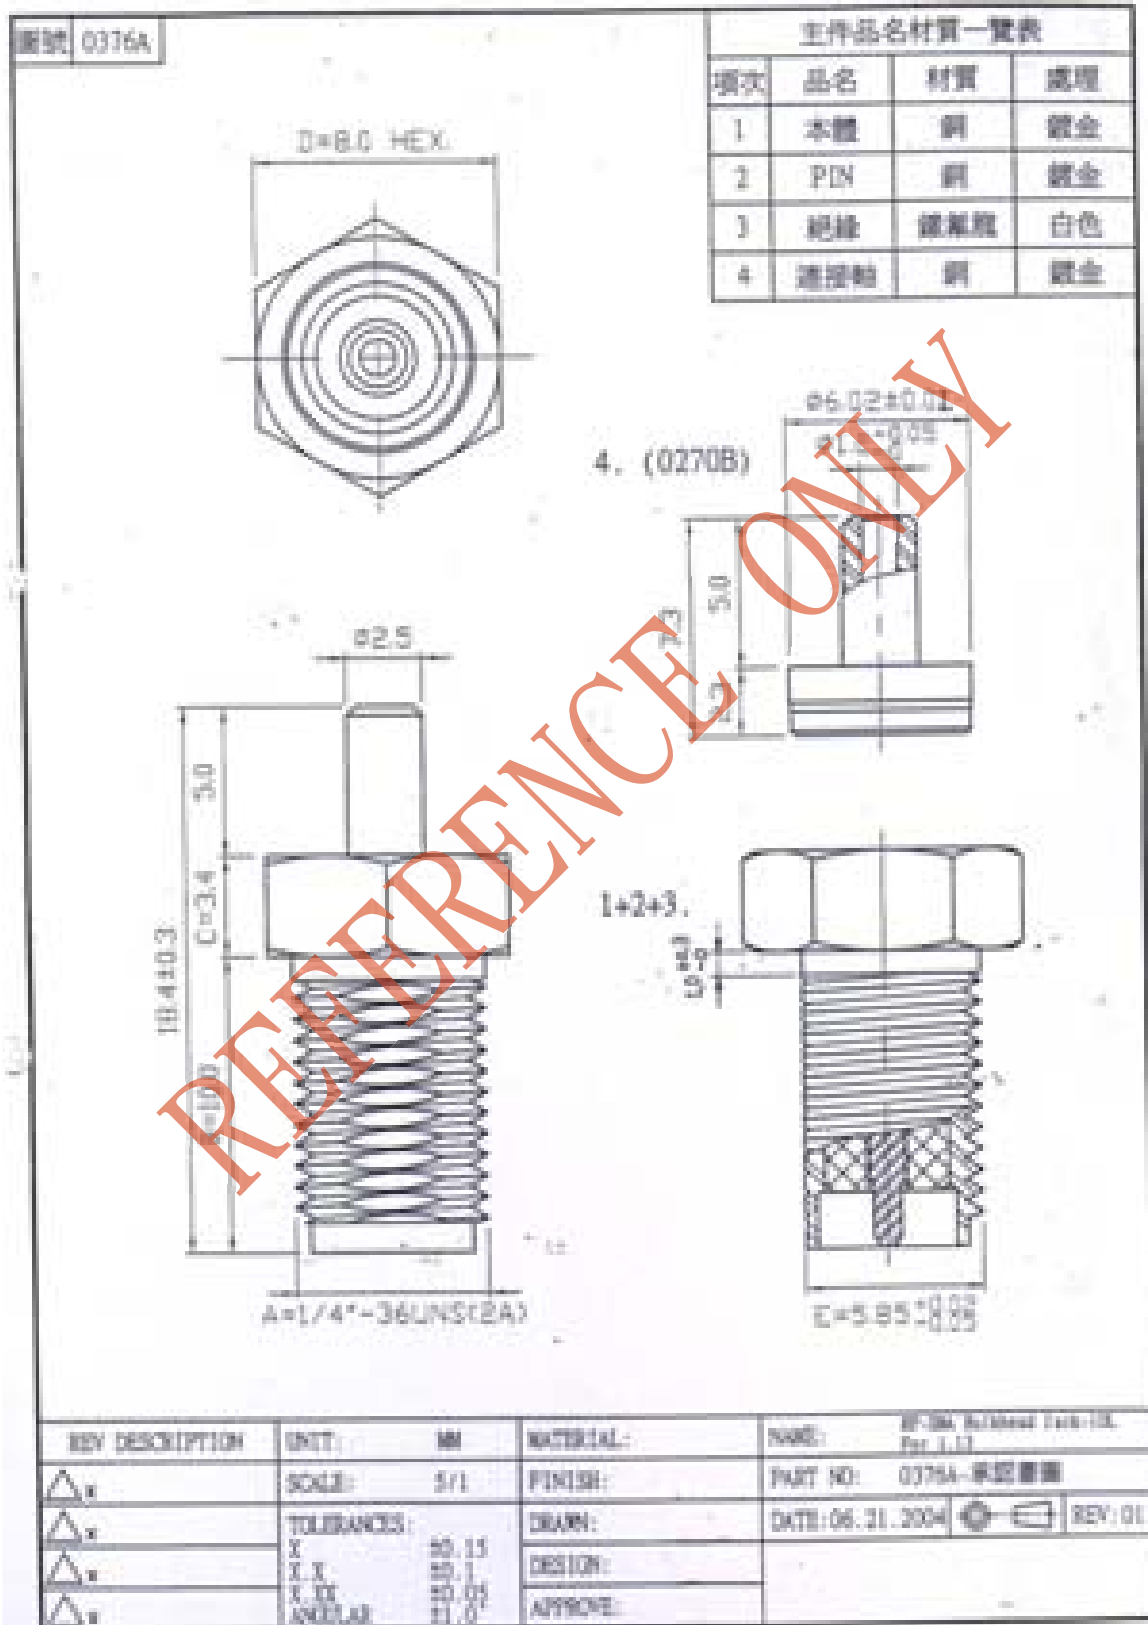


[illegible]

Notes

Material


- (1) Insulating part, UL94V-0, black
- (2) Contact
proper, bronze
gold plating
- (3) Ground contact
proper, bronze, gold plating
- (4) Insulating part No.
100229-001E-01

4. Permissible load of cable at mating

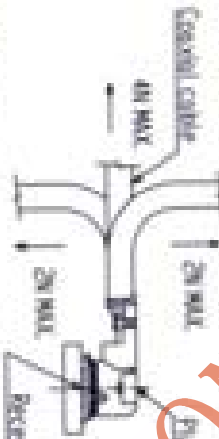

5. Suggestions for mating & unmating operation

- 5-1 Mating
Please mate the connector straightly to vertical direction as much as possible, adjusting the mating axis of plug and receptacle to be exclusive shaft under mating may break the connector, please don't do it.

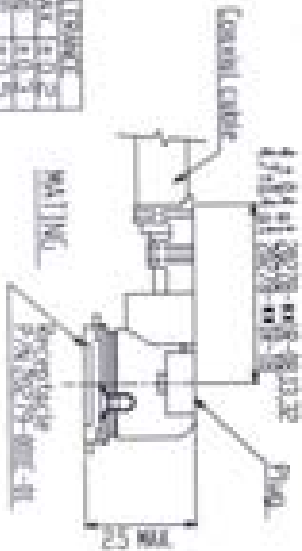

Dimension	Unit
1. MAX. 10.0	mm
2. MAX. 10.0	mm
3. MAX. 10.0	mm
4. MAX. 10.0	mm
5. MAX. 10.0	mm
6. MAX. 10.0	mm
7. MAX. 10.0	mm
8. MAX. 10.0	mm
9. MAX. 10.0	mm
10. MAX. 10.0	mm

1. MAX. 10.0
2. MAX. 10.0
3. MAX. 10.0
4. MAX. 10.0
5. MAX. 10.0
6. MAX. 10.0
7. MAX. 10.0
8. MAX. 10.0
9. MAX. 10.0
10. MAX. 10.0

1. MAX. 10.0
2. MAX. 10.0
3. MAX. 10.0
4. MAX. 10.0
5. MAX. 10.0
6. MAX. 10.0
7. MAX. 10.0
8. MAX. 10.0
9. MAX. 10.0
10. MAX. 10.0




5-1. Mating operation


Please mate the connector straightly to vertical direction as much as possible, adjusting the mating axis of plug and receptacle to be exclusive shaft under mating may break the connector, please don't do it.

5-2. Unmating

- (1) In case of unmating by pulling tool
Please use the pulling tool as the following drawing, and please pull plug to vertical direction as directly as possible.

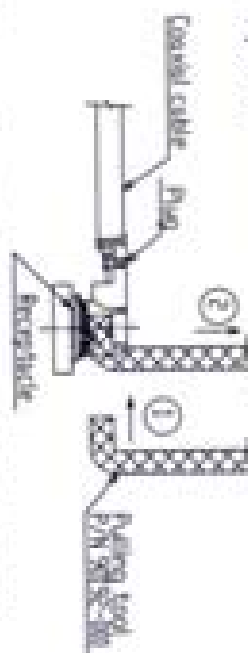

- (2) In case of unmating directly by hand
Please catch the catching wire of plug, and please pull plug to vertical direction as directly as possible.

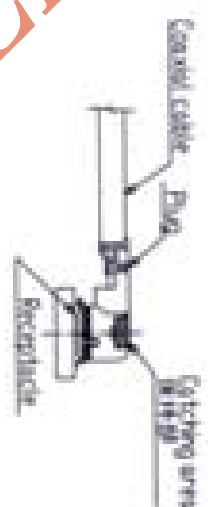

Dimension	Unit
1. MAX. 10.0	mm
2. MAX. 10.0	mm
3. MAX. 10.0	mm
4. MAX. 10.0	mm
5. MAX. 10.0	mm
6. MAX. 10.0	mm
7. MAX. 10.0	mm
8. MAX. 10.0	mm
9. MAX. 10.0	mm
10. MAX. 10.0	mm

I-PEX

Interconnect

High speed connector for plug and receptacle, gold plating

Material Data Sheet

EMI Sleeve Core

SPECIFICATION FOR APPROVAL

CUSTOMER: 萬地電業股份有限公司		C/S P/N:		DATE: 2013/10/9
ITEM: KSA RH 432X10		REF NO: 10-13-040020100-0		
(1) DIMENSION (Unit: mm)		A	4.00 $\pm$ 0.20	mm
			$\pm$	mm
		C	2.00 $\pm$ 0.15	mm
		D	10.00 $\pm$ 0.40	mm
			$\pm$	mm
			$\pm$	mm
			$\pm$	mm
			$\pm$	mm
			$\pm$	mm
(2) ELECTRICAL REQUIREMENTS:				
		REMARK:		
		TEST FREQ		
		TEST FREQ		
Z	35 $\pm$ 0	TEST FREQ	25 kHz	
Z	60 $\pm$ 0	TEST FREQ	100 kHz	
		TEST FREQ		
COIL DATA	Q _{min} L _{min} R _{max}	TEST FREQ		
Finishing 0.45 $\pm$ 0.03 mm T.C.W 1 TS				
(3) TEST INSTRUMENTS				
1. IMPEDANCE ANALYZER: HP4191A				
DRAWN	CHECKED	APPROVED	ISSUE NO.	
DATE	DATE	DATE	WC-05-039	

佳興股份有限公司
CORE-TECH CORPORATION

TEL: 03-4861211
FAX: 03-4861210

INSPECTION DATA

ISSUE NO: WC-RH-039

CUSTOMER	萬地電業股份有限公司			DATE	2003/10/9		Quantity	0 pcs					
PART NO.	10-13-040020100-0												
ITEM	K5A RH 4X2X10												
COIL SPEC	0.65 Φ X 63 mm T.C.W I TS												
COIL DATA	QD=	CO=	(PF)										
TEST FREQ	FO=	Hz	Ft= 25,100 MHz										
TEMPERATURE	28 °C	Humidity	87 %										
ELECTRIC CHARG.				DIMENSION (Unit: mm)									
	L	Q	Z(25)	Z(100)	A	B	C	D	E	F	G	H	I
SP			35.00	60.00	4.00		2.00	18.00					
+					0.20		0.15	0.40					
-			0	0	0.20		0.15	0.40					
1			45.00	82.00	3.96		2.02	9.95					
2			47.00	84.00	3.90		2.03	9.98					
3			46.00	82.00	3.92		2.09	9.96					
4			47.00	82.00	3.91		2.03	9.98					
5			45.00	81.00	3.93		2.08	9.96					
6			46.00	80.00	3.93		2.05	10.00					
7			46.00	81.00	3.95		2.03	10.02					
8			45.00	81.00	3.93		2.07	9.95					
9			46.00	80.00	3.92		2.09	9.93					
10			45.00	82.00	3.96		2.05	9.97					
X			45.00	81.50	3.94		2.05	9.97					
R			2.00	4.00	0.95		0.07	0.09					
TEST INSTRUMENTS				INSP No:									
1. IMPEDANCE ANALYZER: HP4191A													
REMARK:				Inspected		Checked		Approved					

CORE-TECH CORPORATION


Tel: 03-4861211
Fax: 03-4861210

Z-F RESPONSE

K5A RH 4X2X10

1. TEST INSTRUMENT: HP4191A

2. WINDING: 0.65 Φ X83 ■ T.C. ■ ITS

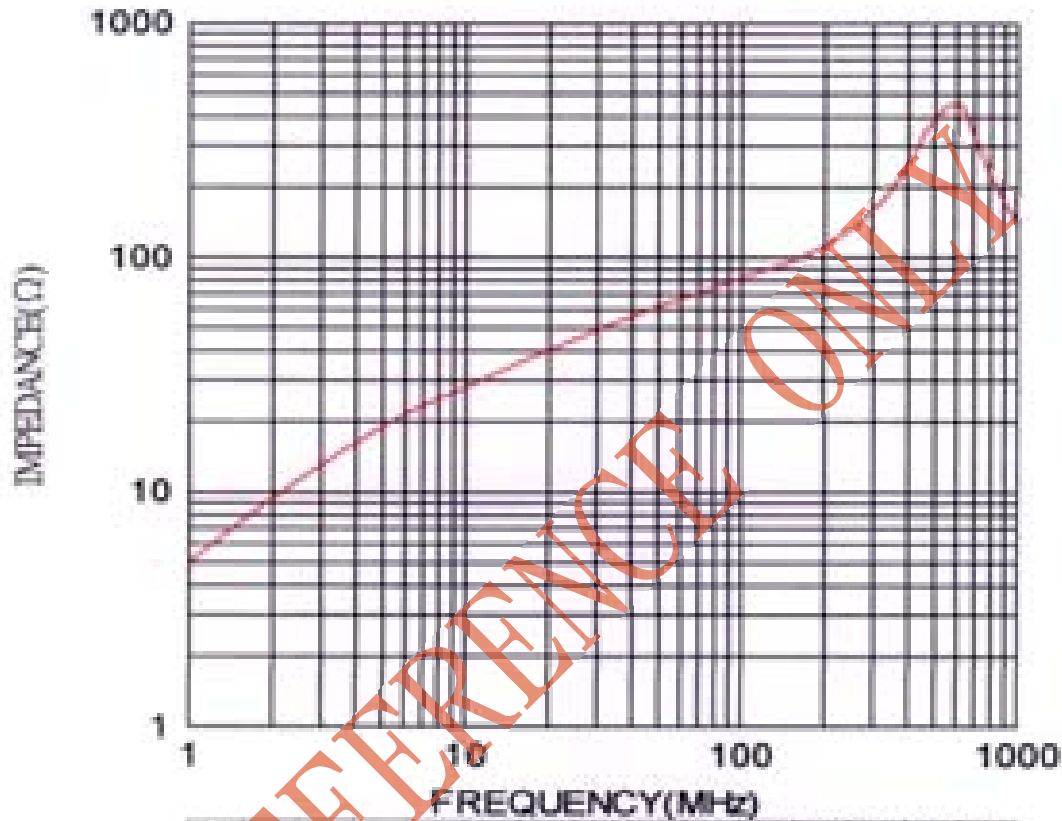

	1	5	10	25	50	100	200	300	400	500	600	700	800	900	1000
Z	5	12	20	45	62	82	113	160	244	392	462	322	329	176	141

(DATA BETWEEN 500MHz AND 1000MHz ARE FOR REFERENCE ONLY)

CORE-TECH CORPORATION

<http://www.coretechweb.com.tw>

E-mail: coretech@tptai.seed.net.tw

TEL: 03-4861211 FAX: 03-4861210



Lisa Tsai

2006/07/18 03:36 PM

收件人： Stacy Lee/Alphanetworks@Alphanetworks, Karl Chou/Alphanetworks@Alphanetworks, Basic Chen/Alphanetworks@Alphanetworks, Nina Liu/Alphanetworks@Alphanetworks, Yi-Ming Chen/Alphanetworks@Alphanetworks

副本抄送：

主旨： 尙亞資料移轉問題點 review meeting minutes

----- 轉呈者 Lisa Tsai/Alphanetworks 於 2006/07/18 03:35 PM -----



Gloria Tsai

2006/07/12 08:16 PM

收件人： ping@cellvision1.com.tw, chl@cellvision1.com.tw, Mike Wang/Alphanetworks@Alphanetworks, Terence Hwang/Alphanetworks@Alphanetworks, Carrier Fan/Alphanetworks@Alphanetworks, Ann Hou/Alphanetworks@Alphanetworks, Lisa Tsai/Alphanetworks@Alphanetworks, Judy Lin/Alphanetworks@Alphanetworks

副本抄送： Christine Tsung/Alphanetworks@Alphanetworks, Elise Wu/Alphanetworks@Alphanetworks, Kevin.c Chang/Alphanetworks@Alphanetworks, Easy Hsu/Alphanetworks@Alphanetworks

主旨： 尙亞資料移轉問題點 review meeting minutes

Dear all,

Subject： 尙亞資料移轉問題點 review meeting minutes

Time： July 12, PM 4:00

Attendee： Cellvision -- Ping Chen, Ch Lin

Alpha -- Mike Wang, Ann Hou, Lisa Tsai, Terence Huang, Judy Lin, Carrier Fan, Gloria

Tsai

Conclusion：

1. 電子件申請 by 廠商申請, 有資料 (原尙亞承認書) 先入 DCC. 缺資料者做記錄, 再依廠商別委請尙亞人員追/補資料
2. 電子件補資料請在 8/15前完成
3. 尙亞提供電子零件 sample (大樣:2pcs, 小樣:20pcs) 及照片. (7/14尙亞回覆何時可提供)
4. 尙亞提供機構包材零件各5pcs sample (7/14尙亞回覆何時可提供)
5. 機構包材件尙亞確認是否已承認. (7/14提供清單)
6. 機構包材件補資料請在 8/15前完成
7. 尙亞廠內製的 label (屬耗材者) 需提供 Label SOP (最好有 Sample), 以便明泰是否有相同料或重新申請料號

CE 電子件	
問題點	Action (先申請料號, 資料再後補)
SGS Report 過期	先以原尚亞資料入DCC, 再後補
缺I/R Profile	先以原尚亞資料入DCC, 再後補
零件單重	ok(原承認書即有資料)
零件耐溫	缺資料時, 先暫放"100"
廠商/代理商資料	缺Vendor code時, 先暫放"99996"
未能提供SGS Report者需提供"宣告書"	先以原尚亞資料入DCC, 再後補
符合排除條款者需"自我宣告書"	先以原尚亞資料入DCC, 再後補
均質物質成份及重量	先以原尚亞資料入DCC, 再後補
零件規格書(IC類要有Marking)	須齊全
安規零件需附安規資料(整份測試Report)	先以原尚亞資料入DCC, 再後補

機構/PM 件	
問題點	Action
SGS Report 過期	先以原尚亞資料入DCC, 再後補
未能提供SGS Report者需提供"宣告書"	尚亞後補資料
符合排除條款者需"自我宣告書"	尚亞後補資料
零件單重	先以原尚亞資料入DCC, 再後補
均質物質成份及重量	先以原尚亞資料入DCC, 再後補
各零件材質證明	尚亞後補資料
機構原始檔及PDF檔	先以原尚亞資料入DCC, 再後補

Thanks!

Best Regards,
Gloria Tsai
Alpha Networks Inc.
TEL: 886-3-5636666 ext.6450
FAX: 886-3-5678124
E-mail: gloria_tsai@alphanetworks.com