




System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/14/2008 4:34:25 PM	DUT Battery Model/No:	
Filename:	Open_251_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.3°C	Liquid Simulant:	850
Device Under Test:	OA3541	Relative Permittivity:	54.46
Relative Humidity:	49.9%	Conductivity:	0.981
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	lap over PCMCIA	Max SAR Y-axis Location:	-17.00 mm
Antenna Configuration:	Integral Open	Max E Field:	23.53 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.633 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.486 / .486 / .486	SAR Start:	0.170 W/kg
Type of Modulation:		SAR End:	0.165 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.95 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/14/08
Input Power Level:	2 uplink timeslots	Extrapolation:	poly4

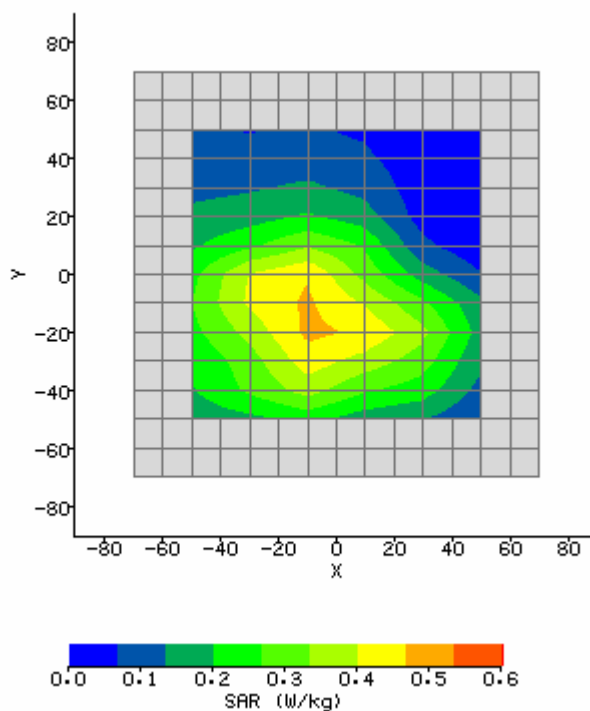


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/18/2008 11:02:22 AM	DUT Battery Model/No:	
Filename:	Open_661.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	1900
Device Under Test:	OA3541	Relative Permittivity:	52.94
Relative Humidity:	45.4%	Conductivity:	1.514
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	10.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-11.00 mm
Antenna Configuration:	Integral Open	Max E Field:	12.59 V/m
Test Frequency:	1880MHz	SAR 1g:	0.328 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.610 / .610 / .610	SAR Start:	0.058 W/kg
Type of Modulation:		SAR End:	0.059 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.80 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/18/08
Input Power Level:	4 uplink timeslots	Extrapolation:	poly4

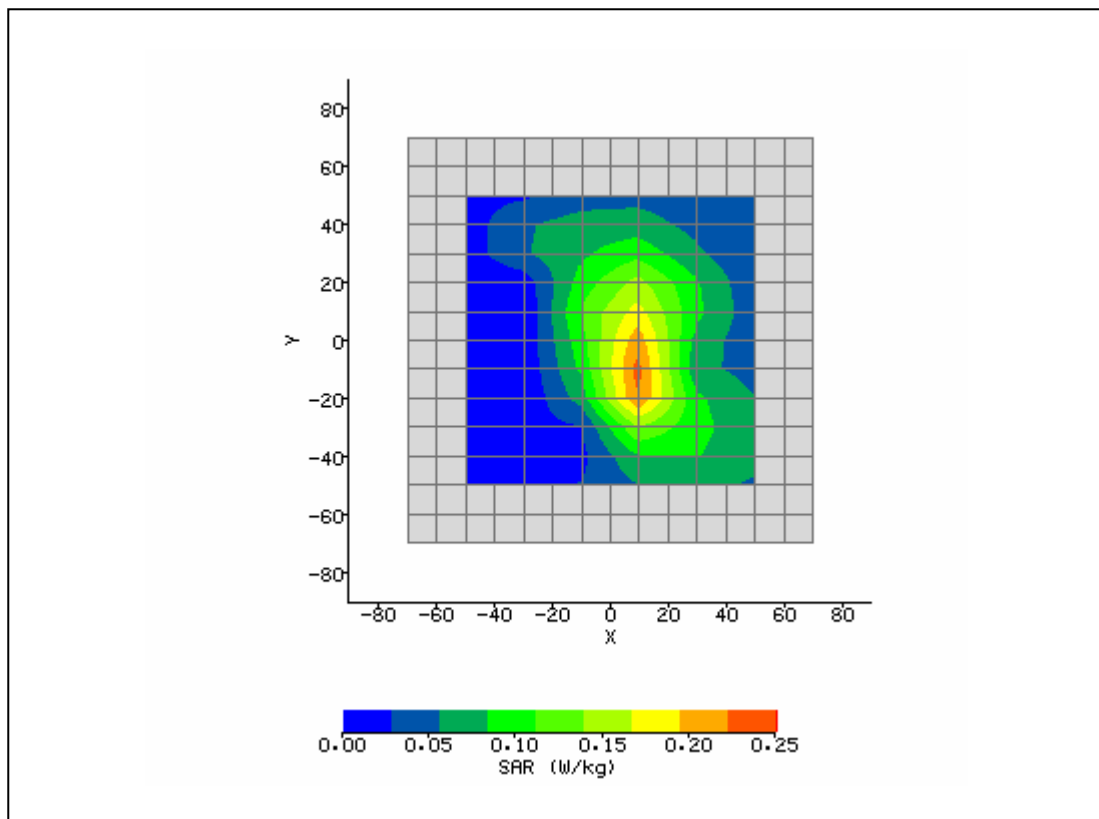


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/18/2008 11:20:26 AM	DUT Battery Model/No:	
Filename:	Open_661.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	1900
Device Under Test:	OA3541	Relative Permittivity:	52.94
Relative Humidity:	45.4%	Conductivity:	1.514
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	20.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-2.00 mm
Antenna Configuration:	Integral closed	Max E Field:	11.33 V/m
Test Frequency:	1880MHz	SAR 1g:	0.251 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.610 / .610 / .610	SAR Start:	0.046 W/kg
Type of Modulation:		SAR End:	0.045 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.72 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/18/08
Input Power Level:	4 uplink timeslots	Extrapolation:	poly4

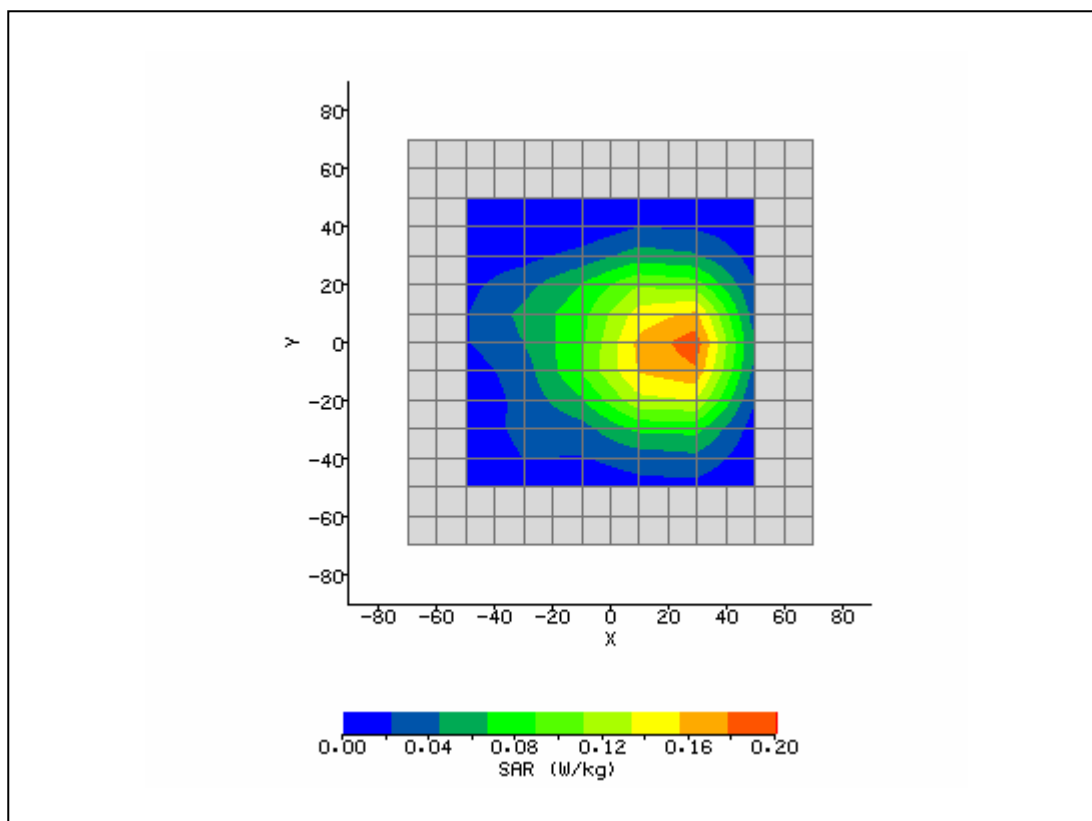


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/14/2008 2:22:52 PM	DUT Battery Model/No:	
Filename:	10_a_5825_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.3°C	Liquid Simulant:	850
Device Under Test:	OA3541	Relative Permittivity:	54.46
Relative Humidity:	49.9%	Conductivity:	0.981
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	lap over PCMCIA	Max SAR Y-axis Location:	-22.00 mm
Antenna Configuration:	Integral Open	Max E Field:	16.15 V/m
Test Frequency:	835MHz	SAR 1g:	0.307 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.486 / .486 / .486	SAR Start:	0.097 W/kg
Type of Modulation:		SAR End:	0.095 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.70 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/14/08
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

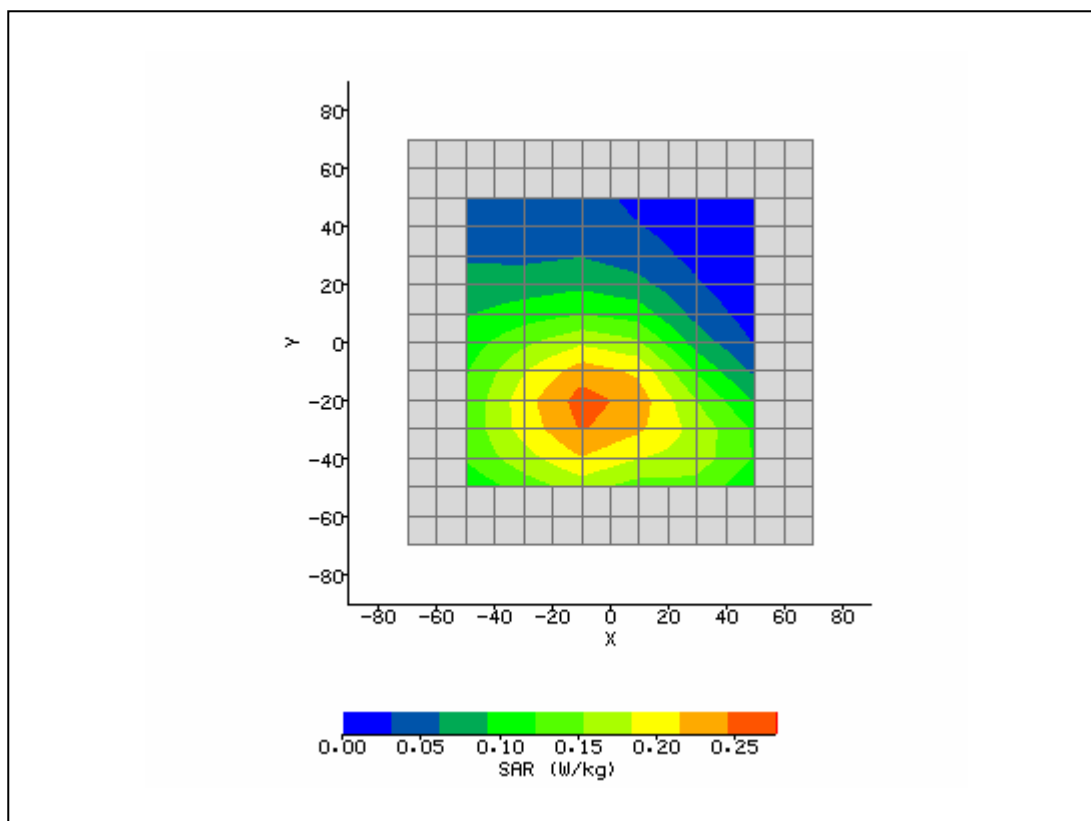


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/14/2008 2:38:16 PM	DUT Battery Model/No:	
Filename:	Open_4175_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.3°C	Liquid Simulant:	850
Device Under Test:	OA3541	Relative Permittivity:	54.46
Relative Humidity:	49.9%	Conductivity:	0.981
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-2.00 mm
DUT Position:	lap over PCMCIA	Max SAR Y-axis Location:	-25.00 mm
Antenna Configuration:	Integral Closed	Max E Field:	5.16 V/m
Test Frequency:	835MHz	SAR 1g:	0.031 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.486 / .486 / .486	SAR Start:	0.009 W/kg
Type of Modulation:		SAR End:	0.009 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.50 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/14/08
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

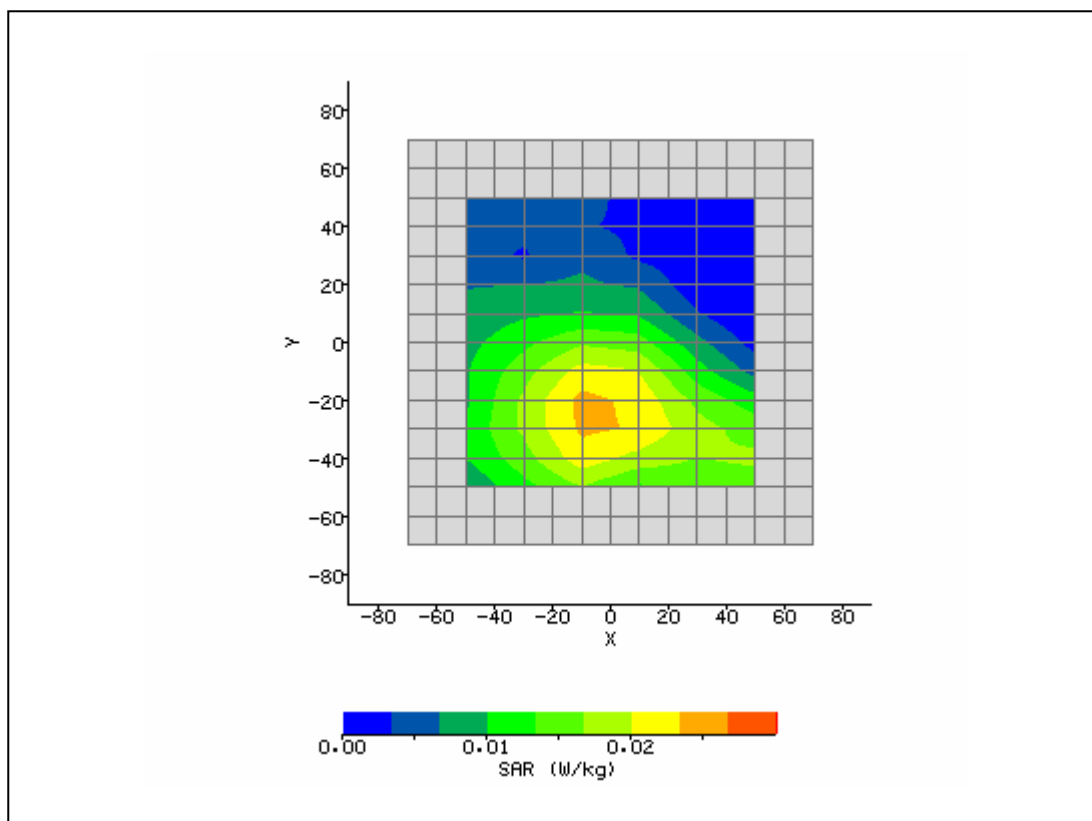

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/18/2008 11:56:21 AM	DUT Battery Model/No:	
Filename:	closed_9400.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	1900
Device Under Test:	OA3541	Relative Permittivity:	52.94
Relative Humidity:	45.4%	Conductivity:	1.514
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	10.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-10.00 mm
Antenna Configuration:	Integral open	Max E Field:	12.66 V/m
Test Frequency:	1880MHz	SAR 1g:	0.302 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.610 / .610 / .610	SAR Start:	0.060 W/kg
Type of Modulation:		SAR End:	0.061 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.75 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/18/08
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

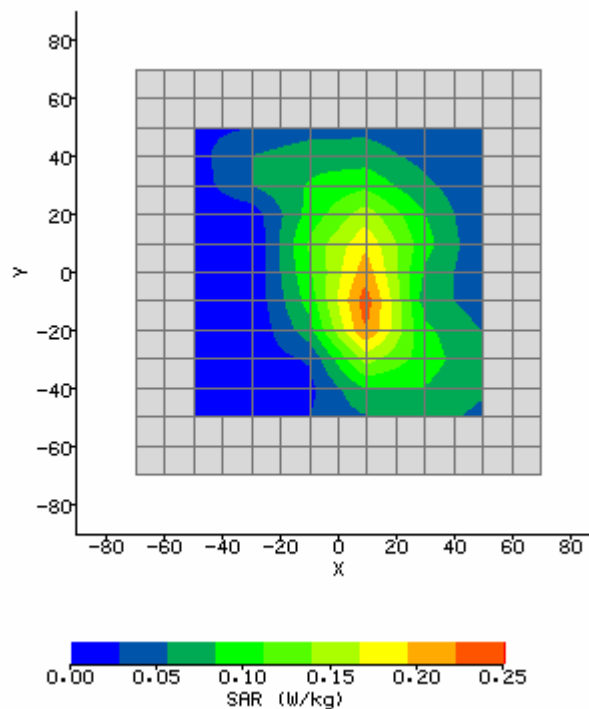

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/14/2008 12:48:59 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	System	Relative Permittivity:	40.83
Relative Humidity:	45.2%	Conductivity:	0.902
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	5.00 mm
Antenna Configuration:	Dipole	Max E Field:	98.73 V/m
Test Frequency:	835MHz	SAR 1g:	10.309 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	6.531 W/kg
Conversion Factors:	.457 / .457 / .457	SAR Start:	2.345 W/kg
Type of Modulation:		SAR End:	2.354 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.39 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/14/08
Input Power Level:	1W	Extrapolation:	poly4

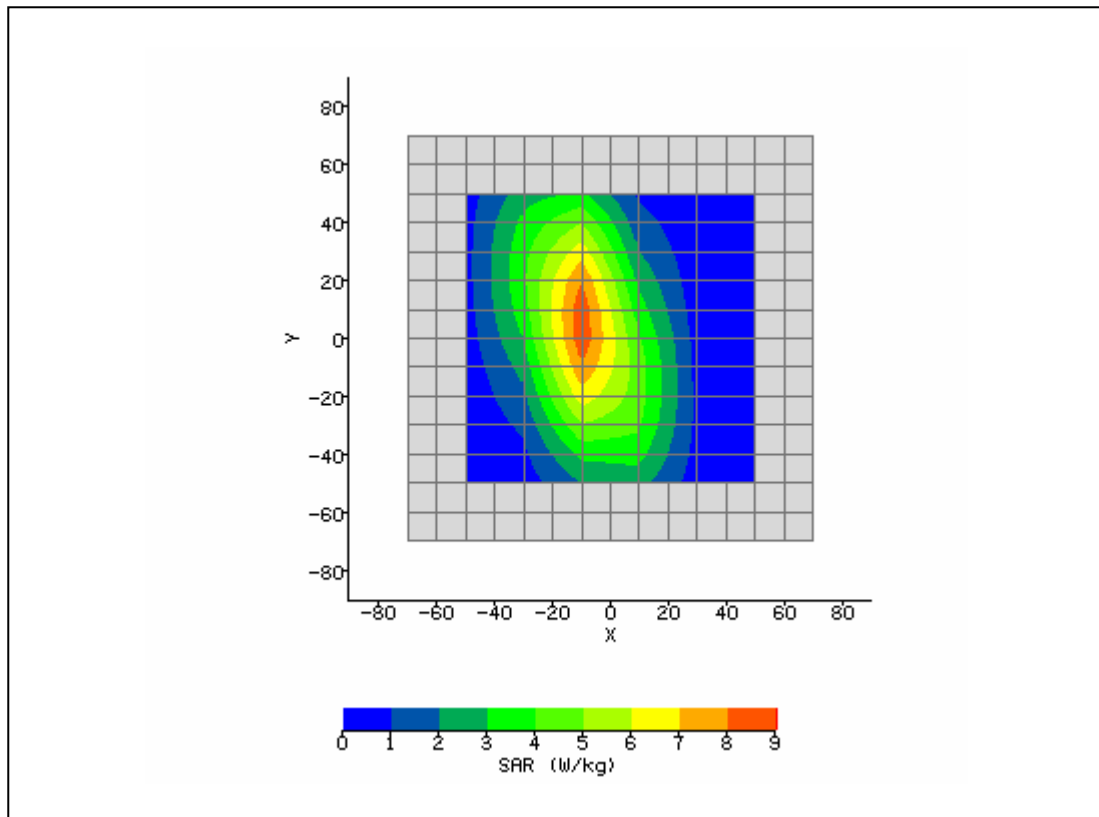

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/18/2008 10:05:50 AM	DUT Battery Model/No:	
Filename:	Open_62.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.2°C	Liquid Simulant:	1900
Device Under Test:	System	Relative Permittivity:	40.01
Relative Humidity:	45.7%	Conductivity:	1.388
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-2.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	13.00 mm
Antenna Configuration:	Dipole	Max E Field:	145.36 V/m
Test Frequency:	1900MHz	SAR 1g:	38.887 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	20.248 W/kg
Conversion Factors:	.550 / .550 / .550	SAR Start:	4.375 W/kg
Type of Modulation:		SAR End:	4.217 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.60 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/18/08
Input Power Level:	1W	Extrapolation:	poly4

