

FCC PART 15

EMI MEASUREMENT AND TEST REPORT

For

Toptrend-meta Information (Shenzhen) Inc

Block 21, Jinbi Industrial Zone, Huangtian, Bao'an,
Shenzhen, China 518128

FCC ID: RWSATS2488DTT04

2004-03-08

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: 2.4GHz 77-Channel Digital Spread-Spectrum Cordless Telephone with Caller ID and Call Waiting on Handset
Test Engineer: Ming Jing / 	
Report No.: R0403012	
Test Date: 2004-03-02	
Reviewed By: Ling Zhang / 	
Prepared By: Bay Area Compliance Laboratory Corporation (BACL) 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: This test report is specially limited to the above client company and product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
SCHEMATICS / BLOCK DIAGRAM	6
EQUIPMENT MODIFICATIONS	6
CONFIGURATION OF TEST SYSTEM	7
TEST SETUP BLOCK DIAGRAM.....	7
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLING LIST AND DETAILS	8
SUMMARY OF TEST RESULTS.....	9
§15.203 - ANTENNA REQUIREMENT.....	10
STANDARD APPLICABLE	10
ANTENNA CONNECTED CONSTRUCTION	10
§15.207(A) - CONDUCTED EMISSIONS.....	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP.....	11
SPECTRUM ANALYZER SETUP	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST PROCEDURE	11
SUMMARY OF TEST RESULTS	12
CONDUCTED EMISSIONS TEST DATA	12
PLOT OF CONDUCTED EMISSIONS TEST DATA	12
§15.209(A) - SPURIOUS EMISSION	15
STANDARD APPLICABLE	15
MEASUREMENT PROCEDURE.....	15
EQUIPMENT LISTS	15
MEASUREMENT RESULT	16
§15.209(F) - SPURIOUS RADIATED EMISSION.....	23
MEASUREMENT UNCERTAINTY	23
EUT SETUP	24
SPECTRUM ANALYZER SETUP	24
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST PROCEDURE	25
CORRECTED AMPLITUDE & MARGIN CALCULATION	25
SUMMARY OF TEST RESULTS	25
RADIATED EMISSION TEST RESULT FOR BASE UNIT	26
RADIATED EMISSION TEST RESULT FOR HANDSET UNIT	28
§15.247(A)(2) – 6 DB BANDWIDTH.....	30
STANDARD APPLICABLE	30
MEASUREMENT PROCEDURE.....	30
EQUIPMENT LISTS	30
MEASUREMENT RESULT	30
§15.247(B)(3) - PEAK OUTPUT POWER MEASUREMENT.....	34
STANDARD APPLICABLE	34

MEASUREMENT PROCEDURE.....	34
EQUIPMENT LISTS	34
MEASUREMENT RESULT	34
§15.247(C) - 100 KHZ BANDWIDTH OF BAND EDGES	37
STANDARD APPLICABLE	37
MEASUREMENT PROCEDURE.....	37
EQUIPMENT LISTS	37
MEASURE RESULTS.....	37
§15.247(D) - POWER SPECTRAL DENSITY	42
STANDARD APPLICABLE	42
MEASUREMENT PROCEDURE.....	42
EQUIPMENT LISTS	42
MEASUREMENT RESULTS.....	43

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Toprend-meta Information (Shenzhen) Inc*'s, model: *ATS2488*, or the "EUT" as referred to in this report is a 2.4GHz 77-Channel Digital Spread-Spectrum Cordless Telephone with Caller ID and Call Waiting on Handset. The EUT was composed of two parts, one is the base which measures approximately 4.75" L x 1.75" W x 5.5" H, and the other is the handset which measures 2.0" L x 1.25" W x 5.5" H. The EUT is a DTS device, which operates at the frequency range of 2402.304 – 2480.128 MHz, with the maximum conducted output power of 6.50dBm for base unit and 7.83dBm for handset unit.

The base unit of EUT utilized the Toprend Meta power adapter, M/N: U090030D12.

** The test data gathered are from a production sample, S/N: ATS248801, provided by the manufacturer.*

Objective

This type approval report is prepared on behalf of *Toprend-meta Information (Shenzhen) Inc* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for Output Power, Antenna Requirements, 6 dB Bandwidth, power spectral density, 100 kHz Bandwidth of Band Edges Measurement, Out of Band Emission, Spurious Emission, Conducted and Spurious Radiated Emission.

Related Submittal(s)/Grant(s)

No Related Submittals.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2001, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Open Area Test site used by BACL to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2001.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The scope of the accreditation covers the FCC Method – 47 CFR Part – Digital Devices, CISPER 22: 1997: Electromagnetic Interference – Limits and Methods of Measurement of Information Technology Equipment test methods.

SYSTEM TEST CONFIGURATION

Justification

The host system was configured for testing according to ANSI C63.4-2001.

The EUT was tested in the normal (native) operating mode to represent *worst-case* results during the final qualification test.

EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the system components. The test software, provided by the customer, is started the Windows terminal program under the Windows 98/2000/ME/XP operating system.

Once loaded, set the Tx channel to low, mid and high for testing.

Special Accessories

As shown in following test block diagram, all interface cables used for compliance testing are shielded. The host PC and the peripherals featured shielded metal connectors.


Schematics / Block Diagram

Please refer to Appendix A.


Equipment Modifications

No modifications were made to the EUT.

Configuration of Test System

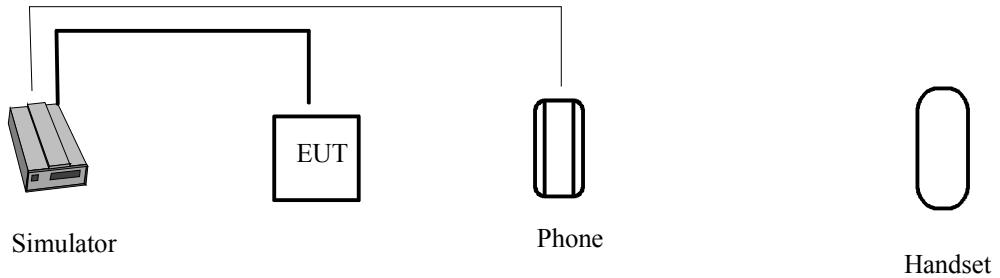

Test Setup Block Diagram

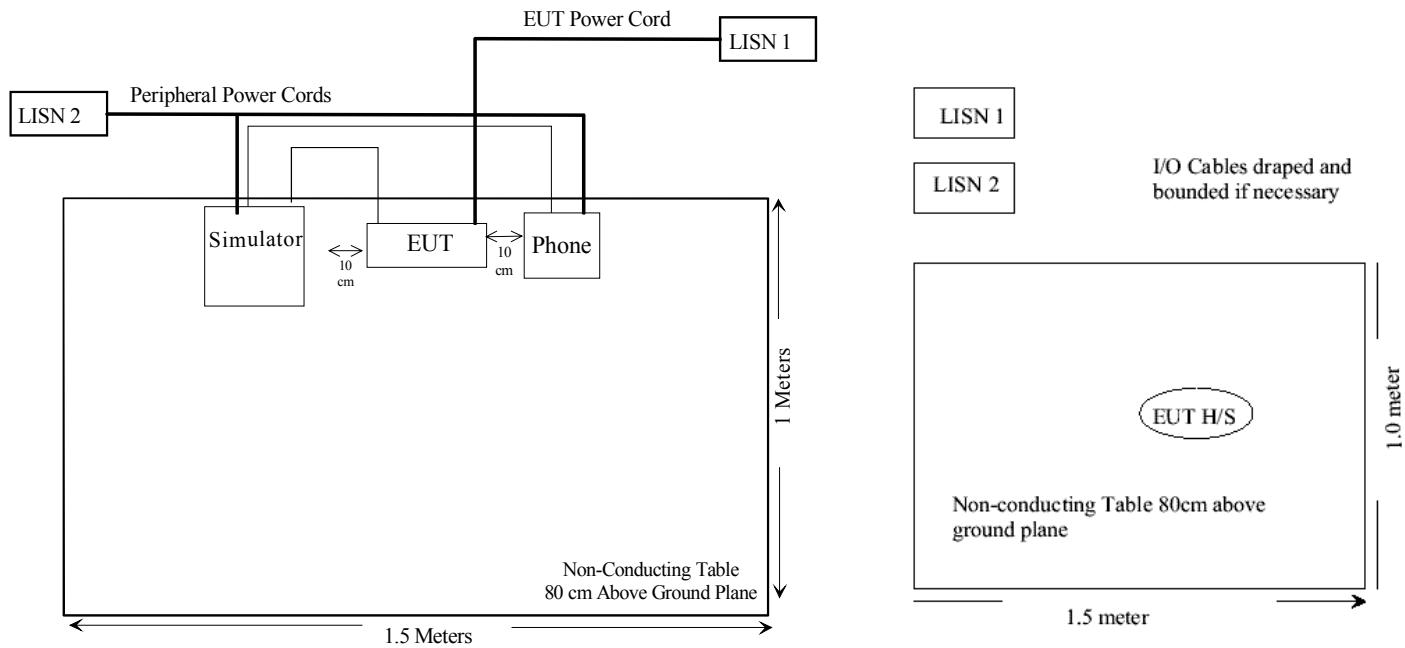

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
TELTONE CORP.	SIMULATOR	TLS-3B-01	80071	DOC
PANASONIC	Telephone	KX-T3175	6IBTB142741	ACJMLA-75986-MT-E

External I/O Cabling List and Details

Cable Description	Length (M)	Port/From	To
None-Shielded Telephone Cable	2.0	RJ45 Port/EUT	Telephone Simulator RJ45 Port
None-Shielded Telephone Cable	2.0	RJ45 Port/Simulator	Telephone RJ45 Port/Panasonic

SUMMARY OF TEST RESULTS

Results reported relate only to the product tested, serial number: *ATS248801*.

FCC RULES	DESCRIPTION OF TEST	RESULT
§2.1091	RF Exposure	Pass
§15.203	Antenna Requirement	Pass
§ 15.207 (a)	Conducted Emissions	Pass
§15.209 (a)	Spurious Emission	Pass
§15.247 (a)(2)	6 dB Bandwidth	Pass
§15.247 (b)(3)	Maximum Peak Output Power	Pass
§ 15.247 (c)	100 kHz Bandwidth of Frequency Band Edge	Pass
§15.247 (d)	Peak Power Spectral Density	Pass
§15.205	Restricted Band	Pass

§15.203 - ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to § 15.247 (1), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connected Construction

The directional gain of antenna used for transmitting is 0 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

§15.207(a) - CONDUCTED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is ± 2.4 dB.

EUT Setup

The measurement was performed in the shield room, using the same setup per ANSI C63.4-2001 measurement procedure. The specification used was FCC 15 Subpart B limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

Spectrum Analyzer Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30Mhz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
Rohde & Schwarz	Artificial LISN	ESH2-Z5	871884/039	2003-03-28
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2003-05-06

* **Statement of Traceability:** BACL Corp. certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the power cord of the host system was connected to the auxiliary outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of each modes tested to ensure EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emission was found to be marginal (within -4 dB μ V of specification limits). Quasi-peak readings are distinguished with a "Qp".

Summary of Test Results

According to the recorded data in following table, the EUT complies with the FCC Conducted margin for a Class B device, with the *worst* margin reading of:

-24.3 dB at 8.100 in the Neutral mode

Environmental Conditions

Temperature:	16° C
Relative Humidity:	48%
ATM Pressure:	1032 mbar

Conducted Emissions Test Data

LINE CONDUCTED EMISSIONS				FCC PART 15 CLASS B	
Frequency MHz	Amplitude dB μ V	Detector Qp/Ave/Peak	Phase Line/Neutral	Limit dB μ V	Margin dB
8.100	25.7	AVG	Neutral	50	-24.3
8.100	26.6	QP	Neutral	60	-33.4
17.500	12.5	AVG	Neutral	50	-37.5
21.600	8.5	AVG	Line	50	-41.5
7.910	4.5	AVG	Line	50	-45.5
0.160	7.3	AVG	Neutral	53	-45.7
17.500	14.3	QP	Neutral	60	-45.7
0.160	16.2	QP	Neutral	63	-46.8
0.160	3.9	AVG	Line	53	-49.1
21.600	9.7	QP	Line	60	-50.3
0.160	8.9	QP	Line	63	-54.1
7.910	4.8	QP	Line	60	-55.2

Plot of Conducted Emissions Test Data

Plot(s) of Conducted Emissions Test Data is presented hereinafter as reference.

Bay Area Compliance Laboratory Corp
Class B

02. Mar 04 09:51

EUT: AT92488
Manuf: Toprend-Meta
Op Cond: Normal
Operator: Ming
Comment: L


Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	W-Time	Atten	Preamp
150k	1M	8k	8k	QP+AV	20ms	15dBBLN	OFF
1M	8M	8k	8k	QP+AV	1ms	15dBBLN	OFF
8M	30M	80k	8k	QP+AV	1ms	15dBBLN	OFF

Final Measurement: x QP / + AV

Meas Time: 1 s
Subranges: 25
Acc Margin: 6dB

◊ Mkr : 180.00 kHz 8.9 dBuV
▽ Mkr : 180.00 kHz 3.8 dBuV

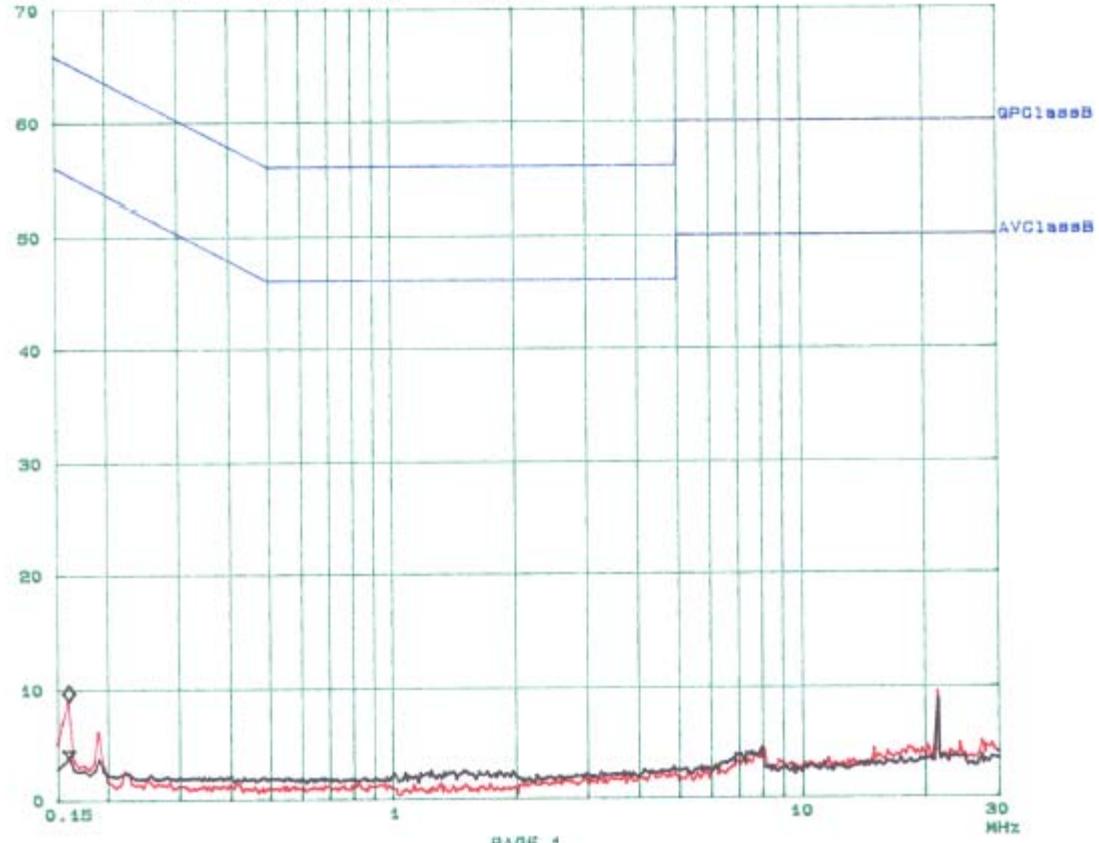


PAGE 1

Bay Area Compliance Laboratory Corp
Class B

02. Mar 04 10:37

BUT: AT92488
Manuf: Toprend-Meta
Op Cond: Normal
Operator: Ming
Comment: N

Scan Settings (3 Ranges)
Frequencies | Receiver Settings
Start Stop Step IF BW Detector M-Time Atten Preamp
180k 1M 5k 9k QP+AV 20ms 15dBULN OFF
1M 5M 5k 9k QP+AV 1ms 15dBULN OFF
5M 20M 50k 9k QP+AV 1ms 15dBULN OFF
Final Measurement: x QP / + AV
Mean Time: 1 s
Subranges: 25
Acc Margin: 6dB

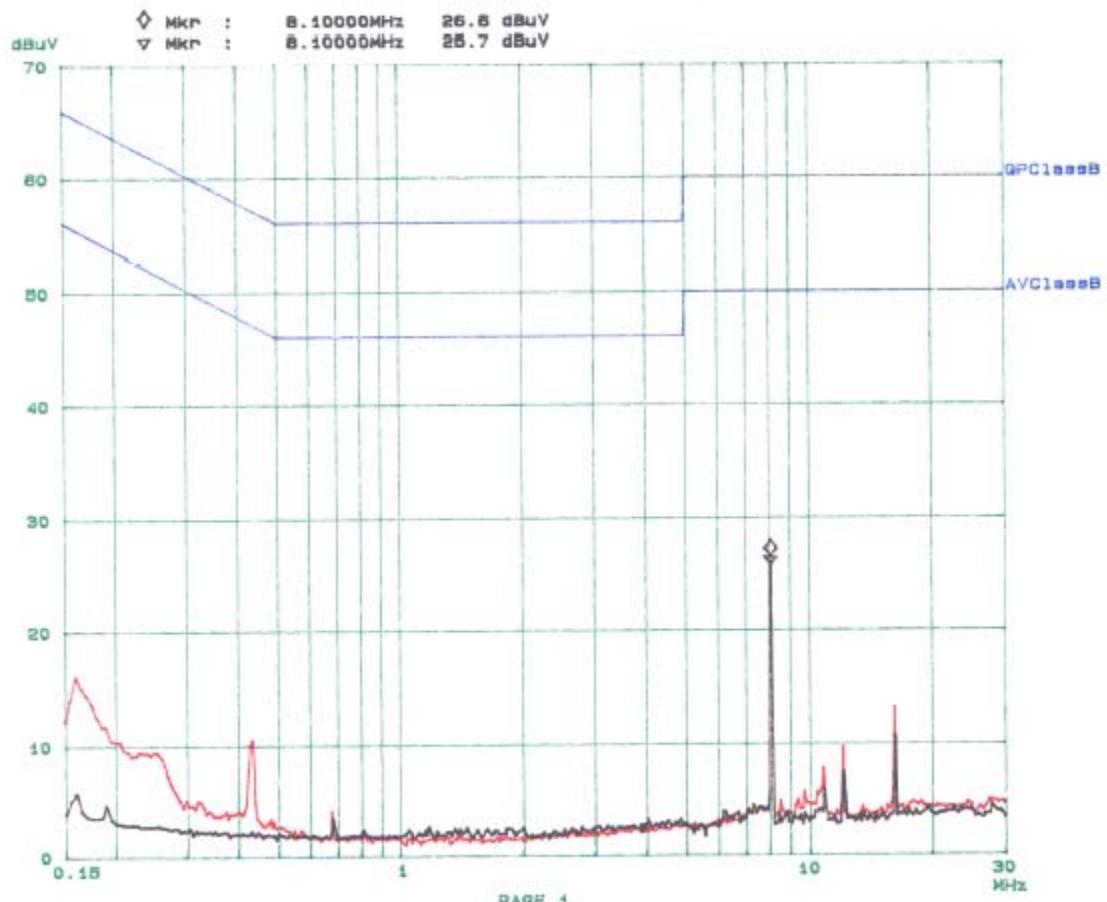

§15.209(a) - SPURIOUS EMISSION

Standard Applicable

According to §15.209 (a), except as provided elsewhere in the subpart of 15.209, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490.....	2400/F(kHz)	300
0.490-1.705.....	24000/F(kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241

Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on a bench without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

Equipment Lists



Manufacturer	Model No.	Description	Calibration Date
HP	8565EC	Spectrum Analyzer	2003-06-30



Measurement Result



Please refer to following pages for plots of spurious emission.



Environmental Conditions



Temperature:	16° C
Relative Humidity:	48%
ATM Pressure:	1032 mbar

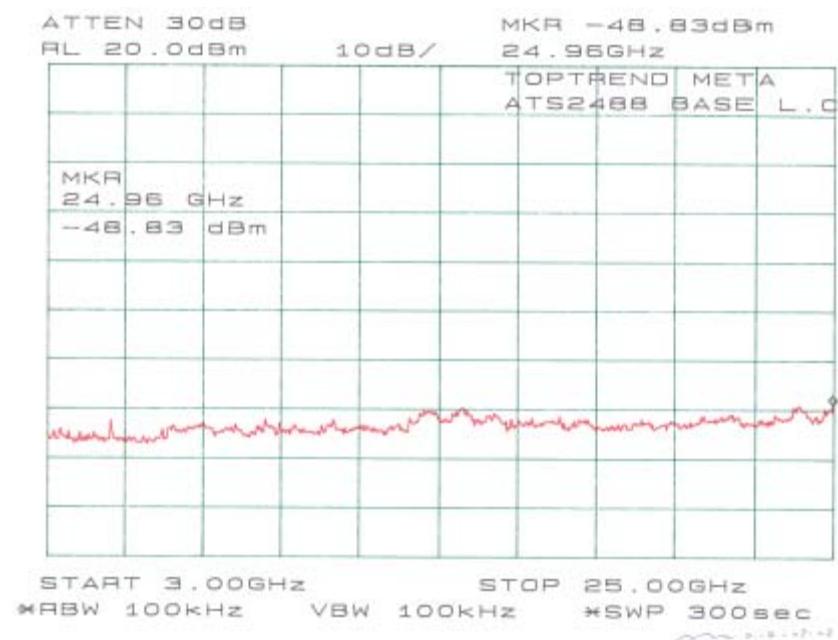
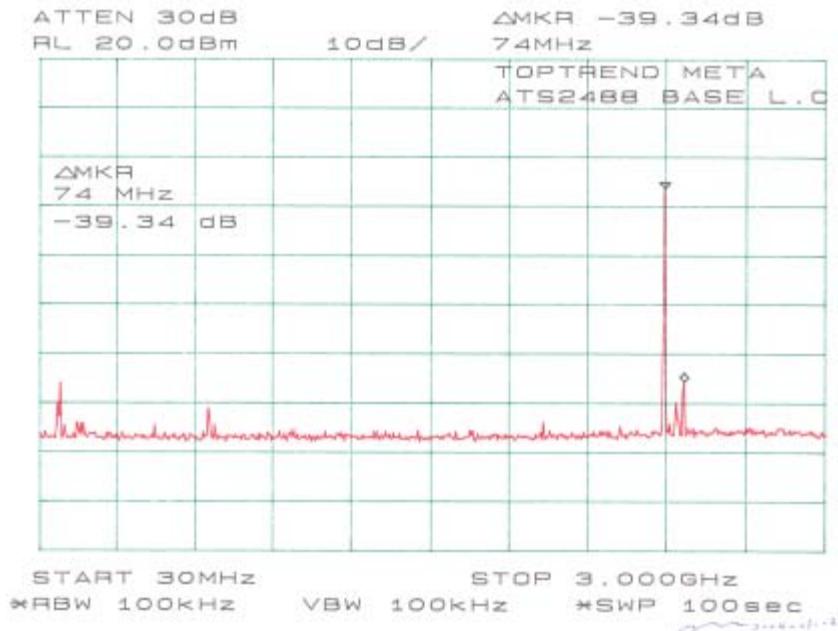


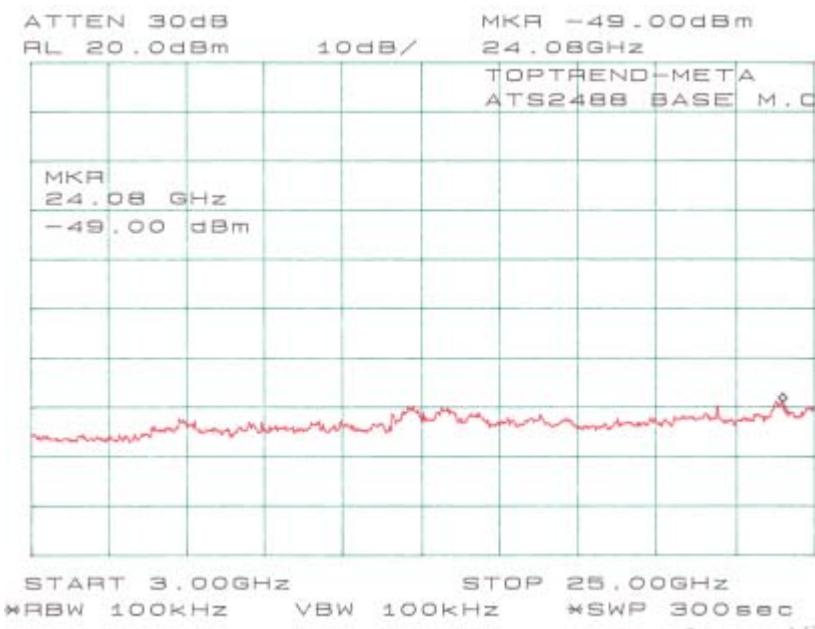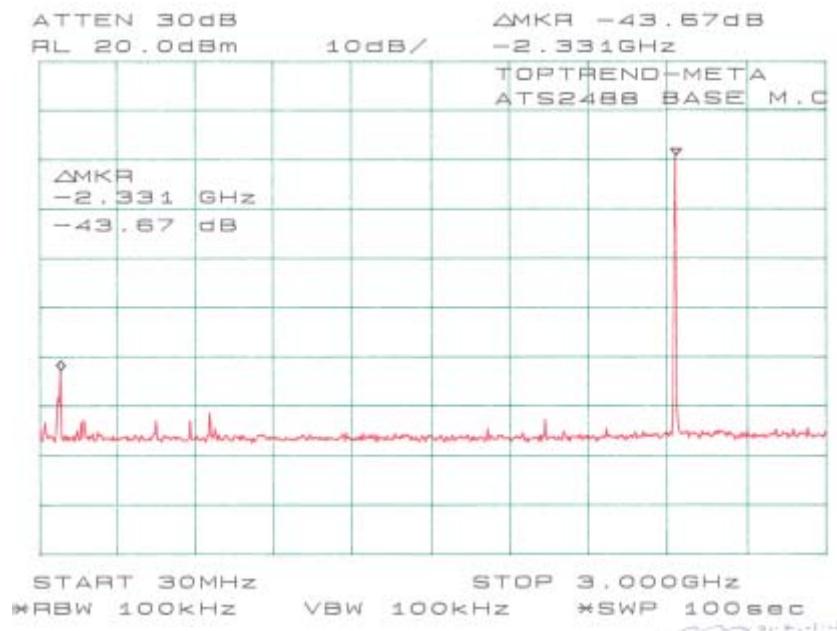

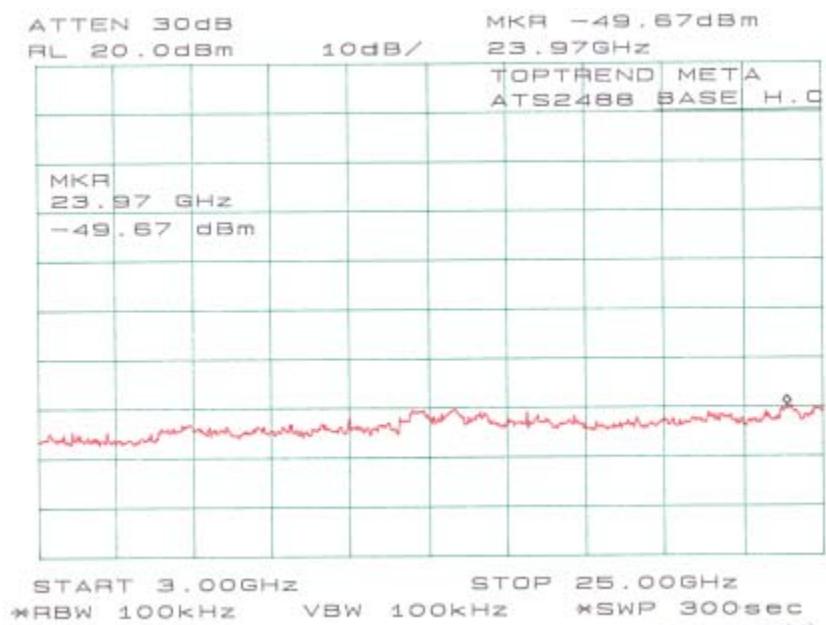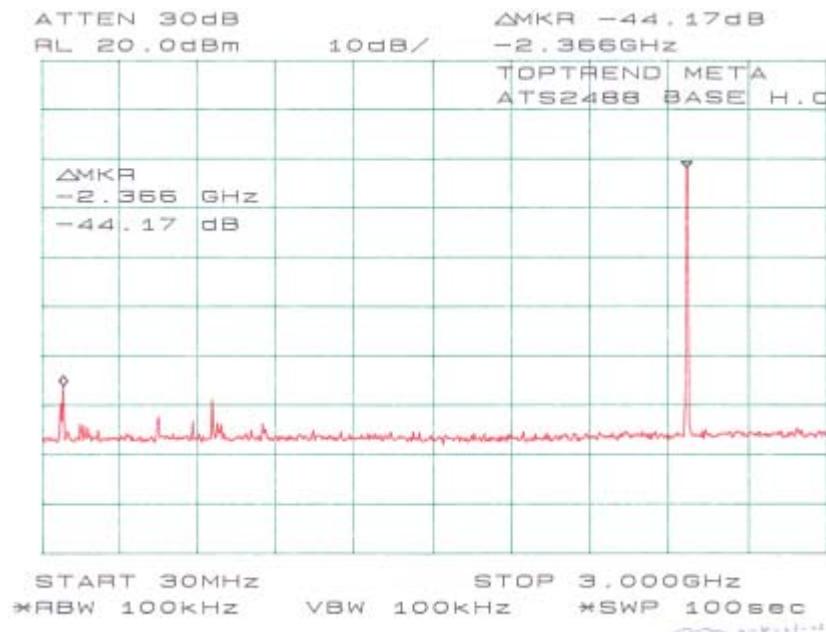

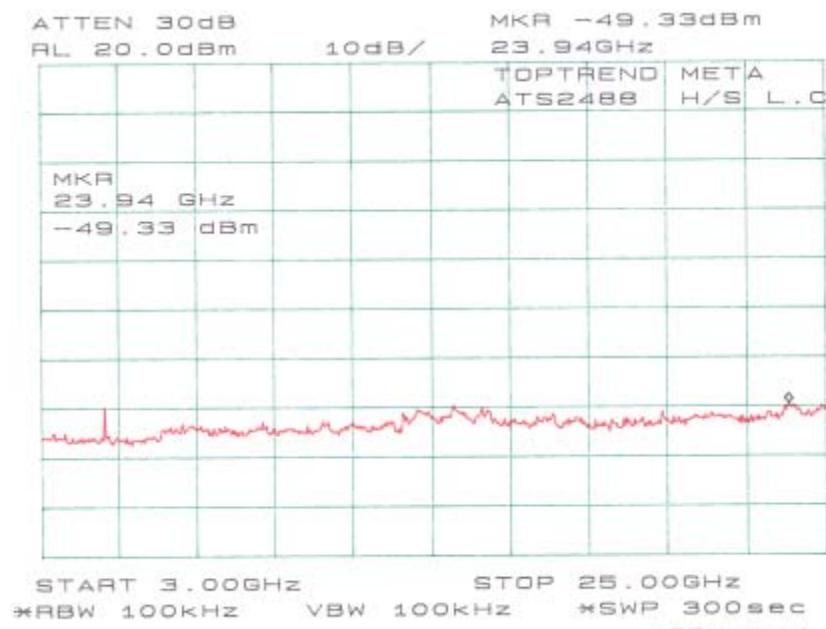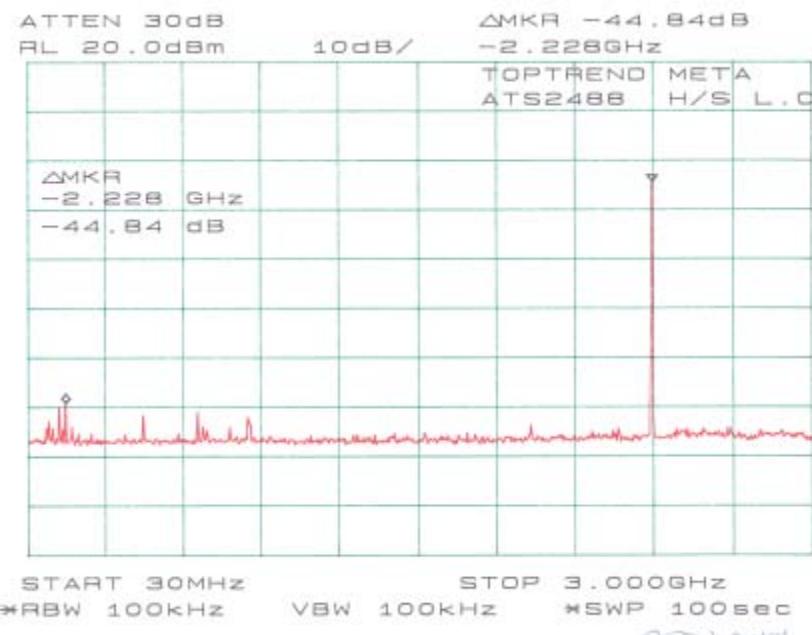

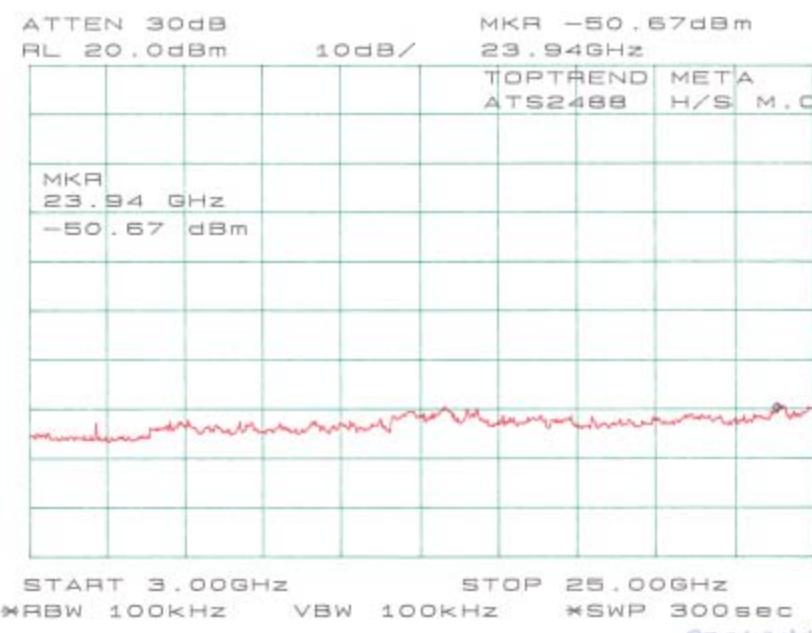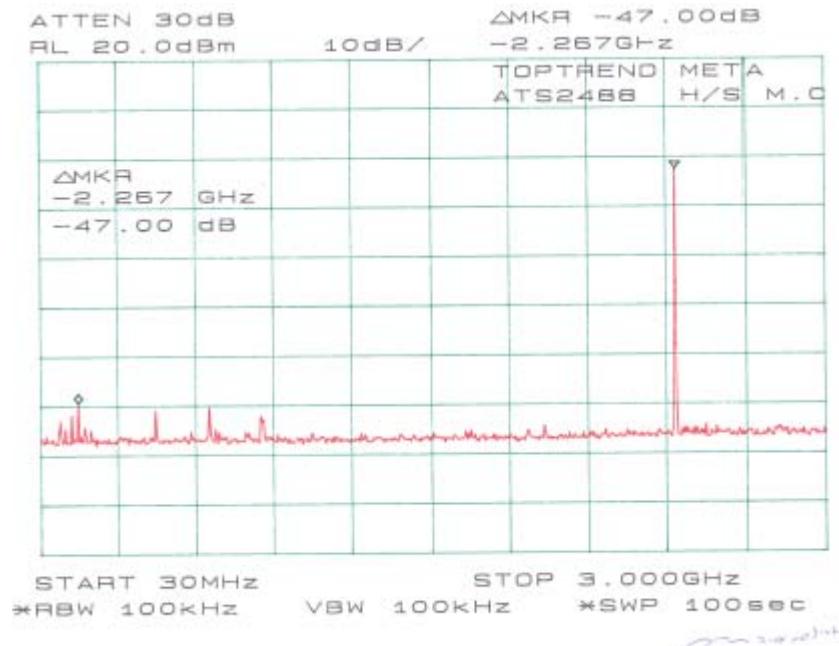

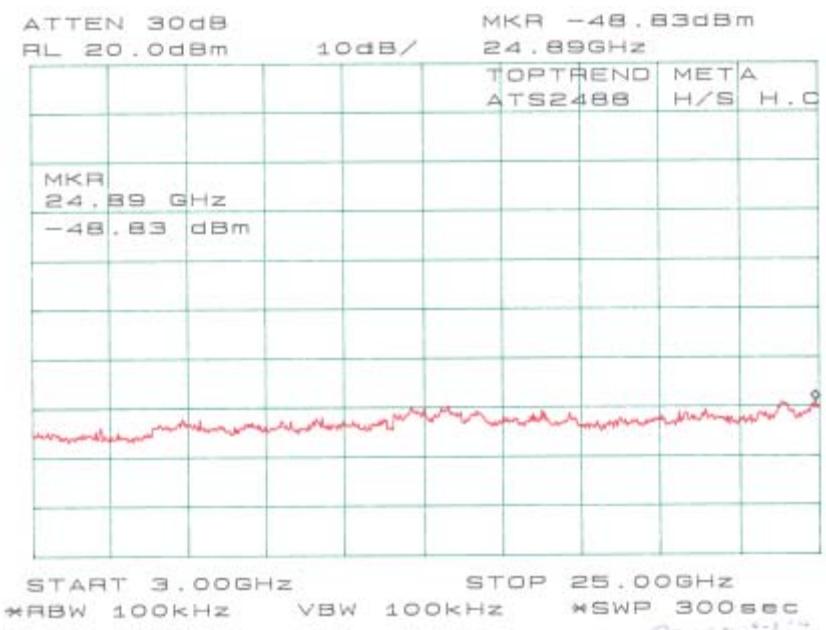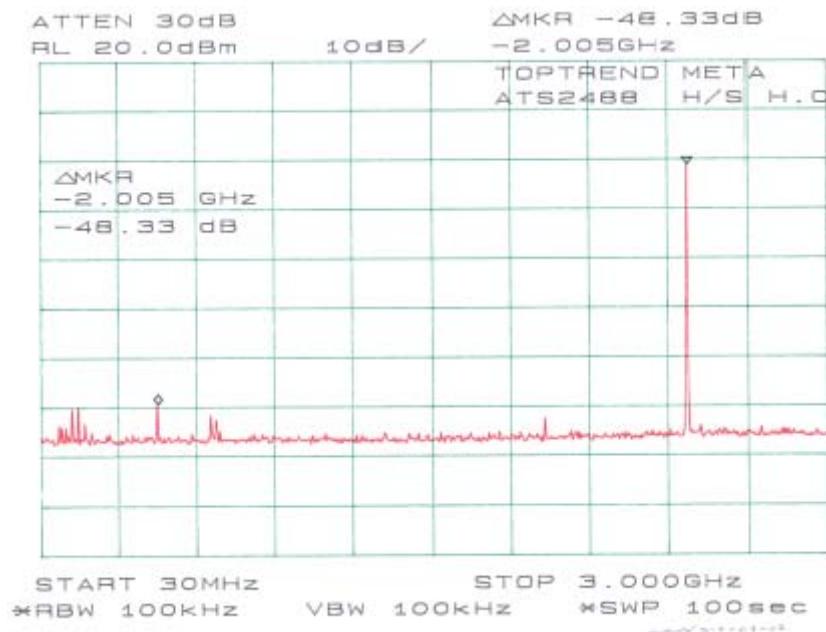

§15.209(f) - SPURIOUS RADIATED EMISSION

Measurement Uncertainty

All measurements involve certain levels of uncertainties. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is ± 4.0 dB.

According to §15.205, except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
¹ 0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2655 – 2900	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.57725	240 – 285	3345.8 – 3358	36.43 – 36.5
13.36 – 13.41	322 – 335.4	3600 – 4400	(²)

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510MHz

² Above 38.6

Except as provided in paragraph (d) and (e), the filed strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

According to §15.209, the device shall meet radiated emission general requirements.

Except for Class A device, the filed strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (Microvolts/meter)	Field Strength (dB μ V/meter)
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup accordance with the ANSI C63.4-2001. The specification used was the FCC 15.209 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

Spectrum Analyzer Setup

According to FCC Rules, 47 CFR, Section 15.33, the frequency was investigated from 30 to 2500 MHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

<u>Frequency Range</u>	<u>RBW</u>	<u>Video B/W</u>
Below 30MHz	10kHz	10kHz
30 – 1000MHz	100kHz	100kHz
Above 1000MHz	1MHz	1MHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
HP	Amplifier, Microwave	8449B	3147A00400	3/14/2003
HP	Amplifier, Pre	8447E	1937A01057	8/4/2003
HP	Amplifier, Pre	8447E	1937A01046	8/2/2003
HP	Analyzer, Spectrum	8565EC	3946A00131	6/30/2003
ETS	Antenna, Biconical	3110B	9603-2315	10/11/2003
A.R.A.	Antenna, Horn, DRG	DRG-118/A	1132	9/30/2003
A. H. Systems	Antenna, Horn, DRG	SAS-200/571	2455-261	8/1/2003
ETS	Antenna, logperiodic	3148	0004-1155	10/11/2003
EMCO	Antenna, Loop, H-Field Gain/AF	6512	00029604	2/12/2004

* **Statement of Traceability:** **BACL Corp.** certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the EUT, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "Qp" in the data table.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC 15.209 Limit}$$

Summary of Test Results

According to the data in section 12.7, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.207 and 15.247, and had the worst margin of:

Environmental Conditions

Temperature:	16° C
Relative Humidity:	48%
ATM Pressure:	1032 mbar

Base Unit:

- 10.7 dB at 7206.912 MHz** in the **Vertical** polarization, Low Channel
- 11.2 dB at 7323.648 MHz** in the **Horizontal** polarization, Middle Channel
- 11.3 dB at 7440.384 MHz** in the **Horizontal** polarization, High Channel
- 10.3 dB at 670.20 MHz** in the **Horizontal** polarization, Unwanted Emission

Handset Unit:

- 9.9 dB at 4804.61 MHz** in the **Vertical** polarization, Low Channel
- 10.1 dB at 4882.432 MHz** in the **Vertical** polarization, Middle Channel
- 3.7 dB at 2483.50 MHz** in the **Vertical** polarization, High Channel
- 9.3 dB at 794.99 MHz** in the **Horizontal** polarization, Unwanted Emission

Radiated Emission Test Result for Base Unit

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dB μ V/ m	Comments		Angle Degree	Height Meter	Polar H/V	Antenna dB μ V/ m	Cable DB		Corr. Ampl. dB μ V/m	Limit dB μ V/m
Low Channel, 1-25GHz											
2402.304	95.6	Fund/Peak	270	1.5	v	28.1	3.4	35.2	91.9		
2402.304	98.7	Fund/Peak	180	1.8	h	28.1	3.4	35.2	95.0		
2402.304	67.9	Fund/Ave	270	1.5	v	28.1	3.4	35.2	64.2		
2402.304	70.5	Fund/Ave	180	1.8	h	28.1	3.4	35.2	66.8		
7206.912	34.8	Ave	90	1.0	v	36.3	6.0	33.8	43.3	54	-10.7
7206.912	34.1	Ave	100	1.8	h	36.3	6.0	33.8	42.6	54	-11.4
4804.608	34.9	Ave	60	1.6	h	32.5	4.9	33.0	39.3	54	-14.7
4804.608	34.5	Ave	250	1.2	v	32.5	4.9	33.0	38.9	54	-15.1
7206.912	49.7	Peak	100	1.8	h	36.3	6.0	33.8	58.2	74	-15.8
7206.912	48.5	Peak	90	1.0	v	36.3	6.0	33.8	57.0	74	-17.0
4804.608	50.6	Peak	60	1.6	h	32.5	4.9	33.0	55.0	74	-19.0
4804.608	49.7	Peak	250	1.2	v	32.5	4.9	33.0	54.1	74	-19.9
Middle Channel, 1-25GHz											
2441.216	90.1	Fund/Peak	250	1.2	v	28.1	3.4	35.2	86.4		
2441.216	95.8	Fund/Peak	310	1.8	h	28.1	3.4	35.2	92.1		
2441.216	62.2	Fund/Ave	250	1.2	v	28.1	3.4	35.2	58.5		
2441.216	67.5	Fund/Ave	310	1.8	h	28.1	3.4	35.2	63.8		
7323.648	34.3	Ave	330	1.6	h	36.3	6.0	33.8	42.8	54	-11.2
7323.648	34.1	Ave	270	1.8	v	36.3	6.0	33.8	42.6	54	-11.4
4882.432	34.5	Ave	90	1.8	h	32.5	4.9	33.0	38.9	54	-15.1
4882.432	34.2	Ave	180	1.5	v	32.5	4.9	33.0	38.6	54	-15.4
7323.648	49.0	Peak	330	1.6	h	36.3	6.0	33.8	57.5	74	-16.5
7323.648	48.1	Peak	270	1.8	v	36.3	6.0	33.8	56.6	74	-17.4
4882.432	50.3	Peak	90	1.8	h	32.5	4.9	33.0	54.7	74	-19.3
4882.432	49.2	Peak	180	1.5	v	32.5	4.9	33.0	53.6	74	-20.4

High Channel, 1-25GHz											
2480.128	92.7	Fund/Peak	270	1.6	v	28.1	3.4	35.2	89.0		
2480.128	96.2	Fund/Peak	60	1.2	h	28.1	3.4	35.2	92.5		
2480.128	64.1	Fund/Ave	270	1.6	v	28.1	3.4	35.2	60.4		
2480.128	67.7	Fund/Ave	60	1.2	h	28.1	3.4	35.2	64.0		
7440.384	34.2	Ave	90	1.8	h	36.3	6.0	33.8	42.7	54	-11.3
7440.384	34.0	Ave	150	1.4	v	36.3	6.0	33.8	42.5	54	-11.5
2483.500	65.5	Peak	180	1.8	h	28.1	3.4	35.2	61.8	74	-12.3
2483.500	42.9	Ave	180	1.8	h	28.1	3.4	35.2	39.2	54	-14.9
4960.256	34.4	Ave	90	1.4	h	32.5	4.9	33.0	38.8	54	-15.2
4960.256	34.1	Ave	0	1.2	v	32.5	4.9	33.0	38.5	54	-15.5
2483.500	61.4	Peak	0	1.5	v	28.1	3.4	35.2	57.7	74	-16.4
7440.384	48.8	Peak	90	1.8	h	36.3	6.0	33.8	57.3	74	-16.7
7440.384	47.9	Peak	150	1.4	v	36.3	6.0	33.8	56.4	74	-17.6
2483.500	38.7	Ave	0	1.5	v	28.1	3.4	35.2	35.0	54	-19.1
4960.256	50.2	Peak	90	1.4	h	32.5	4.9	33.0	54.6	74	-19.4
4960.256	48.9	Peak	0	1.2	v	32.5	4.9	33.0	53.3	74	-20.7

Frequency MHz	Indicated		Table Height Meter	Antenna		Correction Factor			FCC 15 Subpart B	
	Ampl. dB μ V/m	Direction Degree		Polar H/V	Antenna dB μ V/m	Cable Loss dB μ V/m	Amp. dB	Corr. Ampl. dB μ V/m	Limit dB μ V/m	Margin dB
670.20	38.1	230	1.2	h	21.2	3.2	26.8	35.7	46	-10.3
169.68	39.2	290	1.5	h	13.0	1.8	25.7	28.3	43.5	-15.2
271.53	38.8	270	1.8	v	13.3	2.2	26.0	28.3	46	-17.7
55.22	34.6	30	1.5	v	9.8	1.7	25.7	20.4	40	-19.6
261.83	35.9	15	1.8	v	13.4	2.2	25.9	25.6	46	-20.4
266.68	35.2	80	1.6	h	13.4	2.2	25.9	24.9	46	-21.1

FUND = Fundamental

AVG = average

Radiated Emission Test Result for Handset Unit

INDICATED			TABLE	ANTENNA			CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dB μ V/ m	Comments		Angle Degree	Height Meter	Polar H/V	Antenna dB μ V/ m	Cable	Amp.		Corr. Ampl. dB μ V/m	Limit dB μ V/m
Low Channel, 1-25GHz												
2402.30	101.9	Fund/Peak	90	1.5	v	28.1	3.4	35.2	98.2			
2402.30	102.1	Fund/Peak	310	1.8	h	28.1	3.4	35.2	98.4			
2402.30	73.5	Fund/Ave	90	1.5	v	28.1	3.4	35.2	69.8			
2402.30	73.8	Fund/Ave	310	1.8	h	28.1	3.4	35.2	70.1			
4804.61	39.7	Ave	90	1.5	v	32.5	4.9	33.0	44.1	54	-9.9	
4804.61	58.8	Peak	90	1.5	v	32.5	4.9	33.0	63.2	74	-10.8	
7206.91	34.2	Ave	210	1.2	h	36.3	6.0	33.8	42.7	54	-11.3	
4804.61	37.3	Ave	30	1.6	h	32.5	4.9	33.0	41.7	54	-12.3	
7206.91	33.1	Ave	200	1.2	v	36.3	6.0	33.8	41.6	54	-12.4	
4804.61	56.4	Peak	30	1.6	h	32.5	4.9	33.0	60.8	74	-13.2	
7206.91	47.6	Peak	210	1.2	h	36.3	6.0	33.8	56.1	74	-17.9	
7206.91	45.7	Peak	200	1.2	v	36.3	6.0	33.8	54.1	74	-19.9	
Middle Channel, 1-25GHz												
2441.216	101.2	Fund/Peak	270	1.8	v	28.1	3.4	35.2	97.5			
2441.216	101.6	Fund/Peak	290	1.8	h	28.1	3.4	35.2	97.9			
2441.216	73.4	Fund/Ave	270	1.8	v	28.1	3.4	35.2	69.7			
2441.216	73.7	Fund/Ave	290	1.8	h	28.1	3.4	35.2	70.0			
4882.432	39.5	Ave	0	1.8	v	32.5	4.9	33.0	43.9	54	-10.1	
4882.432	58.6	Peak	0	1.8	v	32.5	4.9	33.0	63.0	74	-11.0	
7323.648	34.1	Ave	150	1.2	h	36.3	6.0	33.8	42.6	54	-11.4	
4882.432	37.1	Ave	60	1.6	h	32.5	4.9	33.0	41.5	54	-12.5	
7323.648	33.0	Ave	30	1.5	v	36.3	6.0	33.8	41.5	54	-12.5	
4882.432	56.2	Peak	60	1.6	h	32.5	4.9	33.0	60.6	74	-13.4	
7323.648	47.5	Peak	150	1.2	h	36.3	6.0	33.8	56.0	74	-18.0	
7323.648	45.6	Peak	30	1.5	v	36.3	6.0	33.8	54.1	74	-19.9	

High Channel, 1-25GHz											
2480.13	99.1	Fund/Peak	210	1.6	v	28.1	3.4	35.2	95.4		
2480.13	101.9	Fund/Peak	90	1.8	h	28.1	3.4	35.2	98.2		
2480.13	71.5	Fund/Ave	210	1.6	v	28.1	3.4	35.2	67.8		
2480.13	65.2	Fund/Ave	90	1.8	h	28.1	3.4	35.2	61.5		
2483.500	74.1	Peak	90	1.8	h	28.1	3.4	35.2	70.4	74	-3.7
4960.26	39.4	Ave	0	1.5	v	32.5	4.9	33.0	43.8	54	-10.2
4960.26	58.3	Peak	0	1.5	v	32.5	4.9	33.0	62.7	74	-11.3
2483.500	46.2	Ave	90	1.8	h	28.1	3.4	35.2	42.5	54	-11.6
7440.38	33.8	Ave	0	1.2	h	36.3	6.0	33.8	42.3	54	-11.7
4960.26	37.0	Ave	45	2.0	h	32.5	4.9	33.0	41.4	54	-12.6
7440.38	32.9	Ave	60	1.5	v	36.3	6.0	33.8	41.4	54	-12.6
4960.26	56.1	Peak	45	2.0	h	32.5	4.9	33.0	60.5	74	-13.5
2483.500	61.4	Peak	180	1.5	v	28.1	3.4	35.2	57.7	74	-16.4
7440.38	47.3	Peak	0	1.2	h	36.3	6.0	33.8	55.8	74	-18.2
7440.38	45.5	Peak	60	1.5	v	36.3	6.0	33.8	54.0	74	-20.0
2483.500	33.6	Ave	180	1.5	v	28.1	3.4	35.2	29.9	54	-24.2

Frequency MHz	Indicated		Table Height Meter	Antenna		Correction Factor			FCC 15 Subpart B	
	Ampl. dB μ V/m	Direction Degree		Polar H/V	Antenna dB μ V/m	Cable Loss dB μ V/m	Amp. dB	Corr. Ampl. dB μ V/m	Limit dB μ V/m	Margin dB
794.99	37.2	110	1.3	h	22.6	3.6	26.7	36.7	46	-9.3
998.06	31.9	60	1.5	v	23.8	4.2	26.7	33.2	46	-12.8
262.80	41.4	90	2.0	v	13.4	2.2	25.9	31.1	46	-14.9
30.02	34.2	120	1.5	h	14.9	0.8	25.7	24.2	40	-15.8
36.79	34.8	290	1.5	v	13.4	1.0	25.7	23.5	40	-16.5
50.37	35.1	15	1.6	h	10.2	1.0	25.7	20.6	40	-19.4

FUND = Fundamental

AVG = average

§15.247(a)(2) – 6 DB BANDWIDTH

Standard Applicable

According to §15.247(a)(2), for digital modulation techniques, the minimum 6dB bandwidth shall be at least 500 kHz.

Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth. (6 dB bandwidth for DTS)
4. Repeat above procedures until all frequencies measured were complete.

Equipment Lists

Manufacturer	Model No.	Description	Calibration Date
HP	8565EC	Spectrum Analyzer	2003-06-30

Measurement Result

Environmental Conditions




Temperature:	16° C
Relative Humidity:	48%
ATM Pressure:	1032 mbar




Test Result for Base

Channel	Frequency (MHz)	Measured (MHz)	Measured (kHz)	Standard (kHz)	Result
Low	2402.30	1.37	1370	≥ 500	Pass
Mid	2441.22	1.40	1400	≥ 500	Pass
High	2480.13	1.40	1400	≥ 500	Pass

Test Result for Handset

Channel	Frequency (MHz)	Measured (MHz)	Measured (kHz)	Standard (kHz)	Result
Low	2402.30	1.33	1330	≥ 500	Pass
Mid	2441.22	1.37	1370	≥ 500	Pass
High	2480.13	1.37	1370	≥ 500	Pass

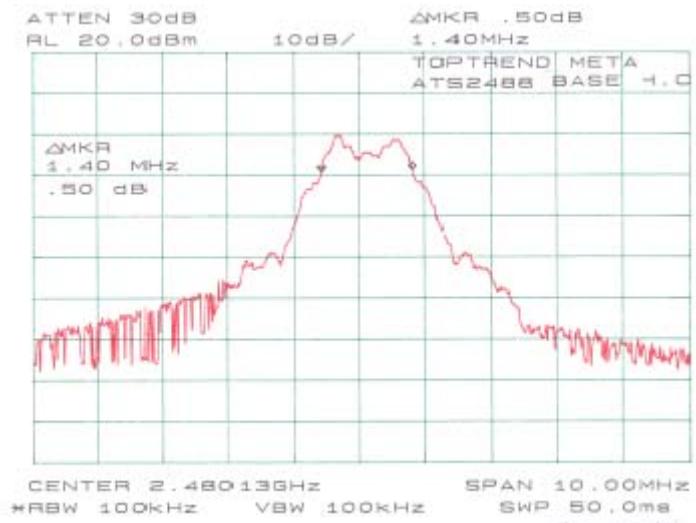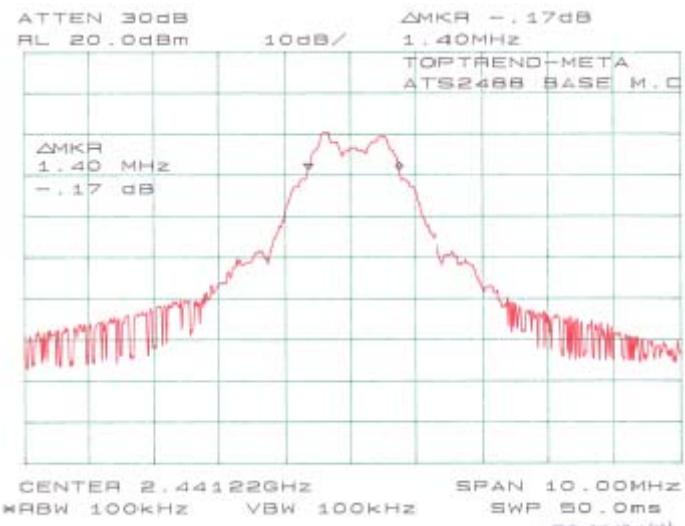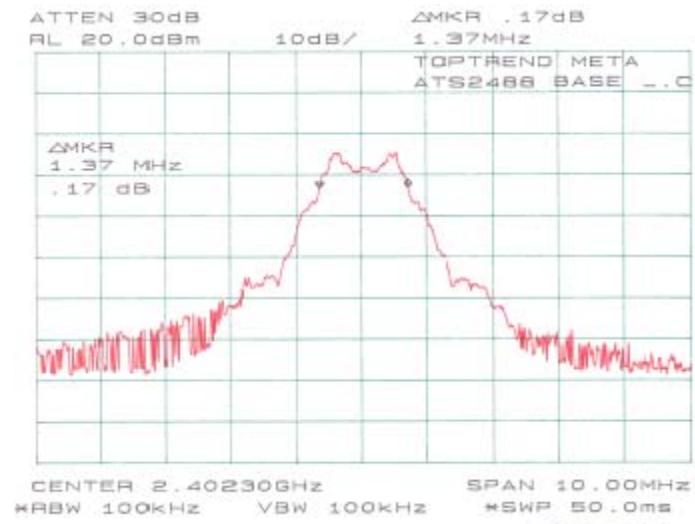

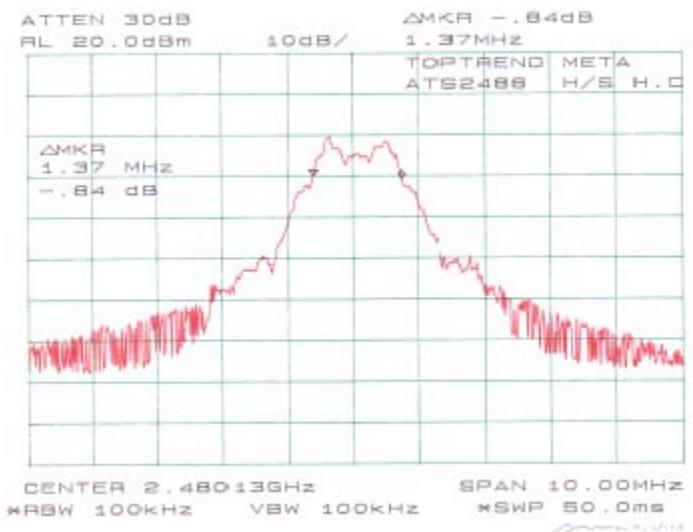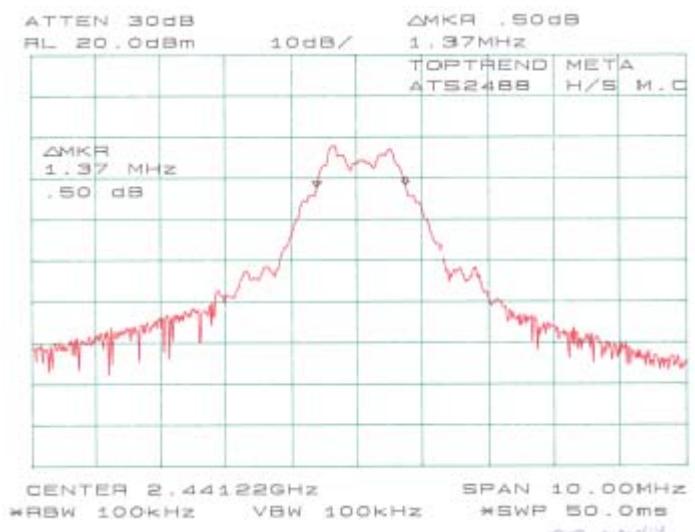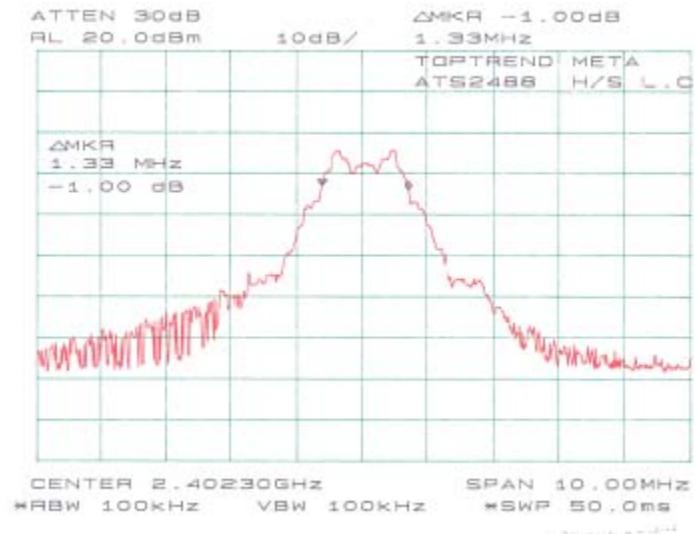


§15.247(b)(3) - PEAK OUTPUT POWER MEASUREMENT

Standard Applicable

According to §15.247(b) (3), for systems using digital modulation in 2400-2483.5 MHz: 1 Watt

Measurement Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a spectrum analyzer.
3. Add a correction factor to the display.



Equipment Lists

Manufacturer	Model No.	Description	Calibration Date
HP	8565EC	Spectrum Analyzer	2003-06-30

Measurement Result

Environmental Conditions



Temperature:	16° C
Relative Humidity:	48%
ATM Pressure:	1032 mbar




Output Power for Base Unit

Channel	Frequency (MHz)	RF Power (dBm)	RF Power (W)	Limit
Low (Ch1)	2402.30	6.33	0.00430	1W (30dBm)
Mid (Ch7)	2441.22	6.50	0.00447	1W (30dBm)
High (Ch11)	2480.13	5.00	0.00316	1W (30dBm)

Output Power for Handset Unit

Channel	Frequency (MHz)	RF Power (dBm)	RF Power (W)	Limit
Low (Ch1)	2402.30	7.83	0.00607	1W (30dBm)
Mid (Ch7)	2441.22	7.33	0.00541	1W (30dBm)
High (Ch11)	2480.13	7.33	0.00541	1W (30dBm)

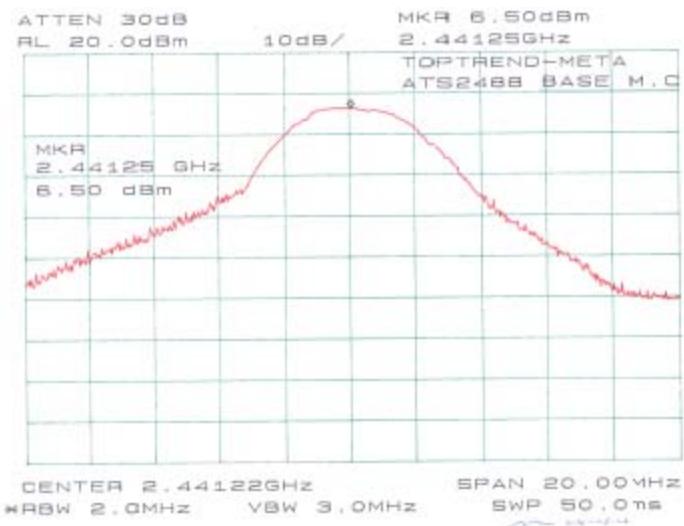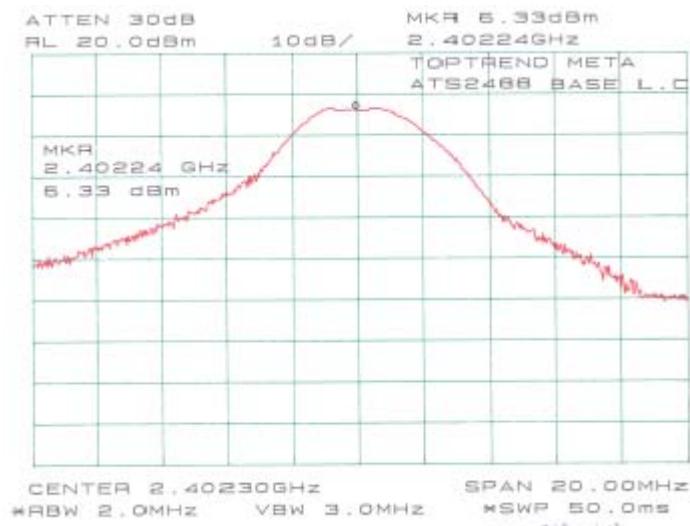

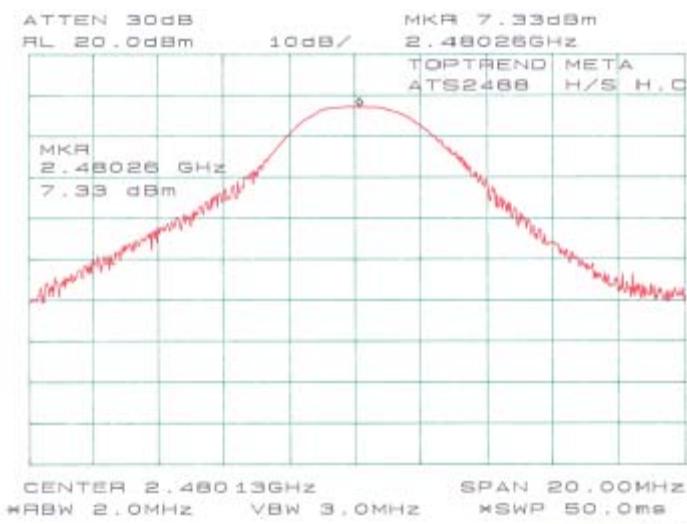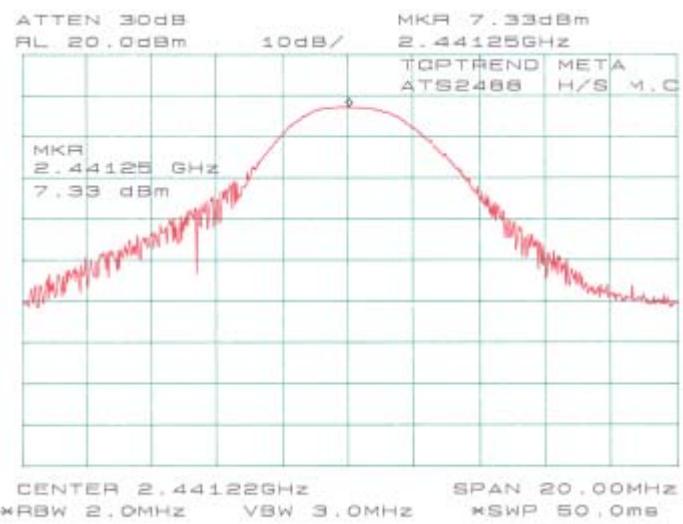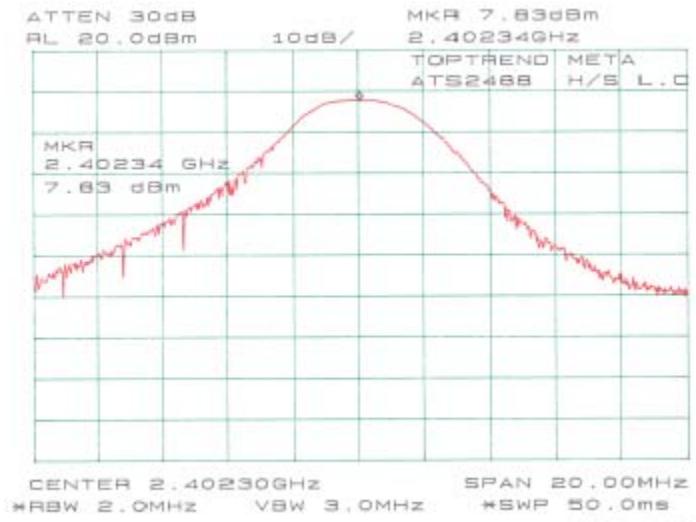

§15.247(c) - 100 KHZ BANDWIDTH OF BAND EDGES

Standard Applicable

According to §15.247(c), in *any* 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) see §15.205(c)).

Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Equipment Lists



Manufacturer	Model No.	Description	Calibration Date
HP	8565EC	Spectrum Analyzer	2003-06-30



Measure Results



Environmental Conditions



Temperature:	16° C
Relative Humidity:	48%
ATM Pressure:	1032 mbar

Please refer to following pages for plots of band edge.

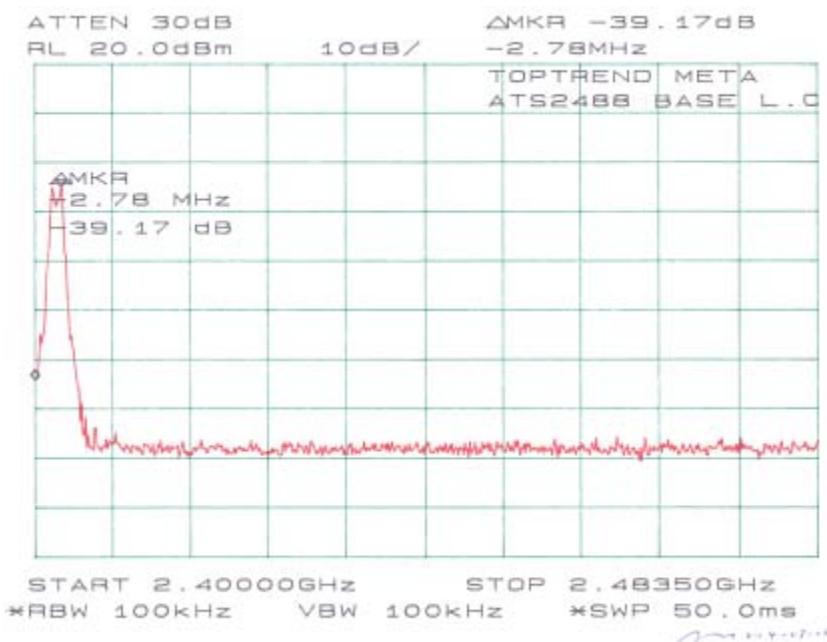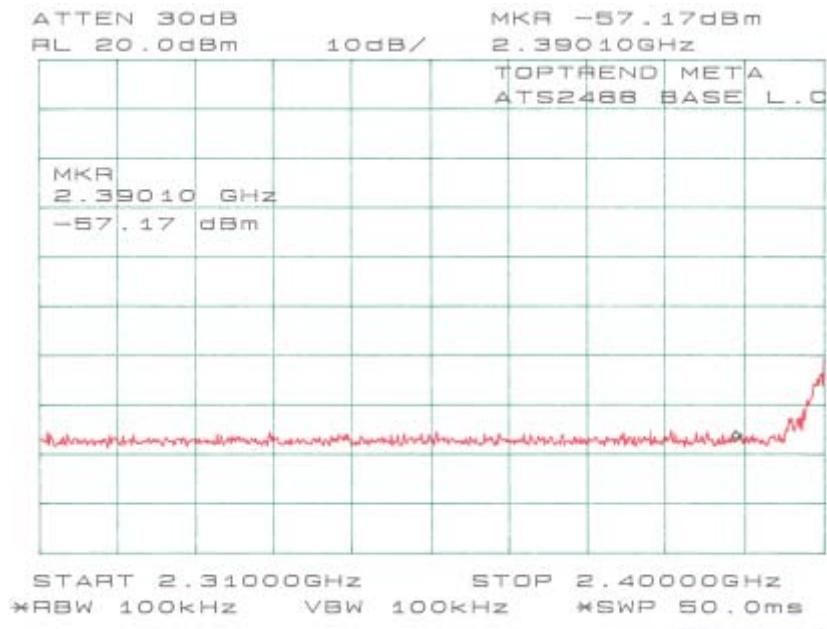

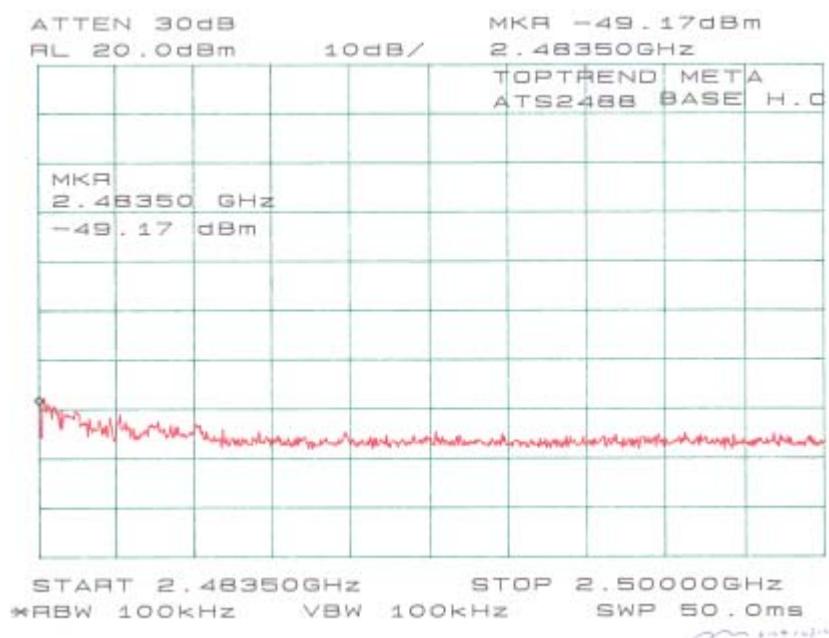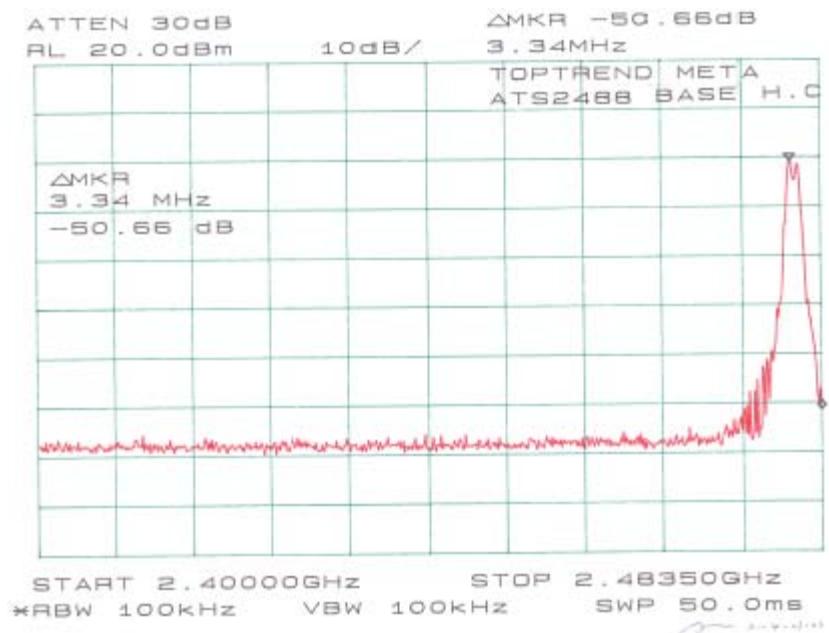

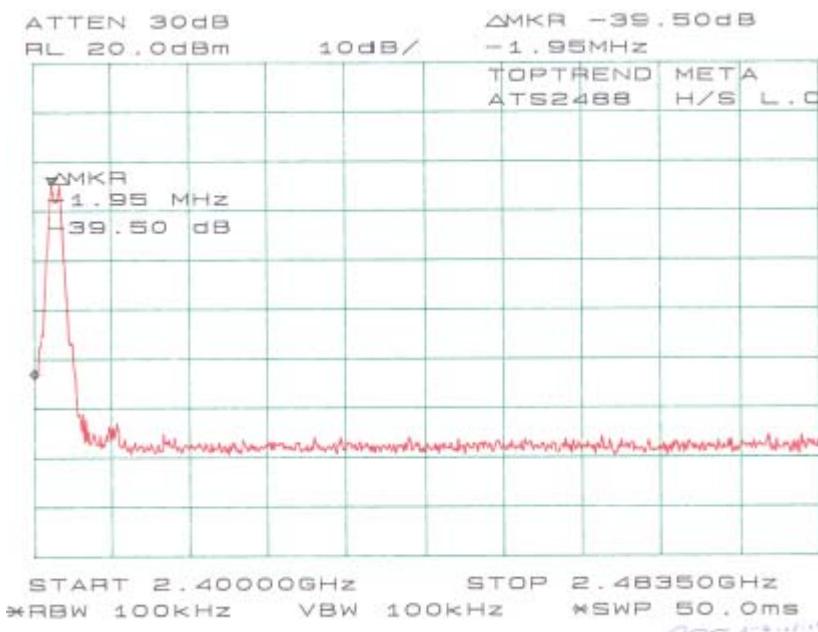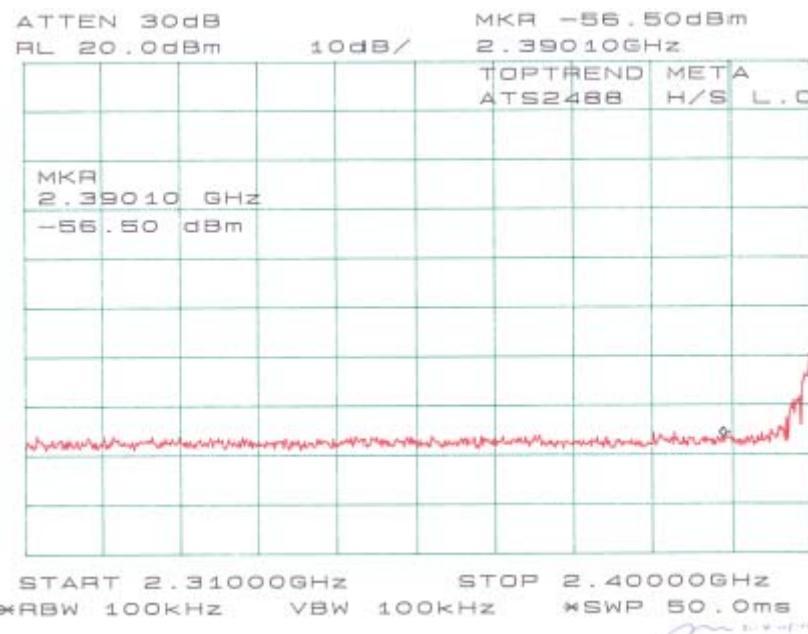

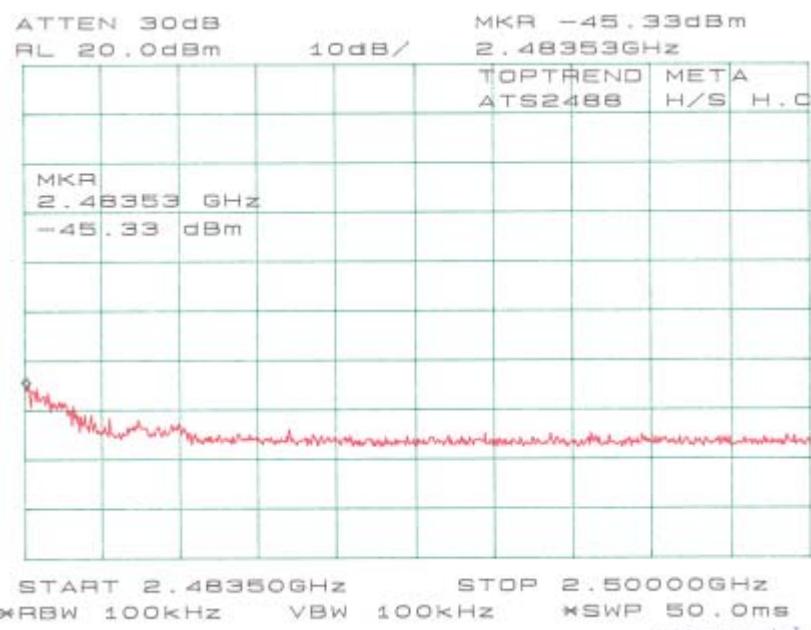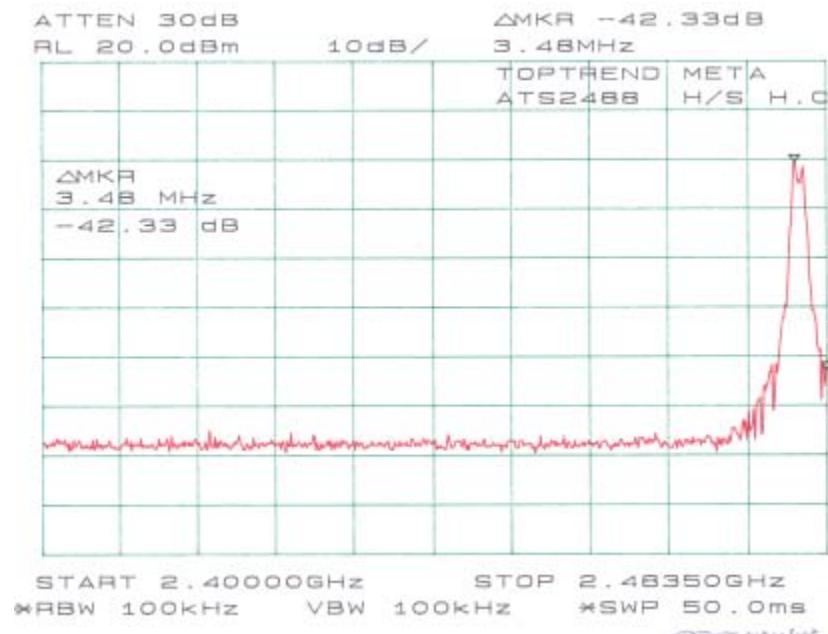

§15.247(d) - POWER SPECTRAL DENSITY

Standard Applicable

According to §15.247 (d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 6MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value. (DTS)
4. Adjust the center frequency of SA on any frequency be measured and set SA to 50MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value. (UNII)
5. Repeat above procedures until all frequencies measured were complete.

Equipment Lists

Manufacturer	Model No.	Description	Calibration Date
HP	8565EC	Spectrum Analyzer	2003-01-22

Measurement Results**Environmental Conditions**

Temperature:	16° C
Relative Humidity:	48%
ATM Pressure:	1032 mbar

Test Result for Base Unit

Channel	Frequency (MHz)	Peak Power Spectral Density (dBm)	Standard (dBm)	Result
Low	2402.30	-12.33	≤ 8	Pass
Mid	2441.22	-7.33	≤ 8	Pass
High	2480.13	-7.83	≤ 8	Pass

Test Result for Handset Unit

Channel	Frequency (MHz)	Peak Power Spectral Density (dBm)	Standard (dBm)	Result
Low	2402.30	-13.17	≤ 8	Pass
Mid	2441.22	-9.50	≤ 8	Pass
High	2480.13	-7.83	≤ 8	Pass

