

Prüfbericht-Nr.: Test report no.:	CN21CQ1H(P15E-WiFi) 001	Auftrags-Nr.: Order no.:	238518403	Seite 1 von 46 Page 1 of 46
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2021-08-03	
Auftraggeber: Client:	Hon Hai Precision Industry Co., Ltd. No.151, Sec. 1, Nankan Rd., Lujhu Dist., Taoyuan City 33859, Taiwan (R.O.C.)			
Prüfgegenstand: Test item:	IEEE 802.11a/b/g/n/ac 2x2 + BT5 Combo Module			
Bezeichnung / Typ-Nr.: Identification / Type no.:	WBUR56			
Auftrags-Inhalt: Order content:	FCC Part 15E Test report (WiFi 5GHz)			
Prüfgrundlage: Test specification:	FCC 47CFR Part 15: Subpart E Section 15.407			
Wareneingangsdatum: Date of sample receipt:	2021-08-18			
Prüfmuster-Nr.: Test sample no:	A003112871-012 A003112871-005			
Prüfzeitraum: Testing period:	2021-08-27 - 2021-09-20			
Ort der Prüfung: Place of testing:	EMC/RF Taipei Testing Site			
Prüflaboratorium: Testing laboratory:	Taipei Testing Laboratories			
Prüfergebnis*: Test result*:	Pass			
überprüft von: compiled by:			genehmigt von: authorized by:	
Datum: Date:	2021-09-30		Ausstellungsdatum: Issue date:	2021-09-30
Stellung / Position:	David Huang Project Manager		Stellung / Position:	Brenda Chen Senior Project Manager
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
5 = mangelhaft N/T = nicht getestet				
5 = poor N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.407(a) & 15.203	Antenna Requirement	Pass
5.1.2	15.407(a)	Maximum Conducted Output Power	Pass
5.1.3	15.407(a)	26 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.407(e)	6 dB Bandwidth (U-NII-3 Band only)	Pass
5.1.5	15.407(g)	Frequency Stability	Pass
5.1.6	15.407(a)	Power Spectral Density	Pass
5.1.7	15.407(b) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
5.1.8	15.407(h) & KDB 905462 D02	Dynamic Frequency Selection	Pass
5.2.1	15.207	Mains Conducted Emission	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS.....	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY.....	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION.....	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS.....	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	11
3.4 SUBMITTED DOCUMENTS.....	11
4. TEST SET-UP AND OPERATION MODES.....	12
4.1 PRINCIPLE OF CONFIGURATION SELECTION	12
4.2 CARRIER FREQUENCY AND CHANNEL.....	13
4.3 TEST OPERATION AND TEST SOFTWARE.....	14
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	17
4.5 TEST SETUP DIAGRAM	18
4.6 DUTY CYCLE OF TEST SIGNAL	19
5. TEST RESULTS	20
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	20
5.1.1 Antenna Requirement	20
5.1.2 Maximum Conducted Output Power	21
5.1.3 26 dB Bandwidth and 99% Occupied Bandwidth	26
5.1.4 6 dB Bandwidth (5725-5850MHz)	27
5.1.5 Frequency Stability Measurement.....	28
5.1.6 Power Spectral Density.....	33
5.1.7 Radiated Spurious Emissions	35
5.1.8 Dynamic Frequency Selection	40
5.2 MAINS EMISSION	45
5.2.1 Mains Conducted Emission.....	45

Prüfbericht - Nr.: CN21CQ1H(P15E-WiFi) 001
Test Report No.

Seite 4 von 46
Page 4 of 46

APPENDIX A - TEST RESULT OF CONDUCTED

APPENDIX B - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION

APPENDIX SP - PHOTOGRAPHS OF TEST SETUP

APPENDIX EP - PHOTOGRAPHS OF EUT

Prüfbericht - Nr.: CN21CQ1H(P15E-WiFi) 001
Test Report No.

Seite 5 von 46
Page 5 of 46

HISTORY OF THIS TEST REPORT

Version	Description	Date Issued
1	Original Release	2021-09-20
2	Added the manufacturer information in page 8	2021-09-30

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

Appendix B - Test Result of Radiated Emissions & Mains Conducted Emission

Appendix SP - Photographs of Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart E Section 15.407
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10:2013
KDB 789033 D02 General UNII Test Procedures New Rules v02r01
KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
KDB 662911 D01 Multiple Transmitter Output v02r01

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 226631
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.30 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.30 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.54 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.52 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is an IEEE 802.11a/b/g/n/ac 2x2 + BT5 Combo Module. It contains a WLAN compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	IEEE 802.11a/b/g/n/ac 2x2 + BT5 Combo Module
Type Identification	WBUR56
FCC ID	RX3-WBUR56
Manufacturer	Hon Hai Precision Industry Co., Ltd. No.151, Sec. 1, Nankan Rd., Lujhu Dist., Taoyuan City 33859, Taiwan (R.O.C.)

Technical Specification of EUT

Item	EUT information
Operating Frequency	Band 1: 5180 MHz ~ 5240 MHz Band 2: 5260 MHz ~ 5320 MHz Band 3: 5500 MHz ~ 5720 MHz Band 4: 5745 MHz ~ 5825 MHz
Channel Number	Band 1: 4 for 802.11a, 802.11n HT20, 802.11ac VHT20 2 for 802.11n HT40, 802.11ac VHT40 1 for 802.11ac VHT80 Band 2: 4 for 802.11a, 802.11n HT20, 802.11ac VHT20 2 for 802.11n HT40, 802.11ac VHT40 1 for 802.11ac VHT80 Band 3: 12 for 802.11a, 802.11n HT20, 802.11ac VHT20 6 for 802.11n HT40, 802.11ac VHT40 3 for 802.11ac VHT80 Band 4: 5 for 802.11a, 802.11n HT20, 802.11ac VHT20 2 802.11n HT40, 802.11ac VHT40 1 for 802.11ac VHT80
Data Rate	802.11a: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to MCS7 802.11ac: up to MCS9
Operation Voltage	3.3 Vdc
Modulation	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)

Item	EUT information
Maximum Output Power (mW)	5180 ~ 5240 MHz: 27.99 5260 ~ 5320 MHz: 28.12 5500 ~ 5720 MHz: 27.32 5745 ~ 5825 MHz: 28.12
Maximum EIRP (mW)	5260 ~ 5320 MHz: 124.45 5500 ~ 5720 MHz: 89.33
DFS Mode	Slave without radar detection
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

802.11a		802.11n HT20		802.11ac VHT20		802.11n HT40		802.11ac VHT40		802.11ac VHT80	
Channel	Power Setting	Channel	Power Setting	Channel	Power Setting	Channel	Power Setting	Channel	Power Setting	Channel	Power Setting
36	59/61	36	61/62	36	60/63	38	62/65	38	62/65	42	49/52
40	58/61	40	60/62	40	59/62	46	60/65	46	60/64	58	48/55
48	57/60	48	58/63	48	58/63	54	60/67	54	67/70	106	47/55
52	57/62	52	58/64	52	67/70	62	62/69	62	67/73	122	46/51
60	59/64	60	59/66	60	68/73	102	60/68	102	60/68	138	47/53
64	58/65	64	59/67	64	68/74	110	60/66	110	60/65	155	61/69
100	58/66	100	59/68	100	59/67	134	59/64	134	59/64		
116	56/61	116	57/61	116	58/61	142	60/68	142	60/68		
140	57/64	140	59/65	140	59/65	151	59/66	151	59/66		
144	58/66	144	59/68	144	60/67	159	62/70	159	61/70		
149	55/62	149	52/58	149	52/57						
157	55/64	157	54/62	157	53/61						
165	58/65	165	55/62	165	55/62						

4.2 Carrier Frequency and Channel

Band	Channel	Frequency (MHz)	802.11a 802.11n HT20 802.11ac VHT20	802.11n HT40 802.11ac VHT40	802.11ac VHT80
U-NII-1 (Band 1)	36	5180	V		
	38	5190		V	
	40	5200	V		
	42	5210			V
	44	5220	V		
	46	5230		V	
	48	5240	V		
U-NII-2A (Band 2)	52	5260	V		
	54	5270		V	
	56	5280	V		
	58	5290			V
	60	5300	V		
	62	5310		V	
	64	5320	V		
U-NII-2C (Band 3)	100	5500	V		
	102	5510		V	
	104	5520	V		
	106	5530			V
	108	5540	V		
	110	5550		V	
	112	5560	V		
	116	5580	V		
	118	5590		V	
	120	5600	V		
	122	5610			V
	124	5620	V		
	126	5630		V	
	128	5640	V		
	132	5660	V		
	134	5670		V	
	136	5680	V		
	140	5700	V		
Straddle Channel	138	5690			V
	142	5710		V	
	144	5720	V		
U-NII-3 (Band 4)	149	5745	V		
	151	5755		V	
	153	5765	V		
	155	5775			V
	157	5785	V		
	159	5795		V	
	161	5805	V		
	165	5825	V		

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with an USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	MPTool.exe
---------------	------------

The samples were used as follows:

A003112871-012 for radiated test

A003112871-005 for conducted test

Full test was applied on all test modes, but only worst case was shown.

The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and receivers.

Modulation Mode	Tx Function
802.11a	2TX (MIMO)
802.11n HT20	2TX (MIMO)
802.11n HT40	2TX (MIMO)
802.11ac VHT20	2TX (MIMO)
802.11ac VHT40	2TX (MIMO)
802.11ac VHT80	2TX (MIMO)

* The modulation and bandwidth are similar for 802.11n mode HT20/HT40 and 802.11ac mode VHT20/VHT40, therefore investigated worse case as representative mode in test report.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on Z-plane.
2. "-" means no effect.

Antenna Port Conducted Measurement

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency (MHz)	Available Channel	Tested Channel	Date Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	6.0
-		5260-5320	52 to 64	52, 60, 64	
-		5500-5720	100 to 144	100, 116, 140, 144	
-		5745-5825	149 to 165	149, 157, 165	
-	802.11n HT20	5180-5240	36 to 48	36, 40, 48	6.5
-		5260-5320	52 to 64	52, 60, 64	
-		5500-5720	100 to 144	100, 116, 140, 144	
-		5745-5825	149 to 165	149, 157, 165	
-	802.11n HT40	5180-5240	38 to 46	38, 46	MCS0
-		5260-5320	54 to 62	54, 62	
-		5500-5720	102 to 142	102, 110, 134, 142	
-		5745-5825	151 to 159	151, 159	
-	802.11ac VHT80	5180-5240	42	42	MCS0
-		5260-5320	58	58	
-		5500-5720	106 to 138	106, 122, 138	
-		5745-5825	155	155	

Radiated Spurious Emissions (Above 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency (MHz)	Available Channel	Tested Channel	Date Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	6.0
-		5260-5320	52 to 64	52, 60, 64	
-		5500-5720	100 to 144	100, 116, 140, 144	
-		5745-5825	149 to 165	149, 157, 165	
-	802.11n HT20	5180-5240	36 to 48	36, 40, 48	6.5
-		5260-5320	52 to 64	52, 60, 64	
-		5500-5720	100 to 144	100, 116, 140, 144	
-		5745-5825	149 to 165	149, 157, 165	
-	802.11n HT40	5180-5240	38 to 46	38, 46	MCS0
-		5260-5320	54 to 62	54, 62	
-		5500-5720	102 to 142	102, 110, 134, 142	
-		5745-5825	151 to 159	151, 159	
-	802.11ac VHT80	5180-5240	42	42	MCS0
-		5260-5320	58	58	
-		5500-5720	106 to 138	106, 122, 138	
-		5745-5825	155	155	

Prüfbericht - Nr.: CN21CQ1H(P15E-WiFi) 001
Test Report No.
Seite 16 von 46
Page 16 of 46
Radiated Spurious Emissions (Below 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency (MHz)	Available Channel	Tested Channel	Date Rate (Mbps)
-	802.11a	5180-5240	36 to 48	48	6.0
-	802.11n HT20	5260-5320	52 to 64	64	6.5
-	802.11n HT20	5500-5720	100 to 144	140, 144	6.5
-	802.11n HT20	5745-5825	149 to 165	165	6.5

Mains Conducted Emission Test

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency (MHz)	Available Channel	Tested Channel	Date Rate (Mbps)
-	802.11n HT20	5260-5320	52 to 64	64	6.5

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	23.7-24.1 °C	49-60 %	Stanislas Charles
Radiated Spurious Emissions above 1 GHz	23.5-25.1 °C	52-56 %	Hunter Wang
Radiated Spurious Emissions below 1 GHz	23.5-25.1 °C	52-56 %	Hunter Wang
Mains Conducted Emission	24.5 °C	52 %	Hunter Wang

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


None

Support Unit


No.	Description	Brand	Model	S/N	Remark
Radiated Test					
A	USB Cable	Hon Hai	Hon Hai	-	20 cm shielded cable w/o core
B	DC Cable	Hon Hai	Hon Hai	-	10 cm non-shielded cable w/o core
1	Notebook	Lenovo	TP00094A	SL10Q37402	-
2	USB Cable	TUV	TUV-030	-	300 cm shielded cable w/o core
3	DC Power Cable	TUV	TUV-015	-	10 cm non-shielded cable w/o core
Mains Conducted Test					
A	USB Cable	Hon Hai	Hon Hai	-	20 cm shielded cable w/o core
B	DC Cable	Hon Hai	Hon Hai	-	10 cm non-shielded cable w/o core
1	DC Power Supply	GWINSTEK	GPC-3030DQ	-	110 cm non-shielded cable w/o core
2	DC Power Cable	TUV	TUV-012	-	90 cm non-shielded cable w/o core
3	Notebook	HP	15-da1046Tx	CND9111MY2	-
Conducted Test					
-	Notebook	HP	TPN-C139	CND93662VF	-
-	Power Supply	PeakTech	2250	188	-
DFS Test					
-	Notebook	HP	TPN-C125	CND6416CFM	-
-	Notebook	LENOVO	TP00094A	PF-1GT015	-
-	Power Supply	Radio Tek	KEITHLEY	002	-
-	AP	NetGear	R7800	4H75745800509	-

4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

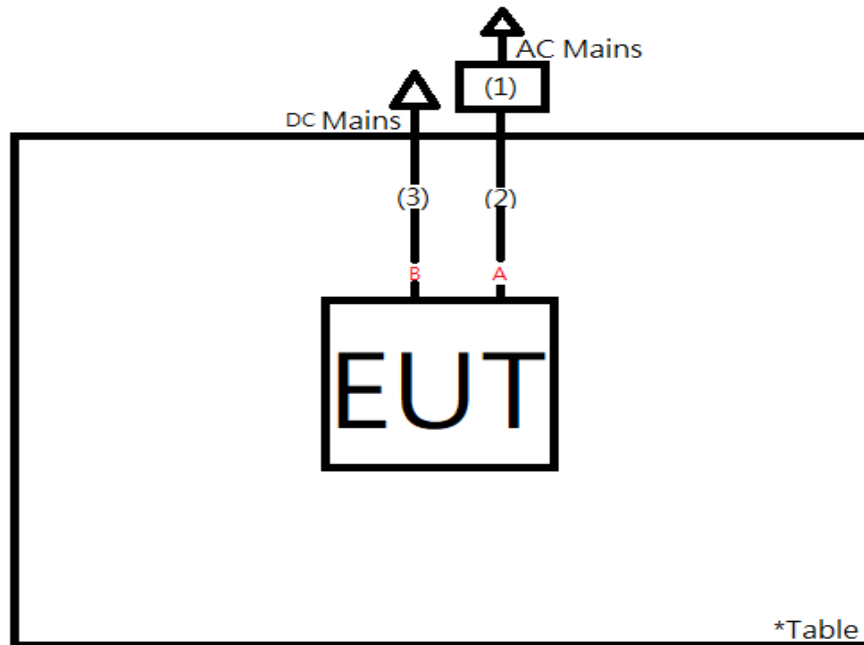


<Mains Conducted Emission mode>

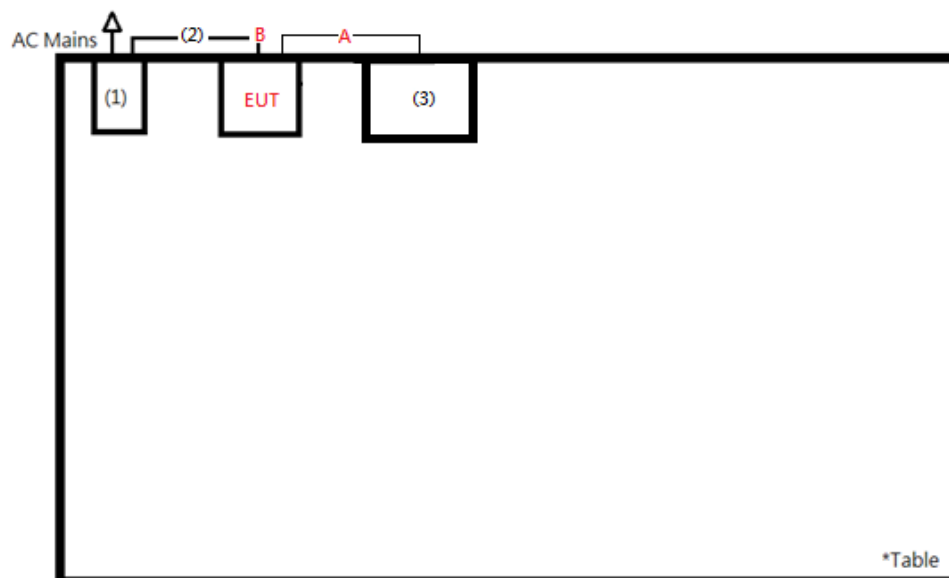

4.6 Duty Cycle of Test Signal

Mode	On + Off Time (ms)	On Time (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11a	1.875	1.35	72.00	1.43
802.11n HT20	2.775	1.14	41.08	3.86
802.11n HT40	1.26	0.755	59.92	2.22
802.11ac VHT80	1.195	0.69	57.74	2.39

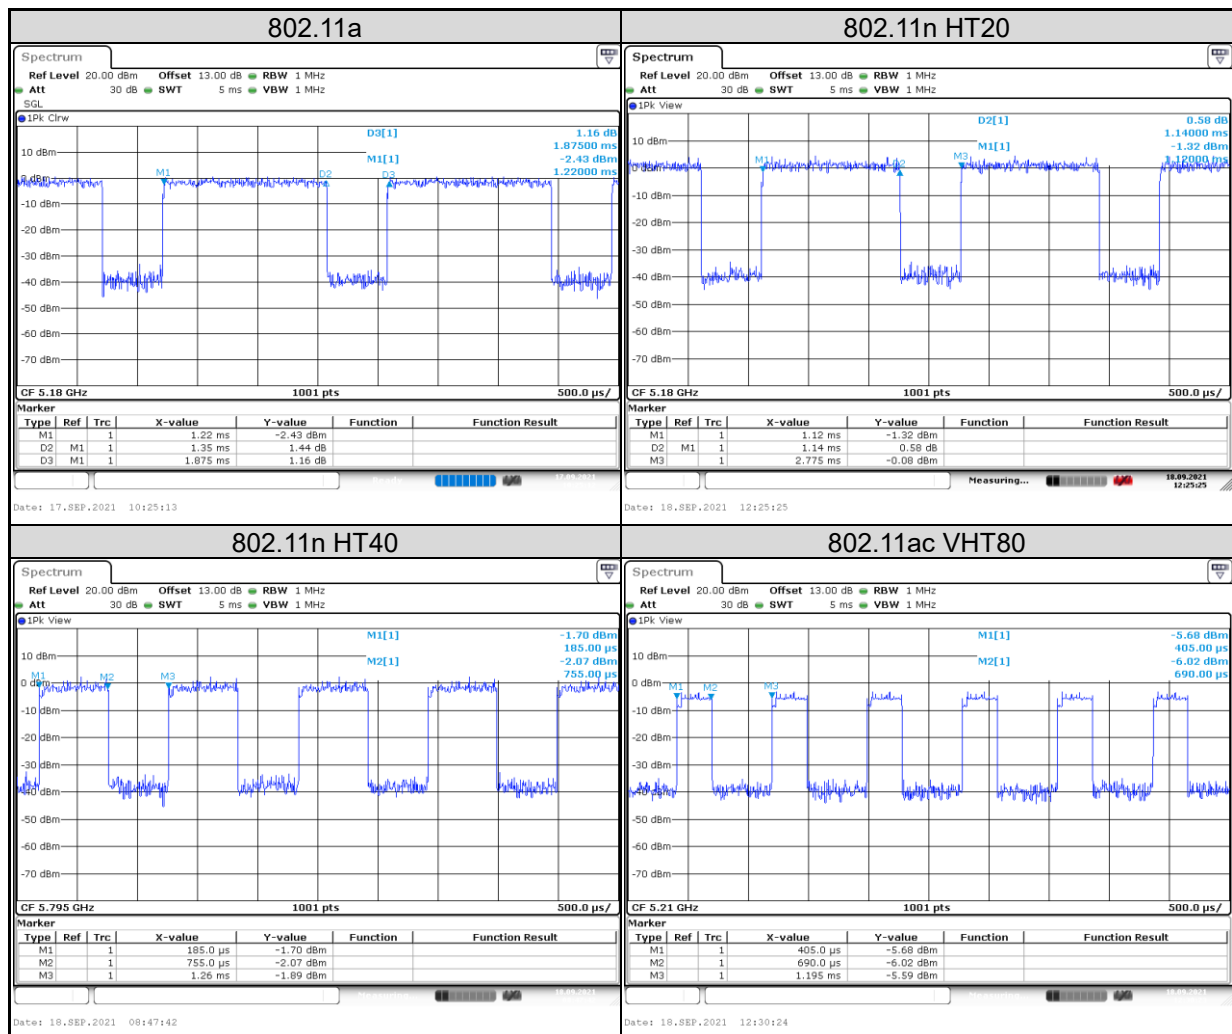

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only

According to the manufacturer declaration, the EUT's antenna specifications are described as below.
 The antenna is used with no possibility of replacement with a non-approved antenna by the end-user.
 Therefore, the EUT is considered to comply with this provision.

ANT	Type	Frequency (MHz)			
		5180 ~ 5240	5260 ~ 5320	5500 ~ 5720	5745 ~ 5825
1	PCB	5.55	5.55	5.06	4.74
2	PCB	3.29	3.29	3.37	2.75
Directional Gain (dBi)		7.50	7.50	7.27	6.81

Note: Directional gain = $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$

Refer to EUT photo for details.

5.1.2 Maximum Conducted Output Power

Limit

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125 mW (21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Point	1 Watt (30 dBm)
	Indoor Access Point	1 Watt (30 dBm)
	Mobile and Portable client device	250 mW (24 dBm)
U-NII-2A	---	250 mW (24 dBm) or 11 dBm + 10 log B*
U-NII-2C	---	250 mW (24 dBm) or 11 dBm + 10 log B*
U-NII-3	---	1 Watt (30 dBm)

Note: B* is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;


Array Gain = 5 log(N_{ANT}/N_{SS}) dB or 3 dB, whichever is less for 20 MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = 10 log(N_{ANT}/N_{SS}) dB.


Kind of Test Site Shielded room

Test Setup

<802.11a, 802.11n HT20, 802.11n HT40>



<802.11ac VHT80>



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2021/3/24	2022/3/23	2021/8/27	2021/9/17
Power Sensor	Anritsu	MA2411B	1725269	2021/3/24	2022/3/23	2021/8/27	2021/9/17
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/8/27	2021/9/17

Test Procedures

<802.11a, 802.11n HT20, 802.11n HT40>

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to AVERAGE. Duty factor is not added to measured value.

<802.11ac VHT80>

- Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99 % occupied bandwidth) of the signal.
- Set sweep trigger to "free run".
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time $\leq$ (number of points in sweep) * T
- Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- Detector = RMS.
- Trace mode = max hold.
- Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

Test Result

<802.11a>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Ant 1	Ant 2	(dBm)	(mW)	
36	5180	10.49	10.40	13.46	22.18	24.00
40	5200	10.25	10.41	13.34	21.58	24.00
48	5240	10.30	10.23	13.28	21.28	24.00
52	5260	10.30	10.42	13.37	21.73	23.72
60	5300	10.27	10.35	13.32	21.48	23.68
64	5320	10.39	10.31	13.36	21.68	23.67
100	5500	10.46	10.26	13.37	21.73	23.68
116	5580	10.39	10.50	13.46	22.18	23.67
140	5700	10.47	10.48	13.49	22.34	23.66
144	5720	10.41	10.38	13.41	21.93	22.75
149	5745	10.00	9.97	13.00	19.95	30.00
157	5785	9.68	10.00	12.85	19.28	30.00
165	5825	9.96	9.95	12.97	19.82	30.00

Note:

For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(18.70) = 23.72 \text{ dBm} < 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(18.54) = 23.68 \text{ dBm} < 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(18.50) = 23.67 \text{ dBm} < 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(18.54) = 23.68 \text{ dBm} < 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(18.50) = 23.67 \text{ dBm} < 24 \text{ dBm}$.
6. $11 \text{ dBm} + 10\log(18.46) = 23.66 \text{ dBm} < 24 \text{ dBm}$.
7. $11 \text{ dBm} + 10\log(14.43) = 22.59 \text{ dBm} < 24 \text{ dBm}$.

<802.11n HT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Ant 1	Ant 2	(dBm)	(mW)	
36	5180	10.87	10.61	13.75	23.71	24.00
40	5200	10.83	10.75	13.80	23.99	24.00
48	5240	10.81	10.89	13.86	24.32	24.00
52	5260	10.84	10.88	13.87	24.38	23.94
60	5300	10.77	10.96	13.88	24.43	23.91
64	5320	10.71	10.98	13.86	24.32	23.90
100	5500	10.79	11.00	13.91	24.60	23.91
116	5580	10.83	10.78	13.82	24.10	23.93
140	5700	11.00	10.85	13.94	24.77	23.92
144	5720	10.76	10.97	13.88	24.43	22.80
149	5745	9.30	9.31	12.32	17.06	30.00
157	5785	9.44	9.49	12.48	17.70	30.00
165	5825	9.37	9.33	12.36	17.22	30.00

Note:

For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(19.70) = 23.94 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(19.54) = 23.91 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(19.50) = 23.90 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(19.54) = 23.91 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(19.62) = 23.93 \text{ dBm} > 24 \text{ dBm}$.
6. $11 \text{ dBm} + 10\log(19.58) = 23.92 \text{ dBm} > 24 \text{ dBm}$.
7. $11 \text{ dBm} + 10\log(14.91) = 22.73 \text{ dBm} > 24 \text{ dBm}$.

<802.11ac VHT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Ant 1	Ant 2	(dBm)	(mW)	
36	5180	10.81	10.75	13.79	23.93	22.50
40	5200	10.80	10.72	13.77	23.82	22.50
48	5240	10.80	10.88	13.85	24.27	22.50
52	5260	10.79	10.90	13.86	24.32	22.50
60	5300	10.74	10.96	13.86	24.32	22.50
64	5320	10.67	10.78	13.74	23.66	22.50
100	5500	10.75	10.70	13.74	23.66	22.50
116	5580	10.90	10.72	13.82	24.10	22.50
140	5700	10.95	10.88	13.93	24.72	22.50
144	5720	11.00	10.73	13.88	24.43	22.50
149	5745	9.33	9.15	12.25	16.79	22.50
157	5785	9.25	9.36	12.32	17.06	22.50
165	5825	9.30	9.29	12.31	17.02	22.50

<802.11n HT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Ant 1	Ant 2	(dBm)	(mW)	
38	5190	11.46	11.45	14.47	27.99	24.00
46	5230	11.35	11.34	14.36	27.29	24.00
54	5270	11.36	11.47	14.43	27.73	24.00
62	5310	11.47	11.49	14.49	28.12	24.00
102	5510	11.31	11.38	14.36	27.29	24.00
110	5550	11.43	11.44	14.45	27.86	24.00
134	5670	11.36	11.35	14.37	27.35	24.00
142	5710	11.27	11.33	14.31	26.98	24.00
151	5755	11.49	11.47	14.49	28.12	30.00
159	5795	11.30	11.34	14.33	27.10	30.00

Note:

For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(42.28) = 27.26 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(42.36) = 27.27 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(42.52) = 27.29 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(42.20) = 27.25 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(42.52) = 27.29 \text{ dBm} > 24 \text{ dBm}$.
6. $11 \text{ dBm} + 10\log(36.42) = 26.61 \text{ dBm} > 24 \text{ dBm}$.

<802.11ac HT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Ant 1	Ant 2	(dBm)	(mW)	
38	5190	11.40	11.31	14.37	27.35	24.00
46	5230	11.35	11.28	14.33	27.10	24.00
54	5270	11.37	11.33	14.36	27.29	24.00
62	5310	11.31	11.32	14.33	27.10	24.00
102	5510	11.26	11.40	14.34	27.16	24.00
110	5550	11.45	11.32	14.40	27.54	24.00
134	5670	11.29	11.31	14.31	26.98	24.00
142	5710	11.25	11.34	14.31	26.98	24.00
151	5755	11.41	11.46	14.45	27.86	30.00
159	5795	11.22	11.37	14.31	26.98	30.00

<802.11ac VHT80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Ant 1	Ant 2	(dBm)	(mW)	
42	5210	8.38	8.23	11.32	13.55	24.00
58	5290	8.36	8.48	11.43	13.90	24.00
106	5530	8.34	8.37	11.37	13.71	24.00
122	5610	8.50	8.36	11.44	13.93	24.00
138	5690	8.46	8.36	11.42	13.87	24.00
155	5775	11.89	11.93	14.92	31.05	30.00

Note:


For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(81.84) = 30.13 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(81.52) = 30.11 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(81.52) = 30.11 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(75.92) = 29.80 \text{ dBm} > 24 \text{ dBm}$.

5.1.3 26 dB Bandwidth and 99% Occupied Bandwidth

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/9/17	2021/9/18

Test Procedure

- a. Set RBW = approximately 1% of the emission bandwidth.
- b. Set the VBW > RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
- f. For 99% Bandwidth Measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.


Test Results

Please refer to Appendix A

5.1.4 6 dB Bandwidth (5725-5850MHz)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/9/18	2021/9/18

Test Procedure

MEASUREMENT PROCEDURE REF

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Test Results

Please refer to Appendix A

5.1.5 Frequency Stability Measurement

Kind of Test Site Shielded room

Test Setup

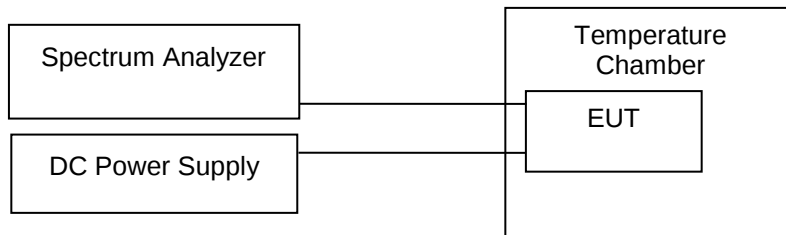

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/8/30	2021/9/1

Test Procedure

- To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
- The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10 dB lower than the measured peak value.
- The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

Test Results
<Chain 0>

Frequency (MHz)	5200			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
3.63	5199.942			11.154
3.3	5199.971			5.577
2.97	5199.942			11.154
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5199.913	5199.913	5199.914	5199.942
40	5199.971	5199.913	5199.913	5199.942
30	5199.942	5199.977	5199.913	5199.913
20	5199.971	5199.942	5199.942	5199.942
10	5199.942	5199.971	5199.942	5199.942
0	5199.971	5199.971	5199.971	5199.971
-10	5200	5199.971	5199.971	5199.971
-20	5200	5200	5200	5200
Max. Deviation (ppm)	16.731	16.731	16.731	16.731

Frequency (MHz)	5300			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
3.63	5299.913			16.415
3.3	5299.913			16.415
2.97	5299.913			16.415
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5299.913	5299.913	5299.942	5299.942
40	5299.951	5299.913	5299.942	5299.913
30	5299.913	5299.913	5299.942	5299.914
20	5299.913	5299.942	5299.913	5299.971
10	5299.942	5299.971	5299.913	5299.942
0	5299.971	5299.971	5299.971	5299.971
-10	5299.971	5299.971	5299.971	5299.971
-20	5300	5300	5300	5299.971
Max. Deviation (ppm)	16.415	16.415	16.415	16.415

Frequency (MHz)	5580			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
3.63	5579.942			10.394
3.3	5579.942			10.394
2.97	5579.942			10.394
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5579.913	5579.942	5579.913	5579.913
40	5579.913	5579.913	5579.942	5579.942
30	5579.913	5579.913	5579.914	5579.913
20	5579.942	5579.913	5579.913	5579.913
10	5579.942	5579.942	5579.942	5579.942
0	5579.942	5579.971	5579.971	5579.971
-10	5580.029	5579.971	5579.971	5579.971
-20	5580	5580	5580	5580.029
Max. Deviation (ppm)	16.731	16.731	16.731	16.731

Frequency (MHz)	5785			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
3.63	5784.913			15.039
3.3	5784.942			10.026
2.97	5784.914			14.866
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5784.913	5784.942	5784.913	5784.913
40	5784.942	5784.971	5784.971	5784.942
30	5784.913	5784.942	5784.942	5784.913
20	5784.942	5784.942	5784.942	5784.913
10	5784.942	5784.971	5784.942	5784.914
0	5784.942	5784.971	5784.971	5784.942
-10	5784.971	5784.971	5784.942	5784.942
-20	5785	5784.971	5785.029	5785
Max. Deviation (ppm)	16.415	10.943	16.415	16.415

<Chain 1>

Frequency (MHz)	5200			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
3.63	5199.971			5.577
3.3	5199.971			5.577
2.97	5199.942			11.154
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5199.942	5199.971	5199.971	5199.942
40	5199.971	5199.913	5199.942	5199.913
30	5199.913	5199.942	5199.942	5199.942
20	5199.971	5199.942	5199.971	5199.942
10	5199.971	5199.971	5200	5199.971
0	5200.029	5200.029	5200	5200.029
-10	5200.029	5200.029	5200	5200
-20	5200.029	5200	5200.029	5200.029
Max. Deviation (ppm)	16.731	16.731	11.154	16.731

Frequency (MHz)	5300			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
3.63	5299.942			10.943
3.3	5299.942			10.943
2.97	5299.942			10.943
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5299.913	5299.971	5299.942	5299.971
40	5299.971	5299.913	5299.942	5299.942
30	5299.942	5299.942	5299.942	5299.971
20	5299.942	5299.942	5299.942	5299.942
10	5299.942	5300	5299.971	5299.971
0	5299.971	5299.971	5300	5300
-10	5300	5300	5300	5300
-20	5300.029	5300	5300	5300
Max. Deviation (ppm)	16.415	16.415	10.943	10.943

Frequency (MHz)	5580			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
3.63	5579.942			10.394
3.3	5579.942			10.394
2.97	5579.942			10.394
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5579.942	5579.913	5579.971	5579.942
40	5579.971	5579.913	5579.942	5579.913
30	5579.913	5579.942	5579.942	5579.942
20	5579.942	5579.942	5579.971	5579.971
10	5579.971	5579.942	5579.971	5579.942
0	5580	5580.029	5580	5579.971
-10	5580.029	5580	5580	5580
-20	5580.087	5580	5580.029	5579.971
Max. Deviation (ppm)	16.731	16.731	11.154	16.731

Frequency (MHz)	5785			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
3.63	5784.942			15.039
3.3	5784.942			10.026
2.97	5784.942			14.866
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5784.942	5784.942	5784.942	5784.942
40	5784.942	5784.942	5784.942	5784.913
30	5784.942	5784.971	5784.971	5784.971
20	5784.942	5784.971	5784.942	5784.971
10	5784.942	5784.971	5785	5784.971
0	5785.058	5785	5785.029	5785
-10	5785.029	5785.058	5785	5785
-20	5785.029	5785.029	5785.058	5785.087
Max. Deviation (ppm)	10.943	10.943	10.943	16.415

5.1.6 Power Spectral Density

Limit

For the 5.15~5.25GHz Bands:

For mobile and portable client devices in the 5.15~5.25GHz band, the Maximum Power spectral density shall not exceed 11dBm/MHz. For an indoor access point operating in the band 5.15~5.25GHz, the maximum power spectral density shall not exceed 17dBm/MHz.

For the 5.25~5.35GHz and 5.47~5.725GHz Bands:


The maximum power spectral density shall not exceed 11dBm/MHz.

For the 5.745~5.85GHz Bands:

The maximum power spectral density shall not exceed 30dBm/500kHz.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/9/18	2021/9/18

Test Procedure

For U-NII-1, U-NII-2A, U-NII-2C band:

Using method SA-2

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add 10 log (1/duty cycle)

※For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 500 kHz, Set VBW $\geq$ 3 RBW, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 500 kHz band segment within the fundamental EBW.
4. Sweep time = auto, trigger set to "free run".
5. Trace average at least 100 traces in power averaging mode.
6. Record the max value and add 10 log (1/duty cycle)

For MIMO mode, calculation method follows FCC KDB 662911 Method 2) a) of power density measurement using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

Test Results

Please refer to Appendix A

5.1.7 Radiated Spurious Emissions

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.407(b).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

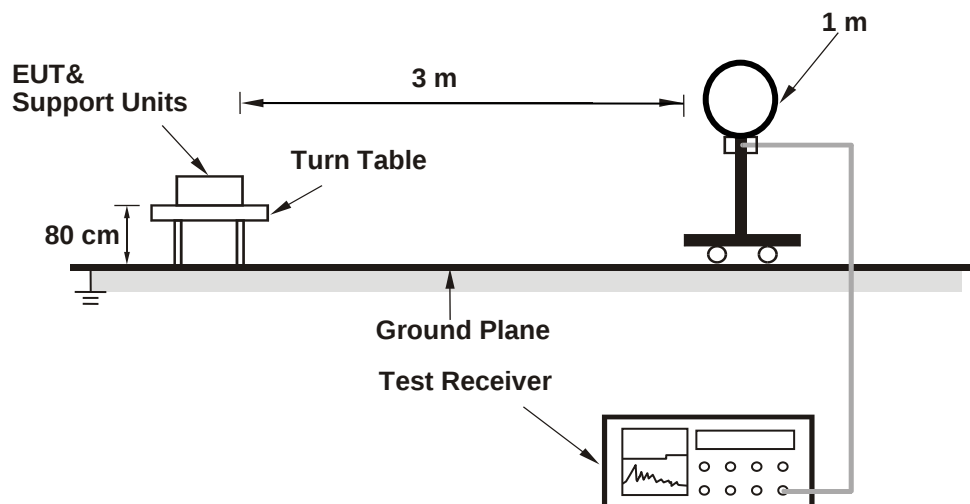

<Radiated Emissions 30 MHz to 1 GHz>

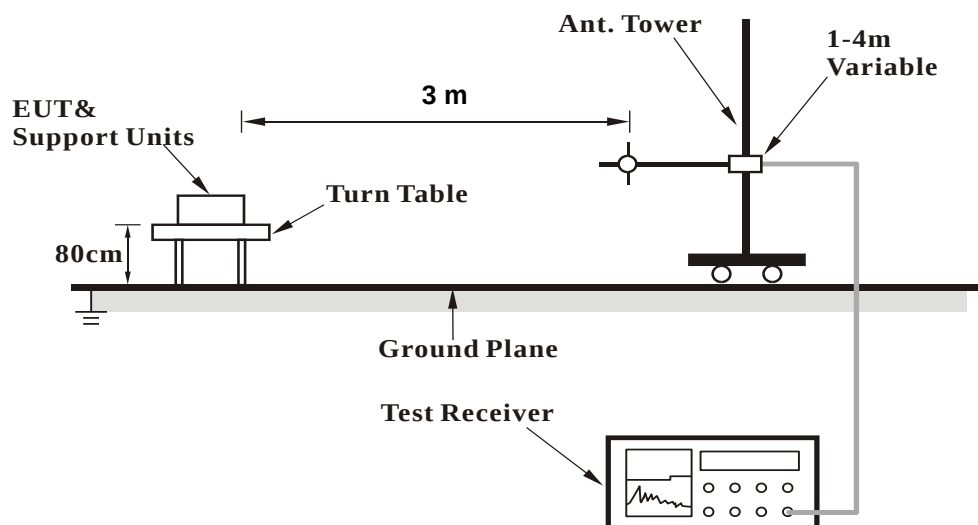

<Radiated Emissions above 1 GHz>

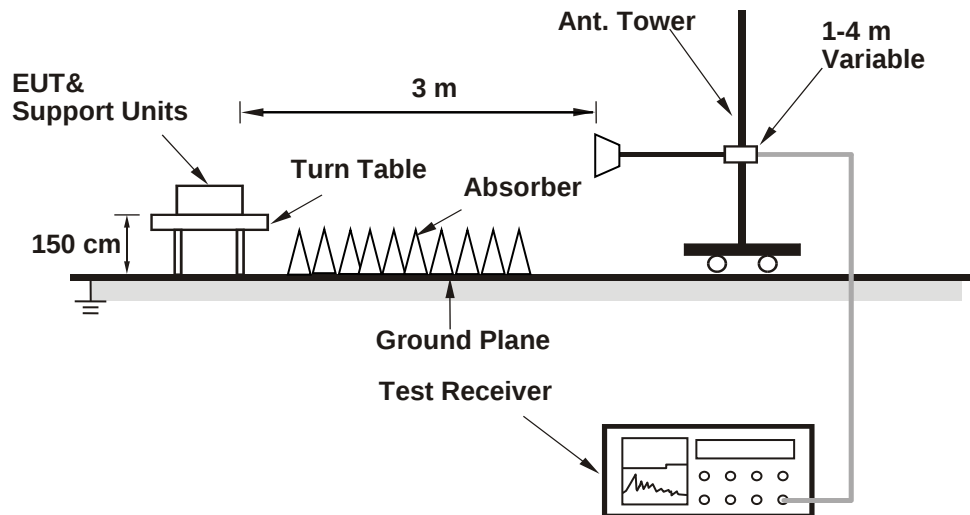

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV40	101508	2021/3/16	2022/3/15
Receiver	R&S	ESR7	102109	2021/3/16	2022/3/15
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2021/2/18	2022/2/17
Horn Antenna	ETS-Lindgren	3117	00218930	2020/12/1	2021/11/30
LF-AMP	Agilent	8447D	2944A10772	2021/2/18	2022/2/17
HF-AMP + AC source	EMCI	EMC051845SE	980633	2021/2/9	2022/2/8
HF-AMP + AC source	EMCI	EMC184045SE	980657	2021/2/1	2022/1/31
Horn Antenna	SCHWARZBECK	BBHA 9170	00887	2021/4/8	2022/4/7
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104EA	800056/4EA	2021/3/17	2022/3/16
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	804680/4	2021/3/17	2022/3/16
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	MY37202/4	2021/3/17	2022/3/16
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800898/2EA	2021/4/16	2022/4/15
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800901/2EA	2021/4/16	2022/4/15
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	801027/2EA	2021/4/16	2022/4/15
Loop Antenna	SCHWARZBECK	FNZB1519B	00215	2021/9/17	2022/9/16

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98 %) or 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.

Prüfbericht - Nr.: **CN21CQ1H(P15E-WiFi) 001**
Test Report No.

Seite 39 von 46
Page 39 of 46

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.

5.1.8 Dynamic Frequency Selection

Limit

<DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection>

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	


<DFS Response Requirement Values>

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	


Kind of Test Site Shielded room


Test Setup

<Setup for Master with injection at the Master>

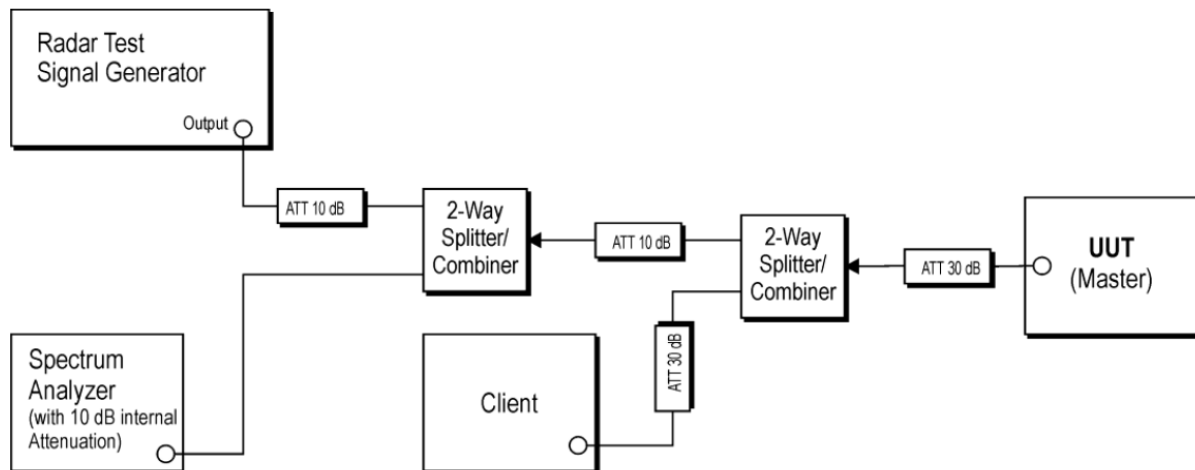

<Setup for Client with injection at the Master>

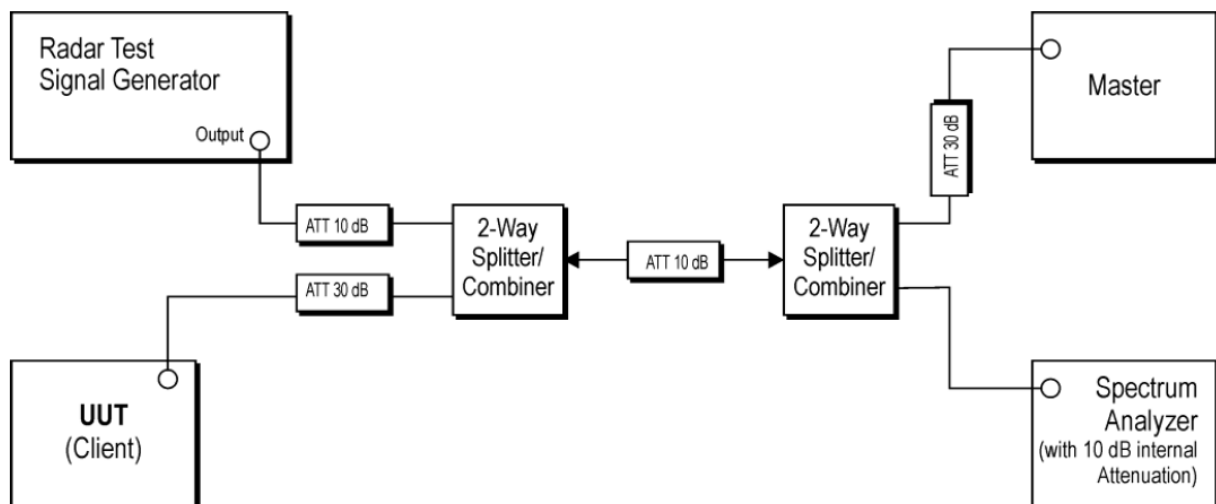
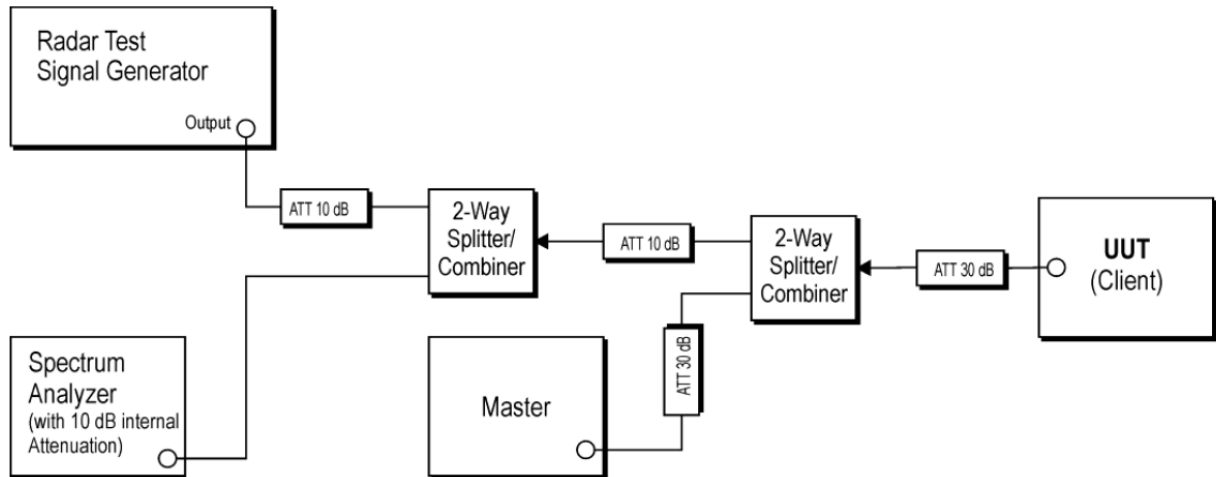
<Setup for Client with injection at the Client>

Test Instruments


Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	Agilent	N9010A	MY53470241	2021/6/15	2022/6/14	2021/9/16	2021/9/16
MXG Vector Signal Generator	Agilent	N5182B	MY53050525	2021/3/25	2022/3/24	2021/9/16	2021/9/16

Requirement

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not required
<i>Channel Closing Transmission Time</i>	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>U-NII Detection Bandwidth and Statistical Performance Check</i>	All BW modes must be tested	Not required
<i>Channel Move Time and Channel Closing Transmission Time</i>	Test using widest BW mode available	Test using the widest BW mode available for the link
<i>All other tests</i>	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

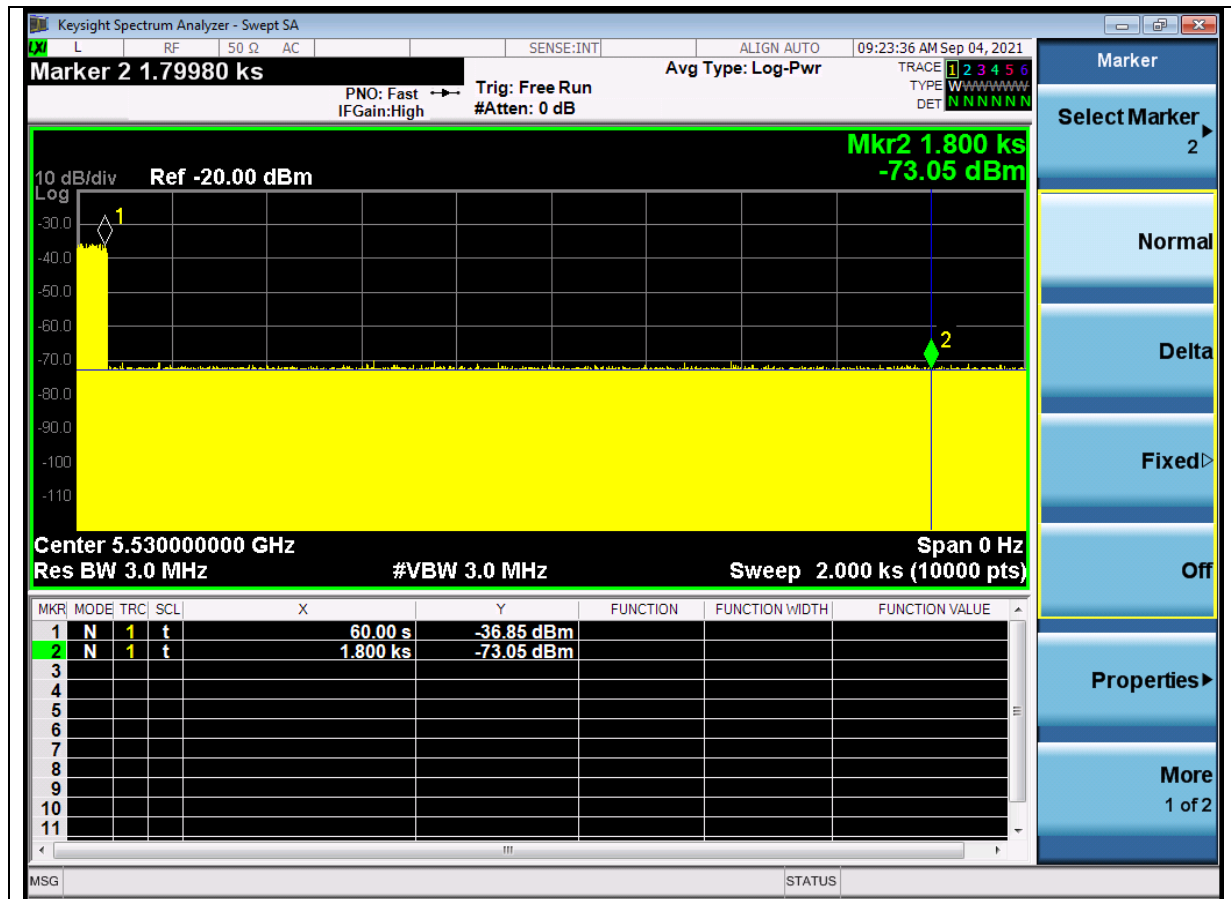

Prüfbericht - Nr.: CN21CQ1H(P15E-WiFi) 001
Test Report No.


Seite 44 von 46
Page 44 of 46

Channel Moving Time


Channel (MHz)	Channel Move Time (s)	Limit (s)	Result
5530	0.46	10	Pass

Channel Closing Transmission Time

Channel (MHz)	Channel Closing Transmission Time (ms)	Limit (ms)	Result
5530	10	200	Pass

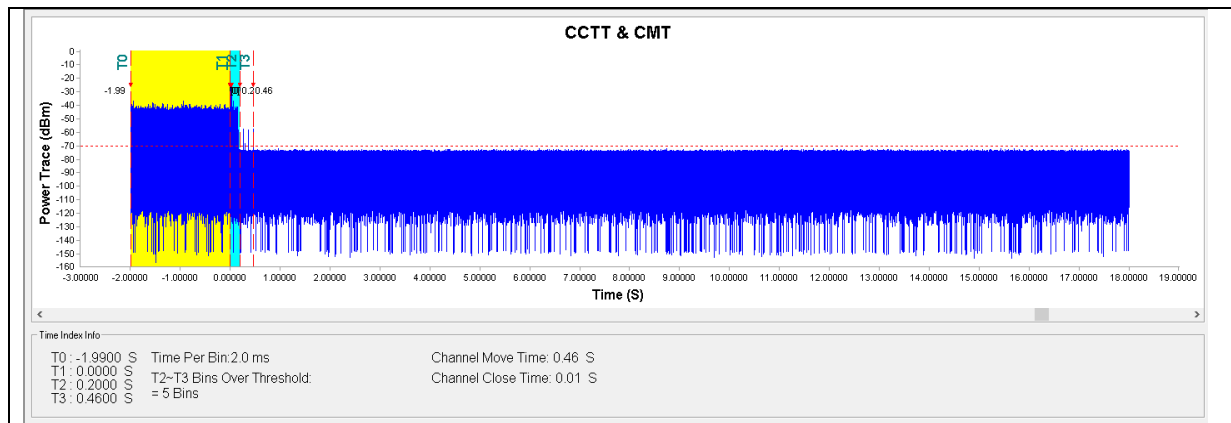

Radar Level

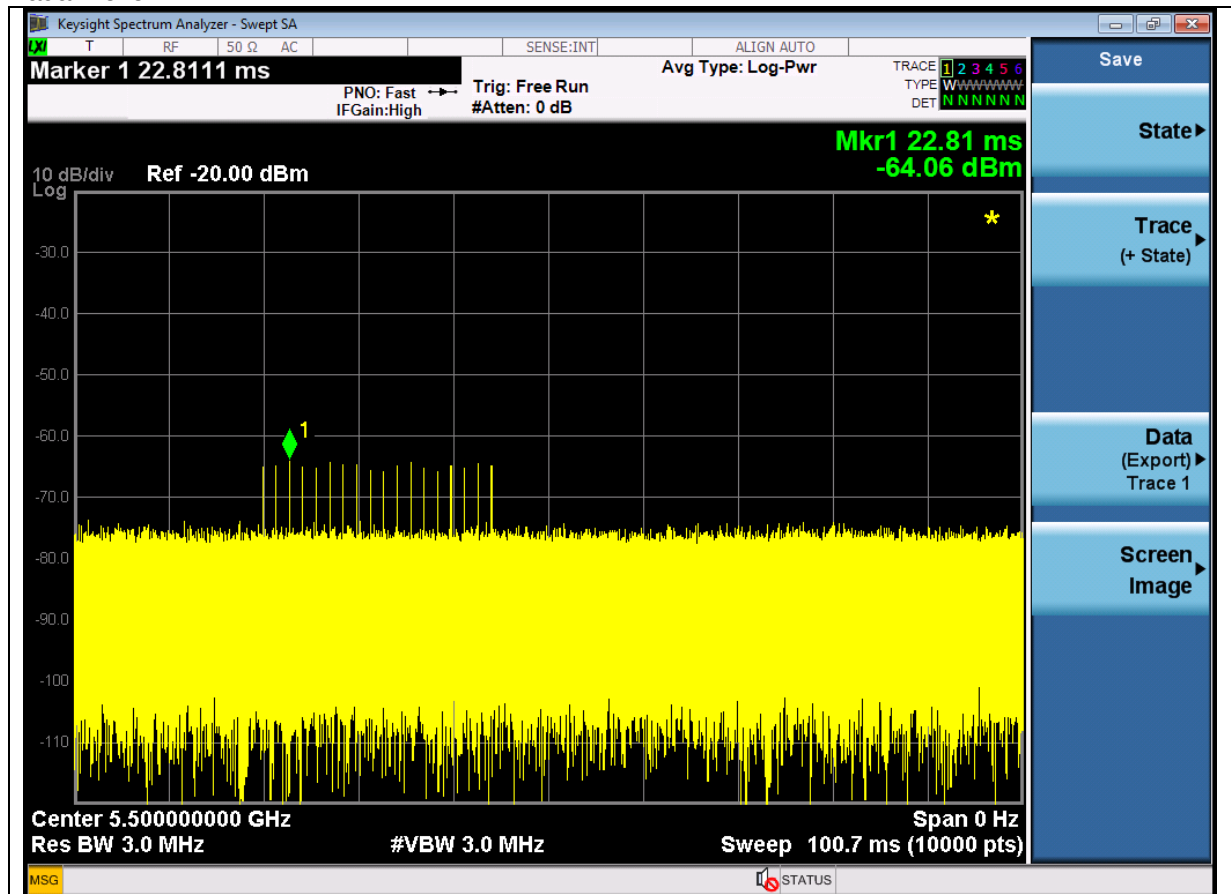

5.2 Mains Emission


5.2.1 Mains Conducted Emission

Limit

Mains Conducted emissions as defined in §15.207 must comply with the mains conducted emission limits.

Kind of Test Site Shielded room

Test Setup

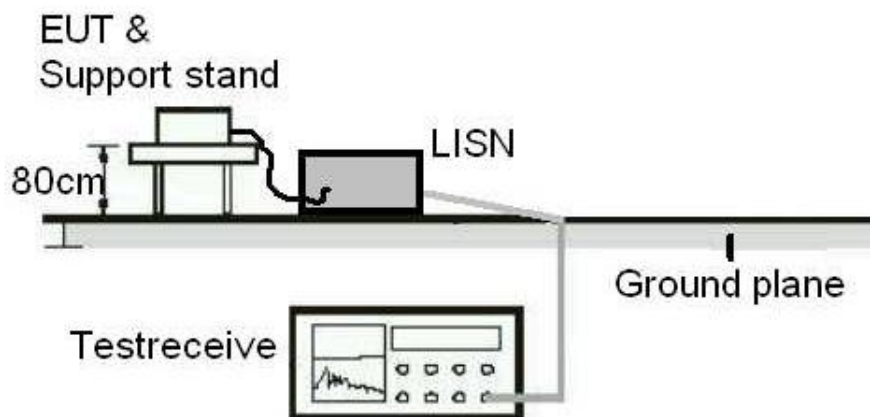

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
TWO-LINE V-NETWORK	schwarzbeck	NSLK 8127	8127-00976	2020/11/03	2021/11/03
EMI Test Receiver	R&S	ESCI	1816063	2020/11/17	2021/11/16
RF Cable	N/A	N/A	EMC-003	2020/11/15	2021/11/14

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

Test Results

Please refer to Appendix B.