



Engineering and Testing for EMC and Safety Compliance

CERTIFICATION APPLICATION REPORT
FCC PART 90

Test Lab: Rhein Tech Laboratories, Inc. Phone: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 Web Site: www.rheintech.com Herndon, VA 20170 Contact: ATCBINFO@rheintech.com		Applicant: Maxon Telecom Co., Ltd. 12F Sewon Venture Town Bldg., 705-18, Yeoksam-Dong, Seoul Kangnam-Ku, 135-080 South Korea Phone: 82-2-2008-1603 Fax: 82-2-2008-1600 Email: jh@maxontelecom.com Contact: JH Kim	
FCC ID:	RXUSP200V2	REPORT DATE:	March 15, 2005
MODEL:	SP200 V2	RTL WORK ORDER NUMBER:	2004187
EQUIPMENT TYPE:	PTT VHF-H	RTL QUOTE NUMBER:	QRTL04-399
FCC Classification:	☒ TNF – Licensed Non-Broadcast Transmitter Held to Face		
FCC Rule Part(s):	Part 90: Private Land Mobile Radio Services		
Frequency Range (MHz)	Output Power (W)	Frequency Tolerance (ppm)	Emission Designator
146.075-173.075	6.5	5	16K0F3E
146.075-173.075	6.5	5	11K0F3E


We, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to or exclusions from the FCC Part 2, FCC Part 90, ANSI C63.2, ANSI/TIA-603-B-2002, and ANSI/TIA/EIA 603-1.

Signature: 

Date: March 15, 2005

Typed/Printed Name: Desmond A. Fraser

Position: President

Signature: 

Date: March 15, 2005

Typed/Printed Name: Daniel Baltzell

Position: Test Engineer

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	SCOPE	5
1.2	TEST FACILITY	5
1.3	RELATED SUBMITTAL(S)/GRANT(S)	5
2	EQUIPMENT INFORMATION.....	6
2.1	TEST SYSTEM DETAILS.....	6
2.2	WORST CASE CONFIGURATION OF TESTED SYSTEM	7
3	FCC PART 2.1033(C)(8); DC VOLTAGES AND CURRENTS	8
4	RF POWER OUTPUT - §2.1046	9
4.1	ANSI/TIA/EIA-603-2002, SECTION 2.2.1 TEST PROCEDURE	9
4.2	RF POWER OUTPUT TEST EQUIPMENT	9
4.3	RF POWER OUTPUT TEST DATA	10
4.4	MODULATION CHARACTERISTICS - §2.1047 TEST PROCEDURE	11
4.5	MODULATION CHARACTERISTICS TEST EQUIPMENT.....	11
5	FCC PART 2 §2.1047(A): MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE.....	11
5.1	TEST PROCEDURE.....	11
5.2	TEST DATA.....	12
6	FCC PART 2 §2.1047(A): MODULATION CHARACTERISTICS - AUDIO LOW PASS FILTER RESPONSE .	13
6.1	TEST PROCEDURE.....	13
6.2	TEST DATA.....	13
7	FCC PART 2 §2.1047(B): MODULATION CHARACTERISTICS - MODULATION LIMITING	14
7.1	TEST PROCEDURE.....	14
7.2	TEST DATA.....	14
8	OCCUPIED BANDWIDTH - §2.1049	18
8.1	OCCUPIED BANDWIDTH - §2.1049 TEST PROCEDURE	18
8.2	OCCUPIED BANDWIDTH TEST EQUIPMENT.....	18
8.3	OCCUPIED BANDWIDTH TEST DATA	19
9	SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051.....	21
9.1	SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051 TEST PROCEDURE	21
9.2	SPURIOUS EMISSIONS AT ANTENNA TERMINAL TEST EQUIPMENT	21
9.3	CONDUCTED SPURIOUS EMISSIONS TEST DATA.....	22
10	RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053	25
10.1	RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053	25
10.2	RADIATED SPURIOUS TEST EQUIPMENT	26
10.3	RADIATED SPURIOUS EMISSIONS TEST DATA - §2.1053	27
11	FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055	28
11.1	MEASUREMENT METHOD	28
11.2	TIME PERIOD AND PROCEDURE	28
11.3	FREQUENCY TOLERANCE	28
11.4	FREQUENCY STABILITY TEST EQUIPMENT	28
11.5	FREQUENCY STABILITY TEST DATA - §2.1055	29
12	FCC PART 90 §90.214: TRANSIENT FREQUENCY BEHAVIOR	32
12.1	TRANSIENT FREQUENCY BEHAVIOR TEST PROCEDURE	32
12.2	TRANSIENT FREQUENCY BEHAVIOR LIMITS	32
12.3	TRANSIENT FREQUENCY BEHAVIOR TEST DATA.....	34
13	FCC PART 2.202: NECESSARY BANDWIDTH AND EMISSION BANDWIDTH	38
14	CONCLUSION.....	39

FIGURE INDEX

FIGURE 2-1:	WORST CASE CONFIGURATION OF SYSTEM UNDER TEST	7
FIGURE 4-1:	ILLUSTRATION OF HOW THE EQUIPMENT IS CONNECTED	9

TABLE INDEX

TABLE 2-1:	EQUIPMENT UNDER TEST (EUT)	6
TABLE 4-1:	RF POWER OUTPUT TEST EQUIPMENT	9
TABLE 4-2:	RF POWER OUTPUT TEST DATA HIGH POWER	10
TABLE 4-3:	RF POWER OUTPUT TEST DATA LOW POWER	10
TABLE 4-4:	MODULATION CHARACTERISTICS TEST EQUIPMENT	11
TABLE 8-1:	OCCUPIED BANDWIDTH TEST EQUIPMENT	18
TABLE 9-1:	SPURIOUS EMISSIONS AT ANTENNA TERMINAL TEST EQUIPMENT	21
TABLE 9-2:	CONDUCTED SPURIOUS EMISSIONS (CHANNEL 6 AT 146.075 MHZ)	22
TABLE 9-3:	CONDUCTED SPURIOUS EMISSIONS (CHANNEL 8 AT 160.075 MHZ)	23
TABLE 9-4:	CONDUCTED SPURIOUS EMISSIONS (CHANNEL 10 AT 173.075 MHZ)	24
TABLE 10-1:	RADIATED SPURIOUS TEST EQUIPMENT	26
TABLE 10-3:	RADIATED SPURIOUS EMISSIONS DATA §2.1053	27
TABLE 11-1:	FREQUENCY STABILITY TEST EQUIPMENT	28
TABLE 11-2:	FREQUENCY STABILITY DATA - §2.1055: TEMPERATURE	29
TABLE 11-3:	FREQUENCY STABILITY DATA - §2.1055: VOLTAGE	31
TABLE 12-1:	REQUIREMENTS FOR EUT WITH 25 KHZ CHANNEL SPACING:	32
TABLE 12-2:	REQUIREMENTS FOR EUT WITH 12.5 KHZ CHANNEL SPACING:	32
TABLE 12-3:	TRANSIENT FREQUENCY BEHAVIOR TEST EQUIPMENT	33

PLOT INDEX

PLOT 5-1:	AUDIO FREQUENCY RESPONSE CHANNEL 3 AT 160.075 MHZ	12
PLOT 6-1:	AUDIO LOW PASS FILTER RESPONSE (CHANNEL 2)	13
PLOT 7-1:	MODULATION LIMITING RESPONSE (POSITIVE PEAK)	14
PLOT 7-2:	MODULATION LIMITING RESPONSE (NEGATIVE PEAK)	15
PLOT 7-3:	MODULATION LIMITING RESPONSE (POSITIVE PEAK)	16
PLOT 7-4:	MODULATION LIMITING RESPONSE (NEGATIVE PEAK)	17
PLOT 8-1:	MASK D (160.075 MHZ; CH 8; NARROWBAND)	19
PLOT 8-2:	MASK B (160.075 MHZ; CH 3; WIDEBAND)	20
PLOT 11-1:	TEMPERATURE FREQUENCY STABILITY - §2.1055	30
PLOT 11-2:	VOLTAGE FREQUENCY STABILITY - §2.1055	31
PLOT 12-1:	ON TIME – CHANNEL 8: 160.075 MHZ; 12.5 KHZ NARROW BAND	34
PLOT 12-2:	OFF TIME – CHANNEL 8: 160.075 MHZ; 12.5 KHZ NARROW BAND	35
PLOT 12-3:	ON TIME – CHANNEL 3: 160.075 MHZ; 25 KHZ WIDE BAND	36
PLOT 12-4:	OFF TIME – CHANNEL 2: 160.075 MHZ; 25 KHZ WIDE BAND	37

APPENDIX INDEX

APPENDIX A:	RF EXPOSURE	40
APPENDIX B:	AGENCY AUTHORIZATION LETTER	41
APPENDIX C:	CONFIDENTIALITY REQUEST LETTER	42
APPENDIX D:	PRODUCT DESCRIPTION	43
APPENDIX E:	ANTENNA SPECIFICATION	44
APPENDIX F:	LABEL AND LABEL LOCATION	45
APPENDIX G:	BILL OF MATERIAL (PARTS LIST)	46
APPENDIX H:	SCHEMATICS	47
APPENDIX I:	BLOCK DIAGRAM	48
APPENDIX J:	USER'S MANUAL	49
APPENDIX K:	TEST PHOTOGRAPHS	50
APPENDIX L:	EXTERNAL PHOTOGRAPHS	52
APPENDIX M:	INTERNAL PHOTOGRAPHS	57

PHOTOGRAPH INDEX

PHOTOGRAPH 1:	FCC ID LABEL AND RF WARNING LABEL LOCATIONS	45
PHOTOGRAPH 2:	RADIATED EMISSIONS FRONT VIEW	50
PHOTOGRAPH 3:	RADIATED EMISSIONS BACK VIEW	51
PHOTOGRAPH 4:	TOP	52
PHOTOGRAPH 5:	BOTTOM	53
PHOTOGRAPH 6:	FRONT	54
PHOTOGRAPH 7:	LEFT SIDE	55
PHOTOGRAPH 8:	RIGHT SIDE	55
PHOTOGRAPH 9:	BACK COVER	56
PHOTOGRAPH 10:	DIGITAL PCB INSIDE FRONT CASE	57
PHOTOGRAPH 11:	PCB FRONT	58
PHOTOGRAPH 12:	RF PCB BACK SIDE	59
PHOTOGRAPH 13:	RF PCB FRONT SIDE	60
PHOTOGRAPH 14:	RF PCB FRONT SIDE WITHOUT SHIELDS	61

1 GENERAL INFORMATION

1.1 SCOPE

FCC Rules Part 90 (Subpart K): This subpart sets forth special requirements applicable to the use of certain frequencies or frequency bands.

All measurements contained in this application were conducted in accordance with the FCC Rules and Regulations CFR47 Part 90 and ANSI/TIA/EIA603-B-2002 Land Mobile FM or PM Communications Equipment Measurement and Performance Standards. The measurement instrumentation conforms to the ANSI C61.1; 4.5 standard for EMI and Field Strength Instrumentation. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

1.2 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.2).

1.3 RELATED SUBMITTAL(S)/GRANT(S)

This is an original application for Certification. A DoC report is on file for the receiver section and digital interface for the EUT.

2 EQUIPMENT INFORMATION

2.1 TEST SYSTEM DETAILS

The EUT was received on January 11, 2005. The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system are:

TABLE 2-1: EQUIPMENT UNDER TEST (EUT)

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
VHF Portable Radio	Maxon	SP200 V2	0000000004	RXUSP200V2	N/A	16419
Antenna	Maxon	N/A	N/A	N/A	N/A	16420
Battery	Maxon	BTM100-01	N/A	N/A	N/A	16421
Battery	Maxon	BTM100-01	N/A	N/A	N/A	16308
Belt Clip	Maxon	N/A	N/A	N/A	N/A	16422

2.2 WORST CASE CONFIGURATION OF TESTED SYSTEM

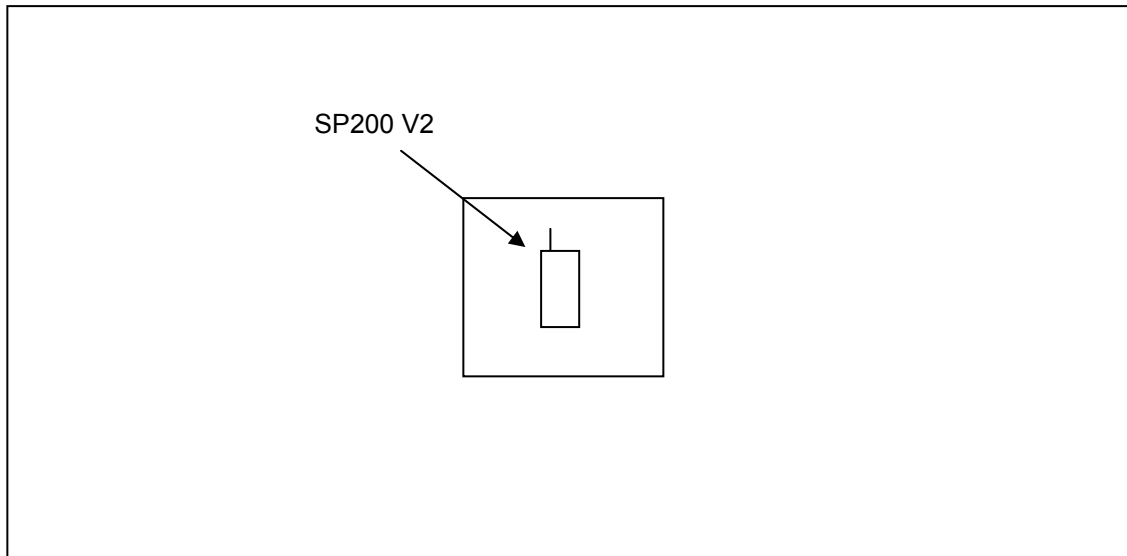


FIGURE 2-1: WORST CASE CONFIGURATION OF SYSTEM UNDER TEST

3 FCC PART 2.1033(C)(8); DC VOLTAGES AND CURRENTS

The DC voltages applied to and DC currents into the several elements of the final radio frequency amplifying device for normal operation over the power range were:

7.5 volts @ 1.6A High Power
7.5 volts @ 0.63A Low Power

4 RF POWER OUTPUT - §2.1046

4.1 ANSI/TIA/EIA-603-2002, SECTION 2.2.1 TEST PROCEDURE

Connect the equipment as illustrated below. Measure the transmitter output power during the defined duty cycle. The EUT was connected to a coaxial attenuator having a 50 Ω load impedance.

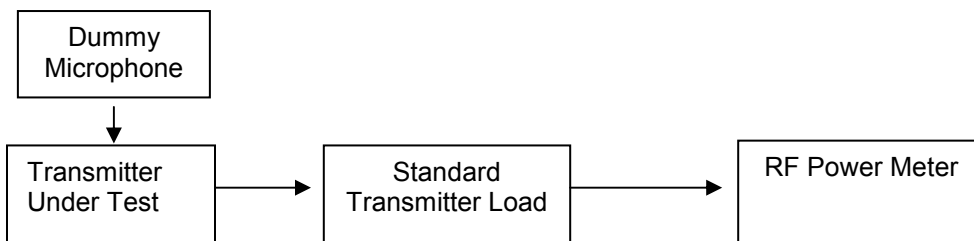


FIGURE 4-1: ILLUSTRATION OF HOW THE EQUIPMENT IS CONNECTED

4.2 RF POWER OUTPUT TEST EQUIPMENT

TABLE 4-1: RF POWER OUTPUT TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Cal. Due Date
901184	Agilent Technologies	E4416A	EPM-P Power Meter, single channel	GB41050573	8/2/05
901186	Agilent Technologies	E9323A	Peak & Average Power Sensor (50 MHz - 6 GHz)	US40410380	8/2/05

4.3 RF POWER OUTPUT TEST DATA

TABLE 4-2: RF POWER OUTPUT TEST DATA HIGH POWER


Frequency (MHz)	Channel	Power Measured (dBm)	Power (Watt)
146.075	1	38.1	6.5
160.075	3	38.1	6.5
173.075	5	37.6	5.8

TABLE 4-3: RF POWER OUTPUT TEST DATA LOW POWER

Frequency (MHz)	Channel	Power Measured (dBm)	Power (Watt)
146.075	6	37.6	5.8
160.075	8	37.1	5.1
173.075	10	37.0	5.0

TEST PERSONNEL:

Dan Baltzell
Test Engineer



Signature

December 11, 2005
Date Of Test

4.4 MODULATION CHARACTERISTICS - §2.1047 TEST PROCEDURE

The modulation characteristic tests do not apply to digital modulation only to those channels with analog modulation.

4.5 MODULATION CHARACTERISTICS TEST EQUIPMENT

TABLE 4-4: MODULATION CHARACTERISTICS TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Cal. Due Date
901118	Hewlett Packard	HP8901B	Modulation Analyzer	2406A00178	7/07/05
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	9/08/05
901054	Hewlett Packard	HP 3586B	Selective Level Meter	1928A01892	9/08/05


5 FCC PART 2 §2.1047(A): MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE

5.1 TEST PROCEDURE

ANSI/TIA-603-B-2002, section 2.2.6. The audio frequency response is the degree of closeness to which the frequency deviation of the transmitter follows a prescribed characteristic. The input audio level at 1000 Hz is set to produce 20% of the rated system deviation. This point is shown as the 0 dB reference level, noted DEVref. The audio signal generator was varied from 300 Hz to 5 kHz with the input level held constant. The deviation in kHz was recorded using a modulation analyzer as DEVfreq. The response in dB relative to 1 kHz was calculated as follows: Audio Frequency Response = 20 LOG (DEVfreq/DEVref)

5.2 TEST DATA

PLOT 5-1: AUDIO FREQUENCY RESPONSE CHANNEL 3 AT 160.075 MHZ

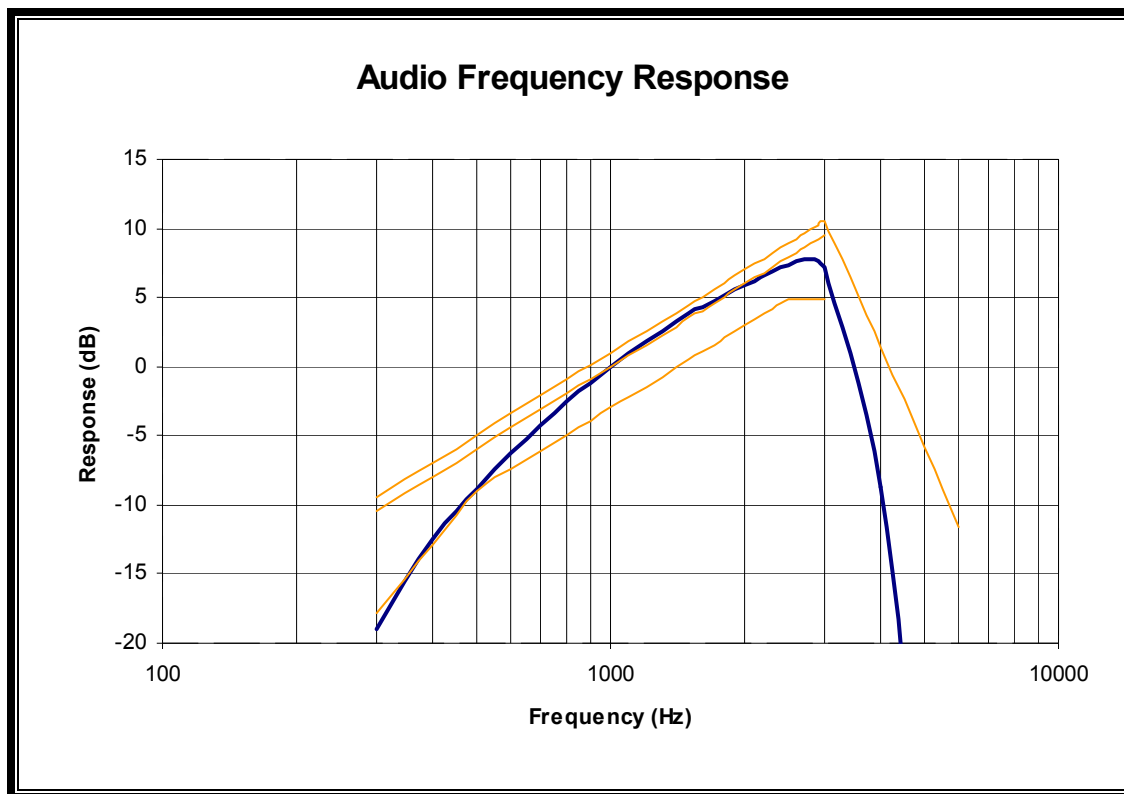

TEST PERSONNEL:

Dan Baltzell
Test Engineer

Signature

January 10, 2005
Date Of Test

6 FCC PART 2 §2.1047(A): MODULATION CHARACTERISTICS - AUDIO LOW PASS FILTER RESPONSE


6.1 TEST PROCEDURE

ANSI/TIA-603-B-2002, 2.2.15

The Audio Low Pass Filter Response is the frequency response of the post limiter low pass filter circuit above 3000 Hz.

6.2 TEST DATA

PLOT 6-1: AUDIO LOW PASS FILTER RESPONSE CHANNEL 2

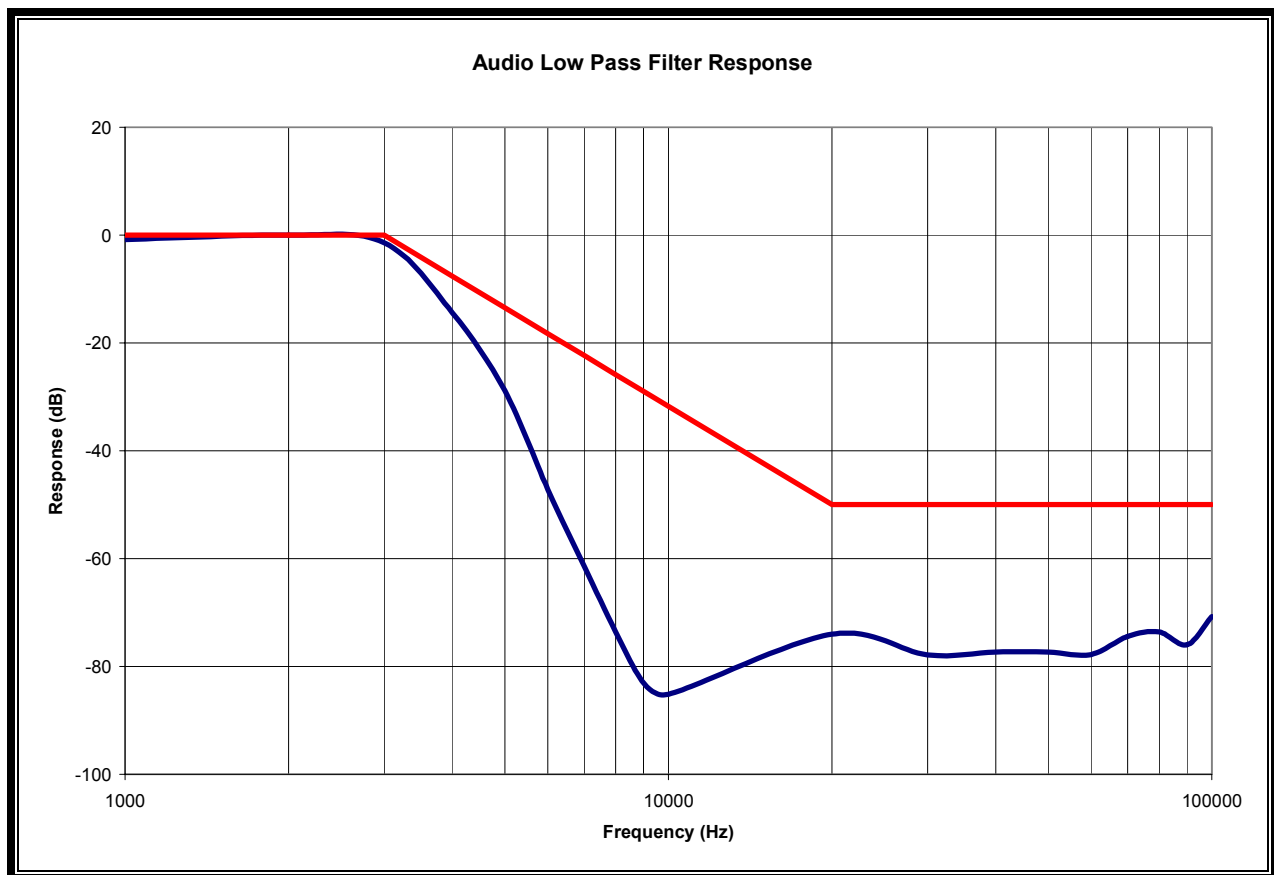

TEST PERSONNEL:

Dan Baltzell
Test Engineer

Signature

January 10, 2005
Date Of Test

7 FCC PART 2 §2.1047(B): MODULATION CHARACTERISTICS - MODULATION LIMITING

7.1 TEST PROCEDURE


ANSI/TIA-B-603-2002, section 2.2.3

The transmitter is adjusted for full rated system deviation. The audio input level is adjusted for 60% of rated system deviation at 1000 Hz. Using this level as a reference (0 dB), the audio input level is varied from the reference to a level +20 dB above it and -20 dB under it, for modulation frequencies of 300 Hz, 1,000 Hz, and 2,500 Hz. The system deviation obtained as a function of the input level is recorded. Both Positive and Negative Peak deviations were recorded.

7.2 TEST DATA


PLOT 7-1: MODULATION LIMITING RESPONSE POSITIVE PEAK, NARROWBAND

Channel 8; 160.075 MHz; Narrowband

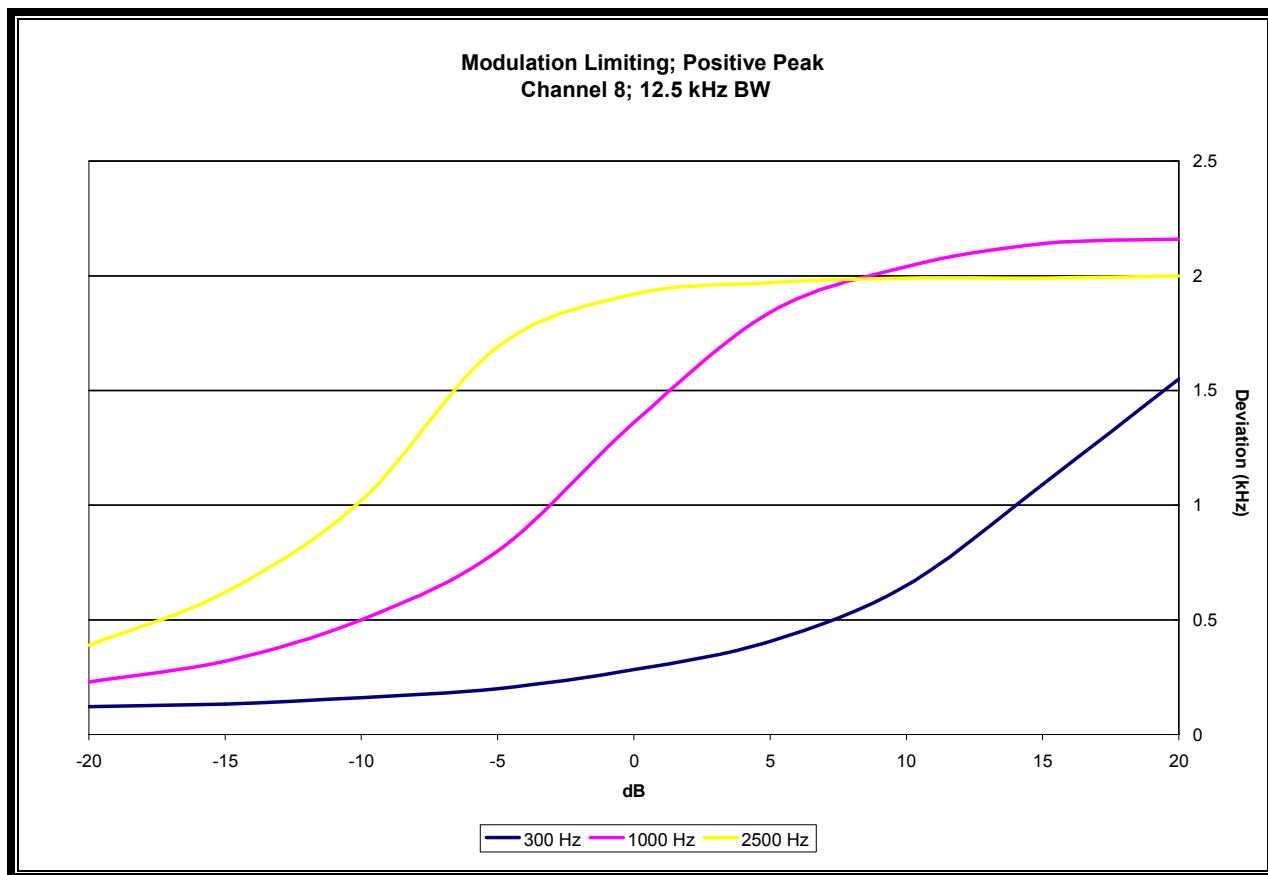


PLOT 7-2: MODULATION LIMITING RESPONSE NEGATIVE PEAK NARROWBAND

Channel 8; 160.075 MHz; Narrowband

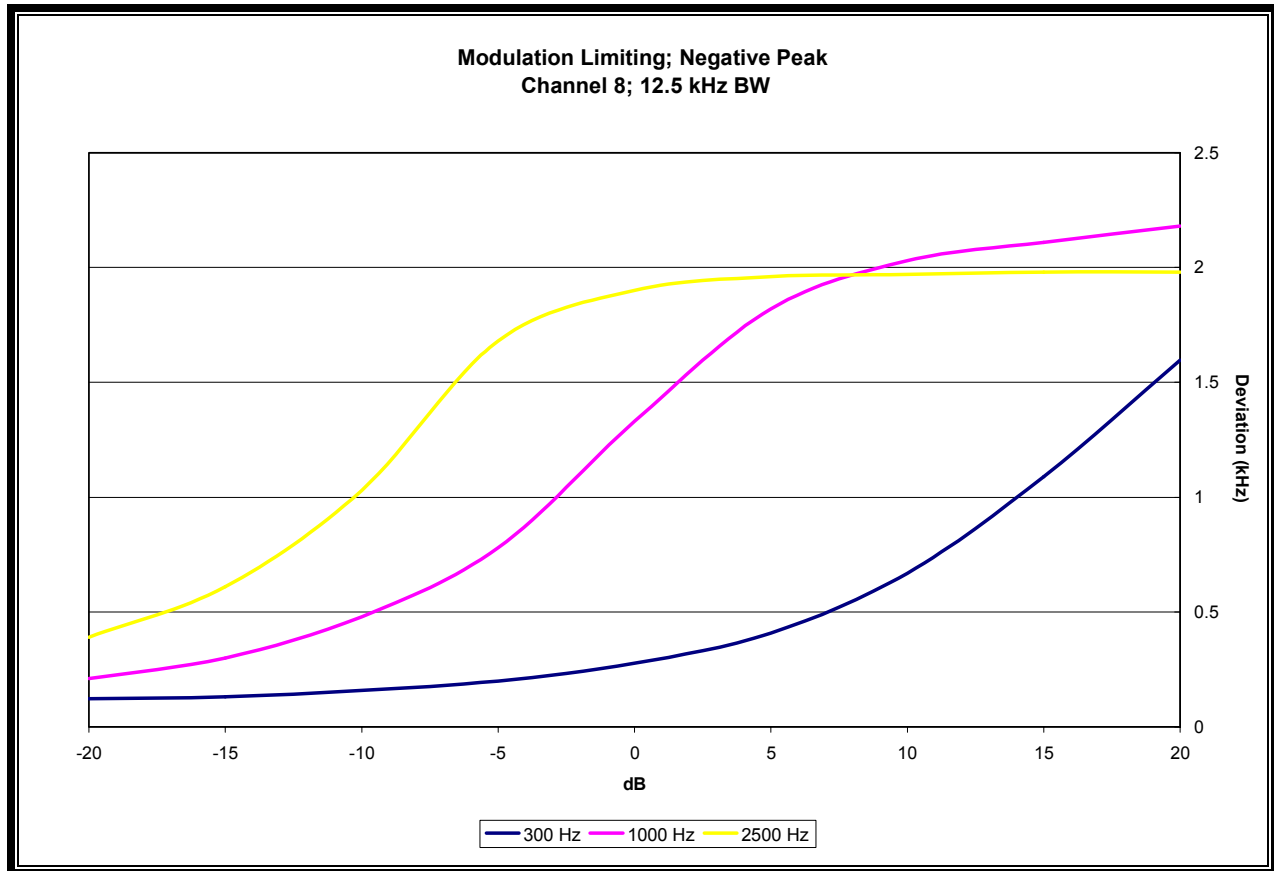


PLOT 7-3: MODULATION LIMITING RESPONSE POSITIVE PEAK WIDEBAND

Channel 3; 160.075 MHz; Wideband

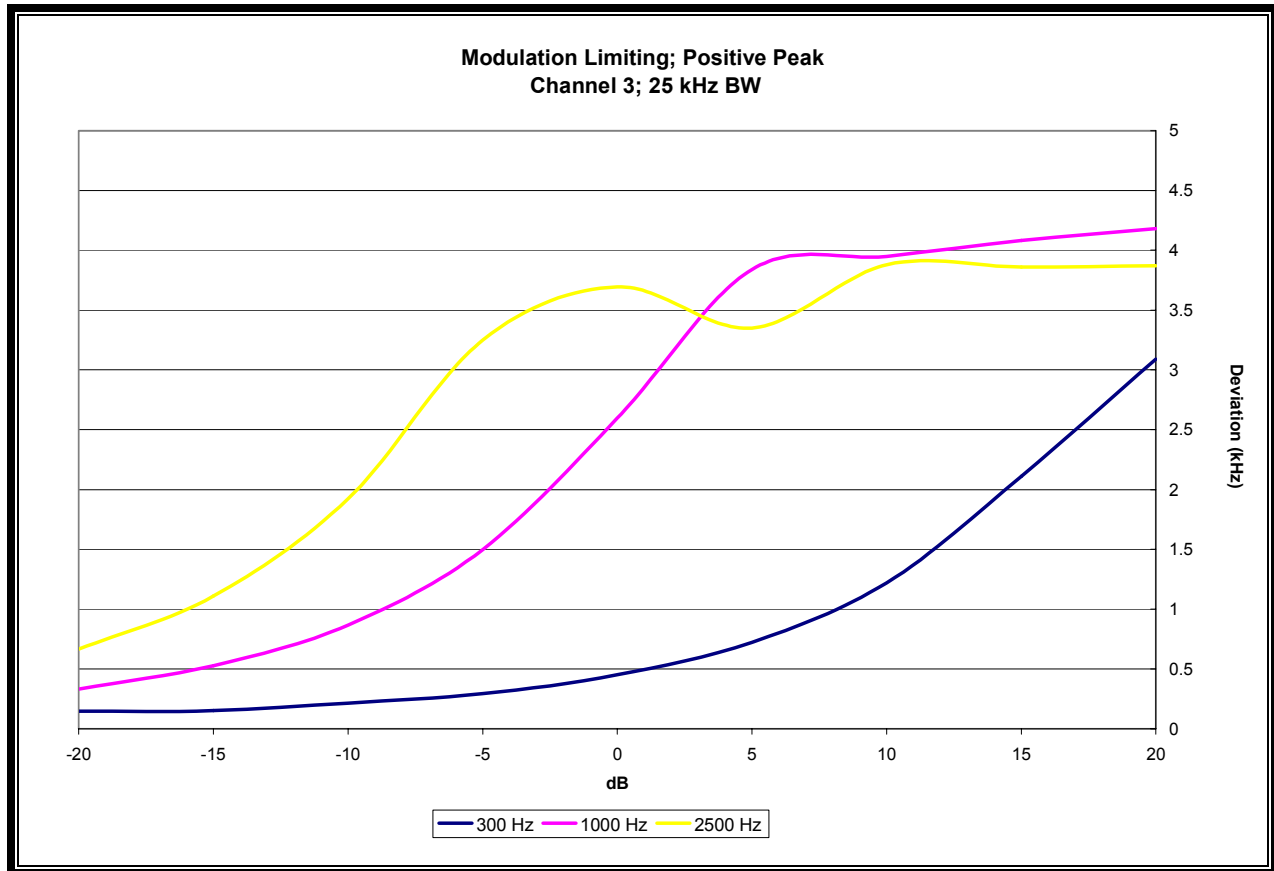

PLOT 7-4: MODULATION LIMITING RESPONSE NEGATIVE PEAK WIDEBAND

Channel 3; 160.075 MHz; Wideband

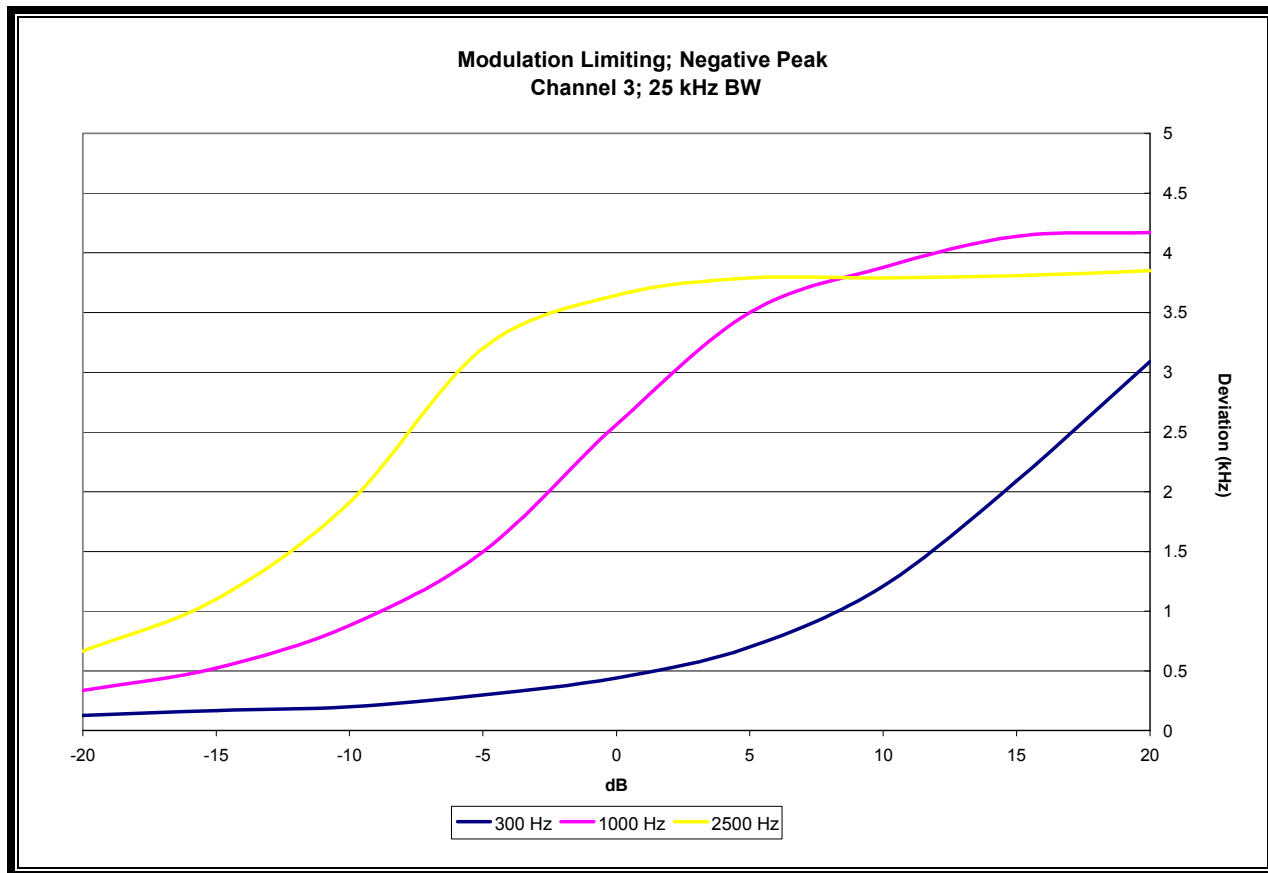

TEST PERSONNEL:

Dan Baltzell

January 10, 2005

Test Engineer

Signature

Date Of Test

8 OCCUPIED BANDWIDTH - §2.1049

8.1 OCCUPIED BANDWIDTH - §2.1049 TEST PROCEDURE

The antenna output terminal of the EUT was connected to the input of a 50 ohm spectrum analyzer through a matched 10 dB attenuator. The radio transmitter was operating at maximum output power with and without internal data modulation. 100% of the in-band modulation was below the specified mask.

(b) *Emission Mask B*. For transmitters that are equipped with an audio low-pass filter pursuant to §90.211(a), the power of any emission must be below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

(d) *Emission Mask D—12.5 kHz channel bandwidth equipment*. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but not more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB, or 70 dB, whichever is the lesser attenuation.


8.2 OCCUPIED BANDWIDTH TEST EQUIPMENT

TABLE 8-1: OCCUPIED BANDWIDTH TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Cal. Due Date
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz - 22 GHz)	3138A07771	6/23/05
901140	Weinschel Corp.	47-10-34 DC-18GHz	Attenuator, 50W 10dB	BK6203	5/13/05
900927	Tektronix	ASG 100	Audio Signal Generator	B03274 V2.3	3/3/05

8.3 OCCUPIED BANDWIDTH TEST DATA

PLOT 8-1: MASK D (160.075 MHz; CH 8; NARROWBAND)

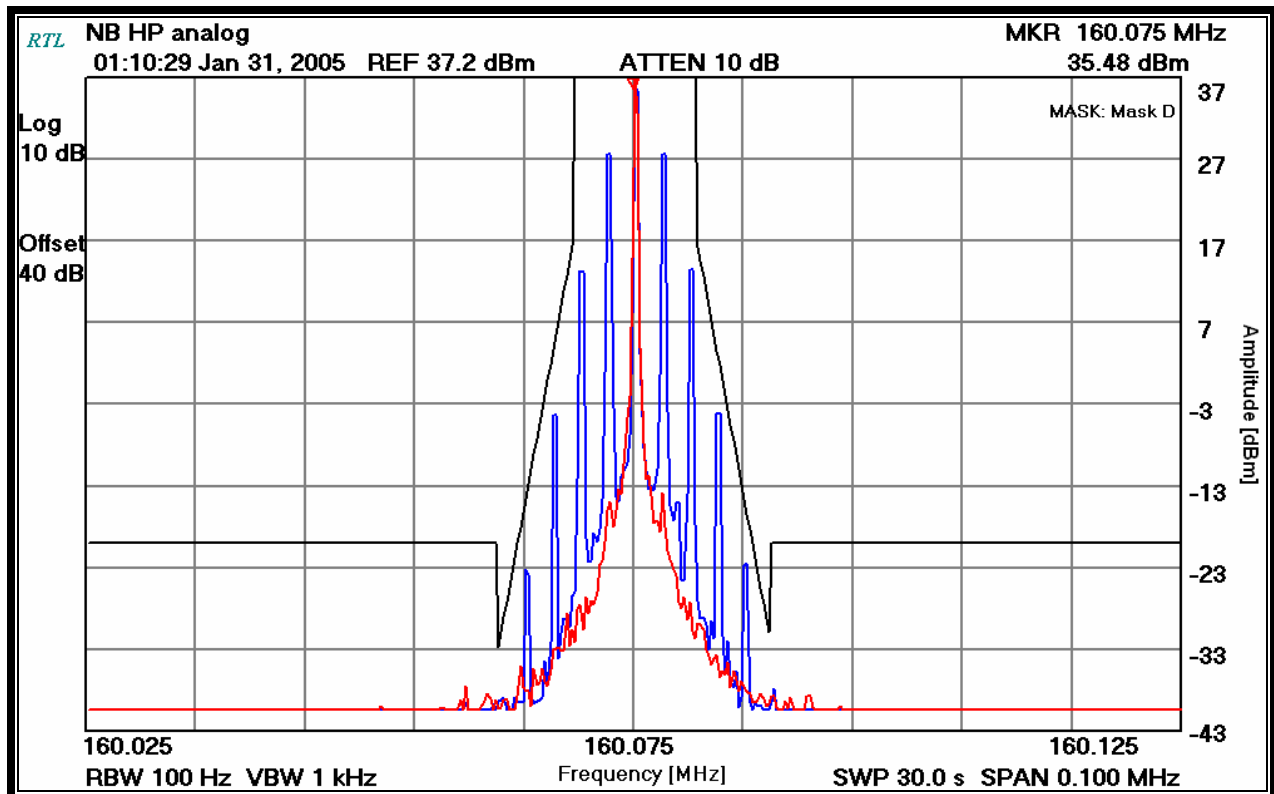


TEST PERSONNEL:

Dan Biggs
Test Engineer

Signature

January 31, 2005
Date Of Test

PLOT 8-2: MASK B (160.075 MHz; CH 3; WIDEBAND)

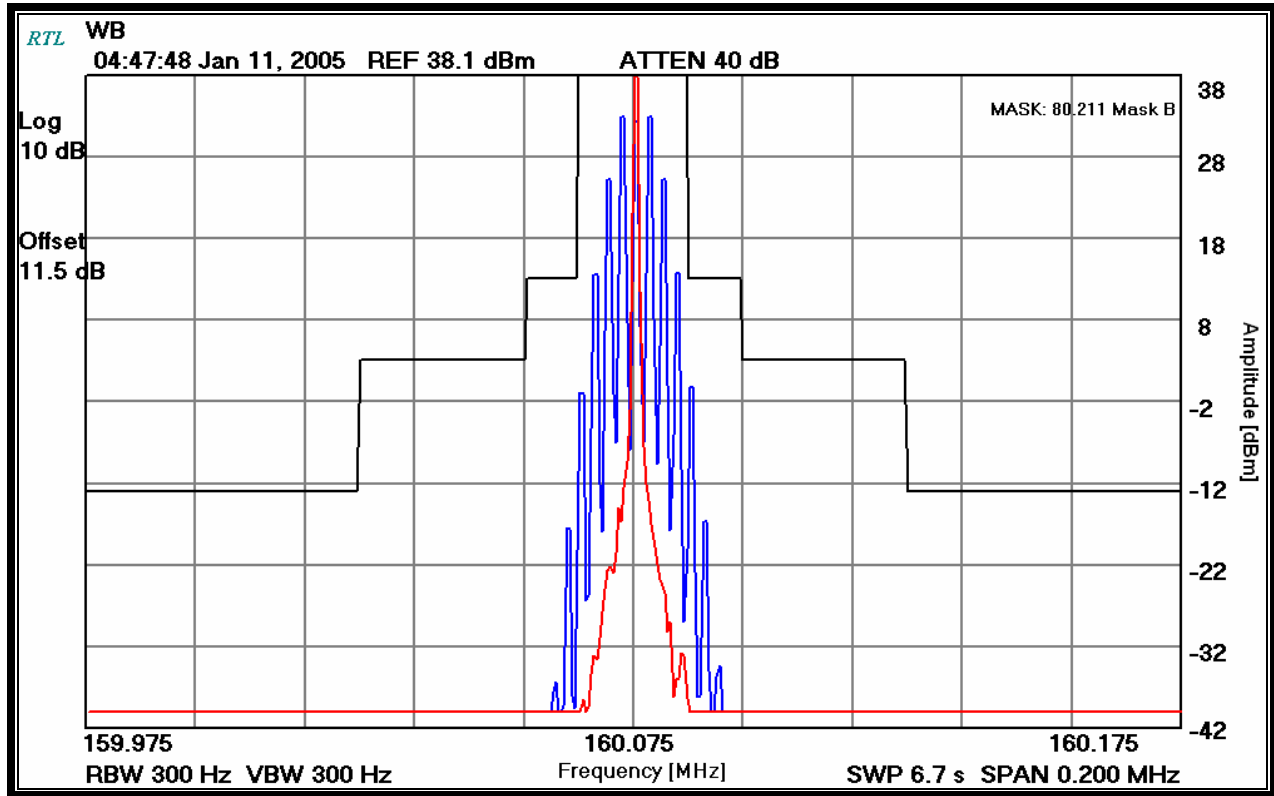

TEST PERSONNEL:

Dan Baltzell
Test Engineer

Signature

January 11, 2005
Date Of Test

9 SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051

9.1 SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051 TEST PROCEDURE

The level of the various conducted spurious frequencies was measured by means of a calibrated spectrum analyzer. The antenna output terminal of the EUT was connected to the input of a 50 Ω spectrum analyzer through a matched 10 dB attenuator and notch filter. The transmitter was operating at maximum power.

9.2 SPURIOUS EMISSIONS AT ANTENNA TERMINAL TEST EQUIPMENT

TABLE 9-1: SPURIOUS EMISSIONS AT ANTENNA TERMINAL TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Cal. Due Date
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz - 22 GHz)	3138A07771	6/23/05
901132	Par Electronics	806-902 (25W)	VHF Notch Filter	N/A	5/13/05

9.3 CONDUCTED SPURIOUS EMISSIONS TEST DATA

TABLE 9-2: CONDUCTED SPURIOUS EMISSIONS (CHANNEL 6 AT 146.075 MHZ)

Operating Frequency (MHz): 146.075
 Channel: 6
 Measured Conducted Power (dBm): 37.6
 Modulation: Analog
 Limit (dBc): 57.6 (50+10LogP)

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Notch Filter Insertion Loss (dB)	Corrected Spectrum Analyzer Level (dBc)	Margin (dB)
292.150	-37.1	0.3	74.4	57.6
438.225	-56.6	0.2	94.0	57.6
584.300	-62.6	0.5	99.7	57.6
730.375	-62.5	0.1	100.0	57.6
876.450	-65.8	0.4	103.0	57.6
1022.525	-75.8	2.7	110.7	57.6
1168.600	-77.0	5.1	109.5	57.6
1314.675	-78.2	7.8	108.0	57.6
1460.750	-78.0	26.9	88.7	57.6

TEST PERSONNEL:

Dan Biggs
 Test Engineer



Signature

January 31, 2005
 Date Of Test

TABLE 9-3: CONDUCTED SPURIOUS EMISSIONS (CHANNEL 8 AT 160.075 MHZ)

Operating Frequency (MHz): 160.075
Channel: 8
Measured Conducted Power (dBm): 37.1
Modulation: Analog
Limit (dBc): 57.1 (50+10LogP)

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Notch Filter Insertion Loss (dB)	Corrected Spectrum Analyzer Level (dBc)	Margin (dB)
320.150	-40.2	0.6	76.7	57.1
480.225	-51.5	0.2	88.4	57.1
640.300	-56.3	0.1	93.3	57.1
800.375	-58.6	0.1	95.6	57.1
960.450	-67.6	0.4	104.3	57.1
1120.525	-66.5	3.6	100.0	57.1
1280.600	-78.3	8.1	107.3	57.1
1440.675	-78.1	26.1	89.1	57.1
1600.750	-76.3	5.8	107.6	57.1

TEST PERSONNEL:

Dan Biggs Test Engineer	 Signature	January 31, 2005 Date Of Test
----------------------------	--	----------------------------------

TABLE 9-4: CONDUCTED SPURIOUS EMISSIONS (CHANNEL 10 AT 173.075 MHZ)

Operating Frequency (MHz): 173.075
Channel: 10
Measured Conducted Power (dBm): 37.0
Modulation: Analog
Limit (dBc): 57.0 (50+10LogP)

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Notch Filter Insertion Loss (dB)	Corrected Spectrum Analyzer Level (dBc)	Margin (dB)
346.150	-39.4	0.3	76.1	57.0
519.225	-55.3	0.3	92.0	57.0
692.300	-60.8	0.2	97.6	57.0
865.375	-67.3	0.5	103.8	57.0
1038.450	-73.6	3.8	106.8	57.0
1211.525	-77.3	4.3	110.0	57.0
1384.600	-77.7	12.0	102.7	57.0
1557.675	-75.3	8.2	104.1	57.0
1730.750	-74.7	9.9	101.8	57.0

TEST PERSONNEL:

Dan Biggs Test Engineer	 Signature	January 31, 2005 Date Of Test
----------------------------	--	----------------------------------

10 RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053

10.1 RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053

A receiving antenna located 3 meters from the turntable received any signal radiated from the transmitter and its operating accessories. The receiving antenna was varied from 1 to 4 meters.

ERP Measurements by Substitution Method:

The EUT was placed on a turntable 3 meters from the receive antenna. The EUT was placed on the turntable with the transmitter transmitting into a non-radiating load. The field of maximum intensity was found by rotating the EUT 360 degrees in all 3 orthogonal axes, and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. An antenna was substituted in place of the EUT. This antenna was fed by a signal generator, and the input level adjusted to the same field strength level as the EUT. The conducted power from the signal generator was recorded. The level was checked at the antenna input using a splitter to verify no impedance mismatch and corrected. The signal generator level was further corrected by subtracting the connecting cable loss, and further corrected with the transmitting antenna gain referenced to a $\frac{1}{2}$ wave dipole measurement.

The spectrum analyzer was set to the following settings: Quasi-peak below 1 GHz (120 kHz RBW/VBW); Average above 1 GHz (1MHz RBW/10 Hz VBW), sweep speed auto.

10.2 RADIATED SPURIOUS TEST EQUIPMENT

TABLE 10-1: RADIATED SPURIOUS TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Cal. Due Date
901053	Schaffner Chase	CBL6112B	Bi-Log Antenna (20 MHz - 2 GHz)	2648	9/20/05
901215	Hewlett Packard	8596EM	EMC Analyzer (9 kHz - 12.8 GHz)	3826A00144	9/8/05
900928	Hewlett Packard	83752A	Synthesized Sweeper, 0.01 to 20 GHz	3610A00866	9/5/05
900814	Electro- Metrics	EM-6961 (RGA-60)	Double Ridged Guide Antenna (1 - 18 GHz)	2310	2/17/06
900772	EMCO	3161-02	Horn antenna (2.0 - 4.0 GHz)	9804-1044	5/20/07
900321	EMCO	3161-03	Horn antenna (4.0 - 8.2 GHz)	9508-1020	5/20/07
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1 - 26.5 GHz)	3008A00505	5/5/05
900154	Compliance Design	Roberts Dipole	Adjustable Elements Dipole Antenna (30 - 1000 MHz)	N/A	10/6/05
900352	Werlatone	C1795	Directional Coupler, 100 watt (1 - 1000 MHz)	4067	7/1/2005
901341	Narda Microwave Corp.	3003-20-40	Coaxial Directional Coupler (2 - 4 GHz)	2	7/1/2005
901342	Narda Microwave Corp.	3044-10	Coaxial Directional Coupler (4 - 8 GHz)	901	7/1/2005
901345	Narda Microwave Corp.	3002-30	Coaxial Directional Coupler (0.95 - 2 GHz)	20032	7/1/2005

10.3 RADIATED SPURIOUS EMISSIONS TEST DATA - §2.1053


Operating Frequency (MHz): 160.075
 Channel: 8
 Measured Conducted Power (dBm): 37.1
 Modulation: Analog narrowband
 Distance (m): 3
 Limit (dBc): 57.1 (50+10LogP)

TABLE 10-2: RADIATED SPURIOUS EMISSIONS DATA §2.1053

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Level (dBc)	Margin (dB)
320.150	72.2	-51.5	2.2	-0.4	91.2	-34.1
480.225	61.4	-59.3	2.6	-0.5	99.5	-42.4
640.300	56.7	-63.0	2.6	-1.1	103.8	-46.7
800.375	53.7	-68.0	3.2	-1.3	109.6	-52.5
960.450	45.3	-71.3	3.5	-1.3	113.2	-56.1
1120.525	45.8	-73.8	3.6	1.0	113.5	-56.4
1280.600	48.7	-69.5	3.8	2.5	107.9	-50.8
1440.675	28.8	-88.8	4.3	4.1	126.1	-69.0
1600.750	41.6	-76.2	4.5	4.7	113.1	-56.0

TEST PERSONNEL:

Daniel Baltzell
 Test Engineer



Signature

February 4, 2005
 Date Of Test

11 FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055

11.1 MEASUREMENT METHOD

The frequency stability of the transmitter was measured by:

1. Temperature: The temperature was varied from -30°C to +50°C at intervals no more than 10°C throughout the temperature range using an environmental chamber. A period of time sufficient to stabilize all of the components in the equipment shall be allowed prior to each frequency measurement.
2. Primary Supply Voltage: The primary supply voltage was varied from 85% to 115% of the voltage normally at the input to the device, or at the power supply terminals if cables are not normally supplied. The EUT was tested down to the battery endpoint.

11.2 TIME PERIOD AND PROCEDURE

1. The carrier frequency of the transmitter was measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment was subjected to a three hour "soak" at -30°C without any power applied.
3. After the "soak" at -30°C, the measurement of the carrier frequency of the transmitter was made within a three-minute interval after applying power to the transmitter.
4. Frequency measurements were made at 10°C intervals up to +50°C, then back to room temperature. A minimum period of one hour was provided to allow stabilization of the equipment at each temperature level.

11.3 FREQUENCY TOLERANCE

The minimum frequency stability shall be 5ppm.

11.4 FREQUENCY STABILITY TEST EQUIPMENT

TABLE 11-1: FREQUENCY STABILITY TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Cal. Due Date
900946	Tenney Engineering, Inc	TH65	Temperature Chamber with Humidity	11380	2/3/05
901247	Wavetek	DM25XT	Multimeter	40804098	3/3/05
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	8/11/05


11.5 FREQUENCY STABILITY TEST DATA - §2.1055

Operating Frequency (MHz): 146.075
Channel: 1
Reference Voltage: 7.5 VDC
Deviation Limit: 5 PPM

TABLE 11-2: FREQUENCY STABILITY DATA - §2.1055: TEMPERATURE

Temperature (°C)	Measured Frequency (MHz)	ppm
-30	146.074431	-3.90
-20	146.074382	-4.23
-10	146.074456	-3.72
0	146.074526	-3.24
10	146.074863	-0.94
20	146.075000	0.00
30	146.075053	0.36
40	146.075097	0.66
50	146.075210	1.44

PLOT 11-1: TEMPERATURE FREQUENCY STABILITY - §2.1055

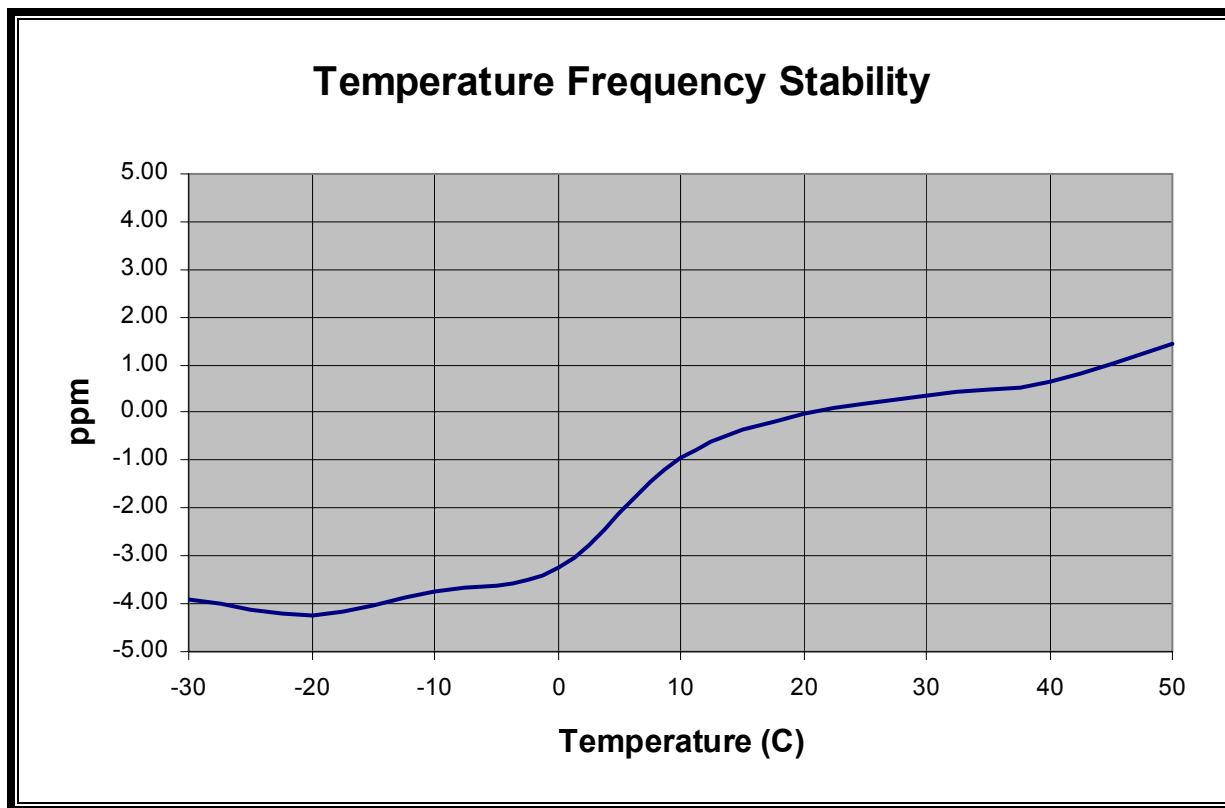

TEST PERSONNEL:

Dan Baltzell
Test Engineer


Signature

January 12, 2005
Date Of Test

TABLE 11-3: FREQUENCY STABILITY DATA - §2.1055: VOLTAGE

Voltage (DC)	Measured Frequency (MHz)	ppm
5.6 (battery end-point)	146.074633	-2.51
6.375	146.074507	-3.37
7.5	146.074515	-3.32
8.625	146.074528	-3.23

PLOT 11-2: VOLTAGE FREQUENCY STABILITY - §2.1055

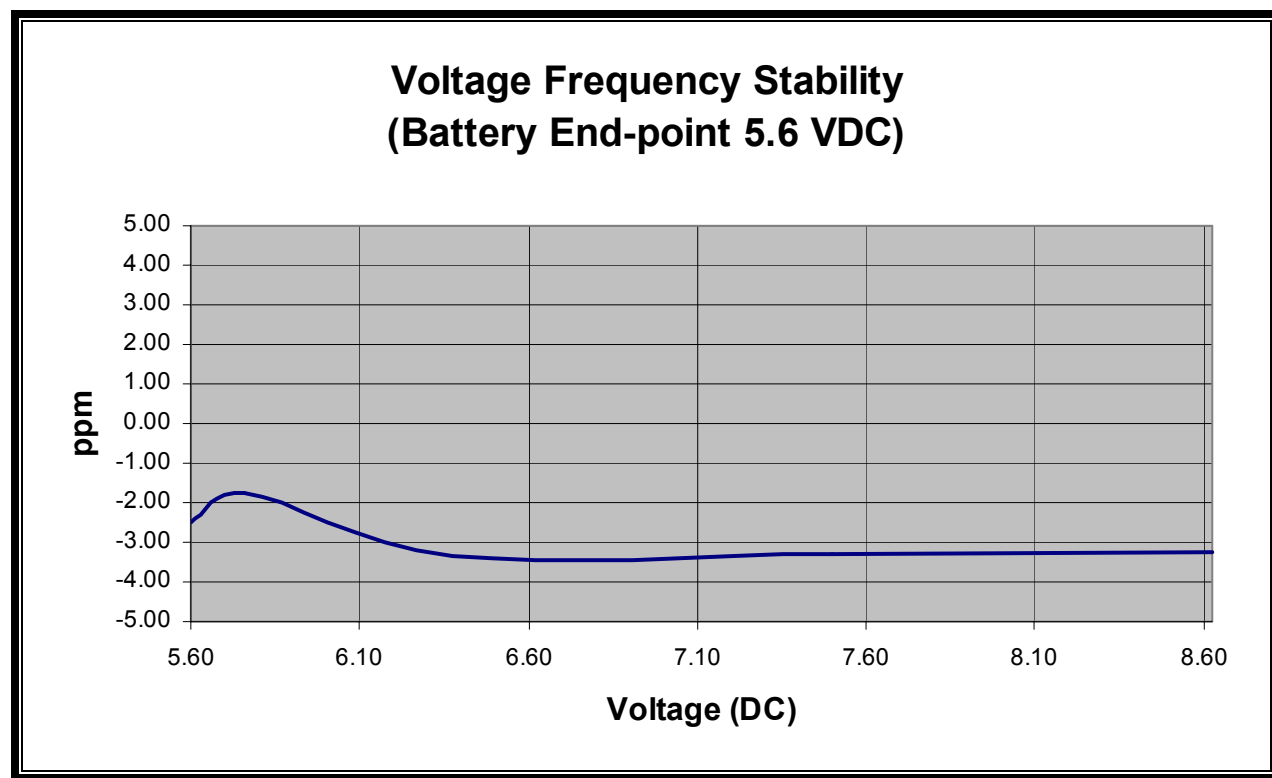

TEST PERSONNEL:

Dan Baltzell
 Test Engineer

Signature

January 12, 2005
 Date Of Test

12 FCC PART 90 §90.214: TRANSIENT FREQUENCY BEHAVIOR

12.1 TRANSIENT FREQUENCY BEHAVIOR TEST PROCEDURE

ANSI/TIA-603-B-2002 section 2.2.19

12.2 TRANSIENT FREQUENCY BEHAVIOR LIMITS

TABLE 12-1: REQUIREMENTS FOR EUT WITH 25 KHZ CHANNEL SPACING

Time Intervals (*)(**)	Maximum Frequency Difference (***)	150-174 MHz	421-512 MHz
t1(****)	± 25 kHz	5.0 mSec	10.0 mSec
t2	± 12.5 kHz	20.0 mSec	25.0 mSec
t3(****)	± 25 kHz	5.0 mSec	10.0 mSec

TABLE 12-2: REQUIREMENTS FOR EUT WITH 12.5 KHZ CHANNEL SPACING

Time Intervals (*)(**)	Maximum Frequency Difference (***)	150-174 MHz	421-512 MHz
t1(****)	± 12.5 kHz	5.0 mSec	10.0 mSec
t2	± 6.25 kHz	20.0 mSec	25.0 mSec
t3(****)	± 12.5 kHz	5.0 mSec	10.0 mSec

(*) t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing. t_1 is the time period immediately following t_{on} . t_2 is the time period immediately following t_1 . t_3 is the time period from the instant when the transmitter is turned off until t_{off} . t_{off} is the instant when the 1 kHz test signal starts to rise.

(**) During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in §90.213.

(***) The difference between the actual transmitter frequency and the assigned transmitter frequency.

(****) If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

Maximum frequency difference between time T2 and T3: Calculation for Channel 8:

The frequency stability is required to be 5 PPM.

4 div. on scope represent 12.5 kHz for narrow band channel.


Therefore, 160.075 MHz times 5 PPM times +/- 4 Divisions divided by 12.5 kHz equals about +/- .26 division. .26 Div. correspond to 0.81 kHz.

TABLE 12-3: TRANSIENT FREQUENCY BEHAVIOR TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Cal. Due Date
900917	Hewlett Packard	8648C	Synthesized Signal Generator (9 kHz - 3200 MHz)	3537A01741	7/6/05
901118	Hewlett Packard	HP8901B	Modulation Analyzer (150 kHz – 1300 MHz)	2406A00178	7/7/05
900561	Tektronix	TDS540A	Oscilloscope	B020129	3/25/05
901214	Hewlett Packard	HP8471D	Detector	2952A19822	5/13/05
900352	Werlatone	C1795	Directional Coupler, 100 watt (1 - 1000 MHz)	4067	7/1/2005
901138	Weinschel Corp.	48-40-34 DC- 18GHz	Attenuator, 100W 40 dB	BK5883	5/13/05
901140	Weinschel Corp.	47-10-34 DC- 18GHz	Attenuator, 50W 10 dB	BK6203	5/13/05

12.3 TRANSIENT FREQUENCY BEHAVIOR TEST DATA

PLOT 12-1: ON TIME – CHANNEL 8: 160.075 MHZ; 12.5 KHZ NARROW BAND

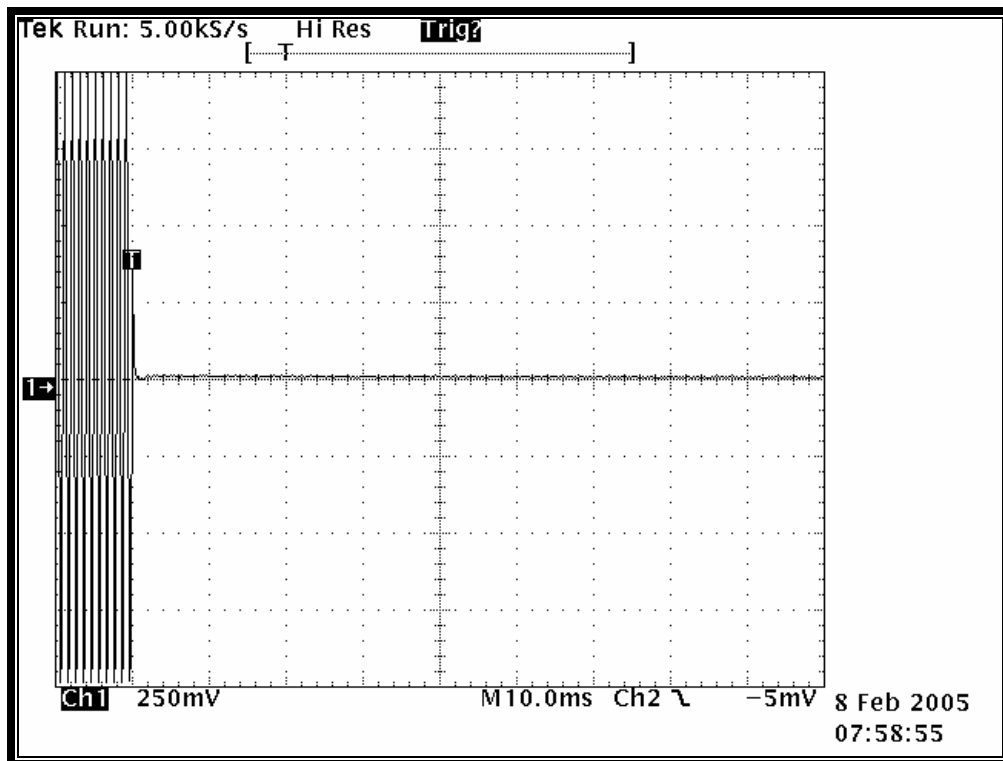

Carrier ON time:
Power: 5 W rated
Channel 8: 160.075 MHz NB (12.5 kHz)
RF Signal Generator: Modulation 12.5 kHz deviation

Timebase: 10 ms/div
Trigger: On negative edge of Ch 2, level -5mV
Ch 2: 250mV/div, Probe 1.000:1
Vertical scale: +/-4 div. corresponds to +/-12.5 kHz


TEST PERSONNEL:

Daniel Baltzell
Test Engineer

Signature

February 8, 2005
Date Of Test

PLOT 12-2: OFF TIME – CHANNEL 8: 160.075 MHZ; 12.5 KHZ NARROW BAND

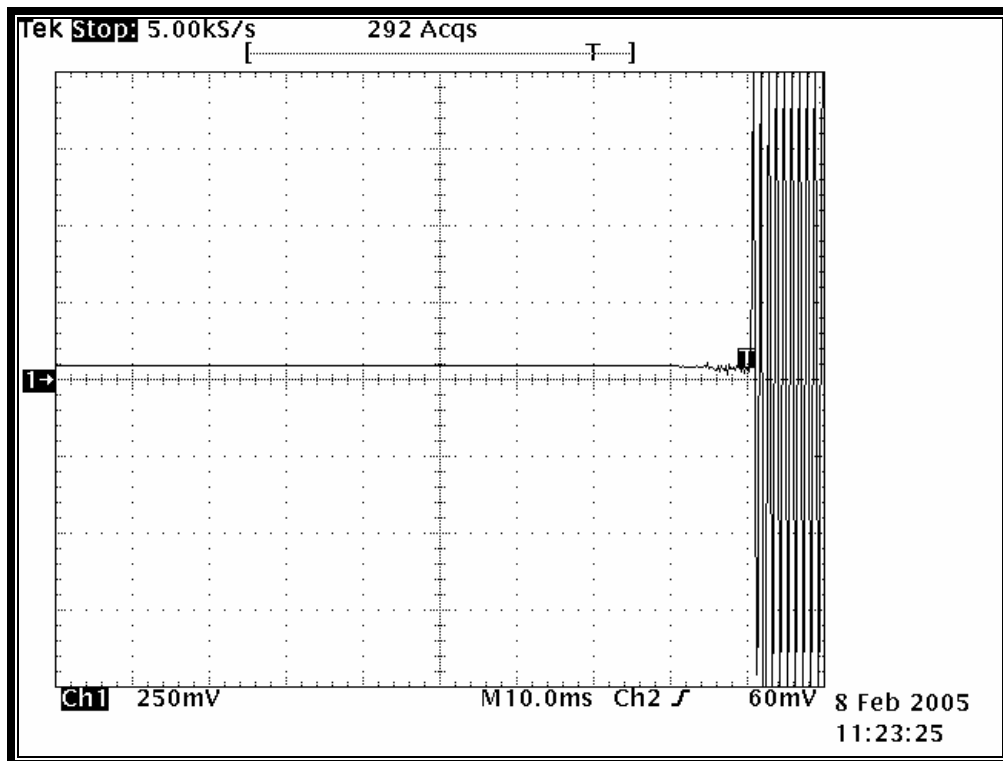

Carrier OFF time:
Power: 5 W rated
Channel 8: 160.075 MHz NB (12.5 kHz)
RF Signal Generator: Modulation 12.5 kHz deviation

Timebase: 10 ms/div
Trigger: On positive edge of Ch 2, level 60 mV
Ch 1: 250mV/div, Probe 1.000:1
Vertical scale: +/-4 div. corresponds to +/-12.5 kHz


TEST PERSONNEL:

Daniel Baltzell
Test Engineer

Signature

February 8, 2005
Date Of Test

PLOT 12-3: ON TIME – CHANNEL 3: 160.075 MHZ; 25 KHZ WIDE BAND

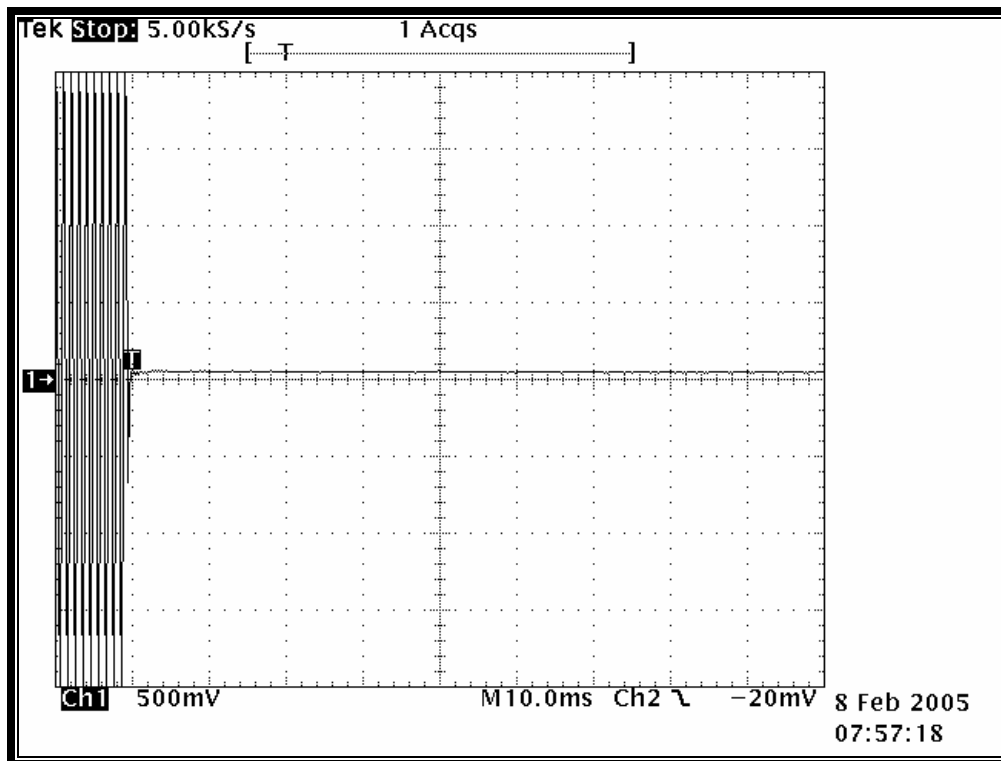

Carrier ON time:
Power: 5 W rated
Channel 3: 160.075 MHz WB (25 kHz)
RF Signal Generator: Modulation 25 kHz deviation

Timebase: 10 ms/div
Trigger: On negative edge of Ch 2, level -20 mV
Ch 1: 500mV/div, Probe 1.000:1
Vertical scale: +/-4 div. corresponds to +/-25 kHz


TEST PERSONNEL:

Daniel Baltzell
Test Engineer

Signature

February 8, 2005
Date Of Test

PLOT 12-4: OFF TIME – CHANNEL 2: 160.075 MHZ; 25 KHZ WIDE BAND

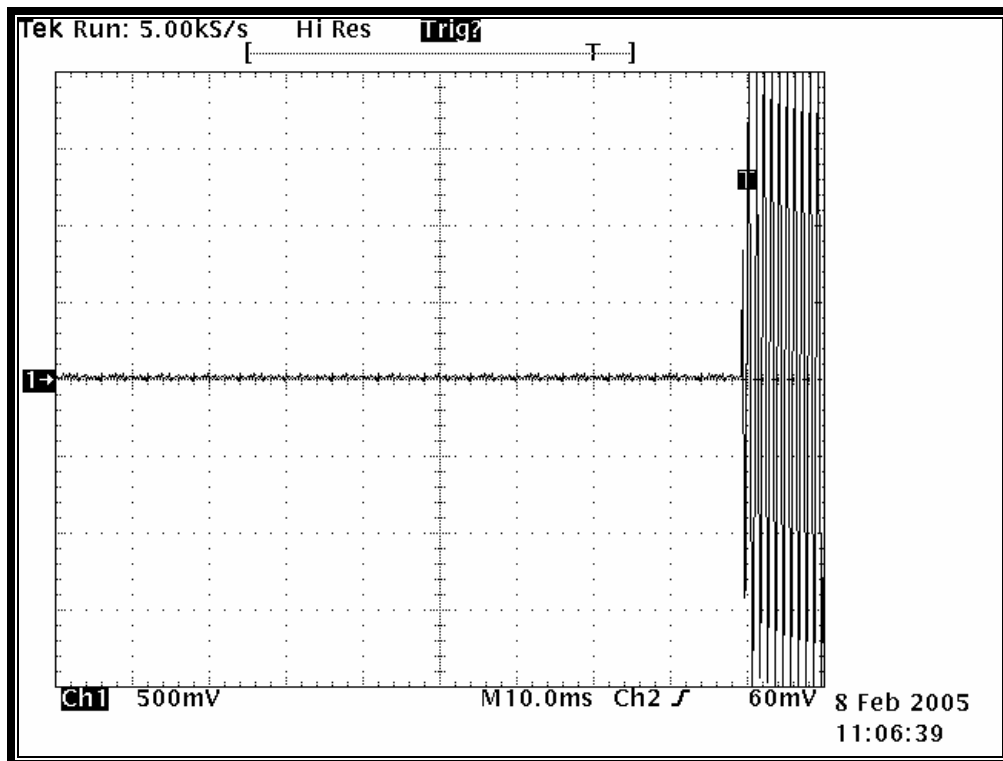

Carrier OFF time:
Power: 5 W rated
Channel 2: 160.075 MHz WB (25 kHz)
RF Signal Generator: Modulation 25 kHz deviation

Timebase: 10 ms/div
Trigger: On positive edge of Ch 2, level 60 mV
Ch 1: 500mV/div, Probe 1.000:1
Vertical scale: +/-4 div. corresponds to +/-12.5 kHz

TEST PERSONNEL:

Daniel Baltzell
Test Engineer

Signature

February 8, 2005
Date Of Test

13 FCC PART 2.202: NECESSARY BANDWIDTH AND EMISSION BANDWIDTH

Type of Emission: F3E; F1E; F1D

Necessary Bandwidth and Emission Bandwidth Calculation

The 25 kHz Analog modulation necessary bandwidth: $B_n = 16K0F3E$

The 12.5 kHz Analog modulation bandwidth = $11K0F3E$

Calculation:

Max modulation (M) in kHz: 3

Max deviation (D) in kHz for (25 KHz channel spacing analog): 5

Max deviation for (D) in kHz for (12.5 KHz channel spacing): 2.5

Constant factor (K): 1

$$B_{n(25\text{KHz analog})} = 2M + 2DK = (2 \times 3) + (2 \times 5 \times 1) = 16 \text{ kHz}$$

$$B_{n(12.5\text{KHz analog})} = 2M + 2DK = (2 \times 3) + (2 \times 2.5 \times 1) = 11 \text{ kHz}$$

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Report #: 2004187
FCC ID: RXUSP200V2
Model: SP200 V2
Standards: FCC Part 90
Date: March 15, 2005

14 CONCLUSION

The data in this measurement report shows that the Maxon Telecom Co., Ltd. SP200 V2 ,
FCC ID: RXUSP200V2, complies with all the requirements of Parts 2 and 90 of the FCC Rules.