

FCC TEST REPORT (15.247)

REPORT NO.: RF940330L05
MODEL NO.: WMIA-139AG
RECEIVED: Apr. 25, 2005
TESTED: May 03 ~ May 10, 2005
ISSUED: May 11, 2005

APPLICANT: SparkLAN Communications, Inc.

ADDRESS: 3Fl., No. 246, Sec. 1, Neihu Road., Neihu
Chiu, Taipei Taiwan 114, R.O.C

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen,
Kwei Shan Hsiang, Taoyuan Hsien 333,
Taiwan, R.O.C.

This test report consists of 68 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



No. 2177-01

Table of Contents

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	6
3.	GENERAL INFORMATION.....	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.4	DESCRIPTION OF SUPPORT UNITS	12
4.	TEST TYPES AND RESULTS (802.11a 5725~5850MHz BAND)	13
4.1	CONDUCTED EMISSION MEASUREMENT	13
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	13
4.1.2	TEST INSTRUMENTS.....	13
4.1.3	TEST PROCEDURES	14
4.1.4	DEVIATION FROM TEST STANDARD	14
4.1.5	TEST SETUP	15
4.1.6	EUT OPERATING CONDITIONS	15
4.1.7	TEST RESULTS	16
4.2	RADIATED EMISSION MEASUREMENT	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	18
4.2.2	TEST INSTRUMENTS.....	19
4.2.3	TEST PROCEDURES	20
4.2.4	DEVIATION FROM TEST STANDARD	20
4.2.5	TEST SETUP	21
4.2.6	EUT OPERATING CONDITIONS	21
4.2.7	TEST RESULTS	22
4.3	6dB BANDWIDTH MEASUREMENT	35
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	35
4.3.2	TEST INSTRUMENTS.....	35
4.3.3	TEST PROCEDURE.....	36
4.3.4	DEVIATION FROM TEST STANDARD	36
4.3.5	TEST SETUP	36
4.3.6	EUT OPERATING CONDITIONS	36
4.3.7	TEST RESULTS	37
4.4	MAXIMUM PEAK OUTPUT POWER	42
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	42
4.4.2	INSTRUMENTS.....	42
4.4.3	TEST PROCEDURES	43
4.4.4	DEVIATION FROM TEST STANDARD	43
4.4.5	TEST SETUP	43
4.4.6	EUT OPERATING CONDITIONS	43



4.4.7	TEST RESULTS	44
4.5	POWER SPECTRAL DENSITY MEASUREMENT	46
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	46
4.5.2	TEST INSTRUMENTS.....	46
4.5.3	TEST PROCEDURE.....	47
4.5.4	DEVIATION FROM TEST STANDARD	47
4.5.5	TEST SETUP	47
4.5.6	EUT OPERATING CONDITION	47
4.5.7	TEST RESULTS	48
4.6	BAND EDGES MEASUREMENT	53
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	53
4.6.2	TEST INSTRUMENTS.....	53
4.6.3	TEST PROCEDURE.....	53
4.6.4	DEVIATION FROM TEST STANDARD	53
4.6.5	EUT OPERATING CONDITION	54
4.6.6	TEST RESULTS	54
4.7	ANTENNA REQUIREMENT	61
4.7.1	STANDARD APPLICABLE	61
4.7.2	ANTENNA CONNECTED CONSTRUCTION	61
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	62
6.	INFORMATION ON THE TESTING LABORATORIES	68



1. CERTIFICATION

PRODUCT: 802.11a Wireless MiniPCI Card
BRAND NAME: SparkLAN
MODEL NO.: WMIA-139AG
APPLICANT: SparkLAN Communications, Inc.
TEST SAMPLE: Engineering Sample
TESTED: May 03 ~ May 10, 2005
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Windy Chou, **DATE:** May 11, 2005
(Windy Chou)

TECHNICAL
ACCEPTANCE : Gary Chang, **DATE:** May 11, 2005
Responsible for (Gary Chang)
RF

APPROVED BY : Cody Chang, **DATE:** May 11, 2005
(Cody Chang, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -22.03dB at 0.171MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.80dB at 267.11MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz ~ 30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.73 dB
	200MHz ~ 1000MHz	3.74 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	802.11a Wireless MiniPCI Card
MODEL NO.	WMIA-139AG
POWER SUPPLY	5.0Vdc from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11a: 54/48/36/24/18/12/9/6Mbps (Turbo mode: up to 108Mbps *see Note 5)
FREQUENCY RANGE	802.11a: 5.150 ~ 5.350GHz and 5.725 ~ 5.850GHz
NUMBER OF CHANNEL	802.11a: 13 for Normal mode / 5 for Turbo mode
CHANNEL SPACING	802.11a: 20MHz for Normal mode / 40MHz for Turbo mode
OUTPUT POWER	67.143mW for 5.150 ~ 5.350GHz 63.680mW for 5.725 ~ 5.850GHz
ANTENNA TYPE	Refer to NOTE 3 below
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in the 5GHz Bands and compatibility with 802.11a technology.
2. This EUT is capable of providing data rates of up to 108 Mbps in 802.11a Turbo mode depending upon reception quality.
3. The following antennas are used in this EUT.

Item	Antenna Brand	Antenna Type	Gain(dBi)
1	PINWHEEL	Printed	2.7
2	PINWHEEL	Printed	2.7
3	TIKI	Printed	7.51

Remark: The item 2 and 3 were chosen for final test in this report. We have tested for each antenna and chosen the highest gain of each antenna for final test and recorded in this report.

4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 5725 ~ 5850MHz band:


For 802.11a: Five channels are provided to this EUT for normal mode.

Channel	Frequency
1	5745 MHz
2	5765 MHz
3	5785 MHz
4	5805 MHz
5	5825 MHz

For 802.11a: Two channels are provided to this EUT for turbo mode.

Channel	Frequency
1	5760 MHz
2	5800 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

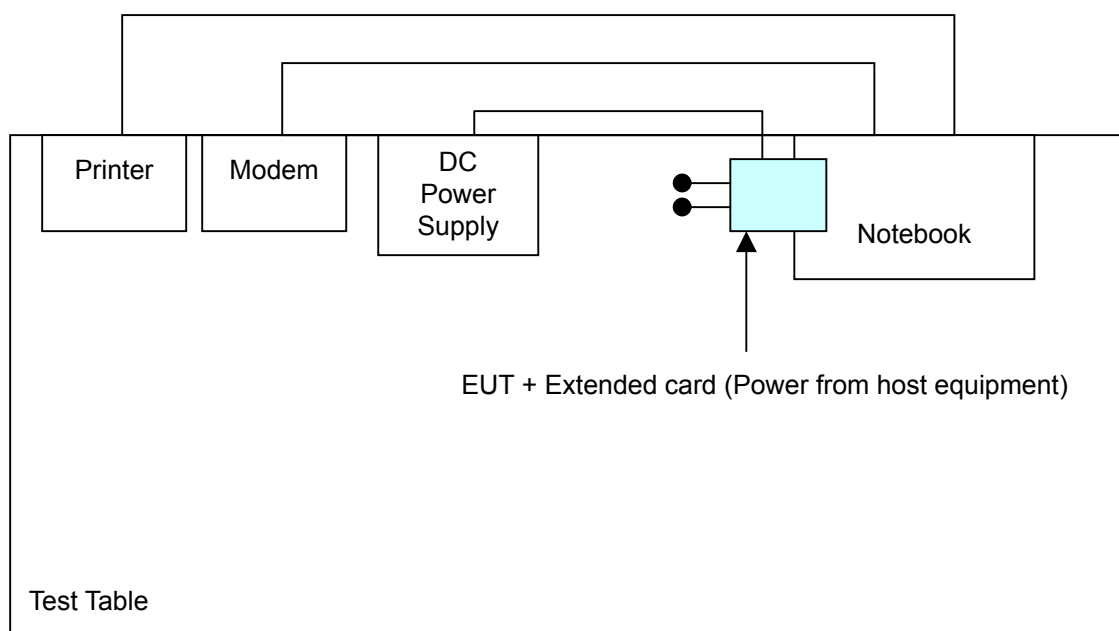

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
1	Note 1	x	x	Note 2	Antenna 2 (gain: 2.70)
2	Note 1	x	x	Note 2	Antenna 3 (gain: 7.51)

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz
RE≥1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement

Note 1: Power Line Conducted Emission is independent of antenna.

Note 2: Conducted RF measurement is independent of antenna.

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
2	802.11a	1 to 5	3	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
1	802.11a	1 to 5	3	OFDM	BPSK	6
2	802.11a	1 to 5	3	OFDM	BPSK	6

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
1	802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6
1	802.11a Turbo	1 to 2	1, 2	OFDM	BPSK	12
2	802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6
2	802.11a Turbo	1 to 2	1, 2	OFDM	BPSK	12

Bandedge Measurement:



- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 5	1, 5	OFDM	BPSK	6
802.11a Turbo	1 to 2	1, 2	OFDM	BPSK	12

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6
802.11a Turbo	1 to 2	1, 2	OFDM	BPSK	12

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an 802.11a Wireless MiniPCI Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS
2	PRINTER	EPSON	LQ-300+	DCGY054147	FCC DoC Approved
3	MODEM	ACEEX	1414V/3	0401008269	IFAXDM1414
4	DC Power Supply	Topward	6603D	700637	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2 shielded cable without core
3	1.2 shielded cable without core
4	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

4. TEST TYPES AND RESULTS (802.11a 5725~5850MHz Band)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
- The lower limit shall apply at the transition frequencies.
 - The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 - All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 06, 2005
RF signal cable Woken	5D-FB	Cable-HyC02-01	Jan. 09, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 20, 2006
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 20, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
- The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 - The test was performed in HwaYa Shielded Room 3.
 - The VCCI Site Registration No. is C-2047.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

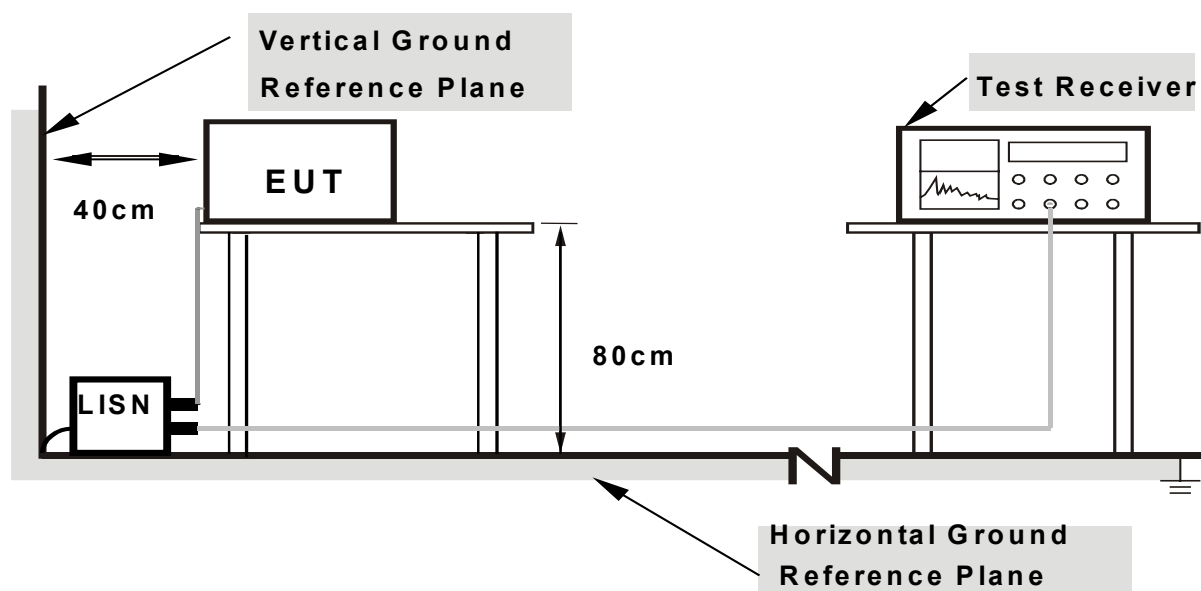

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT into Notebook via a extended card and placed on the testing table.
- b. The Notebook systems run a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The Notebook sent "H" messages to its screen.
- d. The notebook system sent "H" messages to modem.
- e. The notebook system sent "H" messages to printer, and the printer printed them on paper.
- f. Steps c ~ e were repeated.


4.1.7 TEST RESULTS

Conducted Worst-Case Data

EUT	802.11a Wireless MiniPCI Card	MEASUREMENT DETAIL	
MODEL	WMIA-139AG	PHASE	Line 1
CHANNEL	Channel 3	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.171	0.10	42.79	-	42.89	-	64.92	54.92	-22.03	-
2	0.197	0.10	40.06	-	40.16	-	63.74	53.74	-23.58	-
3	1.566	0.20	30.06	-	30.26	-	56.00	46.00	-25.74	-
4	3.770	0.20	26.61	-	26.81	-	56.00	46.00	-29.19	-
5	10.719	0.31	34.15	-	34.46	-	60.00	50.00	-25.54	-
6	16.492	0.52	28.26	-	28.78	-	60.00	50.00	-31.22	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

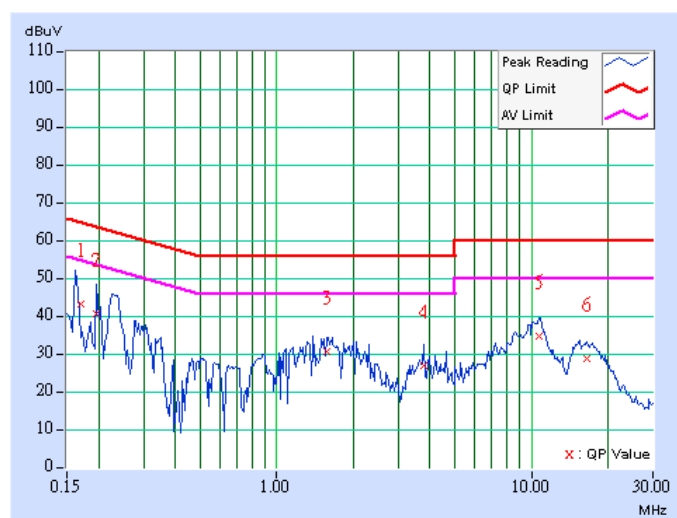

EUT	802.11a Wireless MiniPCI Card	MEASUREMENT DETAIL	
MODEL	WMIA-139AG	PHASE	Line 2
CHANNEL	Channel 3	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	40.01	-	40.11	-	64.61	54.61	-24.50	-
2	0.224	0.10	37.65	-	37.75	-	62.66	52.66	-24.91	-
3	0.349	0.10	28.13	-	28.23	-	58.99	48.99	-30.76	-
4	1.660	0.20	30.68	-	30.88	-	56.00	46.00	-25.12	-
5	10.723	0.41	34.27	-	34.68	-	60.00	50.00	-25.32	-
6	15.746	0.54	27.44	-	27.98	-	60.00	50.00	-32.02	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

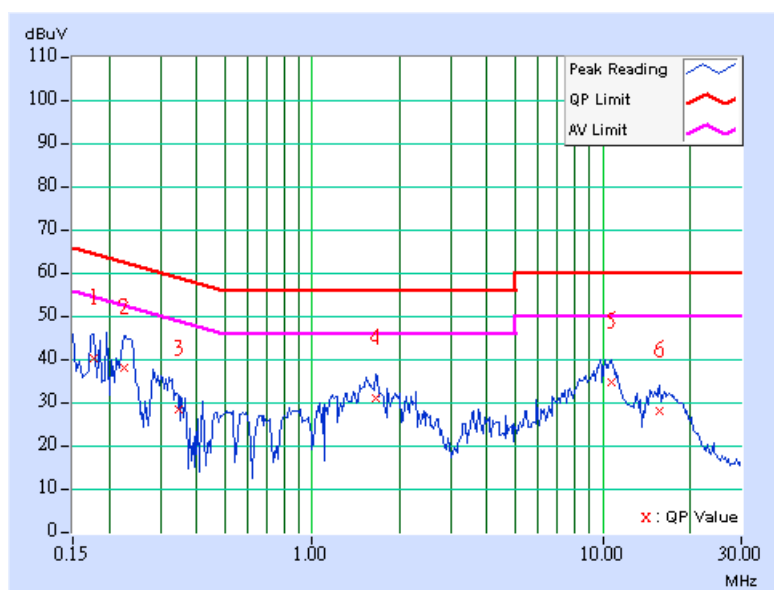

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Dec. 19, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 21, 2005
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Jan. 22, 2006
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Jan. 16, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170241	Feb. 23, 2006
Preamplifier Agilent	8449B	3008A01961	Nov. 09, 2005
Preamplifier Agilent	8447D	2944A10629	Nov. 09, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218182/4	Feb. 17, 2006
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218194/4	Feb. 17, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 1.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The IC Site Registration No. is IC4924-2.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

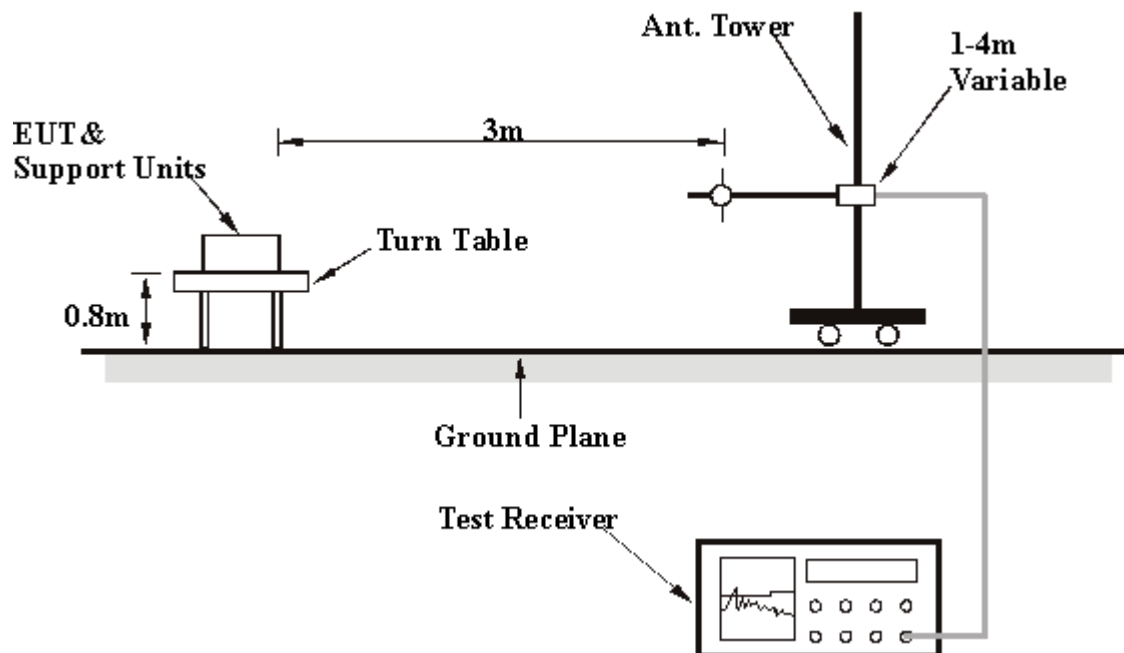

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

Below 1GHz Worst-Case Data

EUT	802.11a Wireless MiniPCI Card	MEASUREMENT DETAIL	
MODEL	WMIA-139AG	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 3	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 66%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui	EUT configure mode	1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.98	34.15 QP	43.50	-9.35	2.00 H	76	23.41	10.74
2	133.03	35.58 QP	43.50	-7.92	2.00 H	46	21.86	13.72
3	193.29	41.50 QP	43.50	-2.00	1.50 H	337	29.84	11.66
4	232.16	41.58 QP	46.00	-4.42	1.50 H	322	29.17	12.41
5	267.15	44.20 QP	46.00	-1.80	1.00 H	331	30.67	13.53
6	298.26	33.65 QP	46.00	-12.35	1.00 H	187	19.35	14.30
7	333.25	40.56 QP	46.00	-5.44	1.00 H	187	25.48	15.08
8	366.29	31.42 QP	46.00	-14.58	1.00 H	226	15.58	15.84
9	399.34	35.84 QP	46.00	-10.16	2.00 H	25	19.22	16.62
10	465.43	36.44 QP	46.00	-9.56	2.00 H	19	18.32	18.12

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
1. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
2. The other emission levels were very low against the limit.
3. Margin value = Emission level – Limit value

EUT	802.11a Wireless MiniPCI Card	MEASUREMENT DETAIL	
MODEL	WMIA-139AG	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 3	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 66%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui	EUT configure mode	1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	26.02 QP	40.00	-13.98	1.00 V	244	12.35	13.68
2	64.99	24.21 QP	40.00	-15.79	1.00 V	103	11.32	12.90
3	133.03	30.51 QP	43.50	-12.99	1.50 V	205	16.79	13.72
4	166.07	33.70 QP	43.50	-9.80	1.00 V	205	19.64	14.07
5	201.06	37.57 QP	43.50	-5.93	2.00 V	262	26.41	11.16
6	232.16	32.64 QP	46.00	-13.36	1.50 V	265	20.23	12.41
7	265.21	37.11 QP	46.00	-8.89	1.50 V	265	23.67	13.45
8	331.30	33.33 QP	46.00	-12.67	1.50 V	289	18.30	15.04
9	401.28	39.96 QP	46.00	-6.04	1.50 V	4	23.30	16.67
10	465.43	33.12 QP	46.00	-12.88	2.00 V	298	15.00	18.12

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
4. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
5. The other emission levels were very low against the limit.
6. Margin value = Emission level – Limit value

EUT	802.11a Wireless MiniPCI Card	MEASUREMENT DETAIL	
MODEL	WMIA-139AG	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 3	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 66%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui	EUT configure mode	2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	64.99	26.66 QP	40.00	-13.34	2.50 H	10	13.76	12.90
2	98.04	39.34 QP	43.50	-4.16	2.00 H	346	28.75	10.59
3	133.03	39.44 QP	43.50	-4.06	2.00 H	319	25.72	13.72
4	166.07	41.52 QP	43.50	-1.98	1.50 H	337	27.45	14.07
5	199.12	41.62 QP	43.50	-1.88	1.00 H	349	30.42	11.20
6	232.16	32.63 QP	46.00	-13.37	1.50 H	316	20.22	12.41
7	333.25	31.58 QP	46.00	-14.42	1.50 H	205	16.50	15.08
8	389.62	34.22 QP	46.00	-11.78	1.00 H	208	17.82	16.39
9	465.43	35.93 QP	46.00	-10.07	2.00 H	268	17.81	18.12
10	607.33	32.97 QP	46.00	-13.03	1.50 H	271	11.98	21.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	30.17 QP	40.00	-9.83	1.00 V	295	16.50	13.68
2	64.99	34.22 QP	40.00	-5.78	1.00 V	97	21.32	12.90
3	133.03	29.37 QP	43.50	-14.13	1.00 V	67	15.65	13.72
4	166.07	33.68 QP	43.50	-9.82	2.00 V	70	19.61	14.07
5	199.12	33.46 QP	43.50	-10.04	1.00 V	292	22.26	11.20
6	467.37	30.55 QP	46.00	-15.45	1.00 V	148	12.41	18.15

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

802.11a OFDM modulation - EUT configure mode 1

EUT	802.11a Wireless MiniPCI Card	MEASUREMENT DETAIL	
MODEL	WMIA-139AG	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 66%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui	EUT CONFIGURE MODE	1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3830.00	47.75 PK	74.00	-26.25	1.31 H	46	13.81	33.95
1	#3830.00	43.11 AV	54.00	-10.89	1.31 H	46	9.17	33.95
2	*5745.00	114.01 PK			1.12 H	5	75.95	38.06
2	*5745.00	104.07 AV			1.12 H	5	66.01	38.06
3	#11490.00	58.20 PK	74.00	-15.80	1.07 H	203	10.97	47.23
3	#11490.00	45.72 AV	54.00	-8.28	1.07 H	203	-1.51	47.23
4	17235.00	71.34 PK	94.01	-22.67	1.31 H	82	19.97	51.37
4	17235.00	56.61 AV	84.07	-27.46	1.31 H	82	5.24	51.37

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3830.00	44.87 PK	74.00	-29.12	1.10 V	253	10.93	33.95
1	#3830.00	37.03 AV	54.00	-16.97	1.10 V	253	3.09	33.95
2	*5745.00	107.11 PK			1.00 V	311	69.05	38.06
2	*5745.00	96.89 AV			1.00 V	311	58.83	38.06
3	#11490.00	56.81 PK	74.00	-17.19	1.21 V	17	9.58	47.23
3	#11490.00	43.51 AV	54.00	-10.49	1.21 V	17	-3.72	47.23
4	17235.00	73.39 PK	87.11	-13.72	1.02 V	177	22.02	51.37
4	17235.00	57.16 AV	76.89	-19.73	1.02 V	177	5.79	51.37

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#”The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

EUT	802.11a Wireless MiniPCI Card	MEASUREMENT DETAIL	
MODEL	WMIA-139AG	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 3	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 66%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui	EUT CONFIGURE MODE	1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3856.00	47.86 PK	74.00	-26.14	1.28 H	28	13.83	34.03
1	#3856.00	43.25 AV	54.00	-10.75	1.28 H	28	9.22	34.03
2	*5785.00	115.37 PK			1.20 H	2	77.22	38.15
2	*5785.00	103.60 AV			1.20 H	2	65.45	38.15
3	#11570.00	58.42 PK	74.00	-15.58	1.10 H	310	11.30	47.12
3	#11570.00	45.95 AV	54.00	-8.05	1.10 H	310	-1.17	47.12
4	17355.00	71.45 PK	95.37	-23.92	1.28 H	100	19.31	52.14
4	17355.00	56.80 AV	83.60	-26.80	1.28 H	100	4.66	52.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3856.00	44.45 PK	74.00	-29.55	1.04 V	340	10.42	34.03
1	#3856.00	37.12 AV	54.00	-16.88	1.04 V	340	3.09	34.03
2	*5785.00	106.58 PK			1.00 V	350	68.43	38.15
2	*5785.00	96.42 AV			1.00 V	350	58.27	38.15
3	#11570.00	55.40 PK	74.00	-18.60	1.17 V	360	8.28	47.12
3	#11570.00	43.21 AV	54.00	-10.79	1.17 V	360	-3.91	47.12
4	17355.00	72.51 PK	86.58	-14.07	1.04 V	189	20.37	52.14
4	17355.00	56.89 AV	76.42	-19.53	1.04 V	189	4.75	52.14

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#”The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

EUT	802.11a Wireless MiniPCI Card	MEASUREMENT DETAIL	
MODEL	WMIA-139AG	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 5	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 66%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui	EUT CONFIGURE MODE	1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3883.00	49.03 PK	74.00	-24.97	1.15 H	198	14.91	34.12
1	#3883.00	44.53 AV	54.00	-9.47	1.15 H	198	10.41	34.12
2	*5825.00	114.61 PK			1.12 H	360	76.40	38.21
2	*5825.00	103.89 AV			1.12 H	360	65.68	38.21
3	#11650.00	60.56 PK	74.00	-13.44	1.02 H	49	13.46	47.10
3	#11650.00	47.54 AV	54.00	-6.46	1.02 H	49	0.44	47.10
4	17475.00	73.73 PK	94.61	-20.88	1.00 H	108	20.64	53.08
4	17475.00	57.70 AV	83.89	-26.19	1.00 H	108	4.61	53.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3883.00	45.90 PK	74.00	-28.10	1.09 V	250	11.78	34.12
1	#3883.00	39.25 AV	54.00	-14.75	1.09 V	250	5.13	34.12
2	*5825.00	103.81 PK			1.08 V	309	65.60	38.21
2	*5825.00	93.25 AV			1.08 V	309	55.04	38.21
3	#11650.00	57.12 PK	74.00	-16.88	1.06 V	24	10.02	47.10
3	#11650.00	44.60 AV	54.00	-9.40	1.06 V	24	-2.50	47.10
4	17475.00	74.24 PK	83.81	-9.57	1.00 V	178	21.16	53.08
4	17475.00	57.53 AV	73.25	-15.72	1.00 V	178	4.45	53.08

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

802.11a OFDM modulation - EUT configure mode 2

EUT	802.11a Wireless MiniPCI Card	MEASUREMENT DETAIL	
MODEL	WMIA-139AG	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 66%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui	EUT CONFIGURE MODE	2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3830.00	46.95 PK	74.00	-27.05	1.28 H	62	13.01	33.95
1	#3830.00	39.99 AV	54.00	-14.01	1.28 H	62	6.05	33.95
2	*5745.00	118.22 PK			1.23 H	80	80.16	38.06
2	*5745.00	108.51 AV			1.23 H	80	70.45	38.06
3	17235.00	63.03 PK	98.22	-35.19	1.17 H	49	11.66	51.37
3	17235.00	50.33 AV	88.51	-38.18	1.17 H	49	11.66	51.37

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3830.00	45.20 PK	74.00	-28.80	1.27 V	37	11.26	33.95
1	#3830.00	35.56 AV	54.00	-18.44	1.27 V	37	1.62	33.95
2	*5745.00	99.07 PK			1.02 V	41	61.01	38.06
2	*5745.00	89.62 AV			1.02 V	41	51.56	38.06
3	17235.00	63.80 PK	79.07	-15.27	1.11 V	274	12.43	51.37
3	17235.00	50.46 AV	69.62	-19.16	1.11 V	274	12.43	51.37

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#”The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

EUT	802.11a Wireless MiniPCI Card	MEASUREMENT DETAIL	
MODEL	WMIA-139AG	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 3	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 66%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui	EUT CONFIGURE MODE	2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3856.00	47.25 PK	74.00	-26.75	1.35 H	350	13.22	34.03
1	#3856.00	40.10 AV	54.00	-13.90	1.35 H	350	6.07	34.03
2	*5785.00	118.34 PK			1.20 H	100	80.19	38.15
2	*5785.00	109.20 AV			1.20 H	100	71.05	38.15
3	17355.00	63.20 PK	98.34	-35.14	1.10 H	333	11.06	52.14
3	17355.00	50.42 AV	89.20	-38.78	1.10 H	333	11.06	52.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3856.00	45.86 PK	74.00	-28.14	1.20 V	40	11.83	34.03
1	#3856.00	36.20 AV	54.00	-17.80	1.20 V	40	2.17	34.03
2	*5785.00	99.40 PK			1.04 V	350	61.25	38.15
2	*5785.00	90.20 AV			1.04 V	350	52.05	38.15
3	17355.00	64.02 PK	79.40	-15.38	1.10 V	300	11.88	52.14
3	17355.00	50.86 AV	70.20	-19.34	1.10 V	300	11.88	52.14

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#”The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

EUT	802.11a Wireless MiniPCI Card	MEASUREMENT DETAIL	
MODEL	WMIA-139AG	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 5	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 66%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui	EUT CONFIGURE MODE	2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3883.00	47.63 PK	74.00	-26.37	1.31 H	75	13.51	34.12
1	#3883.00	40.30 AV	54.00	-13.70	1.31 H	75	6.18	34.12
2	*5825.00	118.56 PK			1.20 H	140	80.35	38.21
2	*5825.00	108.76 AV			1.20 H	140	70.55	38.21
3	17475.00	63.58 PK	98.56	-33.18	1.15 H	123	10.50	53.08
3	17475.00	50.89 AV	88.76	-37.87	1.15 H	123	10.50	53.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3883.00	45.88 PK	74.00	-28.12	1.22 V	40	11.76	34.12
1	#3883.00	36.10 AV	54.00	-17.90	1.22 V	40	1.98	34.12
2	*5825.00	99.48 PK			1.05 V	350	61.27	38.21
2	*5825.00	90.34 AV			1.05 V	350	52.13	38.21
3	17475.00	64.32 PK	79.48	-15.16	1.08 V	310	11.24	53.08
3	17475.00	50.96 AV	70.34	-19.38	1.08 V	310	11.24	53.08

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#”The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

802.11a Turbo OFDM modulation

EUT	802.11a Wireless MiniPCI Card	MEASUREMENT DETAIL	
MODEL	WMIA-139AG	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 66%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui	EUT CONFIGURE MODE	1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3840.00	48.54 PK	74.00	-25.46	1.26 H	51	14.56	33.98
1	#3840.00	44.23 AV	54.00	-9.77	1.26 H	51	10.25	33.98
2	*5760.00	112.32 PK			1.24 H	70	74.23	38.09
2	*5760.00	103.23 AV			1.24 H	70	65.14	38.09
3	#11520.00	56.62 PK	74.00	-17.38	1.29 H	346	9.42	47.20
3	#11520.00	43.74 AV	54.00	-10.26	1.29 H	346	-3.46	47.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3840.00	47.54 PK	74.00	-26.46	1.06 V	24	13.56	33.98
1	#3840.00	42.42 AV	54.00	-11.58	1.06 V	24	8.44	33.98
2	*5760.00	106.49 PK			1.05 V	360	68.40	38.09
2	*5760.00	97.10 AV			1.05 V	360	59.01	38.09
3	#11520.00	55.89 PK	74.00	-18.11	1.16 V	299	8.69	47.20
3	#11520.00	44.05 AV	54.00	-9.95	1.16 V	299	-3.15	47.20
4	17280.00	67.07 PK	86.49	-19.42	1.00 V	69	15.41	51.66
4	17280.00	53.65 AV	77.10	-23.45	1.00 V	69	15.41	51.66

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#”The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

EUT	802.11a Wireless MiniPCI Card	MEASUREMENT DETAIL	
MODEL	WMIA-139AG	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 2	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 66%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui	EUT CONFIGURE MODE	1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3866.00	49.10 PK	74.00	-24.90	1.24 H	120	15.03	34.07
1	#3866.00	44.50 AV	54.00	-9.50	1.24 H	120	10.43	34.07
2	*5800.00	112.28 PK			1.31 H	350	74.10	38.18
2	*5800.00	102.58 AV			1.31 H	350	64.40	38.18
3	#11600.00	56.83 PK	74.00	-17.17	1.24 H	140	9.76	47.07
3	#11600.00	44.10 AV	54.00	-9.90	1.24 H	140	-2.97	47.07

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3866.00	48.20 PK	74.00	-25.80	1.10 V	10	14.13	34.07
1	#3866.00	42.86 AV	54.00	-11.14	1.10 V	10	8.79	34.07
2	*5800.00	106.96 PK			1.04 V	121	68.78	38.18
2	*5800.00	97.58 AV			1.04 V	121	59.40	38.18
3	#11600.00	56.12 PK	74.00	-17.88	1.11 V	340	9.05	47.07
3	#11600.00	44.38 AV	54.00	-9.62	1.11 V	340	-2.69	47.07
4	17400.00	66.85 PK	86.98	-20.11	1.01 V	72	14.43	52.42
4	17400.00	53.41 AV	77.58	-24.17	1.01 V	72	14.43	52.42

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

802.11a Turbo OFDM modulation

EUT	802.11a Wireless MiniPCI Card	MEASUREMENT DETAIL	
MODEL	WMIA-139AG	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 66%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui	EUT CONFIGURE MODE	2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3840.00	46.68 PK	74.00	-27.32	1.22 H	66	12.70	33.98
1	#3840.00	40.07 AV	54.00	-13.93	1.22 H	66	6.09	33.98
2	*5760.00	115.49 PK			1.26 H	85	77.40	38.09
2	*5760.00	105.98 AV			1.26 H	85	67.89	38.09
3	#11520.00	55.92 PK	74.00	-18.08	1.22 H	286	8.72	47.20
3	#11520.00	42.72 AV	54.00	-11.28	1.22 H	286	-4.48	47.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3840.00	44.29 PK	74.00	-29.71	1.30 V	156	10.31	33.98
1	#3840.00	34.40 AV	54.00	-19.60	1.30 V	156	0.42	33.98
2	*5760.00	96.87 PK			1.35 V	96	58.78	38.09
2	*5760.00	88.14 AV			1.35 V	96	50.05	38.09
3	#11520.00	57.33 PK	74.00	-16.67	1.15 V	149	10.13	47.20
3	#11520.00	45.32 AV	54.00	-8.68	1.15 V	149	-1.88	47.20

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

EUT	802.11a Wireless MiniPCI Card	MEASUREMENT DETAIL	
MODEL	WMIA-139AG	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 2	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 66%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui	EUT CONFIGURE MODE	2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3866.00	46.83 PK	74.00	-27.17	1.20 H	51	12.76	34.07
1	#3866.00	40.52 AV	54.00	-13.48	1.20 H	51	6.45	34.07
2	*5800.00	115.24 PK			1.25 H	85	77.06	38.18
2	*5800.00	105.82 AV			1.25 H	85	67.64	38.18
3	#11600.00	55.74 PK	74.00	-18.26	1.20 H	300	8.67	47.07
3	#11600.00	42.80 AV	54.00	-11.20	1.20 H	300	-4.27	47.07

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3866.00	44.20 PK	74.00	-29.80	1.31 V	245	10.13	34.07
1	#3866.00	34.10 AV	54.00	-19.90	1.31 V	245	0.03	34.07
2	*5800.00	97.10 PK			1.40 V	85	58.92	38.18
2	*5800.00	88.52 AV			1.40 V	85	50.34	38.18
3	#11600.00	58.22 PK	74.00	-15.78	1.11 V	165	11.15	47.07
3	#11600.00	45.74 AV	54.00	-8.26	1.11 V	165	-1.33	47.07

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

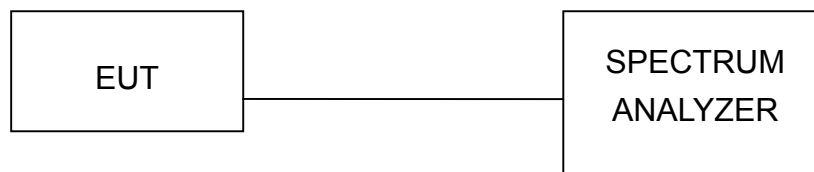

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11a OFDM modulation


EUT	802.11a Wireless MiniPCI Card	MODEL	WMIA-139AG
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 65%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	5745	16.40	0.5	PASS
3	5785	16.44	0.5	PASS
5	5825	16.44	0.5	PASS


CH 1

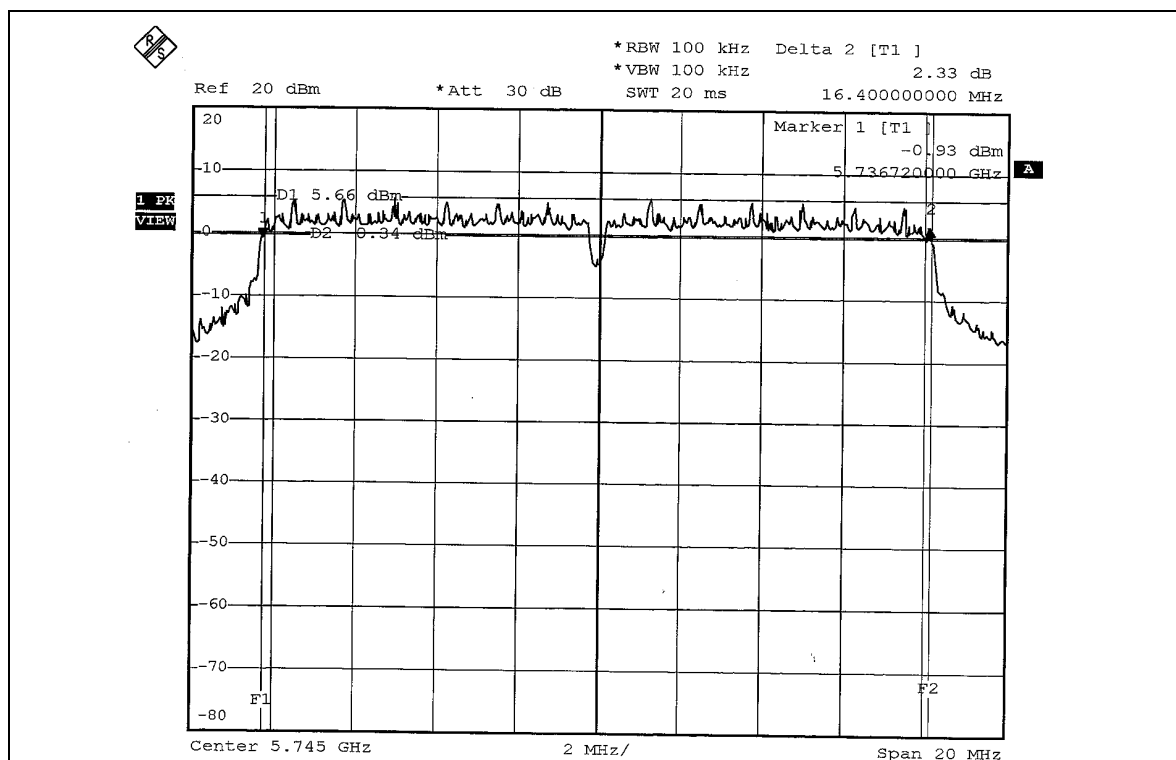

CH 3

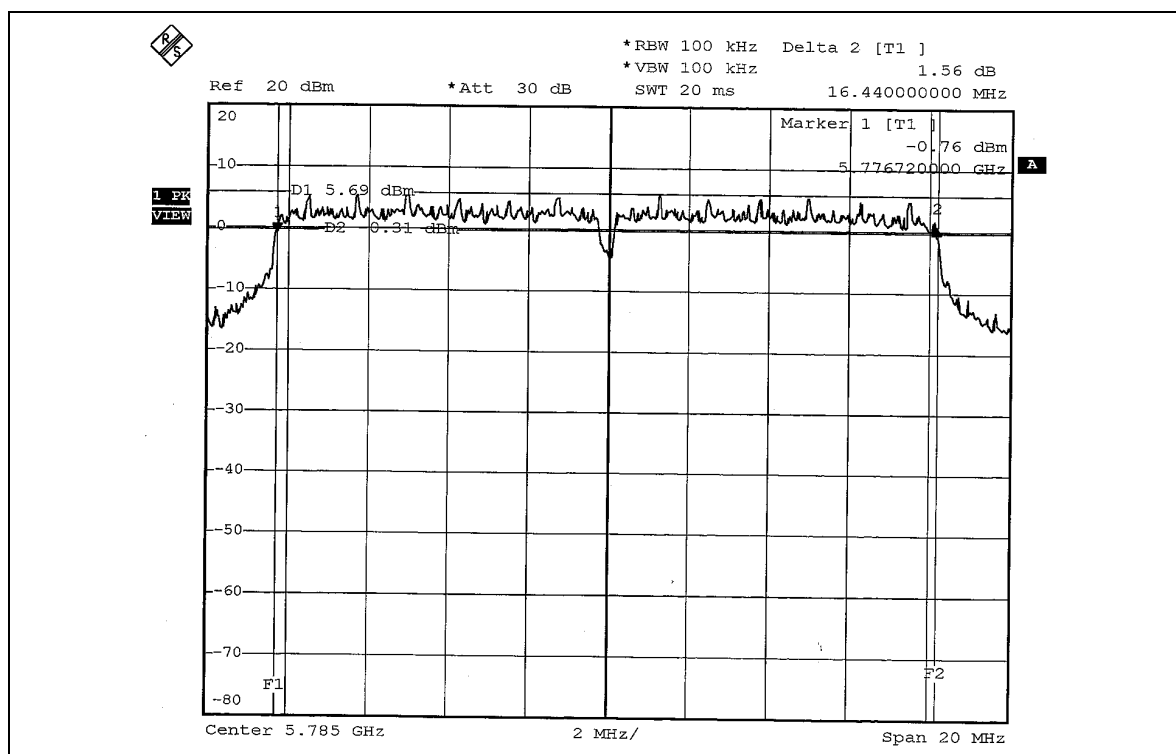

CH 5

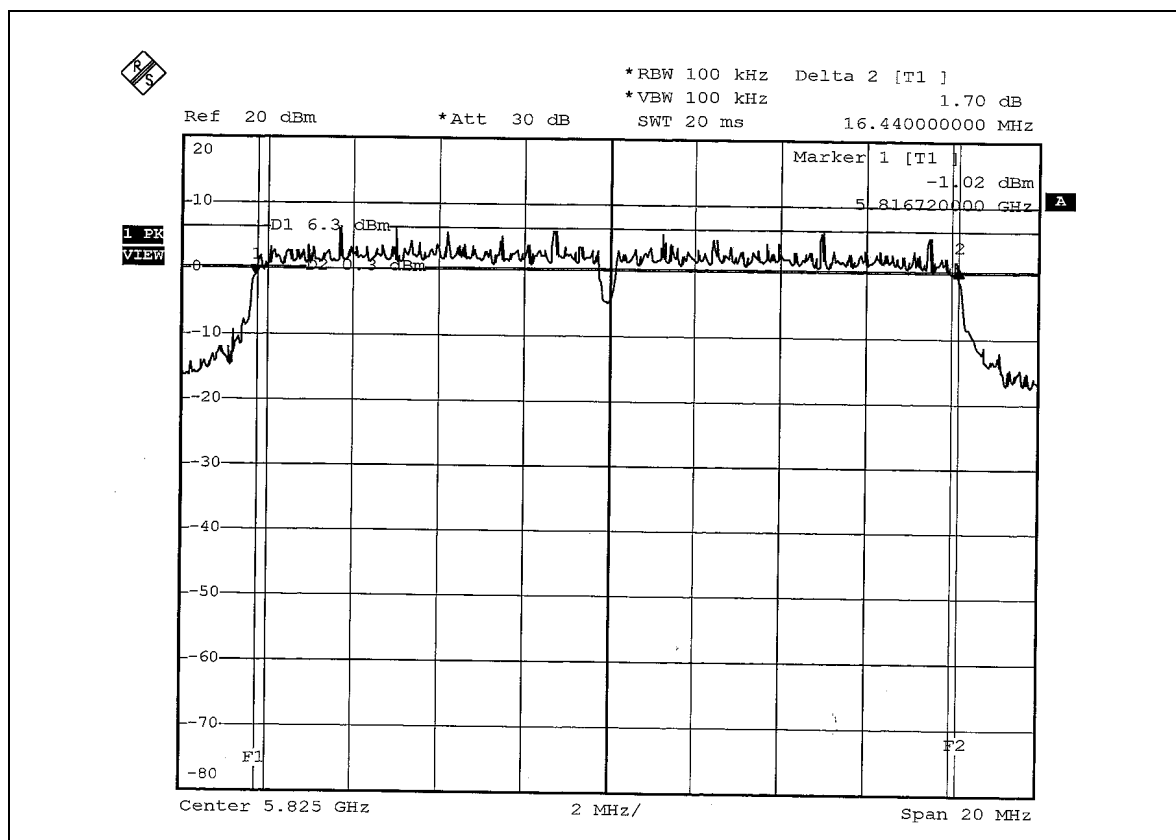


802.11a Turbo OFDM modulation


EUT	802.11a Wireless MiniPCI Card	MODEL	WMIA-139AG
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 65%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	5760	31.44	0.5	PASS
2	5800	32.64	0.5	PASS

CH 1

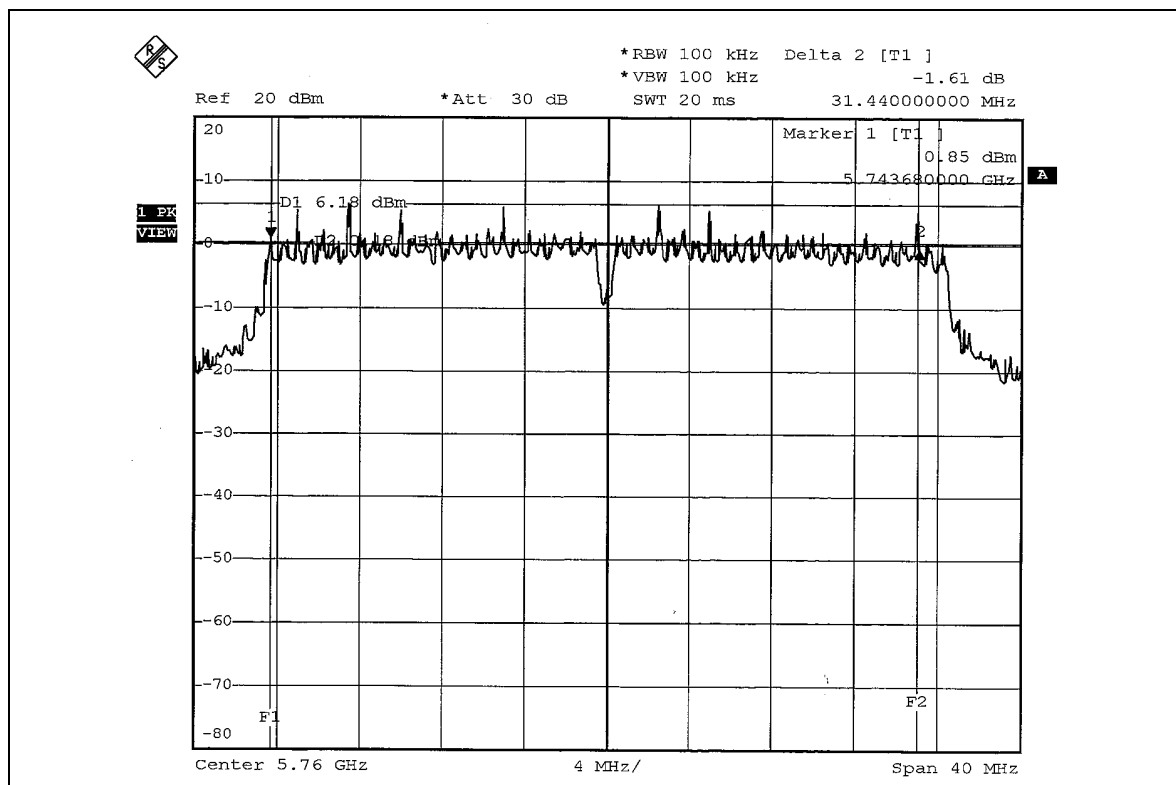

CH 2

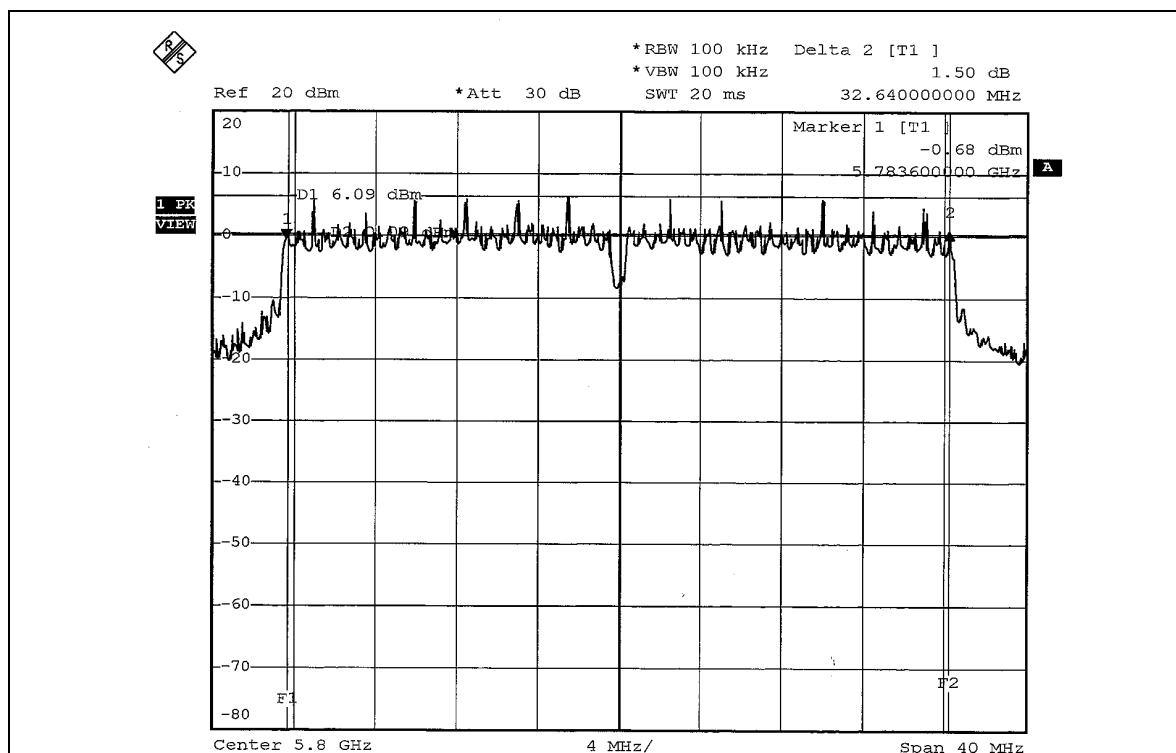

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2005
TEKTRONIX OSCILLOSCOPE	TDS 1012	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA..

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator . The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6

4.4.7 TEST RESULTS

802.11a OFDM modulation

EUT	802.11a Wireless MiniPCI Card	MODEL	WMIA-139AG
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 65%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	5745	63.387	18.02	28	PASS
3	5785	63.680	18.04	28	PASS
5	5825	63.533	18.03	28	PASS

Note: According to 15.247(b) (4), the maximum antenna gain 7.51dBi is higher than 6dBi, so limit of peak power shall be reduced by 2dBi.

802.11a Turbo OFDM modulation

EUT	802.11a Wireless MiniPCI Card	MODEL	WMIA-139AG
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 65%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	5760	63.680	18.04	28	PASS
2	5800	63.533	18.03	28	PASS

Note: According to 15.247(b) (4), the maximum antenna gain 7.51dBi is higher than 6dBi, so limit of peak power shall be reduced by 2dBi.

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 5.9.6


4.5.7 TEST RESULTS

802.11a OFDM modulation


EUT	802.11a Wireless MiniPCI Card	MODEL	WMIA-139AG
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 65%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5745	-8.41	8	PASS
3	5785	-8.34	8	PASS
5	5825	-8.07	8	PASS


CH 1

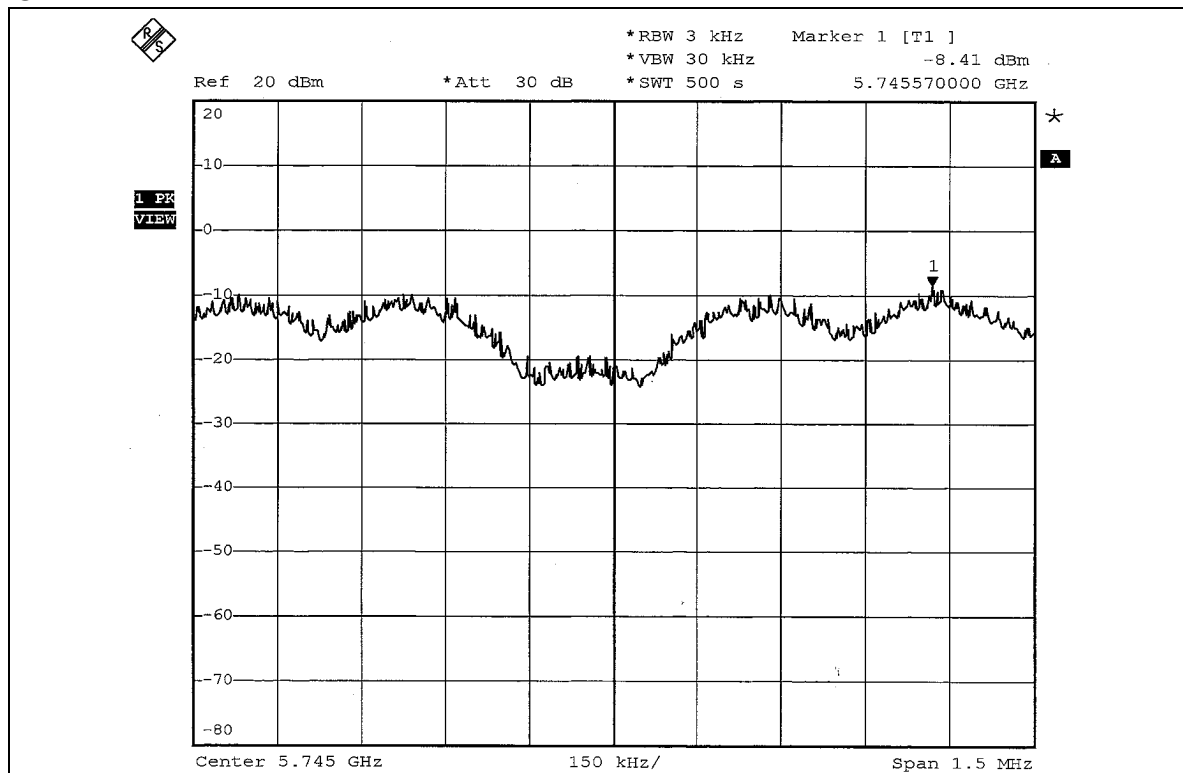

CH 3

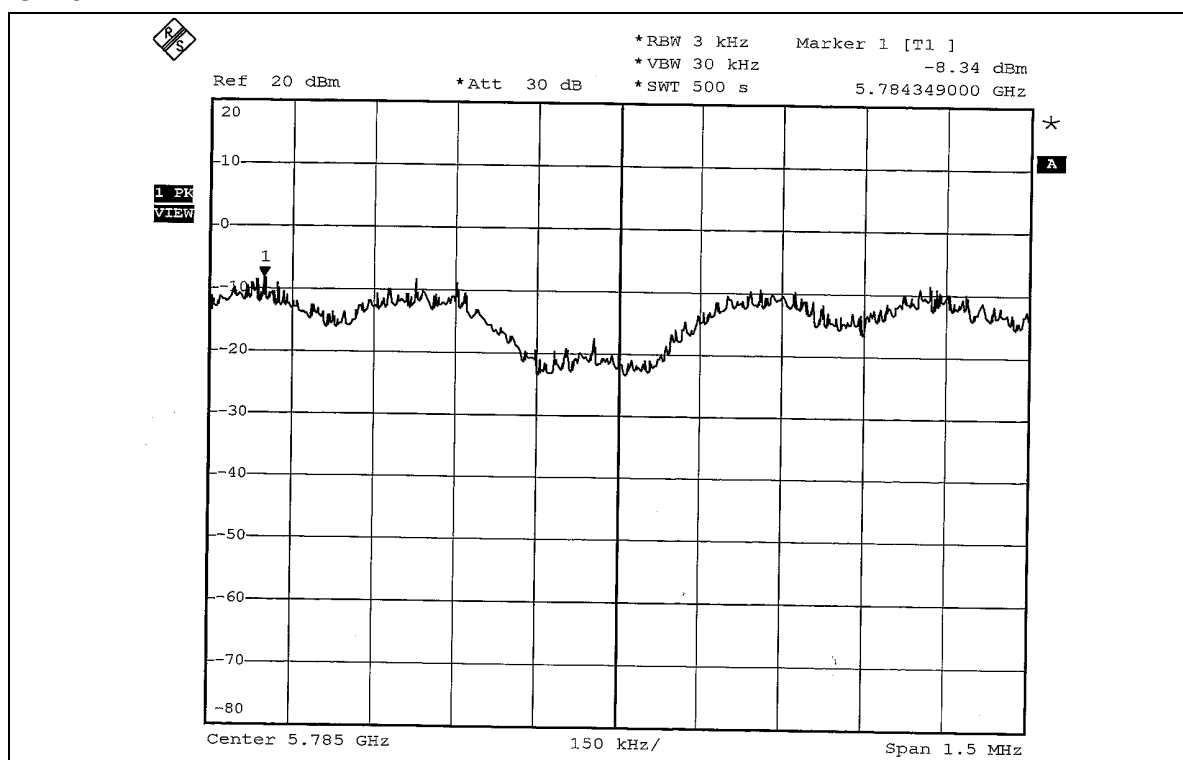

CH 5

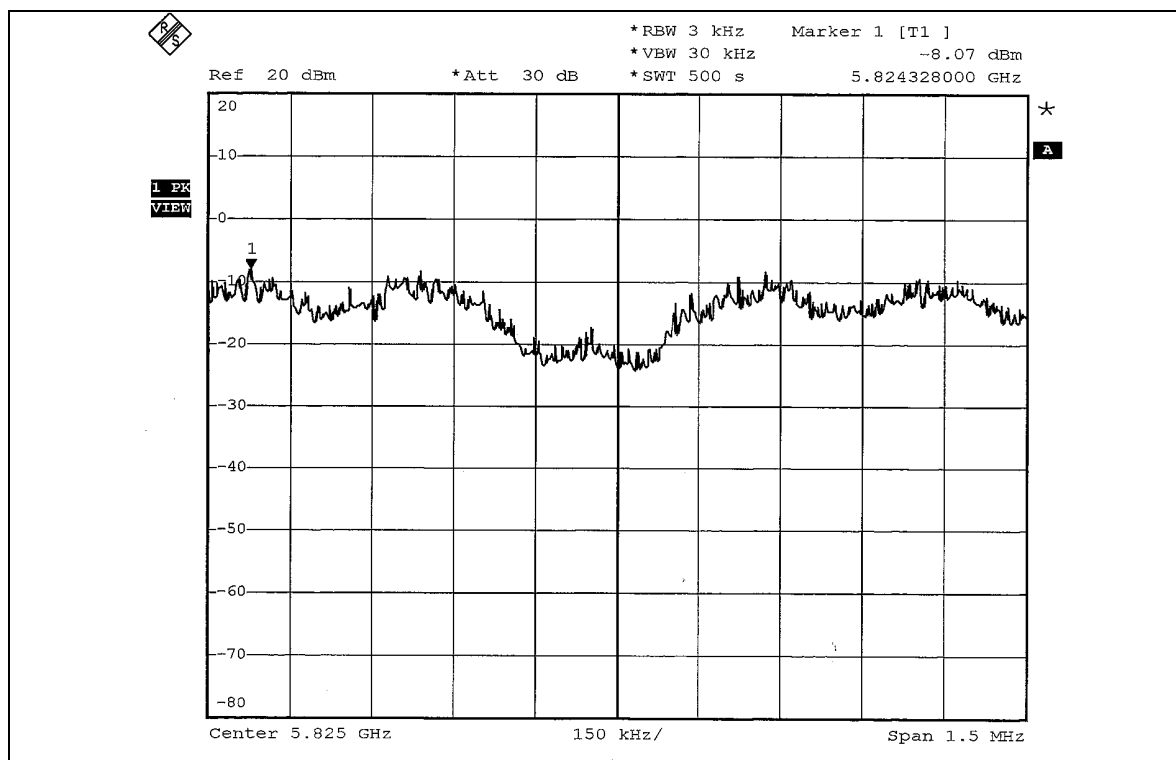


**802.11a Turbo OFDM modulation**


EUT	802.11a Wireless MiniPCI Card	MODEL	WMIA-139AG
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 65%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5760	-10.30	8	PASS
2	5800	-10.03	8	PASS

CH 1

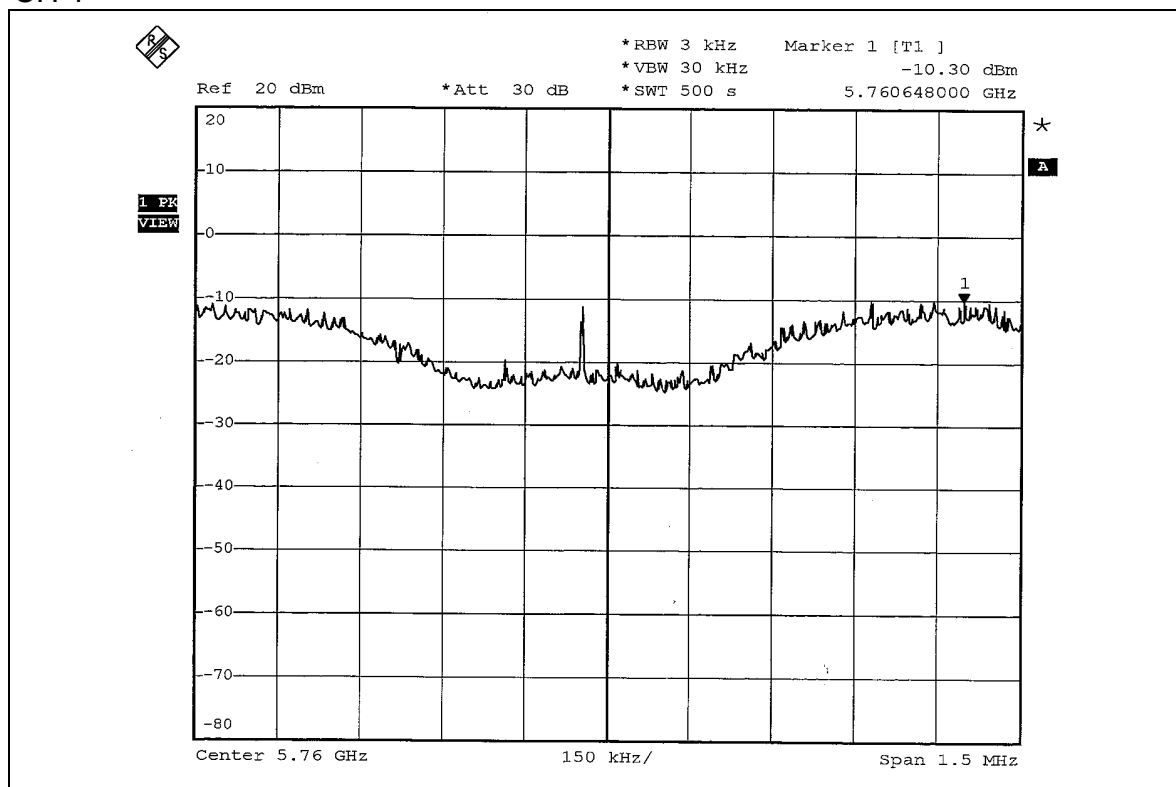

CH 2

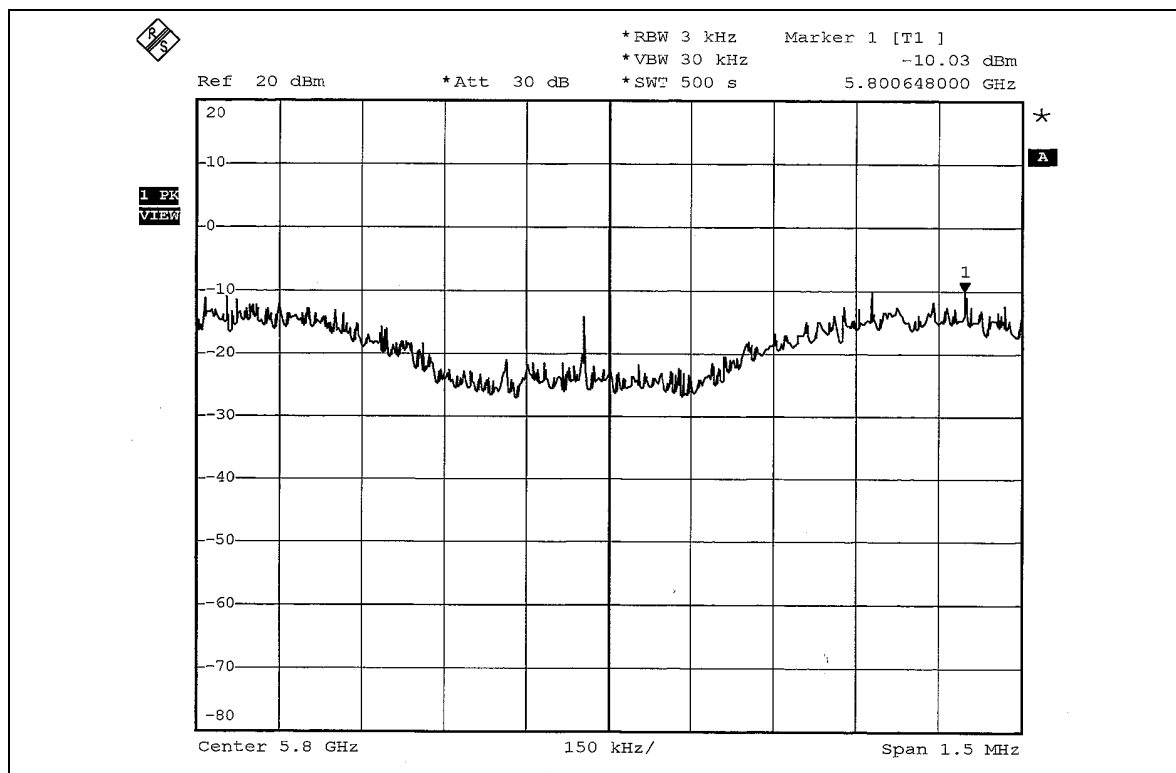

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation







4.6.5 EUT OPERATING CONDITION



Same as Item 5.9.6



4.6.6 TEST RESULTS



The spectrum plots are attached on the following pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).

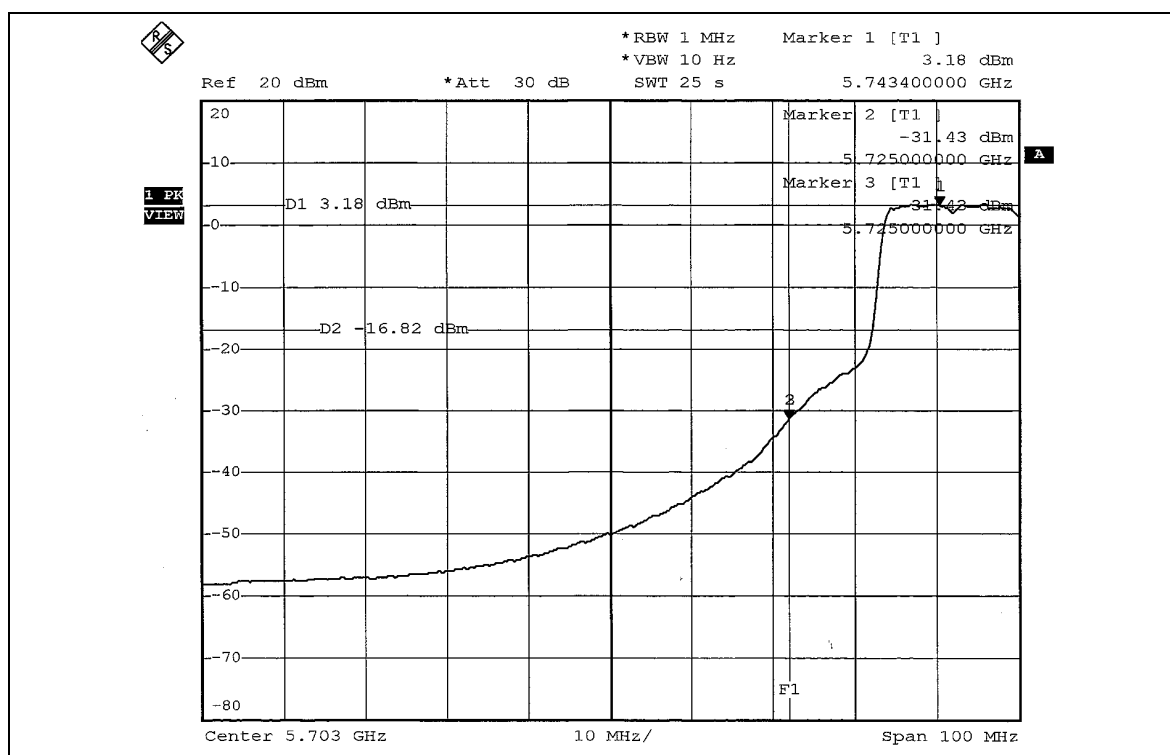
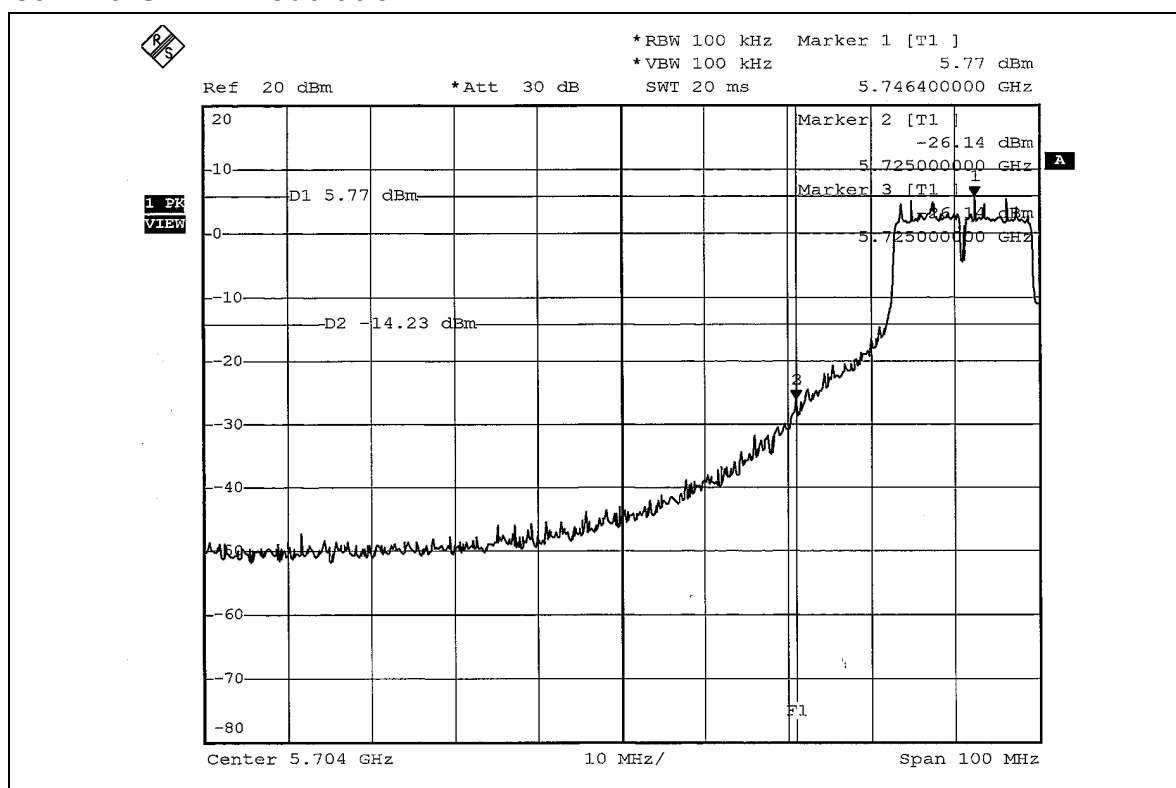
802.11a OFDM modulation

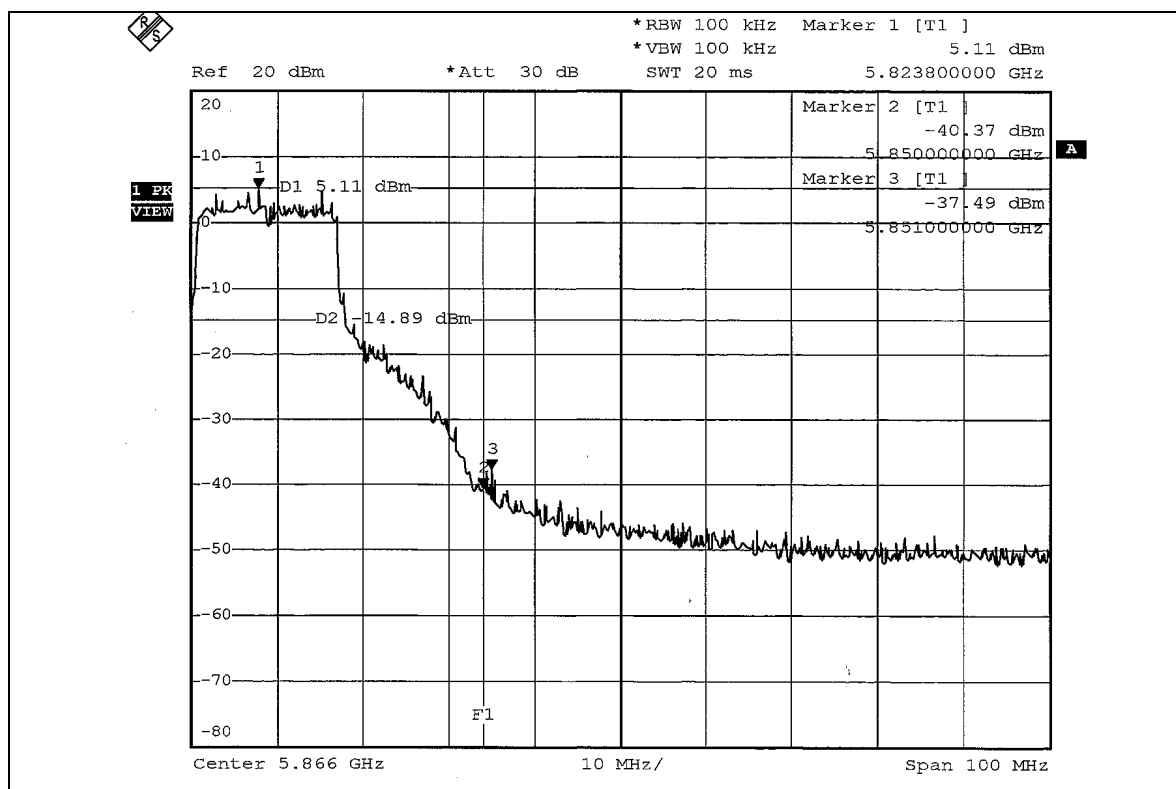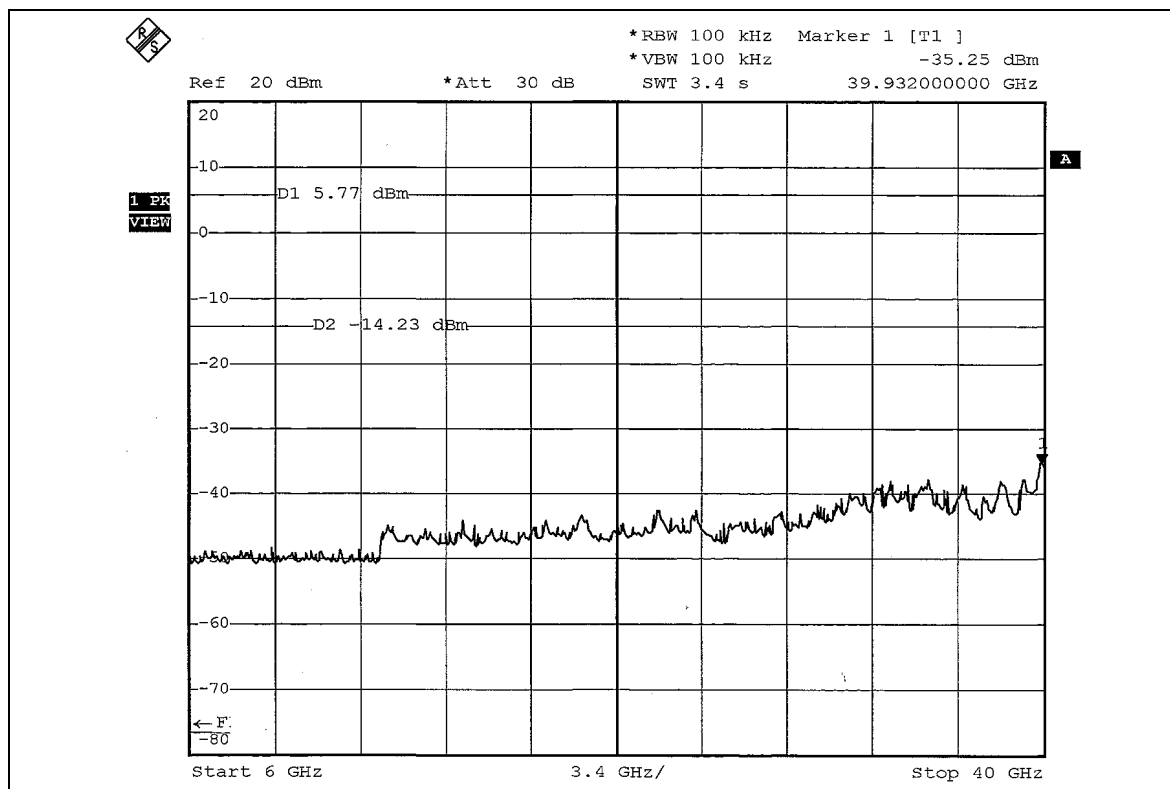

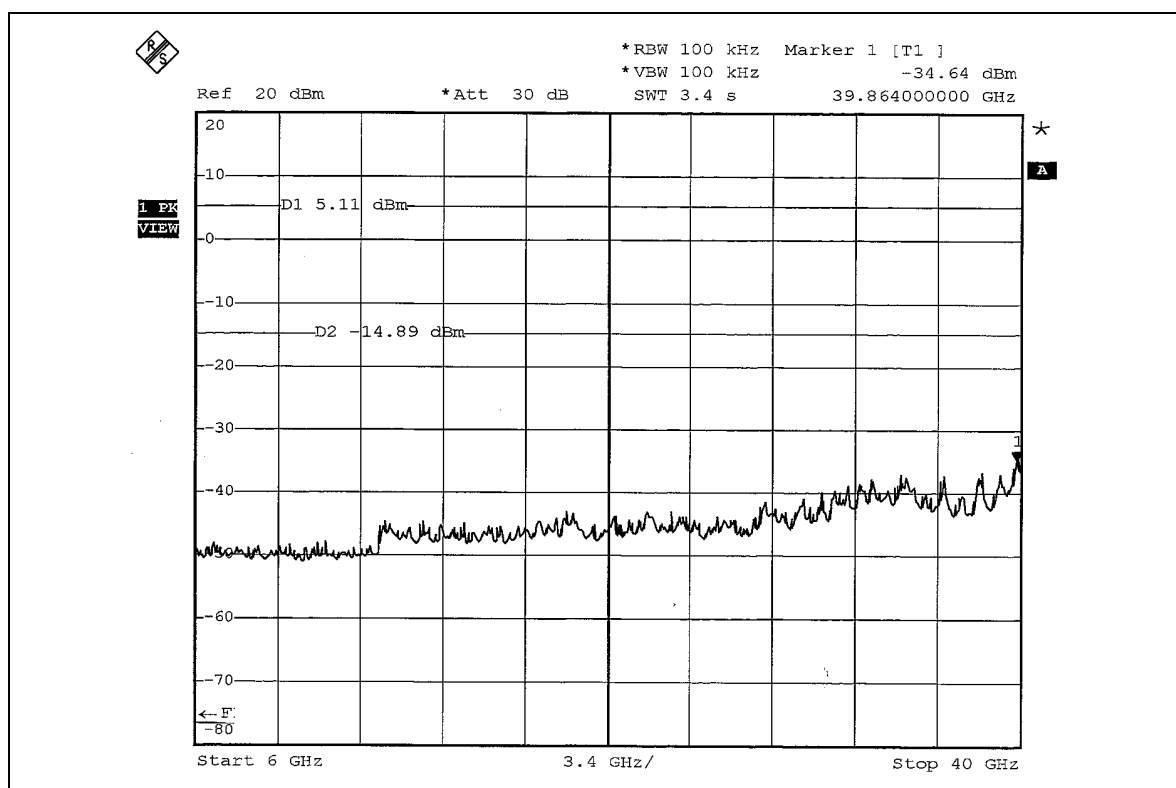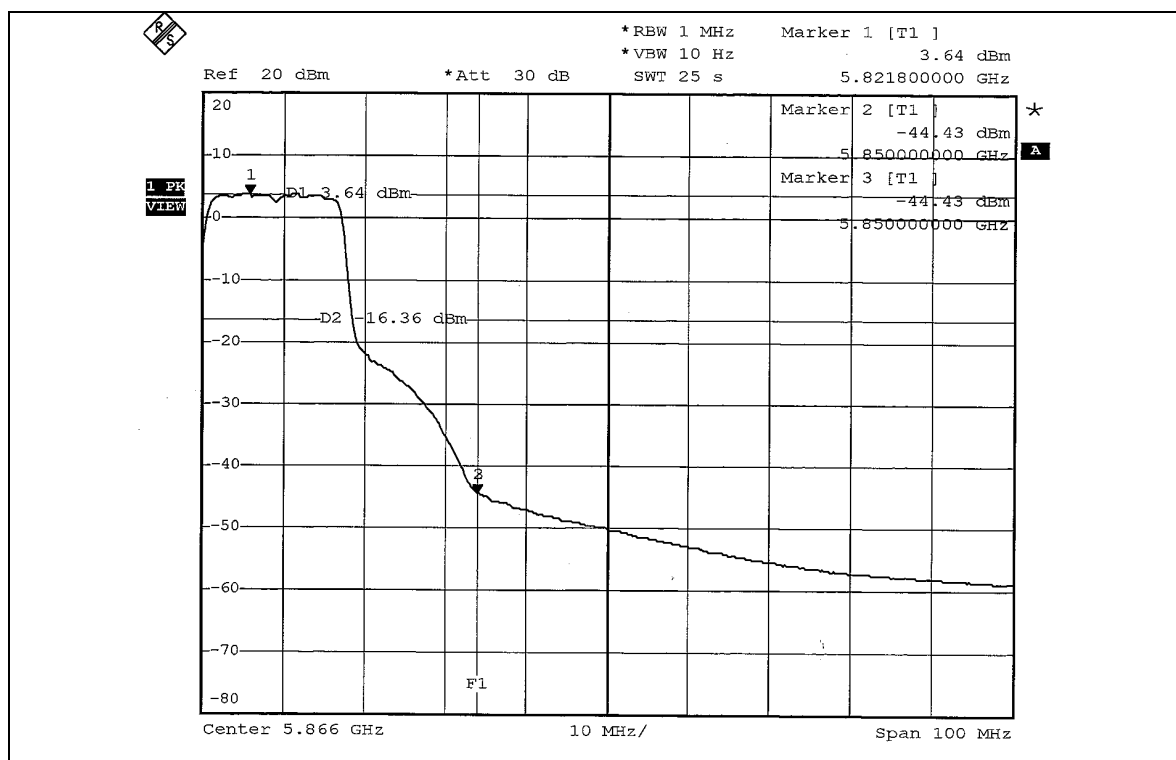

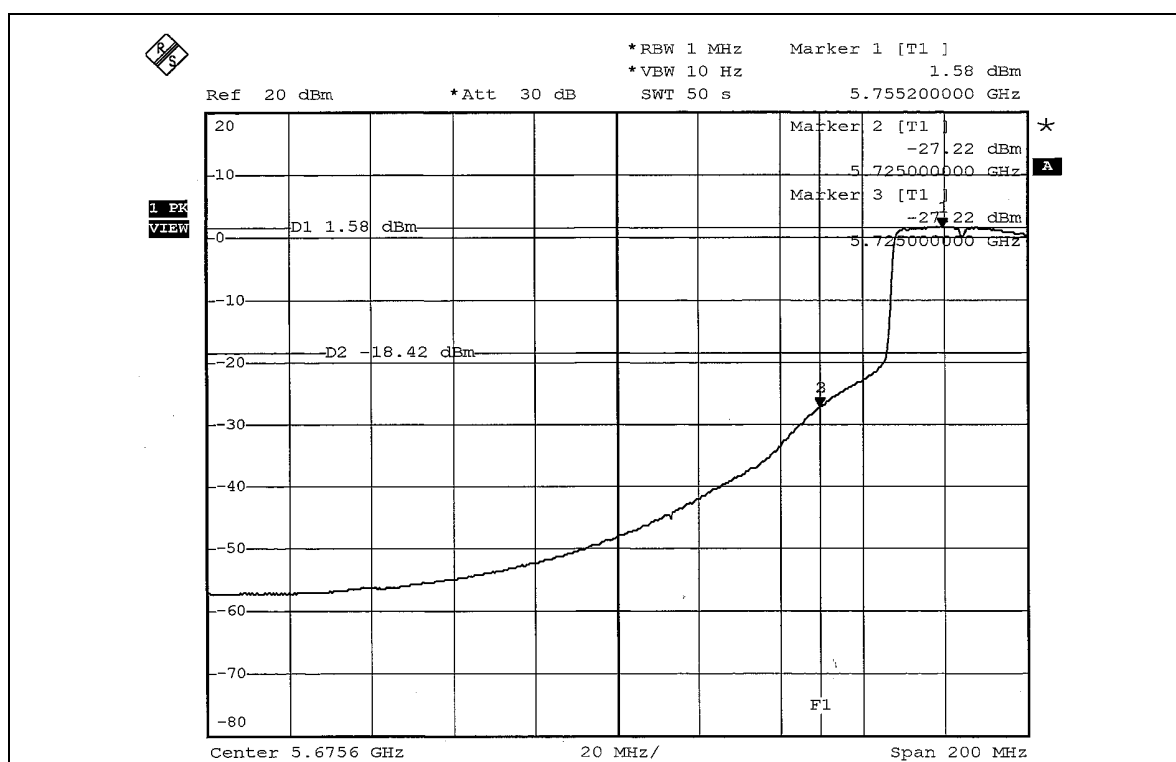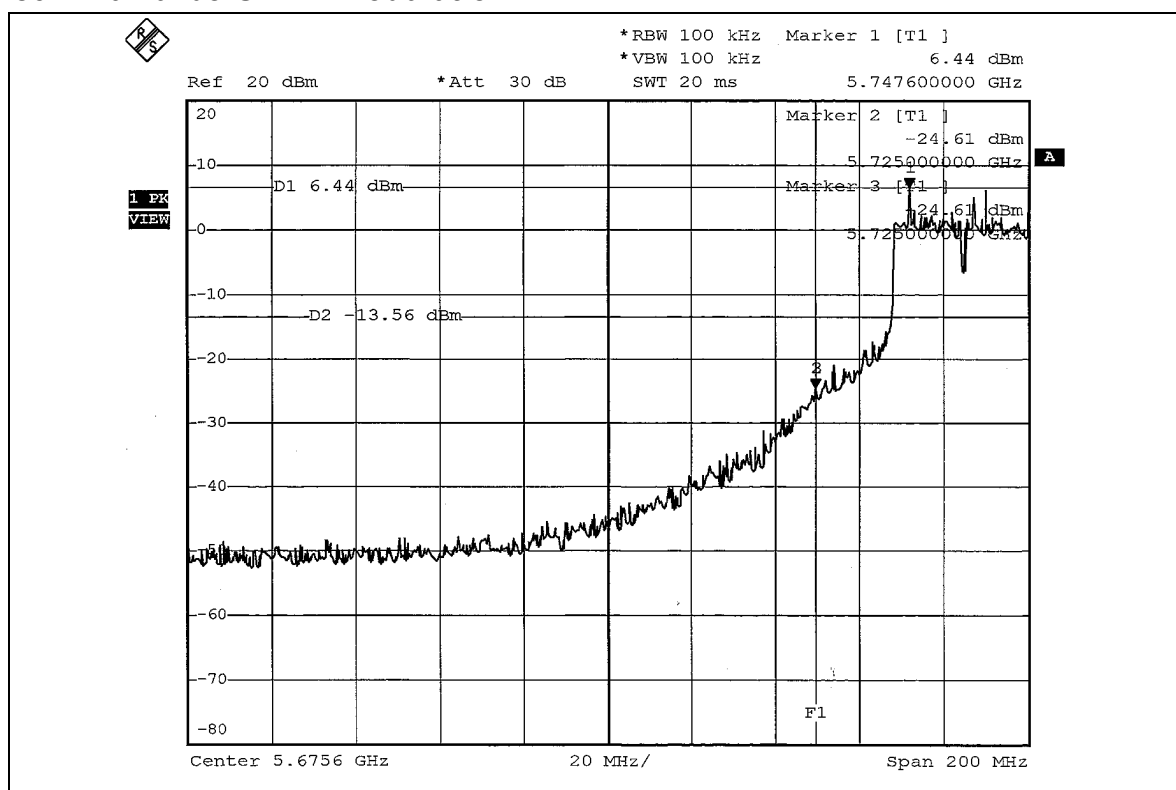802.11a Turbo OFDM modulation

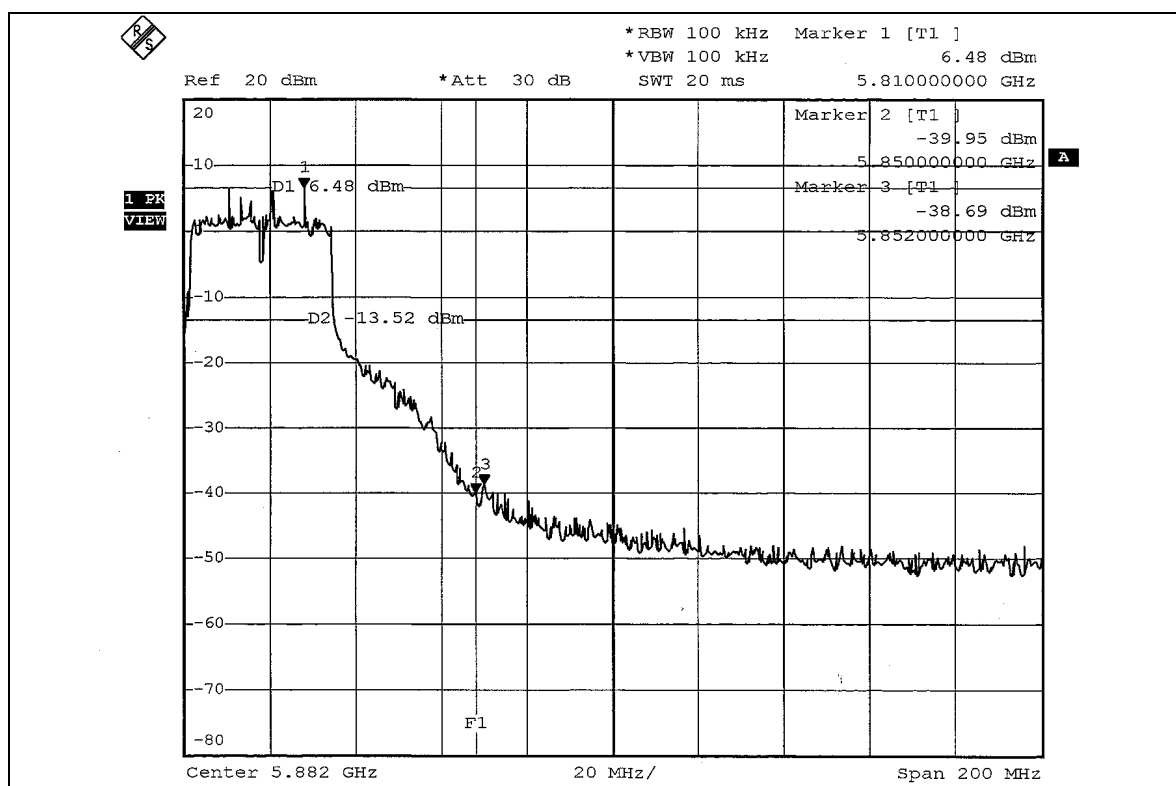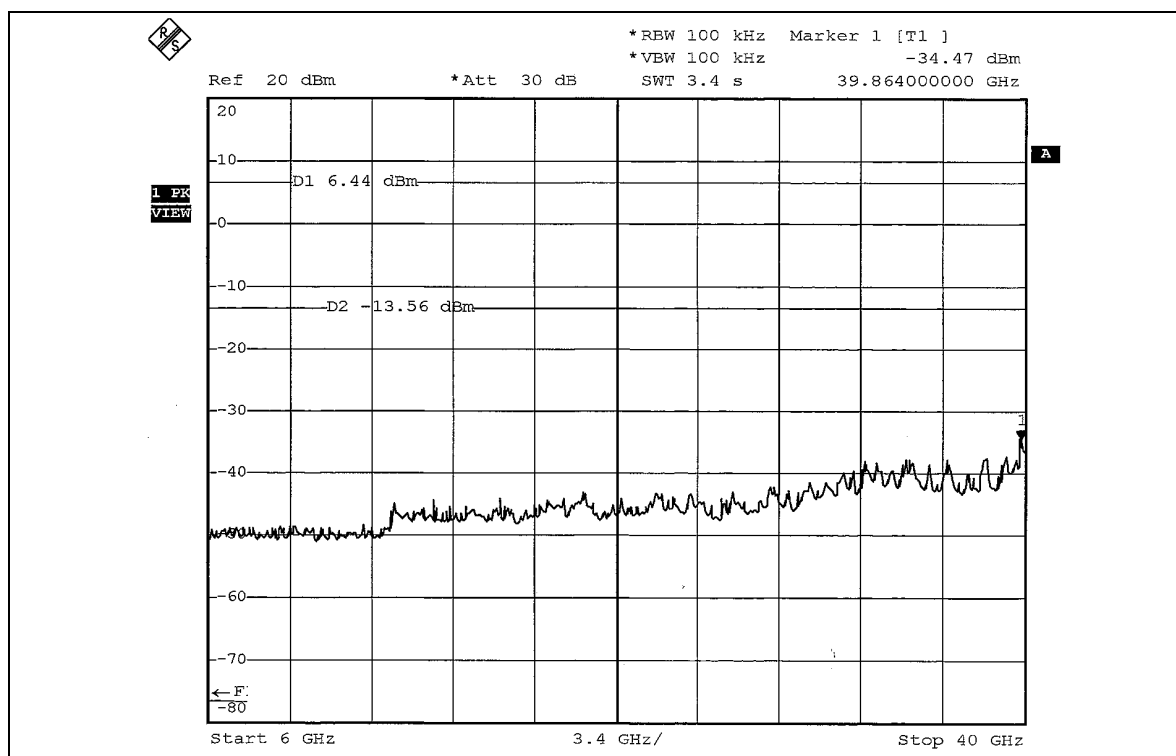

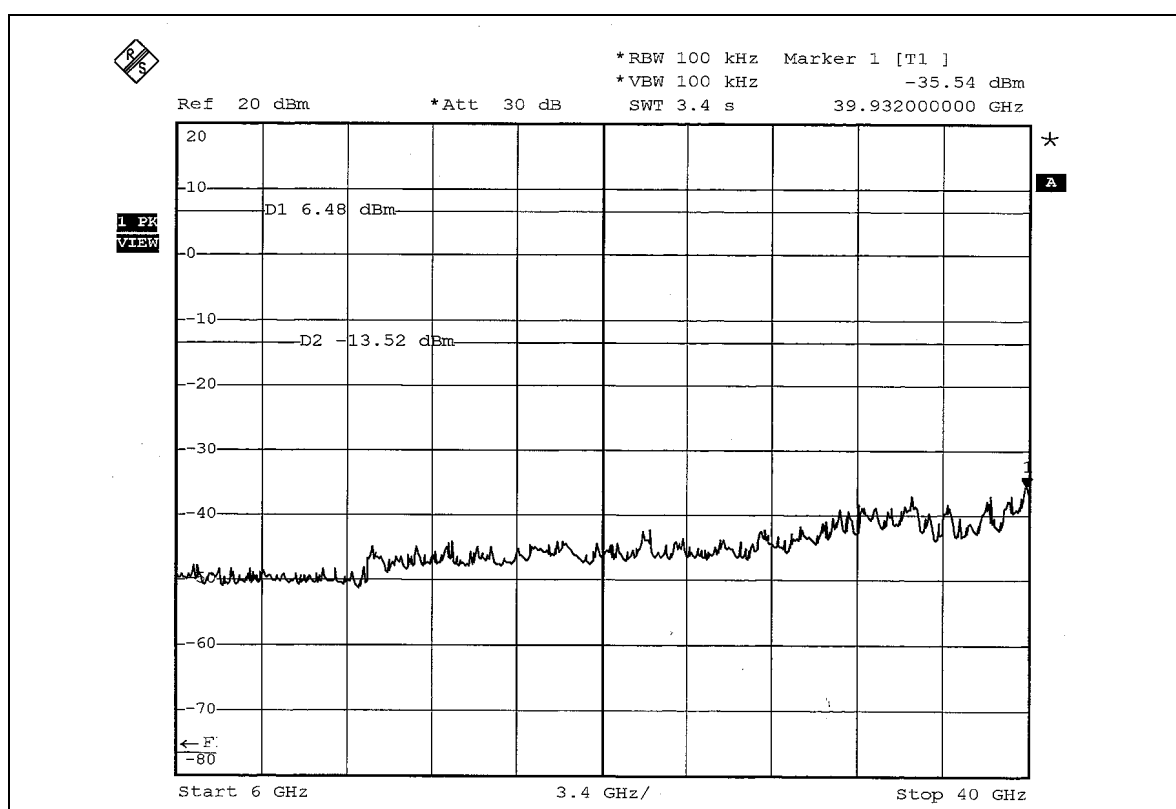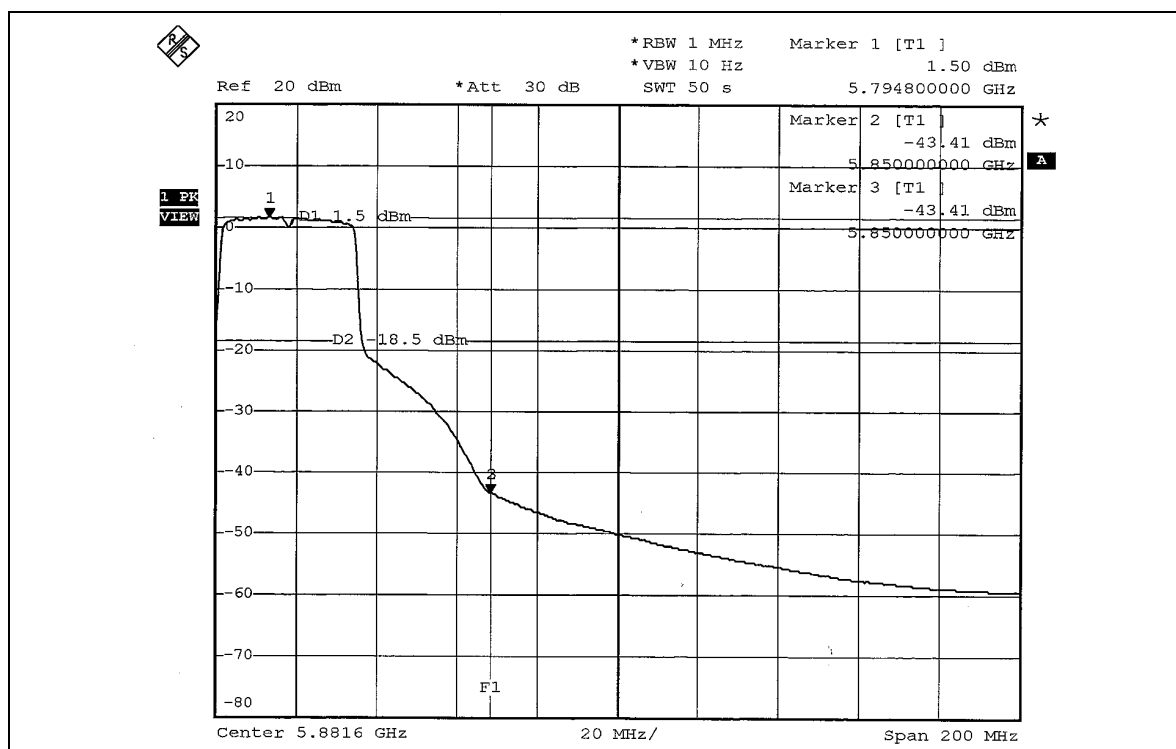



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Printed antenna with UFL connector. The maximum Gain of the antenna is 7.51dBi.

5. PHOTOGRAPHS OF THE TEST CONFIGURATION



CONDUCTED EMISSION TEST – Antenna 1





CONDUCTED EMISSION TEST – Antenna 2





CONDUCTED EMISSION TEST – Antenna 3

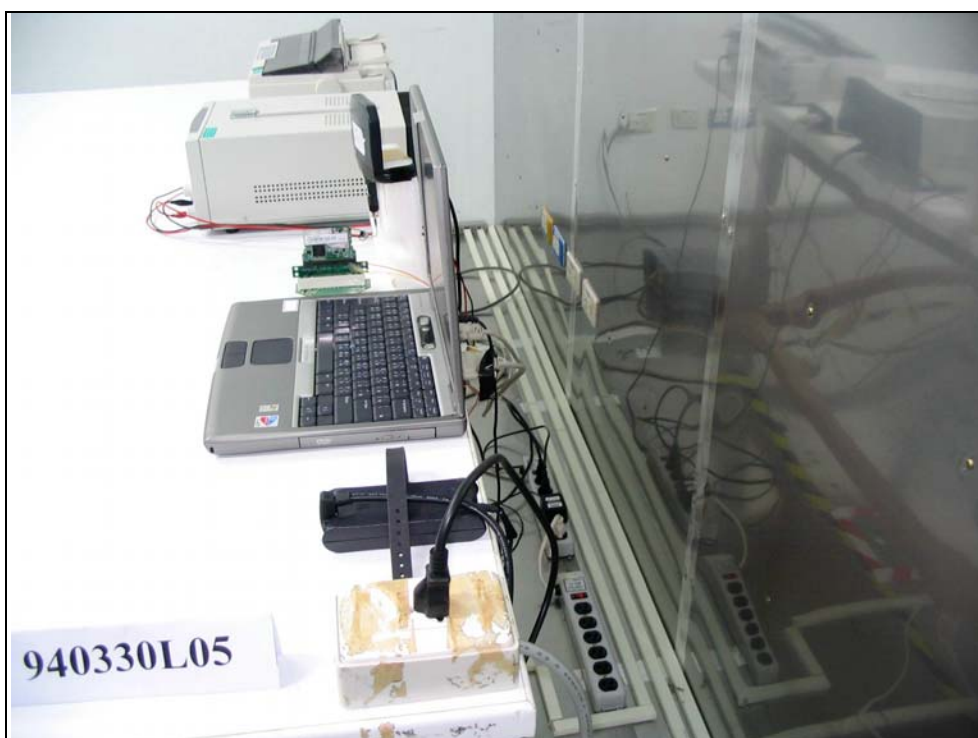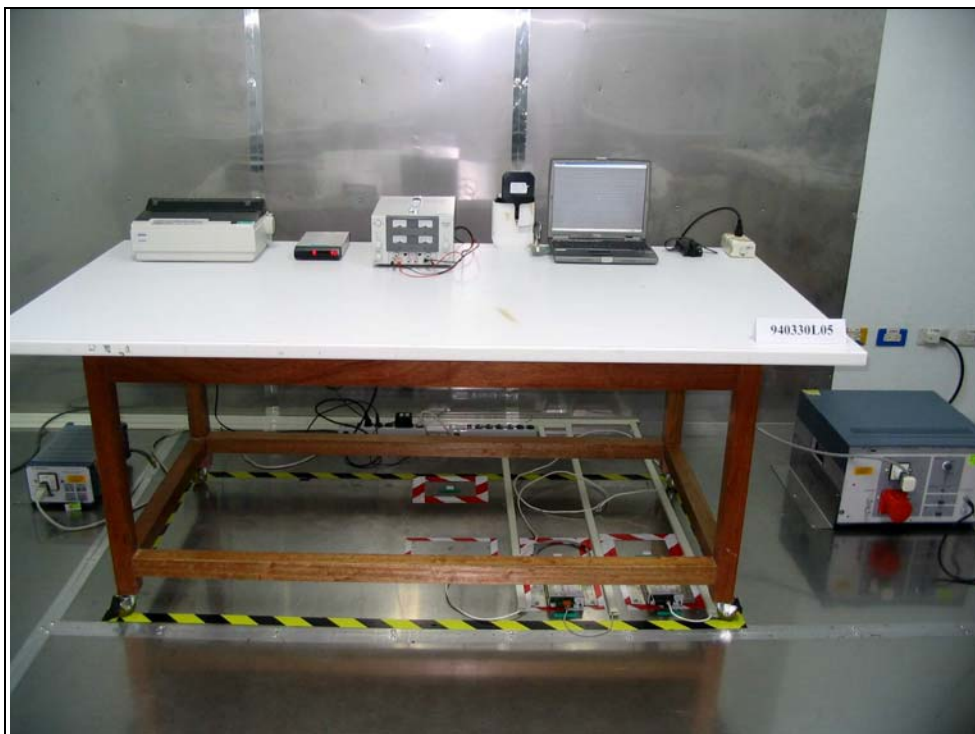



RADIATED EMISSION TEST – Antenna 1

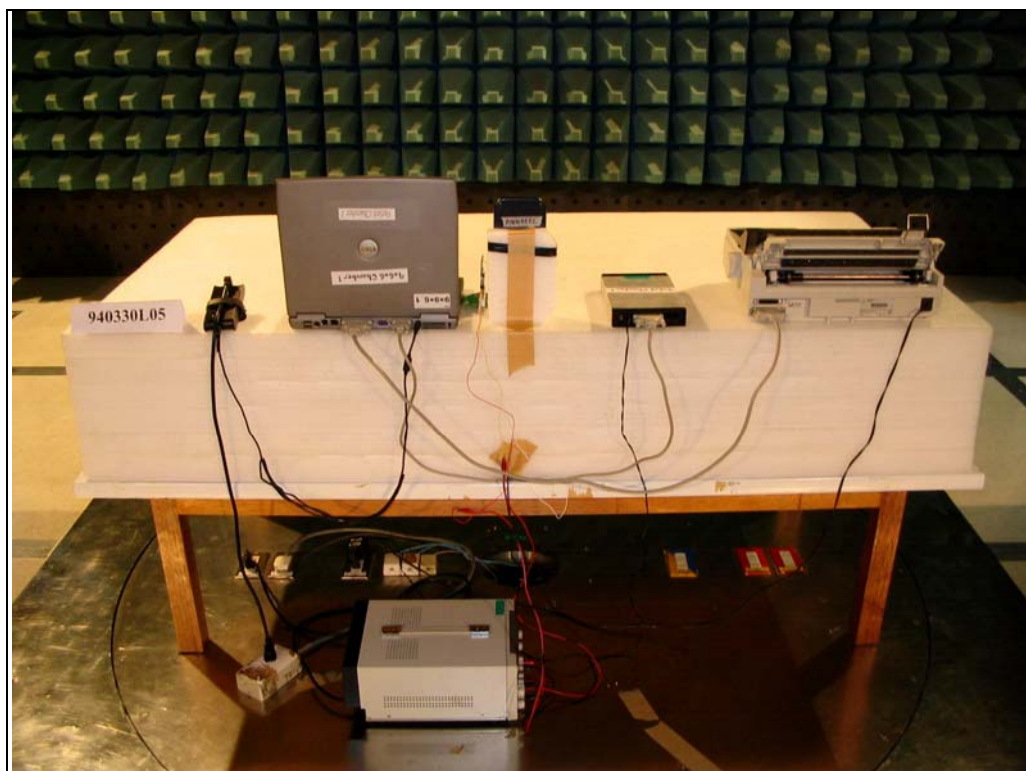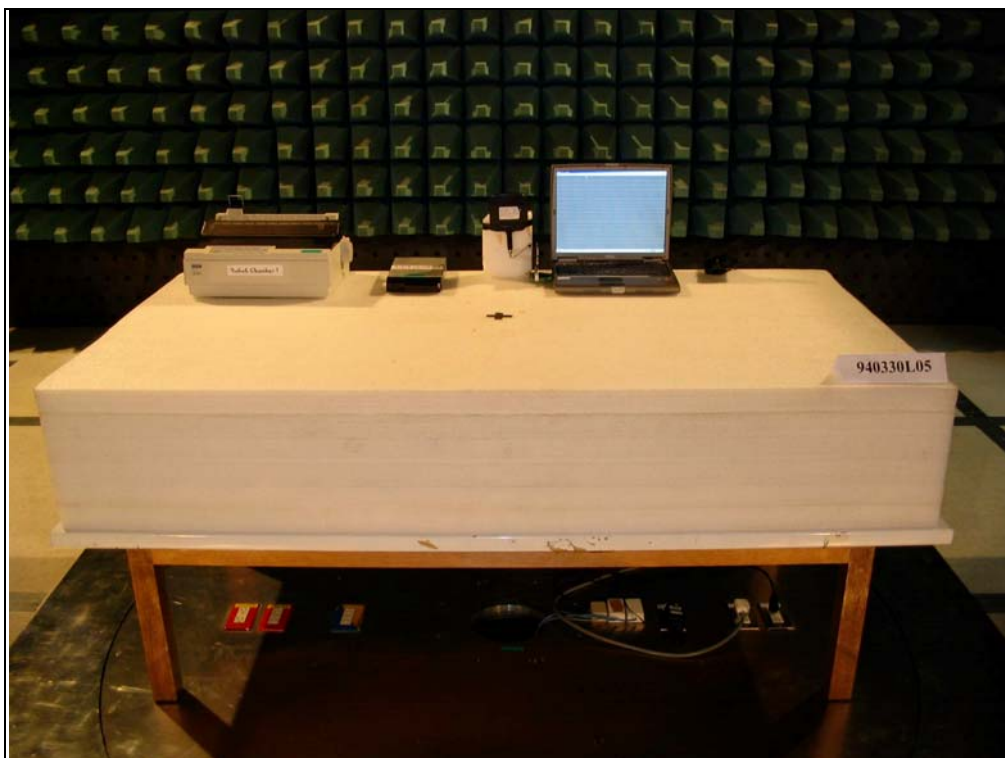

RADIATED EMISSION TEST – Antenna 2

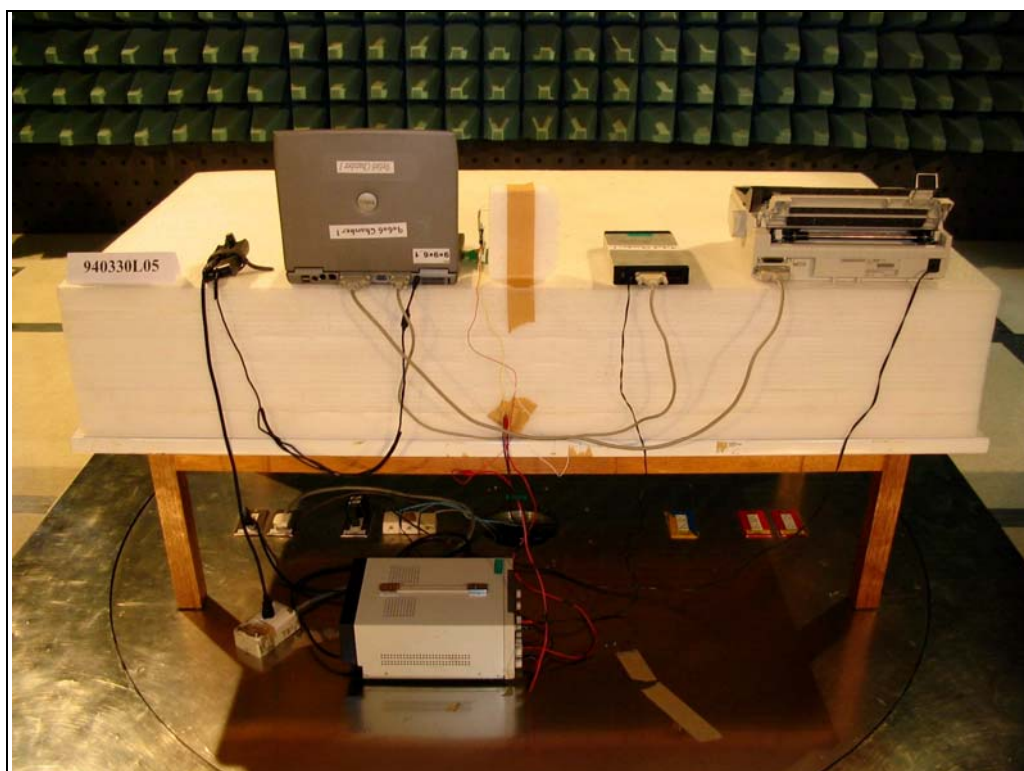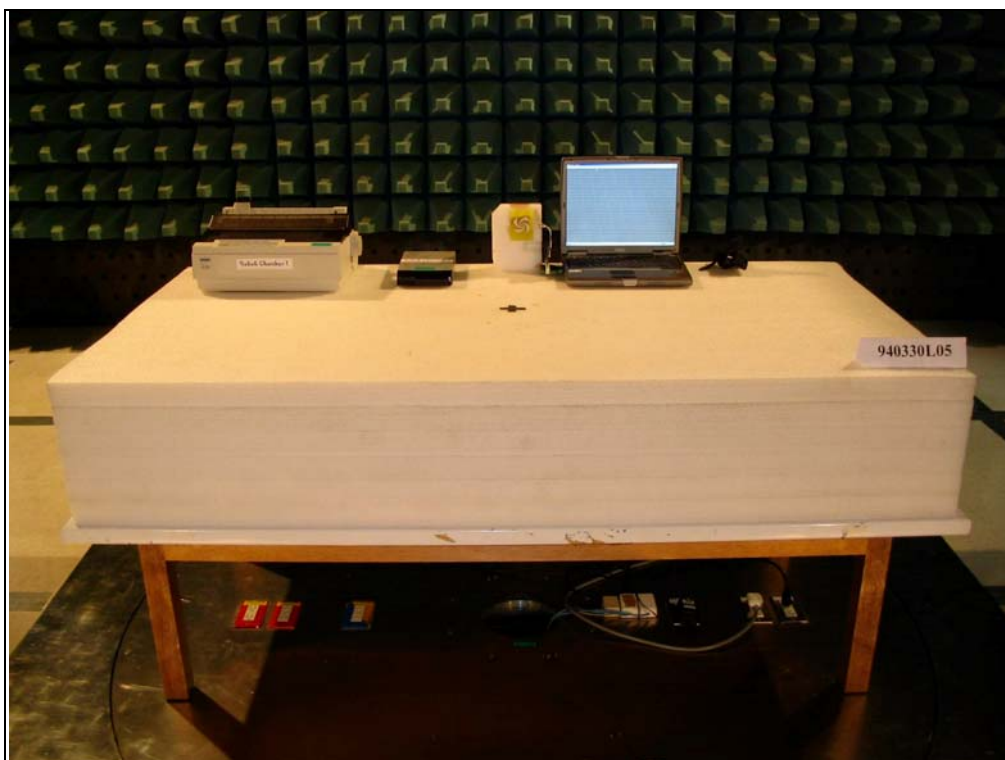

RADIATED EMISSION TEST – Antenna 3

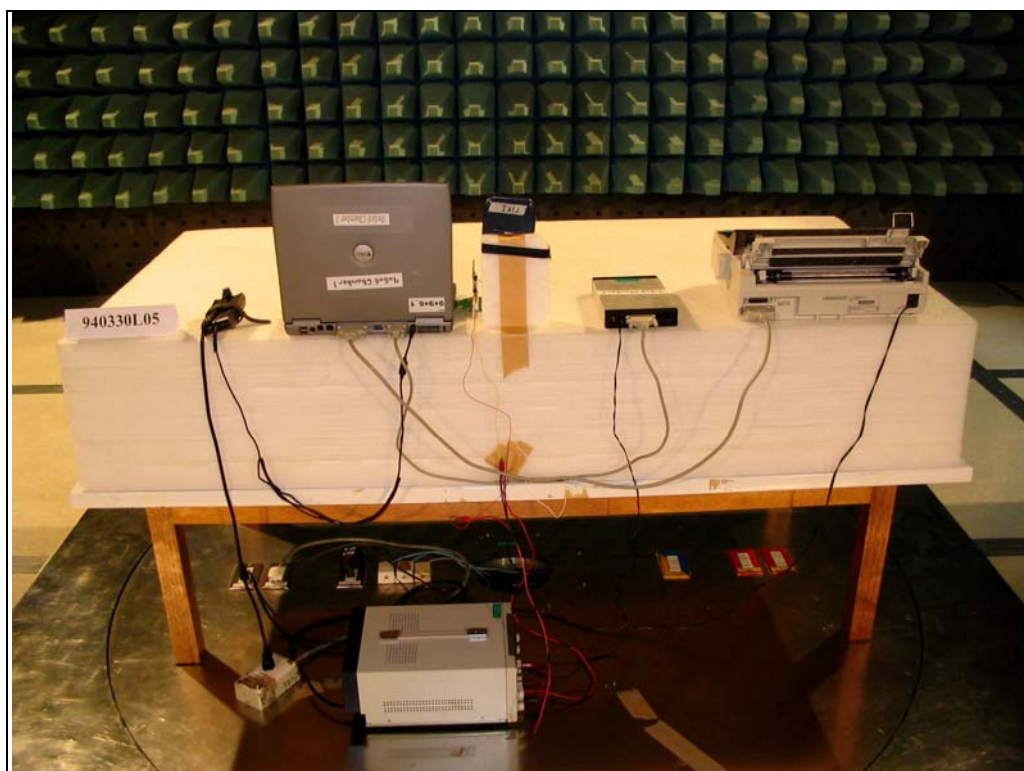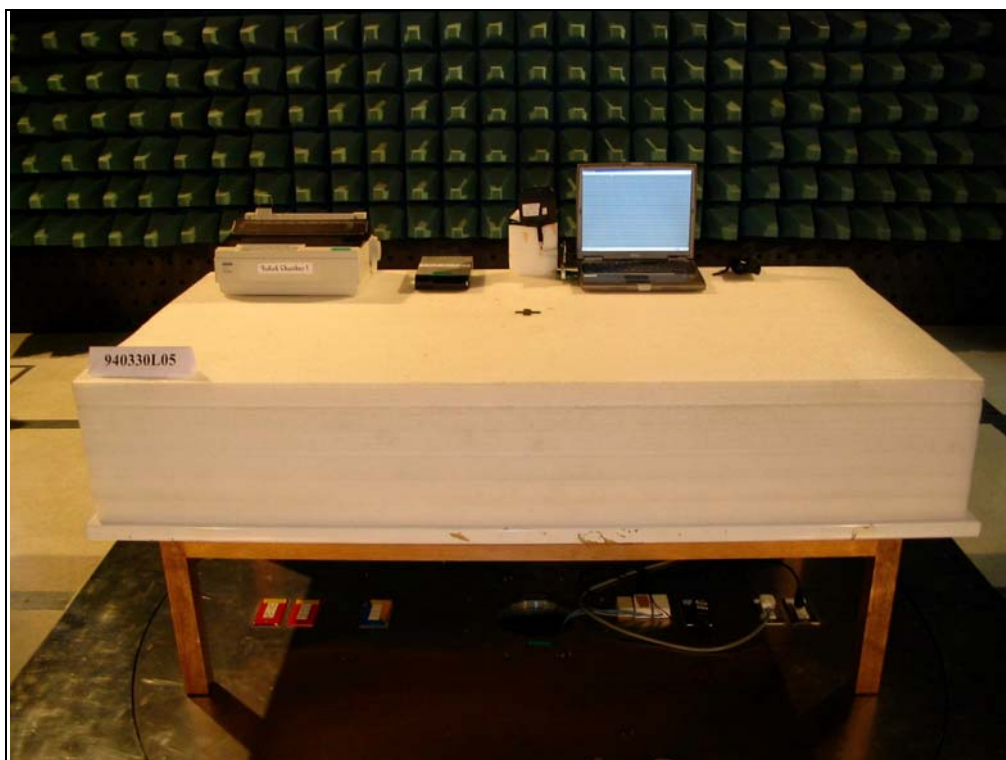

6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also