

SCALE 1:1

NOTES:

1. MATERIAL: THERMAL TRANSFER PRINTABLE SILVER MATTE METALIZE
POLYESTER LABEL STOCK (REF: RRADY WORLDWIDE, INC. P/N. B.-/

POLYESTER LABEL STOCK (REF: BRADY WORLDWIDE, INC P/N B-486) ALL CHARACTERS AND SYMBOLS MUST BE BLACK.

- 2. REF: PRINT WITH BRADY SERIES R4300 RIBBONS.
- 3. ENGINEERING REF:

CSA ACCEPTED APPLIED-SURFACE MATERIALS & TEMPERATURE RANGE -

METALS (BARE, PLATED OR ENAMELED STEEL, & ANODIZED OR ENAMELED ALUMINUM):

PHENOLICS, MELAMINES:

-40 °C TO 100 °C -40 °C TO 80 °C

-40 °C TO 125 °C

PPS, PC, PE, PP, PB, PA PI, PS, ABS, PVC, GRP, GREP, PET, PBT:

- 4. HONEYWELL LOGO TO BE 13 PTS HIGH. SUPPLY MANAGEMENT TO SUPPLY ARTWORK DATA.
- 5. ALL CHARACTERS TO BE HELVETICA NARROW OR EQUIVALENT
- 6. ALL FIXED CHARACTERS TO BE 6 PTS HIGH, EXCEPT LOGS AND AS NOTED.
- 7. SERVICE TEMPERATURE -40 °F TO 248 °F

STORAGE CONDITIONS: UP TO 2 YEARS WHEN STORED IN ORIGINAL PACKAGING


AND AT 32 °F TO 80 °F AND 35% TO 60% RH.

8. AGENCY APPROVALS: MATERIAL AND PRINTING PROCESS MUST BE

UL RECOGNIZED TO UL969 LABELING AND MARKING STANDARD, AND CSA ACCEPTED TO C22.2 NO. 0.15 – ADHESIVE LABELS STANDARD

MATERIAL AND PROCESS OTHER THAN REFERENCED ABOVE MUST BE HONEYWELL APPROVED.

- 9. SEE DRAWING 51153884 FOR CURRENT REVISION LEVEL.
- 10. SEE DRAWING S-12927-C FOR SERIALIZATION FORMAT.

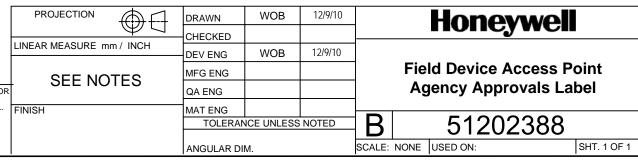

COPYRIGHT 2008, HONEYWELL INTERNATIONAL INC. NEITHER THIS DOCUMENT NOR THE INFORMATION CONTAINED HEREIN SHALL BE REPRODUCED, USED OR DISCLOSED TO OTHERS WITHOUT THE WRITTEN AUTHORIZATION OF HONEYWELL. USE, DUPLICATION, OR DISCLOSURE OF THIS DOCUMENT IS SUBJECT TO THE RESTRICTIONS SET FORTH IN A WRITTEN AGREEMENT. NOTHING CONTAINED HEREIN SHALL BE CONSTRUED AS CONFERING BY IMPLICATION, ESTOPPEL, OR OTHERWISE ANY LICENSE TO ANY PATENT, TRADEMARK, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT OF HONEYWELL OR ANY THIRD PARTY.

