

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com



Test Report

Product Name: WIRELESS TRUCK SCALE SENSOR

FCC ID: S6VRFPSI-01

Applicant:

**ESCHERLOGIC INC.
1481 ROSEBANK ROAD
PICKERING ONTARIO L1V 1P3
CANADA**

Date Receipt: 4/1/2005

Date Tested: 4/22/2005

APPLICANT: ESCHERLOGIC INC.

FCC ID: S6VRFPSI-01

REPORT #: E\ESCHERLOGIC\678AUT5\678AUT5TestReport.doc

COVER SHEET

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: ESCHERLOGIC INC.

FCC ID: S6VRFPSI-01

TABLE OF CONTENTS

TEST REPORT CONTAINING:

PAGE 1.....TEST EQUIPMENT LIST
PAGE 2.....TEST PROCEDURE
PAGE 3-4.....RADIATION INTERFERENCE TEST DATA
PAGE 5.....OCCUPIED BANDWIDTH
PAGE 6.....OCCUPIED BANDWIDTH PLOTS
PAGE 7.....CALCULATION OF DUTY CYCLE
PAGE 8-9.....DUTY CYCLE PLOTS

EXHIBIT INCLUDED:

BLOCK DIAGRAM
SCHEMATIC
USERS MANUAL
LABEL SAMPLE
LABEL LOCATION
EXTERNAL PHOTOGRAPHS
INTERNAL PHOTOGRAPHS
OPERATIONAL DESCRIPTION
TEST SET UP PHOTOGRPAH

APPLICANT: ESCHERLOGIC INC.

FCC ID: S6VRFPSI-01

REPORT #: E\ESCHERLOGIC\678AUT5\678AUT5TestReport.doc

TABLE OF CONTENTS

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

EMC Equipment List

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/27/04	3/26/07
3-Meter OATS	TEI	N/A	N/A	Listed 1/13/03	1/12/06
Biconnical Antenna	Eaton	94455-1	1057	CAL 3/18/03	3/18/05
Biconnical Antenna	Eaton	94455-1	1096	CAL 10/1/01	10/1/03
Biconnical Antenna	Electro- Metrics	BIA-25	1171	CAL 4/26/01	4/26/03
Blue Tower Quasi-Peak Adapter	HP	85650A	2811A01279	CAL 4/15/03	4/15/05
Blue Tower RF Preselector	HP	85685A	2620A00294	CAL 4/27/04	4/27/06
Blue Tower Spectrum Analyzer	HP	8568B	2928A04729 2848A18049	CAL 4/15/03	4/15/05
LISN	Electro- Metrics	ANS-25/2	2604	CAL 10/9/01	10/9/03
LISN	Electro- Metrics	EM-7820	2682	CAL 3/12/03	3/12/05
Log- Periodic Antenna	Eaton	96005	1243	CAL 5/8/03	5/8/05

APPLICANT: ESCHERLOGIC INC.

FCC ID: S6VRFPSI-01

REPORT #: E\ESCHERLOGIC\678AUT5\678AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC. The UUT was transmitting a test signal during the testing.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-2003 using a HEWLETT PACKARD spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the UUT was 74.3oF with a humidity of 69%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz)	METER READING + ACF = FS
33	20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES: The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The UUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

APPLICANT: ESCHERLOGIC INC.
FCC ID: S6VRFPSI-01
REPORT #: E\ESCHERLOGIC\678AUT5\678AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: ESCHERLOGIC INC.
FCC ID: S6VRFPSI-01
NAME OF TEST: RADIATION INTERFERENCE
RULES PART NUMBER: 15.249, 15.209

REQUIREMENTS:

FIELD STRENGTH	FIELD STRENGTH	S15.209
of Fundamental: 902-928 MHz 2.4-2.4835 GHz 94 dBuV/m @3m	of Harmonics 54 dBuV/m @3m	30 - 88 MHz 40 dBuV/m @3M 88 - 216 MHz 43.5 216 - 960 MHz 46 ABOVE 960 MHz 54dBuV/m

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

TEST RESULTS: This unit DOES meet the FCC requirements.

TEST DATA:

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB	Duty Cycle Factor	Field Strength dBuV/m	Margin dB
916.5	916.5	45.9	H	1.97	23.43	11.3	60.00	34.00
916.5	916.5	48.8	V	1.97	22.6	11.3	62.07	31.93
916.5	1,833.00	18	H	2.77	30.2	11.3	39.67	14.33
916.5	1,833.00	21	V	2.77	30.2	11.3	42.67	11.33
916.5	2,749.50	23.1	V	3.42	32.9	11.3	48.12	5.88
916.5	2,749.50	23.9	H	3.42	32.9	11.3	48.92	5.08
916.5	3,666.00	19.7	V	4.2	33.43	11.3	46.03	7.97
916.5	3,666.00	24.6	H	4.2	33.43	11.3	50.93	3.07
916.5	4,582.50	14.7	V	4.79	34.17	11.3	42.36	11.64
916.5	4,582.50	17.8	H	4.79	34.17	11.3	45.46	8.54

APPLICANT: ESCHERLOGIC INC.
FCC ID: S6VRFPSI-01
REPORT #: E\ESCHERLOGIC\678AUT5\678AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: ESCHERLOGIC INC.
FCC ID: S6VRFPSI-01
NAME OF TEST: RADIATION INTERFERENCE

TEST PROCEDURE: ANSI STANDARD C63.4-2003 using a Hewlett Packard Model 8566B spectrum analyzer, a Hewlett Packard Model 85685A Pre-selector, a Hewlett Packard Model 85650A Quasi-Peak adapter, and an appropriate antenna. The bandwidth of spectrum analyzer was 100 kHz with an appropriate sweep speed. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

PERFORMED BY: JOSEPH SCOGLIO DATE: 4/1/2005

APPLICANT: ESCHERLOGIC INC.
FCC ID: S6VRFPSI-01
REPORT #: E\ESCHERLOGIC\678AUT5\678AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: ESCHERLOGIC INC.

FCC ID: S6VRFPSI-01

NAME OF TEST: Occupied Bandwidth

RULES PART NO.: 15.249

REQUIREMENTS: The field strength of any emissions appearing outside the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.209.

THE PLOT ON THE NEXT PAGE REPRESENTS THE EMISSIONS TAKEN FOR THIS DEVICE.

METHOD OF MEASUREMENT: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division. The horizontal scale is set to 20 kHz per division.

TEST RESULTS: The unit DOES meet the FCC requirements.

PERFORMED BY: JOSEPH SCOGLIO

DATE: 4/1/2005

APPLICANT: ESCHERLOGIC INC.

FCC ID: S6VRFPSI-01

REPORT #: E\ESCHERLOGIC\678AUT5\678AUT5TestReport.doc


TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

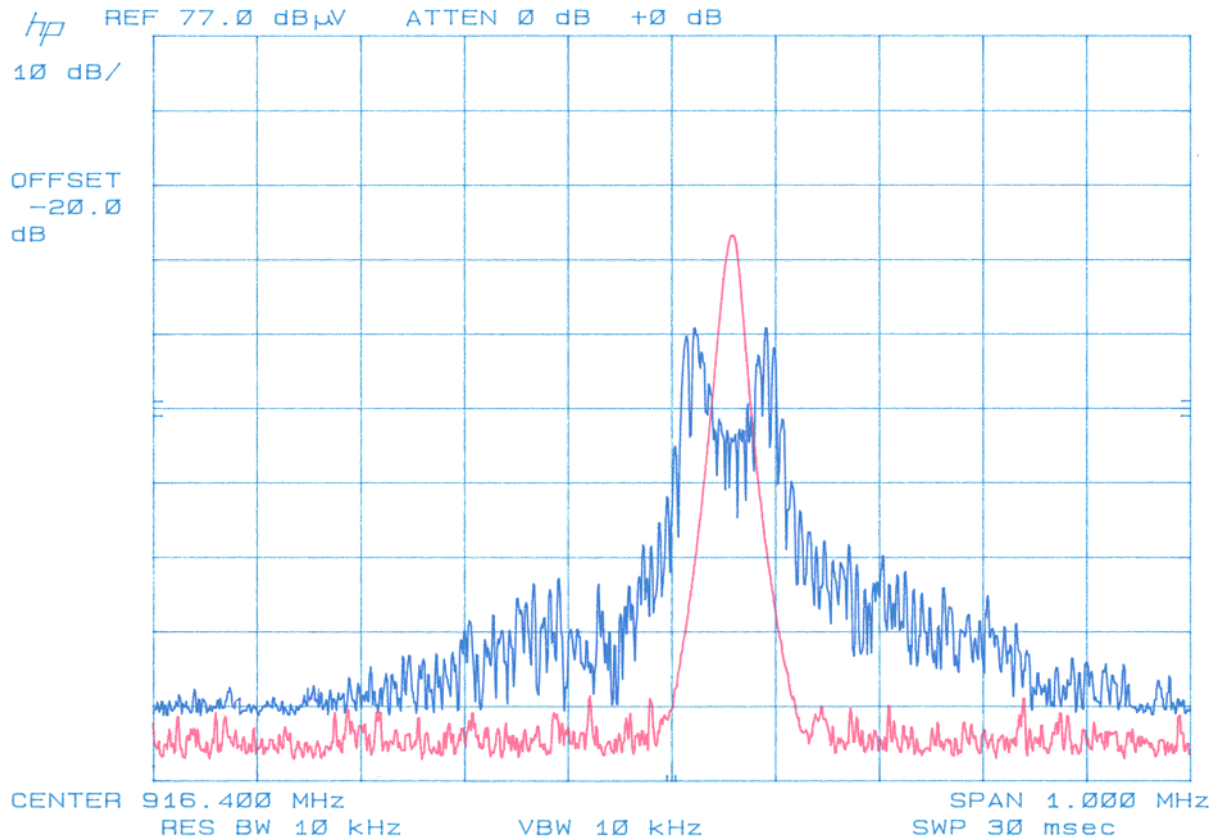

APPLICANT: ESCHERLOGIC INC.

FCC ID: S6VRFPSI-01

REPORT #: E\ESCHERLOGIC\678AUT5\678AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: ESCHERLOGIC INC.

FCC ID: S6VRFPSI-01

CALCULATION OF DUTY CYCLE:

The period of the pulse train is determined by observing it on an oscilloscope or a spectrum analyzer with zero (0) frequency span. A plot is then made of the pulse train with a sweep time of 100milliseconds. This sweep determines the duration of the pulse train, which in this case is millisecond. This sweep allows the determination of the number of and type of pulses, i.e. long & short. Plots are then made showing the duration of each type of pulse and its duration. From the 100millisecond Plot the number of a given type of pulse is then multiplied by the duration of that type pulse. This allows the calculation of the amount of time the UUT is on within 100 ms. If the pulse train is longer than 100 ms then this number is multiplied by 100 to determine the percentage ON TIME. If the pulse train is less than 100 ms the total on time is divided by the length of the pulse train and then multiplied by 100 to determine the percentage ON TIME. In this case there was 1 pulse, 27.2 ms on time within a 100 ms of the pulse train. In this case the ON time was 27.2 ms long.

$dB = 20 \cdot \log(\text{ON time})$

$DCF = 20 \log(27.2/100)$

$DCF = 20 \log(0.272)$

$DCF = -11.3\text{dBd}$

APPLICANT: ESCHERLOGIC INC.

FCC ID: S6VRFPSI-01

REPORT #: E\ESCHERLOGIC\678AUT5\678AUT5TestReport.doc


TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

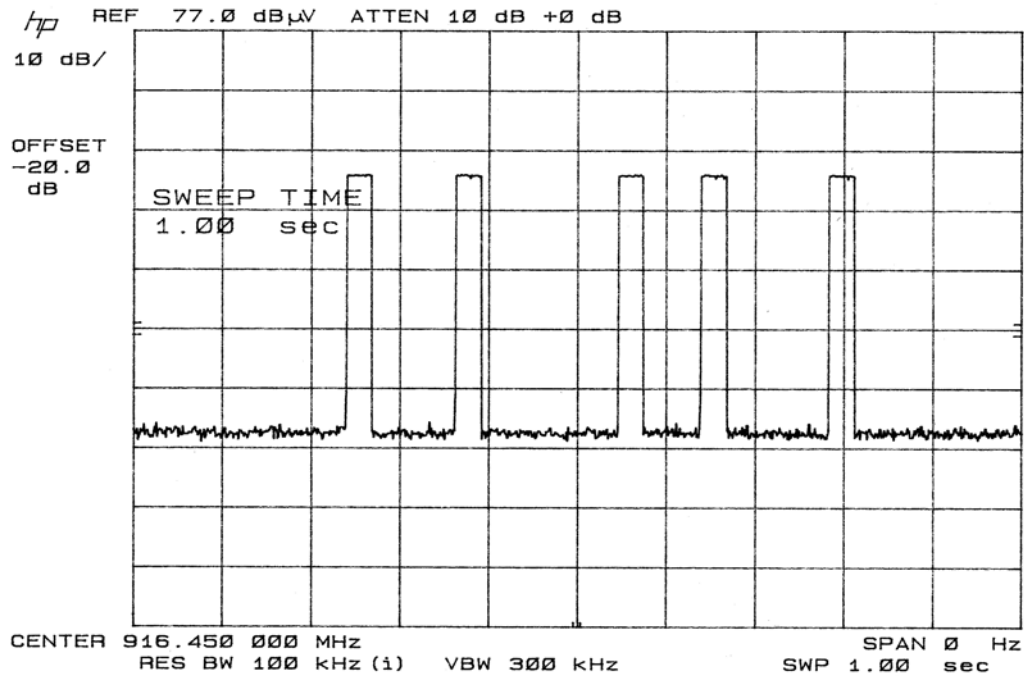

APPLICANT: ESCHERLOGIC INC.

FCC ID: S6VRFPSI-01

REPORT #: E\ESCHERLOGIC\678AUT5\678AUT5TestReport.doc


TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

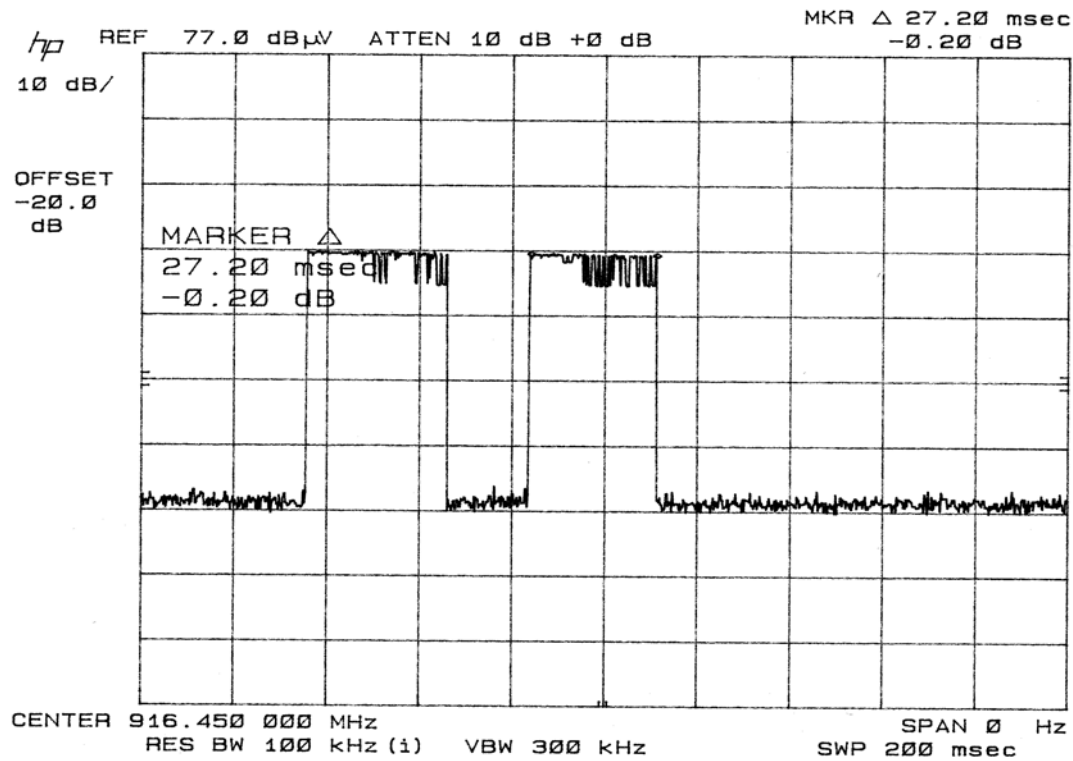

APPLICANT: ESCHERLOGIC INC.

FCC ID: S6VRFPSI-01

REPORT #: E\ESCHERLOGIC\678AUT5\678AUT5TestReport.doc