



FCC TEST REPORT

REPORT NO.: RF930713L03

MODEL NO.: Toggle Transmitter
(refer to page 5 for other model no.)

RECEIVED: July 13, 2004

TESTED: July 14 ~ August 05, 2004

APPLICANT: ftech Corporation

ADDRESS: No. 16, Nan-ke 9th Rd., Science-based
Industrial Park, Tainan 741, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 19, Hwa Ya 2nd rd., Kueishan, Taoyuan,
Taiwan, R.O.C.

This test report consists of 20 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Table of Contents

- 1 CERTIFICATION..... 3
- 2 SUMMARY OF TEST RESULTS 4
- 2.1 MEASUREMENT UNCERTAINTY..... 4
- 3. GENERAL INFORMATION 5
- 3.1 GENERAL DESCRIPTION OF EUT 5
- 3.2 DESCRIPTION OF TEST MODES 6
- 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS 6
- 3.4 DESCRIPTION OF SUPPORT UNITS 7
- 3.5 CONFIGURATION OF SYSTEM UNDER TEST 7
- 4. TEST TYPES AND RESULTS 8
- 4.1 RADIATED EMISSION MEASUREMENT 8
- 4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT..... 8
- 4.1.2 TEST INSTRUMENTS..... 10
- 4.1.3 TEST PROCEDURES 11
- 4.1.4 DEVIATION FROM TEST STANDARD 11
- 4.1.5 TEST SETUP..... 12
- 4.1.6 EUT OPERATING CONDITIONS 12
- 4.1.7 TEST RESULTS 13
- 4.3 OCCUPIED BANDWIDTH MEASUREMENT 16
- 4.3.1 LIMITS OF BAND EDGES MEASUREMENT..... 16
- 4.3.2 TEST INSTRUMENTS..... 16
- 4.3.3 TEST PROCEDURES 16
- 4.3.4 DEVIATION FROM TEST STANDARD 17
- 4.3.5 TEST SETUP..... 17
- 4.3.6 TEST RESULTS 17
- 5. PHOTOGRAPHS OF THE TEST CONFIGURATION 19
- 6. INFORMATION ON THE TESTING LABORATORIES 20

**1 CERTIFICATION**

PRODUCT : Lightning Switch
MODEL NO.: Toggle Transmitter (refer to page 5 for other model no.)
BRAND: Lightning
APPLICANT : ftech Corporation
TESTED: July 14 ~ August 05, 2004
TEST ITEM: ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.231),
ANSI C63.4-2001

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Stacy Hsueh , **DATE:** Aug. 10, 2004
(Stacy Hsueh)

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** Aug. 10, 2004
Responsible for RF (Gary Chang)

APPROVED BY : Cody Chang , **DATE:** Aug. 10, 2004
(Cody Chang, Supervisor)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	NA	NA
15.231 15.209	Radiated Emission Test	PASS	Minimum passing margin is -8.14dB at 433.93MHz
15.231	20dB Occupied Bandwidth Measurement	PASS	Meet the requirement of limit

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Radiated emissions	30MHz ~ 200MHz	3.63 dB
	200MHz ~1000MHz	3.65 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Lightning Switch
MODEL NO.	Toggle Transmitter (refer to following table for other models)
POWER SUPPLY	3.0Vdc, 1.5mA, 50ms
MODULATION TYPE	ASK
CARRIER FREQUENCY OF EACH CHANNEL	433.92MHz
NUMBER OF CHANNEL	1
ANTENNA TYPE	Whip antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT include Transmitter part and Receiver part. The model no.: Toggle Transmitter includes Tx of 433.92MHz application used for control signal transmitting. Receiver part which model no.: Toggle Receiver has been presented in DoC report of number 930713L03.
2. The model as below are identical to each other except for their model due to marketing requirement.

Item	Model	Brand	difference
1	Toggle Transmitter	Lightning	For Tx
2	Main Transmitter	Lightning	For Tx with remote switch
3	Toggle Receiver	Lightning	For Rx

3. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

One channel is provided in the EUT :

Channel	Frequency
1	433.92 MHz

NOTE: Since the EUT is considered a portable unit, it was pre-tested on the positioned of each 3 axis. The worst case was found when positioned on Z-plane. There for only the test data of this Z-plane was used for Radiated test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Lightning Switch. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.231)


ANSI C63.4 : 2001

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

NA

3.5 CONFIGURATION OF SYSTEM UNDER TEST

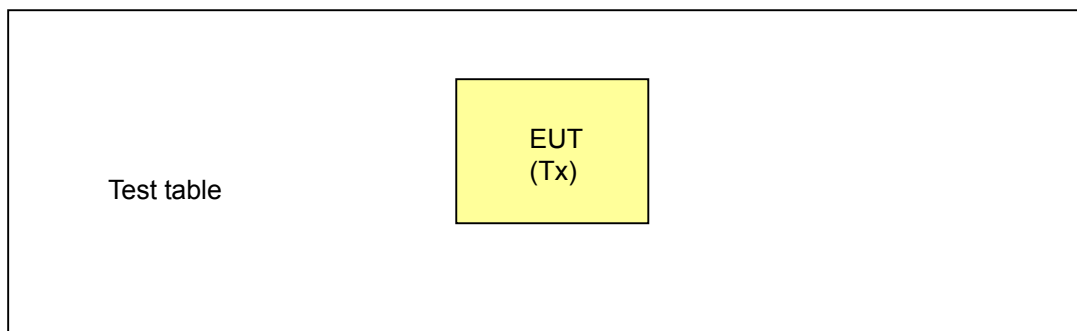



4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.231 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental		Field Strength of Spurious	
	uV/meter	dBuV/meter	uV/meter	dBuV/meter
40.66 – 40.70	2250	67.04	225	48.04
70 – 130	1250	61.94	125	41.94
130 – 174	1250 to 3750	61.94 to 71.48	125 to 375	41.94 to 51.48
174 – 260	3750	71.48	75	37.50
260 – 470	3750 to 12500	71.48 to 81.94	375 to 1250	51.48 to 61.94
Above 470	12500	81.94	1250	61.94

NOTE:

- (1) Where F is the frequency in MHz, the formula for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = $56.81818(F) - 6136.3636$; for the band 260-470 MHz, uV/m at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.
- (2) The above field strength limits are specified at a distance of 3meters. The tighter limits apply at the band edges.



Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Feb. 09, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Dec. 15, 2004
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170242	Feb. 23, 2005
Preamplifier Agilent	8447D	2944A10631	Jan. 15, 2005
Preamplifier Agilent	8449B	3008A01960	Jan. 22, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219272/4	Mar. 04, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219275/4	Mar. 04, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-4.



4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

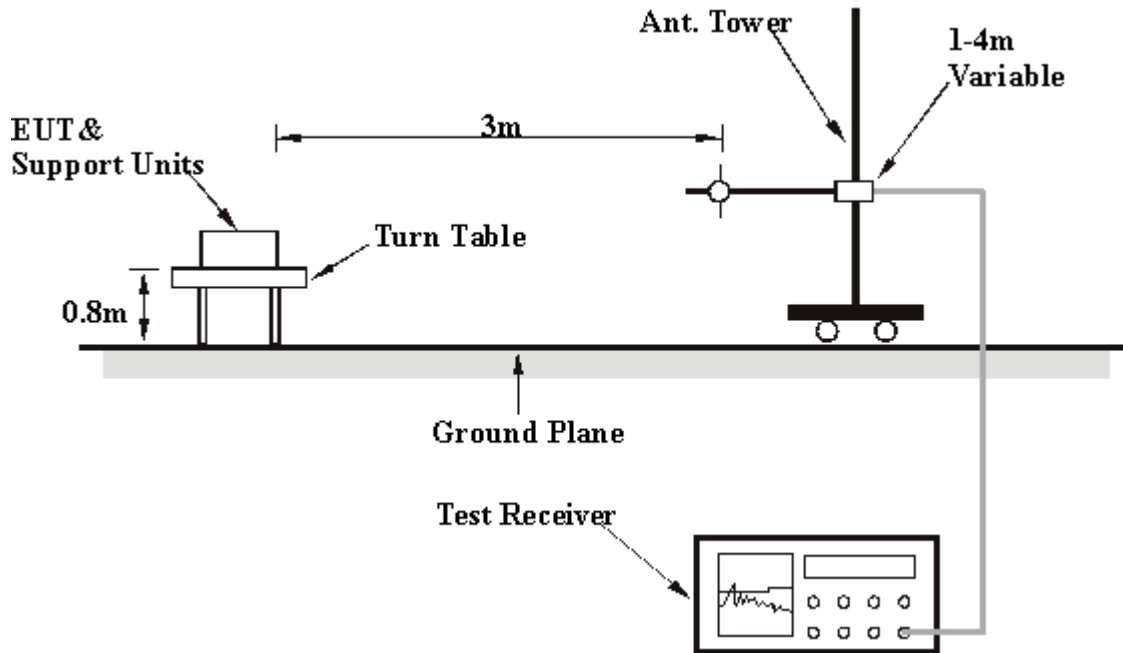

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

Same as item 4.1.6



4.1.7 TEST RESULTS

EUT	Lightning Switch	MODEL	Toggle Transmitter
FREQUENCY RANGE	Below 1000MHz	DETECTOR FUNCTION	Quasi-Peak / Peak Average
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa
TESTED BY	Leo Hung		



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	17.91 QP	40.00	-22.09	1.00 H	340	3.90	14.01
2	63.05	10.29 QP	40.00	-29.71	1.00 H	52	-2.98	13.27
3	*433.93	92.66 PK	100.80	-8.14	1.00 H	84	75.07	17.59
3	*433.93	61.38 AV	80.80	-19.42	1.00 H	84	43.79	17.59
4	867.88	62.35 PK	72.66	-10.31	1.00 H	28	38.12	24.23
4	867.88	31.07 AV	46.00	-14.93	1.00 H	28	6.84	24.23
5	898.92	17.29 QP	46.00	-28.71	1.00 H	253	-7.50	24.79
6	947.52	17.52 QP	46.00	-28.48	1.00 H	88	-7.78	25.30


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	30.75 QP	40.00	-9.25	1.00 V	346	16.74	14.01
2	92.20	24.58 QP	43.50	-18.92	1.00 V	43	14.31	10.27
3	*433.91	86.27 PK	100.80	-14.53	1.00 V	139	68.68	17.59
3	*433.91	54.99 AV	80.80	-25.79	1.00 V	139	37.40	17.59
4	821.16	25.06 QP	46.00	-20.94	1.00 V	244	1.41	23.65
4	867.85	55.46 PK	66.27	-10.81	1.00 V	163	31.23	24.23
5	867.85	24.18 AV	46.00	-21.82	1.00 V	163	-0.05	24.23
6	957.23	25.39 QP	46.00	-20.61	1.00 V	55	0.04	25.35

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB) = Antenna Factor (dB) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "*" = Fundamental frequency
 6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle)
Where the duty factor is calculated from following formula:

$$20\log(\text{Duty cycle}) = 20\log \frac{20*0.1055\text{ms} + 2*(35*0.0885\text{ms})}{100\text{ms}} = -31.278\text{dB}$$

please see page 14~15 for plotted duty

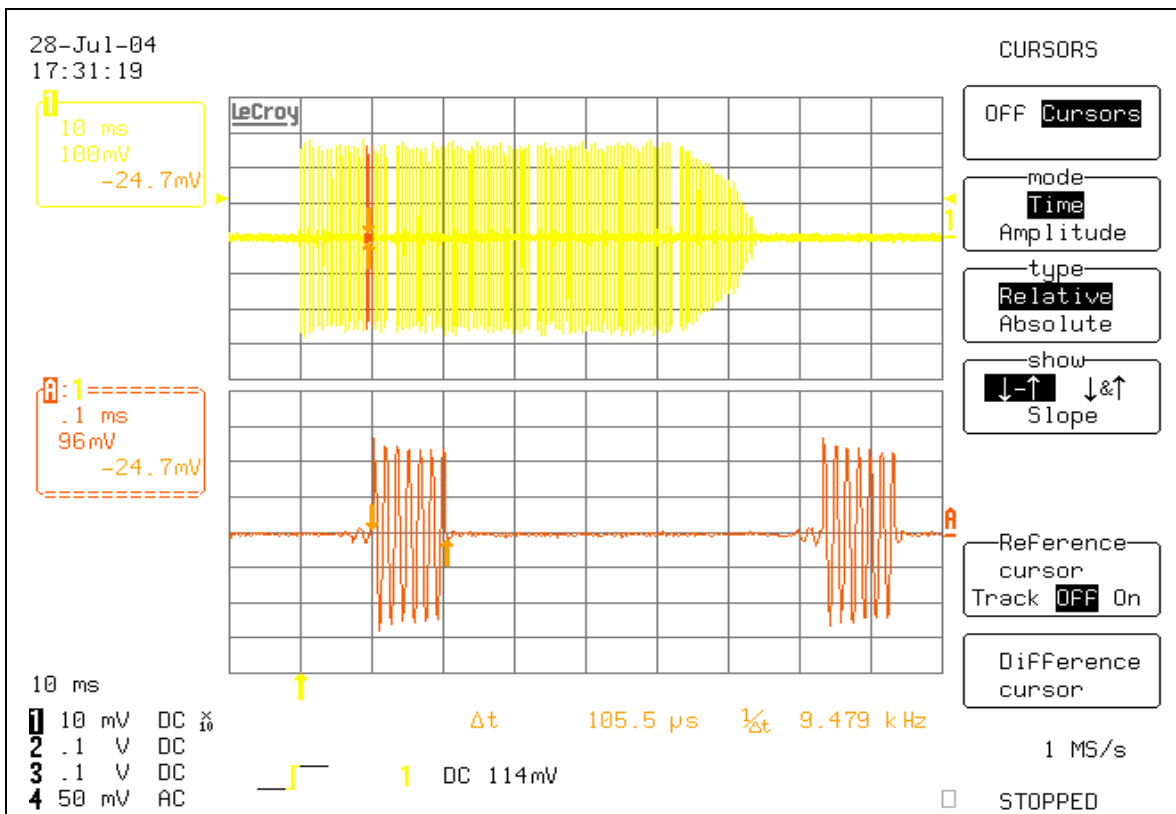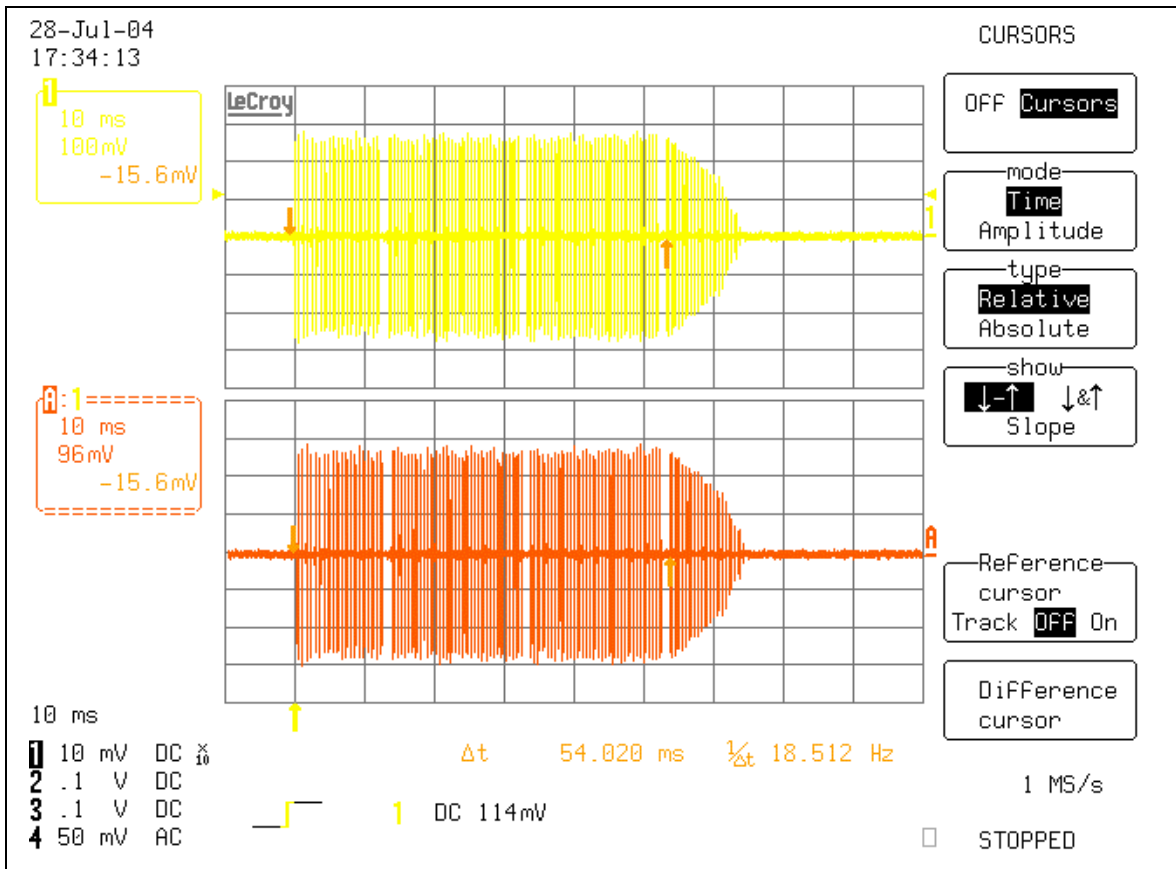

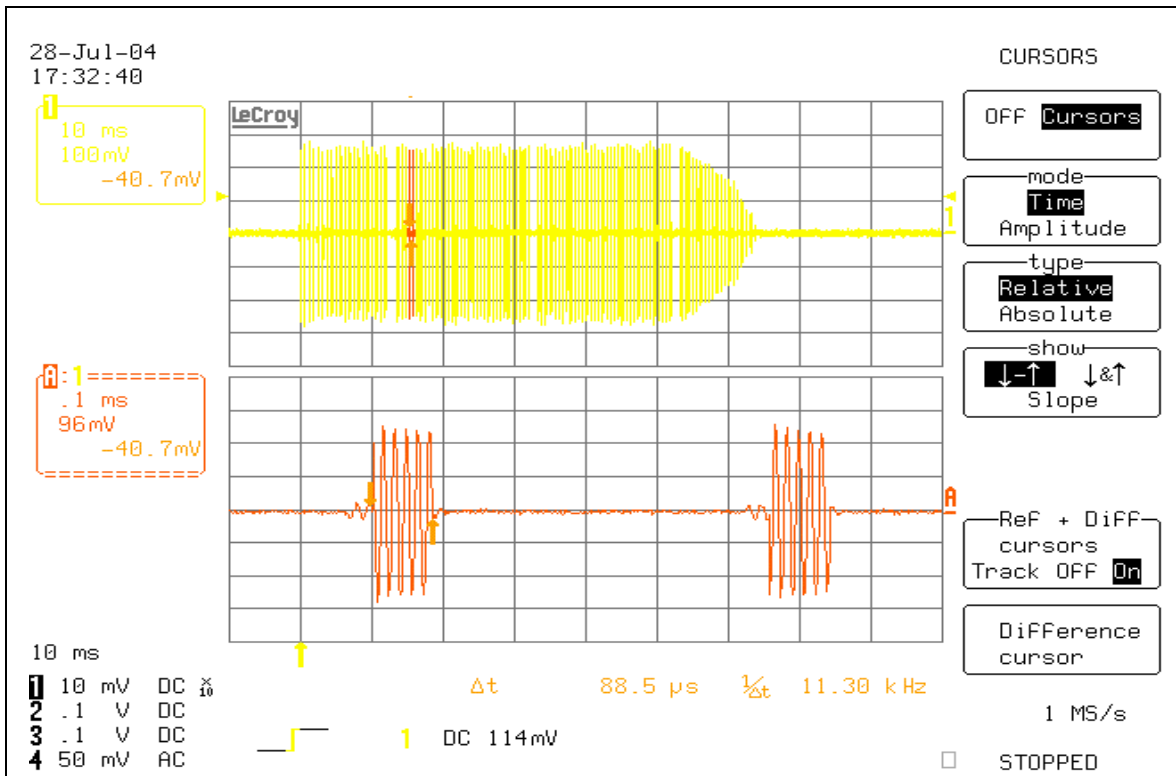



4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF BAND EDGES MEASUREMENT

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for device operating above 70 MHz and below 900 MHz.

Fundamental Frequency (MHz)	Limit of 20 dB Bandwidth(kHz)
433.92	1084.8

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURES

- 1 The EUT was placed on the turn table .
- 2 The signal was coupled to the spectrum analyzer through an antenna.
- 3 Set the resolution bandwidth to 10kHz and video bandwidth to 30kHz then select Peak function to scan the channel frequency.
- 4 The 20dB bandwidth was measured and recorded.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation


4.3.5 TEST SETUP

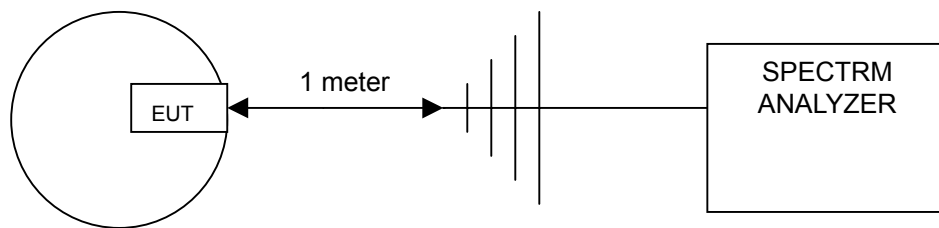

4.3.6 TEST RESULTS



Frequency (MHz)	20 dB bandwidth (kHz)	Maximum limit (kHz)	PASS/FAIL
433.92	54.00	1084.80	PASS

The plot of test result is attached as below.

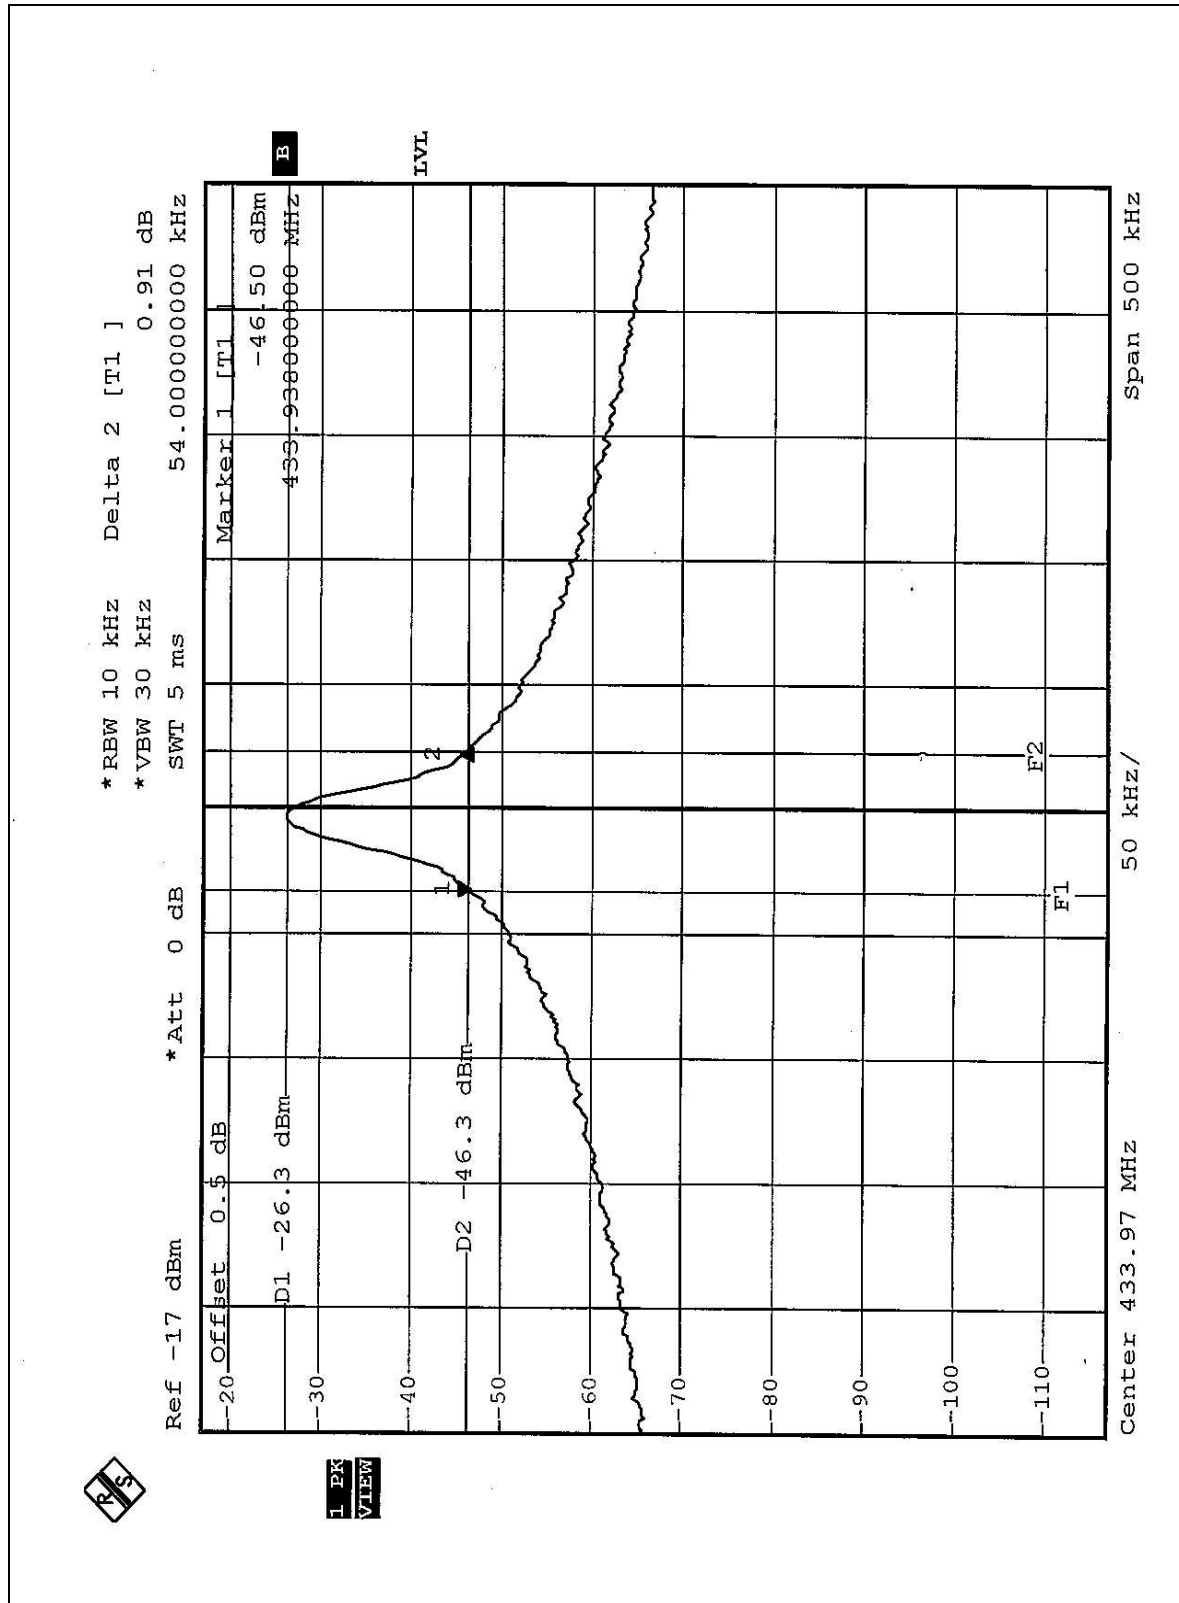

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

RADIATED EMISSION TEST

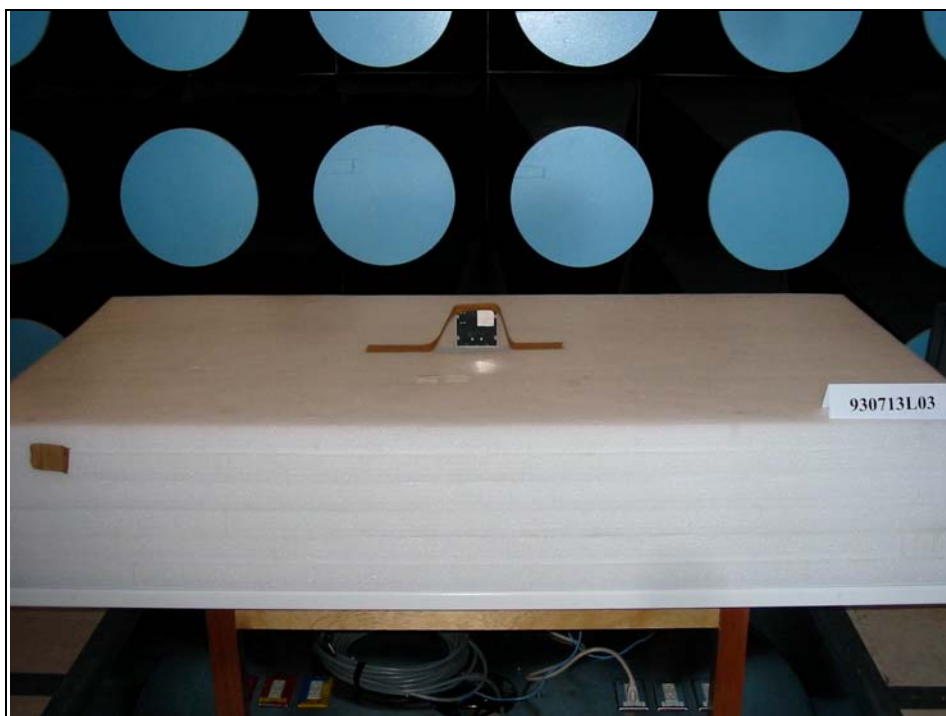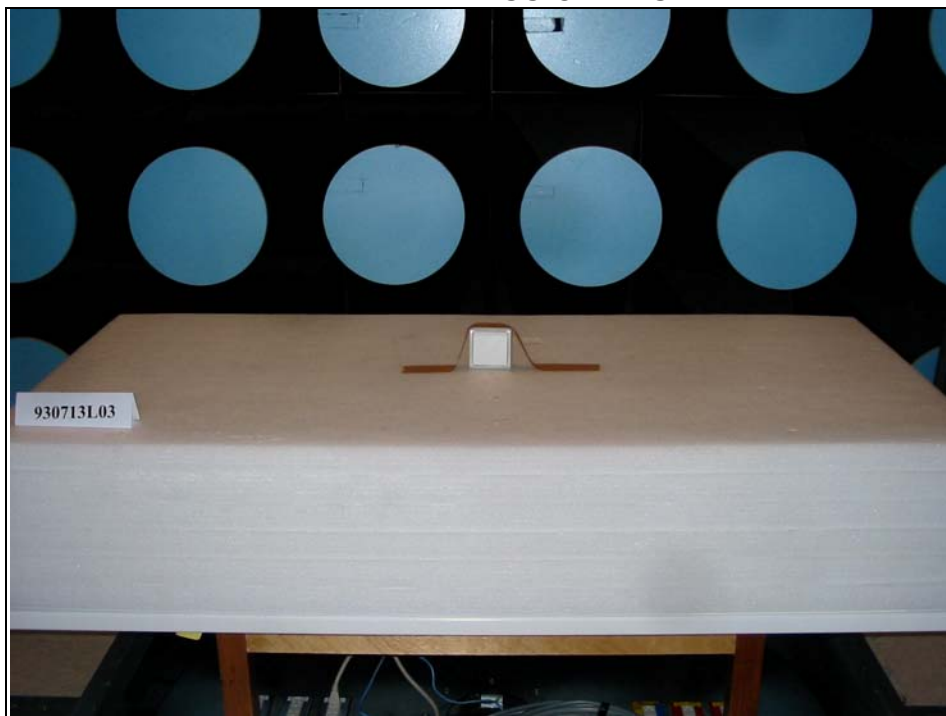



6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Linko RF Lab.
Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

Report Format Version 1.2