

# Report on the FCC and IC Testing of the Siemens AG

Model: SIMATIC RTLS4083T  
MLFB: 6GT2700-5DC15


In accordance with FCC 47 CFR Part 15 F  
and ISED RSS-220 and ISED RSS-Gen

Prepared for:

Siemens AG  
76181 Karlsruhe  
Germany

FCC ID:  
IC

SCF4083T02  
---

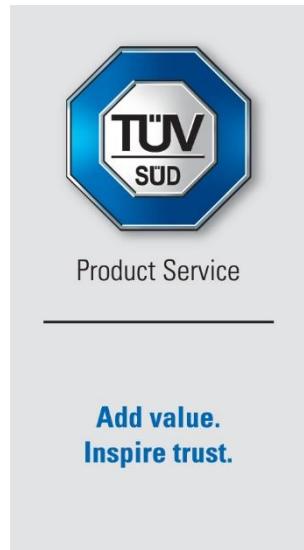

## COMMERCIAL-IN-CONFIDENCE

Date: 2024-02-06

Document Number: TR-713308979-01 | Revision 2

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Alexander Deese	2024-02-06	 SIGN-ID 880772
Authorised Signatory	Matthias Stumpe	2024-02-06	 SIGN-ID 880788

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

### Engineering Statement:

This measurement shown in this report were made in accordance with the procedures described on test pages.  
All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15 E and ISED RSS-220 and RSS-GEN.

The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Alexander Deese	2024-02-06	 SIGN-ID 880772

Laboratory Accreditation

Laboratory recognition

Industry Canada test site registration

DAkkS Reg. No. D-PL-11321-11-02

Registration No. BNetzA-CAB-16/21-15

3050A-2

DAkkS Reg. No. D-PL-11321-11-03

### Executive Statement:

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15 F:2021 and ISED RSS220:2018 and ISED RSSGen:2019

#### DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2024 TÜV SÜD Product Service.

Trade Register Munich  
HRB 85742  
VAT ID No. DE129484267  
Information pursuant to Section 2(1)  
DL-InfoV (Germany) at  
[www.tuvsud.com/imprint](http://www.tuvsud.com/imprint)

Managing Directors:  
Walter Reithmaier (Sprecher / CEO)  
Patrick van Welij

Phone: +49 (0) 9421 56 82-0  
Fax: +49 (0) 9421 56 82-199  
[www.tuvsud.com](http://www.tuvsud.com)

TÜV SÜD Product Service GmbH  
Äußere Frühlingstraße 45  
94315 Straubing  
Germany



## Content

1	Report Summary.....	2
1.1	Modification Report.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results.....	3
1.4	Product Information .....	4
1.5	Test Configuration .....	4
1.6	Modes of Operation .....	4
1.7	Deviations from Standard .....	4
1.8	EUT Modifications Record.....	5
1.9	Test Location .....	5
2	Test Details.....	6
2.1	Antenna requirement .....	6
2.2	Bandwidth of Signal.....	7
2.3	Peak Power .....	11
2.4	Radiated Emissions .....	14
2.5	Radiated Emissions in GPS bands.....	30
2.6	Signal deactivation .....	34
3	Measurement Uncertainty .....	37
Annex A: Photographs of Test Setup		6 Pages
Annex B: External photographs of EUT		3 Pages



# 1 Report Summary

## 1.1 Modification Report

Alternations and additions of this report will be issued to the holders of each copy in the form of a complete document.

Revision	Description of changes	Date of Issue
0	First Issue	2023-11-29
1	Specification clause references updated.	2024-01-30
2	Chapter 2.1 Antenna requirement added	2024-02-06

Table 1: Report of Modifications

## 1.2 Introduction

Applicant	Siemens AG
Manufacturer	Siemens AG
Model Number(s)	SIMATIC RTLS4083T MLFB: 6GT2700-5DC15
Serial Number(s)	A50503
Hardware Version(s)	FS:01
Software Version(s)	FS:01
Number of Samples Tested	1
Test Specification(s) /	FCC 47 CFR Part15 F : 2019,
Issue / Date	FCC 47 CFR Part15 C : 2019 and ISED RSS-220, Issue 1, Amd. 1 : 2018 ISED RSS-Gen, Issue 5, Amd. 1 : 2019
Test Plan/Issue/Date	---
Order Number	9707940255
Date	2023-08-16
Date of Receipt of EUT	2023-07-31
Start of Test	2023-09-15
Finish of Test	2023-11-28
Name of Engineer(s)	Alexander Deese
Related Document(s)	ANSI C63.10:2013



### 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15 F and ISED RSS-220 and RSS-Gen is shown below.

Section	Specification Clause	Test Description	Result
Transmitting continuously			
2.1	15.203	Antenna requirement	Pass
2.2	15.503(a), (b), (c), (d)	Bandwidth of Signal	Pass
2.3	15.519(e), 15.521	Peak Power	Pass
2.4	15.505(a), 15.519(c), 15.521(c), 15.521(h), 15.209	Radiated Emissions	Pass
2.5	15.519(d)	Radiated Emissions in GPS bands	Pass
	15.505(a), 15.207	Conducted Disturbance at Mains Terminal	Not applicable, battery supplied
2.5	15.519(a)	Signal deactivation	Pass

Table 2: Results according to FCC 47 CFR Part 15 F

Section	Specification Clause	Test Description	Result
Transmitting continuously			
2.2	2	Bandwidth of Signal	Pass
2.3	5.3.1(g), Annex 4	Peak Power	Pass
2.4	5.3.1(c) 5.3.1(d)	Radiated Emissions	Pass
2.5	5.3.1(e)	Radiated Emissions in GPS bands	Pass
2.5	5.3.1(b)	Signal deactivation	Pass

Table 3: Results according to ISED RSS-220

Section	Specification Clause	Test Description	Result
Transmitting continuously			
2.2	6.7	Bandwidth of Signal	Pass
	8.11	Temperature Stability	N/A
	8.8	AC Power Line Conducted Emissions	Not applicable, battery supplied
2.4	8.9, 8.10	Radiated Emissions	Pass

Table 4: Results according to ISED RSS-Gen



## 1.4 Product Information

### 1.4.1 Technical Description


RTLS-Transponder

<i>Frequency Band</i>	2405 – 2480 MHz
	3993.6 – 6489.6 MHz
<i>Supply Voltage:</i>	3.7 V
<i>Supply Frequency:</i>	DC, battery supplied

## 1.5 Test Configuration

The device was 3.7 V DC power supplied. UWB was transmitting continuously. Y-axis of the device was determined as the worst case for the measurements in this report.

## 1.6 Modes of Operation

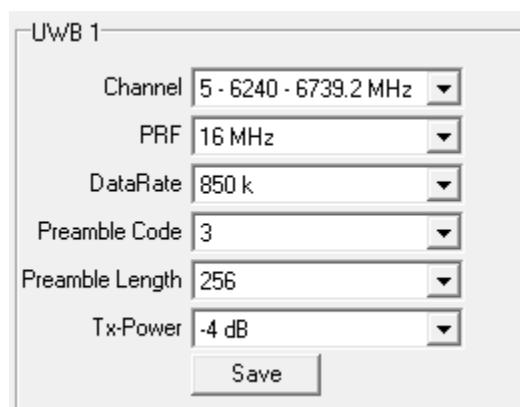

## 1.7 Deviations from Standard

---



## 1.8 EUT Modifications Record

The table below details modifications made to the EUT during the test program.  
The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	As supplied by the customer	Not Applicable	Not Applicable

Table 5

## 1.9 Test Location

TÜV SÜD Product Service conducted the following tests at our Straubing test laboratory:

Test Name	Name of Engineer(s)
Transmitting continuously	
Bandwidth of Signal	Alexander Deese
Peak Power	Alexander Deese
Radiated Emissions	Alexander Deese
Radiated Emissions in GPS bands	Alexander Deese
Signal deactivation	Alexander Deese

**Office Address:**

Äußere Frühlingstraße 45  
94315 Straubing  
Germany



## 2 Test Details

### 2.1 Antenna requirement

#### 2.1.1 Specification Reference

FCC 47 CFR Part 15 C, Clauses 15.203

#### 2.1.2 Equipment under Test and Modification State

SIMATIC RTLS4083T; S/N A50503; Modification state 0

#### 2.1.3 Date of Test

---

#### 2.1.4 Specification Limits

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some fields disturbance sensors, or to other intentional radiators which must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits are not exceeded.

#### 2.1.5 Test Results

The antenna is permanently attached.



## 2.2 Bandwidth of Signal

### 2.2.1 Specification Reference

FCC 47 CFR Part 15 F, Clause 15.503(a), (b), (c), (d)

ISED RSS-220, Clause 2

ISED RSS-Gen, Clause 6.7

### 2.2.2 Equipment under Test and Modification State

SIMATIC RTLS4083T; S/N A50503; Modification state 0

### 2.2.3 Date of Test

2023-11-21

### 2.2.4 Environmental Conditions

Ambient Temperature	21 °C
Relative Humidity	45 %

### 2.2.5 Specification Limits

A UWB device is an intentional radiator that has either a -10 dBc bandwidth ( $\frac{f_H+f_L}{2}$ ) of at least 500 MHz or a -10 dB ( $2 \frac{f_H-f_L}{f_H+f_L}$ ) fractional bandwidth greater than 0.2.


### 2.2.6 Test Method

The test was performed according to ANSI C63.10, clauses 6.9 and 10.1.

## 2.2.7 Test Results

Frequency Channel	$f_L$ (GHz)	$f_H$ (GHz)	-10 dB Bandwidth (MHz)	Minimum -10 dB Bandwidth (MHz)
5	6.17483	6.79079	615.96	500

Table 6: 10 dB bandwidth and fractional bandwidth

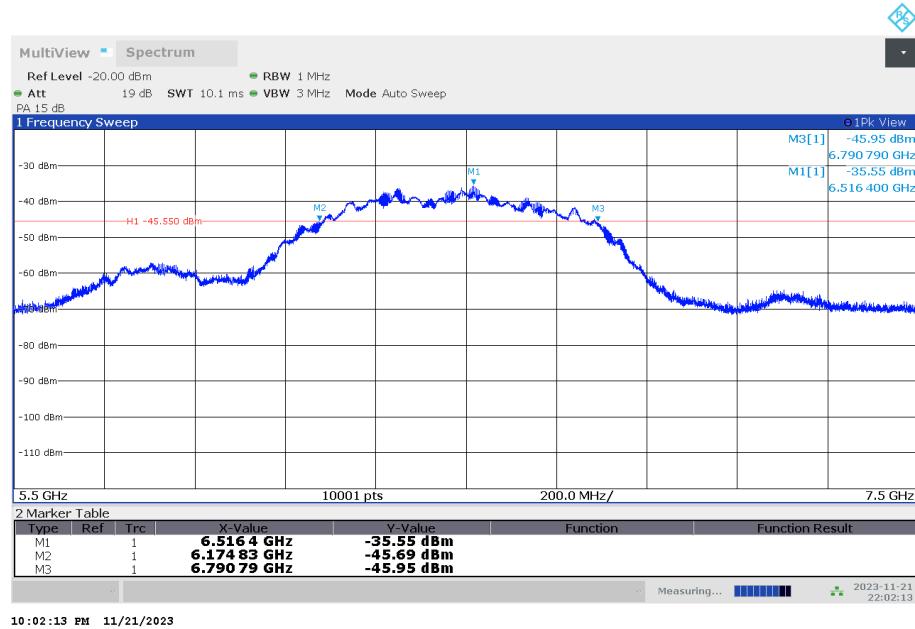

Frequency Channel	99% Bandwidth (MHz)
5	910.955

Table 7: 99% bandwidth





## 2.2.8 Test Location and Test Equipment

The test was carried out in fully anechoic chamber no. 2:

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Signal and Spectrum Analyser	Rohde & Schwarz	FSW43	53496	12	2024-04-30
Double ridged horn antenna	EMCO	3115	19383	36	2026-04-30

**Table 8**



## 2.3 Peak Power

### 2.3.1 Specification Reference

FCC 47 CFR Part 15 F, Clause 15.519(e) and 15.521  
ISED RSS-220, Clauses 4. 5.3.1(g) and Annex 4

### 2.3.2 Equipment under Test and Modification State

SIMATIC RTLS4083T; S/N A50503; Modification state 0

### 2.3.3 Date of Test

2023-11-09

### 2.3.4 Environmental Conditions

Ambient Temperature	21 °C
Relative Humidity	43 %

### 2.3.5 Specification Limits

There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs,  $f_M$ . That limit is 0 dBm e.i.r.p. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, following the procedures.

### 2.3.6 Test Method

The test was performed according to ANSI C63.10, section 10.3.5

### 2.3.7 Test Results

Frequency Channel	$f_M$ (GHz)	Resolution Bandwidth (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)
5	6.5162475	50	-8.49	0

Table 9: Peak Power



$f_M$  of 6.516 GHz is contained within the UWB Bandwidth of  $f_L$  of 6.175 and  $f_H$  of 6.791.



### 2.3.8 Test Location and Test Equipment

The test was carried out in fully anechoic chamber no. 2:

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Signal and Spectrum Analyser	Rohde & Schwarz	FSW43	53496	12	2024-04-30
Double ridged horn antenna	EMCO	3115	19383	36	2026-04-30

**Table 10**



## 2.4 Radiated Emissions

### 2.4.1 Specification Reference

FCC 47 CFR Part 15 F, Clauses 15.505(a), 15.519(c), 15.521(c), 15.521(h)

FCC 47 CFR Part 15 C, Clauses 15.209

ISED RSS-220, Clause 5.3.1(c), 5.3.1(d)

ISED RSS-Gen, Clauses 8.9

### 2.4.2 Equipment under Test and Modification State

SIMATIC RTLS4083T; S/N A50503; Modification state 0

### 2.4.3 Date of Test

2023-09-15 to 2023-11-10

### 2.4.4 Environmental Conditions

Ambient Temperature	22 °C
Relative Humidity	50 %



## 2.4.5 Specification Limits

### 2.4.5.1 Radiated emissions up to 960 MHz according to 47 CFR 15.517(c), 15.519(c), 15.209 and ISED RSS-220, Clause 5.2.1 (c), 5.2.1 (c), 5.3.1 (d), 5.3.1 (d)

The radiated emissions at or below 960 MHz from a device operating under the provisions of this sections shall not exceed the general radiated emission limits:

General radiated emission limits:					
Frequency Range (MHz)	Test distance (m)	Field strength		Field strength	
		( $\mu$ A/m)	(dB $\mu$ A/m)	( $\mu$ V/m)	(dB $\mu$ V/m)
0.009 – 0.49	300	6.37 / $f$	20*lg(6.37 / $f$ )	2400 / $f$	20*lg(2400 / $f$ )
0.49 – 1.705	30	63.7 / $f$	20*lg(63.7 / $f$ )	24000 / $f$	20*lg(24000 / $f$ )
1.705 – 30	30	0.08	20*lg(0.08 / $f$ )	30	20*lg(30 / $f$ )
30 – 88	3	---	---	100	40
88 – 216	3	--	---	150	43.5
126 – 960	3	--	---	200	46

Note 1:  $f$  in kHz

Table 11 General radiated emission limits

At frequencies at or above 30 MHz, measurements may be performed at distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempts should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

### 2.4.5.2 Radiated emissions above 960 MHz according to 47 CFR 15.519(c)

The radiated emissions above 960 MHz shall not exceed the following average (RMS) limits when measured using a resolution bandwidth of 1 MHz:

Frequency range	EIRP
960 MHz – 1610 MHz	-75.3 dBm
1610 MHz – 1990 MHz	-63.3 dBm
1990 MHz – 3.1 GHz	-61.3 dBm
3.1 GHz – 10.6 GHz	-41.3 dBm
above 10.6 GHz	-61.3 dBm



#### 2.4.5.3 Radiated emissions above 960 MHz according to ISED RSS-220, Clause 5.2.1 (d)

The radiated emissions above 960 MHz shall not exceed the following average (RMS) limits when measured using a resolution bandwidth of 1 MHz:

Frequency range	EIRP
960 MHz – 1610 MHz	-75.3 dBm
1610 MHz – 4750 MHz	-70.0 dBm
4750 MHz – 10.6 GHz	-41.3 dBm
above 10.6 GHz	-51.3 dBm

#### 2.4.5.4 Radiated emissions above 960 MHz according to ISED RSS-220, Clause 5.3.1 (d)

The radiated emissions above 960 MHz shall not exceed the following average (RMS) limits when measured using a resolution bandwidth of 1 MHz:

Frequency range	EIRP
960 MHz – 1610 MHz	-75.3 dBm
1610 MHz – 4750 MHz	-70.0 dBm
4750 MHz – 10.6 GHz	-41.3 dBm
above 10.6 GHz	-61.3 dBm

## 2.4.6 Test Method

The test was performed according to ANSI C63.10, sections 11.11 and 11.12


Prescans are performed in six positions of the EUT to get the full spectrum of emission caused by the EUT with the measuring antenna raised and lowered from 1 m to 4 m with vertical and horizontal polarisation to find the combination of table position, antenna height and antenna polarisation for the maximum emission levels.

Data reduction is applied to these results to select those levels having less margin than 10 dB or exceeding the limit using subranges and limited number of maximums.

Further maximisation for adjusting the maximum position is following.

Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

### 2.4.6.1 Frequency range 9 kHz – 30 MHz

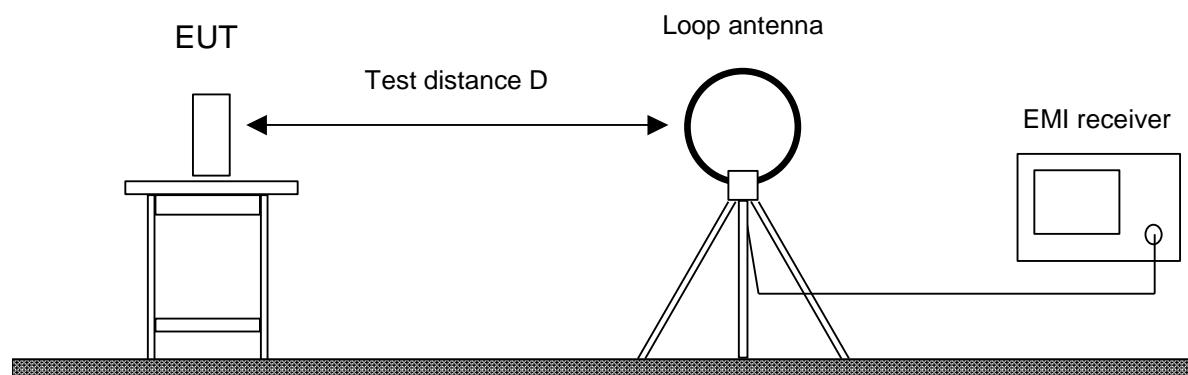


The EUT was placed on a non-conductive table, 0.8 m above the ground.

Radiated emissions in the frequency 9 kHz – 30 MHz is measured within a semi-anechoic room with an active loop antenna with the measurement detector set to peak. In addition in the frequency range 9 kHz to 490 kHz also an average detector was used. The measurement bandwidth of the receiver was set to 300 Hz in the frequency range 9 kHz to 150 kHz and 10 kHz in the frequency range 150 kHz to 30 MHz. Prescans were performed in six positions of the EUT.

For final measurements the detector was set to CISPR quasi-peak and in addition to CISPR average in the frequency range 9 kHz to 490 kHz with a resolution bandwidth 200 Hz in the frequency range 9 kHz to 150 kHz and 9 kHz in the frequency range 150 kHz to 30 MHz. Final tests were performed immediately after a final frequency and zoom (for drifting disturbances) and maximum adjustment.

#### 2.4.6.2 Frequency range 30 MHz – 1 GHz

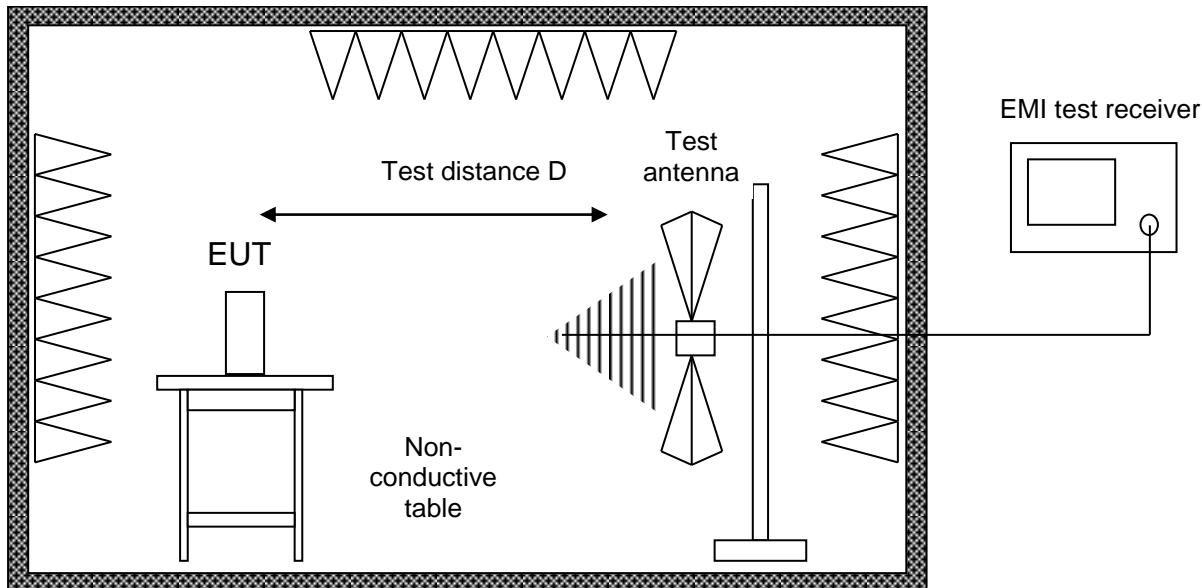


Alternate test site (semi anechoic room)

The EUT was placed on a non-conductive table, 0.8 m above the ground plane. Radiated emissions in the frequency range 30 MHz – 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4. for alternative test sites. A linear polarised logarithmic periodic antenna combined with a 4:1 broadband dipole (“Trilog broadband antenna”) is used.

For prescan tests the test receiver is set to peak-detector with a bandwidth of 120 kHz. With the measurement bandwidth of the test receiver set to 120 kHz CISPR quasi-peak detector is selected for final measurements following immediately after a final frequency zoom (for drifting disturbances) and maximum adjustment.

#### 2.4.6.3 Frequency range above 1 GHz

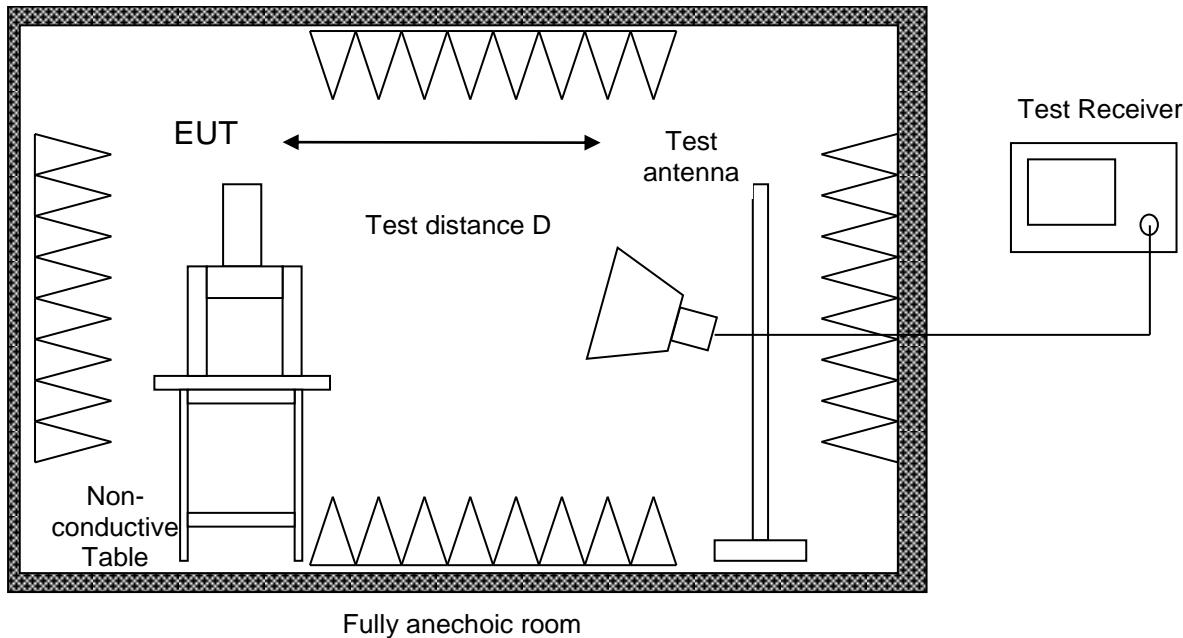

The EUT was placed on a non-conductive table, 1.5 m above the ground plane. Radiated emission tests above 1 GHz are performed in a fully anechoic room with the SVSWR requirements of ANSI C63.4. Measurements are performed both in the horizontal and vertical planes of polarisation using a test receiver with the detector function set to peak and average and the resolution bandwidth set to 1 MHz. Testing above 1 GHz is performed with horn antennas with the EUT in boresight of the antenna. For prescan tests the test receiver is set to peak- and average-detector with a bandwidth of 1 MHz. With the measurement bandwidth of the test receiver set to 1 MHz and peak- and CISPR average-detector is selected for final measurements following immediately after a final frequency zoom (for drifting disturbances) and maximum adjustment.



## 2.4.7 Test Results

<i>Frequency range</i>	<i>Test distance</i>
9 kHz to 30 MHz	3 m
30 MHz to 1 GHz	3 m
960 MHz to 8.2 GHz	0.5 m
8.2 GHz to 18 GHz	1 m
18 GHz to 26.5 GHz	0.5 m
26.5 GHz to 40 GHz	0.1 m

Table 12


### Sample calculation:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + (\text{Cable attenuation (dB)} + \text{Antenna Transducer (dB(1/m)))}$$

Additional correction of limit in the frequency range 9 – 490 kHz (300 m to 3 m): +80.0 dB


Additional correction of limit in the frequency range 490 kHz – 30 MHz (30 m to 3 m): +40.0 dB

Additional correction of limit in the frequency ranges above 1 GHz (3 m to 1 m): +9.54 dB

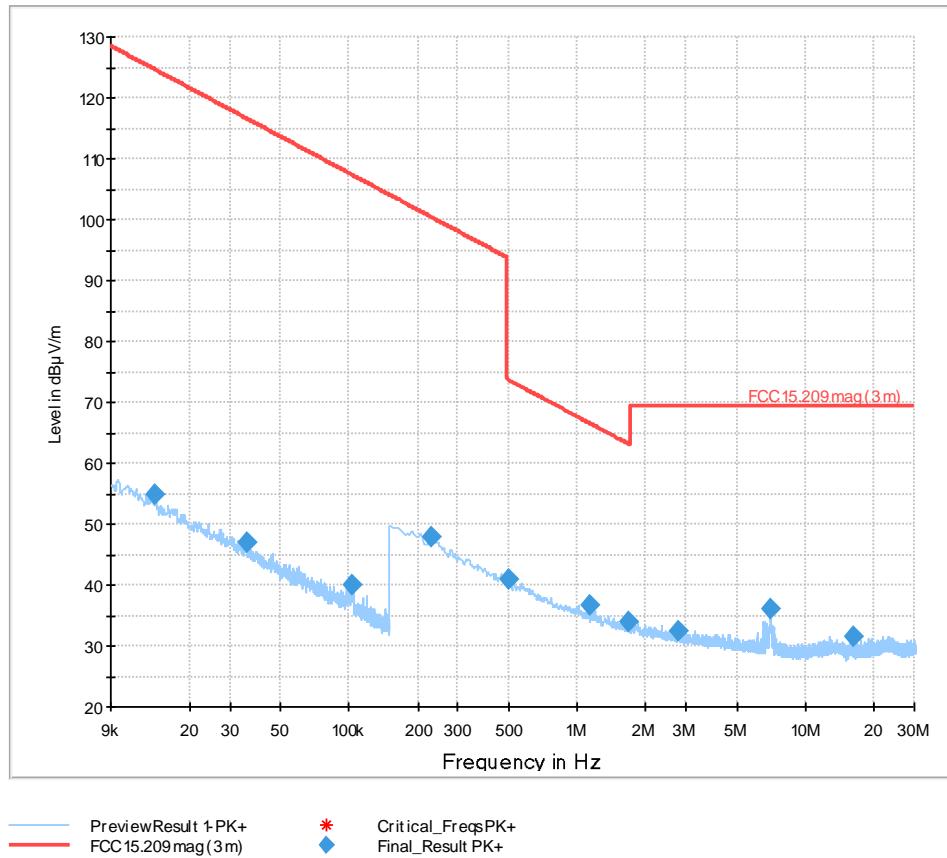

### Final Results:


Frequency MHz	MaxPeak dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Meas. Time ms	Bandwidth kHz	Pol	Azimuth deg	Corr. dB/m
0.014147	54.73	124.57	69.85	10.0	0.300	V	79.0	20
0.035614	46.96	116.56	69.60	10.0	0.300	V	114.0	20
0.102589	40.06	107.37	67.31	10.0	0.300	V	118.0	20
0.230595	47.90	100.34	52.44	10.0	10.000	V	311.0	20
0.502230	40.89	73.59	32.69	10.0	10.000	V	54.0	20
1.129080	36.73	66.57	29.84	10.0	10.000	H	181.0	20
1.669365	33.79	63.18	29.39	10.0	10.000	H	229.0	20
2.791725	32.52	69.50	36.98	10.0	10.000	V	247.0	20
7.006545	35.97	69.50	33.53	10.0	10.000	H	5.0	20
16.101840	31.65	69.50	37.85	10.0	10.000	H	0.0	20

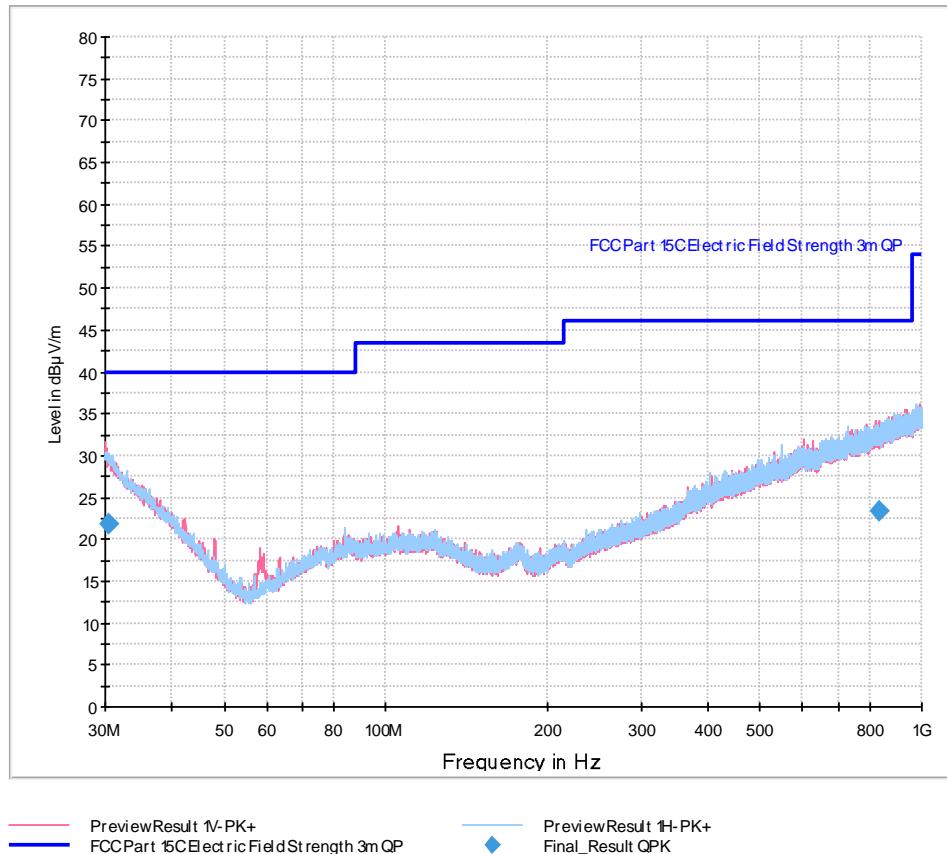

### Final Results:

Frequency MHz	QuasiPeak dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB/m
30.450000	21.73	40.00	18.27	1000.0	120.000	231.0	V	43.0	24.9
831.360000	23.30	46.02	22.72	1000.0	120.000	166.0	V	-16.0	29.6


**X-axis:**

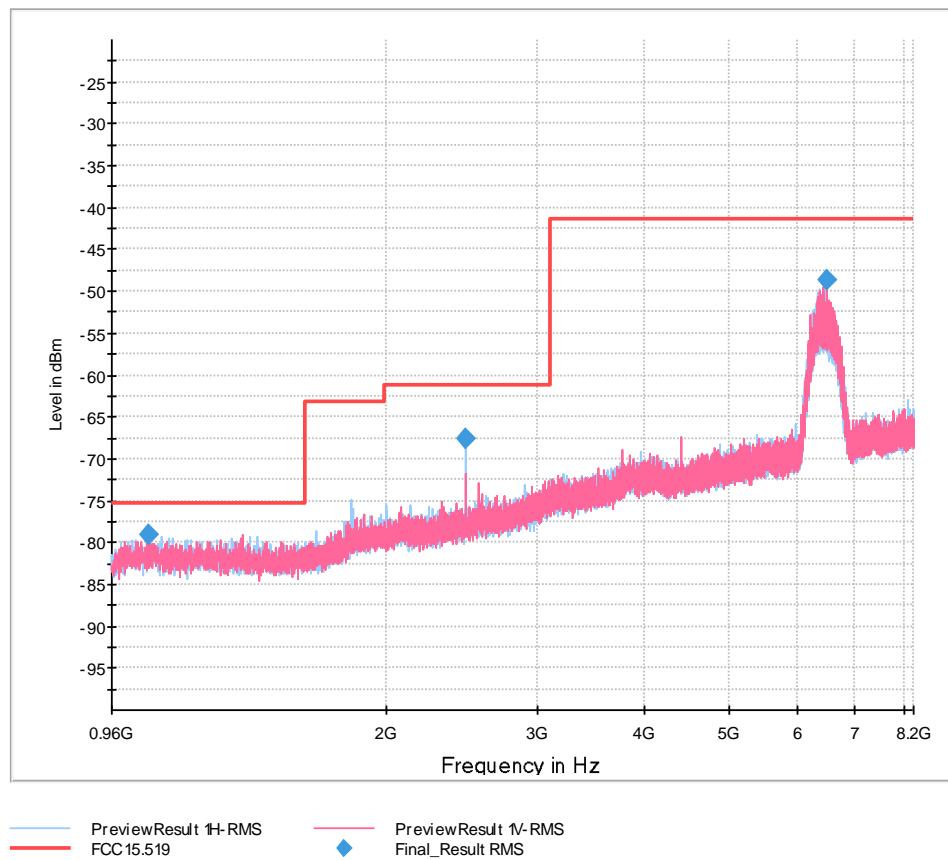

**Final Results:**

Frequency MHz	RMS dBm	Limit dBm	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
1060.907500	-79.00	-75.30	3.70	2.5	1000.000	150.0	V	155.0	-113.3
2478.137500	-67.53	-61.30	6.23	2.5	1000.000	150.0	H	225.0	-108.4
6489.097500	-48.68	-41.30	7.38	2.5	1000.000	150.0	V	42.0	-99.5

**Y-axis:**

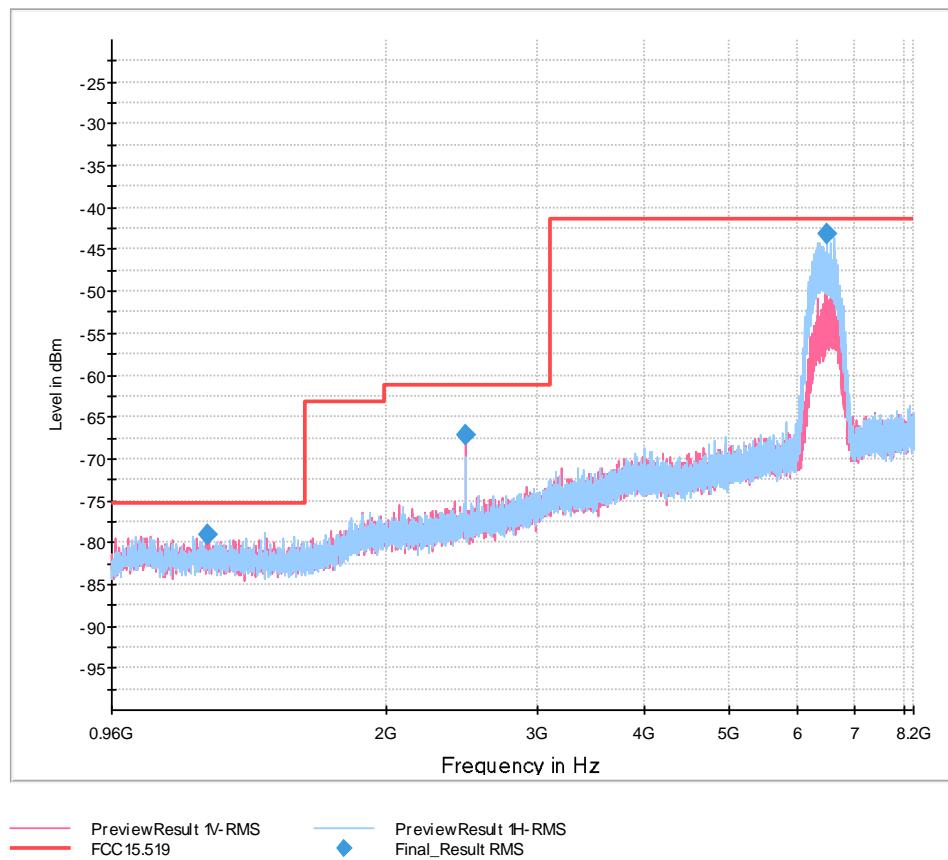


**Final Results:**

Frequency MHz	RMS dBm	Limit dBm	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
1238.287500	-78.97	-75.30	3.67	2.5	1000.000	150.0	V	94.0	-113.5
2478.137500	-67.22	-61.30	5.92	2.5	1000.000	150.0	V	308.0	-108.4
6489.550000	-43.07	-41.30	1.77	2.5	1000.000	150.0	H	180.0	-99.5


**Y-axis was chosen as worst case for further and previous measurements.**

**Z-axis:**

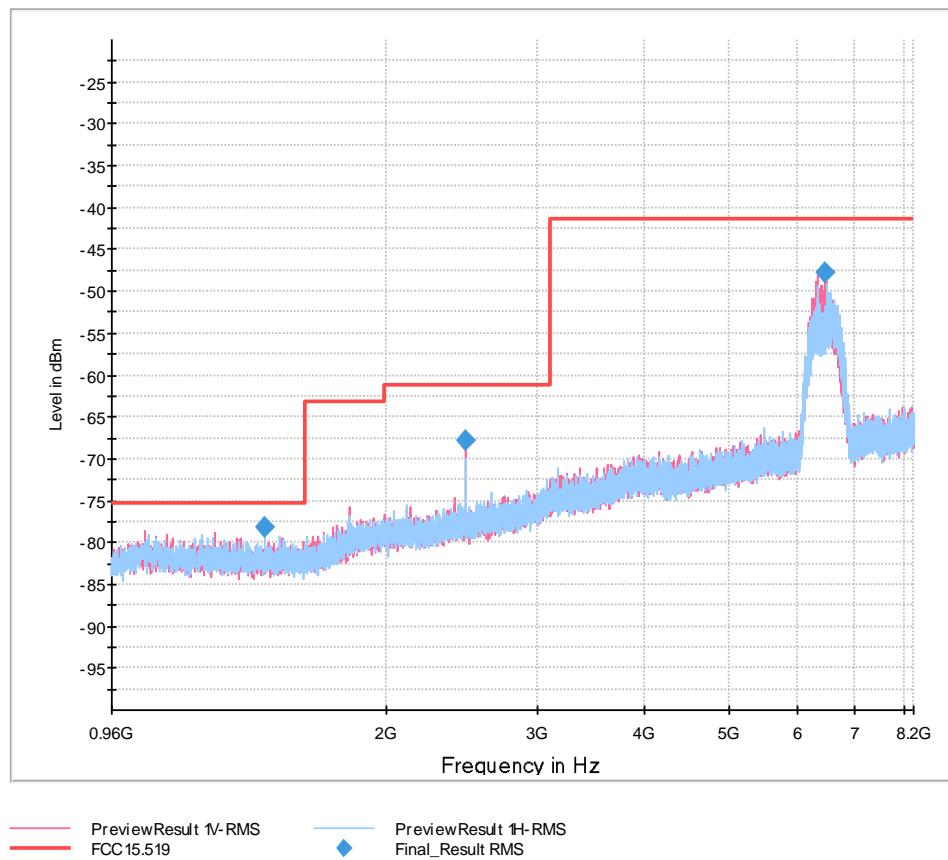


**Final Results:**

Frequency MHz	RMS dBm	Limit dBm	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
1444.627500	-78.11	-75.30	2.81	2.5	1000.000	150.0	H	44.0	-113.7
2477.685000	-67.77	-61.30	6.47	2.5	1000.000	150.0	V	0.0	-108.4
6463.305000	-47.82	-41.30	6.52	2.5	1000.000	150.0	V	292.0	-99.7

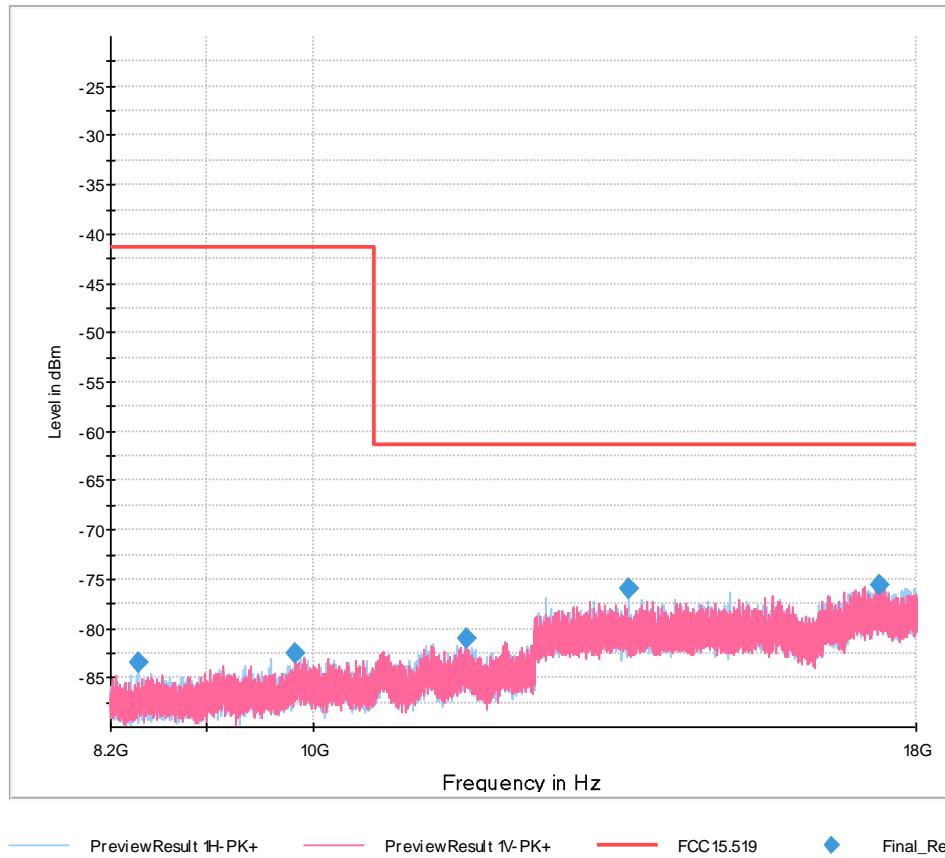


### Final Results:

Frequency MHz	MaxPeak dBm	Limit dBm	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
8417.700000	-83.41	-41.30	42.11	2.5	1000.000	150.0	H	341.0	-99
9825.050000	-82.46	-41.30	41.16	2.5	1000.000	150.0	V	210.0	-97
11593.950000	-80.98	-61.30	19.68	2.5	1000.000	150.0	V	286.0	-96
13585.100000	-75.97	-61.30	14.67	2.5	1000.000	150.0	H	304.0	-92
13585.100000	-75.97	-61.30	14.67	2.5	1000.000	150.0	H	304.0	-92
17360.200000	-75.53	-61.30	14.23	2.5	1000.000	150.0	H	157.0	-90

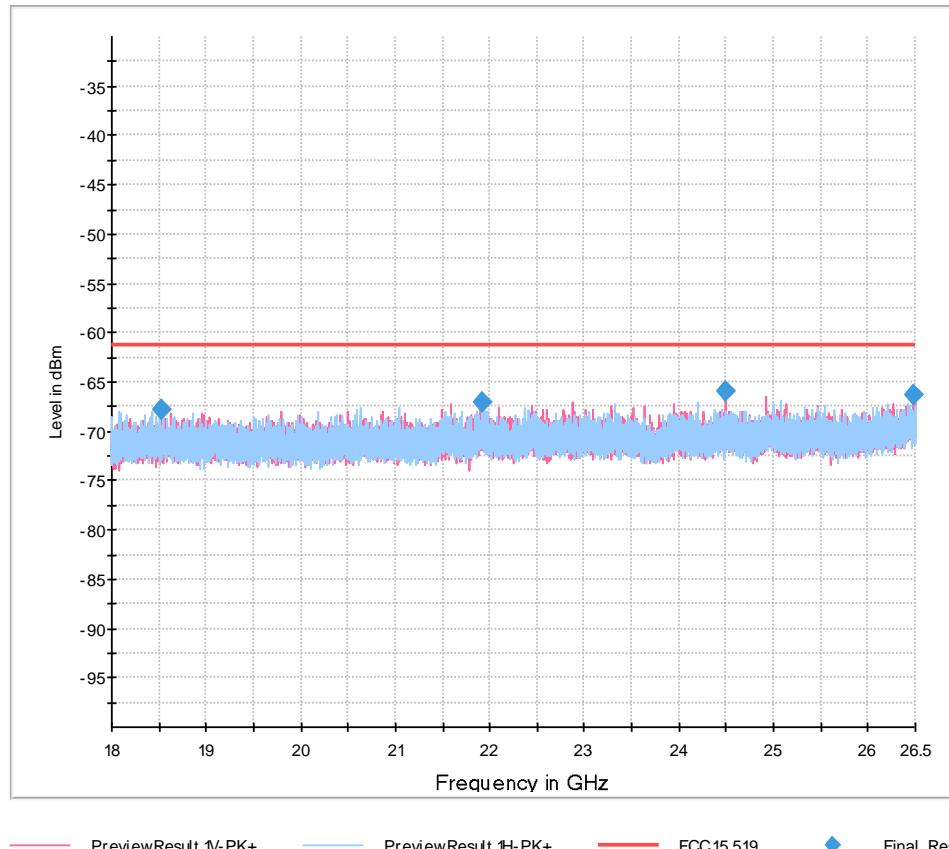

### Final Results:

Frequency MHz	MaxPeak dBm	Limit dBm	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
18521.900000	-67.86	-61.30	6.56	20.0	1000.000	150.0	V	286.0	-83
21910.000000	-67.01	-61.30	5.71	20.0	1000.000	150.0	H	324.0	-82
24483.375000	-65.84	-61.30	4.54	20.0	1000.000	150.0	V	73.0	-82
26486.400000	-66.31	-61.30	5.01	20.0	1000.000	150.0	V	73.0	-81

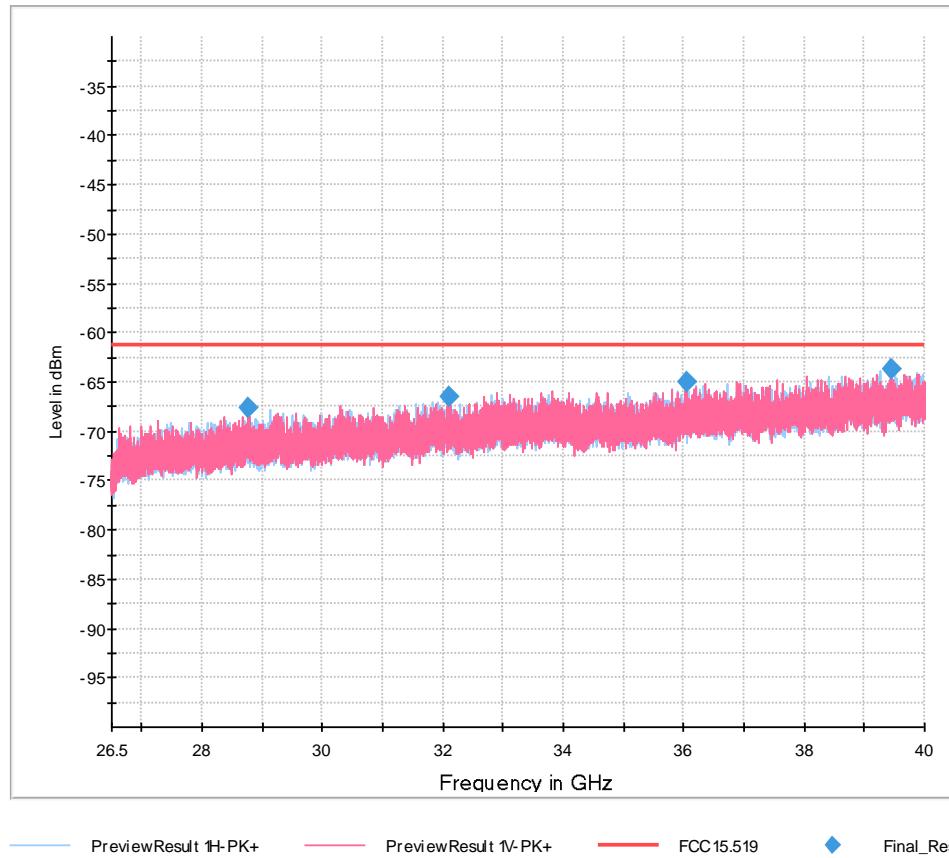

### Final Results:

Frequency MHz	MaxPeak dBm	Limit dBm	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
28754.950000	-67.56	-61.30	6.26	20.0	1000.000	150.0	V	195.0	-84
32116.450000	-66.53	-61.30	5.23	20.0	1000.000	150.0	V	216.0	-83
36056.200000	-64.97	-61.30	3.67	20.0	1000.000	150.0	V	231.0	-82
39437.500000	-63.60	-61.30	2.30	20.0	1000.000	150.0	H	158.0	-81

## 2.4.8 Test Location and Test Equipment

The test was carried out in fully anechoic chamber no. 2 and semi anechoic chamber no. 11:

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Signal and Spectrum Analyser	Rohde & Schwarz	FSW43	53496	12	2024-04-30
Double ridged horn antenna	EMCO	3115	19383	36	2026-04-30
Horn antenna	EMCO	3160-07	18874	---	---
Horn antenna	EMCO	3160-08	18875	---	---
Horn antenna	EMCO	3160-09	19125	---	---
Horn antenna	EMCO	3160-10	19442	---	---
Loop antenna	Schwarzbeck	FMZB 1519 B	44334	36	2026-06-30
ULTRALOG Antenna	Rohde & Schwarz	HL562E	61486	36	2026-04-30
Fixed attenuator	Aeroflex	ATT 6dB	61491	36	2026-04-30
EMI test receiver	Rohde & Schwarz	ESW44	39897	12	2024-04-30

Table 13



## 2.5 Radiated Emissions in GPS bands

### 2.5.1 Specification Reference

FCC 47 CFR Part 15 F, Clauses 15.519 (d)  
ISED RSS-220, Clause 5.3.1 (d)

### 2.5.2 Equipment under Test and Modification State

SIMATIC RTLS4083T; S/N A50503; Modification state 0

### 2.5.3 Date of Test

2023-11-09

### 2.5.4 Environmental Conditions

Ambient Temperature	21 °C
Relative Humidity	43 %

### 2.5.5 Specification Limits

In addition to the radiated emission limits above, UWB transmitters shall not exceed the following average (RMS) limits when measured using a resolution bandwidth of no less than 1 kHz:

<i>Frequency range</i>	<i>EIRP</i>
1164 MHz – 1240 MHz	-85.3 dBm
1559 MHz – 1620 MHz	-85.3 dBm



## 2.5.6 Test Method

The test was performed according to ANSI C63.10, sections 11.11 and 11.12  
See section 2.5.6 for details.


## 2.5.7 Test Results

<i>Frequency range</i>	<i>Test distance</i>
1164 MHz – 1240 MHz	0.5 m
1559 MHz – 1620 MHz	0.5 m

Table 14

### Sample calculation:

Final Value (dB $\mu$ V/m) =      Reading Value (dB $\mu$ V) + (Cable attenuation (dB)  
+ Antenna Transducer (dB(1/m)))

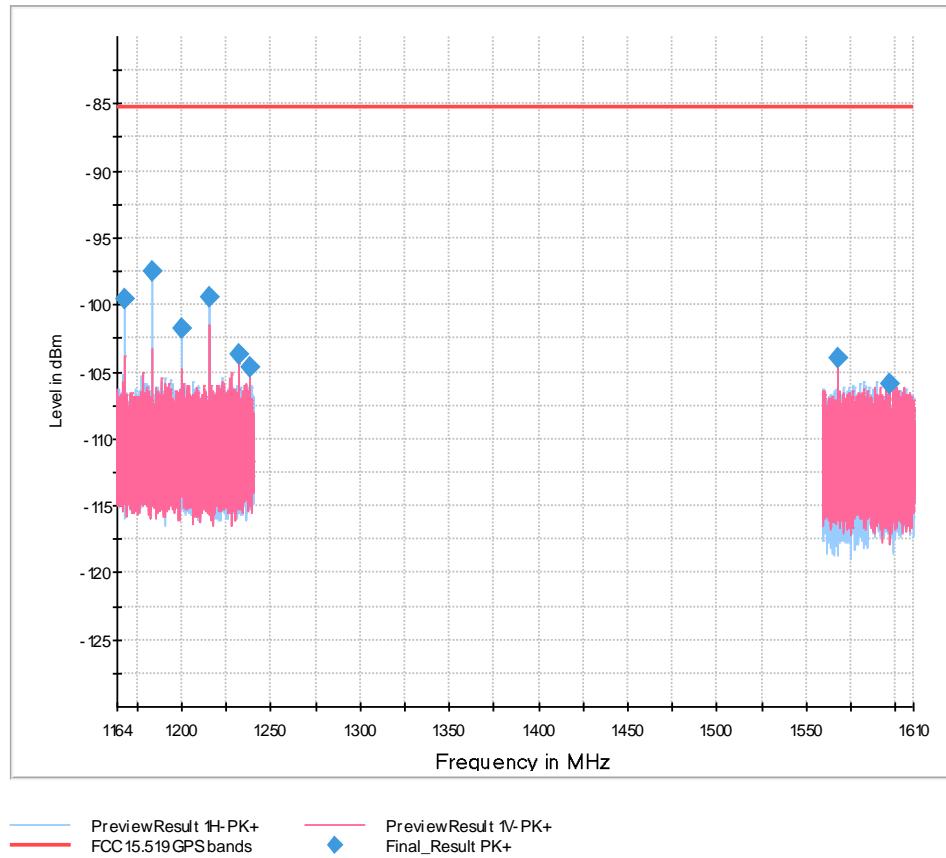

### Final Results 1:

Frequency MHz	MaxPeak dBm	Limit dBm	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
1168.001020	-99.51	-85.30	14.21	2.5	1.000	150.0	H	228.0	-114
1184.001300	-97.55	-85.30	12.25	2.5	1.000	150.0	H	200.0	-114
1200.001580	-101.78	-85.30	16.48	2.5	1.000	150.0	H	200.0	-114
1216.001480	-99.42	-85.30	14.12	2.5	1.000	150.0	H	191.0	-113
1232.001380	-103.67	-85.30	18.37	2.5	1.000	150.0	H	207.0	-113
1238.383480	-104.72	-85.30	19.42	2.5	1.000	150.0	H	191.0	-113
1568.001755	-103.94	-85.30	18.64	2.5	1.000	150.0	H	233.0	-113
1596.560225	-105.84	-85.30	20.54	2.5	1.000	150.0	V	286.0	-113



## 2.5.8 Test Location and Test Equipment

The test was carried out in fully anechoic chamber no. 2:

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Signal and Spectrum Analyser	Rohde & Schwarz	FSW43	53496	12	2024-04-30
Double ridged horn antenna	EMCO	3115	19383	36	2026-04-30

**Table 15**



## 2.6 Signal deactivation

### 2.6.1 Specification Reference

FCC 47 CFR Part 15 F, Clause 15.519(a)  
ISED RSS-220, Clauses 4 and 5.3.1(b)

### 2.6.2 Equipment under Test and Modification State

SIMATIC RTLS4083T; S/N A50503; Modification state 0

### 2.6.3 Date of Test

2023-11-28

### 2.6.4 Environmental Conditions

Ambient Temperature	21 °C
Relative Humidity	47 %


### 2.6.5 Specification Limits

A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

## 2.6.6 Test Method

---

## 2.6.7 Test Results

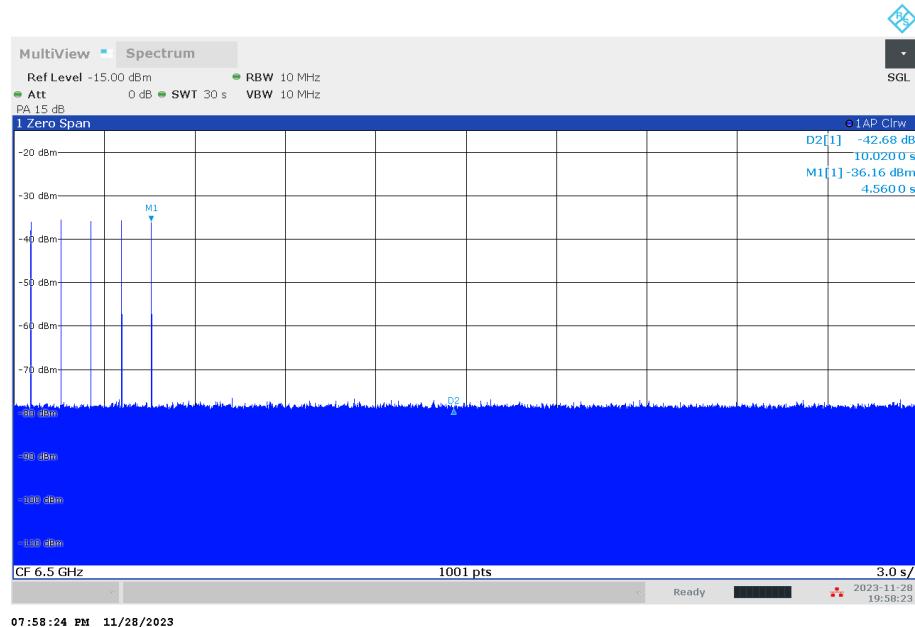

The associated receiver was turned off at 4.56 s (Marker 1) of the measurement. Device under test ceased transmission immediately.



## 2.6.8 Test Location and Test Equipment

The test was carried out in fully anechoic chamber no. 2:

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Signal and Spectrum Analyser	Rohde & Schwarz	FSW43	53496	12	2024-04-30
Double ridged horn antenna	EMCO	3115	19383	36	2026-04-30

**Table 16**

### 3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

<i>Radio Interference Emission Testing</i>		
<i>Test Name</i>	<i>kp</i>	<i>Expanded Uncertainty</i>
Conducted Voltage Emission		
9 kHz to 150 kHz (50Ω/50µH AMN)	2	± 3.8 dB
150 kHz to 30 MHz (50Ω/50µH AMN)	2	± 3.4 dB
100 kHz to 200 MHz (50Ω/5µH AMN)	2	± 3.6 dB
Discontinuous Conducted Emission		
9 kHz to 150 kHz (50Ω/50µH AMN)	2	± 3.8 dB
150 kHz to 30 MHz (50Ω/50µH AMN)	2	± 3.4 dB
Conducted Current Emission		
9 kHz to 200 MHz	2	± 3.5 dB
Magnetic Fieldstrength		
9 kHz to 30 MHz (with loop antenna)	2	± 3.9 dB
9 kHz to 30 MHz (large-loop antenna 2 m)	2	± 3.5 dB
Radiated Emission		
30 MHz to 300 MHz	2	± 4.9 dB
300 MHz to 1 GHz	2	± 5.0 dB
1 GHz to 6 GHz	2	± 4.6 dB
Test distance 10 m		
30 MHz to 300 MHz	2	± 4.9 dB
300 MHz to 1 GHz	2	± 4.9 dB
The expanded uncertainty reported according to CISPR16-4-2: 2011 + A1 + A2 + Cor1 is based on a standard uncertainty multiplied by a coverage factor of kp = 2, providing a level of confidence of p = 95.45%		

Table 17 Measurement uncertainty based on CISPR 16-4-2

<i>Radio Interference Emission Testing</i>		
<i>Test Name</i>	<i>kp</i>	<i>Expanded Uncertainty</i>
Occupied Bandwidth	2	$\pm 5\%$
Conducted Power		
9 kHz $\leq$ f $<$ 30 MHz	2	$\pm 1.0$ dB
30 MHz $\leq$ f $<$ 1 GHz	2	$\pm 1.5$ dB
1 GHz $\leq$ f $\leq$ 40 GHz	2	$\pm 2.5$ dB
1 MS/s power sensor (TS8997)	2	$\pm 1.5$ dB
Occupied Bandwidth	2	$\pm 5\%$
Power Spectral Density	2	$\pm 3.0$ dB
Radiated Power		
25 MHz – 6 GHz	1.96	$\pm 4.4$ dB
1 GHz – 18 GHz	1.96	$\pm 4.7$ dB
18 GHz – 40 GHz	1.96	$\pm 4.9$ dB
40 GHz – 325 GHz	1.96	$\pm 6.1$ dB
Conducted Spurious Emissions	2	$\pm 3.0$ dB
Radiated Spurious Emissions	2	$\pm 6.0$ dB
Voltage		
DC	2	$\pm 1.0\%$
AC	2	$\pm 2.0\%$
Time (automatic)	2	$\pm 5\%$
Frequency	2	$\pm 10^{-7}$

The expanded uncertainty reported according to ETSI TR 100 028:2001 is based on a standard uncertainty multiplied by a coverage factor of  $kp = 2$ , providing a level of confidence of  $p = 95.45\%$

**Table 18 Measurement uncertainty based on ETSI TR 100 028**

The measurement uncertainty in the laboratory is less than or equal to the maximum measurement uncertainty according to CISPR16-4-2: 2011 + A1 + A2 + Cor1 ( $U_{CISPR}$ ) and as specified in the test report below. This normative regulation means that the measured value is also the value to be assessed in relation to the limit value.

<i>Test Name</i>	<i>Expanded Uncertainty</i>
Occupied Bandwidth	±5 %
Conducted Power	
9 kHz ≤ f < 30 MHz	±1.0 dB
30 MHz ≤ f < 1 GHz	±1.5 dB
1 GHz ≤ f ≤ 40 GHz	±2.5 dB
1 MS/s power sensor (2.4 / 5 GHz band)	±1.5 dB
Power Spectral Density	±3.0 dB
Radiated Power	
25 MHz – 26.5 GHz	±6.0 dB
26.5 GHz – 66 GHz	±8.0 dB
40 GHz – 325 GHz	±10.0 dB
Conducted Spurious Emissions	±3.0 dB
Radiated Field Strength 9 kHz – 40 GHz	±6.0 dB
Voltage	
DC	± 1.0 %
AC	± 2.0 %
Time (automatic)	± 5 %
Frequency	± 10 <sup>-7</sup>

**Table 19 Decision Rule: Maximum allowed measurement uncertainty**