

## **Transceiver Certification Test Report**

**FCC ID: SDBAPXCVRZIG01  
IC ID: 2220A-APXCVRZIG01**

**FCC Rule Part: CFR 47 Part 24 Subpart D, Part 90 Subpart I, Part 101  
Subpart C**

**IC Standards Specification: RSS-119, RSS-134**

**ACS Report Number: 07-0352-LD**

**Applicant: Sensus Metering Systems  
Model: APXCVRZIG01**


**Test Begin Date: August 22, 2007  
Test End Date: August 24, 2007**

**Report Issue Date: August 27, 2007**



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report is not to be used to claim certification, approval, or endorsement by NVLAP, NIST or any government agency.

  
**Prepared by: \_\_\_\_\_**  
**Jeff Woods**  
**Wireless Certification Engineer**  
**ACS, Inc.**

  
**Reviewed by: \_\_\_\_\_**  
**J. Kirby Munroe**  
**Manager Wireless Certifications**  
**ACS, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.  
**This report contains 39 pages**

# Table of Content

---

<b>1.0 General</b>	3
1.1 Purpose	3
1.2 Product Description	3
1.3 Test Methodology and Configuration	3
1.3.1 Test Configurations and Justification	3
1.3.2 In-Band Testing Methodology	4
1.4 Emission Designators	4
<b>2.0 Test Facilities</b>	5
2.1 Location	5
2.2 Laboratory Accreditations/Recognitions/Certifications	5
2.3 Radiated Emissions Test Site Description	6
2.3.1 Semi-Anechoic Chamber Test Site	6
2.3.2 Open Area Tests Site (OATS)	7
2.4 Conducted Emissions Test Site Description	8
<b>3.0 Applicable Standards and References</b>	8
<b>4.0 List of Test Equipment</b>	9
<b>5.0 Support Equipment</b>	10
<b>6.0 EUT Setup and Block Diagram</b>	10
<b>7.0 Summary of Tests</b>	11
7.1 RF Power Output	11
7.1.1 Measurement Procedure	11
7.1.2 Measurement Results	11
7.2 Occupied Bandwidth (Emission Limits)	15
7.2.1 Measurement Procedure	15
7.2.2 Measurement Results	15
7.3 Spurious Emissions at Antenna Terminals	20
7.3.1 Measurement Procedure	20
7.3.2 Measurement Results	20
7.4 Field Strength of Spurious Emissions	26
7.4.1 Measurement Procedure	26
7.4.2 Measurement Results	26
7.5 Frequency Stability	29
7.5.1 Measurement Procedure	29
7.5.2 Measurement Results	30
7.6 Radiated Emissions (Unintentional Radiators)	38
7.6.1 Measurement Procedure	38
7.6.2 Measurement Results	38
7.7 Power Line Conducted Emissions	39
7.7.1 Measurement Procedure	39
7.7.2 Measurement Results	39
<b>8.0 Conclusion</b>	39

## **Additional Exhibits Included In Filing**

Internal Photographs

Tune-up Procedure

Product Labeling

Installation/Users Guide

Theory of Operation

Schematics

External Photographs

Test Setup Photographs

RF Exposure – MPE Calculations

System Block Diagram

Parts List

## 1.0 GENERAL

### 1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 2 Subpart J, Part 24 Subpart D, Part 90 Subpart I, and Part 101 Subpart C of the FCC's Code of Federal Regulations and RSS-119 and RSS-134.

### 1.2 Product Description

The APXCVRZIG01 transceiver module is a printed circuit board that provides wireless communication capability via the SMS wireless telemetry network. The APXCVRZIG01 also communicates using a Zigbee transceiver to devices within a few hundred feet. It therefore provides the user with a method of communicating between a remote system and various devices locally.

Manufacturer Information:  
Sensus Metering Systems  
8601 six forks Road  
Raleigh, NC 27615

Factory Contact:  
Bob Davis  
Sensus Metering Systems  
114 Northpark Blvd  
Suite 10  
Covington, LA 70433  
985-773-1236

Detailed photographs of the EUT are filed separately with this filing.

### 1.3 Test Methodology and Configurations

#### 1.3.1 Test Configurations and Justification

The APXCVRZIG01 is a module designed to be integrated into a host device therefore testing was performed on the module in a stand-alone configuration with the exception of AC power line conducted emissions. AC power line conducted emissions was performed with the module installed into a typical host device.

For RF conducted measurements, the APXCVRZIG01 was modified with an external RF connector to the PCB. The APXCVRZIG01 utilizes non-detachable antennas for normal operation but for RF conducted testing the antennas were disconnected and a 50-Ohm test cable soldered (with the appropriate ground connection) to the PCB.

The APXCVRZIG01 contains multiple transceivers which can operate simultaneously, the SMS wireless telemetry transceiver and the Zigbee transceiver. These transceivers do not share the same antenna therefore only radiated inter-modulation products were evaluated. The results are included in Section 7.6.3 of this report.

This report only addresses the SMS wireless telemetry radio section which operates under FCC Part 24, 90, and 101 as well as IC RSS-119 and RSS-134. The 2400-2483.5 MHz Zigbee operation under FCC Part 15.247 and IC RSS-210 is addressed in ACS report 07-0352-15C.

**1.3.2 In-Band Testing Methodology**

For testing in accordance with 47 CFR 2.1046-2.1057, OET/Lab recommends that the following be used to select test frequencies for licensed devices:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
10 to 100 MHz	3	1 near top, 1 near middle and 1 near bottom

The APXCVRZIG01 is designed to operate in multiple bands under the requirements of CFR 47 Parts 24, 90, and 101. The following is a list of the frequency bands of operation sorted based on the FCC rule parts in which the band is associated.

CFR Title 47 Rule Part	Frequency Band of Operation (MHz)
24D	901.0 - 902.0
24D	930.0 - 931.0
24D	940.0 - 941.0
90	896.0125 - 901.0
90	935.0 - 940.0
101	928.85 - 929.0
101	932.0 - 932.5
101	941.0 - 941.5
101	959.85 - 960.0

Based on the requirements set forth in accordance 47 CFR 2.1046-2.1057 as stated above, the methodology in selecting the places to test in the bands of operation is outlined in the following table.

CFR Title 47 Rule Part	Frequency Band of Operation (MHz)	Location in the Range of Operation
90	896.0125 - 901.0	1 near top and 1 near bottom
24D	901.0 - 902.0	
101	928.85 - 929.0	Middle
24D	930.0 - 931.0	Middle
101	932.0 - 932.5	Middle
90	935.0 - 940.0	1 near top and 1 near bottom
24D	940.0 - 941.0	
101	941.0 - 941.5	
101	959.85 - 960.0	Middle

The data provided in this report is sorted based on the rule part.

**1.4 Emission Designators**

The APXCVRZIG01 transmitter produces four distinct modulation formats. The necessary bandwidth calculations for these formats may be found in a separate document.

The emissions designators for the three modulation types for the APXCVRZIG01 are as follows:

EMISSIONS DESIGNATORS:

Normal Mode: 9K60F2D    Half-Baudrate Mode: 4K80F2D    MPass Mode: 5K90F1D

## 2.0 TEST FACILITIES

### 2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions  
5015 B.U. Bowman Drive  
Buford, GA 30518  
Phone: (770) 831-8048  
Fax: (770) 831-8598

### 2.2 Laboratory Accreditations/Recognitions/Certifications

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment. In addition, ACS is compliant to ISO 17025 as certified by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program. The following certification numbers have been issued in recognition of these accreditations and certifications:

FCC Registration Number: 89450  
Industry Canada Lab Code: IC 4175  
VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

NVLAP Lab Code: 200612-0

### 2.3 Radiated Emissions Test Site Description

#### 2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

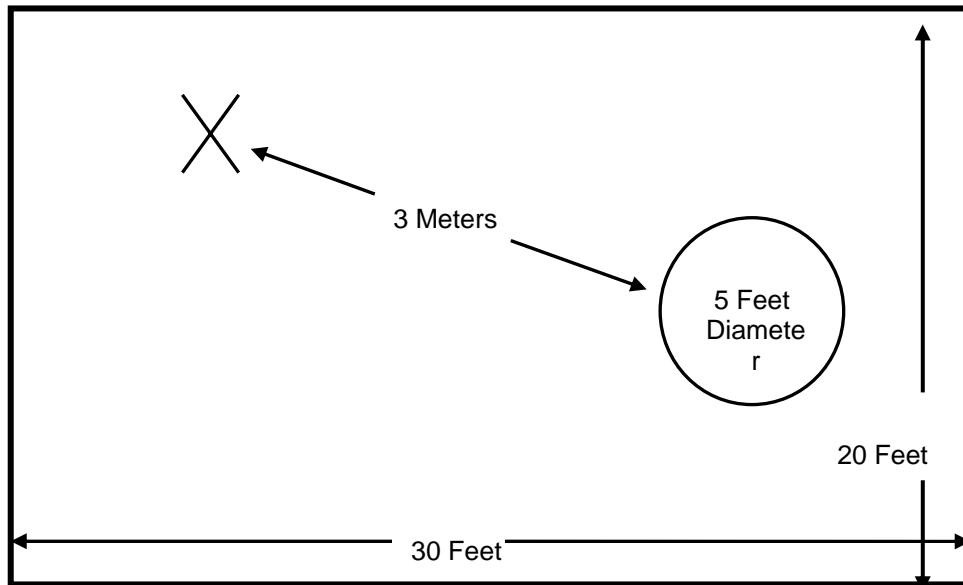


Figure 2.3-1: Semi-Anechoic Chamber Test Site

**2.3.2 Open Area Tests Site (OATS)**


The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

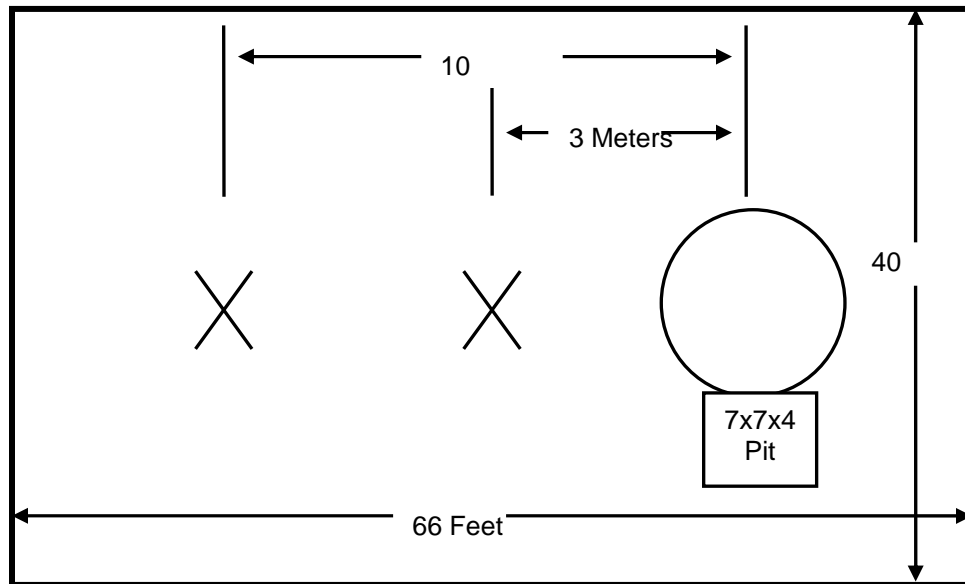

**Figure 2.3-2: Open Area Test Site**

## 2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal group reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

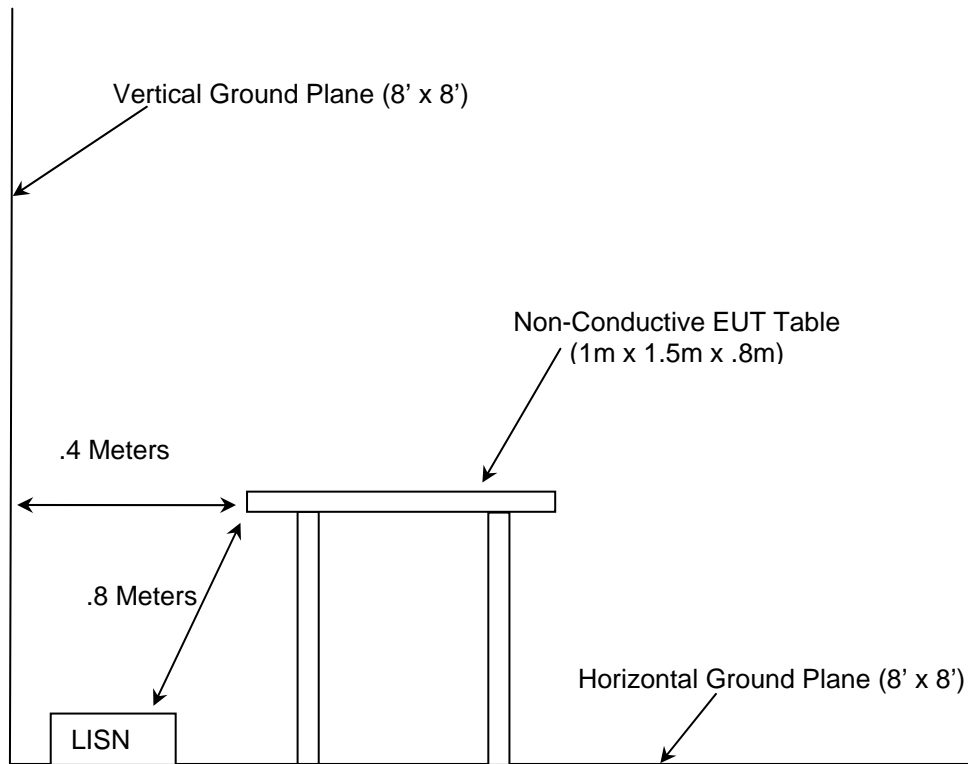


Figure 2.4-1: AC Mains Conducted EMI Site

## 3.0 APPLICABLE STANDARD REFERENCES

The following standards were used:

- 1 - ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz - 2003
- 2 - US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures - 2006
- 3 - US Code of Federal Regulations (CFR): Title 47, Part 24, Subpart D: Personal Communication Service - 2006
- 4 - US Code of Federal Regulations (CFR): Title 47, Part 90, Subpart I: Private Land Mobile Radio Services - 2006
- 5 - US Code of Federal Regulations (CFR): Title 47, Part 101, Subpart C: Fixed Microwave Services – 2006
- 6 – TIA-603-C: Land Mobile FM or PM - Communications Equipment - Measurement and Performance Standards – 2004
- 7 - Industry Canada Radio Standards Specification: RSS-119 - Land Mobile and Fixed Radio Transmitters and Receivers Operating in the Frequency Range 27.41-960 MHz - Issue 9, June 2007
- 8 - Industry Canada Radio Standards Specification: RSS-134 - 900 MHz Narrowband Personal Communications Services - Issue 1, Revision 1, March 25, 2000



#### 4.0 LIST OF TEST EQUIPMENT

All test equipment used for regulatory testing is calibrated yearly or according to manufacturer's specifications.

**Table 4-1: Test Equipment**

Equipment Calibration Information					
ACS#	Mfg.	Eq. type	Model	S/N	Cal. Due
1	Rohde & Schwarz	ESMI - Display	833771/007	Spectrum Analyzers	03-05-2008
2	Rohde & Schwarz	ESMI-Receiver	839587/003	Spectrum Analyzers	03-05-2008
16	ACS	Cable	16	Cables	05-21-2008
22	Agilent	8449B	3008A00526	Amplifiers	04-10-2008
25	Chase	CBL6111	1043	Antennas	06-06-2008
30	Spectrum Technologies	DRH-0118	970102	Antennas	05-10-2008
70	Rohde & Schwarz	ESH-3	879676/050	Spectrum Analyzers	08-15-2008
140	Thermotron	Environmental Chamber	SM-16C	19639	08-30-2007
152	EMCO	703125	9111-1905	LISN	02-20-2008
153	EMCO	703125	9411-2268	LISN	11-16-2007
167	ACS	Chamber EMI Cable Set	167	Cables	01-05-2008
168	Hewlett Packard	11947A	44829	Attenuators	03-13-2008
222	Andrew	F1-SMSM	473703-A0138A	Cables	09-07-2007
282	Microwave Circuits	H2G020G4	74541	Filters	03-09-2008
283	Rohde & Schwarz	FSP40	1000033	Spectrum Analyzers	11-09-2008
290	Florida RF Cables	SMSE-200-72.0-SMRE	None	Cables	05-15-2008
291	Florida RF Cables	SMRE-200W-12.0-SMRE	None	Cables	05-15-2008
292	Florida RF Cables	SMR-290AW-480.0-SMR	None	Cables	05-24-2008
321	Hewlett Packard	HPC 8447D	1937A02809	Amplifiers	07-17-2008
329	A.H.Systems	SAS-571	721	Antennas	08-13-2008
331	Microwave Circuits	H1G513G1	31417	Filters	08-29-2007
338	Hewlett Packard	8449B	3008A01111	Amplifiers	09-26-2007
NA	Agilent	8257D	MY45470442	Signal Generator	03-24-2008

5.0 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Manufacturer	Equipment Type	Model Number	Serial Number
Sensus	EUT	APXCVRZIG01	See Section 1.2
Sensus	3 Phase Electric Meter	9S(8S)	KZ6021031287
OK Industries	DC Power Supply	PS732	36095

6.0 EQUIPMENT UNDER TEST SETUP AND BLOCK DIAGRAM

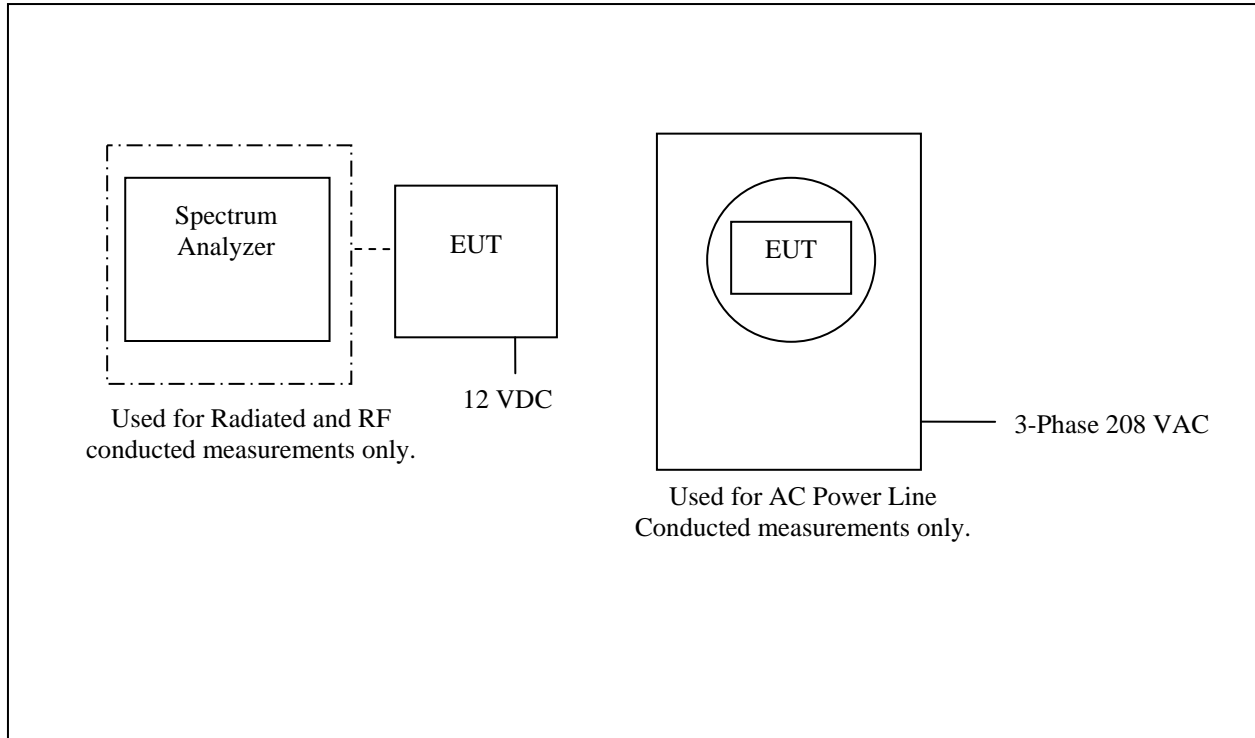


Figure 6-1: EUT Test Setup

The EUT was integrated into a typical host for the purpose of AC power line conducted emissions.

For RF conducted measurements, the APXCVRZIG01 was modified with an external RF connector to the PCB. The APXCVRZIG01 utilizes a non-detachable antenna for normal operation but for RF conducted testing the antenna were disconnected and a 50-Ohm test cable soldered (with the appropriate ground connection) to the PCB.

\*See Test Setup photographs for additional detail.

## 7.0 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

### 7.1 RF Power Output - FCC Section 2.1046

#### 7.1.1 Measurement Procedure


The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through a 20 dB passive attenuator. The resolution and video bandwidths of the spectrum analyzer were set at sufficient levels, >> signal bandwidth, to produce accurate results. The internal correction factors of the spectrum analyzer were employed to correct for any cable or attenuator losses. Results are shown below in Table 7.1.2-1 and Figure 7.1.2-1 through 7.1.2-8.

#### 7.1.2 Measurement Results


**Table 7.1.2-1: Peak Output Power**

Frequency (MHz)	FCC Rule Part	Output Power (dBm)
901.9875	Part 24	29.80
930.5000	Part 24	29.76
896.0125	Part 90	29.99
935.0125	Part 90	29.72
928.9250	Part 101	29.84
932.2500	Part 101	29.76
941.4875	Part 101	29.60
959.9250	Part 101	29.32

**Part 24**

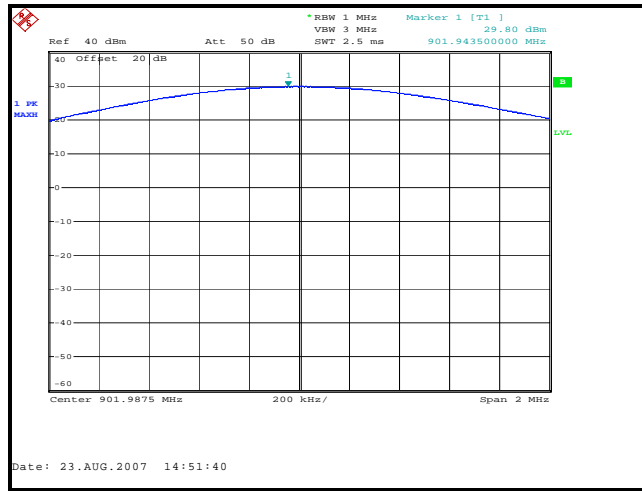


**Figure 7.1.2-1: Peak Output Power 901.9875 MHz**

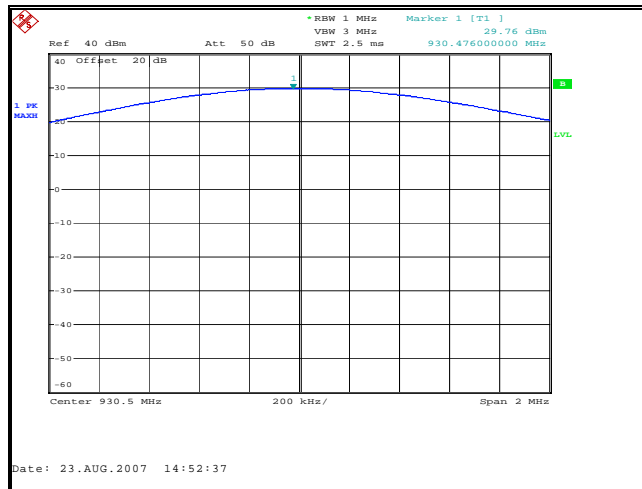

**Figure 7.1.2-2: Peak Output Power 930.5 MHz**

**Part 90**

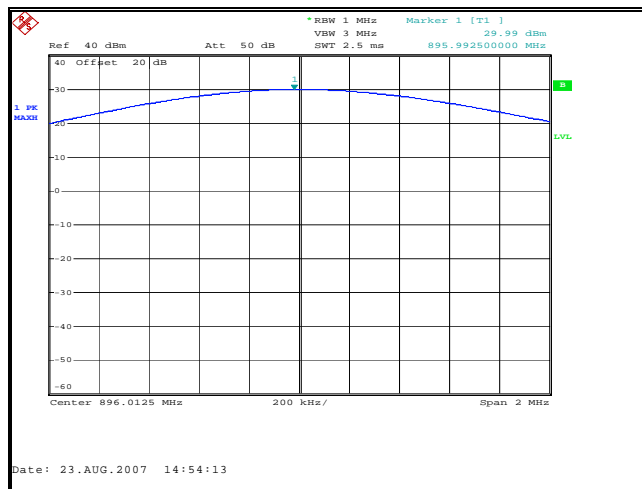

**Figure 7.1.2-3: Peak Output Power 896.0125 MHz**

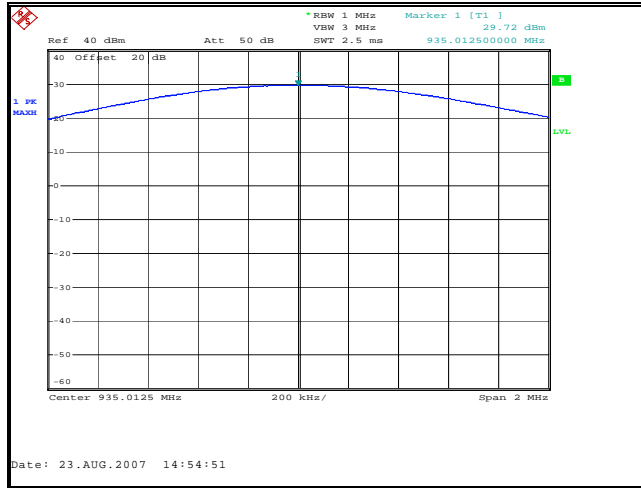


Figure 7.1.2-4: Peak Output Power 935.0125 MHz

**Part 101**

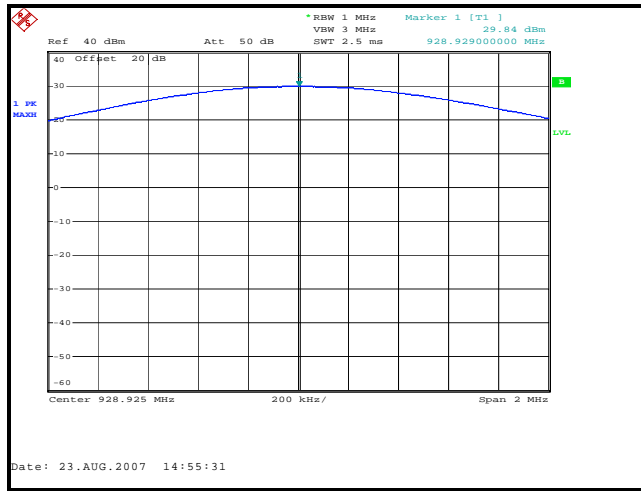


Figure 7.1.2-5: Peak Output Power 928.925 MHz

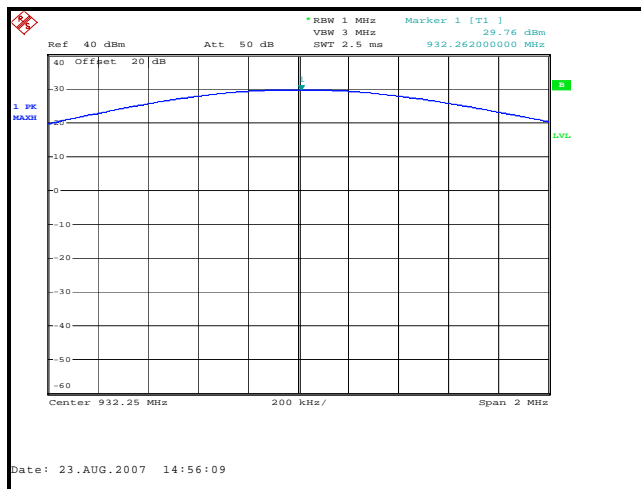


Figure 7.1.2-6: Peak Output Power 932.25 MHz

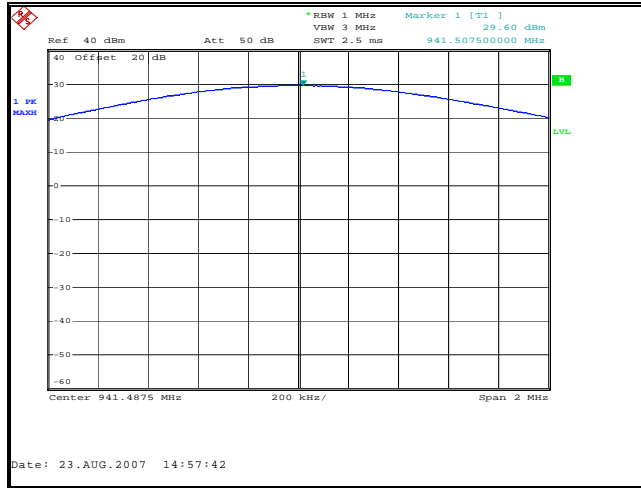


Figure 7.1.2-7: Peak Output Power 941.4875 MHz

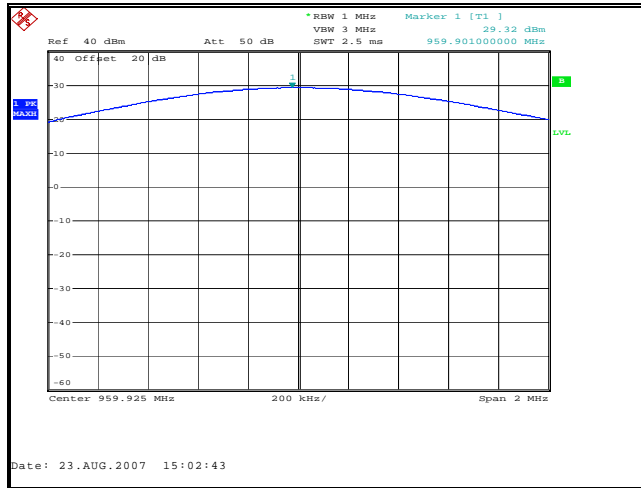


Figure 7.1.2-8: Peak Output Power 959.925 MHz

## 7.2 Occupied Bandwidth (Emission Limits) - FCC Section 2.1049

### 7.2.1 Measurement Procedure

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through a 20 dB passive attenuator. The spectrum analyzer resolution and video bandwidths were set to 300 Hz. The internal correction factors of the spectrum analyzer were employed to correct for any cable or attenuator losses. Results of the test are shown below for all modes of operation.

### 7.2.2 Measurement Results – Part 24.133 a(1), a(2)

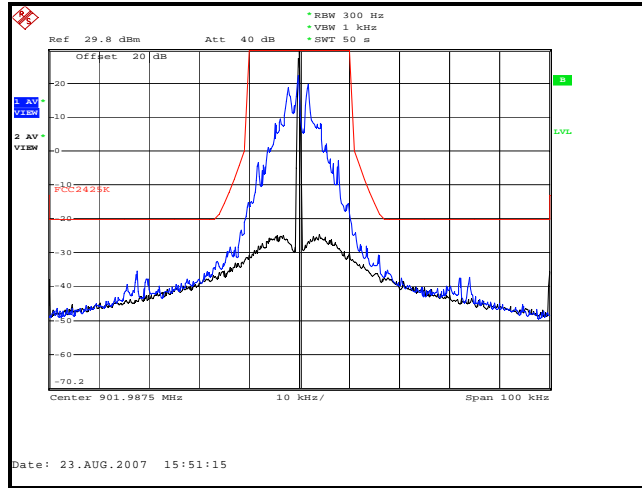


Figure 7.2.2-1: Normal Mode – 901.9875 MHz – 25 kHz Channel

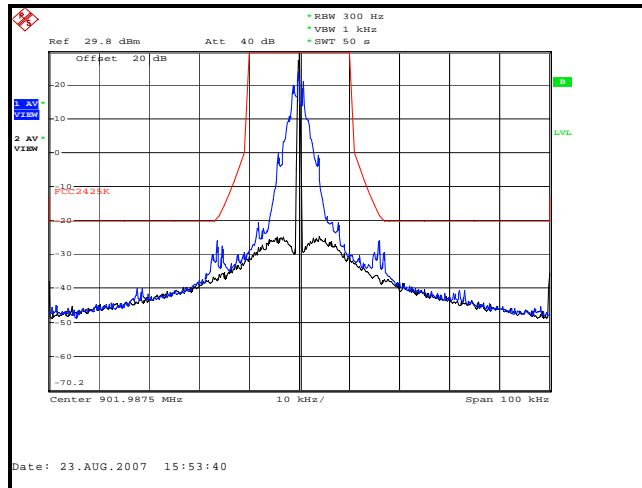


Figure 7.2.2-2: Half-Baud Rate Mode – 901.9875 MHz – 25 kHz Channel

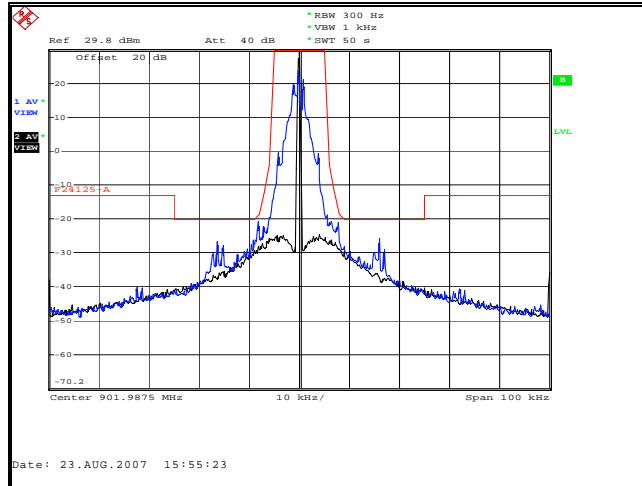


Figure 7.2.2-3: Half-Baud Rate – 901.9875 MHz – 12.5 kHz Channel

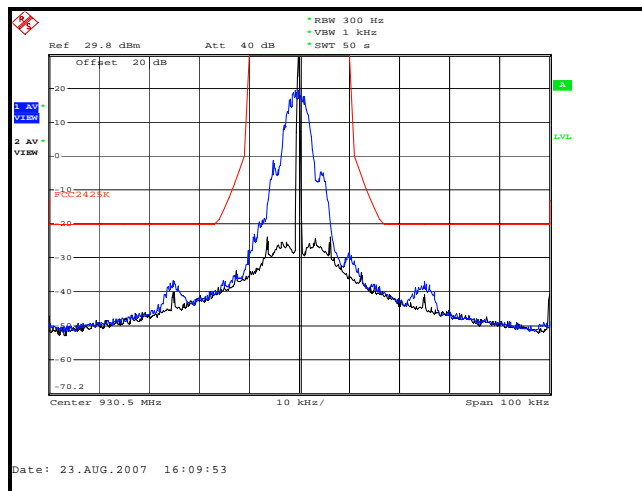


Figure 7.2.2-4: MPass Mode – 930.5 MHz – 25 kHz Channel

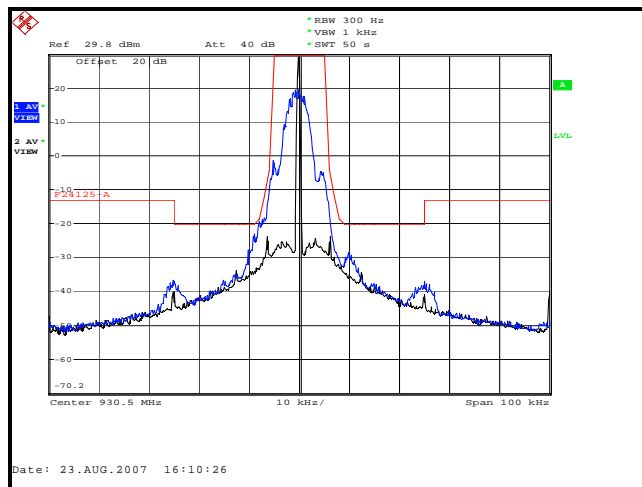


Figure 7.2.2-5: MPass Mode – 930.5 MHz – 12.5 kHz Channel



7.2.3 Measurement Results – Part 90.210 (j)

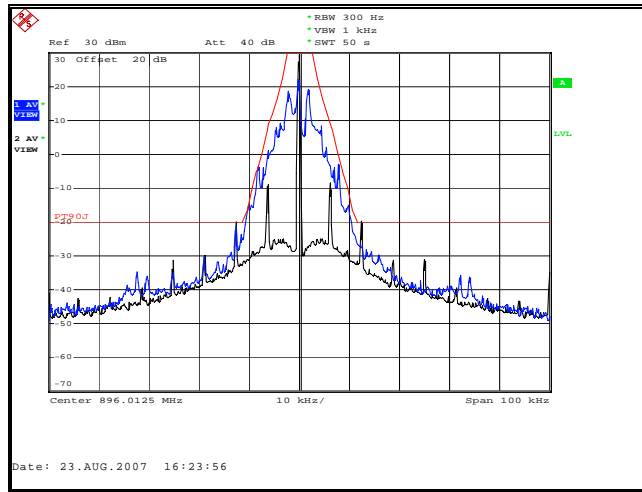


Figure 7.2.3-1: Normal Mode – 896.0125 MHz

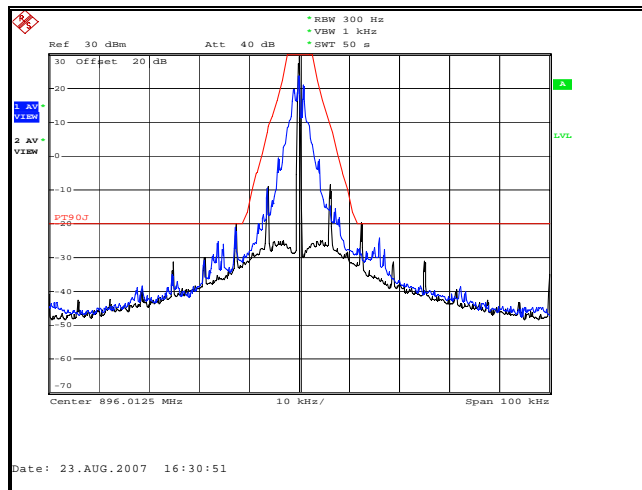


Figure 7.2.3-2: Half-Baud Rate Mode – 896.0125 MHz

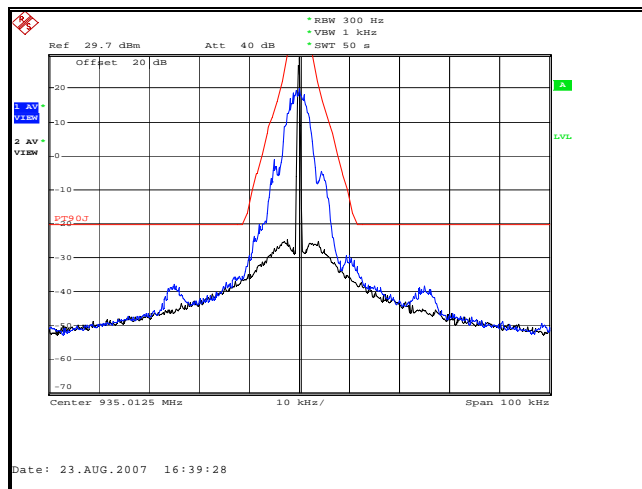


Figure 7.2.3-3: MPass Mode – 935.0125 MHz

7.2.4 Measurement Results – Part 101.111 a(6)

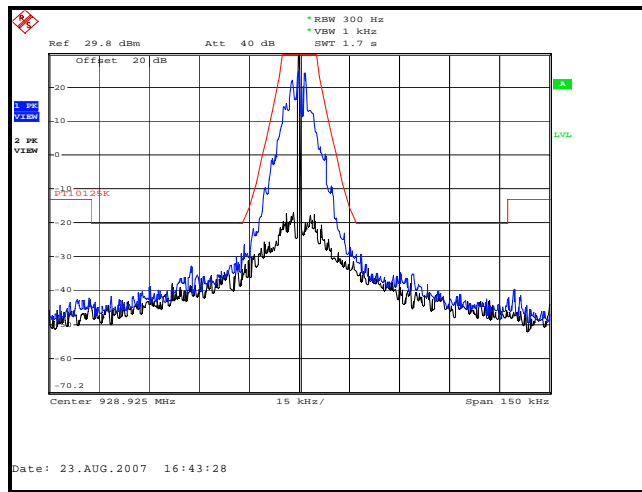


Figure 7.2.4-1: Normal Mode – 928.925 MHz

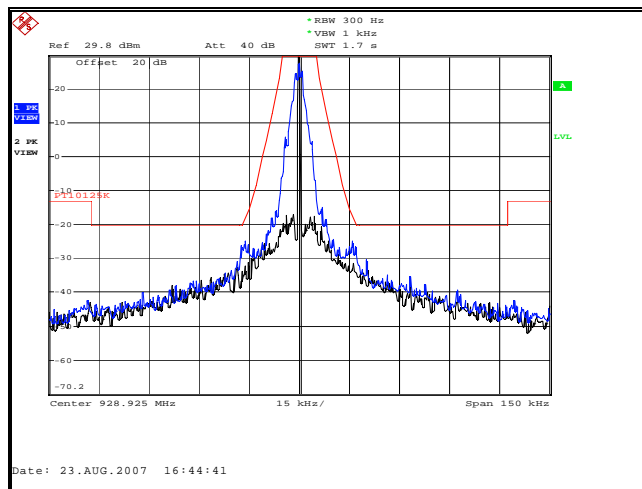


Figure 7.2.4-2: Half-Baud Rate Mode – 928.925 MHz

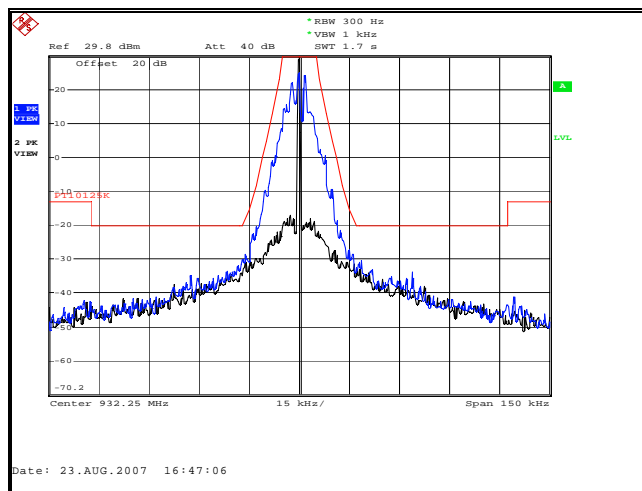


Figure 7.2.4-3: Normal Mode – 932.25 MHz

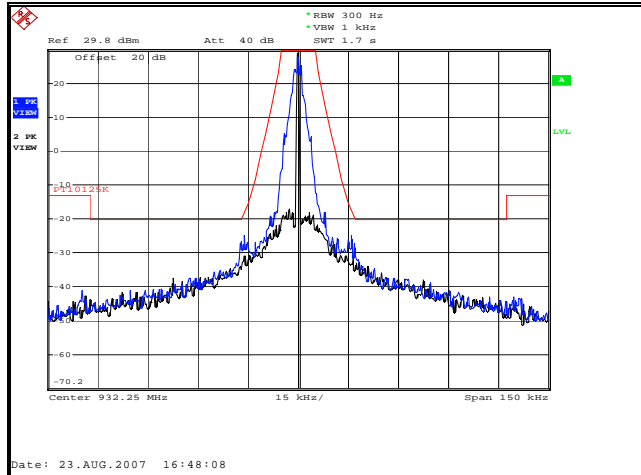


Figure 7.2.4-4: Half-Baud Rate Mode – 932.25 MHz

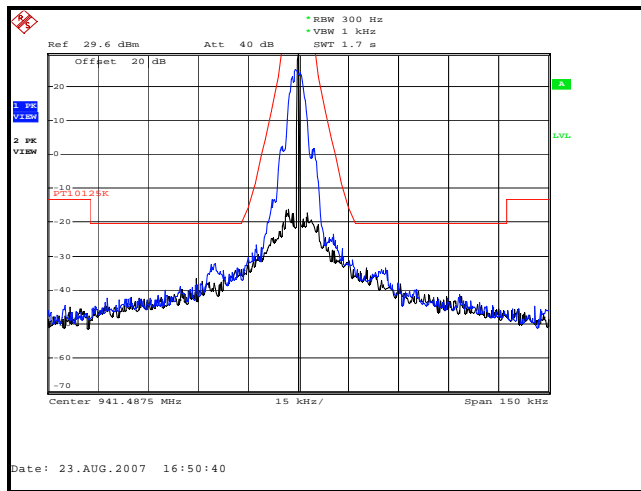


Figure 7.2.4-5: MPass Mode – 941.4875 MHz

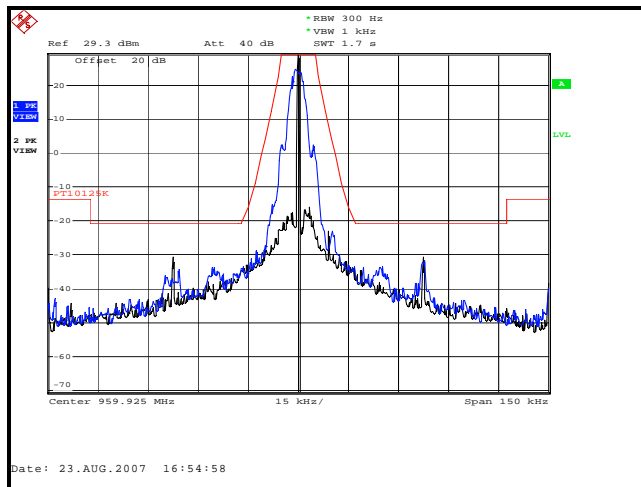


Figure 7.2.4-6: MPass Mode – 959.925 MHz

**7.3 Spurious Emissions at Antenna Terminals - FCC Section 2.1051; 24.133 a(1), a(2); 90.210 (j); 101.111 a (6)**


**7.3.1 Measurement Procedure**

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through a 20 dB passive attenuator. The spectrum analyzer resolution bandwidth was set to 30 kHz below 1000 MHz and 1 MHz above 1000 MHz. The internal correction factors of the spectrum analyzer were employed to correct for any cable or attenuator losses. The spectrum was investigated in accordance to CFR 47 Part 2.1057.


**7.3.2 Measurement Results**

Data was collected according to Section 1.3.2 in the mode that produced the worst case emissions. Plots are supplied in Figure 7.3.2-1 through 7.3.2.16.

**PART 24**

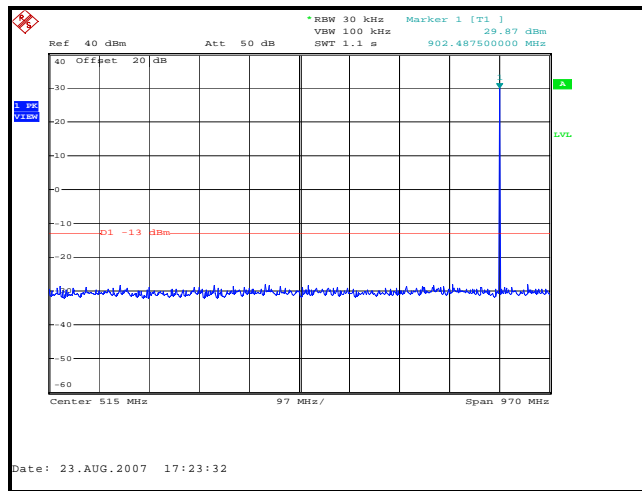

**Figure 7.3.2-1: Normal Mode – 901.9875 MHz – 30MHz to 1GHz**

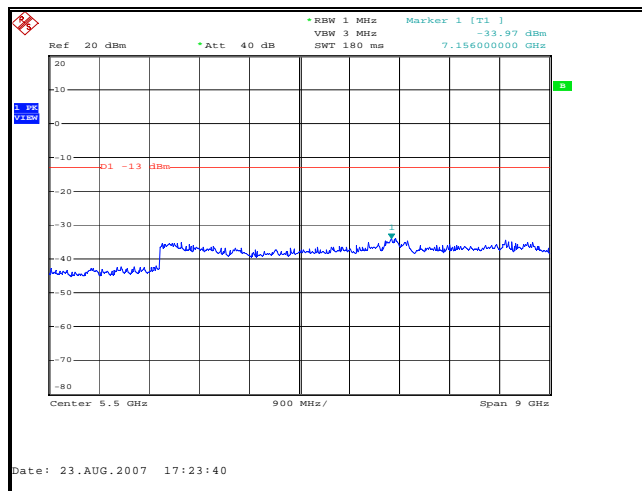

**Figure 7.3.2-2: Normal Mode – 901.9875 MHz – 1GHz to 10GHz**

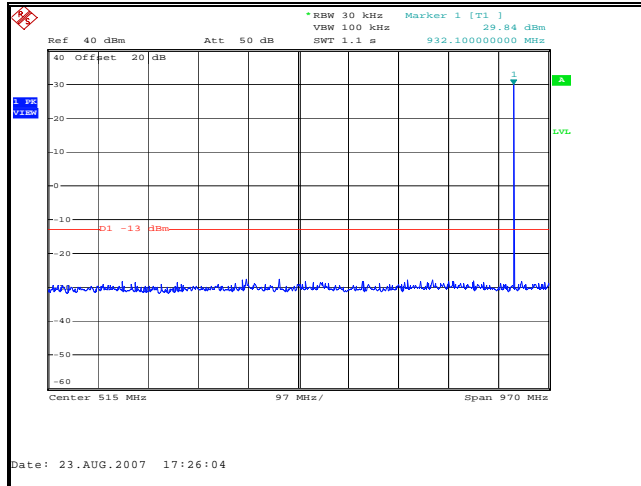


Figure 7.3.2-3: Mpass Mode – 930.5 MHz – 30MHz to 1GHz

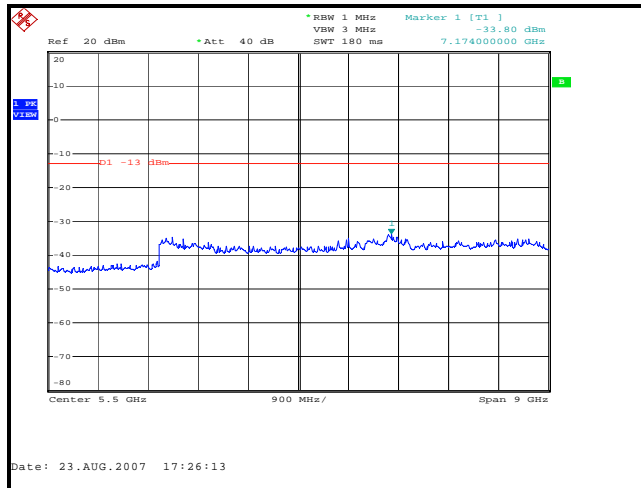


Figure 7.3.2-4: Mpass Mode – 930.5 MHz – 1GHz to 10GHz

**PART 90**

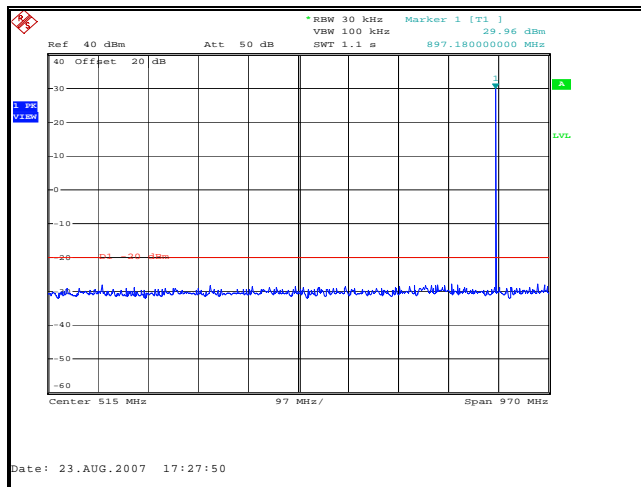


Figure 7.3.2-5: Normal Mode – 896.0125 MHz – 30MHz to 1GHz

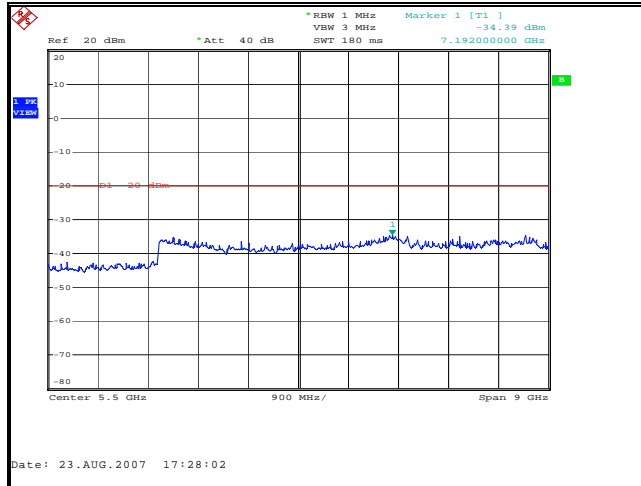


Figure 7.3.2-6: Normal Mode – 896.0125 MHz – 1GHz to 10GHz

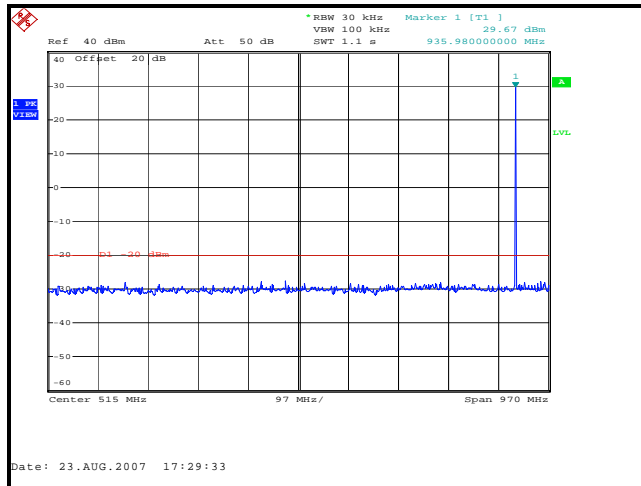


Figure 7.3.2-7: MPassMode – 935.0125 MHz – 30MHz to 1GHz



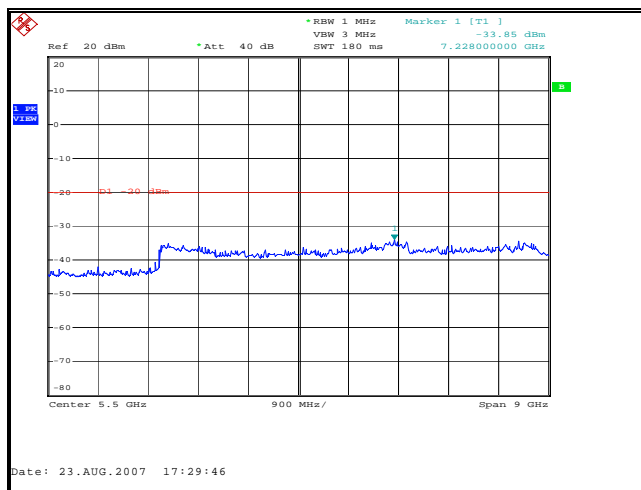


Figure 7.3.2-8: MPass Mode – 935.0125 MHz – 1GHz to 10GHz


**PART 101**

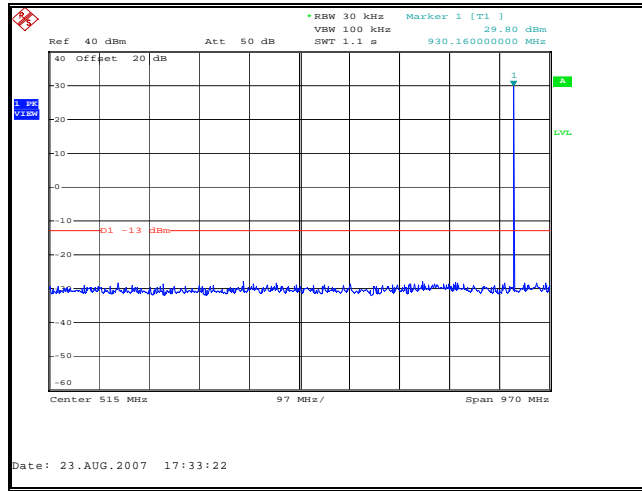

**Figure 7.3.2-9: Normal Mode – 928.925 MHz – 30MHz to 1GHz**

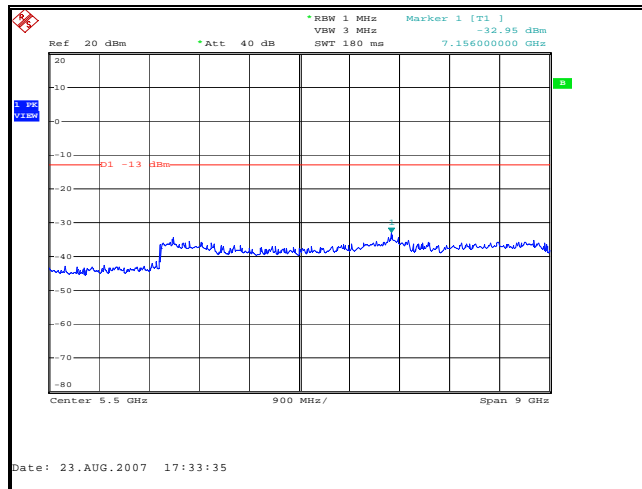

**Figure 7.3.2-10: Normal Mode – 928.925 MHz – 1GHz to 10GHz**

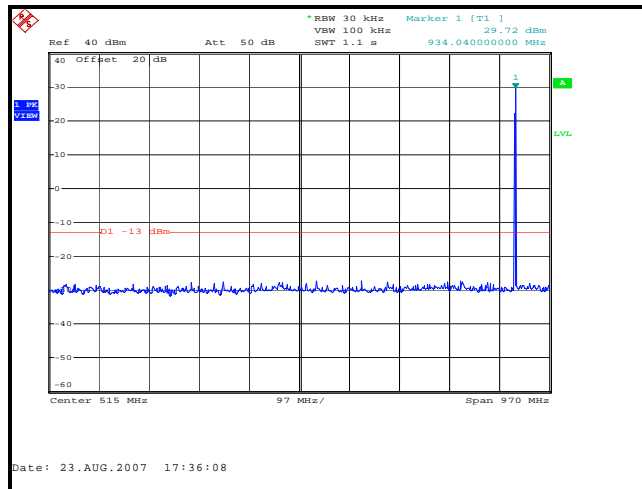

**Figure 7.3.2-11: Normal Mode – 932.25 MHz – 30MHz to 1GHz**

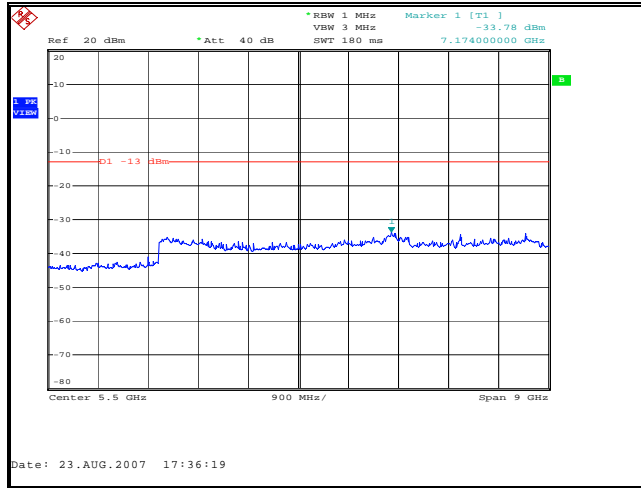


Figure 7.3.2-12: Normal Mode – 932.25 MHz – 1GHz to 10GHz

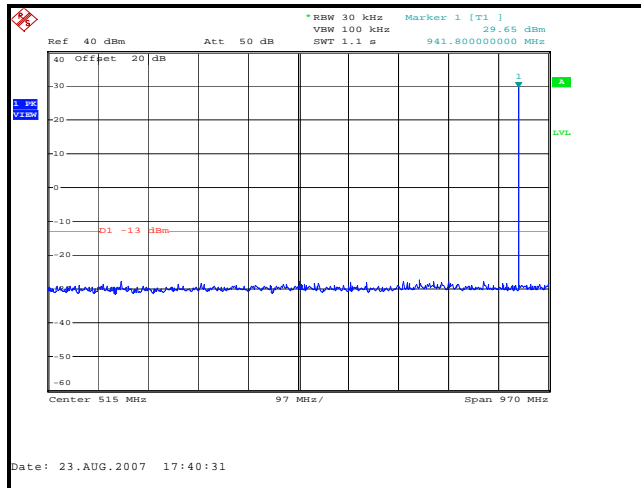


Figure 7.3.2-13: MPass Mode – 941.4875 MHz – 30MHz to 1GHz

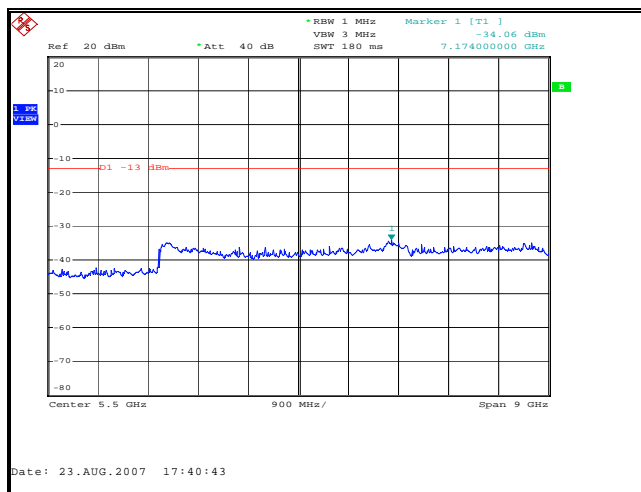


Figure 7.3.2-14: MPass Mode – 941.4875 MHz – 1GHz to 10GHz



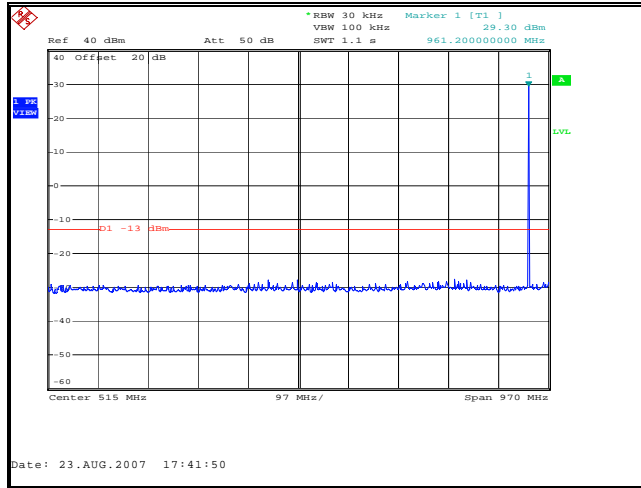


Figure 7.3.2-15: MPass Mode – 959.925 MHz – 30MHz to 1GHz

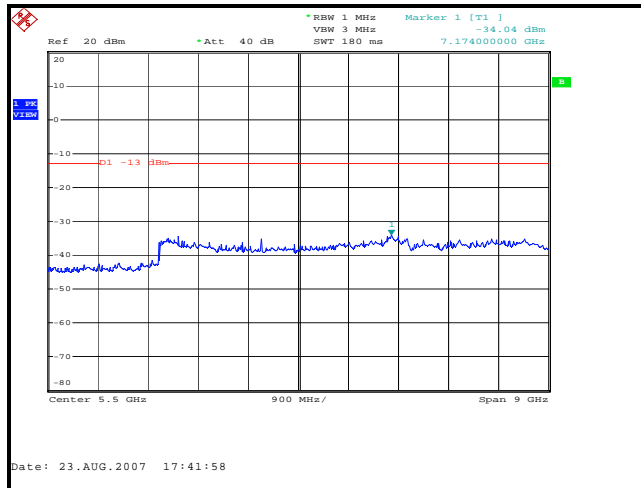


Figure 7.3.2-16: MPass Mode – 959.925 MHz – 1GHz to 10GHz

## 7.4 Field Strength of Spurious Emissions - FCC Section 2.1053, 24.133, 90.210, and 101.111

### 7.4.1 Measurement Procedure

The equipment under test is placed in the Semi-Anechoic Chamber (described in section 2.3.1) on a wooden table at the turntable center. For each spurious emission, the antenna mast is raised and lowered from one (1) to four (4) meters and the turntable is rotated 360° and the maximum reading on the spectrum analyzer is recorded. This was repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. The signal generator's frequency is set to that of the spurious emission recorded from the equipment under test. The antenna mast is raised and lowered from one (1) to four (4) meters to obtain a maximum reading on the spectrum analyzer. The output of the signal generator is then adjusted until the reading on the spectrum analyzer matches that obtained from the equipment under test. The signal generator level is recorded. The power in dBm of each spurious emission is calculated by correcting the signal generator level for the cable loss and gain of the substitution antenna referenced to a dipole. The spectrum was investigated up to 10 times the fundamental emission.

Data was collected at frequencies according to Section 1.3.2. Results of the test are shown below. The magnitude of all spurious emissions not reported were attenuated below the noise floor of the measurement system and therefore not specified in this report.

The equipment under test was evaluated to multiple FCC rule parts with the most stringent limit applied to all measurements.

The APXCVRZIG01 contains multiple transceivers which can operate simultaneously therefore inter-modulation products were evaluated and found to be compliant.

### 7.4.2 Measurement Results

#### PART 24

**Table 7.4.2-1: Field Strength of Spurious Emissions – 901.9875 MHz – Normal Mode**

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1803.975	-36.53	-35.66	H	5.10	-30.56	-20.00	10.56
1803.975	-37.87	-36.65	V	5.20	-31.45	-20.00	11.45
2705.9625	-51.66	-49.12	H	5.52	-43.60	-20.00	23.60
2705.9625	-49.38	-46.84	V	5.42	-41.42	-20.00	21.42
3607.95	-56.82	-53.61	H	6.81	-46.80	-20.00	26.80
3607.95	-57.48	-54.63	V	6.79	-47.84	-20.00	27.84
4509.9375	-55.14	-51.26	H	7.19	-44.07	-20.00	24.07
4509.9375	-53.82	-47.1	V	6.99	-40.11	-20.00	20.11
6312.9125	-57.93	-52.58	H	6.41	-46.17	-20.00	26.17
8117.8875	-51.76	-38.09	H	6.25	-31.84	-20.00	11.84
8117.8875	-57.7	-46.16	V	6.25	-39.91	-20.00	19.91

Note: Frequencies not reported were below the noise floor of the analyzer.

Table 7.4.2-2: Field Strength of Spurious Emissions – 930.5 MHz – MPass Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1861	-32.04	-31.60	H	4.99	-26.61	-20.00	6.61
1861	-35.41	-35.1	V	5.09	-30.01	-20.00	10.01
2791.5	-48.21	-46.02	H	5.63	-40.39	-20.00	20.39
2791.5	-48.9	-46.1	V	5.53	-40.57	-20.00	20.57
3722	-53.52	-48.15	H	6.66	-41.49	-20.00	21.49
3722	-56.92	-53.71	V	6.61	-47.10	-20.00	27.10
4652.5	-56.08	-48.73	H	6.91	-41.82	-20.00	21.82
4652.5	-56.54	-52.3	V	6.68	-45.62	-20.00	25.62
6513.5	-55.02	-42.71	H	6.18	-36.53	-20.00	16.53
7444	-56.28	-42.36	H	5.94	-36.42	-20.00	16.42
8374.5	-55.42	-41.78	H	6.28	-35.50	-20.00	15.50
8374.5	-57.42	-43.92	V	6.28	-37.64	-20.00	17.64

Note: Frequencies not reported were below the noise floor of the analyzer.

## PART 90

Table 7.4.2-3: Field Strength of Spurious Emissions – 896.0125MHz – Normal Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1792.025	-39.23	-38.83	H	5.12	-33.71	-20.00	13.71
1792.025	-38.24	-37.59	V	5.22	-32.37	-20.00	12.37
2688.0375	-47.15	-43.02	H	5.49	-37.53	-20.00	17.53
2688.0375	-46.34	-42.8	V	5.39	-37.41	-20.00	17.41
3584.05	-56.74	-51.11	H	6.84	-44.27	-20.00	24.27
3584.05	-57.17	-54.43	V	6.82	-47.61	-20.00	27.61
4480.0625	-56.43	-51	H	7.17	-43.83	-20.00	23.83
4480.0625	-53.79	-48.09	V	6.98	-41.11	-20.00	21.11
6272.0875	-57.02	-50.1	H	6.45	-43.65	-20.00	23.65
8064.1125	-52.65	-38.02	H	6.25	-31.77	-20.00	11.77
8064.1125	-58.09	-48.1	V	6.25	-41.85	-20.00	21.85

Note: Frequencies not reported were below the noise floor of the analyzer.

Table 7.4.2-4: Field Strength of Spurious Emissions – 935.0125MHz – MPass Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1870.025	-34.47	-33.20	H	4.97	-28.23	-20.00	8.23
1870.025	-34.9	-34.43	V	5.07	-29.36	-20.00	9.36
2805.0375	-47.04	-43.48	H	5.65	-37.83	-20.00	17.83
2805.0375	-48.03	-43.27	V	5.55	-37.72	-20.00	17.72
3740.05	-49.22	-43.5	H	6.63	-36.87	-20.00	16.87
4675.0625	-53.62	-45.25	H	6.86	-38.39	-20.00	18.39
4675.0625	-53.97	-46.96	V	6.63	-40.33	-20.00	20.33
7480.1	-54.89	-41.07	H	5.95	-35.12	-20.00	15.12
8415.1125	-49.78	-33.48	H	6.29	-27.19	-20.00	7.19
8415.1125	-55.17	-40.18	V	6.29	-33.89	-20.00	13.89

Note: Frequencies not reported were below the noise floor of the analyzer.

**PART 101**

**Table 7.4.2-5: Field Strength of Spurious Emissions – 928.925MHz – Normal Mode**

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1857.85	-32.31	-31.63	H	4.99	-26.64	-20.00	6.64
1857.85	-35.94	-34.99	V	5.09	-29.90	-20.00	9.90
2786.775	-48.66	-46.5	H	5.62	-40.88	-20.00	20.88
2786.775	-51.53	-49	V	5.52	-43.48	-20.00	23.48
3715.7	-56.13	-52.48	H	6.67	-45.81	-20.00	25.81
3715.7	-56.99	-53.35	V	6.62	-46.73	-20.00	26.73
4644.625	-57.91	-52.51	H	6.92	-45.59	-20.00	25.59
4644.625	-58.16	-56.54	V	6.70	-49.84	-20.00	29.84
6502.475	-56.56	-47.48	H	6.19	-41.29	-20.00	21.29
6502.475	-59.38	-51	V	6.39	-44.61	-20.00	24.61
7431.4	-54.89	-42	H	5.93	-36.07	-20.00	16.07
8360.325	-54.43	-40.5	H	6.28	-34.22	-20.00	14.22
8360.325	-58.14	-49.53	V	6.28	-43.25	-20.00	23.25

Note: Frequencies not reported were below the noise floor of the analyzer.

**Table 7.4.2-6: Field Strength of Spurious Emissions – 932.25MHz – Normal Mode**

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1865	-33.33	-32.92	H	4.98	-27.94	-20.00	7.94
1865	-35.6	-35.01	V	5.08	-29.93	-20.00	9.93
2797.5	-46.66	-43.76	H	5.64	-38.12	-20.00	18.12
2797.5	-47.62	-43.78	V	5.54	-38.24	-20.00	18.24
3730	-54.94	-50.2	H	6.65	-43.55	-20.00	23.55
3730	-56.43	-51.22	V	6.60	-44.62	-20.00	24.62
4662.5	-54.4	-47	H	6.89	-40.11	-20.00	20.11
4662.5	-54.99	-47.25	V	6.66	-40.59	-20.00	20.59
7460	-54.3	-42.53	H	5.94	-36.59	-20.00	16.59
8392.5	-52.57	-37.45	H	6.29	-31.16	-20.00	11.16

Note: Frequencies not reported were below the noise floor of the analyzer.

**Table 7.4.2-7: Field Strength of Spurious Emissions – 941.4875MHz – MPass Mode**

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1882.975	-33.96	-32.71	H	4.94	-27.77	-20.00	7.77
1882.975	-35.51	-34.32	V	5.04	-29.28	-20.00	9.28
2824.4625	-46.79	-44.25	H	5.67	-38.58	-20.00	18.58
2824.4625	-47.17	-43.9	V	5.57	-38.33	-20.00	18.33
3765.95	-52.37	-47.22	H	6.60	-40.62	-20.00	20.62
3765.95	-56.49	-53.48	V	6.55	-46.93	-20.00	26.93
4707.4375	-57.17	-51.65	H	6.80	-44.85	-20.00	24.85
4707.4375	-53.08	-45.42	V	6.56	-38.86	-20.00	18.86
7531.9	-54.4	-40.3	H	5.98	-34.32	-20.00	14.32
8473.3875	-49.58	-34.28	H	6.30	-27.98	-20.00	7.98
8473.3875	-55.47	-40.17	V	6.30	-33.87	-20.00	13.87

Note: Frequencies not reported were below the noise floor of the analyzer.

Table 7.4.2-8: Field Strength of Spurious Emissions – 959.925MHz – MPass Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1919.85	-32.29	-31.00	H	4.87	-26.13	-20.00	6.13
1919.85	-32.84	-32	V	4.97	-27.03	-20.00	7.03
2879.775	-48.21	-45.48	H	5.75	-39.73	-20.00	19.73
2879.775	-47.98	-45.25	V	5.65	-39.60	-20.00	19.60
3839.7	-48.92	-42.1	H	6.51	-35.59	-20.00	15.59
3839.7	-54.15	-48.85	V	6.44	-42.41	-20.00	22.41
4799.625	-53.06	-43.72	H	6.62	-37.10	-20.00	17.10
4799.625	-53.24	-45.23	V	6.36	-38.87	-20.00	18.87
8639.325	-56.03	-42.02	H	6.34	-35.68	-20.00	15.68

Note: Frequencies not reported were below the noise floor of the analyzer.

## 7.5 Frequency Stability - FCC Section 2.1055, 24.135, 90.213, 101.107

### 7.5.1 Measurement Procedure

The equipment under test is placed inside an environmental chamber. The RF output is directly coupled to the input of the measurement equipment and a power supply is attached to the primary supply voltage.

Frequency measurements were made at the extremes of the of temperature range  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  and at intervals of  $10^{\circ}\text{C}$  at normal supply voltage. A period of time sufficient to stabilize all components of the equipment was allowed at each frequency measurement. At a temperature  $20^{\circ}\text{C}$  the supply voltage was varied from 85% to 115% from the normal. The maximum variation of frequency was recorded.

Data was collected at frequencies according to Section 1.3.2. Results of the test are shown below in Figures 7.5.2-1 through 7.5.2-8.

7.5.2 Measurement Results

PART 24

## Frequency Stability

Mode: Frequency (MHz): 901.987502  
 Channel: Deviation Limit (PPM): 1.0ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	901.987312	-0.211	100%	12.00
-20 C	901.987452	-0.055	100%	12.00
-10 C	901.987467	-0.039	100%	12.00
0 C	901.987452	-0.055	100%	12.00
10 C	901.987375	-0.141	100%	12.00
20 C	901.987192	-0.344	100%	12.00
30 C	901.987212	-0.322	100%	12.00
40 C	901.987277	-0.249	100%	12.00
50 C	901.987225	-0.307	100%	12.00
20 C	901.987480	-0.024	85%	10.200
20 C	901.987502	0.000	115%	13.800

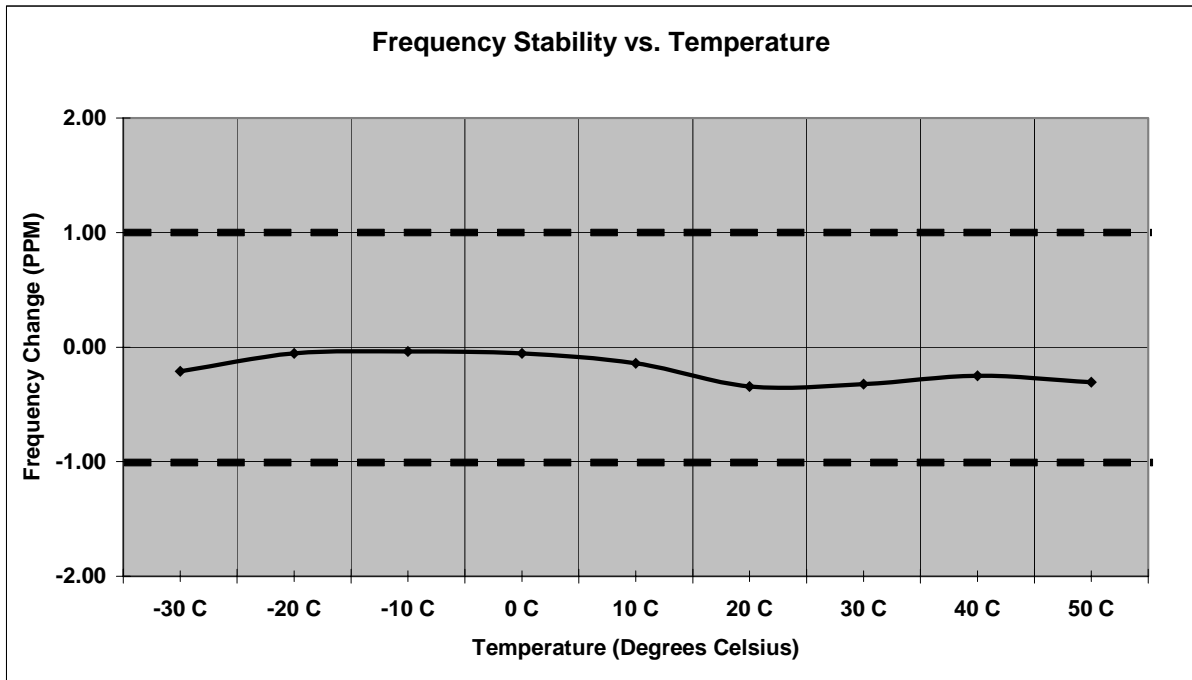


Figure 7.5.2-1: Frequency Stability – 901.9875MHz

# Frequency Stability

**Mode:** Frequency (MHz): 930.50009  
**Channel:** Deviation Limit (PPM): 1ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	930.499657	-0.465	100%	12.00
-20 C	930.499895	-0.210	100%	12.00
-10 C	930.499980	-0.118	100%	12.00
0 C	930.499917	-0.186	100%	12.00
10 C	930.499875	-0.231	100%	12.00
20 C	930.499642	-0.481	100%	12.00
30 C	930.499690	-0.430	100%	12.00
40 C	930.499650	-0.473	100%	12.00
50 C	930.499715	-0.403	100%	12.00
20 C	930.500015	-0.081	85%	10.200
20 C	930.500035	-0.059	115%	13.800

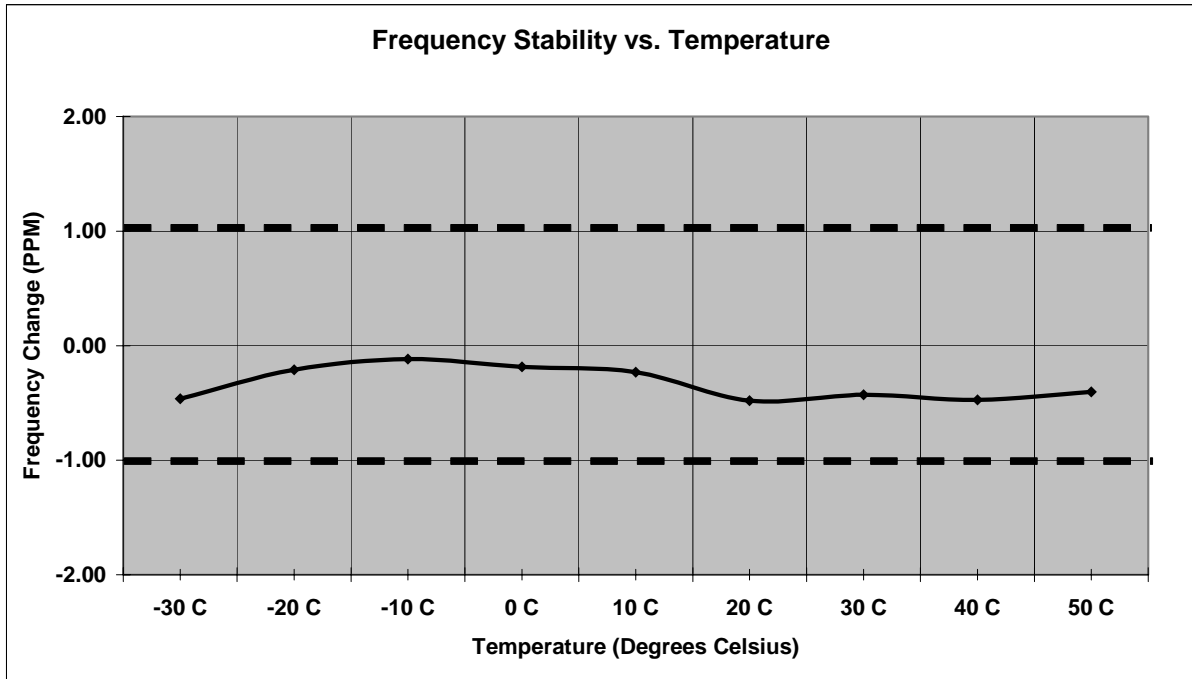


Figure 7.5.2-2: Frequency Stability – 930.5MHz

**PART 90**

# Frequency Stability

Mode: Frequency (MHz): 896.012552  
 Channel: Deviation Limit (PPM): 1ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	896.012082	-0.525	100%	12.00
-20 C	896.012460	-0.103	100%	12.00
-10 C	896.012492	-0.067	100%	12.00
0 C	896.012497	-0.061	100%	12.00
10 C	896.012347	-0.229	100%	12.00
20 C	896.012232	-0.357	100%	12.00
30 C	896.012170	-0.426	100%	12.00
40 C	896.012215	-0.376	100%	12.00
50 C	896.012215	-0.376	100%	12.00
20 C	896.012562	0.011	85%	10.200
20 C	896.012535	-0.019	115%	13.800

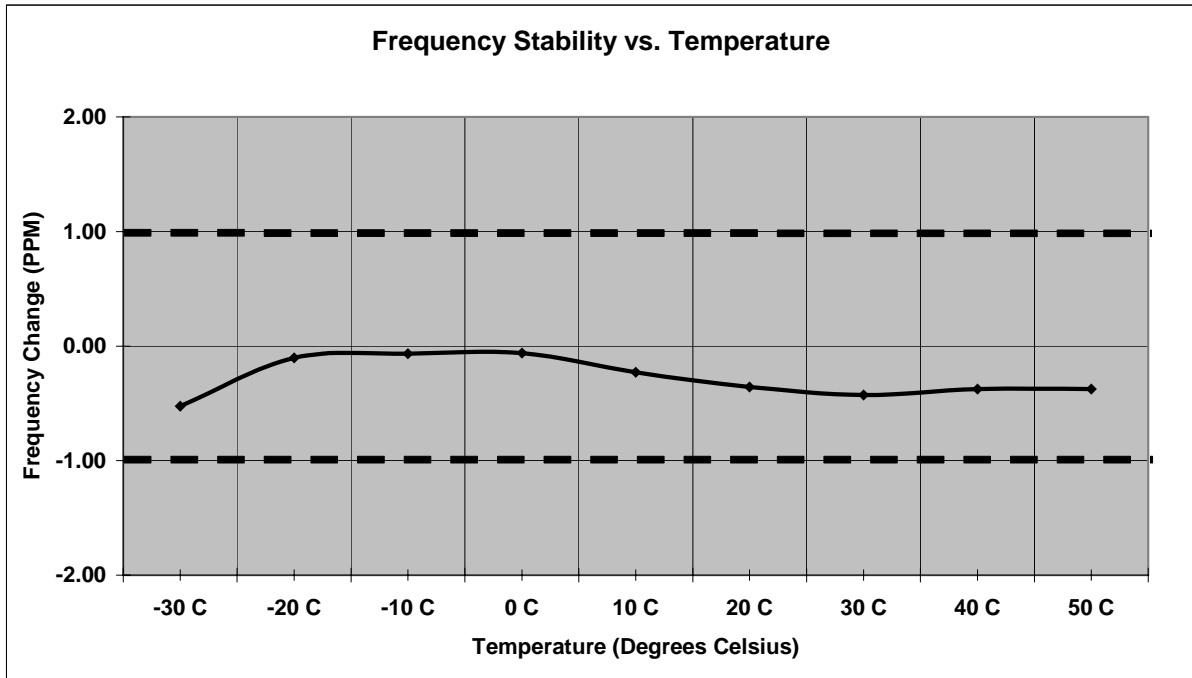


Figure 7.5.2-3: Frequency Stability – 896.0125MHz



# Frequency Stability

Mode: Frequency (MHz): 935.012542  
 Channel: Deviation Limit (PPM): 1ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	935.012117	-0.455	100%	12.00
-20 C	935.012447	-0.102	100%	12.00
-10 C	935.012477	-0.070	100%	12.00
0 C	935.012422	-0.128	100%	12.00
10 C	935.012347	-0.209	100%	12.00
20 C	935.012272	-0.289	100%	12.00
30 C	935.012147	-0.422	100%	12.00
40 C	935.012147	-0.422	100%	12.00
50 C	935.012202	-0.364	100%	12.00
20 C	935.012502	-0.043	85%	10.200
20 C	935.012555	0.014	115%	13.800

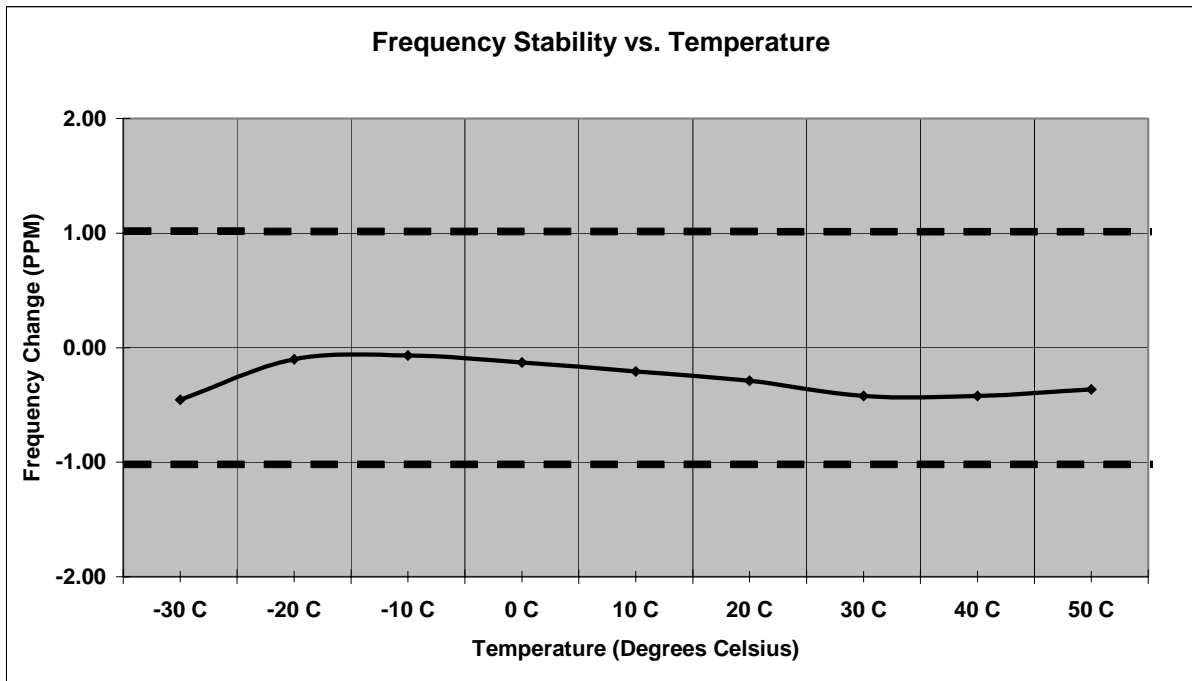


Figure 7.5.2-4: Frequency Stability – 935.0125MHz

**PART 101**

# Frequency Stability

Mode: Frequency (MHz): 928.92501  
 Channel: Deviation Limit (PPM): 1ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	928.924727	-0.305	100%	12.00
-20 C	928.924990	-0.022	100%	12.00
-10 C	928.924977	-0.036	100%	12.00
0 C	928.924935	-0.081	100%	12.00
10 C	928.924805	-0.221	100%	12.00
20 C	928.924697	-0.337	100%	12.00
30 C	928.924637	-0.402	100%	12.00
40 C	928.924642	-0.396	100%	12.00
50 C	928.924690	-0.344	100%	12.00
20 C	928.925040	0.032	85%	10.200
20 C	928.925060	0.054	115%	13.800

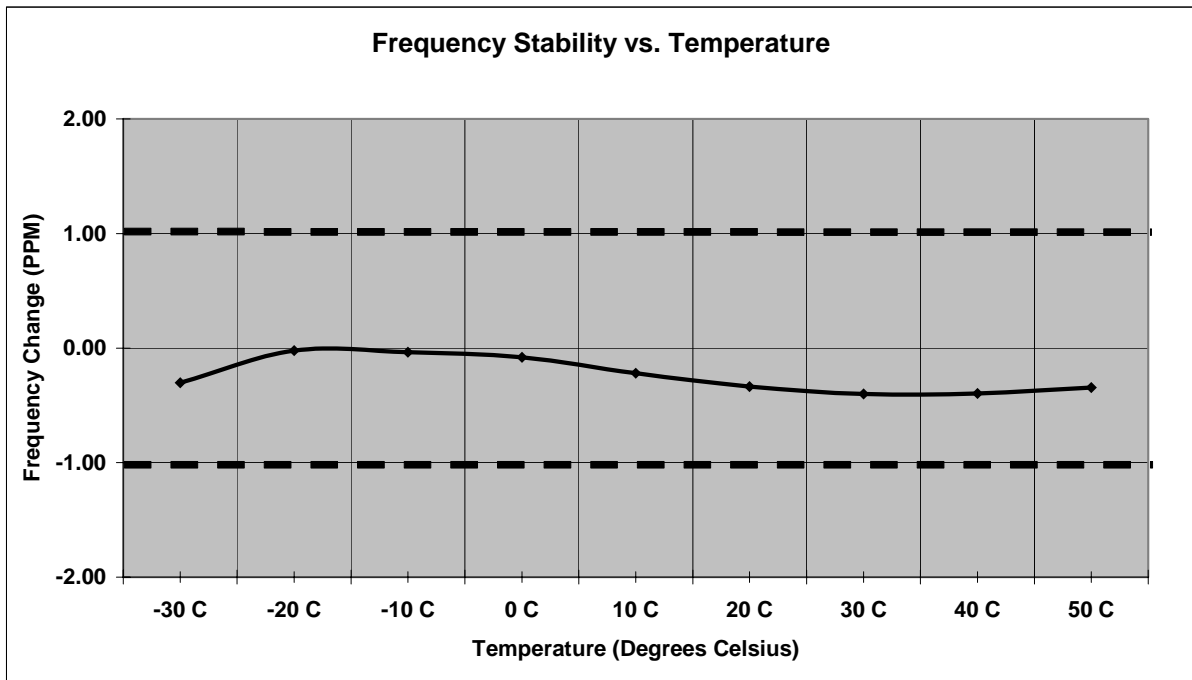


Figure 7.5.2-5: Frequency Stability – 928.925MHz

# Frequency Stability

Mode: Frequency (MHz): 932.250042  
 Channel: Deviation Limit (PPM): 1ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	932.249797	-0.263	100%	12.00
-20 C	932.249972	-0.075	100%	12.00
-10 C	932.249977	-0.070	100%	12.00
0 C	932.249925	-0.126	100%	12.00
10 C	932.249777	-0.284	100%	12.00
20 C	932.249635	-0.437	100%	12.00
30 C	932.249710	-0.356	100%	12.00
40 C	932.249690	-0.378	100%	12.00
50 C	932.249687	-0.381	100%	12.00
20 C	932.249992	-0.054	85%	10.200
20 C	932.250017	-0.027	115%	13.800

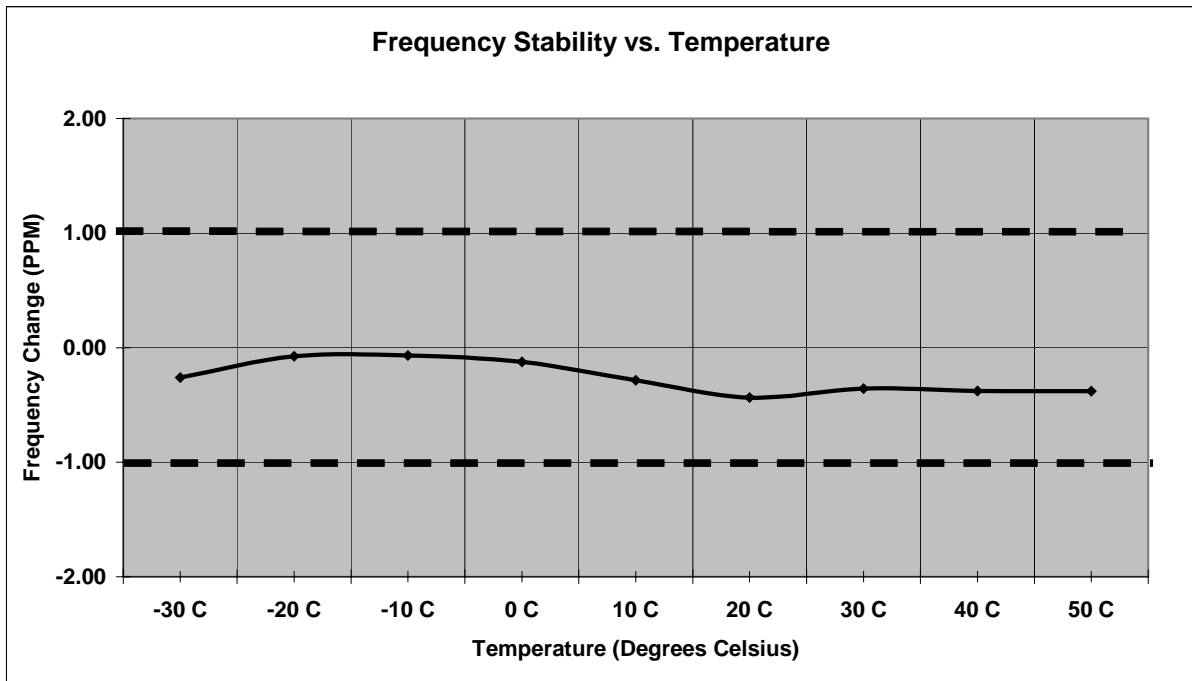


Figure 7.5.2-6: Frequency Stability – 932.5MHz

# Frequency Stability

**Mode:** Frequency (MHz): 941.487537  
**Channel:** Deviation Limit (PPM): 1ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	941.487300	-0.252	100%	12.00
-20 C	941.487335	-0.215	100%	12.00
-10 C	941.487472	-0.069	100%	12.00
0 C	941.487452	-0.090	100%	12.00
10 C	941.487292	-0.260	100%	12.00
20 C	941.487215	-0.342	100%	12.00
30 C	941.487225	-0.331	100%	12.00
40 C	941.487277	-0.276	100%	12.00
50 C	941.487167	-0.393	100%	12.00
20 C	941.487477	-0.064	85%	10.200
20 C	941.487465	-0.076	115%	13.800

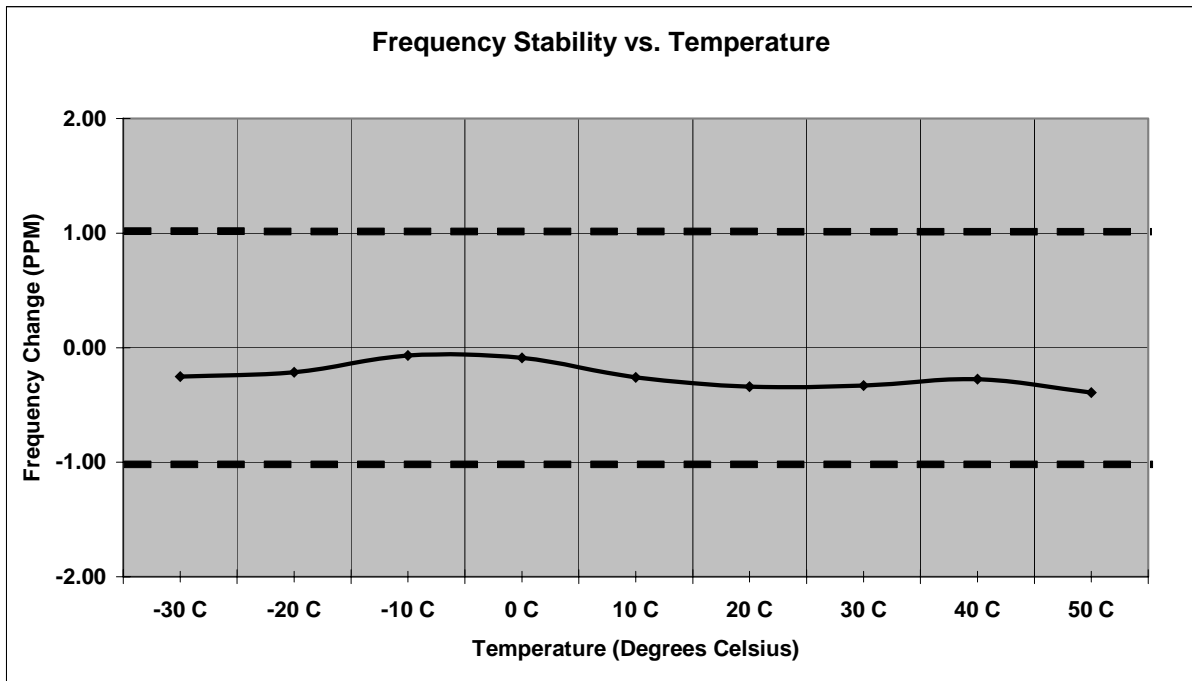


Figure 7.5.2-7: Frequency Stability – 941.4875MHz

# Frequency Stability

Mode: Frequency (MHz): 959.924975  
 Channel: Deviation Limit (PPM): 1ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	959.924770	-0.214	100%	12.00
-20 C	959.924965	-0.010	100%	12.00
-10 C	959.925015	0.042	100%	12.00
0 C	959.924952	-0.024	100%	12.00
10 C	959.924875	-0.104	100%	12.00
20 C	959.924780	-0.203	100%	12.00
30 C	959.924660	-0.328	100%	12.00
40 C	959.924650	-0.339	100%	12.00
50 C	959.924732	-0.253	100%	12.00
20 C	959.925005	0.031	85%	10.200
20 C	959.924947	-0.029	115%	13.800

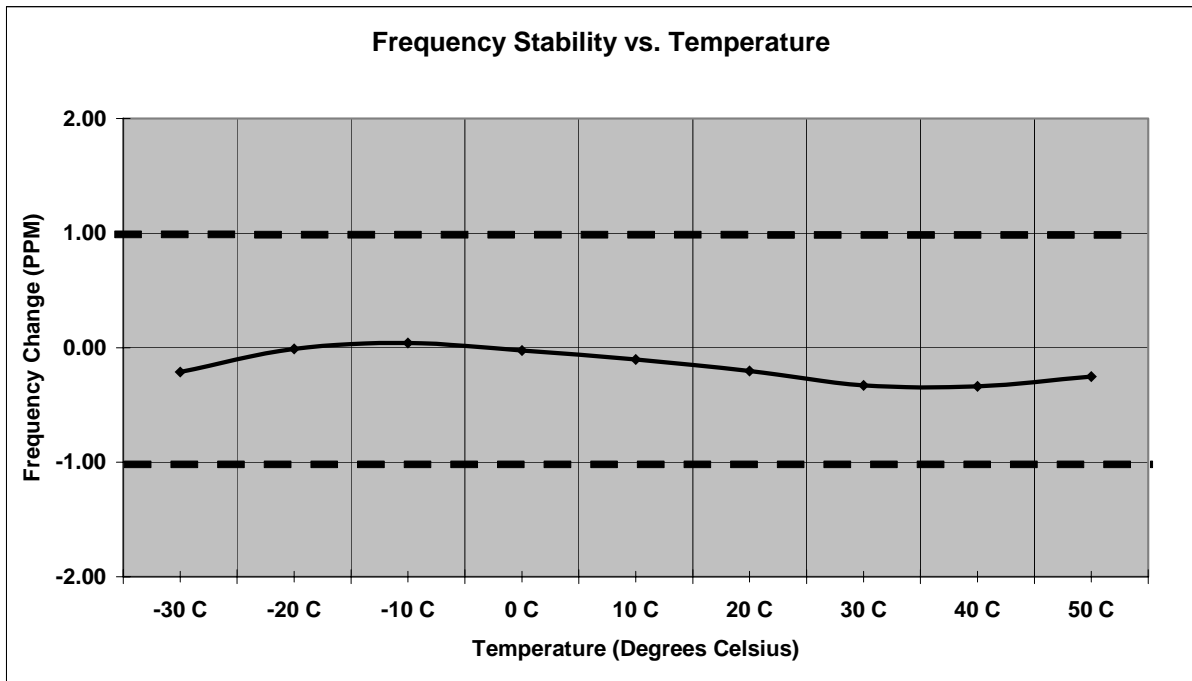


Figure 7.5.2-8: Frequency Stability – 959.925MHz

## 7.6 Radiated Emissions (Unintentional Radiators) - FCC Section 15.109

### 7.6.1 Measurement Procedure

The equipment under test is placed in the Semi-Anechoic Chamber (described in section 2.3.1) on a wooden table at the turntable center. For each radiated emission, the antenna mast is raised and lowered from one (1) to four (4) meters and the turntable is rotated 360° to obtain a maximum peak reading on the spectrum analyzer. The radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector for frequencies below 1000 MHz and an Average detector function for frequencies above 1000 MHz. This repeated for both horizontal and vertical polarizations of the receive antenna.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

Field Strength (dBuV/m) = EMI Receiver Level (dBuV) + Cable Loss (dB) – Amplifier Gain (dB) + Antenna Correction Factor (1/m)

Results of the test are shown below in Table 7.6.2-1.

### 7.6.2 Measurement Results

**Table 7.6.2-1: Radiated Emissions Tabulated Data**

Frequency (MHz)	Uncorrected Reading (dBμV/m)	Antenna Polarity (H/V)	Antenna Height (cm)	Turntable Azimuth (°)	Total Correction Factor (dB)	Corrected Reading (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30	22.44	V	100	0	-8.40	14.04	40.0	25.96
64.48	39.91	V	100	199	-20.27	19.64	40.0	20.36
115.14	33.59	V	100	80	-13.29	20.30	43.5	23.20
156.1	38.95	V	100	0	-14.04	24.91	43.5	18.59
195.97	34.07	V	100	0	-14.73	19.34	43.5	24.16
333.93	22.06	V	100	0	-10.09	11.97	46.0	34.03
682.05	21.83	V	100	0	-1.76	20.07	46.0	25.93
840.48	21.66	H	100	0	0.98	22.64	46.0	23.36
946.11	21.61	H	100	0	2.01	23.62	46.0	22.38
983.83	22.22	V	100	0	3.26	25.48	54.0	28.52

Measurements taken above 983.83 MHz were below the noise floor of the measurement equipment.

## 7.7 Power Line Conducted Emissions - FCC Section 15.107

### 7.7.1 Measurement Procedure

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer's resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss

Margin = Applicable Limit - Corrected Reading

The APXCVRZIG01 module was integrated into a representative host device for the purpose of showing compliance. See section 6.0 for test setup details.

### 7.7.2 Measurement Results

Results of the test are shown below in and Tables 7.7-1.

**Table 7.7-1: Conducted EMI Results**

Frequency (MHz)	Uncorrected Reading (dBuV)		Total Correction Factor (dB)	Corrected Level (dBuV)		Limit (dBuV)		Margin (dB)	
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
<b>Line 1</b>									
0.15	48.9	8.3	9.80	58.70	18.10	66.00	56.00	7.3	37.9
0.2	45.4	7.5	9.80	55.20	17.30	63.61	53.61	8.4	36.3
0.25	42.6	10.5	9.80	52.40	20.30	61.76	51.76	9.4	31.5
0.4	34.7	9.3	9.80	44.50	19.10	57.85	47.85	13.4	28.8
0.69	28.7	11	9.80	38.50	20.80	56.00	46.00	17.5	25.2
0.99	27.1	10.2	9.80	36.90	20.00	56.00	46.00	19.1	26.0
<b>Line 2</b>									
0.16	48.7	8.1	9.80	58.50	17.90	65.46	55.46	7.0	37.6
0.19	46.5	7	9.80	56.30	16.80	64.04	54.04	7.7	37.2
0.21	44.9	8.3	9.80	54.70	18.10	63.21	53.21	8.5	35.1
0.24	43.5	11.8	9.80	53.30	21.60	62.10	52.10	8.8	30.5
0.51	34.4	12	9.80	44.20	21.80	56.00	46.00	11.8	24.2
0.55	34.8	17	9.80	44.60	26.80	56.00	46.00	11.4	19.2
<b>Line 3</b>									
0.15	49.6	7.8	9.80	59.40	17.60	66.00	56.00	6.6	38.4
0.26	42.7	9.2	9.80	52.50	19.00	61.43	51.43	8.9	32.4
0.32	38.9	15	9.80	48.70	24.80	59.71	49.71	11.0	24.9
0.35	37.5	8.1	9.80	47.30	17.90	58.96	48.96	11.7	31.1
0.43	33.1	10.1	9.80	42.90	19.90	57.25	47.25	14.4	27.4
0.5	30.6	13	9.80	40.40	22.80	56.00	46.00	15.6	23.2

## 8.0 CONCLUSION

In the opinion of ACS, Inc. the model APXCVRZIG01, manufactured by Sensus Metering Systems, meets all the requirements of FCC Part 24, 90, and 101 as well as IC RSS-119 and RSS-134 as applicable.

End Report