

FCC
RF
TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
BIG JUKEBOX SPEAKER

ISSUED TO
Tonika Electronics Technology (Shenzhen) Co., Ltd
No.55 Busha Road, Nanwan Town, Longgang District, Shenzhen,
Guangdong Province, China.



Prepared by: 
Cao Shaocong
(Reporting Specialist)

Date: 2014.07.18

Approved by: 
Wei Yanquan
(Chief Engineer)

Date: 2014.07.18

Report No.: BL-SZ1470032-601

EUT Type: BIG JUKEBOX SPEAKER

Model Name: TA-320D, CHT956

Brand Name: Tonika

Test Standard: 47 CFR Part 15 Subpart C

FCC ID: SDN-B021008

Test conclusion: PASS

Test Date: 2014.07.08 – 2014.07.16

Date of Issue: 2014.07.18

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions</u>
<u>Rev. 01</u>	<u>2014.07.18</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Test Environment Condition	5
1.4	Announce	6
2	PRODUCT INFORMATION	7
2.1	Applicant	7
2.2	Manufacturer	7
2.3	General Description for Equipment under Test (EUT)	7
2.4	Technical Information	7
2.5	Ancillary Equipment	8
3	SUMMARY OF TEST RESULTS.....	9
3.1	Test Standards.....	9
3.2	Verdict.....	9
4	GENERAL TEST CONFIGURATIONS.....	10
4.1	Test Environments	10
4.2	Test Equipment List	10
4.3	Test Configurations	11
4.4	Description of Test Setup.....	11
4.4.1	For Antenna Port Test.....	11
4.4.2	For AC Power Supply Port Test	11
4.4.3	For Radiated Test (Below 30MHz).....	12
4.4.4	For Radiated Test (30MHz-1GHz)	12
4.4.5	For Radiated Test (Above 1GHz).....	13
4.5	Test Conditions	13

5	TEST ITEMS.....	14
5.1	Antenna Requirements	14
5.1.1	Standard Applicable	14
5.1.2	Antenna Anti-Replacement Construction	14
5.1.3	Antenna Gain	14
5.2	Number of Hopping Frequency	15
5.2.1	Limit.....	15
5.2.2	Test Procedure.....	15
5.3	Peak Output Power	16
5.3.1	Test Limit.....	16
5.3.2	Test Procedure.....	16
5.4	Occupied Bandwidth	17
5.4.1	Limit.....	17
5.4.2	Test Procedure.....	17
5.5	Carrier Frequency Separation.....	18
5.5.1	Limit.....	18
5.5.2	Test Procedure.....	18
5.6	Time of Occupancy (Dwell time)	19
5.6.1	Limit.....	19
5.6.2	Test Procedure.....	19
5.7	Conducted Spurious Emission	20
5.7.1	Limit.....	20
5.7.2	Test Procedure.....	20
5.8	Conducted Emission	21
5.8.1	Limit.....	21
5.8.2	Test Procedure.....	21
5.9	Radiated Spurious Emission	22
5.9.1	Limit.....	22
5.9.2	Test Procedure.....	22
5.10	Band Edge	23
5.10.1	Limit	23

5.10.2	Test Procedure	23
ANNEX A	TEST RESULT	24
A.1	Number of Hopping Frequency	24
A.2	Peak Output Power	27
A.3	20dB and 99% bandwidth	31
A.4	Hopping Frequency Separation	35
A.5	Average Time of Occupancy	37
A.6	Conducted Spurious Emissions	41
A.7	Conducted Emissions	50
A.8	Radiated Emission	52
A.9	Band Edge	86
ANNEX B	TEST SETUP PHOTOS	95
B.1	Conducted Test Photo	95
B.2	Radiated Test Photo	96
ANNEX C	EUT PHOTOS	99
C.1	Appearance of the EUT	99
C.2	Inside of the EUT	103

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6683 3402
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625. The laboratory has met the requirements of the IAS Accreditation Criteria for Testing Laboratories (AC89), has demonstrated compliance with ISO/IEC Standard 17025:2005. The accreditation certificate number is TL-588. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Test Environment Condition

Ambient Temperature	15 to 35°C
Ambient Relative Humidity	30 to 60%
Ambient Pressure	86 to 106kPa

1.4 Announce

- (1) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (2) The test report is invalid if there is any evidence and/or falsification.
- (3) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (4) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant

Applicant	Tonika Electronics Technology (Shenzhen) Co., Ltd
Address	No.55 Busha Road, Nanwan Town, Longgang District, Shenzhen, Guangdong Province, China.

2.2 Manufacturer

Manufacturer	Tonika Electronics Technology (Shenzhen) Co., Ltd
Address	No.55 Busha Road, Nanwan Town, Longgang District, Shenzhen, Guangdong Province, China.

2.3 General Description for Equipment under Test (EUT)

EUT Type	BIG JUKEBOX SPEAKER
Model Name	TA-320D, CHT956
Hardware Version	N/A
Software Version	N/A
Network and Wireless connectivity	BT 2.0
About the Product	The equipment is BIG JUKEBOX SPEAKER, it contains BT Module operating at 2.4GHz ISM band.

2.4 Technical Information

TX/ RX Operating Range	2400~2483.5MHz band $f_c = 2402 \text{ MHz} + N \times 1 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 0 to 78.	
Modulation Type	Carrier	Frequency Hopping Spread Spectrum
	Digital	GFSK, $\pi/4$ -DQPSK
Antenna Type	PCB Antenna	
Antenna Gain	0dBi	

2.5 Ancillary Equipment

Ancillary Equipment 1	AC Adapter	
	Brand Name	N/A
	Model No	BSC60-180300
	Serial No	(N/A. marked #1 by test site)
	Rated Input	~ 100-240V, 2.0A, 50/60Hz
	Rated Output	≡ 18V, 3.0A

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (12-30-13 Edition)	Miscellaneous Wireless Communications Services
2	FCC PUBLIC NOTICE DA 00-705 (Mar. 30, 2000)	Filling and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
3	ANSI C63.4-2009	American National Standard for Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
4	ANSI C63.10-2009	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	--	Pass ^{Note 1}
2	Number of Hopping Frequency	15.247(a)	ANNEX A.1	Pass
3	Peak Output Power	15.247(b)	ANNEX A.2	Pass
4	Occupied Bandwidth	15.247(a)	ANNEX A.3	Pass
5	Carrier Frequency Separation	15.247(a)	ANNEX A.4	Pass
6	Time of Occupancy (Dwell time)	15.247(a)	ANNEX A.5	Pass
7	Conducted Spurious Emission	15.247(d)	ANNEX A.6	Pass
8	Conducted Emission	15.207	ANNEX A.7	Pass
9	Radiated Spurious Emission	15.209 15.247(c)	ANNEX A.8	Pass
10	Band Edge	15.247(d)	ANNEX A.9	Pass

Note 1: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity (%)	30 -60	
Atmospheric Pressure (kPa)	86-106	
Temperature	NT (Normal Temperature)	+20°C to +25°C
	LT (Low Temperature)	-20°C
	HT (High Temperature)	+55°C
Working Voltage of the EUT	NV (Normal Voltage)	3.0V

4.2 Test Equipment List


Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	AGILENT	E4440A	MY45304434	2014.05.10	2015.05.09
Spectrum Analyzer	ROHDE&SCHWARZ	FSL3	103640/003	2014.05.02	2015.05.01
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2014.05.14	2015.05.13
Power Splitter	KMW	DCPD-LDC	1305003215	2014.05.14	2015.05.13
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2014.05.08	2015.05.07
Attenuator (20dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2014.07.03	2015.07.02
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2014.07.03	2015.07.02
Test Antenna-Loop(9kHz-30MHz)	SCHWARZBECK	FMZB 1519	1519-037	2014.07.03	2015.07.02
Test Antenna-Bi-Log(30MHz-3G Hz)	SCHWARZBECK	VULB 9163	9163-624	2014.07.03	2015.07.02
Test Antenna-Horn(1-18GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2014.07.03	2015.07.02
Test Antenna-Horn(15-26.5GHz)	SCHWARZBECK	BBHA 9170	9170-305	2014.07.03	2015.07.02
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2013.10.07	2014.10.06

4.3 Test Configurations


Test Configurations (TC) NO.	Description	
	Signal Description	Operating Frequency
Transmitter		
TC01	GFSK modulation, package type DH5, hopping on	--
TC02	GFSK modulation, package type DH5, hopping off	Ch No. 0/ 2402MHz
TC03	GFSK modulation, package type DH5, hopping off	Ch No. 39/ 2441MHz
TC04	GFSK modulation, package type DH5, hopping off	Ch No. 78/ 2480MHz
TC05	$\pi/4$ -DQPSK modulation, package type DH5, hopping on	--
TC06	$\pi/4$ -DQPSK modulation, package type DH5, hopping off	Ch No. 0/ 2402MHz
TC07	$\pi/4$ -DQPSK modulation, package type DH5, hopping off	Ch No. 39/ 2441MHz
TC08	$\pi/4$ -DQPSK modulation, package type DH5, hopping off	Ch No. 78/ 2480MHz

4.4 Description of Test Setup

4.4.1 For Antenna Port Test

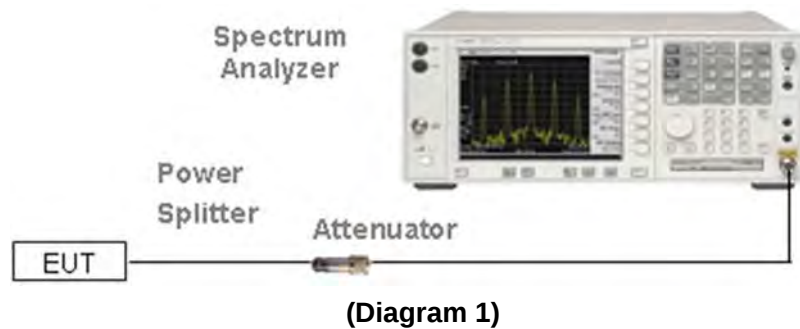


4.4.2 For AC Power Supply Port Test

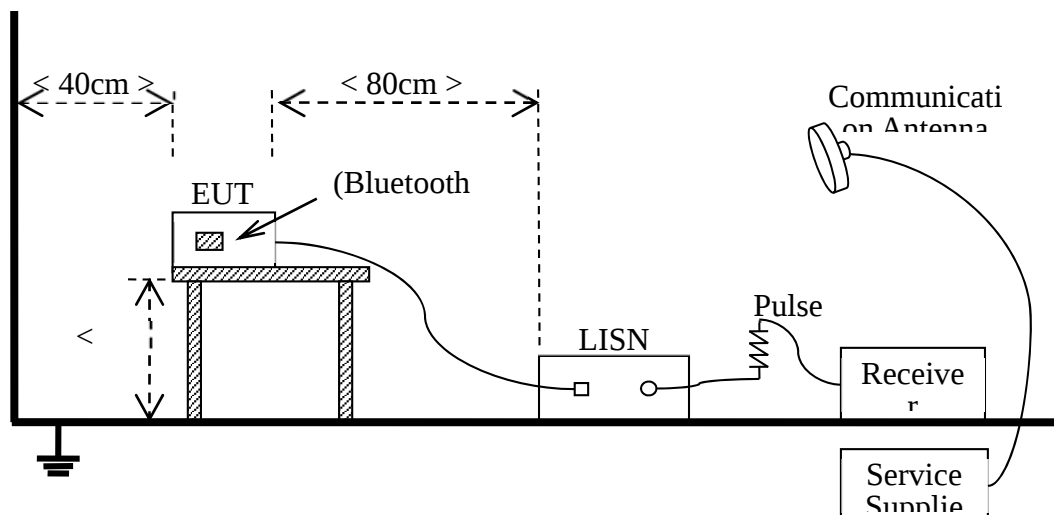


(Diagram 2)

4.4.3 For Radiated Test (Below 30MHz)

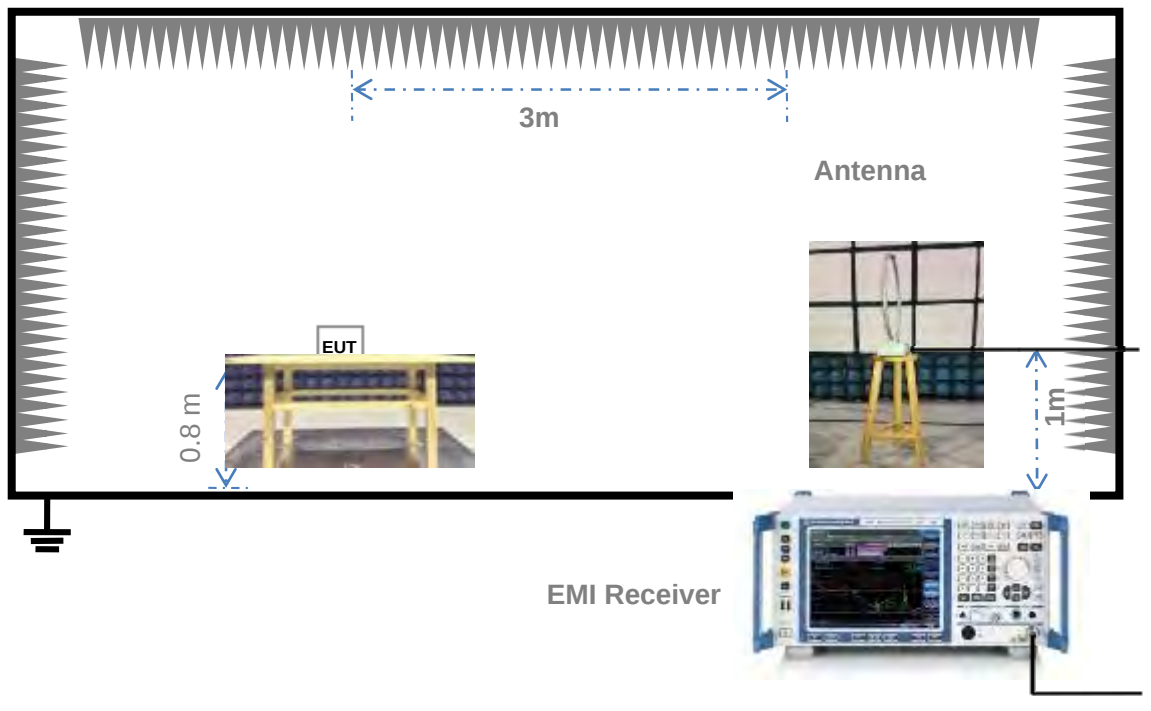


(Diagram 3)

4.4.4 For Radiated Test (30MHz-1GHz)

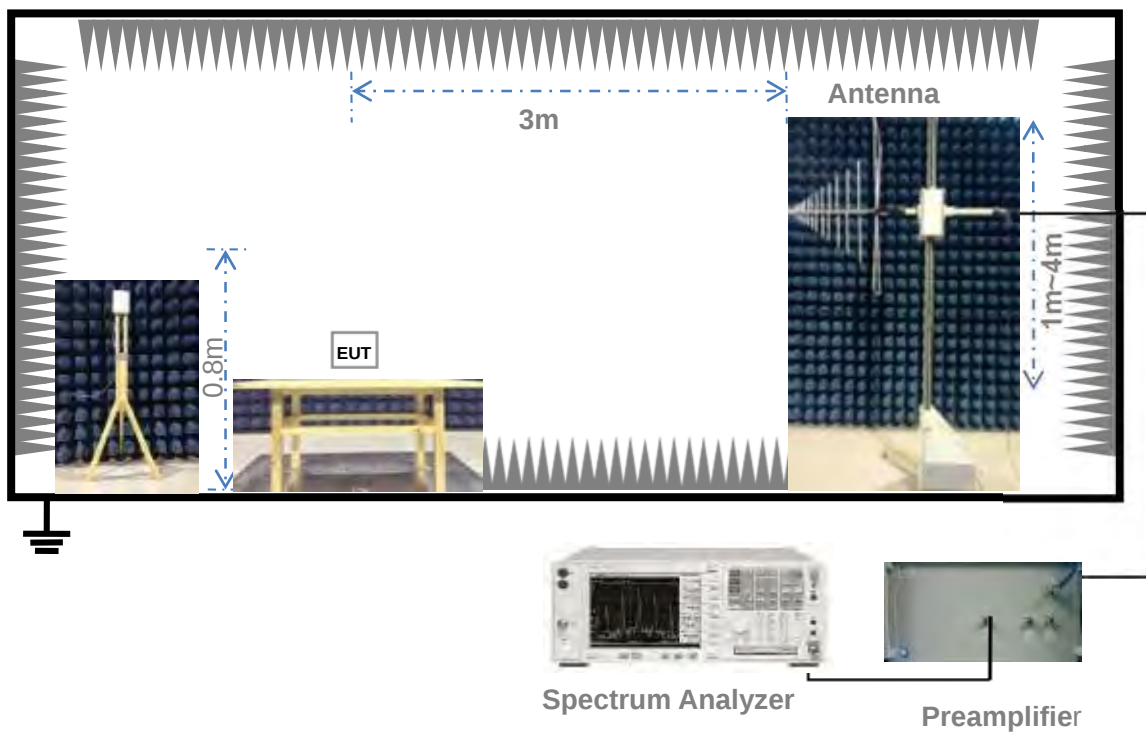

(Diagram 4)

4.4.5 For Radiated Test (Above 1GHz)

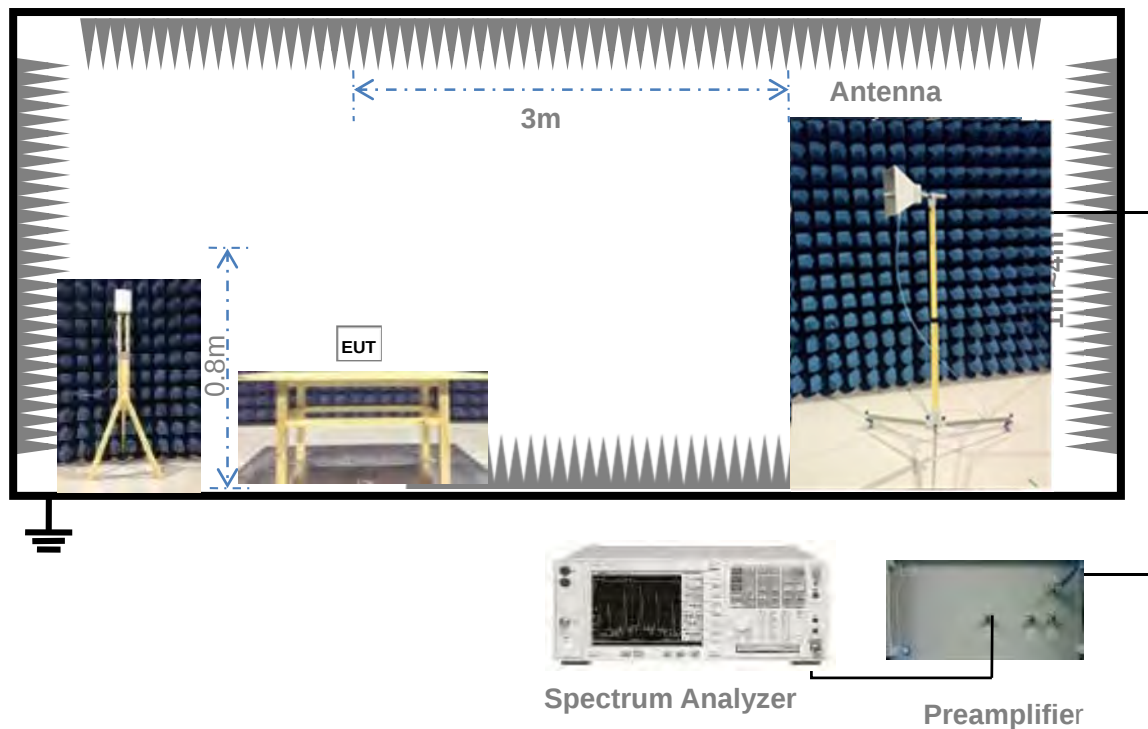

(Diagram 5)

4.5 Test Conditions

Test Case	Test Conditions		
	Test Env.	Test Setup ^{Note 1}	Test Configuration ^{Note 2}
Number of Hopping Frequency	NTNV	Test Setup 1	TC01, TC05
Peak Output Power	NTNV	Test Setup 1	TC02, TC03, TC04, TC06, TC07, TC08,
Occupied Bandwidth	NTNV	Test Setup 1	TC03, TC07
Carrier Frequency Separation	NTNV	Test Setup 1	TC01, TC05
Time of Occupancy (Dwell time)	NTNV	Test Setup 1	TC01, TC05
Conducted Spurious Emission	NTNV	Test Setup 1	TC02, TC03, TC04, TC06, TC07, TC08,
Conducted Emission	NTNV	Test Setup 2	TC02, TC03, TC04, TC06, TC07, TC08,
Radiated Emission	NTNV	Test Setup 3 Test Setup 4 Test Setup 5	TC02, TC03, TC04, TC06, TC07, TC08,
Band Edge	NTNV	Test Setup 5	TC02, TC04, TC06, TC08
Note:			
1. Please refer to section 4.4 for test setup details.			
2. Please refer to section 4.3 for test setup details.			

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Standard Applicable

FCC §15.203 & 15.247(b)


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is An embedded-in	An embedded-in antenna design is used.

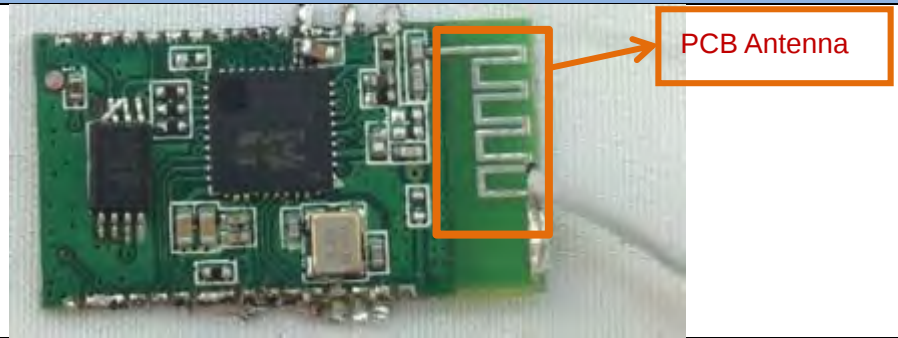Reference Documents	Item
Photo	

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequency

5.2.1 Limit

FCC §15.247(a)(1)(iii)

Frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

5.2.2 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.3 Peak Output Power

5.3.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt.

5.3.2 Test Procedure

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a)

The 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

5.4.2 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

5.5.2 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a)

Frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.6.2 Test Procedure

The average time of occupancy on any channel within the Period can be calculated with formulas:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4s * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4s * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4s * \{\text{Number of Hopping Frequency}\}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.7 Conducted Spurious Emission

5.7.1 Limit

FCC §15.247(d)

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(c)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.9.2 Test Procedure

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.10 Band Edge

5.10.1 Limit

FCC §15.209&15.247(d)

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.10.2 Test Procedure

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak /AV

Trace = max hold

Allow the trace to stabilize.

$E \text{ [dB}\mu\text{V/m]} = UR + AT + A\text{Factor [dB]}; AT = LCable \text{ loss [dB]} - G\text{preamp [dB]}$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	PASS
π/4-DQPSK	2400 - 2483.5	79	15	PASS

Test plots


GFSK 2.4GHz~2.4415GHz

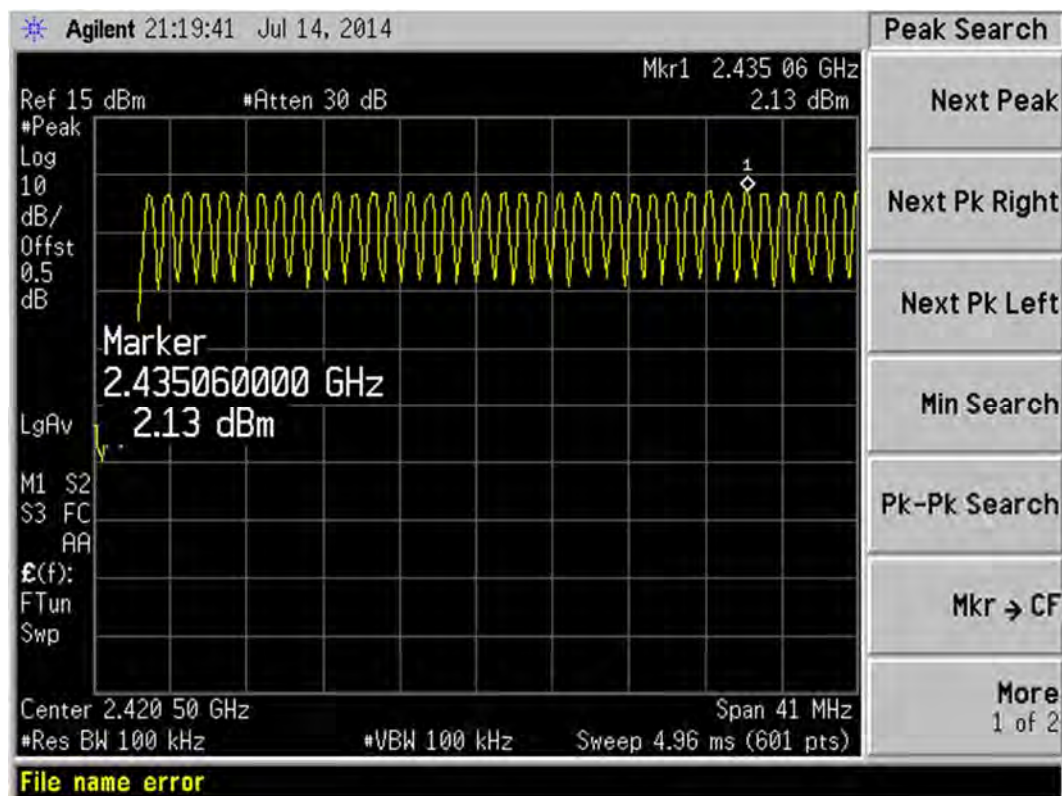


GFSK 2.4415GHz~2.4835GHz

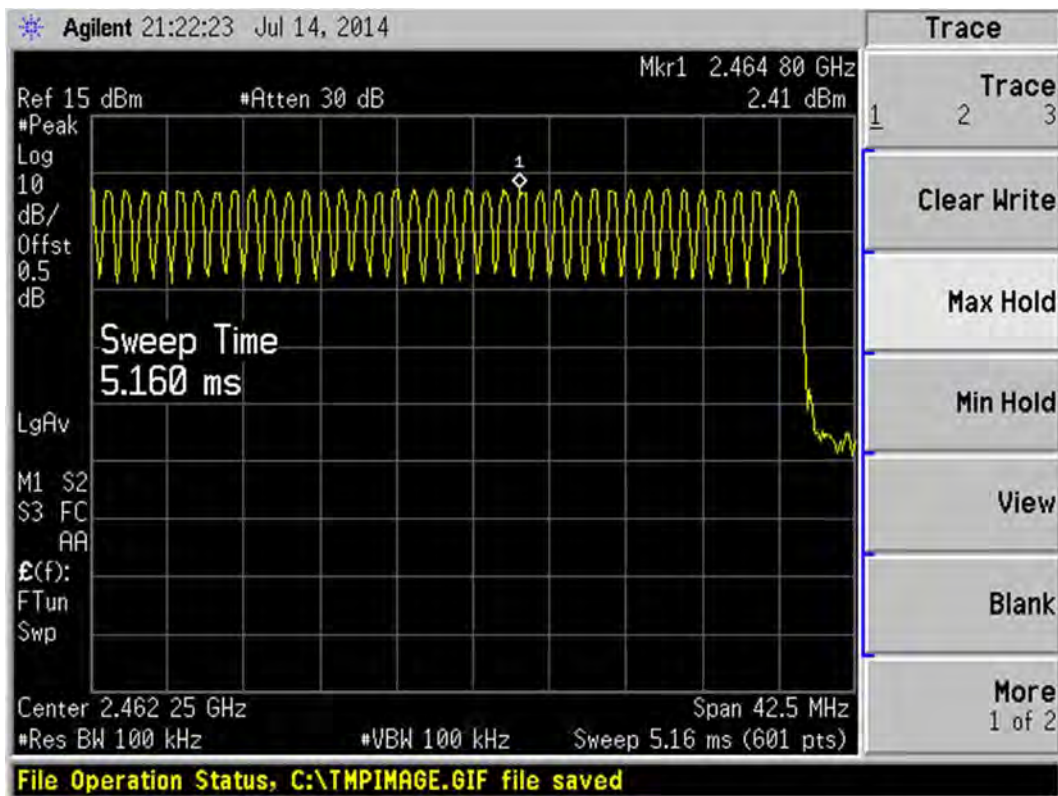

II/4-DQPSK 2.4GHz~2.4415GHz

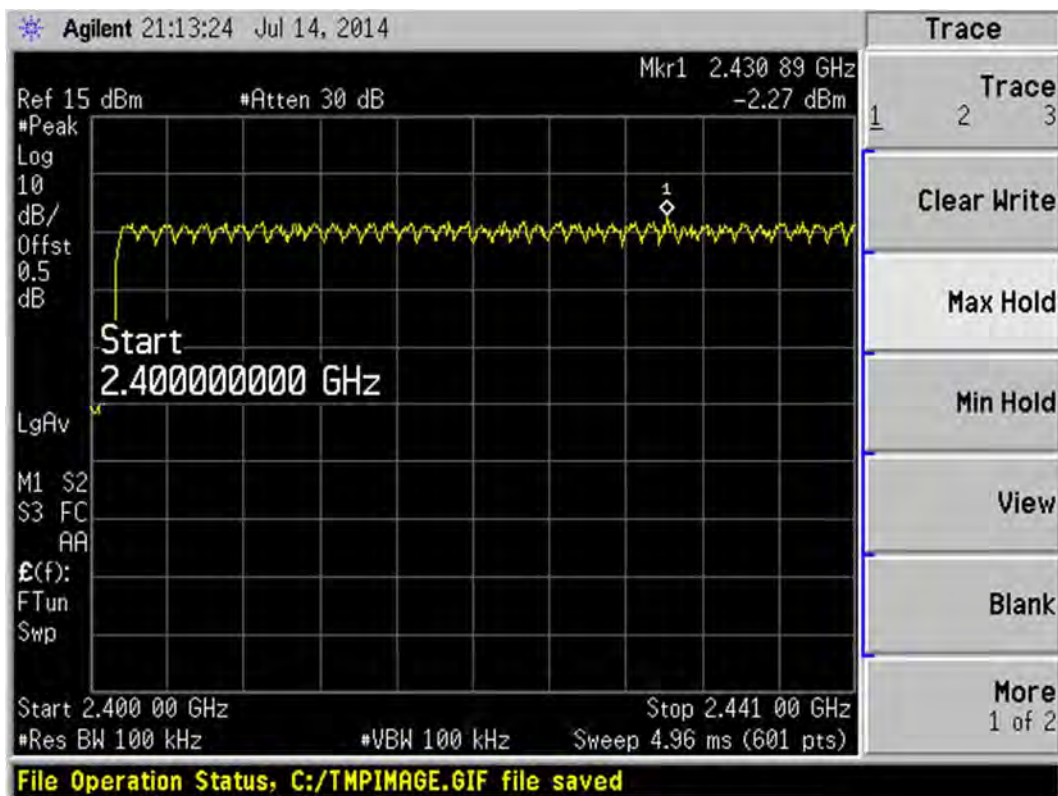

II/4-DQPSK 2.4415GHz~2.4835GHz

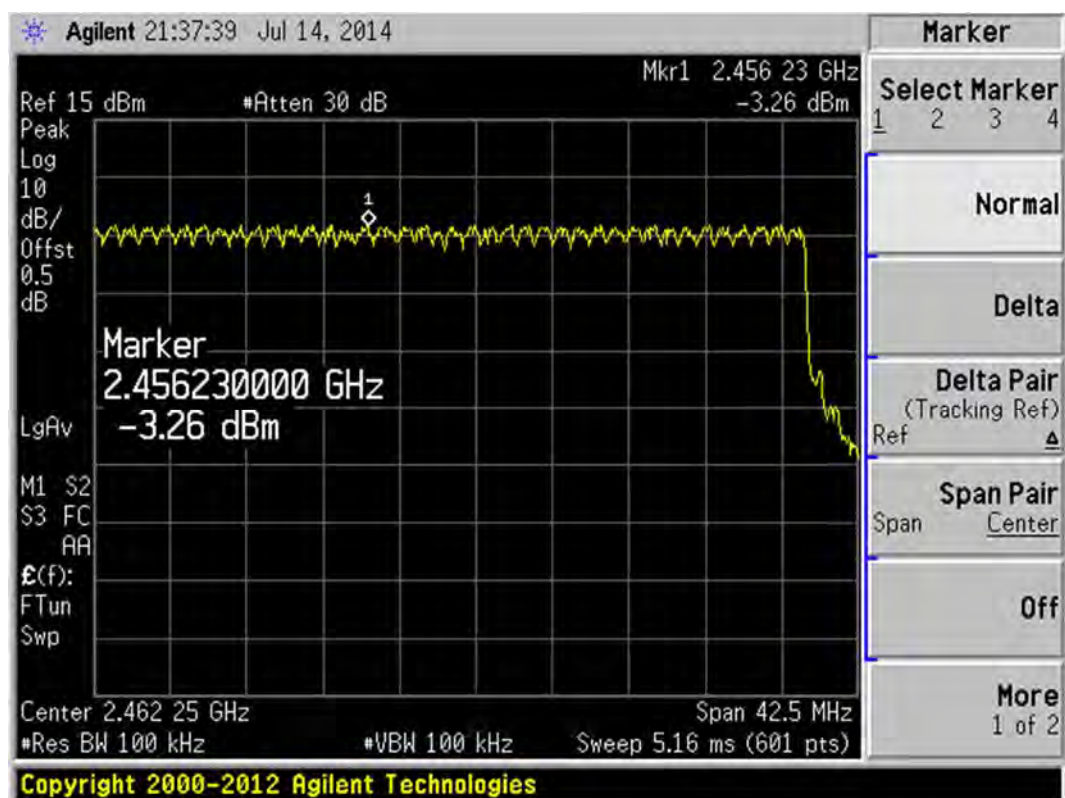

A.2 Peak Output Power

Test Data

GFSK Mode:


Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	mW	dBm	mW	
0	2402	2.26	1.68	30	1000	PASS
39	2441	2.53	1.79			PASS
78	2480	2.66	1.85			PASS

π/4-DQPSK Mode:


Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	mW	dBm	mW	
0	2402	0.65	1.16	30	1000	PASS
39	2441	0.92	1.24			PASS
78	2480	0.95	1.24			PASS

Test plots


GFSK LOW CHANNEL

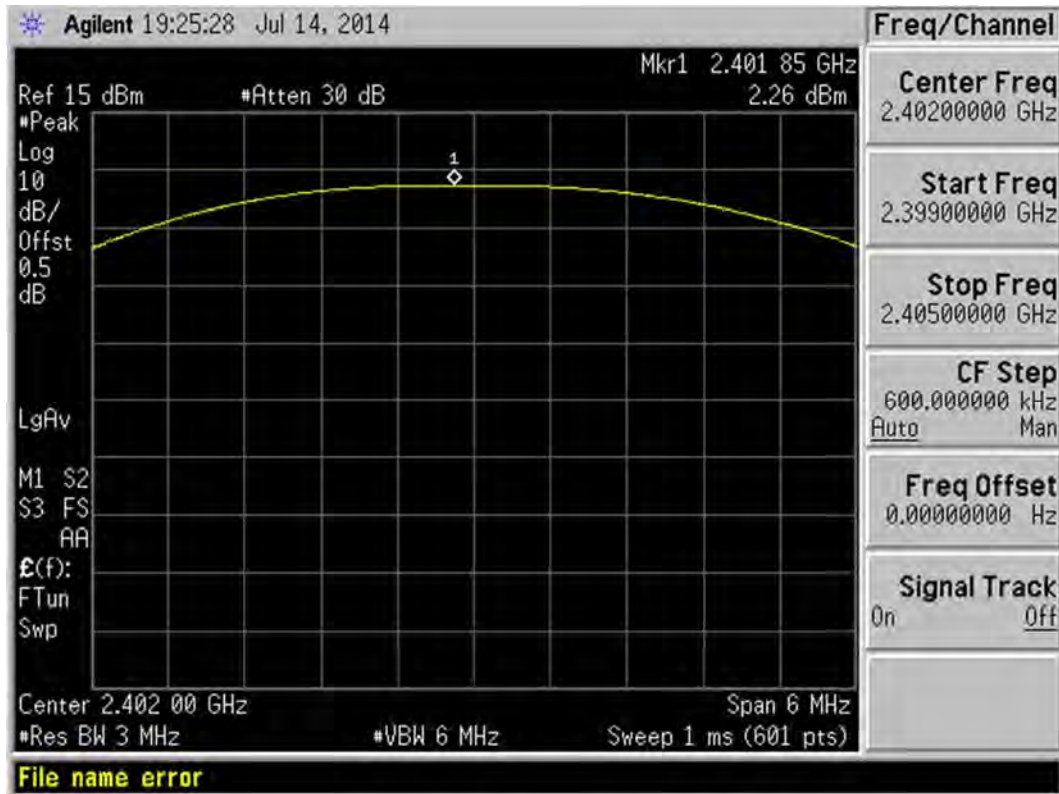


GFSK MID CHANAEL

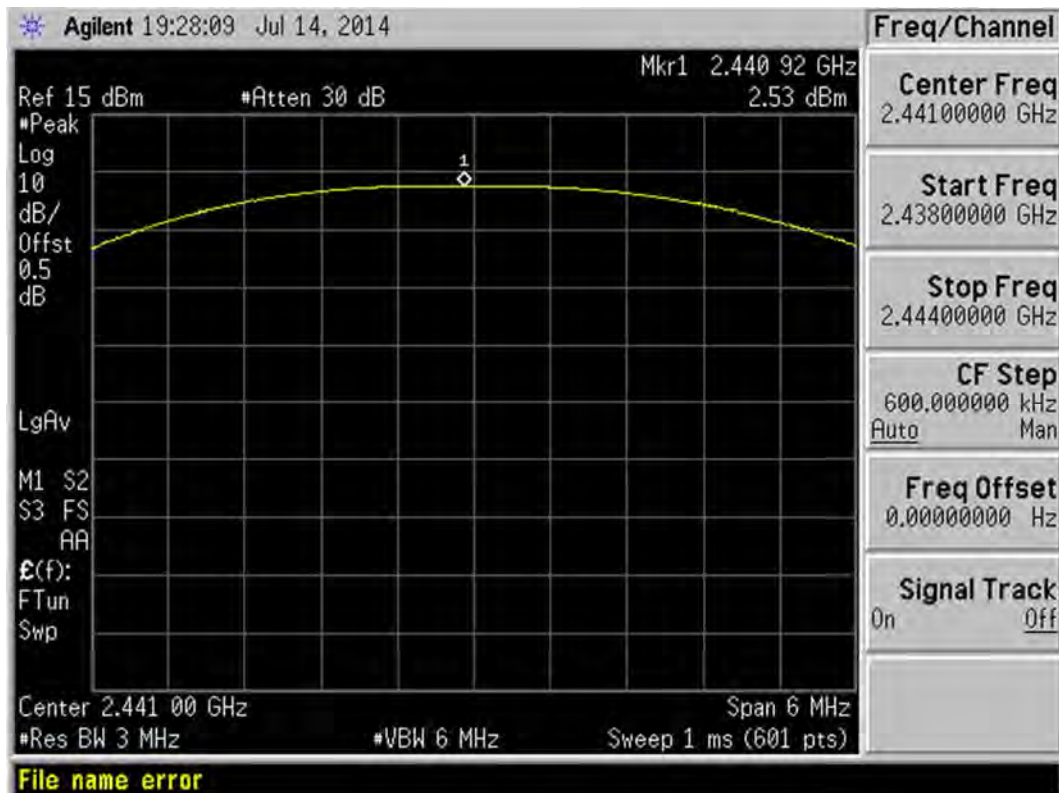


GFSK HIGH CHANNEL

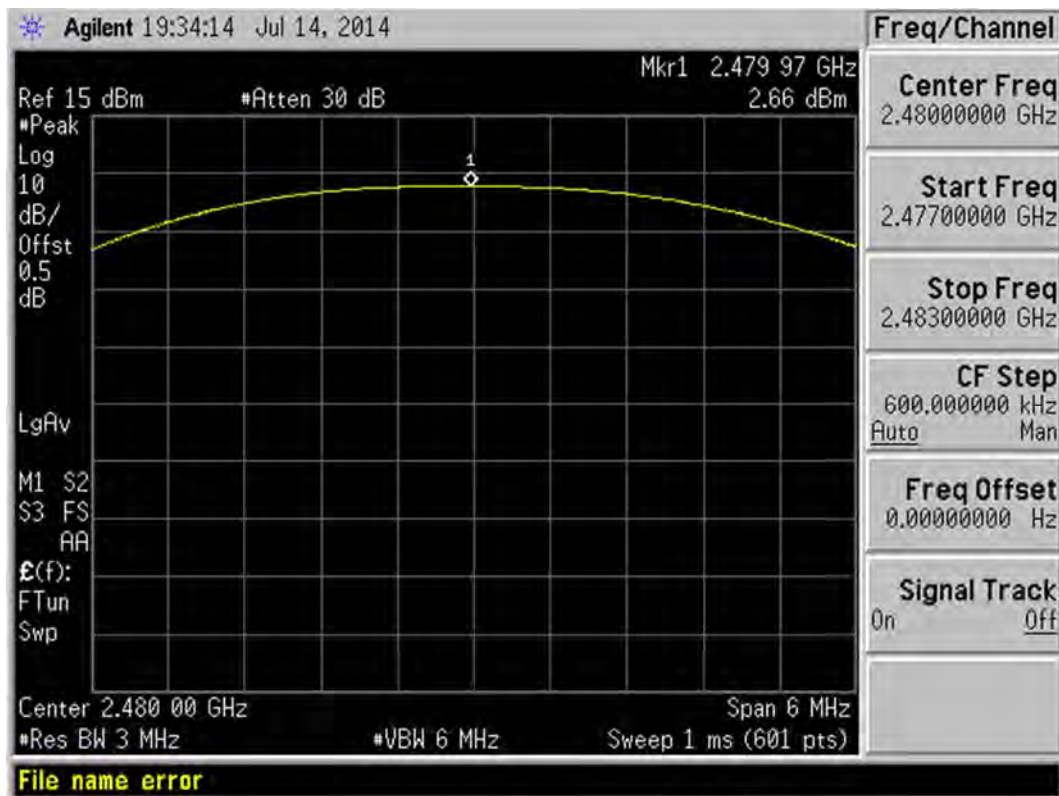


II/4-DQPSK LOW CHANNEL

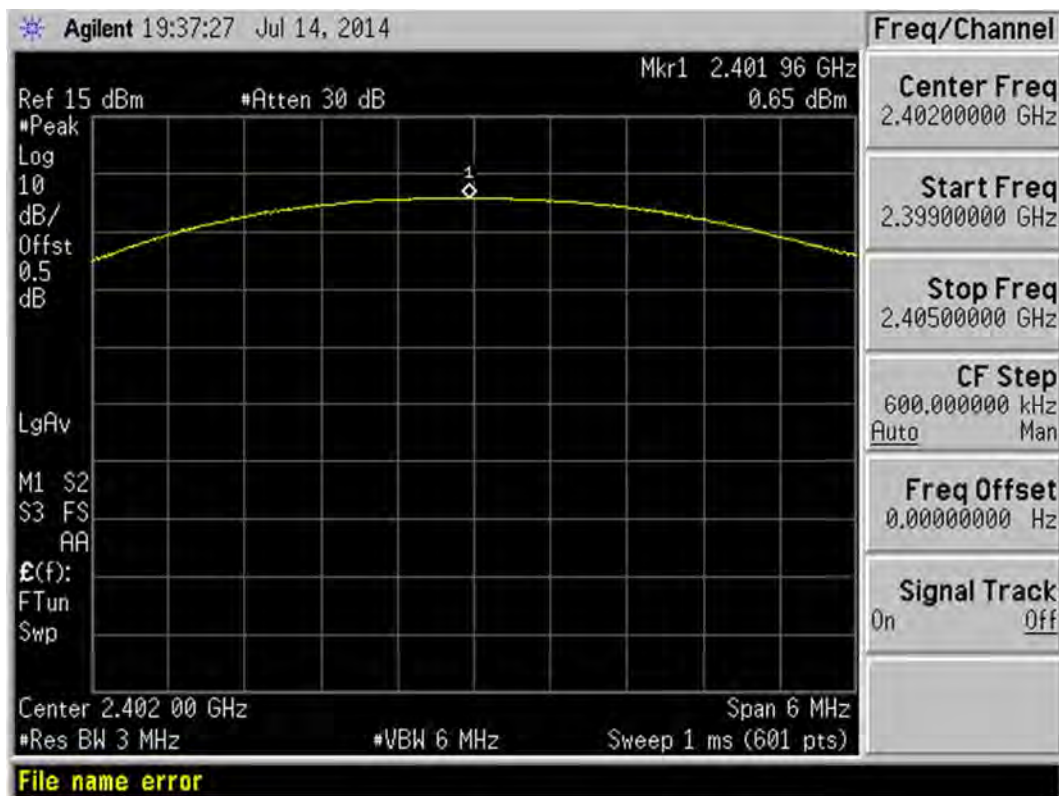

II/4-DQPSK MID CHANAEL

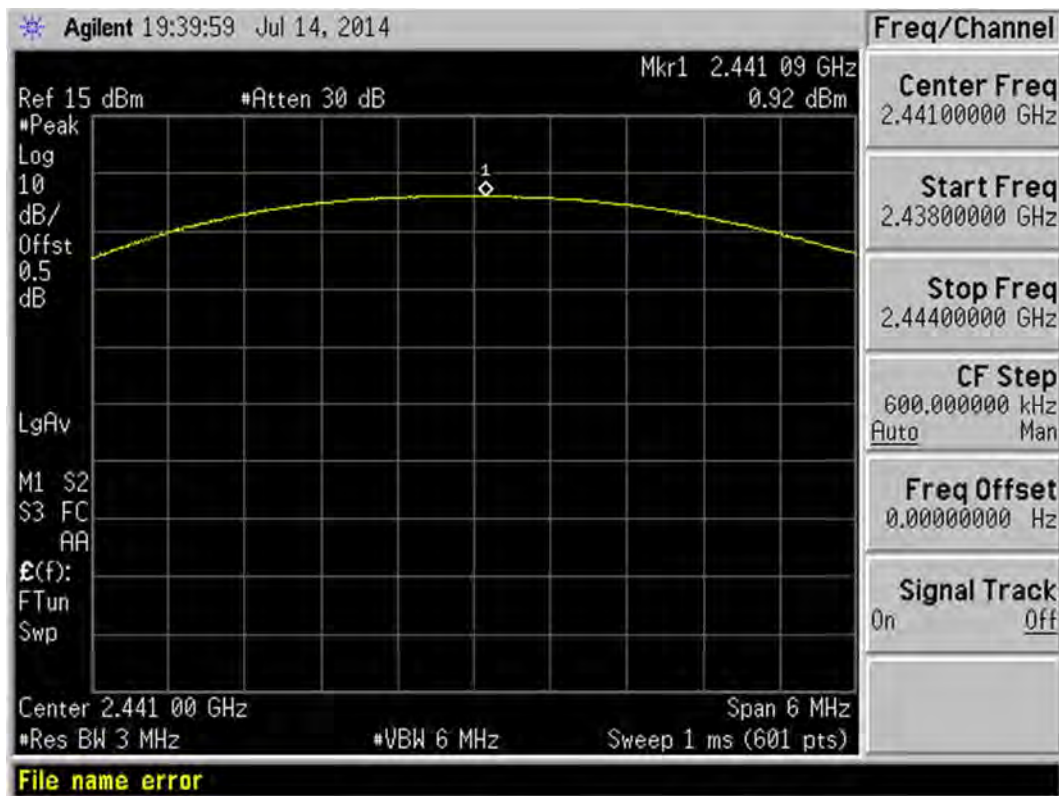

II/4-DQPSK HIGH CHANNEL

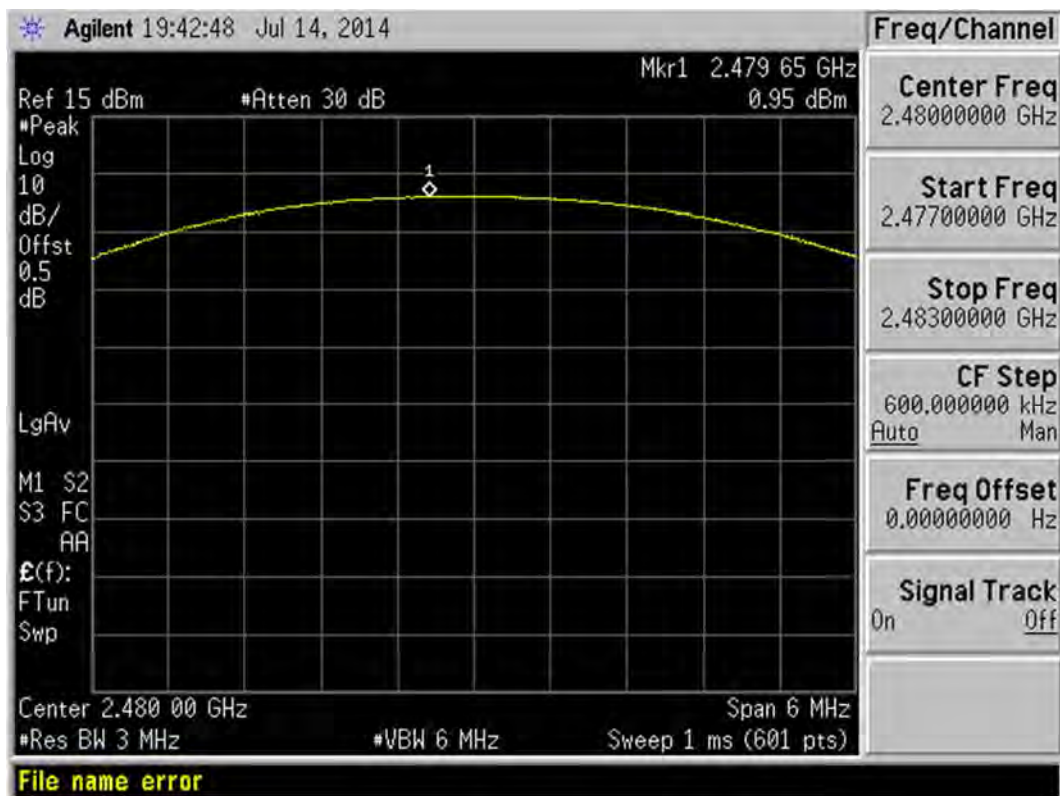

A.3 20dB and 99% bandwidth

Test Data

GFSK Mode:


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (kHz)
Low	2402	1.145	992.9737
Middle	2441	1.151	996.3551
High	2480	1.140	989.7509

π/4-DQPSK Mode:


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.437	1.3256
Middle	2441	1.420	1.3049
High	2480	1.416	1.2811

Test plots


GFSK LOW CHANNEL

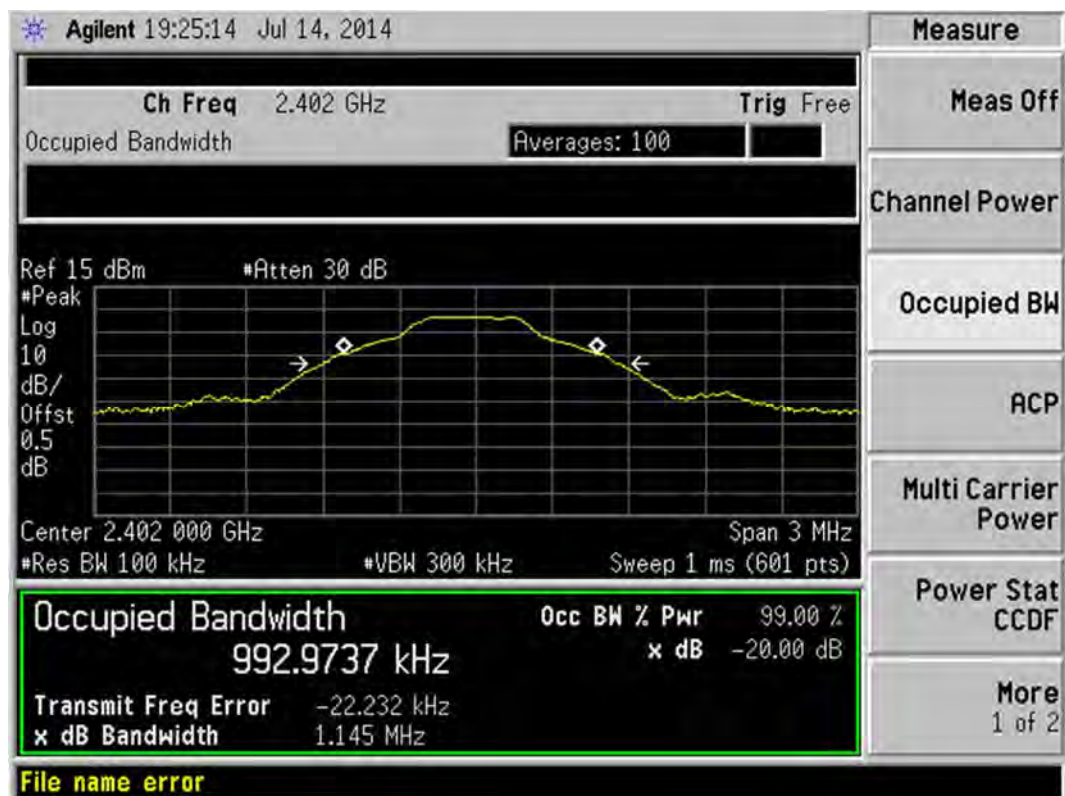


GFSK MID CHANAEL

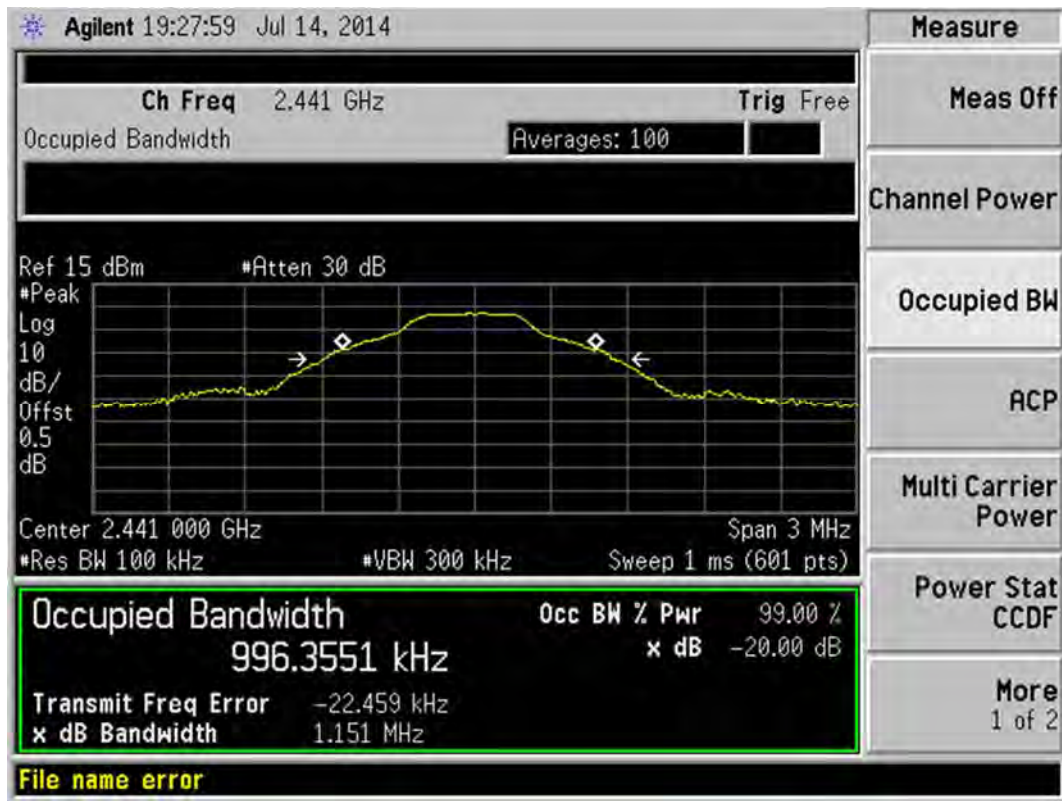


GFSK HIGH CHANNEL

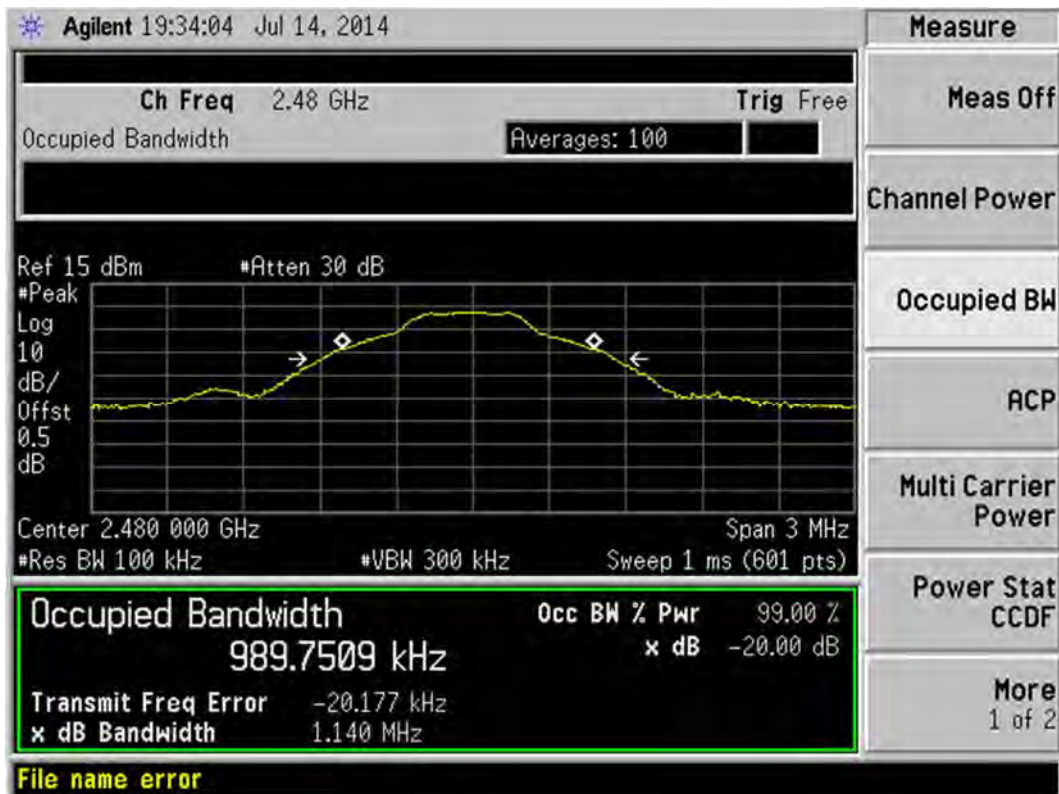


II/4-DQPSK LOW CHANNEL

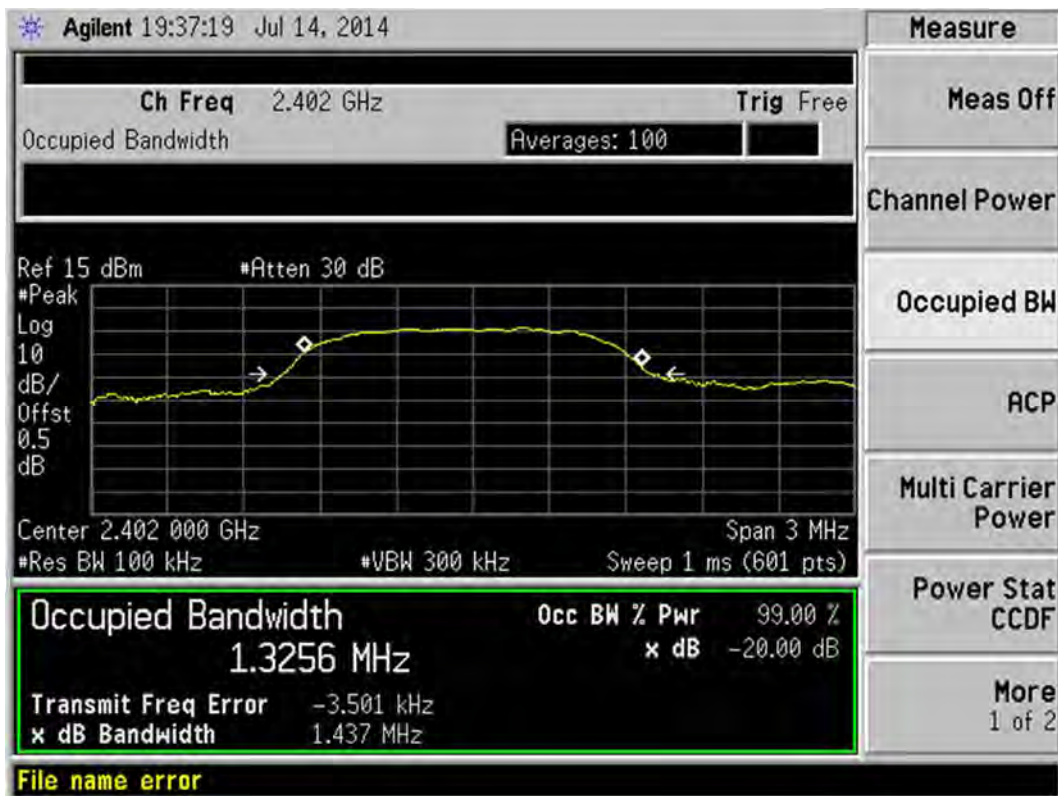

II/4-DQPSK MID CHANAEL

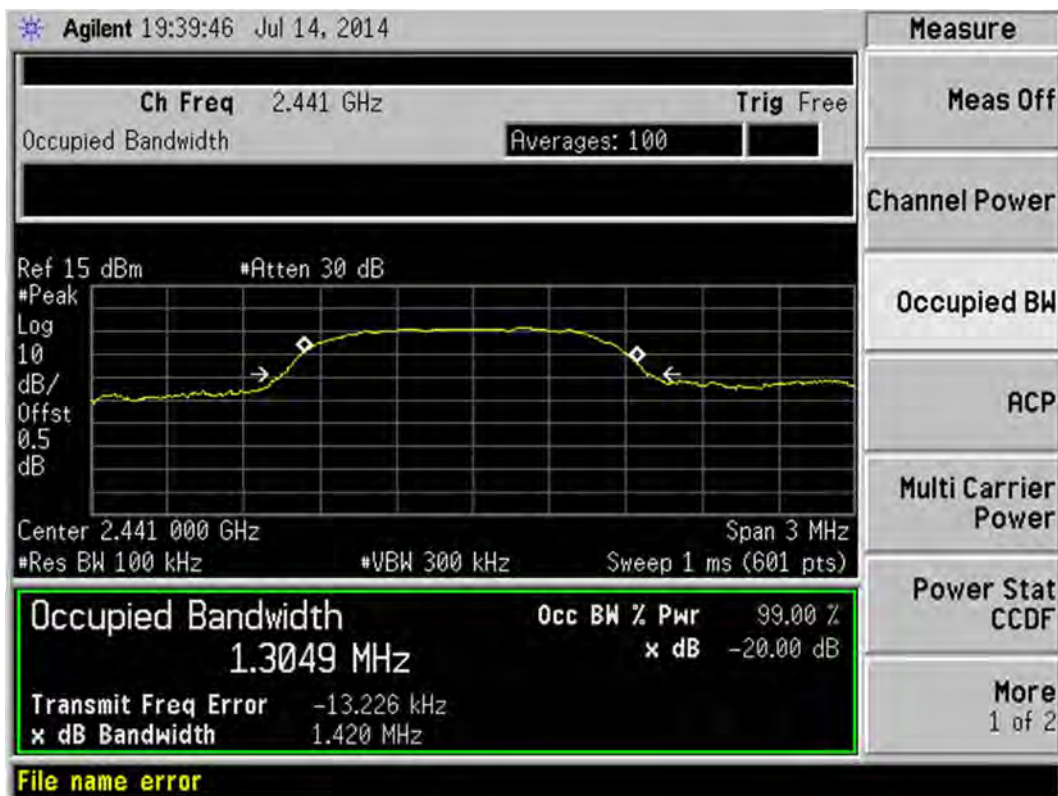

II/4-DQPSK HIGH CHANNEL

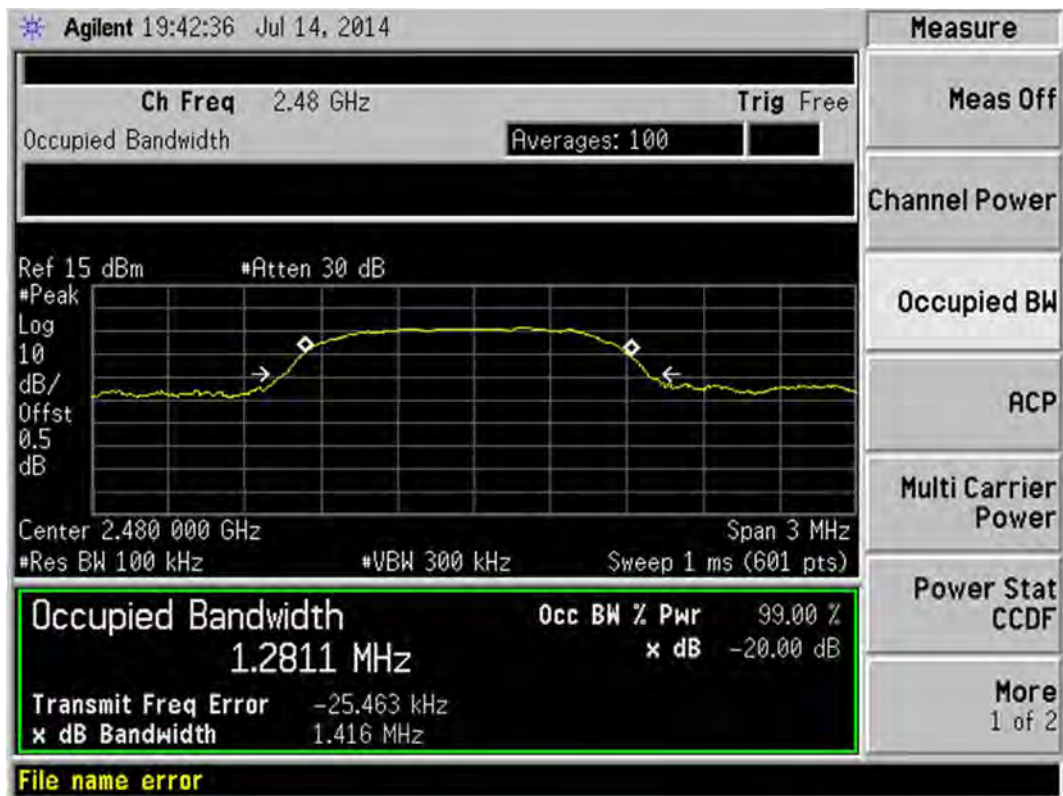


Test Data


Mode	Frequency separation (MHz)	Max 20 dB Bandwidth (MHz)	Two-thirds of the 20dB bandwidth (MHz)	Verdict
GFSK	1.015	1.515	1.010	PASS
Π/4-DQPSK Mode	1.005	1.437	0.958	PASS

Test plots

GFSK

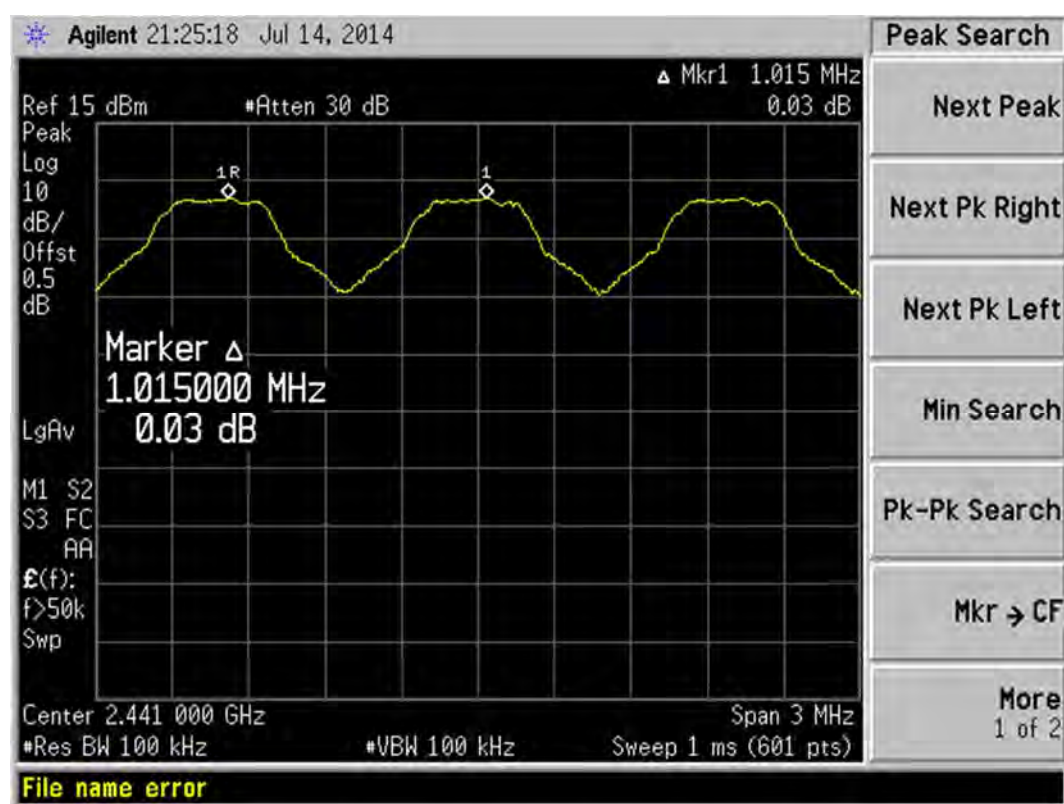

II/4-DQPSK

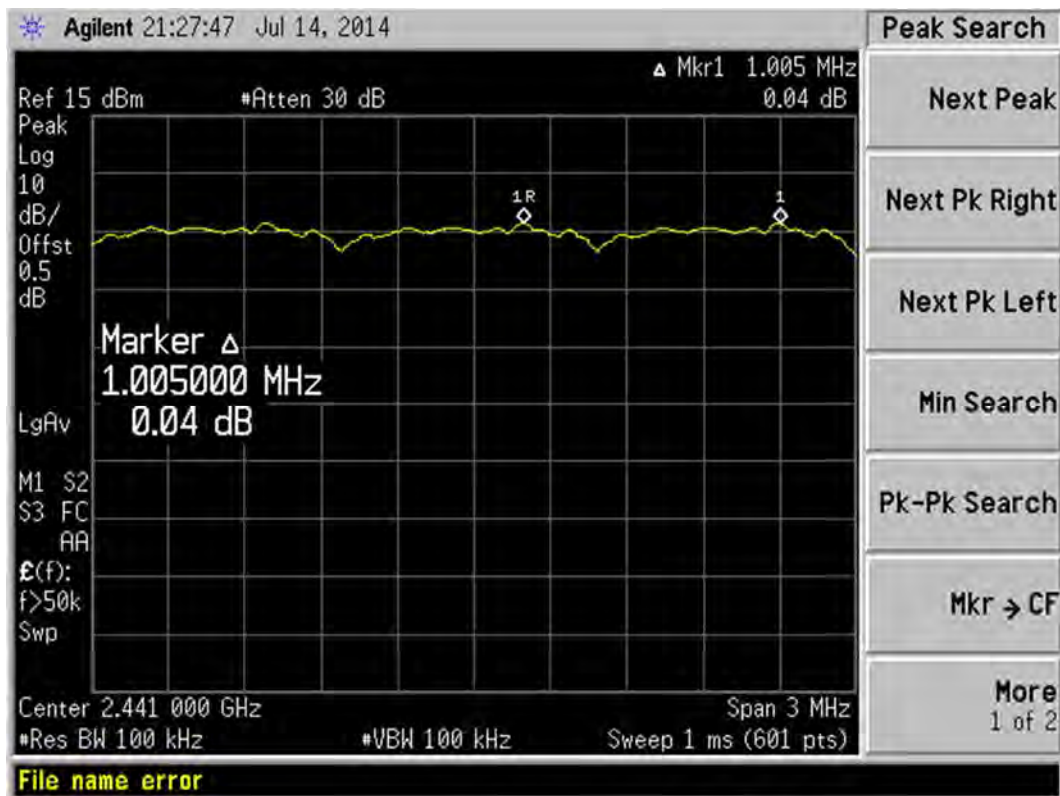

A.5 Average Time of Occupancy

Test Data

GFSK Mode:


DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38	121.604	0.4	PASS
DH 3	1.66	265.608	0.4	PASS
DH 5	2.90	309.343	0.4	PASS

π/4-DQPSK Mode:


DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38	121.604	0.4	PASS
DH 3	1.66	265.608	0.4	PASS
DH 5	2.88	307.210	0.4	PASS

Test Plots


GFSK DH1

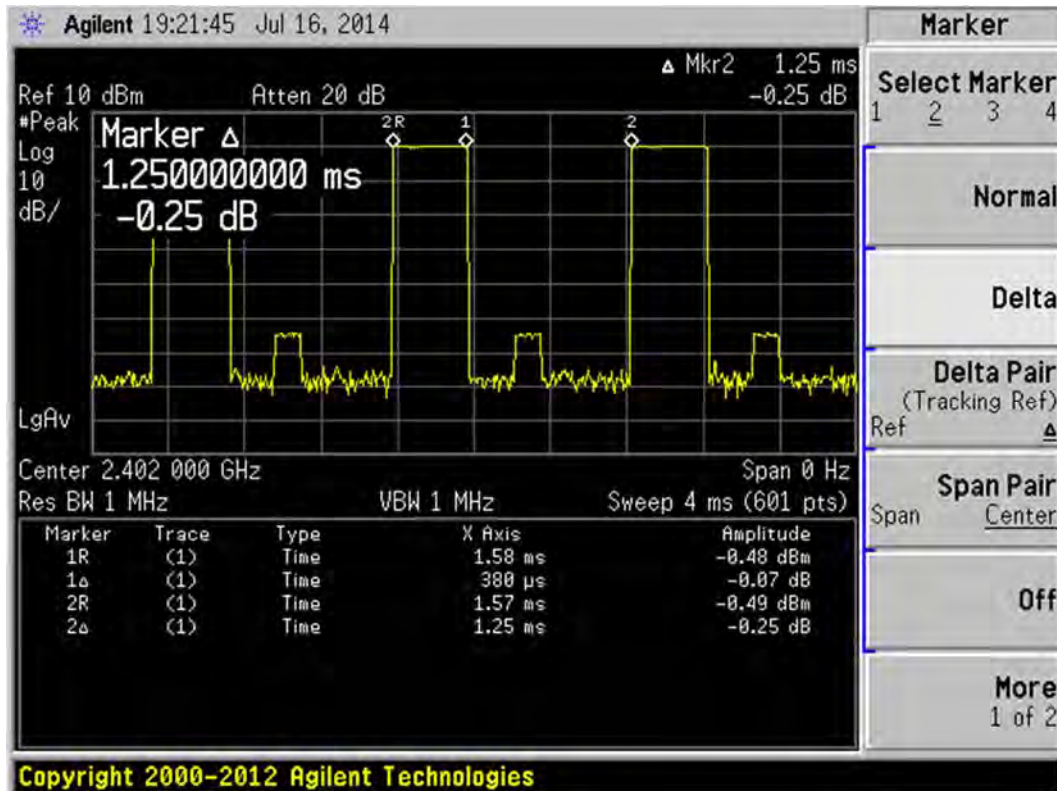


GFSK DH3

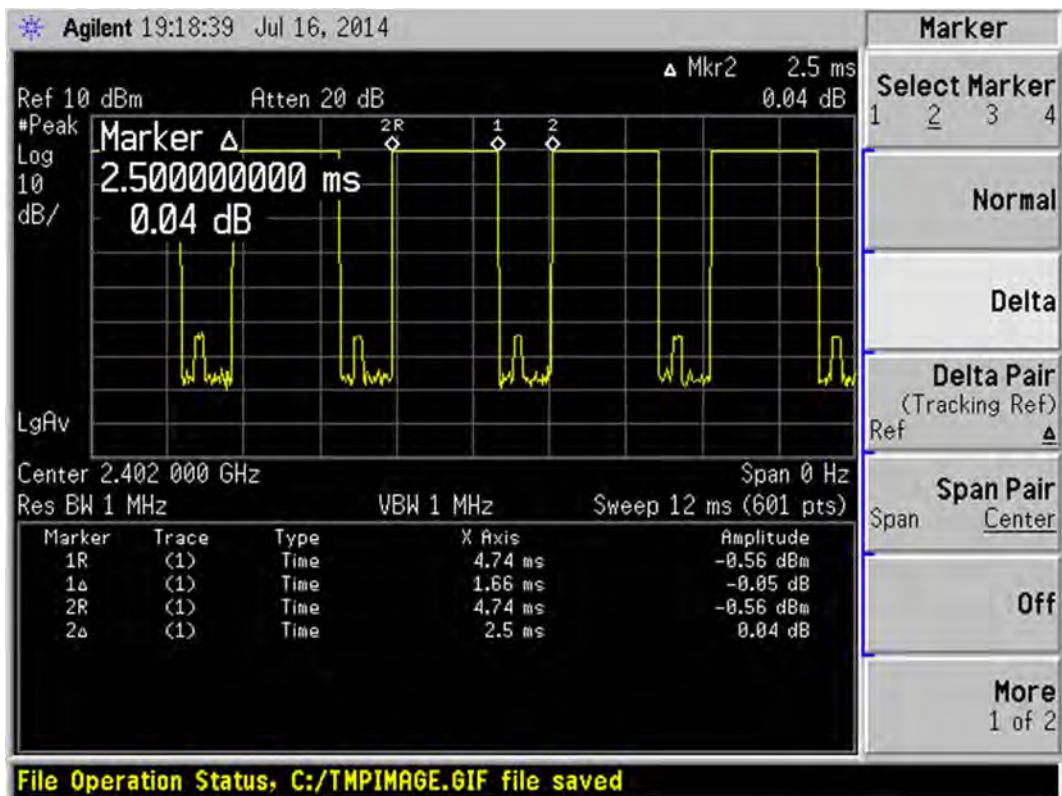


GFSK DH5

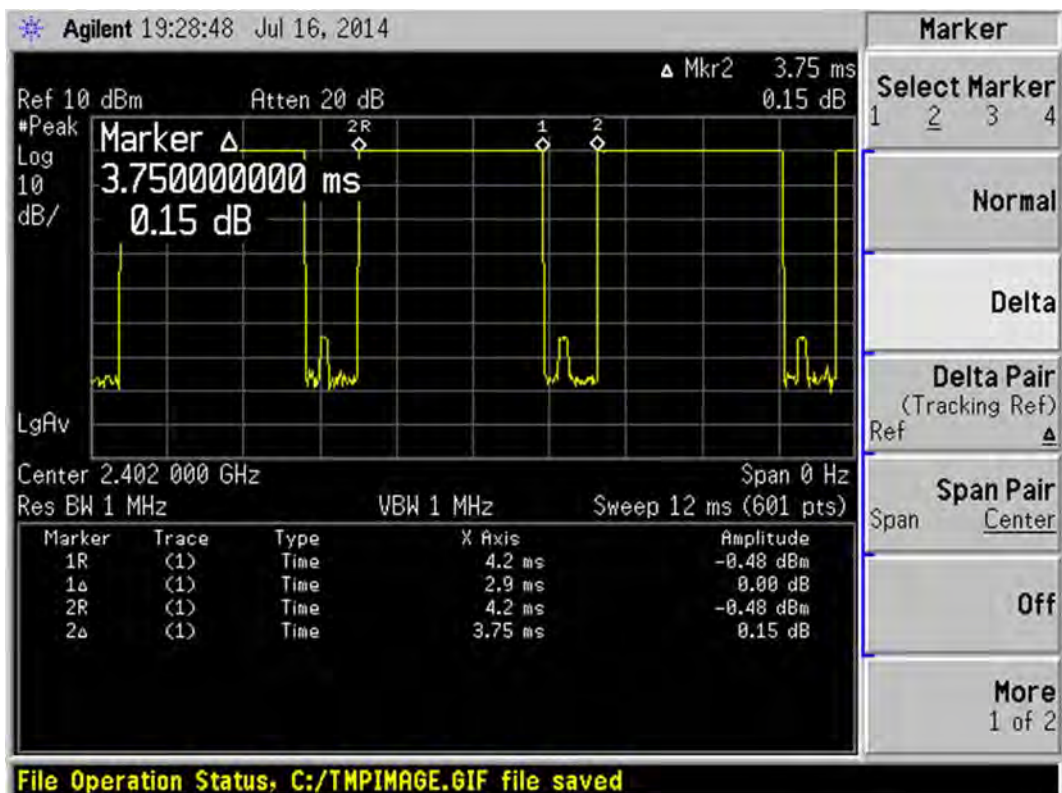


II/4-DQPSK DH1

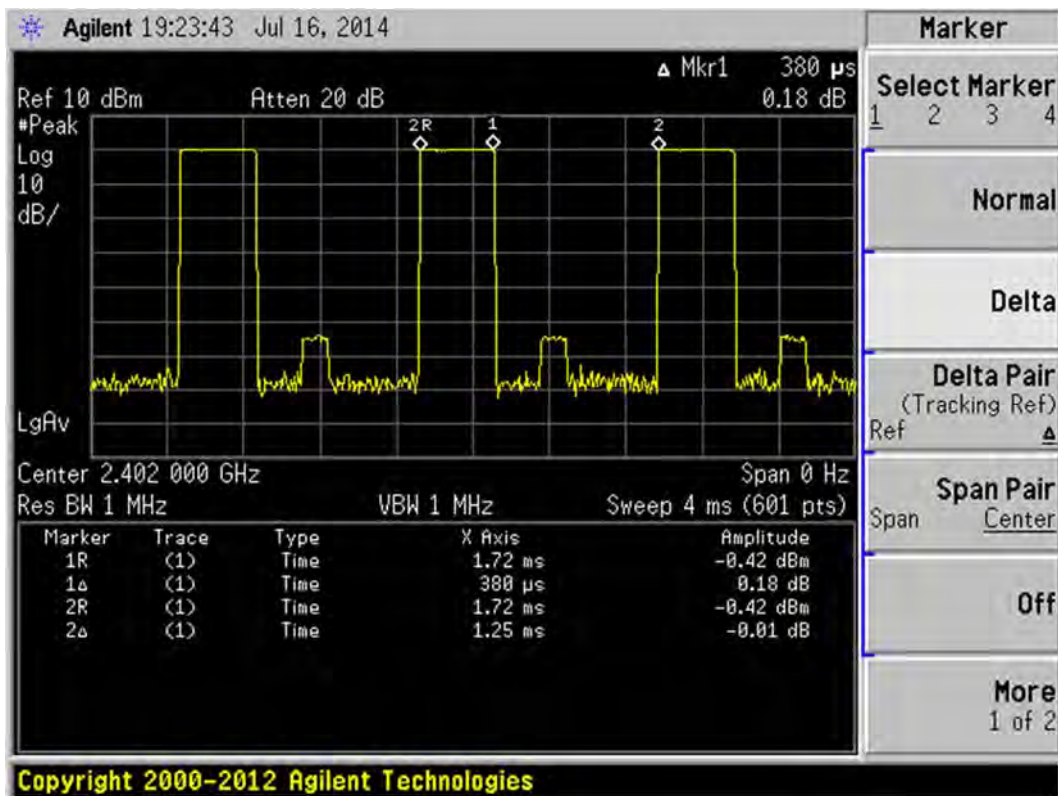

II/4-DQPSK DH3

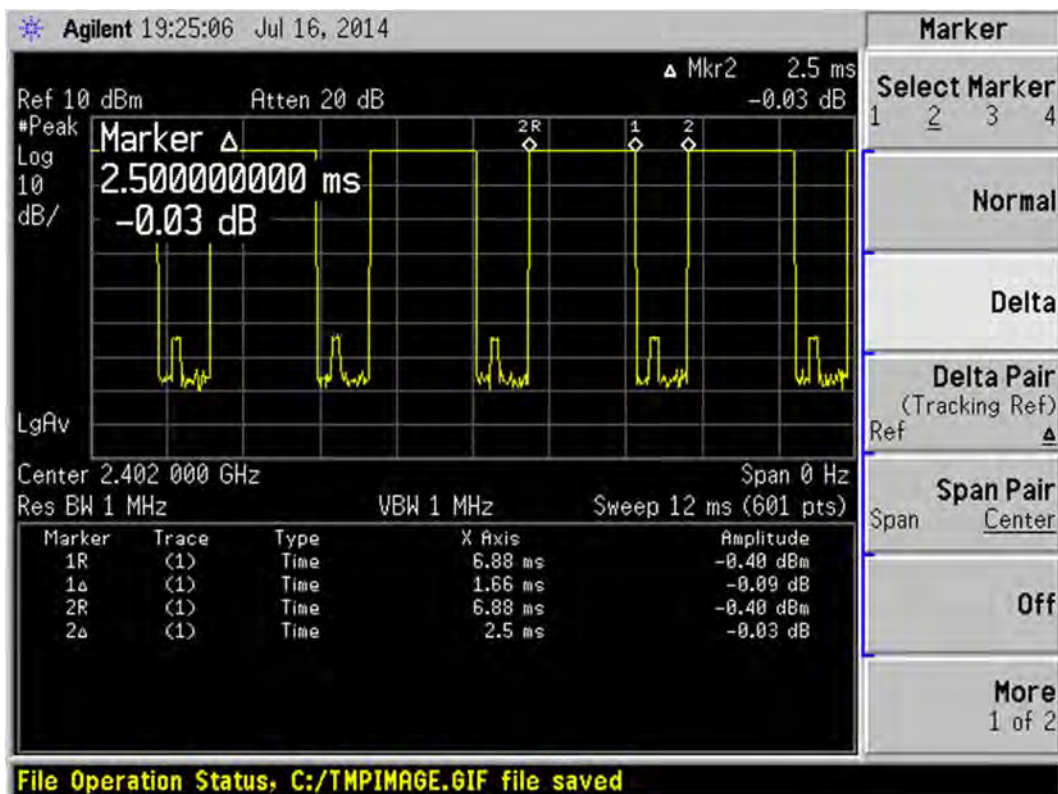

II/4-DQPSK DH5

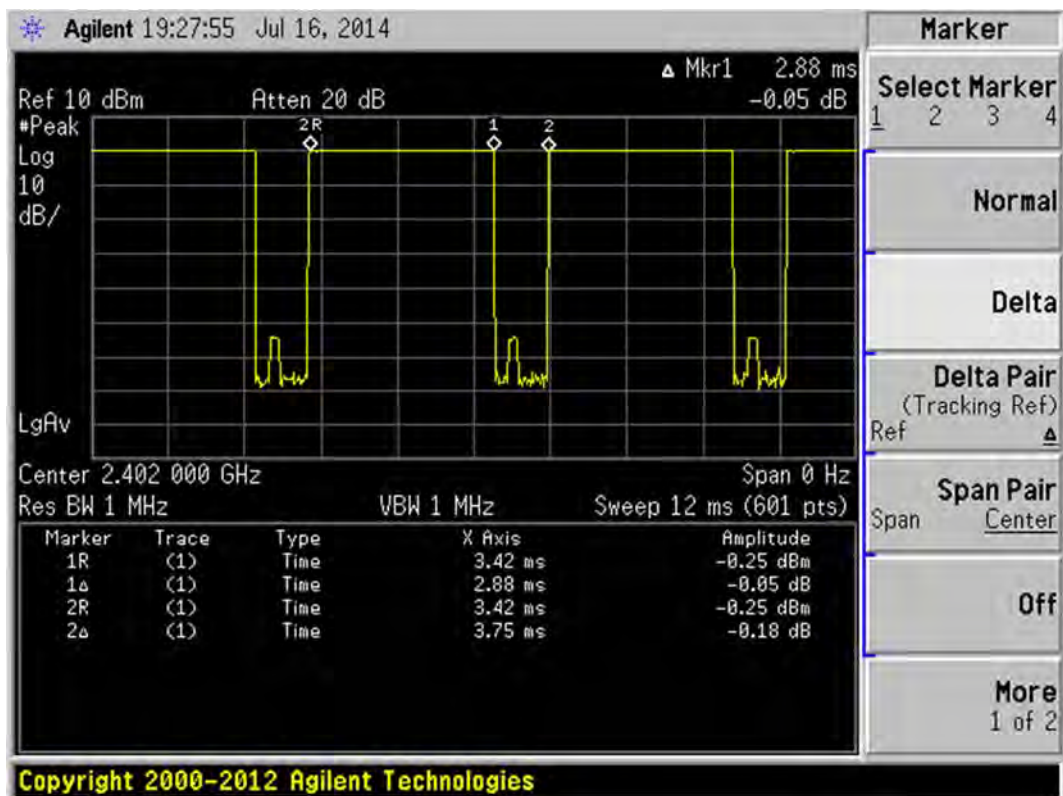

A.6 Conducted Spurious Emissions

Test Data

GFSK Mode:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated 20 dBc Limit	
0	2402	-36.70	1.94	-18.1	PASS
39	2441	-34.17	2.12	-17.9	PASS
78	2480	-36.12	2.22	-17.8	PASS

□/4-DQPSK Mode:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated 20 dBc Limit	
0	2402	-40.67	-3.33	-23.3	PASS
39	2441	-41.14	-3.23	-23.2	PASS
78	2480	-40.90	-3.63	-23.6	PASS

Test Plots


GFSK LOW CHANNEL, BANDEDGE

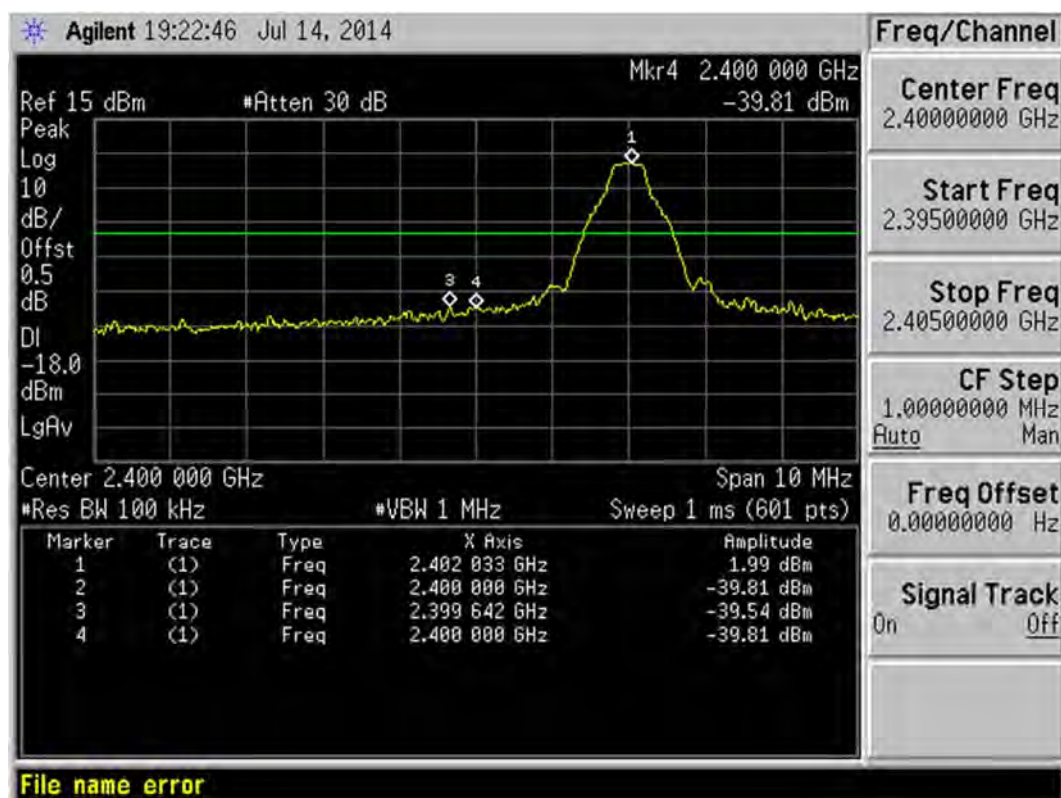


GFSK LOW CHANNEL, SPURIOUS 30MHz~3GHz

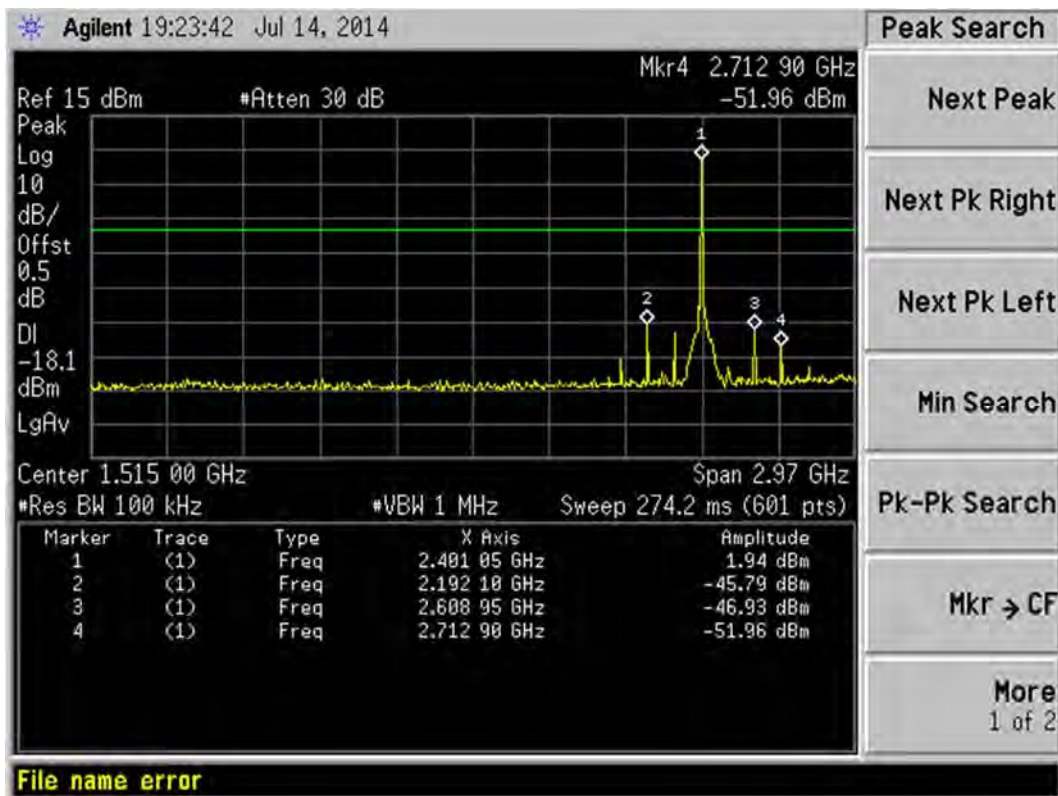


GFSK LOW CHANNEL, SPURIOUS 3GHz~25GHz

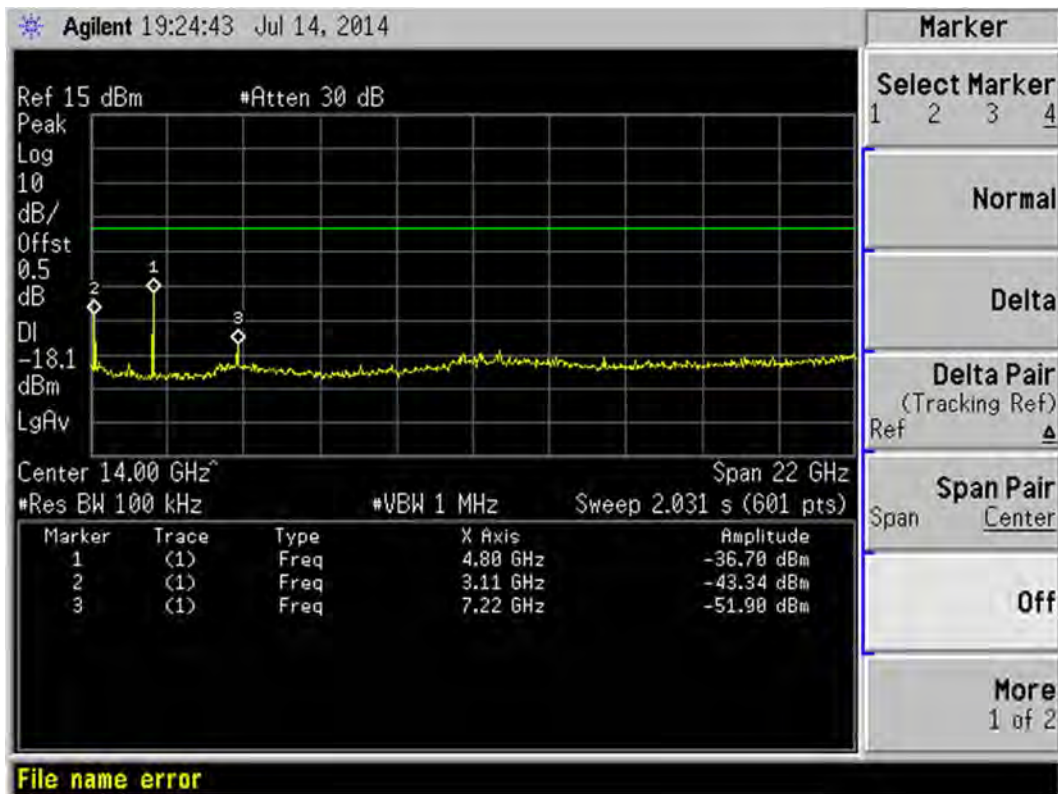


GFSK MID CHANNEL, SPURIOUS 30MHz~3GHz

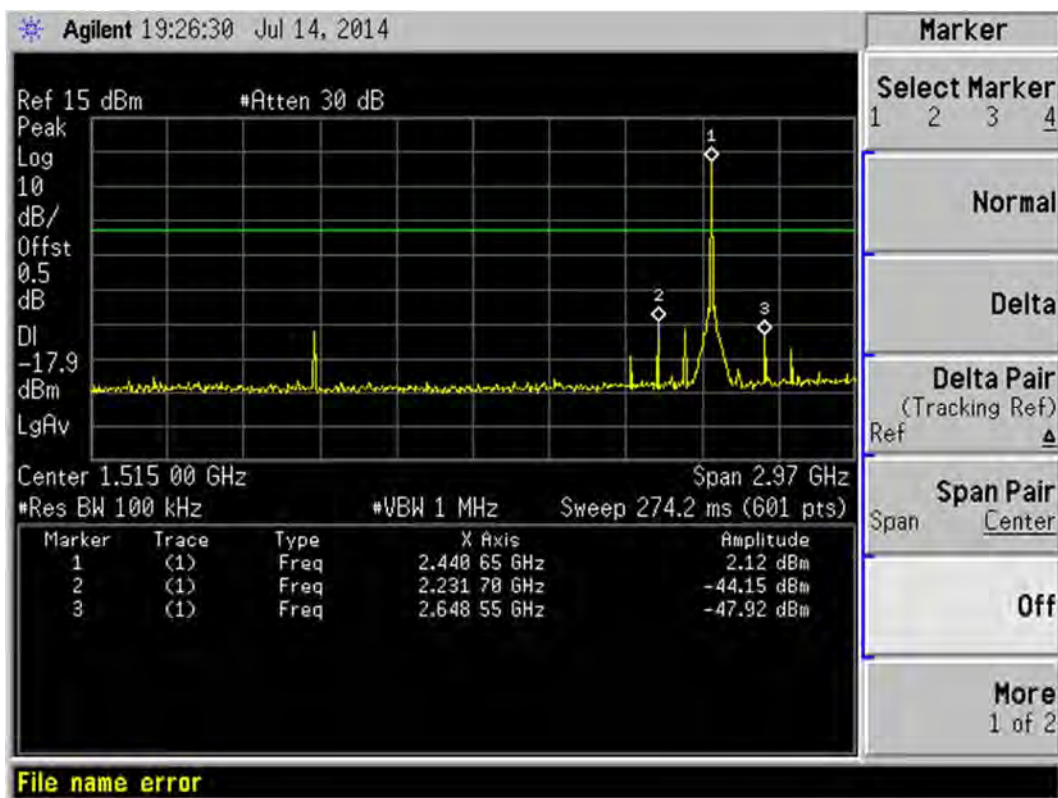


GFSK MID CHANNEL, SPURIOUS 3GHz~25GHz

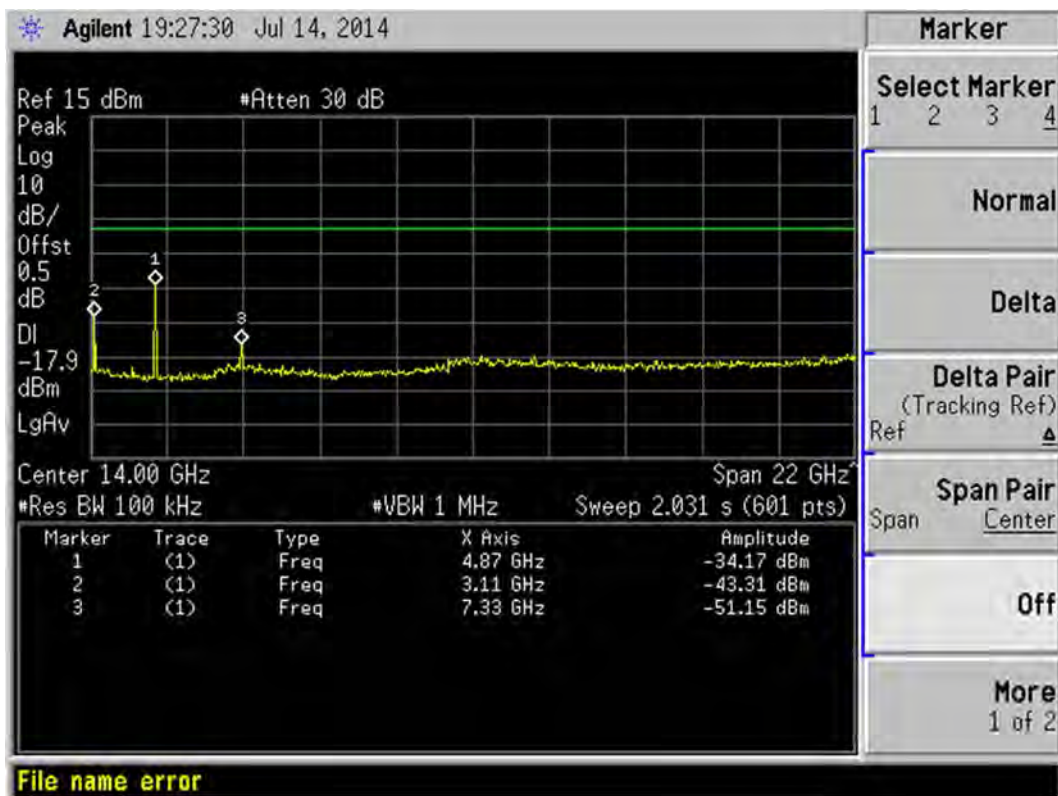


GFSK HIGH CHANNEL, BANDEDGE

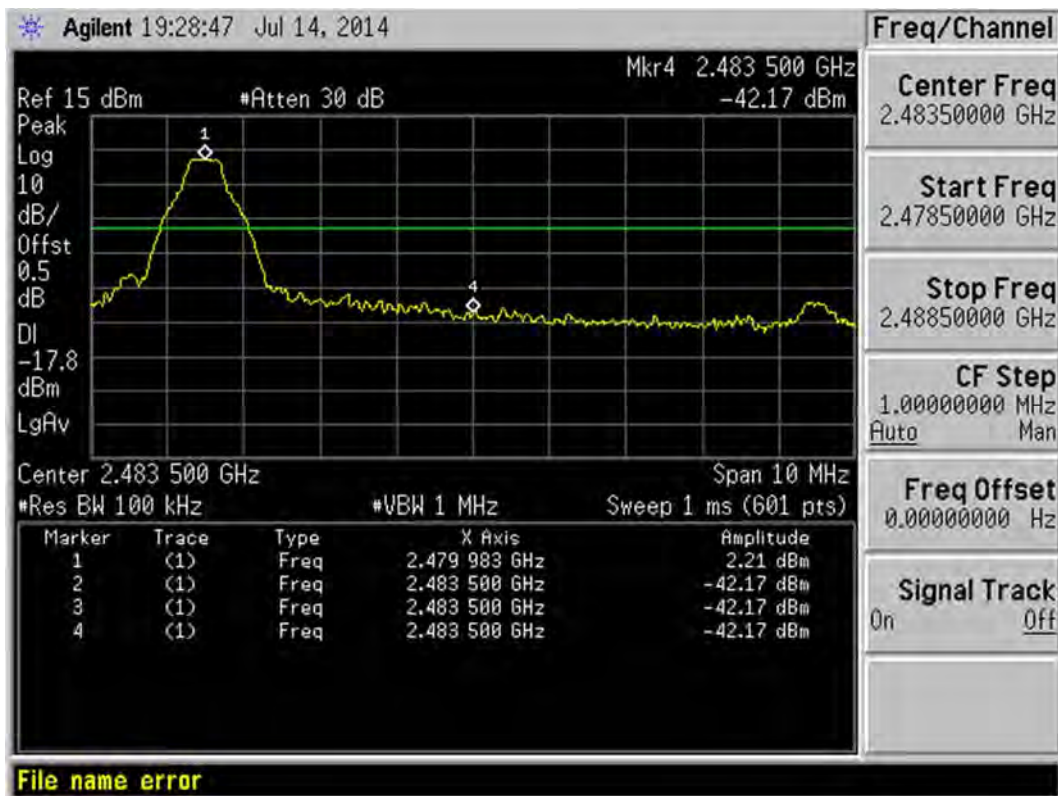


GFSK HIGH CHANNEL, SPURIOUS 30MHz~3GHz

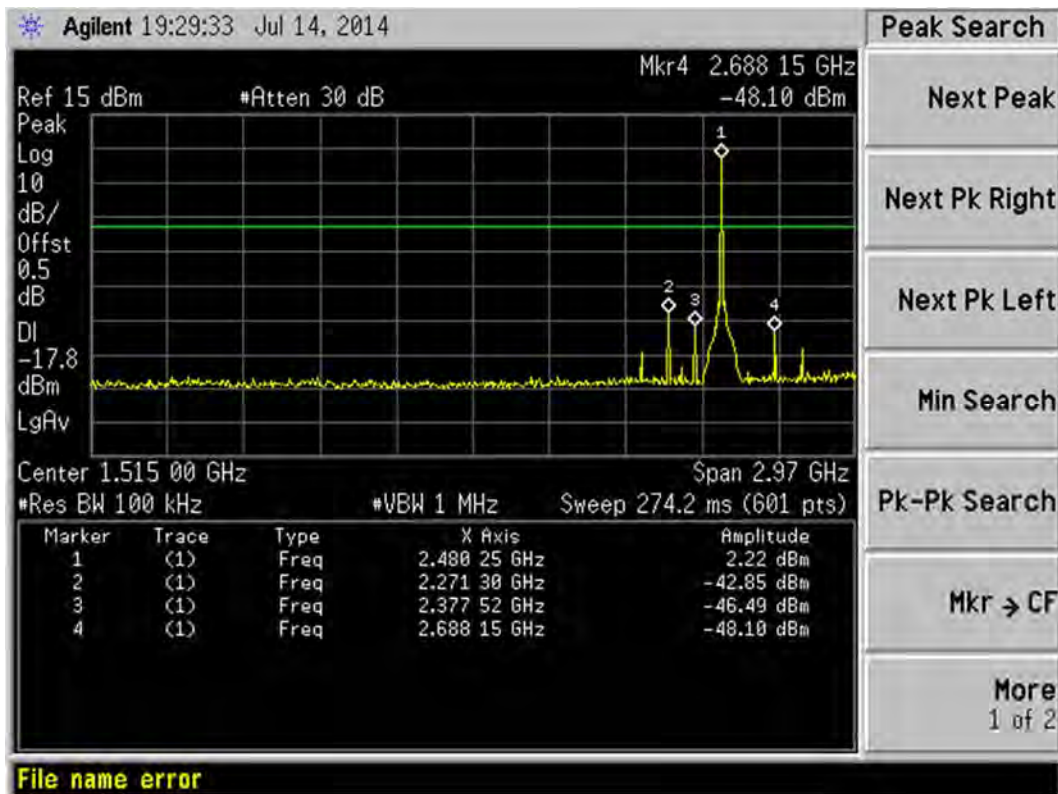


GFSK HIGH CHANNEL, SPURIOUS 3GHz~25GHz

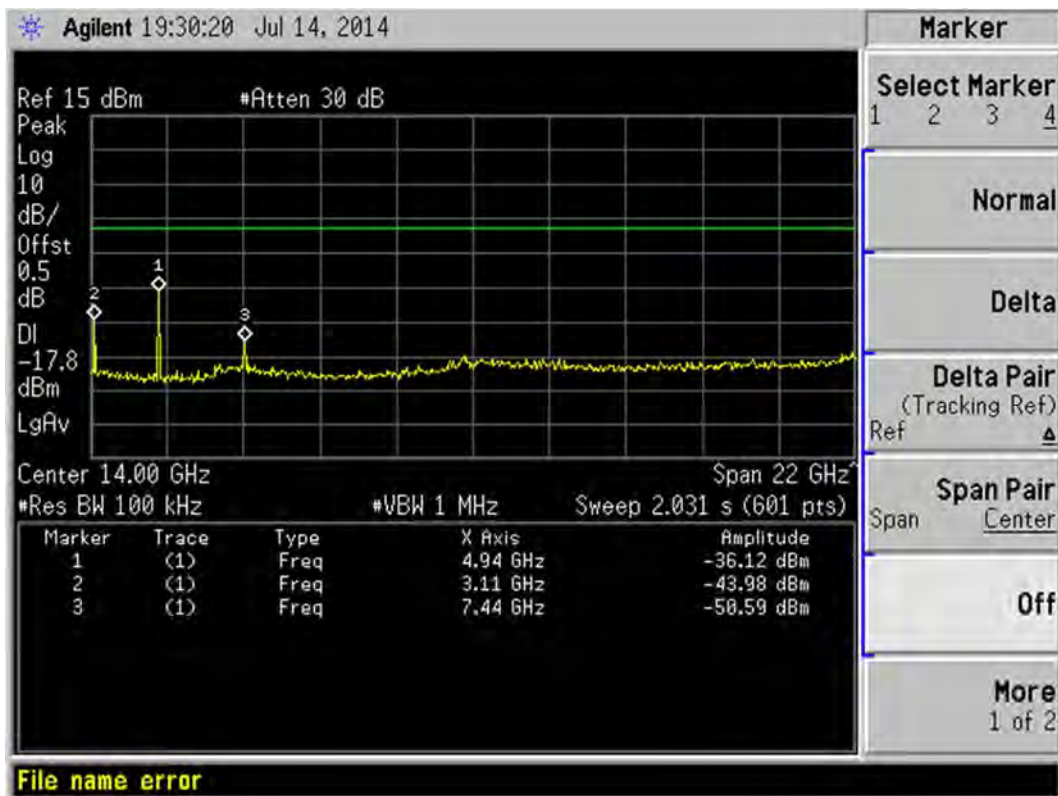


II/4-DQPSK LOW CHANNEL, BANDEDGE

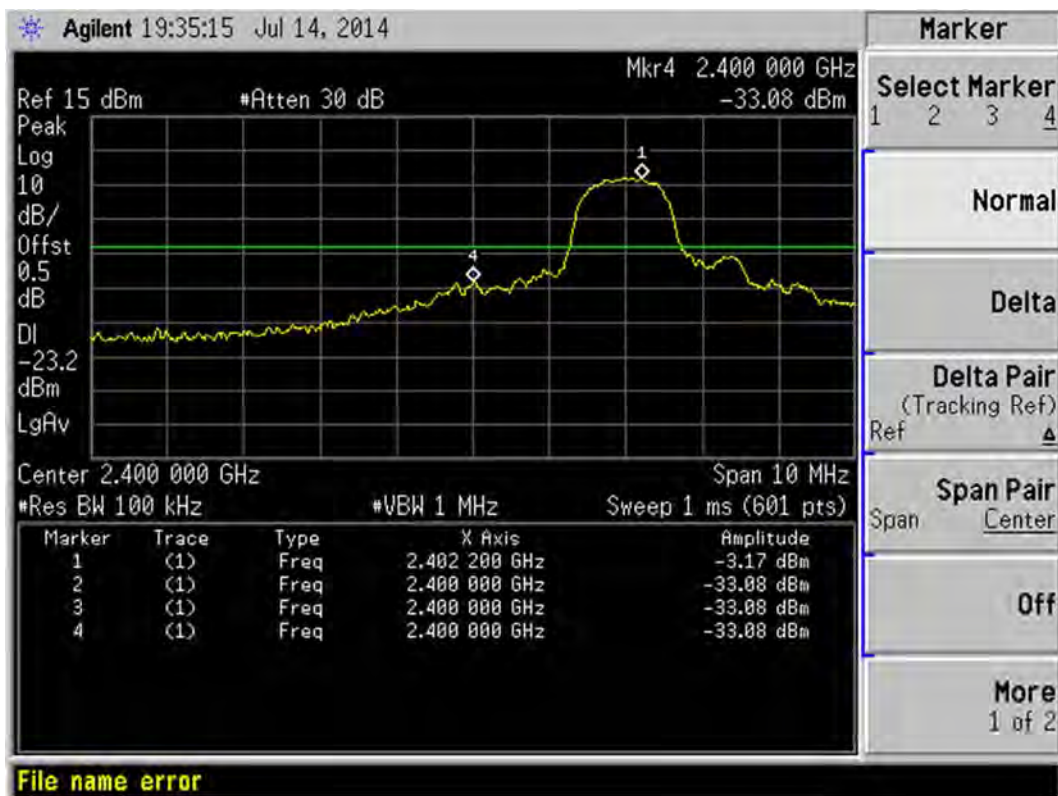


II/4-DQPSK LOW CHANNEL, SPURIOUS 30MHz~3GHz

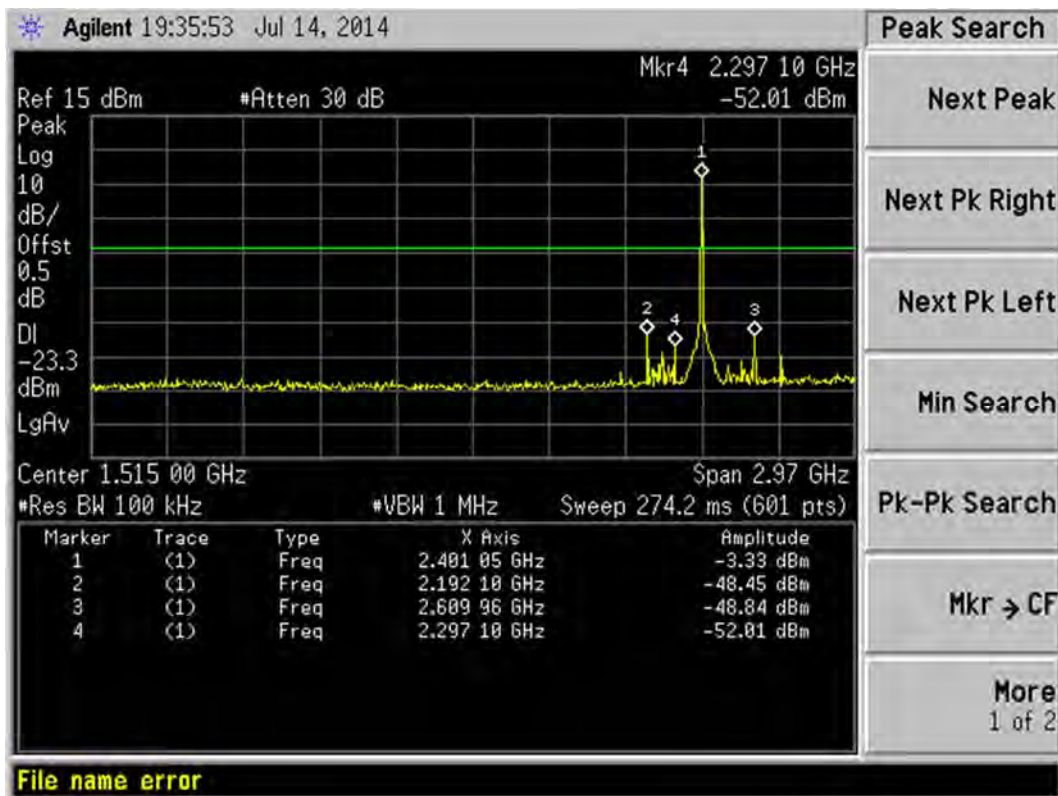


II/4-DQPSK LOW CHANNEL, SPURIOUS 3GHz~25GHz

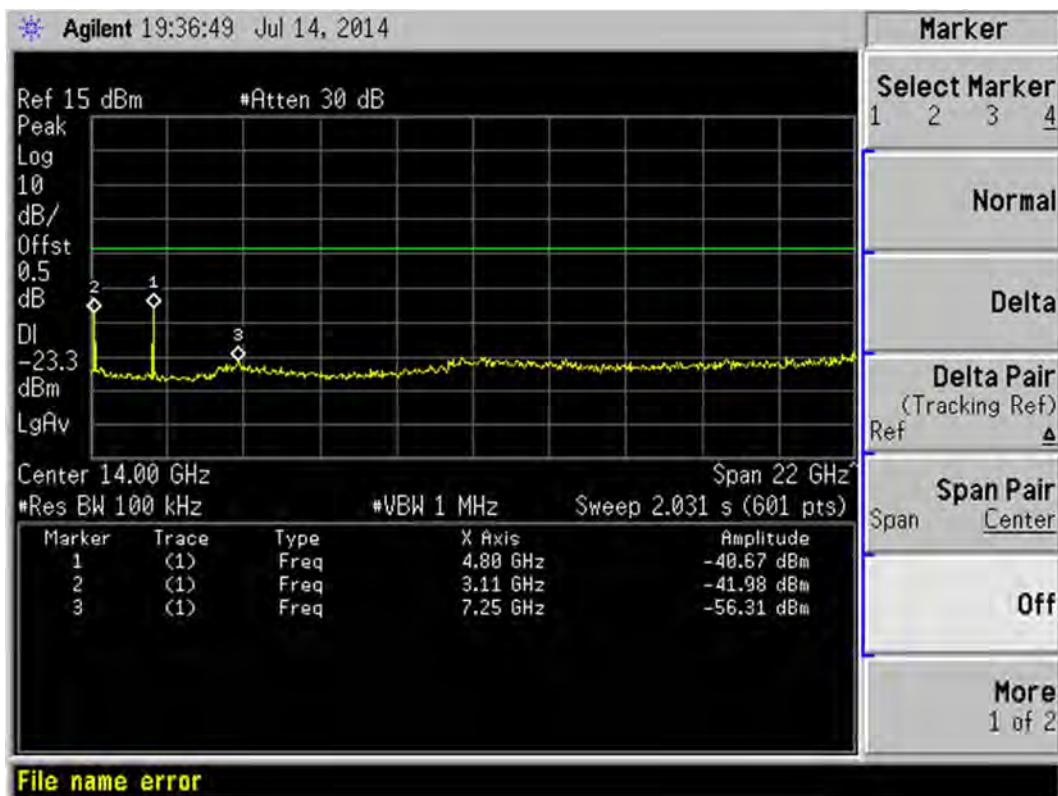


II/4-DQPSK MID CHANNEL, SPURIOUS 30MHz~3GHz

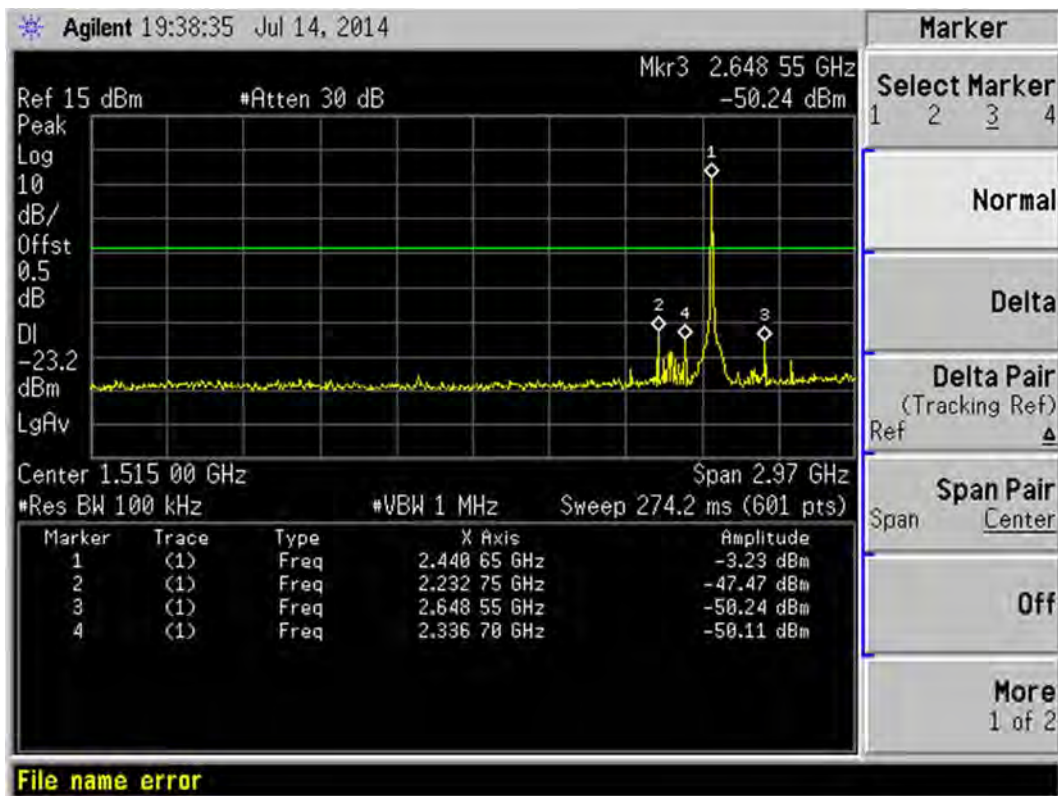


II/4-DQPSK MID CHANNEL , SPURIOUS 3GHz~25GHz

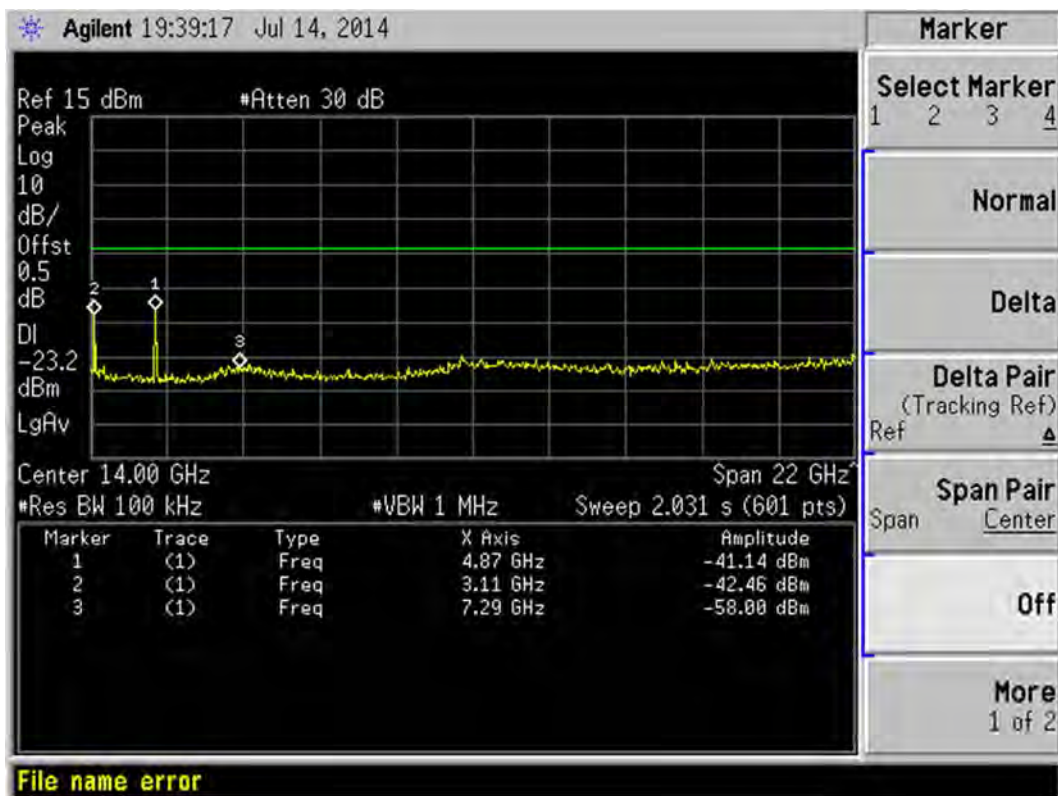


II/4-DQPSK HIGH CHANNEL , BANDEDGE

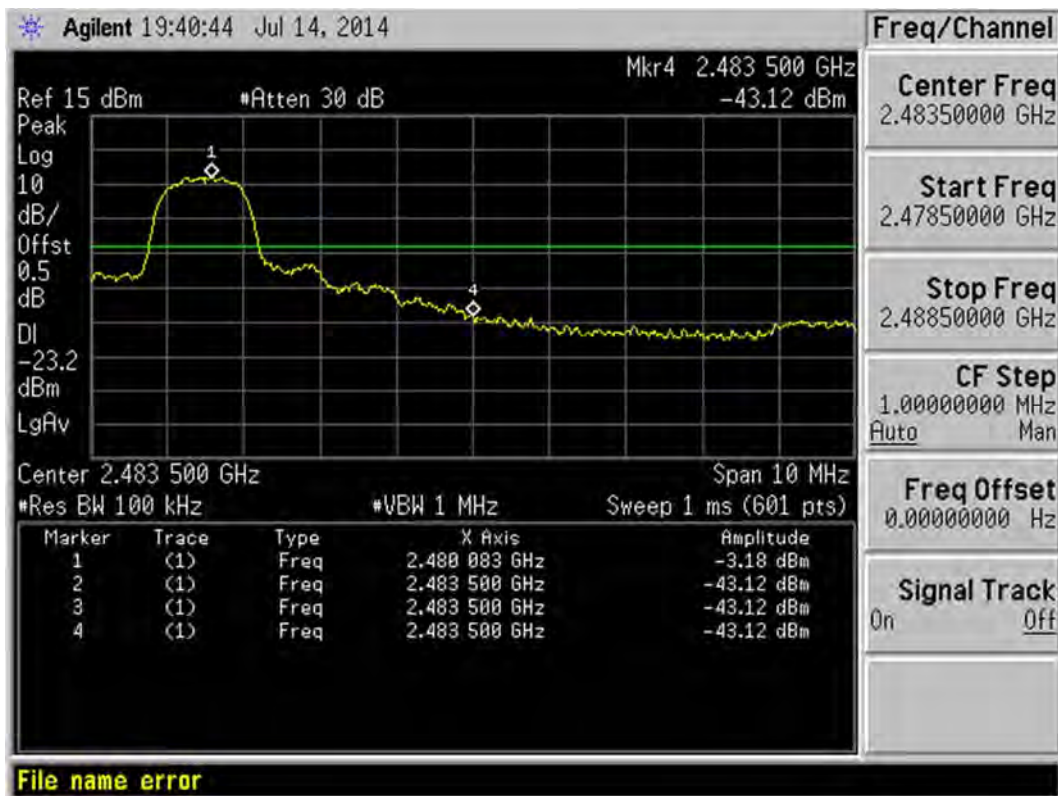

II/4-DQPSK HIGH CHANNEL, SPURIOUS 30MHz~3GHz

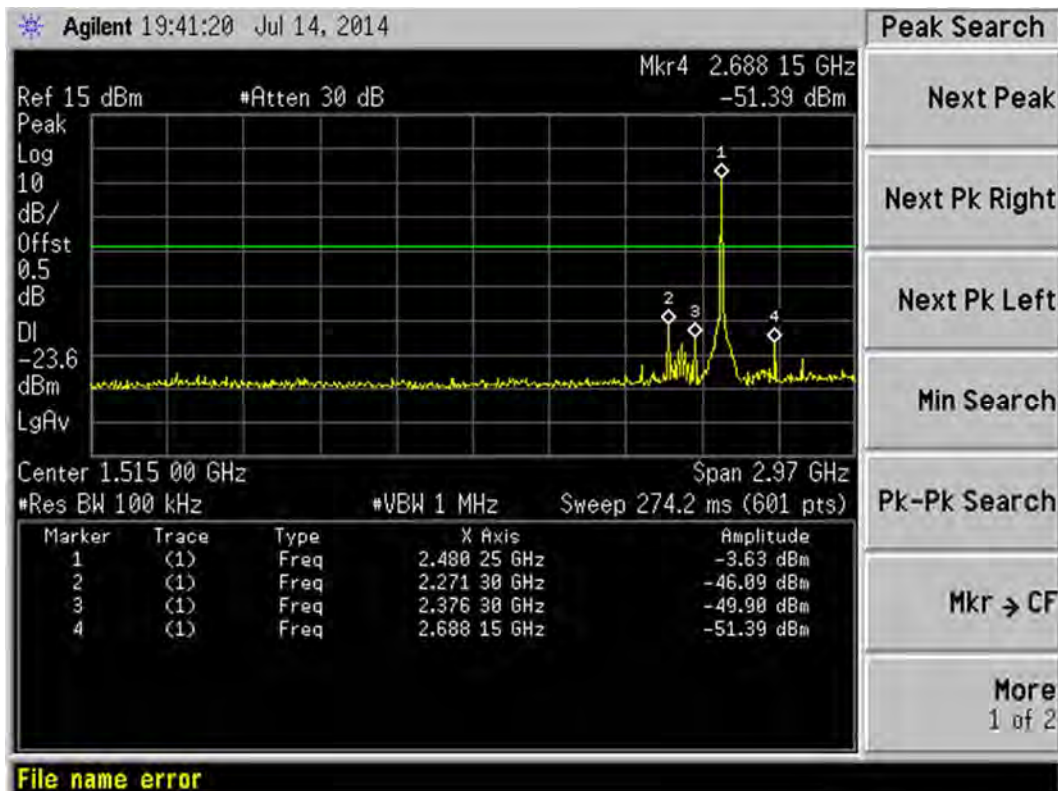

II/4-DQPSK HIGH CHANNEL, SPURIOUS 3GHz~25GHz

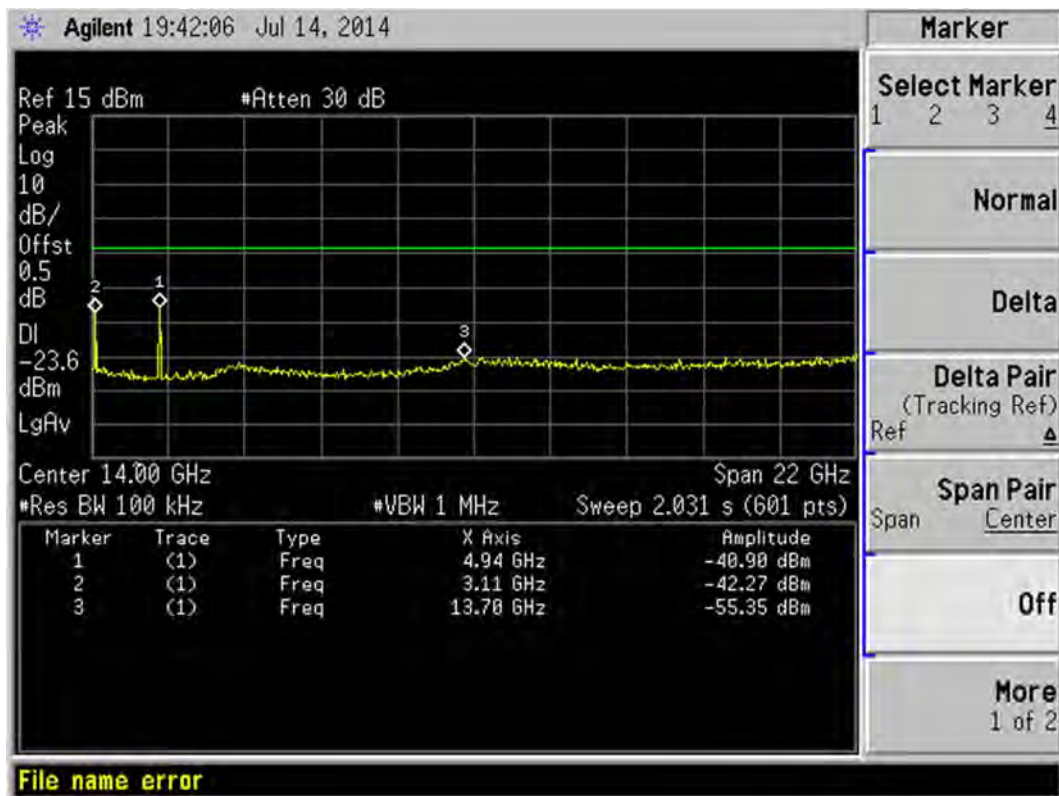


A.7 Conducted Emissions

Test Data


Frequency (MHz)	Peak Level (dBuV)	Q-peak Level (dBuV)	Average Level (dBuV)	Factor Level (dB)	QP Limit Level (dBuV)	AV Limit Level (dBuV)	Margin (dB)	Line	Verdict
0.16	51.7	--	43.9	10.00	65.6	55.6	11.70	L Line	PASS
0.55	54.0	--	41.6	10.00	56.0	46.0	4.40	L Line	PASS
1.12	45.0	--	29.5	10.00	56.0	46.0	16.50	L Line	PASS
3.37	55.48	50.70	39.50	10.00	56.0	46.0	5.30	L Line	PASS
9.91	43.9	--	36.7	10.00	60.0	50.0	13.30	L Line	PASS
16.51	47.4	--	38.8	10.00	60.0	50.0	11.20	L Line	PASS
Frequency (MHz)	Peak Level (dBuV)	Q-peak Level (dBuV)	Average Level (dBuV)	Factor Level (dB)	QP Limit Level (dBuV)	AV Limit Level (dBuV)	Margin (dB)	Line	Verdict
0.16	50.8	--	44.1	10.00	65.8	55.8	11.70	N Line	PASS
0.54	54.74	51.91	43.27	10.00	56.0	46.0	2.73	N Line	PASS
1.11	45.8	--	30.0	10.00	56.0	46.0	16.00	N Line	PASS
3.50	54.5	--	42.2	10.00	56.0	46.0	3.80	N Line	PASS
9.24	43.9	--	36.7	10.00	60.0	50.0	13.30	N Line	PASS
15.84	44.6	--	37.2	10.00	60.0	50.0	12.80	N Line	PASS

Test Plots

PHASE L

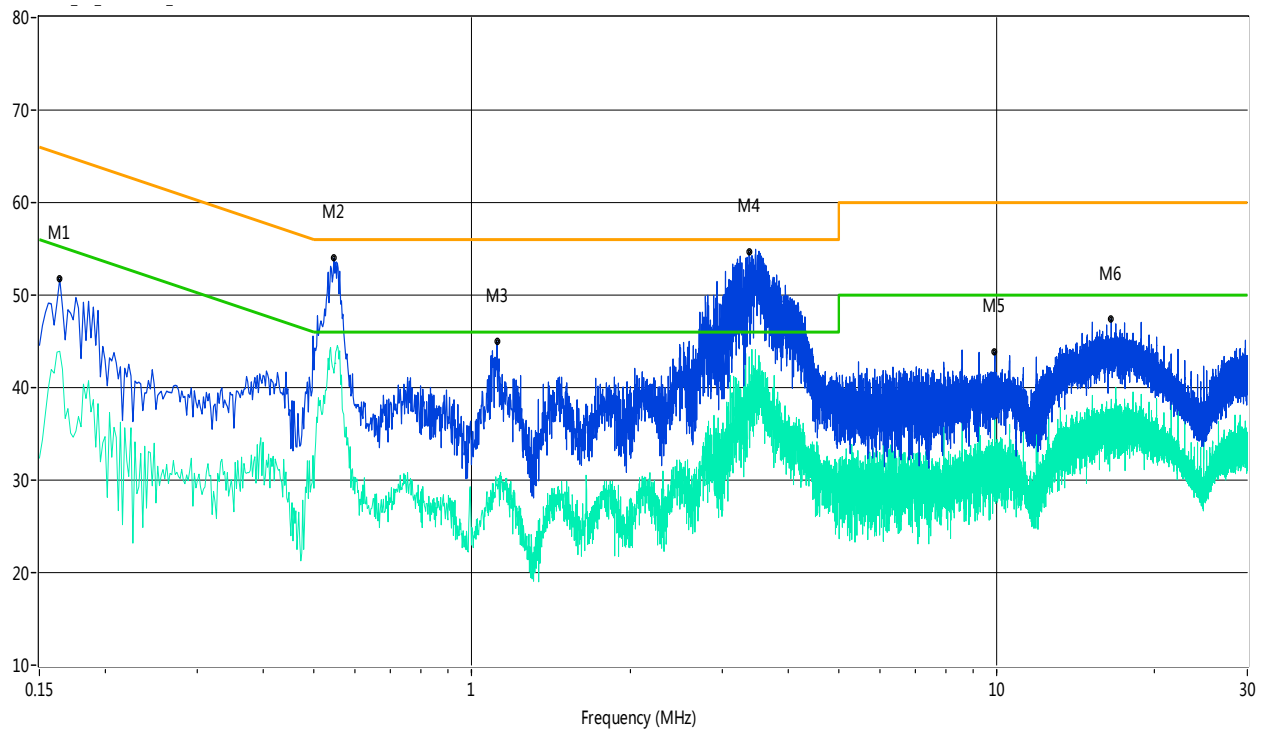

PHASE N

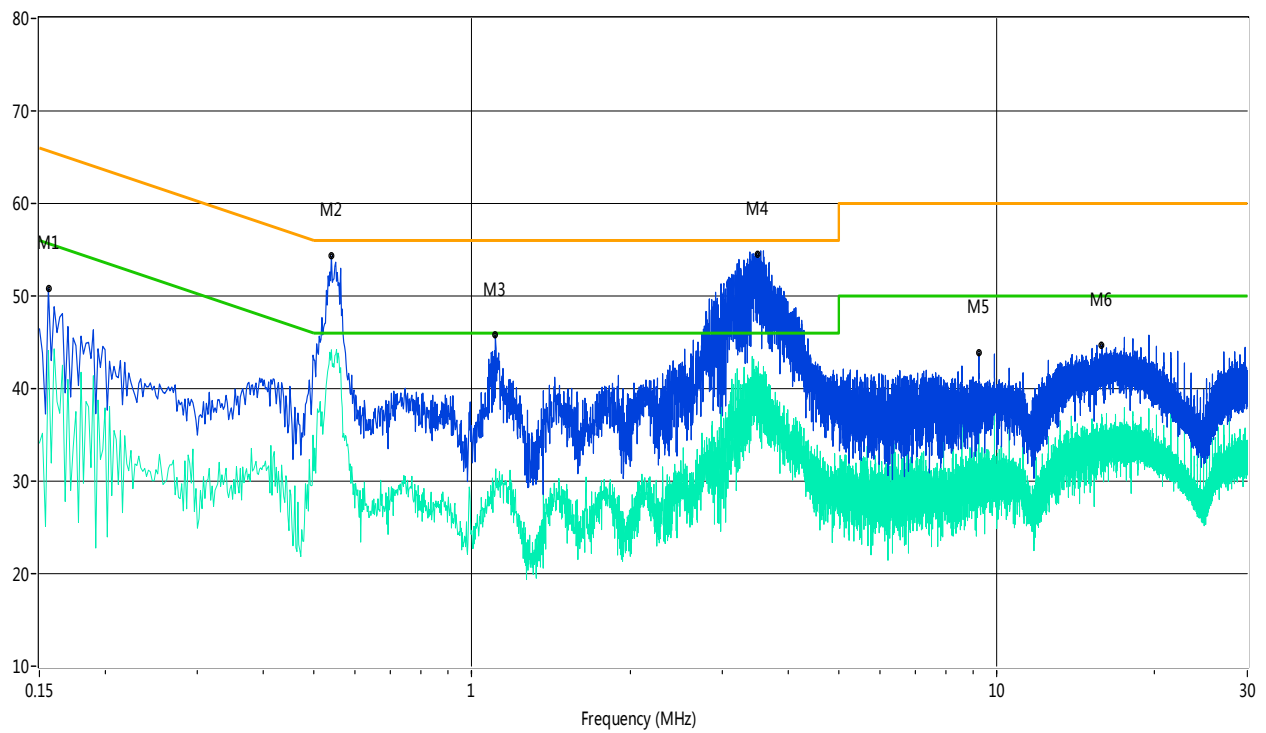


A.8 Radiated Emission

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


The worst data of 9 kHz to 1GMHz

Below 30MHz

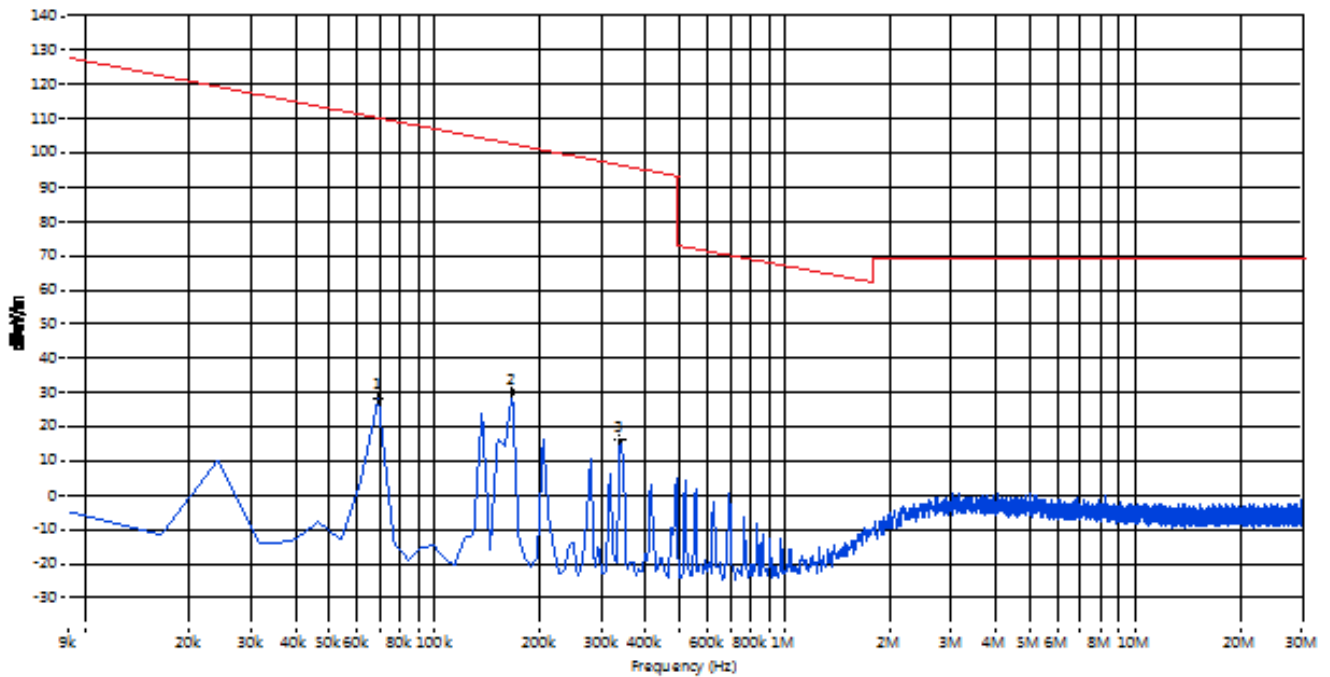


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Verdict
0.069	28.28	--	--	--	110.8	--	0.0	PASS
0.166	30.01	--	--	--	103.2	--	0.0	PASS
0.339	15.93	--	--	--	97.0	--	0.0	PASS

30MHz to 1GHz, ANT V

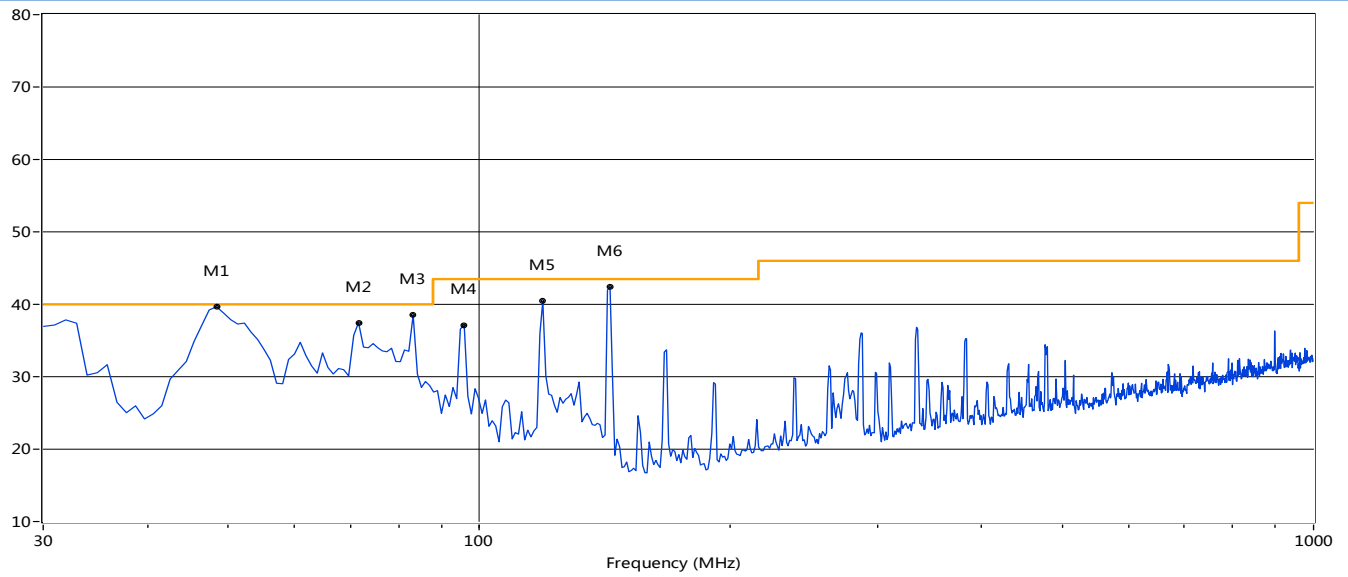

Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (°)	Height (cm)	ANT	Verdict
47.44	39.23	--	--	-18.02	--	40.0	--	0.77	313.20	100	Vertical	PASS
71.67	37.49	--	--	-22.82	--	40.0	--	2.51	135.80	100	Vertical	PASS
83.30	38.51	--	--	-23.31	--	40.0	--	1.49	306.30	100	Vertical	PASS
95.89	37.14	--	--	-20.33	--	43.5	--	6.36	360.00	100	Vertical	PASS
119.15	40.42	--	--	-21.20	--	43.5	--	3.08	360.00	100	Vertical	PASS
143.38	42.40	--	--	-23.15	--	43.5	--	1.10	320.00	100	Vertical	PASS

30MHz to 1GHz, ANT H

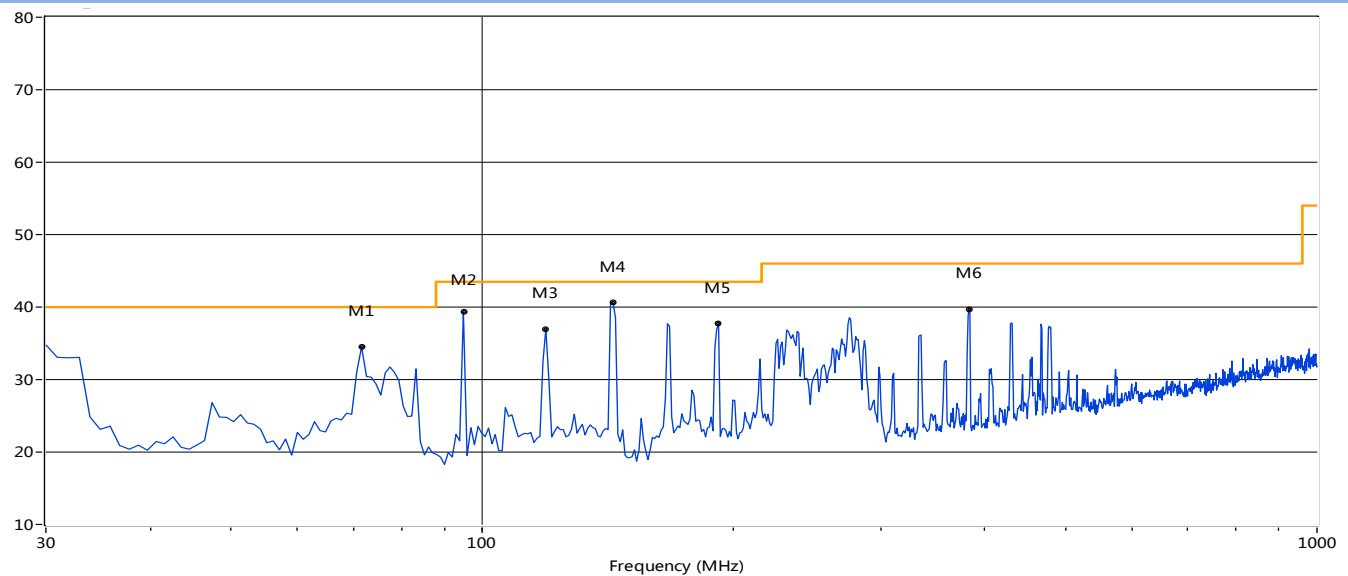


Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (°)	Height (cm)	ANT	Verdict
71.67	34.50	--	--	-22.82	--	40.0	--	5.50	279.10	100	Horizontal	PASS
94.93	39.30	--	--	-20.46	--	43.5	--	4.20	359.40	100	Horizontal	PASS
119.15	36.93	--	--	-21.20	--	43.5	--	6.57	108.10	100	Horizontal	PASS
143.38	40.59	--	--	-23.15	--	43.5	--	2.91	198.30	100	Horizontal	PASS
191.83	37.72	--	--	-20.51	--	43.5	--	5.78	262.60	100	Horizontal	PASS
382.73	39.74	--	--	-15.31	--	46.0	--	6.26	346.30	100	Horizontal	PASS

Note: The marked spikes near 2400MHz with circle should be ignored because they are Fundamental signal.

Test Data and Plots(1GHz ~ 10th Harmonic)

GFSK LOW CHANNEL 1GHz to 6GHz, ANT V


RE Test case_FCC 15C 1GHz-6GHz

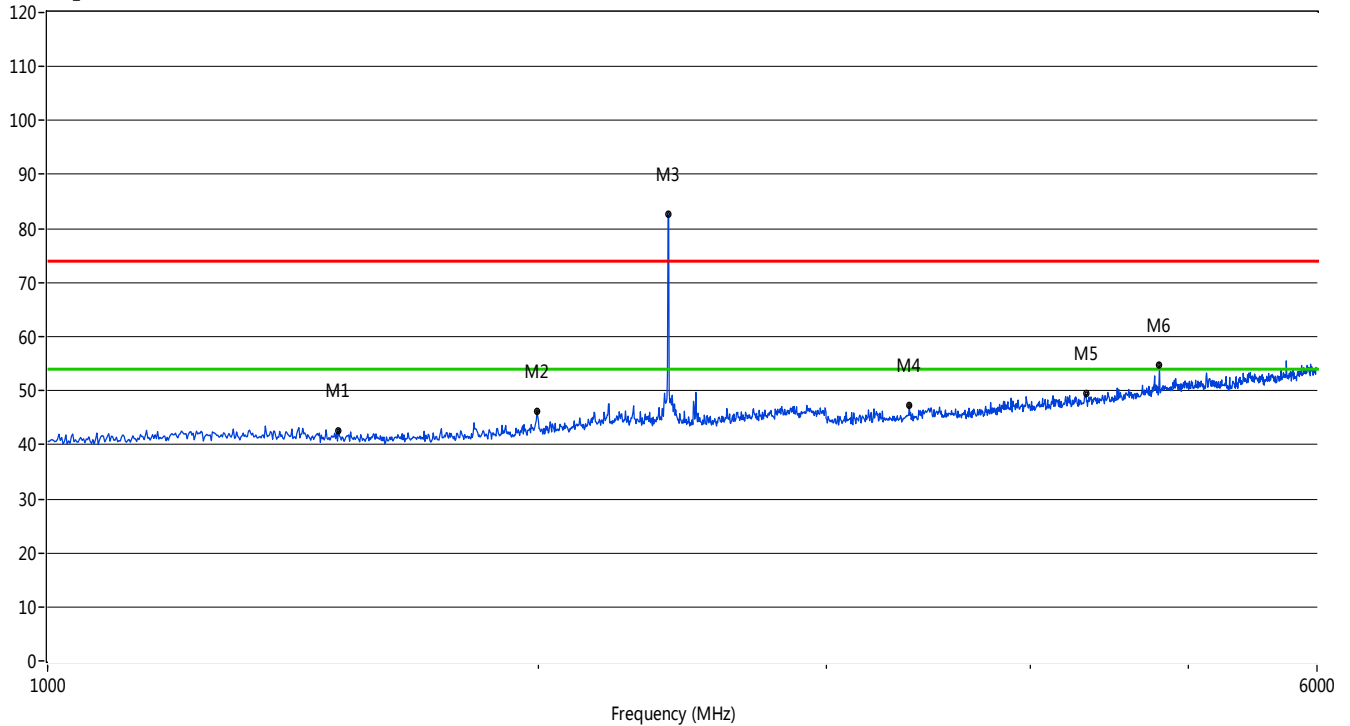

Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (°)	Height (cm)	ANT	Verdict
1507.49	42.58	--	--	-4.38	74.0	--	54.0	11.42	27.10	100	Vertical	PASS
1995.00	46.22	--	--	-2.89	74.0	--	54.0	7.78	8.20	100	Vertical	PASS
2400.60	82.60	--	--	-0.67	N/A	--	N/A	--	198.80	100	Vertical	N/A
3374.63	47.32	--	--	8.36	74.0	--	54.0	6.68	73.30	100	Vertical	PASS
4330.67	49.38	--	--	10.66	74.0	--	54.0	4.62	1.90	100	Vertical	PASS
4804.20	54.71	--	46.52	12.35	74.0	--	54.0	-0.71	104.00	100	Vertical	PASS


GFSK LOW CHANNEL 1GHz to 6GHz, ANT H

RE Test case_FCC 15C 1GHz-6GHz

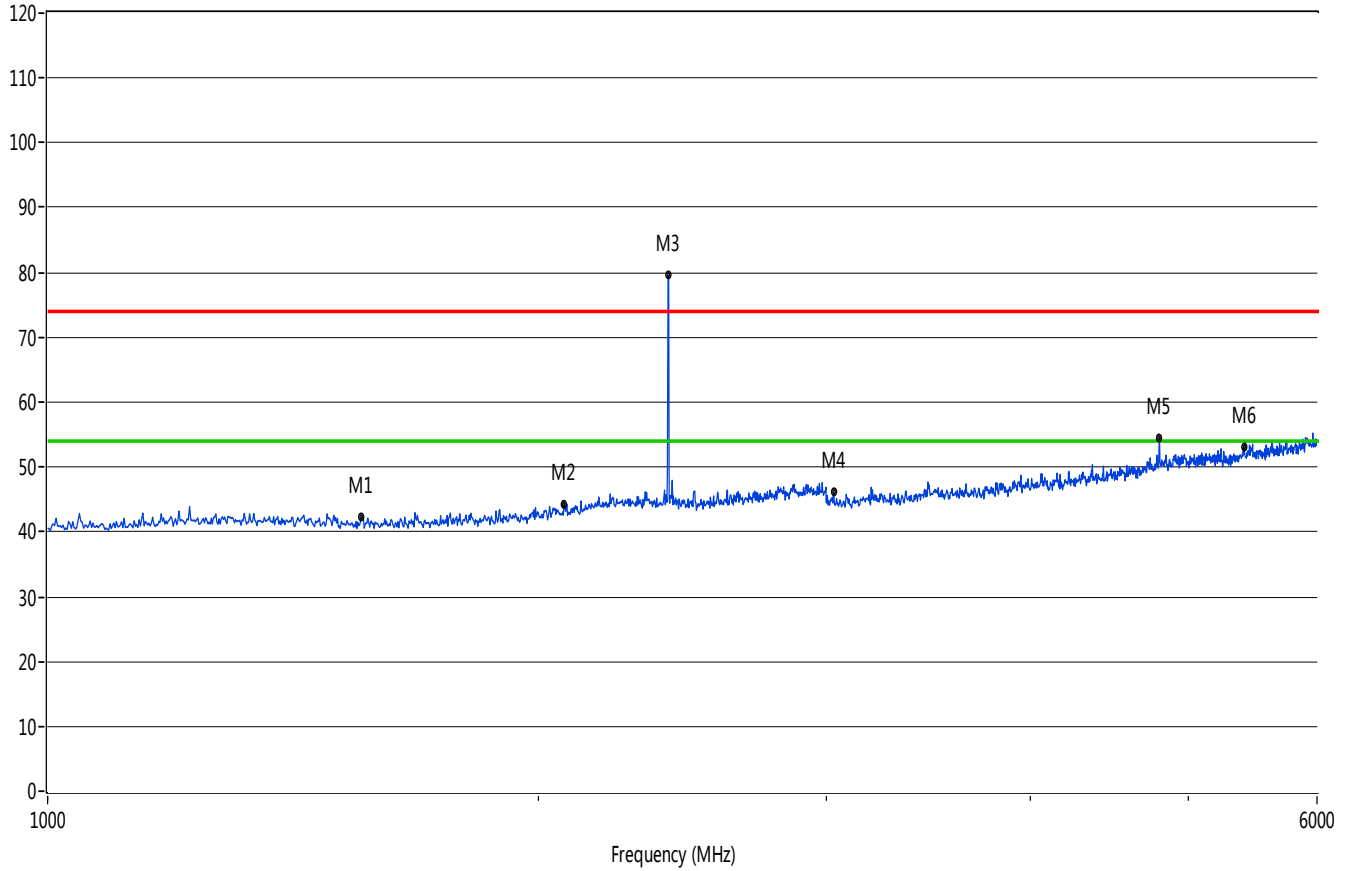


Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (°)	Height (cm)	ANT	Verdict
1557.44	42.28	--	--	-4.39	74.0	--	54.0	11.72	123.90	100	Horizontal	PASS
2072.93	44.35	--	--	-2.21	74.0	--	54.0	9.65	230.10	100	Horizontal	PASS
2400.60	79.61	--	--	-0.67	N/A	--	N/A	--	137.70	100	Horizontal	N/A
3032.97	46.09	--	--	7.73	74.0	--	54.0	7.91	207.30	100	Horizontal	PASS
4804.200	54.55	--	44.36	12.35	74.0	--	54.0	9.64	173.50	100	Horizontal	PASS
5412.59	53.14	--	--	13.16	74.0	--	54.0	0.86	254.50	100	Horizontal	PASS

GFSK LOW CHANNEL 6GHz to 25GHz, ANT V

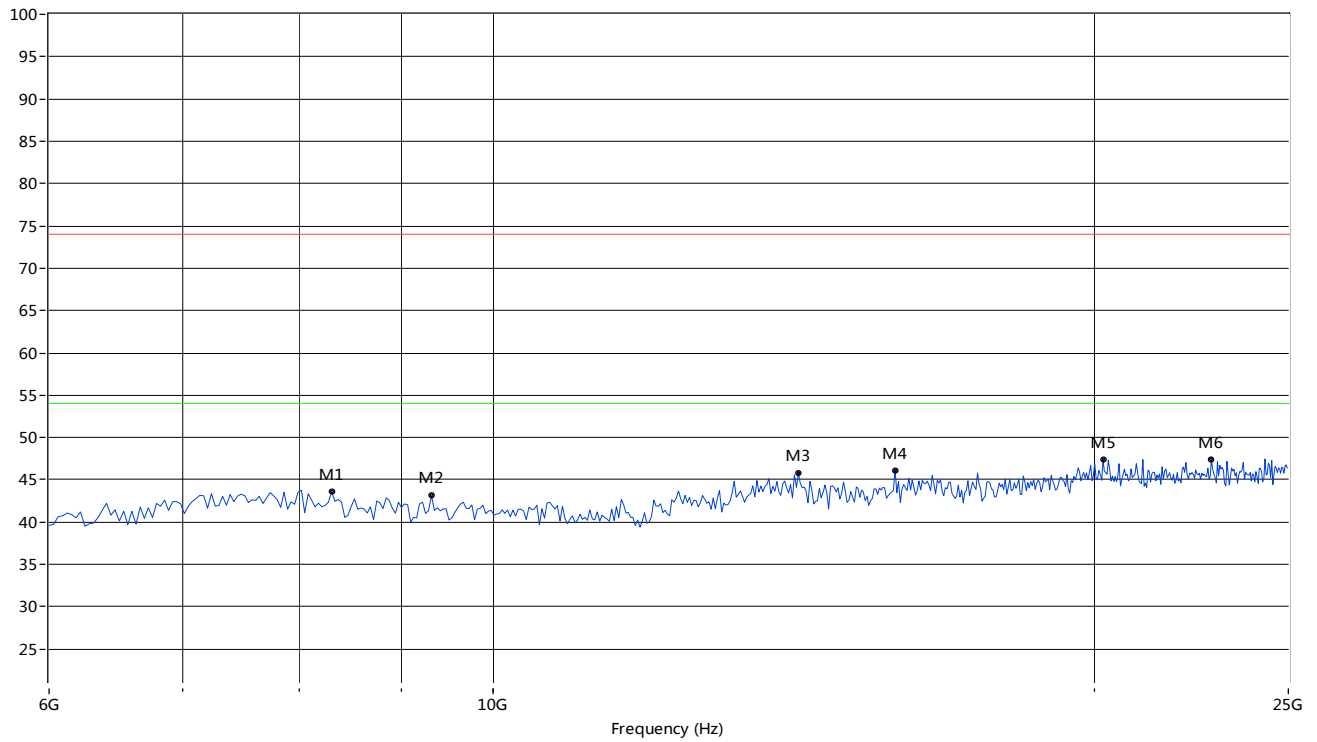

No.	Fre.(MHz)	Peak	Q-Peak	Average	PK Limit	QP Limit	AV Limit	Margin	Table	Polarization	Verdict
1	8307.82	43.58	--	--	74.0	--	54.0	30.42	253	Vertical	PASS
2	9319.47	43.12	--	--	74.0	--	54.0	30.88	150	Vertical	PASS
3	14219.63	45.85	--	--	74.0	--	54.0	28.15	340	Vertical	PASS
4	15895.17	46.13	--	--	74.0	--	54.0	27.87	154	Vertical	PASS
5	20194.68	47.46	--	--	74.0	--	54.0	26.54	127	Vertical	PASS
6	22881.86	47.38	--	--	74.0	--	54.0	26.62	5	Vertical	PASS


GFSK LOW CHANNEL 6GHz to 25GHz, ANT H

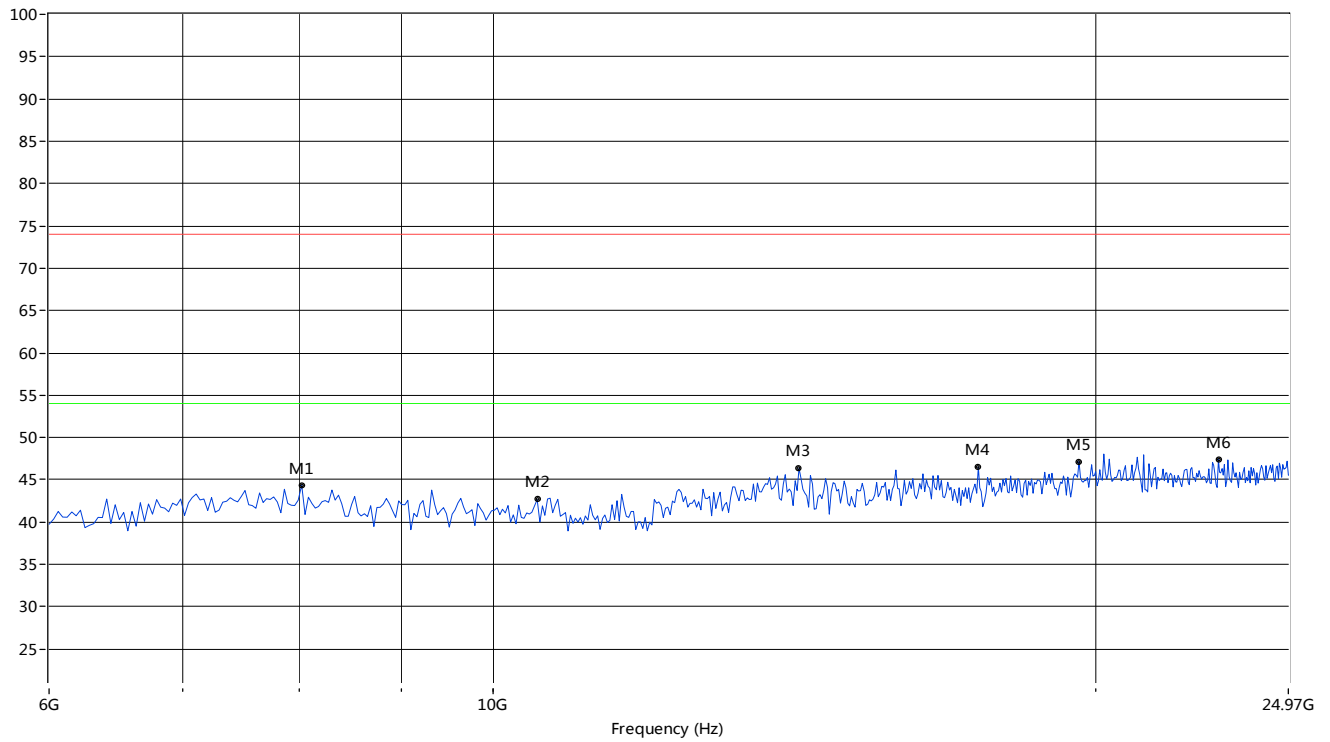

No.	Fre.(MHz)	Peak	Q-Peak	Average	PK Limit	QP Limit	AV Limit	Margin	Table	Polarization	Verdict
1	8023.29	44.38	--	--	74.0	--	54.0	29.62	152	Horizontal	PASS
2	10520.80	42.66	--	--	74.0	--	54.0	31.34	277	Horizontal	PASS
3	14219.63	46.34	--	--	74.0	--	54.0	27.66	51	Horizontal	PASS
4	17475.87	46.54	--	--	74.0	--	54.0	27.46	42	Horizontal	PASS
5	19625.62	47.15	--	--	74.0	--	54.0	26.85	275	Horizontal	PASS
6	23039.93	47.38	--	--	74.0	--	54.0	26.62	346	Horizontal	PASS

GFSK MID CHANNEL 1GHz to 6GHz, ANT V


RE Test case_FCC 15C 1GHz-6GHz

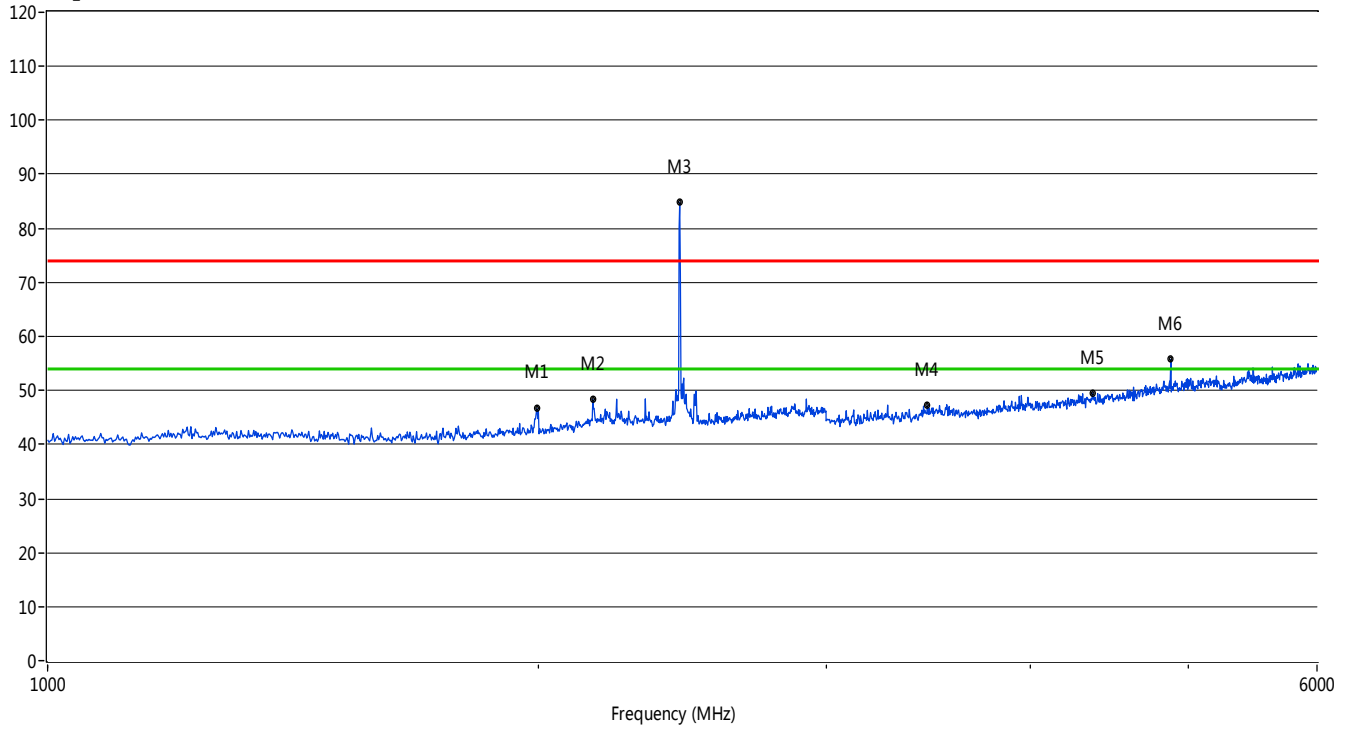

Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (°)	Height (cm)	ANT	Verdict
1995.00	46.64	--	--	-2.89	74.0	--	54.0	7.36	239.50	100	Vertical	PASS
2158.84	48.37	--	--	-1.34	74.0	--	54.0	5.63	225.80	100	Vertical	PASS
2440.56	84.80	--	--	-0.54	N/A	--	N/A	--	216.20	100	Vertical	N/A
3461.54	47.18	--	--	8.96	74.0	--	54.0	6.82	146.00	100	Vertical	PASS
4369.63	49.52	--	--	10.92	74.0	--	54.0	4.48	64.90	100	Vertical	PASS
4882.12	55.78	--	47.32	12.34	74.0	--	54.0	-1.78	105.30	100	Vertical	PASS


GFSK MID CHANNEL 1GHz to 6GHz, ANT H

RE Test case_FCC 15C 1GHz-6GHz

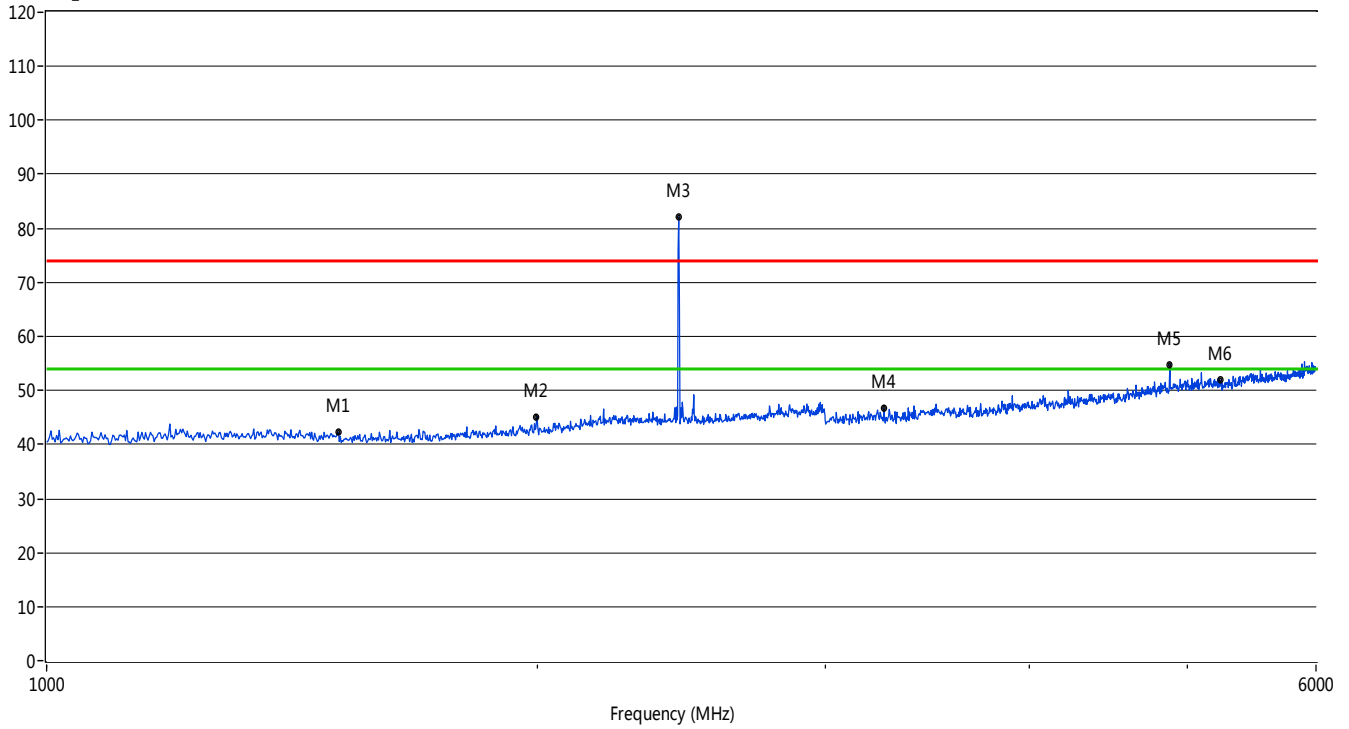


Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (°)	Height (cm)	ANT	Verdict
1509.49	42.31	--	--	-4.38	74.0	--	54.0	11.69	120.90	100	Horizontal	PASS
1997.00	45.17	--	--	-2.88	74.0	--	54.0	8.83	245.90	100	Horizontal	PASS
2440.56	82.15	--	--	-0.54	N/A	--	N/A	--	139.60	100	Horizontal	N/A
3260.74	46.78	--	--	8.10	74.0	--	54.0	7.22	212.90	100	Horizontal	PASS
4882.12	54.86	--	46.35	12.34	74.0	--	54.0	7.65	165.90	100	Horizontal	PASS
5244.76	51.95	--	--	12.51	74.0	--	54.0	2.05	152.40	100	Horizontal	PASS

GFSK MID CHANNEL 6GHz to 25GHz, ANT V

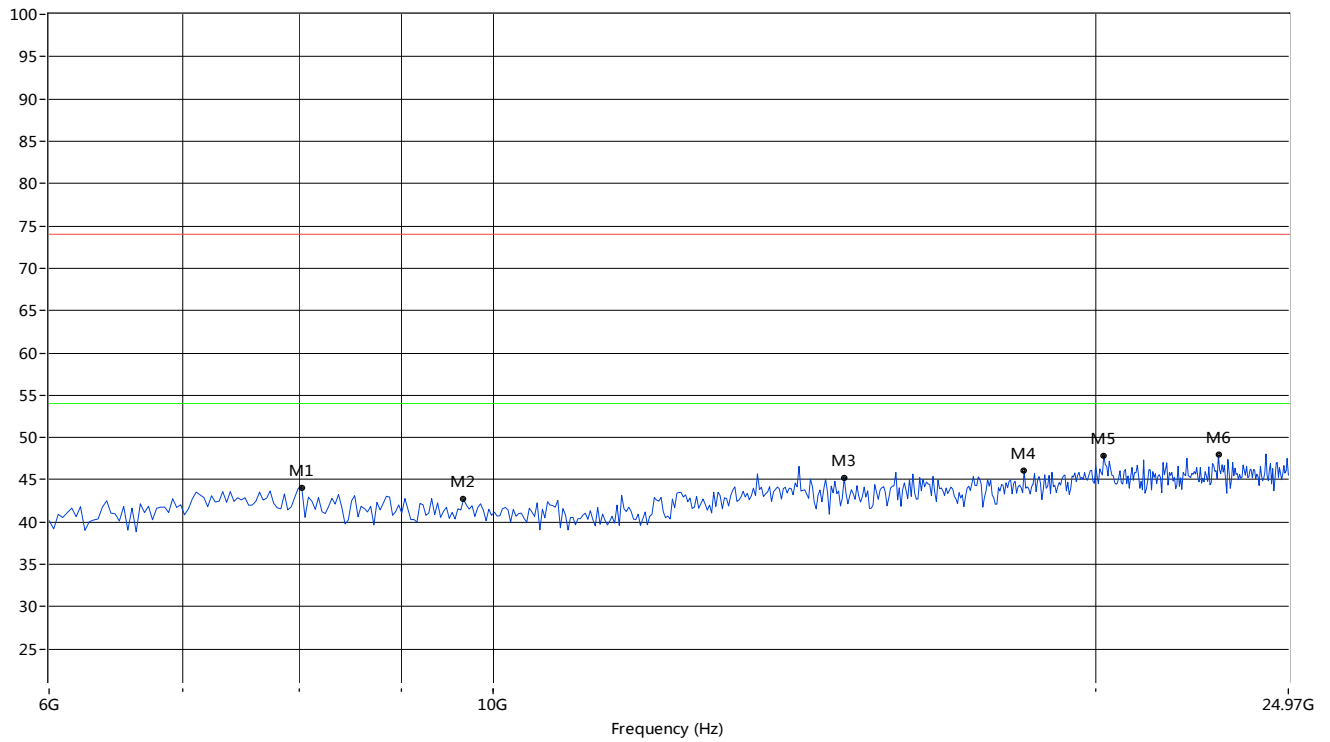

No.	Fre.(MHz)	Peak	Q-Peak	Average	PK Limit	QP Limit	AV Limit	Margin	Table	Polarization	Verdict
1	8023.29	44.09	--	--	74.0	--	54.0	29.91	49	Vertical	PASS
2	9667.22	42.67	--	--	74.0	--	54.0	31.33	267	Vertical	PASS
3	14978.37	45.24	--	--	74.0	--	54.0	28.76	0	Vertical	PASS
4	18424.29	46.07	--	--	74.0	--	54.0	27.93	147	Vertical	PASS
5	20194.68	47.88	--	--	74.0	--	54.0	26.12	172	Vertical	PASS
6	23039.93	47.93	--	--	74.0	--	54.0	26.07	283	Vertical	PASS


GFSK MID CHANNEL 6GHz to 25GHz, ANT H

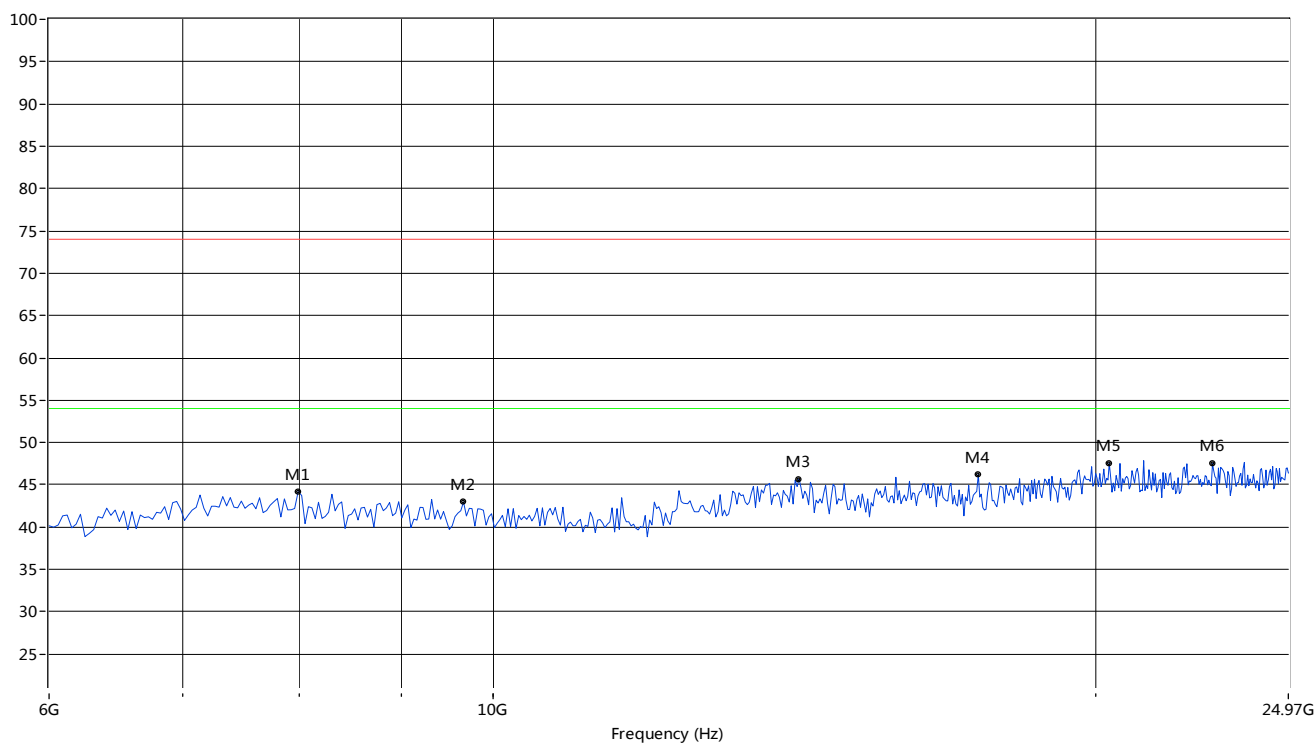

No.	Fre.(MHz)	Peak	Q-Peak	Average	PK Limit	QP Limit	AV Limit	Margin	Table	Polarization	Verdict
1	7991.68	44.18	--	--	74.0	--	54.0	29.82	267	Horizontal	PASS
2	9667.22	42.97	--	--	74.0	--	54.0	31.03	244	Horizontal	PASS
3	14219.63	45.70	--	--	74.0	--	54.0	28.30	329	Horizontal	PASS
4	17475.87	46.24	--	--	74.0	--	54.0	27.76	100	Horizontal	PASS
5	20321.13	47.55	--	--	74.0	--	54.0	26.45	180	Horizontal	PASS
6	22881.86	47.49	--	--	74.0	--	54.0	26.51	174	Horizontal	PASS

GFSK HIGH CHANNEL 1GHz to 6GHz, ANT V


RE Test case_FCC 15C 1GHz-6GHz

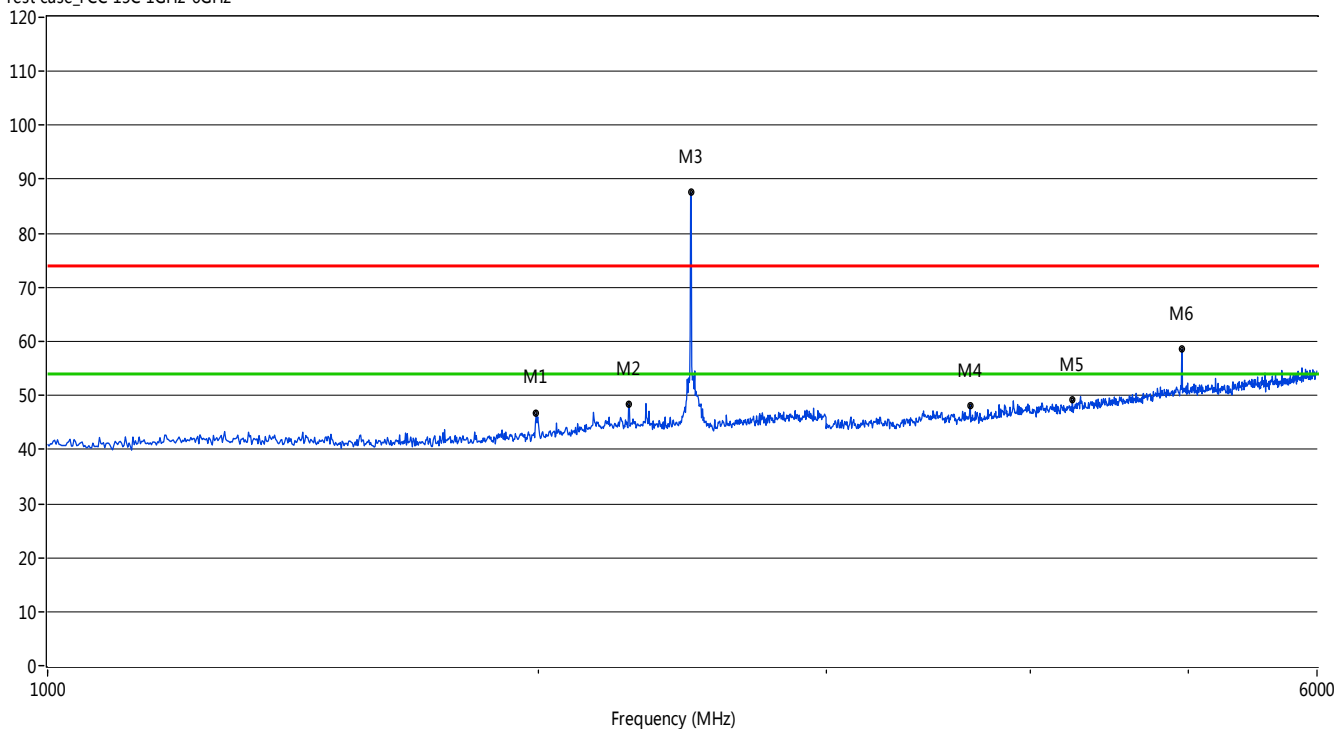

Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1993.01	46.68	--	--	-2.85	74.0	--	54.0	7.32	239.50	100	Vertical	PASS
2270.73	48.37	--	--	-0.73	74.0	--	54.0	5.63	217.00	100	Vertical	PASS
2478.52	87.61	--	--	-0.62	N/A	--	N/A	--	212.30	100	Vertical	N/A
3677.32	48.25	--	--	8.88	74.0	--	54.0	5.75	272.50	100	Vertical	PASS
4246.75	49.16	--	--	10.31	74.0	--	54.0	4.84	161.20	100	Vertical	PASS
4960.04	58.59	--	50.44	12.64	74.0	--	54.0	-4.59	113.90	100	Vertical	PASS


GFSK HIGH CHANNEL 1GHz to 6GHz, ANT H

RE Test case_FCC 15C 1GHz-6GHz

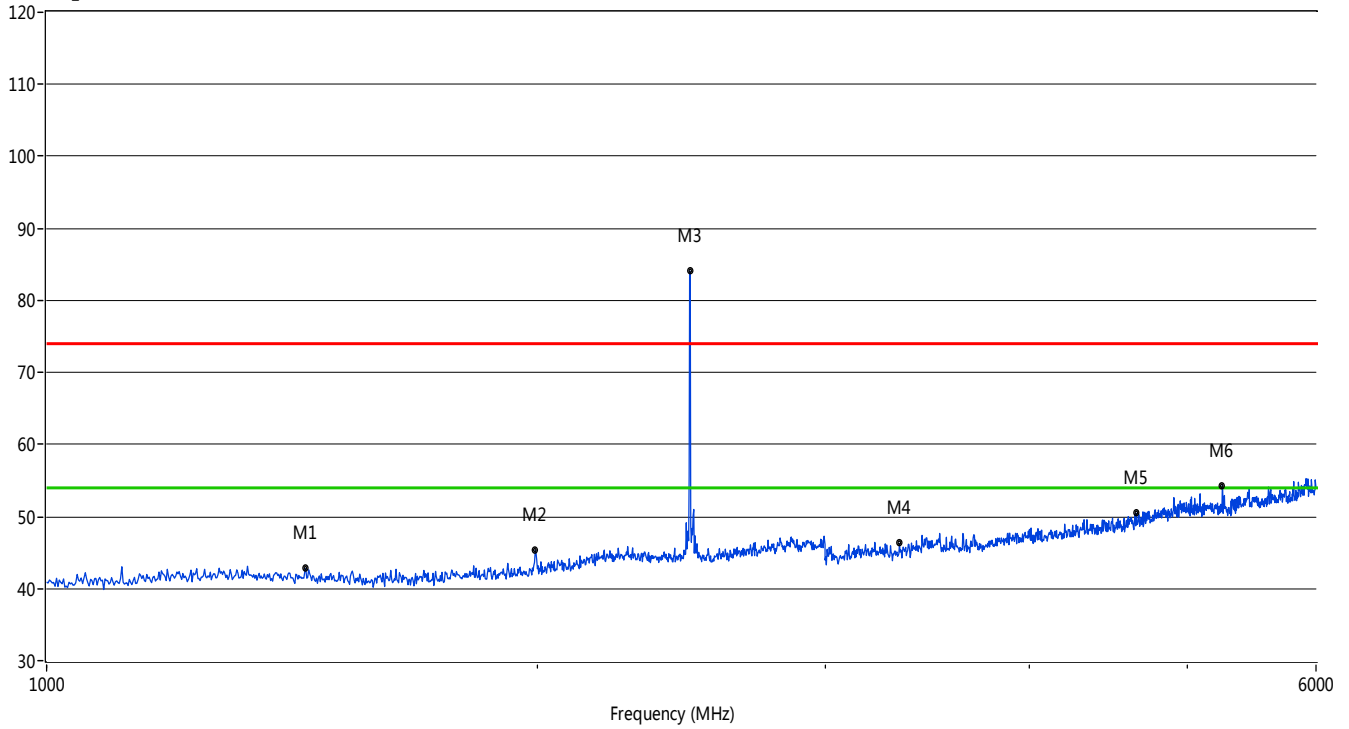


Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (°)	Height (cm)	ANT	Verdict
1441.56	42.80	--	--	-4.25	74.0	--	54.0	11.20	22.60	100	Horizontal	PASS
1993.01	45.36	--	--	-2.85	74.0	--	54.0	8.64	114.70	100	Horizontal	PASS
2478.52	84.12	--	--	-0.62	N/A	--	N/A	--	138.10	100	Horizontal	N/A
3332.67	46.29	--	--	7.95	74.0	--	54.0	7.71	132.50	100	Horizontal	PASS
4657.34	50.45	--	--	11.37	74.0	--	54.0	3.55	348.60	100	Horizontal	PASS
5256.74	54.33	--	46.29	12.75	74.0	--	54.0	7.71	230.40	100	Horizontal	PASS

GFSK HIGH CHANNEL 6GHz to 25GHz, ANT V

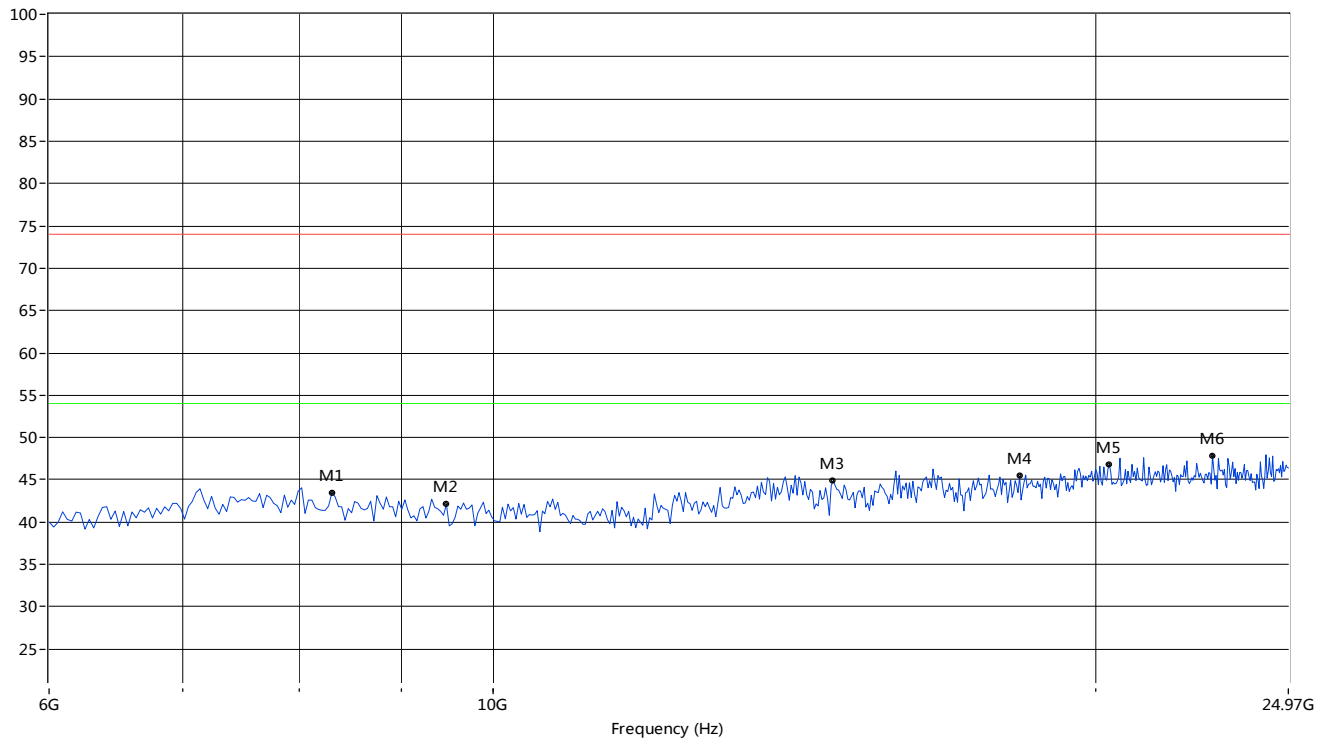

No.	Fre.(MHz)	Peak	Q-Peak	Average	PK Limit	QP Limit	AV Limit	Margin	Table	Polarization	Verdict
1	8307.82	43.47	--	--	74.0	--	54.0	30.53	30	Vertical	PASS
2	9477.54	42.08	--	--	74.0	--	54.0	31.92	50	Vertical	PASS
3	14788.69	44.89	--	--	74.0	--	54.0	29.11	27	Vertical	PASS
4	18329.45	45.43	--	--	74.0	--	54.0	28.57	264	Vertical	PASS
5	20321.13	46.83	--	--	74.0	--	54.0	27.17	89	Vertical	PASS
6	22881.86	47.90	--	--	74.0	--	54.0	26.10	344	Vertical	PASS


GFSK HIGH CHANNEL 6GHz to 25GHz, ANT H

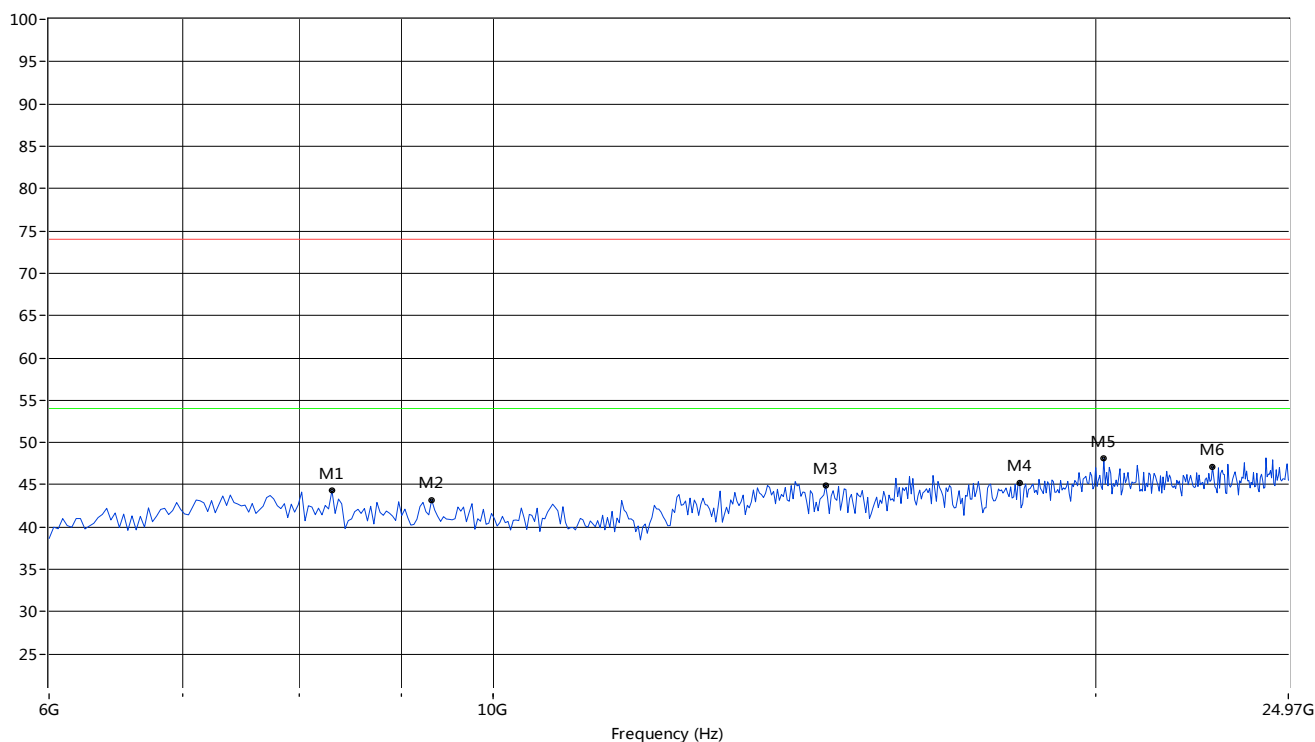

No.	Fre.(MHz)	Peak	Q-Peak	Average	PK Limit	QP Limit	AV Limit	Margin	Table	Polarization	Verdict
1	8307.82	44.32	--	--	74.0	--	54.0	29.68	54	Horizontal	PASS
2	9319.47	43.20	--	--	74.0	--	54.0	30.80	23	Horizontal	PASS
3	14662.23	44.94	--	--	74.0	--	54.0	29.06	90	Horizontal	PASS
4	18329.45	45.24	--	--	74.0	--	54.0	28.76	134	Horizontal	PASS
5	20194.68	48.08	--	--	74.0	--	54.0	25.92	282	Horizontal	PASS
6	22881.86	47.12	--	--	74.0	--	54.0	26.88	316	Horizontal	PASS

II/4-DQPSK LOW CHANNEL 1GHz to 6GHz, ANT V


RE Test case_FCC 15C 1GHz-6GHz

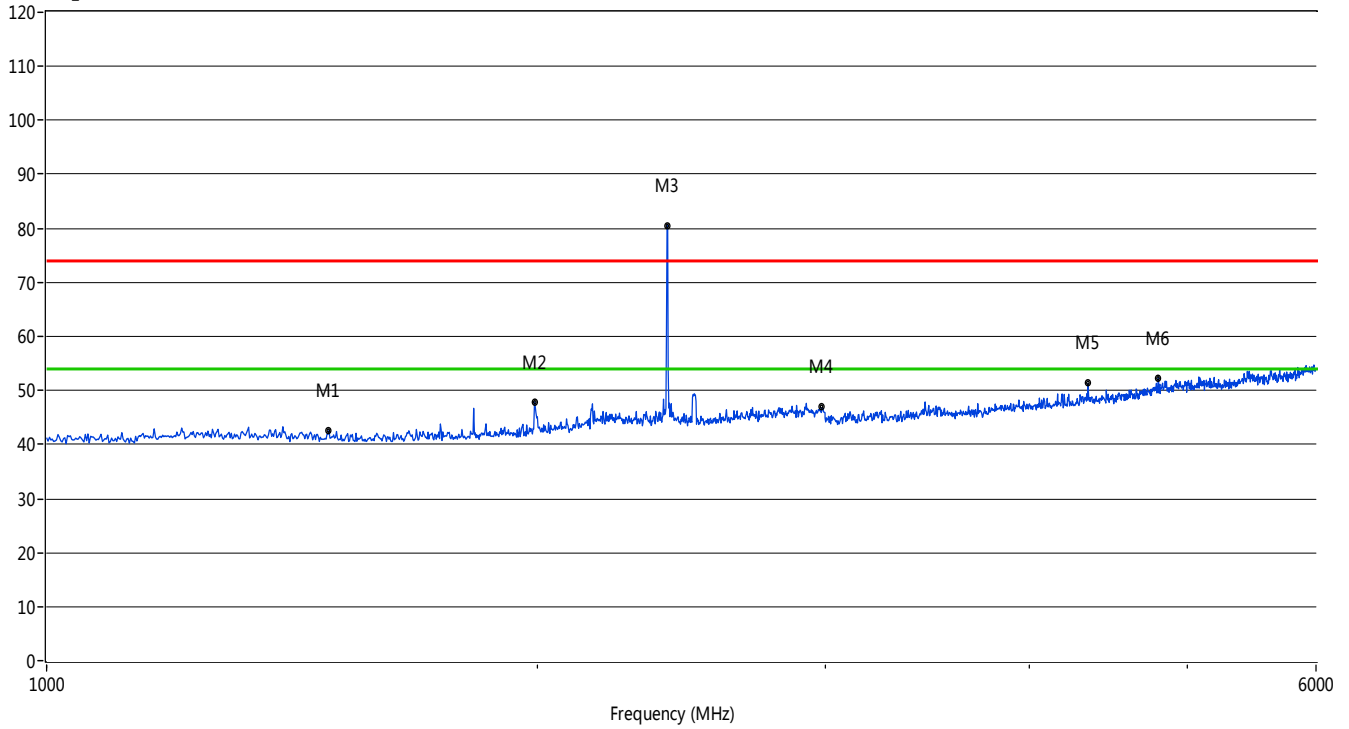

Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (°)	Height (cm)	ANT	Verdict
1489.51	42.59	--	--	-4.20	74.0	--	54.0	11.41	2.30	100	vertical	PASS
1991.01	47.90	--	--	-2.81	74.0	--	54.0	6.10	241.90	100	vertical	PASS
2400.60	80.58	--	--	-0.67	N/A	--	N/A	--	196.10	100	vertical	N/A
2988.01	46.89	--	--	2.30	74.0	--	54.0	7.11	132.20	100	vertical	PASS
4348.65	51.30	--	--	10.92	74.0	--	54.0	2.70	94.40	100	vertical	PASS
4801.20	52.28	--	--	12.37	74.0	--	54.0	1.72	77.60	100	vertical	PASS


II/4-DQPSK LOW CHANNEL 1GHz to 6GHz, ANT H

RE Test case_FCC 15C 1GHz-6GHz

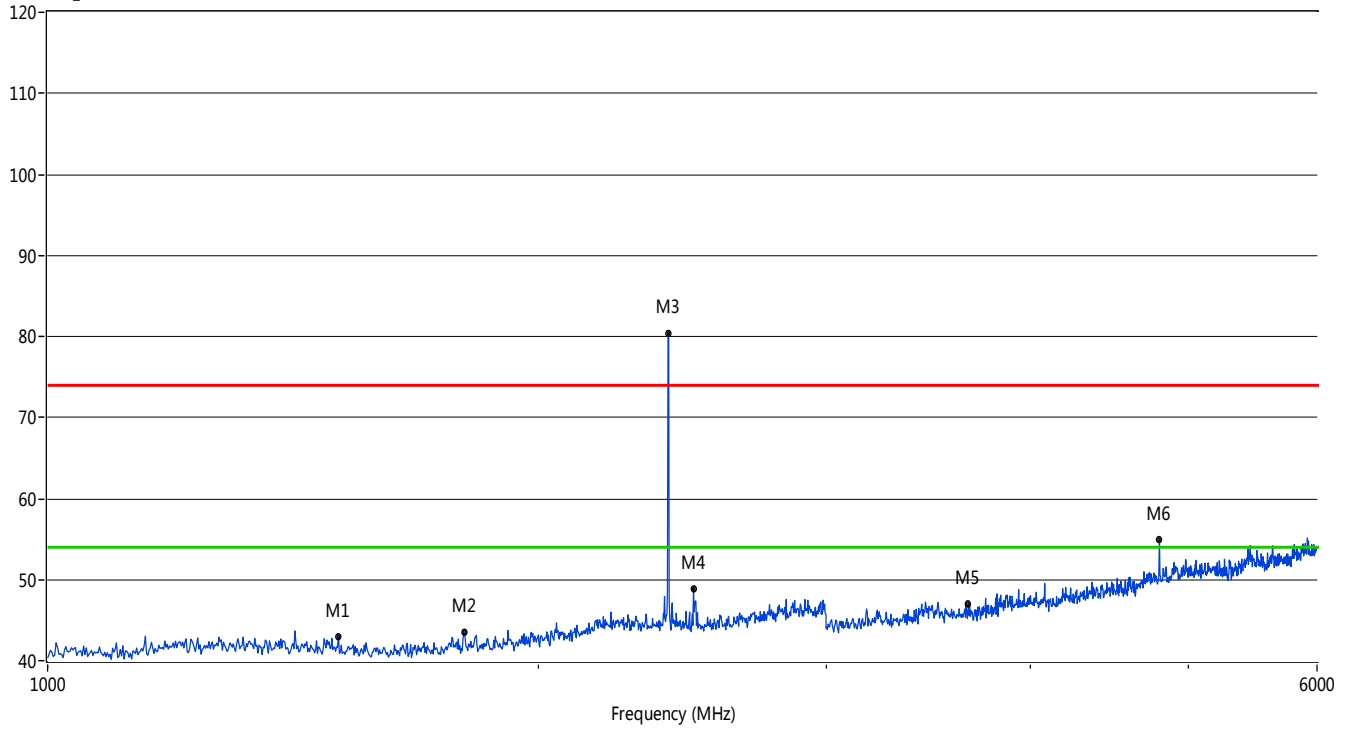


Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (°)	Height (cm)	ANT	Verdict
1507.49	43.02	--	--	-4.38	74.0	--	54.0	10.98	96.70	100	Horizontal	PASS
1801.20	43.44	--	--	-3.78	74.0	--	54.0	10.56	1.10	100	Horizontal	PASS
2400.60	80.43	--	--	-0.67	N/A	--	N/A	--	156.80	100	Horizontal	N/A
2488.51	48.89	--	--	-0.59	74.0	--	54.0	5.11	207.70	100	Horizontal	PASS
3668.33	47.00	--	--	8.93	74.0	--	54.0	7.00	210.10	100	Horizontal	PASS
4804.20	54.96	--	46.71	12.35	74.0	--	54.0	7.29	162.60	100	Horizontal	PASS

II/4-DQPSK LOW CHANNEL 6GHz to 25GHz, ANT V

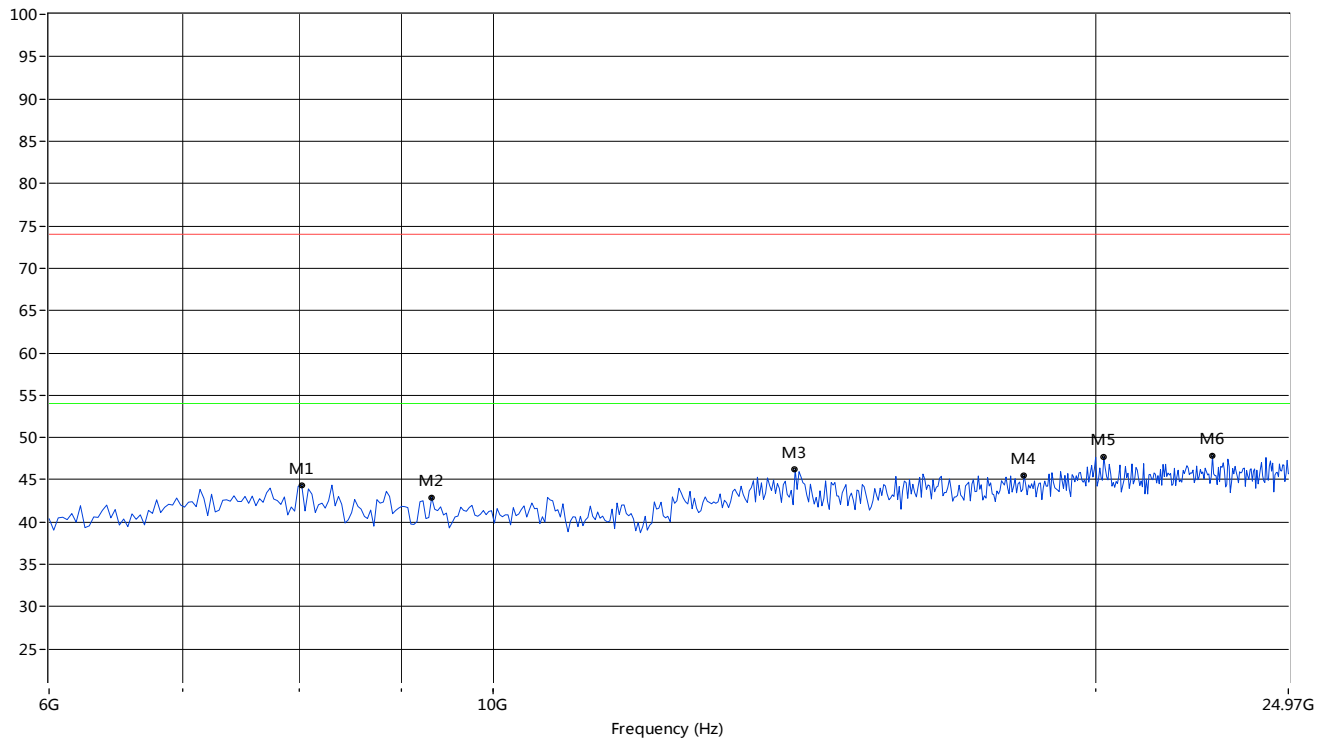

No.	Fre.(MHz)	Peak	Q-Peak	Average	PK Limit	QP Limit	AV Limit	Margin	Table	Polarization	Verdict
1	8023.29	44.37	--	--	74.0	--	54.0	29.63	290	Vertical	PASS
2	9319.47	42.91	--	--	74.0	--	54.0	31.09	227	Vertical	PASS
3	14156.41	46.23	--	--	74.0	--	54.0	27.77	328	Vertical	PASS
4	18424.29	45.53	--	--	74.0	--	54.0	28.47	61	Vertical	PASS
5	20194.68	47.68	--	--	74.0	--	54.0	26.32	248	Vertical	PASS
6	22881.86	47.82	--	--	74.0	--	54.0	26.18	352	Vertical	PASS


Π/4-DQPSK LOW CHANNEL 6GHz to 25GHz, ANT H

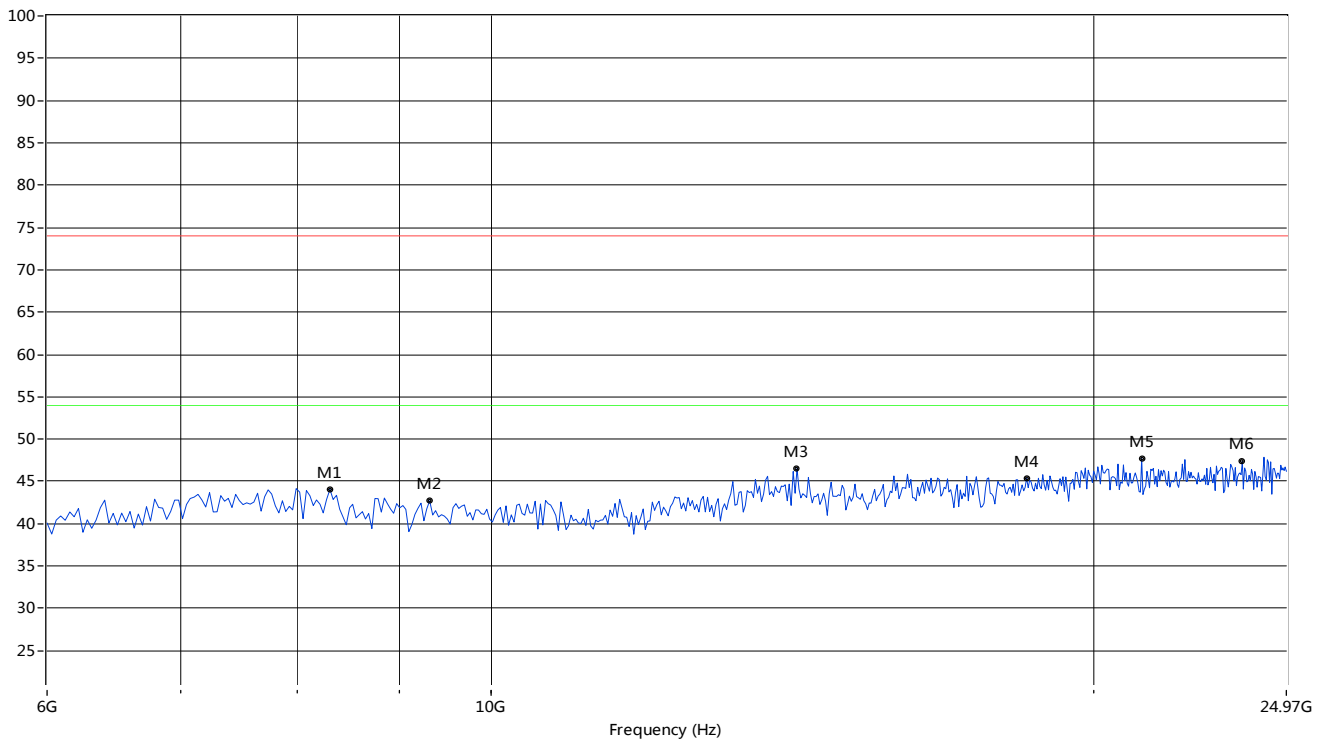

No.	Fre.(MHz)	Peak	Q-Peak	Average	PK Limit	QP Limit	AV Limit	Margin	Table	Polarization	Verdict
1	8307.82	44.04	--	--	74.0	--	54.0	29.96	133	Horizontal	PASS
2	9319.47	42.70	--	--	74.0	--	54.0	31.30	221	Horizontal	PASS
3	14219.63	46.51	--	--	74.0	--	54.0	27.49	317	Horizontal	PASS
4	18519.13	45.40	--	--	74.0	--	54.0	28.60	102	Horizontal	PASS
5	21143.09	47.68	--	--	74.0	--	54.0	26.32	169	Horizontal	PASS
6	23735.44	47.38	--	--	74.0	--	54.0	26.62	182	Horizontal	PASS

II/4-DQPSK MID CHANNEL 1GHz to 6GHz, ANT V


RE Test case_FCC 15C 1GHz-6GHz

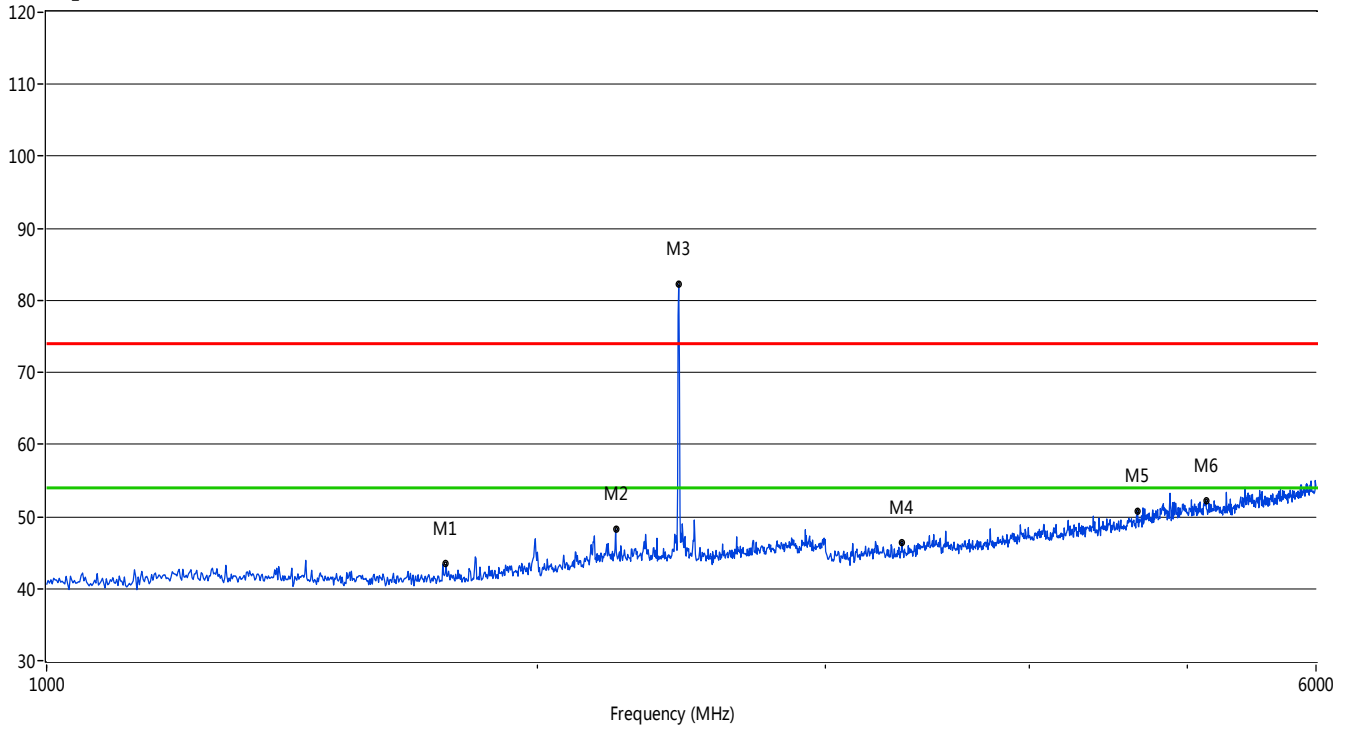

Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (°)	Height (cm)	ANT	Verdict
1757.24	43.42	--	--	-3.63	74.0	--	54.0	10.58	109.70	100	vertical	PASS
2232.77	48.26	--	--	-0.56	74.0	--	54.0	5.74	211.70	100	vertical	PASS
2440.56	82.20	--	--	-0.54	N/A	--	N/A	--	211.70	100	vertical	N/A
3344.66	46.37	--	--	8.08	74.0	--	54.0	7.63	355.50	100	vertical	PASS
4663.34	50.77	--	--	11.35	74.0	--	54.0	3.23	333.00	100	vertical	PASS
5136.86	52.22	--	--	13.23	74.0	--	54.0	1.78	85.20	100	vertical	PASS


II/4-DQPSK MID CHANNEL 1GHz to 6GHz, ANT H

RE Test case_FCC 15C 1GHz-6GHz

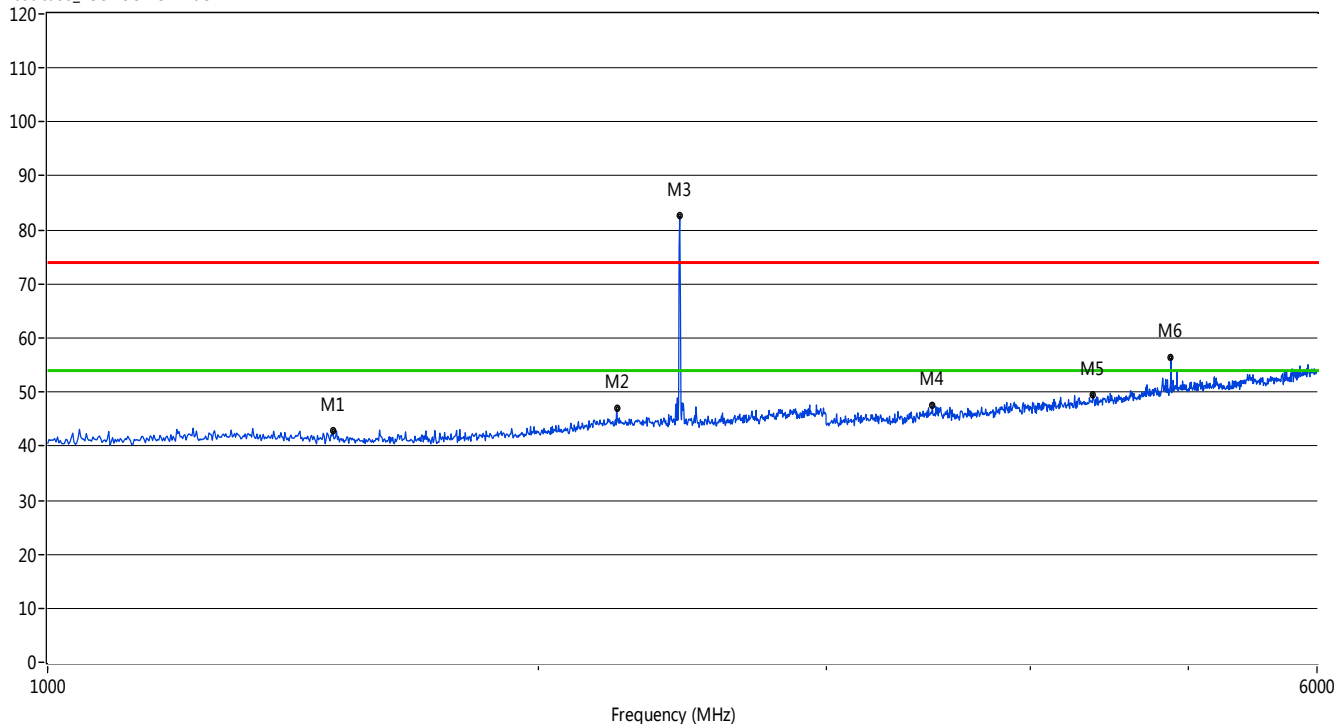


Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1495.50	42.85	--	--	-4.24	74.0	--	54.0	11.15	68.30	100	Horizontal	PASS
2232.77	46.90	--	--	-0.56	74.0	--	54.0	7.10	119.50	100	Horizontal	PASS
2440.56	82.61	--	--	-0.54	N/A	--	N/A	--	138.20	100	Horizontal	N/A
3485.51	47.45	--	--	8.85	74.0	--	54.0	6.55	359.10	100	Horizontal	PASS
4372.63	49.51	--	--	10.89	74.0	--	54.0	4.49	169.70	100	Horizontal	PASS
4882.12	56.35	--	48.01	12.34	74.0	--	54.0	0.99	169.70	100	Horizontal	PASS

II/4-DQPSK MID CHANNEL 6GHz to 25GHz, ANT V

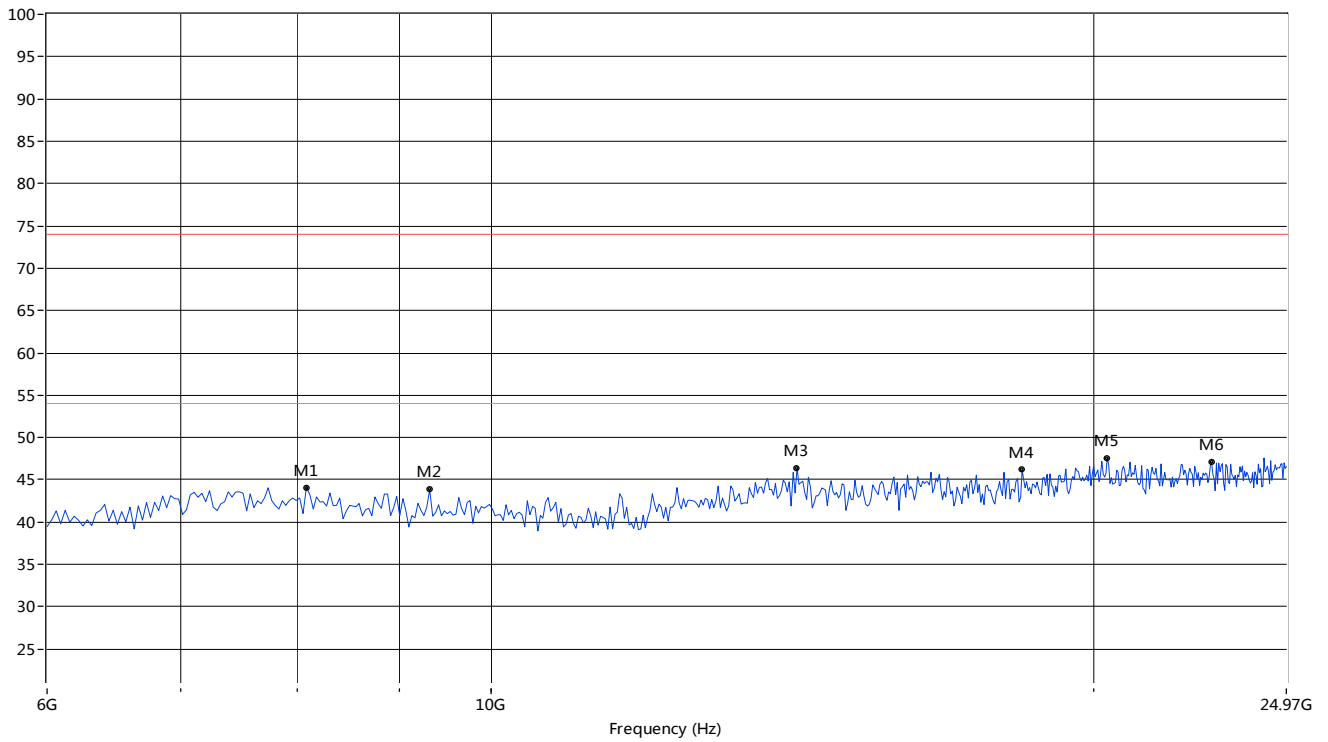

No.	Fre.(MHz)	Peak	Q-Peak	Average	PK Limit	QP Limit	AV Limit	Margin	Table	Polarization	Verdict
1	8086.52	44.11	--	--	74.0	--	54.0	29.89	19	Vertical	PASS
2	9319.47	43.83	--	--	74.0	--	54.0	30.17	262	Vertical	PASS
3	14219.63	46.36	--	--	74.0	--	54.0	27.64	100	Vertical	PASS
4	18424.29	46.20	--	--	74.0	--	54.0	27.80	289	Vertical	PASS
5	20321.13	47.61	--	--	74.0	--	54.0	26.39	306	Vertical	PASS
6	22913.48	47.04	--	--	74.0	--	54.0	26.96	174	Vertical	PASS


II/4-DQPSK MID CHANNEL 6GHz to 25GHz, ANT H

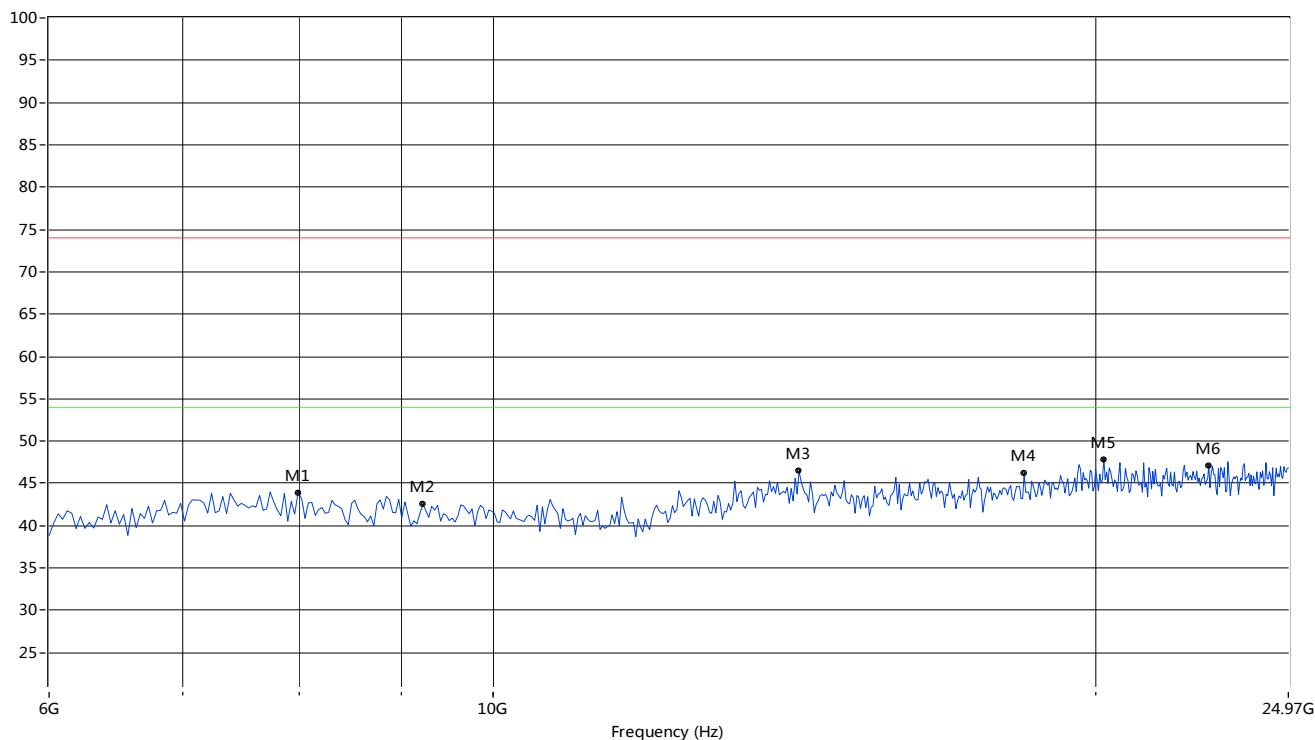

No.	Fre.(MHz)	Peak	Q-Peak	Average	PK Limit	QP Limit	AV Limit	Margin	Table	Polarization	Verdict
1	7991.68	43.95	--	--	74.0	--	54.0	30.05	68	Horizontal	PASS
2	9224.63	42.52	--	--	74.0	--	54.0	31.48	74	Horizontal	PASS
3	14219.63	46.45	--	--	74.0	--	54.0	27.55	116	Horizontal	PASS
4	18424.29	46.16	--	--	74.0	--	54.0	27.84	0	Horizontal	PASS
5	20194.68	47.86	--	--	74.0	--	54.0	26.14	177	Horizontal	PASS
6	22787.02	47.15	--	--	74.0	--	54.0	26.85	131	Horizontal	PASS

II/4-DQPSK HIGH CHANNEL 1GHz to 6GHz, ANT V


RE Test case_FCC 15C 1GHz-6GHz

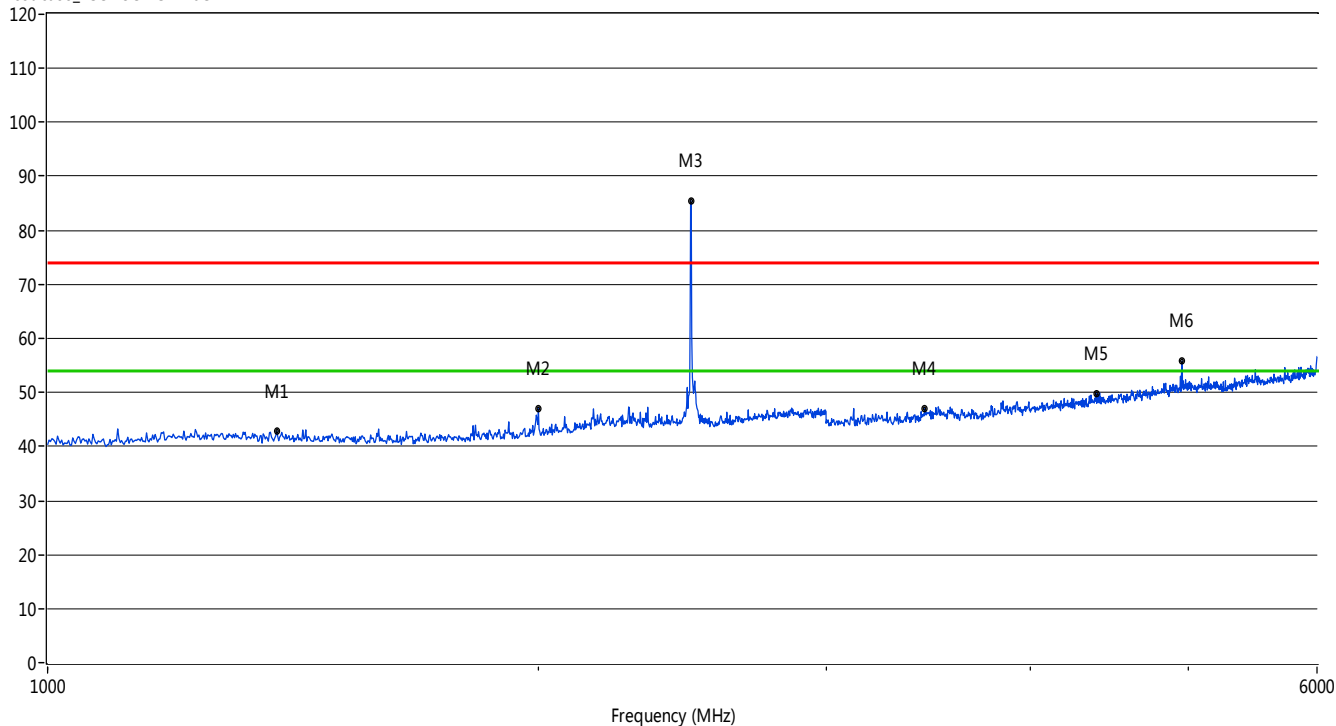

Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (°)	Height (cm)	ANT	Verdict
1381.62	42.88	--	--	-4.33	74.0	--	54.0	11.12	260.90	100	vertical	PASS
1999.00	47.03	--	--	-2.92	74.0	--	54.0	6.97	237.50	100	vertical	PASS
2478.52	85.52	--	--	-0.62	74.0	--	54.0	-31.52	213.70	100	vertical	FAIL
3449.55	47.10	--	--	9.08	74.0	--	54.0	6.90	68.30	100	vertical	PASS
4393.61	49.79	--	--	10.68	74.0	--	54.0	4.21	278.20	100	vertical	PASS
4960.04	55.82	--	47.69	12.64	74.0	--	54.0	-1.82	190.60	100	vertical	PASS


II/4-DQPSK HIGH CHANNEL 1GHz to 6GHz, ANT H

RE Test case_FCC 15C 1GHz-6GHz

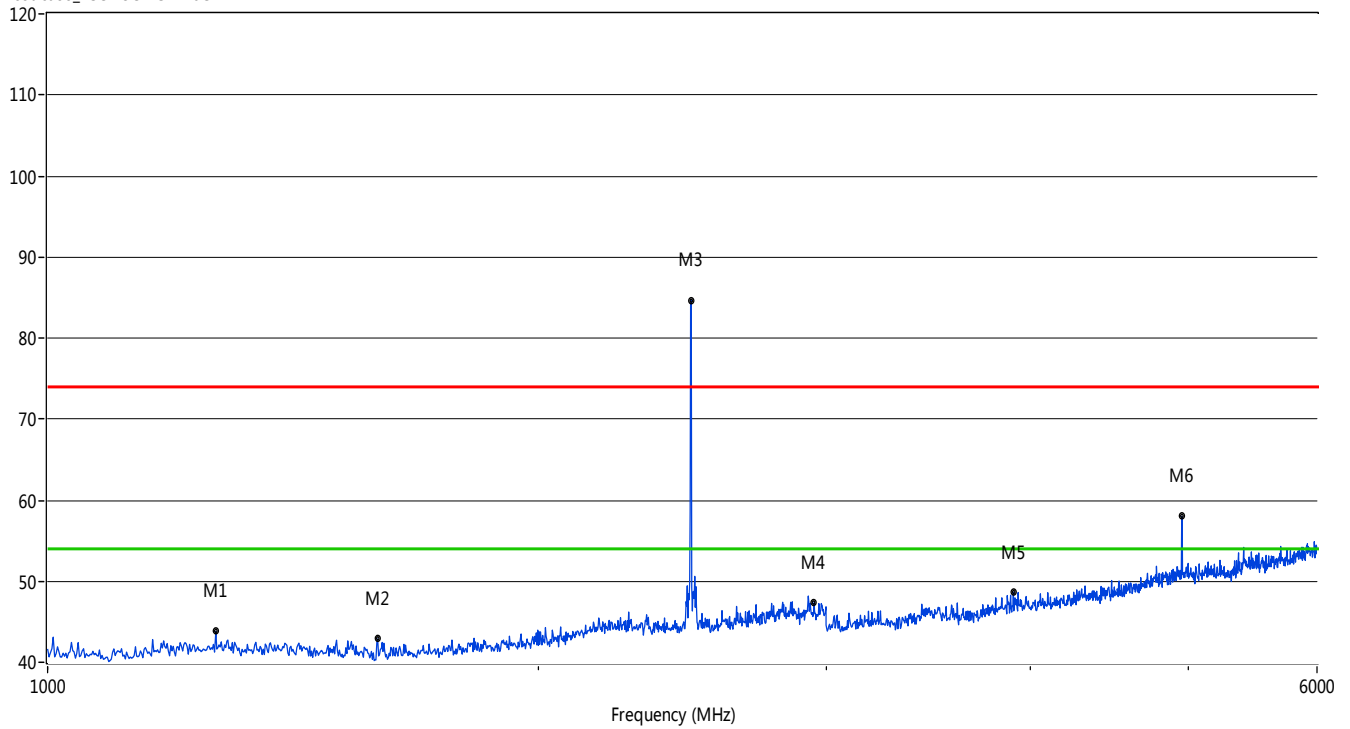


Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (°)	Height (cm)	ANT	Verdict
1267.73	43.82	--	--	-3.92	74.0	--	54.0	10.18	223.80	100	Horizontal	PASS
1593.41	42.88	--	--	-4.30	74.0	--	54.0	11.12	164.20	100	Horizontal	PASS
2480.52	84.58	--	--	-0.66	N/A	--	N/A	--	136.20	100	Horizontal	N/A
2950.05	47.37	--	--	1.96	74.0	--	54.0	6.63	283.40	100	Horizontal	PASS
3908.09	48.64	--	--	10.14	74.0	--	54.0	5.36	295.30	100	Horizontal	PASS
4957.04	58.01	--	50.35	12.65	74.0	--	54.0	-4.01	37.60	100	Horizontal	PASS

II/4-DQPSK HIGH CHANNEL 6GHz to 25GHz, ANT V

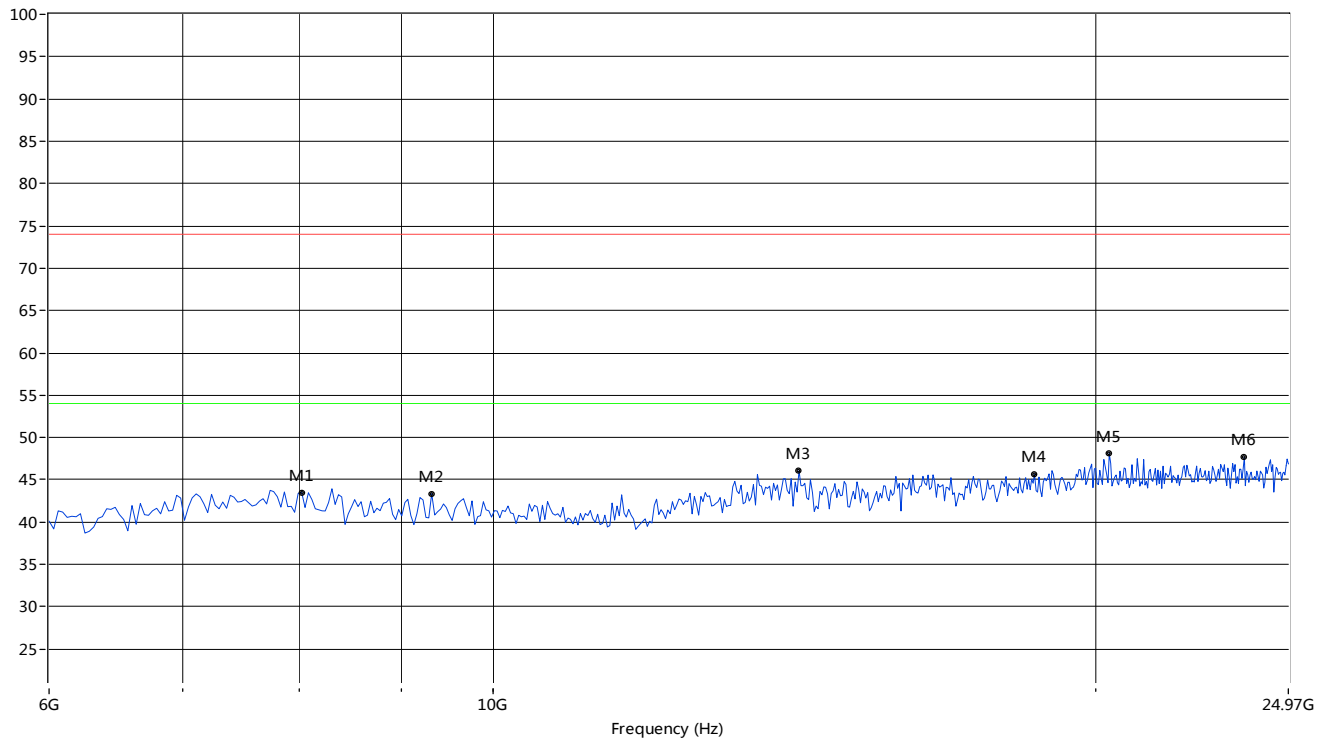

No.	Fre.(MHz)	Peak	Q-Peak	Average	PK Limit	QP Limit	AV Limit	Margin	Table	Polarization	Verdict
1	8023.29	43.51	--	--	74.0	--	54.0	30.49	202	Vertical	PASS
2	9319.47	43.36	--	--	74.0	--	54.0	30.64	177	Vertical	PASS
3	14219.63	46.06	--	--	74.0	--	54.0	27.94	194	Vertical	PASS
4	18645.59	45.61	--	--	74.0	--	54.0	28.39	125	Vertical	PASS
5	20321.13	48.10	--	--	74.0	--	54.0	25.90	97	Vertical	PASS
6	23735.44	47.70	--	--	74.0	--	54.0	26.30	310	Vertical	PASS

Π/4-DQPSK HIGH CHANNEL 6GHz to 25GHz, ANT H

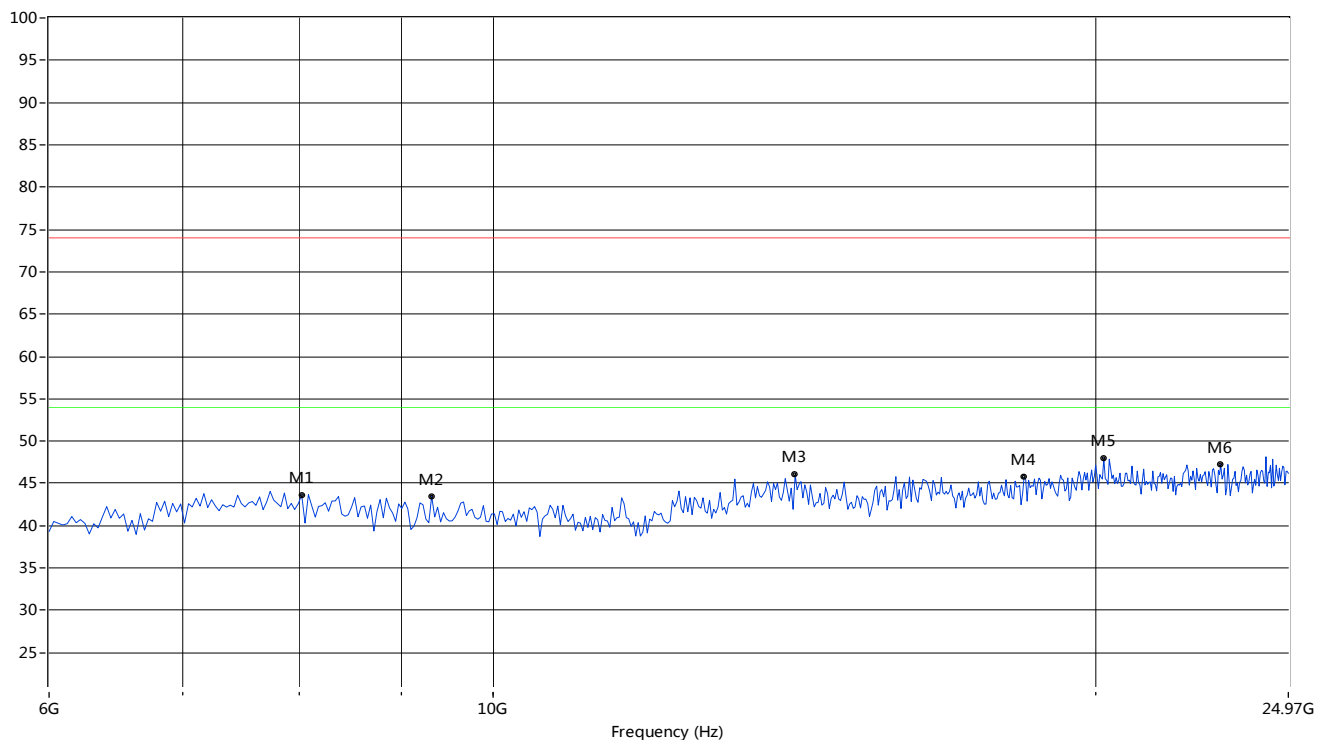


No.	Fre.(MHz)	Peak	Q-Peak	Average	PK Limit	QP Limit	AV Limit	Margin	Table	Polarization	Verdict
1	8023.29	43.63	--	--	74.0	--	54.0	30.37	281	Horizontal	PASS
2	9319.47	43.48	--	--	74.0	--	54.0	30.52	257	Horizontal	PASS
3	14156.41	46.01	--	--	74.0	--	54.0	27.99	3	Horizontal	PASS
4	18424.29	45.78	--	--	74.0	--	54.0	28.22	115	Horizontal	PASS
5	20194.68	47.92	--	--	74.0	--	54.0	26.08	268	Horizontal	PASS
6	23103.16	47.29	--	--	74.0	--	54.0	26.71	150	Horizontal	PASS

Hopping Mode:

GFSK MODE 1GHz to 6GHz, ANT V


RE Test case_FCC 15C 1GHz-6GHz

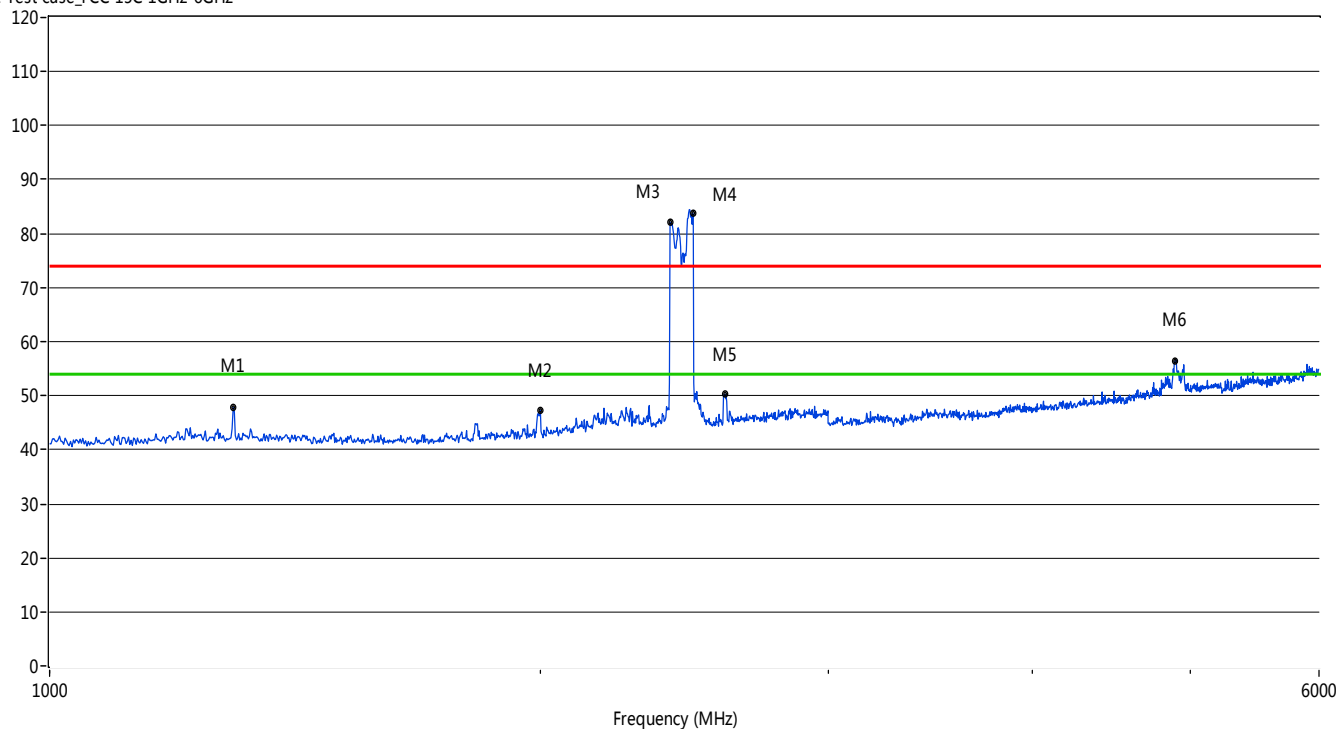

Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (°)	Height (cm)	ANT	Verdict
1295.70	47.85	--	--	-4.17	74.0	--	54.0	6.15	175.10	100	Vertical	PASS
1999.00	47.28	--	--	-2.92	74.0	--	54.0	6.72	10.30	100	Vertical	PASS
2400.60	82.06	--	--	-0.67	N/A	--	N/A	--	202.00	100	Vertical	N/A
2478.52	83.77	--	--	-0.62	74.0	--	54.0	-29.77	202.00	100	Vertical	FAIL
2594.41	50.30	--	--	0.37	74.0	--	54.0	3.70	25.40	100	Vertical	PASS
4894.110	56.29	--	39.59	12.49	74.0	--	54.0	14.41	117.10	100	Vertical	PASS


GFSK MODE 1GHz to 6GHz, ANT H

RE Test case_FCC 15C 1GHz-6GHz

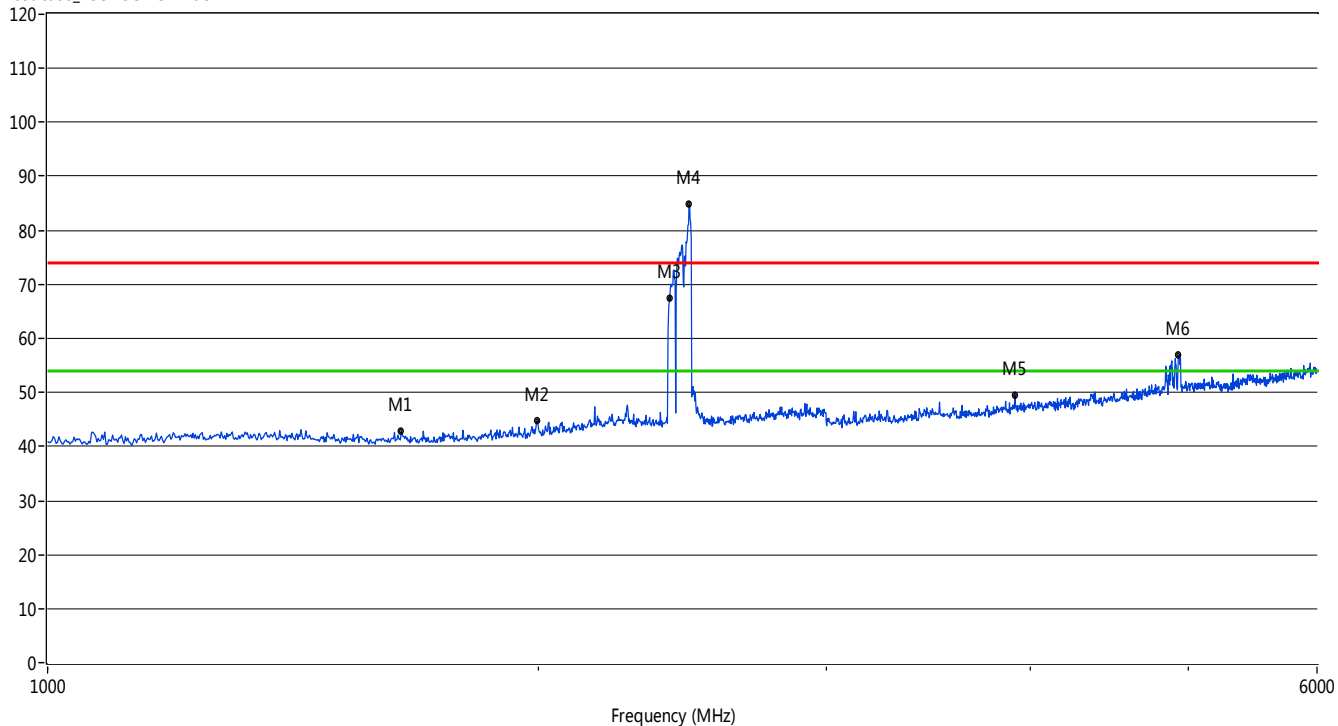


Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (°)	Height (cm)	ANT	Verdict
1647.35	42.78	--	--	-4.35	74.0	--	54.0	11.22	297.70	100	Horizontal	PASS
1995.00	44.78	--	--	-2.89	74.0	--	54.0	9.22	257.30	100	Horizontal	PASS
2406.59	67.52	--	--	-0.78	N/A	--	N/A	--	78.00	100	Horizontal	N/A
2472.53	84.82	--	--	-0.47	N/A	--	N/A	--	138.50	100	Horizontal	N/A
3917.08	49.43	--	--	10.18	74.0	--	54.0	4.57	238.20	100	Horizontal	PASS
4933.07	56.86	--	47.95	12.49	74.0	--	54.0	-2.86	172.60	100	Horizontal	PASS

GFSK MODE 6GHz to 25GHz, ANT V

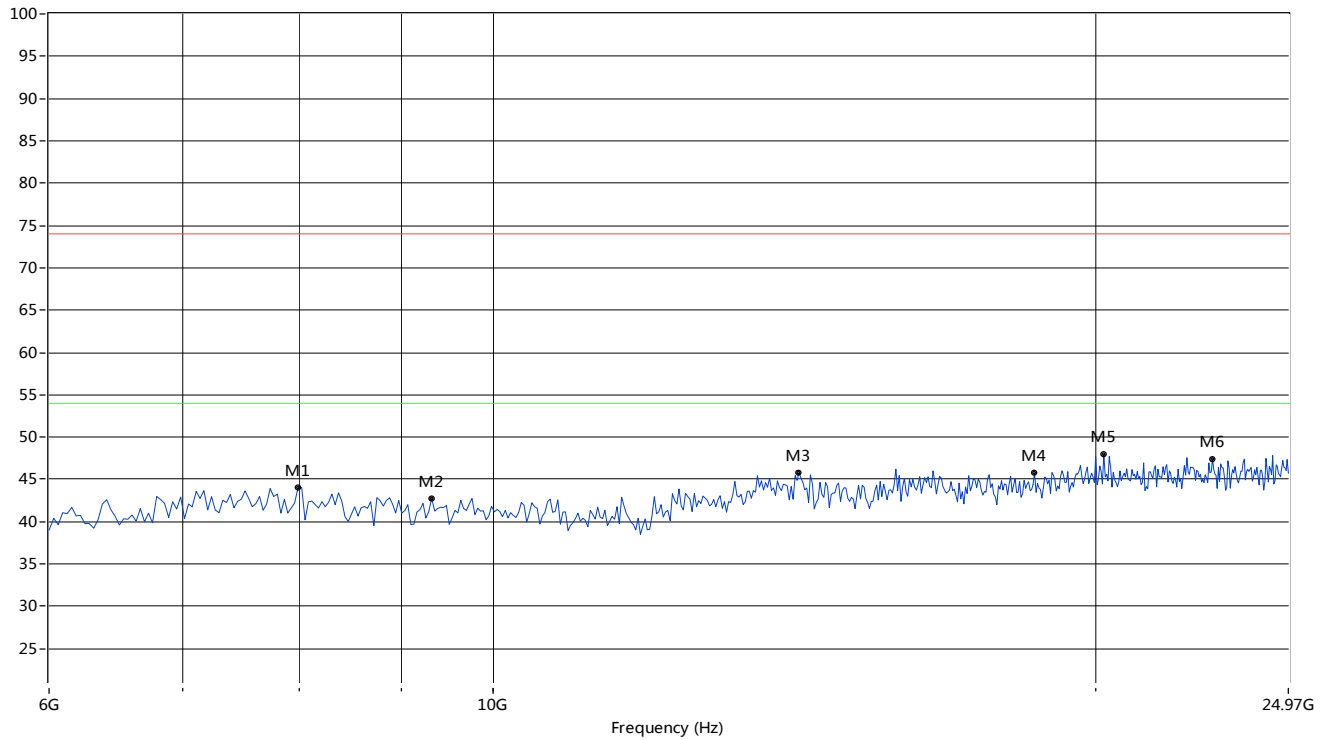

No.	Fre.(MHz)	Peak	Q-Peak	Average	PK Limit	QP Limit	AV Limit	Margin	Table	Polarization	Verdict
1	7991.68	44.09	--	--	74.0	--	54.0	29.91	202	Vertical	PASS
2	9319.47	42.77	--	--	74.0	--	54.0	31.23	248	Vertical	PASS
3	14219.63	45.82	--	--	74.0	--	54.0	28.18	37	Vertical	PASS
4	18645.59	45.78	--	--	74.0	--	54.0	28.22	309	Vertical	PASS
5	20194.68	47.94	--	--	74.0	--	54.0	26.06	320	Vertical	PASS
6	22881.86	47.44	--	--	74.0	--	54.0	26.56	7	Vertical	PASS


GFSK MODE 6GHz to 25GHz, ANT H

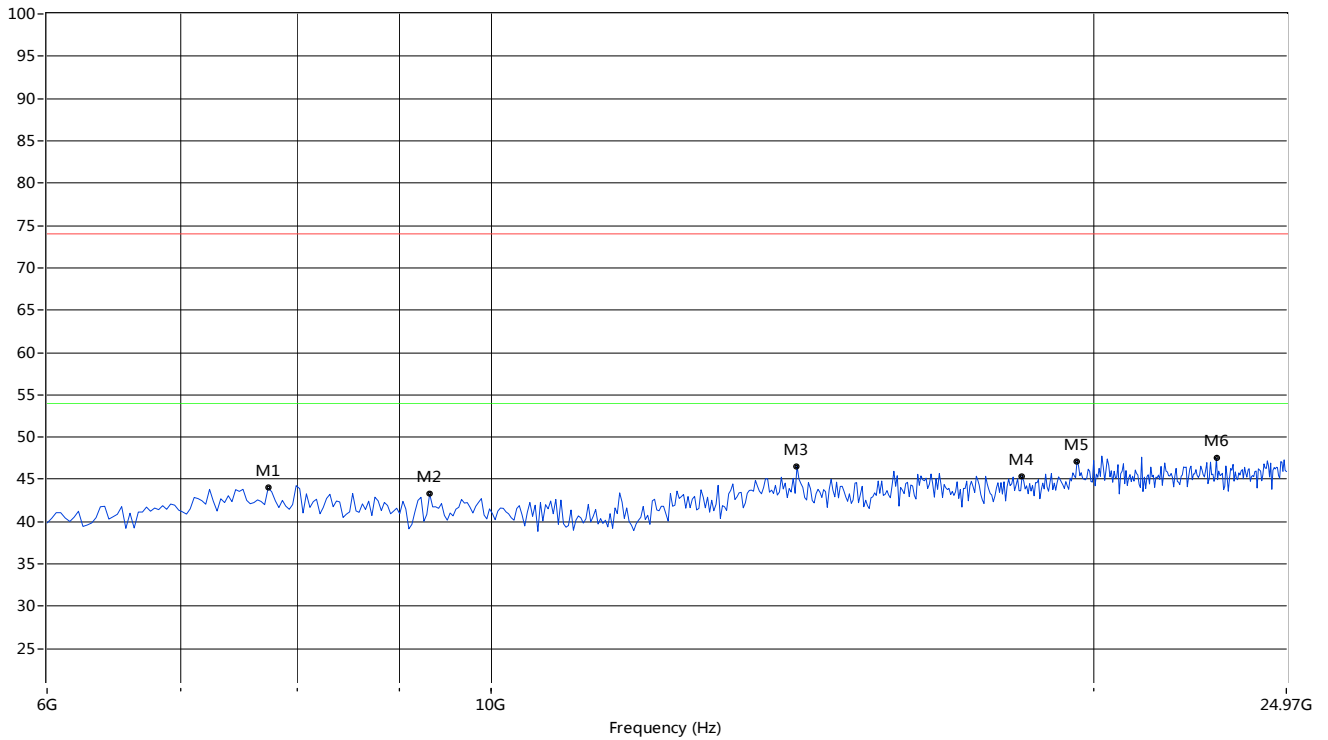

No.	Fre.(MHz)	Peak	Q-Peak	Average	PK Limit	QP Limit	AV Limit	Margin	Table	Polarization	Verdict
1	7738.77	43.97	--	--	74.0	--	54.0	30.03	303	Horizontal	PASS
2	9319.47	43.28	--	--	74.0	--	54.0	30.72	135	Horizontal	PASS
3	14219.63	46.58	--	--	74.0	--	54.0	27.42	209	Horizontal	PASS
4	18424.29	45.41	--	--	74.0	--	54.0	28.59	153	Horizontal	PASS
5	19625.62	47.12	--	--	74.0	--	54.0	26.88	261	Horizontal	PASS
6	23039.93	47.50	--	--	74.0	--	54.0	26.50	351	Horizontal	PASS

Π/4-DQPSK MODE 1GHz to 6GHz, ANT V


RE Test case_FCC 15C 1GHz-6GHz

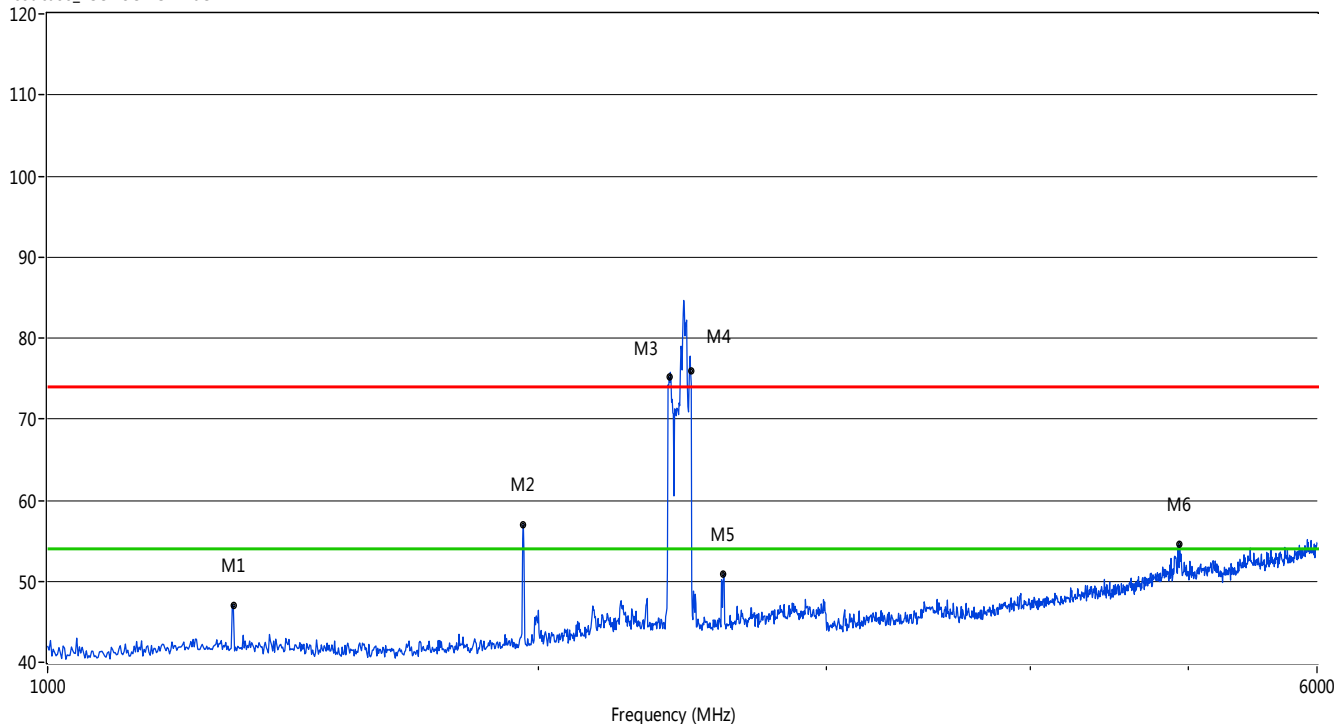

Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (°)	Height (cm)	ANT	Verdict
1299.70	47.00	--	--	-4.09	74.0	--	54.0	7.00	164.60	100	Vertical	PASS
1957.040	56.95	--	47.95	-2.94	74.0	--	54.0	6.05	359.50	100	Vertical	PASS
2404.60	75.14	--	--	-0.78	N/A	--	N/A	--	60.10	100	Vertical	N/A
2478.52	75.85	--	--	-0.62	N/A	--	N/A	--	94.90	100	Vertical	N/A
2596.40	50.92	--	--	0.34	74.0	--	54.0	3.08	39.90	100	Vertical	PASS
4942.06	54.50	--	46.98	12.48	74.0	--	54.0	-0.50	198.40	100	Vertical	PASS


II/4-DQPSK MODE 1GHz to 6GHz, ANT H

RE Test case_FCC 15C 1GHz-6GHz

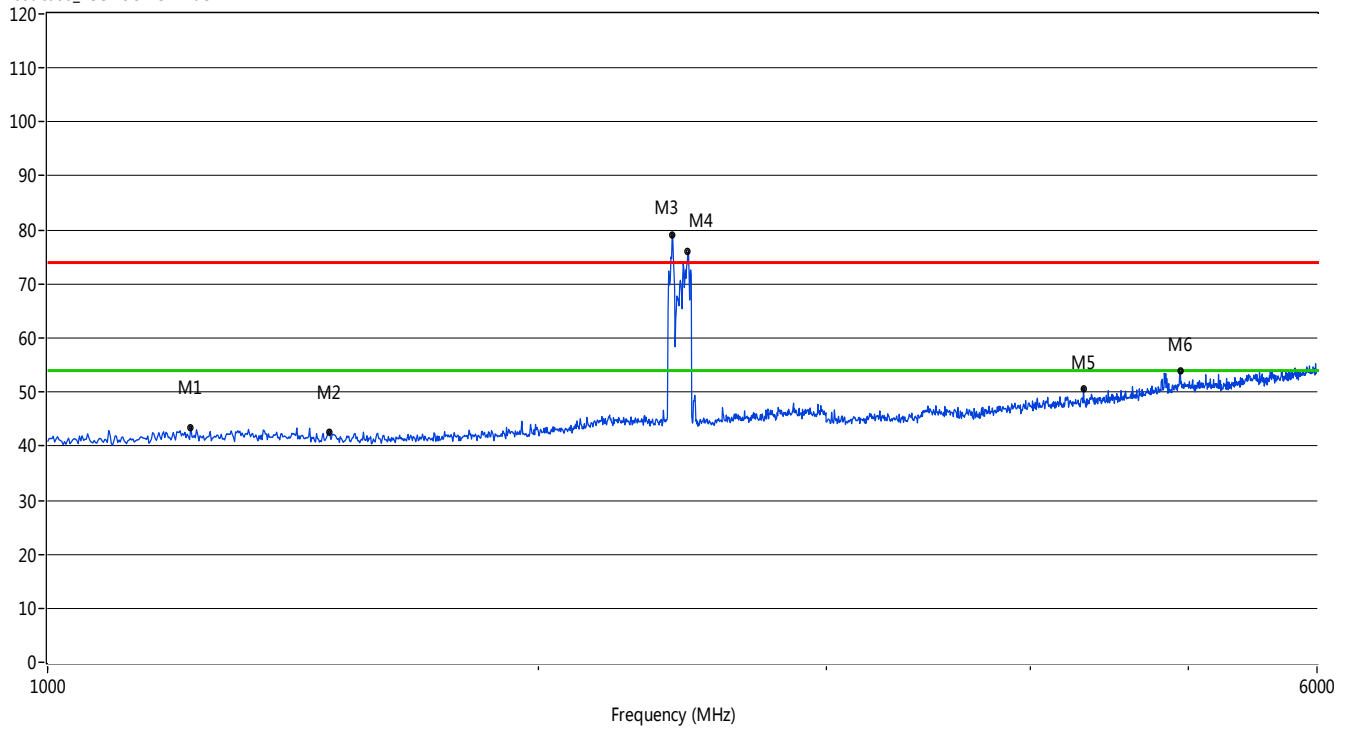


Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (°)	Height (cm)	ANT	Verdict
1223.78	43.48	--	--	-4.22	74.0	--	54.0	10.52	286.20	100	Horizontal	PASS
1487.51	42.64	--	--	-4.17	74.0	--	54.0	11.36	26.00	100	Horizontal	PASS
2414.59	79.14	--	--	-0.54	N/A	--	N/A	--	141.80	100	Horizontal	N/A
2468.53	75.95	--	--	-0.38	N/A	--	N/A	--	268.90	100	Horizontal	N/A
4315.68	50.73	--	--	10.82	74.0	--	54.0	3.27	335.40	100	Horizontal	PASS
4945.05	53.94	--	--	12.51	74.0	--	54.0	0.06	34.00	100	Horizontal	PASS

Π/4-DQPSK MODE 6GHz to 25GHz, ANT V

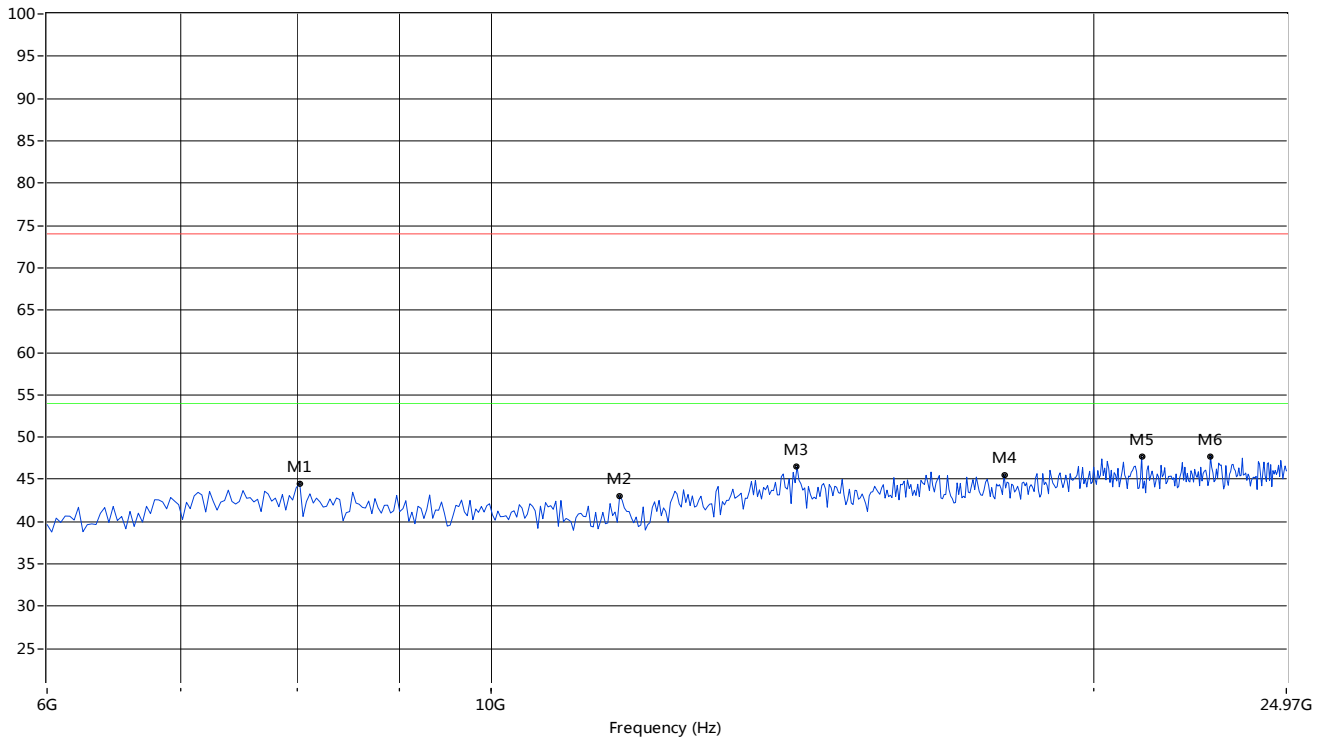

No.	Fre.(MHz)	Peak	Q-Peak	Average	PK Limit	QP Limit	AV Limit	Margin	Table	Polarization	Verdict
1	8023.29	44.55	--	--	74.0	--	54.0	29.45	83	Vertical	PASS
2	11595.67	43.04	--	--	74.0	--	54.0	30.96	45	Vertical	PASS
3	14219.63	46.51	--	--	74.0	--	54.0	27.49	145	Vertical	PASS
4	18044.93	45.51	--	--	74.0	--	54.0	28.49	139	Vertical	PASS
5	21143.09	47.69	--	--	74.0	--	54.0	26.31	199	Vertical	PASS
6	22881.86	47.75	--	--	74.0	--	54.0	26.25	354	Vertical	PASS

Π/4-DQPSK MODE 6GHz to 25GHz, ANT H

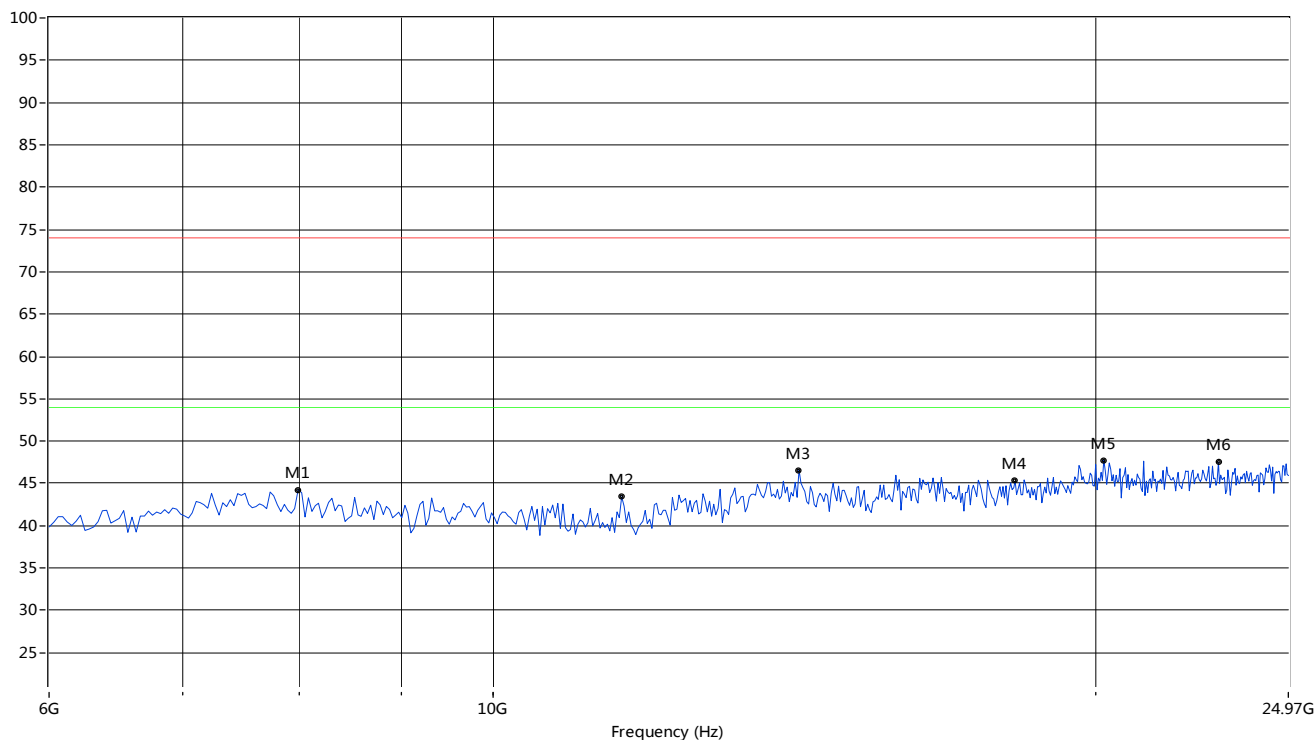

No.	Fre.(MHz)	Peak	Q-Peak	Average	PK Limit	QP Limit	AV Limit	Margin	Table	Polarization	Verdict
1	7991.68	44.26	--	--	74.0	--	54.0	29.74	156	Horizontal	PASS
2	11595.67	43.41	--	--	74.0	--	54.0	30.59	235	Horizontal	PASS
3	14219.63	46.58	--	--	74.0	--	54.0	27.42	262	Horizontal	PASS
4	18234.61	45.28	--	--	74.0	--	54.0	28.72	114	Horizontal	PASS
5	20194.68	47.75	--	--	74.0	--	54.0	26.25	309	Horizontal	PASS
6	23039.93	47.50	--	--	74.0	--	54.0	26.50	171	Horizontal	PASS

A.9 Band Edge

Test Data


The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Test Plots

GFSK LOW CHANNEL , ANT V, PEAK



GFSK LOW CHANNEL , ANT V, AVERAGE

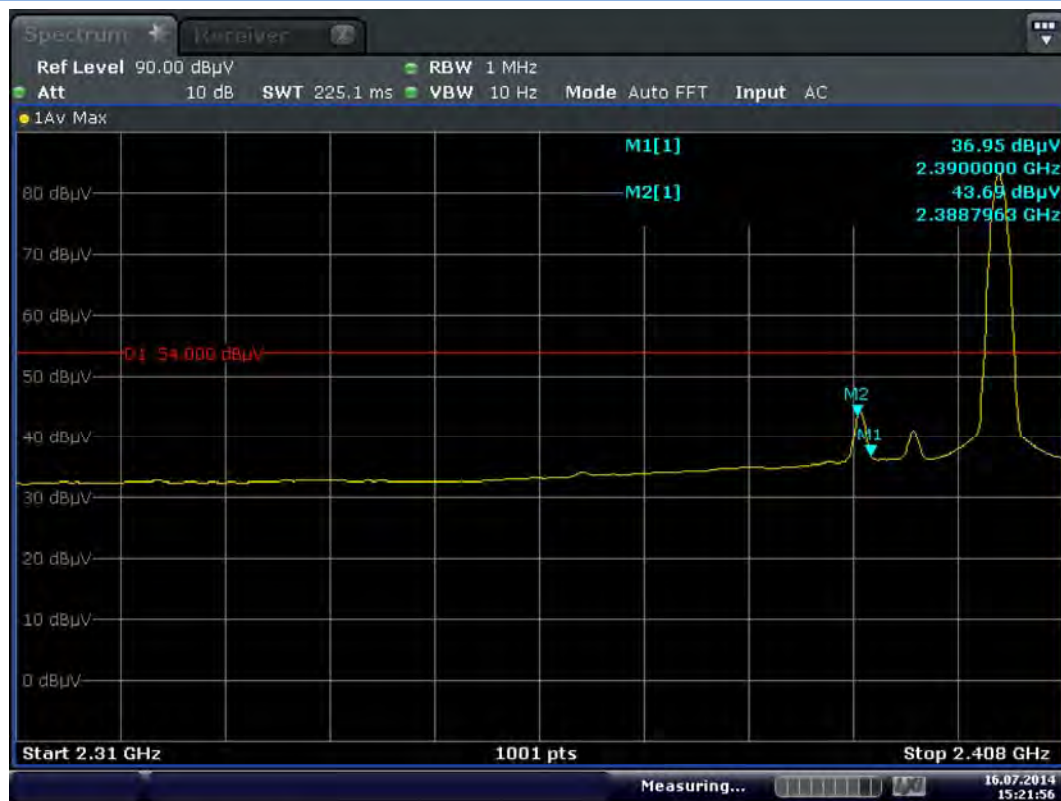

Date: 16.JUL.2014 15:21:57

GFSK LOW CHANNEL , ANT H, PEAK




Date: 16.JUL.2014 14:24:47

GFSK LOW CHANNEL , ANT H, AVERAGE



Date: 16.JUL.2014 15:33:13

GFSK HIGH CHANNEL , ANT V, PEAK

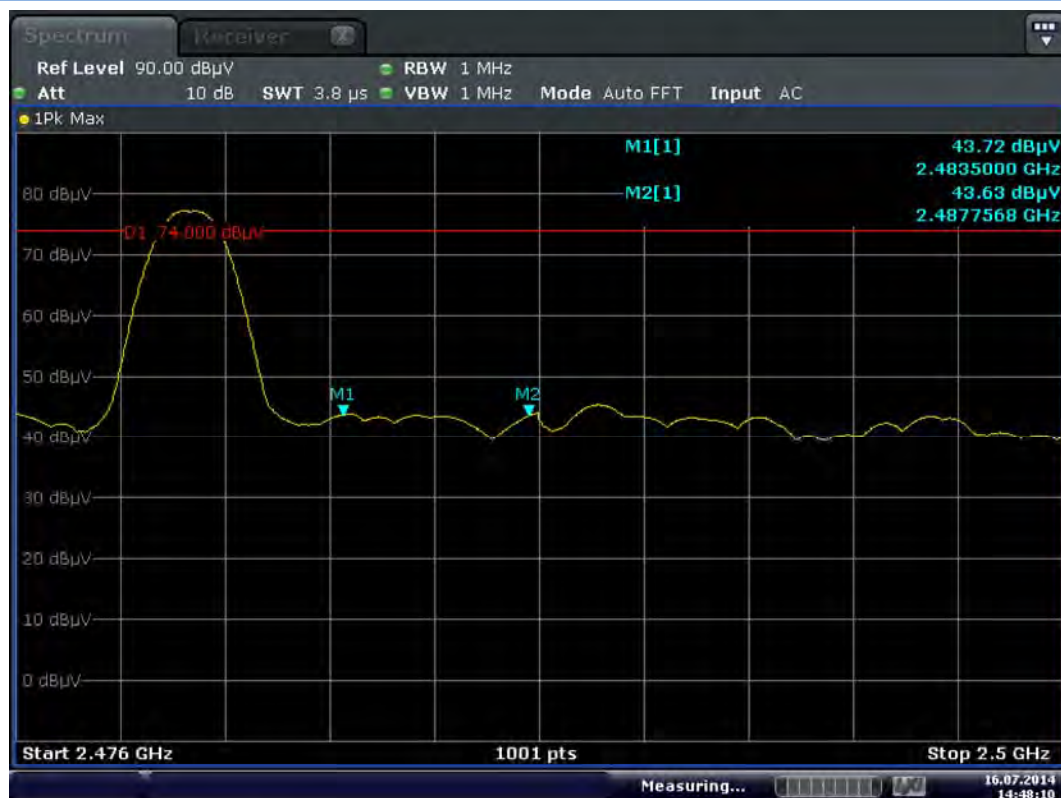


Date: 16.JUL.2014 14:48:11


GFSK HIGH CHANNEL, ANT V, AVERAGE



GFSK HIGH CHANNEL, ANT H, PEAK

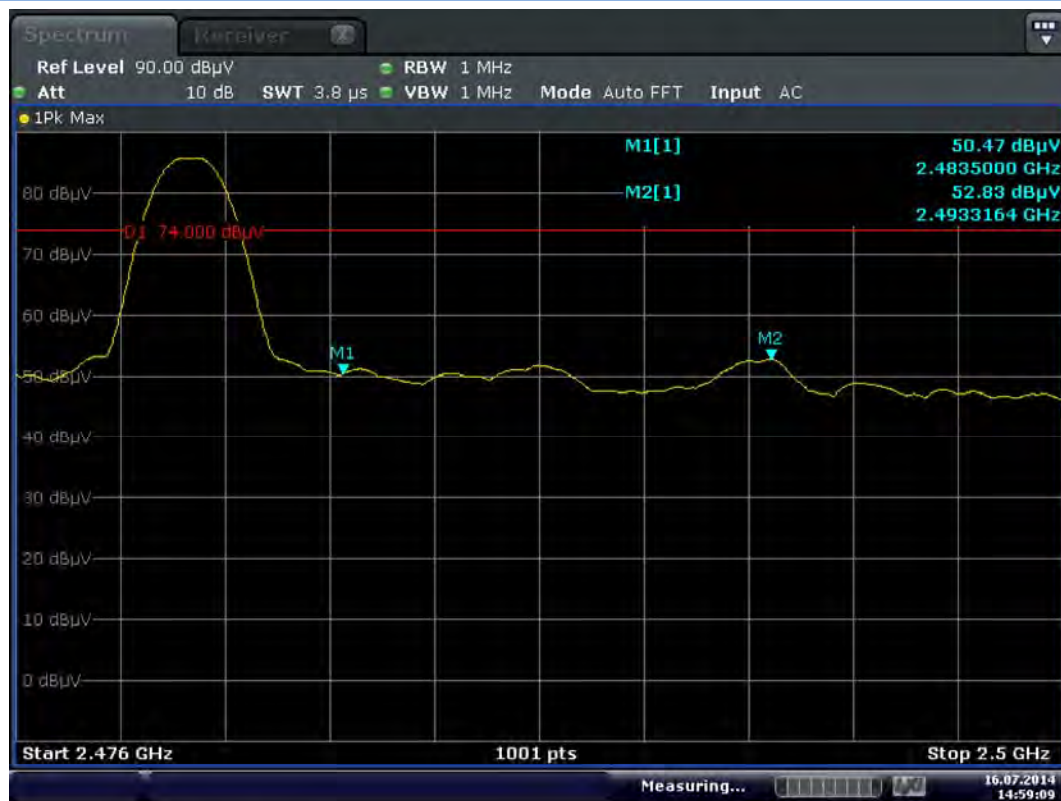


GFSK HIGH CHANNEL , ANT H, AVERAGE

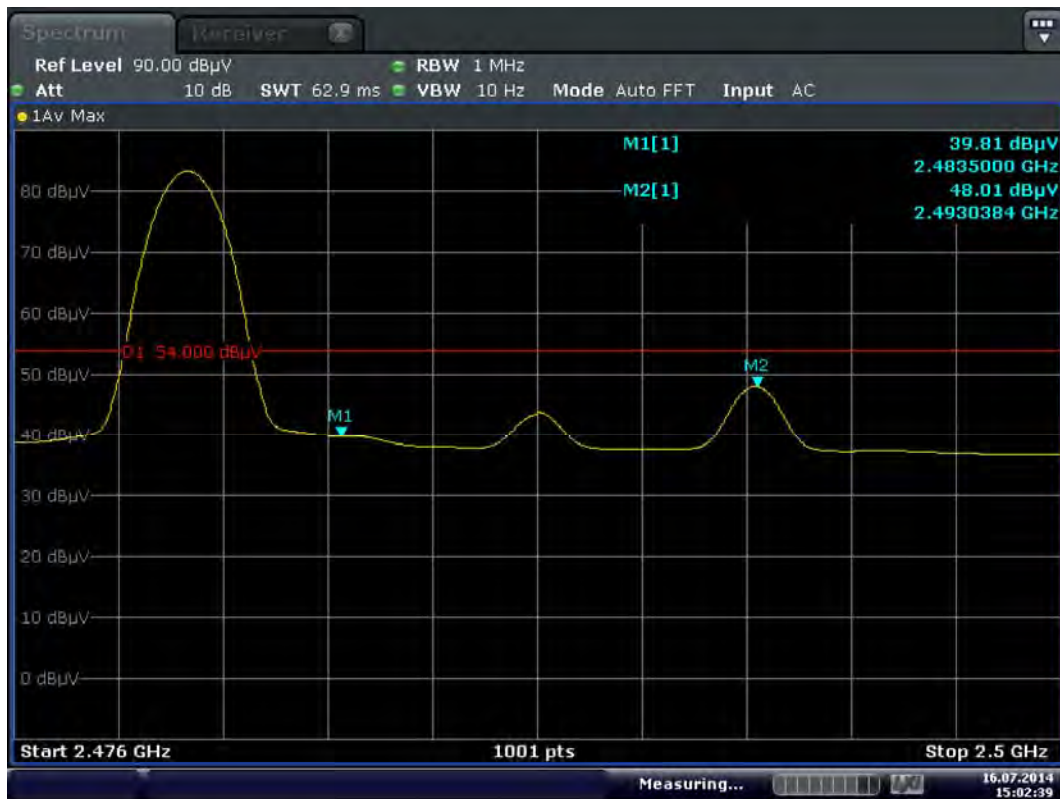

π /4DQPSK LOW CHANNEL , ANT V, PEAK



π /4DQPSK LOW CHANNEL, ANT V, AVERAGE

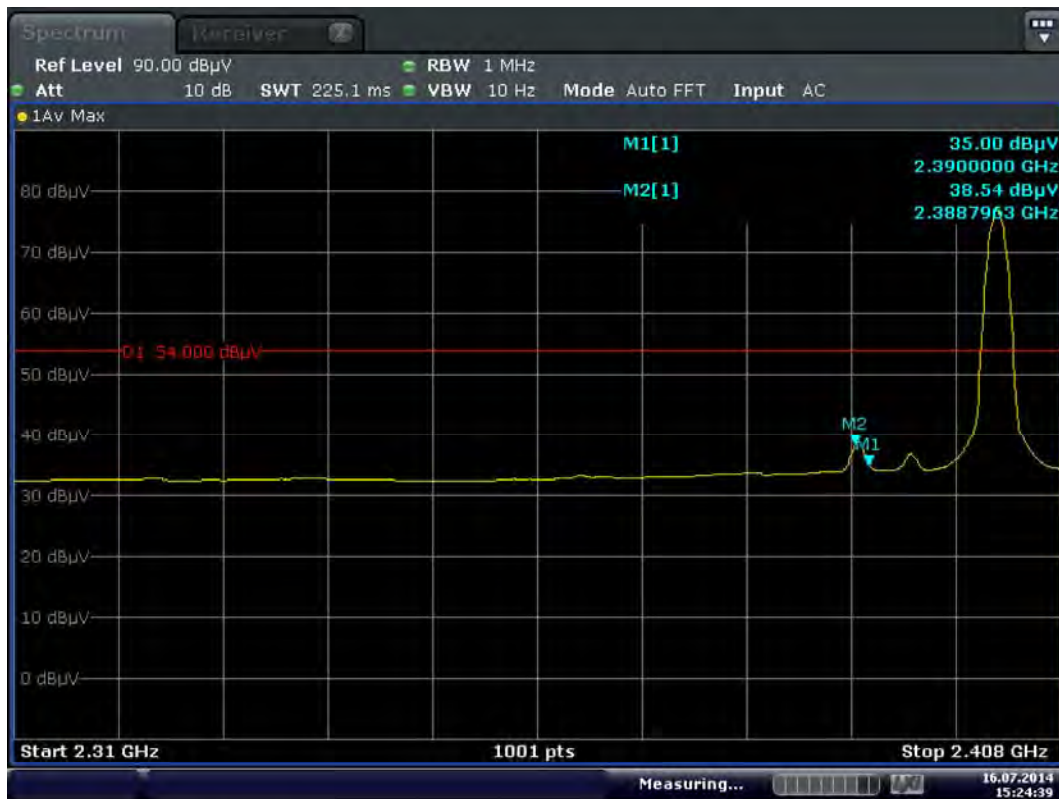

Date: 16.JUL.2014 15:24:40

π /4DQPSK LOW CHANNEL, ANT H, PEAK



Date: 16.JUL.2014 14:36:13

π /4DQPSK LOW CHANNEL, ANT H, AVERAGE




Date: 16.JUL.2014 15:27:44

π /4DQPSK HIGH CHANNEL, ANT V, PEAK



Date: 16.JUL.2014 14:52:03

π /4DQPSK HIGH CHANNEL, ANT V, AVERAGE

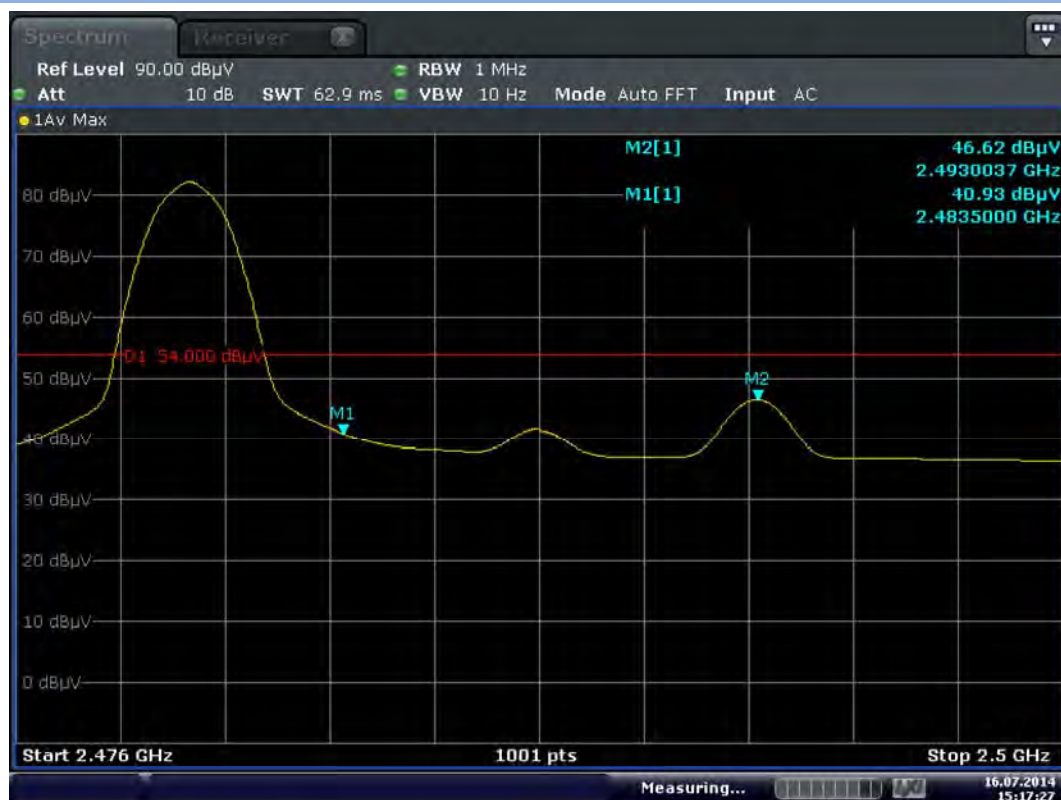


Date: 16.JUL.2014 15:17:27

π /4DQPSK HIGH CHANNEL , ANT H, PEAK



Date: 16.JUL.2014 14:55:38


J1 /4DQPSK HIGH CHANNEL, ANT H, AVERAGE

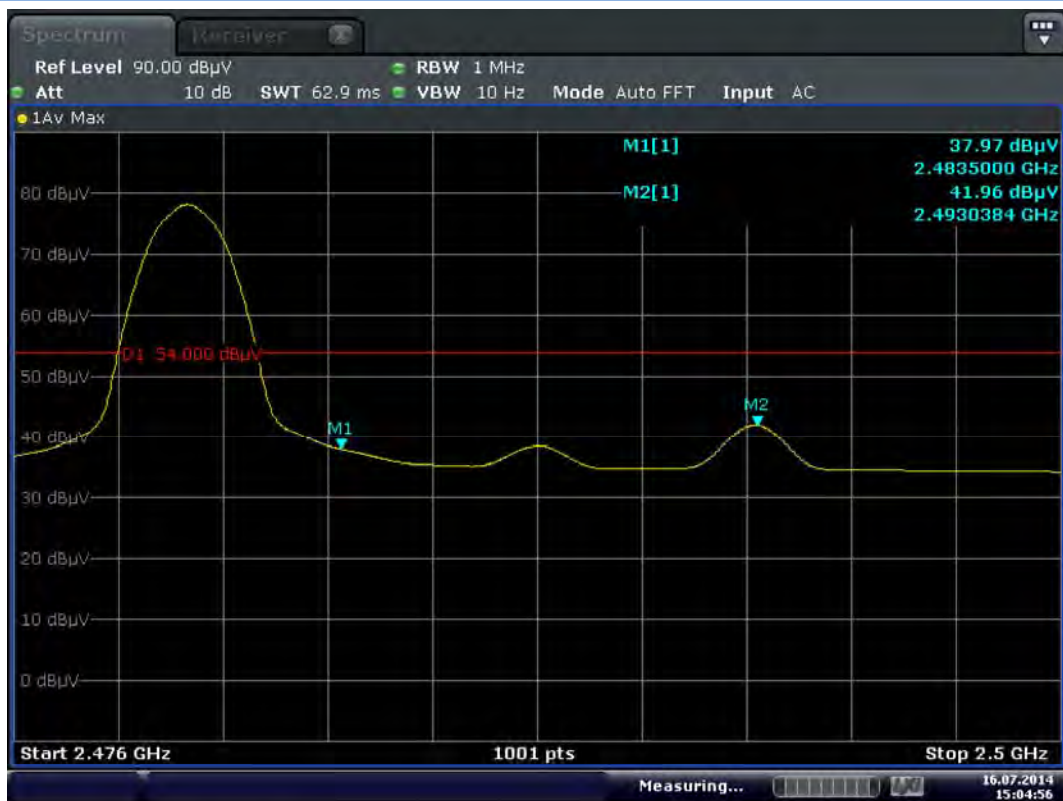

Date: 16.JUL.2014 15:04:57

ANNEX B TEST SETUP PHOTOS

B.1 Conducted Test Photo

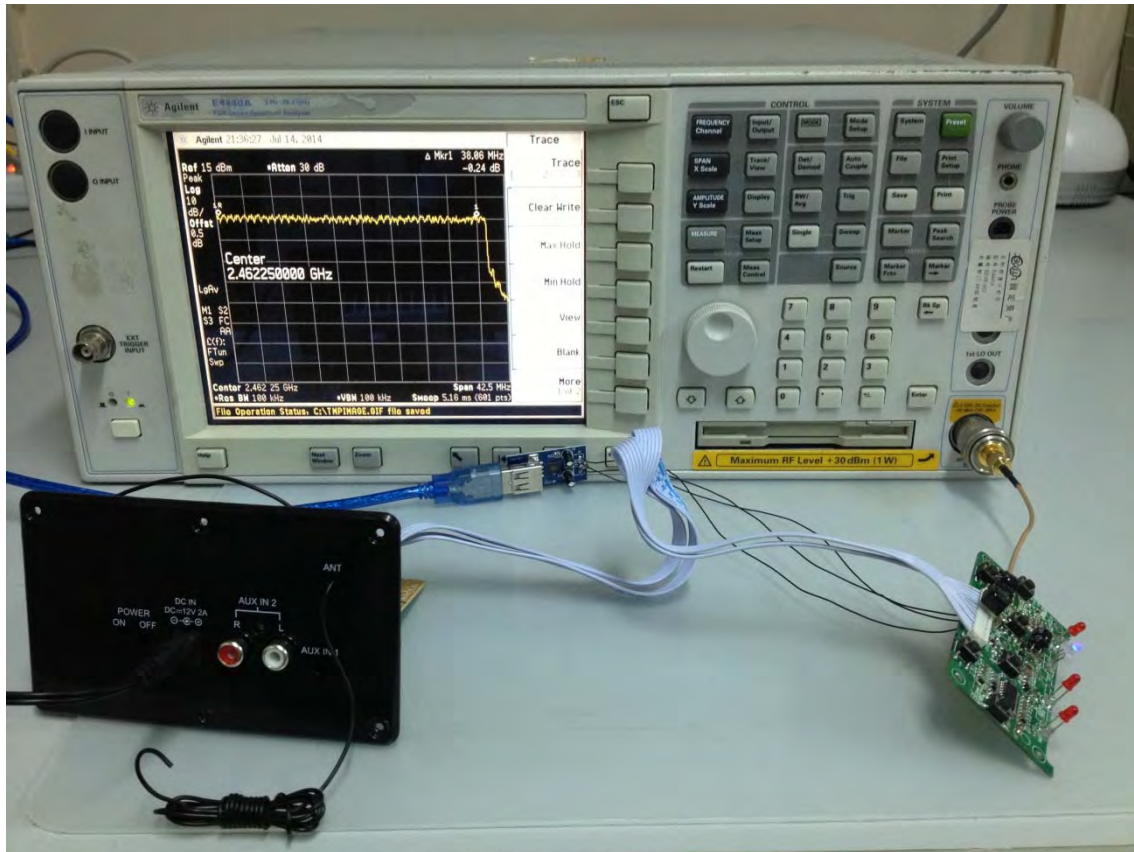


B.2 Radiated Test Photo





Below 30MHz



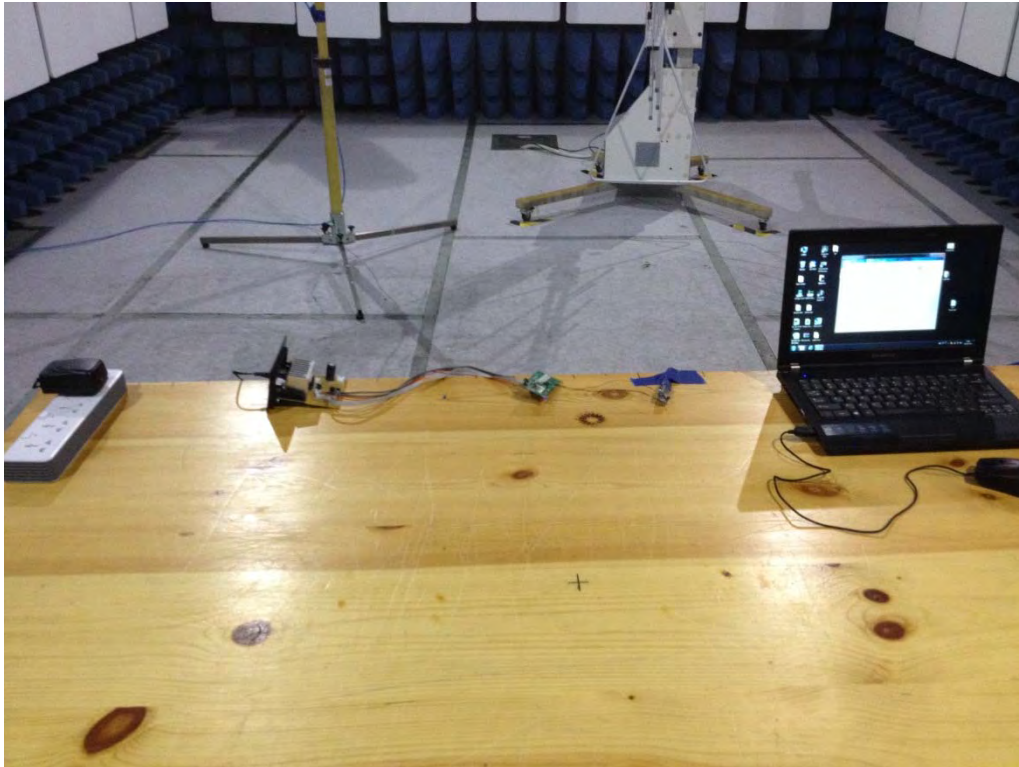

30MHz to 1GHz

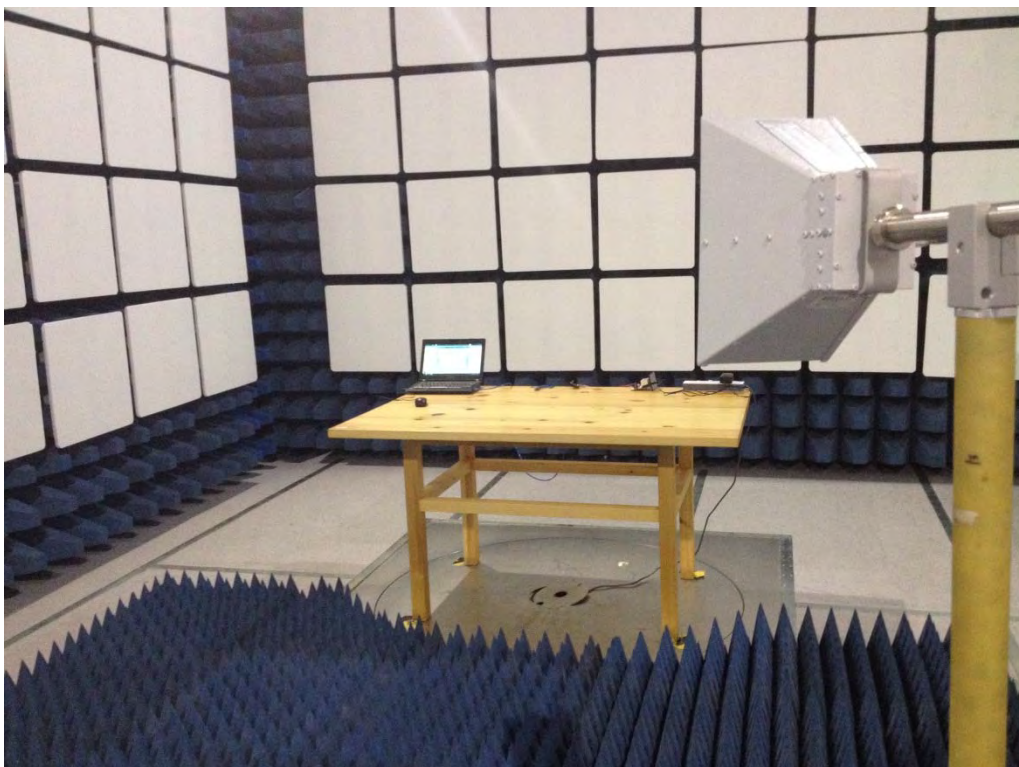

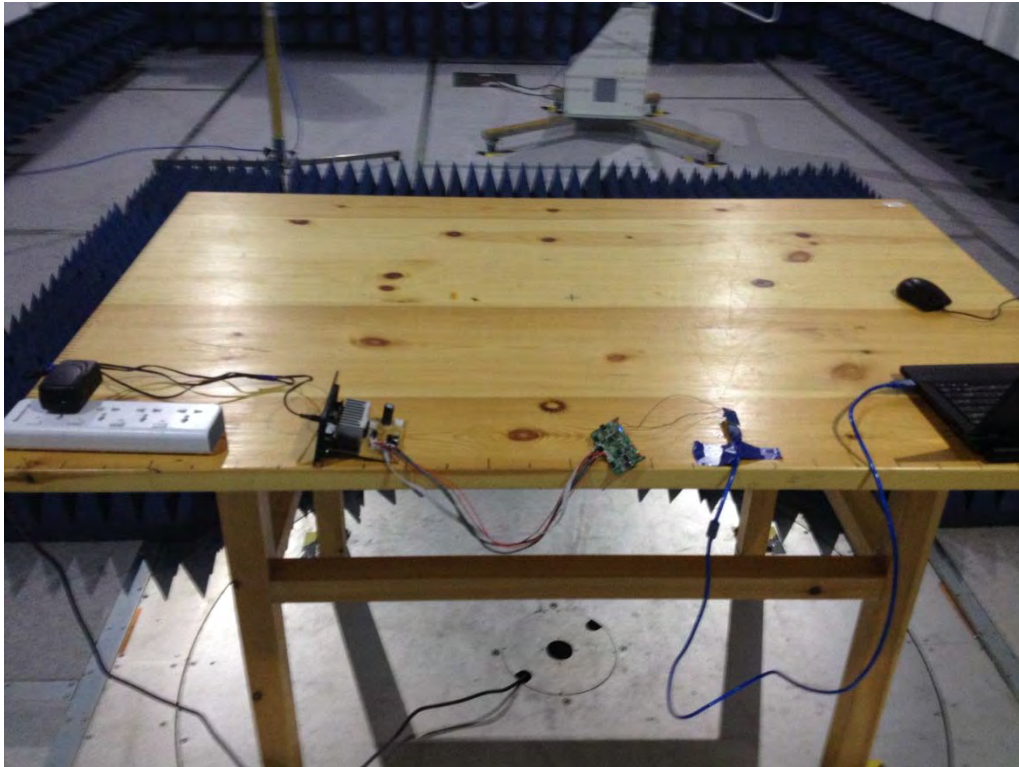

Above 1GHz

ANNEX C EUT PHOTOS

C.1 Appearance of the EUT



THE FRONT OF EUT (1)



THE FRONT OF EUT (2)



THE DOWN OF EUT



THE UP OF EUT



THE LEFT OF EUT




THE CHARGER OF EUT


C.2 Inside of the EUT




EUT UNCOVER VIEW

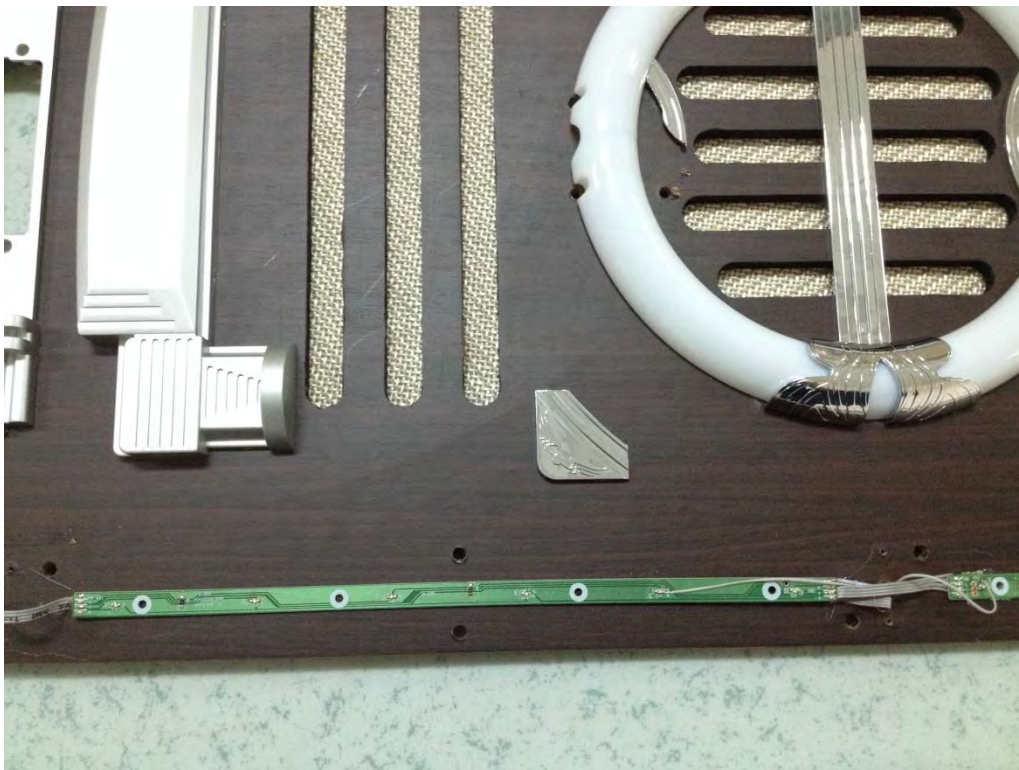


EUT UNCOVER VIEW

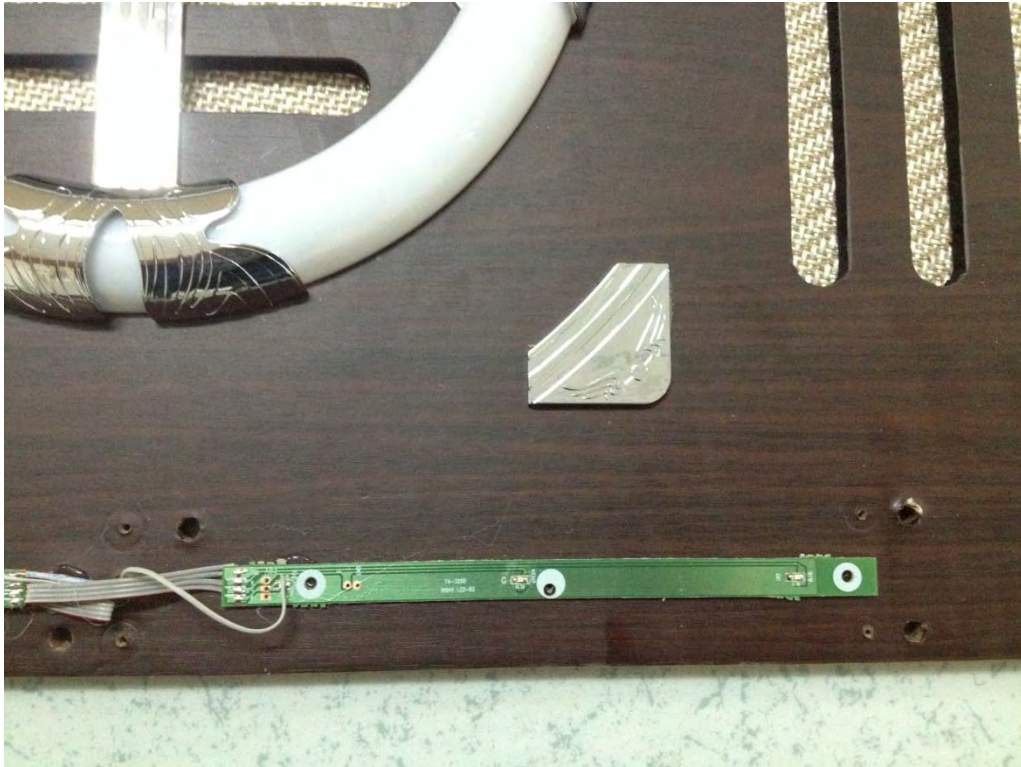


EUT UNCOVER VIEW

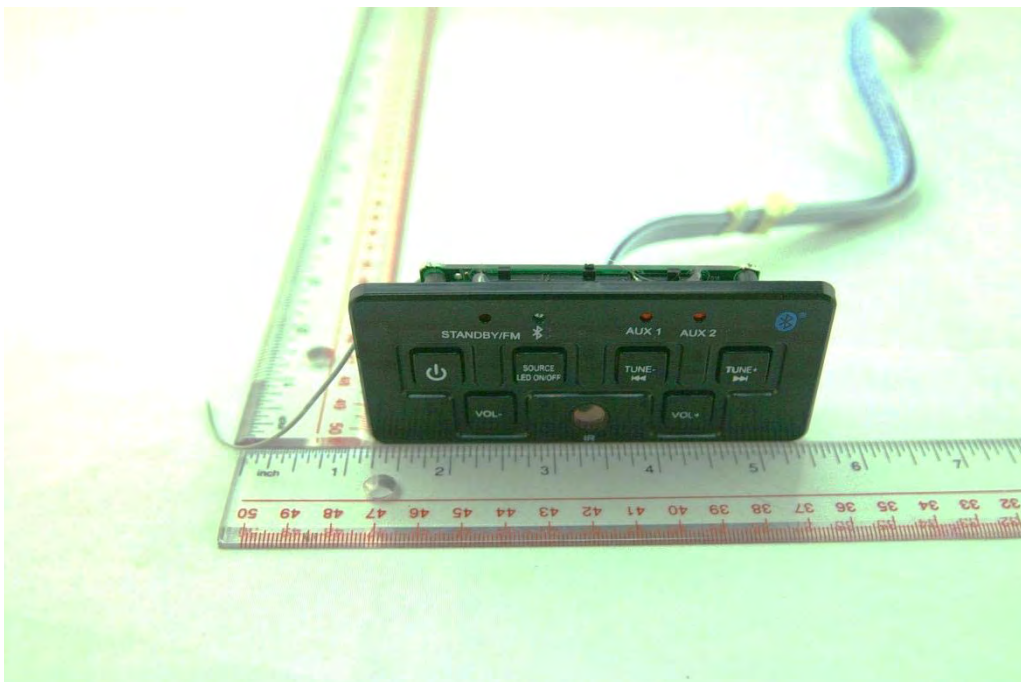


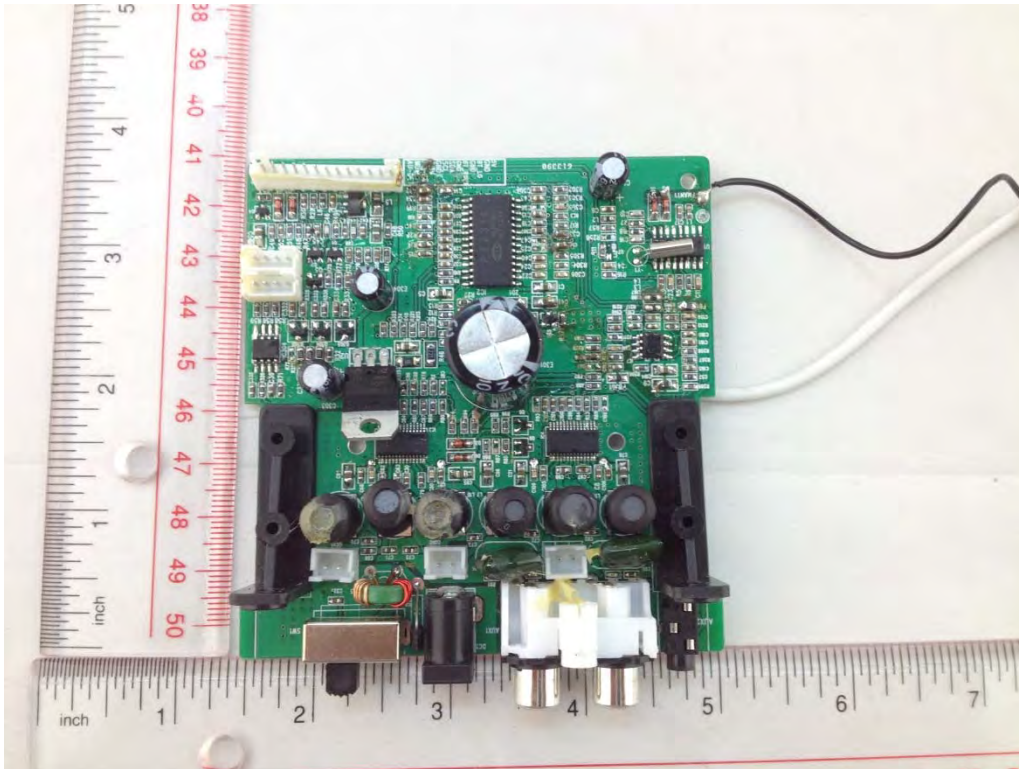


MAIN BOARD BACK VIEW 1

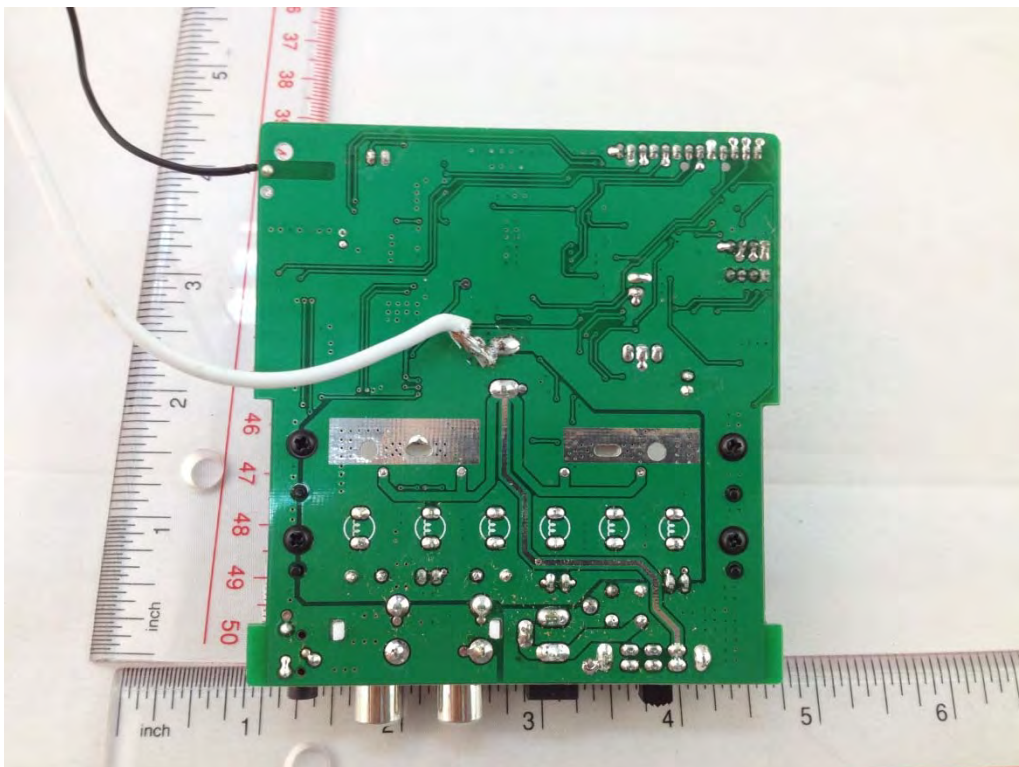


MAIN BOARD BACK VIEW 2

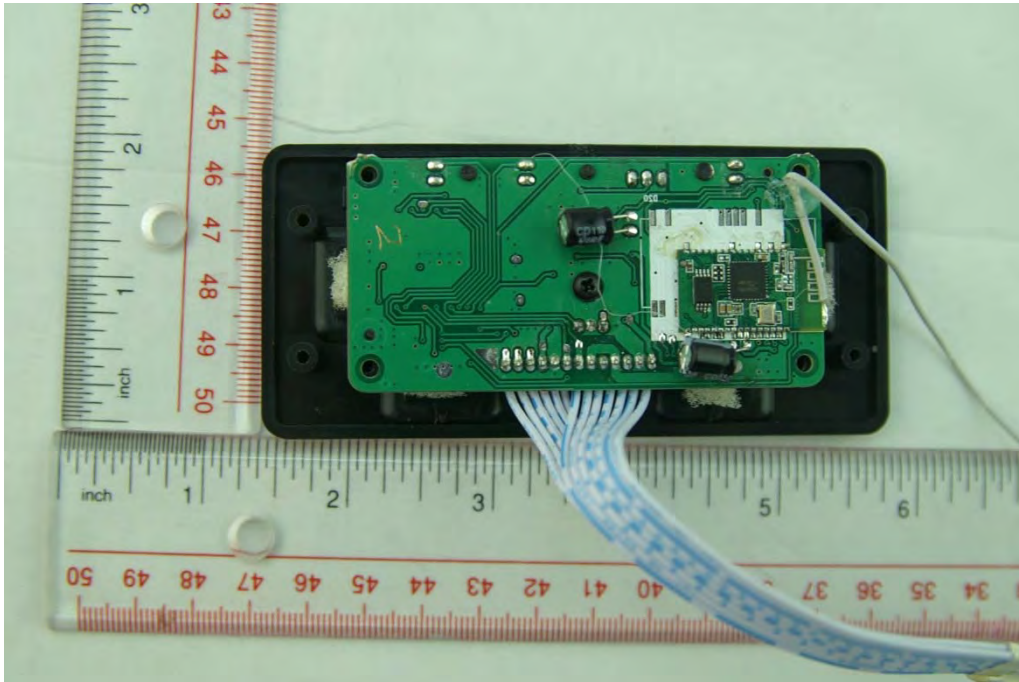


MAIN BOARD BACK VIEW 3

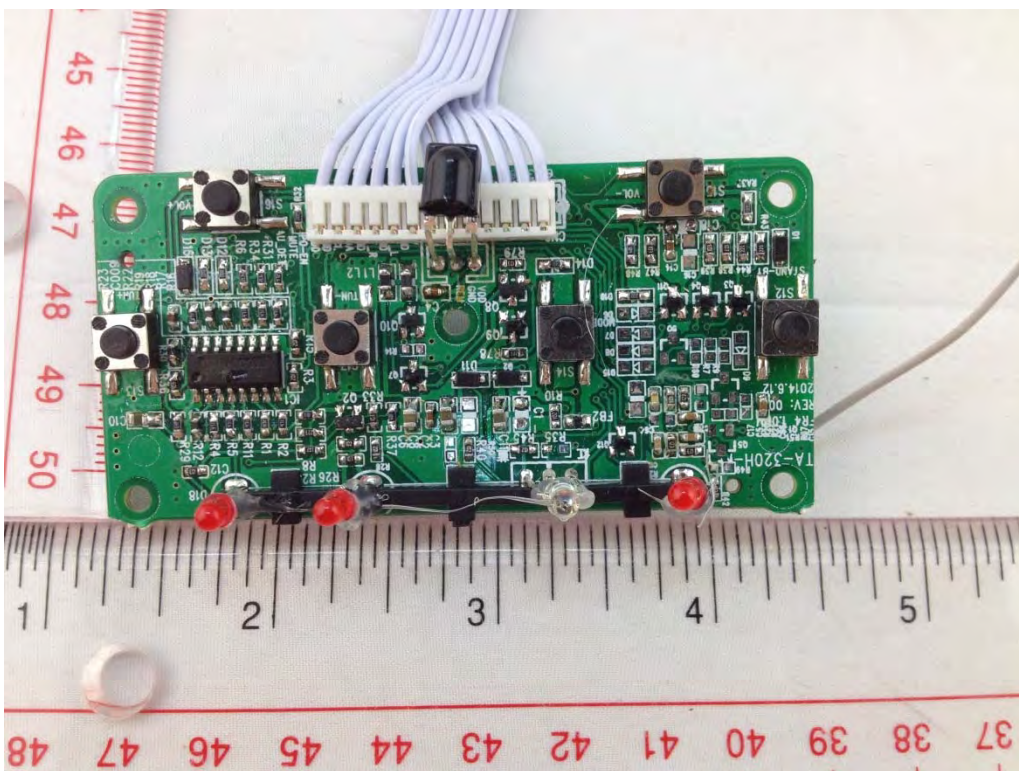


MAIN BOARD BACK VIEW 4

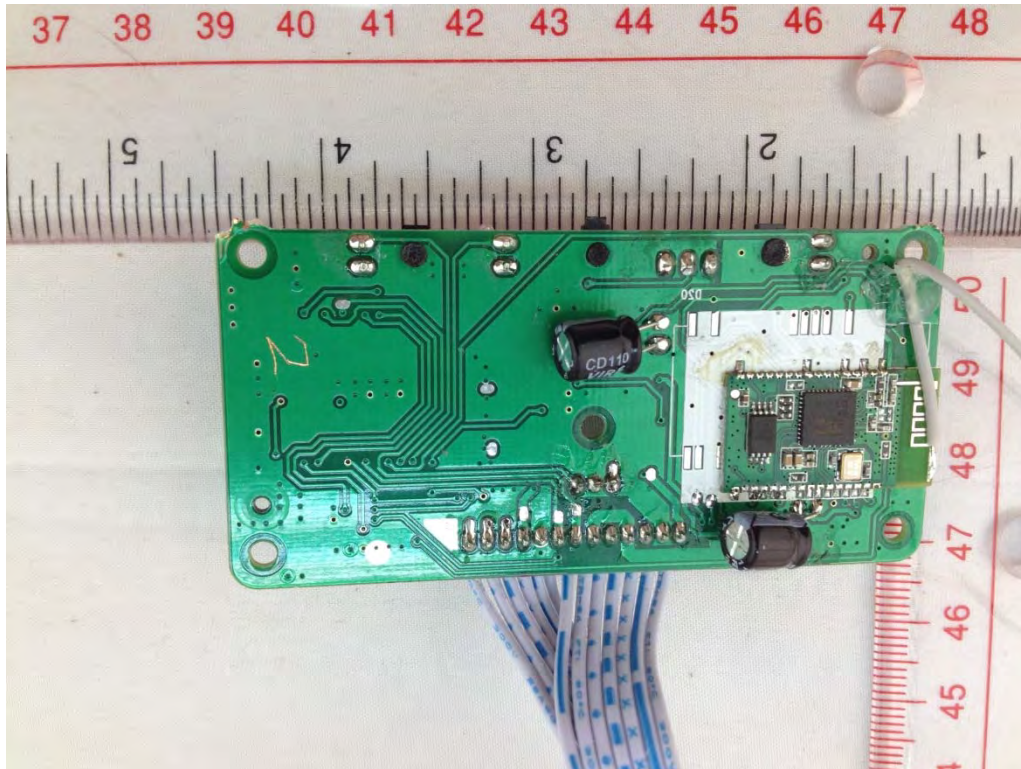

MAIN BOARD BACK VIEW 4

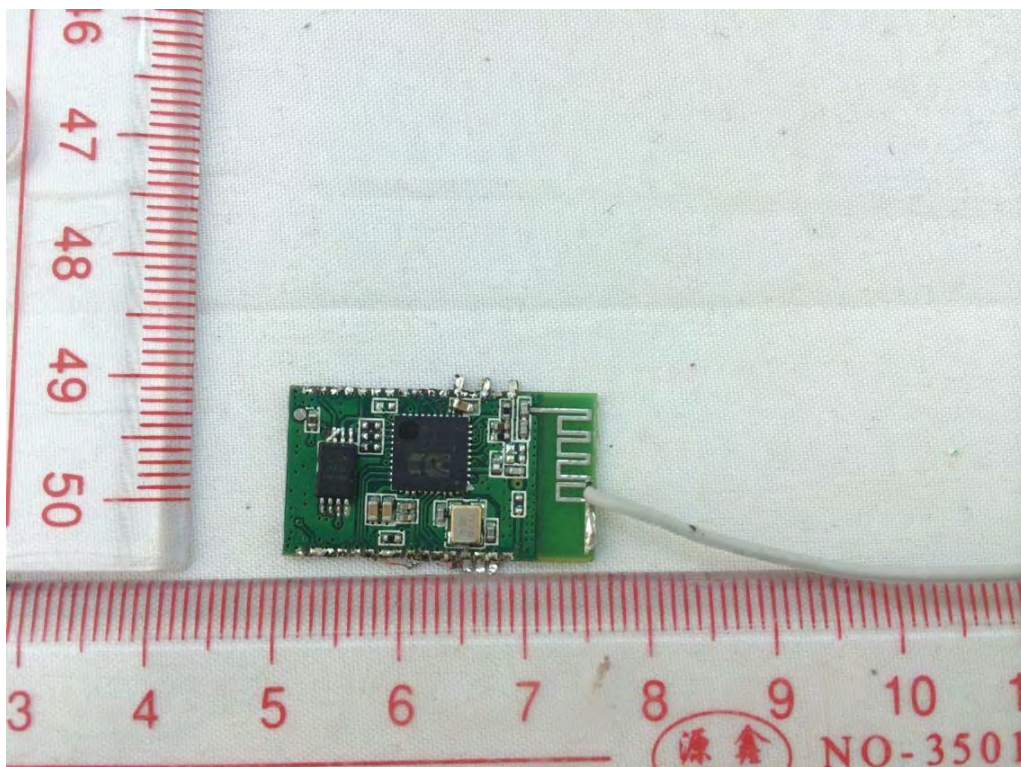

RF MODULE

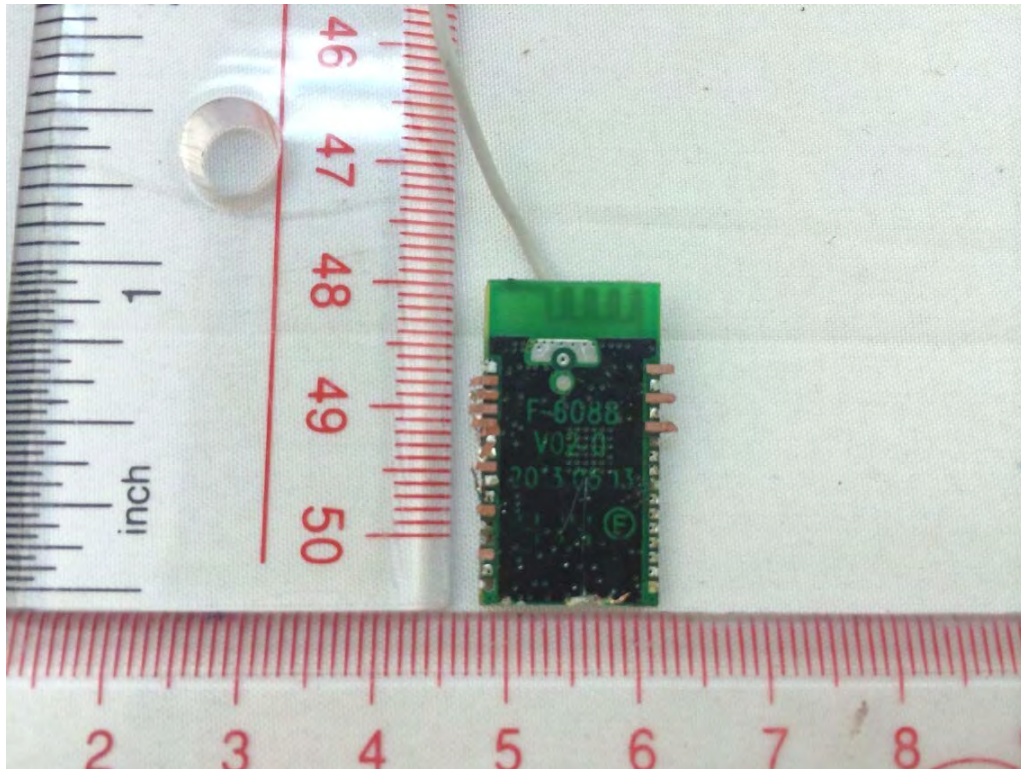

RF MODULE

--END OF REPORT--