



STC Test Report



Date: 2013-08-15
No.: DM111940

Page 1 of 83

Applicant (LEH002): Tonika Electronics Technology (Shenzhen) Co., Ltd.
No.55 Busha Road No.2 Shanwei Industrial Estate,
Zhangshubu Commune, Nanwan Town, Longgang district,
Shenzhen, Guangdong, China

Manufacturer: Tonika Electronics Technology (Shenzhen) Co., Ltd.
No.55 Busha Road No.2 Shanwei Industrial Estate,
Zhangshubu Commune, Nanwan Town, Longgang district,
Shenzhen, Guangdong, China

Description of Sample(s): Product: Bluetooth Stereo Speaker
Brand Name: CRAIG
Model Number: TA-323
FCC ID: SDNB020548

Date Sample(s) Received: 2013-07-23

Date Tested: 2013-08-03 to 2013-08-07

Investigation Requested: Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2012 and ANSI C63.4: 2009 for FCC Certification.

Conclusion(s): The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

Remark(s): For additional model(s) details, see page 3



LONG Yun Jian, Along
Authorized Signatory
ElectroMagnetic Compatibility Department
For and on behalf of
STC (Dongguan) Company Limited



STC Test Report

Date: 2013-08-15

No.: DM111940

Page 2 of 83

CONTENT:

| | |
|----------------------------------------------------------------|-------------------|
| Cover | Page 1 of 83 |
| Content | Page 2 of 83 |
| <u>1.0</u> <u>General Details</u> | |
| 1.1 Test Laboratory | Page 3 of 83 |
| 1.2 Equipment Under Test [EUT] Description of EUT operation | Page 3 of 83 |
| 1.3 Date of Order | Page 3 of 83 |
| 1.4 Submitted Sample | Page 3 of 83 |
| 1.5 Test Duration | Page 3 of 83 |
| 1.6 Country of Origin | Page 3 of 83 |
| 1.7 RF Module Details | Page 4 of 83 |
| 1.8 Antenna Details | Page 4 of 83 |
| <u>2.0</u> <u>Technical Details</u> | |
| 2.1 Investigations Requested | Page 5 of 83 |
| 2.2 Test Standards and Results Summary | Page 5 of 83 |
| 2.3 Table for Test Modes | Page 6 of 83 |
| <u>3.0</u> <u>Test Results</u> | |
| 3.1 Emission | Page 7 - 74 of 83 |
| <u>Appendix A</u> | |
| List of Measurement Equipment | Page 75 of 83 |
| <u>Appendix B</u> | |
| Ancillary Equipment | Page 75 of 83 |
| <u>Appendix C</u> | |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 3 of 83

Photographs

Page 76 - 83 of 83

1.0 General Details

1.1 Test Laboratory

STC (Dongguan) Company Limited
EMC Laboratory
68 Fumin Nan Road, Dalang, Dongguan, China

Telephone: (86 769) 81119888
Fax: (86 769) 81116222

1.2 Equipment Under Test [EUT] Description of Sample(s)

Product: Bluetooth Stereo Speaker
Manufacturer: Tonika Electronics Technology (Shenzhen) Co., Ltd.
Brand Name: CRAIG
Model Number: TA-323
Additional Model Number(s): CHT913
Input Voltage: 5Vd.c. with Jack
The AC/DC adaptor was provided by the applicant with following details:
Brand name: N/A; Model no.: HB10-050150USPA; Input: 100-240Va.c. 50/60Hz 0.4A;
Output: 5Vd.c. 1500mA.

1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Bluetooth Stereo Speaker of Tonika Electronics Technology (Shenzhen) Co., Ltd., it is Audio System, modulation by IC; and type is frequency hopping speed spectrum Modulation.

1.3 Date of Order

2013-07-23

1.4 Submitted Sample(s):

1 Sample

1.5 Test Duration

2013-08-03 to 2013-08-07

1.6 Country of Origin

China

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 4 of 83

1.7 RF Module Details

Module Model Number: CT8853
Module FCC ID:
Module Transmission Type: Bluetooth V2.1+EDR
Modulation: FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK)
Data Rates:
1Mbps: GFSK
2 Mbps: $\pi/4$ -DQPSK
3 Mbps: 8DPSK
Frequency Range: 2400-2483.5MHz
Carrier Frequencies: 2402MHz – 2480MHz

Module Specification (specification provided by manufacturer)

1.8 Antenna Details

Antenna Type: PCB layout internal antenna
Antenna Gain: 2dBi

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15

Page 5 of 83

No.: DM111940

2.0 Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2012 Regulations. FCC Pubic Notice DA 00-705 and ANSI C63.4: 2009 for FCC Certification.

2.2 Test Standards and Results Summary Tables

| EMISSION Results Summary | | | | | | |
|-----------------------------------------------|------------------------------|----------------------------|---------------------|-------------------------------------|--------------------------|--------------------------|
| Test Condition | Test Requirement | Test Method | Class / Severity | Test Result | | |
| | | | | Pass | Fail | N/A |
| Maximum Peak Conducted Output Power | FCC 47CFR 15.247(b)(1) | FCC Pubic Notice DA 00-705 | N/A | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Radiated Spurious Emissions | FCC 47CFR 15.209 | ANSI C63.4:2009 | N/A | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| AC Mains Conducted Emissions | FCC 47CFR 15.207 | ANSI C63.4:2009 | N/A | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Number of Hopping Frequency | FCC 47CFR 15.247(a)(2)(b)(1) | FCC Pubic Notice DA 00-705 | N/A | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 20dB Bandwidth | FCC 47CFR 15.247(a)(2) | FCC Pubic Notice DA 00-705 | N/A | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Hopping Channel Separation | FCC 47CFR 15.247(a)(1) | FCC Pubic Notice DA 00-705 | N/A | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Band-edge compliance of RF Conducted Emission | FCC 47CFR 15.247(c) | FCC Pubic Notice DA 00-705 | N/A | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Time of Occupancy (Dwell Time) | FCC 47CFR 15.247(a)(1)(iii) | FCC Pubic Notice DA 00-705 | N/A | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Antenna requirement | FCC 47CFR 15.203 | N/A | N/A | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| RF Exposure | FCC 47CFR 15.247(i) | N/A | N/A | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Note: N/A – Not Applicable

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 6 of 83

2.3 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate in the table below is the worst case rate with respect to the specific test item.

Investigation has been done on all the possible configurations for searching the worst cases.

The following table is a list of the test modes shown in this test report.

| Test Items | Mode | Data Rate |
|--------------------------------------------|-------------------------------|-----------------------|
| Maximum Peak Conducted Output Power | GFSK / $\pi/4$ -DQPSK / 8DPSK | 1MBps / 2MBps / 3MBps |
| Hopping Channel Separation | GFSK / $\pi/4$ -DQPSK / 8DPSK | 1MBps / 2MBps / 3MBps |
| Number of Hopping Frequency | GFSK / $\pi/4$ -DQPSK / 8DPSK | 2MBps |
| Time of Occupancy(Dwell Time) | 8DPSK (DH1 / DH3 / DH5) | 2MBps |
| Radiated Spurious Emissions | GFSK / $\pi/4$ -DQPSK / 8DPSK | 1MBps / 2MBps / 3MBps |
| Band-edge compliance of Conducted Emission | GFSK / $\pi/4$ -DQPSK / 8DPSK | 2MBps |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 7 of 83

3.0 Test Results

3.1 Emission

3.1.1 Maximum Peak Conducted Output Power

Test Requirement: FCC 47CFR 15.247(b)(1)
Test Method: FCC Pubic Notice DA 00-705
Test Date: 2013-08-05
Mode of Operation: Tx mode


Test Method:

The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in dBm.

Spectrum Analyzer Setting:

RBW = 3 MHz, VBW= 3MHz, Sweep = Auto, Span = 10MHz
Detector = Peak, Trace = Max. hold

Test Setup:

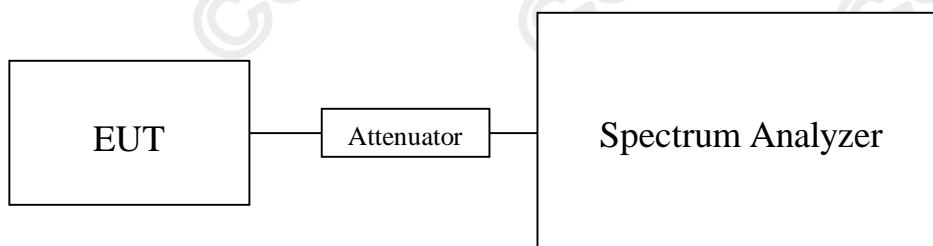

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15

Page 8 of 83

No.: DM111940

Limits for Maximum Peak Conducted Output Power [FCC 47CFR 15.247]:

The maximum peak output power shall not exceeded the following limits:
For frequency hopping systems employing at least 75 hopping channels: 1 Watt
For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts
For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt

Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2402 | 0.00101 |

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2441 | 0.00105 |

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2480 | 0.00107 |

Results of Bluetooth Communication mode ($\pi/4$ -DQPSK) (Fundamental Power): Pass

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2402 | 0.00091 |

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2442 | 0.00098 |

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2480 | 0.00104 |

Results of Bluetooth Communication mode (8 DPSK) (Fundamental Power): Pass

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2402 | 0.00089 |

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2442 | 0.00097 |

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2480 | 0.00106 |

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB
1GHz to 18GHz 1.7dB

Remark:

1. All test data for each data rate were verified, but only the worst case was reported.
2. The EUT is programmed to transmit signals continuously for all testing.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 9 of 83

3.1.2 Radiated Spurious Emissions

Test Requirement: FCC 47CFR 15.209
Test Method: ANSI C63.4:2009
Test Date: 2013-08-05
Mode of Operation: Tx mode / Bluetooth Communication mode (GFSK / $\pi/4$ -DQPSK / 8DPSK)

Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: Semi-anechoic chamber located on the STC (Dongguan) Company Ltd. 68 Fumin Nan Road, Dalang, Dongguan, Guangdong, PRC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 10 of 83

Spectrum Analyzer Setting:

9KHz – 30MHz (Pk & Av)

RBW: 10kHz
VBW: 30kHz
Sweep: Auto
Span: Fully capture the emissions being measured
Trace: Max. hold


30MHz – 1GHz (QP)

RBW: 120kHz
VBW: 120kHz
Sweep: Auto
Span: Fully capture the emissions being measured
Trace: Max. hold

Above 1GHz (Pk & Av)

RBW: 1MHz
VBW: 3MHz
Sweep: Auto
Span: Fully capture the emissions being measured
Trace: Max. hold

Test Setup:

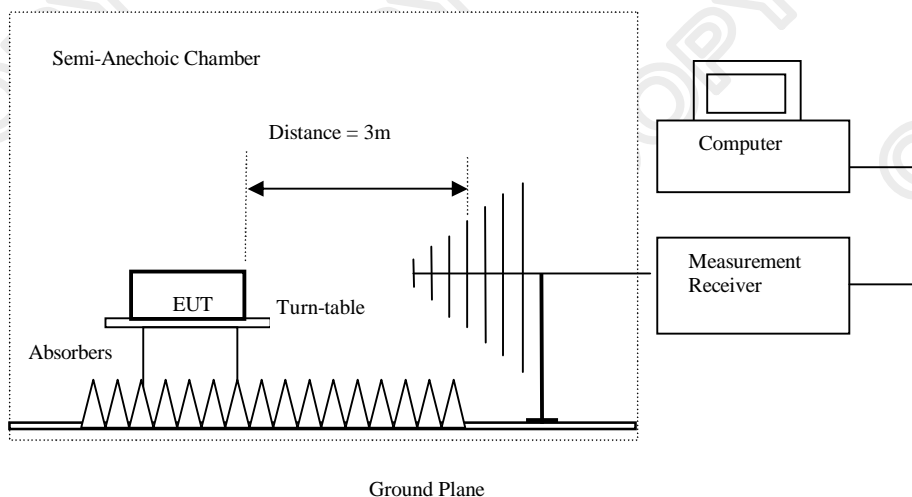

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz horn antennas are used, 9kHz to 30MHz loop antennas are used.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 11 of 83

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

| Frequency Range [MHz] | Quasi-Peak Limits [$\mu\text{V/m}$] |
|--------------------------|------------------------------------------|
| 0.009-0.490 | 2400/F (kHz) |
| 0.490-1.705 | 24000/F (kHz) |
| 1.705-30 | 30 |
| 30-88 | 100 |
| 88-216 | 150 |
| 216-960 | 200 |
| Above 960 | 500 |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx mode (2402.0 MHz) (GFSK mode) (9kHz – 30MHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------------|---------------------------------------|------------------------------|-----------------------------------------|--------------------------------------|--------------------------|---------------------|
| Frequency MHz | Measured Level dB μV | Correction Factor dB/m | Field Strength dB $\mu\text{V/m}$ | Field Strength $\mu\text{V/m}$ | Limit $\mu\text{V/m}$ | E-Field Polarity |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

Result of Tx mode (2402.0 MHz) (GFSK mode) (30MHz – 1GHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------------|---------------------------------------|------------------------------|-----------------------------------------|--------------------------------------|--------------------------|---------------------|
| Frequency MHz | Measured Level dB μV | Correction Factor dB/m | Field Strength dB $\mu\text{V/m}$ | Field Strength $\mu\text{V/m}$ | Limit $\mu\text{V/m}$ | E-Field Polarity |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

Result of Tx mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass

| Field Strength of Spurious Emissions Peak Value | | | | | | |
|----------------------------------------------------|-------------------------------------------|------------------------------|-----------------------------------------|------------------------------------|------------------------------|---------------------|
| Frequency MHz | Measured Level @3m dB μV | Correction Factor dB/m | Field Strength dB $\mu\text{V/m}$ | Limit @3m dB $\mu\text{V/m}$ | Margin dB $\mu\text{V/m}$ | E-Field Polarity |
| 4804.0 | 22.4 | 41.5 | 63.9 | 74.0 | 10.1 | Vertical |
| 4804.0 | 20.9 | 42.4 | 63.3 | 74.0 | 10.7 | Horizontal |
| 7206.0 | 9.2 | 45.1 | 54.3 | 74.0 | 19.7 | Vertical |
| 7206.0 | 6.8 | 46.2 | 53.0 | 74.0 | 21.0 | Horizontal |
| 9608.0 | 6.1 | 48.0 | 54.1 | 74.0 | 19.9 | Vertical |
| 9608.0 | 3.8 | 48.8 | 52.6 | 74.0 | 21.4 | Horizontal |
| 12010.0 | 2.0 | 51.5 | 53.5 | 74.0 | 20.5 | Vertical |
| 12010.0 | 0.2 | 52.4 | 52.6 | 74.0 | 21.4 | Horizontal |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 12 of 83

Result of Tx mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency MHz | Measured Level @3m dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Limit @3m dB μ V/m | Margin dB μ V/m | E-Field Polarity |
| 4804.0 | 8.2 | 41.5 | 49.7 | 54.0 | 4.3 | Vertical |
| 4804.0 | 6.6 | 42.4 | 49.0 | 54.0 | 5.0 | Horizontal |
| 7206.0 | -5.1 | 45.1 | 40.0 | 54.0 | 14.0 | Vertical |
| 7206.0 | -7.3 | 46.2 | 38.9 | 54.0 | 15.1 | Horizontal |
| 9608.0 | -8.1 | 48.0 | 39.9 | 54.0 | 14.1 | Vertical |
| 9608.0 | -10.4 | 48.8 | 38.4 | 54.0 | 15.6 | Horizontal |
| 12010.0 | -12.3 | 51.5 | 39.2 | 54.0 | 14.8 | Vertical |
| 12010.0 | -14.0 | 52.4 | 38.4 | 54.0 | 15.6 | Horizontal |

Result of Tx mode (2441.0 MHz) (GFSK mode) (9kHz – 30MHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------------|---------------------------------|------------------------------|-----------------------------------|--------------------------------|--------------------|---------------------|
| Frequency MHz | Measured Level dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit μ V/m | E-Field Polarity |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

Results of Tx mode (2441.0 MHz) (GFSK mode) (30MHz – 1000MHz): PASS

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------------|---------------------------------|------------------------------|-----------------------------------|--------------------------------|--------------------|---------------------|
| Frequency MHz | Measured Level dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit μ V/m | E-Field Polarity |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 13 of 83

Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass

| Field Strength of Spurious Emissions Peak Value | | | | | | |
|----------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency MHz | Measured Level @3m dBuV | Correction Factor dB/m | Field Strength dBuV/m | Limit @3m dBuV/m | Margin dBuV/m | E-Field Polarity |
| 4882.0 | 21.1 | 41.6 | 62.7 | 74.0 | 11.3 | Vertical |
| 4882.0 | 19.8 | 42.5 | 62.3 | 74.0 | 11.7 | Horizontal |
| 7323.0 | 8.7 | 45.2 | 53.9 | 74.0 | 20.1 | Vertical |
| 7323.0 | 6.4 | 46.3 | 52.7 | 74.0 | 21.3 | Horizontal |
| 9764.0 | 4.9 | 48.1 | 53.0 | 74.0 | 21.0 | Vertical |
| 9764.0 | 3.3 | 48.9 | 52.2 | 74.0 | 21.8 | Horizontal |
| 12205.0 | 1.0 | 51.6 | 52.6 | 74.0 | 21.4 | Vertical |
| 12205.0 | -1.1 | 52.5 | 51.4 | 74.0 | 22.6 | Horizontal |

Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency MHz | Measured Level @3m dBuV | Correction Factor dB/m | Field Strength dBuV/m | Limit @3m dBuV/m | Margin dBuV/m | E-Field Polarity |
| 4882.0 | 7.0 | 41.6 | 48.6 | 54.0 | 5.4 | Vertical |
| 4882.0 | 5.6 | 42.5 | 48.1 | 54.0 | 5.9 | Horizontal |
| 7323.0 | -5.7 | 45.2 | 39.5 | 54.0 | 14.5 | Vertical |
| 7323.0 | -7.7 | 46.3 | 38.6 | 54.0 | 15.4 | Horizontal |
| 9764.0 | -9.2 | 48.1 | 38.9 | 54.0 | 15.1 | Vertical |
| 9764.0 | -11.0 | 48.9 | 37.9 | 54.0 | 16.1 | Horizontal |
| 12205.0 | -13.3 | 51.6 | 38.3 | 54.0 | 15.7 | Vertical |
| 12205.0 | -15.2 | 52.5 | 37.3 | 54.0 | 16.7 | Horizontal |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15

Page 14 of 83

No.: DM111940

Result of Tx mode (2480.0 MHz) (GFSK mode) (9kHz – 30MHz): Pass

| Field Strength of Spurious Emissions | | | | | | |
|-------------------------------------------------------------|----------------|-------------------|----------------|----------------|-----------|------------------|
| Average Value | | | | | | |
| Frequency | Measured Level | Correction Factor | Field Strength | Field Strength | Limit | E-Field Polarity |
| MHz | dB μ V | dB/m | dB μ V/m | μ V/m | μ V/m | |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

Results of Tx mode (2480.0 MHz) (GFSK mode) (30MHz – 1000MHz): PASS

| Field Strength of Spurious Emissions | | | | | | |
|-------------------------------------------------------------|----------------|-------------------|----------------|----------------|-----------|------------------|
| Average Value | | | | | | |
| Frequency | Measured Level | Correction Factor | Field Strength | Field Strength | Limit | E-Field Polarity |
| MHz | dB μ V | dB/m | dB μ V/m | μ V/m | μ V/m | |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass

| Field Strength of Spurious Emissions | | | | | | |
|--------------------------------------|--------------------|-------------------|----------------|--------------|--------------|------------------|
| Peak Value | | | | | | |
| Frequency | Measured Level @3m | Correction Factor | Field Strength | Limit @3m | Margin | E-Field Polarity |
| MHz | dB μ V | dB/m | dB μ V/m | dB μ V/m | dB μ V/m | |
| 4960.0 | 21.8 | 41.4 | 63.2 | 74.0 | 10.8 | Vertical |
| 4960.0 | 20.3 | 42.7 | 63.0 | 74.0 | 11.0 | Horizontal |
| 7440.0 | 8.5 | 45.6 | 54.1 | 74.0 | 19.9 | Vertical |
| 7440.0 | 6.4 | 46.5 | 52.9 | 74.0 | 21.1 | Horizontal |
| 9920.0 | 4.1 | 48.6 | 52.7 | 74.0 | 21.3 | Vertical |
| 9920.0 | 2.0 | 49.7 | 51.7 | 74.0 | 22.3 | Horizontal |
| 12400.0 | 0.2 | 51.7 | 51.9 | 74.0 | 22.1 | Vertical |
| 12400.0 | -1.3 | 52.7 | 51.4 | 74.0 | 22.6 | Horizontal |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15

Page 15 of 83

No.: DM111940

Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency MHz | Measured Level @3m dBuV | Correction Factor dB/m | Field Strength dBuV/m | Limit @3m dBuV/m | Margin dBuV/m | E-Field Polarity |
| 4960.0 | 7.6 | 41.4 | 49.0 | 54.0 | 5.0 | Vertical |
| 4960.0 | 6.0 | 42.7 | 48.7 | 54.0 | 5.3 | Horizontal |
| 7440.0 | -5.9 | 45.6 | 39.7 | 54.0 | 14.3 | Vertical |
| 7440.0 | -7.8 | 46.5 | 38.7 | 54.0 | 15.3 | Horizontal |
| 9920.0 | -10.1 | 48.6 | 38.5 | 54.0 | 15.5 | Vertical |
| 9920.0 | -12.2 | 49.7 | 37.5 | 54.0 | 16.5 | Horizontal |
| 12400.0 | -14.1 | 51.7 | 37.6 | 54.0 | 16.4 | Vertical |
| 12400.0 | -15.4 | 52.7 | 37.3 | 54.0 | 16.7 | Horizontal |

Result of Tx mode (2402.0 MHz) ($\pi/4$ -DQPSK mode) (9kHz – 30MHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------------|---------------------------------|------------------------------|-----------------------------------|--------------------------------|--------------------|---------------------|
| Frequency MHz | Measured Level dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit μ V/m | E-Field Polarity |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

Result of Tx mode (2402.0 MHz) ($\pi/4$ -DQPSK mode) (30MHz – 1GHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------------|---------------------------------|------------------------------|-----------------------------------|--------------------------------|--------------------|---------------------|
| Frequency MHz | Measured Level dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit μ V/m | E-Field Polarity |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 16 of 83

Result of Tx mode (2402.0 MHz) ($\pi/4$ -DQPSK mode) (Above 1GHz): Pass

| Field Strength of Spurious Emissions Peak Value | | | | | | |
|----------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency MHz | Measured Level @3m dBuV | Correction Factor dB/m | Field Strength dBuV/m | Limit @3m dBuV/m | Margin dBuV/m | E-Field Polarity |
| 4804.0 | 22.0 | 41.5 | 63.5 | 74.0 | 10.5 | Vertical |
| 4804.0 | 20.7 | 42.4 | 63.1 | 74.0 | 10.9 | Horizontal |
| 7206.0 | 8.4 | 45.1 | 53.5 | 74.0 | 20.5 | Vertical |
| 7206.0 | 6.2 | 46.2 | 52.4 | 74.0 | 21.6 | Horizontal |
| 9608.0 | 5.7 | 48.0 | 53.7 | 74.0 | 20.3 | Vertical |
| 9608.0 | 3.5 | 48.8 | 52.3 | 74.0 | 21.7 | Horizontal |
| 12010.0 | 1.1 | 51.5 | 52.6 | 74.0 | 21.4 | Vertical |
| 12010.0 | -0.3 | 52.4 | 52.1 | 74.0 | 21.9 | Horizontal |

Result of Tx mode (2402.0 MHz) ($\pi/4$ -DQPSK mode) (Above 1GHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency MHz | Measured Level @3m dBuV | Correction Factor dB/m | Field Strength dBuV/m | Limit @3m dBuV/m | Margin dBuV/m | E-Field Polarity |
| 4804.0 | 7.9 | 41.5 | 49.4 | 54.0 | 4.6 | Vertical |
| 4804.0 | 6.5 | 42.4 | 48.9 | 54.0 | 5.1 | Horizontal |
| 7206.0 | -5.9 | 45.1 | 39.2 | 54.0 | 14.8 | Vertical |
| 7206.0 | -7.7 | 46.2 | 38.5 | 54.0 | 15.5 | Horizontal |
| 9608.0 | -8.5 | 48.0 | 39.5 | 54.0 | 14.5 | Vertical |
| 9608.0 | -10.7 | 48.8 | 38.1 | 54.0 | 15.9 | Horizontal |
| 12010.0 | -13.1 | 51.8 | 38.7 | 54.0 | 15.3 | Vertical |
| 12010.0 | -14.4 | 52.4 | 38 | 54.0 | 16.0 | Horizontal |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15

Page 17 of 83

No.: DM111940

Result of Tx mode (2441.0 MHz) ($\pi/4$ -DQPSK mode) (9kHz – 30MHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------------|---------------------------------|------------------------------|-----------------------------------|--------------------------------|--------------------|---------------------|
| Frequency MHz | Measured Level dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit μ V/m | E-Field Polarity |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

Results of Tx mode (2441.0 MHz) ($\pi/4$ -DQPSK mode) (30MHz – 1000MHz): PASS

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------------|---------------------------------|------------------------------|-----------------------------------|--------------------------------|--------------------|---------------------|
| Frequency MHz | Measured Level dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit μ V/m | E-Field Polarity |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

Result of Tx mode (2441.0 MHz) ($\pi/4$ -DQPSK mode) (Above 1GHz): Pass

| Field Strength of Spurious Emissions Peak Value | | | | | | |
|----------------------------------------------------|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency MHz | Measured Level @3m dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Limit @3m dB μ V/m | Margin dB μ V/m | E-Field Polarity |
| 4882.0 | 20.6 | 41.6 | 62.2 | 74.0 | 11.8 | Vertical |
| 4882.0 | 19.6 | 42.5 | 62.1 | 74.0 | 11.9 | Horizontal |
| 7323.0 | 7.2 | 45.2 | 52.4 | 74.0 | 21.6 | Vertical |
| 7323.0 | 5.8 | 46.3 | 52.1 | 74.0 | 21.9 | Horizontal |
| 9764.0 | 4.4 | 48.1 | 52.5 | 74.0 | 21.5 | Vertical |
| 9764.0 | 3.0 | 48.9 | 51.9 | 74.0 | 22.1 | Horizontal |
| 12205.0 | 0.8 | 51.6 | 52.4 | 74.0 | 21.6 | Vertical |
| 12205.0 | -1.1 | 52.5 | 51.4 | 74.0 | 22.6 | Horizontal |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 18 of 83

Result of Tx mode (2441.0 MHz) ($\pi/4$ -DQPSK mode) (Above 1GHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency MHz | Measured Level @3m dBuV | Correction Factor dB/m | Field Strength dBuV/m | Limit @3m dBuV/m | Margin dBuV/m | E-Field Polarity |
| 4882.0 | 6.4 | 41.6 | 48.0 | 54.0 | 6.0 | Vertical |
| 4882.0 | 5.4 | 42.5 | 47.9 | 54.0 | 6.1 | Horizontal |
| 7323.0 | -7.2 | 45.2 | 38.0 | 54.0 | 16.0 | Vertical |
| 7323.0 | -8.3 | 46.3 | 38.0 | 54.0 | 16.0 | Horizontal |
| 9764.0 | -9.7 | 48.1 | 38.4 | 54.0 | 15.6 | Vertical |
| 9764.0 | -11.3 | 48.9 | 37.6 | 54.0 | 16.4 | Horizontal |
| 12205.0 | -13.5 | 51.6 | 38.1 | 54.0 | 15.9 | Vertical |
| 12205.0 | -15.2 | 52.5 | 37.3 | 54.0 | 16.7 | Horizontal |

Result of Tx mode (2480.0 MHz) ($\pi/4$ -DQPSK mode) (9kHz – 30MHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------------|---------------------------------|------------------------------|-----------------------------------|--------------------------------|--------------------|---------------------|
| Frequency MHz | Measured Level dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit μ V/m | E-Field Polarity |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

Results of Tx mode (2480.0 MHz) ($\pi/4$ -DQPSK mode) (30MHz – 1000MHz): PASS

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------------|---------------------------------|------------------------------|-----------------------------------|--------------------------------|--------------------|---------------------|
| Frequency MHz | Measured Level dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit μ V/m | E-Field Polarity |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 19 of 83

Result of Tx mode (2480.0 MHz) ($\pi/4$ -DQPSK mode) (Above 1GHz): Pass

| Field Strength of Spurious Emissions Peak Value | | | | | | |
|----------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency MHz | Measured Level @3m dBuV | Correction Factor dB/m | Field Strength dBuV/m | Limit @3m dBuV/m | Margin dBuV/m | E-Field Polarity |
| 4960.0 | 20.9 | 41.4 | 62.3 | 74.0 | 11.7 | Vertical |
| 4960.0 | 19.3 | 42.7 | 62.0 | 74.0 | 12.0 | Horizontal |
| 7440.0 | 8.1 | 45.6 | 53.7 | 74.0 | 20.3 | Vertical |
| 7440.0 | 5.8 | 46.5 | 52.3 | 74.0 | 21.7 | Horizontal |
| 9920.0 | 3.5 | 48.6 | 52.1 | 74.0 | 21.9 | Vertical |
| 9920.0 | 2.3 | 49.7 | 52.0 | 74.0 | 22.0 | Horizontal |
| 12400.0 | 0.3 | 51.7 | 52.0 | 74.0 | 22.0 | Vertical |
| 12400.0 | -1.2 | 52.7 | 51.5 | 74.0 | 22.5 | Horizontal |

Result of Tx mode (2480.0 MHz) ($\pi/4$ -DQPSK mode) (Above 1GHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency MHz | Measured Level @3m dBuV | Correction Factor dB/m | Field Strength dBuV/m | Limit @3m dBuV/m | Margin dBuV/m | E-Field Polarity |
| 4960.0 | 6.8 | 41.4 | 48.2 | 54.0 | 5.8 | Vertical |
| 4960.0 | 5.1 | 42.7 | 47.8 | 54.0 | 6.2 | Horizontal |
| 7440.0 | -6.2 | 45.6 | 39.4 | 54.0 | 14.6 | Vertical |
| 7440.0 | -8.3 | 46.5 | 38.2 | 54.0 | 15.8 | Horizontal |
| 9920.0 | -10.6 | 48.6 | 38.0 | 54.0 | 16.0 | Vertical |
| 9920.0 | -12.0 | 49.7 | 37.7 | 54.0 | 16.3 | Horizontal |
| 12400.0 | -14.0 | 51.7 | 37.7 | 54.0 | 16.3 | Vertical |
| 12400.0 | -15.3 | 52.7 | 37.4 | 54.0 | 16.6 | Horizontal |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15

Page 20 of 83

No.: DM111940

Result of Tx mode (2402.0 MHz) (8DPSK) (9kHz – 30MHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------------|---------------------------------|------------------------------|-----------------------------------|--------------------------------|--------------------|---------------------|
| Frequency MHz | Measured Level dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit μ V/m | E-Field Polarity |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

Result of Tx mode (2402.0 MHz) (8DPSK) (30MHz – 1GHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------------|---------------------------------|------------------------------|-----------------------------------|--------------------------------|--------------------|---------------------|
| Frequency MHz | Measured Level dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit μ V/m | E-Field Polarity |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

Result of Tx mode (2402.0 MHz) (8DPSK) (Above 1GHz): Pass

| Field Strength of Spurious Emissions Peak Value | | | | | | |
|----------------------------------------------------|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency MHz | Measured Level @3m dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Limit @3m dB μ V/m | Margin dB μ V/m | E-Field Polarity |
| 4804.0 | 21.8 | 41.5 | 63.3 | 74.0 | 10.7 | Vertical |
| 4804.0 | 20.2 | 42.4 | 62.6 | 74.0 | 11.4 | Horizontal |
| 7206.0 | 9.3 | 45.1 | 54.4 | 74.0 | 19.6 | Vertical |
| 7206.0 | 6.5 | 46.2 | 52.7 | 74.0 | 21.3 | Horizontal |
| 9608.0 | 5.9 | 48.0 | 53.9 | 74.0 | 20.1 | Vertical |
| 9608.0 | 3.6 | 48.8 | 52.4 | 74.0 | 21.6 | Horizontal |
| 12010.0 | 1.3 | 51.8 | 53.1 | 74.0 | 20.9 | Vertical |
| 12010.0 | 0.1 | 52.4 | 52.5 | 74.0 | 21.5 | Horizontal |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 21 of 83

Result of Tx mode (2402.0 MHz) (8DPSK) (Above 1GHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency MHz | Measured Level @3m dBuV | Correction Factor dB/m | Field Strength dBuV/m | Limit @3m dBuV/m | Margin dBuV/m | E-Field Polarity |
| 4804.0 | 7.7 | 41.5 | 49.2 | 54.0 | 4.8 | Vertical |
| 4804.0 | 6.0 | 42.4 | 48.4 | 54.0 | 5.6 | Horizontal |
| 7206.0 | -4.0 | 45.1 | 41.1 | 54.0 | 12.9 | Vertical |
| 7206.0 | -7.6 | 46.2 | 38.6 | 54.0 | 15.4 | Horizontal |
| 9608.0 | -8.2 | 48.0 | 39.8 | 54.0 | 14.2 | Vertical |
| 9608.0 | -10.7 | 48.8 | 38.1 | 54.0 | 15.9 | Horizontal |
| 12010.0 | -13.0 | 51.8 | 38.8 | 54.0 | 15.2 | Vertical |
| 12010.0 | -14.0 | 52.4 | 38.4 | 54.0 | 15.6 | Horizontal |

Result of Tx mode (2441.0 MHz) (8DPSK) (9kHz – 30MHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------------|---------------------------------|------------------------------|-----------------------------------|--------------------------------|--------------------|---------------------|
| Frequency MHz | Measured Level dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit μ V/m | E-Field Polarity |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

Results of Tx mode (2441.0 MHz) (8DPSK) (30MHz – 1000MHz): PASS

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------------|---------------------------------|------------------------------|-----------------------------------|--------------------------------|--------------------|---------------------|
| Frequency MHz | Measured Level dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit μ V/m | E-Field Polarity |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15

Page 22 of 83

No.: DM111940

Result of Tx mode (2441.0 MHz) (8DPSK) (Above 1GHz): Pass

| Field Strength of Spurious Emissions Peak Value | | | | | | |
|----------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency MHz | Measured Level @3m dBuV | Correction Factor dB/m | Field Strength dBuV/m | Limit @3m dBuV/m | Margin dBuV/m | E-Field Polarity |
| 4882.0 | 21.4 | 41.6 | 63.0 | 74.0 | 11.0 | Vertical |
| 4882.0 | 19.9 | 42.5 | 62.4 | 74.0 | 11.6 | Horizontal |
| 7323.0 | 8.4 | 45.2 | 53.6 | 74.0 | 20.4 | Vertical |
| 7323.0 | 5.8 | 46.3 | 52.1 | 74.0 | 21.9 | Horizontal |
| 9764.0 | 4.6 | 48.1 | 52.7 | 74.0 | 21.3 | Vertical |
| 9764.0 | 2.2 | 48.9 | 51.1 | 74.0 | 22.9 | Horizontal |
| 12205.0 | 0.7 | 51.6 | 52.3 | 74.0 | 21.7 | Vertical |
| 12205.0 | -1.3 | 52.5 | 51.2 | 74.0 | 22.8 | Horizontal |

Result of Tx mode (2441.0 MHz) (8DPSK) (Above 1GHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency MHz | Measured Level @3m dBuV | Correction Factor dB/m | Field Strength dBuV/m | Limit @3m dBuV/m | Margin dBuV/m | E-Field Polarity |
| 4882.0 | 7.2 | 41.6 | 48.8 | 54.0 | 5.2 | Vertical |
| 4882.0 | 5.7 | 42.5 | 48.2 | 54.0 | 5.8 | Horizontal |
| 7323.0 | -6.0 | 45.2 | 39.2 | 54.0 | 14.8 | Vertical |
| 7323.0 | -8.3 | 46.3 | 38.0 | 54.0 | 16.0 | Horizontal |
| 9764.0 | -9.5 | 48.1 | 38.6 | 54.0 | 15.4 | Vertical |
| 9764.0 | -12.0 | 48.9 | 36.9 | 54.0 | 17.1 | Horizontal |
| 12205.0 | -13.7 | 51.6 | 37.9 | 54.0 | 16.1 | Vertical |
| 12205.0 | -15.4 | 52.5 | 37.1 | 54.0 | 16.9 | Horizontal |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15

Page 23 of 83

No.: DM111940

Result of Tx mode (2480.0 MHz) (8DPSK) (9kHz – 30MHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------------|---------------------------------|------------------------------|-----------------------------------|--------------------------------|--------------------|---------------------|
| Frequency MHz | Measured Level dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit μ V/m | E-Field Polarity |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

Results of Tx mode (2480.0 MHz) (8DPSK) (30MHz – 1000MHz): PASS

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------------|---------------------------------|------------------------------|-----------------------------------|--------------------------------|--------------------|---------------------|
| Frequency MHz | Measured Level dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit μ V/m | E-Field Polarity |
| Emissions detected are more than 20 dB below the FCC Limits | | | | | | |

Result of Tx mode (2480.0 MHz) (8DPSK) (Above 1GHz): Pass

| Field Strength of Spurious Emissions Peak Value | | | | | | |
|----------------------------------------------------|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency MHz | Measured Level @3m dB μ V | Correction Factor dB/m | Field Strength dB μ V/m | Limit @3m dB μ V/m | Margin dB μ V/m | E-Field Polarity |
| 4960.0 | 21.9 | 41.4 | 63.3 | 74.0 | 10.7 | Vertical |
| 4960.0 | 19.5 | 42.7 | 62.2 | 74.0 | 11.8 | Horizontal |
| 7440.0 | 8.4 | 45.6 | 54.0 | 74.0 | 20.0 | Vertical |
| 7440.0 | 5.8 | 46.5 | 52.3 | 74.0 | 21.7 | Horizontal |
| 9920.0 | 3.6 | 48.6 | 52.2 | 74.0 | 21.8 | Vertical |
| 9920.0 | 1.6 | 49.7 | 51.3 | 74.0 | 22.7 | Horizontal |
| 12400.0 | 0.2 | 51.7 | 51.9 | 74.0 | 22.1 | Vertical |
| 12400.0 | -1.5 | 52.7 | 51.2 | 74.0 | 22.8 | Horizontal |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 24 of 83

Result of Tx mode (2480.0 MHz) (8DPSK) (Above 1GHz): Pass

| Field Strength of Spurious Emissions Average Value | | | | | | |
|-------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency MHz | Measured Level @3m dBuV | Correction Factor dB/m | Field Strength dBuV/m | Limit @3m dBuV/m | Margin dBuV/m | E-Field Polarity |
| 4960.0 | 7.7 | 41.4 | 49.1 | 54.0 | 4.9 | Vertical |
| 4960.0 | 5.3 | 42.7 | 48.0 | 54.0 | 6.0 | Horizontal |
| 7440.0 | -5.9 | 45.6 | 39.7 | 54.0 | 14.3 | Vertical |
| 7440.0 | -8.3 | 46.5 | 38.2 | 54.0 | 15.8 | Horizontal |
| 9920.0 | -10.6 | 48.6 | 38.0 | 54.0 | 16.0 | Vertical |
| 9920.0 | -12.6 | 49.7 | 37.1 | 54.0 | 16.9 | Horizontal |
| 12400.0 | -14.2 | 51.7 | 37.5 | 54.0 | 16.5 | Vertical |
| 12400.0 | -15.6 | 52.7 | 37.1 | 54.0 | 16.9 | Horizontal |

Remarks:

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty: (9kHz - 30MHz): 3.3dB
(30MHz - 1GHz): 4.6dB
(1GHz - 26GHz): 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 25 of 83

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:


| Frequency Range [MHz] | Quasi-Peak Limits [$\mu\text{V}/\text{m}$] |
|--------------------------|-------------------------------------------------|
| 0.009-0.490 | 2400/F (kHz) |
| 0.490-1.705 | 24000/F (kHz) |
| 1.705-30 | 30 |
| 30-88 | 100 |
| 88-216 | 150 |
| 216-960 | 200 |
| Above 960 | 500 |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode (EUT paired with iPod) (GFSK / $\pi/4$ -DQPSK/ 8DPSK) (30MHz – 1GHz): Pass

Please refer to the following table for result details

Horizontal

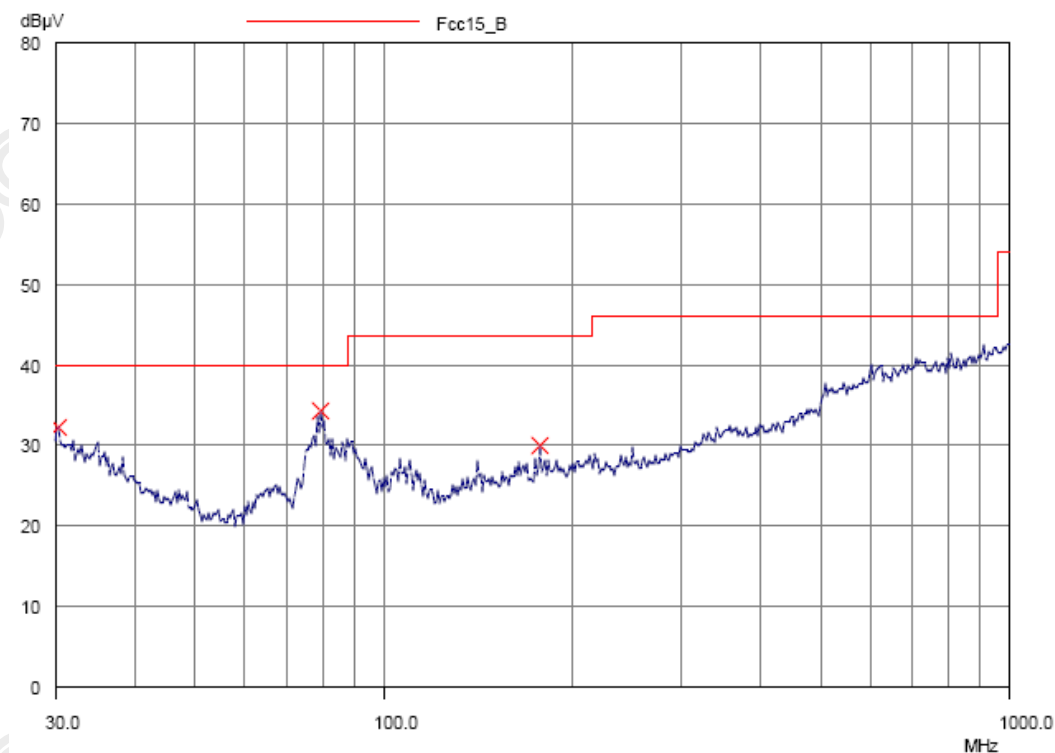

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 26 of 83

Result of Bluetooth Communication mode (EUT paired with iPod) (GFSK / $\pi/4$ -DQPSK/ 8DPSK)
(30MHz – 1GHz): Pass

| Radiated Emissions Quasi-Peak | | | | | |
|----------------------------------|---------------------|------------------------------|------------------------------|---------------------------|---------------------------|
| Emission Frequency MHz | E-Field Polarity | Level @3m dB μ V/m | Limit @3m dB μ V/m | Level @3m μ V/m | Limit @3m μ V/m |
| 30.3 | Horizontal | 32.2 | 40.0 | 40.7 | 100 |
| 79.5 | Horizontal | 34.3 | 40.0 | 51.9 | 100 |
| 177.9 | Horizontal | 30.1 | 43.5 | 32.0 | 150 |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 27 of 83

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:


| Frequency Range [MHz] | Quasi-Peak Limits [$\mu\text{V}/\text{m}$] |
|--------------------------|-------------------------------------------------|
| 0.009-0.490 | 2400/F (kHz) |
| 0.490-1.705 | 24000/F (kHz) |
| 1.705-30 | 30 |
| 30-88 | 100 |
| 88-216 | 150 |
| 216-960 | 200 |
| Above960 | 500 |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode (EUT paired with iPod) (GFSK / $\pi/4$ -DQPSK/ 8DPSK) (30MHz – 1GHz): Pass

Please refer to the following table for result details

Vertical

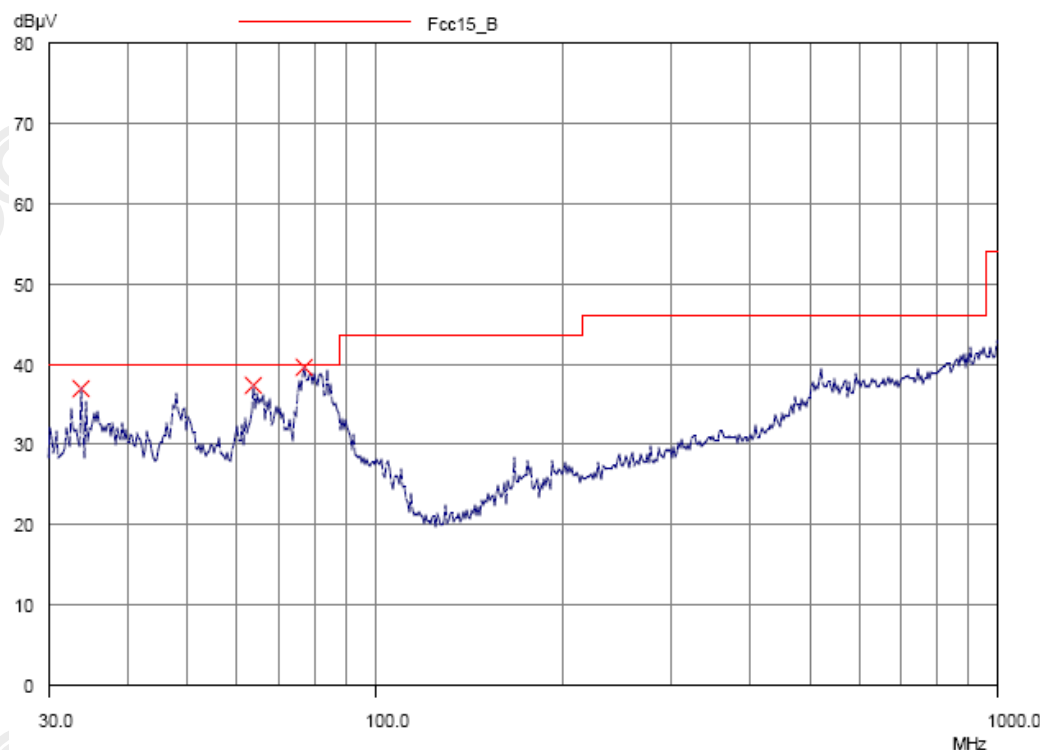

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 28 of 83

Result of Bluetooth Communication mode (EUT paired with iPod) (GFSK / $\pi/4$ -DQPSK/ 8DPSK)
(30MHz – 1GHz): Pass

| Radiated Emissions Quasi-Peak | | | | | |
|----------------------------------|---------------------|------------------------------|------------------------------|---------------------------|---------------------------|
| Emission Frequency MHz | E-Field Polarity | Level @3m dB μ V/m | Limit @3m dB μ V/m | Level @3m μ V/m | Limit @3m μ V/m |
| 33.7 | Vertical | 36.8 | 40.0 | 69.2 | 100 |
| 64.1 | Vertical | 36.5 | 40.0 | 66.8 | 100 |
| 77.3 | Vertical | 38.7 | 40.0 | 86.1 | 100 |

Remarks:

Calculated measurement uncertainty (30MHz – 1GHz): 4.6dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 29 of 83


3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207
Test Method: ANSI C63.4:2009
Test Date: 2013-08-07
Mode of Operation: Bluetooth Communication mode
Test Voltage: 117Va.c., 60Hz

Test Method:

The test was performed in accordance with ANSI C63.4: 2009, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Test Setup:

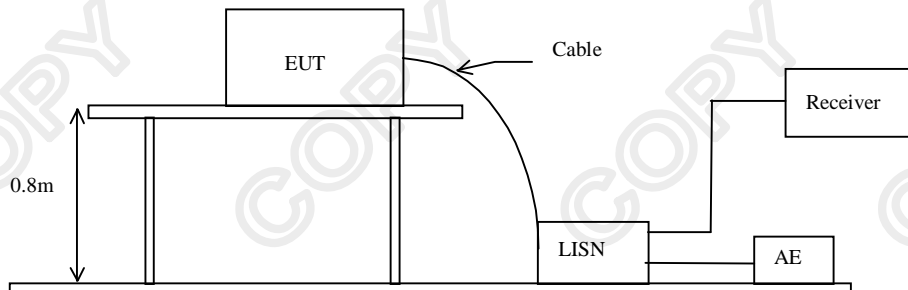

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 30 of 83

Limit for Conducted Emissions (FCC 47 CFR 15.207):


| Frequency Range [MHz] | Quasi-Peak Limits [dB μ V] | Average [dB μ V] |
|--------------------------|-----------------------------------|-------------------------|
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5.0 | 56 | 46 |
| 5.0-30.0 | 60 | 50 |

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Bluetooth Communication mode (EUT paired with iPod) (L): PASS

Please refer to the following diagram for individual results.

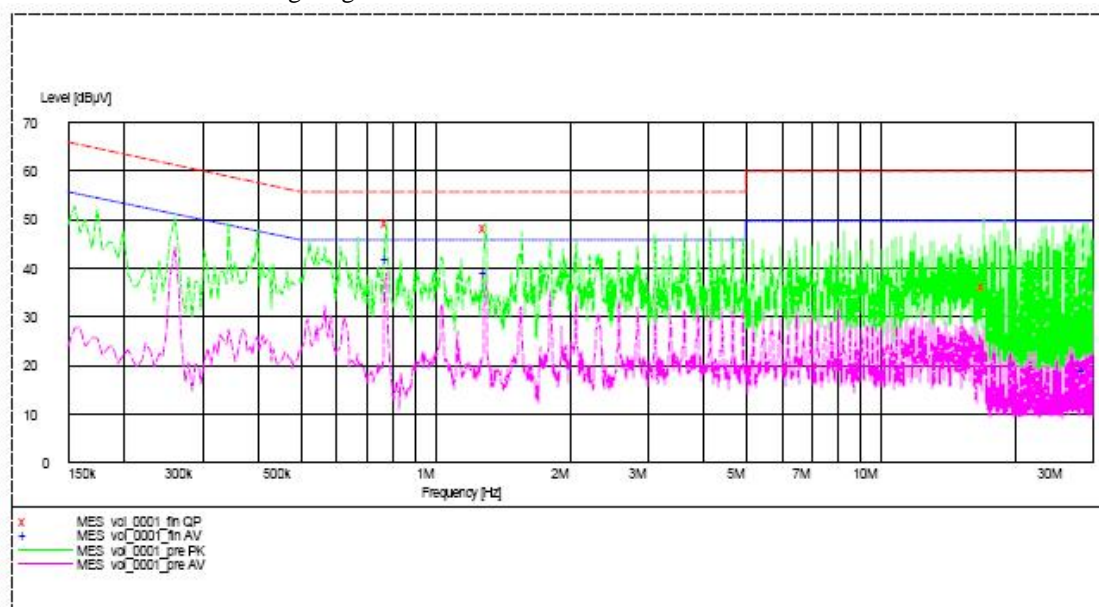

| Conductor Live or Neutral | Frequency MHz | Quasi-peak | | Average | |
|------------------------------|------------------|---------------------|---------------------|---------------------|---------------------|
| | | Level dB μ V | Limit dB μ V | Level dB μ V | Limit dB μ V |
| Live | 0.780 | 49.5 | 56.0 | _*_ | _*_ |
| Live | 1.300 | 48.3 | 56.0 | _*_ | _*_ |
| Live | 17.115 | 36.4 | 60.0 | _*_ | _*_ |



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 31 of 83

Limit for Conducted Emissions (FCC 47 CFR 15.207):


| Frequency Range [MHz] | Quasi-Peak Limits [dB μ V] | Average [dB μ V] |
|--------------------------|-----------------------------------|-------------------------|
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5.0 | 56 | 46 |
| 5.0-30.0 | 60 | 50 |

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Bluetooth Communication mode (EUT paired with iPod) (N): PASS

Please refer to the following diagram for individual results.

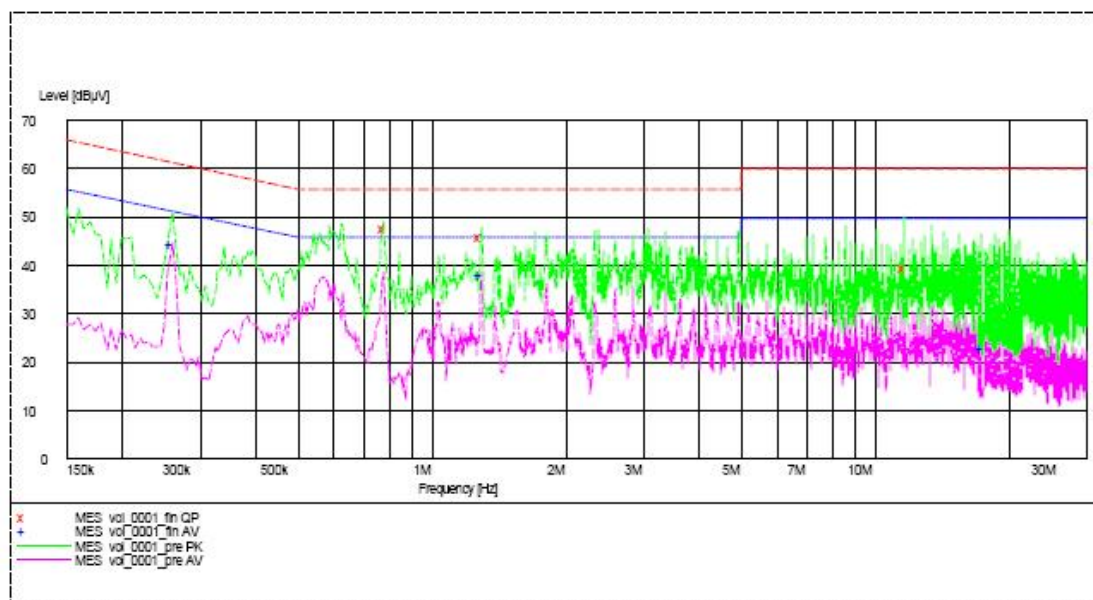

| Conductor Live or Neutral | Frequency MHz | Quasi-peak | | Average | |
|------------------------------|------------------|---------------------|---------------------|---------------------|---------------------|
| | | Level dB μ V | Limit dB μ V | Level dB μ V | Limit dB μ V |
| Neutral | 0.260 | -*- | -*- | 44.4 | 51.0 |
| Neutral | 1.295 | 45.9 | 56.0 | 38.3 | 46.0 |
| Neutral | 17.460 | -*- | -*- | 22.8 | 50.0 |
| Neutral | 0.780 | 47.5 | 56.0 | -*- | -*- |
| Neutral | 11.675 | 39.5 | 60.0 | -*- | -*- |

Remarks:

Calculated measurement uncertainty (0.15MHz – 30MHz): 3.2dB

-*- Emission(s) that is far below the corresponding limit line.



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 32 of 83

3.1.4 Number of Hopping Frequency

Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels

Test Method:

The RF output of the EUT was connected to the spectrum analyzer by a low loss cable.

Spectrum Analyzer Setting:


RBW = 1MHz, VBW \geq RBW, Sweep = Auto, Span = the frequency band of operation
Detector = Peak, Trace = Max. hold

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

Measurement Data:

GFSK: 79 of 79 Channel

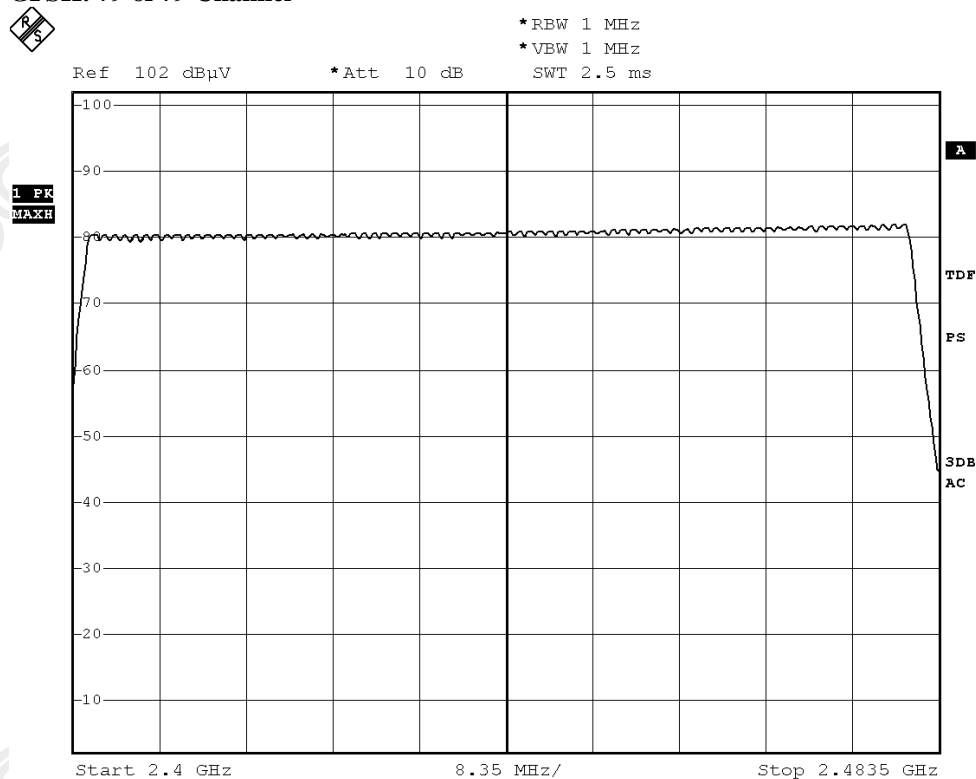

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 33 of 83

$\pi/4$ -DQPSK: 79 of 79 Channel




* RBW 1 MHz
* VBW 1 MHz
SWT 2.5 ms

Ref 102 dB μ V

* Att 10 dB

SWT 2.5 ms

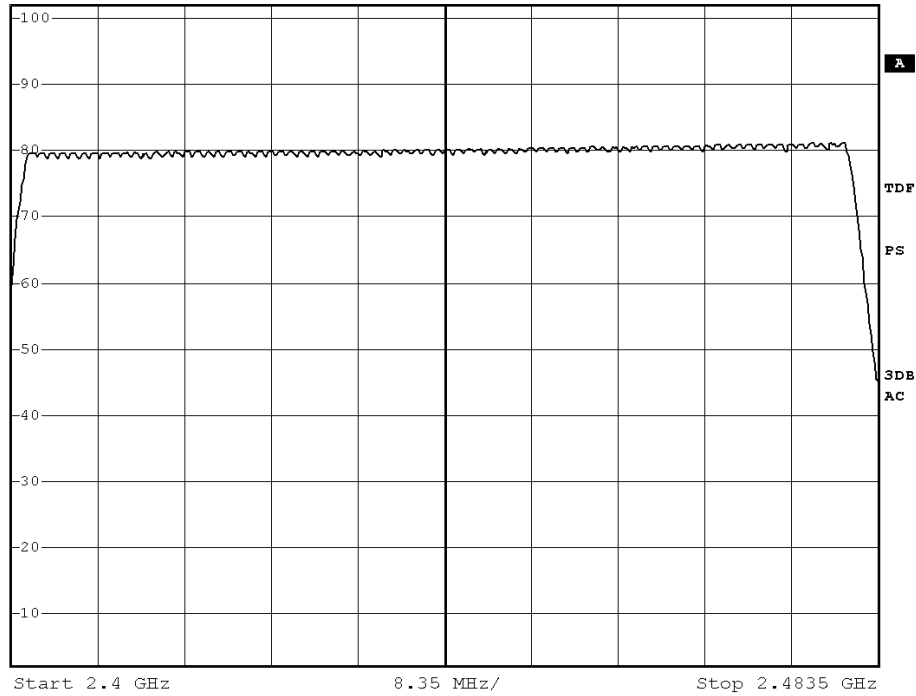

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 34 of 83


8DPSK: 79 of 79 Channel



*RBW 1 MHz
*VBW 1 MHz
SWT 2.5 ms

Ref 102 dBμV

*Att 10 dB

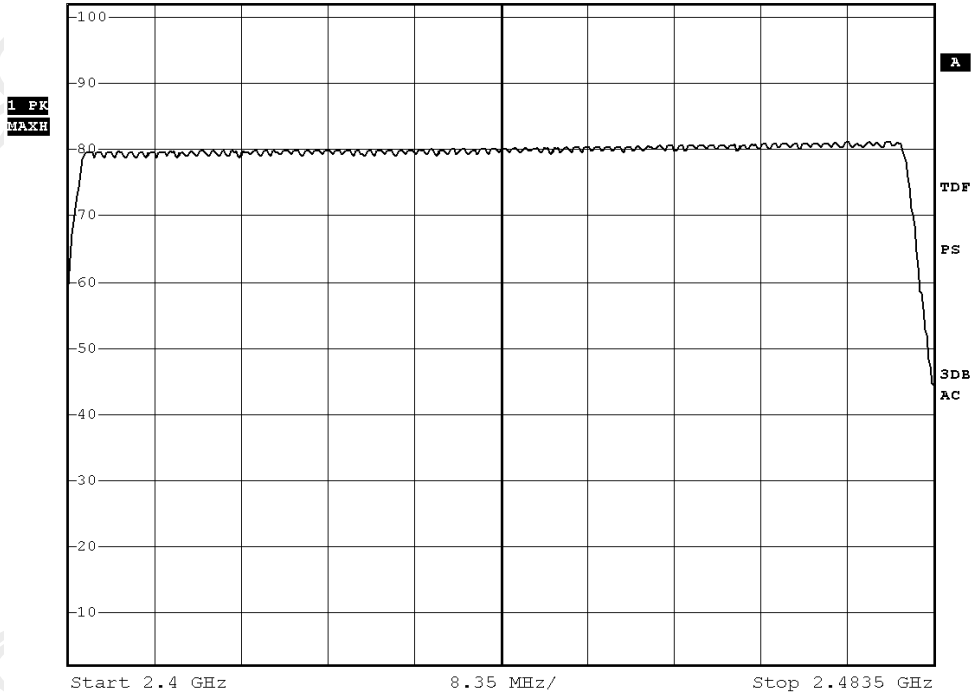

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 35 of 83

3.1.5 20dB Bandwidth

Test Requirement: FCC 47CFR 15.247(a)(1)
Test Method: ANSI C63.4:2009
Test Date: 2013-08-03
Mode of Operation: Communication mode

Remark:

The result has been done on all the possible configurations for searching the worst cases.

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940


Page 36 of 83

| Fundamental Frequency [MHz] | 20dB Bandwidth [MHz] | FCC Limits [MHz] |
|--------------------------------|-------------------------|---------------------|
| 2402 | 1.05 | Within 2400-2483.5 |

(Lowest Operating Frequency) - (GFSK)



*RBW 30 kHz Marker 1 [T1]
*VBW 100 kHz 56.67 dB μ V
Ref 102 dB μ V *Att 10 dB SWT 5 ms 2.401480000 GHz

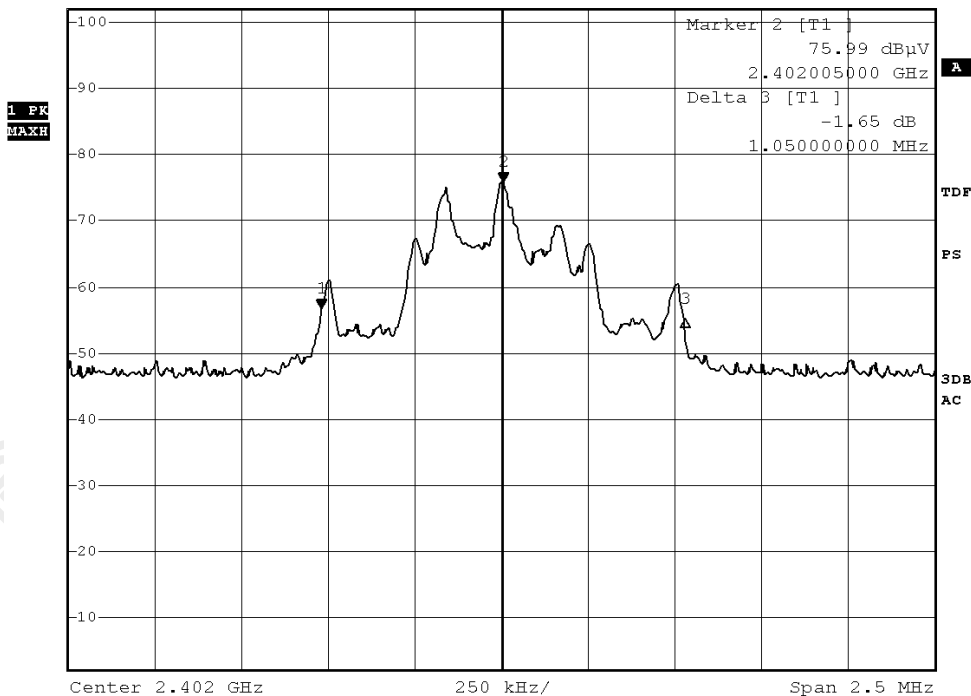

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940


Page 37 of 83

| Fundamental Frequency [MHz] | 20dB Bandwidth [MHz] | FCC Limits [MHz] |
|--------------------------------|-------------------------|---------------------|
| 2441 | 1.045 | Within 2400-2483.5 |

(Middle Operating Frequency) - (GFSK)



Ref 102 dB μ V *Att 10 dB *RBW 30 kHz Marker 1 [T1] 57.75 dB μ V
*VBW 100 kHz 2.440480000 GHz
SWT 5 ms

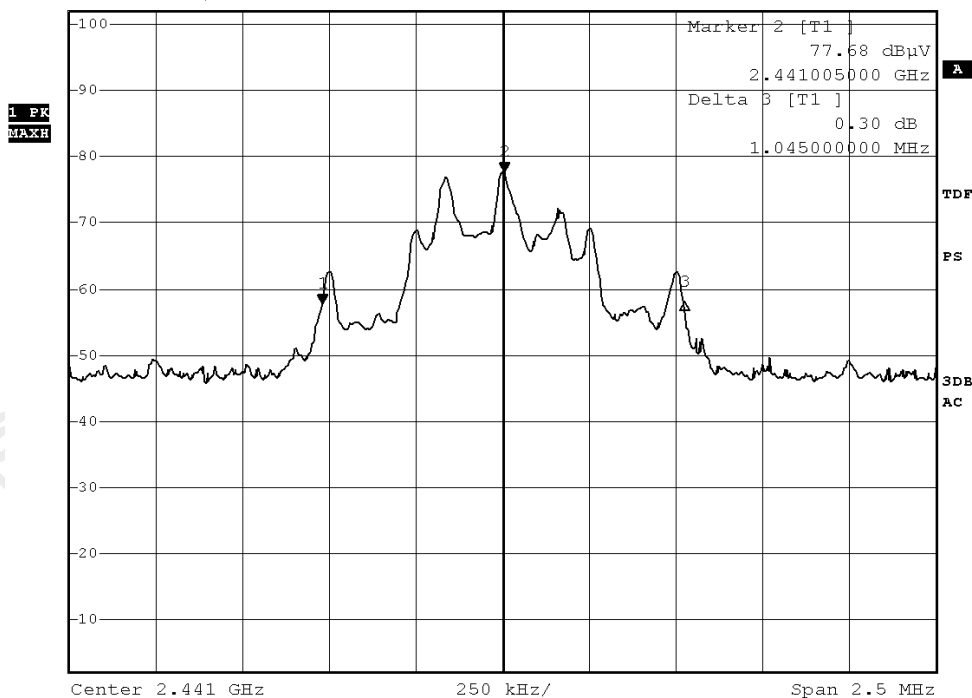

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940


Page 38 of 83

| Fundamental Frequency [MHz] | 20dB Bandwidth [MHz] | FCC Limits [MHz] |
|--------------------------------|-------------------------|---------------------|
| 2480 | 1.050 | Within 2400-2483.5 |

(Highest Operating Frequency) - (GFSK)



Ref 102 dB μ V *Att 10 dB *RBW 30 kHz Marker 1 [T1] 60.92 dB μ V
SWT 5 ms 2.479475000 GHz

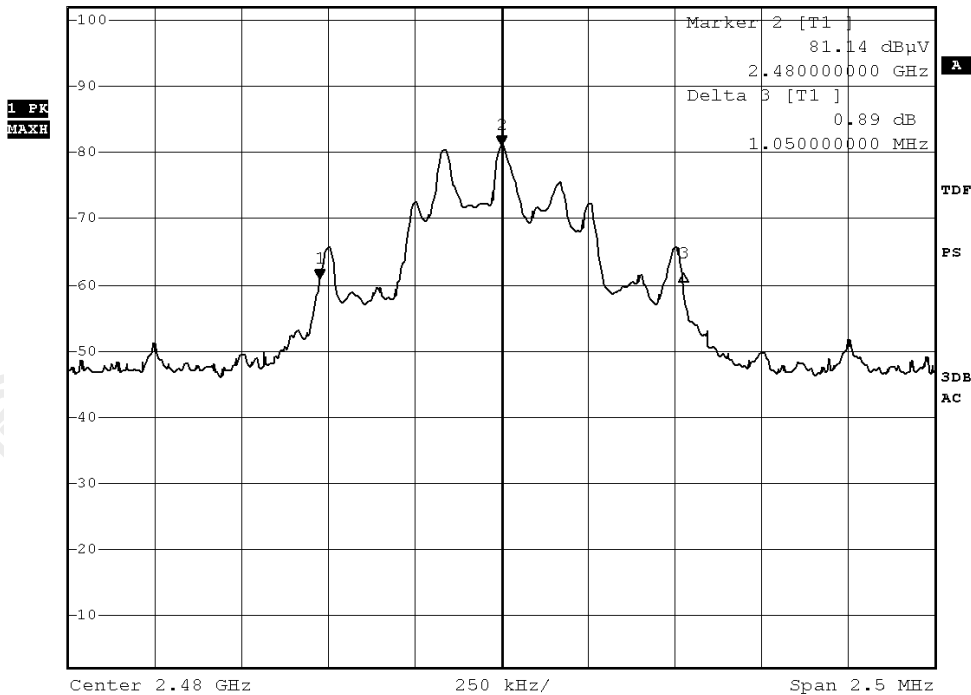

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 39 of 83

| Fundamental Frequency [MHz] | 20dB Bandwidth [MHz] | FCC Limits [MHz] |
|--------------------------------|-------------------------|---------------------|
| 2402 | 1.215 | Within 2400-2483.5 |


(Lowest Operating Frequency) - ($\pi/4$ -DQPSK)



*RBW 30 kHz Marker 1 [T1]
 *VBW 100 kHz 54.13 dB μ V
 SWT 5 ms 2.401345000 GHz

Ref 102 dB μ V

*Att 10 dB

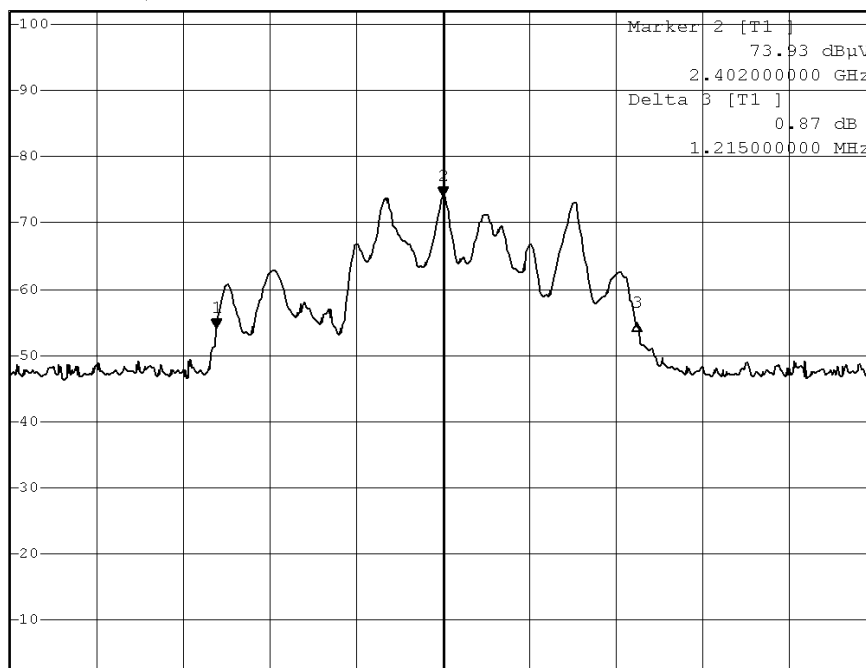

Center 2.402 GHz

250 kHz/

Span 2.5 MHz

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940


Page 40 of 83

| Fundamental Frequency [MHz] | 20dB Bandwidth [MHz] | FCC Limits [MHz] |
|--------------------------------|-------------------------|---------------------|
| 2441 | 1.210 | Within 2400-2483.5 |

(Middle Operating Frequency) - ($\pi/4$ -DQPSK)



Ref 102 dB μ V *Att 10 dB *RBW 30 kHz Marker 1 [T1] 56.62 dB μ V
*VBW 100 kHz 2.441005000 GHz
SWT 5 ms 2.440350000 GHz

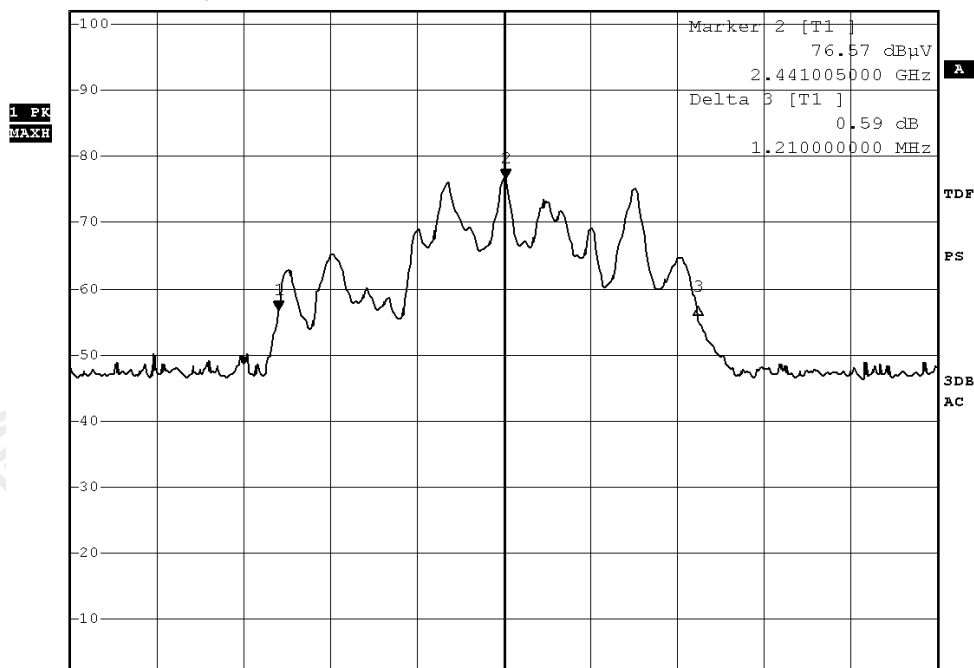

Center 2.441 GHz 250 kHz/ Span 2.5 MHz

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 41 of 83

| Fundamental Frequency [MHz] | 20dB Bandwidth [MHz] | FCC Limits [MHz] |
|--------------------------------|-------------------------|---------------------|
| 2480 | 1.215 | Within 2400-2483.5 |


(Highest Operating Frequency) - ($\pi/4$ -DQPSK)



*RBW 30 kHz Marker 1 [T1]
 *VBW 100 kHz 58.71 dB μ V
 SWT 5 ms 2.479345000 GHz

Ref 102 dB μ V

*Att 10 dB

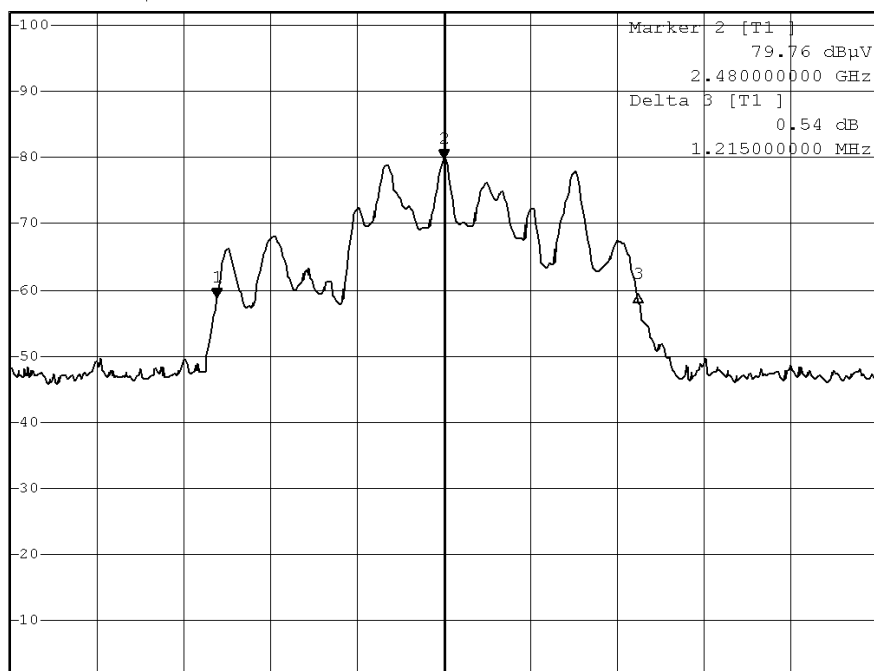

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 42 of 83


| Fundamental Frequency [MHz] | 20dB Bandwidth [MHz] | FCC Limits [MHz] |
|--------------------------------|-------------------------|---------------------|
| 2402 | 1.1664 | Within 2400-2483.5 |

(Lowest Operating Frequency) - (8DPSK)



*RBW 30 kHz Marker 1 [T1]
 *VBW 100 kHz 80.61 dBμV
 *Att 10 dB SWT 5 ms 2.402006000 GHz

Ref 102 dBμV

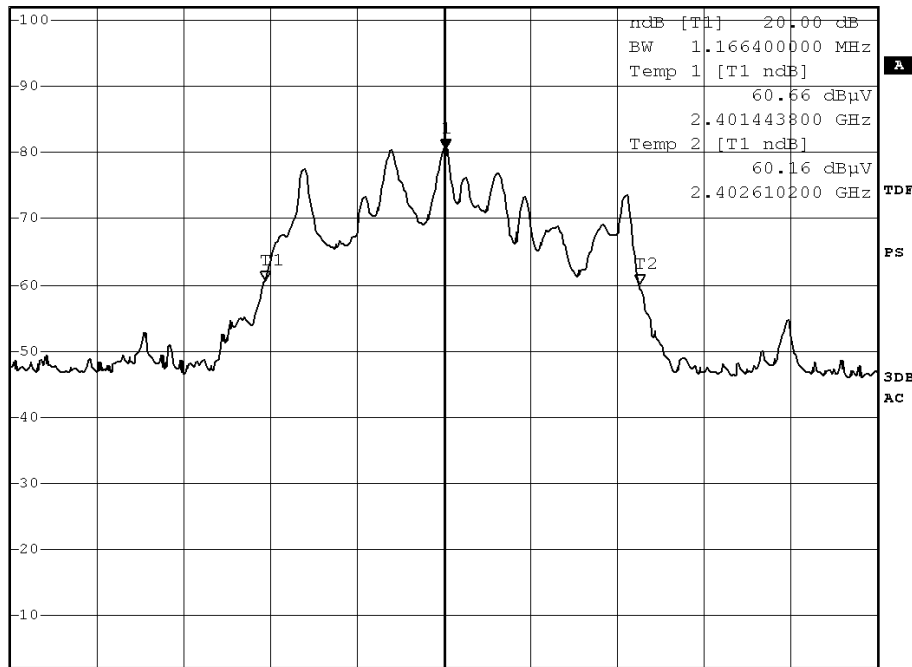

Center 2.402 GHz

270 kHz/

Span 2.7 MHz

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstdc.org E-mail: hkstdc@hkstdc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940


Page 43 of 83

| Fundamental Frequency [MHz] | 20dB Bandwidth [MHz] | FCC Limits [MHz] |
|--------------------------------|-------------------------|---------------------|
| 2441 | 1.1718 | Within 2400-2483.5 |

(Middle Operating Frequency) - (8DPSK)



Ref 102 dB μ V *Att 10 dB *RBW 30 kHz Marker 1 [T1] 78.03 dB μ V
 *VW 100 kHz 2.441000000 GHz
 SWT 5 ms

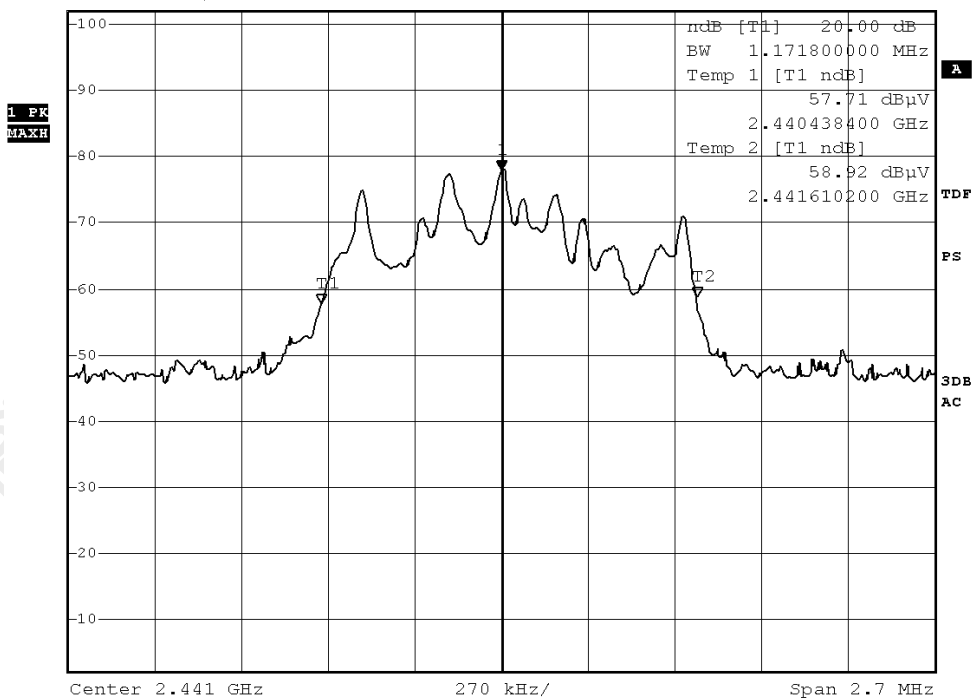

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940


Page 44 of 83

| Fundamental Frequency [MHz] | 20dB Bandwidth [MHz] | FCC Limits [MHz] |
|--------------------------------|-------------------------|---------------------|
| 2480 | 1.1718 | Within 2400-2483.5 |

(Highest Operating Frequency) - (8DPSK)



Ref 102 dB μ V *Att 10 dB *RBW 30 kHz Marker 1 [T1]
*VBW 100 kHz 78.47 dB μ V
SWT 5 ms 2.480005400 GHz

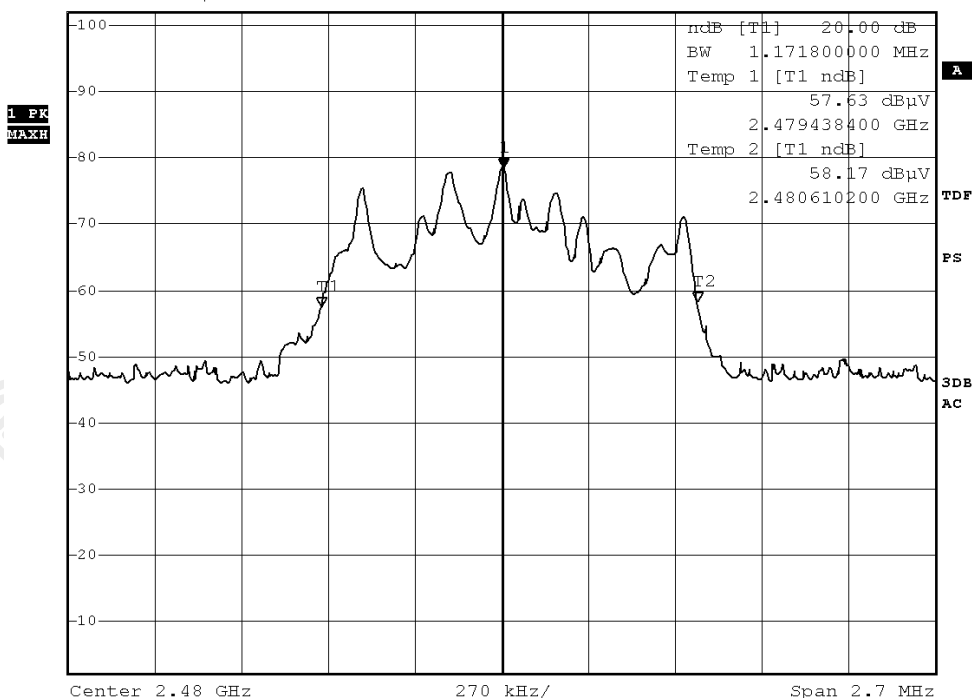

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 45 of 83

3.1.6 Hopping Channel Separation

Requirements:

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit:

The measured max bandwidth * 2/3 = 1.215MHz * 2/3 = 810kHz

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 46 of 83

Channel separation = 1MHz (>810kHz) (GFSK)
Channel 0 – Channel 1, Pass




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 83.65 dBuV
SWT 2.5 ms 2.402002000 GHz

Ref 107 dBuV

*Att 15 dB

2.402002000 GHz

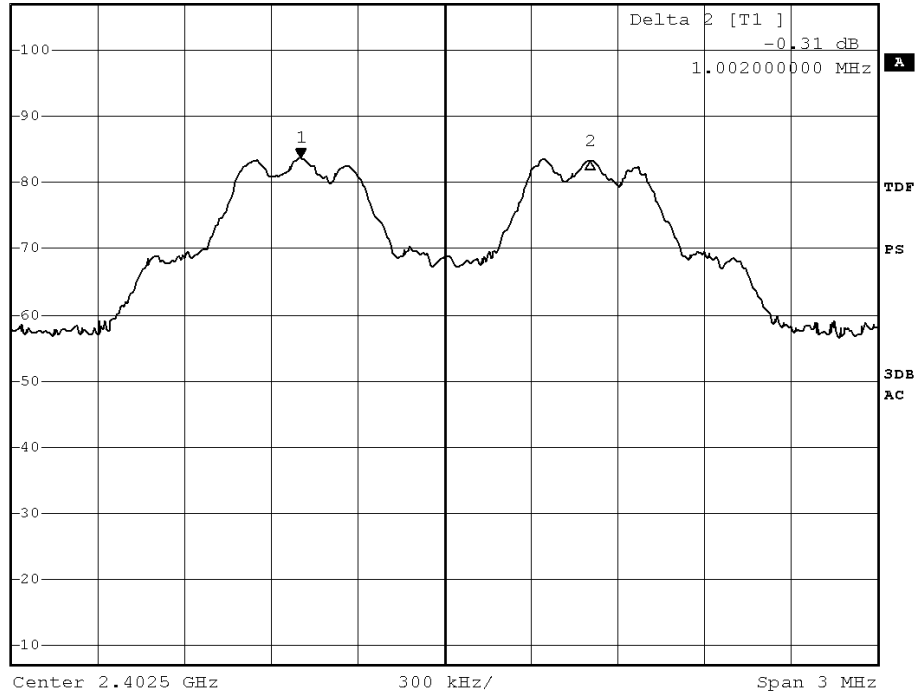

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 47 of 83

Channel 39 – Channel 40, Pass



*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 80.56 dBμV
SWT 2.5 ms 2.441002000 GHz

Ref 107 dBμV


*Att 15 dB

Delta 2 [T1]

0.33 dB

1.002000000 MHz

1 PK
MAXH

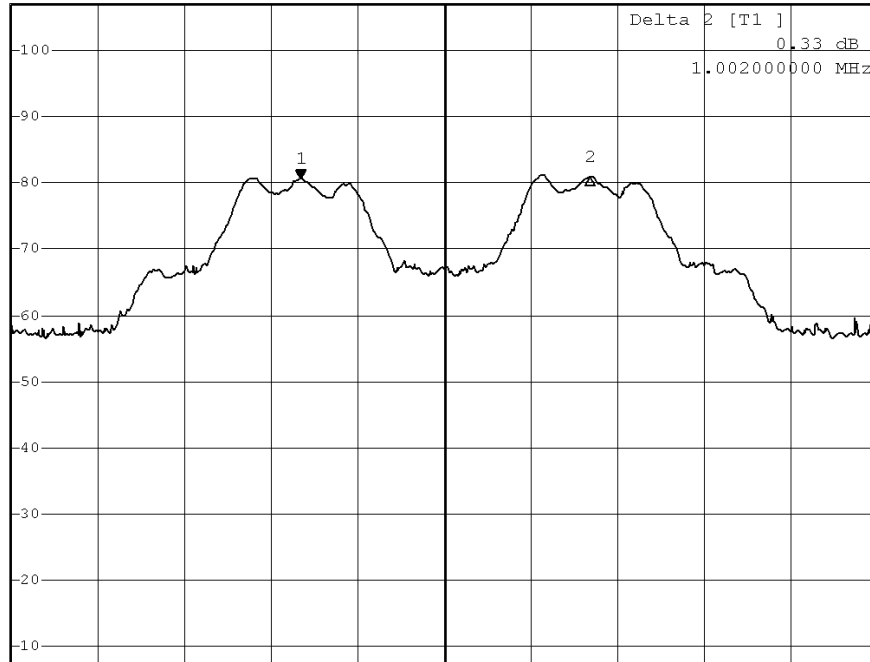

Center 2.4415 GHz

300 kHz/

Span 3 MHz

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 48 of 83

Channel 78 – Channel 79, Pass



*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 79.73 dBµV
SWT 2.5 ms 2.479002000 GHz

Ref 107 dBµV


*Att 15 dB

Delta 2 [T1]

0.34 dB

1.002000000 MHz

1 PK
MAXH

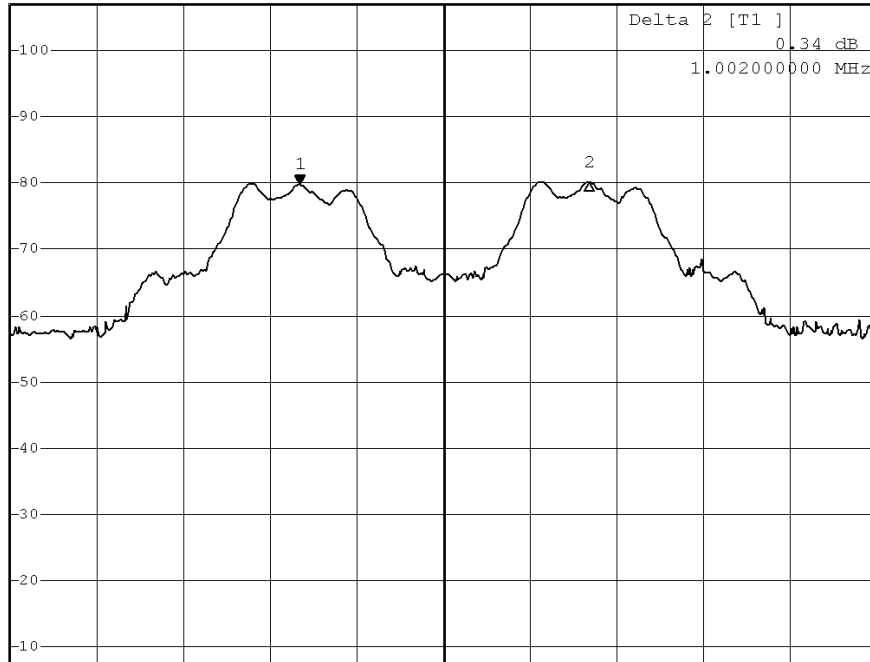

Center 2.4795 GHz

300 kHz/

Span 3 MHz

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date: 2013-08-15
No.: DM111940

Page 49 of 83

Channel separation = 1MHz (>810kHz) ($\pi/4$ - DQPSK)
Channel 0 – Channel 1, Pass

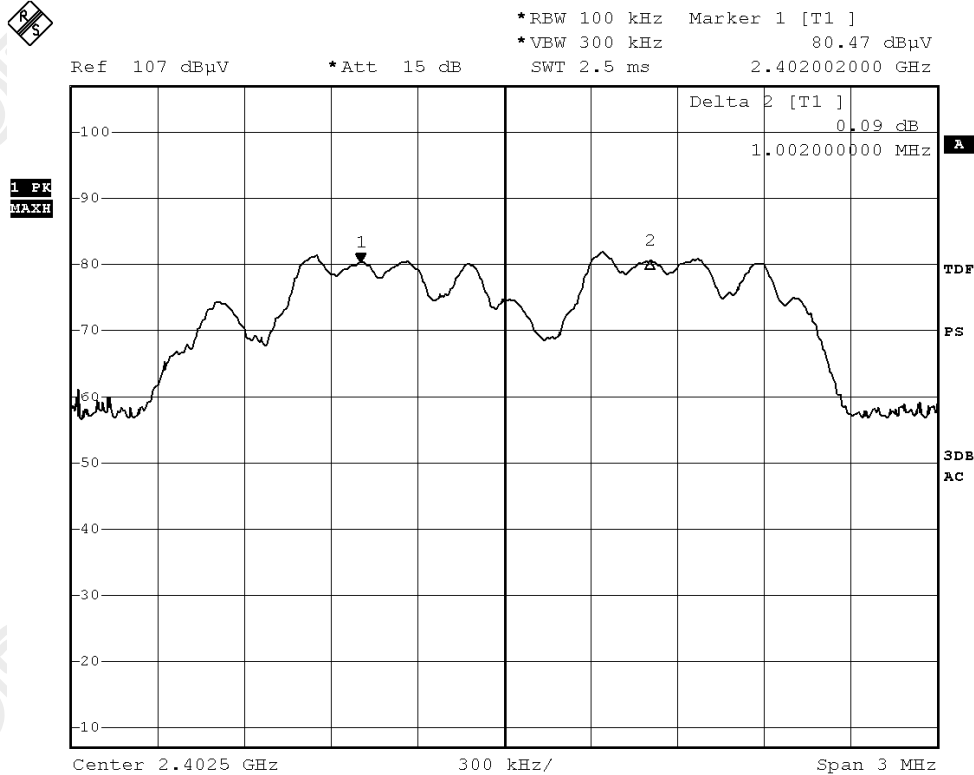

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 50 of 83

Channel 39 – Channel 40, Pass




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 81.88 dB μ V
SWT 2.5 ms 2.441002000 GHz

Ref 107 dB μ V

*Att 15 dB

2.441002000 GHz

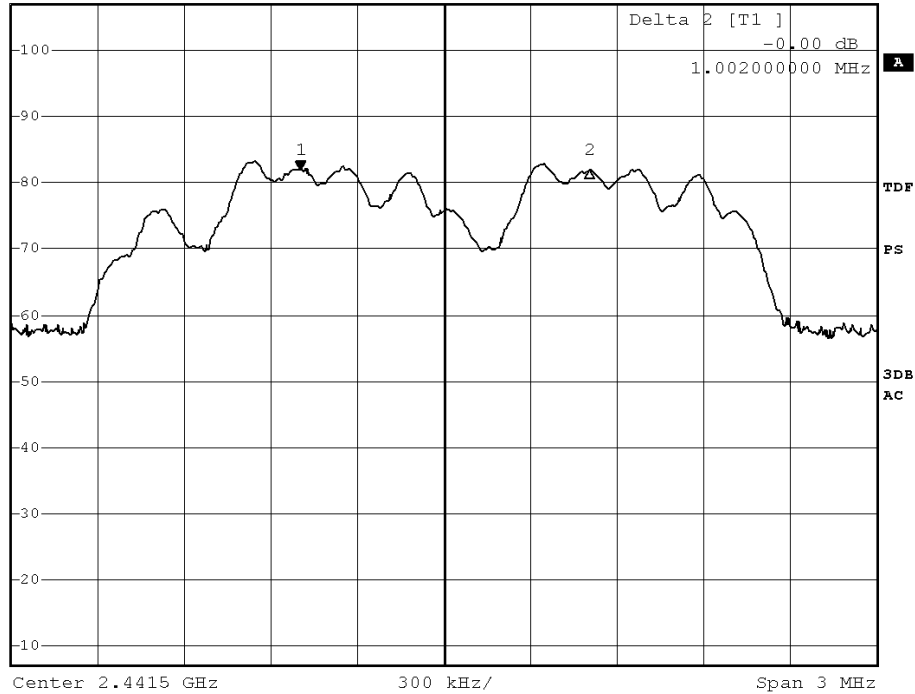

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 51 of 83

Channel 78 – Channel 79, Pass



*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 80.10 dBµV
SWT 2.5 ms 2.479002000 GHz

Ref 107 dBµV


*Att 15 dB

Delta 2 [T1]

0.43 dB

1.002000000 MHz

1 PK
MAXH

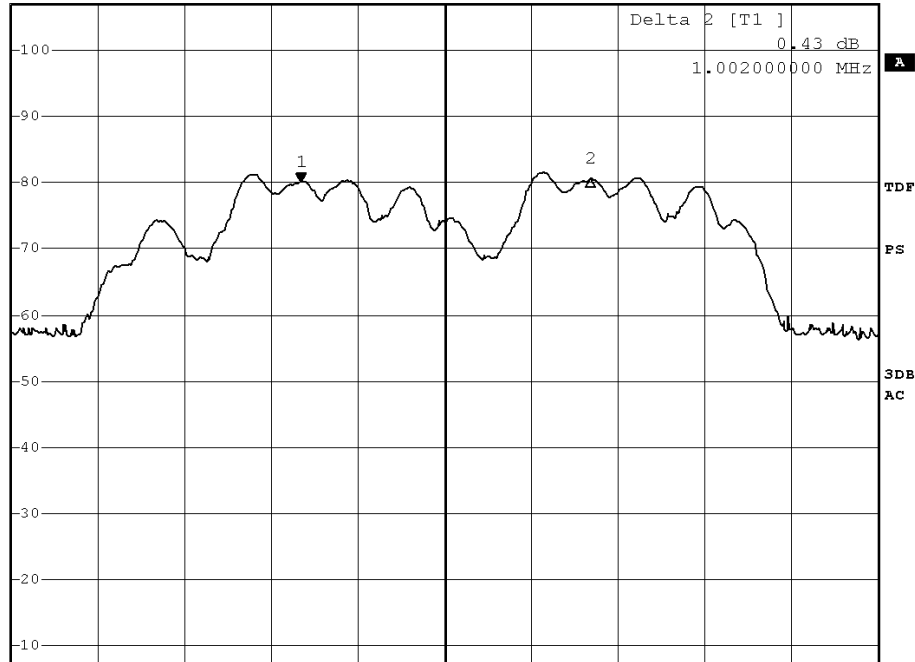

Center 2.4795 GHz

300 kHz/

Span 3 MHz

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 52 of 83

Channel separation = 1MHz (>810kHz) (8DPSK)

Channel 0 – Channel 1, Pass




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 81.35 dBuV
SWT 2.5 ms 2.401996000 GHz

Ref 107 dBuV

*Att 15 dB

2.401996000 GHz

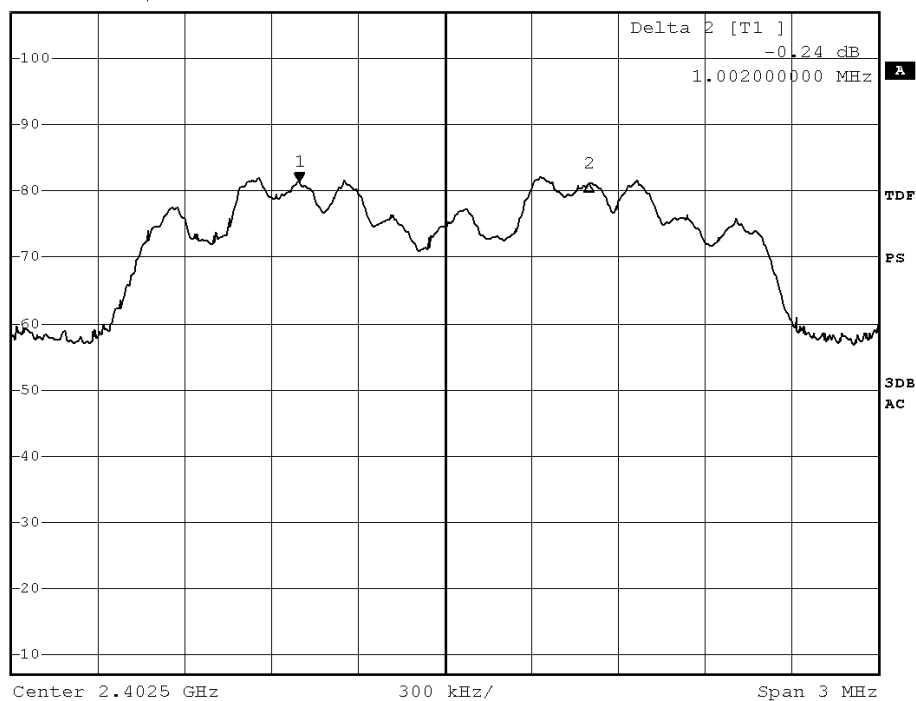

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 53 of 83

Channel 39 – Channel 40, Pass



*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 80.21 dBµV
SWT 2.5 ms 2.441002000 GHz

Ref 107 dBµV


*Att 15 dB

Delta 2 [T1]

-0.15 dB

1.002000000 MHz

1 PK
MAXH

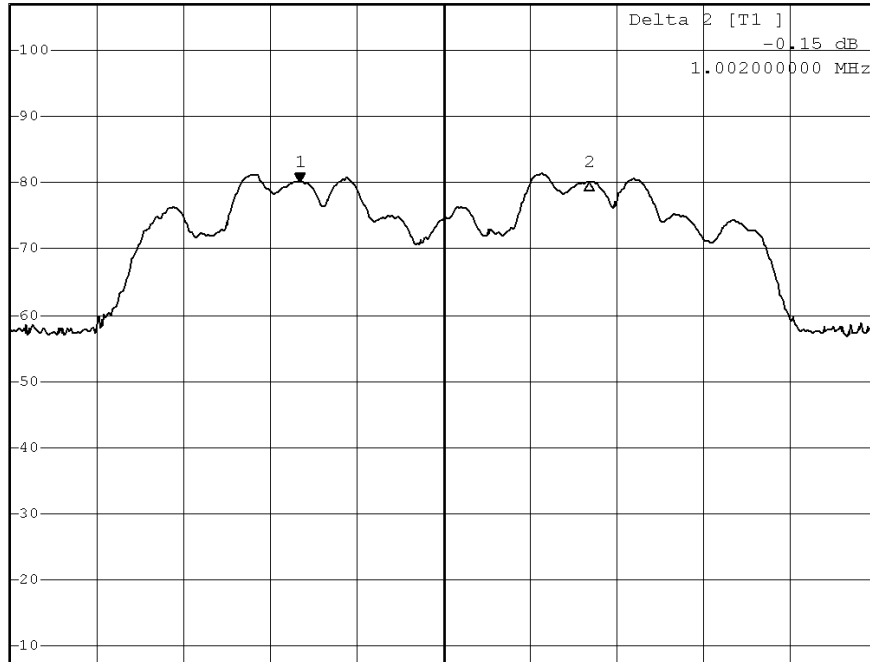

Center 2.4415 GHz

300 kHz/

Span 3 MHz

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 54 of 83

Channel 78 – Channel 79, Pass




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 79.40 dBuV
SWT 2.5 ms 2.479008000 GHz

Ref 107 dBuV

*Att 15 dB

2.479008000 GHz

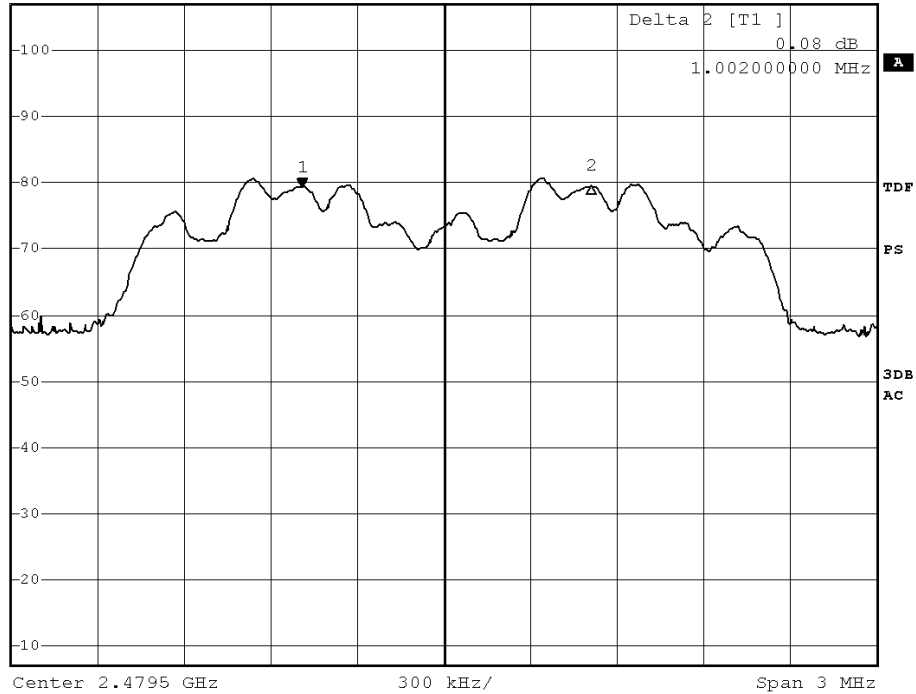

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date: 2013-08-15
No.: DM111940

Page 55 of 83

3.1.7 Band-edge Compliance of RF Conducted Emissions

Lowest (GFSK)

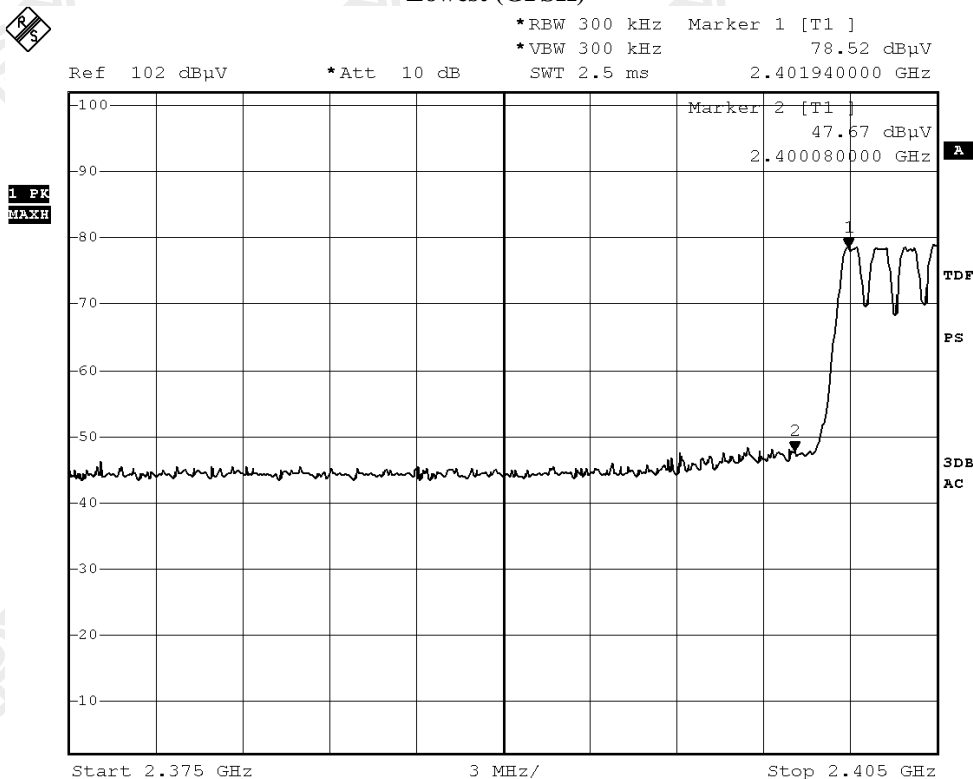

| Field Strength of Band-edge Compliance | | | | | | |
|----------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Peak Value | | | | | | |
| Frequency MHz | Measured Level @3m dBμV | Correction Factor dB/m | Field Strength dBμV/m | Limit @3m dBμV/m | Margin dBμV/m | E-Field Polarity |
| 2400.0 | 23.9 | 35.4 | 59.3 | 74.0 | 14.7 | Vertical |
| Field Strength of Band-edge Compliance | | | | | | |
| Average Value | | | | | | |
| Frequency MHz | Measured Level @3m dBμV | Correction Factor dB/m | Field Strength dBμV/m | Limit @3m dBμV/m | Margin dBμV/m | E-Field Polarity |
| 2400.0 | 9.8 | 35.4 | 45.2 | 54.0 | 8.8 | Vertical |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org


This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 56 of 83

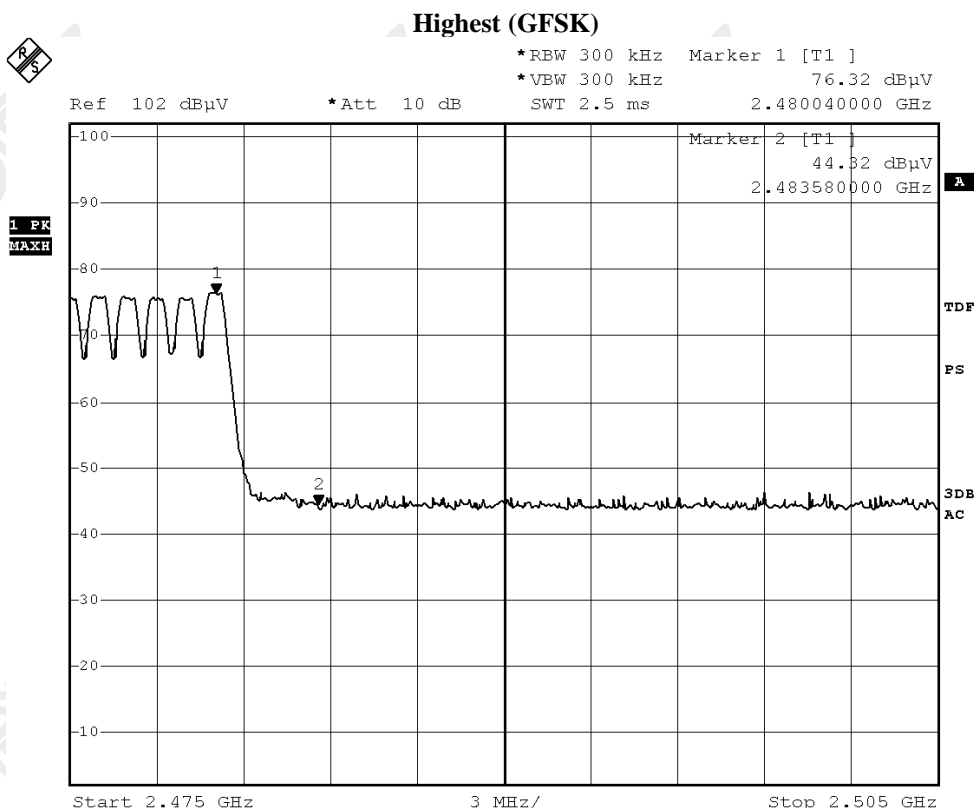

| Field Strength of Band-edge Compliance | | | | | | |
|----------------------------------------|--------------------|-------------------|----------------|-----------|--------|------------------|
| Peak Value | | | | | | |
| Frequency | Measured Level @3m | Correction Factor | Field Strength | Limit @3m | Margin | E-Field Polarity |
| MHz | dBμV | dB/m | dBμV/m | dBμV/m | dBμV/m | |
| 2483.5 | 22.5 | 35.4 | 57.9 | 74.0 | 16.1 | Vertical |
| Field Strength of Band-edge Compliance | | | | | | |
| Average Value | | | | | | |
| Frequency | Measured Level @3m | Correction Factor | Field Strength | Limit @3m | Margin | E-Field Polarity |
| MHz | dBμV | dB/m | dBμV/m | dBμV/m | dBμV/m | |
| 2483.5 | 8.2 | 35.4 | 43.6 | 54.0 | 10.4 | Vertical |




STC Test Report

Date: 2013-08-15
No.: DM111940

Page 57 of 83

Lowest ($\pi/4$ -DQPSK)

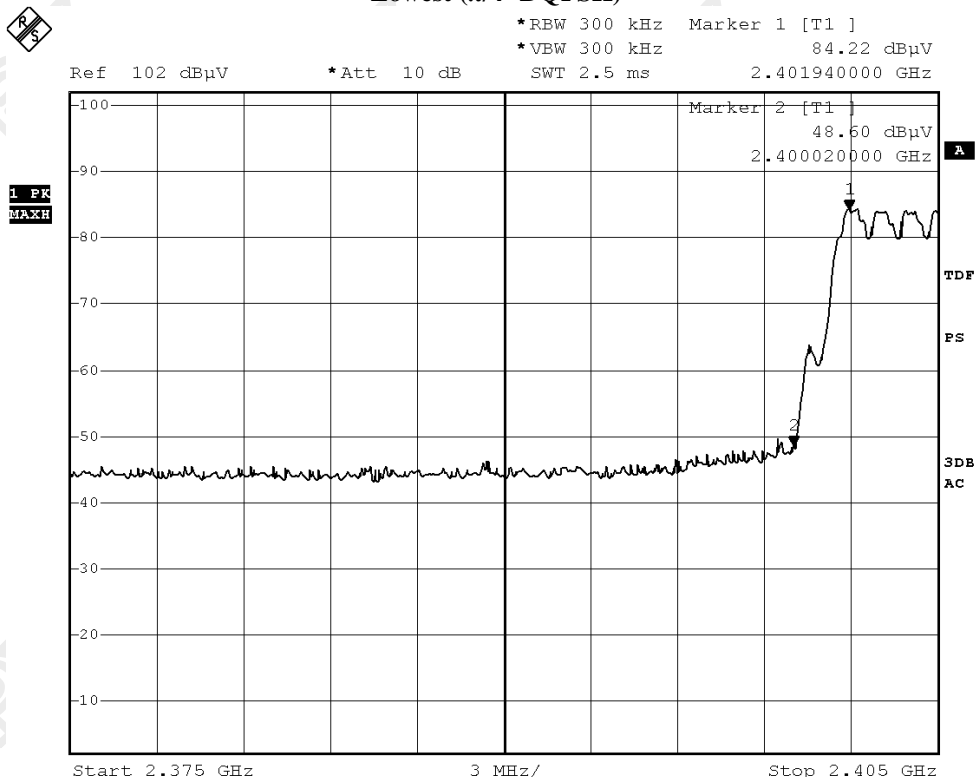

| Field Strength of Band-edge Compliance | | | | | | |
|----------------------------------------|--------------------|-------------------|----------------|-----------|--------|------------------|
| Peak Value | | | | | | |
| Frequency | Measured Level @3m | Correction Factor | Field Strength | Limit @3m | Margin | E-Field Polarity |
| MHz | dBμV | dB/m | dBμV/m | dBμV/m | dBμV/m | |
| 2400.0 | 24.7 | 35.4 | 60.1 | 74.0 | 13.9 | Vertical |
| Field Strength of Band-edge Compliance | | | | | | |
| Average Value | | | | | | |
| Frequency | Measured Level @3m | Correction Factor | Field Strength | Limit @3m | Margin | E-Field Polarity |
| MHz | dBμV | dB/m | dBμV/m | dBμV/m | dBμV/m | |
| 2400.0 | 10.6 | 35.4 | 46.0 | 54.0 | 8.0 | Vertical |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
 Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
 For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date: 2013-08-15
No.: DM111940

Page 58 of 83

Highest ($\pi/4$ -DQPSK)

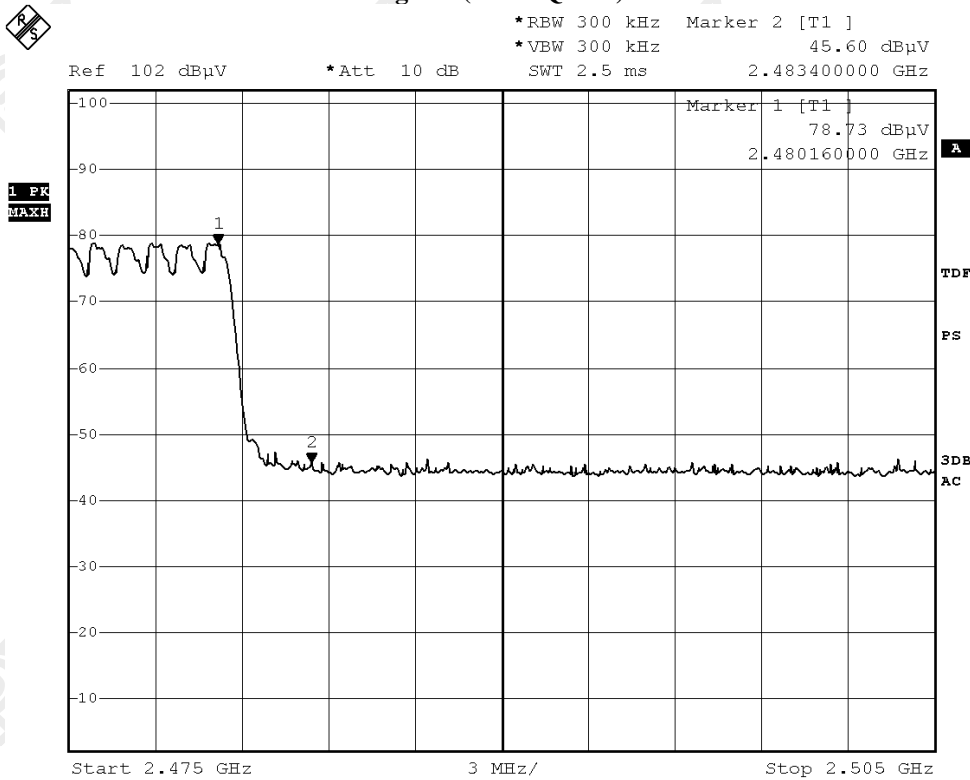

| Field Strength of Band-edge Compliance | | | | | | |
|----------------------------------------|--------------------|-------------------|----------------|-----------|--------|------------------|
| Peak Value | | | | | | |
| Frequency | Measured Level @3m | Correction Factor | Field Strength | Limit @3m | Margin | E-Field Polarity |
| MHz | dBμV | dB/m | dBμV/m | dBμV/m | dBμV/m | |
| 2483.5 | 23.0 | 35.4 | 58.4 | 74.0 | 15.6 | Vertical |
| Field Strength of Band-edge Compliance | | | | | | |
| Average Value | | | | | | |
| Frequency | Measured Level @3m | Correction Factor | Field Strength | Limit @3m | Margin | E-Field Polarity |
| MHz | dBμV | dB/m | dBμV/m | dBμV/m | dBμV/m | |
| 2483.5 | 8.8 | 35.4 | 44.2 | 54.0 | 9.8 | Vertical |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
 Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org


This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
 For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 59 of 83

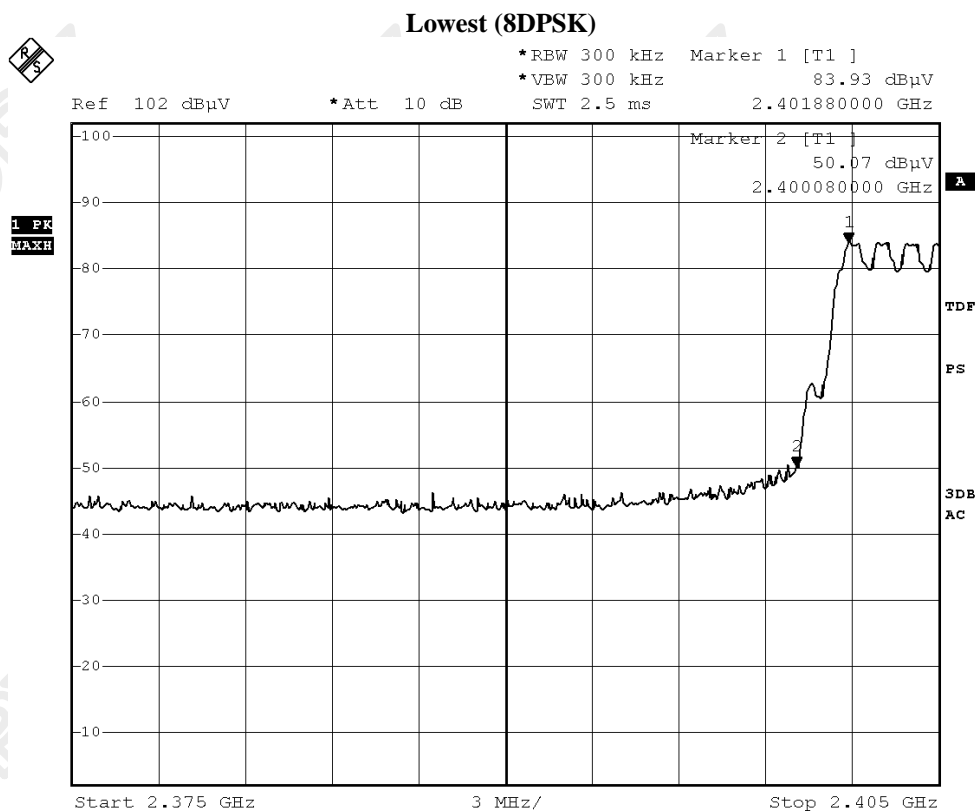

| Field Strength of Band-edge Compliance | | | | | | |
|-----------------------------------------------|--------------------|-------------------|----------------|-----------|--------|------------------|
| Peak Value | | | | | | |
| Frequency | Measured Level @3m | Correction Factor | Field Strength | Limit @3m | Margin | E-Field Polarity |
| MHz | dBμV | dB/m | dBμV/m | dBμV/m | dBμV/m | |
| 2400.0 | 23.8 | 35.4 | 59.2 | 74.0 | 14.8 | Vertical |
| Field Strength of Band-edge Compliance | | | | | | |
| Average Value | | | | | | |
| Frequency | Measured Level @3m | Correction Factor | Field Strength | Limit @3m | Margin | E-Field Polarity |
| MHz | dBμV | dB/m | dBμV/m | dBμV/m | dBμV/m | |
| 2400.0 | 9.7 | 35.4 | 45.1 | 54.0 | 8.9 | Vertical |




STC Test Report

Date: 2013-08-15
No.: DM111940

Page 60 of 83

Highest (8DPSK)

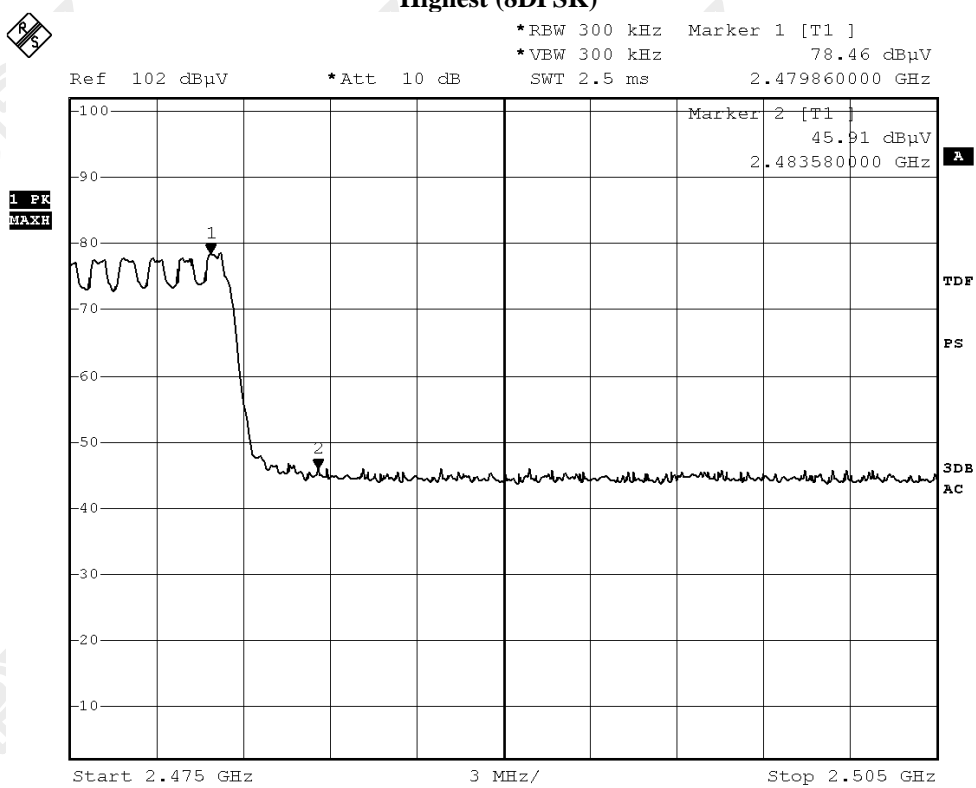

| Field Strength of Band-edge Compliance | | | | | | |
|----------------------------------------|--------------------|-------------------|----------------|-----------|--------|------------------|
| Peak Value | | | | | | |
| Frequency | Measured Level @3m | Correction Factor | Field Strength | Limit @3m | Margin | E-Field Polarity |
| MHz | dBμV | dB/m | dBμV/m | dBμV/m | dBμV/m | |
| 2483.5 | 22.3 | 35.4 | 57.7 | 74.0 | 16.3 | Vertical |
| Field Strength of Band-edge Compliance | | | | | | |
| Average Value | | | | | | |
| Frequency | Measured Level @3m | Correction Factor | Field Strength | Limit @3m | Margin | E-Field Polarity |
| MHz | dBμV | dB/m | dBμV/m | dBμV/m | dBμV/m | |
| 2483.5 | 8.0 | 35.4 | 43.4 | 54.0 | 10.6 | Vertical |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
 Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
 For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 61 of 83

3.1.8 Time of Occupancy (Dwell Time)

Occupancy Time (Dwell time)


Requirements:

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channel employed.
No requirements for Digital Transmission System.

Dwell Time = Pulse Duration * hop rate / number of channel * observation duration

Observed duration: $0.4s \times 79 = 31.6s$

Channel Occupied in 8DPSK: 79 of 79 Channel

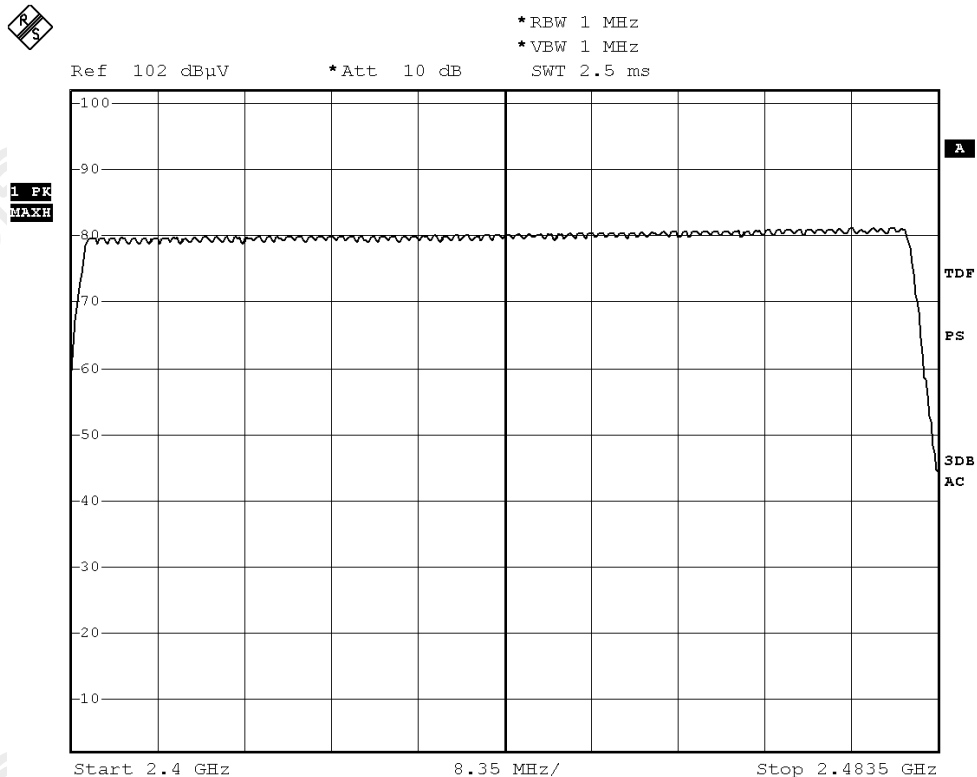

The Hong Kong Standards and Testing Centre Ltd.
10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 62 of 83

COPY

COPY

COPY

COPY

COPY

COPY

COPY

COPY

COPY

COPY

COPY

COPY

The Hong Kong Standards and Testing Centre Ltd.
10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report


Date: 2013-08-15
No.: DM111940

Page 63 of 83

DH5 Packet:

DH5 Packet permit maximum $1600/79/6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds

Fig. A
[Pulse duration of Lowest Channel]

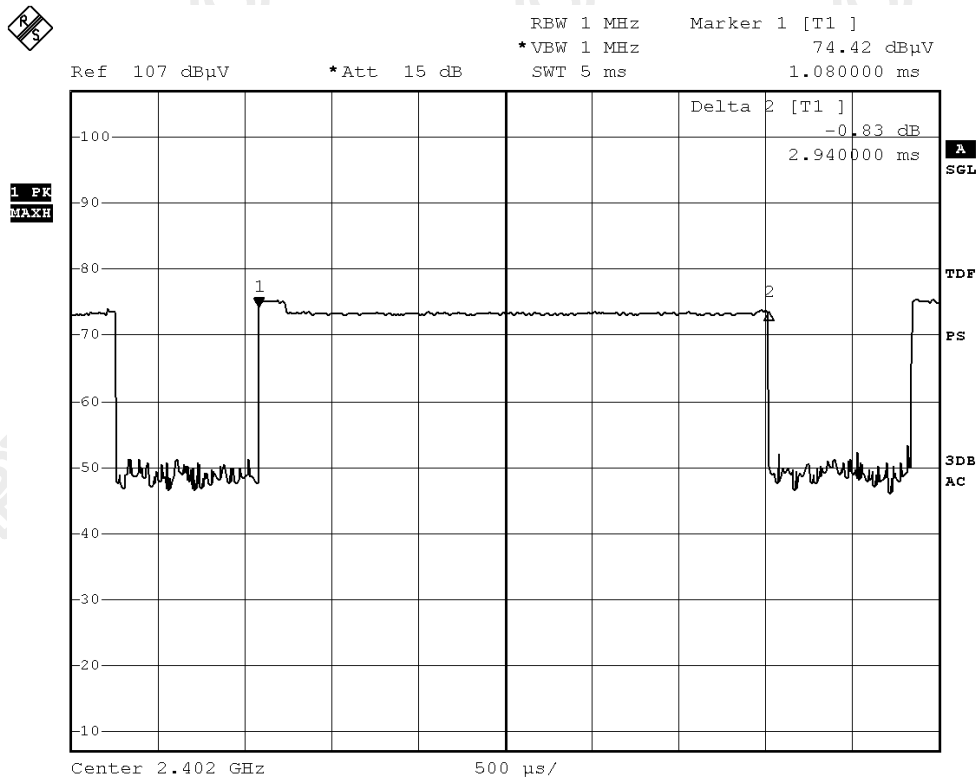

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date: 2013-08-15
No.: DM111940

Page 64 of 83

Fig. B
[Pulse duration of Middle Channel]

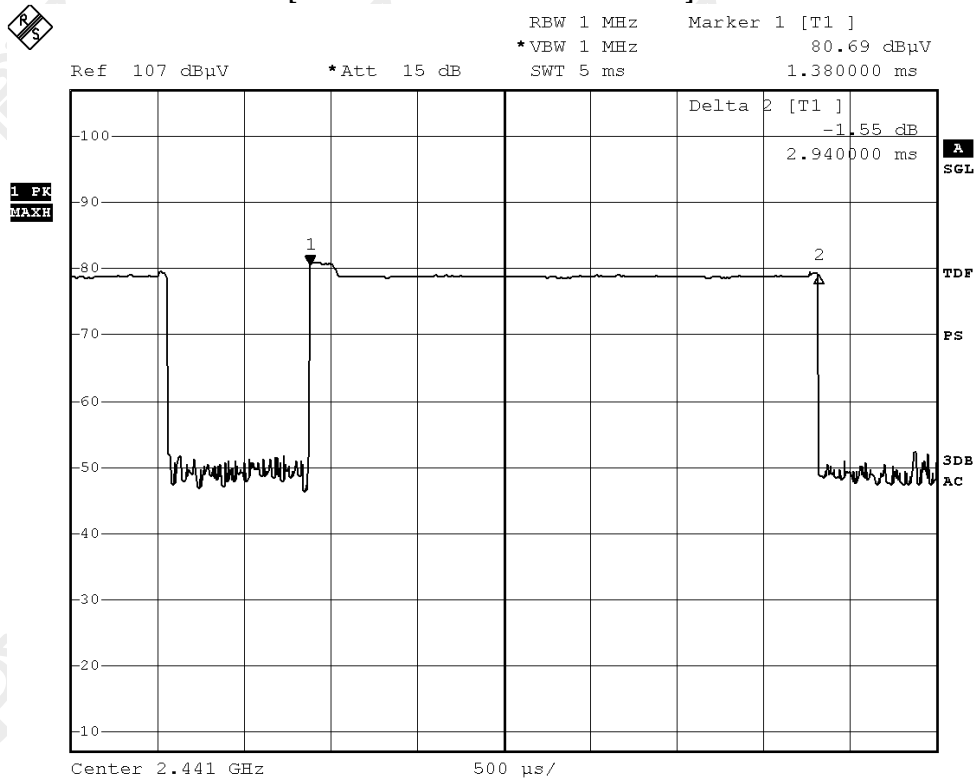

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date: 2013-08-15
No.: DM111940

Page 65 of 83

Fig. C
[Pulse duration of Highest Channel]

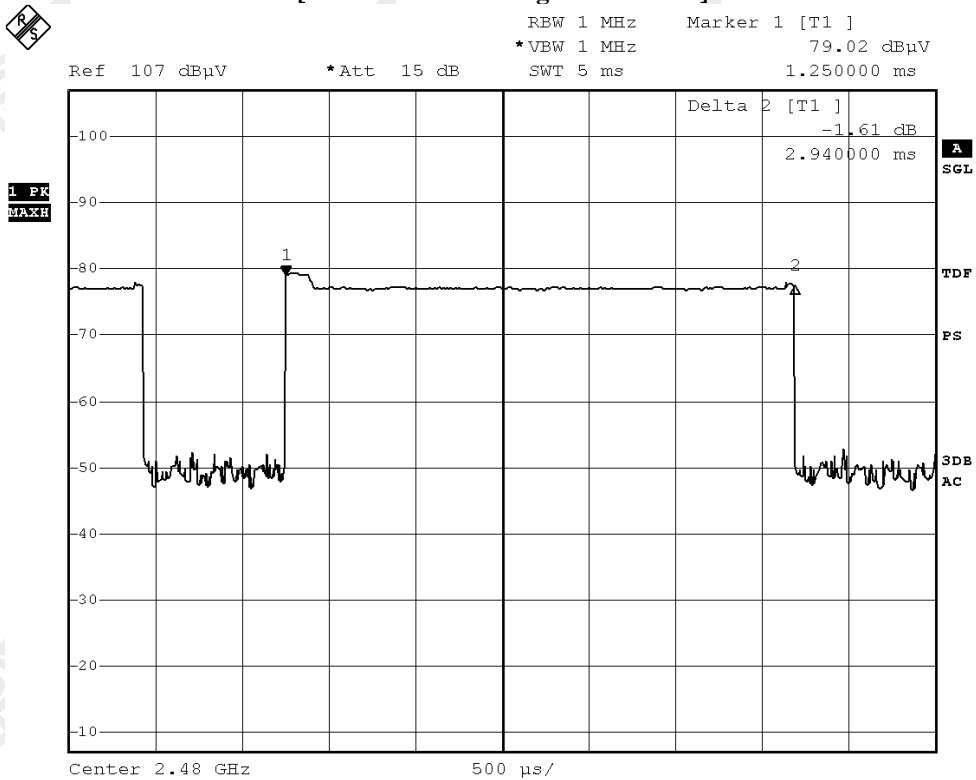

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report


Date: 2013-08-15
No.: DM111940

Page 66 of 83

DH3 Packet:

DH3 Packet permit maximum $1600/79/4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds

Fig. D
[Pulse duration of Lowest Channel]

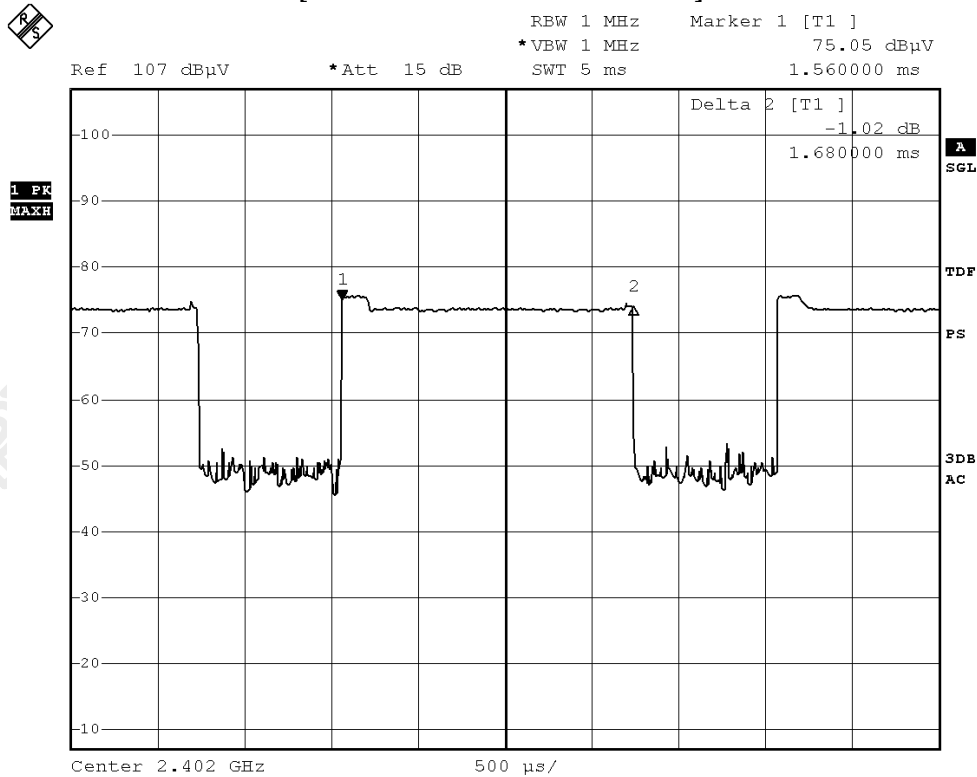

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date: 2013-08-15
No.: DM111940

Page 67 of 83

Fig. E
[Pulse duration of Middle Channel]

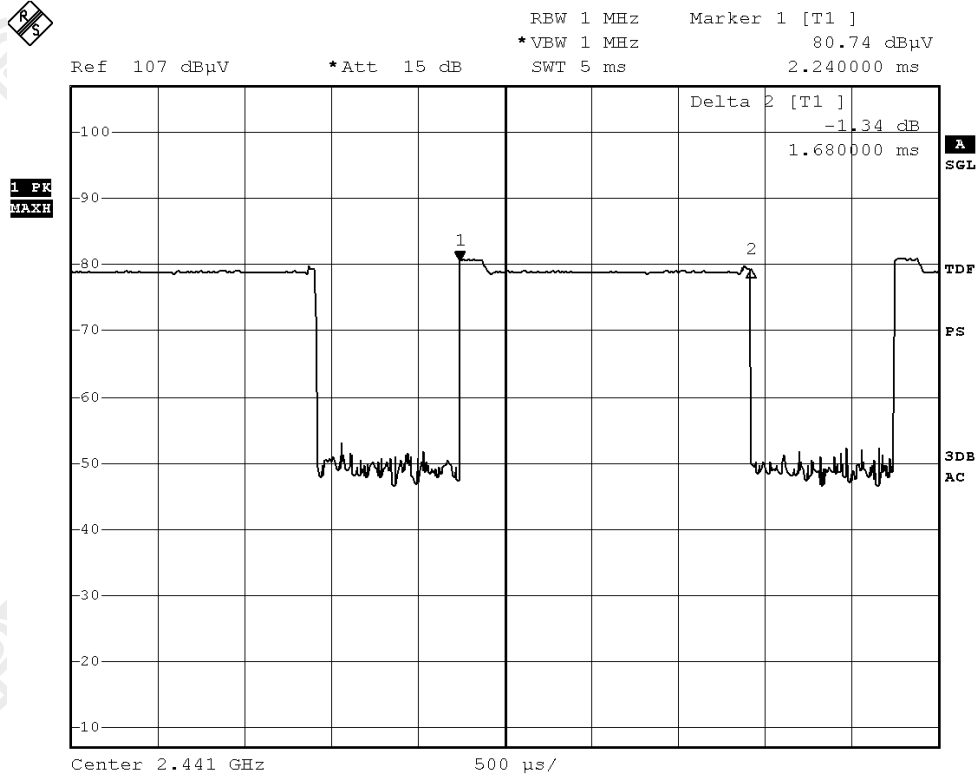

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date: 2013-08-15
No.: DM111940

Page 68 of 83

Fig. F
[Pulse duration of Highest Channel]

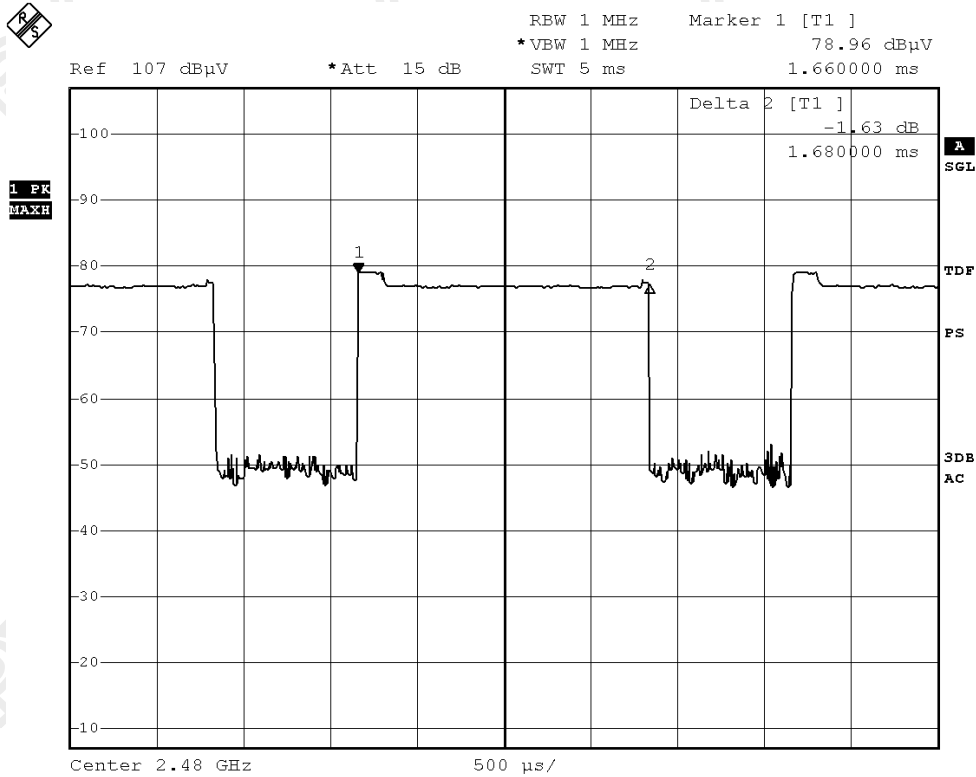

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report


Date: 2013-08-15
No.: DM111940

Page 69 of 83

DH1 Packet:

DH1 Packet permit maximum $1600/79/2 = 10.12$ hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds

Fig. G
[Pulse duration of Lowest Channel]

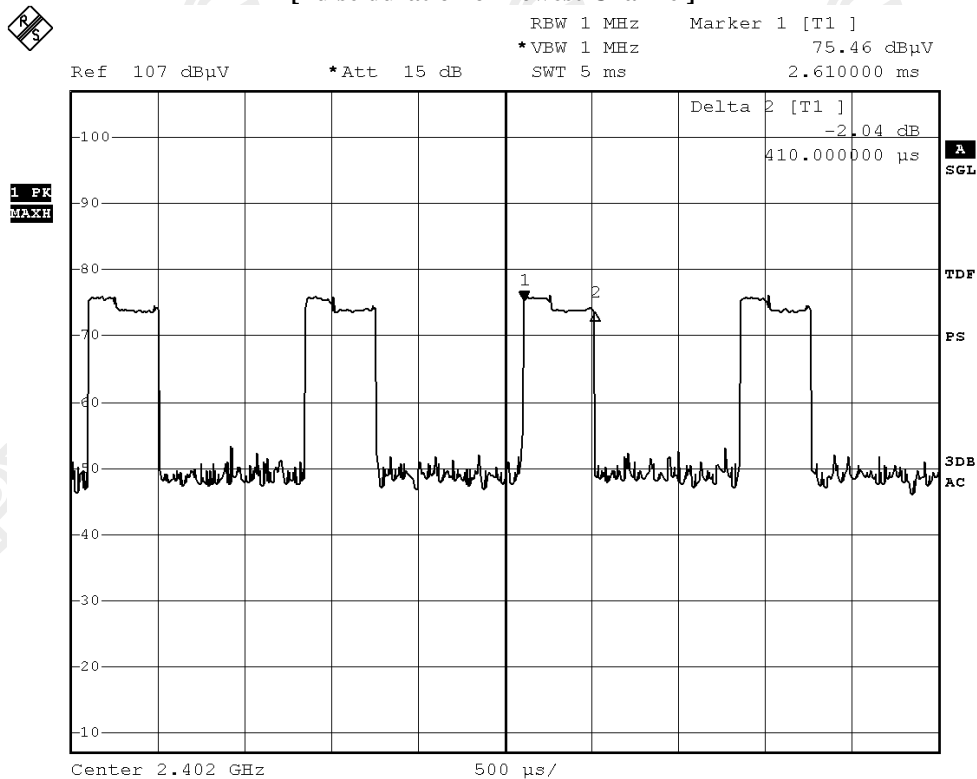

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date: 2013-08-15
No.: DM111940

Page 70 of 83

Fig. H
[Pulse duration of Middle Channel]

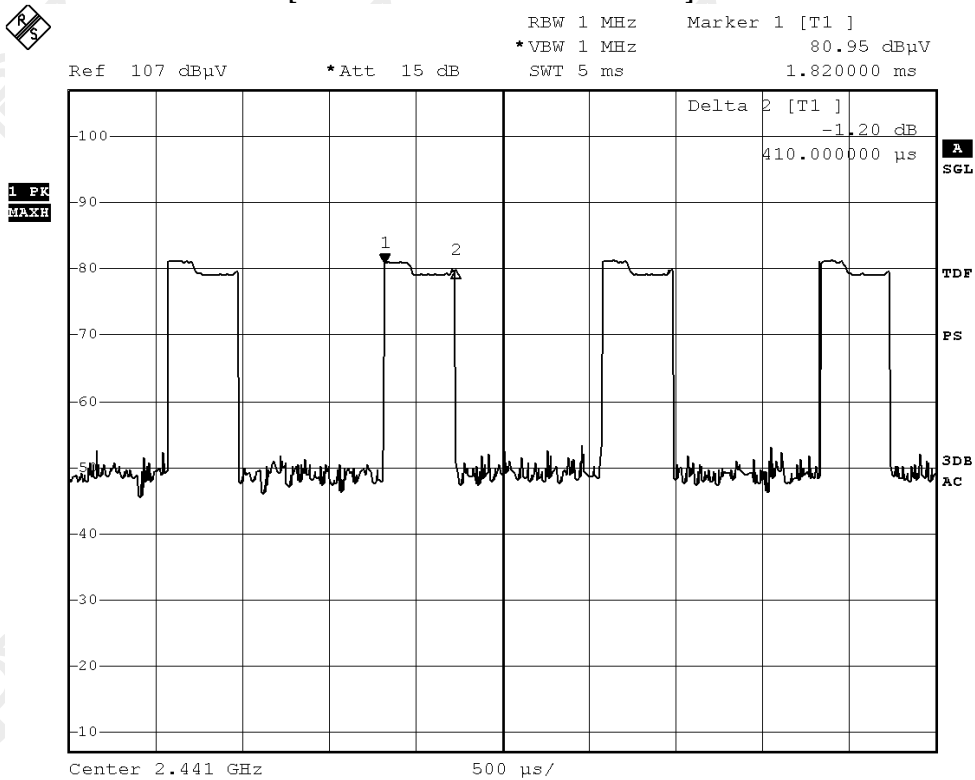

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date: 2013-08-15
No.: DM111940

Page 71 of 83

Fig. I
[Pulse duration of Highest Channel]

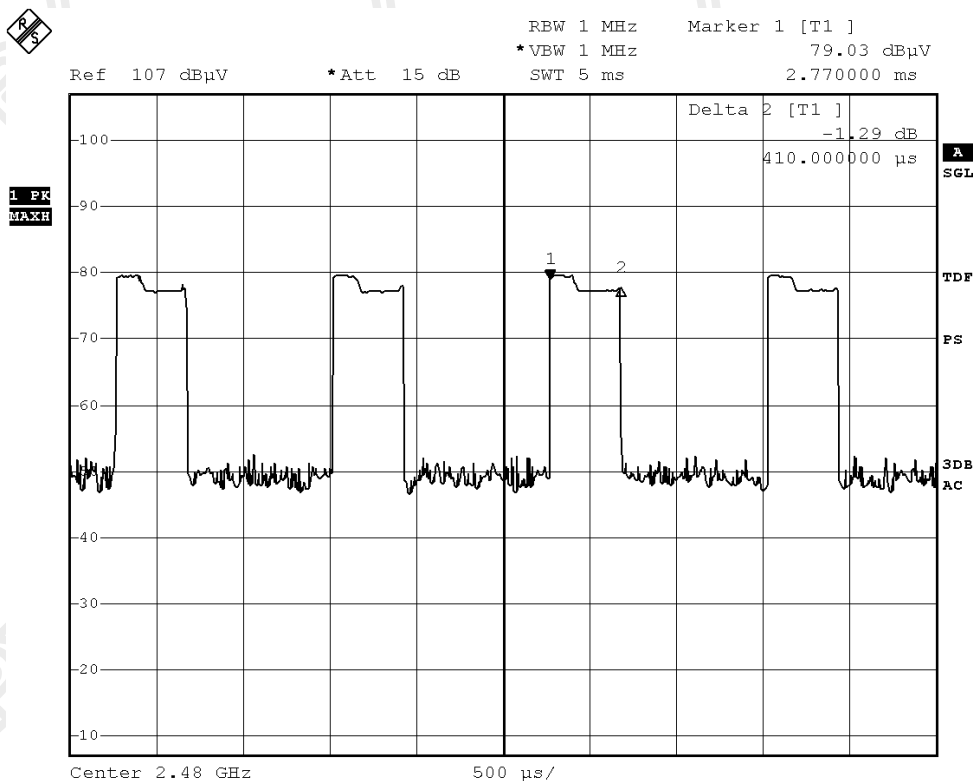

Time of occupancy (Dwell Time):

| Data Packet | Frequency (MHz) | Pulse Duration (ms) | Dwell Time (s) | Limits (s) | Test Results |
|-------------|-----------------|---------------------|----------------|------------|--------------|
| DH5 | 2402 | 2.940 | 0.314 | 0.400 | Complies |
| DH5 | 2441 | 2.940 | 0.314 | 0.400 | Complies |
| DH5 | 2480 | 2.940 | 0.314 | 0.400 | Complies |
| DH3 | 2402 | 1.680 | 0.269 | 0.400 | Complies |
| DH3 | 2441 | 1.680 | 0.269 | 0.400 | Complies |
| DH3 | 2480 | 1.680 | 0.269 | 0.400 | Complies |
| DH1 | 2402 | 0.410 | 0.131 | 0.400 | Complies |
| DH1 | 2441 | 0.410 | 0.131 | 0.400 | Complies |
| DH1 | 2480 | 0.410 | 0.131 | 0.400 | Complies |



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 72 of 83

3.1.9 Channel Centre Frequency

Requirements:

Frequency hopping system in the 2400-2483.5MHz band shall use at least 79 (Channel 0 to 78) non-overlapping channels.

The EUT operates in according with the Bluetooth system specification within the 2400 - 2483.5 MHz frequency band.

RF channels for Bluetooth systems are spaced 1 MHz and are ordered in channel number k. In order to comply with out-of-band regulations, a lower frequency guard band of 2.0 MHz and a higher frequency guard band of 3.5MHz is used.

The operating frequencies of each channel are as follows:

First RF channel start from 2400MHz + 2MHz guard band = 2402MHz

Frequency of RF Channel = 2402+k MHz, k = 0,...,78 (Channel separation = 1MHz)

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 73 of 83

3.1.10 Pseudorandom Hopping Algorithm

Requirements:

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

EUT Pseudorandom Hopping Algorithm

The EUT is a Bluetooth device, the Pseudo-random hopping pattern; hopping characteristics and algorithm are based on the Bluetooth specification.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 74 of 83

3.1.11 Antenna Requirement

Test Requirements: § 15.203

Test Specification:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Results:

This is PCB layout internal antenna. There is no external antenna, the antenna gain =2.0dBi. User is unable to remove or changed the Antenna.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 75 of 83

3.1.12 RF Exposure

Test Requirement: FCC 47CFR 15.247(i)
Test Date: 2013-08-05
Mode of Operation: BT mode
Dimension of EUT: 297mm x 100mm x 79mm

Requirements:

In 15.247(i), an equipment shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the limits in §§ 1.1310 and 2.1093 of this chapter. Applications to the Commission for construction permits, licenses to transmit or renewals thereof, equipment authorizations or modifications in existing facilities must contain a statement confirming compliance with the limits unless the facility, operation, or transmitter is categorically excluded, as discussed below. Technical information showing the basis for this statement must be submitted to the Commission upon request.

According to KDB447498 D01 General RF Exposure Guidance v05, unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Exclusion Threshold condition.

Test Results:

RF Exposure Evaluation

The Maximum conducted output power = 1.07mW (at frequency = 2.480 GHz)

It's Conducted source-based time-averaging output power = 1.07 mW (at frequency = 2.480 GHz)

Since the SAR test exclusion thresholds for 2450MHz at test separation distances ≤ 5 mm = 10mW and the Conducted source-based time-averaging output power is less than 10mW.

Therefore, the SAR evaluation can be exempted.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 76 of 83

Appendix A

List of Measurement Equipment

| EQP NO. | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | LAST CAL | DUE CAL |
|---------|----------------------------------------------|---------------------------|------------------|----------------|------------|------------|
| EMD004 | LISN | ROHDE & SCHWARZ | ESH3-Z5 | 100102 | 2013.03.15 | 2014.03.14 |
| EMD022 | EMI Test Receiver | ROHDE & SCHWARZ | ESCS30 | 100314 | 2013.03.15 | 2014.03.14 |
| EMD061 | Biconilog Antenna | ETS.LINDGREN | 3142C | 00060439 | 2012.11.03 | 2014.11.02 |
| EMD062 | Double-Ridged Waveguide (1GHz – 18GHz) | ETS.LINDGREN | 3117 | 00075933 | 2012.11.28 | 2014.11.27 |
| EMD084 | MULTI-DVICE CONTROLLER | ETS.LINDGREN | 2090 | 00060107 | N/A | N/A |
| EMD088 | Video Contol Unit | ETS.LINDGREN | Y21953A | 2601073 | N/A | N/A |
| EMD093 | Monitor | ViewSonic | VA9036 | Q8X064201876 | N/A | N/A |
| EMD102 | Intelligent Frequency | Ainuo Instrument Co., Ltd | AN97005SS | 79707454 | N/A | N/A |
| EMD103 | Intelligent Frequency | Ainuo Instrument Co., Ltd | AN97005SS | 79707455 | N/A | N/A |
| EMD105 | FACT-3 EMC Chamber | ETS.LINDGREN | FACT-3 | 3803 | N/A | N/A |
| EMD106 | Shielding Room #1 | ETS.LINDGREN | RFD-100 | 3802 | N/A | N/A |
| EMD111 | Power meter | ROHDE & SCHWARZ | NRVD | 102051 | 2013.03.15 | 2014.03.14 |
| | 100V Insertion Unit | ROHDE & SCHWARZ | URV5-Z4 | 100464 | 2013.03.15 | 2014.03.14 |
| EMD113 | Pre-Amplifier | ROHDE & SCHWARZ | N/A | 1129588 | 2013.03.15 | 2014.03.14 |
| EMD124 | Loop Antenna | ETS-Lindgren | 6502 | 00104905 | 2012.03.26 | 2014.03.25 |
| EMD131 | Standard Gain Horn Antenna (18GHz – 26.5GHz) | Chengdu AINFO Inc. | JTXLB-42-15-C-KF | J2021100721001 | 2013.01.25 | 2015.01.24 |

Remarks:-

CM Corrective Maintenance
N/A Not Applicable or Not Available
TBD To Be Determined

Appendix B

Ancillary Equipment

| ITEM NO. | DESCRIPTION | MODEL NO. | FCC ID | REMARK |
|----------|-------------|-----------|-----------|--------|
| 1 | iPod Touch | A1367 | BCG-E2407 | N/A |

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 77 of 83

Appendix C

Photographs of EUT

Front View of the product



Rear View of the product



Inside View of the product



The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940


Page 78 of 83

Photographs of EUT

Inner Circuit Top View – All PCBs




Inner Circuit Bottom View – All PCBs

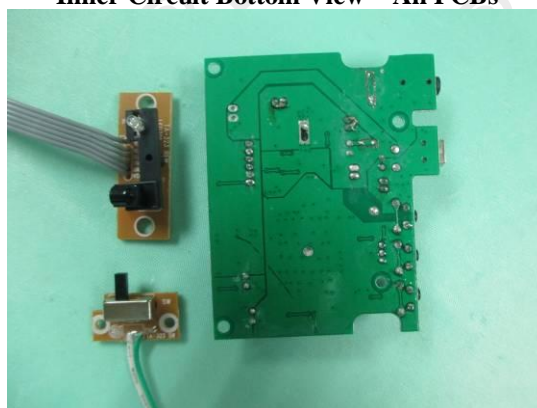


Inner Circuit Top View



Inner Circuit Bottom View

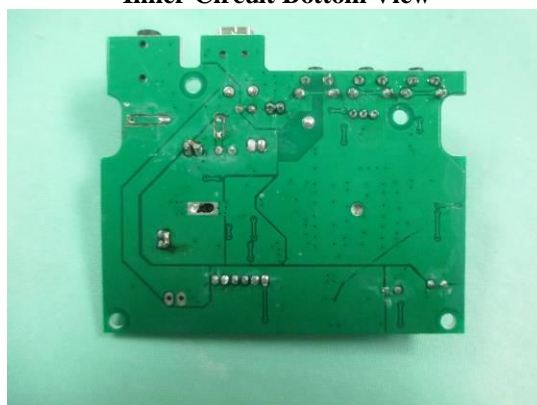

Inner Circuit Top View

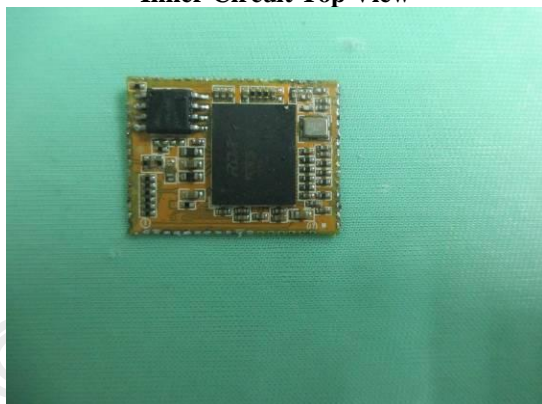

Inner Circuit Bottom View



The Hong Kong Standards and Testing Centre Ltd.
10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date: 2013-08-15
No.: DM111940


Page 79 of 83

Photographs of EUT


Inner Circuit Top View

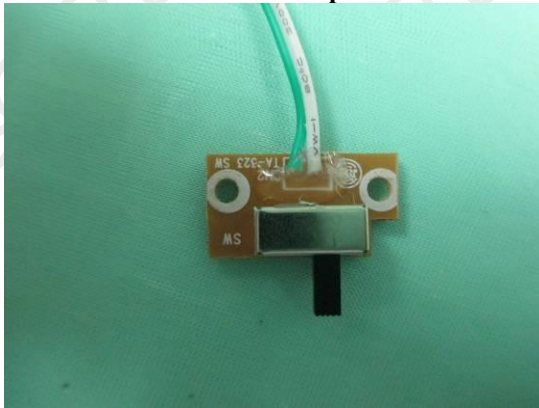


Inner Circuit Bottom View

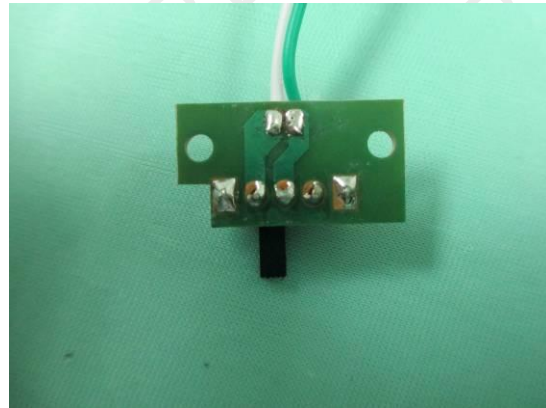

Inner Circuit Top View

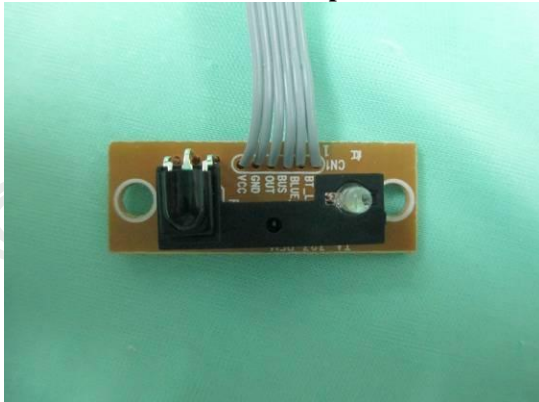

Inner Circuit Bottom View

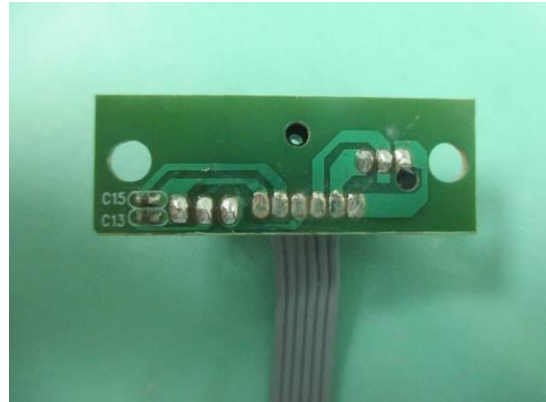

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date: 2013-08-15
No.: DM111940

Page 80 of 83

Photographs of EUT

Measurement of Radiated Emission Test Set Up

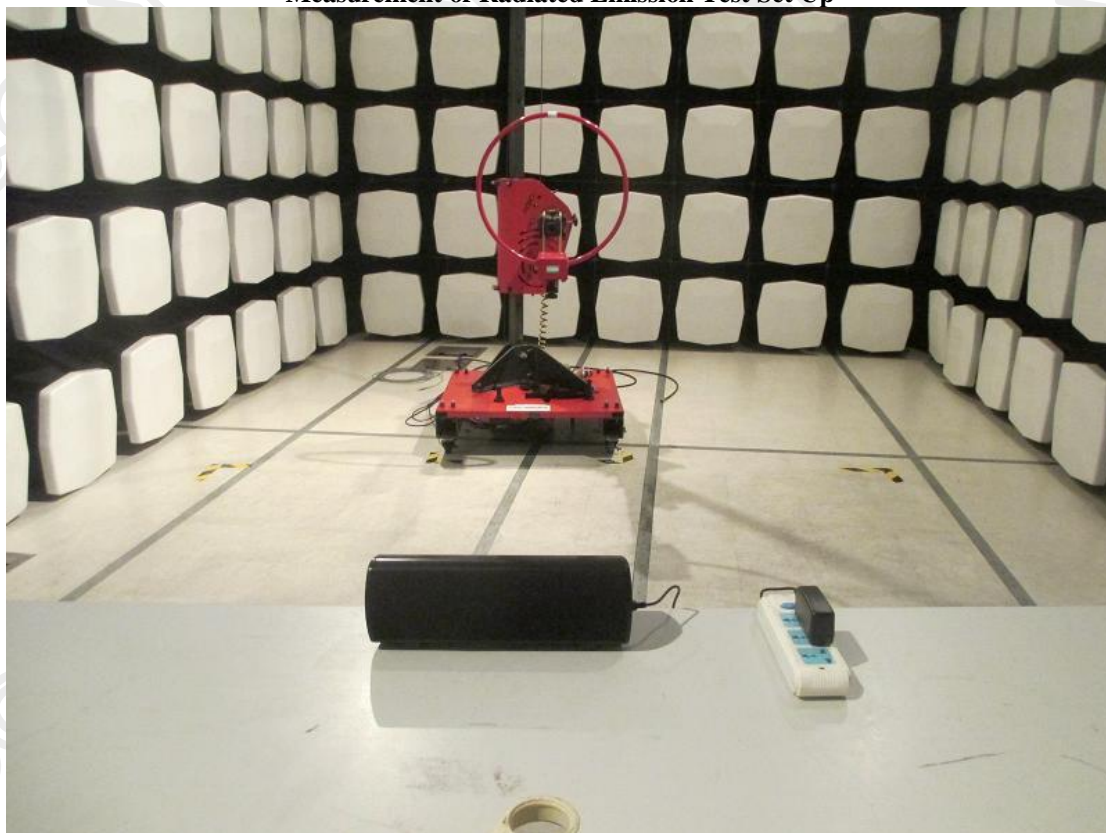

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date: 2013-08-15
No.: DM111940

Page 81 of 83

Photographs of EUT

Measurement of Radiated Emission Test Set Up

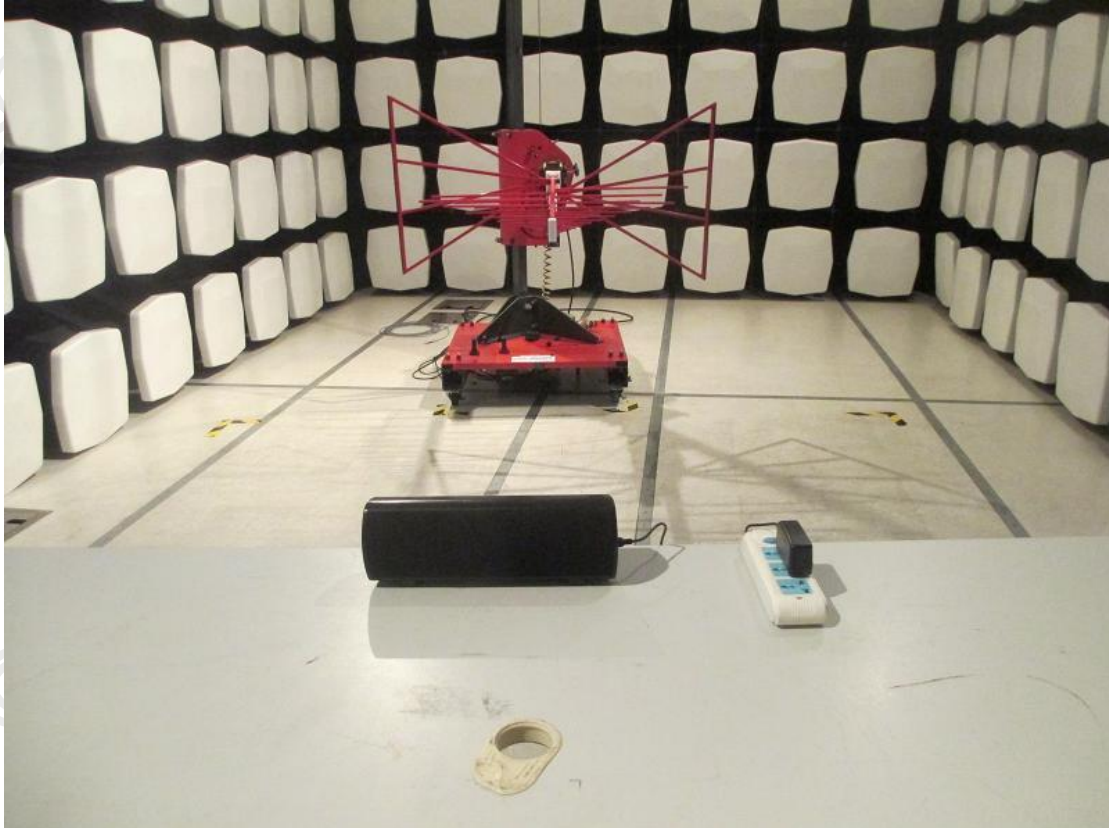

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date: 2013-08-15
No.: DM111940

Page 82 of 83

Photographs of EUT

Measurement of Radiated Emission Test Set Up

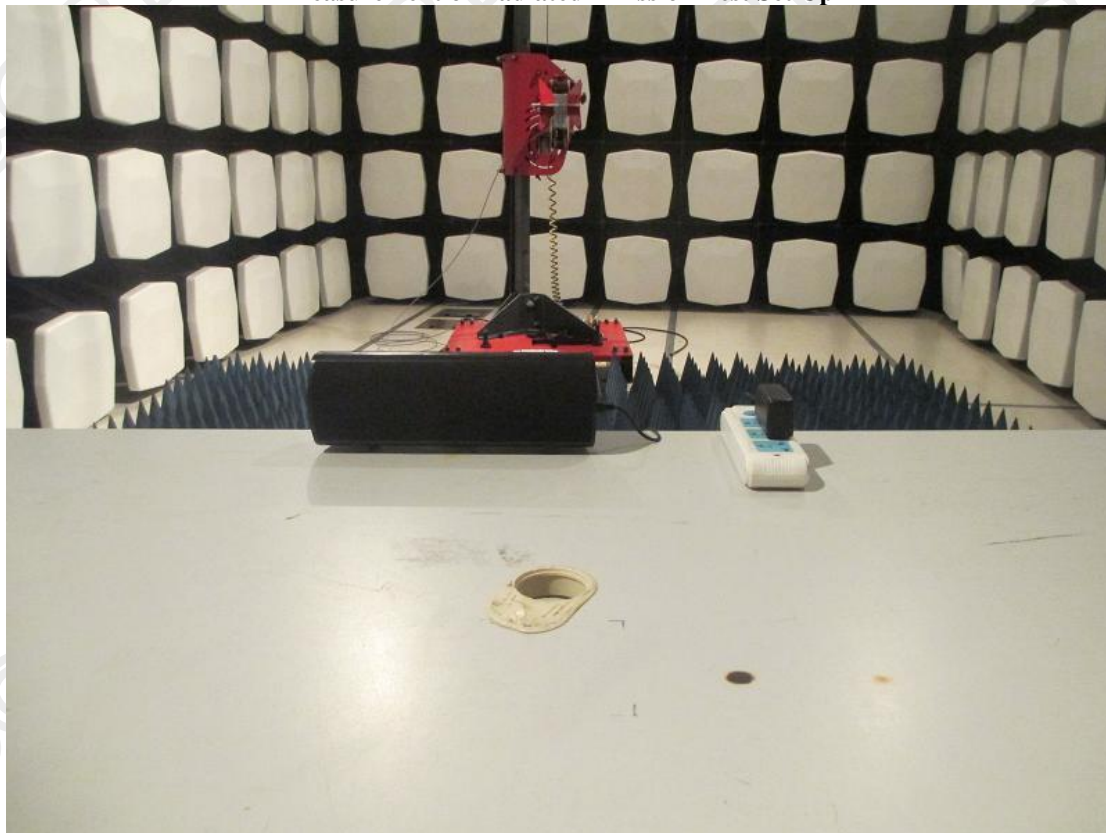

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date: 2013-08-15
No.: DM111940

Page 83 of 83

Photographs of EUT

Measurement of Conducted Emission Test Set Up



***** End of Test Report *****

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage