


1301 – SCS Forest KilnScout test setup photos for Radiated Emissions.

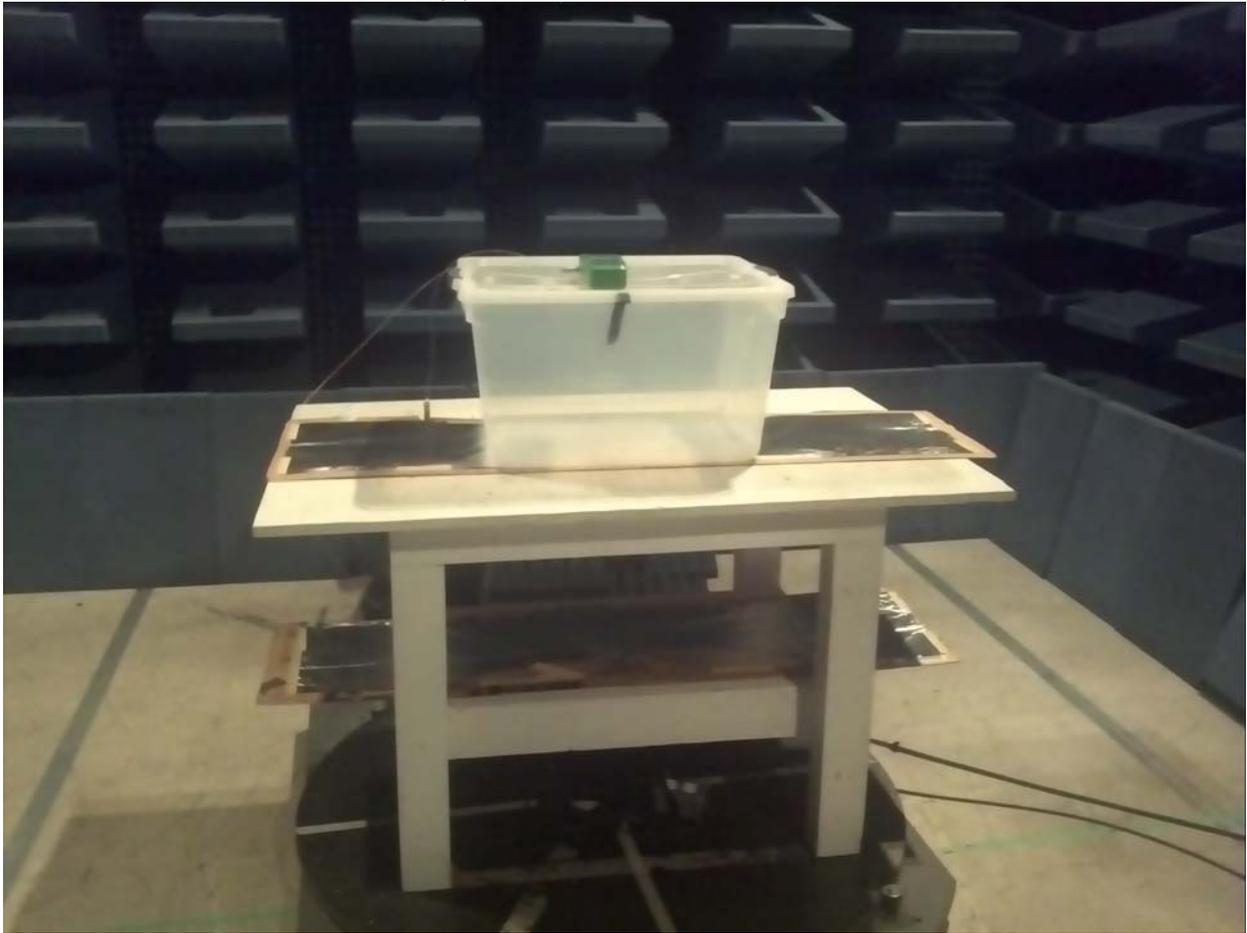

EUT positioned and tested in a simulated configuration.

The EUT is used to measure the moisture content of a stack of wood that is inside of a drying Kiln.

The EUT is positioned on top of the stack and 2 metal plates are inserted inside of the stack.



Side view of test setup



Close-up of lower metal plate and interconnection clip



Close-up of upper metal plate and interconnection clip



Close-up of interconnecting clip interface to EUT



Close-up of EUT