

Company: VT Miltope Corporation

Test of: nMAP2 (802.11 a/n/ac Wireless Access Point)

To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)

Report No.: MLTP26-U5 Rev A



TEST REPORT

FROM



opening wireless markets

Test of: VT Miltope Corporation nMAP2

to

To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)

Test Report Serial No.: MLTP26-U5 Rev A

This report supersedes: None

Applicant: VT Miltope Corporation
3800 Richardson Road South
Hope Hull Alabama 36043
USA

Product Function: In-Flight Entertainment
Wireless Access Point

Issue Date: 31st March 2015

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

Contents

1. ACCREDITATION, LISTINGS & RECOGNITION	4
1.1. TESTING ACCREDITATION.....	4
1.2. RECOGNITION	5
1.3. PRODUCT CERTIFICATION	6
2. DOCUMENT HISTORY	7
3. TEST RESULT CERTIFICATE	8
4. REFERENCES AND MEASUREMENT UNCERTAINTY	9
4.1. Normative References	9
4.2. Test and Uncertainty Procedure	10
5. PRODUCT DETAILS AND TEST CONFIGURATIONS	11
5.1. Technical Details	11
5.2. Scope Of Test Program.....	12
5.3. Equipment Model(s) and Serial Number(s).....	14
5.4. Antenna Details	14
5.5. Cabling and I/O Ports	14
5.6. Test Configurations.....	15
5.7. Equipment Modifications	15
5.8. Deviations from the Test Standard	15
6. TEST SUMMARY	16
7. TEST EQUIPMENT CONFIGURATION(S)	17
8. MEASUREMENT AND PRESENTATION OF TEST DATA	21
9. TEST RESULTS	22
9.1. 6 dB & 99% Bandwidth.....	22
9.2. Conducted Output Power	27
9.3. Conducted Spurious Emissions.....	33
9.3.1. <i>Conducted Band-Edge Emissions</i>	33
9.3.2. <i>Conducted Spurious Emissions</i>	41
9.4. Power Spectral Density	46
9.5. Radiated Emissions	51
9.5.1. <i>Radiated Spurious Emissions</i>	51
9.5.2. <i>Radiated Band-Edge Emissions</i>	56
9.5.3. <i>Digital Emissions (0.03 – 1 GHz)</i>	65
9.6. ac Wireline Emissions.....	68
APPENDIX A – GRAPHICAL DATA	70
A.1. CONDUCTED TEST PLOTS	70
A.1.1. <i>6 dB & 99% Bandwidth</i>	71
A.1.2. <i>Conducted Output Power</i>	107
A.1.3. <i>Emissions</i>	143
A.1.4. <i>Power Spectral Density</i>	203

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



American Association for Laboratory Accreditation

Accredited Laboratory

A2LA has accredited

MICOM LABS


Pleasanton, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 28th day of February 2014.



President & CEO
For the Accreditation Council
Certificate Number 2381.01
Valid to November 30, 2015



For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 5 of 251

1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 7 of 251

2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	21 st March 2015	
Rev A	31 st March 2015	Initial Release
.		
.		
.		
.		
.		

In the above table the latest report revision will replace all earlier versions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 8 of 251

3. TEST RESULT CERTIFICATE

Manufacturer: VT Miltope Corporation 3800 Richardson Road South Hope Hull, Alabama 36043 USA	Tested By: MiCOM Labs, Inc. 575 Boulder Court Pleasanton, California 94566 USA
Model: nMAP2	Telephone: +1 925 462 0304
Equipment Type: 802.11 a/n/ac Wireless Access Point	Fax: +1 925 462 0306
S/N's: Not Available	
Test Date(s): 16 th February – 16 th March 2015	Website: www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC CFR 47 Part 15 Subpart C 15.247 (DTS)	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



TESTING CERT #2381.01


Graeme Grieve
Quality Manager MiCOM Labs, Inc.


Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 644545 D01 v01r02	Oct 31 2013	Guidance for IEEE 802.11ac Old rules.
II	KDB 662911	Oct 31 2013	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band
III	KDB 558074 D01	June 6,2014	DTS Meas Guidance v03r02 Guidance for performing compliance measurements on Digital Transmission Systems (DTS) operating under section 15.247.
IV	KDB 558074 D02	June 5,2014	DTS Part 15.247 Old Rule. Guidance for performing compliance measurements on Digital Transmission Systems (DTS) operating under section 15.247.
V	A2LA	April 2014	Reference to A2LA Accreditation Status – A2LA Advertising Policy
VI	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
VII	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VIII	CISPR 22	2008	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement
IX	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
X	FCC 47 CFR Part 15.247	2014	CFR Title 47 Part 15.247 – Radio Frequency Devices; Subpart C – Intentional Radiators
XI	ICES-003	Issue 5 2012	Spectrum Management and Telecommunications; Interference-Causing Equipment Standard. Information Technology Equipment (ITE) – Limits and methods of measurement.
XII	M 3003	Edition 3 Nov. 2012	Expression of Uncertainty and Confidence in Measurements
XIII	RSS-210 Annex 8	2010	Radio Standards Specification 210; License-exempt Radio Apparatus (All Frequency Bands): Category I Equipment
XIV	RSS-Gen	2010	General Requirements and Information for the Certification of Radio communication Equipment
XV	KDB 644545 D02 v01	June 7th 2012	Alternative Guidance for IEEE 802.11ac and pre-ac Device emissions testing, old rules.
XVI	KDB 644545 D03	August 14th 2014	Guidance for IEEE 802.11ac New Rules v01
XVII	FCC 47 CFR Part 2.1033	2014	FCC requirements and rules regarding photographs and test setup diagrams.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

Details	Description
Purpose:	Test of the VT Miltope Corporation nMAP2 to FCC CFR 47 Part 15 Subpart C 15.247 (DTS).
Applicant:	Miltope Corporation 3800 Richardson Road South Hope Hull, Alabama 36043 USA
Manufacturer:	As Applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	MLTP26 - nMAP2
Date EUT received:	November 25, 2014
Standard(s) applied:	FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Dates of test (from - to):	16 th February – 16 th March 2015
No of Units Tested:	1
Type of Equipment:	802.11 a/n/ac Wireless Access Point
Product Trade Name:	nMAP
Model(s):	nMAP2
Location for use:	Indoor
Declared Frequency Range(s):	2400 - 2483.5 MHz
Primary function of equipment:	Wireless Access Point for In-Flight Entertainment (IFE)
Secondary function of equipment:	Non-Provided
Type of Modulation:	CCK, OFDM
EUT Modes of Operation:	2400 - 2483.5 MHz: 802.11b; 802.11g; 802.11n HT-20; 802.11n HT-40;
Declared Nominal Output Power (Ave):	+23 dBm
Transmit/Receive Operation:	Transceiver – Half Duplex
System Beam Forming:	This device has no beam-forming capability
Rated Input Voltage and Current:	DC only (Battery operated / external supply) 28Vdc
Operating Temperature Range:	Declared Range 0°C to 50°C
ITU Emission Designator:	2400 – 2483.5 MHz 802.11b 12M5G1D 2400 – 2483.5 MHz 802.11g 17M7D1D 2400 – 2483.5 MHz 802.11n – HT-20 17M7D1D 2400 – 2483.5 MHz 802.11n – HT-40 36M7D1D
Equipment Dimensions:	226mm x 192mm x 161mm / 8.9"" x 7.6"" x 6.3"" (W x D x H)
Weight:	2.0 kgs
Hardware Rev:	Rev B
Software Rev:	V1.0.06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

5.2. Scope Of Test Program

VT Miltope Corporation nMAP2

The scope of the test program was to test the VT Miltope Corporation nMAP2, 802.11 a/n/ac Wireless Access Point configurations in the frequency ranges 2400 - 2483.5 MHz for compliance against the following specification:

FCC CFR 47 Part 15 Subpart C 15.247 (DTS)

VT Miltope Corporation nMAP2



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

FCC OET KDB Implementation

This test program implements the following FCC KDB – 662911 31st October 2013;
Emissions Testing of Transmitters with Multiple Outputs in the Same Band

The KDB document provides guidance for measurements of conducted output emissions of devices that employ a single transmitter with multiple outputs in the same band, with the outputs occupying the same or overlapping frequency ranges. It applies to EMC compliance measurements on devices that transmit on multiple antennas simultaneously in the same or overlapping frequency ranges through a coordinated process. Examples include, but are not limited to, devices employing beam forming or multiple-input and multiple-output (MIMO.) This guidance applies to both licensed and unlicensed devices wherever the FCC rules call for conducted output measurements. Guidance is provided for in-band, out-of-band and spurious emission measurements.

This guidance does not apply to the multiple transmitters included in a composite device, such as a device that combines an 802.11 modem with a cell phone in one enclosure with each driving its own antenna.

5.3. Equipment Model(s) and Serial Number(s)

Model / Description	Serial no.	Hardware version	Software version
nMAP2	nMAP2-EQ24	Rev B	v1.3.04-root

5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
Inverted F	Skycross	AHAD00123	Inverted F	4.5	-	360	-	2400 - 2483.5
Inverted F	Skycross	AHAD00123	Inverted F	4.8	-	360	-	2400 - 2483.5
Inverted F	Skycross	AHAD00123	Inverted F	5.1	-	360	-	2400 - 2483.5

BF Gain - Beamforming Gain

Dir BW - Directional BeamWidth

X-Pol - Cross Polarization

5.5. Cabling and I/O Ports

Number and type of I/O ports

1. J1 – EN4165 Power & I/O Connector, > 1 m screened cable
2. J2 – 2 x EN4165 I/O Connector, > 1 m screened cable

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

5.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Operational Mode(s) (802.11a/b/g/n/ac)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
2400 - 2483.5 MHz				
802.11b	1	2,412.00	2,437.00	2,462.00
802.11g	6	2,412.00	2,437.00	2,462.00
802.11n HT-20	6.5	2,412.00	2,437.00	2,462.00
802.11n HT-40	13.5	2,422.00	2,437.00	2,452.00

Results for the above configurations are provided in this report

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

6. TEST SUMMARY

List of Measurements

Test Header	Result	Data Link
Conducted Testing		
15.247(a)(2) 6 dB & 99% Bandwidth	Complies	View Data
15.247(b), 15.31(e) Conducted Output Power	Complies	View Data
15.247(d) Emissions	-	-
(1) Conducted Emissions	-	-
(i) Conducted Spurious Emissions	Complies	View Data
(ii) Conducted Band-Edge Emissions	Complies	View Data
15.247(e) Power Spectral Density	Complies	View Data
Radiated Testing		
Radiated Spurious Emissions	Complies	View Data
Radiated Restricted Band-Edge Emissions	Complies	View Data
Digital Emissions (0.03 - 1GHz)	Complies	View Data
ac Wireline Testing	*Not Applicable	--

***Not applicable under the scope of this project.** Although the nMAP2 can be powered from 115 Vac it does not connect to the Public Utility Network and therefore ac Wireline Emissions were not tested as part of this program.

NOTE: VT Miltope Corporation tested the device against **DO-160, “Environmental Conditions and Test Procedures for Airborne Equipment.”**

D0-160 Test Report Details

Test Lab: ITL Inc.

Address: 1127 Baker Street, Costa Mesa, California 92626

Report Number: 15627, Rev N/C

Issue Date: 11th March 2015

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

7. TEST EQUIPMENT CONFIGURATION(S)


7.1. Conducted Test Set-Up

Conducted RF Emission Test Set-up(s) with Environmental Chamber

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Conducted Output Power
2. 6 dB & 99% Bandwidth
3. Conducted Emissions
4. Power Spectral Density

*environmental chamber utilized

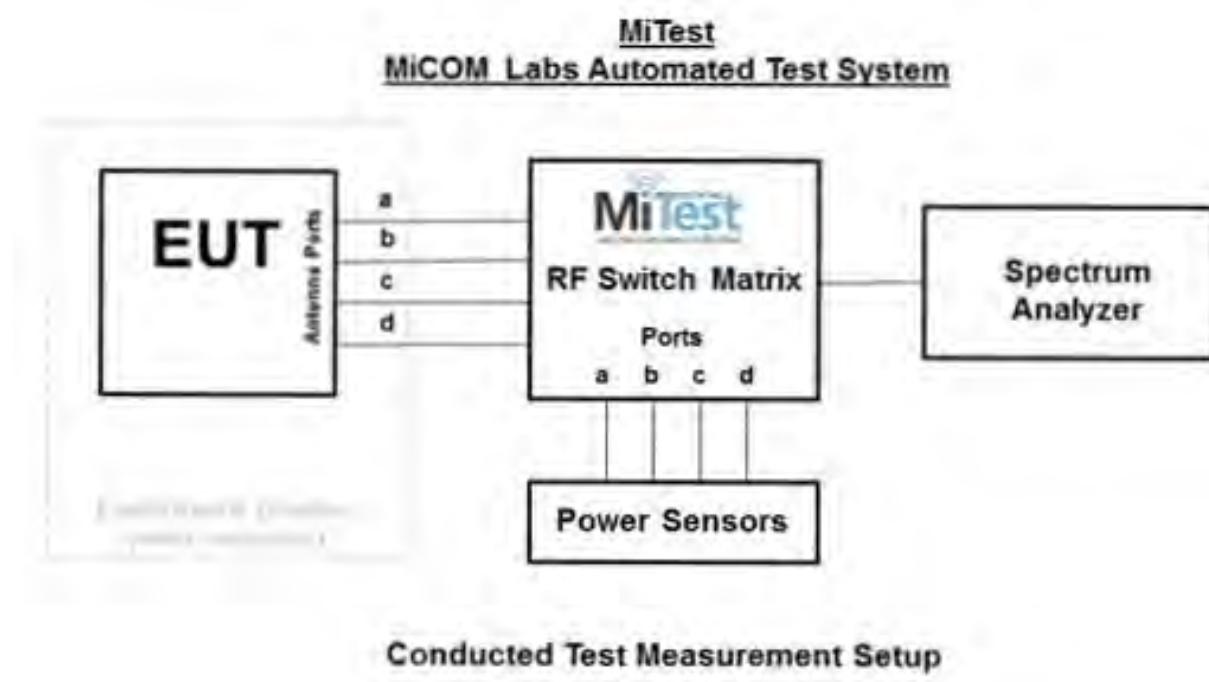

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 18 of 251

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
127	Power Supply	HP	6674A	US36370530	Cal when used
158	Barometer/Thermometer	Control Company	4196	E2846	04 Dec 2015
193	Receiver 20 Hz to 7 GHz	Rhode & Schwarz	ESI 7	838496/007	14 Jan 2016
248	Resistance Thermometer	Thermotronics	GR2105-02	9340 #1	30 Oct 2015
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	31 Jul 2015
376	USB 10MHz - 18GHz Average Power Sensor	Agilent	U2000A	MY51440005	28 Oct 2015
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	17 Jul 2015
381	4x4 RF Switch Box	MiCOM Labs	MiTest RF Switch Box	MIC002	30 Jun 2015
419	Laptop with Labview Software	Lenova	W520	TS02	Not Required
420	USB to GPIB Interface	National Instruments	GPIB-USB HS	1346738	Not Required
435	USB Wideband Power Sensor	Boonton	55006	8730	31 Jul 2015
436	USB Wideband Power Sensor	Boonton	55006	8731	31 Jul 2015
437	USB Wideband Power Sensor	Boonton	55006	8759	31 Jul 2015
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
460	Dell Computer with installation of MiTest executable.	Dell	Optiplex330	BC944G1	Not Required
74	Environmental Chamber Chamber 3	Tenney	TTC	12808-1	30 Sep 2015
RF#2 GPIB#1	GPIB cable to Power Supply	HP	GPIB	None	Not Required
RF#2 SMA#1	EUT to Mitest box port 1	Flexco	SMA Cable port1	None	30 Jun 2015
RF#2 SMA#2	EUT to Mitest box port 2	Flexco	SMA Cable port2	None	30 Jun 2015
RF#2 SMA#3	EUT to Mitest box port 3	Flexco	SMA Cable port3	None	30 Jun 2015
RF#2 SMA#4	EUT to Mitest box port 3	Flexco	SMA Cable port4	None	30 Jun 2015
RF#2 SMA#SA	Mitest box to SA	Flexco	SMA Cable SA	None	30 Jun 2015
RF#2 USB#1	USB Cable to Mitest Box	Dynex	USB Cable	None	Not Required


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

7.2. Radiated Spurious Emission Test Set-up > 1 GHz

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.2 Radiated Spurious Emissions

Radiated Emission Measurement Setup – Above 1 GHz

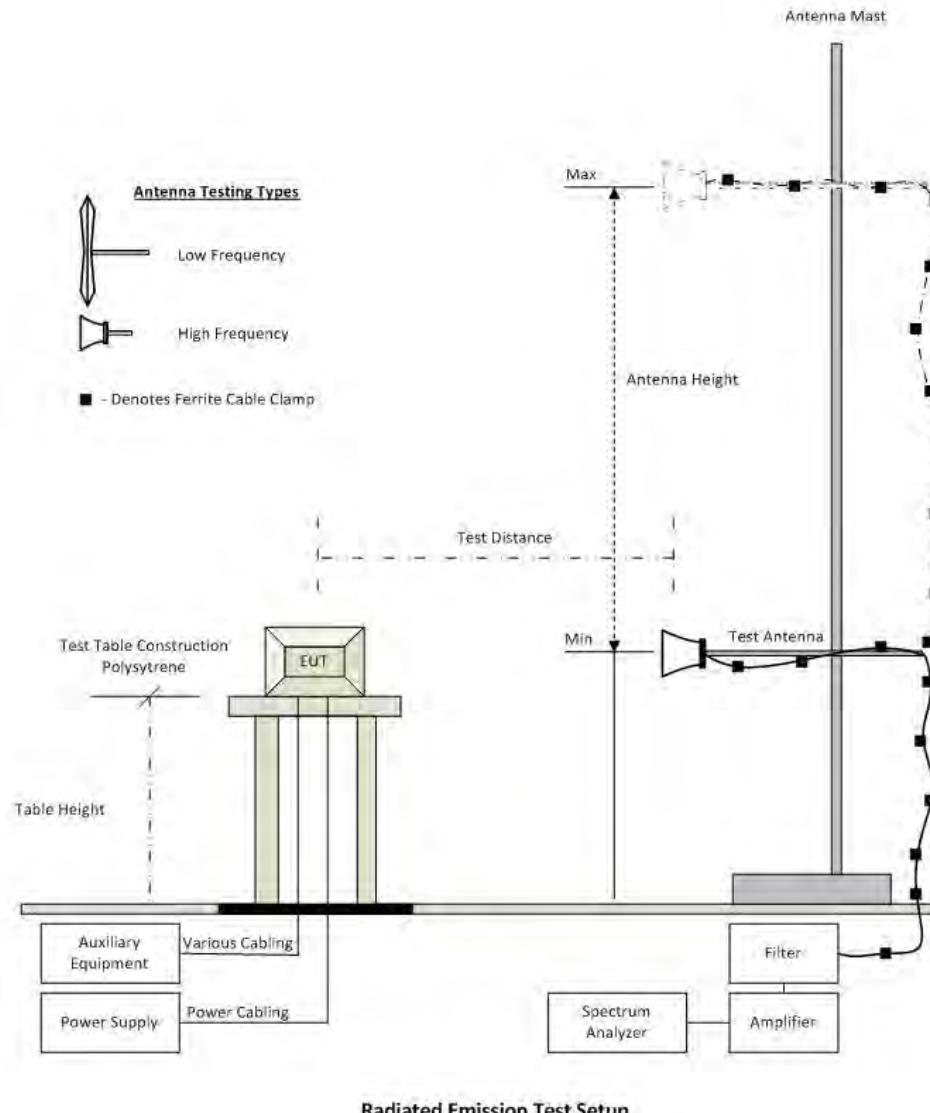

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 20 of 251

Traceability of Test Equipment Utilized for Radiated Emission Testing

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	04 Dec 2015
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CY101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	31 Jul 2015
301	5470 to 5725 MHz Notch Filter	Microtronics	RBC50704	001	08 Oct 2015
302	5150 to 5350 MHz Notch Filter	Microtronics	BRC50703	002	08 Oct 2015
303	5725 to 5875 MHz Notch filter	Microtronics	BRC50705	003	08 Oct 2015
310	SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001	30 Oct 2015
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	14 Aug 2015
342	2.4 GHz Notch Filter	EWT	EWT-14-0203	H1	08 Oct 2015
343	5.15 GHz Notch Filter	EWT	EWT-14-0200	H1	08 Oct 2015
344	5.35 GHz Notch Filter	EWT	EWT-14-0201	H1	08 Oct 2015
345	5.46 GHz Notch Filter	EWT	EWT-14-0202	H1	08 Oct 2015
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	08 Oct 2015
396	2.4 GHz Notch Filter	Microtronics	BRM50701	001	07 Oct 2015
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	23 Oct 2015
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	10 Oct 2015
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	30 May 2015
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
502	Test Software for Radiated Emissions	EMISoft	Vasona	Version 5 Build 59	Not Required
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9. TEST RESULTS

9.1. 6 dB & 99% Bandwidth

Conducted Test Conditions for 6 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	6 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(2)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for 6 dB and 99% Bandwidth Measurement

The bandwidth at 6 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits for 6 dB and 99% Bandwidth

- (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:
- (2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 23 of 251

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11b	Duty Cycle (%):	94
Data Rate:	1 MBit/s	Antenna Gain (dBi):	5
Modulation:	CCK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			KHz	MHz
2412.0	7.054	7.054	7.054	--	7.054	7.054	≥500.0	-6.55
2437.0	7.054	7.535	7.054	--	7.535	7.054	≥500.0	-6.55
2462.0	7.535	7.054	7.054	--	7.535	7.054	≥500.0	-6.55

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
2412.0	13.066	12.505	12.345	--	13.066		
2437.0	12.505	12.505	12.104	--	12.505		
2462.0	11.944	11.864	11.784	--	11.944		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 24 of 251

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11g	Duty Cycle (%):	85
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	5
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			KHz	MHz
2412.0	17.635	17.555	17.555	--	17.635	17.555	≥500.0	-17.06
2437.0	17.395	17.234	17.074	--	17.395	17.074	≥500.0	-16.57
2462.0	17.635	17.395	17.555	--	17.635	17.395	≥500.0	-16.90

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
2412.0	17.715	17.635	17.635	--	17.715		
2437.0	17.635	17.635	17.635	--	17.635		
2462.0	17.635	17.635	17.715	--	17.715		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 25 of 251

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11n HT-20	Duty Cycle (%):	95
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	5
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			KHz	MHz
2412.0	17.635	17.635	17.635		17.635	17.635	≥500.0	-17.14
2437.0	17.555	17.555	17.154		17.555	17.154	≥500.0	-16.65
2462.0	17.635	17.555	17.475		17.635	17.475	≥500.0	-16.98

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
2412.0	17.635	17.635	17.715	--	17.715		
2437.0	17.635	17.635	17.635	--	17.635		
2462.0	17.715	17.635	17.635	--	17.715		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 26 of 251

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11n HT-40	Duty Cycle (%):	87
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	5
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			KHz	MHz
2422.0	36.072	36.232	36.393	--	36.393	36.072	≥500.0	-35.57
2437.0	34.469	35.752	36.232	--	36.232	34.469	≥500.0	-33.97
2452.0	35.110	35.110	32.866	--	35.110	32.866	≥500.0	-32.37

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
2422.0	36.713	36.713	36.874	--	36.874		
2437.0	36.232	36.232	36.553	--	36.553		
2452.0	36.232	36.232	33.667	--	36.232		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9.2. Conducted Output Power

Conducted Test Conditions for Fundamental Emission Output Power			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Output Power	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (b) & (c)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Fundamental Emission Output Power Measurement

In the case of average power measurements an average power sensor was utilized.

For peak power measurements the spectrum analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.

Testing was performed under ambient conditions at nominal voltage only. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured, summed (Σ) and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Supporting Information

Calculated Power = $A + G + Y + 10 \log (1/x)$ dBm

A = Total Power [$10 \times \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$]

G = Antenna Gain

Y = Beamforming Gain

x = Duty Cycle (average power measurements only)

Limits for Fundamental Emission Output Power

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following for non-frequency hopping systems:

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi:

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

(iii) Fixed, point-to-point operation, as used in paragraphs (c)(1)(i) and (c)(1)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

(2) In addition to the provisions in paragraphs (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:

(i) Different information must be transmitted to each receiver.

(ii) If the transmitter employs an antenna system that emits multiple directional beams but does not do emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

(A) The directional gain shall be calculated as the sum of $10 \log$ (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

(B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.

(iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.

(iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 29 of 251

Equipment Configuration for Peak Output Power

Variant:	802.11b	Duty Cycle (%):	94
Data Rate:	1 MBit/s	Antenna Gain (dBi):	4.5
Modulation:	CCK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dBm	
2412.0	17.97	17.92	17.92	--	22.71	30.00	-7.29	20.00
2437.0	17.62	18.13	17.80	--	22.63	30.00	-7.37	20.00
2462.0	17.12	17.71	17.66	--	22.28	30.00	-7.72	20.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 30 of 251

Equipment Configuration for Peak Output Power

Variant:	802.11g	Duty Cycle (%):	85
Data Rate:	6 MBit/s	Antenna Gain (dBi):	4.5
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dBm	
2412.0	17.55	17.31	17.63	--	22.27	30.00	-7.73	20.00
2437.0	17.11	17.45	17.36	--	22.08	30.00	-7.92	20.00
2462.0	16.53	17.13	16.99	--	21.66	30.00	-8.34	20.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 31 of 251

Equipment Configuration for Peak Output Power

Variant:	802.11n HT-20	Duty Cycle (%):	95
Data Rate:	95	Antenna Gain (dBi):	4.5
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dBm	
2412.0	17.54	17.46	17.59	--	22.30	30.00	-7.70	20.00
2437.0	17.31	17.60	17.39	--	22.21	30.00	-7.79	20.00
2462.0	16.54	17.17	17.16	--	21.74	30.00	-8.26	20.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 32 of 251

Equipment Configuration for Peak Output Power

Variant:	802.11n HT-40	Duty Cycle (%):	87
Data Rate:	13.5 MBit/s	Antenna Gain (dBi):	4.5
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dBm	
2422.0	18.38	18.26	18.44	--	23.13	30.00	-6.87	20.00
2437.0	17.38	17.65	17.33	--	22.23	30.00	-7.77	20.00
2452.0	17.05	17.50	17.22	--	22.03	30.00	-7.97	20.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9.3. Conducted Spurious Emissions

9.3.1. Conducted Band-Edge Emissions

Equipment Configuration for Conducted Low Band-Edge Emissions - Peak

Variant:	802.11b	Duty Cycle (%):	94
Data Rate:	1 MBit/s	Antenna Gain (dBi):	5
Modulation:	CCK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2412.0 MHz					
Band-Edge Frequency:	2400.0 MHz					
Test Frequency Range:	2350.0 - 2422.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	-43.57	-13.00	2404.50	--	--	-4.500
b	-44.76	-13.00	2404.30	--	--	-4.300
c	-44.85	-13.00	2405.10	--	--	-5.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 34 of 251

Equipment Configuration for Conducted Low Band-Edge Emissions - Peak

Variant:	802.11g	Duty Cycle (%):	85
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	5
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2412.0 MHz					
Band-Edge Frequency:	2400.0 MHz					
Test Frequency Range:	2350.0 - 2422.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	<u>-34.19</u>	-21.00	2402.70	--	--	-2.700
b	<u>-35.74</u>	-21.00	2402.70	--	--	-2.700
c	<u>-33.56</u>	-20.00	2402.70	--	--	-2.700

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 35 of 251

Equipment Configuration for Conducted Low Band-Edge Emissions - Peak

Variant:	802.11n HT-20	Duty Cycle (%):	95
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	5
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2412.0 MHz					
Band-Edge Frequency:	2400.0 MHz					
Test Frequency Range:	2350.0 - 2422.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	<u>-34.42</u>	-21.00	2402.70	--	--	-2.700
b	<u>-34.51</u>	-21.00	2402.70	--	--	-2.700
c	<u>-34.29</u>	-20.00	2402.80	--	--	-2.800

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 36 of 251

Equipment Configuration for Conducted Low Band-Edge Emissions - Peak

Variant:	802.11n HT-40	Duty Cycle (%):	87
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	5
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2422.0 MHz					
Band-Edge Frequency:	2400.0 MHz					
Test Frequency Range:	2292.0 - 2442.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin	
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-36.54	-22.00	2402.60	--	--	-2.600
b	-36.21	-21.00	2402.60	--	--	-2.600
c	-35.34	-22.00	2402.60	--	--	-2.600

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 37 of 251

Equipment Configuration for Conducted High Band-Edge Emissions - Peak

Variant:	802.11b	Duty Cycle (%):	94
Data Rate:	1 MBit/s	Antenna Gain (dBi):	5
Modulation:	CCK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2462.0 MHz				
Band-Edge Frequency:	2483.5 MHz				
Test Frequency Range:	2452.0 - 2524.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	<u>-47.05</u>	-14.00	2469.00	--	--
b	<u>-46.27</u>	-13.00	2468.60	--	--
c	<u>-47.18</u>	-13.00	2469.00	--	--

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 38 of 251

Equipment Configuration for Conducted High Band-Edge Emissions - Peak

Variant:	802.11g	Duty Cycle (%):	85
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	5
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2462.0 MHz					
Band-Edge Frequency:	2483.5 MHz					
Test Frequency Range:	2452.0 - 2524.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	46.36	-22.00	2471.30	--	--	-12.200
b	-45.86	-21.00	2471.20	--	--	-12.300
c	-47.18	-20.00	2471.20	--	--	-12.300

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 39 of 251

Equipment Configuration for Conducted High Band-Edge Emissions - Peak

Variant:	802.11n HT-20	Duty Cycle (%):	95
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	5
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2462.0 MHz				
Band-Edge Frequency:	2483.5 MHz				
Test Frequency Range:	2452.0 - 2524.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-46.31	-22.00	2471.30	--	--
b	-46.21	-21.00	2471.30	--	--
c	-47.28	-20.00	2471.30	--	--

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 40 of 251

Equipment Configuration for Conducted High Band-Edge Emissions - Peak

Variant:	802.11n HT-40	Duty Cycle (%):	87
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	5
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2452.0 MHz				
Band-Edge Frequency:	2483.5 MHz				
Test Frequency Range:	2432.0 - 2582.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-46.61	-24.00	2470.80	--	--
b	-46.50	-24.00	2470.80	--	--
c	-46.66	-22.00	2470.50	--	--

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9.3.2. Conducted Spurious Emissions

Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Max Unwanted Emission Levels	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (d)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement

Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 30 dBc (average detector) or 20 dBc (peak detector) below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits Transmitter Conducted Spurious and Band-Edge Emissions

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 42 of 251

Equipment Configuration for Transmitter Conducted Spurious Emissions

Variant:	802.11b	Duty Cycle (%):	94
Data Rate:	1 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	CCK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2412.0	30.0 - 26000.0	-49.402	-14.00	-49.579	-14.00	-48.137	-14.00	--	--
2437.0	30.0 - 26000.0	-50.012	-14.00	-49.780	-14.00	-49.628	-15.00	--	--
2462.0	30.0 - 26000.0	-49.971	-15.00	-49.713	-14.00	-49.746	-15.00	--	--

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 43 of 251

Equipment Configuration for Transmitter Conducted Spurious Emissions

Variant:	802.11g	Duty Cycle (%):	85
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2412.0	30.0 - 26000.0	-49.685	-21.00	-49.804	-23.00	-49.898	-20.00	--	--
2437.0	30.0 - 26000.0	-49.711	-24.00	-49.066	-21.00	-49.573	-22.00	--	--
2462.0	30.0 - 26000.0	-50.047	-22.00	-49.813	-22.00	-49.802	-23.00	--	--

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 44 of 251

Equipment Configuration for Transmitter Conducted Spurious Emissions

Variant:	802.11n HT-20	Duty Cycle (%):	95
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2412.0	30.0 - 26000.0	-49.024	-23.00	-49.695	-24.00	-49.788	-21.00	--	--
2437.0	30.0 - 26000.0	-48.796	-24.00	-49.573	-23.00	-49.455	-24.00	--	--
2462.0	30.0 - 26000.0	-50.311	-25.00	-49.796	-25.00	-49.506	-25.00	--	--

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 45 of 251

Equipment Configuration for Transmitter Conducted Spurious Emissions

Variant:	802.11n HT-40	Duty Cycle (%):	87
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2422.0	30.0 - 26000.0	-49.471	-25.00	-49.890	-23.00	-49.558	-25.00	--	--
2437.0	30.0 - 26000.0	-49.536	-24.00	-49.839	-27.00	-49.678	-27.00	--	--
2452.0	30.0 - 26000.0	-49.752	-25.00	-49.115	-27.00	-49.752	-25.00	--	--

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9.4. Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Power Spectral Density	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (e)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Power Spectral Density

The transmitter output was connected to a spectrum analyzer and the measured made in a 3 kHz resolution bandwidth using the analyzer auto-coupled sweep-time. A peak value was found over the full emission bandwidth and the spectrum downloaded for post processing purposes.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. The Peak Power Spectral Density is the highest level found across the emission bandwidth. With multiple antenna port measurements the numerical analyzer data from each port is summed (à) and a link to this additional graphic is provided.

Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with multiple transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were post processed and the resulting numerical and graphical data presented.

NOTE:

It may be observed that the spectrum in some antenna port plots break the limit line however this in itself does NOT constitute a failure. In all cases a spectrum summation plot is provided in order to prove compliance. A failure occurs only after the summation of all spectrum plots have been summed and are found to be greater than the limit line.

Supporting Information

Calculated Power = $A + 10 \log (1/x)$ dBm

A = Total Power Spectral Density $[10 \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$

x = Duty Cycle

Limits Power Spectral Density

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 47 of 251

Equipment Configuration for Power Spectral Density - Peak

Variant:	802.11b	Duty Cycle (%):	93.9
Data Rate:	1 MBit/s	Antenna Gain (dBi):	4.50
Modulation:	CCK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Amplitude Summation	Limit	Margin
	Port(s) (dBm/3KHz)						
MHz	a	b	c	d	dBm/3KHz	dBm/3KHz	dB
2412.0	-5.484	-7.719	-7.141	--	-2.907	8.0	-10.9
2437.0	-6.401	-7.579	-5.278	--	-2.518	8.0	-10.5
2462.0	-7.983	-7.190	-6.462	--	-3.086	8.0	-11.1

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 48 of 251

Equipment Configuration for Power Spectral Density - Peak

Variant:	802.11g	Duty Cycle (%):	85.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	4.50
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Amplitude Summation	Limit	Margin
	Port(s) (dBm/3KHz)						
MHz	a	b	c	d	dBm/3KHz	dBm/3KHz	dB
2412.0	-16.291	-16.187	-16.141	--	-11.772	8.0	-19.7
2437.0	-16.515	-16.433	-16.387	--	-12.563	8.0	-20.5
2462.0	-16.519	-16.840	-16.509	--	-13.152	8.0	-21.1

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 49 of 251

Equipment Configuration for Power Spectral Density - Peak

Variant:	802.11n HT-20	Duty Cycle (%):	94.8
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	4.50
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Amplitude Summation	Limit	Margin
	Port(s) (dBm/3KHz)						
MHz	a	b	c	d	dBm/3KHz	dBm/3KHz	dB
2412.0	<u>-16.194</u>	<u>-16.080</u>	<u>-15.419</u>	--	<u>-12.132</u>	8.0	-20.1
2437.0	<u>-15.878</u>	<u>-16.255</u>	<u>-15.110</u>	--	<u>-12.395</u>	8.0	-20.4
2462.0	<u>-16.645</u>	<u>-16.271</u>	<u>-16.615</u>	--	<u>-12.333</u>	8.0	-20.3

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: VT Miltope Corporation nMAP2
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: MLTP26-U5 Rev A
Issue Date: 31st March 2015
Page: 50 of 251

Equipment Configuration for Power Spectral Density - Peak

Variant:	802.11n HT-40	Duty Cycle (%):	87.3
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	4.50
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Amplitude Summation	Limit	Margin
	Port(s) (dBm/3KHz)						
MHz	a	b	c	d	dBm/3KHz	dBm/3KHz	dB
2422.0	<u>-17.129</u>	<u>-16.710</u>	<u>-17.011</u>	--	<u>-13.213</u>	8.0	-21.2
2437.0	<u>-17.253</u>	<u>-16.741</u>	<u>-17.499</u>	--	<u>-14.295</u>	8.0	-22.3
2452.0	<u>-19.220</u>	<u>-19.313</u>	<u>-19.830</u>	--	<u>-15.462</u>	8.0	-23.4

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9.5. Radiated Emissions

9.5.1. Radiated Spurious Emissions

Transmitter Radiated Spurious Emissions (above 1 GHz); Peak Field Strength Measurements; and Radiated Band Edge Measurements – Restricted Bands

FCC, Part 15 Subpart C §15.247(d) 15.205; 15.209
Industry Canada RSS-210 §A8.5, §2.2, §2.6
Industry Canada RSS-Gen §4.7

Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

Operational Modes

Operational mode(s) tested for spurious emissions were the modes which delivered maximum spectral density.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

For example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:


$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

NOTE: KDB 662911 was implemented for Out-of-Band measurements. Where necessary Option (2) Measure and add 10 log (N) dB was implemented

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	38
Power Setting	20	Press. (mBars)	998
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1	Client laptop w/ iperf inside; Master laptop w/ iperf outside;		
Test Notes 2	120VAC		

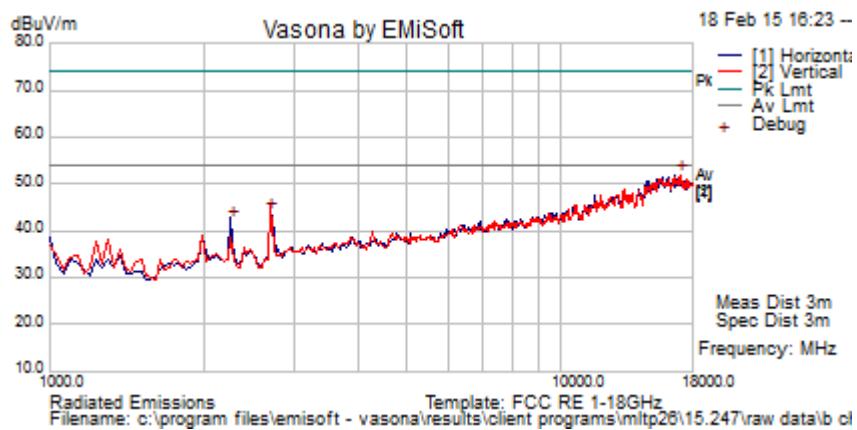


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2701.297	51.3	4.2	-11.4	44.1	Peak [Scan]	V	98	361	54.0	-9.9	Pass	
2258.953	50.7	3.8	-12.1	42.3	Peak [Scan]	H	98	361	54.0	-11.7	Pass	
Legend:		TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission										
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	38
Power Setting	20	Press. (mBars)	998
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1	Client laptop w/ iperf inside; Master laptop w/ iperf outside;		
Test Notes 2	120VAC		

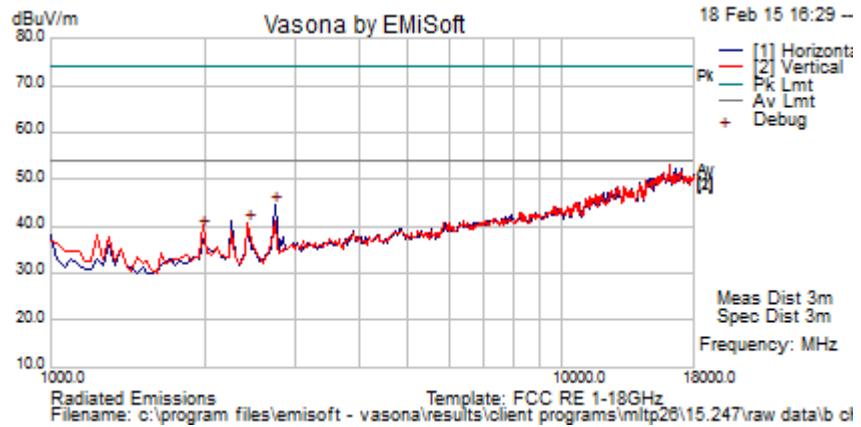


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments					
2739.414	51.3	4.2	-11.4	44.2	Peak [Scan]	H	98	361	54.0	-9.8	Pass						
2433.016	48.2	3.9	-11.7	40.4	Peak [Scan]	V	98	361	54.0	-13.6	Pass	FUND					
1983.003	48.5	3.5	-12.8	39.2	Peak [Scan]	V						NRB					
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission																
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak																

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	38
Power Setting	20	Press. (mBars)	998
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1	Client laptop w/ iperf inside; Master laptop w/ iperf outside;		
Test Notes 2	120VAC		

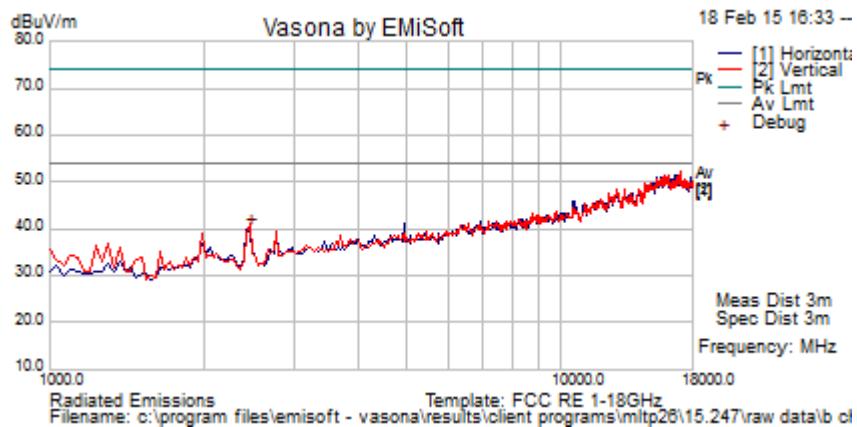

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2447.725	47.8	4.0	-11.7	40.1	Peak [Scan]	V	98	361	54.0	-14.0	Pass	FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9.5.2. Radiated Band-Edge Emissions

Integral Antenna


Peak Limit 74.0 dB μ V/m, Average Limit 54.0 dB μ V/m

2.4 GHz Frequency Band

Operational Mode	Restricted Band 2390 MHz		Restricted Band 2483.5 MHz			Power Setting	
	dBμV/m		Power Setting	dBμV/m			
	Peak	Average		Peak	Average		
b	60.75	37.40	20	61.26	39.66	20	
g	56.39	36.94	20	56.69	39.48	20	
n HT-20	64.28	45.81	20	65.81	43.42	20	
n HT-40	67.08	49.50	20	71.44	45.50	20	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


802.11b Operating Channel 2412 MHz 2390 MHz Radiated Band-Edge

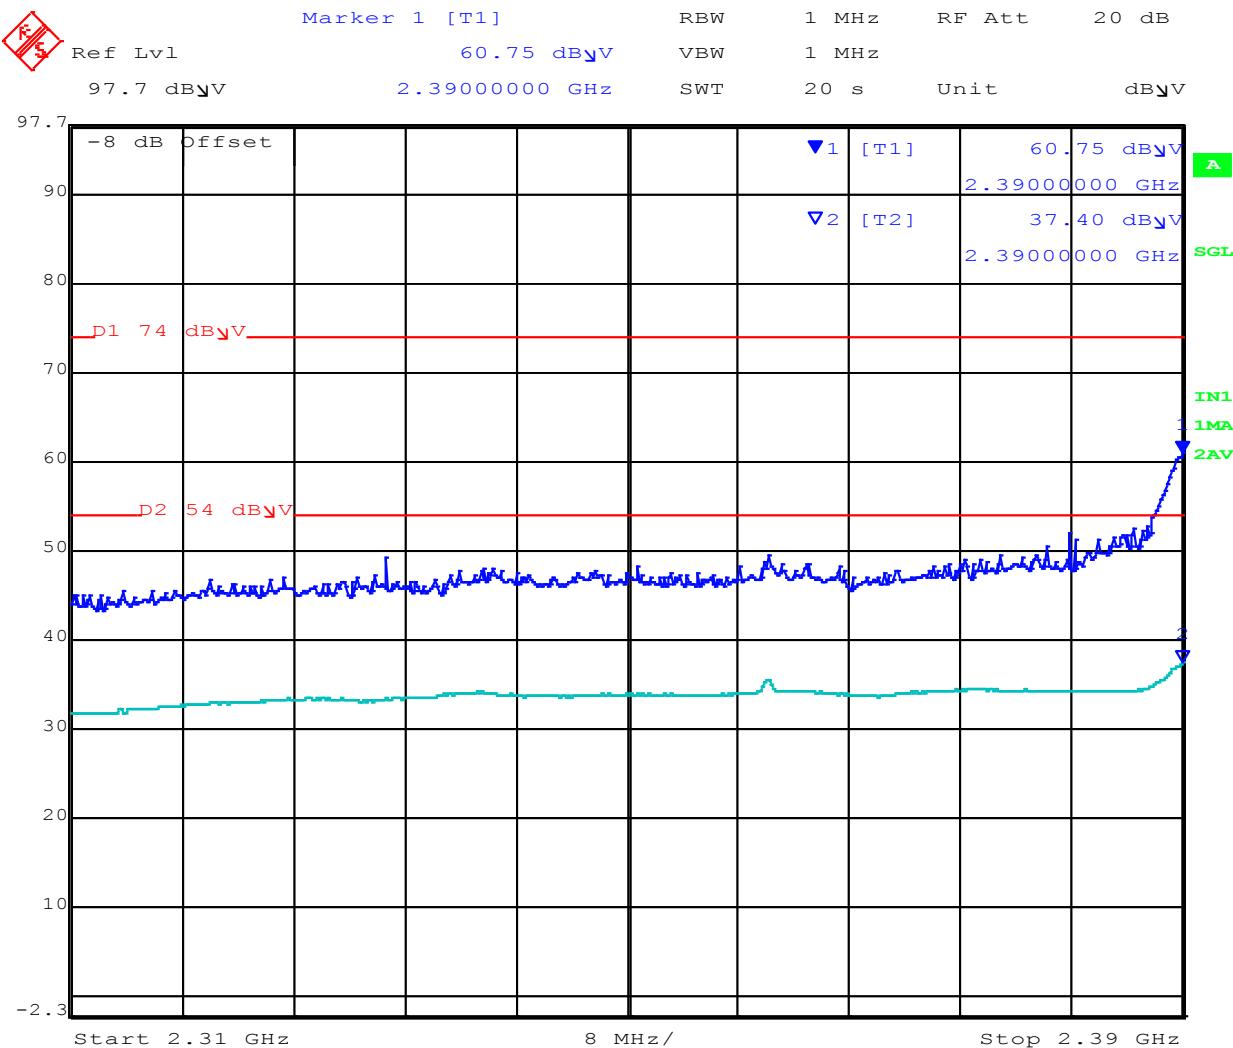

Date: 18.FEB.2015 10:45:49

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


802.11b Operating Channel 2462 MHz 22483.5 MHz Radiated Band-Edge

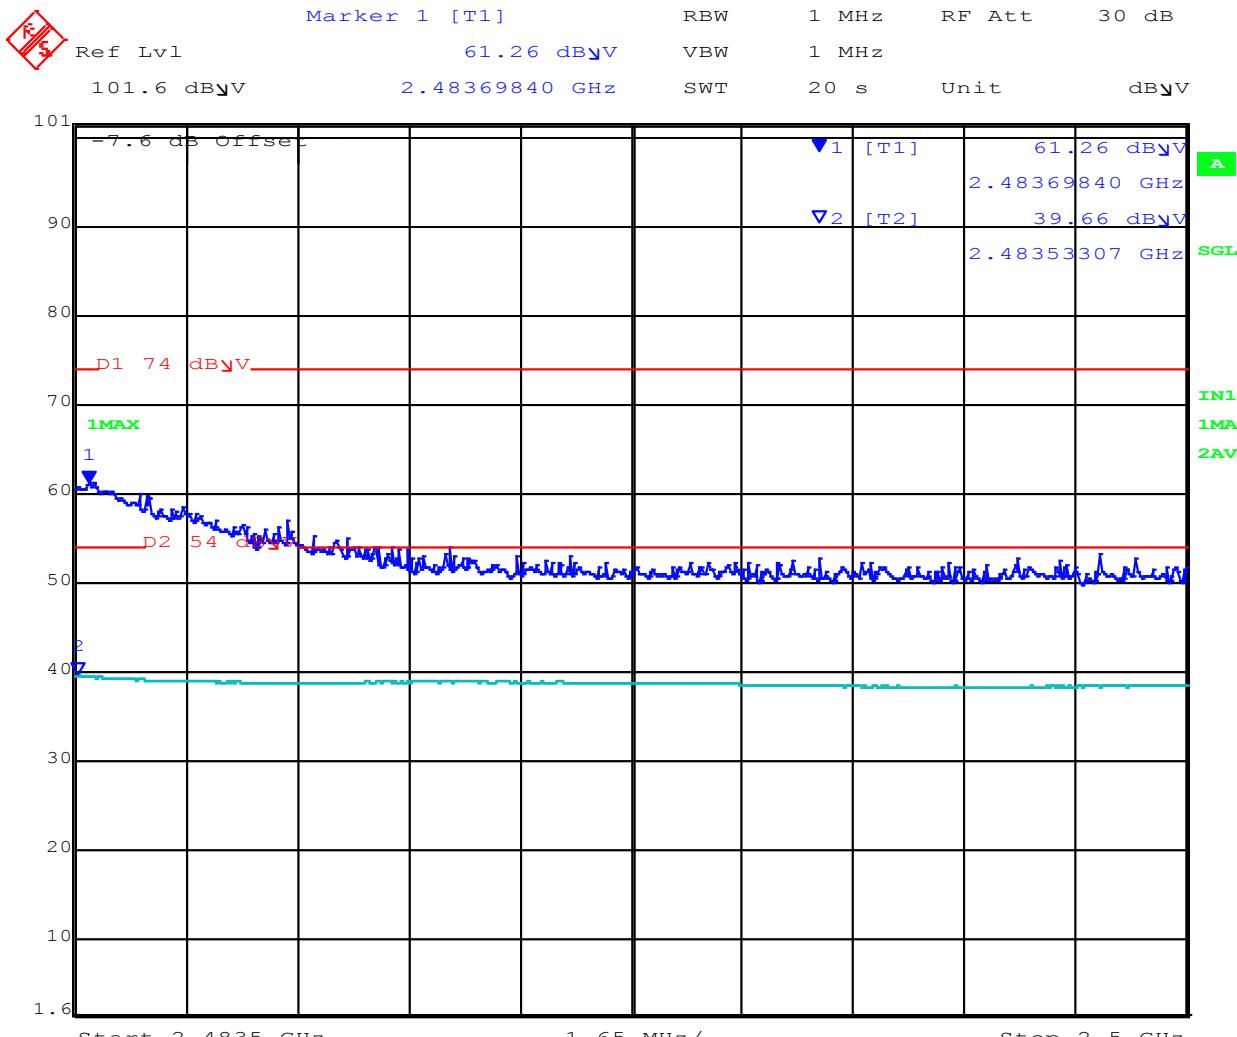

Date: 18.FEB.2015 16:06:21

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


802.11g Operating Channel 2412 MHz 2390 MHz Radiated Band-Edge

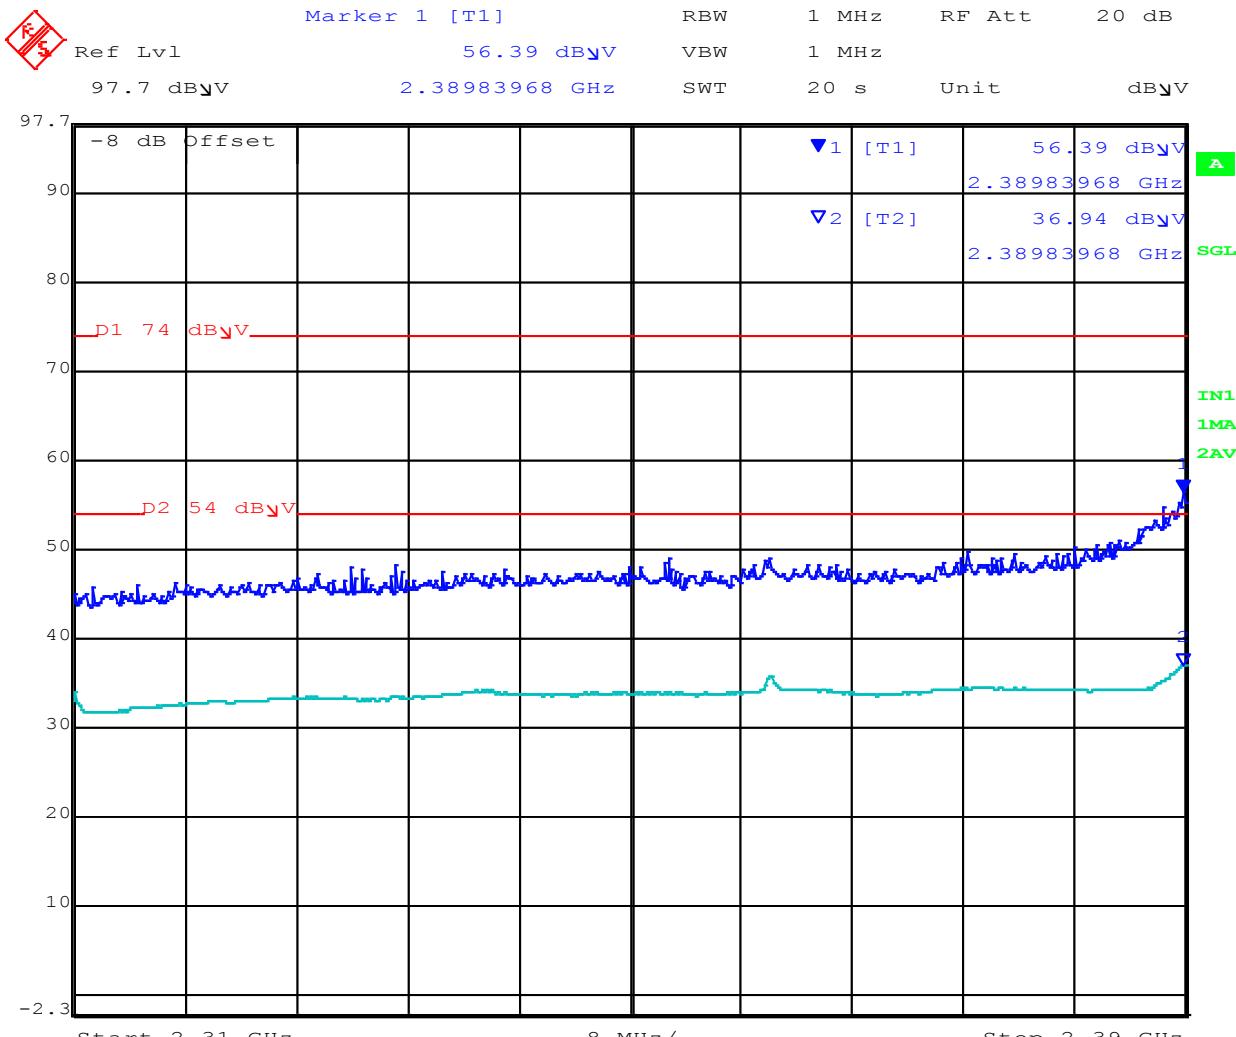

Date: 18.FEB.2015 10:48:25

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


802.11g Operating Channel 2462 MHz 22483.5 MHz Radiated Band-Edge

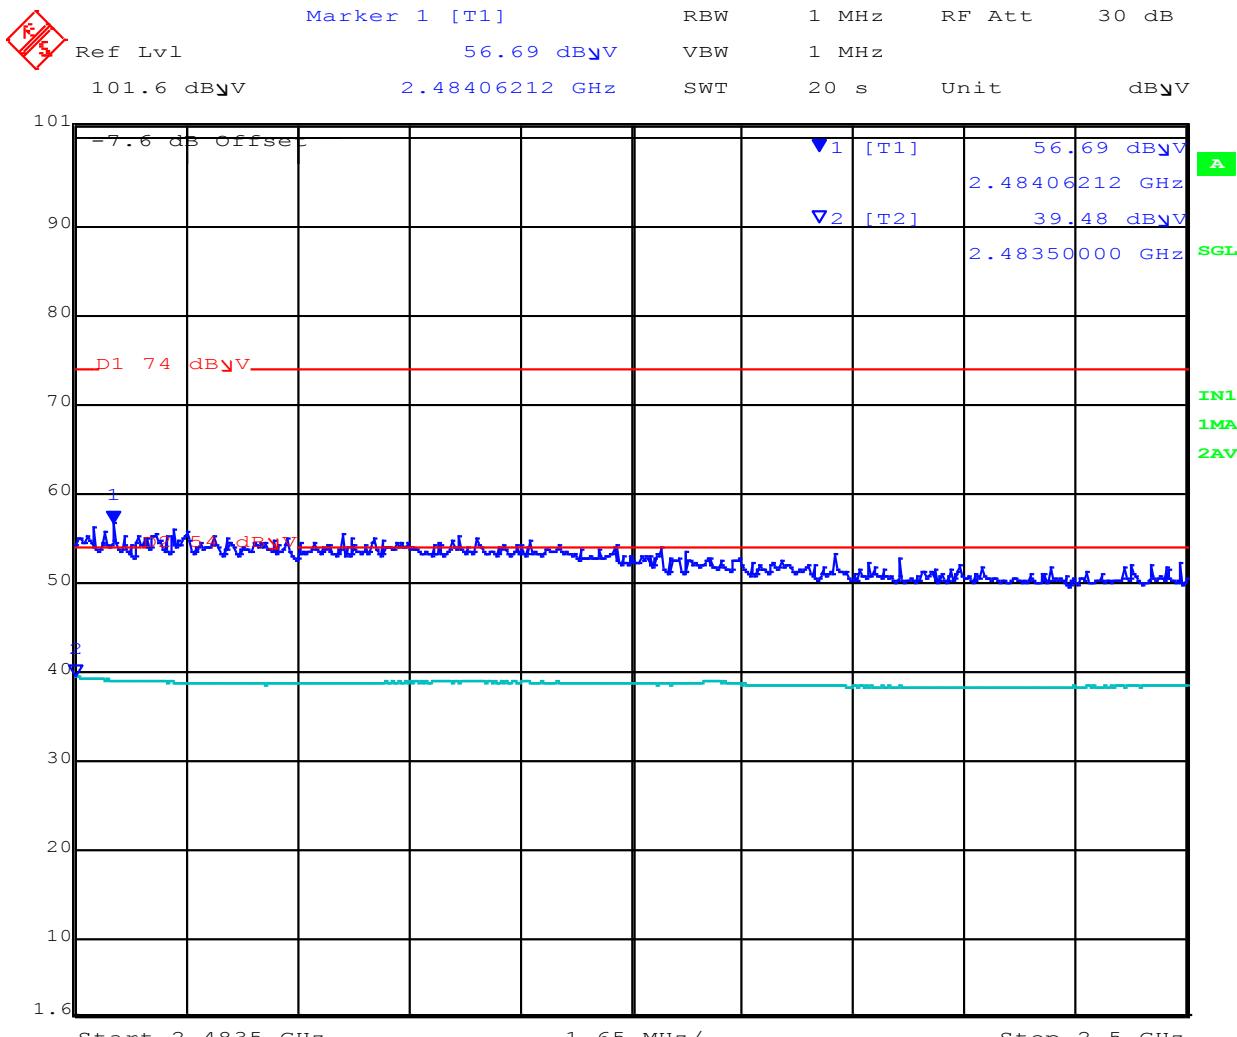

Date: 18.FEB.2015 16:08:17

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


802.11n HT-20 Operating Channel 2412 MHz 2390 MHz Radiated Band-Edge

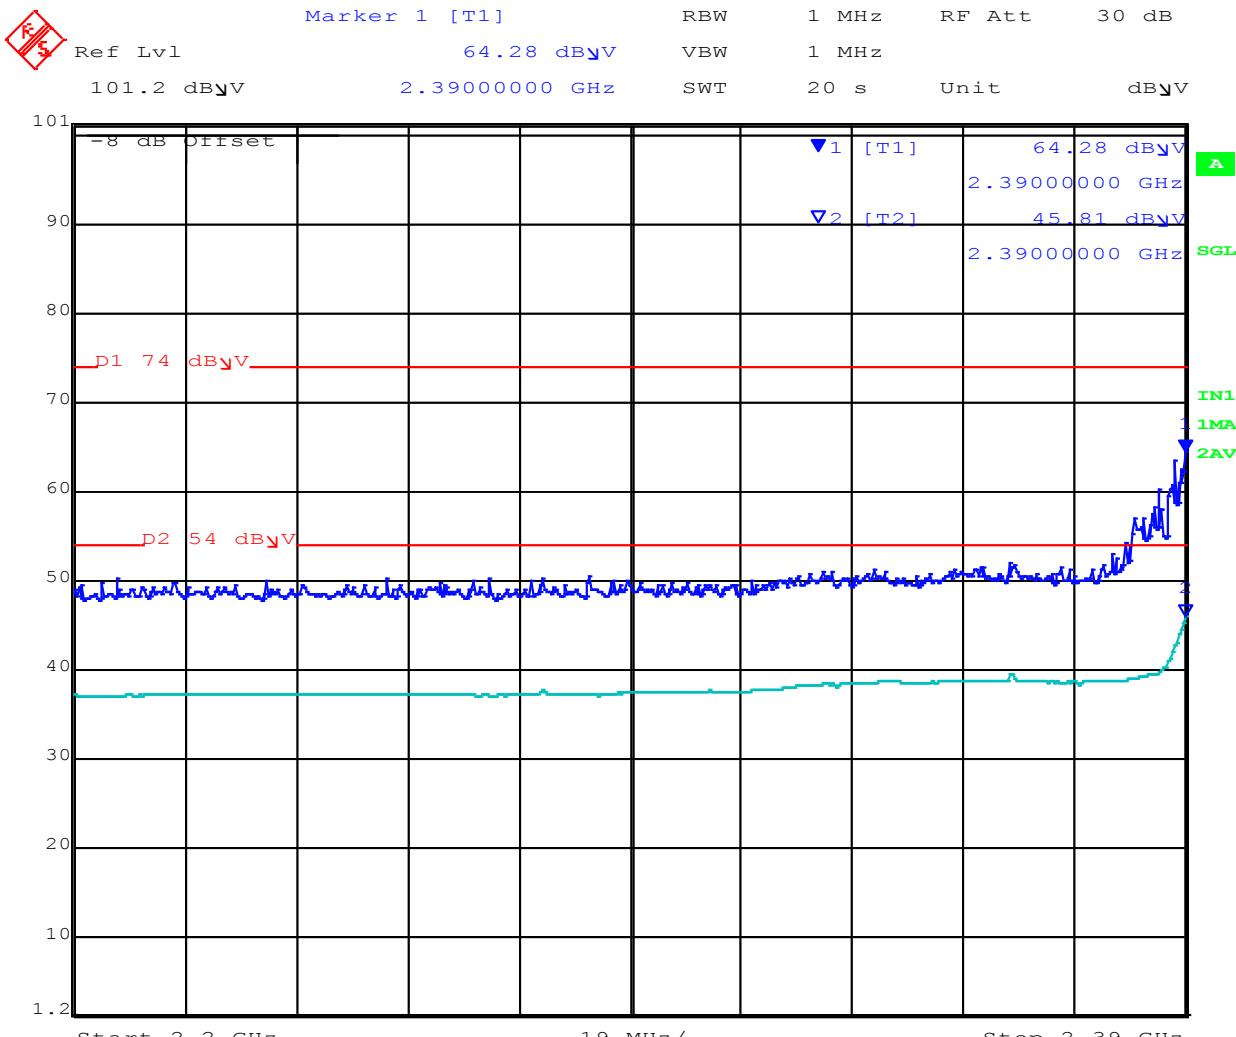

Date: 18.FEB.2015 15:53:17

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


802.11n HT-20 Operating Channel 2462 MHz 22483.5 MHz Radiated Band-Edge

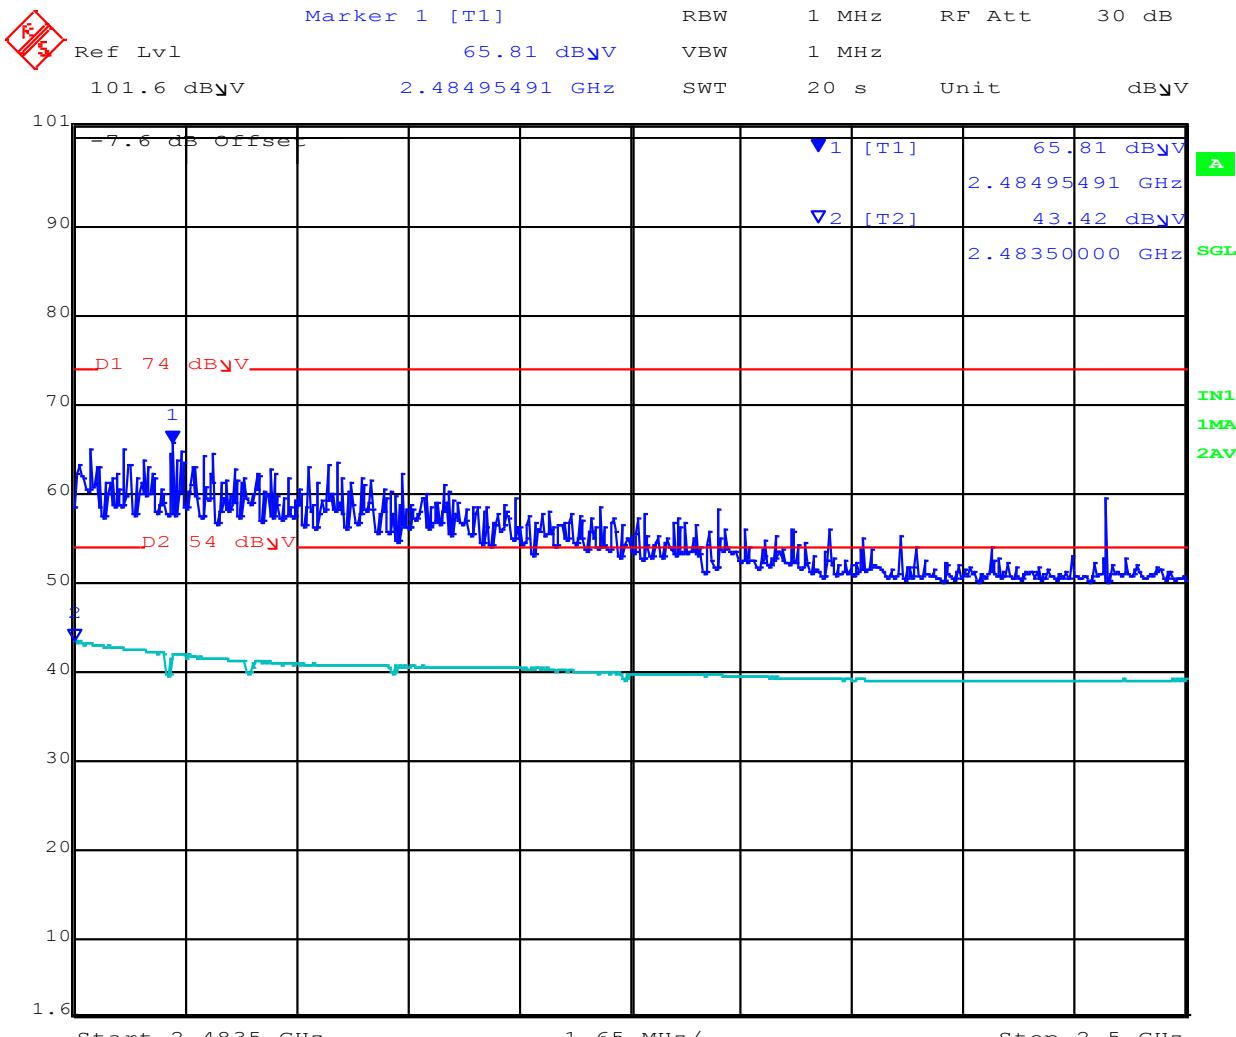

Date: 18.FEB.2015 16:10:12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


802.11n HT-40 Operating Channel 2422 MHz 2390 MHz Radiated Band-Edge

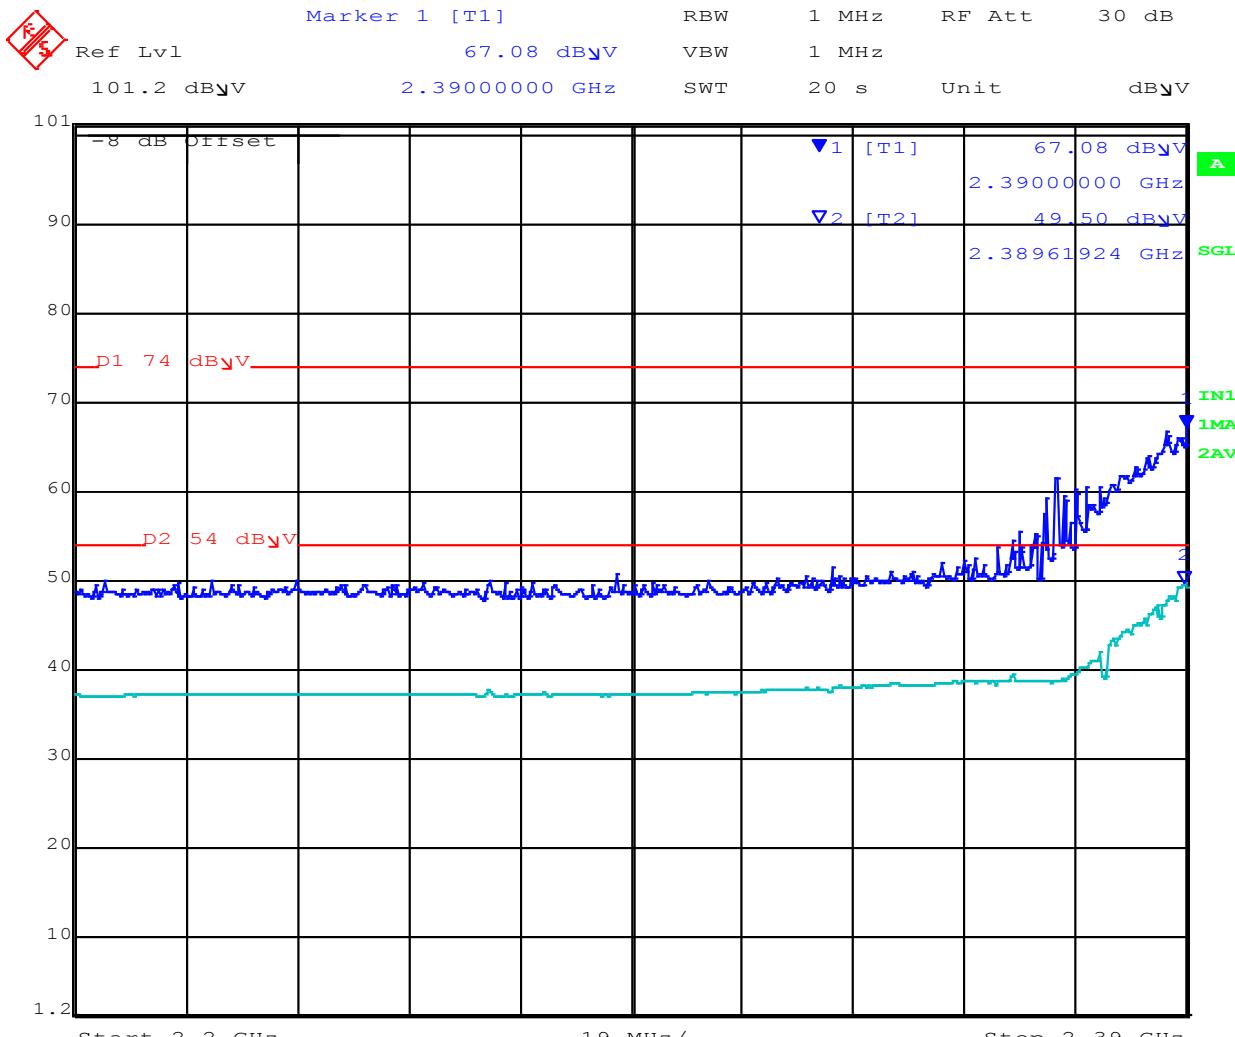

Date: 18.FEB.2015 15:51:19

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

802.11n HT-40 Operating Channel 2452 MHz 22483.5 MHz Radiated Band-Edge

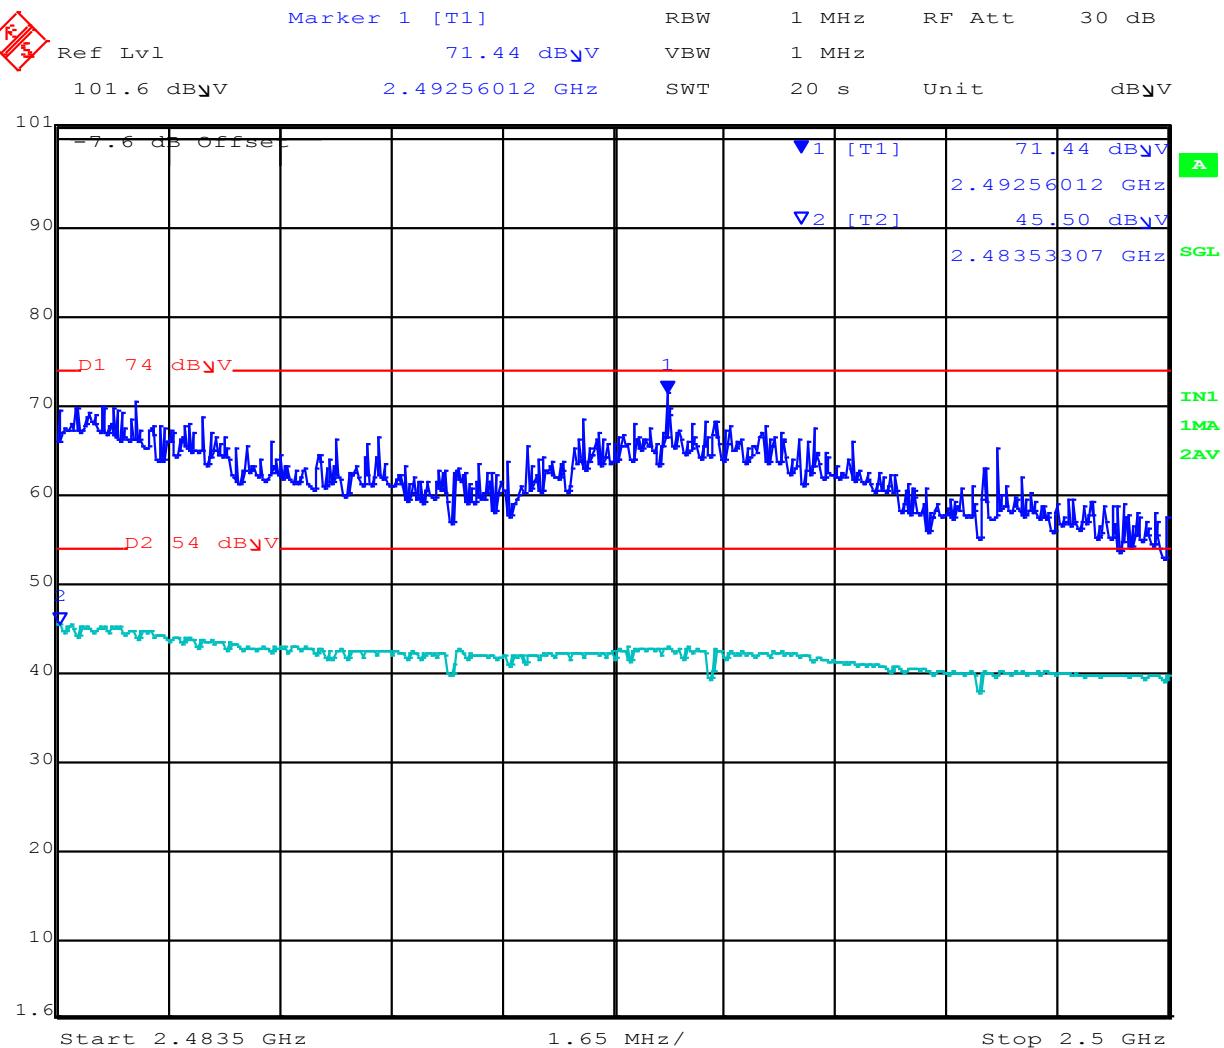

Date: 18.FEB.2015 16:12:02

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9.5.3. Digital Emissions (0.03 – 1 GHz)

FCC, Part 15 Subpart C §15.205/ §15.209 Industry Canada RSS-210 §2.2

Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet (POE). Both modes were tested for emissions below 1GHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:


$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

Measurement Results: Radiated Emissions; 30-1000MHz,

Test Freq.:	2437	Engineer:	SB
Variant:	802.11g	Temp (°C):	21.5
Freq. Range:	30-1000 MHz	Rel. Hum.(%):	37
Power Setting:	20	Press. (mBars):	1002
Antenna:	Integral		
Test Notes 1:	120VAC		
Test Notes 2:	Master laptop outside via ethernet; Client laptop inside wifi client;		

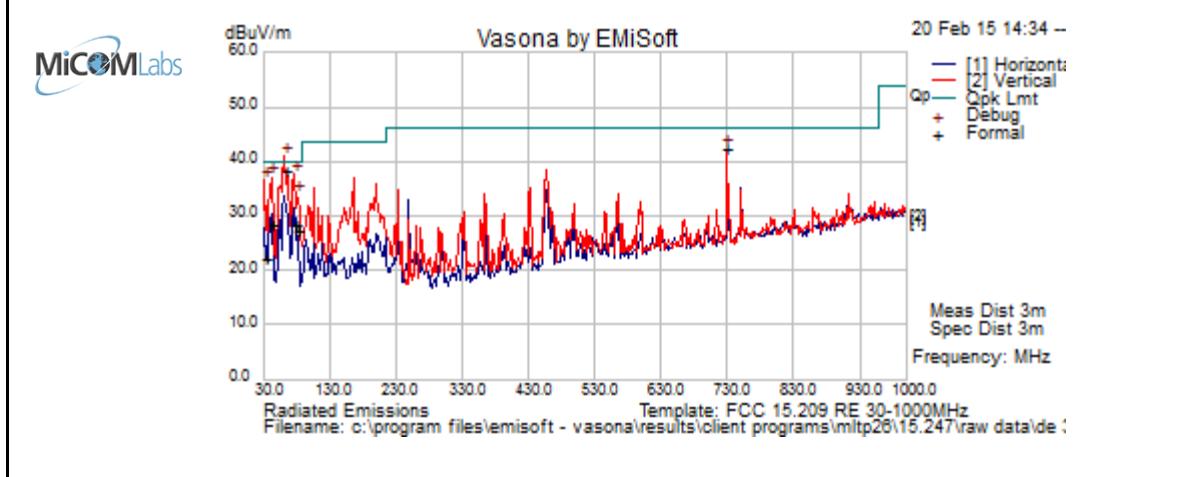

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
62.520	58.4	3.7	-23.8	38.3	Quasi Max	V	99	355	40.0	-1.7	Pass	
76.653	47.8	3.8	-23.2	28.4	Quasi Max	V	124	74	40.0	-11.6	Pass	
41.007	42.8	3.6	-18.2	28.2	Quasi Max	V	129	-1	40.0	-11.8	Pass	
31.944	29.8	3.5	-11.2	22.1	Quasi Max	V	136	208	40.0	-17.9	Pass	
729.012	45.8	6.2	-9.8	42.2	Quasi Max	V	99	106	46.0	-3.8	Pass	
81.137	46.9	3.9	-23.7	27.1	Quasi Max	V	117	145	40.0	-12.9	Pass	
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Specification

Limits

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

§15.209 (a) Limit Matrix

Frequency(MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------


9.6. ac Wireline Emissions

FCC, Part 15 Subpart C §15.207
Industry Canada RSS-Gen §7.2.2

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test Measurement Set up

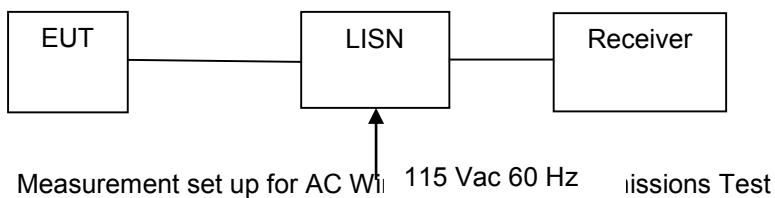

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Not applicable under the scope of this project. Although the nMAP2 can be powered from 115 Vac it does not connect to the Public Utility Network and therefore ac Wireline Emissions were not tested as part of this program.

NOTE: VT Miltope Corporation tested the device against DO-160, “Environmental Conditions and Test Procedures for Airborne Equipment.”

D0-160 Test Report Details

Test Lab: ITL Inc.
Address: 1127 Baker Street, Costa Mesa, California 92626
Report Number: 15627, Rev N/C
Issue Date: 11th March 2015

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Specification

Limit

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

§15.207 (a) Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	± 2.64 dB
-------------------------	---------------