

Report No.: SZEM130200083301

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 82

# **FCC REPORT**

**Application No:** SZEM1302000833RF

**Applicant:** Shenzhen Boeye Technology Co., Ltd **Manufacturer:** Shenzhen Boeye Technology Co., Ltd

Factory: Shenzhen Sang Fei Consumer Communications Co., Ltd

**Product Name:** E-Reader

Model No.(EUT): C63

FCC ID: SHZ-C63

**Standards:** 47 CFR Part 15, Subpart C (2012)

**Date of Receipt:** 2013-03-04

**Date of Test:** 2013-03-11 to 2013-03-27

**Date of Issue:** 2013-05-06

Test Result: PASS \*

. \* In the configuration tested, the EUT complied with the standards specified above.

#### Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM130200083301

Page: 2 of 82

# 2 Test Summary

Test Item	Test Requirement	Test method	Result	
Antenna Requirement	47 CFR Part 15, Subpart C Section	ANSI C63.10 2009	PASS	
	15.203/15.247 (c)	7 11 10 1 000 1 10 2000		
AC Power Line	47 CFR Part 15, Subpart C Section			
Conducted	15.207	ANSI C63.10 2009	PASS	
Emission	10.207			
Conducted Peak Output	47 CFR Part 15, Subpart C Section	KDB558074 D01	PASS	
Power	15.247 (b)(3)	NDB336074 D01	PASS	
6dB Occupied	47 CFR Part 15, Subpart C Section	KDB558074 D01	PASS	
Bandwidth	15.247 (a)(2)	NDB330074 D01	1 700	
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01	PASS	
Band-edge for RF	47 CFR Part 15, Subpart C Section	KDB558074 D01	PASS	
Conducted Emissions	15.247(d)	KDB336074 D01	PASS	
RF Conducted Spurious	47 CFR Part 15, Subpart C Section	KDB558074 D01	PASS	
Emissions	15.247(d)	NDB336074 D01	FAGG	
Radiated Spurious	47 CFR Part 15, Subpart C Section	ANSI C63.10 2009	PASS	
Emissions	15.205/15.209	ANSI 003.10 2009	rass	
Band Edge (Radiated	47 CFR Part 15, Subpart C Section	ANSI C63.10 2009	DASS	
Emission)	15.205/15.209	ANSI 003.10 2009	PASS	



Report No.: SZEM130200083301

Page: 3 of 82

## 3 Contents

			Page
1	COV	/ER PAGE	1
2	TES	T SUMMARY	2
3	1 COVER PAGE       1         2 TEST SUMMARY       2         3 CONTENTS       3         4 GENERAL INFORMATION       4         4.1 CLIENT INFORMATION       4         4.2 GENERAL DESCRIPTION OF EUT       4         4.3 TEST ENVIRONMENT AND MODE       6         4.4 DESCRIPTION OF SUPPORT UNITS       6         4.5 TEST LOCATION       6         4.6 TEST FACILITY       7         4.7 DEVIATION FROM STANDARDS       7         4.8 ABNORMALITIES FROM STANDARD CONDITIONS       7         4.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER       7         4.10 EQUIPMENT LIST       8         5 TEST RESULTS AND MEASUREMENT DATA       11         5.1 ANTENNA REQUIREMENT       11         5.2 CONDUCTED EMISSIONS       12         5.3 CONDUCTED EMISSIONS       12         5.4 6DB OCCUPY BANDWIDTH       25         5.5 POWER SPECTRAL DENSITY       33         5.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS       46         5.7 RF CONDUCTED SPURIOUS EMISSIONS       46		
4	GEN	IERAL INFORMATION	4
	4.1		
	4.2		
	4.3	TEST ENVIRONMENT AND MODE	6
	_		
	• • • •		
	_		
	_	OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
	4.10	EQUIPMENT LIST	8
5	TES	T RESULTS AND MEASUREMENT DATA	11
	5.1	ANTENNA REQUIREMENT	11
	5.2	CONDUCTED EMISSIONS	12
	5.3	CONDUCTED PEAK OUTPUT POWER	16
	5.4	6DB OCCUPY BANDWIDTH	25
	5.5		
	5.6		
	5.7		
	5.8	RADIATED SPURIOUS EMISSIONS	
	5.8.1		
	5.8.2		
	5.9	BAND EDGE (RADIATED EMISSION)	65-82



Report No.: SZEM130200083301

Page: 4 of 82

## 4 General Information

## 4.1 Client Information

Applicant:	Shenzhen Boeye Technology Co., Ltd
Address of Applicant:	Room No.401, Unit 3, Block C, Kexing Science Park, Keyuan Road,
	Nanshan Hi-tech Park, Nanshan District, Shenzhen P.R.C.
Manufacturer:	Shenzhen Boeye Technology Co., Ltd
Address of Manufacturer:	Room No.401, Unit 3, Block C, Kexing Science Park, Keyuan Road,
	Nanshan Hi-tech Park, Nanshan District, Shenzhen P.R.C.
Factory:	Shenzhen Sang Fei Consumer Communications Co., Ltd
Address of Factory:	11 Science and Technology Road Sci. and Tech. Industrial Park
	Nanshan District Shenzhen

# 4.2 General Description of EUT

-	
Product Name:	E-Reader
Model No.:	C63
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
	IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
	IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK)
<b>31</b>	IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK)
	IEEE for 802.11n(HT20 and HT40): OFDM (64QAM, 16QAM,
	QPSK,BPSK)
Sample Type:	Portable production
Test Power Grade:	Max set level (manufacturer declare )
Test Software of EUT:	EMI.EMI (manufacturer declare )
Antenna Type:	Integral
Antenna Gain:	1.86dBi
Power Supply:	AC ADAPTER
	MODEL: MLF-012W0501000
	I/P: AC 100-240V 50/60Hz 0.4A
	O/P: DC 5V === 1 A
	DC 3.7V 1500mAh rechargeable battery
Test Voltage:	DC 5V by USB Port from PC input AC 120V/60Hz
USB Cable:	85 cm (shielded with two ferrite core)
Earphone cable:	120 cm (Unshielded)



Report No.: SZEM130200083301

Page: 5 of 82

Operation Frequency each of channel(802.11b/g/n HT20)										
Channel	Fr	equency	Channe	Frequency	Channel	Fre	quency	Chan	nel	Frequency
1	24	412MHz	4	2427MHz	7	244	12MHz	10	)	2457MHz
2	24	417MHz	5	2432MHz	8	244	17MHz	11		2462MHz
3	24	422MHz	6	2437MHz	9	245	52MHz			
Operation F	-requ	iency each	of channe	el(802.11n HT40	)					
Channel Frequency				Channel	Frequen	су	Chan	nel	F	requency
1		24221	ИНz	4	2437MF	lz	7			2452MHz
2 2427MHz		ИНz	5	2442MF	lz					
3 2432MI		ИНz	6	2447MH	lz					

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

#### For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

#### For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz





Report No.: SZEM130200083301

Page: 6 of 82

## 4.3 Test Environment and Mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1015mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all
	kind of data rate.

# 4.4 Description of Support Units

The EUT has been tested as an independent unit.

## 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM130200083301

Page: 7 of 82

# 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

#### FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

#### 4.7 Deviation from Standards

None.

## 4.8 Abnormalities from Standard Conditions

None.

# 4.9 Other Information Requested by the Customer

None.



Report No.: SZEM130200083301

Page: 8 of 82

# 4.10Equipment List

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2013-06-10		
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2013-10-24		
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2013-05-17		
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2013-11-10		
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2013-11-10		
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2013-11-10		
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2013-05-17		
8	Coaxial Cable	SGS	N/A	SEL0025	2013-05-29		
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24		
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24		
11	Barometer	Chang Chun	DYM3	SEL0088	2013-05-24		



Report No.: SZEM130200083301

Page: 9 of 82

	RE in Chamber				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2013-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2013-05-17
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2013-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2013-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2013-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2013-05-17
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2013-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2013-05-59
10	Coaxial cable	SGS	N/A	SEL0189	2013-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2013-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2013-05-29
13	Band filter	Amindeon	82346	SEL0094	2013-05-17
14	Barometer	Chang Chun	DYM3	SEL0088	2013-05-24
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2013-05-17
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2013-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2013-06-04



Report No.: SZEM130200083301

Page: 10 of 82

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2013-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2013-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2013-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2013-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2013-05-24
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2013-05-17
8	Band filter	amideon	82346	SEL0094	2013-05-17
9	POWER METER	R&S	NRVS	SEL0144	2013-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2013-05-17
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2013-10-24

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM130200083301

Page: 11 of 82

## 5 Test results and Measurement Data

# 5.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.86dBi.

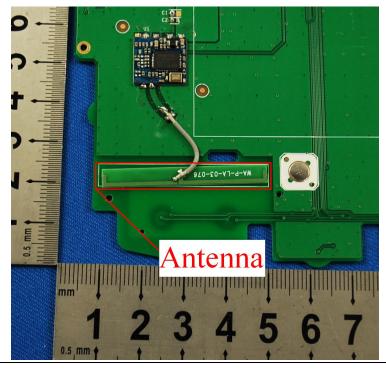



Report No.: SZEM130200083301

Page: 12 of 82


## 5.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range:	150kHz to 30MHz			
Limit:	Francisco (MIII-)	Limit (dBuV)		
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithm	n of the frequency.		_
Test Procedure:	The mains terminal disturt room.	oance voltage test was	s conducted in a shi	elded
	2) The EUT was connected to Impedance Stabilization N impedance. The power cal connected to a second LIS plane in the same way as multiple socket outlet strip single LISN provided the r 3) The tabletop EUT was placed on the horizontal ground reference plane. A placed on the horizontal ground reference preference plane. The LISN unit under test and bonded mounted on top of the ground the EUT and associated en the EUT and associated en an all of the impansion of	etwork) which provides oles of all other units of SN 2, which was bonder the LISN 1 for the unit was used to connect reating of the LISN was reced upon a non-metallished for floor-standing around reference plane, the a vertical ground reference of the unit was placed 0.8 m from the vertical ground reference plane. To a ground reference plane. To find the LISN 1 and the quipment was at least of the units of the relation of the	s a 50Ω/50μH + 5Ω I f the EUT were d to the ground refer being measured. A nultiple power cable not exceeded. c table 0.8m above trangement, the EUT ference plane. The rad reference plane. The rad reference plane. The horizontal ground om the boundary of plane for LISNs his distance was EUT. All other units 0.8 m from the LISN we positions of	rence s to a the was ear he the of 2.



Report No.: SZEM130200083301

Page: 13 of 82

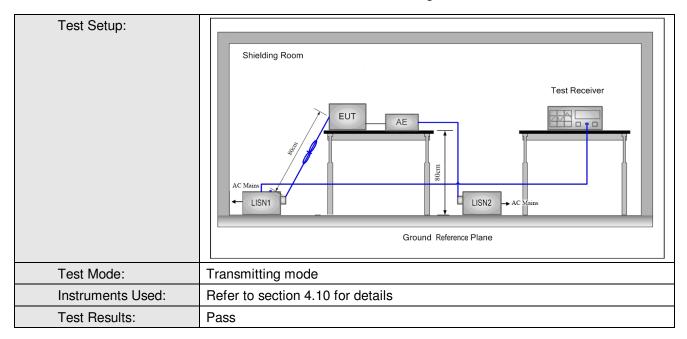

#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130200083301

Page: 14 of 82



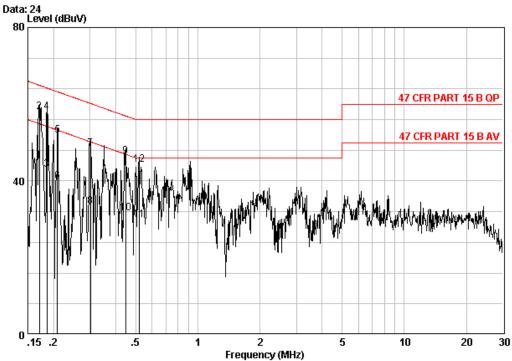

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE LINE

Job No. : 0833RF Mode : Transmitting


		Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
		MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1		0.17034	0.02	9.70	35.40	45.12	54.94	-9.82	Average
2	0	0.17034	0.02	9.70	48.32	58.04	64.94	-6.90	QP
3		0.18541	0.02	9.70	33.20	42.92	54.24	-11.32	Average
4	0	0.18541	0.02	9.70	48.25	57.97	64.24	-6.27	QP
5		0.20833	0.02	9.70	42.20	51.91	63.27	-11.36	QP
6		0.20833	0.02	9.70	30.10	39.82	53.27	-13.45	Average
7		0.30188	0.01	9.70	38.63	48.35	60.19	-11.84	QP
8		0.30188	0.01	9.70	23.60	33.31	50.19	-16.88	Average
9		0.44679	0.01	9.80	36.57	46.38	56.93	-10.56	QP
10		0.44679	0.01	9.80	21.80	31.61	46.93	-15.32	Average
11		0.51824	0.01	9.80	20.10	29.91	46.00	-16.09	Average
12		0.51824	0.01	9.80	34.36	44.17	56.00	-11.83	QP



Report No.: SZEM130200083301

Page: 15 of 82

#### Neutral Line:

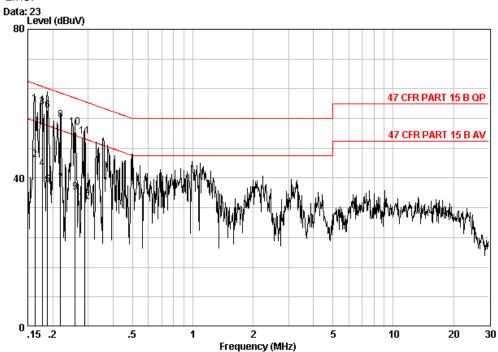

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE NEUTRAL

Job No. : 0833RF Mode : Transmitting

			Cable	LISN	Read		Limit	Over	
		Freq	Loss	Factor	Level	Level	Line	Limit	Remark
		MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0	0.16241	0.02	9.70	50.20	59.92	65.34	-5.42	QP
2		0.16241	0.02	9.70	35.10	44.82	55.34	-10.52	Average
3	0	0.17678	0.02	9.70	49.32	59.04	64.64	-5.59	QP
4		0.17678	0.02	9.70	32.80	42.52	54.64	-12.12	Average
5		0.18838	0.02	9.70	28.50	38.22	54.11	-15.89	Average
6	0	0.18838	0.02	9.70	48.50	58.22	64.11	-5.89	QP
7		0.21851	0.02	9.70	28.90	38.62	52.88	-14.26	Average
8	0	0.21851	0.02	9.70	45.90	55.61	62.88	-7.26	QP
9		0.25888	0.02	9.70	26.50	36.22	51.47	-15.25	Average
10	0	0.25888	0.02	9.70	43.83	53.55	61.47	-7.92	QP
11		0.28935	0.01	9.70	41.50	51.21	60.54	-9.33	QP
12		0.28935	0.01	9.70	23.90	33.61	50.54	-16.93	Average

#### Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM130200083301

Page: 16 of 82

# 5.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)			
Test Method:	KDB558074 D01			
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table			
	Ground Reference Plane			
	Remark:			
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Test Instruments:	Refer to section 4.10 for details			
Exploratory Test Mode:	: Transmitting mode			
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b;			
	54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst			
	case of 802.11n(HT20); 135Mbps of rate is the worst case of			
	802.11n(HT40)			
Limit:	30dBm			
Test Results:	Pass			

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130200083301

Page: 17 of 82

Pre-scan und	re-scan under all rate at lowest channel 1							
Mode		802	.11b			_		
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps				
Power (dBm)	17.88	17.99	18.13	18.25				
Mode				802	2.11g			
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Power (dBm)	15.22	15.4	15.51	15.77	16.01	16.08	16.17	16.4
Mode				802.11	n(HT20)			
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
Power (dBm)	15.83	15.91	16.05	16.11	16.22	16.43	16.56	16.74
Mode	e 802.11n(HT40)							
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps
Power (dBm)	15.34	15.38	15.55	15.64	15.8	15.91	15.99	16.12

Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20);135Mbps of rate is the worst case of 802.11n(HT40).



Report No.: SZEM130200083301

Page: 18 of 82

#### **Measurement Data**

ivied Surement Data						
	802.11b mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	16.39	30.00	Pass			
Middle	15.69	30.00	Pass			
Highest	14.89	30.00	Pass			
802.11g mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	14.54	30.00	Pass			
Middle	13.78	30.00	Pass			
Highest	12.95	30.00	Pass			
802.11n(HT20)mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	13.88	30.00	Pass			
Middle	13.39	30.00	Pass			
Highest	12.55	30.00	Pass			
802.11n(HT40)mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	14.26	30.00	Pass			
Middle	13.67	30.00	Pass			
Highest	13.19	30.00	Pass			




Report No.: SZEM130200083301


Page: 19 of 82

#### Test plot as follows:



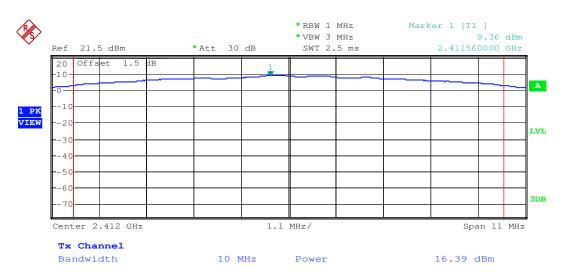

Test mode: 802.11b Test channel: Middle

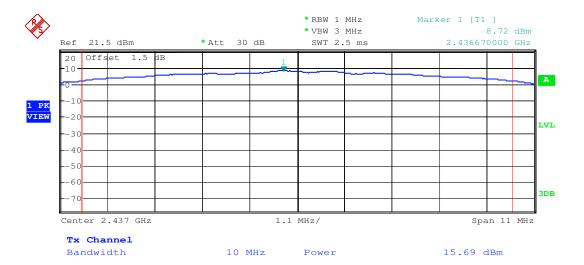


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms e-document.htm">www.sgs.com/terms e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130200083301

Page: 20 of 82

Test mode: 802.11b Test channel: Highest

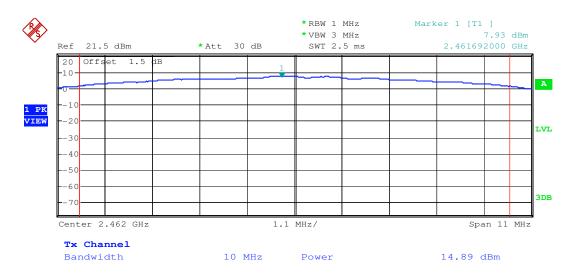

Test mode: 802.11g Test channel: Lowest

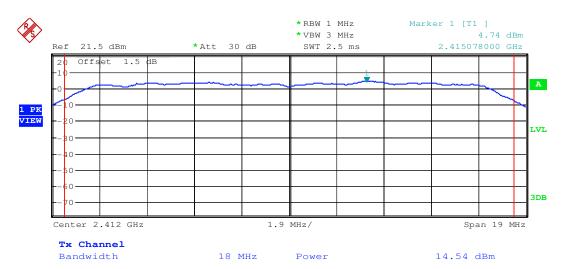


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms e-document.htm">www.sgs.com/terms e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130200083301

Page: 21 of 82

Test mode: 802.11g Test channel: Middle

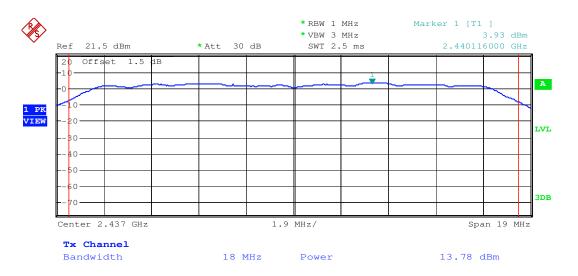

Test mode: 802.11g Test channel: Highest

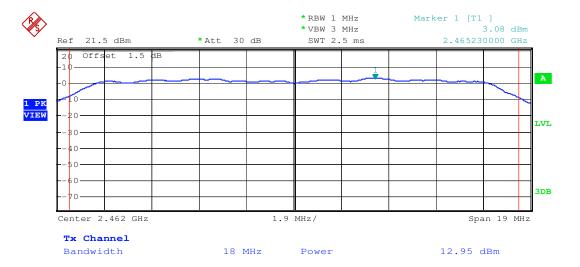





Report No.: SZEM130200083301

Page: 22 of 82

Test mode: 802.11n(HT20) Test channel: Lowest

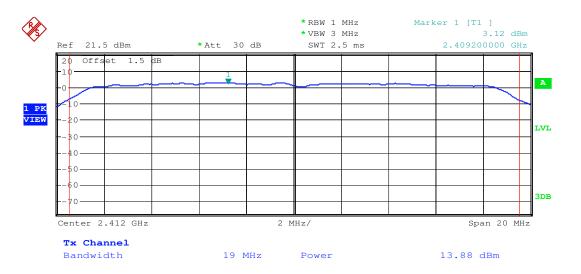


Test mode: 802.11n(HT20) Test channel: Middle

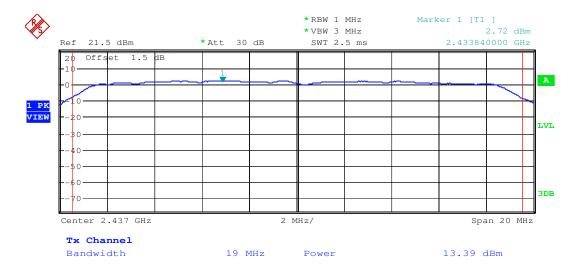





Report No.: SZEM130200083301

Page: 23 of 82



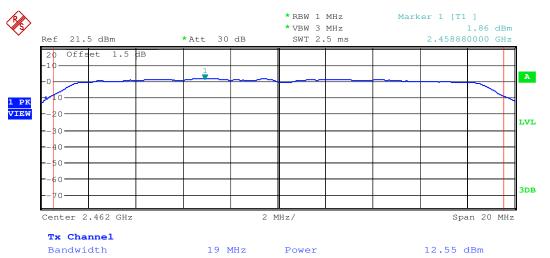

Test mode: 802.11n(HT40) Test channel: Lowest

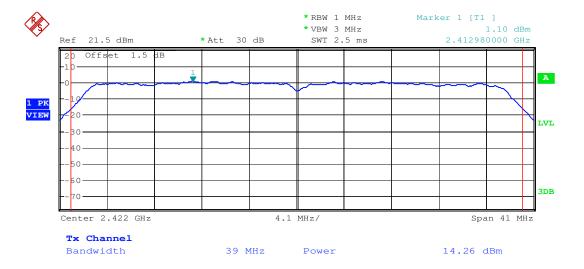


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms e-document.htm">www.sgs.com/terms e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130200083301

Page: 24 of 82

Test mode: 802.11n(HT40) Test channel: Middle

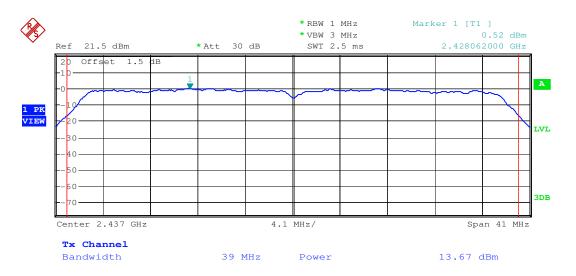

Test mode: 802.11n(HT40) Test channel: Highest

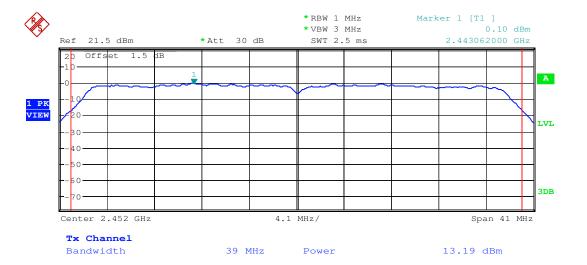



Report No.: SZEM130200083301

Page: 25 of 82

# 5.4 6dB Occupy Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)			
Test Method:	KDB558074 D01			
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane			
Instruments Used:	Refer to section 4.10 for details			
Exploratory Test Mode:	Transmitting mode			
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b;			
	54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst			
	case of 802.11n(HT20); 135Mbps of rate is the worst case of			
	802.11n(HT40)			
Limit:	≥ 500 kHz			
Test Results:	Pass			





Report No.: SZEM130200083301

Page: 26 of 82

#### **Measurement Data**

Wedsarement Data					
802.11b mode					
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result		
Lowest	9.00	≥500	Pass		
Middle	8.82	≥500	Pass		
Highest	8.76	≥500	Pass		
802.11g mode					
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result		
Lowest	16.56	≥500	Pass		
Middle	16.56	≥500	Pass		
Highest	16.56	≥500	Pass		
	802.11n(HT20) mode				
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result		
Lowest	17.82	≥500	Pass		
Middle	17.82	≥500	Pass		
Highest	17.82	≥500	Pass		
802.11n(HT40)mode					
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result		
Lowest	36.50	≥500	Pass		
Middle	36.50	≥500	Pass		
Highest	36.50	≥500	Pass		




Report No.: SZEM130200083301


Page: 27 of 82

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

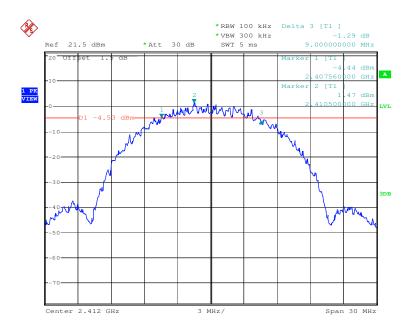



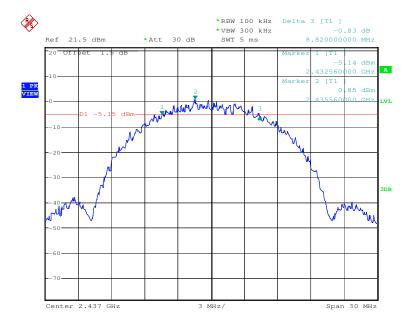





Report No.: SZEM130200083301

Page: 28 of 82

Test mode: 802.11b Test channel: Highest

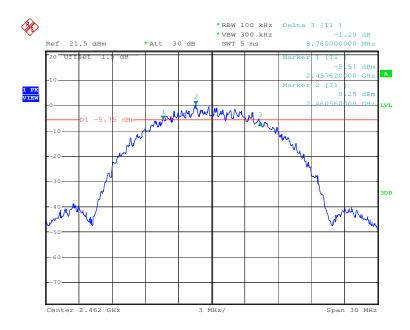

Test mode: 802.11g Test channel: Lowest

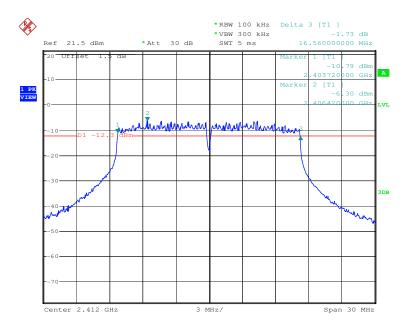


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130200083301

Page: 29 of 82

Test mode: 802.11g Test channel: Middle

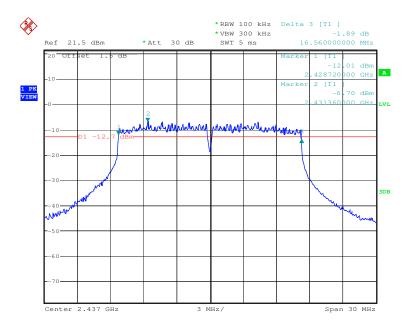

Test mode: 802.11g Test channel:	Highest
----------------------------------	---------

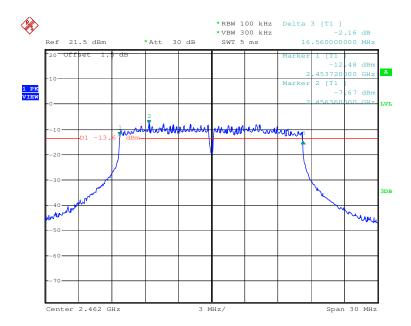





Report No.: SZEM130200083301

Page: 30 of 82

Test mode: 802.11n(HT20) Test channel: Lowest

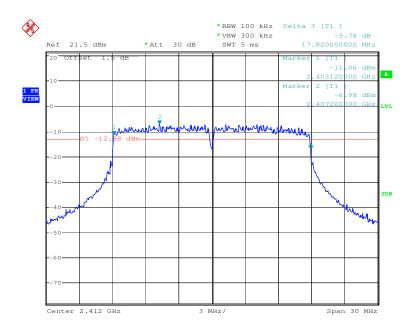



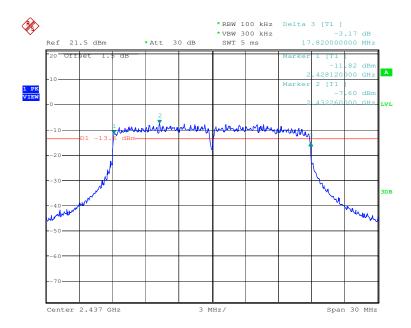





Report No.: SZEM130200083301

Page: 31 of 82

Test mode: 802.11n(HT20) Test channel: Highest

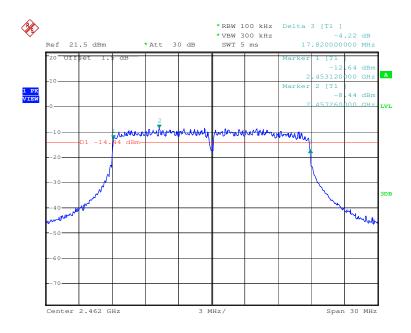

rest mode.   ouz.rm(n140)   rest channel.   Lowest		Test mode:	802.11n(HT40)	Test channel:	Lowest
--	--	------------	---------------	---------------	--------

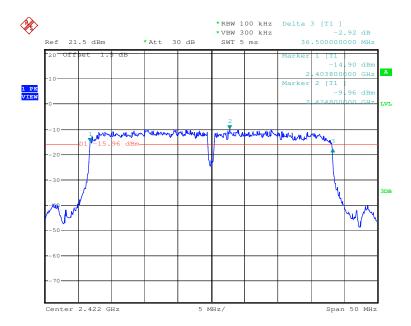





Report No.: SZEM130200083301

Page: 32 of 82

Test mode: 802.11n(HT40) Test channel: Middle

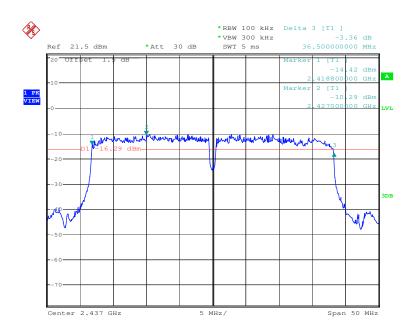

rest mode. Tighest	Test mode:	802.11n(HT40)	Test channel:	Highest
--------------------	------------	---------------	---------------	---------

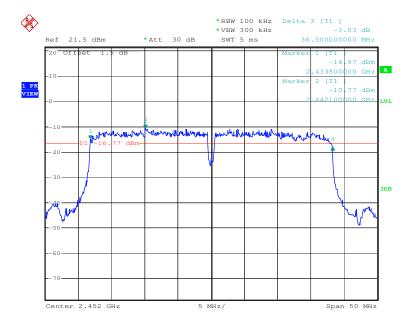



Report No.: SZEM130200083301

Page: 33 of 82

# 5.5 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)			
Test Method:	KDB558074 D01			
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:			
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Test Instruments:	Refer to section 4.10 for details			
Exploratory Test Mode:	Transmitting mode			
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b;			
	54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40)			
Limit:	≤8.00dBm			
Test Results:	Pass			

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130200083301

Page: 34 of 82

#### **Measurement Data**

WedSurement Data						
	802.11b mode					
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result			
Lowest	-11.70	≤8.00	Pass			
Middle	-12.73	≤8.00	Pass			
Highest	-13.58	≤8.00	Pass			
802.11g mode						
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result			
Lowest	-19.89	≤8.00	Pass			
Middle	-20.90	≤8.00	Pass			
Highest	-21.24	≤8.00	Pass			
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result			
Lowest	-20.28	≤8.00	Pass			
Middle	-21.11	≤8.00	Pass			
Highest	-21.69	≤8.00	Pass			
802.11n(HT40) mode						
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result			
Lowest	-22.50	≤8.00	Pass			
Middle	-22.39	≤8.00	Pass			
Highest	-23.29	≤8.00	Pass			




Report No.: SZEM130200083301


Page: 35 of 82

#### Test plot as follows:

Test mode: 802.11b Test channel: Lowest

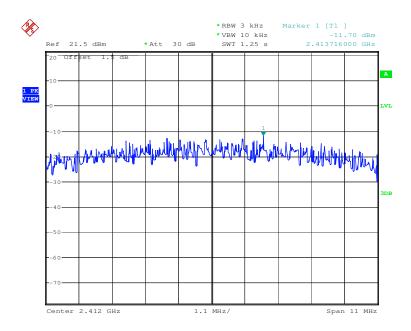

Test mode: 802.11b Test channel: Middle

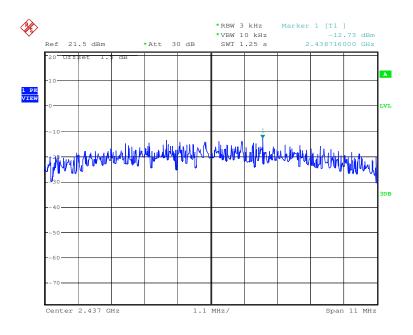







Report No.: SZEM130200083301

Page: 36 of 82

Test mode: 802.11b Test channel: Highest

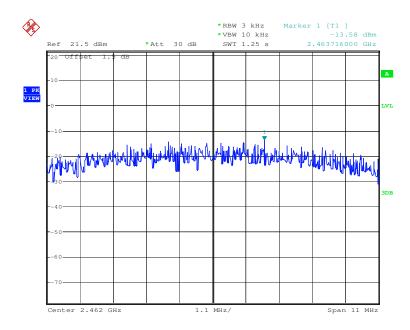

Test mode: 802.11g Test channel: Lowest

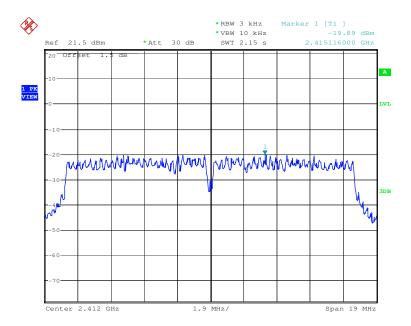


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130200083301

Page: 37 of 82

Test mode: 802.11g Test channel: Middle

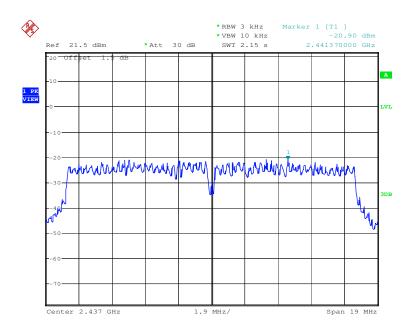

Te	est mode:	802.11g	Test channel:	Highest

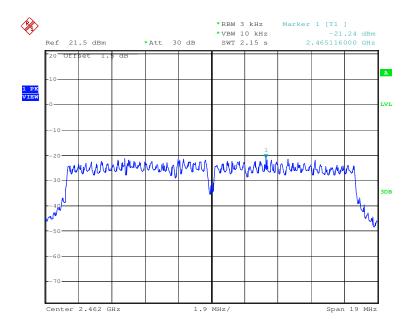





Report No.: SZEM130200083301

Page: 38 of 82

Test mode: 802.11n(HT20) Test channel: Lowest

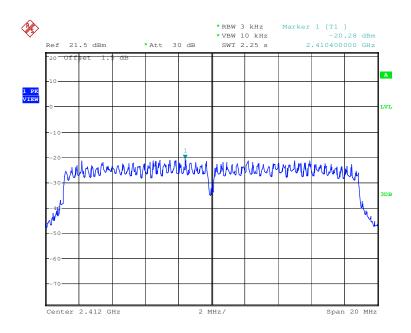



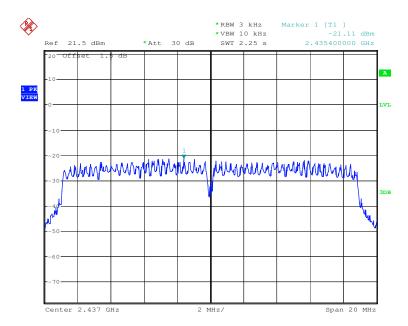






Report No.: SZEM130200083301

Page: 39 of 82

Test mode: 802.11n(HT20) Test channel: Highest

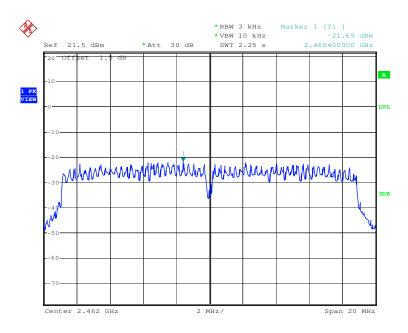



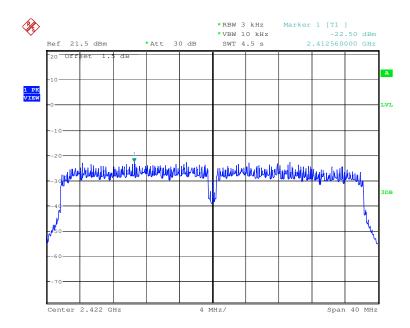





Report No.: SZEM130200083301

Page: 40 of 82

Test mode: 802.11n(HT40) Test channel: Middle

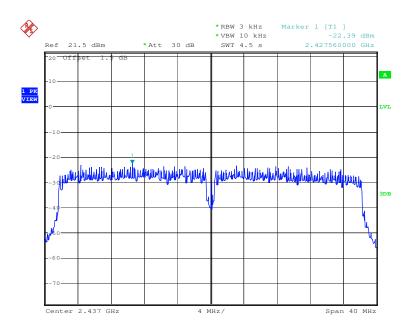



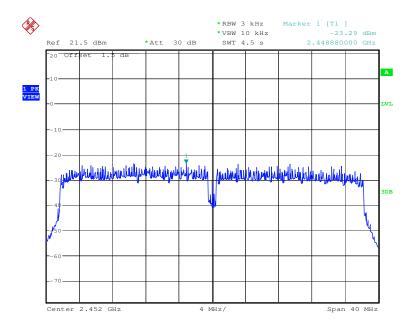



Report No.: SZEM130200083301

Page: 41 of 82

# 5.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	KDB558074 D01
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:  Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b;
	54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms-e-document.htm">www.sgs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130200083301


Page: 42 of 82

#### Test plot as follows:

Test mode: 802.11b Test channel: Lowest

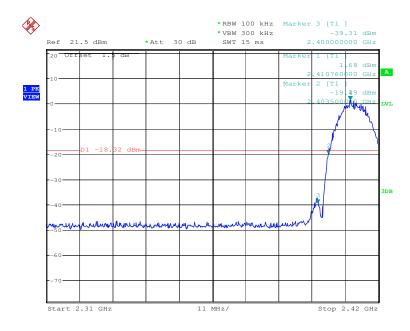

Test mode: 802.11b Test channel: Highest

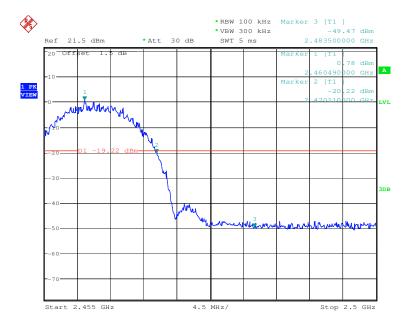





Report No.: SZEM130200083301

Page: 43 of 82

Test mode: 802.11g Test channel: Lowest

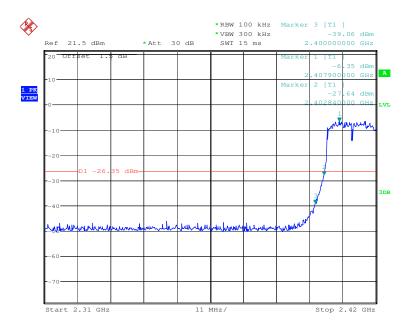



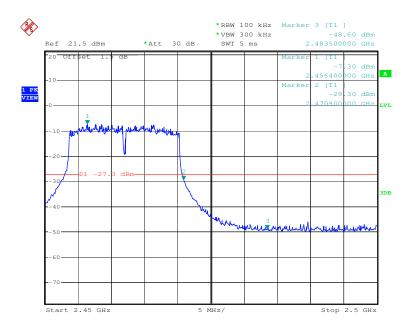





Report No.: SZEM130200083301

Page: 44 of 82

Test mode: 802.11n(HT20) Test channel: Lowest

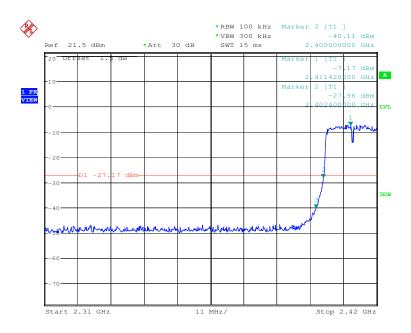



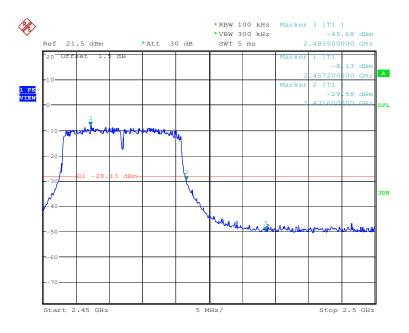





Report No.: SZEM130200083301

Page: 45 of 82

Test mode: 802.11n(HT40) Test channel: Lowest

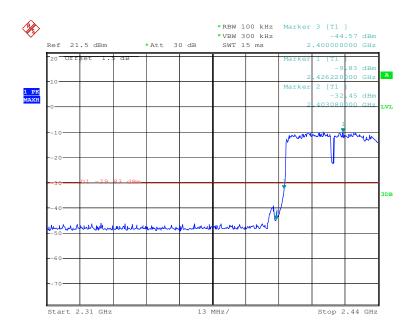

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

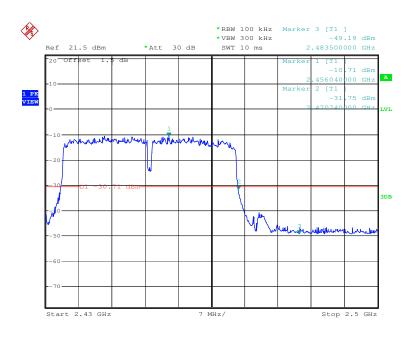





Report No.: SZEM130200083301

Page: 46 of 82

# 5.7 RF Conducted Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	KDB558074 D01
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:  Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130200083301


Page: 47 of 82

### Test plot as follows:

Test mode: 802.11b Test channel: Lowest

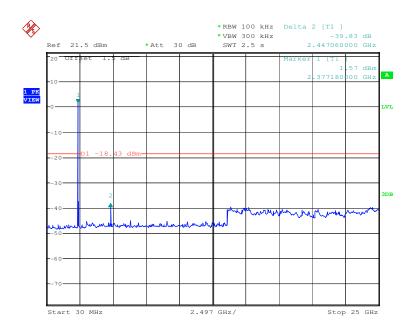



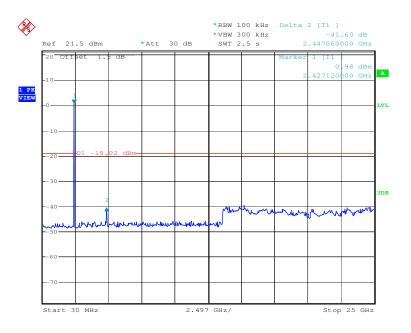






Report No.: SZEM130200083301

Page: 48 of 82

Test mode: 802.11b Test channel: Highest

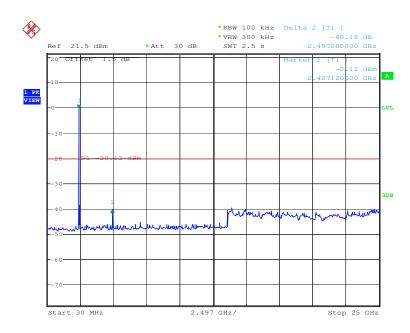



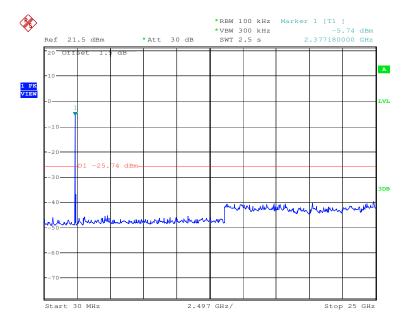





Report No.: SZEM130200083301

Page: 49 of 82

Test mode: 802.11g Test channel: Middle

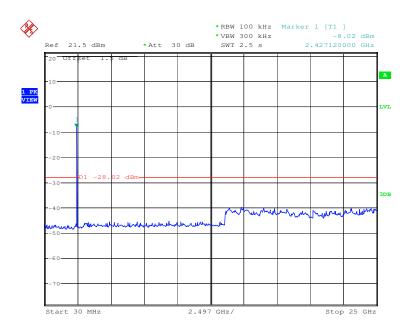

Te	est mode:	802.11g	Test channel:	Highest

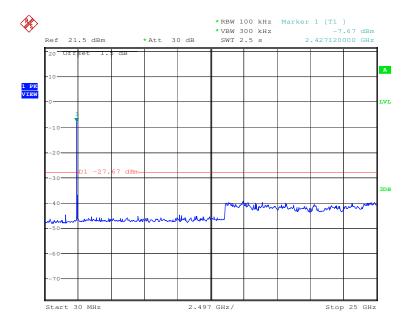





Report No.: SZEM130200083301

Page: 50 of 82

Test mode: 802.11n(HT20) Test channel: Lowest

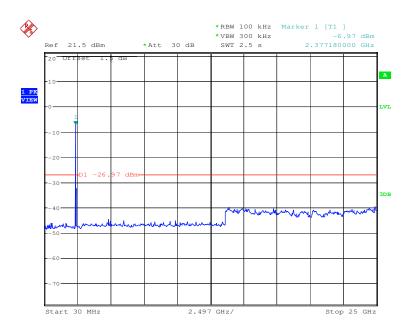

Test mode:	802.11n(HT20)	Test channel:	Middle

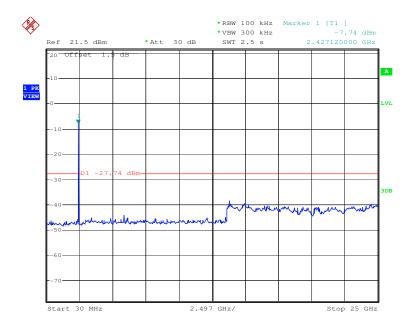





Report No.: SZEM130200083301

Page: 51 of 82

Test mode: 802.11n(HT20) Test channel: Highest

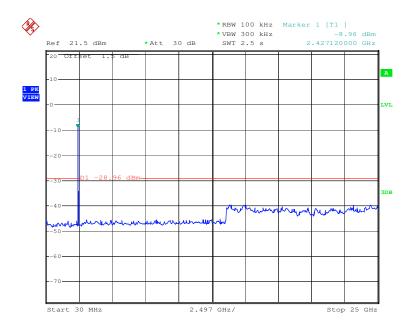



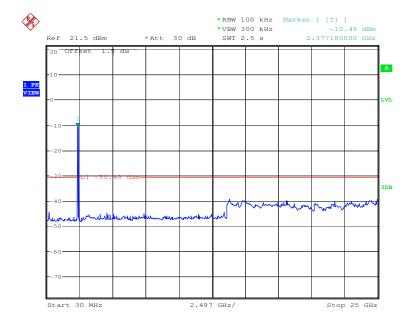






Report No.: SZEM130200083301

Page: 52 of 82

Test mode: 802.11n(HT40) Test channel: Middle

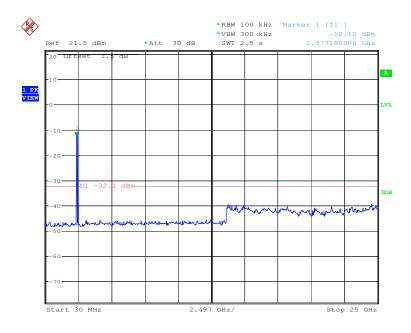



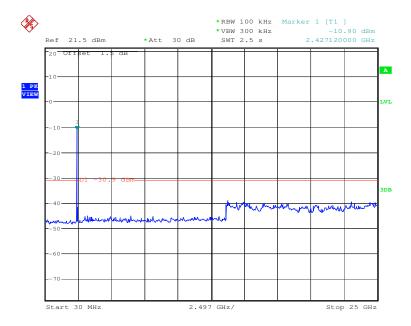



Report No.: SZEM130200083301

Page: 53 of 82

# 5.8 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10 2009								
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Receiver Setup:	Frequency Detector RBW VBW Remark								
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak				
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average				
	0.090MHz-0.110MHz	10kHz	30kHz	Quasi-peak					
	0.110MHz-0.490MHz	30kHz	Peak						
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average				
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak				
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak				
	Above 1GHz	Peak	1MHz	3MHz	Peak				
	Above Idiiz	Peak	1MHz	10Hz	Average				
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)				
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300				
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30				
	1.705MHz-30MHz	30	-	-	30				
	30MHz-88MHz	100	40.0	Quasi-peak	3				
	88MHz-216MHz	150	43.5	Quasi-peak	3				
	216MHz-960MHz	200	46.0	Quasi-peak	3				
	960MHz-1GHz	500	54.0	Quasi-peak	3				
	Above 1GHz	Average	3						
	Note: 15.35(b), Unless of	herwise specified,	the limit on	peak radio fre	equency				
	emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the topeak emission level radiated by the device.								


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms-e-document.htm">www.sgs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130200083301

Page: 54 of 82

### Test Setup:

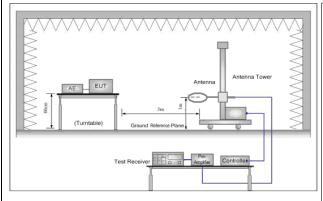

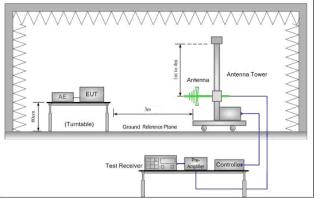


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

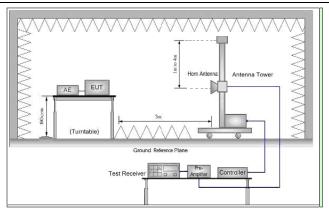


Figure 3. Above 1 GHz

#### Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB



Report No.: SZEM130200083301

Page: 55 of 82

	margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
	g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
	h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
	i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b;
	54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst
	case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40)
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass






Report No.: SZEM130200083301

Page: 56 of 82

#### 5.8.1 Radiated emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical



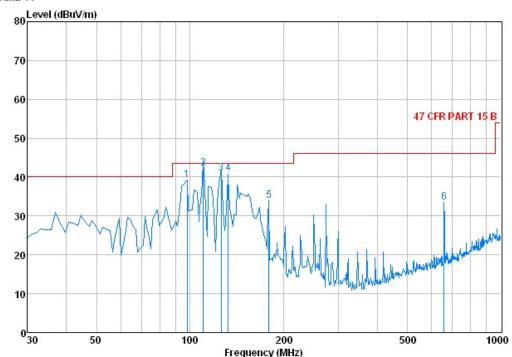

Condition: 47 CFR PART 15 B 3m 3142C NEW VERTICAL

Job No. : 0833RF

Mode : Transmitting

			Cable	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		97.90	1.18	6.20	27.20	59.09	39.27	43.50	-4.23
2	р	110.51	1.23	7.59	27.13	60.52	42.21	43.50	-1.29
3		126.03	1.27	7.98	27.03	58.73	40.95	43.50	-2.55
4		132.82	1.28	8.26	26.99	58.46	41.01	43.50	-2.49
5		179.38	1.37	6.87	26.78	52.41	33.87	43.50	-9.63
6		657.59	2.82	16.00	27.47	42.06	33.41	46.00	-12.59




Report No.: SZEM130200083301

Page: 57 of 82

Test mode: Transmitting Horizontal
------------------------------------



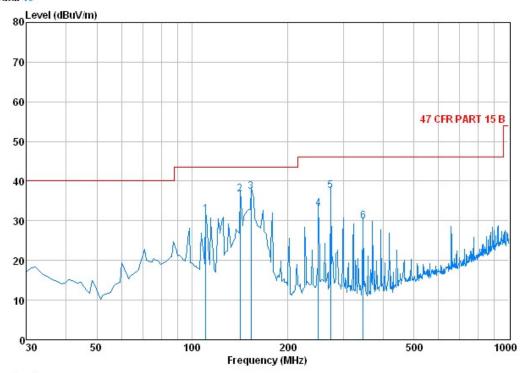

Condition: 47 CFR PART 15 B 3m 3142C NEW HORIZONTAL

Job No. : 0833RF

Mode : Transmitting

		Cable.	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	110.51	1.23	7.59	27.13	49.98	31.67	43.50	-11.83
2	141.55	1.30	8.72	26.95	53.68	36.75	43.50	-6.75
3 p	153.19	1.32	9.47	26.89	53.54	37.44	43.50	-6.06
4	250.19	1.68	8.50	26.54	49.41	33.05	46.00	-12.95
5	273.47	1.78	9.14	26.47	53.13	37.58	46.00	-8.42
6	346.22	2.05	10.61	26.77	43.96	29.85	46.00	-16.15

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130200083301

Page: 58 of 82

#### 5.8.2 Transmitter emission above 1GHz

Test mode:	802	.11b	Test cha	annel:	Lowest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4821.757	7.45	34.68	41.64	46.62	47.11	74	-26.89	Vertical
5850.919	7.91	35.45	41.06	46.29	48.59	74	-25.41	Vertical
6544.350	8.16	36.27	40.45	45.52	49.50	74	-24.50	Vertical
8292.376	9.42	36.12	38.93	44.05	50.66	74	-23.34	Vertical
9859.472	9.79	37.56	37.58	41.80	51.57	74	-22.43	Vertical
11370.050	10.84	38.43	38.02	42.00	53.25	74	-20.75	Vertical
3598.087	5.90	33.32	40.74	46.74	45.22	74	-28.78	Horizontal
4834.046	7.46	34.65	41.65	46.93	47.39	74	-26.61	Horizontal
6561.030	8.17	36.25	40.43	46.43	50.42	74	-23.58	Horizontal
7880.772	9.29	36.00	39.29	45.13	51.13	74	-22.87	Horizontal
8703.294	9.54	36.36	38.59	44.86	52.17	74	-21.83	Horizontal
10560.940	10.25	38.32	37.68	42.27	53.16	74	-20.84	Horizontal
Test mode:	802	.11b	Test cha	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
3700.260	6.05	33.45	40.81	46.19	44.88	74	-29.12	Vertical
4871.103	7.48	34.59	41.68	47.95	48.34	74	-25.66	Vertical
5986.509	7.97	35.67	40.94	46.12	48.82	74	-25.18	Vertical
7547.013	9.14	36.00	39.57	45.83	51.40	74	-22.60	Vertical
8703.294	9.54	36.36	38.59	44.49	51.80	74	-22.20	Vertical
10778.210	10.41	38.41	37.77	42.94	53.99	74	-20.01	Vertical
4594.102	7.18	35.06	41.47	45.58	46.35	74	-27.65	Horizontal
5689.360	7.84	35.20	41.19	45.12	46.97	74	-27.03	Horizontal
6347.466	8.10	36.12	40.63	45.46	49.05	74	-24.95	Horizontal
7566.249	9.17	36.00	39.56	44.62	50.23	74	-23.77	Horizontal
8703.294	9.54	36.36	38.59	42.98	50.29	74	-23.71	Horizontal
10453.950	10.17	38.24	37.64	42.29	53.06	74	-20.94	Horizontal



Report No.: SZEM130200083301

Page: 59 of 82

Test mode:	Test mode: 802.11b		Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4594.102	7.18	35.06	41.47	46.04	46.81	74	-27.19	Vertical
6283.164	8.07	36.04	40.68	46.63	50.06	74	-23.94	Vertical
7643.683	9.23	36.00	39.49	44.93	50.67	74	-23.33	Vertical
8549.586	9.49	36.24	38.72	44.63	51.64	74	-22.36	Vertical
9562.854	9.67	37.27	37.83	42.99	52.10	74	-21.90	Vertical
10916.260	10.50	38.47	37.83	42.24	53.38	74	-20.62	Vertical
3903.444	6.33	33.70	40.97	45.79	44.85	74	-29.15	Horizontal
4455.890	7.03	35.06	41.37	46.35	47.07	74	-26.93	Horizontal
5821.207	7.89	35.42	41.07	45.95	48.19	74	-25.81	Horizontal
6696.010	8.21	36.11	40.31	46.66	50.67	74	-23.33	Horizontal
7566.249	9.17	36.00	39.56	46.60	52.21	74	-21.79	Horizontal
10480.590	10.19	38.28	37.65	42.97	53.79	74	-20.21	Horizontal

Test mode:	802	.11g	Test ch	annel:	Lowest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4582.422	7.18	35.06	41.47	45.54	46.31	74	-27.69	Vertical
5617.407	7.81	35.09	41.25	45.37	47.02	74	-26.98	Vertical
6478.053	8.14	36.26	40.51	44.47	48.36	74	-25.64	Vertical
7800.936	9.27	36.00	39.36	43.68	49.59	74	-24.41	Vertical
9636.161	9.68	37.34	37.76	41.69	50.95	74	-23.05	Vertical
11112.520	10.64	38.48	37.91	42.25	53.46	74	-20.54	Vertical
4809.499	7.44	34.70	41.63	44.89	45.40	74	-28.60	Horizontal
6544.350	8.16	36.27	40.45	44.36	48.34	74	-25.66	Horizontal
7547.013	9.14	36.00	39.57	44.35	49.92	74	-24.08	Horizontal
8725.477	9.55	36.37	38.55	43.01	50.38	74	-23.62	Horizontal
9370.083	9.65	37.03	37.99	42.13	50.82	74	-23.18	Horizontal
10999.950	10.56	38.50	37.86	42.18	53.38	74	-20.62	Horizontal



Report No.: SZEM130200083301

Page: 60 of 82

Test mode:	802	.11g	Test ch	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4688.616	7.29	34.90	41.54	44.65	45.30	74	-28.70	Vertical
6363.645	8.10	36.14	40.61	44.86	48.49	74	-25.51	Vertical
7566.249	9.17	36.00	39.56	44.34	49.95	74	-24.05	Vertical
8527.851	9.49	36.23	38.73	43.60	50.59	74	-23.41	Vertical
9538.543	9.67	37.23	37.86	42.31	51.35	74	-22.65	Vertical
11428.080	10.87	38.42	38.04	42.32	53.57	74	-20.43	Vertical
5732.974	7.86	35.26	41.15	46.30	48.27	74	-25.73	Horizontal
6696.010	8.21	36.11	40.31	45.99	50.00	74	-24.00	Horizontal
7470.558	9.05	35.99	39.64	44.82	50.22	74	-23.78	Horizontal
8549.586	9.49	36.24	38.72	43.89	50.90	74	-23.10	Horizontal
9636.161	9.68	37.34	37.76	41.89	51.15	74	-22.85	Horizontal
11341.140	10.81	38.43	38.00	42.27	53.51	74	-20.49	Horizontal

Test mode:	802	.11g	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4594.102	7.18	35.06	41.47	44.73	45.50	74	-28.50	Vertical
5689.360	7.84	35.20	41.19	44.91	46.76	74	-27.24	Vertical
6347.466	8.10	36.12	40.63	45.25	48.84	74	-25.16	Vertical
7624.250	9.22	36.00	39.51	45.72	51.43	74	-22.57	Vertical
8462.975	9.47	36.19	38.78	43.35	50.23	74	-23.77	Vertical
10999.950	10.56	38.50	37.86	41.94	53.14	74	-20.86	Vertical
4490.048	7.05	35.15	41.40	46.54	47.34	74	-26.66	Horizontal
6544.350	8.16	36.27	40.45	47.10	51.08	74	-22.92	Horizontal
7413.726	8.99	35.97	39.69	45.81	51.08	74	-22.92	Horizontal
8355.943	9.43	36.14	38.88	44.51	51.20	74	-22.80	Horizontal
9538.543	9.67	37.23	37.86	43.04	52.08	74	-21.92	Horizontal
11140.850	10.67	38.47	37.92	41.95	53.17	74	-20.83	Horizontal



Report No.: SZEM130200083301

Page: 61 of 82

Test mode:	802	.11n(HT20)	Test cha	annel:	Lowest	Remark	·	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4536.000	7.12	35.14	41.43	45.32	46.15	74	-27.85	Vertical
5674.896	7.83	35.18	41.20	46.31	48.12	74	-25.88	Vertical
6611.326	8.18	36.20	40.40	46.14	50.12	74	-23.88	Vertical
7643.683	9.23	36.00	39.49	44.70	50.44	74	-23.56	Vertical
8549.586	9.49	36.24	38.72	44.20	51.21	74	-22.79	Vertical
10560.940	10.25	38.32	37.68	42.87	53.76	74	-20.24	Vertical
4821.757	7.45	34.68	41.64	46.33	46.82	74	-27.18	Horizontal
5689.360	7.84	35.20	41.19	45.95	47.80	74	-26.20	Horizontal
7319.964	8.87	35.93	39.77	46.37	51.40	74	-22.60	Horizontal
8271.294	9.41	36.11	38.95	45.27	51.84	74	-22.16	Horizontal
9465.979	9.66	37.16	37.91	43.30	52.21	74	-21.79	Horizontal
11486.410	10.91	38.40	38.06	42.72	53.97	74	-20.03	Horizontal
Test mode:	802	.11n(HT20)	Test cha	annel:	Middle	Remark	•	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4871.103	7.48	34.59	41.68	45.59	45.98	74	-28.02	Vertical
6299.178	8.08	36.06	40.66	44.74	48.22	74	-25.78	Vertical
7394.878	8.96	35.96	39.71	45.13	50.34	74	-23.66	Vertical
8462.975	9.47	36.19	38.78	43.22	50.10	74	-23.90	Vertical
9465.979	9.66	37.16	37.91	42.18	51.09	74	-22.91	Vertical
11341.140	10.81	38.43	38.00	42.30	53.54	74	-20.46	Vertical
4501.492	7.07	35.20	41.40	46.29	47.16	74	-26.84	Horizontal
5689.360	7.84	35.20	41.19	46.54	48.39	74	-25.61	Horizontal
6628.177	8.19	36.18	40.38	46.15	50.14	74	-23.86	Horizontal
7394.878	8.96	35.96	39.71	46.16	51.37	74	-22.63	Horizontal
8703.294	9.54	36.36	38.59	43.98	51.29	74	-22.71	Horizontal
10669.020	10.33	38.37	37.73	42.96	53.93	74	-20.07	Horizontal



Report No.: SZEM130200083301

Page: 62 of 82

Test mode:		802	.11n(HT20)	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cab Los (dB	s	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4629.319	7.2	2	35.01	41.50	45.17	45.90	74	-28.10	Vertical
5791.646	7.8	9	35.37	41.10	46.19	48.35	74	-25.65	Vertical
6628.177	8.1	9	36.18	40.38	45.44	49.43	74	-24.57	Vertical
8042.903	9.3	4	36.01	39.15	46.24	52.44	74	-21.56	Vertical
9636.161	9.6	8	37.34	37.76	43.10	52.36	74	-21.64	Vertical
10888.510	10.4	19	38.46	37.81	42.74	53.88	74	-20.12	Vertical
4629.319	7.2	2	35.01	41.50	46.55	47.28	74	-26.72	Horizontal
6478.053	8.1	4	36.26	40.51	46.01	49.90	74	-24.10	Horizontal
7566.249	9.1	7	36.00	39.56	45.31	50.92	74	-23.08	Horizontal
8377.241	9.4	4	36.15	38.87	44.64	51.36	74	-22.64	Horizontal
9538.543	9.6	7	37.23	37.86	42.94	51.98	74	-22.02	Horizontal
10999.950	10.5	6	38.50	37.86	42.20	53.40	74	-20.60	Horizontal

Test mode:	Test mode: 802.11n(HT40) Test channel: Lowest Remark:		:	Peak				
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
3700.260	6.05	33.45	40.81	45.40	44.09	74	-29.91	Vertical
4883.519	7.48	34.59	41.68	45.96	46.35	74	-27.65	Vertical
6283.164	8.07	36.04	40.68	45.84	49.27	74	-24.73	Vertical
7880.772	9.29	36.00	39.29	44.96	50.96	74	-23.04	Vertical
9441.913	9.66	37.14	37.94	42.94	51.80	74	-22.20	Vertical
11370.050	10.84	38.43	38.02	41.86	53.11	74	-20.89	Vertical
4641.118	7.25	34.98	41.51	46.36	47.08	74	-26.92	Horizontal
5791.646	7.89	35.37	41.10	46.81	48.97	74	-25.03	Horizontal
6544.350	8.16	36.27	40.45	46.33	50.31	74	-23.69	Horizontal
7470.558	9.05	35.99	39.64	45.60	51.00	74	-23.00	Horizontal
9370.083	9.65	37.03	37.99	43.50	52.19	74	-21.81	Horizontal
11140.850	10.67	38.47	37.92	41.80	53.02	74	-20.98	Horizontal



Report No.: SZEM130200083301

Page: 63 of 82

Test mode:	8	802.	11n(HT40)	Test ch	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Cabl Loss (dB	s	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4501.492	7.07	7	35.20	41.40	45.45	46.32	74	-27.68	Vertical
6094.137	8.0	1	35.82	40.84	46.10	49.09	74	-24.91	Vertical
7547.013	9.14	4	36.00	39.57	44.79	50.36	74	-23.64	Vertical
8419.999	9.45	5	36.17	38.82	44.13	50.93	74	-23.07	Vertical
9562.854	9.67	7	37.27	37.83	42.40	51.51	74	-22.49	Vertical
10587.850	10.2	27	38.33	37.69	42.24	53.15	74	-20.85	Vertical
4547.561	7.14	4	35.12	41.44	45.27	46.09	74	-27.91	Horizontal
5865.832	7.92	2	35.48	41.04	47.26	49.62	74	-24.38	Horizontal
6494.564	8.15	5	36.28	40.50	45.75	49.68	74	-24.32	Horizontal
7413.726	8.99	9	35.97	39.69	45.10	50.37	74	-23.63	Horizontal
8725.477	9.55	5	36.37	38.55	45.30	52.67	74	-21.33	Horizontal
11112.520	10.6	64	38.48	37.91	41.92	53.13	74	-20.87	Horizontal

Test mode:	802	.11n(HT40)	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3308.185	5.50	33.28	40.52	45.58	43.84	74	-30.16	Vertical
4410.750	6.96	34.97	41.35	45.39	45.97	74	-28.03	Vertical
5244.295	7.65	34.65	41.58	46.08	46.80	74	-27.20	Vertical
6478.053	8.14	36.26	40.51	46.35	50.24	74	-23.76	Vertical
7941.185	9.31	36.00	39.24	44.92	50.99	74	-23.01	Vertical
11994.380	11.28	38.90	38.28	41.48	53.38	74	-20.62	Vertical
3672.110	6.00	33.41	40.80	47.49	46.10	74	-27.90	Horizontal
4676.696	7.29	34.92	41.54	46.65	47.32	74	-26.68	Horizontal
5850.919	7.91	35.45	41.06	46.75	49.05	74	-24.95	Horizontal
6347.466	8.10	36.12	40.63	47.19	50.78	74	-23.22	Horizontal
7566.249	9.17	36.00	39.56	45.59	51.20	74	-22.80	Horizontal
10560.940	10.25	38.32	37.68	42.25	53.14	74	-20.86	Horizontal



Report No.: SZEM130200083301

Page: 64 of 82

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) The disturbance above 12GHz up to 25GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM130200083301

Page: 65 of 82

# 5.9 Band Edge (Radiated Emission)

Test Requirement:	47 CFR Part 15C Section	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10 2009	ANSI C63.10 2009								
Test Site:	Measurement Distance: 3r	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Limit:	Frequency	Limit (dBuV/m @3m)	Remark							
	30MHz-88MHz	40.0	Quasi-peak Value							
	88MHz-216MHz	88MHz-216MHz 43.5 Quasi-peak Va								
	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.0	Quasi-peak Value							
	54.0 Average Value									
	Above 1GHz 74.0 Peak Value									
Test Setup:										

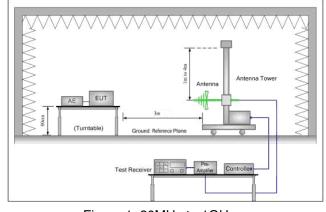

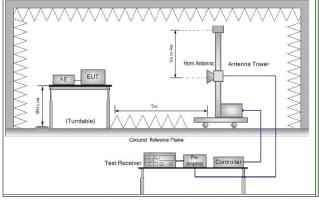


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz





Report No.: SZEM130200083301

Page: 66 of 82

Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
	g. Test the EUT in the lowest channel, the Highest channel
	h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
	<ul> <li>i. Repeat above procedures until all frequencies measured was complete.</li> </ul>
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b;
	54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst
	case of 802.11n(HT20); 135Mbps of rate is the worst case of
	802.11n(HT40)
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass




Report No.: SZEM130200083301

Page: 67 of 82

#### Test plot as follows:

Worse case mode: 802.11b Test channel: Lowest Remark: Peak Vertical

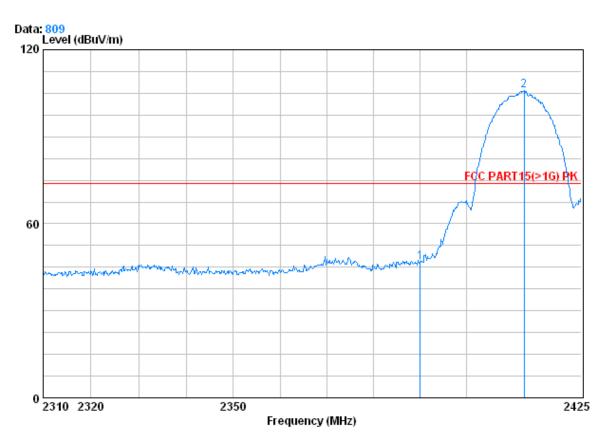

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 0833RF

Mode : 2412 BAND EDGE B


	Limit Line	Level		Preamp Factor			Freq	
dB	dBuV/m	dBuV/m	dBuV	dB	dB/m	dB	MHz	
	74.00 74.00						2390.000 2412.465	1 2 0



Report No.: SZEM130200083301

Page: 68 of 82

Worse case mode: 802.11b Test channel: Lowest Remark: Peak Horizontal

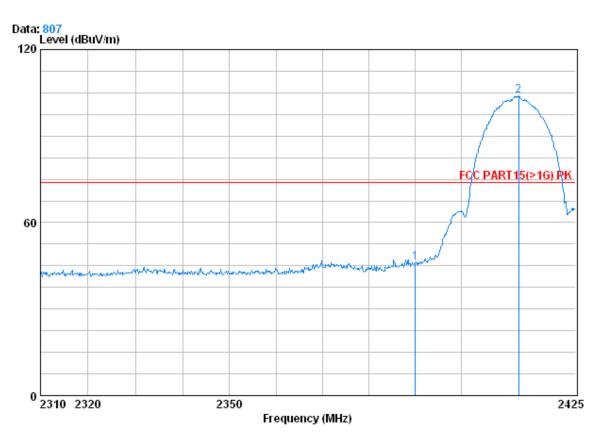

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 0833RF

Mode : 2412 BAND EDGE B


			Cable	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	50.33	45.97	74.00	-28.03
2	0	2412.465	2.99	32.54	39.86	108.18	103.86	74.00	29.86



Report No.: SZEM130200083301

Page: 69 of 82

Worse case mode: 802.11b Test channel: Highest Remark: Peak Vertical

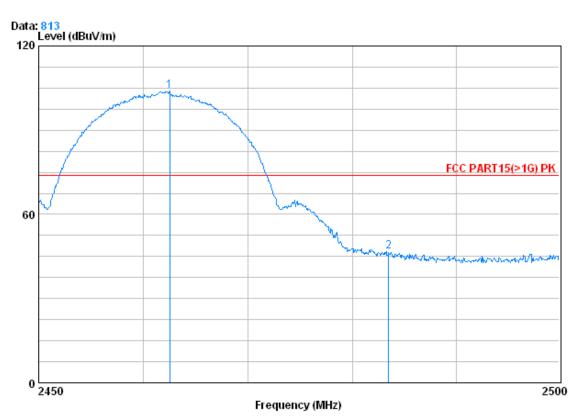

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 0833RF

Mode : 2462 BAND EDGE B

CableAntenna Preamp Read Limit Over Freq Loss Factor Factor Level Level Line Limit MHzdB dB/m dB dBuV dBuV/m dBuV/m dB 74.00 30.13 1 0 2462.500 3.02 32.64 39.91 108.38 104.13 2483.500 3.03 32.67 39.92 50.88 46.66 74.00 -27.34


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130200083301

Page: 70 of 82

Worse case mode: 802.11b Test channel: Highest Remark: Peak Horizontal

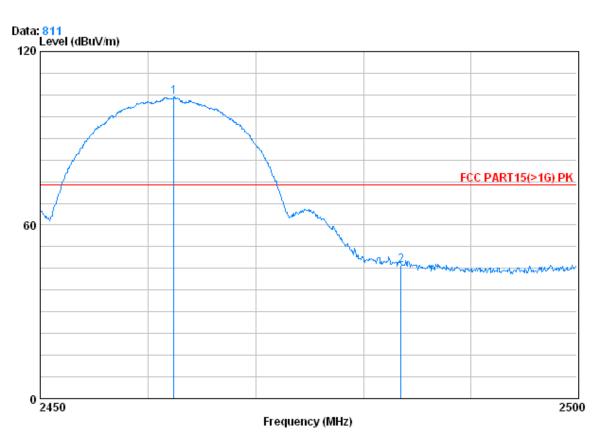

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 0833RF

Mode : 2462 BAND EDGE B

CableAntenna Preamp Read Limit Over Loss Factor Factor Freq Level Level Line Limit MHz dBuV dBuV/m dBuV/m dΒ dB/m dΒ 1 0 2462.350 3.02 32.64 39.91 108.62 104.38 74.00 30.38 2483.500 3.03 32.67 39.92 50.17 45.95 74.00 -28.05


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130200083301

Page: 71 of 82

Worse case mode: 802.11g Test channel: Lowest Remark: Peak Vertical

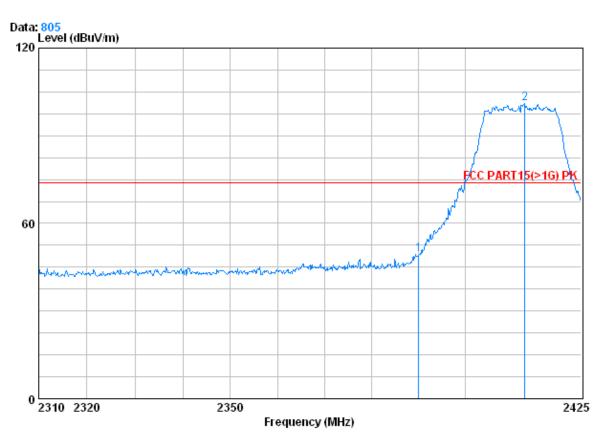

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 0833RF

Mode : 2412 BAND EDGE G

		Cablei	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	53.58	49.22	74.00	-24.78
2 0	2412.810	2.99	32.54	39.86	105.35	101.02	74.00	27.02


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms.e-document.htm">www.sgs.com/terms.e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130200083301

Page: 72 of 82

Worse case mode: 802.11g Test channel: Lowest Remark: Peak Horizontal

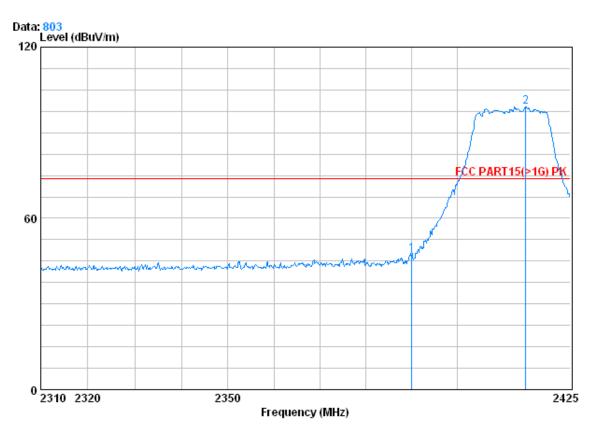

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 0833RF

Mode : 2412 BAND EDGE G

			Cable.	CableAntenna		Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	51.67	47.31	74.00	-26.69
2	X	2415.110	2.99	32.54	39.86	103.47	99.14	74.00	25.14


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms.e-document.htm">www.sgs.com/terms.e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130200083301

Page: 73 of 82

Worse case mode: 802.11g Test channel: Highest Remark: Peak Vertical

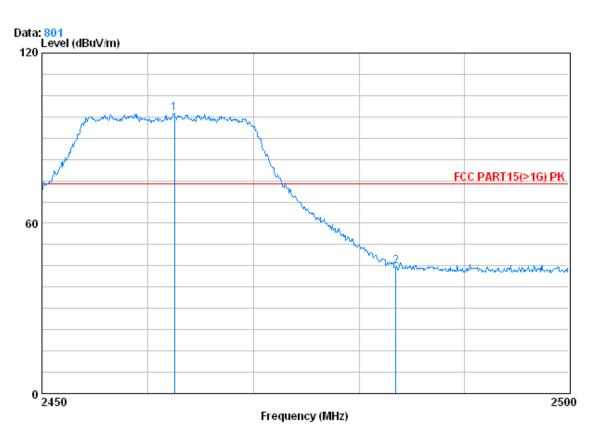

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 0833RF

Mode : 2462 BAND EDGE G


			CableAntenna		Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2462.500	3.02	32.64	39.91	102.96	98.71	74.00	24.71
2		2483.500	3.03	32.67	39.92	49.02	44.80	74.00	-29.20



Report No.: SZEM130200083301

Page: 74 of 82

Worse case mode: 802.11g Test channel: Highest Remark: Peak Horizontal

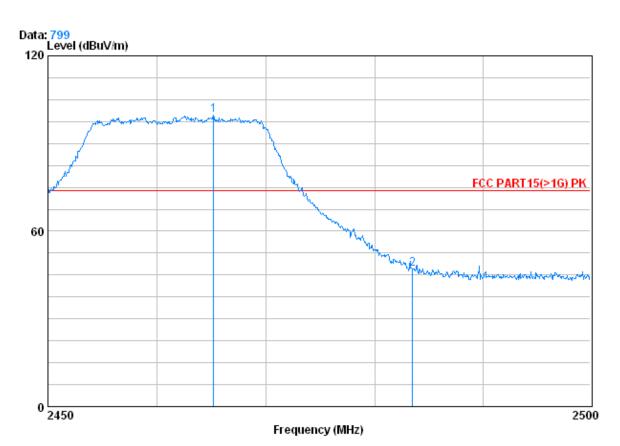

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 0833RF

Mode : 2462 BAND EDGE G

			CableAntenna		Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	0	2465.150	3.02	32.64	39.91	103.90	99.66	74.00	25.66
2		2483.500	3.03	32.67	39.92	51.43	47.21	74.00	-26.79


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms.e-document.htm">www.sgs.com/terms.e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130200083301

Page: 75 of 82

Worse case mode: 802.11n(HT20) Test channel: Lowest Remark: Peak Vertical

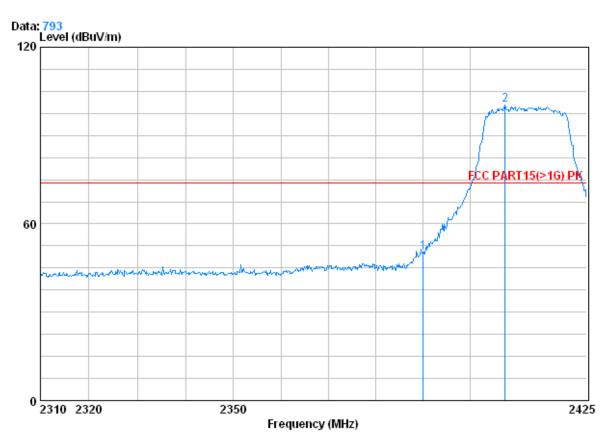

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 0833RF

Mode : 2412 BAND EDGE N(HT20)

		Cable	lntenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 @	2390.000 2407.405			39.85 39.86				






Report No.: SZEM130200083301

Page: 76 of 82

Worse case mode: 802.11n(HT20) Test channel: Lowest Remark: Peak Horizontal

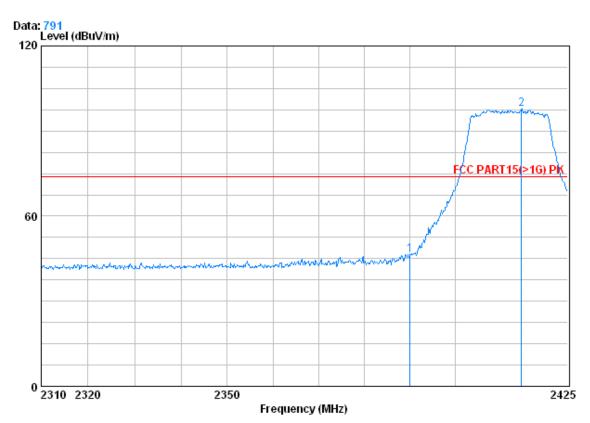

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 0833RF

Mode : 2412 BAND EDGE N(HT20)


			CableAntenna		Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	50.81	46.46	74.00	-27.54
2	X	2414.650	2.99	32.54	39.86	102.05	97.73	74.00	23.73



Report No.: SZEM130200083301

Page: 77 of 82

Worse case mode: 802.11n(HT20) Test channel: Highest Remark: Peak Vertical

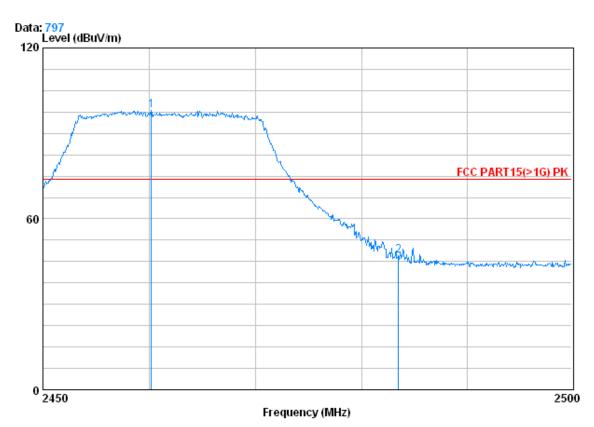

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 0833RF

Mode : 2462 BAND EDGE N(HT20)


			CableAntenna		Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2460.150	3.02	32.64	39.91	102.23	97.98	74.00	23.98
2		2483.500	3.03	32.67	39.92	51.46	47.24	74.00	-26.76



Report No.: SZEM130200083301

Page: 78 of 82

Worse case mode: 802.11n(HT20) Test channel: Highest Remark: Peak Horizontal

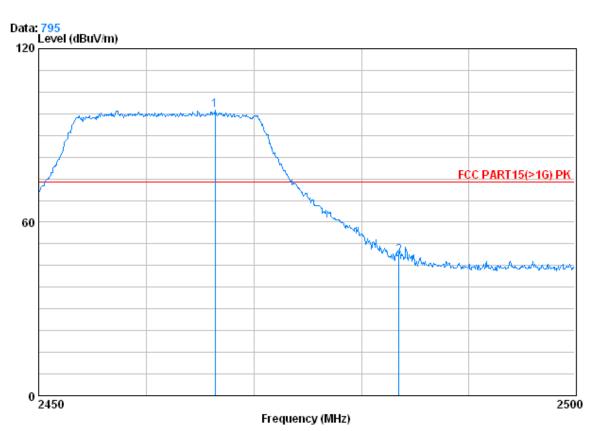

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 0833RF

Mode : 2462 BAND EDGE N(HT20)


~~	~	. 2 102 211112 22 22 11(	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,						
			Cable	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2466.350	3.02	32.64	39.91	102.93	98.69	74.00	24.69
2		2483.500	3.03	32.67	39.92	52.70	48.48	74.00	-25.52



Report No.: SZEM130200083301

Page: 79 of 82

Worse case mode: 802.11n(HT40) Test channel: Lowest Remark: Peak Vertical

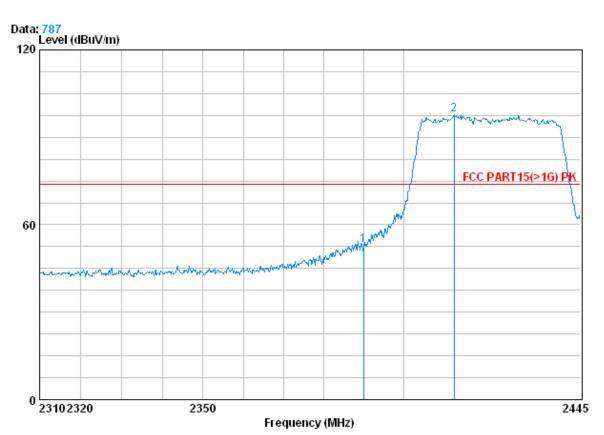

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 0833RF

Mode : 2422 BAND EDGE N(HT40)

	CableAntenna Pres			Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 X	2390.000 2412.870						74.00 74.00	


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms.e-document.htm">www.sgs.com/terms.e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130200083301

Page: 80 of 82

Worse case mode: 802.11n(HT40) Test channel: Lowest Remark: Peak Horizontal

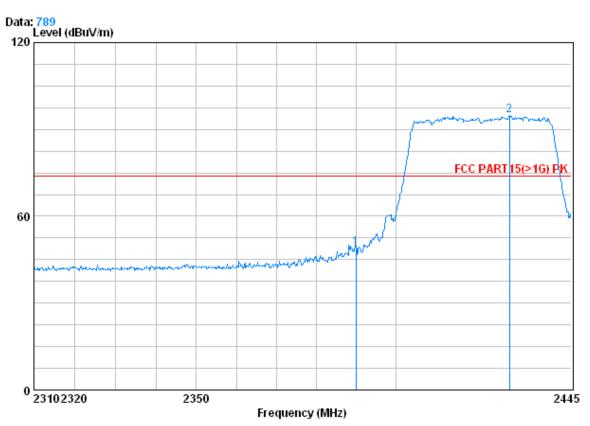

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 0833RF

Mode : 2422 BAND EDGE N(HT40)

			/						
			Cable	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	53.56	49.21	74.00	-24.79
2	X	2429.070	3.00	32.58	39.88	99.04	94.74	74.00	20.74


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130200083301

Page: 81 of 82

Worse case mode: 802.11n(HT40) Test channel: Highest Remark: Peak Vertical

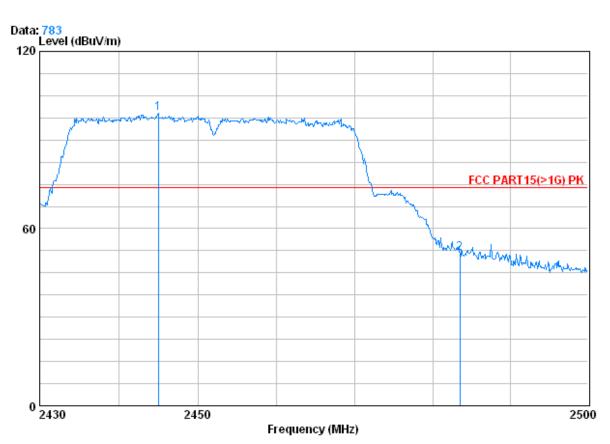

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 0833RF

Mode : 2452 BAND EDGE N(HT40)

			Cable	Antenna	Preamp	Kead		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	0	2444.980 2483.500		32.61 32.67					


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130200083301

Page: 82 of 82

Worse case mode: 802.11n(HT40) Test channel: Highest Remark: Peak Horizontal

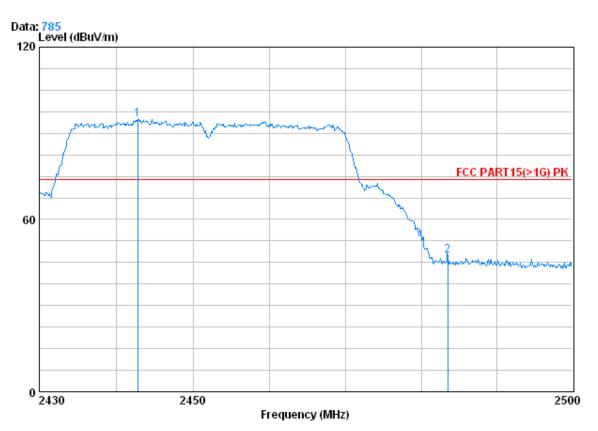

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 0833RF

Mode : 2452 BAND EDGE N(HT40)

		CableAntenna		Preamp Read			Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X 2	2442.810 2483.500			39.89 39.92				

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

 As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.