

Report on the Radio Testing  
For  
Draeger Safety UK Ltd  
on  
Dräger PSS AirBoss Sentinel  
Report no. TRA-051967-47-13B  
2025-06-19

RF916 14.0



0026

Report Number: TRA-051967-47-13B  
Issue: B

REPORT ON THE RADIO TESTING OF A  
Draeger Safety UK Ltd  
Dräger PSS AirBoss Sentinel  
WITH RESPECT TO SPECIFICATION  
FCC 47CFR 15.247

TEST DATE: 2023-04-24 to 2024-03-28 & 2024-07-12

Tested by:



S Garwell, D Winstanley  
Radio Test Engineer's

Written by:



S Garwell  
Radio Test Engineer

Approved by:

John Charters  
Lab Manager

Date: 2025-06-19

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE  
[2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

RF916 14.0



## 1 Revision Record

<i>Issue Number</i>	<i>Issue Date</i>	<i>Revision History</i>
A	2024-05-29	Original
B	2025-06-19	Updated Average channel Occupancy and added duty cycle for hopping over all frequencies used for time averaged power, General updates and corrections throughout document.

## 2 Summary

TEST REPORT NUMBER: TRA-051967-47-13B

WORKS ORDER NUMBER: TRA-051967-21

PURPOSE OF TEST: Certification

TEST SPECIFICATION: 47CFR15.247

EQUIPMENT UNDER TEST (EUT): Dräger PSS AirBoss Sentinel

FCC IDENTIFIER: SIZ-AB001

EUT SERIAL NUMBER: ARTB3784 ARTB 0010 02/24

MANUFACTURER/AGENT: Draeger Safety UK Ltd

ADDRESS: Ullswater Close  
Blyth Riverside Business Park  
Blyth  
NE24 4RG  
United Kingdom

CLIENT CONTACT: Eoghan Quigley  
☎ 01670 352 891  
✉ eoghan.quigley@draeger.com

ORDER NUMBER: 4303193234

TEST DATE: 2023-04-24 to 2024-03-28 & 2024-07-12

TESTED BY: Steven Garwell. Daniel Winstanley  
Element

## 2.1 Test Summary

<b>Test Method and Description</b>	<b>Requirement Clause 47CFR15</b>	<b>Applicable to this equipment</b>	<b>Result / Note</b>
Radiated spurious emissions (restricted bands of operation and cabinet radiation)	15.247(d)	<input checked="" type="checkbox"/>	<i>Pass</i>
AC power line conducted emissions	15.207	<input type="checkbox"/>	<i>Note 1</i>
Carrier frequency separation	15.247 (a) (1)	<input checked="" type="checkbox"/>	<i>Pass</i>
Number of hopping channels	15.247 (a) (1) (i), (ii) and (iii)	<input checked="" type="checkbox"/>	<i>Pass</i>
Average time of occupancy	15.247 (a) (1) (i), (ii) and (iii)	<input checked="" type="checkbox"/>	<i>Pass</i>
Maximum peak conducted output power	15.247 (a) (1), (b)(1) and (b)(2)	<input checked="" type="checkbox"/>	<i>Pass</i>
20 dB emission bandwidth	15.247 (a) (1) (i) and (ii)	<input checked="" type="checkbox"/>	<i>Pass</i>
Out-of-band emissions	15.247(d)	<input checked="" type="checkbox"/>	<i>Pass</i>
Calculation of duty correction	-	<input checked="" type="checkbox"/>	<i>Pass</i>

### Specific note:

1. The EUT is a battery powered device

### General notes:


The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

The decision rule for compliance is not inherent within this specification and compliance is based on the customer requesting a simple acceptance rule based on understanding and acceptance of Elements Measurement Uncertainty values.

**Graphical Representation of a Pass / Fail Binary Statement - Simple Acceptance**

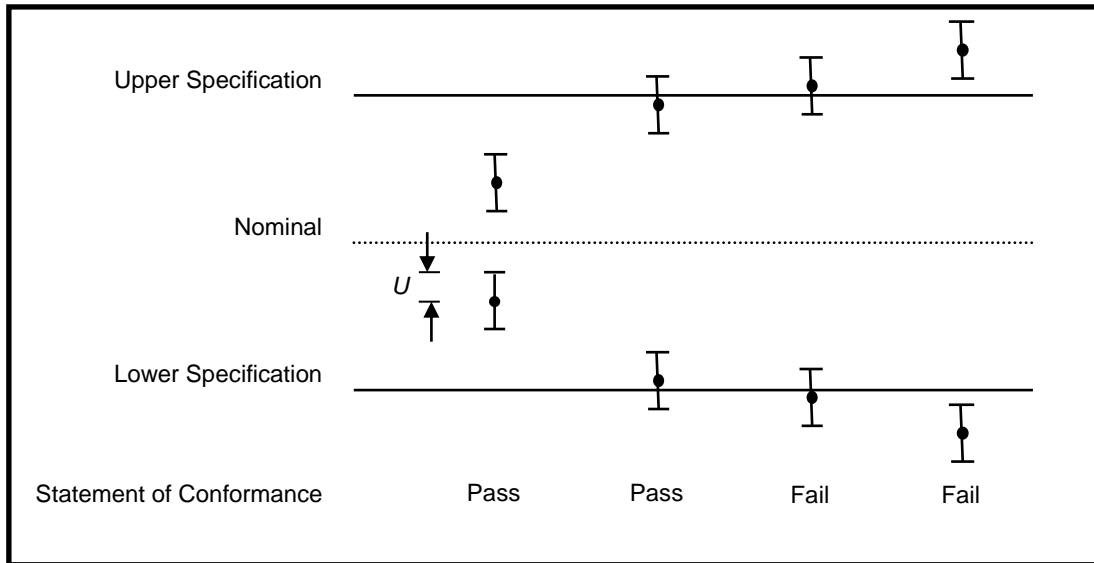

● = Measured value  
 U = 95 % expanded measurement uncertainty

### 3 Contents

1	Revision Record.....	3
2	Summary.....	4
2.1	Test Summary.....	5
3	Contents.....	7
4	Introduction.....	9
5	Test Specifications.....	10
5.1	Normative References.....	10
5.2	Deviations from Test Standards.....	10
6	Glossary of Terms.....	11
7	Equipment under Test.....	12
7.1	EUT Identification.....	12
7.2	System Equipment.....	12
7.3	EUT Mode of Operation.....	12
7.4	EUT Radio Parameters.....	12
7.4.1	General.....	12
7.4.2	Antennas.....	12
7.5	EUT Description.....	12
8	Modifications.....	13
9	EUT Test Setup.....	14
9.1	Block Diagram.....	14
9.2	General Set-up Photograph.....	14
9.3	Measurement software.....	15
10	General Technical Parameters.....	16
10.1	Normal Conditions.....	16
10.2	Varying Test Conditions.....	16
11	Radiated emissions.....	17
11.1	Definitions.....	17
11.2	Test Parameters.....	17
11.3	Test Limit.....	17
11.4	Test Method.....	18
11.5	Test Equipment.....	19
11.6	Test Results.....	20
12	Carrier frequency separation.....	28
12.1	Definition.....	28
12.2	Test Parameters.....	28
12.3	Test Limit.....	28
12.4	Test Method.....	29
12.5	Test Equipment.....	29
12.6	Test Results.....	30
13	Number of hopping frequencies.....	31
13.1	Definition.....	31
13.2	Test Parameters.....	31
13.3	Test Limit.....	31
13.4	Test Method.....	32
13.5	Test Equipment.....	32
13.6	Test Results.....	33
14	Average channel occupancy.....	34
14.1	Definition.....	34
14.2	Test Parameters.....	34
14.3	Test Limit.....	34
14.4	Test Method.....	35
14.5	Test Equipment.....	35
14.6	Test Results.....	36
15	Maximum peak conducted output power.....	37
15.1	Definition.....	37
15.2	Test Parameters.....	37
15.3	Test Limit.....	37
15.4	Test Method.....	38
15.5	Test Equipment.....	38
15.6	Test Results.....	39
16	Occupied Bandwidth.....	40
16.1	Definition.....	40
16.2	Test Parameters.....	40
16.3	Test Limit.....	40
16.4	Test Method.....	41

16.5	Test Equipment .....	41
16.6	Test Results – 20 dB Occupied Channel Bandwidth .....	42
17	Out-of-band and conducted spurious emissions .....	43
17.1	Definition .....	43
17.2	Test Parameters.....	43
17.3	Test Limits.....	43
17.4	Test Method .....	44
17.5	Test Equipment .....	44
17.6	Test Results .....	45
18	Duty Cycle.....	51
18.1	Definition .....	51
18.2	Test Parameters.....	51
18.3	Test Limit.....	51
18.4	Test Method .....	52
18.5	Test Equipment .....	52
18.6	Test Results .....	53
19	Measurement Uncertainty .....	54



## 4 Introduction

This report TRA-051967-47-13B presents the results of the Radio testing on a Draeger Safety UK Ltd, Dräger PSS AirBoss Sentinel to specification 47CFR15 Radio Frequency Devices.

The testing was carried out for Draeger Safety UK Ltd by Element, at the address detailed below.

<input checked="" type="checkbox"/>	Element Skelmersdale Unit 1 Pendle Place Skelmersdale West Lancashire WN8 9PN UK	<input type="checkbox"/>	Element Surrey Hills Unit 15 B Henley Business Park Pirbright Road Normandy Guildford GU3 2DX UK
-------------------------------------	--	--------------------------	---

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

Throughout this report EUT denotes equipment under test.

FCC Site Listing:

The test laboratory is accredited for the above sites under the following US-UK MRA, Designation numbers.

Element Skelmersdale                      UK2020

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

## **5 Test Specifications**

### **5.1 Normative References**

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

### **5.2 Deviations from Test Standards**

There were no deviations from the test standard.

## 6 Glossary of Terms

<b>§</b>	denotes a section reference from the standard, not this document
<b>AC</b>	Alternating Current
<b>ANSI</b>	American National Standards Institute
<b>BW</b>	bandwidth
<b>C</b>	Celsius
<b>CFR</b>	Code of Federal Regulations
<b>CW</b>	Continuous Wave
<b>dB</b>	decibel
<b>dBm</b>	dB relative to 1 milliwatt
<b>DC</b>	Direct Current
<b>DSSS</b>	Direct Sequence Spread Spectrum
<b>EIRP</b>	Equivalent Isotropically Radiated Power
<b>ERP</b>	Effective Radiated Power
<b>EUT</b>	Equipment Under Test
<b>FCC</b>	Federal Communications Commission
<b>FHSS</b>	Frequency Hopping Spread Spectrum
<b>Hz</b>	hertz
<b>IC</b>	Industry Canada
<b>ITU</b>	International Telecommunication Union
<b>LBT</b>	Listen Before Talk
<b>m</b>	metre
<b>max</b>	maximum
<b>MIMO</b>	Multiple Input and Multiple Output
<b>min</b>	minimum
<b>MRA</b>	Mutual Recognition Agreement
<b>N/A</b>	Not Applicable
<b>PCB</b>	Printed Circuit Board
<b>PDF</b>	Portable Document Format
<b>Pt-mpt</b>	Point-to-multipoint
<b>Pt-pt</b>	Point-to-point
<b>RF</b>	Radio Frequency
<b>RH</b>	Relative Humidity
<b>RMS</b>	Root Mean Square
<b>Rx</b>	receiver
<b>s</b>	second
<b>SVSWR</b>	Site Voltage Standing Wave Ratio
<b>Tx</b>	transmitter
<b>UKAS</b>	United Kingdom Accreditation Service
<b>V</b>	volt
<b>W</b>	watt
<b>Ω</b>	ohm

## 7 Equipment under Test

### 7.1 EUT Identification

- Name: Dräger PSS AirBoss Sentinel
- Serial Number: ARTB3784 ARTB 0010 02/24
- Model Number: 3722330
- Software Revision: V6
- Build Level / Revision Number: Rev 02
- FCC ID: SIZ-AB001

### 7.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

1. Laptop Computer – Dell Latitude E6410

### 7.3 EUT Mode of Operation

The EUT was transmitting on the frequencies as indicated, the frequencies where programmed using Hterm 0.8.5 software which was supplied on a test laptop.

### 7.4 EUT Radio Parameters

#### 7.4.1 General

<b>Frequencies of operation:</b>	902.25 MHz to 907.15 MHz
<b>Modulation type:</b>	4-GFSK
<b>Occupied channel bandwidth:</b>	100 kHz
<b>Channel spacing:</b>	100 kHz
<b>Declared output power:</b>	≤ 27 dBm
<b>Nominal Supply Voltage:</b>	7.5 V dc via 5 x AA Alkaline batteries
<b>Duty cycle:</b>	81.9 %

#### 7.4.2 Antennas

<b>Type:</b>	PCB printed Inverted F
<b>Frequency range:</b>	902 MHz to 914 MHz
<b>Gain:</b>	-1.61 dBi maximum

### 7.5 EUT Description

The EUT is an Open circuit breathing apparatus with compressed air cylinder used for Fire Fighting.

This report covers the testing of the 900 MHz radio only.


## **8 Modifications**

No modifications were performed during this assessment.

## 9 EUT Test Setup


### 9.1 Block Diagram

The following diagram shows basic EUT interconnections with cable type and cable lengths identified:

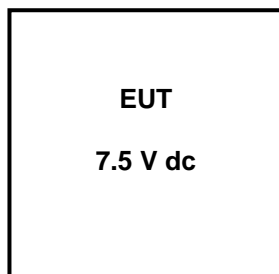

### 9.2 General Set-up Photograph

The following photograph shows basic EUT set-up:

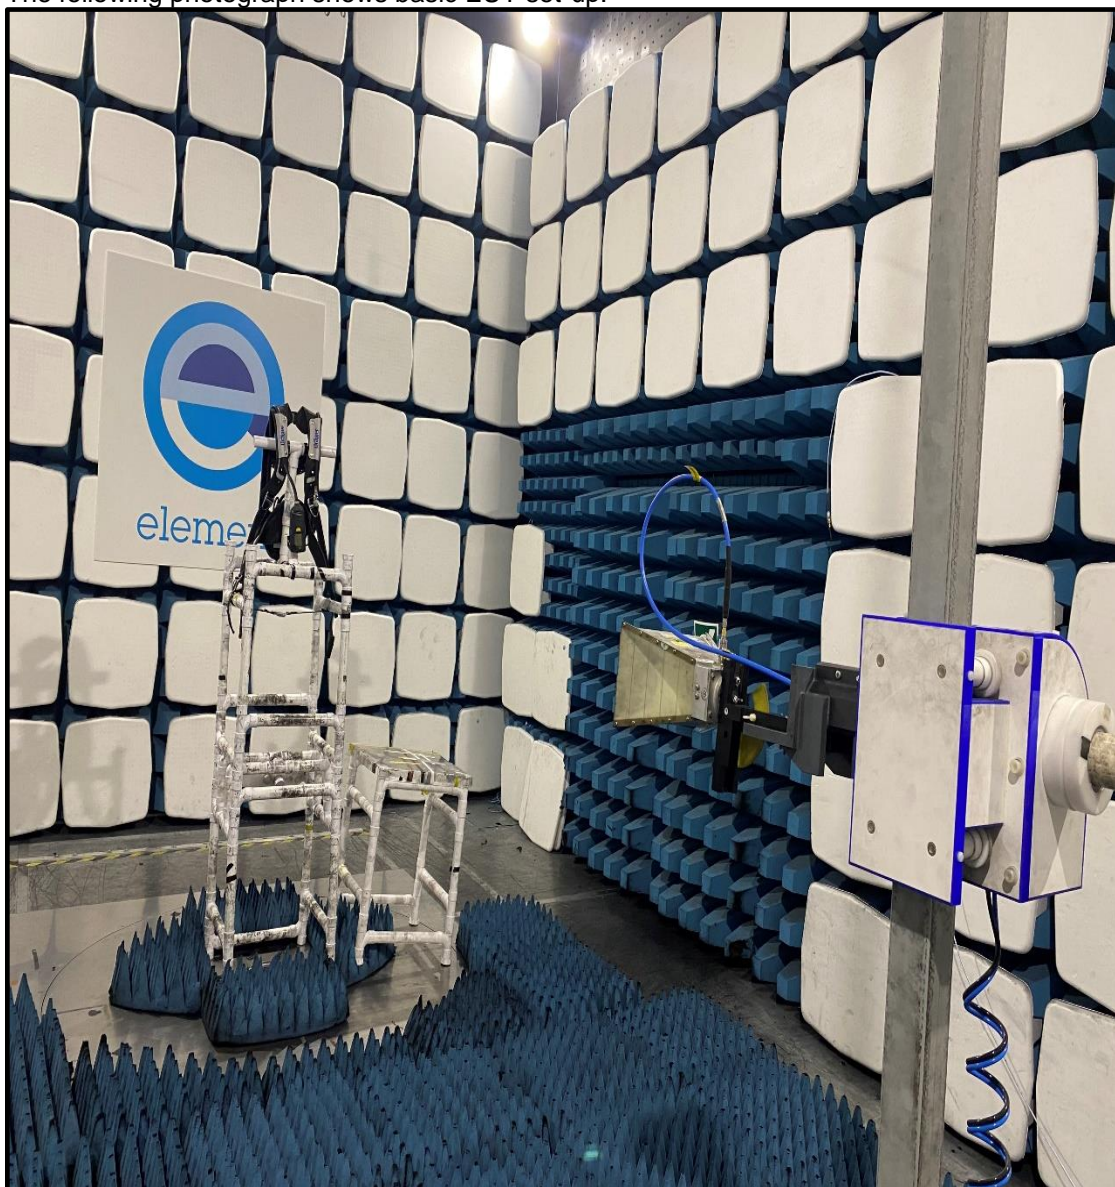

### **9.3 Measurement software**

Where applicable, the following software was used to perform measurements contained within this report.

Element Emissions R5  
Element Transmitter Bench Test  
ETS Lindgren EMPower V1.0.4.2

## 10 General Technical Parameters

### 10.1 Normal Conditions

The E U T was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was 7.5 V dc via 5 x AA Alkaline batteries.

### 10.2 Varying Test Conditions

There are no specific frequency stability requirements for the type of device. The results contained in this report demonstrate that the occupied bandwidth is contained within the authorised band.

Variation of supply voltage is required to ensure stability of the declared output power. During carrier power testing the following variations were made:

	<b>Category</b>	<b>Nominal</b>	<b>Variation</b>
<input type="checkbox"/>	Mains	110 Vac +/-2 %	85 % and 115 %
<input checked="" type="checkbox"/>	Battery	New battery	N/A



## 11 Radiated emissions

### 11.1 Definitions

#### *Spurious emissions*

Emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

#### *Restricted bands*

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

### 11.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Chamber 1
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5 and 6.6
EUT Frequencies Measured:	902.25 MHz, 907.15 MHz
Deviations from Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz; Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak; Above 1 GHz: RMS average and Peak

### Environmental Conditions (Normal Environment)

Temperature: +21 °C	+15 °C to +35 °C (as declared)
Humidity: 38 % RH	20 % RH to 75 % RH (as declared)
Supply: 7.5 V dc	7.5 V dc (as declared)

### 11.3 Test Limit

Unwanted emissions that fall within the restricted frequency bands shall comply with the limits specified:

#### General Field Strength Limits for License-Exempt Transmitters at Frequencies above 30 MHz

<i>Frequency (MHz)</i>	<i>Field Strength (µV/m at 3 m)</i>	<i>Field Strength (dBµV/m at 3 m)</i>
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

On frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function. On frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit.

## 11.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure i, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dB $\mu$ V/m at the regulatory distance, using:

$$FS = PR + CL + AF - PA + DC - CF$$

$$\text{Factor} = CL + AF - PA$$

Where,

PR is the power recorded on the receiver / spectrum analyzer in dB $\mu$ V;

CL is the cable loss in dB;

AF is the test antenna factor in dB/m;


PA is the pre-amplifier gain in dB (where used);

DC is the duty correction factor in dB (where used, e.g. harmonics of pulsed fundamental);

CF is the distance factor in dB (where measurement distance different to limit distance);

This field strength value is then compared with the regulatory limit.

**Figure i Test Setup**


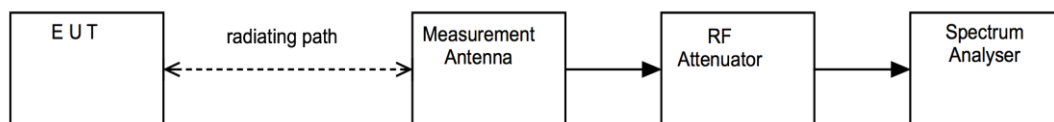


**11.5 Test Equipment**


<b>Test equipment use date: 2024-03-24 to 2024-03-28</b>				
<b>Equipment Description</b>	<b>Manufacturer</b>	<b>Equipment Type</b>	<b>Element No</b>	<b>Due For Calibration</b>
Spectrum Analyser	R&S	FSU46	REF910	2025-01-30
Bilog	Chase	CBL611/B	U573	2024-10-14
Pre Amp	AMETEK	LNA6901	U711	2024-04-12
1-18GHz Horn	EMCO	3115	L139	2024-07-01
Horn 18-26GHz (&U330)	Flann	20240-20	L300	2024-06-30
Pre Amp	Agilent	8449B	L572	2024-10-30
High Pass Filter	Atlantic Microwave	AFH-07000	U558	2025-02-15
Chamber 1	Rainford EMC	ATS	U387	2026-01-24
Radiated Test Software	Element	Emissions R5	REF9000	Cal Not Required

### 11.6 Test Results


902.25 MHz; Bottom Channel; Power setting: 60 Constant TX; Antenna 1

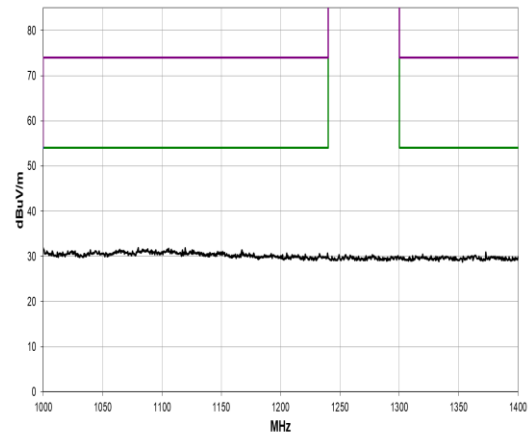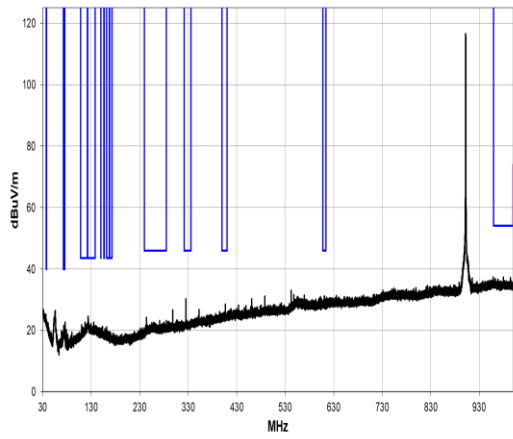

30 MHz to 1 GHz

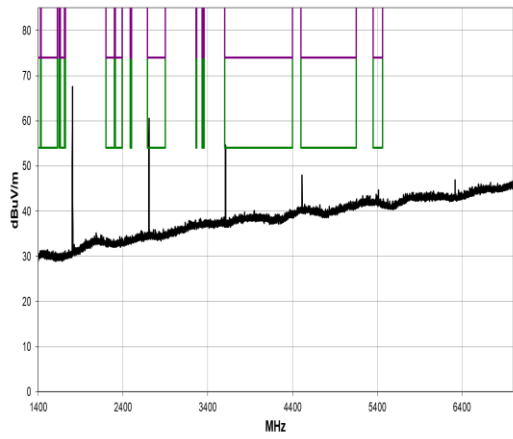

1 GHz to 1.4 GHz


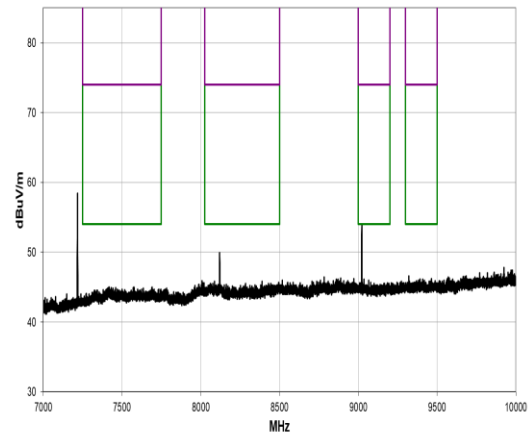


1.4 GHz to 7 GHz


7 GHz to 10 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
2706.792	64.1	-2.5	2.26	17.1	-18.0	0.0	Horz	AV	0.0	43.6	54.0	-10.4
2706.833	60.2	-2.5	1.46	19.1	-18.0	0.0	Vert	AV	0.0	39.7	54.0	-14.3
3609.083	56.6	0.9	1.85	108.0	-18.0	0.0	Vert	AV	0.0	39.5	54.0	-14.5
4510.958	50.3	3.7	1.6	18.1	-18.0	0.0	Horz	AV	0.0	36.0	54.0	-18.0
5413.342	47.0	6.5	1.7	326.0	-18.0	0.0	Horz	AV	0.0	35.5	54.0	-18.5
3608.875	52.5	0.9	1.84	107.1	-18.0	0.0	Horz	AV	0.0	35.4	54.0	-18.6
5413.050	46.8	6.5	1.7	54.9	-18.0	0.0	Vert	AV	0.0	35.3	54.0	-18.7
4511.500	49.0	3.7	1.7	87.1	-18.0	0.0	Vert	AV	0.0	34.7	54.0	-19.3
9022.367	50.9	8.4	1.7	125.1	-18.0	0.0	Horz	AV	0.0	41.3	54.0	-12.7
9022.383	49.5	8.4	1.77	351.1	-18.0	0.0	Vert	AV	0.0	39.9	54.0	-14.1
8120.567	49.1	8.7	1.67	217.8	-18.0	0.0	Horz	AV	0.0	39.8	54.0	-14.2
8120.400	48.4	8.7	1.7	44.9	-18.0	0.0	Vert	AV	0.0	39.1	54.0	-14.9
2706.792	64.1	-2.5	2.26	17.1		0.0	Horz	PK	0.0	61.6	74.0	-12.4
2706.833	60.2	-2.5	1.46	19.1		0.0	Vert	PK	0.0	57.7	74.0	-16.3
3609.083	56.6	0.9	1.85	108.0		0.0	Vert	PK	0.0	57.5	74.0	-16.5
4510.958	50.3	3.7	1.6	18.1		0.0	Horz	PK	0.0	54.0	74.0	-20.0
5413.342	47.0	6.5	1.7	326.0		0.0	Horz	PK	0.0	53.5	74.0	-20.5
3608.875	52.5	0.9	1.84	107.1		0.0	Horz	PK	0.0	53.4	74.0	-20.6
5413.050	46.8	6.5	1.7	54.9		0.0	Vert	PK	0.0	53.3	74.0	-20.7
4511.500	49.0	3.7	1.7	87.1		0.0	Vert	PK	0.0	52.7	74.0	-21.3
9022.367	50.9	8.4	1.7	125.1		0.0	Horz	PK	0.0	59.3	74.0	-14.7
9022.383	49.5	8.4	1.77	351.1		0.0	Vert	PK	0.0	57.9	74.0	-16.1
8120.567	49.1	8.7	1.67	217.8		0.0	Horz	PK	0.0	57.8	74.0	-16.2
8120.400	48.4	8.7	1.7	44.9		0.0	Vert	PK	0.0	57.1	74.0	-16.9


907.15 MHz; Top Channel; Power setting: 60 Constant TX; Antenna 1

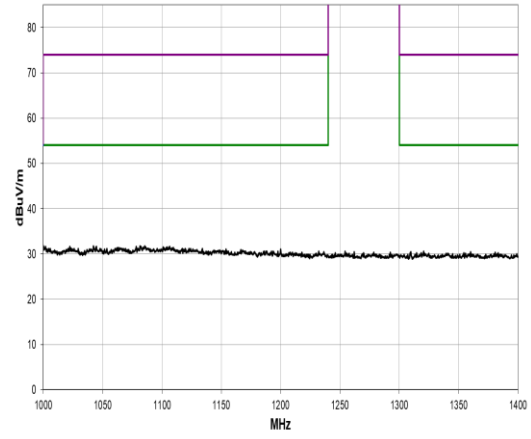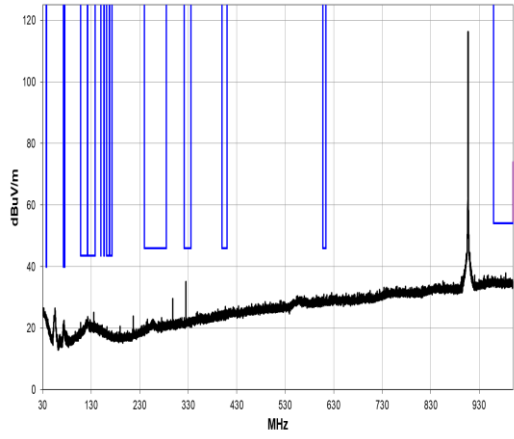

30 MHz to 1 GHz

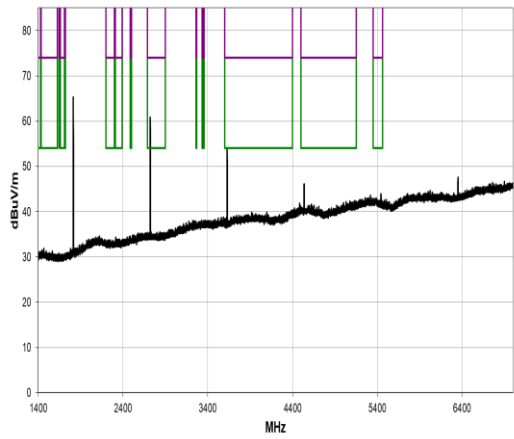

1 GHz to 1.4 GHz


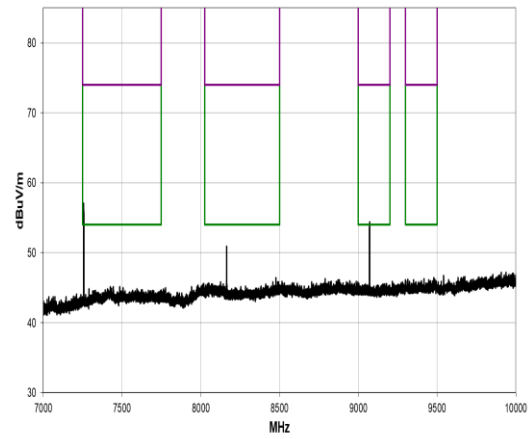


1.4 GHz to 7 GHz


7 GHz to 10 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
2721.475	64.4	-2.5	1.7	20.2	-18.0	0.0	Horz	AV	0.0	43.9	54.0	-10.1
2721.358	60.5	-2.5	1.39	17.1	-18.0	0.0	Vert	AV	0.0	40.0	54.0	-14.0
3628.433	56.5	1.0	1.95	90.1	-18.0	0.0	Horz	AV	0.0	39.5	54.0	-14.5
3628.550	55.4	1.0	1.51	106.1	-18.0	0.0	Vert	AV	0.0	38.4	54.0	-15.6
4535.683	50.3	3.8	1.53	316.1	-18.0	0.0	Horz	AV	0.0	36.1	54.0	-17.9
5443.058	47.1	6.5	1.7	56.2	-18.0	0.0	Vert	AV	0.0	35.6	54.0	-18.4
5442.500	46.8	6.5	1.8	15.9	-18.0	0.0	Horz	AV	0.0	35.3	54.0	-18.7
4535.558	49.1	3.8	1.7	225.0	-18.0	0.0	Vert	AV	0.0	34.9	54.0	-19.1
7256.967	53.6	8.1	1.88	100.9	-18.0	0.0	Horz	AV	0.0	43.7	54.0	-10.3
9071.408	51.3	8.4	1.76	340.1	-18.0	0.0	Vert	AV	0.0	41.7	54.0	-12.3
9071.375	50.4	8.4	1.81	350.9	-18.0	0.0	Horz	AV	0.0	40.8	54.0	-13.2
7257.092	50.6	8.1	1.81	350.9	-18.0	0.0	Vert	AV	0.0	40.7	54.0	-13.3
8164.633	49.3	8.5	1.7	217.9	-18.0	0.0	Horz	AV	0.0	39.8	54.0	-14.2
8164.092	48.5	8.5	1.7	44.9	-18.0	0.0	Vert	AV	0.0	39.0	54.0	-15.0
2721.475	64.4	-2.5	1.7	20.2		0.0	Horz	PK	0.0	61.9	74.0	-12.1
2721.358	60.5	-2.5	1.39	17.1		0.0	Vert	PK	0.0	58.0	74.0	-16.0
3628.433	56.5	1.0	1.95	90.1		0.0	Horz	PK	0.0	57.5	74.0	-16.5
3628.550	55.4	1.0	1.51	106.1		0.0	Vert	PK	0.0	56.4	74.0	-20.0
4535.683	50.3	3.8	1.53	316.1		0.0	Horz	PK	0.0	54.1	74.0	-20.5
5443.058	47.1	6.5	1.7	56.2		0.0	Vert	PK	0.0	53.6	74.0	-20.6
5442.500	46.8	6.5	1.8	15.9		0.0	Horz	PK	0.0	53.3	74.0	-20.7
4535.558	49.1	3.8	1.7	225.0		0.0	Vert	PK	0.0	52.9	74.0	-21.3
7256.967	53.6	8.1	1.88	100.9		0.0	Horz	PK	0.0	61.7	74.0	-12.3
9071.408	51.3	8.4	1.76	340.1		0.0	Horz	PK	0.0	59.7	74.0	-14.3
9071.375	50.4	8.4	1.81	350.9		0.0	Vert	PK	0.0	58.8	74.0	-15.2
7257.092	50.6	8.1	1.81	350.9		0.0	Vert	PK	0.0	58.7	74.0	-15.3
8164.633	49.3	8.5	1.7	217.9		0.0	Horz	PK	0.0	57.8	74.0	-16.2
8164.092	48.5	8.5	1.7	44.9		0.0	Vert	PK	0.0	57.0	74.0	-17.0


902.25 MHz; Bottom Channel; Power setting: 60 Constant TX; Antenna 2

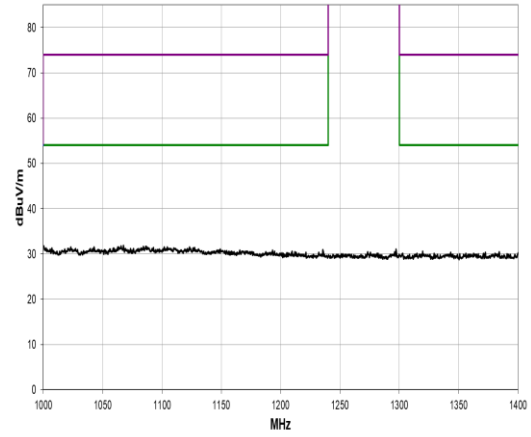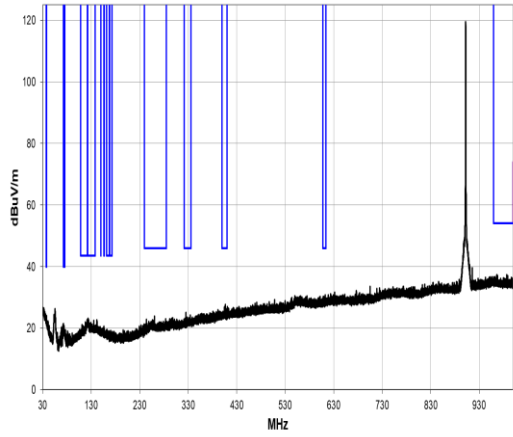

30 MHz to 1 GHz

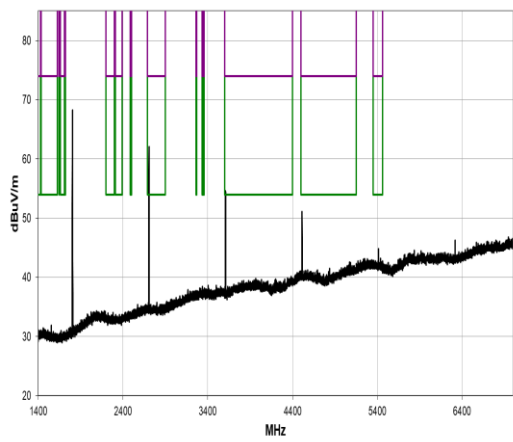

1 GHz to 1.4 GHz

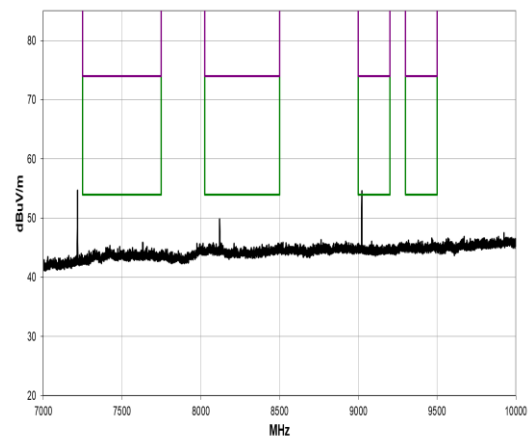



1.4 GHz to 7 GHz

7 GHz to 10 GHz




Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Duty cycle Correction factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
2706.675	65.6	-2.5	1.76	19.9	-18.0	0.0	Horz	AV	0.0	45.1	54.0	-8.9
2706.675	61.7	-2.5	1.32	13.1	-18.0	0.0	Vert	AV	0.0	41.2	54.0	-12.8
3609.117	56.9	0.9	2.59	239.9	-18.0	0.0	Horz	AV	0.0	39.8	54.0	-14.2
3609.008	56.4	0.9	1.7	109.9	-18.0	0.0	Vert	AV	0.0	39.3	54.0	-14.7
4511.425	53.5	3.7	2.4	93.0	-18.0	0.0	Horz	AV	0.0	39.2	54.0	-14.8
4510.983	50.7	3.7	1.7	89.1	-18.0	0.0	Vert	AV	0.0	36.4	54.0	-17.6
5413.692	46.7	6.5	1.7	24.2	-18.0	0.0	Horz	AV	0.0	35.2	54.0	-18.8
5413.792	46.7	6.5	1.7	59.1	-18.0	0.0	Vert	AV	0.0	35.2	54.0	-18.8
9022.392	51.7	8.4	1.69	124.1	-18.0	0.0	Horz	AV	0.0	42.1	54.0	-11.9
9022.742	49.7	8.4	1.75	352.1	-18.0	0.0	Vert	AV	0.0	40.1	54.0	-13.9
8120.417	48.9	8.7	1.63	14.9	-18.0	0.0	Horz	AV	0.0	39.6	54.0	-14.4
8120.450	48.8	8.7	1.7	286.1	-18.0	0.0	Vert	AV	0.0	39.5	54.0	-14.5
2706.708	65.6	-2.5	1.76	19.9		0.0	Horz	PK	0.0	63.1	74.0	-10.9
2706.733	61.7	-2.5	1.32	13.1		0.0	Vert	PK	0.0	59.2	74.0	-14.8
3609.075	56.9	0.9	2.59	239.9		0.0	Horz	PK	0.0	57.8	74.0	-16.2
3609.108	56.4	0.9	1.7	109.9		0.0	Vert	PK	0.0	57.3	74.0	-16.7
4511.242	53.5	3.7	2.4	93.0		0.0	Horz	PK	0.0	57.2	74.0	-16.8
4511.367	50.7	3.7	1.7	89.1		0.0	Vert	PK	0.0	54.4	74.0	-19.6
5413.617	46.7	6.5	1.7	24.2		0.0	Horz	PK	0.0	53.2	74.0	-20.8
5413.933	46.7	6.5	1.7	59.1		0.0	Vert	PK	0.0	53.2	74.0	-20.8
9022.608	51.7	8.4	1.69	124.1		0.0	Horz	PK	0.0	60.1	74.0	-13.9
9022.492	49.7	8.4	1.75	352.1		0.0	Vert	PK	0.0	58.1	74.0	-15.9
8120.300	48.9	8.7	1.63	14.9		0.0	Vert	PK	0.0	57.6	74.0	-16.4
8120.042	48.8	8.7	1.7	286.1		0.0	Horz	PK	0.0	57.5	74.0	-16.5


907.15 MHz; Top Channel; Power setting: 60 Constant TX; Antenna 2

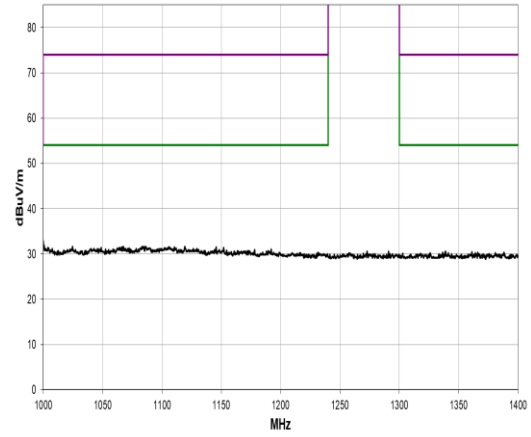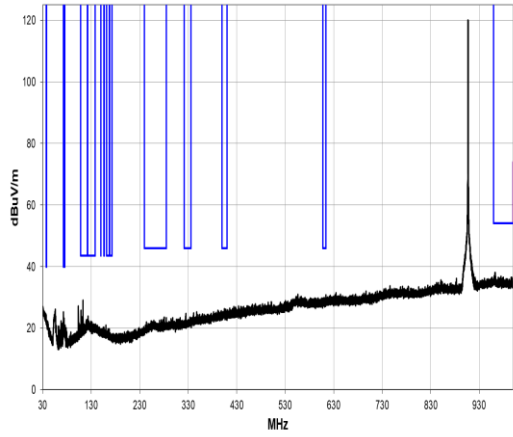

30 MHz to 1 GHz

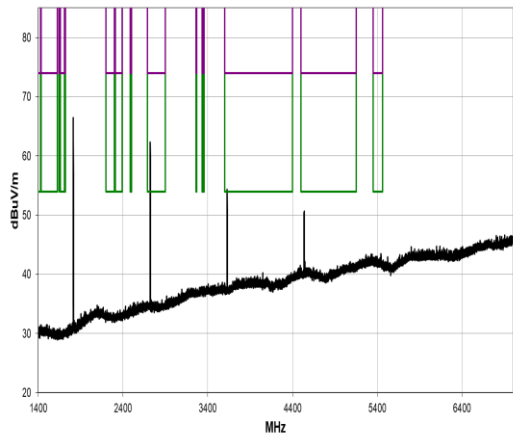

1 GHz to 1.4 GHz

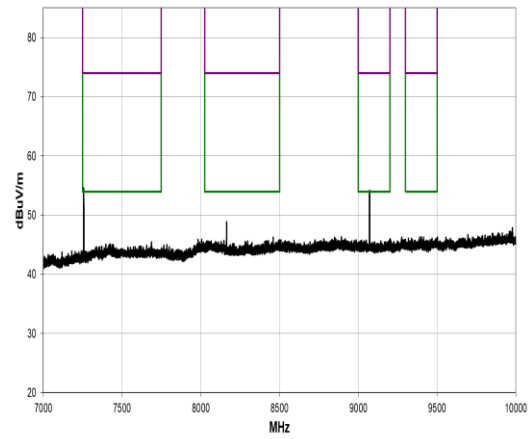

1.4 GHz to 7 GHz

7 GHz to 10 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Duty cycle Correction factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
2721.325	65.3	-2.5	1.7	21.9	-18.0	0.0	Horz	AV	0.0	44.8	54.0	-9.2
2721.458	61.2	-2.5	1.39	18.1	-18.0	0.0	Vert	AV	0.0	40.7	54.0	-13.3
3628.633	55.5	1.0	1.7	102.1	-18.0	0.0	Vert	AV	0.0	38.5	54.0	-15.5
4535.667	52.6	3.8	2.16	93.9	-18.0	0.0	Horz	AV	0.0	38.4	54.0	-15.6
3628.592	55.0	1.0	1.95	106.2	-18.0	0.0	Horz	AV	0.0	38.0	54.0	-16.0
5442.892	46.7	6.5	1.95	9.2	-18.0	0.0	Horz	AV	0.0	35.2	54.0	-18.8
4535.650	49.3	3.8	1.7	87.1	-18.0	0.0	Vert	AV	0.0	35.1	54.0	-18.9
5442.583	46.2	6.5	1.88	61.2	-18.0	0.0	Vert	AV	0.0	34.7	54.0	-19.3
7257.125	51.6	8.1	1.88	99.0	-18.0	0.0	Horz	AV	0.0	41.7	54.0	-12.3
9071.550	50.3	8.4	1.56	338.1	-18.0	0.0	Horz	AV	0.0	40.7	54.0	-13.3
7257.183	49.5	8.4	1.76	345.9	-18.0	0.0	Vert	AV	0.0	39.9	54.0	-14.1
9071.317	49.3	8.1	1.84	349.8	-18.0	0.0	Vert	AV	0.0	39.4	54.0	-14.6
8164.333	48.3	8.5	1.7	12.9	-18.0	0.0	Vert	AV	0.0	38.8	54.0	-15.2
8164.217	48.2	8.5	1.7	281.9	-18.0	0.0	Horz	AV	0.0	38.7	54.0	-15.3
2721.325	65.3	-2.5	1.7	21.9		0.0	Horz	PK	0.0	62.8	74.0	-11.2
2721.458	61.2	-2.5	1.39	18.1		0.0	Vert	PK	0.0	58.7	74.0	-15.3
3628.633	55.5	1.0	1.7	102.1		0.0	Vert	PK	0.0	56.5	74.0	-17.5
4535.667	52.6	3.8	2.16	93.9		0.0	Horz	PK	0.0	56.4	74.0	-17.6
3628.592	55.0	1.0	1.95	106.2		0.0	Horz	PK	0.0	56.0	74.0	-18.0
5442.892	46.7	6.5	1.95	9.2		0.0	Horz	PK	0.0	53.2	74.0	-20.8
4535.650	49.3	3.8	1.7	87.1		0.0	Vert	PK	0.0	53.1	74.0	-20.9
5442.583	46.2	6.5	1.88	61.2		0.0	Vert	PK	0.0	52.7	74.0	-21.3
7256.950	51.6	8.1	1.88	99.0		0.0	Horz	PK	0.0	59.7	74.0	-14.3
9071.500	50.3	8.4	1.56	338.1		0.0	Horz	PK	0.0	58.7	74.0	-15.3
9071.517	49.5	8.4	1.76	345.9		0.0	Vert	PK	0.0	57.9	74.0	-16.1
7257.158	49.3	8.1	1.84	349.8		0.0	Vert	PK	0.0	57.4	74.0	-16.6
8164.300	48.3	8.5	1.7	12.9		0.0	Vert	PK	0.0	56.8	74.0	-17.2
8164.200	48.2	8.5	1.7	281.9		0.0	Horz	PK	0.0	56.7	74.0	-17.3

## 12 Carrier frequency separation

### 12.1 Definition

The carrier frequency separation is the frequency separation between two adjacent hopping frequencies.

### 12.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio :Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.2
EUT Frequencies Measured:	All; 902.25 MHz – 907.15 MHz
EUT Test Modulations:	Internal pattern generation – hopping enabled
Deviations From Standard:	None
Measurement BW:	1 kHz / 10 kHz
Measurement Detector:	Peak

### Environmental Conditions (Normal Environment)

Temperature: +22 °C	+15 °C to +35 °C (as declared)
Humidity: 34 % RH	20 % RH to 75 % RH (as declared)
Supply: 7.5 V dc	7.5 V dc (as declared)

### 12.3 Test Limit


For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

**12.4 Test Method**

With the EUT setup as per section 9 of this report and connected as per Figure iii, the emissions of the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each nominal bandwidth.

**Figure iii Test Setup**

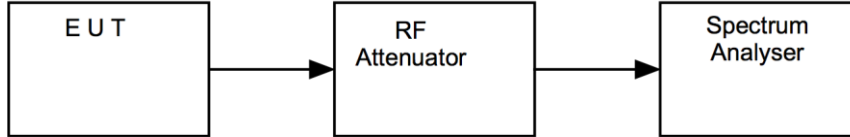


**12.5 Test Equipment**

Test equipment use date: 2023-04-24				
<i>Equipment Type</i>	<i>Manufacturer</i>	<i>Equipment Description</i>	<i>Element No</i>	<i>Due For Calibration</i>
EMI Receiver	R&S	ESR26	U489	2024-10-11
Attenuator	AtlanTecRF Microwave	20dB SMA Attenuator	U632	Cal in use
Attenuator	AtlanTecRF Microwave	6dB SMA Attenuator	U635	Cal in use

12.6 Test Results


Antenna 1; Modulation: 4-GFSK; Power Setting: 60			
$F_{1c}$ (MHz)	$F_{2c}$ (MHz)	Channel Separation, $F_{2c} - F_{1c}$ (kHz)	Result
904.64993	904.74993	100	Pass

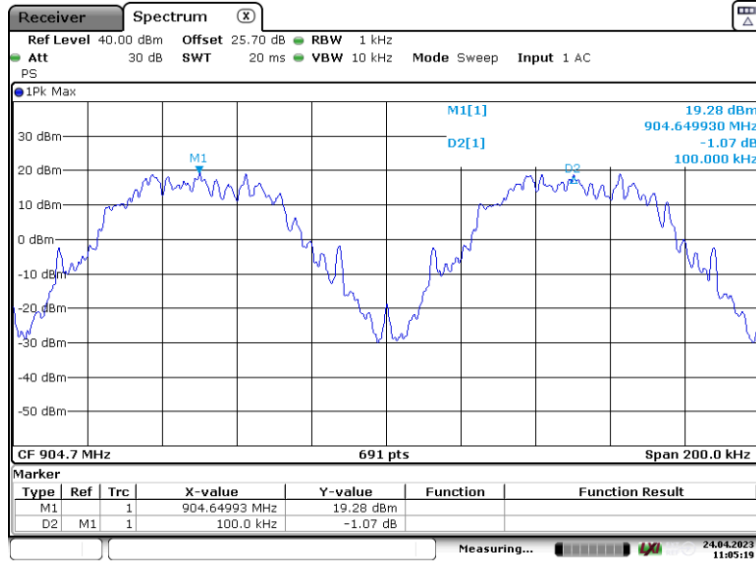

Date: 24.APR.2023 11:05:19

902.25 MHz to 907.15 MHz – All Hopping

Antenna 2; Modulation: FM; Power Setting: 60			
$F_{1c}$ (MHz)	$F_{2c}$ (MHz)	Channel Separation, $F_{2c} - F_{1c}$ (kHz)	Result
904.64993	904.74993	100	Pass

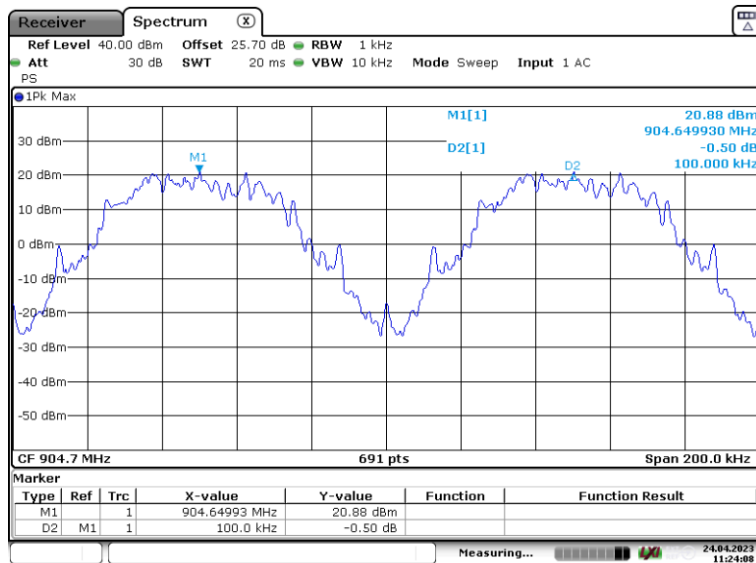

Date: 24.APR.2023 11:24:08

902.25 MHz to 907.15 MHz – All Hopping

## 13 Number of hopping frequencies

### 13.1 Definition

The total number of hopping frequencies (the centre frequencies defined within the hopping sequence of a FHSS equipment) which are randomly sequenced in order to spread the transmission.

### 13.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.3
EUT Frequencies Measured:	All; 902.25 MHz to 907.15 MHz
EUT Test Modulations:	Internal pattern generation – hopping enabled
Deviations From Standard:	None
Measurement BW:	30 kHz / 100 kHz
Measurement Detector:	Peak

### Environmental Conditions (Normal Environment)

Temperature: +22 °C	+15 °C to +35 °C (as declared)
Humidity: 33 % RH	20 % RH to 75 % RH (as declared)
Supply: 7.5 V dc	7.5 V dc (as declared)

### 13.3 Test Limit


- For frequency hopping systems in the band 902 to 928 MHz: if the -20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels;  
If the -20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels;
- Frequency hopping systems operating in the band 2400 to 2483.5 MHz shall use at least 15 hopping channels;
- Frequency hopping systems operating in the band 5725 to 5850 MHz shall use at least 75 hopping channels.

**13.4 Test Method**

With the EUT setup as per section 9 of this report and connected as per Figure iv, the emissions of the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each nominal bandwidth.

**Figure iv Test Setup**

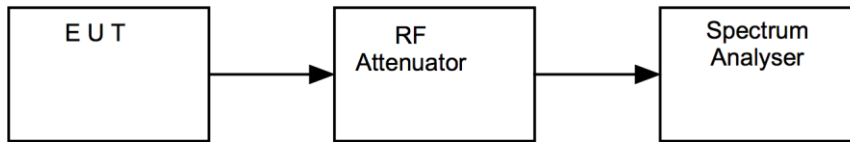


**13.5 Test Equipment**

Test equipment use date: 2023-04-24				
<i>Equipment Type</i>	<i>Manufacturer</i>	<i>Equipment Description</i>	<i>Element No</i>	<i>Due For Calibration</i>
EMI Receiver	R&S	ESR26	U489	2024-10-11
Attenuator	AtlanTecRF Microwave	20dB SMA Attenuator	U632	Cal in use
Attenuator	AtlanTecRF Microwave	6dB SMA Attenuator	U635	Cal in use




13.6 Test Results

Antenna: 1; Modulation: 4-GFSK; Power setting: 60			
Lowest channel, $F_{CL}$ (MHz)	Highest channel, $F_{CH}$ (MHz)	Number of channels observed	Result
902.25	907.15	50	Pass

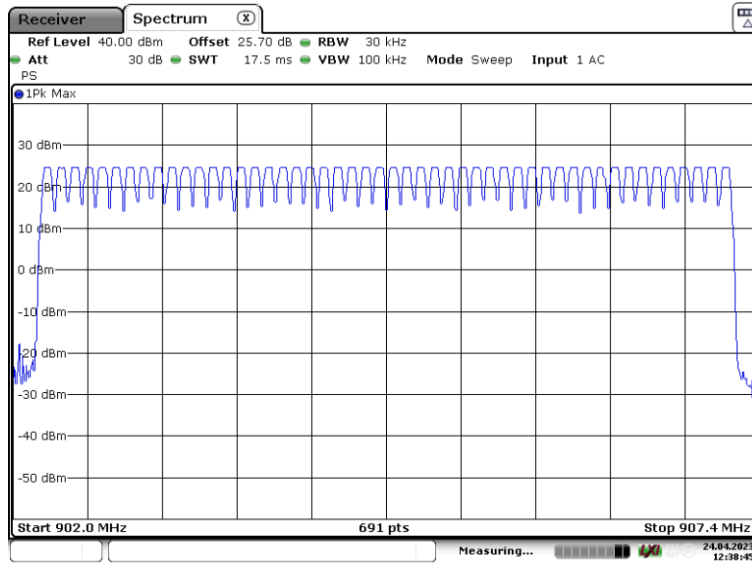

902.25 MHz to 907.15 MHz – All Hopping

Antenna: 2; Modulation: 4-GFSK; Power setting: 60			
Lowest channel, $F_{CL}$ (MHz)	Highest channel, $F_{CH}$ (MHz)	Number of channels observed	Result
902.25	907.15	50	Pass

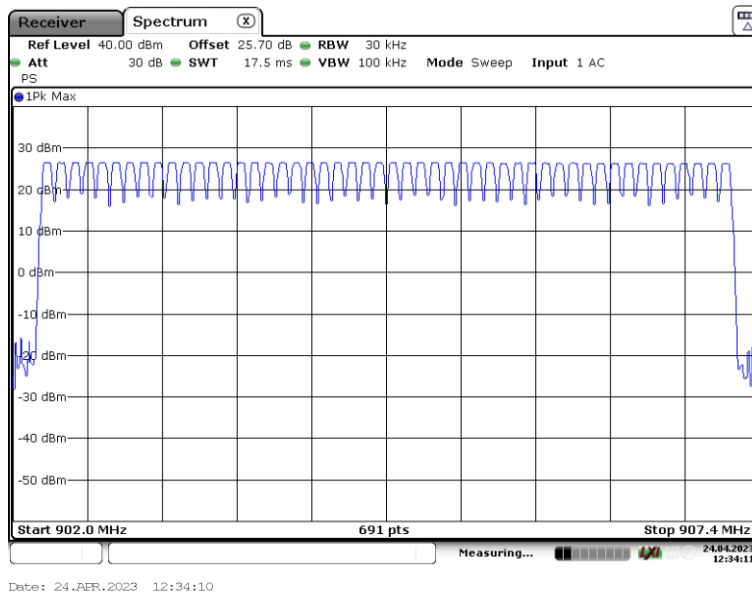

902.25 MHz to 907.15 MHz – All Hopping

## 14 Average channel occupancy

### 14.1 Definition

The channel occupancy is the total of the transmitter 'on' times, during an observation period, on a particular hopping frequency.

### 14.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.4
EUT Frequencies Measured:	902.25 MHz
EUT Number of hopping channels:	50
EUT Test Modulations:	Internal pattern generation – hopping enabled
Deviations From Standard:	None
Measurement BW:	100 kHz / 300 kHz
Measurement Detector:	Peak

### Environmental Conditions (Normal Environment)

Temperature: +22 °C	+15 °C to +35 °C (as declared)
Humidity: 31 % RH	20 % RH to 75 % RH (as declared)
Supply: 7.5 V dc	7.5 V dc (as declared)

### 14.3 Test Limit


- For frequency hopping systems in the band 902 to 928 MHz: if the -20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20 second period; If the -20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10 second period;
- Frequency hopping systems operating in the band 2400 to 2483.5 MHz: The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed;
- Frequency hopping systems operating in the band 5725 to 5850 MHz: The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

#### 14.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure v, the emissions of the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. A number of hops were observed to confirm consistency of the dwell time / observe the worst case. All modulation schemes, data rates and power settings were used to observe the worst-case configuration.

**Figure v Test Setup**

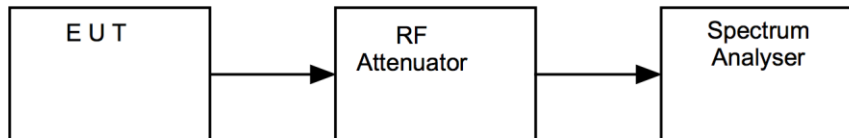


#### 14.5 Test Equipment

<i>Test equipment use date: 2023-04-24 to 2024-03-28</i>				
<i>Equipment Type</i>	<i>Manufacturer</i>	<i>Equipment Description</i>	<i>Element No</i>	<i>Due For Calibration</i>
EMI Receiver	R&S	ESR26	U489	2024-10-11
Attenuator	AtlanTecRF Microwave	20dB SMA Attenuator	U632	Cal in use
Attenuator	AtlanTecRF Microwave	6dB SMA Attenuator	U635	Cal in use


<i>Test equipment use date: 2024-07-12</i>				
<i>Equipment Type</i>	<i>Manufacturer</i>	<i>Equipment Description</i>	<i>Element No</i>	<i>Due For Calibration</i>
Spectrum Analyser	R&S	FSU26	U405	2025-06-07

14.6 Test Results

Antenna 1: Modulation: 4-GFSK; Power setting: 60				
Individual occupancy time (ms)	Observation period (s)	Number of hops observed	Average time of occupancy (s)	Result
12.484615	20	14	0.17478461	Pass

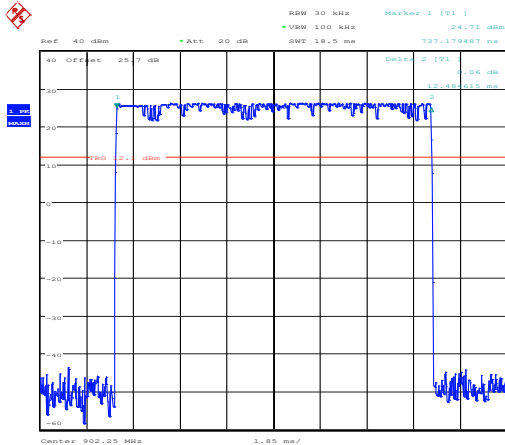


Tx on (All Hopping)

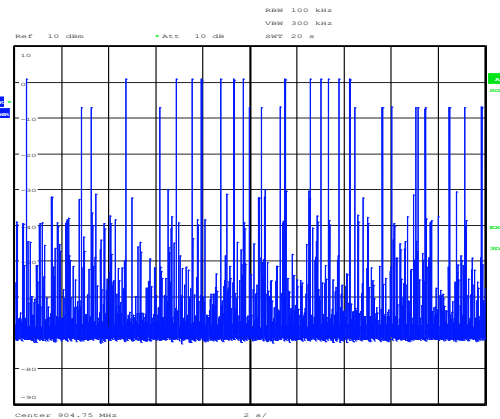


Number of transmissions during observation period

Number of transmissions during observation period measurement Made on 12<sup>th</sup> July 2024

Antenna 2: Modulation: 4-GFSK; Power setting: 60				
Individual occupancy time (ms)	Observation period (s)	Number of hops observed	Average time of occupancy (s)	Result
12.484615	20	14	0.17478461	Pass

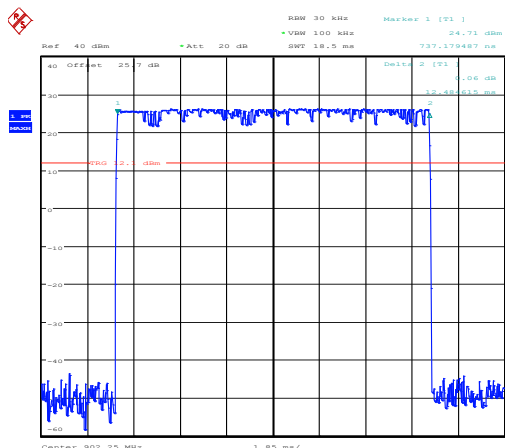

Tx on (All Hopping)

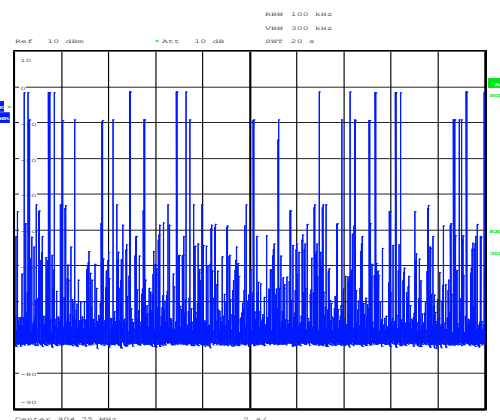

Number of transmissions during observation period

Number of transmissions during observation period measurement Made on 12<sup>th</sup> July 2024

## 15 Maximum peak conducted output power

### 15.1 Definition

The maximum peak conducted output power is defined as the maximum power level measured with a peak detector using a filter with width and shape of which is sufficient to accept the signal bandwidth.

### 15.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.5
EUT Frequencies Measured:	902.25 MHz, 907.15 MHz – hopping disabled.
Deviations From Standard:	None
Measurement BW:	200 kHz
Spectrum Analyzer Video BW:	1 MHz
Measurement Detector:	Peak
Voltage Extreme Environment Test Range:	Battery Power = new battery.

### Environmental Conditions (Normal Environment)

Temperature: +22 °C	+15 °C to +35 °C (as declared)
Humidity: 37 % RH	20 % RH to 75 % RH (as declared)

### 15.3 Test Limit


- For frequency hopping systems operating in the band 902 to 928 MHz, the maximum peak conducted output power shall not exceed 1 W, and the e.i.r.p. shall not exceed 4 W, if the hopset uses 50 or more hopping channels; the maximum peak conducted output power shall not exceed 0.25 W, and the e.i.r.p. shall not exceed 1 W, if the hopset uses less than 50 hopping channels.
- For frequency hopping systems operating in the band 2400 to 2483.5 MHz and employing at least 175 hopping channels, the maximum peak conducted output power shall not exceed 1 W; for all other frequency hopping systems in the band, the maximum peak conducted output power shall not exceed 0.125 W. The e.i.r.p. shall not exceed 4 W.
- For frequency hopping systems operating in the band 5725 to 5850 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W.
- Point-to-point systems in the bands 2400-2483.5 MHz and 5725 to 5850 MHz are permitted to have an e.i.r.p. higher than 4 W provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers.

**15.4 Test Method**

With the EUT setup as per section 9 of this report and connected as per Figure vi, the resolution bandwidth of the spectrum analyser was increased above the EUT occupied bandwidth and the peak emission data noted.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

**Figure vi Test Setup**

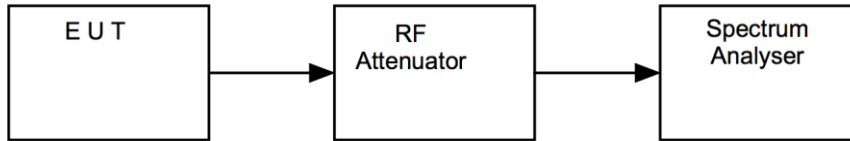


**15.5 Test Equipment**


<b>Test equipment use date: 2023-04-24</b>				
<b>Equipment Type</b>	<b>Manufacturer</b>	<b>Equipment Description</b>	<b>Element No</b>	<b>Due For Calibration</b>
EMI Receiver	R&S	ESR26	U489	2024-10-11
Attenuator	AtlanTecRF Microwave	20dB SMA Attenuator	U632	Cal in use
Attenuator	AtlanTecRF Microwave	6dB SMA Attenuator	U635	Cal in use

15.6 Test Results

Antenna: 1; Modulation: 4-GFSK; Power Setting: 60			
Frequency (MHz)	Maximum peak conducted output power		Result
	(dBm)	(W)	
902.25	24.47	0.2799	Pass
907.15	24.56	0.2858	Pass

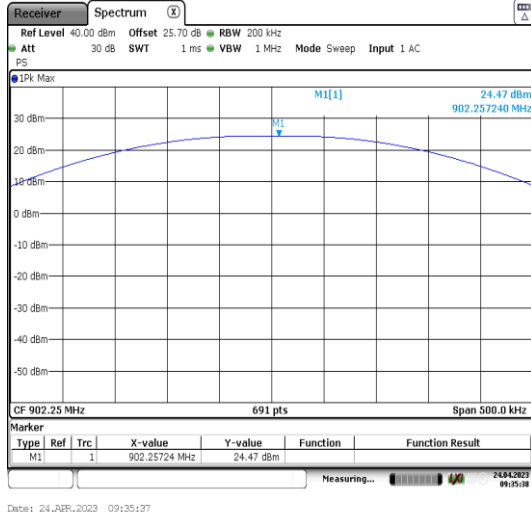


902.25 MHz

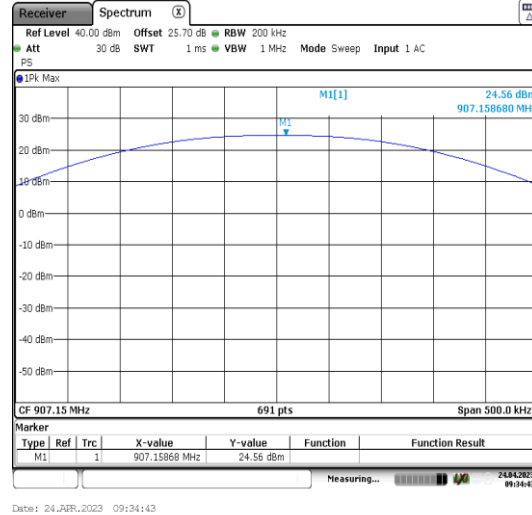


907.15 MHz

Antenna: 2; Modulation: 4-GFSK; Power Setting: 60			
Frequency (MHz)	Maximum peak conducted output power		Result
	(dBm)	(W)	
902.25	26.01	0.3990	Pass
907.15	26.17	0.4140	Pass

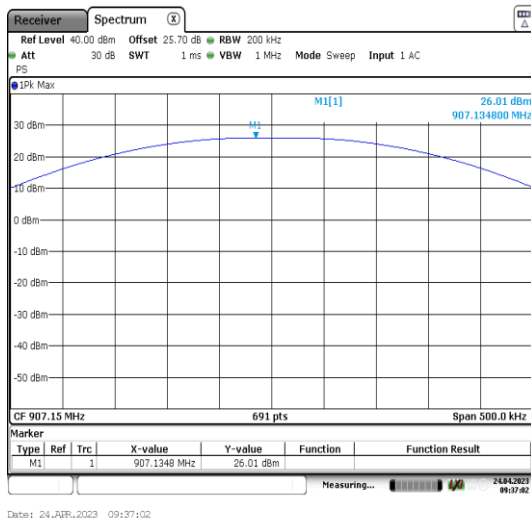

902.25 MHz

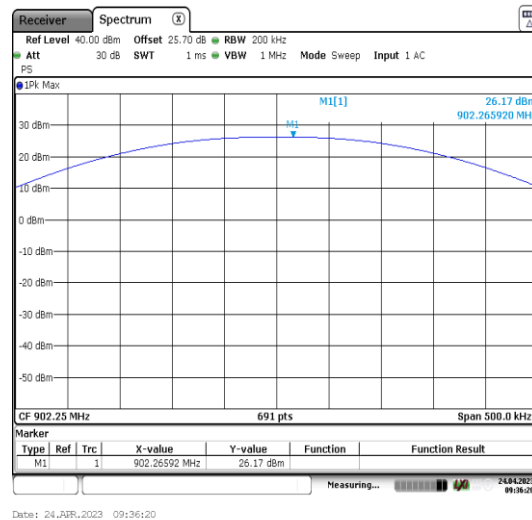

907.15 MHz

## 16 Occupied Bandwidth

### 16.1 Definition

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

### 16.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.9
EUT Frequencies Measured:	902.25 MHz, 907.15 MHz – hopping stopped.
EUT Test Modulations:	4-GFSK
Deviations From Standard:	None
Measurement BW: (requirement: 1 % to 5 % OBW)	1 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	10 kHz
Measurement Span: (requirement 2 to 5 times OBW)	110 kHz
Measurement Detector:	Peak

### Environmental Conditions (Normal Environment)

Temperature: +22 °C	+15 °C to +35 °C (as declared)
Humidity: 37.9 % RH	20 % RH to 75 % RH (as declared)
Supply: 7.5 V dc	7.5 V dc (as declared)

### 16.3 Test Limit

- For frequency hopping systems in the band 902 to 928 MHz: The maximum allowed -20 dB bandwidth of the hopping channel is 500 kHz.
- Frequency hopping systems operating in the band 5725 to 5850 MHz: The maximum -20 dB bandwidth of the hopping channel shall be 1 MHz




**16.4 Test Method**

With the EUT setup as per section 9 of this report and connected as per Figure vii, the bandwidth of the EUT was measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

**Figure vii Test Setup**

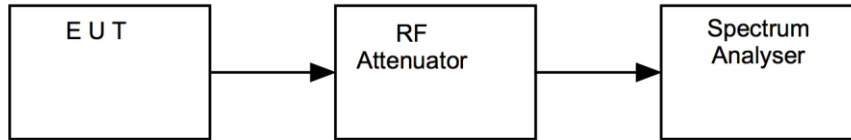


**16.5 Test Equipment**


Test equipment used date: 2023-04-24				
<i>Equipment Type</i>	<i>Manufacturer</i>	<i>Equipment Description</i>	<i>Element No</i>	<i>Due For Calibration</i>
EMI Receiver	R&S	ESR26	U489	2024-10-11
Attenuator	AtlanTecRF Microwave	20dB SMA Attenuator	U632	Cal in use
Attenuator	AtlanTecRF Microwave	6dB SMA Attenuator	U635	Cal in use

16.6 Test Results – 20 dB Occupied Channel Bandwidth

20 dB Occupied Channel Bandwidth; Modulation: 4-GFSK; Power setting: 60; Antenna 1				
Channel Frequency (MHz)	$F_L$ (MHz)	$F_H$ (MHz)	20dB Bandwidth (kHz)	Result
902.25	902.219910	902.279770	59.860	Pass
907.15	907.119590	907.179450	59.860	Pass

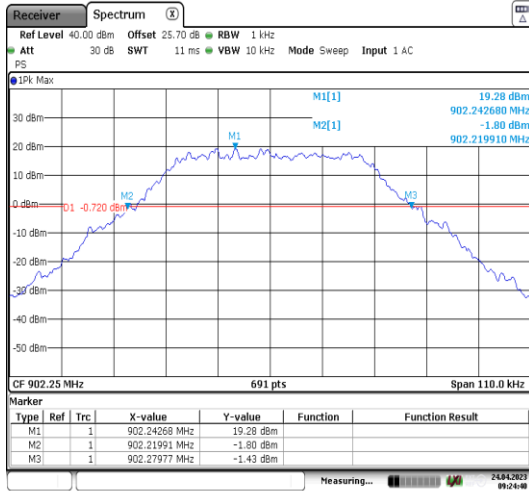


902.25 MHz

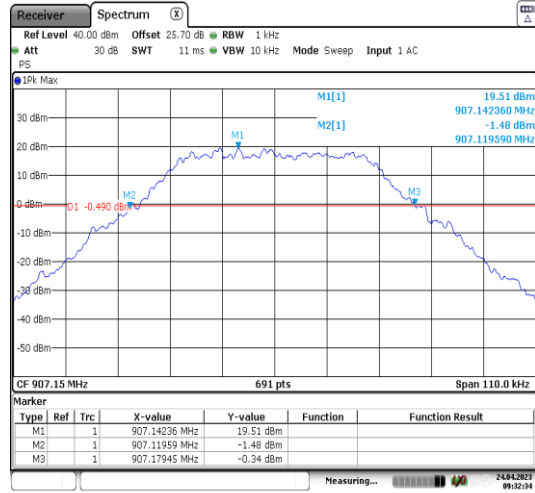


907.15 MHz

20 dB Occupied Channel Bandwidth; Modulation: 4-GFSK; Power setting: 60; Antenna 2				
Channel Frequency (MHz)	$F_L$ (MHz)	$F_H$ (MHz)	20dB Bandwidth (kHz)	Result
902.25	902.219913	902.279770	59.857	Pass
907.15	907.119913	907.179770	59.857	Pass

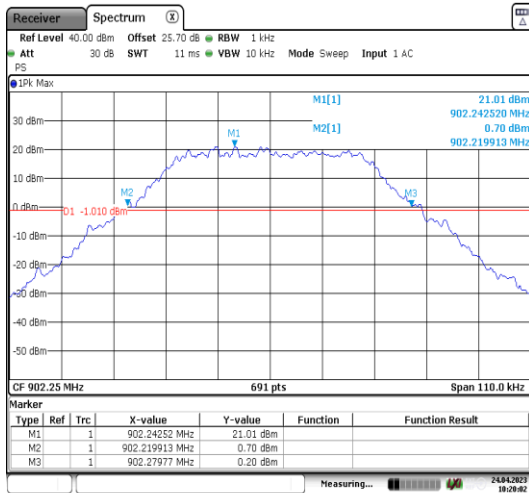

902.25 MHz

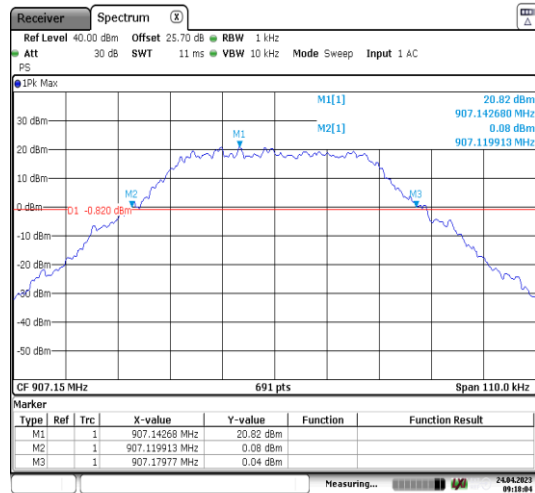

907.15 MHz

## 17 Out-of-band and conducted spurious emissions

### 17.1 Definition

#### *Out-of-band emission.*

Emission on a frequency or frequencies immediately outside the necessary bandwidth that results from the modulation process but excluding spurious emissions.

#### *Spurious emission.*

Emission on a frequency or frequencies that are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products, and frequency conversion products, but exclude out-of-band emissions.

### 17.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.8
EUT Frequencies Measured:	902.25 MHz, 907.15 MHz
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	300 kHz
Measurement Detector:	Peak
Measurement Range:	9 kHz to 10 GHz

### Environmental Conditions (Normal Environment)

Temperature: +22 °C	+15 °C to +35 °C (as declared)
Humidity: 33 % RH	20 % RH to 75 % RH (as declared)
Supply: 7.5 V dc	7.5 V dc (as declared)

### 17.3 Test Limits


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in FCC 47CFR15.209(a) / RSS-Gen is not required.

### 17.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure viii, the emissions from the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.



**Figure viii Test Setup**

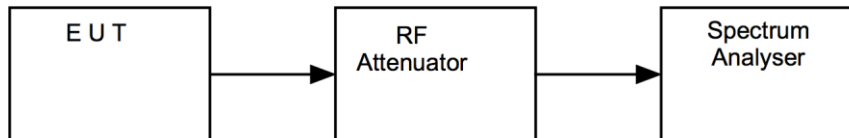


### 17.5 Test Equipment

Test equipment use date: 2023-04-24				
<i>Equipment Type</i>	<i>Manufacturer</i>	<i>Equipment Description</i>	<i>Element No</i>	<i>Due For Calibration</i>
EMI Receiver	R&S	ESR26	U489	2024-10-11
Attenuator	AtlanTecRF Microwave	20dB SMA Attenuator	U632	Cal in use
Attenuator	AtlanTecRF Microwave	6dB SMA Attenuator	U635	Cal in use


17.6 Test Results

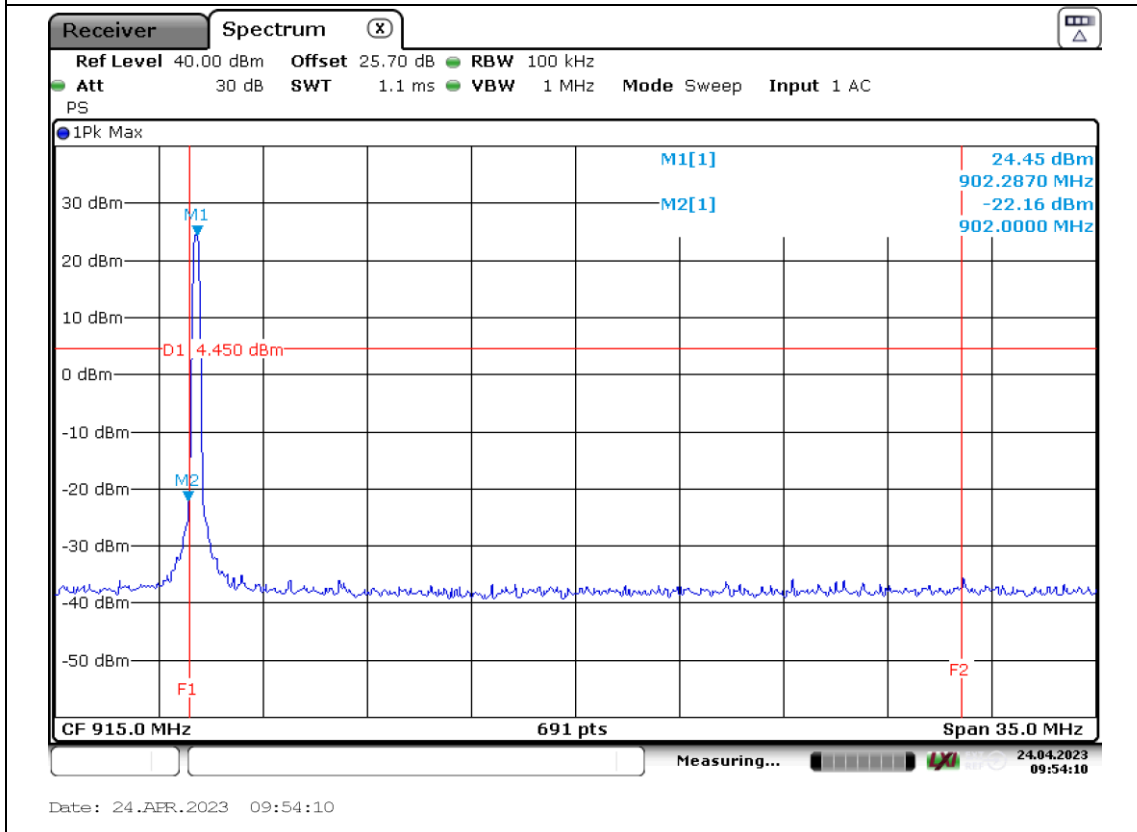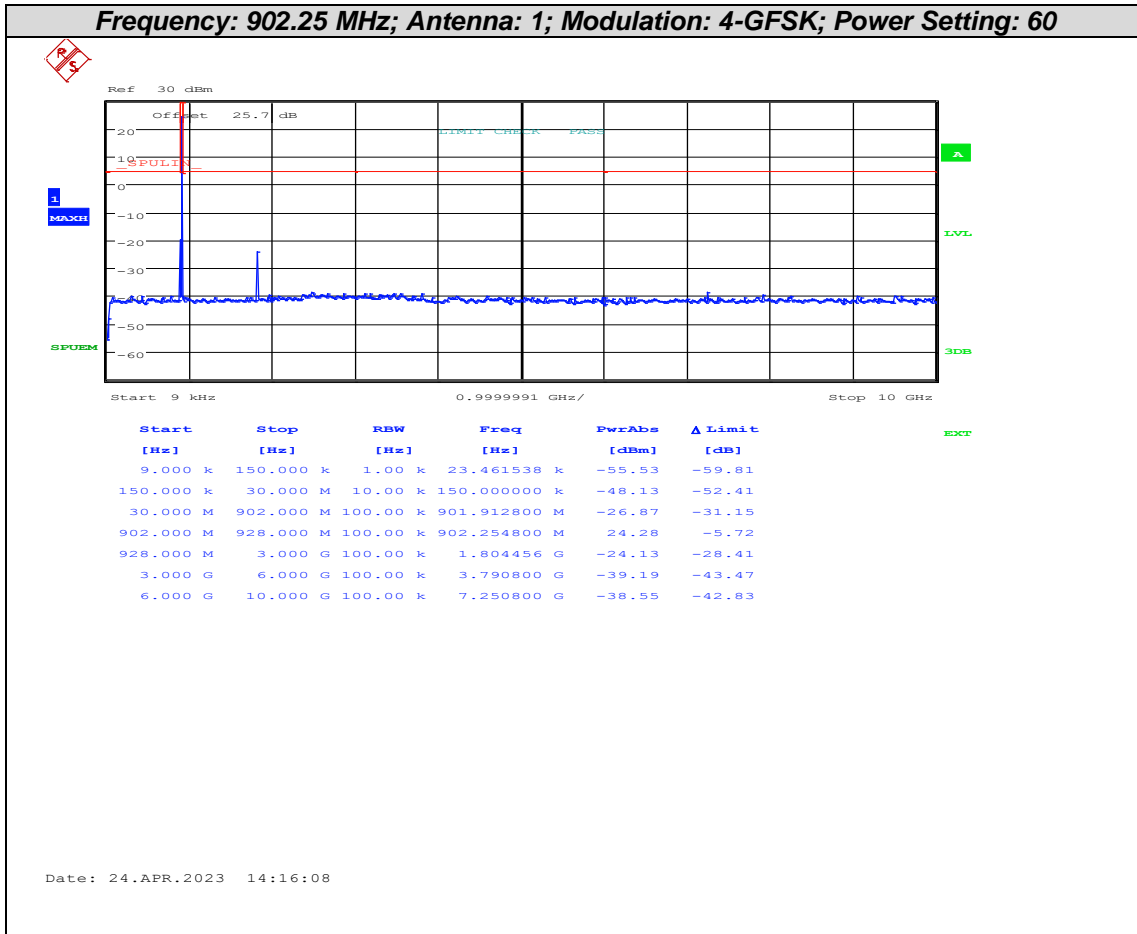


**Frequency: 907.15 MHz; Antenna: 1; Modulation: 4-GFSK; Power Setting: 60**

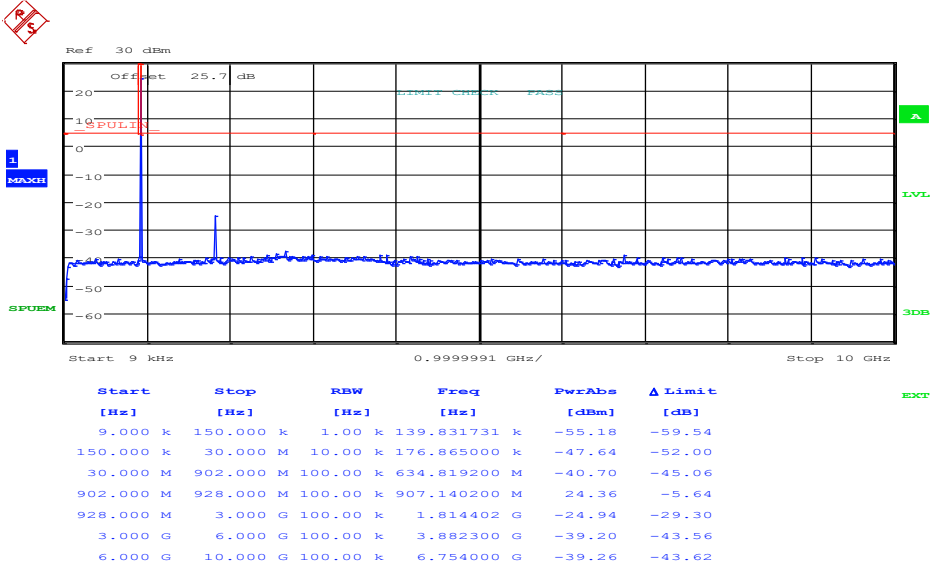


Date: 24.APR.2023 14:18:21

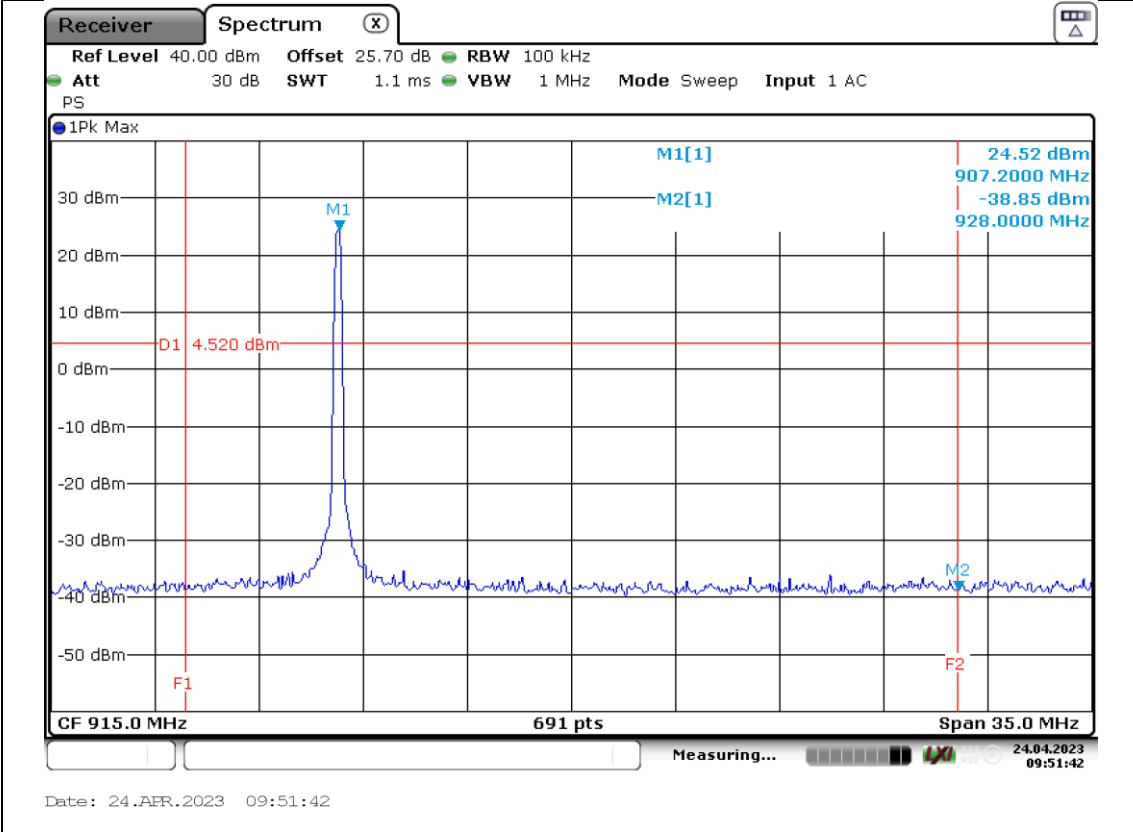


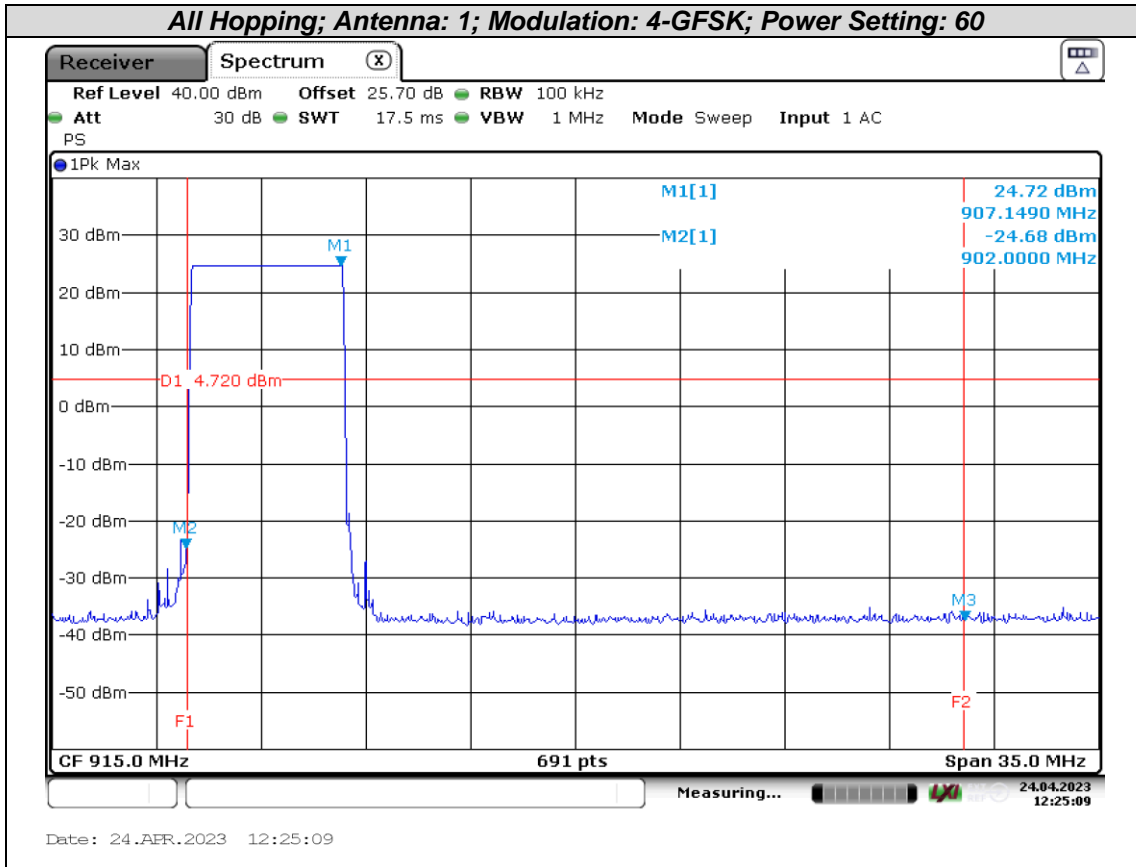

**Frequency: 902.25 MHz; Antenna: 2; Modulation: 4-GFSK; Power Setting: 60**

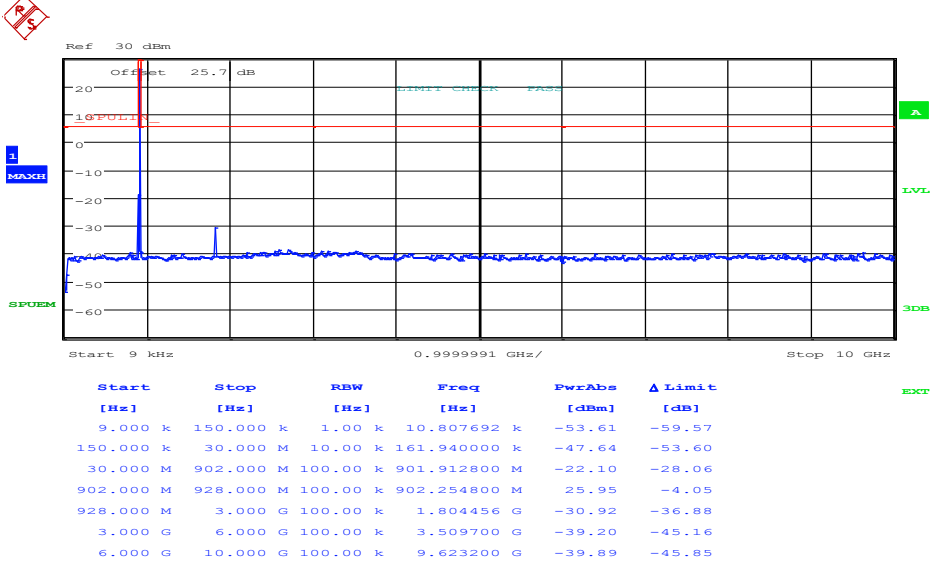


Date: 24.APR.2023 14:11:07

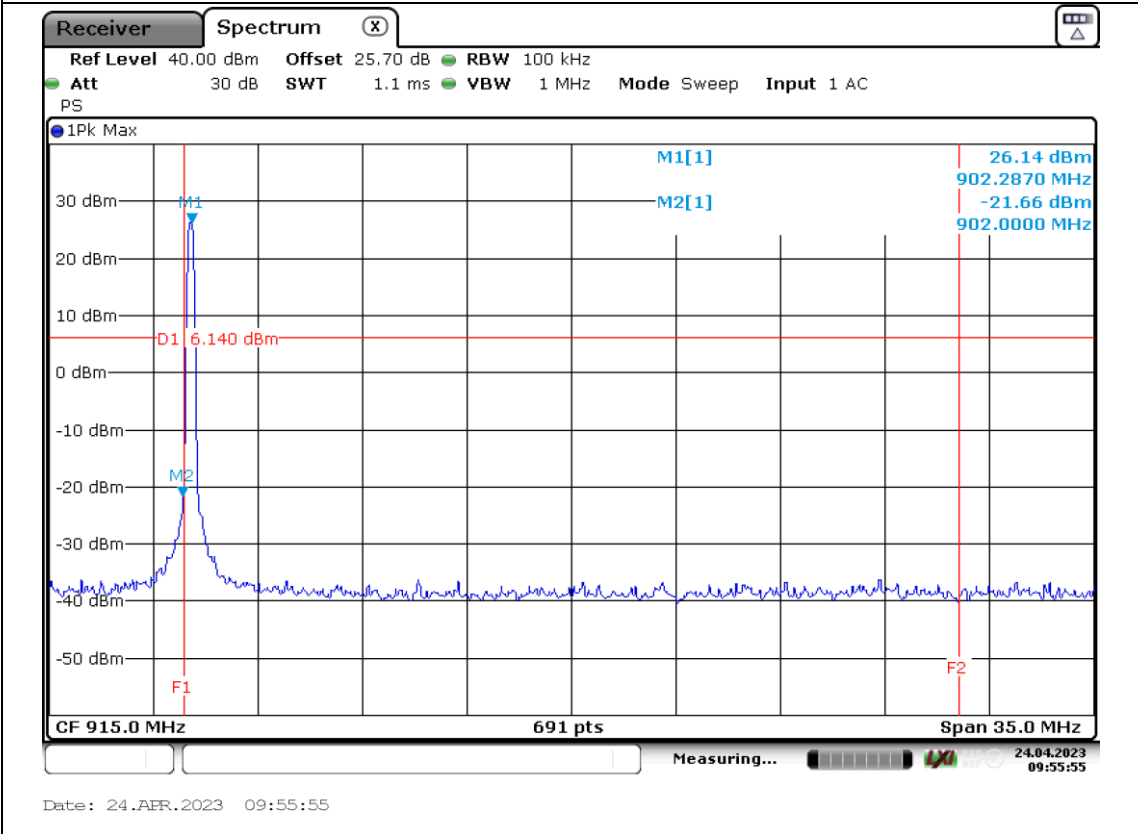




**Frequency: 907.15 MHz; Antenna: 2; Modulation: 4-GFSK; Power Setting: 60**

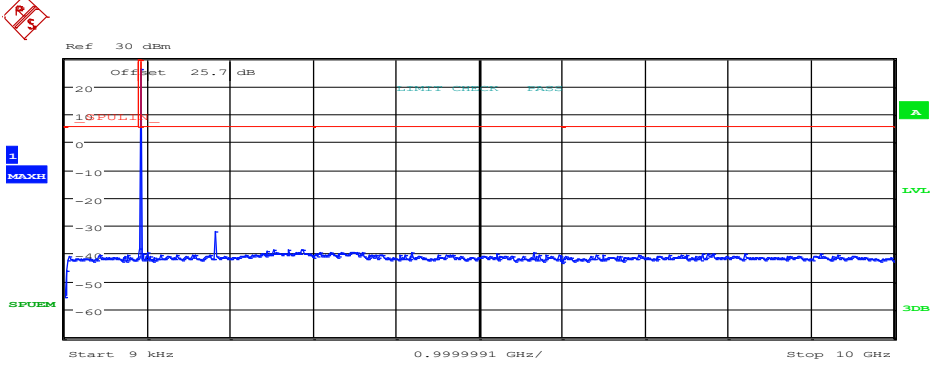


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
9.000 k	150.000 k	1.00 k	10.581731 k	-55.89	-61.68
150.000 k	30.000 M	10.00 k	188.805000 k	-46.47	-52.26
30.000 M	902.000 M	100.00 k	754.893600 M	-40.72	-46.51
902.000 M	928.000 M	100.00 k	907.155800 M	25.79	-4.21
928.000 M	3.000 G	100.00 k	1.814402 G	-31.97	-37.76
3.000 G	6.000 G	100.00 k	3.198900 G	-39.52	-45.31
6.000 G	10.000 G	100.00 k	7.684000 G	-40.05	-45.84

Date: 24.APR.2023 14:13:31

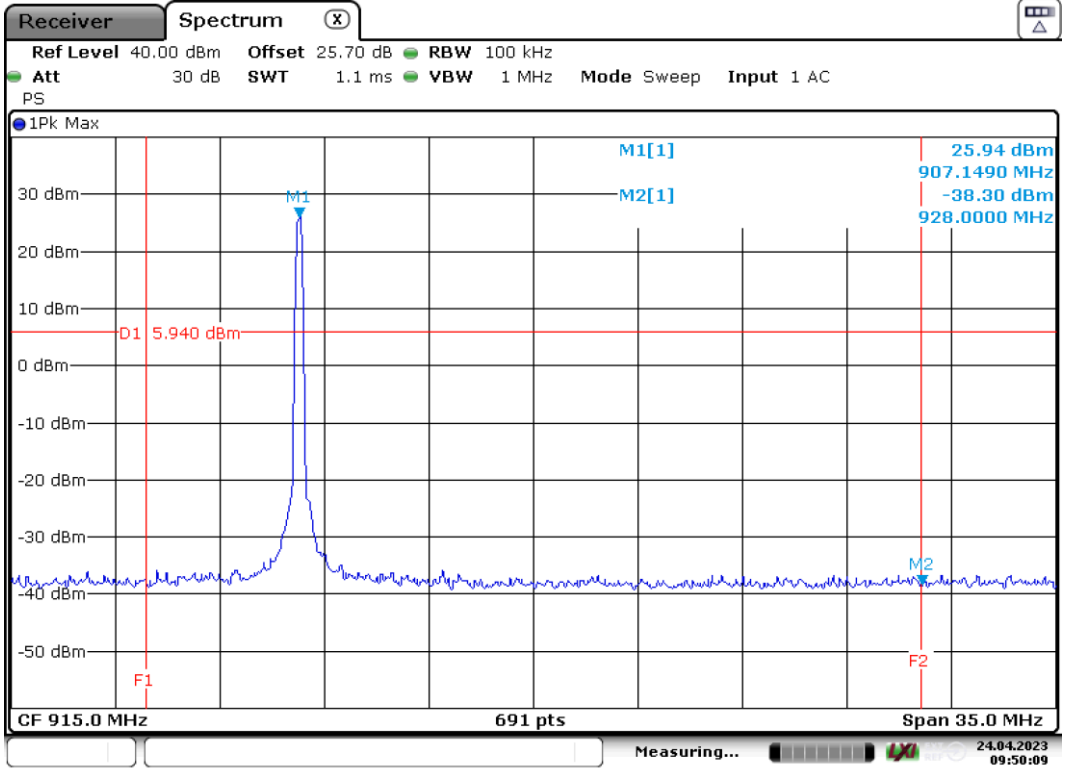

Date: 24.APR.2023 09:50:09

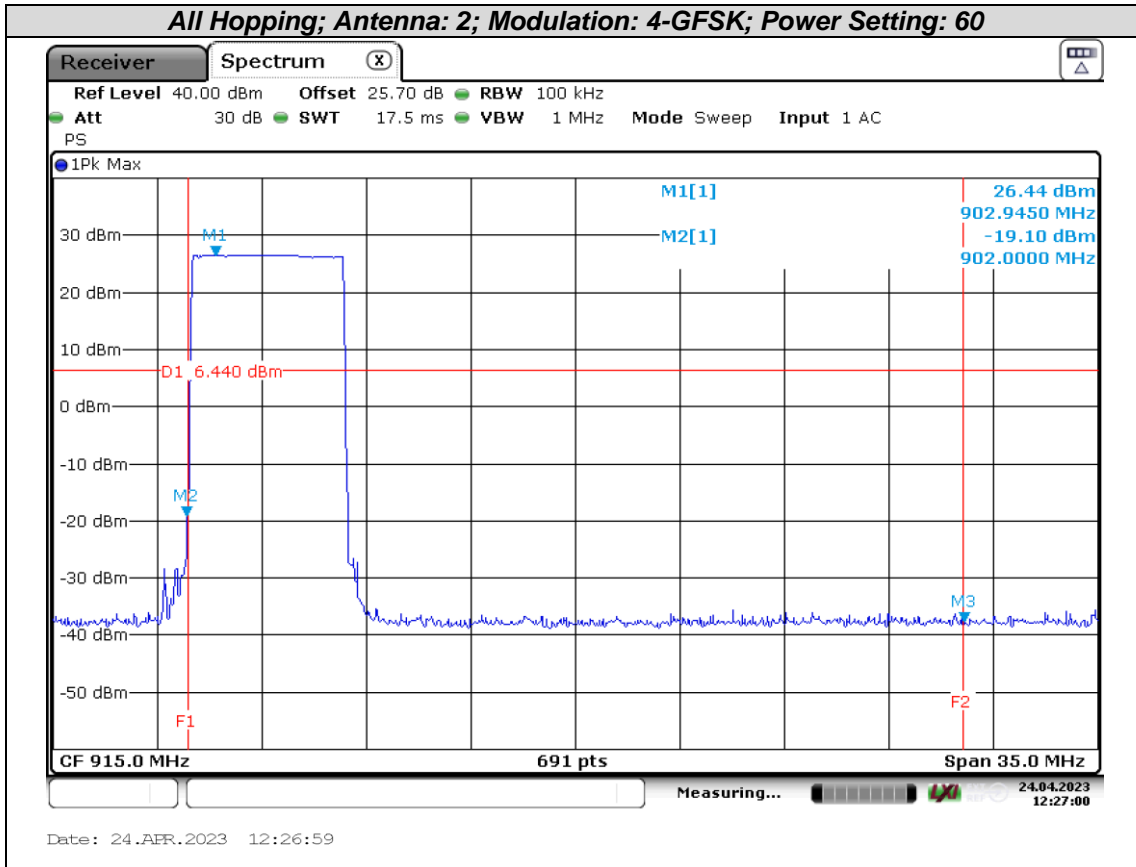

## 18 Duty Cycle

### 18.1 Definition

The ratio of the sum of all pulse durations to the total period, during a specified period of operation.

### 18.2 Test Parameters

Test Location:	Element Skelmersdale
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.6
Deviations From Standard:	None
Temperature Extreme Environment Test Range:	N/A
Voltage Extreme Environment Test Range:	N/A

### Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 50% RH	20 % RH to 75 % RH (as declared)

### 18.3 Test Limit

N/A.

## 18.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vii, the duty of the EUT was calculated from the sum of total on and off times over the observation period.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, bandwidths, data rates and power settings were measured

[1] Single antenna output devices

Duty was measured at the antenna port.


[2] Multiple antenna output devices

Duty was measured as the combination of all ports simultaneously.

The duty cycle correction factor, DC, shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as:

- 1) If power averaging (rms) mode was used in step f), then the applicable correction factor is  $[10 \log (1 / D)]$ , where  $D$  is the duty cycle.
- 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is  $[20 \log (1 / D)]$ , where  $D$  is the duty cycle.
- 3) If a specific emission is demonstrated to be continuous ( $D \geq 98\%$ ) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

**Figure vii Test Setup**

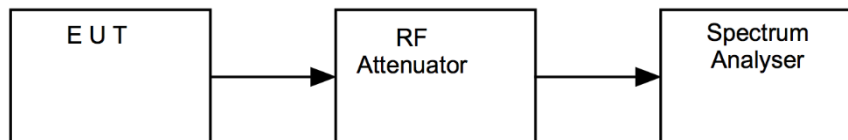


## 18.5 Test Equipment

<i>Test equipment use date: 2023-04-24 to 2024-03-28</i>				
<i>Equipment Type</i>	<i>Manufacturer</i>	<i>Equipment Description</i>	<i>Element No</i>	<i>Due For Calibration</i>
EMI Receiver	R&S	ESR26	U489	2024-10-11
Attenuator	AtlanTecRF Microwave	20dB SMA Attenuator	U632	Cal in use
Attenuator	AtlanTecRF Microwave	6dB SMA Attenuator	U635	Cal in use

<i>Test equipment use date: 2024-07-12</i>				
<i>Equipment Type</i>	<i>Manufacturer</i>	<i>Equipment Description</i>	<i>Element No</i>	<i>Due For Calibration</i>
Power Meter	ETS Lindgren	7002-006	REF2286	2024-11-17


18.6 Test Results

On time in 100 ms Period Test date: 2023-04-28				
Test Environment		Tx on time (ms)	No of Tx (100ms)	Calculated Factor (dB)
V <sub>nominal</sub>	T <sub>nominal</sub>	12.484615	1	-18

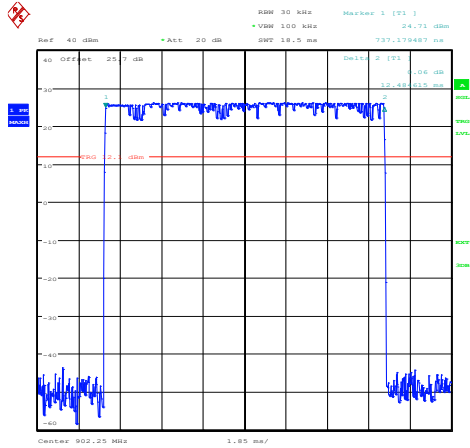

Date: 25.APR.2023 09:13:16


Tx on time

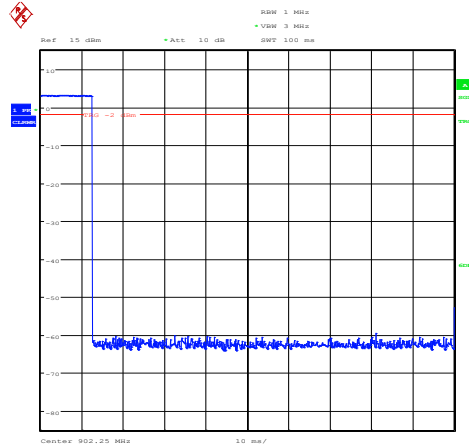

Date: 28.APR.2023 14:36:53

No of Tx in 100ms

Duty Cycle hopping over all frequencies Test date: 2024-07-12		
Test Environment		Duty Cycle %
V <sub>nominal</sub>	T <sub>nominal</sub>	23.7

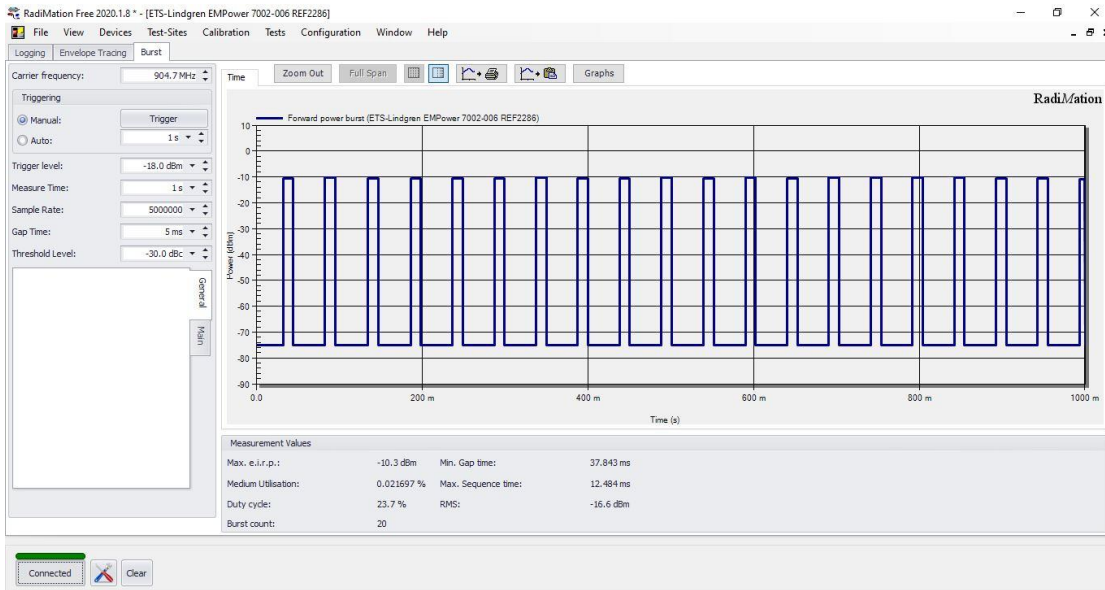

## 19 Measurement Uncertainty

### Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence where no required test level exists.

<i>Test/Measurement</i>	<i>Budget Number</i>	<i>MU</i>
<b><i>Conducted RF Power, Power Spectral Density, Adjacent Channel Power and Spurious emissions</i></b>		
Absolute RF power (via antenna connector) Sampling Power Meter to 8 GHz	MU4001	<b>0.9 dB</b>
Carrier Power and PSD - Spectrum Analysers	MU4004	<b>1.7 dB</b>
Adjacent Channel Power	MU4002	<b>1.9 dB</b>
Transmitter conducted spurious emissions (Including emissions due to intermodulation)	MU4041	<b>0.9 dB</b>
Conducted power and spurious emissions 40 GHz to 50 GHz	MU4042	<b>2.4 dB</b>
Conducted power and spurious emissions 50 GHz to 75 GHz	MU4043	<b>2.5 dB</b>
Conducted power and spurious emissions 75 GHz to 110 GHz	MU4044	<b>2.4 dB</b>
<b><i>Radiated RF Power and Spurious emissions ERP and EIRP</i></b>		
Effective Radiated Power Reverb Chamber	MU4020	<b>3.7 dB</b>
Effective Radiated Power	MU4021	<b>4.7 dB</b>
TRP Emissions 30 MHz to 1 GHz using CBL6111 or CBL6112 Bilog Antenna	MU4046	<b>5.3 dB</b>
TRP Emissions 1 GHz to 18 GHz using HL050 Log Periodic Antenna	MU4047	<b>5.1 dB</b>
TRP Emissions 18 GHz to 26.5 GHz using Standard Gain Horn	MU4048	<b>2.7 dB</b>
TRP Emissions 26.5 GHz to 40 GHz using Standard Gain Horn	MU4049	<b>2.7 dB</b>
In-band (3450-3650 MHz) TRP using CATR_ASH_B2	MU4051	<b>4.1 dB</b>
Cellular Radiated Spurious Emissions in a SAC 30 MHz to 180 MHz	MU4052	<b>6.3 dB</b>
Cellular Radiated Spurious Emissions in a SAC 180 MHz to 18 GHz	MU4052	<b>3.6 dB</b>
Cellular Radiated Spurious Emissions in a FAR 30 MHz to 180 MHz	MU4052	<b>5.4 dB</b>
Cellular Radiated Spurious Emissions in a FAR 180 MHz to 18 GHz	MU4052	<b>3.0 dB</b>
<b><i>Spurious Emissions Electric and Magnetic Field</i></b>		
Radiated Spurious Emissions 30 MHz to 1 GHz (Including emissions due to intermodulation)	MU4037	<b>4.8 dB</b>
Radiated Spurious Emissions 1-18 GHz (Including emissions due to intermodulation)	MU4032	<b>4.5 dB</b>
E Field Emissions 18 GHz to 26 GHz	MU4024	<b>3.2 dB</b>
E Field Emissions 26 GHz to 40 GHz	MU4025	<b>3.3 dB</b>
E Field Emissions 40 GHz to 50 GHz	MU4026	<b>3.5 dB</b>
E Field Emissions 50 GHz to 75 GHz	MU4027	<b>3.6 dB</b>
E Field Emissions 75 GHz to 110 GHz	MU4028	<b>3.6 dB</b>
Radiated Magnetic Field Emissions	MU4031	<b>2.3 dB</b>

<b>Test/Measurement</b>	<b>Budget Number</b>	<b>MU</b>
<b>Frequency Measurements</b>		
Frequency Deviation	MU4022	<b>3.7 kHz</b>
Frequency error using CMTA test set	MU4023	<b>113.441 Hz</b>
Frequency error using GPS locked frequency source	MU4045	<b>0.0413 ppm</b>
<b>Bandwidth/Spectral Mask Measurements</b>		
Channel Bandwidth	MU4005	<b>3.87%</b>
Transmitter Mask Amplitude	MU4039	<b>1.3 dB</b>
Transmitter Mask Frequency	MU4040	<b>2.59%</b>
<b>Time Domain Measurements</b>		
Transmission Time	MU4038	<b>4.40%</b>
<b>Dynamic Frequency Selection (DFS) Parameters</b>		
DFS Analyser - Measurement Time	MU4006	<b>678.984 µs</b>
DFS Generator - Frequency Error	MU4007	<b>91.650 Hz</b>
DFS Threshold Conducted	MU4008	<b>1.3 dB</b>
DFS Threshold Radiated	MU4009	<b>3.2 dB</b>
<b>Receiver Parameters</b>		
EN 300 328 Receiver Blocking	MU4010	<b>1.1 dB</b>
EN 301 893 Receiver Blocking	MU4011	<b>1.1 dB</b>
EN 303 340 Adjacent Channel Selectivity	MU4012	<b>1.1 dB</b>
EN 303 340 Overloading	MU4013	<b>1.1 dB</b>
EN 303 340 Receiver Blocking	MU4014	<b>1.1 dB</b>
EN 303 340 Receiver Sensitivity	MU4015	<b>0.9 dB</b>
EN 303 372-1 Image Rejection	MU4016	<b>1.4 dB</b>
EN 303 372-1 Receiver Blocking	MU4017	<b>1.1 dB</b>
EN 303 372-2 Adjacent Channel Selectivity	MU4018	<b>1.1 dB</b>
EN 303 372-2 Dynamic Range	MU4019	<b>0.9 dB</b>
Receiver Blocking Talk Mode Conducted	MU4033	<b>1.2 dB</b>
Receiver Blocking Talk Mode- radiated	MU4034	<b>3.4 dB</b>
Rx Blocking, listen mode, blocking level	MU4035	<b>3.2 dB</b>
Rx Blocking, listen mode, radiated Threshold Measurement	MU4036	<b>3.4 dB</b>
Adjacent Sub Band Selectivity	MU4003	<b>4.2 dB</b>

<b>Test/Measurement</b>	<b>Budget Number</b>	<b>MU</b>
<b>Rohde &amp; Schwarz TS8997</b>		
Carrier frequency	MU4050	<b>5.2 ppm</b>
RF Output Power	MU4050	<b>1.0 dB</b>
Peak Power	MU4050	<b>0.8 dB</b>
Power Spectral Density	MU4050	<b>1.0 dB</b>
Occupied Channel Bandwidth	MU4050	<b>2.08 %</b>
Transmitter unwanted emissions in-band	MU4050	<b>0.9 dB</b>
Transmitter unwanted emissions in the spurious domain 30 MHz to 1 GHz	MU4050	<b>0.6 dB</b>
Transmitter unwanted emissions in the spurious domain 1 GHz to 12.75 GHz	MU4050	<b>1.8 dB</b>
Receiver Spurious emission 30 MHz to 1 GHz	MU4050	<b>0.6 dB</b>
Receiver Spurious emission 1 GHz to 12.75 GHz	MU4050	<b>1.8 dB</b>
Duty Cycle	MU4050	<b>0.02 %</b>
Tx Sequence	MU4050	<b>0.02 %</b>
Tx Gap	MU4050	<b>0.02 %</b>
Medium Utilisation	MU4050	<b>0.1 %</b>
Accumulated Transmit Time	MU4050	<b>0.01 %</b>
Minimum Frequency Occupation Time	MU4050	<b>0.01 %</b>
Hopping Frequency Separation	MU4050	<b>0.6 %</b>
Receiver blocking (for bit streams)	MU4050	<b>3.0 dB</b>
Channel Access Mechanism / Adaptivity / DFS / Contention Based Protocol	MU4050	<b>1.8 dB</b>