

FCC TEST REPORT

FCC ID : SJ8-CA810A
Applicant : RDI Technology (Shenzhen) Co., Ltd.
Address : Building C1 Xintang Industrial Park, East Baishixia, Fuyong, Baoan, Shenzhen, China
Manufacturer : the same as above
Address : the same as above
Equipment Under Test (EUT) :
Product Name : Wireless Camera
Model No. : CA810A
Standards : FCC CFR47 Part 15 Section 15.247:2010
Date of Test : January 15~24,2013
Date of Issue : January 24,2013

Test Result : **PASS**

Remark:

* The sample described above has been tested to be in compliance with the requirements of ANSI C63.4:2003. The test results have been reviewed and comply with the rules listed above and found to meet their essential requirements.

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District,


Shenzhen 518105, China

Tel: +86-755-83551033

Fax: +86-755-83552400

Compiled by:

Approved by:



Zero Zhou / Project Engineer

Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Duty Cycle	15.35	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY.....	2
3 CONTENTS.....	3
4 GENERAL INFORMATION	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 TEST FACILITY.....	6
4.4 TEST LOCATION	6
5 EQUIPMENT USED DURING TEST.....	7
5.1 EQUIPMENTS LIST	7
5.2 MEASUREMENT UNCERTAINTY	7
5.3 TEST EQUIPMENT CALIBRATION.....	7
6 CONDUCTED EMISSION.....	8
6.1 E.U.T. OPERATION	8
6.2 EUT SETUP.....	9
6.3 CONDUCTED EMISSION TEST RESULT	9
7 RADIATED SPURIOUS EMISSIONS	12
7.1 EUT OPERATION :	12
7.2 TEST SETUP	13
7.3 SPECTRUM ANALYZER SETUP	14
7.4 TEST PROCEDURE	15
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	15
7.6 SUMMARY OF TEST RESULTS.....	16
8 DUTY CYCLE.....	28
8.1 TEST PROCEDURE	28
8.2 TEST RESULT	28
9 BAND EDGE MEASUREMENT.....	30
9.1 TEST RESULT:.....	31
10 20 DB BANDWIDTH MEASUREMENT.....	35
10.1 TEST PROCEDURE:	35
10.2 TEST RESULT:	35
11 MAXIMUM PEAK OUTPUT POWER.....	37
11.1 TEST PROCEDURE:	37
11.2 TEST RESULT:	37
12 HOPPING CHANNEL SEPARATION	40
12.1 TEST PROCEDURE:	40
12.2 TEST RESULT:	40
13 NUMBER OF HOPPING FREQUENCY	43
13.1 TEST PROCEDURE:	43
13.2 TEST RESULT:	43
14 DWELL TIME.....	44
14.1 TEST PROCEDURE:	44
14.2 TEST RESULT:	44

15	ANTENNA REQUIREMENT	47
16	RF EXPOSURE	48
16.1	REQUIMENTS:	48
16.2	THE PROCEDURES / LIMIT	48
16.3	MPE CALCULATION METHOD	49
17	PHOTOGRAPHS – TEST SETUP	50
17.1	PHOTOGRAPH – RADIATION SPURIOUS EMISSION TEST SETUP	50
17.2	PHOTOGRAPH – CONDUCTED EMISSION TEST SETUP	52
18	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	53
18.1	EXTERNAL VIEW	53
18.2	EUT - INTERNAL VIEW	55
18.3	EUT – RF MODULE VIEW	59
19	FCC LABEL	61

4 General Information

4.1 General Description of E.U.T.

Product Name	: Wireless Camera
Model No.	: CA810A
Operation Frequency	: 2402MHz ~ 2480MHz,39 channels in total
Type of Modulation	: GFSK
Oscillator	:Crystal 32.768kHz and 27MHz for CPU,16MHz for RF module
Antenna installation	: Integrated Antenna
Antenna Gain	: 2 dBi

4.2 Details of E.U.T.

Technical Data	: DC 9V 600mA powered by adapter (input: 100 ~ 240VAC, 50/60Hz,200mA)
Adapter manufacturer	: Csec
M/N	: CS6D090060FUF

4.3 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration 7760A, July 10, 2012.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

4.4 Test Location

All the tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen, China

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101178	Aug. 13,2012	Aug. 13,2013
2.	LISN	R&S	ENV216	101215	Aug. 13,2012	Aug. 13,2013
3.	Cable	HUBER+SUHNER	CBL2-NN-3M	2230300	Aug. 13,2012	Aug. 13,2013
4.	Switch	---	RSU/M2	---	Aug. 13,2012	Aug. 13,2013
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer	Agilent	E7405A	MY45114943	Aug. 13,2012	Aug. 13,2013
2.	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Aug. 13,2012	Aug. 13,2013
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Aug. 13,2012	Aug. 13,2013
4.	Broad-band Horn Antenna	SCHWARZBECK	VULB9163	667	Aug. 13,2012	Aug. 13,2013
5.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	399	Aug. 13,2012	Aug. 13,2013
6.	Broadband Preamplifier	SCHWARZBECK	BBV 9719	9719-254	Aug. 13,2012	Aug. 13,2013
7.	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-148	Aug. 13,2012	Aug. 13,2013
8.	10m Coaxial Cable with N- plug	SCHWARZBECK	AK 9515 H	-	Aug. 13,2012	Aug. 13,2013
9.	10m 50 Ohm Coaxial Cable with N-plug	SCHWARZBECK	AK 9513	-	Aug. 13,2012	Aug. 13,2013
10.	Positioning Controller	C&C LAB	CC-C-IF	-	Aug. 13,2012	Aug. 13,2013
11.	Color Monitor	SUNSP0	SP-14C	-	Aug. 13,2012	Aug. 13,2013

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 4.74 dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

Waltek Services (Shenzhen) Co.,Ltd.

<http://www.waltek.com.cn>

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar

EUT Operation:


The pre-test was performed in normal link mode and continuously transmit mode, the worse mode is normal link mode, so the data show is that mode's only.

The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.2 EUT Setup

The EUT was placed on the test table in shielding room.

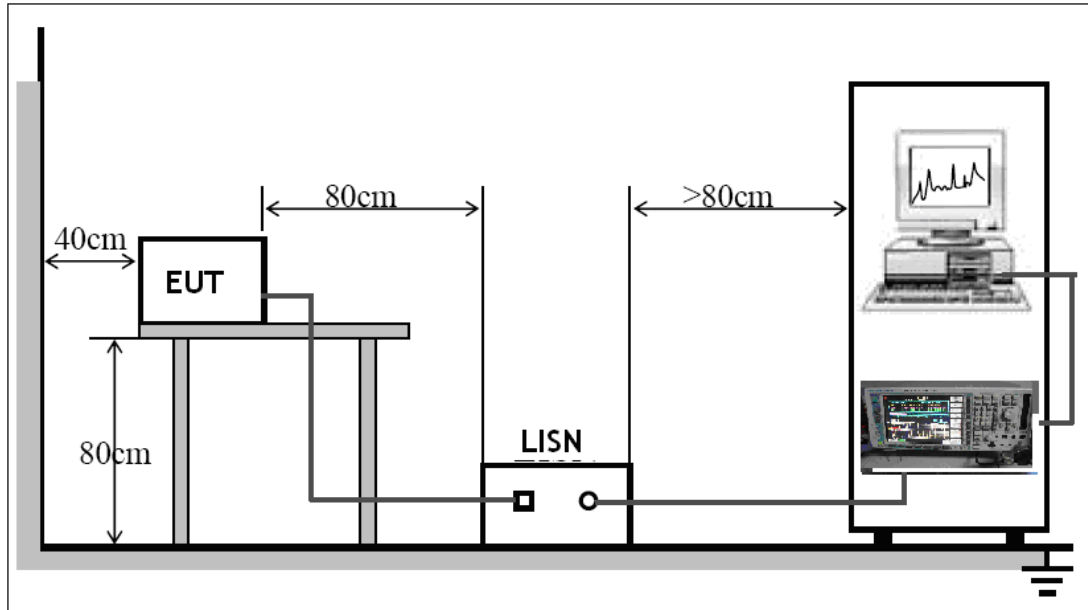


6.3 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Test mode: normal operation mode

Live line:

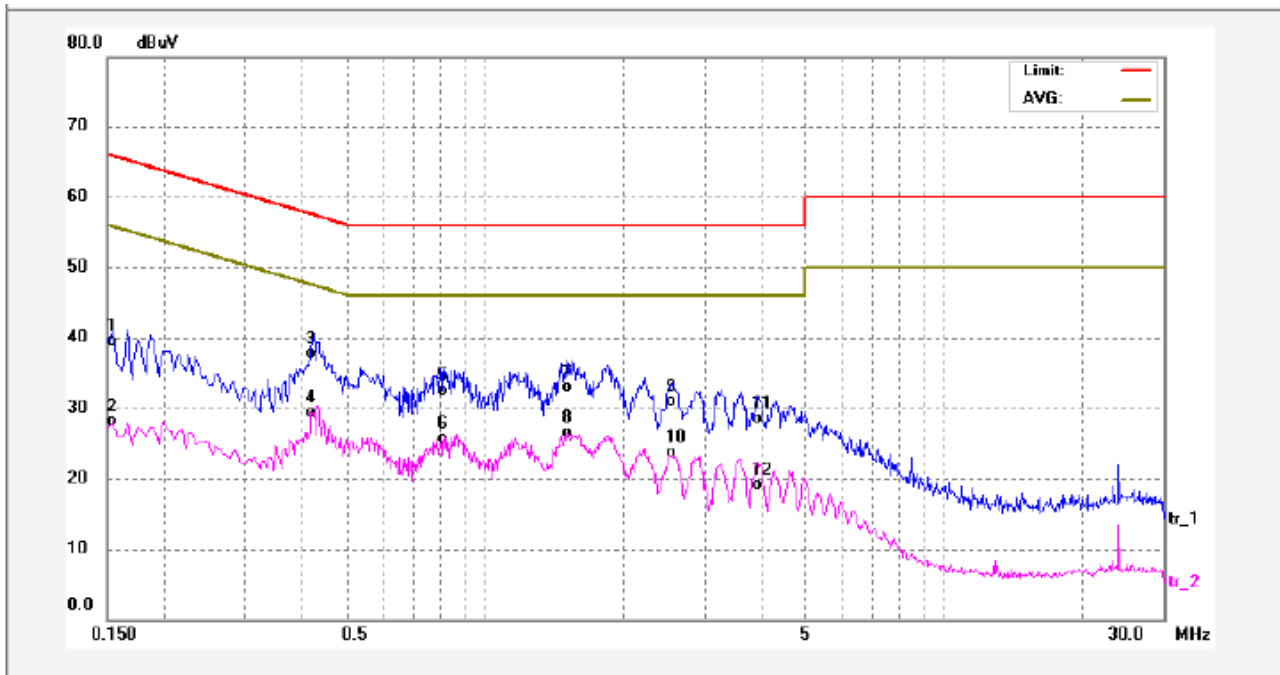

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	27.62	11.18	38.80	65.78	-26.98	QP	
2	0.1539	16.07	11.18	27.25	55.78	-28.53	AVG	
3	0.4220	25.57	11.31	36.88	57.41	-20.53	QP	
4	0.4220	17.29	11.31	28.60	47.41	-18.81	AVG	
5	0.8100	20.43	11.28	31.71	56.00	-24.29	QP	
6	0.8100	13.62	11.28	24.90	46.00	-21.10	AVG	
7	1.5100	20.82	11.19	32.01	56.00	-23.99	QP	
8	1.5100	14.58	11.19	25.77	46.00	-20.23	AVG	
9	2.5700	18.92	11.21	30.13	56.00	-25.87	QP	
10	2.5700	11.79	11.21	23.00	46.00	-23.00	AVG	
11	3.9540	16.40	11.23	27.63	56.00	-28.37	QP	
12	3.9540	7.06	11.23	18.29	46.00	-27.71	AVG	

Neutral line:

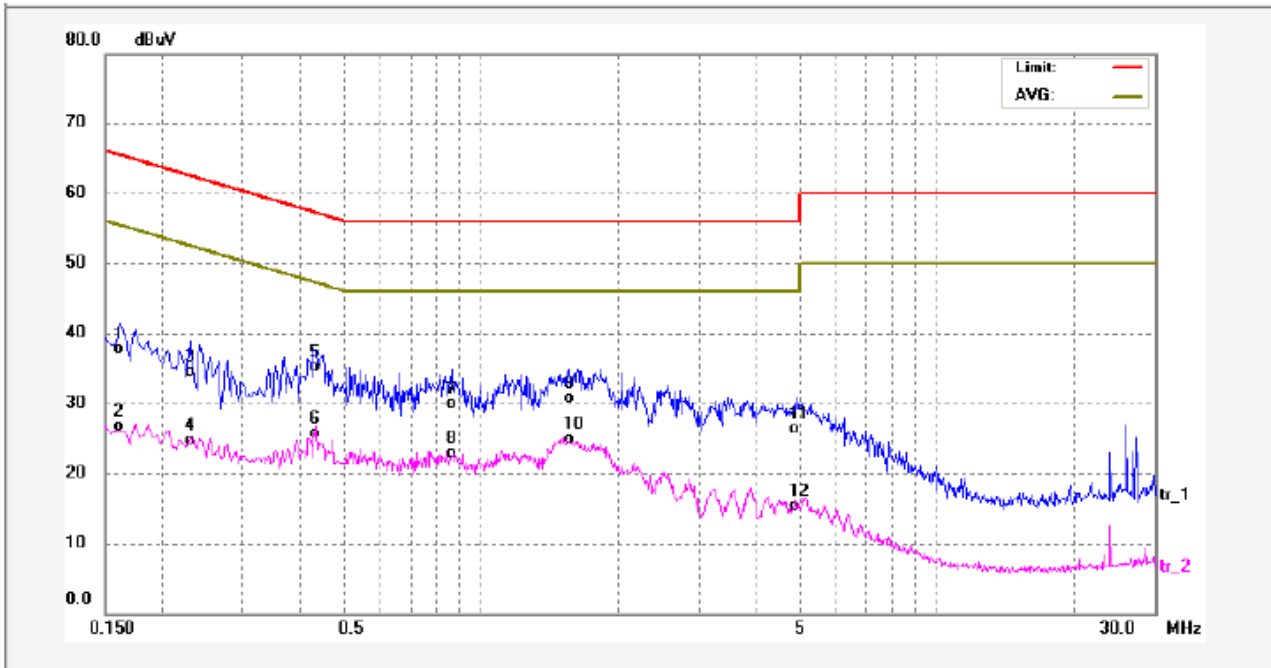

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1620	25.63	11.20	36.83	65.36	-28.53	QP	
2	0.1620	14.67	11.20	25.87	55.36	-29.49	AVG	
3	0.2300	22.42	11.30	33.72	62.45	-28.73	QP	
4	0.2300	12.59	11.30	23.89	52.45	-28.56	AVG	
5	0.4300	22.99	11.31	34.30	57.25	-22.95	QP	
6	0.4300	13.68	11.31	24.99	47.25	-22.26	AVG	
7	0.8620	17.76	11.25	29.01	56.00	-26.99	QP	
8	0.8620	10.80	11.25	22.05	46.00	-23.95	AVG	
9	1.5660	18.78	11.19	29.97	56.00	-26.03	QP	
10	1.5660	12.84	11.19	24.03	46.00	-21.97	AVG	
11	4.9380	14.29	11.24	25.53	56.00	-30.47	QP	
12	4.9380	3.35	11.24	14.59	46.00	-31.41	AVG	

7 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: DA 00-705

Test Result: PASS

Frequency Range: 9KHz to 25GHz

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation :

Operating Environment:


Temperature: 25.5 °C

Humidity: 51 % RH


Atmospheric Pressure: 1012 mbar

7.2 Test Setup


The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.
The test setup for emission measurement below 30MHz.

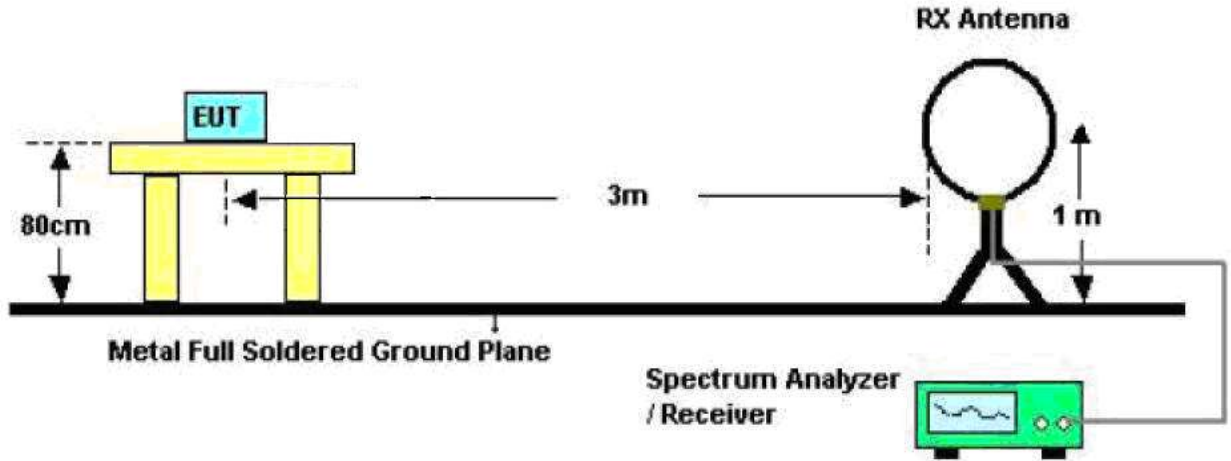

The test setup for emission measurement from 30 MHz to 1 GHz.

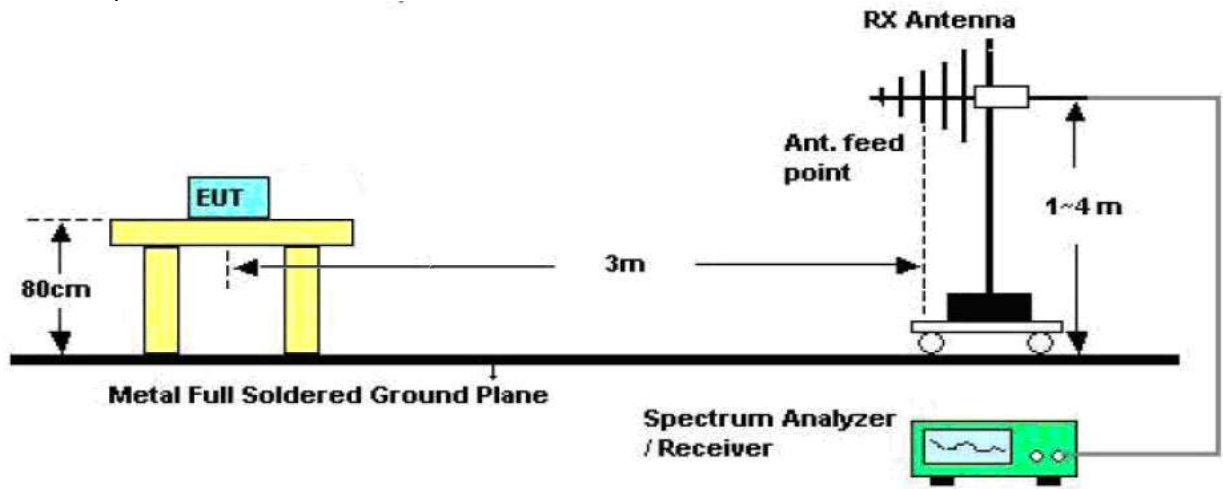

The test setup for emission measurement above 1 GHz.

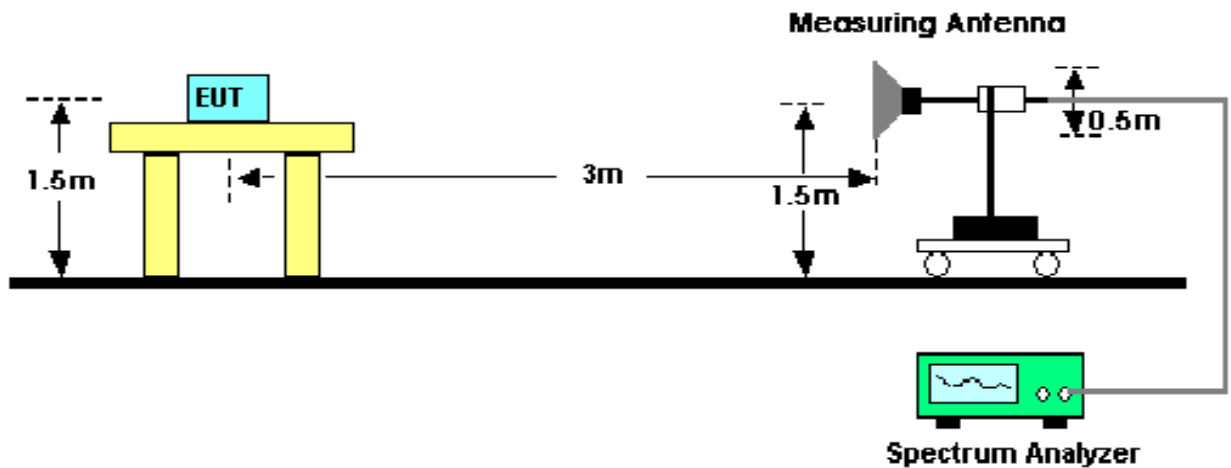

7.3 Spectrum Analyzer Setup

According to FCC Part15 Rules, the system was tested 9KHz to 25000MHz.

Below 30MHz

Sweep Speed.....Auto
IF Bandwidth10KHz
Video Bandwidth10KHz
Resolution Bandwidth.....10KHz

30MHz ~ 1GHz

Sweep Speed.....Auto
IF Bandwidth120 KHz
Video Bandwidth100KHz
Quasi-Peak Adapter Bandwidth.....120 KHz
Quasi-Peak Adapter ModeNormal
Resolution Bandwidth100KHz

Above 1GHz

Sweep Speed.....Auto
IF Bandwidth120 KHz
Video Bandwidth3MHz
Quasi-Peak Adapter Bandwidth.....120 KHz
Quasi-Peak Adapter ModeNormal
Resolution Bandwidth1MHz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B.

The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency :Below 30MHz


After pretest,we found no higher emission than background level, the data does not been shown in the test report.

Test Frequency : 30MHz ~ 1000MHz

Remark: the EUT was pretested at the high, middle and low channel, and the worse case was the low Channel, so the data show was the low channel only.


Test mode: normal operation mode

Antenna polarization: Vertical

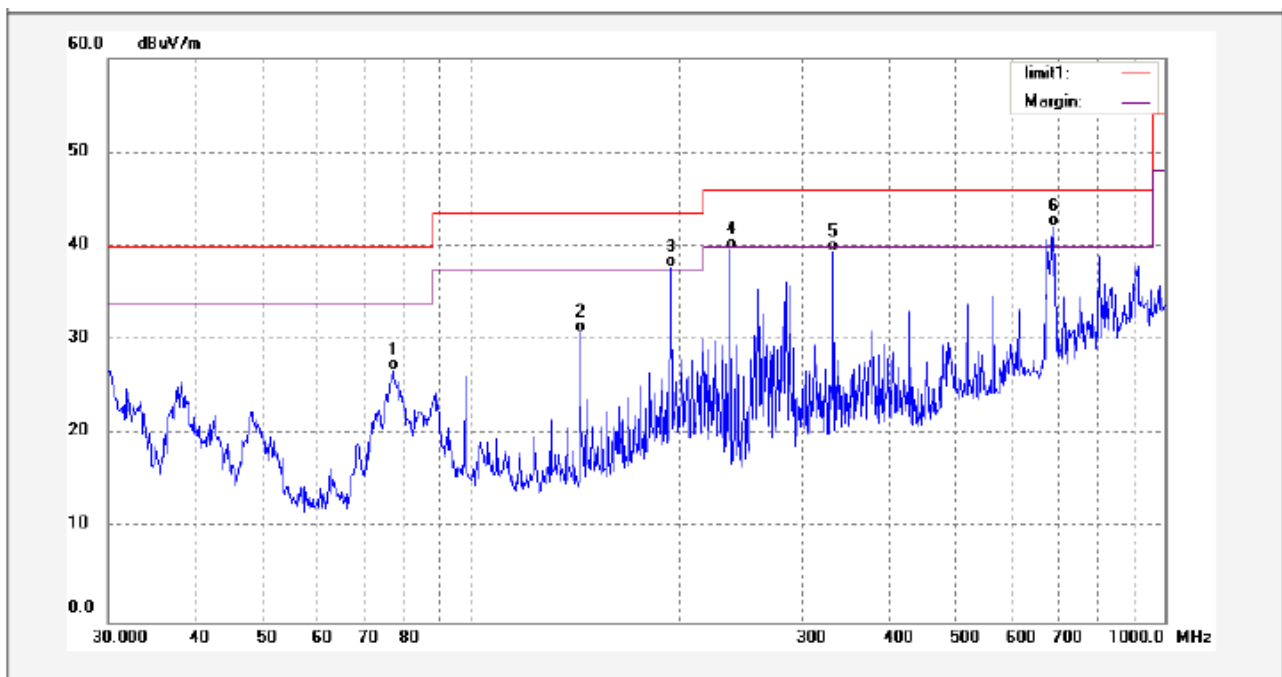

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	77.1963	17.54	9.17	26.71	40.00	-13.29	QP	
2	143.7760	19.47	11.39	30.86	43.50	-12.64	QP	
3	194.4985	22.86	14.81	37.67	43.50	-5.83	QP	
4	236.7928	24.03	15.66	39.69	46.00	-6.31	QP	
5	332.9536	19.97	19.47	39.44	46.00	-6.56	QP	
6	689.0510	15.79	26.26	42.05	46.00	-3.95	QP	


Antenna polarization: Horizontal

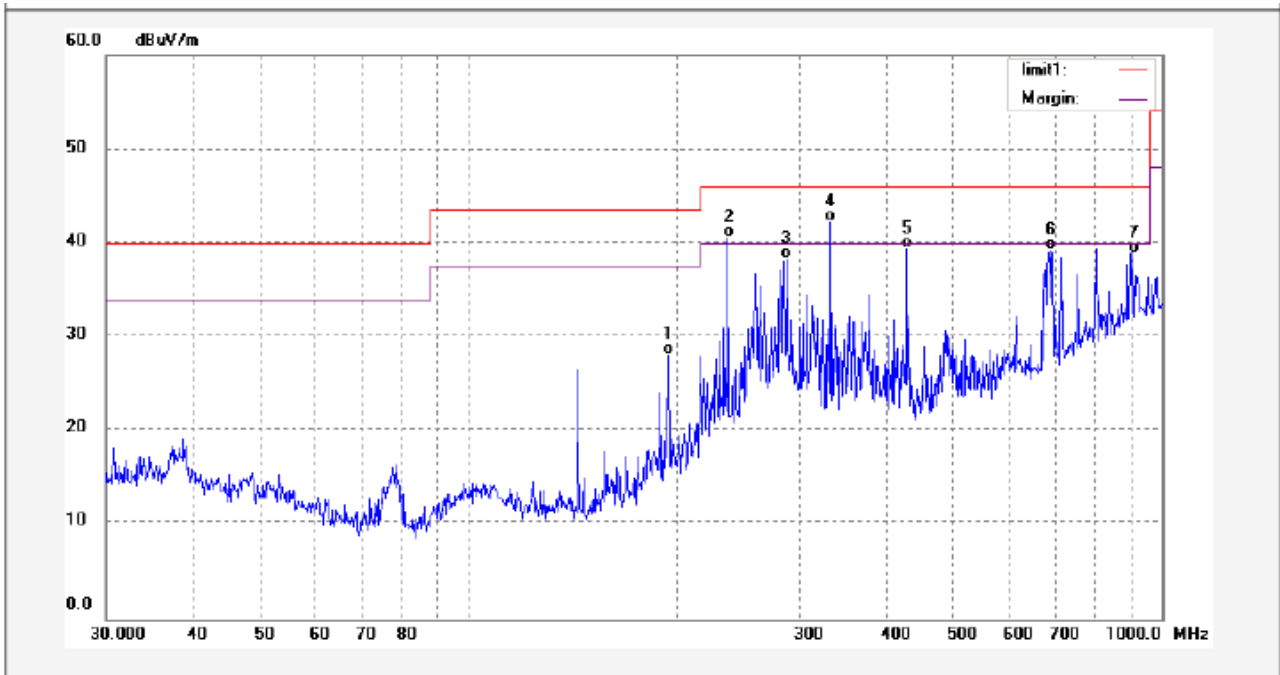

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	194.4985	13.38	14.81	28.19	43.50	-15.31	QP	
2	236.7928	24.92	15.66	40.58	46.00	-5.42	QP	
3	288.2840	21.62	16.64	38.26	46.00	-7.74	QP	
4	332.9536	22.79	19.46	42.25	46.00	-3.75	QP	
5	428.7960	18.83	20.50	39.33	46.00	-6.67	QP	
6	689.0510	13.02	26.26	39.28	46.00	-6.72	QP	
7	909.4941	7.61	31.38	38.99	46.00	-7.01	QP	


Test mode: receiving whole band

Antenna polarization: Vertical

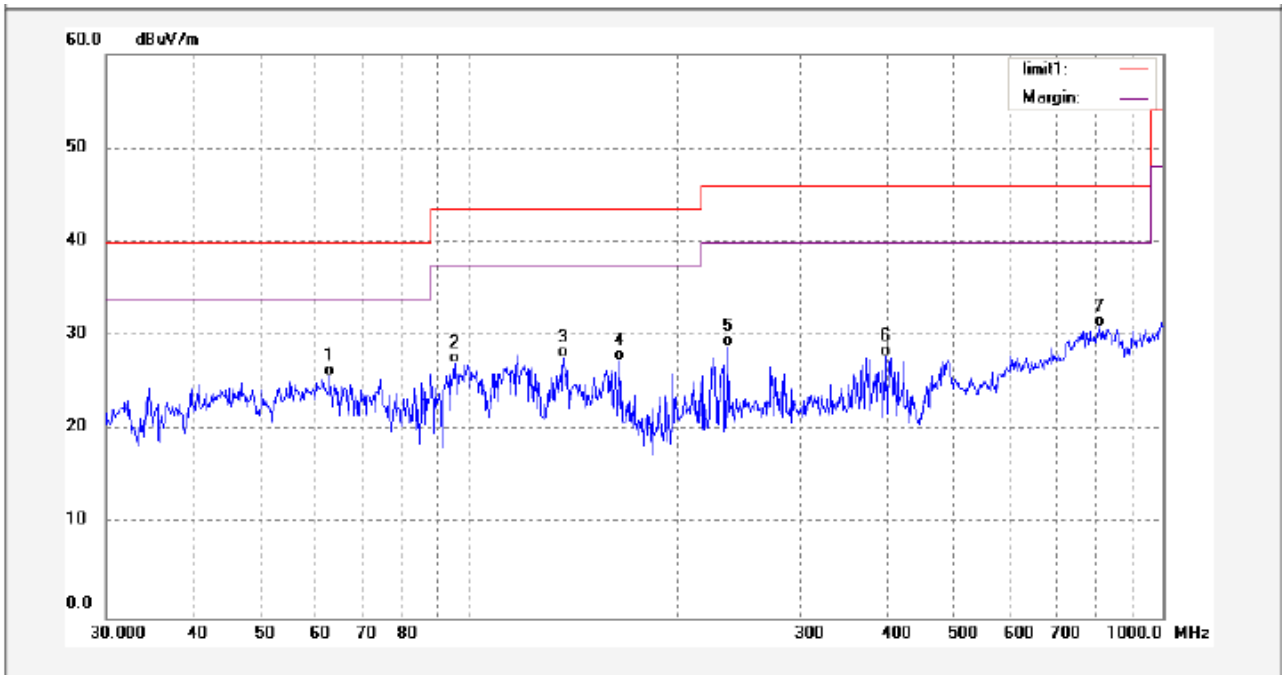

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	62.9639	14.06	11.64	25.70	40.00	-14.30	QP	
2	95.3130	13.89	13.21	27.10	43.50	-16.40	QP	
3	136.8746	15.72	11.94	27.66	43.50	-15.84	QP	
4	164.8911	15.44	11.94	27.38	43.50	-16.12	QP	
5	236.7926	13.26	15.66	28.92	46.00	-17.08	QP	
6	399.6981	6.91	20.91	27.82	46.00	-18.18	QP	
7	812.7744	1.83	29.22	31.05	46.00	-14.95	QP	

Antenna polarization: Horizontal

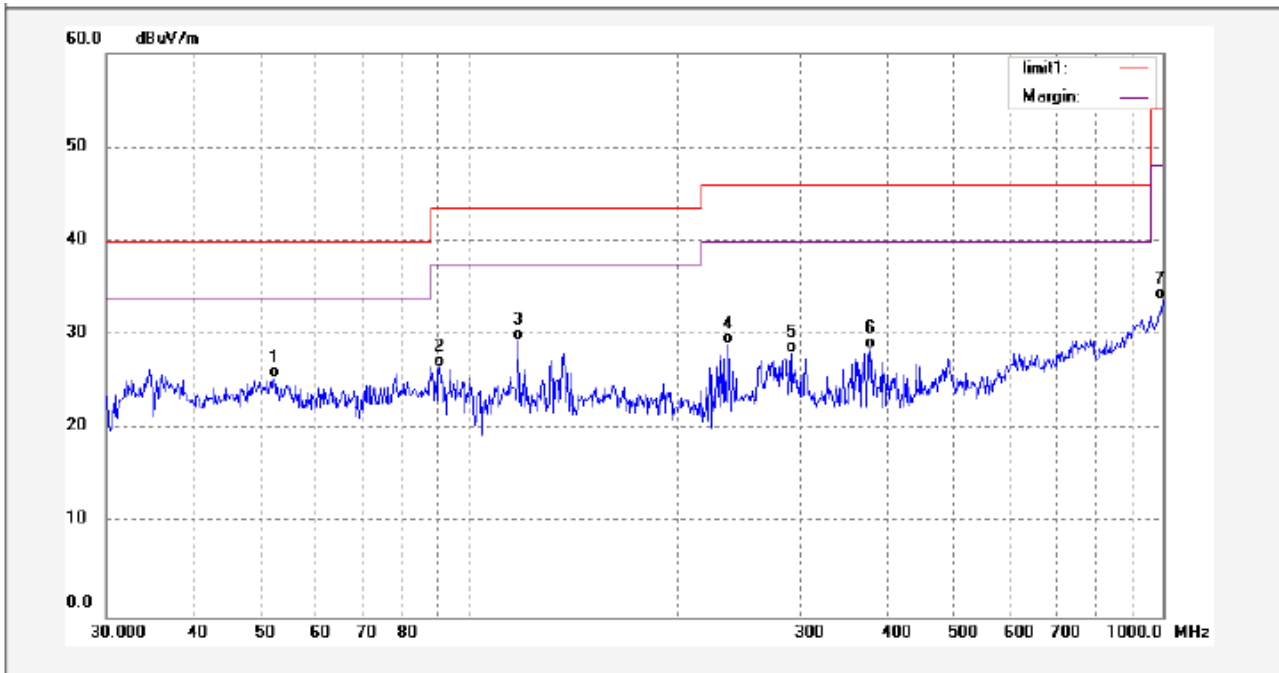


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	52.4498	11.00	14.39	25.39	40.00	-14.61	QP	
2	90.7379	14.80	11.88	26.68	43.50	-16.82	QP	
3	117.6814	17.25	12.24	29.49	43.50	-14.01	QP	
4	236.7926	13.42	15.66	29.08	46.00	-16.92	QP	
5	291.3387	11.43	16.75	28.18	46.00	-17.82	QP	
6	379.1779	8.52	20.05	28.57	46.00	-17.43	QP	
7	1000.0000	1.22	32.55	33.77	54.00	-20.23	QP	

Test Frequency: 1GHz ~ 18GHz

AV = Peak +20Log₁₀(duty cycle) =PK+(-15)=PK-15 [refer to section 8 for more detail]

Test mode: TX2402MHz


Antenna polarization: Vertical

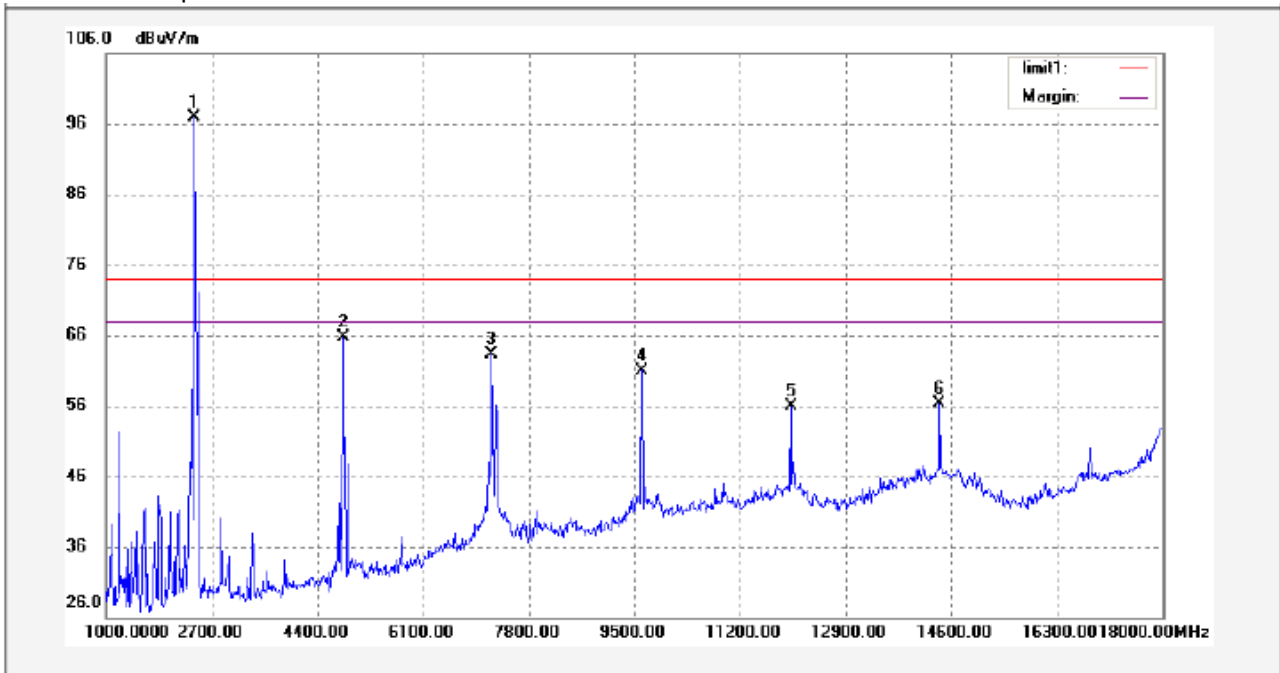

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.000	112.61	-15.61	97.00	74.00	23.00	peak	
2	4808.000	77.70	-11.97	65.73	74.00	-8.27	peak	
3	7205.000	70.54	-7.21	63.33	74.00	-10.67	peak	
4	9619.000	66.70	-5.70	61.00	74.00	-13.00	peak	
5	12016.000	60.45	-4.47	55.98	74.00	-18.02	peak	
6	14413.000	55.94	0.41	56.35	74.00	-17.65	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.000	-15	82.00	54.00	28	AV	
2	4808.000	-15	50.73	54.00	-3.27	AV	
3	7205.000	-15	48.33	54.00	-5.67	AV	
4	9619.000	-15	46.00	54.00	-8	AV	
5	12016.000	-15	40.98	54.00	-13.02	AV	
6	14413.000	-15	41.35	54.00	-12.65	AV	

Antenna polarization: Horizontal

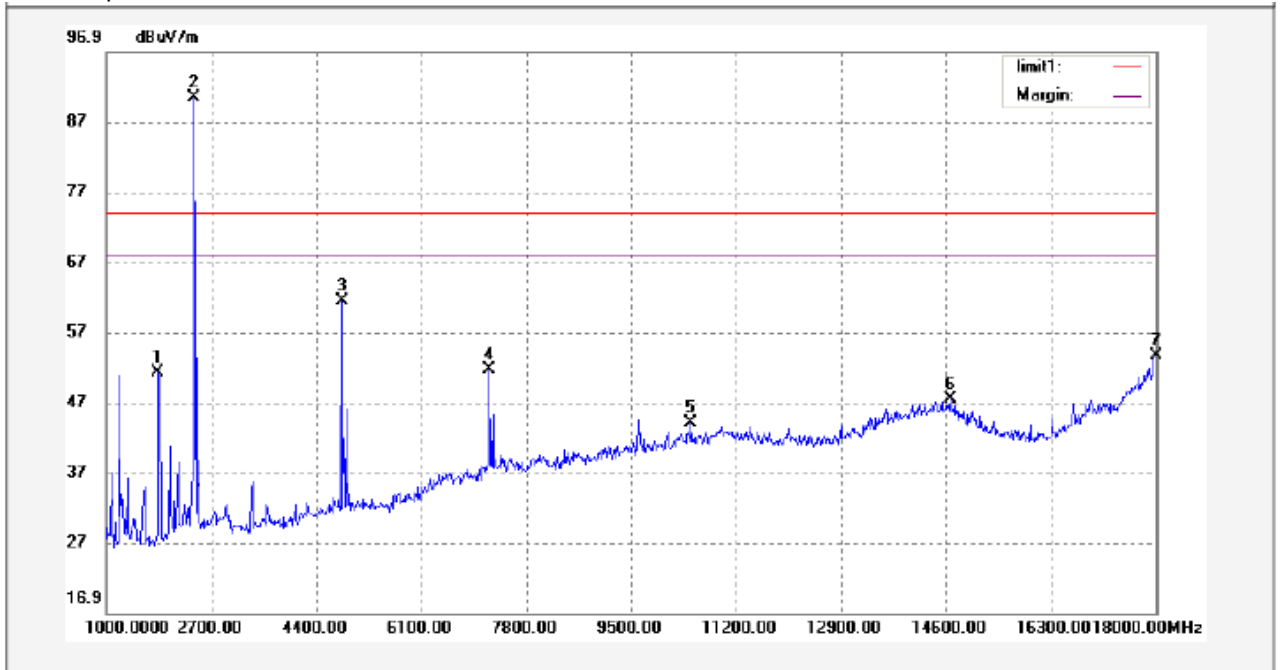


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1833.000	68.78	-17.50	51.28	74.00	-22.72	peak	
2	2402.000	106.06	-15.59	90.47	74.00	16.47	peak	
3	4808.000	73.29	-11.97	61.32	74.00	-12.68	peak	
4	7205.000	58.74	-7.21	51.53	74.00	-22.47	peak	
5	10469.000	48.17	-4.26	43.91	74.00	-30.09	peak	
6	14668.000	47.04	0.33	47.37	74.00	-26.63	peak	
7	18000.000	46.60	7.08	53.68	74.00	-20.32	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1833.000	-15	36.28	54.00	-17.72	AV	
2	2402.000	-15	75.47	54.00	21.47	AV	
3	4808.000	-15	46.32	54.00	-7.68	AV	
4	7205.000	-15	36.53	54.00	-17.47	AV	
5	10469.000	-15	28.91	54.00	-25.09	AV	
6	14668.000	-15	32.37	54.00	-21.63	AV	
7	18000.000	-15	38.68	54.00	-15.32	AV	

Test Frequency: 1GHz ~ 18GHz

Test mode: TX2440MHz


Antenna polarization: Vertical

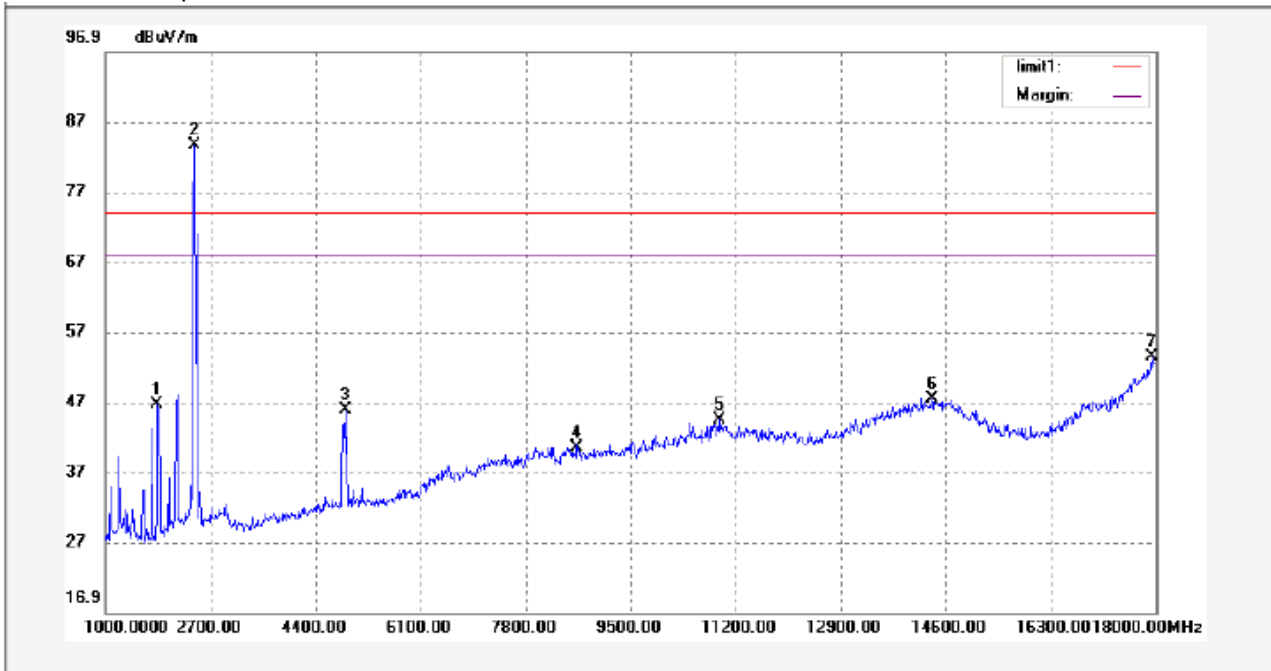

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1833.000	64.03	-17.50	46.53	74.00	-27.47	peak	
2	2440.000	99.26	-15.70	83.56	74.00	9.56	peak	
3	4893.000	57.78	-11.91	45.87	74.00	-28.13	peak	
4	8633.000	46.98	-6.62	40.36	74.00	-33.64	peak	
5	10945.000	47.94	-3.48	44.46	74.00	-29.54	peak	
6	14379.000	47.16	0.34	47.50	74.00	-26.50	peak	
7	17932.000	47.43	6.06	53.49	74.00	-20.51	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1833.000	-15	31.53	54.00	-22.47	AV	
2	2440.000	-15	68.56	54.00	14.56	AV	
3	4893.000	-15	30.87	54.00	-23.13	AV	
4	8633.000	-15	25.36	54.00	-28.64	AV	
5	10945.000	-15	29.46	54.00	-24.54	AV	
6	14379.000	-15	32.50	54.00	-21.5	AV	
7	17932.000	-15	38.49	54.00	-15.51	AV	

Antenna polarization: Horizontal

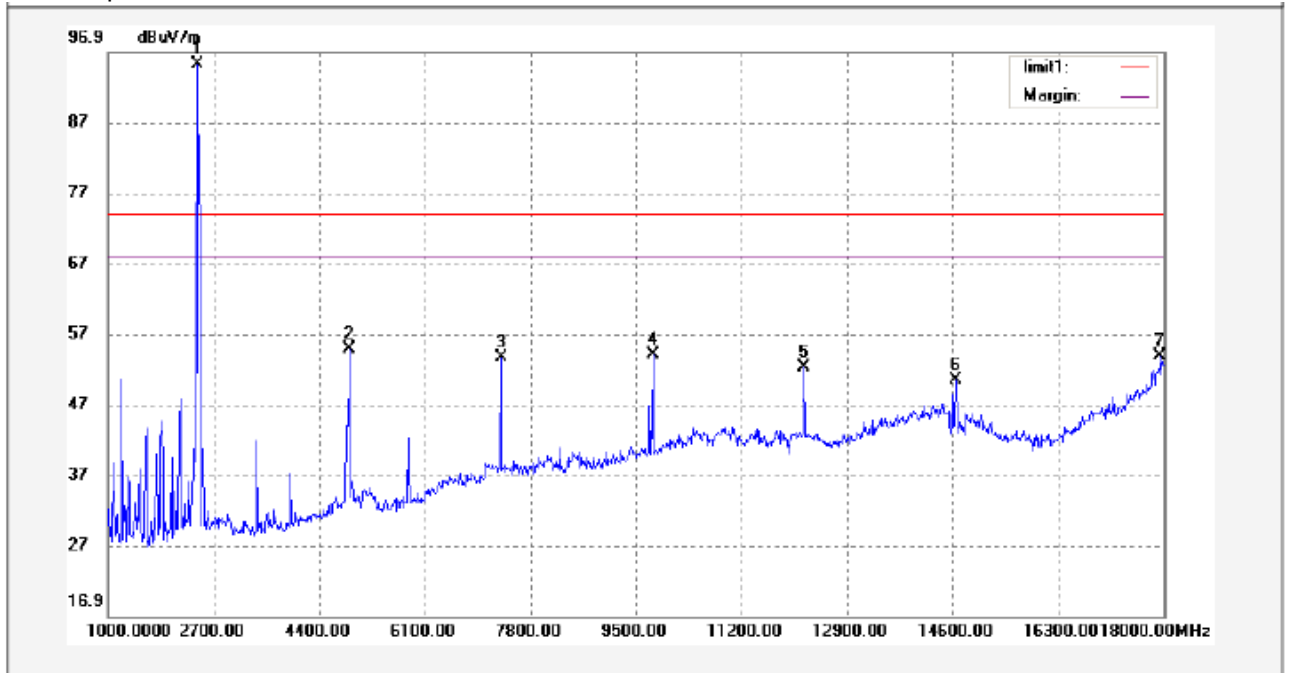


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2440.000	110.86	-15.70	95.16	74.00	21.16	peak	
2	4893.000	66.66	-11.91	54.75	74.00	-19.25	peak	
3	7324.000	60.72	-7.13	53.59	74.00	-20.41	peak	
4	9772.000	59.20	-5.28	53.92	74.00	-20.08	peak	
5	12203.000	56.60	-4.40	52.20	74.00	-21.80	peak	
6	14651.000	50.12	0.37	50.49	74.00	-23.51	peak	
7	17949.000	47.52	6.31	53.83	74.00	-20.17	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2440.000	-15	80.16	54.00	26.16	AV	
2	4893.000	-15	39.75	54.00	-14.25	AV	
3	7324.000	-15	38.59	54.00	-15.41	AV	
4	9772.000	-15	38.92	54.00	-15.08	AV	
5	12203.000	-15	37.20	54.00	-16.8	AV	
6	14651.000	-15	35.49	54.00	-18.51	AV	
7	17949.000	-15	38.83	54.00	-15.17	AV	

Test mode: TX2478MHz


Antenna polarization: Vertical

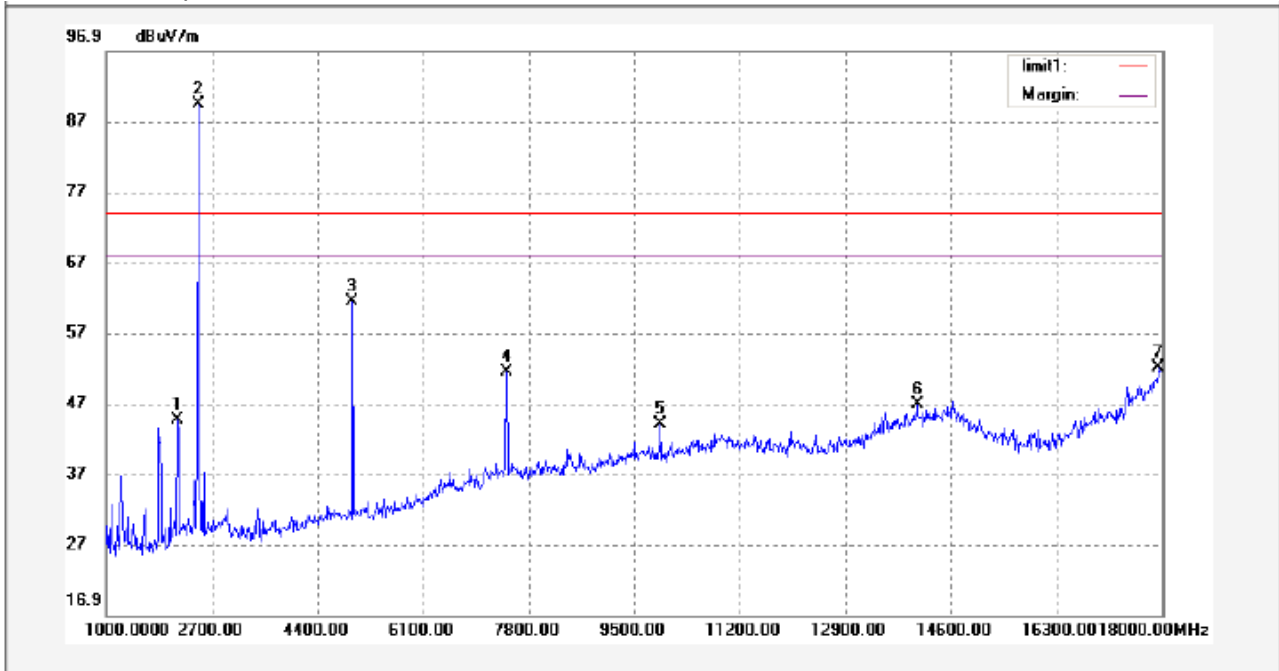

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2139.000	59.93	-15.41	44.52	74.00	-29.48	peak	
2	2478.000	105.16	-15.68	89.48	74.00	15.48	peak	
3	4961.000	73.12	-11.77	61.35	74.00	-12.65	peak	
4	7443.000	58.25	-6.91	51.34	74.00	-22.66	peak	
5	9925.000	49.12	-5.15	43.97	74.00	-30.03	peak	
6	14056.000	47.36	-0.52	46.84	74.00	-27.16	peak	
7	17949.000	45.63	6.31	51.94	74.00	-22.06	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2139.000	-15	29.52	54.00	-24.48	AV	
2	2478.000	-15	74.48	54.00	20.48	AV	
3	4961.000	-15	46.35	54.00	-7.65	AV	
4	7443.000	-15	36.34	54.00	-17.66	AV	
5	9925.000	-15	28.97	54.00	-25.03	AV	
6	14056.000	-15	31.84	54.00	-22.16	AV	
7	17949.000	-15	36.94	54.00	-17.06	AV	

Antenna polarization: Horizontal

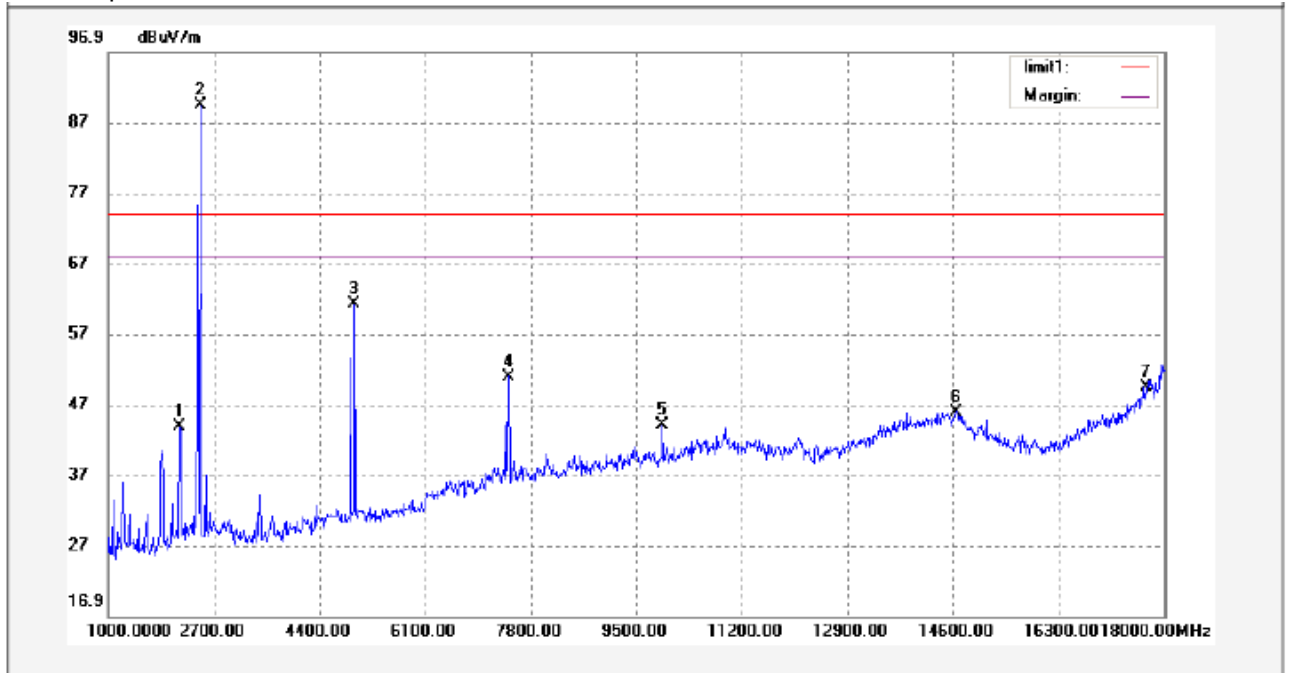


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2139.000	59.20	-15.41	43.79	74.00	-30.21	peak	
2	2478.000	105.16	-15.68	89.48	74.00	15.48	peak	
3	4961.000	72.89	-11.77	61.12	74.00	-12.88	peak	
4	7443.000	57.81	-6.91	50.90	74.00	-23.10	peak	
5	9925.000	49.20	-5.15	44.05	74.00	-29.95	peak	
6	14651.000	45.53	0.37	45.90	74.00	-28.10	peak	
7	17711.000	45.65	3.71	49.36	74.00	-24.64	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2139.000	-15	28.79	54.00	-25.21	AV	
2	2478.000	-15	74.48	54.00	20.48	AV	
3	4961.000	-15	46.12	54.00	-7.88	AV	
4	7443.000	-15	35.90	54.00	-18.1	AV	
5	9925.000	-15	29.05	54.00	-24.95	AV	
6	14651.000	-15	30.90	54.00	-23.1	AV	
7.	17711.000	-15	34.36	54.00	-19.64	AV	

Test mode: receiving whole band(Battery operation)


Antenna polarization: Vertical

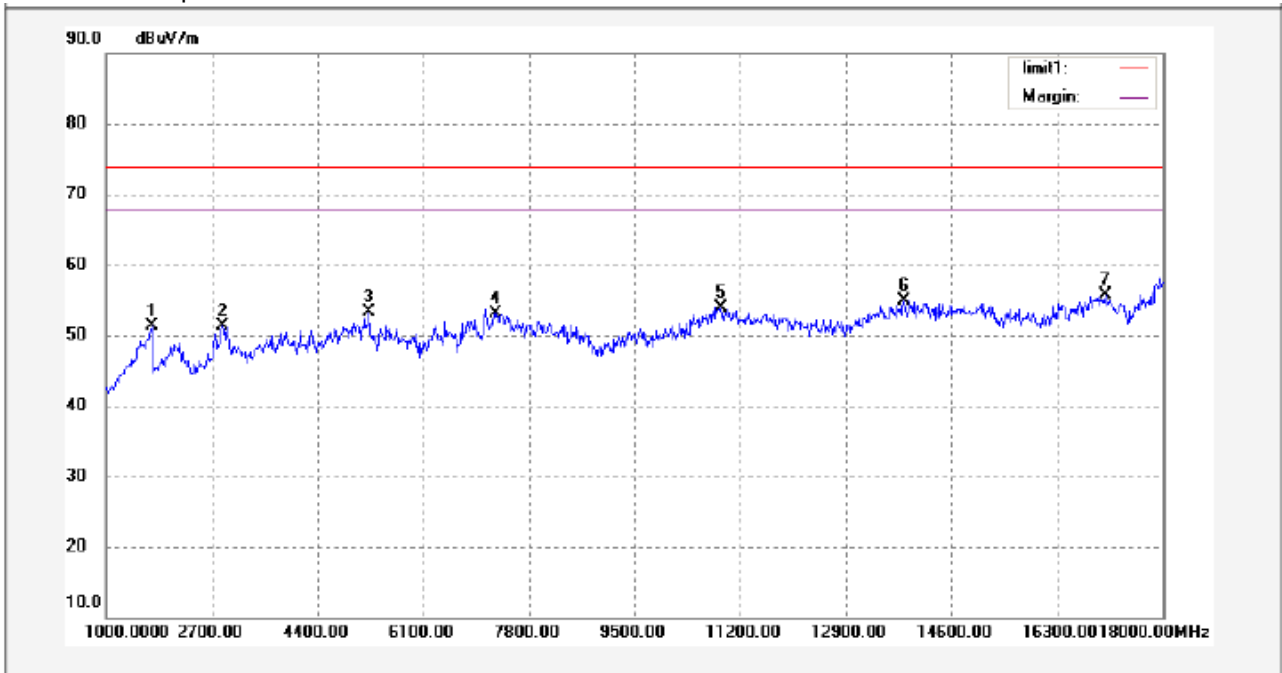

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1731.000	64.10	-12.89	51.21	74.00	-22.79	peak	
2	2870.000	59.15	-7.93	51.22	74.00	-22.78	peak	
3	5233.000	55.88	-2.56	53.32	74.00	-20.68	peak	
4	7256.000	48.96	4.11	53.07	74.00	-20.93	peak	
5	10894.000	42.58	11.35	53.93	74.00	-20.07	peak	
6	13835.000	38.58	16.31	54.89	74.00	-19.11	peak	
7	17082.000	35.18	20.54	55.72	74.00	-18.28	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1731.000	-15	36.21	54.00	-17.79	AV	
2	2870.000	-15	36.22	54.00	-17.78	AV	
3	5233.000	-15	38.32	54.00	-15.68	AV	
4	7256.000	-15	38.07	54.00	-15.93	AV	
5	10894.000	-15	38.93	54.00	-15.07	AV	
6	13835.000	-15	39.89	54.00	-14.11	AV	
7	17082.000	-15	40.72	54.00	-13.28	AV	

Antenna polarization: Horizontal

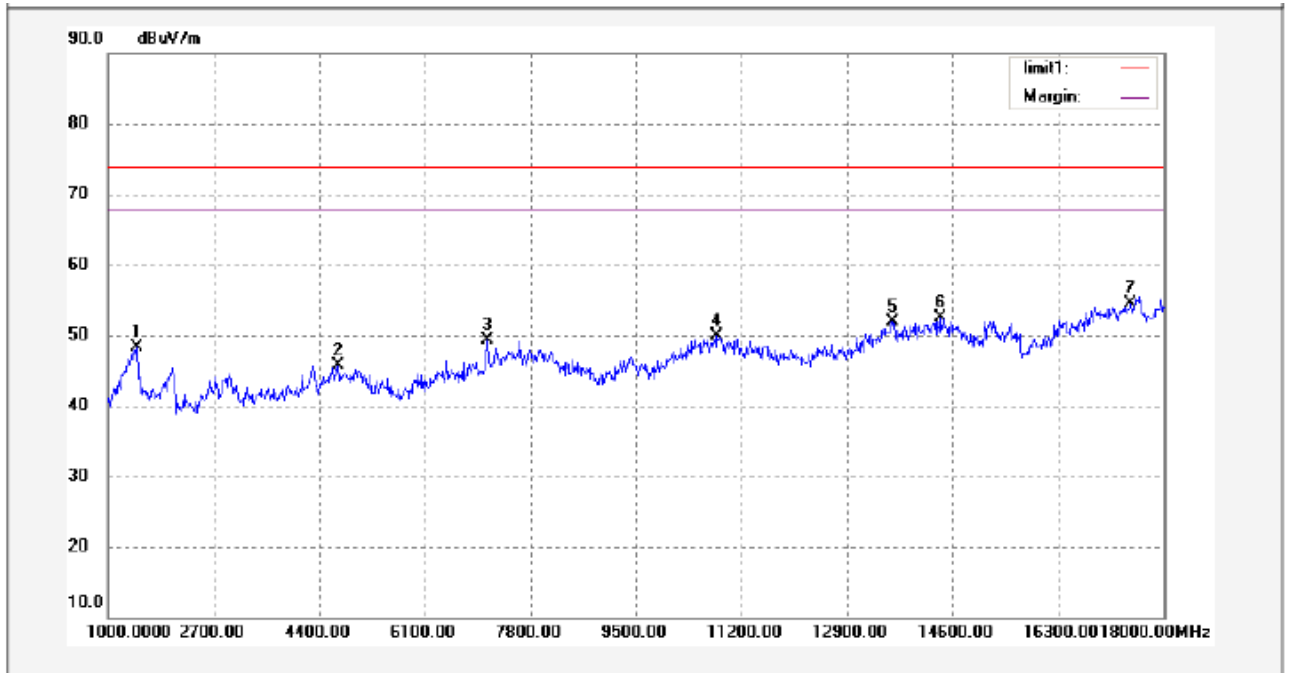

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1459.000	61.19	-12.94	48.25	74.00	-25.75	peak	
2	4706.000	49.24	-3.46	45.78	74.00	-28.22	peak	
3	7103.000	45.83	3.44	49.27	74.00	-24.73	peak	
4	10809.000	38.91	11.02	49.93	74.00	-24.07	peak	
5	13631.000	36.22	15.63	51.85	74.00	-22.15	peak	
6	14396.000	34.15	18.38	52.53	74.00	-21.47	peak	
7	17473.000	31.71	22.70	54.41	74.00	-19.59	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1459.000	-15	33.25	54.00	-20.75	AV	
2	4706.000	-15	30.78	54.00	-23.22	AV	
3	7103.000	-15	34.27	54.00	-19.73	AV	
4.	10809.000	-15	34.93	54.00	-19.07	AV	
5.	13631.000	-15	36.85	54.00	-17.15	AV	
6.	14396.000	-15	37.53	54.00	-16.47	AV	
7.	17473.000	-15	39.41	54.00	-14.59	AV	

Test Frequency :Above 18GHz

After pretest,we found no higher emission than background level, the data does not been shown in the test report.


8 Duty Cycle

Test Requirement: FCC Part 15.35
Test Method: ANSI C63.4:2003
Test Status: TX mode.

8.1 Test Procedure


1. The EUT was placed on a turntable which is 0.8m above ground plane
2. Set EUT as normal working mode
3. Set SPA center frequency = fundamental frequency, RBW = 100 kHz, VBW = 100 kHz, Span = 0 Hz, Adjacent sweep time.

8.2 Test Result

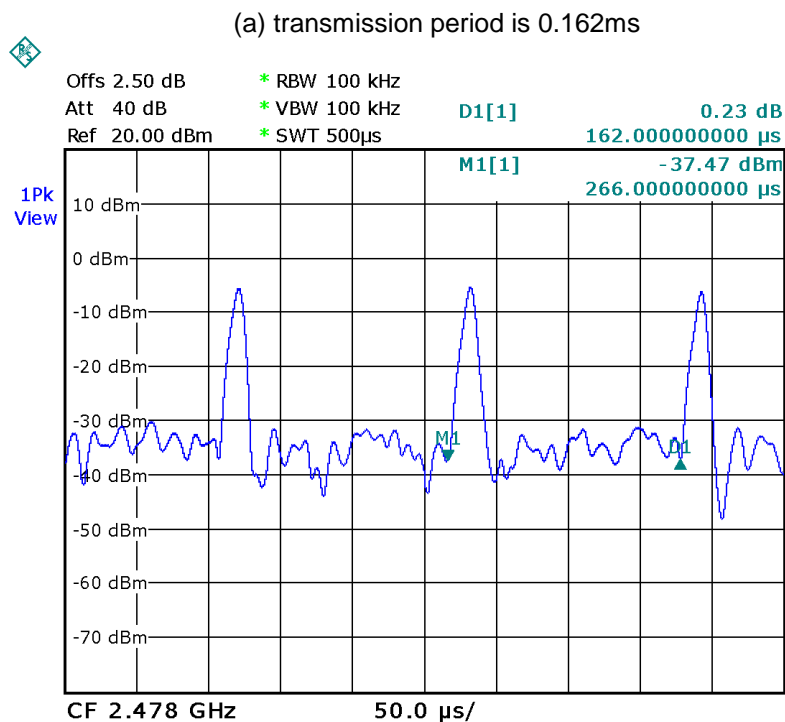

Date: 19.JAN.2013 17:17:28

(b) Single pulse time is 0.030ms

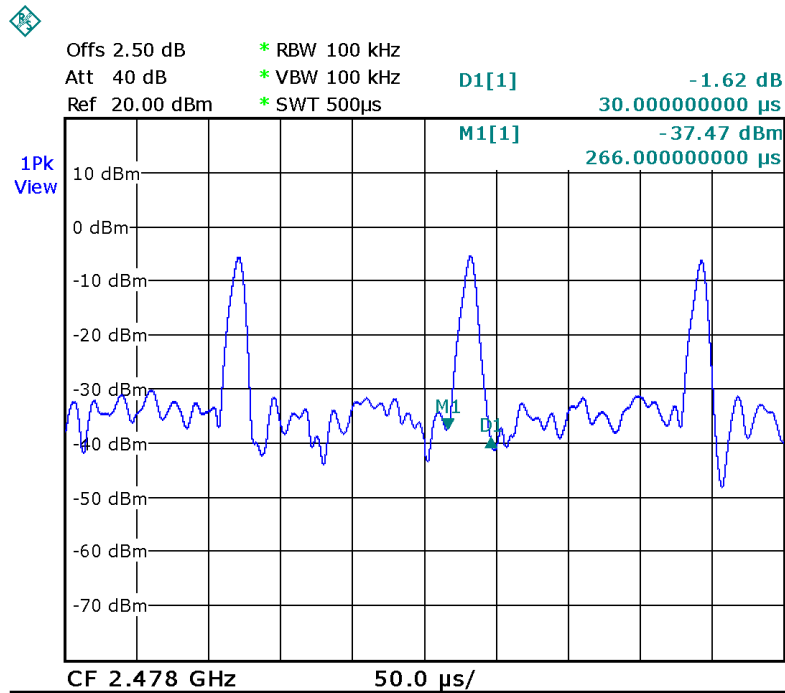

Date: 19.JAN.2013 17:17:15

The EUT is auto. operation for transmitter, it is declared by the manufacturer as a duty cycle ratio of less than 100%.

The EUT's work time : $T_{on} = \text{pulse time} = 0.030 \text{ ms}$

The EUT's work period : $T = T_{ON} + T_{OFF} = \text{transmission period} = 0.162 \text{ ms}$

The EUT's duty cycle : $D = T_{on} / T = 0.030 / 0.162 * 100\% = 18.52\%$

Duty Cycle Correction Factor(dB) = $20 * \text{Log}_{10}(\text{Duty Cycle}) = 20 * \text{Log}_{10}(18.52\%)$


= -15dB

9 Band Edge Measurement

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	DA 00-705
Measurement Distance:	3m
Limit:	40.0 dBuV/m between 30MHz & 88MHz; 43.5 dBuV/m between 88MHz & 216MHz; 46.0 dBuV/m between 216MHz & 960MHz; 54.0 dBuV/m above 960MHz. 74.0 dBuV/m for peak above 1GHz 54.0 dBuV/m for AVG above 1GHz
Detector:	For Peak value: RBW = 1 MHz for $f \geq 1$ GHz VBW \geq RBW; Sweep = auto Detector function = peak Trace = max hold For AVG value: RBW = 1 MHz for $f \geq 1$ GHz VBW = 10Hz; Sweep = auto Detector function = AVG Trace = max hold

9.1 Test Result:


Lower Channel – Peak, Vertical

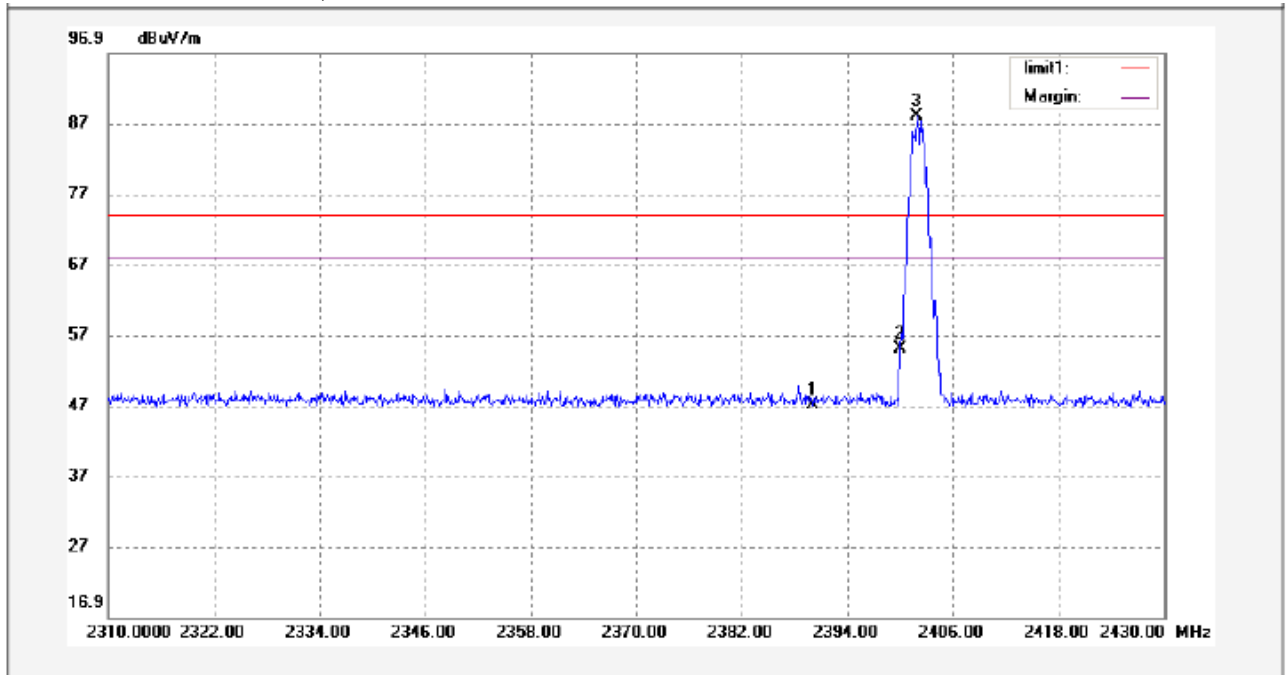

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2390.000	44.53	2.53	47.06	74.00	-26.94	peak	
2	2400.000	52.47	2.52	54.99	74.00	-19.01	peak	
3	2401.920	85.53	2.52	88.05	74.00	14.05	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2390.000	-12	35.06	54.00	-18.94	AV	
2	2400.000	-12	42.99	54.00	-11.01	AV	
3	2401.920	-12	76.05	54.00	22.05	AV	


Lower Channel – Peak, Horizontal

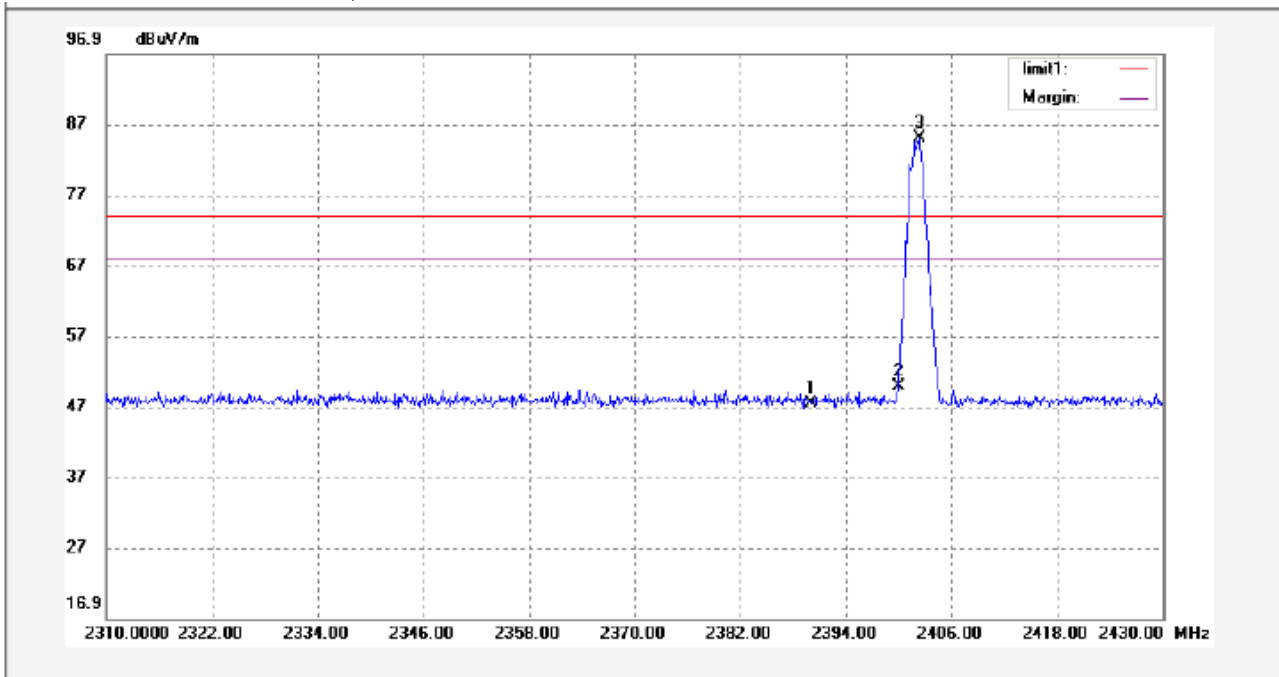

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2390.000	44.94	2.53	47.47	74.00	-26.53	peak	
2	2400.000	47.36	2.52	49.88	74.00	-24.12	peak	
3	2402.400	82.41	2.51	84.92	74.00	10.92	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2390.000	-12	35.47	54.00	-18.53	AV	
2	2400.000	-12	37.88	54.00	-16.12	AV	
3	2402.400	-12	72.92	54.00	18.92	AV	


Upper Channel – Peak, Vertical

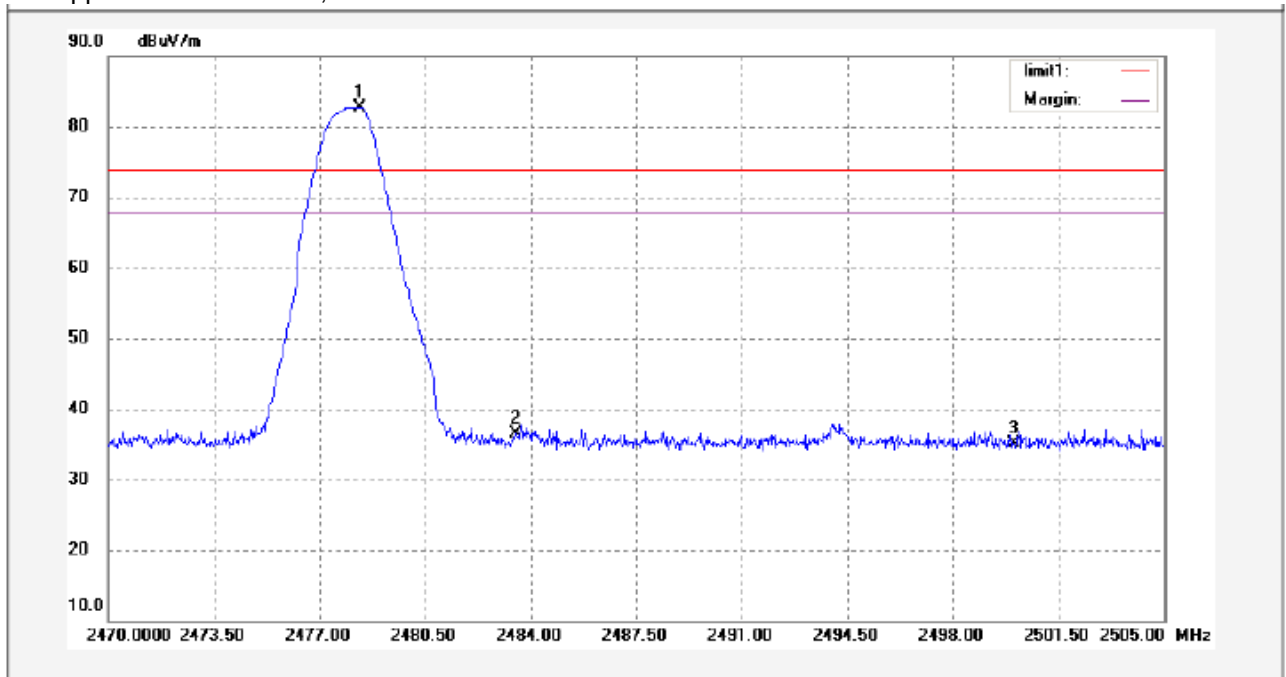

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2478.330	91.97	-9.22	82.75	74.00	8.75	peak	
2	2483.500	45.73	-9.20	36.53	74.00	-37.47	peak	
3	2500.000	44.28	-9.15	35.13	74.00	-38.87	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2478.330	-12	70.75	54.00	16.75	AV	
2	2483.500	-12	24.53	54.00	-29.47	AV	
3	2500.00	-12	23.13	54.00	-30.87	AV	

Upper Channel – Peak, Horizontal

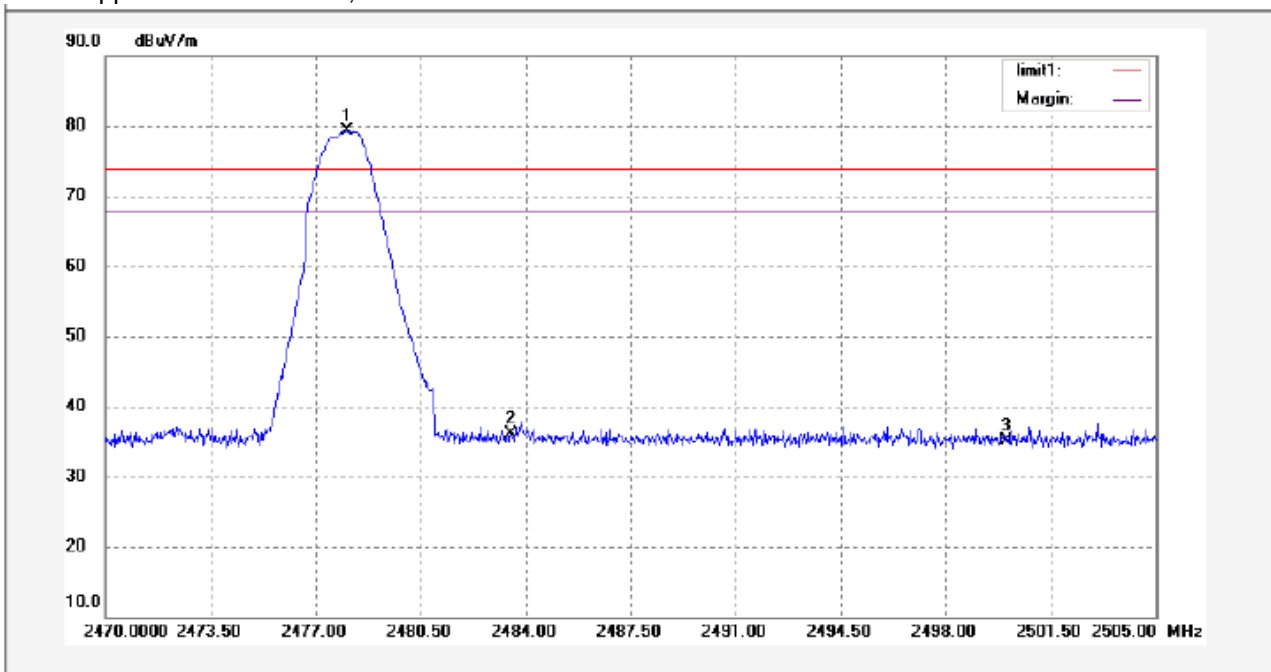

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2478.050	88.46	-9.22	79.24	74.00	5.24	peak	
2	2483.500	45.37	-9.20	36.17	74.00	-37.83	peak	
3	2500.000	44.22	-9.15	35.07	74.00	-38.93	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2478.050	-12	67.24	54.00	13.24	AV	
2	2483.500	-12	24.17	54.00	-29.83	AV	
3	2500.000	-12	23.07	54.00	-30.93	AV	

10 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247
 Test Method: DA 00-705
 Test Mode: Test in fixing operating frequency at low, Middle, high channel.


10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 100kHz


10.2 Test Result:

Test Channel	Bandwidth
Low	1.936MHz
Middle	2.006MHz
High	1.866MHz


Test result plot as follows:

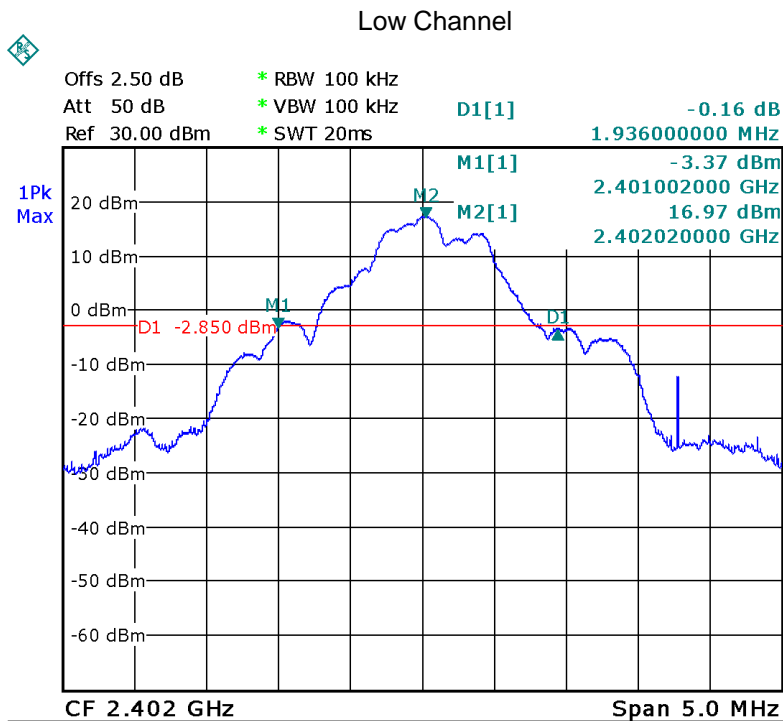

Date: 19.JAN.2013 15:50:04

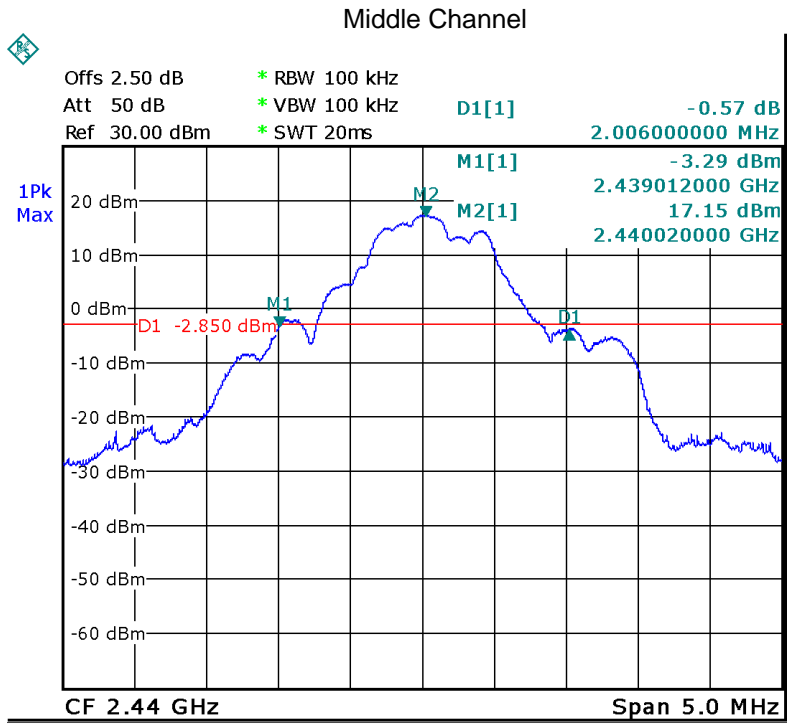

Date: 19.JAN.2013 15:49:04

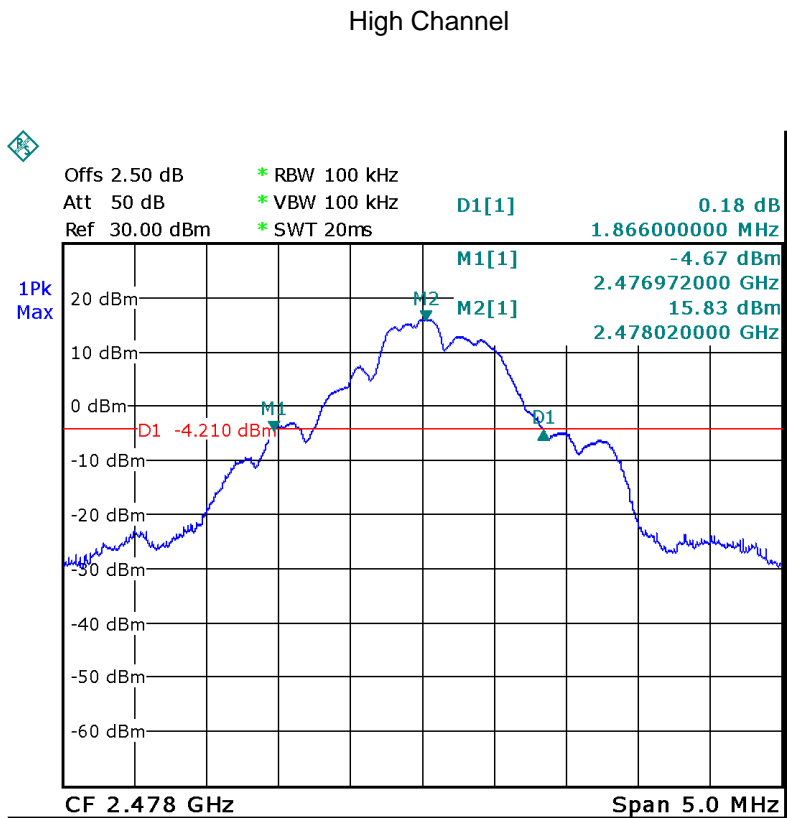

Date: 19.JAN.2013 15:43:39

11 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 0.125watts (20.97 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.

11.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 1 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

11.2 Test Result:

Test Channel	Output Power (dBm)	Limit (dBm)
Low	17.12	20.97
Middle	17.07	20.97
High	15.86	20.97


Remark:Antenna gain is 2dBi,RF cable loss is 0.5dB,then the offset is 2.5dB.

Test result plot as follows:

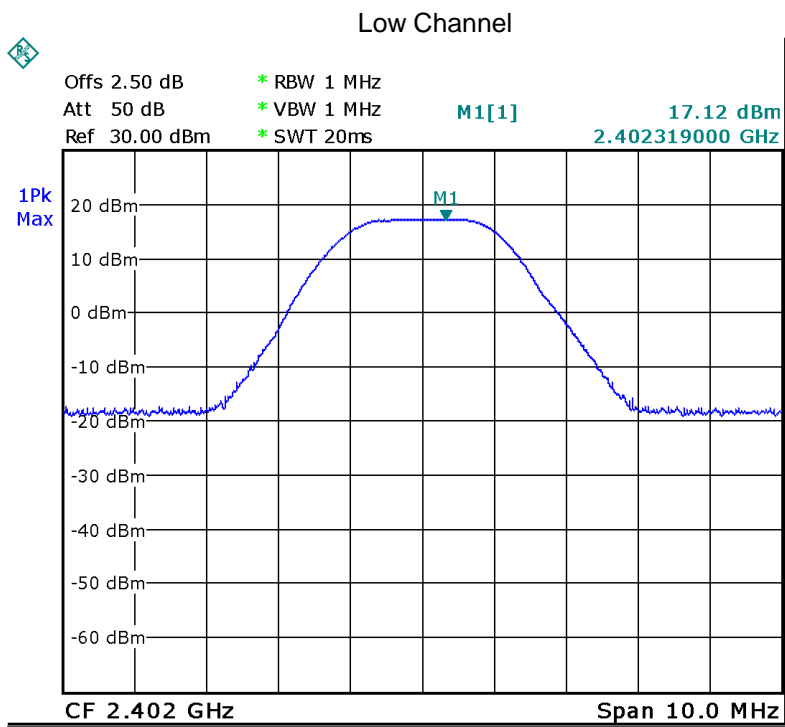


Date: 19.JAN.2013 15:39:58

Middle Channel

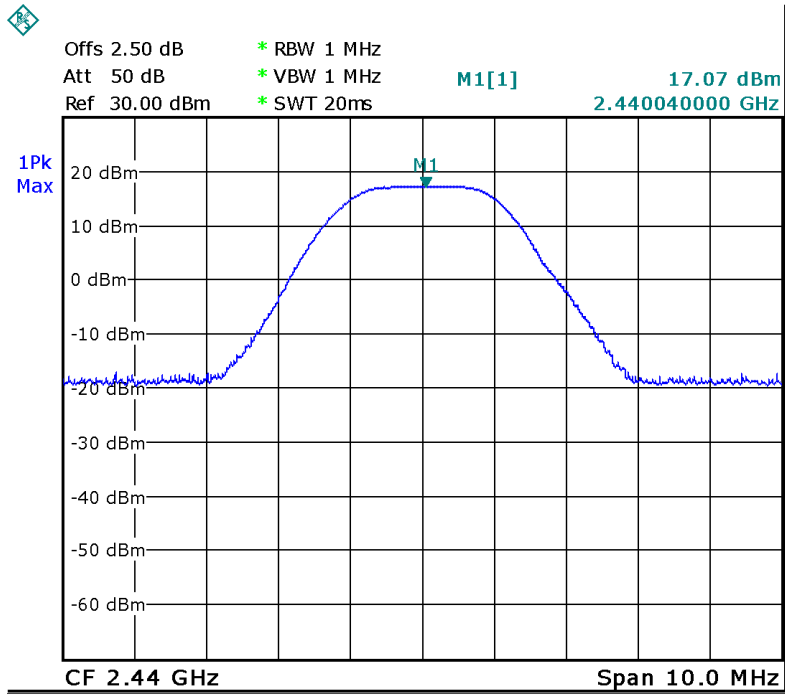

Date: 19.JAN.2013 15:40:47

High Channel

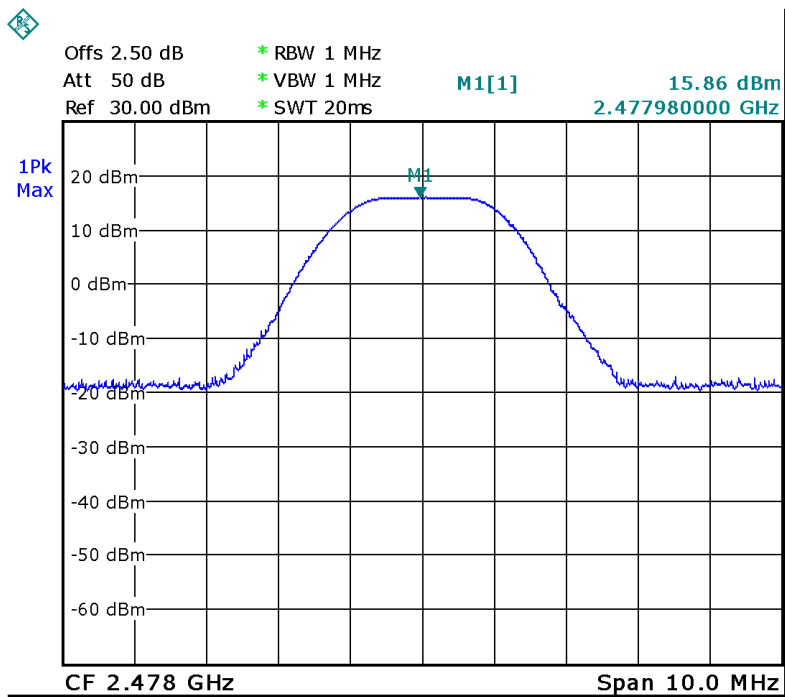

Date: 19.JAN.2013 15:41:21

12 Hopping Channel Separation

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Limit: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.

Test Mode: Test in hopping transmitting operating mode.

12.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz , Span = 5MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.

12.2 Test Result:

Test Channel	Separation (MHz)	Result
Low	2.006	PASS
Middle	2.016	PASS
High	2.006	PASS


Test result plot as follows:

Low Channel

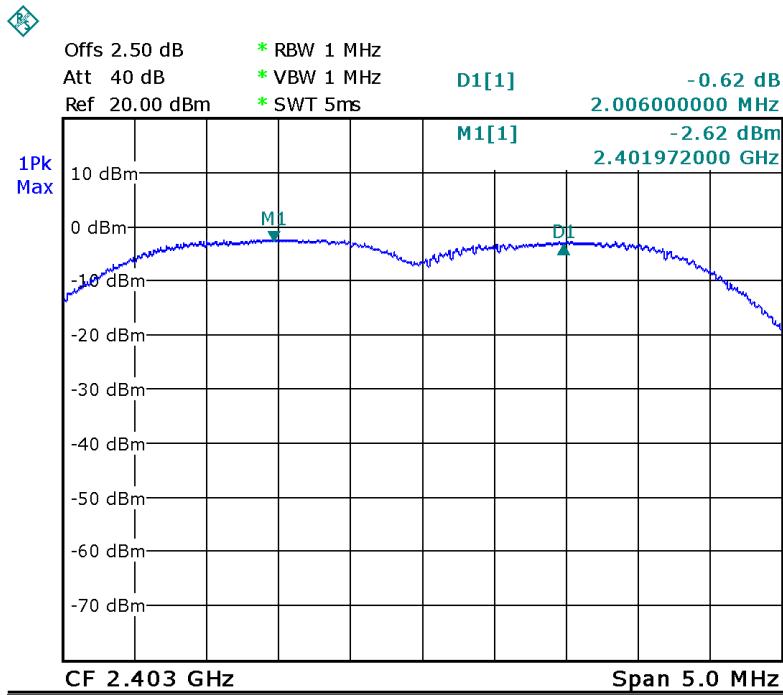


Date: 24.JAN.2013 14:13:25

Middle Channel

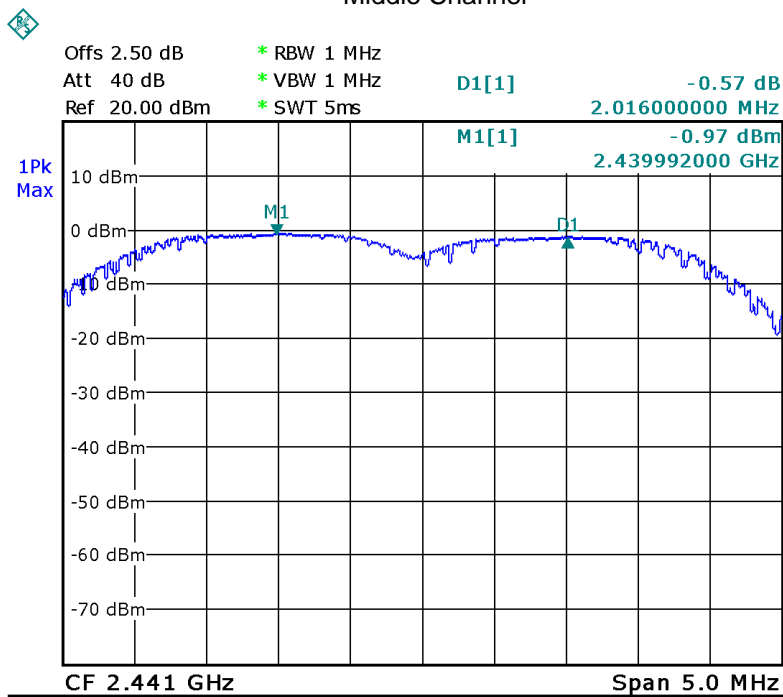

Date: 24.JAN.2013 14:11:58

High Channel

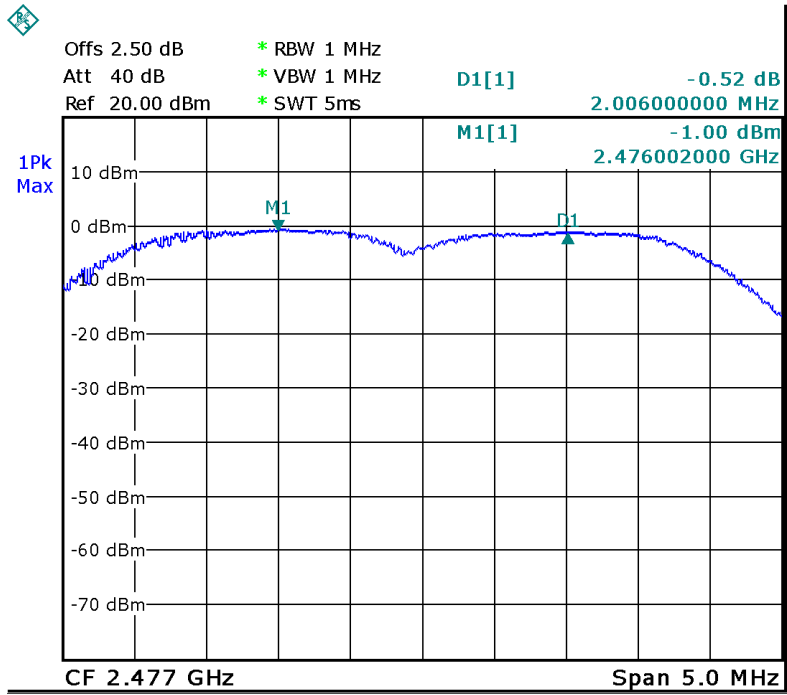

Date: 24.JAN.2013 14:10:49

13 Number of Hopping Frequency


Test Requirement: FCC CFR47 Part 15 Section 15.247
Test Method: DA 00-705
Test Limit: Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode: Test in hopping transmitting operating mode.

13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

13.2 Test Result:

Total Channels are 39 Channels.

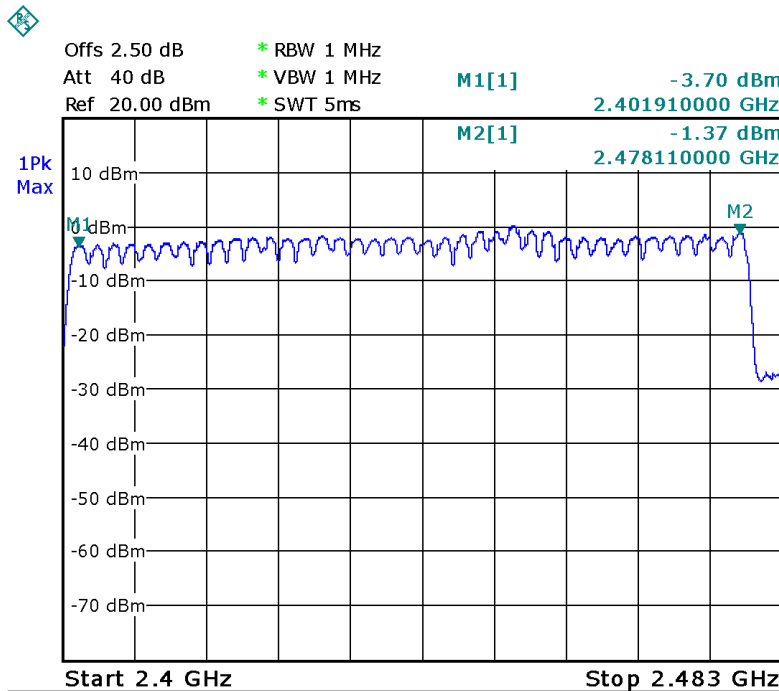

Date: 24.JAN.2013 14:07:57

14 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

14.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centered on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 1MHz.Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

14.2 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period: $T = 0.4(s) * 39 = 15.6 (s)$


So, the Dwell Time can be calculated as follows:

Dwell time = $31 * 15.6 * (MkrDelta) / 1000$


Note : Mkr Delta is once pulse time.

Frequency	Mkr Delta(ms)	Dwell Time(s)	Limits(s)	Result
2402 MHz	0.210	0.102	0.400	Pass
2440 MHz	0.209	0.102	0.400	Pass
2478 MHz	0.212	0.103	0.400	Pass


Low Channel

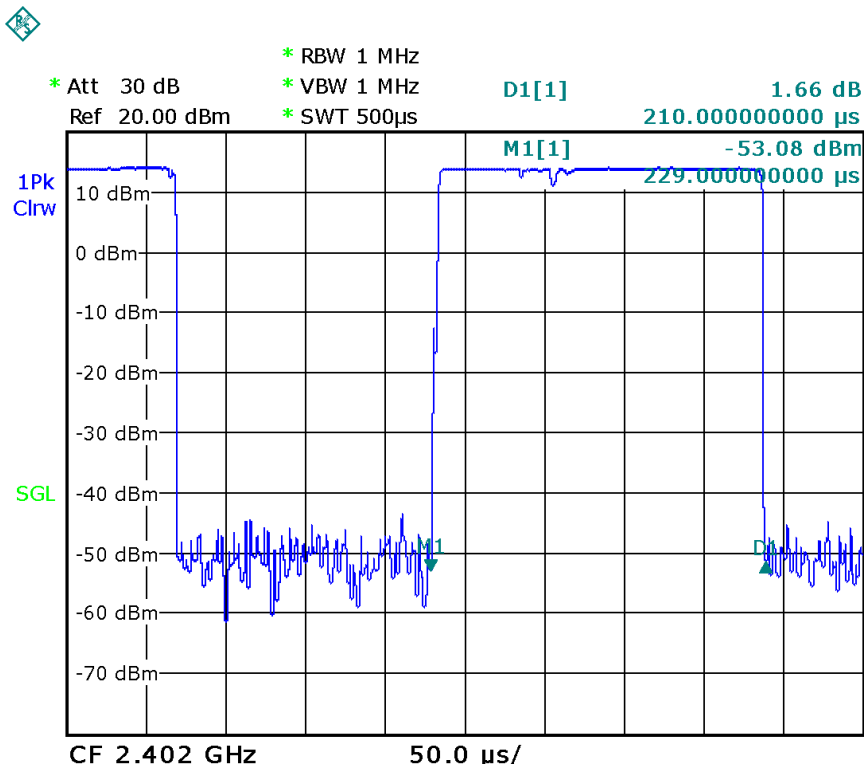

Middle Channel

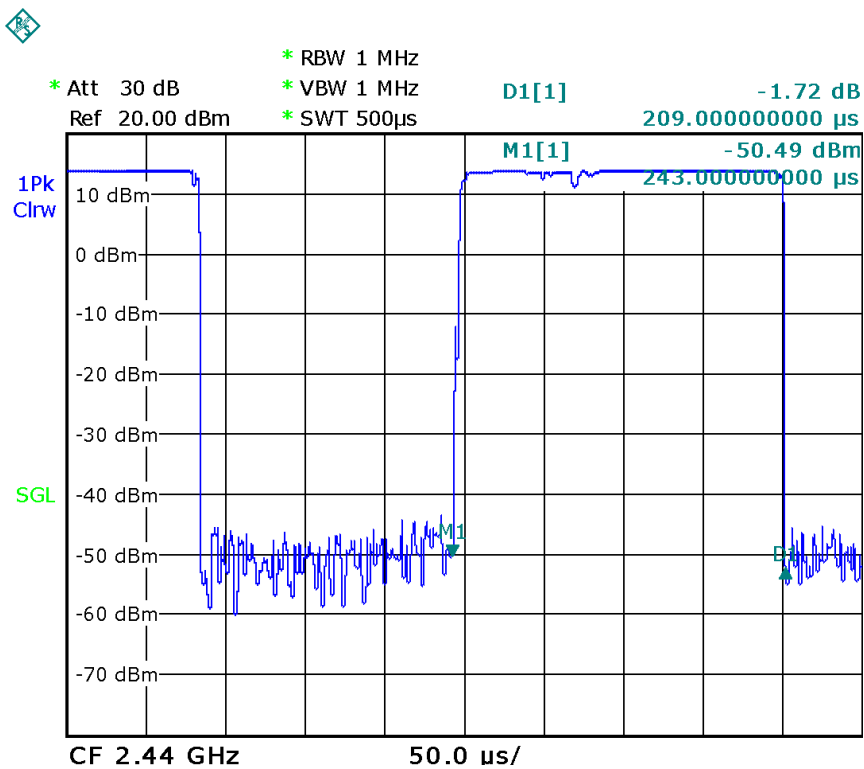

High Channel

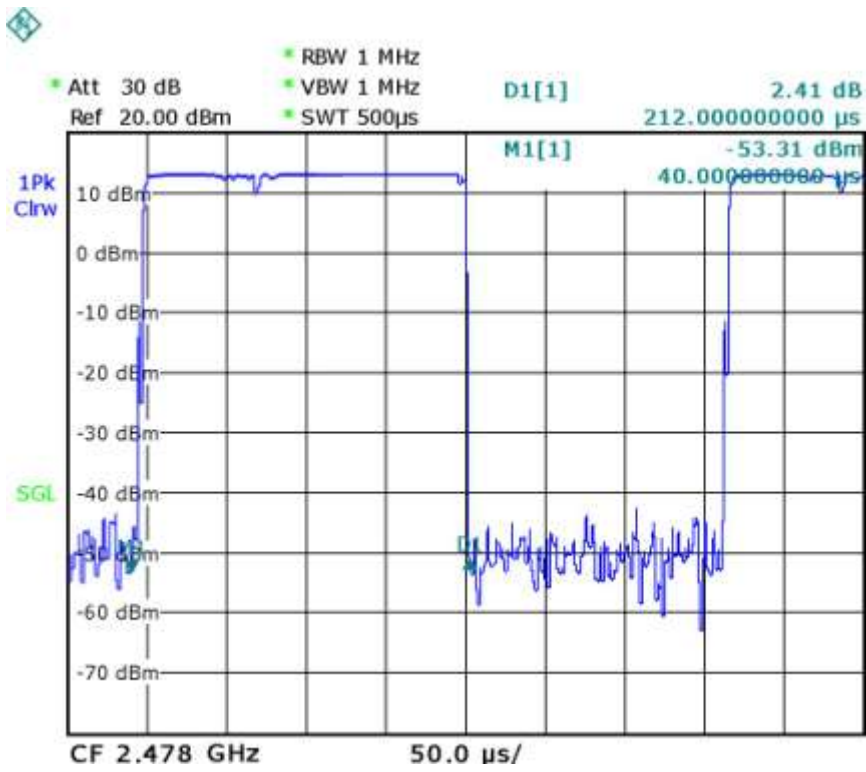

15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a antenna with RP SMA connector, fulfill the requirement of this section.

16 RF Exposure

Test Requirement: FCC Part 1.1307

Test Mode: The EUT work in test mode(Tx).

16.1 Requirments:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

16.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

16.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, $d=0.2\text{m}$, as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
2	1.58	17.12	51.52	0.016	1	Complies


17 Photographs – Test Setup

17.1 Photograph – Radiation Spurious Emission Test Setup


Below 30MHz



30MHz-1GHz

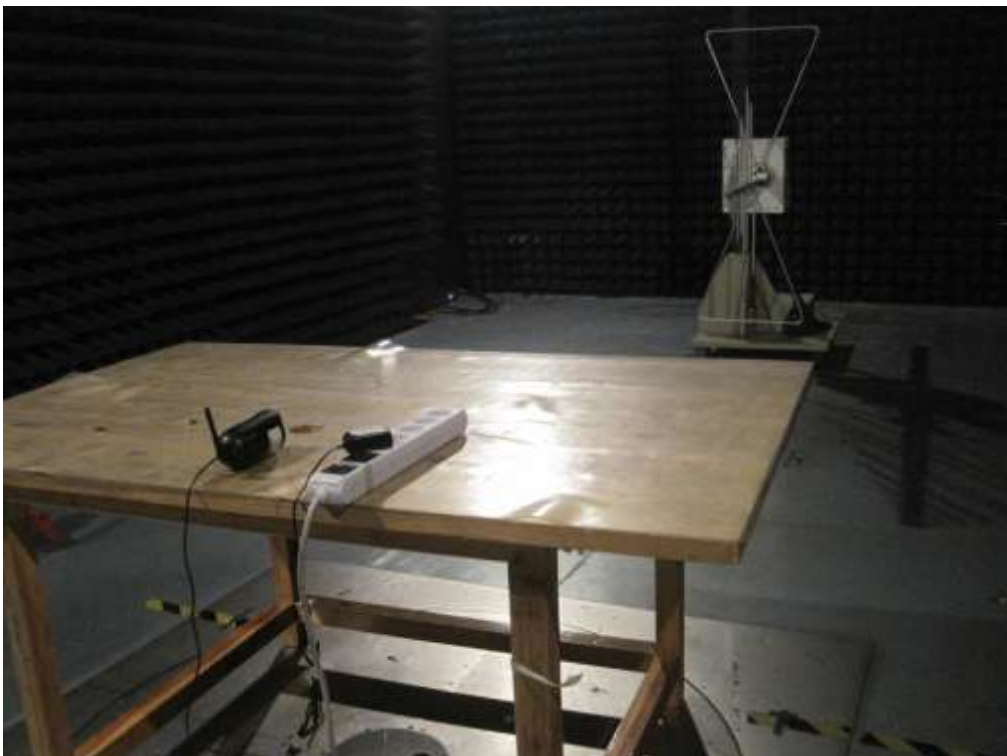

Above 1GHz

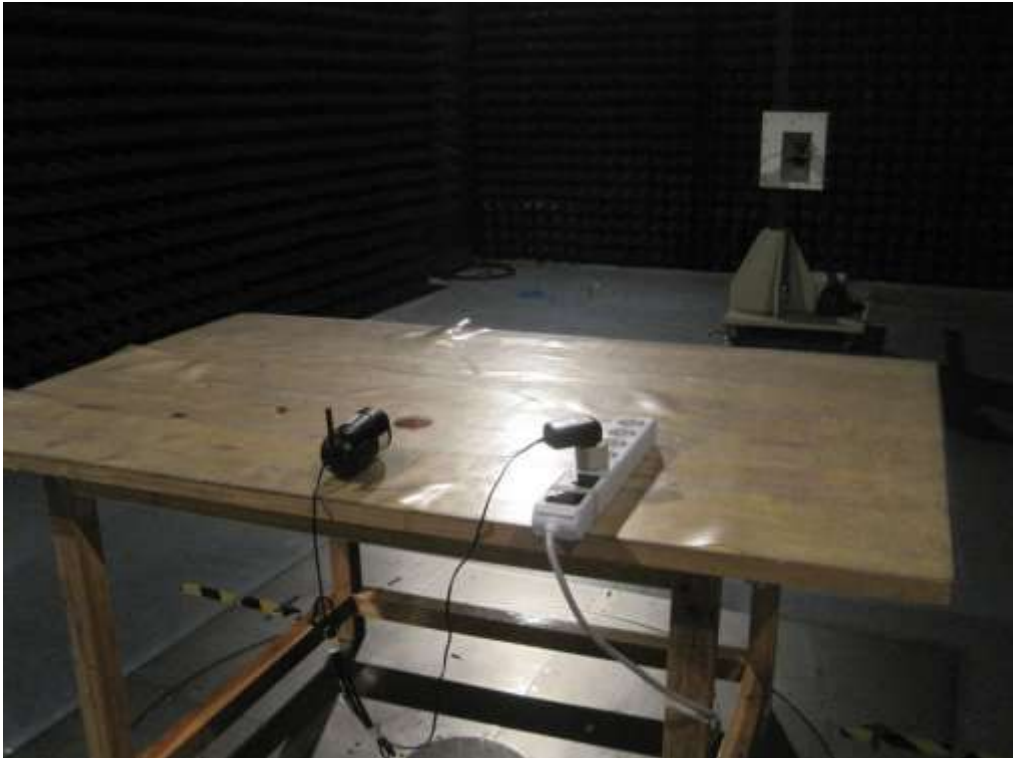

17.2 Photograph – Conducted Emission Test Setup




18 Photographs - Constructional Details

18.1 External View










18.2 EUT - Internal View

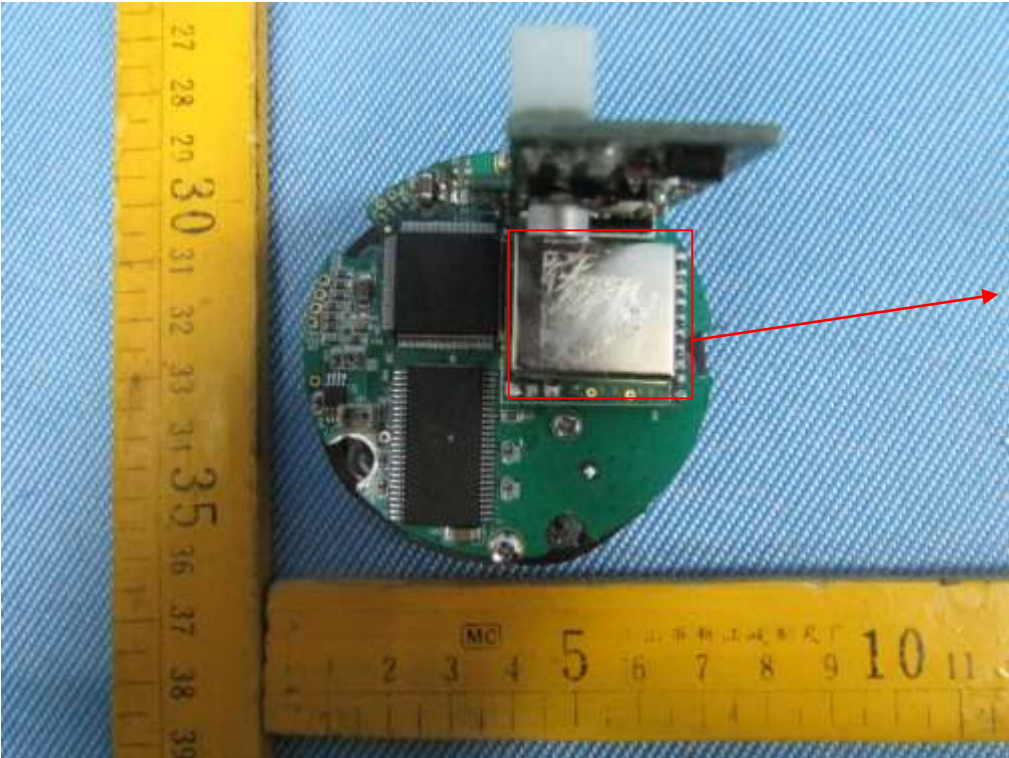



RF module

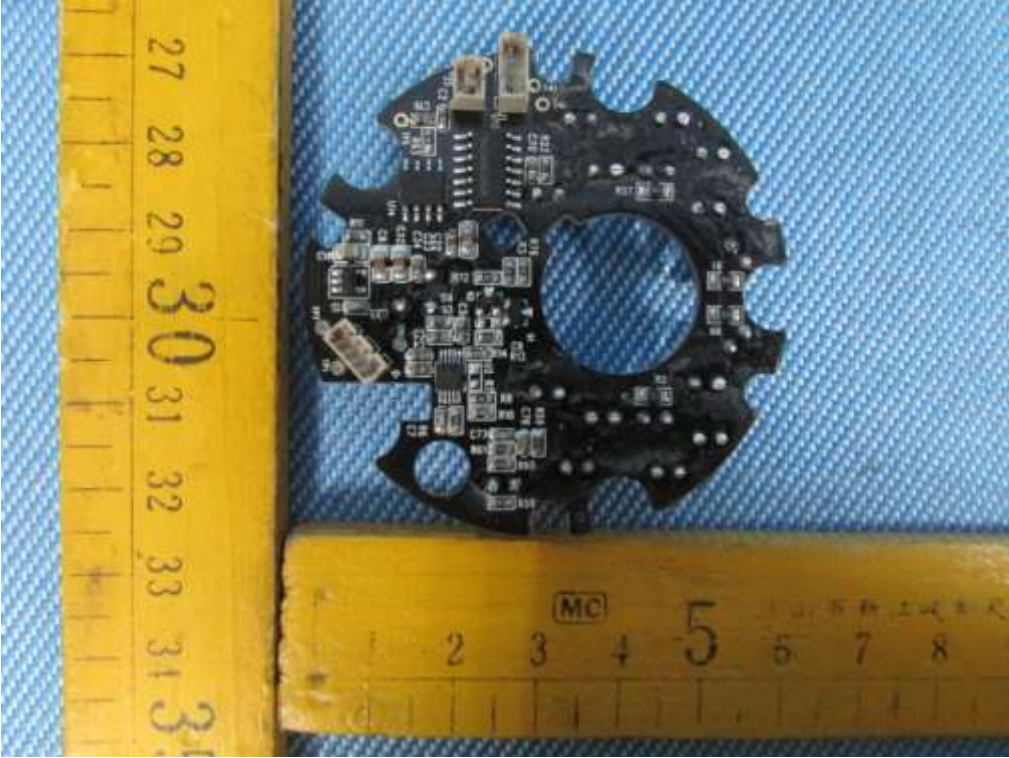

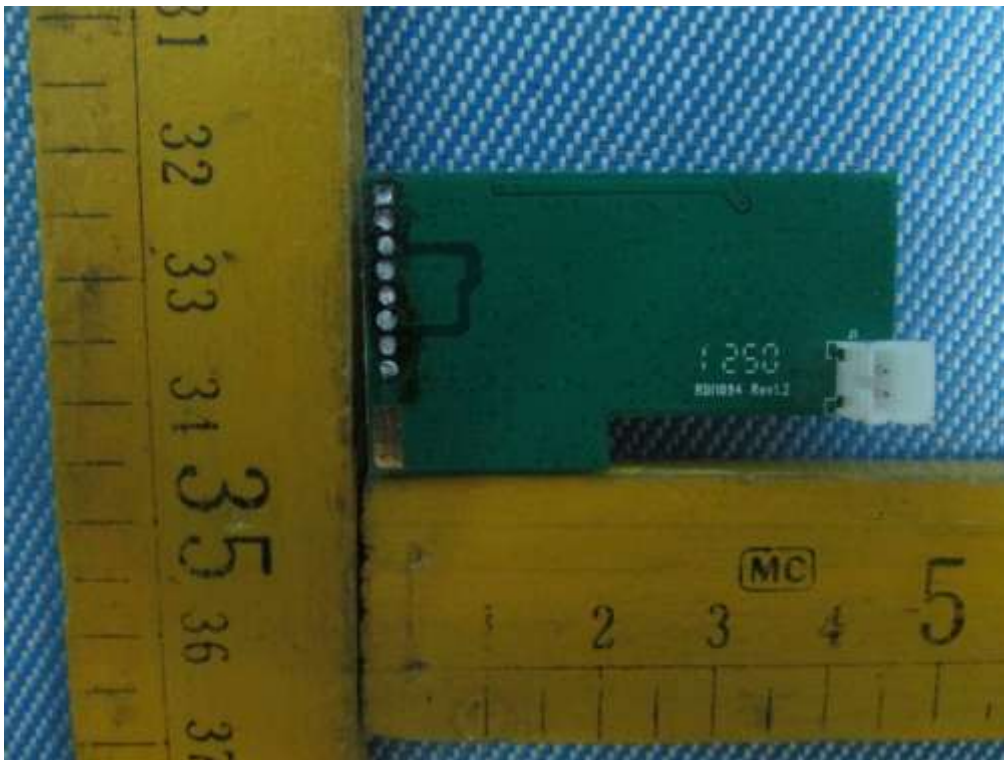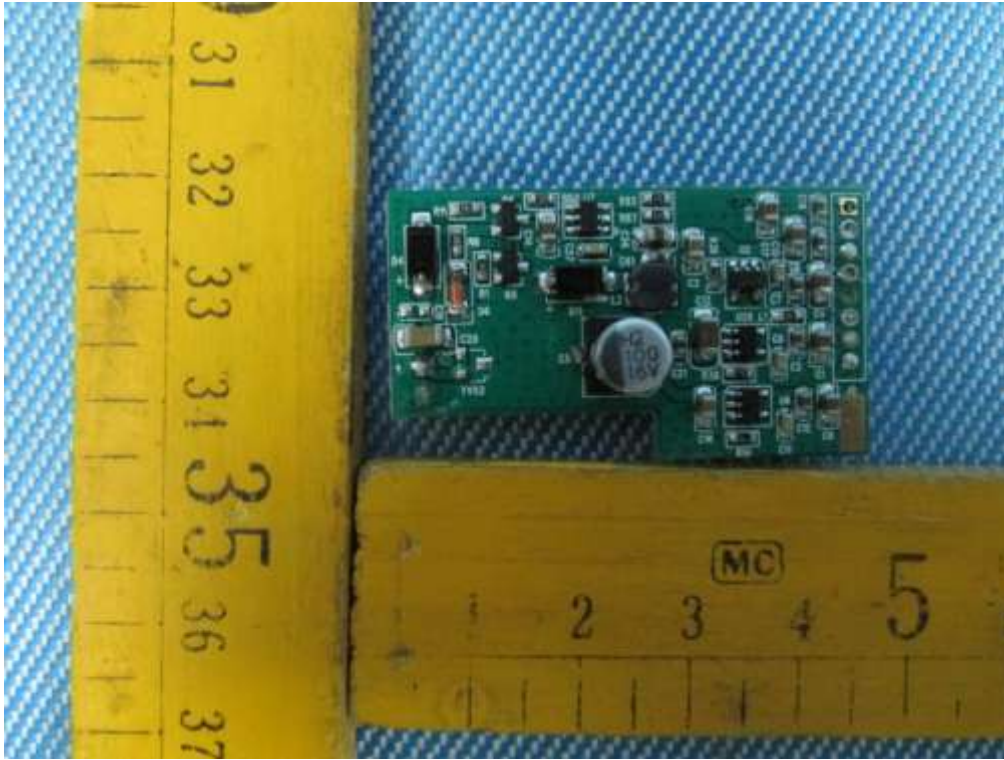

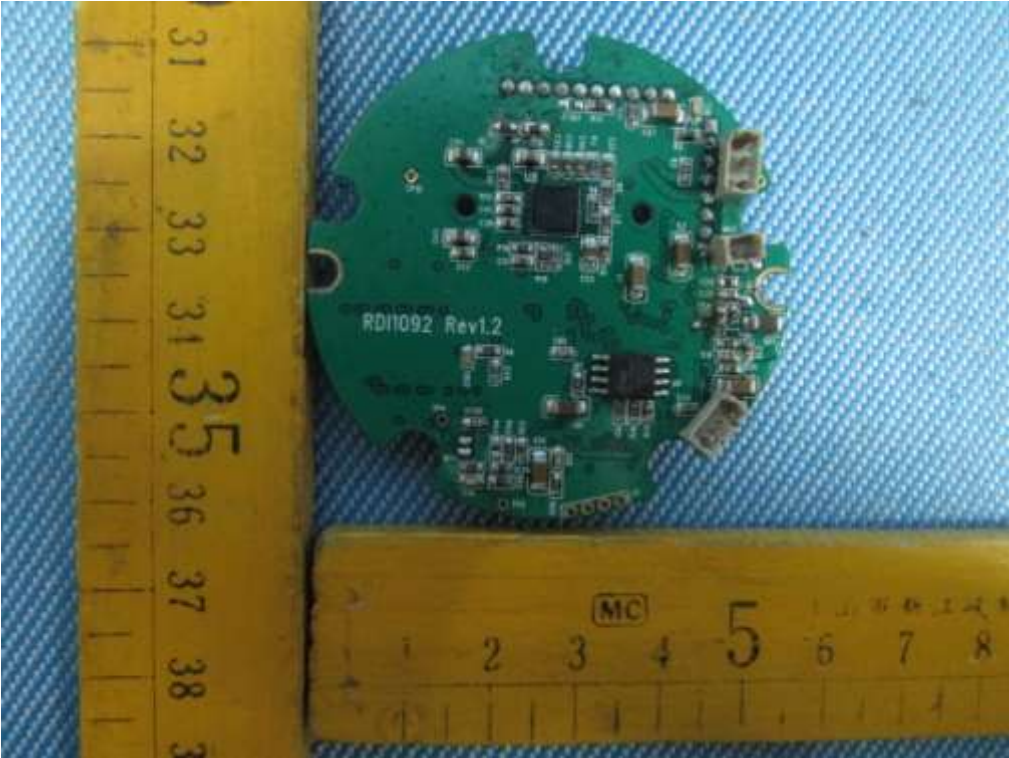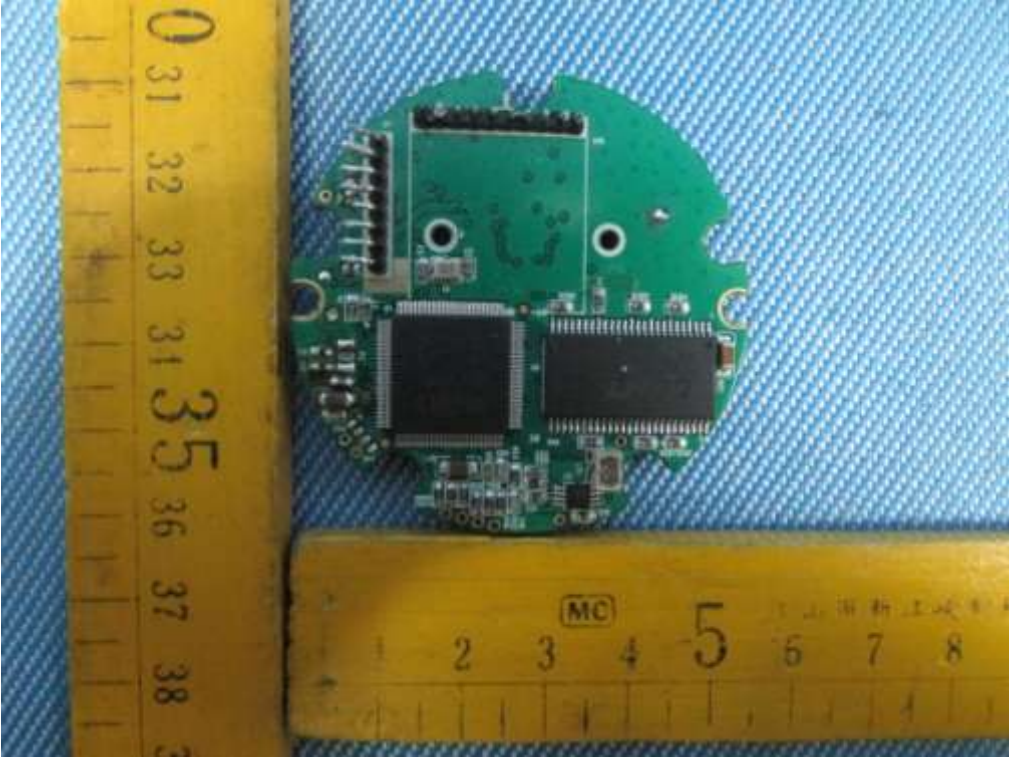

18.3 EUT – RF module View

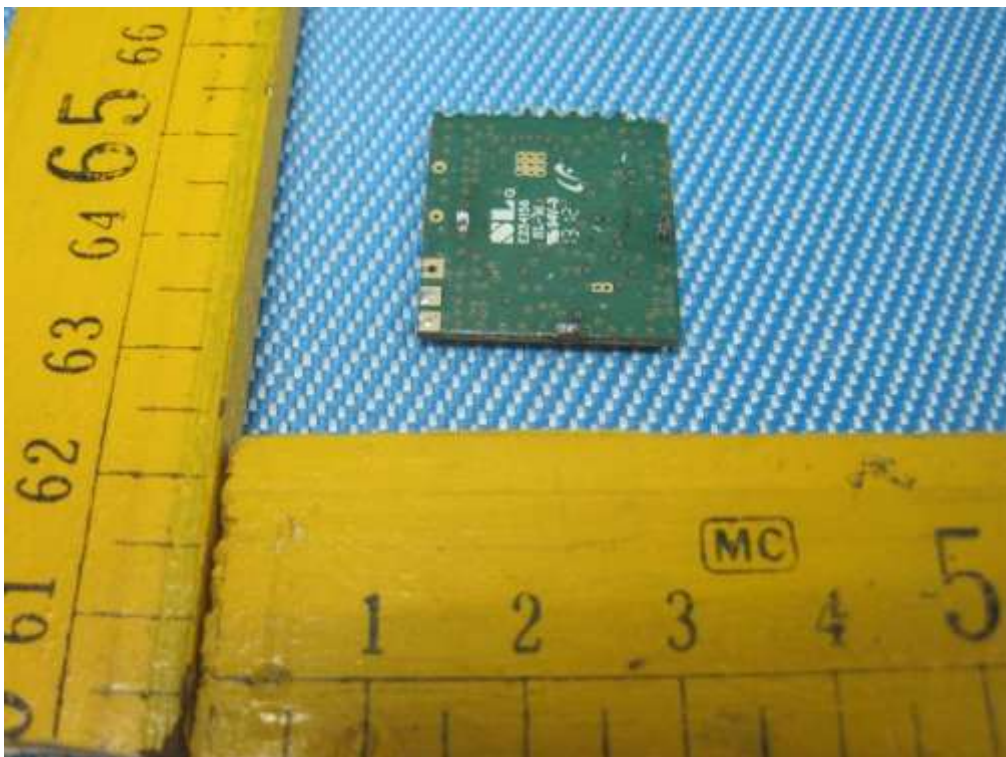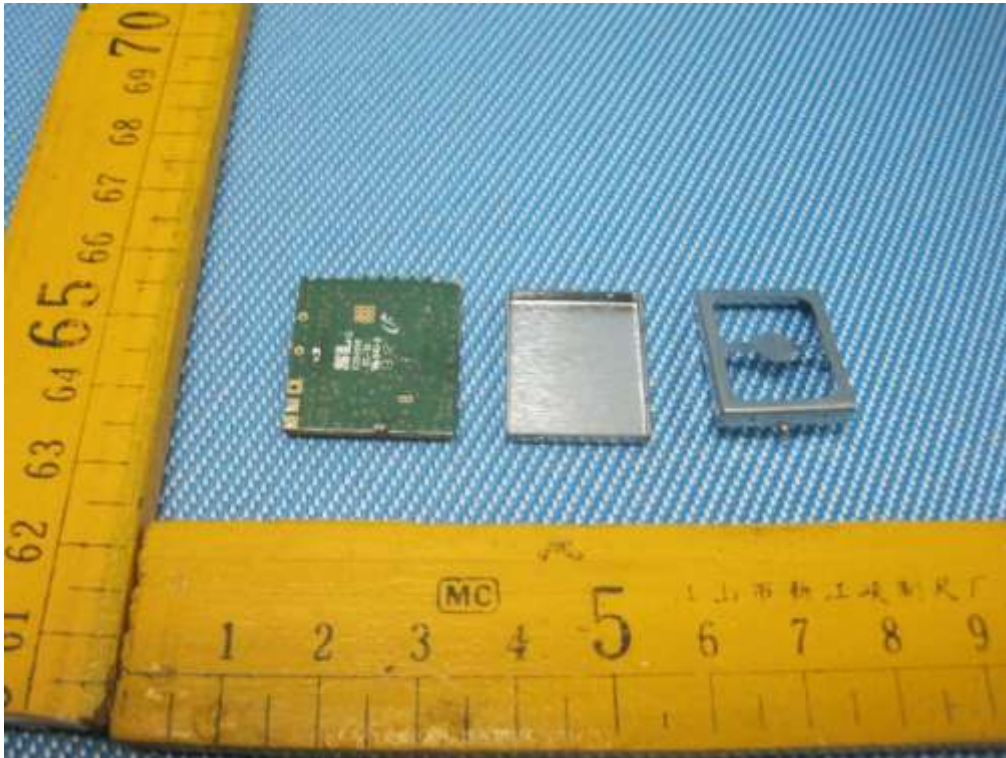



19 FCC Label

FCC Label Sample for model: CA810A

FCC ID: SJ8-CA810A

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

FCC Label Location for model: CA810A

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.



=End of report=