

HYUNDAI CALIBRATION & CERTIFICATION TECH. CO., LTD.

Product Compliance Division, EMC Team
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNKI-DO, 467-701, KOREA
TEL : +82 31 639 8517 FAX : +82 31 639 8525

CERTIFICATION

Manufacture;

idisplay.tv corporation

5690 STEWART AVENUE FREMONT, CA 94538

idisplay.tv corporation FRN : 0011-5528-82

Date of Issue : SEPTEMBER 10, 2004

Test Report No.: HCT-F04-0904

Test Site: HYUNDAI CALIBRATION & CERTIFICATION
TECHNOLOGIES CO., LTD.

HCT FRN : 0005-8664-21

FCC ID :

SJJPAT-42EPI9N

MODEL:

PAT-42EPI9N

Rule Part(s): Part 15 & 2; ET Docket 95-19
Equipment Class: FCC Class B Peripheral Device (JBP)
Standard(s): FCC Class B (CISPR 22)
EUT Type: PDP TV Monitor
Max. Resolution(s): 1024 X 768 (@85Hz)
Model: PAT-42EPI9N
Port/Connector(s): RS-232, Phone Jack, DVI, PC audio input, D-SUB, Component 1, DVI audio input, Component 2, DVD audio, S-video, VCR video Composite, VCR audio, Video out, Antenna, POWER, SPEAKER

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2001 (Grant Notes: #19, #28).

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Report prepared by : Ki-Soo Kim
Manager of EMC Tech. Part



TABLE OF CONTENTS

PAGE

REPORT COVER	1
TABLE OF CONTENTS	2
1.1 SCOPE	3
2.1 INTRODUCTION (SITE DESCRIPTION)	4
3.1 PRODUCTION INFORMATION	5-6
4.1 DESCRIPTION OF TESTS (CONDUCTED)	7
4.3 DESCRIPTION OF TESTS (RADIATED)	8
5.1 LIST OF SUPPORT EQUIPMENT	9-11
6.1 TEST DATA (CONDUCTED)	12-16
7.1 TEST DATA (RADIATED)	17
8.1 SAMPLE CALCULATIONS	18
9.1 TEST EQUIPMENT	19
10.1 TEST SOFTWARE USED	20
11.1 CONCLUSION	21

ATTACHMENT A: FCC ID LABEL & LOCATION

ATTACHMENT B: EXTERNAL PHOTOGRAPHS

ATTACHMENT C: BLOCK DIAGRAM

ATTACHMENT D: TEST SETUP PHOTOGRAPHS

ATTACHMENT E-1: USER'S MANUAL 1

ATTACHMENT E-2: USER'S MANUAL 2

ATTACHMENT E-3: USER'S MANUAL 3

ATTACHMENT F-1: INTERNAL PHOTOGRAPHS 1

ATTACHMENT F-2: INTERNAL PHOTOGRAPHS 2

MEASUREMENT REPORT

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

Applicant Name:	idisplay.tv corporation
Address:	5690 STEWART AVENUE FREMONT, CA 94538

- **FCC ID : SJJPAT-42EPI9N**
- Equipment Class: FCC Class B Peripheral Device (JBP)
- EUT Type: PDP TV MONITOR
- Model(s): SJJPAT-42EPI9N
- Rule Part(s): FCC Part 15 Subpart B
- Test Procedure(s): ANSI C63.4 (2001)
- Dates of Tests: August 16, 2004 ~ August 20, 2004
- Place of Tests: 254-1,MAEKOK-RI,HOBUP-MYUN,ICHON-SI,KYOUNGKI-DO,467-701,KOREA

2.1 INTRODUCTION

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-1992) was used in determining radiated and conducted emissions emanating from **idisplay.tv corporation. PDP TV Monitor FCC ID: SJJPAT-42EPI9N**

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, MAEKOK-RI, HOBUP-MYUN, ICHON-SI, KYOUNGKI-DO, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 23, 2003 (Confirmation Number: EA90661)

3.1 PRODUCT INFORMATION

3.2 Equipment Description

Equipment Under Test (EUT) is the **idisplay.tv corporation**

Model : PAT-42EPI9N, PDP TV MONITOR

FCC ID : **SJJPAT-42EPI9N**

Maximum Resolution(s): 1024 X 768 (@68.68KHz/ 85Hz)

Frequency Range(s): H-Sync: 31KHz – 68KHz

V-Sync: 60Hz – 85 Hz

Power Supply: AC 100-240V 50/ 60Hz

Power Cord: *Unshielded* AC power cord

Port(s)/Input Connector(s): RS-232, Phone Jack, DVI, PC audio input, D-SUB,
Component input for DVD, DVD audio, S-video, VCR video Composite,
VCR audio, Video out, Audio out, Antenna, POWER, SPEAKER


Cable(s): RS-232, Phone Jack, Shielded DVI (with ferrite on both ends), PC audio input, Shielded D-Sub
(with ferrite on both ends), Component input for DVD, DVD audio, S-video, VCR video
Composite, VCR audio, Antenna, POWER, SPEAKER

Pixel : Horizontal : 852, Vertical : 480 DOT


Weight (Net) : 36Kg with package, 43Kg net product

EMI Suppression Devices:

1. Attach a gasket to the Rear Panel.

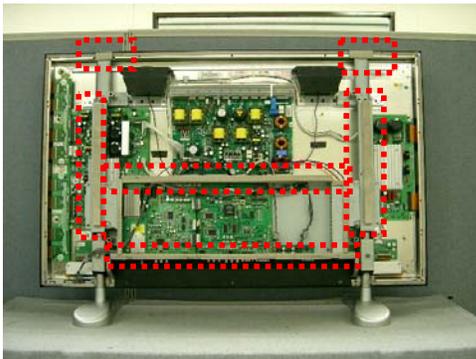

2. Apply a ferrite Core to the Speaker Cable and the gasket to the Rear Speaker Panel.

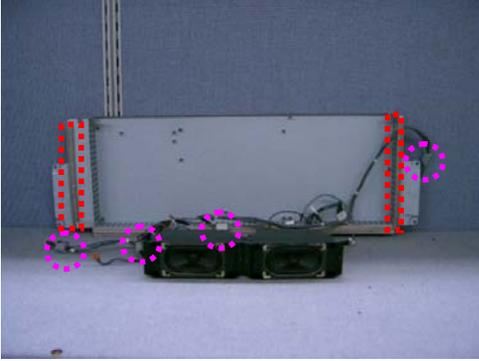

4.1 Description of Tests(Conducted)

4.2 Powerline Conducted RFI (150kHz- 30MHz)

The power line conducted RFI measurements were performed according to CISPR 22.

The EUT was placed on a non-conducting 1.0 by 1.5 meter table which is 0.8 meters in height and 0.40 meters away from the vertical wall of the shielded enclosure. Power to the EUT is provided through a Rohde & Schwarz 50 Ω / 50 uH Line Impedance Stabilization Network (LISN) and the support equipment through a separate Solar 50 Ω / 50 uH Line- Conducted Test Facility LISN. Sufficient time for the EUT, support equipment, and test equipment were allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME. The spectrum was scanned from 150kHz to 30 MHz. Each maximum EME was remeasured using an EMI receiver. The detector function of the receiver was set to CISPR quasi- peak and average mode with the bandwidth set to 9 kHz. Each emission was maximized consistent with the typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum Diagram emission. Excess cable lengths were bundled at the centre with 30- 40cm. in length. The worst-case configuration is noted in the test report and the photographs are attached. Each EME reported was calibrated using the Rohde & Schwarz SMX signal generator and are listed on Table 1. RFI Conducted FCC Class B

RFI CONDUCTED	CISPR 22 CLASS B Limits dB(uV/m)	
	CISPR 22 Quasi-Peak	CISPR 22 Average
150kHz - 0.5MHz	66-56**	56-46**
0.5MHz - 5MHz	56	46
5MHz - 30MHz	60	50
**Limits decreases linearly with the logarithm of frequency		

Table 1. RFI Conducted Limits

4.3 Description of Tests(Radiated)

Radiated Emissions

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The spectrum was scanned from 30 to 300 MHz using biconical antenna, 300 to 1000 MHz using log- periodic antenna, and above 1 GHz using linearly polarized horn antennas. Final measurements were made outdoors at 10-meter test range using Dipole antennas and EMI receiver. For frequencies above 1 GHz, horn antennas were used. Sufficient time for the EUT, support equipment, and test equipment were allowed in order for them to warm up to their normal operating condition. The EMI receiver detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120 kHz. The EUT, support equipment, and interconnecting cables were arranged to the configuration that produces the maximum EME emission found during preliminary scan. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Horizontal and vertical antenna polarizations were checked. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/ or support equipment, and powering the monitor the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission.

ITE Radiated Limits			
Frequency (MHz)	FCC Limit @ 3m. Quasi-Peak dB[μV/m]	FCC Limit @ 10m.* Quasi – Peak dB [μV/m]	CISPR Limit @ 10m. Quasi-Peak dB [μV/m]
30-88	40.0	29.5	30.0
88-216	43.5	33.0	30.0
216-230	46.0	35.6	30.0
230-960	46.0	35.6	37.0
960-1000	54.0	43.5	37.0
> 1000	54.0	43.5	43.5
* Limit extrapolated 20 dB/decade			

Table 2. Radiated Class B limits @ 10-meters

5.1 Support Equipment Used

DEVICE TYPE	MANUFACTURER	MODEL NUMBER	FCC ID / DoC	CONNECTED TO
PDP MONITOR (EUT)	idisplay.TV corporation	PAT-42EPI9N	SJJPAT-42EPI9N	P.C
P.C	H.P	HP Pavilion 8921	DoC	N/A
KEY BOARD	H.P	5181	DoC	P.C
MOUSE	MICROSOFT	Intellimouse	DoC	P.C
PRINTER	H.P	C4569A	DoC	P.C
Termination	<p style="text-align: center;"> Audio (10Ω) S-Video(75Ω) AV(Audio : 10Ω, Video : 75Ω) Composite 1 : (Audio : 10Ω, Video : 75Ω) Composite 2: (Audio : 10Ω, Video : 75Ω) </p>			

5.2 Cable Description

	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
MONITOR(EUT)	N	Y	1.8(P), 1.5(D)
PC(HOST)	N	N/A	1.8(P)
KEY BOARD	N/A	Y	1.8(D)
MOUSE	N/A	Y	1.8(D)
PRINTER	N	Y	1.8(P), 1.8(D)
RS-232	N/A	Y	1.8(D)
PHONE JACK	N/A	Y	1.8(D)
DVI	N/A	Y	1.8(D)
PC AUDIO	N/A	Y	1.8 (D)
D-SUB	N/A	Y	1.8(D)
COMPONENT DVD	N/A	Y	1.8(D)
AUDIO DVD	N/A	Y	1.8(D)
S-VIDEO	N/A	Y	1.5(D)
COMPOSITE VCR	N/A	Y	1.8(D)
AUDIO VCR	N/A	Y	1.8(D)
ANTENNA	N/A	Y	3.0(D)
POWER	N	N/A	1.8(P)

The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

5.3 Noise Suppression Parts on Cable. (I/O CABLE)

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
KEY BOARD	N	N/A	Y	P.C END
MOUSE	Y	P.C END	Y	P.C END
PRINTER	Y	BOTH END	Y	BOTH END
RS-232	N	N/A	Y	P.C END
PHONE JACK	N	N/A	N	N/A
DVI	Y	BOTH END	Y	BOTH END
PC AUDIO	N	N/A	Y	BOTH END
D-SUB	Y	BOTH END	Y	BOTH END
COMPONENT DTV	N	N/A	Y	BOTH END
AUDIO DTV	N	N/A	Y	BOTH END
COMPONENT DVD	N	N/A	Y	BOTH END
AUDIO DVD	N	N/A	Y	BOTH END
S-VIDEO	N	N/A	Y	BOTH END
COMPOSITE VCR	N	N/A	Y	BOTH END
AUDIO VCR	N	N/A	Y	BOTH END
ANTENNA	Y	BOTH END	Y	BOTH END
POWER	N	N/A	N	N/A


6.1 LINE-CONDUCTED TEST DATA

HCT
EMC TESTING Laboratory

EUT: PAT-42EPI9N
 Manufacturer: IDISPLAY
 Operating Condition: NORMAL
 Test Site: SHIELD ROOM
 Operator: KS-KIM
 Test Specification: CISPR 22 CLASS B
 Comment: H

SCAN TABLE: "CISPR 22 Voltage"

Short Description:		CISPR 22 Voltage					
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer	
150.0 kHz	500.0 kHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

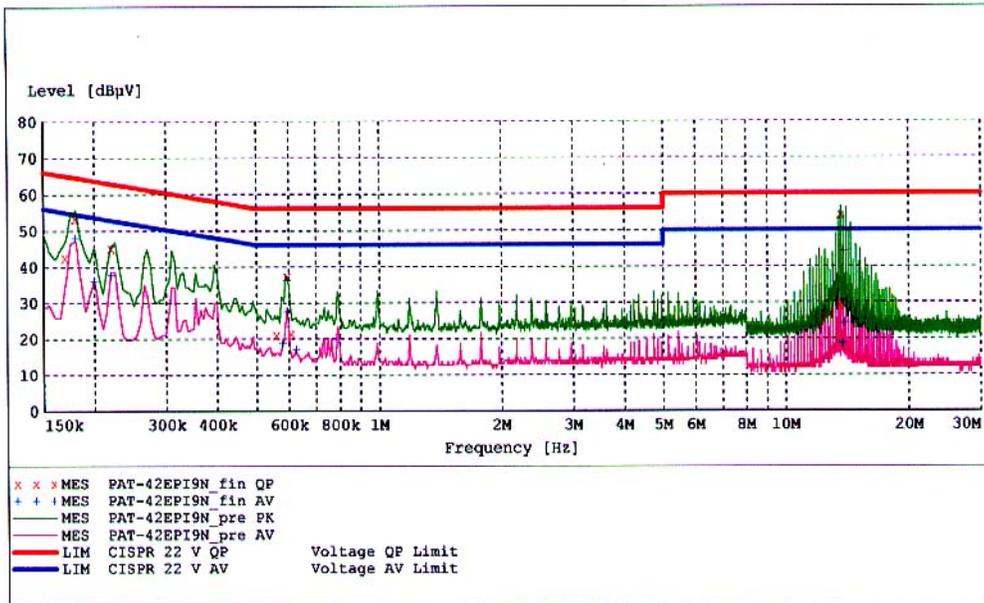

MEASUREMENT RESULT: "PAT-42EPI9N_fin_QP"

8/11/04 4:52PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.170000	42.50	10.1	65	22.4	1	---
0.180000	53.40	10.1	65	11.1	1	---
0.220000	45.00	10.1	63	17.9	1	---
0.560000	21.00	10.1	56	35.0	1	---
0.595000	37.30	10.2	56	18.7	1	---
0.610000	21.40	10.2	56	34.6	1	---
13.565000	29.10	10.5	60	30.9	1	---
13.665000	54.20	10.5	60	5.8	1	---
13.710000	29.90	10.5	60	30.1	1	---

MEASUREMENT RESULT: "PAT-42EPI9N_fin AV"

8/11/04 4:52PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.180000	48.20	10.1	55	6.3	1	---
0.200000	36.20	10.1	54	17.4	1	---
0.220000	37.80	10.1	53	15.0	1	---
0.580000	18.80	10.2	46	27.2	1	---
0.595000	27.50	10.2	46	18.5	1	---
0.625000	17.00	10.2	46	29.0	1	---
13.800000	18.60	10.5	50	31.4	1	---
13.860000	44.10	10.5	50	5.9	1	---
13.935000	24.40	10.5	50	25.6	1	---

HCT
EMC TESTING Laboratory

EUT: PAT-42EPI9N
 Manufacturer: IDISPLAY
 Operating Condition: NORMAL
 Test Site: SHIELD ROOM
 Operator: KS-KIM
 Test Specification: CISPR 22 CLASS B
 Comment: N

SCAN TABLE: "CISPR 22 Voltage"

Short Description:		CISPR 22 Voltage				
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

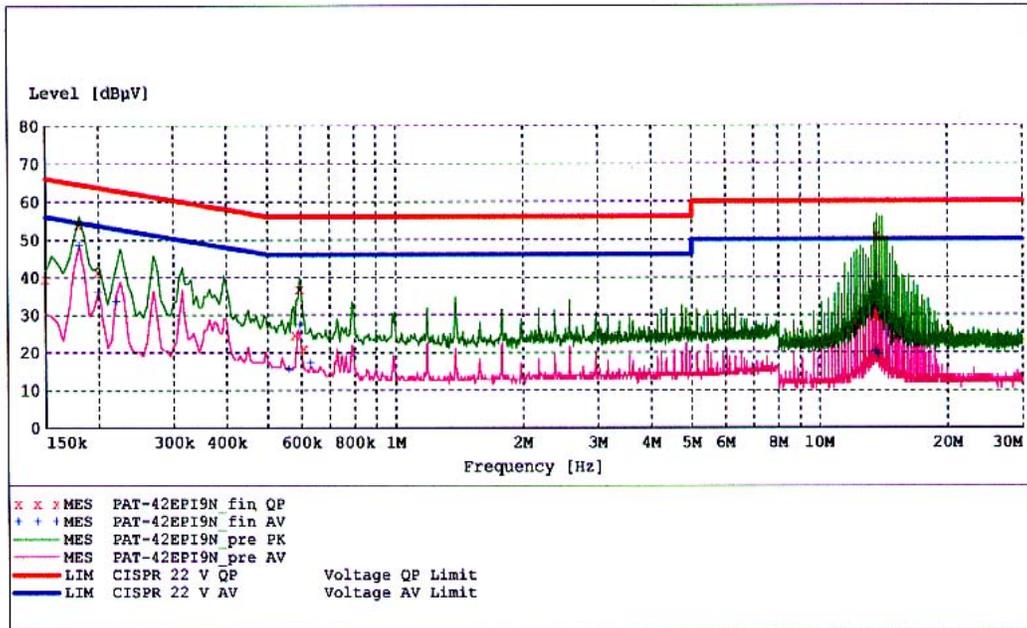

MEASUREMENT RESULT: "PAT-42EPI9N_fin QP"

8/11/04 4:56PM

Frequency MHz	Level dBpV	Transd dB	Limit dBpV	Margin dB	Line	PE
0.150000	39.70	10.1	66	26.3	1	---
0.180000	53.90	10.1	65	10.6	1	---
0.200000	41.40	10.1	64	22.2	1	---
0.580000	24.70	10.2	56	31.3	1	---
0.595000	36.80	10.2	56	19.2	1	---
0.610000	21.00	10.2	56	35.0	1	---
13.565000	30.30	10.5	60	29.7	1	---
13.660000	50.90	10.5	60	9.1	1	---
13.770000	28.90	10.5	60	31.1	1	---

MEASUREMENT RESULT: "PAT-42EPI9N_fin AV"

8/11/04 4:56PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.180000	48.80	10.1	55	5.7	1	---
0.200000	36.10	10.1	54	17.5	1	---
0.220000	33.70	10.1	53	19.1	1	---
0.560000	15.70	10.1	46	30.3	1	---
0.595000	27.40	10.2	46	18.6	1	---
0.630000	17.30	10.2	46	28.7	1	---
13.575000	20.40	10.5	50	29.6	1	---
13.660000	40.00	10.5	50	10.0	1	---
13.770000	19.50	10.5	50	30.5	1	---

NOTES:

- 1. All modes of operation were investigated and the worst-case emissions are reported.**
- 2. The CISPR RFI conducted limits are listed on Table 1 (Page 8).**
- 3. Line H = Hot Line N = Neutral**

** Measurements using CISPR quasi-peak mode.

7.1 RADIATED TEST DATA

Frequency MHz	Reading dBuV	Ant. Factor dB/m	Cable Loss dB/m	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB/m
32.4	6.8	18.1	1.2	V	26.1	30	-3.9
57.0	15.1	8.7	1.7	V	25.5	30	-4.5
144.2	7.0	14.7	2.6	V	24.3	30	-5.7
165.7	6.6	15.6	2.9	H	25.1	30	-4.9
199.8	6.6	16.2	3.2	V	26.0	30	-4.0
240.0	10.2	17.2	3.5	H	30.9	37	-6.1
280.8	7.1	18.4	3.8	V	29.3	37	-7.7
430.7	8.0	17.8	4.8	V	30.6	37	-6.4
479.9	7.6	18.8	5.0	V	31.4	37	-5.6
506.2	7.4	19.2	5.1	V	31.7	37	-5.3

Radiated Measurements at 10-meters.
D-SUB 1024 X 768 (@68.68KHz/ 85Hz)

NOTES:

- The monitor(EUT) has many video interface ports (DVI, D-SUB, COMPONENT FOR DVD, S-VIDEO, COMPOSITE) to support many kinds of graphics adapters. So all modes of operation were investigated and the worst-case emissions are reported.

** AFCL = Antenna Factor (Roberts dipole) and Cable Loss .

*** Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

8.1 Sample Calculations

$$\text{dB } \square/\text{m} = 20 \log_{10}(\square)$$

8.2 Example 1:

@ 13.665 MHz

Class B limit = 60 dB μ V
Reading = 54.2 dB μ V (calibrated level)

Margin = 54.2 – 60.0 = -5.8
= **5.8 dB below limit**

8.3 Example 2:

@ 32.4 MHz

Class B limit = 30 dB μ V/m
Reading = 6.8 dB μ V/m (calibrated level)
Antenna Factor + Cable Loss = 19.3 dB
Total = 26.1 dB μ V/m

Margin = 26.1 - 30.0 = - 3.9
= **3.9 dB below limit**

9.1 Test Equipment

<u>Type</u>	<u>Manufacture</u>	<u>Model Number</u>	<u>CAL Date</u>
EMI Test Receiver	Rohde & Schwarz	ES140	2003.11.16
EMI Test Receiver	Rohde & Schwarz	ESVS30	2004.07.16
LISN	Rohde & Schwarz	ESH2-Z5	2004.07.28
LISN	EMCO	ESH3-Z5	2004.07.28
Attenuator	Rohde & Schwarz	ESH3-Z2	2003.11.16
Amplifier	Hewlett-Packard	8447E	2004.08.23
TRILOG Antenna	Schwarzbeck	9160	2004.04.06
Antenna Position Tower	EMCO	1051-12	N/A
Turn Table	EMCO	1060-06	N/A
Power Analyzer	Voltech	PM 3300	2004.02.15
Reference Network Impedance	Voltech	IEC 555	N/A
AC Power Source	PACIFIC	Magnetic Module	N/A
AC Power Source	PACIFIC	360-AMX	2003.11.25
Controller	HD GmbH	HD 100	N/A
SlideBar	HD GmbH	KMS 560	N/A

10.1 Test Software Used

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software, contained on a 3-1/2 inch disc, was inserted into drive A and is auto starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is : (1) Display test, (2) RS 232 test (3) Key board test, (4) Printer test, (5) FDD test, (6) HDD test. The complete cycle takes about 20 seconds and is repeated continuously. As the keyboard and mouse are strictly input devices, no data is transmitted to them during test. They are however, continuously scanned for data input activity. The video resolution modes setup and change program was used during the radiated and conducted emission testing.

NOTE: This is a sample of the basic program used during the test. However, during testing, a different software program may be used; whichever determines the worst-case condition. In addition, the program used also depends on the number and type of devices being tested.

Actual program used is the "H" pattern in Notepad under Windows environment. All resolution modes (640X480, 800X600, 1024X768) were investigated and tested

11.1 Conclusion

The data collected shows that the **idisplay.tv corporation. PDP TV MONITOR**
FCC ID: SJJPAT-42EPI9N complies with §15.107 and §15.109 of the FCC Rules.