



## FCC RADIO TEST REPORT

Applicant's company	<b>Xirrus, Inc.</b>
Applicant Address	2101 Corporate Center Drive, Thousand Oaks, CA 91320 USA
FCC ID	<b>SK6-XD2240</b>
Manufacturer's company	<b>Lite-On Network Communication (Dongguan) Limited</b>
Manufacturer Address	30#Keji Rd., Yin Hu Industrial Area, Qingxi Town, DongGuan City, Guangdong, China

Product Name	Wireless Access Point
Brand Name	XIRRUS, AVAYA
Model No.	XD2240, WAP9144
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Received Date	Aug. 17, 2015
Final Test Date	Jan. 20, 2016
Submission Type	Class II Change

### Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01r01, KDB662911 D01 v02r01, KDB644545 D03 v01**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	8
3.5. Table for Test Modes.....	9
3.6. Table for Testing Locations.....	10
3.7. Class II Change .....	11
3.8. Table for Multiple List.....	11
3.9. Table for Supporting Units .....	11
3.10. Table for Parameters of Test Software Setting .....	12
3.11. EUT Operation during Test .....	12
3.12. Duty Cycle .....	12
3.13. Test Configurations .....	13
<b>4. TEST RESULT .....</b>	<b>14</b>
4.1. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	14
4.2. 6dB Spectrum Bandwidth Measurement .....	22
4.3. Maximum Conducted Output Power Measurement.....	27
4.4. Power Spectral Density Measurement .....	30
4.5. Radiated Emissions Measurement .....	37
4.6. Band Edge Emissions Measurement .....	52
4.7. Frequency Stability Measurement .....	59
4.8. Antenna Requirements .....	66
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>67</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>68</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A2</b>



## History of This Test Report



## 1. VERIFICATION OF COMPLIANCE

Product Name : Wireless Access Point  
Brand Name : XIRRUS, AVAYA  
Model No. : XD2240, WAP9144  
Applicant : Xirrus, Inc.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Aug. 17, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads "Sam Chen".

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.2	15.407(e)	6dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	5.49 dB
4.4	15.407(a)	Power Spectral Density	Complies	6.67 dB
4.5	15.407(b)	Radiated Emissions	Complies	6.62 dB
4.6	15.407(b)	Band Edge Emissions	Complies	0.08 dB
4.7	15.407(g)	Frequency Stability	Complies	-
4.8	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Product Type	WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From PoE
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9 for 20MHz bandwidth ; 4 for 40MHz bandwidth 2 for 80MHz bandwidth
Channel Band Width (99%)	Band 1: IEEE 802.11ac MCS0/Nss1 (VHT20): 18.06 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 38.78 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 76.12 MHz Band 4: IEEE 802.11ac MCS0/Nss1 (VHT20): 17.97 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 41.10 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 75.83 MHz
Maximum Conducted Output Power	Band 1: IEEE 802.11ac MCS0/Nss1 (VHT20): 23.31 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 22.75 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 19.86 dBm Band 4: IEEE 802.11ac MCS0/Nss1 (VHT20): 22.80 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 23.22 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 17.93 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input checked="" type="checkbox"/> With beamforming for 802.11n/ac in 2.4GHz/5GHz	<input type="checkbox"/> Without beamforming
Operate Condition	<input checked="" type="checkbox"/> Indoor	<input type="checkbox"/> Outdoor

#### Antenna and Band width

Antenna	Four (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

#### IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	4	MCS 0-31
802.11n (HT40)	4	MCS 0-31
802.11ac (VHT20)	4	MCS 0-9/Nss1-4
802.11ac (VHT40)	4	MCS 0-9/Nss1-4
802.11ac (VHT80)	4	MCS 0-9/Nss1-4

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40, VHT80 in 5GHz.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40: IEEE 802.11ac

### 3.2. Accessories

Others
Wall-mounted rack*1

### 3.3. Table for Filed Antenna

<For Radio 1>

Ant.	Brand	Model Name	Antenna Type	Connector
1	Liteon	WP8868-E-XS	PIFA Ant.	I-PEX
3	Liteon	WP8868-E-XS	PIFA Ant.	I-PEX
5	Liteon	WP8868-E-XS	PIFA Ant.	I-PEX
7	Liteon	WP8868-E-XS	PIFA Ant.	I-PEX

Ant.	Frequency (MHz) / (dBi)		
	2412, 2422	2437	2452, 2462
1	2.07	1.35	1.84
3	4.67	3.82	4.52
5	3.68	3.64	3.04
7	4.23	4.10	3.51

Ant.	5GHz Band / (dBi)	
	Band 1	Band 4
1	0.23	3.09
3	4.19	4.29
5	4.93	4.86
7	4.65	3.94

Frequency Band (MHz)	Correlated Composite Gain / (dBi) (4TX, 1S)	Uncorrelated Composite Gain / (dBi) (4TX, 4S)
2412, 2422	6.99	1.40
2437	7.02	1.36
2452, 2462	7.22	1.68
5150 ~ 5250 (Band 1)	6.10	0.78
5725 ~ 5850 (Band 4)	7.29	1.56

## &lt;For Radio 2&gt;

Ant.	Brand	Model Name	Antenna Type	Connector
2	Liteon	WP8868-E-XS	PIFA Ant.	I-PEX
4	Liteon	WP8868-E-XS	PIFA Ant.	I-PEX
6	Liteon	WP8868-E-XS	PIFA Ant.	I-PEX
8	Liteon	WP8868-E-XS	PIFA Ant.	I-PEX

Ant.	Frequency (MHz) / (dBi)		
	2412, 2422	2437	2452, 2462
2	1.79	1.19	1.08
4	3.96	3.51	3.06
6	2.93	2.93	3.38
8	2.10	2.49	1.79

Ant.	5GHz Band / (dBi)	
	Band 1	Band 4
2	1.64	4.60
4	3.02	3.45
6	3.48	4.78
8	3.93	3.69

Frequency Band (MHz)	Correlated Composite Gain / (dBi) (4TX, 1S)	Uncorrelated Composite Gain / (dBi) (4TX, 4S)
2412, 2422	6.01	0.65
2437	5.86	0.22
2452, 2462	5.33	-0.26
5150 ~ 5250 (Band 1)	4.88	-0.30
5725 ~ 5850 (Band 4)	6.98	1.68

Note: The EUT has eight antennas.

**For Conducted Test:**

Radio 1 and Radio 2 are the same radios, radio 2 has been evaluated to be the worst case so it's chosen to conduct tests.

Radio 1 and Radio 2 equipped the same type antennas, Radio 1 has the higher gain than radio 2 so it's chosen to conduct the gain test.

**For Radiated Test:**

Radio 1 and Radio 2 are the same radios; radio 1 has been evaluated to be the worst case so it's chosen to radiate tests.

**<For 2.4GHz and 5GHz Band>**

**For IEEE 802.11a/b/g/n/ac mode (4TX/4RX)**

**For Radio 1**


Chain 5, Chain 6, Chain 7 and Chain 8 can be used as transmitting/receiving antenna.

Chain 5, Chain 6, Chain 7 and Chain 8 could transmit/receive simultaneously.

**For Radio 2**

Chain 1, Chain 2, Chain 3 and Chain 4 can be used as transmitting/receiving antenna.

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

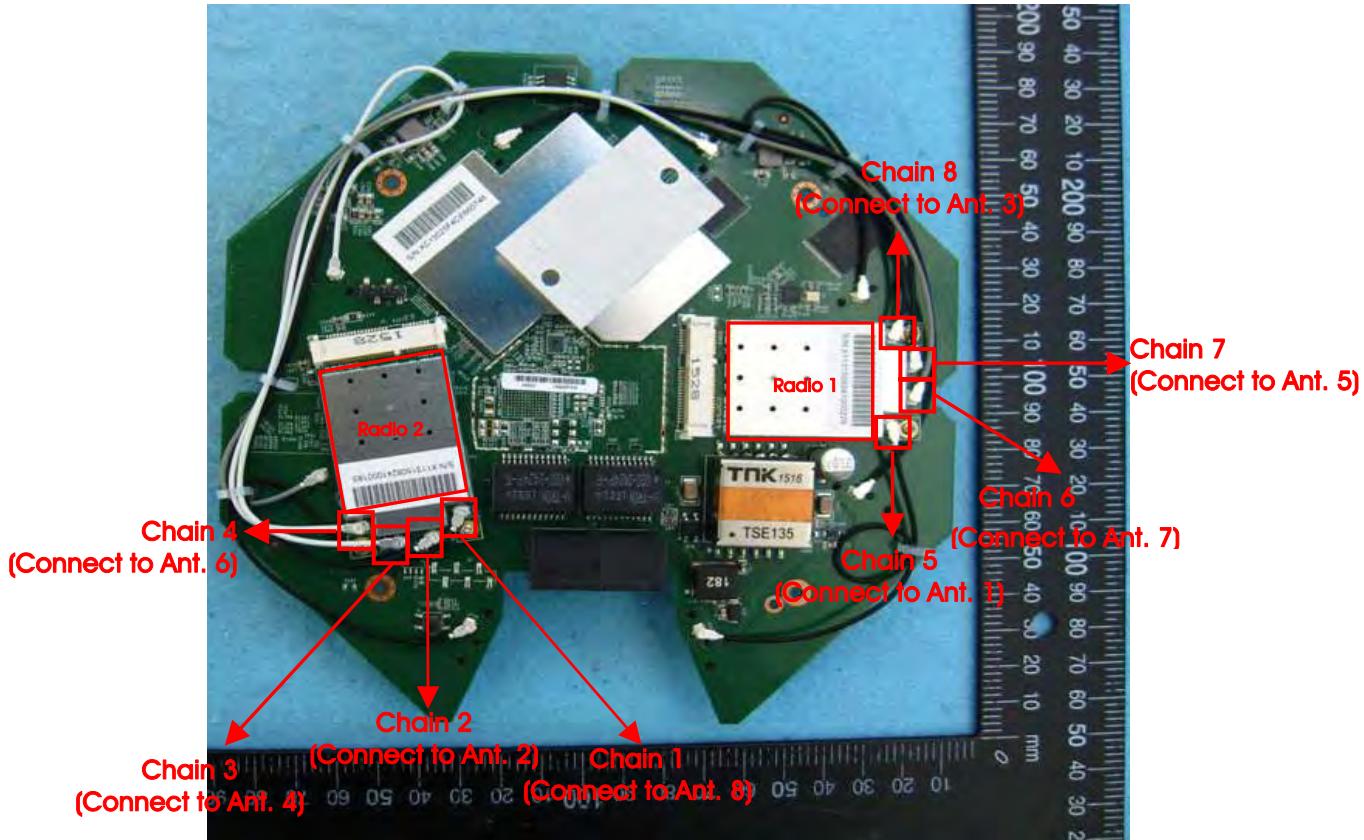

### 3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 151, 159.

For 80MHz bandwidth systems, use Channel 42, 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
Max. Conducted Output Power	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/157/165	5+6+7+8
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	5+6+7+8
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	5+6+7+8
Power Spectral Density	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/157/165	5+6+7+8
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	5+6+7+8
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	5+6+7+8
26dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/157/165	5+6+7+8
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	5+6+7+8
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	5+6+7+8
6dB Spectrum Bandwidth Measurement	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	5+6+7+8
	11ac VHT40	Band 4	MCS0/Nss1	151/159	5+6+7+8
	11ac VHT80	Band 4	MCS0/Nss1	155	5+6+7+8
Radiated Emission Above 1GHz	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/157/165	5+6+7+8
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	5+6+7+8
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	5+6+7+8
Band Edge Emission	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/157/165	5+6+7+8
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	5+6+7+8
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	5+6+7+8
Frequency Stability	20 MHz	Band 1&4	-	40/157	7
	40 MHz	Band 1&4	-	38/151	7
	80 MHz	Band 1&4	-	42/155	7

Note 1: VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

2. The PoE below are for measurement only, would not be marketed.

Power	Brand	Model No.	FCC ID
PoE	H3C	EWPAM1NPoE	N/A

The following test modes were performed for all tests:

**For Radiated Emission test<Above 1GHz>:**

The EUT can be placed at Y-axis and Z-axis and it has radio 1 and radio 2 supporting WLAN 2.4GHz and WLAN 5GHz functions. After evaluating, the EUT at Y-axis with WLAN 2.4GHz\_radio 1 and EUT as Z-axis with WLAN 5GHz\_radio 1 functions was the worst case. Consequently, measurement for Radiated Emissions will follow this same test mode.

**For Co-location MPE Test:**

Mode 1. Radio 1 (2.4GHz WLAN) + Radio 2 (2.4GHz WLAN) Mode

Mode 2. Radio 1 (2.4GHz WLAN) + Radio 2 (5GHz WLAN) Mode

Mode 3. Radio 1 (5GHz WLAN) + Radio 2 (2.4GHz WLAN) Mode

Mode 4. Radio 1 (5GHz WLAN) + Radio 2 (5GHz WLAN) Mode

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA582537-01) tests is added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.6. Table for Testing Locations

Test Site Location					
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Class II Change

This product is an extension of original one reported under Sporton project number: FR582537AB

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Adding beam-forming function.	1. 26dB Bandwidth and 99% Occupied Bandwidth 2. 6dB Spectrum Bandwidth 3. Maximum Conducted Output Power 4. Power Spectral Density 5. Radiated Emissions<Above 1GHz> 6. Band Edge Emissions 7. Frequency Stability
2. Adding a model name: WAP9144 3. Adding a trade name: AVAYA	After evaluating, it is not necessary to re-test all test items.

### 3.8. Table for Multiple List

The brand name and model numbers in the following table are all refer to the identical product.

Brand Name	Model Name	Description
XIRRUS	XD2240	
AVAYA	WAP9144	All the design is the same, just for different marketing use.

From the above models, model: XD2240 was selected as representative model for the test and its data was recorded in this report.

### 3.9. Table for Supporting Units

#### For Test Site No: 03CH01-CB

Support Unit	Brand	Model	FCC ID
NB*2	DELL	E4300	DoC
PoE	H3C	EWPAM1NPOE	N/A
RX Client	BCM	BCM58535EAP	DoC

#### For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
PoE	H3C	EWPAM1NPOE	N/A

### 3.10. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	Xircon v1.0.2.25					
Mode	Test Frequency (MHz)					
	NCB: 20MHz					
	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
802.11ac MCS0/Nss1 VHT20	90	90	70	64	90	72
Mode	NCB: 40MHz					
802.11ac MCS0/Nss1 VHT40	5190 MHz	5230 MHz	5755 MHz	5795 MHz		
	56	70	60	90		
Mode	NCB: 80MHz					
802.11ac MCS0/Nss1 VHT80	5210 MHz			5775 MHz		
	58			52		

### 3.11. EUT Operation during Test

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.


The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe" to link with the remote workstation to receive and transmit packet by RX Client and transmit duty cycle no less 98%

### 3.12. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	3.830	4.183	91.57%	0.38	0.26
802.11ac MCS0/Nss1 VHT40	3.653	4.070	89.75%	0.47	0.27
802.11ac MCS0/Nss1 VHT80	5.043	5.478	92.06%	0.36	0.20

### 3.13. Test Configurations

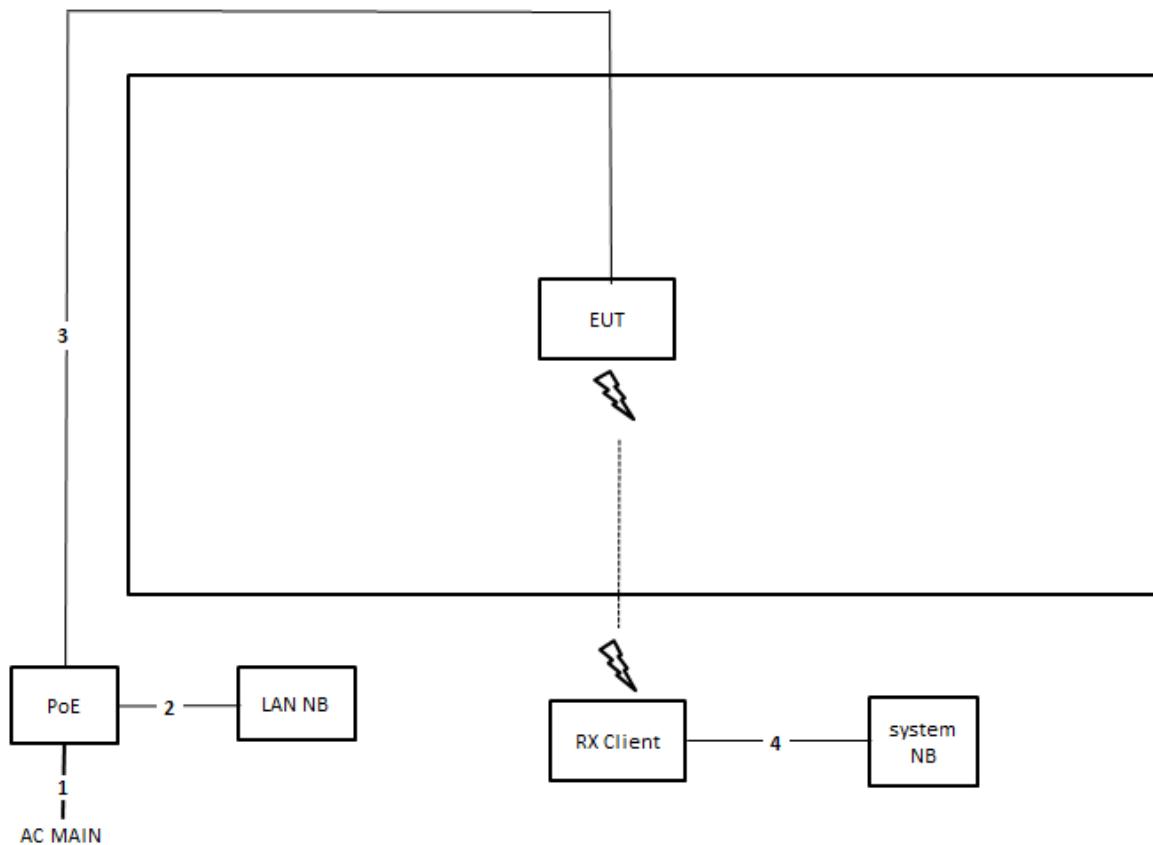

Item	Connection	Shielded	Length(m)
1	Power cable	No	1m
2	RJ-45 cable	No	1m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	1m

## 4. TEST RESULT

### 4.1. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

#### 4.1.1. Limit

No restriction limits.

#### 4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold

#### 4.1.3. Test Procedures

##### For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### 4.1.4. Test Setup Layout

##### For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### 4.1.5. Test Deviation

There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 4.1.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	25°C	Humidity	54%
Test Engineer	Clemens Fang		


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11ac MCS0/Nss1 VHT20	5180 MHz	21.57	17.97
	5200 MHz	21.91	18.06
	5240 MHz	21.39	18.06
	5745 MHz	21.04	17.97
	5785 MHz	21.04	17.97
	5825 MHz	21.04	17.97
802.11ac MCS0/Nss1 VHT40	5190 MHz	45.51	37.05
	5230 MHz	68.99	38.78
	5755 MHz	40.58	36.90
	5795 MHz	73.04	41.10
802.11ac MCS0/Nss1 VHT80	5210 MHz	81.45	76.12
	5775 MHz	80.87	75.83

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5180 MHz**

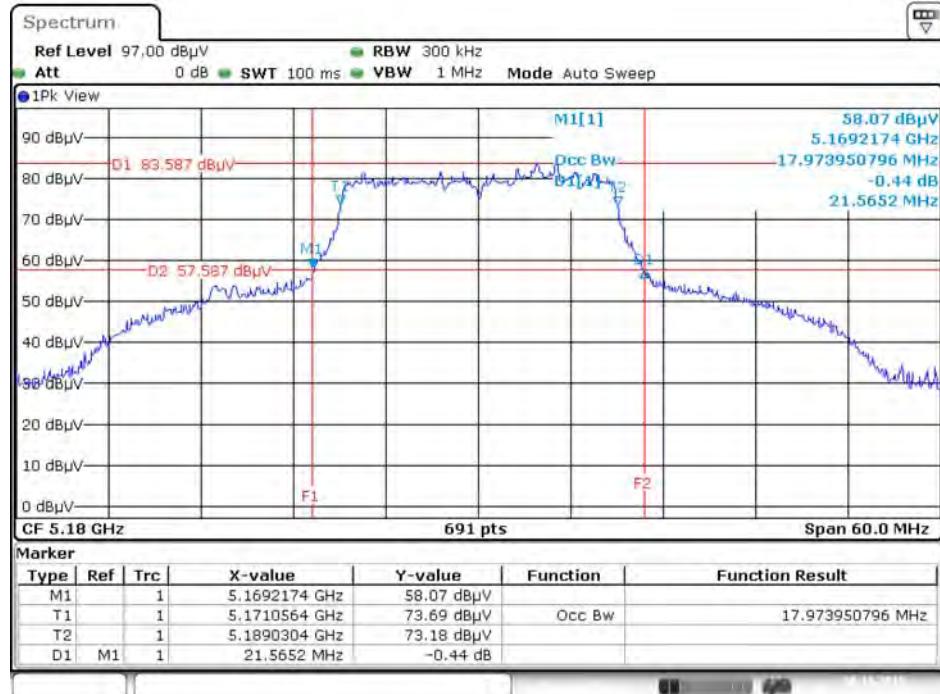


Date: 30.NOV.2015 22:55:48

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 5 + Chain 6 + Chain 7 + Chain 8/ 5200 MHz**

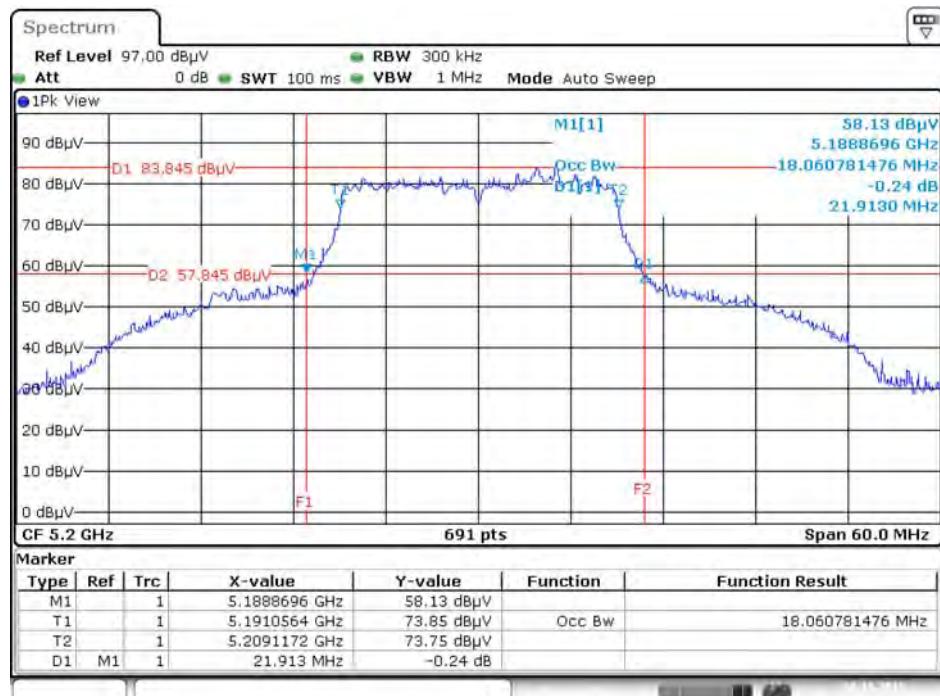


Date: 30.NOV.2015 22:54:21

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5240 MHz**

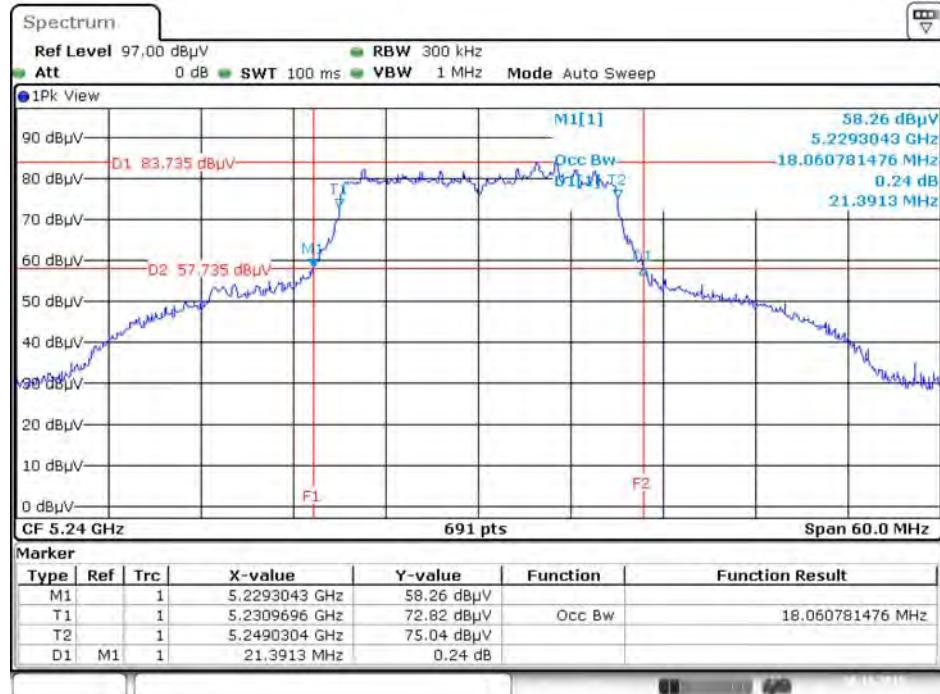


Date: 30.NOV.2015 22:57:20

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5745 MHz**

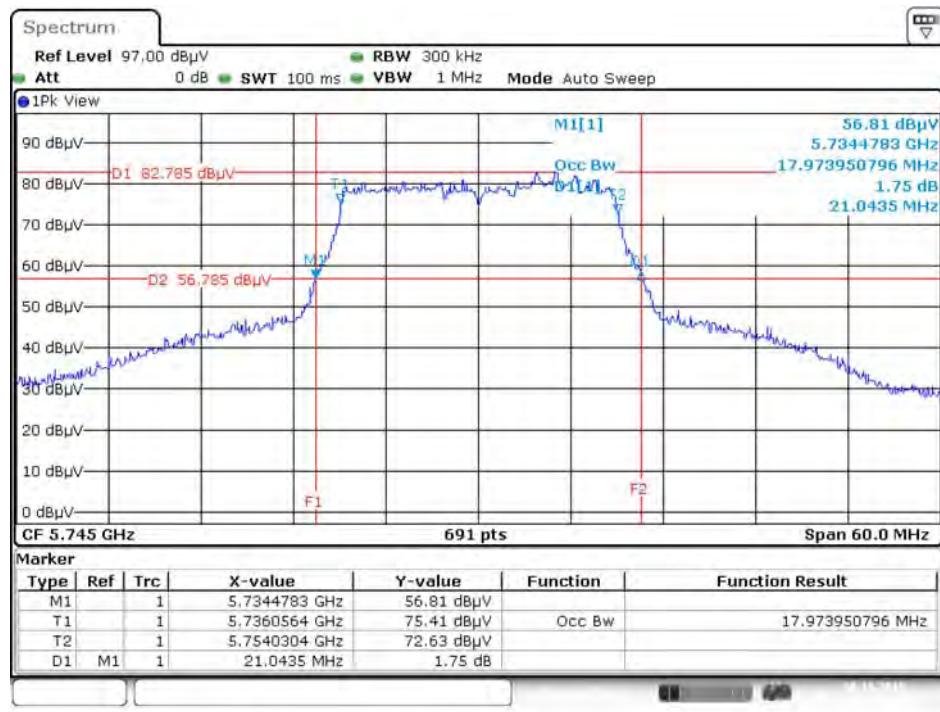


Date: 30.NOV.2015 22:58:32

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 5 + Chain 6 + Chain 7 + Chain 8/ 5785 MHz**

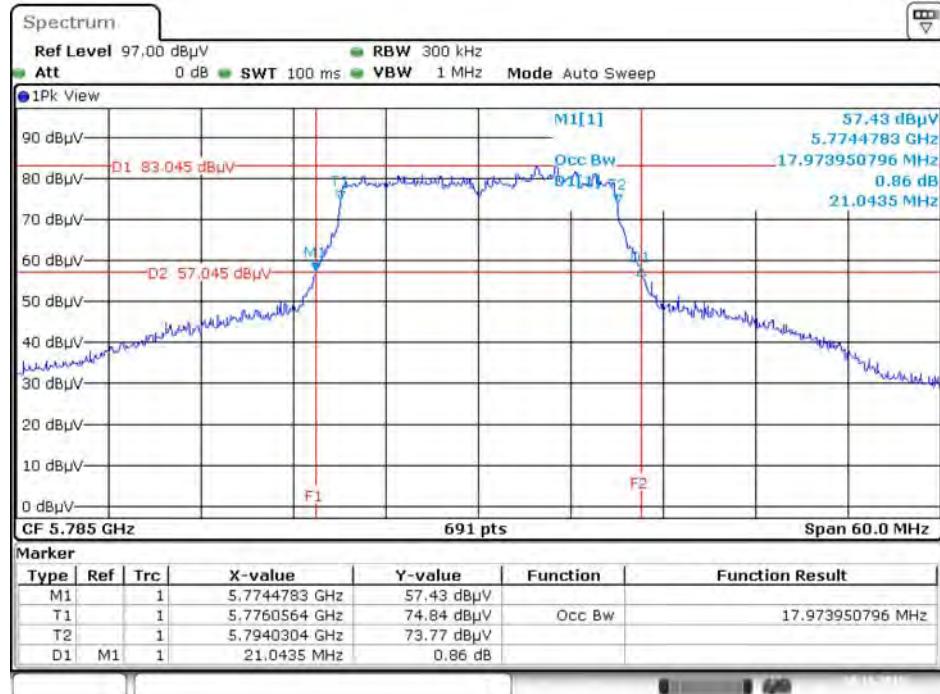


Date: 30.NOV.2015 22:59:31

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5825 MHz**

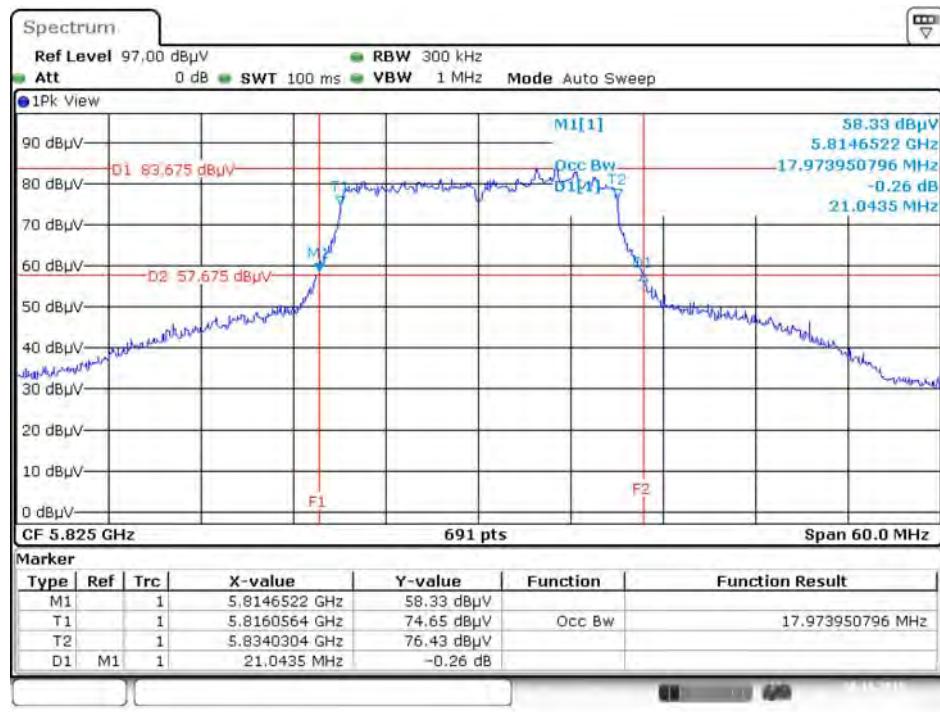


Date: 30.NOV.2015 23:00:28

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5190 MHz**

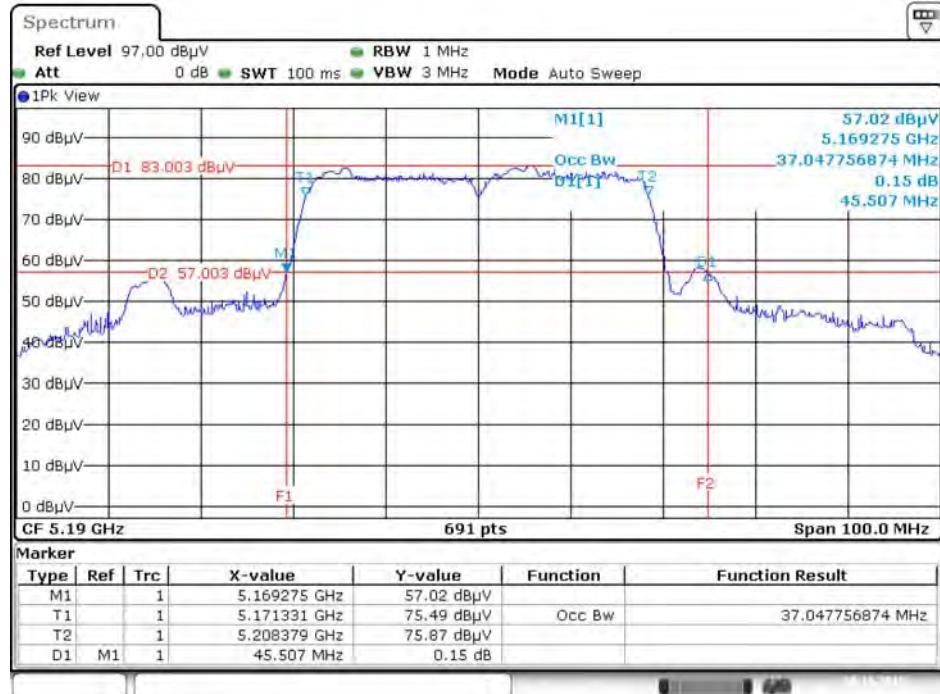


Date: 30.NOV.2015 23:35:11

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5230 MHz**

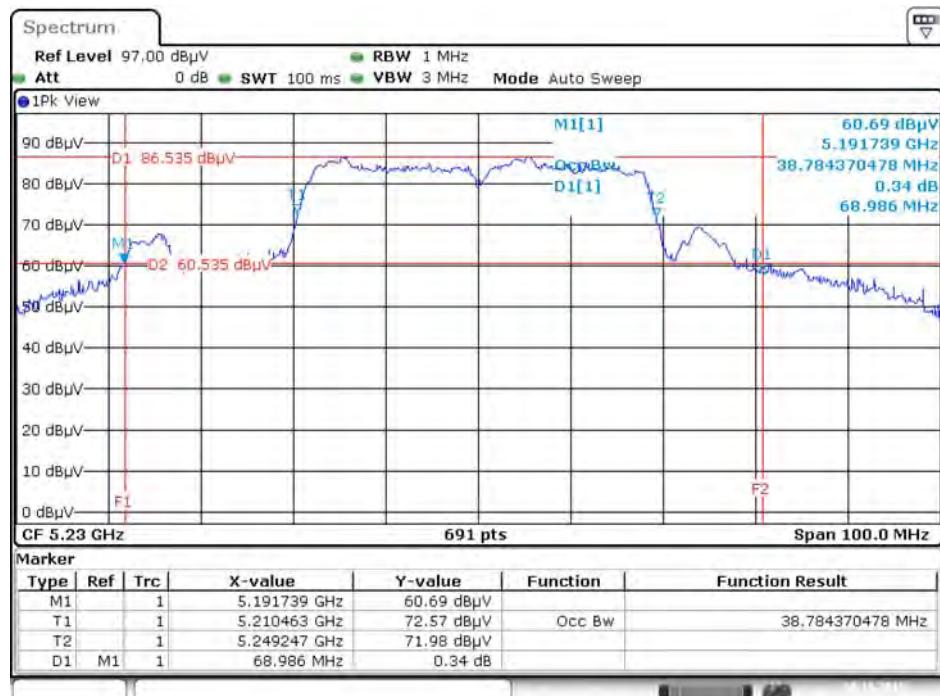


Date: 30.NOV.2015 23:36:44

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5755 MHz**

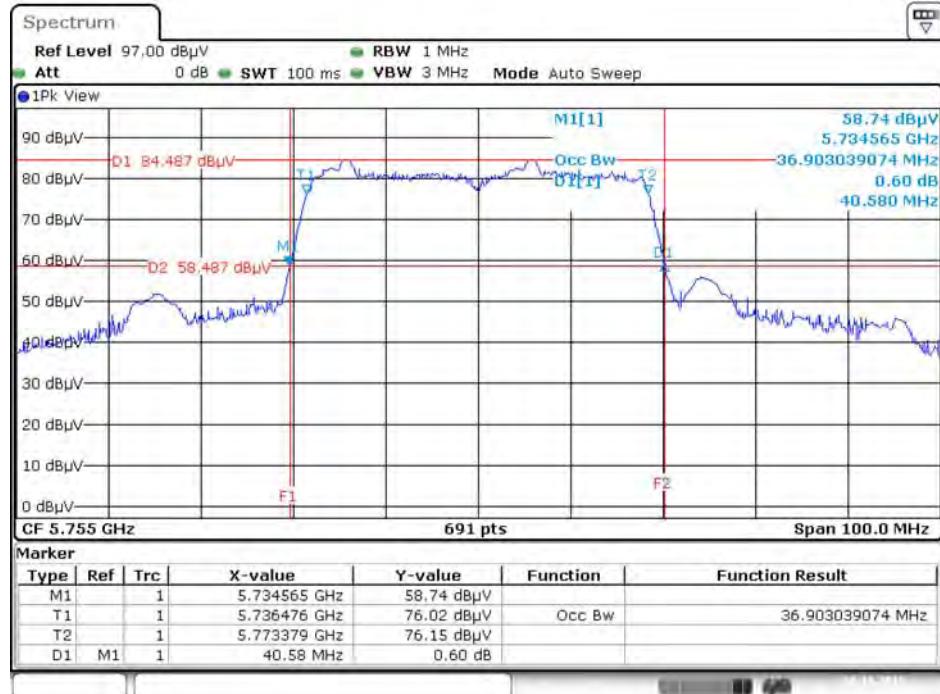


Date: 30.NOV.2015 23:38:05

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5795 MHz**

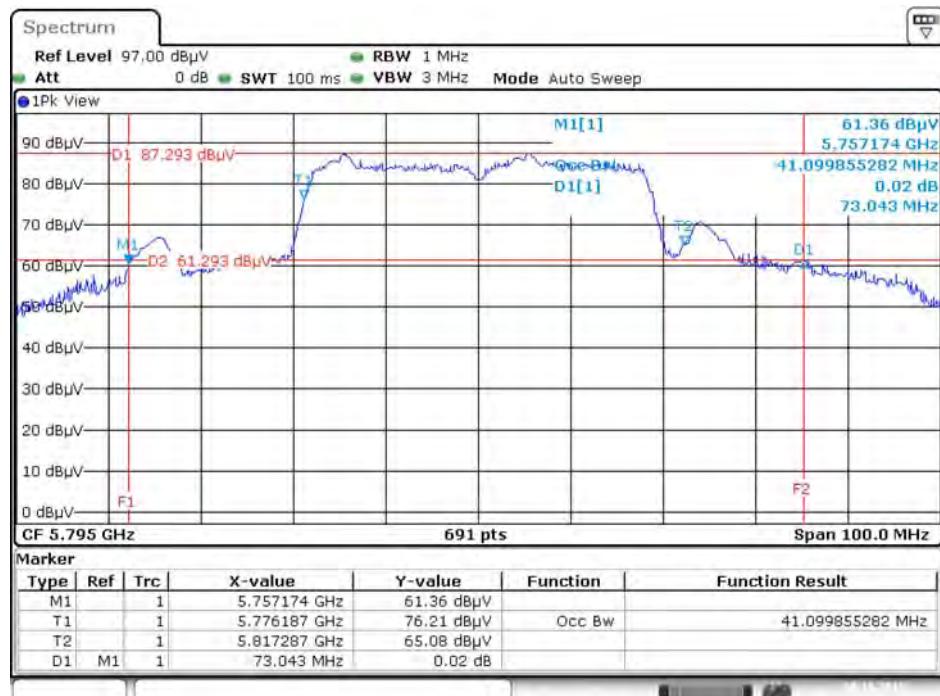


Date: 30.NOV.2015 23:39:11

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5210 MHz**

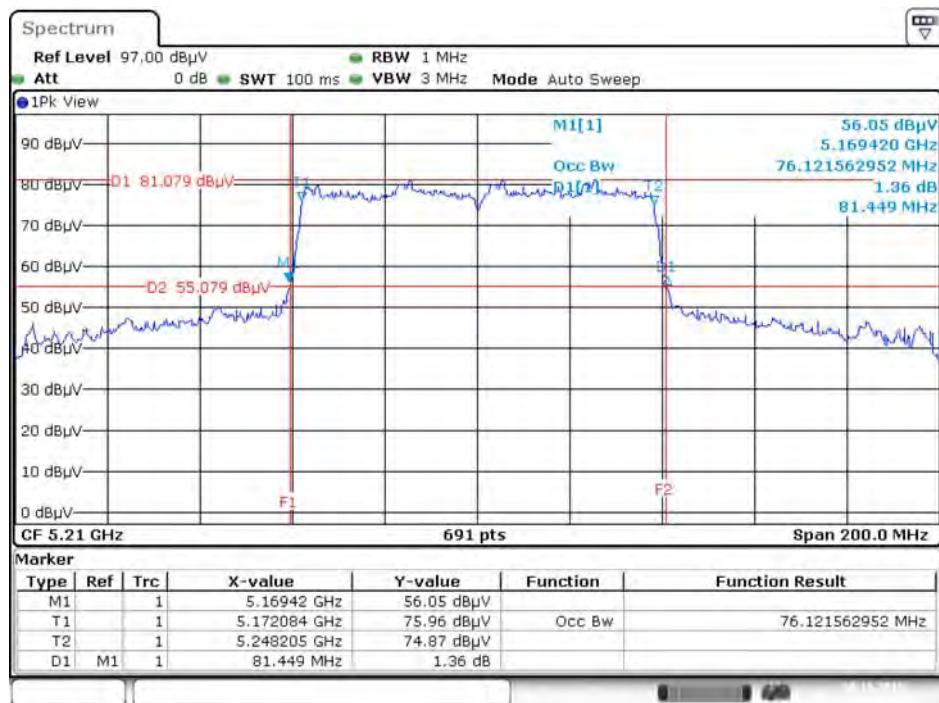

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5775 MHz**

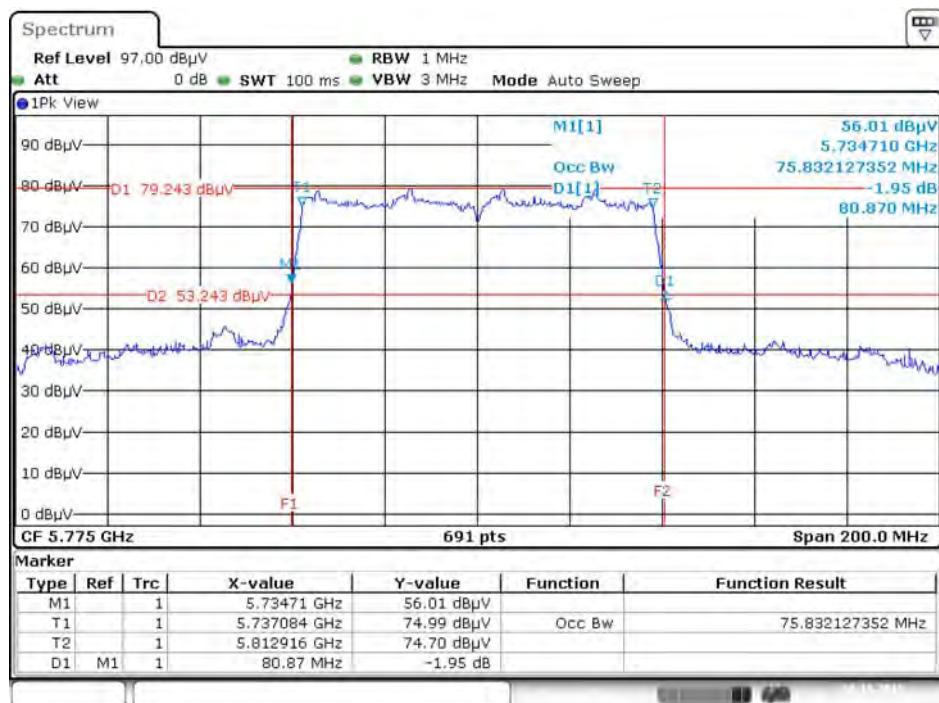

## 4.2. 6dB Spectrum Bandwidth Measurement

### 4.2.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times RBW$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.2.3. Test Procedures

#### For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01r01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

### 4.2.4. Test Setup Layout

#### For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### **4.2.5. Test Deviation**

There is no deviation with the original standard.

#### **4.2.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 6dB Spectrum Bandwidth


Temperature	25°C	Humidity	54%
Test Engineer	Clemens Fang		

Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11ac MCS0/Nss1 VHT20	5745 MHz	8.87	500	Complies
	5785 MHz	10.09	500	Complies
	5825 MHz	8.82	500	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	25.04	500	Complies
	5795 MHz	35.13	500	Complies
	5775 MHz	75.07	500	Complies


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


### 6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5825 MHz

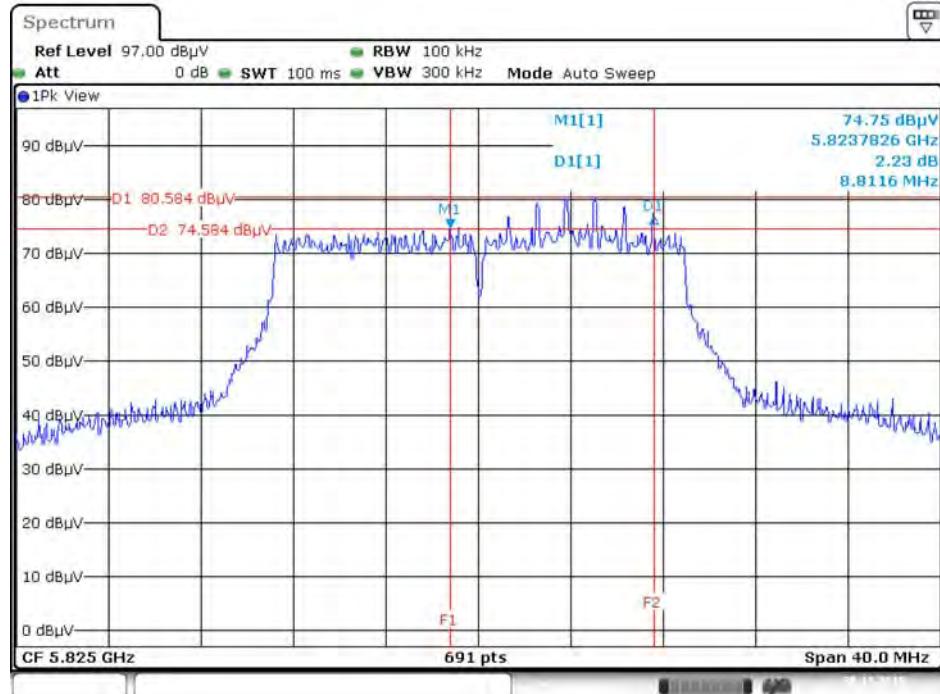

### 6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5755MHz

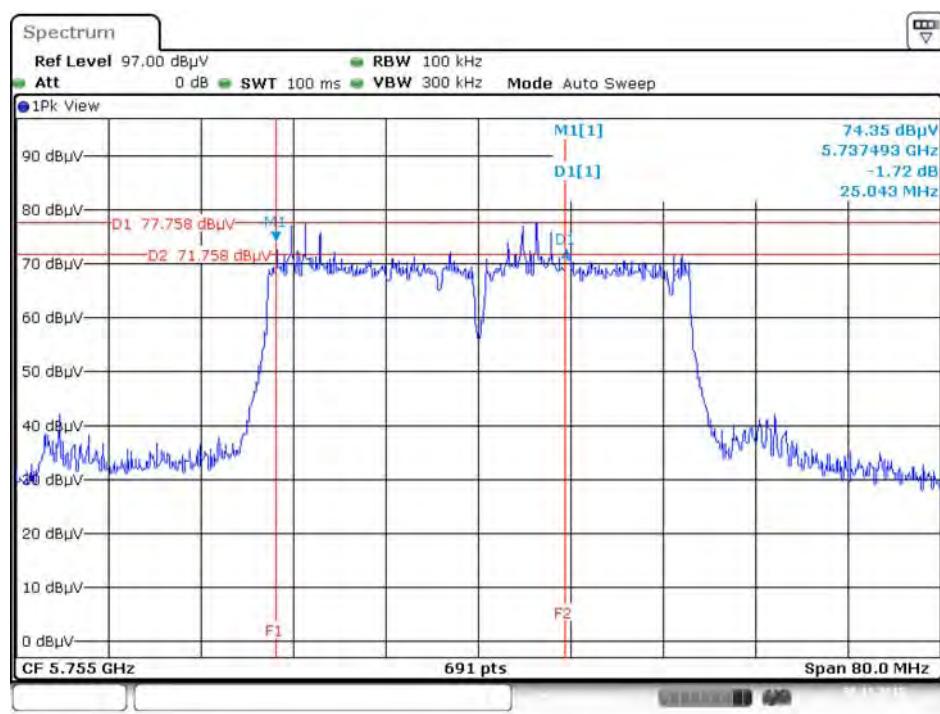

**6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5775 MHz**

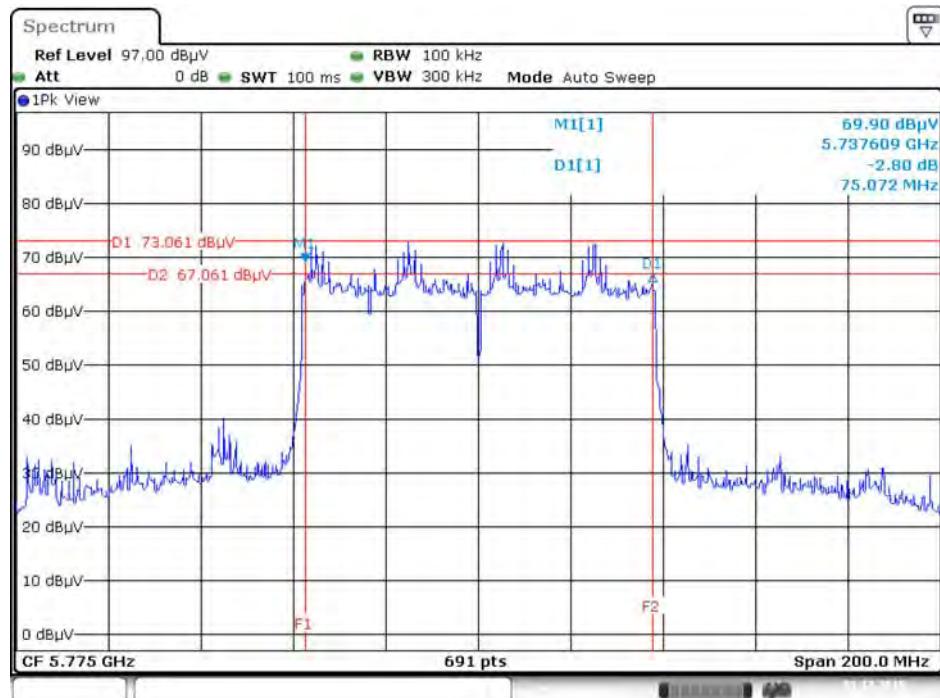

## 4.3. Maximum Conducted Output Power Measurement

### 4.3.1. Limit

Frequency Band		Limit
<input checked="" type="checkbox"/> 5.15~5.25 GHz		
Operating Mode		
<input type="checkbox"/>	Outdoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
<input checked="" type="checkbox"/>	Indoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<input type="checkbox"/>	Fixed point-to-point access points	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
<input type="checkbox"/>	Mobile and portable client devices	The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

<input checked="" type="checkbox"/>	5.725~5.85 GHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.
-------------------------------------	----------------	--

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01r01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout

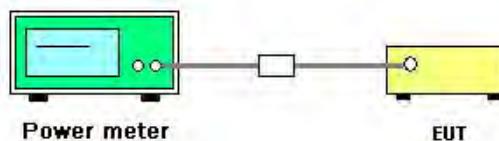

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	54%		
Test Engineer	Clemens Fang	Test Date	Nov. 30, 2015		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 5	Chain 6	Chain 7	Chain 8	Total		
802.11ac MCS0/Nss1 VHT20	5180 MHz	17.02	17.30	16.70	17.40	23.13	29.90	Complies
	5200 MHz	17.19	17.73	16.38	17.74	23.31	29.90	Complies
	5240 MHz	15.87	16.82	15.96	16.37	22.29	29.90	Complies
	5745 MHz	13.68	15.17	13.66	14.57	20.34	28.71	Complies
	5785 MHz	15.94	17.59	16.19	17.17	22.80	28.71	Complies
	5825 MHz	16.19	17.38	16.11	17.29	22.80	28.71	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	13.26	13.71	13.21	13.74	19.51	29.90	Complies
	5230 MHz	16.16	17.14	16.43	17.12	22.75	29.90	Complies
	5755 MHz	13.15	14.65	13.36	14.17	19.90	28.71	Complies
	5795 MHz	16.39	18.09	16.75	17.39	23.22	28.71	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	13.86	14.24	12.79	14.29	19.86	29.90	Complies
	5775 MHz	11.07	13.05	11.27	11.95	17.93	28.71	Complies

Note:

802.11ac MCS0/Nss1 VHT20 5180 MHz / 5200 MHz / 5240 MHz

802.11ac MCS0/Nss1 VHT40 5190 MHz / 5230 MHz

802.11ac MCS0/Nss1 VHT80 5210 MHz

$$\text{Directional Gain} = 10 \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{K=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.10 \text{dBi, so limit} = 30 - (6.10 - 6) = 29.90 \text{ dBm}$$

802.11ac MCS0/Nss1 VHT20 5745 MHz / 5785 MHz / 5825 MHz

802.11ac MCS0/Nss1 VHT40 5755 MHz / 5795 MHz

802.11ac MCS0/Nss1 VHT80 5775 MHz

$$\text{Directional Gain} = 10 \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{K=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.29 \text{dBi, so limit} = 30 - (7.29 - 6) = 28.71 \text{ dBm}$$

## 4.4. Power Spectral Density Measurement

### 4.4.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Band	Limit
<input checked="" type="checkbox"/> 5.15~5.25 GHz	
Operating Mode	
<input type="checkbox"/> Outdoor access point	17 dBm/MHz
<input checked="" type="checkbox"/> Indoor access point	17 dBm/MHz
<input type="checkbox"/> Fixed point-to-point access points	17 dBm/MHz
<input type="checkbox"/> Mobile and portable client devices	11 dBm/MHz
<input checked="" type="checkbox"/> 5.725~5.85 GHz	30 dBm/500kHz

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW ( $< 500$ kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	

#### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01r01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.
5. For 5.725~5.85 GHz, the measured result of PSD level must add  $10\log(500\text{kHz}/\text{RBW})$  and the final result should  $\leq 30 \text{ dBm}$ .

#### 4.4.4. Test Setup Layout

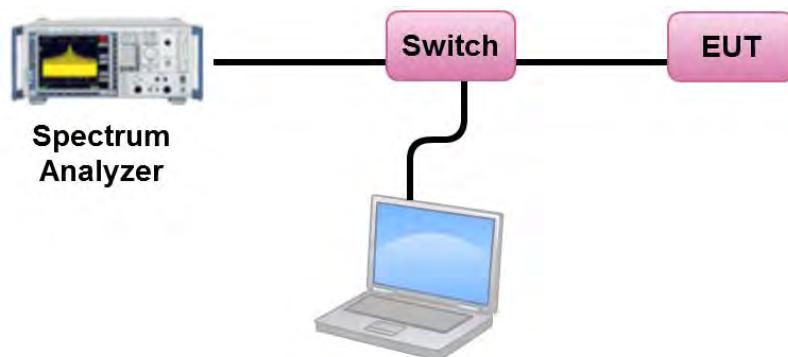

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	54%
Test Engineer	Clemens Fang	Test Date	Nov. 30, 2015

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 5 + Chain 6 + Chain 7 + Chain 8

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	9.92	16.90	Complies
40	5200 MHz	10.23	16.90	Complies
48	5240 MHz	8.95	16.90	Complies

Note:  $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}} \left\{\sum_{K=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right] = 6.10\text{dBi}$ , so limit =  $17-(6.10-6)=16.90\text{ dBm/MHz}$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	7.02	-3.01	4.01	28.71	Complies
157	5785 MHz	9.66	-3.01	6.65	28.71	Complies
165	5825 MHz	9.65	-3.01	6.64	28.71	Complies

Note:  $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}} \left\{\sum_{K=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right] = 7.29\text{dBi}$ , so limit =  $30-(7.29-6)=28.71\text{ dBm/500kHz}$

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 5 + Chain 6 + Chain 7 + Chain 8

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	3.30	16.90	Complies
46	5230 MHz	6.55	16.90	Complies

Note:  $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}} \left\{\sum_{K=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right] = 6.10\text{dBi}$ , so limit =  $17-(6.10-6)=16.90\text{ dBm/MHz}$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
151	5755 MHz	3.80	-3.01	0.79	28.71	Complies
159	5795 MHz	6.94	-3.01	3.93	28.71	Complies

Note:  $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}} \left\{\sum_{K=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right] = 7.29\text{dBi}$ , so limit =  $30-(7.29-6)=28.71\text{ dBm/500kHz}$

## Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 5 + Chain 6 + Chain 7 + Chain 8

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	0.56	16.90	Complies

Note:  $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{K=1}^{N_{ANT}} g_{j,k}\right)^2}{N_{ANT}}\right] = 6.10\text{dBi}$ , so limit =  $17-(6.10-6)=16.90\text{ dBm/MHz}$


Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
155	5775 MHz	-1.20	-3.01	-4.21	28.71	Complies

Note:  $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{K=1}^{N_{ANT}} g_{j,k}\right)^2}{N_{ANT}}\right] = 7.29\text{dBi}$ , so limit =  $30-(7.29-6)=28.71\text{ dBm/500kHz}$


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5200 MHz**

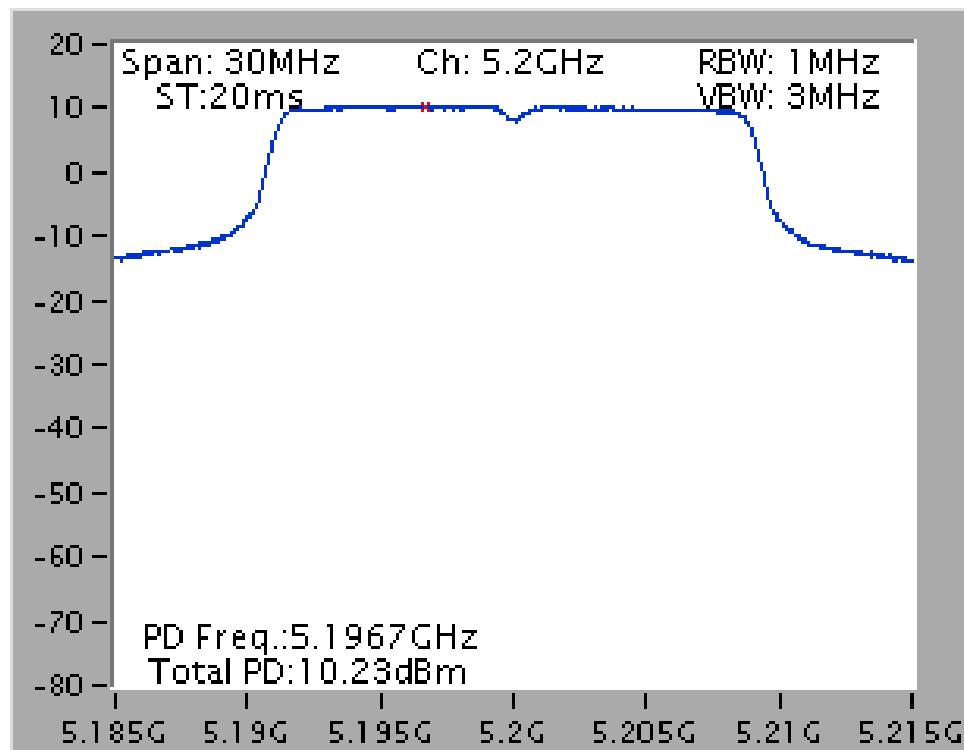


**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5785 MHz**

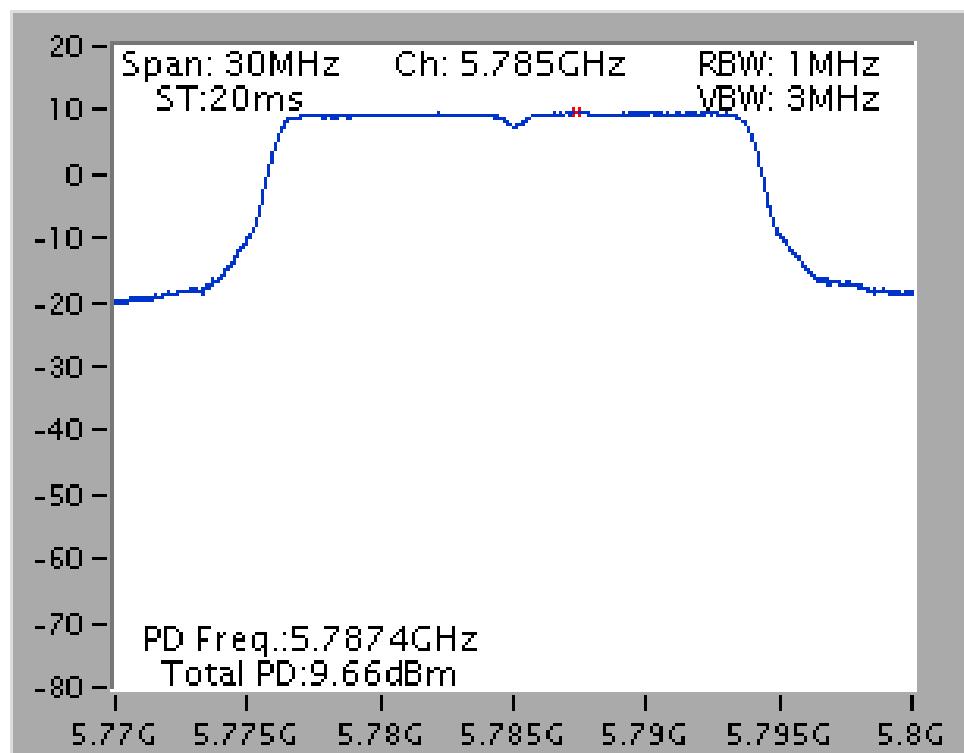


**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5230 MHz**

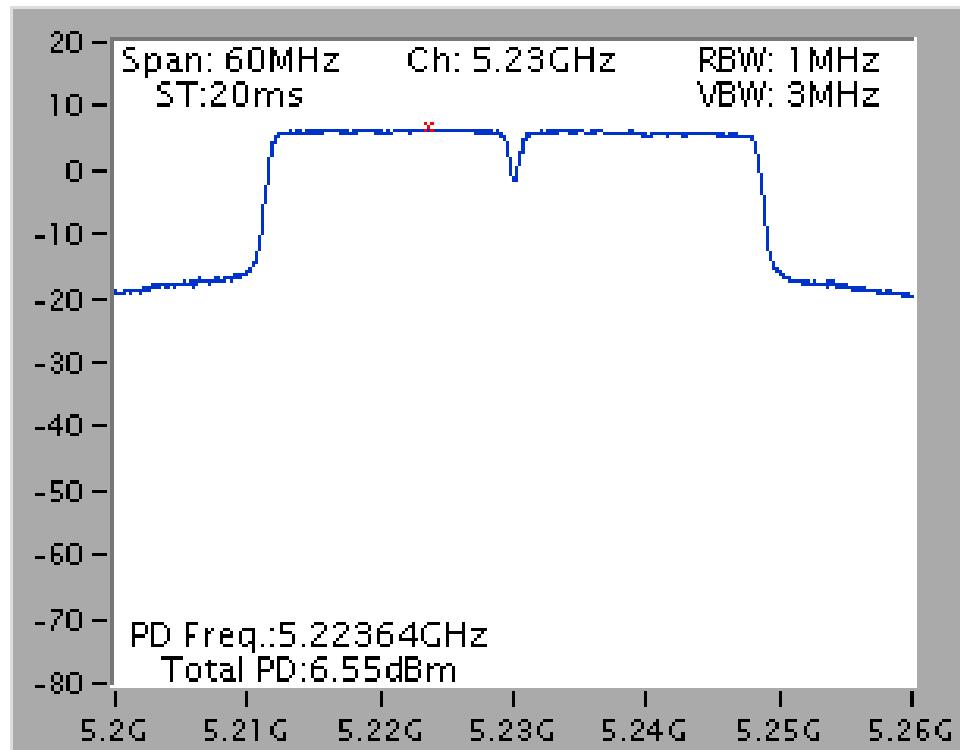


**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5795 MHz**

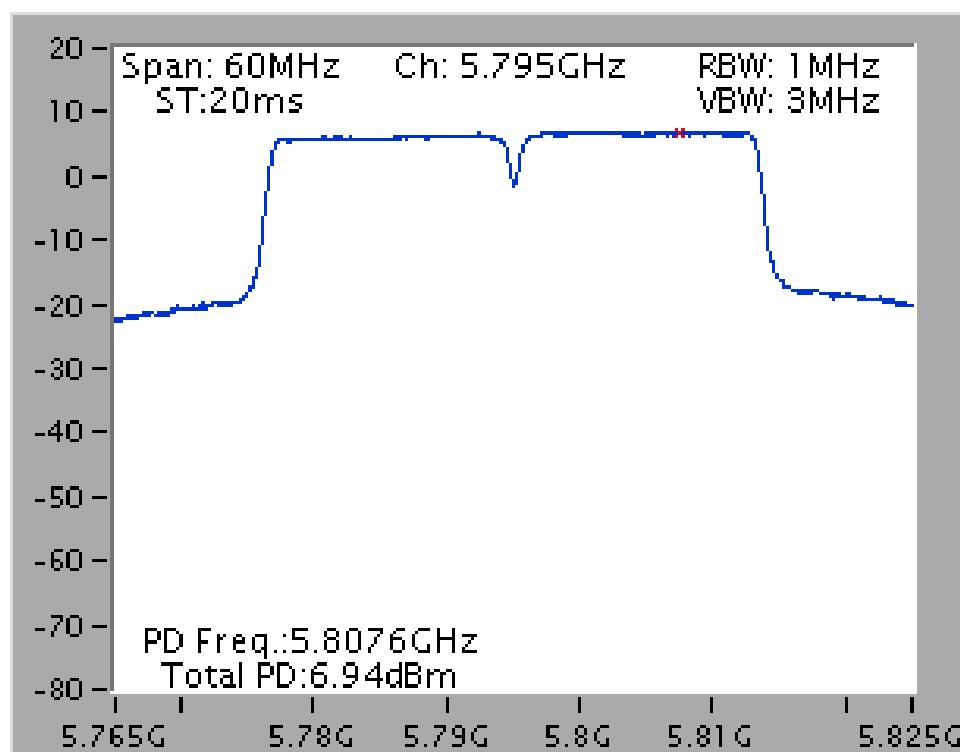

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5210 MHz**

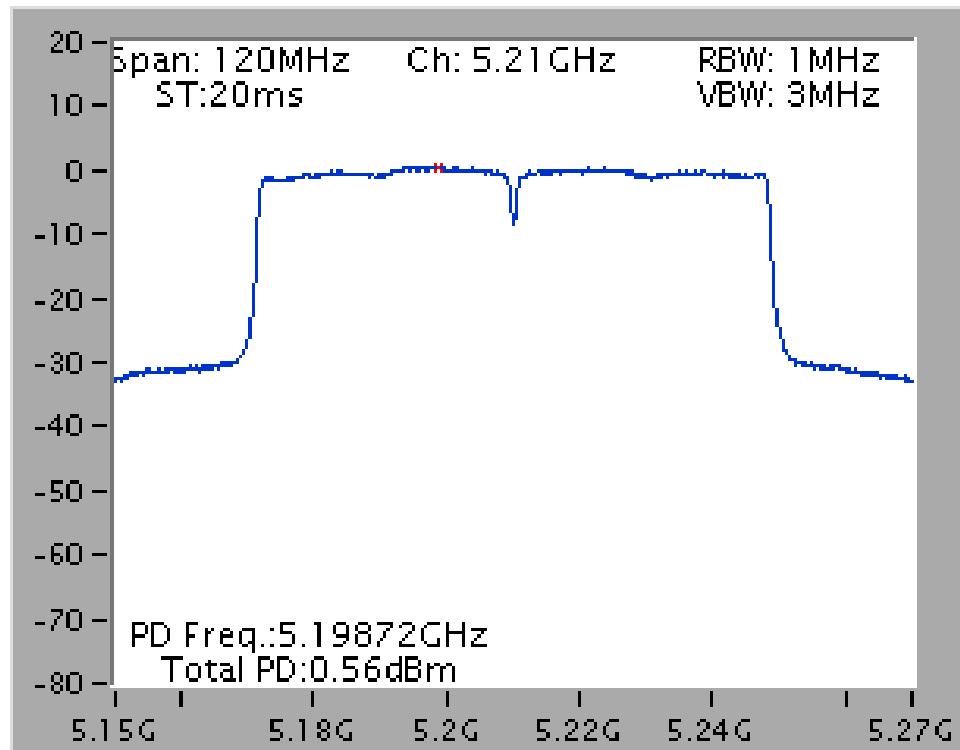

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 5 + Chain 6 + Chain 7 + Chain 8 / 5775 MHz**

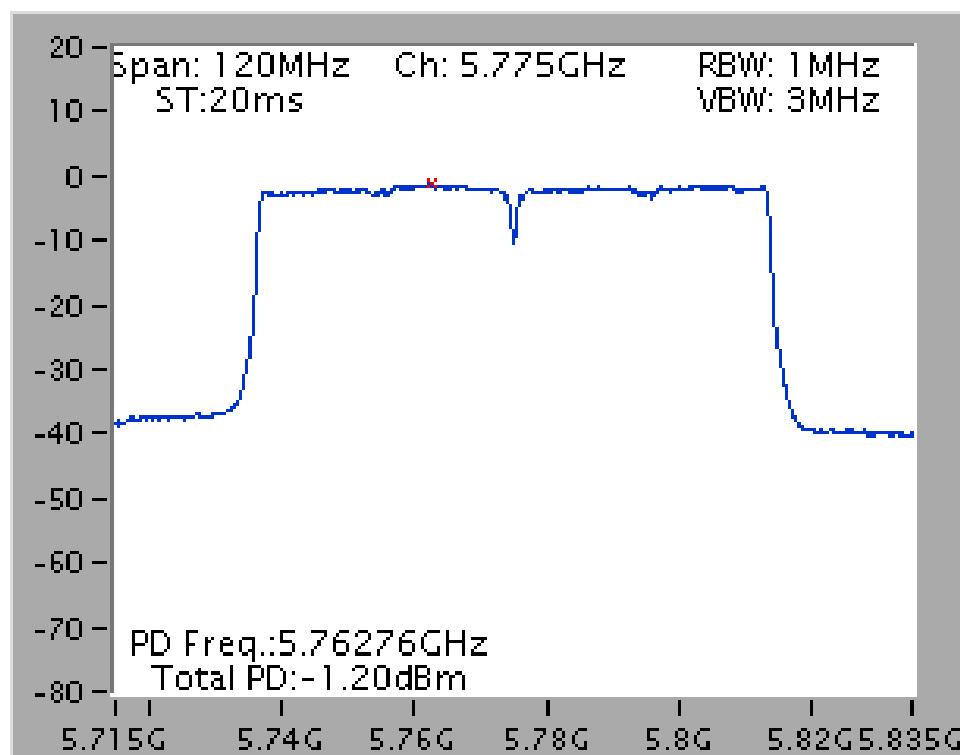

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.5.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout

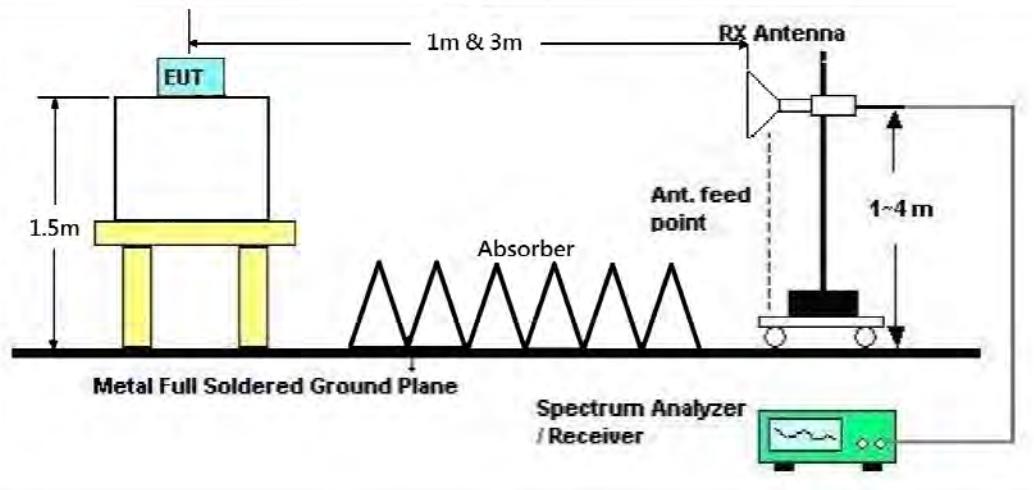

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in beamforming transmitting mode.

## 4.5.7. Results for Radiated Emissions (1GHz~40GHz)

Temperature	25°C	Humidity	56%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 5 + Chain 6 + Chain 7 + Chain 8
Test Date	Dec. 29, 2015		

## Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dBuV	dB			dB	cm	deg	
1	15536.42	47.24	54.00	-6.76	32.08	12.49	38.39	35.72	250	116	HORIZONTAL	Average	
2	15542.50	60.32	74.00	-13.68	45.16	12.49	38.39	35.72	250	116	HORIZONTAL	Peak	

## Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dBuV	dB			dB	cm	deg	
1	15535.00	46.73	54.00	-7.27	31.57	12.49	38.39	35.72	250	278	VERTICAL	Average	
2	15543.92	60.74	74.00	-13.26	45.58	12.49	38.39	35.72	250	278	VERTICAL	Peak	

Temperature	25°C	Humidity	56%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 5 + Chain 6 + Chain 7 + Chain 8
Test Date	Dec. 29, 2015		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV			cm	deg		
1	15598.94	59.92	74.00	-14.08	44.75	12.52	38.38	35.73	250	205	HORIZONTAL	Peak	
2	15600.24	46.90	54.00	-7.10	31.73	12.52	38.38	35.73	250	205	HORIZONTAL	Average	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV			cm	deg		
1	15596.54	47.38	54.00	-6.62	32.21	12.52	38.38	35.73	250	144	VERTICAL	Average	
2	15598.42	59.85	74.00	-14.15	44.68	12.52	38.38	35.73	250	144	VERTICAL	Peak	

Temperature	25°C	Humidity	56%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 5 + Chain 6 + Chain 7 + Chain 8
Test Date	Dec. 29, 2015		

**Horizontal**

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	cm	deg			
1	15720.30	46.18	54.00	-7.82	30.98	12.60	38.35	35.75	250	52	HORIZONTAL	Average	
2	15724.38	59.66	74.00	-14.34	44.46	12.60	38.35	35.75	250	52	HORIZONTAL	Peak	

**Vertical**

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	cm	deg			
1	15717.36	59.02	74.00	-14.98	43.82	12.60	38.35	35.75	250	195	VERTICAL	Peak	
2	15724.38	46.26	54.00	-7.74	31.06	12.60	38.35	35.75	250	195	VERTICAL	Average	



Temperature	25°C	Humidity	56%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Chain 5 + Chain 6 + Chain 7 + Chain 8
Test Date	Dec. 29, 2015		

**Horizontal**

Freq	Level	Limit		Over Line	Read Level	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10982.74	45.14	54.00	-8.86	29.19	10.67	39.27	33.99	250	284	HORIZONTAL	Average
2	10989.52	58.62	74.00	-15.38	42.67	10.67	39.27	33.99	250	284	HORIZONTAL	Peak

**Vertical**

Freq	Level	Limit		Over Line	Read Level	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10980.92	58.36	74.00	-15.64	42.41	10.67	39.27	33.99	250	141	VERTICAL	Peak
2	10982.84	45.29	54.00	-8.71	29.34	10.67	39.27	33.99	250	141	VERTICAL	Average

Temperature	25°C	Humidity	56%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Chain 5 + Chain 6 + Chain 7 + Chain 8
Test Date	Dec. 29, 2015		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV			cm	deg		
1	11566.90	58.10	74.00	-15.90	42.34	10.98	39.15	34.37	250	263	HORIZONTAL	Peak	
2	11573.12	44.57	54.00	-9.43	28.81	10.98	39.15	34.37	250	263	HORIZONTAL	Average	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV			cm	deg		
1	11570.64	44.51	54.00	-9.49	28.75	10.98	39.15	34.37	250	90	VERTICAL	Average	
2	11573.72	57.82	74.00	-16.18	42.06	10.98	39.15	34.37	250	90	VERTICAL	Peak	

Temperature	25°C	Humidity	56%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Chain 5 + Chain 6 + Chain 7 + Chain 8
Test Date	Dec. 29, 2015		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV			dB	dB/m	dB	cm
1	11652.16	44.70	54.00	-9.30	29.01	11.03	39.07	34.41	250	259	HORIZONTAL	Average	
2	11654.76	57.58	74.00	-16.42	41.89	11.03	39.07	34.41	250	259	HORIZONTAL	Peak	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV			dB	dB/m	dB	cm
1	11646.64	44.71	54.00	-9.29	29.02	11.01	39.09	34.41	250	350	VERTICAL	Average	
2	11653.02	58.20	74.00	-15.80	42.51	11.03	39.07	34.41	250	350	VERTICAL	Peak	



Temperature	25°C	Humidity	56%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 5 + Chain 6 + Chain 7 + Chain 8
Test Date	Dec. 29, 2015		

**Horizontal**

Freq	Level	Limit		Over Line	Read Limit	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		dB	dB									
1	15565.26	60.56	74.00	-13.44	45.39	12.52	38.38	35.73	250	75	HORIZONTAL	Peak
2	15575.00	47.23	54.00	-6.77	32.06	12.52	38.38	35.73	250	75	HORIZONTAL	Average

**Vertical**

Freq	Level	Limit		Over Line	Read Level	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		dB	dB									
1	15565.92	47.10	54.00	-6.90	31.93	12.52	38.38	35.73	250	189	VERTICAL	Average
2	15569.82	60.30	74.00	-13.70	45.13	12.52	38.38	35.73	250	189	VERTICAL	Peak

Temperature	25°C	Humidity	56%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 5 + Chain 6 + Chain 7 + Chain 8
Test Date	Dec. 29, 2015		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			Antenna	Preamp					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	10456.98	44.13	54.00	-9.87	28.74	10.38	38.84	33.83	250	136	HORIZONTAL	Average
2	10462.56	57.34	74.00	-16.66	41.95	10.38	38.84	33.83	250	136	HORIZONTAL	Peak

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			Antenna	Preamp					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	10459.18	57.51	74.00	-16.49	42.12	10.38	38.84	33.83	250	82	VERTICAL	Peak
2	10464.94	43.91	54.00	-10.09	28.52	10.38	38.84	33.83	250	82	VERTICAL	Average

Temperature	25°C	Humidity	56%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Chain 5 + Chain 6 + Chain 7 + Chain 8
Test Date	Dec. 29, 2015		

**Horizontal**

Freq	Level	Limit		Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dB									
MHz	dBuV/m	dBuV/m	dB									
1	11505.90	58.45	74.00	-15.55	42.64	10.94	39.20	34.33	250	128	HORIZONTAL	Peak
2	11511.40	44.94	54.00	-9.06	29.15	10.94	39.20	34.35	250	128	HORIZONTAL	Average

**Vertical**

Freq	Level	Limit		Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dB									
MHz	dBuV/m	dBuV/m	dB									
1	11505.92	58.19	74.00	-15.81	42.38	10.94	39.20	34.33	250	225	VERTICAL	Peak
2	11507.46	45.14	54.00	-8.86	29.33	10.94	39.20	34.33	250	225	VERTICAL	Average

Temperature	25°C	Humidity	56%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Chain 5 + Chain 6 + Chain 7 + Chain 8
Test Date	Dec. 29, 2015		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV			cm	deg		
1	11585.82	58.37	74.00	-15.63	42.65	10.99	39.12	34.39	250	123	HORIZONTAL	Peak	
2	11592.86	44.60	54.00	-9.40	28.88	10.99	39.12	34.39	250	123	HORIZONTAL	Average	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV			cm	deg		
1	11585.14	57.75	74.00	-16.25	42.03	10.99	39.12	34.39	250	50	VERTICAL	Peak	
2	11592.94	44.65	54.00	-9.35	28.93	10.99	39.12	34.39	250	50	VERTICAL	Average	

Temperature	25°C	Humidity	56%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 5 + Chain 6 + Chain 7 + Chain 8
Test Date	Dec. 29, 2015		

**Horizontal**

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15635.36	46.53	54.00	-7.47	31.34	12.55	38.37	35.73	250	91	HORIZONTAL	Average	
2	15637.44	59.71	74.00	-14.29	44.52	12.55	38.37	35.73	250	91	HORIZONTAL	Peak	

**Vertical**

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15624.60	46.49	54.00	-7.51	31.30	12.55	38.37	35.73	250	254	VERTICAL	Average	
2	15625.84	58.97	74.00	-15.03	43.78	12.55	38.37	35.73	250	254	VERTICAL	Peak	

<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Peter Wu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 5 + Chain 6 + Chain 7 + Chain 8
<b>Test Date</b>	Dec. 29, 2015		

**Horizontal**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11549.40	58.28	74.00	-15.72	42.52	10.96	39.17	34.37	250	195	HORIZONTAL Peak
2	11550.00	45.00	54.00	-9.00	29.24	10.96	39.17	34.37	250	195	HORIZONTAL Average

**Vertical**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11541.60	44.93	54.00	-9.07	29.15	10.96	39.17	34.35	250	108	VERTICAL Average
2	11544.16	57.48	74.00	-16.52	41.70	10.96	39.17	34.35	250	108	VERTICAL Peak

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Band Edge Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for Peak

### 4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3.

### 4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in beamforming transmitting mode.

#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Peter Wu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 5 + Chain 6 + Chain 7 + Chain 8
<b>Test Date</b>	Dec. 28, 2015		

##### Channel 36

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	5144.40	67.59	74.00	-6.41	61.52	7.24	33.17	34.34	232	130	VERTICAL	Peak
2	5149.60	50.83	54.00	-3.17	44.76	7.24	33.17	34.34	232	130	VERTICAL	Average
3	5173.20	112.09			105.91	7.29	33.23	34.34	232	130	VERTICAL	Peak
4	5174.80	101.86			95.68	7.29	33.23	34.34	232	130	VERTICAL	Average

Item 3, 4 are the fundamental frequency at 5180 MHz.

##### Channel 40

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	5147.60	63.29	74.00	-10.71	57.22	7.24	33.17	34.34	265	135	VERTICAL	Peak
2	5150.00	45.84	54.00	-8.16	39.77	7.24	33.17	34.34	265	135	VERTICAL	Average
3	5192.00	99.81			93.58	7.32	33.25	34.34	265	135	VERTICAL	Average
4	5192.40	110.84			104.61	7.32	33.25	34.34	265	135	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 5200 MHz.

##### Channel 48

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	5150.00	44.79	54.00	-9.21	38.72	7.24	33.17	34.34	258	136	VERTICAL	Average
2	5150.00	57.25	74.00	-16.75	51.18	7.24	33.17	34.34	258	136	VERTICAL	Peak
3	5241.20	101.68			95.32	7.36	33.34	34.34	258	136	VERTICAL	Average
4	5243.20	111.07			104.70	7.36	33.34	34.33	258	136	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	56%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149, 157, 165 / Chain 5 + Chain 6 + Chain 7 + Chain 8
Test Date	Dec. 28, 2015		

### Channel 149

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dBuV	dB	dB/m						
1	5713.80	49.63	54.00	-4.37	41.70	7.88	34.41	34.36	271	165	HORIZONTAL	Average		
2	5713.80	66.29	74.00	-7.71	58.36	7.88	34.41	34.36	271	165	HORIZONTAL	Peak		
3	5722.60	77.06	78.20	-1.14	69.10	7.87	34.45	34.36	271	165	HORIZONTAL	Peak		
4	5737.80	100.39			92.43	7.87	34.45	34.36	271	165	HORIZONTAL	Average		
5	5739.00	110.07			102.07	7.86	34.50	34.36	271	165	HORIZONTAL	Peak		

Item 4, 5 are the fundamental frequency at 5745 MHz.

### Channel 157

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dBuV	dB	dB/m						
1	5701.40	47.68	54.00	-6.32	39.79	7.88	34.36	34.35	294	340	VERTICAL	Average		
2	5715.00	58.78	74.00	-15.22	50.85	7.88	34.41	34.36	294	340	VERTICAL	Peak		
3	5725.00	59.10	78.20	-19.10	51.14	7.87	34.45	34.36	294	340	VERTICAL	Peak		
4	5785.80	110.72			102.65	7.86	34.59	34.38	294	340	VERTICAL	Peak		
5	5786.60	101.44			93.37	7.86	34.59	34.38	294	340	VERTICAL	Average		
6	5850.00	58.36	78.20	-19.84	50.13	7.84	34.78	34.39	294	340	VERTICAL	Peak		
7	5860.00	48.27	54.00	-5.73	40.00	7.83	34.83	34.39	294	340	VERTICAL	Average		
8	5875.00	61.12	74.00	-12.88	52.81	7.83	34.87	34.39	294	340	VERTICAL	Peak		

Item 4, 5 are the fundamental frequency at 5785 MHz.

### Channel 165

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dBuV	dB	dB/m						
1	5833.00	102.86			94.67	7.84	34.73	34.38	279	342	VERTICAL	Average		
2	5833.20	112.06			103.87	7.84	34.73	34.38	279	342	VERTICAL	Peak		
3	5850.00	78.12	78.20	-0.08	69.89	7.84	34.78	34.39	279	342	VERTICAL	Peak		
4	5860.00	49.52	54.00	-4.48	41.25	7.83	34.83	34.39	279	342	VERTICAL	Average		
5	5862.20	69.17	74.00	-4.83	60.90	7.83	34.83	34.39	279	342	VERTICAL	Peak		

Item 1, 2 are the fundamental frequency at 5825 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Peter Wu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 5 + Chain 6 + Chain 7 + Chain 8
<b>Test Date</b>	Dec. 28, 2015		

**Channel 38**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dB			dBuV	dB			cm	deg		
MHz		dBuV/m	dBuV/m										
1	5146.00	70.24	74.00	-3.76	64.17	7.24	33.17	34.34	250	134	VERTICAL	Peak	
2	5150.00	53.84	54.00	-0.16	47.77	7.24	33.17	34.34	250	134	VERTICAL	Average	
3	5185.20	105.39			99.21	7.29	33.23	34.34	250	134	VERTICAL	Peak	
4	5188.40	94.37			88.14	7.32	33.25	34.34	250	134	VERTICAL	Average	

Item 3, 4 are the fundamental frequency at 5190 MHz.

**Channel 46**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dB			dBuV	dB			cm	deg		
MHz		dBuV/m	dBuV/m										
1	5145.00	48.06	54.00	-5.94	41.99	7.24	33.17	34.34	250	135	VERTICAL	Average	
2	5150.00	59.26	74.00	-14.74	53.19	7.24	33.17	34.34	250	135	VERTICAL	Peak	
3	5236.00	100.03			93.67	7.36	33.34	34.34	250	135	VERTICAL	Average	
4	5238.00	109.89			103.53	7.36	33.34	34.34	250	135	VERTICAL	Peak	

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	25°C	Humidity	56%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151, 159 / Chain 5 + Chain 6 + Chain 7 + Chain 8
Test Date	Dec. 28, 2015~Dec. 29, 2015		

### Channel 151

Freq	Level	Limit		Over Limit	Read Level	Cable			A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			Loss	Antenna Factor	Preamp Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1 5714.60	68.25	74.00	-5.75	60.32	7.88	34.41	34.36	272	160	VERTICAL	Peak	
2 5715.00	53.87	54.00	-0.13	45.94	7.88	34.41	34.36	272	160	VERTICAL	Average	
3 5717.40	74.38	78.20	-3.82	66.45	7.88	34.41	34.36	272	160	VERTICAL	Peak	
4 5739.40	95.80			87.80	7.86	34.50	34.36	272	160	VERTICAL	Average	
5 5739.40	106.23			98.23	7.86	34.50	34.36	272	160	VERTICAL	Peak	

Item 4, 5 are the fundamental frequency at 5755 MHz.

### Channel 159

Freq	Level	Limit		Over Limit	Read Level	Cable			A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			Loss	Antenna Factor	Preamp Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1 5715.00	49.52	54.00	-4.48	41.59	7.88	34.41	34.36	250	170	VERTICAL	Average	
2 5715.00	61.40	74.00	-12.60	53.47	7.88	34.41	34.36	250	170	VERTICAL	Peak	
3 5725.00	62.79	78.20	-15.41	54.83	7.87	34.45	34.36	250	170	VERTICAL	Peak	
4 5808.20	99.66			91.50	7.85	34.69	34.38	250	170	VERTICAL	Average	
5 5808.26	112.66			104.50	7.85	34.69	34.38	250	170	VERTICAL	Peak	
6 5858.80	68.89	78.20	-9.31	60.62	7.83	34.83	34.39	250	170	VERTICAL	Peak	
7 5860.00	52.57	54.00	-1.43	44.30	7.83	34.83	34.39	250	170	VERTICAL	Average	
8 5876.20	69.77	74.00	-4.23	61.46	7.83	34.87	34.39	250	170	VERTICAL	Peak	

Item 4, 5 are the fundamental frequency at 5795 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Peter Wu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42, 155 / Chain 5 + Chain 6 + Chain 7 + Chain 8
<b>Test Date</b>	Dec. 29, 2015~Jan. 20, 2016		

**Channel 42**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5145.20	67.20	74.00	-6.80	61.13	7.24	33.17	34.34	250	164 VERTICAL	Peak
2	5149.20	53.87	54.00	-0.13	47.80	7.24	33.17	34.34	250	164 VERTICAL	Average
3	5212.40	101.61			95.34	7.33	33.28	34.34	250	164 VERTICAL	Peak
4	5216.40	92.47			86.20	7.33	33.28	34.34	250	164 VERTICAL	Average

Item 3, 4 are the fundamental frequency at 5210 MHz.

**Channel 155**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5700.60	64.74	74.00	-9.26	56.85	7.88	34.36	34.35	150	165 VERTICAL	Peak
2	5715.00	53.20	54.00	-0.80	45.27	7.88	34.41	34.36	150	165 VERTICAL	Average
3	5717.40	68.21	78.20	-9.99	60.28	7.88	34.41	34.36	150	165 VERTICAL	Peak
4	5779.80	100.33			92.25	7.86	34.59	34.37	150	165 VERTICAL	Peak
5	5806.20	91.60			83.44	7.85	34.69	34.38	150	165 VERTICAL	Average
6	5855.60	66.17	78.20	-12.03	57.94	7.84	34.78	34.39	150	165 VERTICAL	Peak
7	5860.00	53.80	54.00	-0.20	45.53	7.83	34.83	34.39	150	165 VERTICAL	Average
8	5860.00	69.75	74.00	-4.25	61.48	7.83	34.83	34.39	150	165 VERTICAL	Peak

Item 4, 5 are the fundamental frequency at 5775 MHz.

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.7. Frequency Stability Measurement

### 4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

### 4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c-f)/f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is  $0^\circ\text{C} \sim 50^\circ\text{C}$ .

### 4.7.4. Test Setup Layout

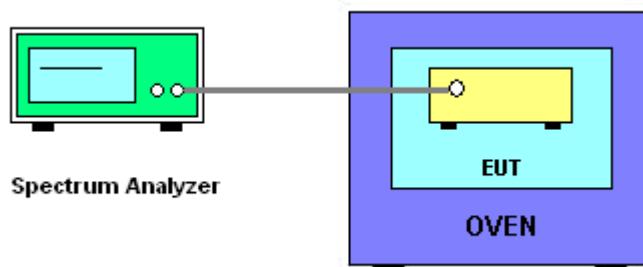

#### 4.7.5. Test Deviation

There is no deviation with the original standard.

#### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.7.7. Test Result of Frequency Stability

Temperature	25°C	Humidity	54%
Test Engineer	Clemens Fang	Test Date	Nov. 30, 2015

**Mode: 20 MHz / Chain 7**

##### Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5200.0229	5200.0215	5200.0197	5200.0176
110.00	5200.0217	5200.0204	5200.0188	5200.0169
93.50	5200.0203	5200.0192	5200.0180	5200.0158
Max. Deviation (MHz)	0.0229	0.0215	0.0197	0.0176
Max. Deviation (ppm)	4.40	4.13	3.79	3.38
Result	Complies			

##### Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5200.0242	5200.0230	5200.0211	5200.0189
10	5200.0229	5200.0216	5200.0201	5200.0183
20	5200.0217	5200.0204	5200.0188	5200.0169
30	5200.0203	5200.0192	5200.0178	5200.0162
40	5200.0187	5200.0172	5200.0156	5200.0136
50	5200.0170	5200.0158	5200.0143	5200.0116
Max. Deviation (MHz)	0.0242	0.0230	0.0211	0.0189
Max. Deviation (ppm)	4.65	4.42	4.06	3.63
Result	Complies			

**Voltage vs. Frequency Stability**

Voltage		Measurement Frequency (MHz)			
(V)		5785 MHz			
		0 Minute	2 Minute	5 Minute	10 Minute
126.50	5785.0259	5785.0245	5785.0227	5785.0206	
110.00	5785.0247	5785.0234	5785.0218	5785.0199	
93.50	5785.0233	5785.0222	5785.0210	5785.0188	
Max. Deviation (MHz)	0.0259	0.0245	0.0227	0.0206	
Max. Deviation (ppm)	4.48	4.24	3.92	3.56	
Result	Complies				

**Temperature vs. Frequency Stability**

Temperature		Measurement Frequency (MHz)			
( $^{\circ}$ C)		5785 MHz			
		0 Minute	2 Minute	5 Minute	10 Minute
0	5785.0272	5785.0260	5785.0241	5785.0219	
10	5785.0259	5785.0246	5785.0231	5785.0213	
20	5785.0247	5785.0234	5785.0218	5785.0199	
30	5785.0233	5785.0222	5785.0208	5785.0192	
40	5785.0217	5785.0202	5785.0186	5785.0166	
50	5785.0200	5785.0188	5785.0173	5785.0146	
Max. Deviation (MHz)	0.0272	0.0260	0.0241	0.0219	
Max. Deviation (ppm)	4.70	4.49	4.17	3.79	
Result	Complies				

**Mode: 40 MHz / Chain 7**
**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5190.0264	5190.0250	5190.0232	5190.0211
110.00	5190.0252	5190.0239	5190.0223	5190.0204
93.50	5190.0238	5190.0227	5190.0215	5190.0193
Max. Deviation (MHz)	0.0264	0.0250	0.0232	0.0211
Max. Deviation (ppm)	5.09	4.82	4.47	4.07
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
( $^{\circ}$ C)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5190.0277	5190.0265	5190.0246	5190.0224
10	5190.0264	5190.0251	5190.0236	5190.0218
20	5190.0252	5190.0239	5190.0223	5190.0204
30	5190.0238	5190.0227	5190.0213	5190.0197
40	5190.0222	5190.0207	5190.0191	5190.0171
50	5190.0205	5190.0193	5190.0178	5190.0151
Max. Deviation (MHz)	0.0277	0.0265	0.0246	0.0224
Max. Deviation (ppm)	5.34	5.11	4.74	4.32
Result	Complies			

**Voltage vs. Frequency Stability**

Voltage		Measurement Frequency (MHz)			
(V)	5755 MHz				
	0 Minute	2 Minute	5 Minute	10 Minute	
126.50	5755.0247	5755.0233	5755.0215	5755.0194	
110.00	5755.0235	5755.0222	5755.0206	5755.0187	
93.50	5755.0221	5755.0210	5755.0198	5755.0176	
Max. Deviation (MHz)	0.0247	0.0233	0.0215	0.0194	
Max. Deviation (ppm)	4.29	4.05	3.74	3.37	
Result	Complies				

**Temperature vs. Frequency Stability**

Temperature		Measurement Frequency (MHz)			
( $^{\circ}$ C)	5755 MHz				
	0 Minute	2 Minute	5 Minute	10 Minute	
0	5755.0260	5755.0248	5755.0229	5755.0207	
10	5755.0247	5755.0234	5755.0219	5755.0201	
20	5755.0235	5755.0222	5755.0206	5755.0187	
30	5755.0221	5755.0210	5755.0196	5755.0180	
40	5755.0205	5755.0190	5755.0174	5755.0154	
50	5755.0188	5755.0176	5755.0161	5755.0134	
Max. Deviation (MHz)	0.0260	0.0248	0.0229	0.0207	
Max. Deviation (ppm)	4.52	4.31	3.98	3.60	
Result	Complies				

**Mode: 80 MHz / Chain 7**
**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5210.0260	5210.0246	5210.0228	5210.0207
110.00	5210.0248	5210.0235	5210.0219	5210.0200
93.50	5210.0234	5210.0223	5210.0211	5210.0189
Max. Deviation (MHz)	0.0260	0.0246	0.0228	0.0207
Max. Deviation (ppm)	4.99	4.72	4.38	3.97
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
( $^{\circ}$ C)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5210.0273	5210.0261	5210.0242	5210.0220
10	5210.0260	5210.0247	5210.0232	5210.0214
20	5210.0248	5210.0235	5210.0219	5210.0200
30	5210.0234	5210.0223	5210.0209	5210.0193
40	5210.0218	5210.0203	5210.0187	5210.0167
50	5210.0201	5210.0189	5210.0174	5210.0147
Max. Deviation (MHz)	0.0273	0.0261	0.0242	0.0220
Max. Deviation (ppm)	5.24	5.01	4.64	4.22
Result	Complies			

**Voltage vs. Frequency Stability**

Voltage		Measurement Frequency (MHz)			
(V)		5775 MHz			
		0 Minute	2 Minute	5 Minute	10 Minute
126.50	5775.0275	5775.0261	5775.0243	5775.0222	
110.00	5775.0263	5775.0250	5775.0234	5775.0215	
93.50	5775.0249	5775.0238	5775.0226	5775.0204	
Max. Deviation (MHz)	0.0275	0.0261	0.0243	0.0222	
Max. Deviation (ppm)	4.76	4.52	4.21	3.84	
Result	Complies				

**Temperature vs. Frequency Stability**

Temperature		Measurement Frequency (MHz)			
( $^{\circ}$ C)		5775 MHz			
		0 Minute	2 Minute	5 Minute	10 Minute
0	5775.0288	5775.0276	5775.0257	5775.0235	
10	5775.0275	5775.0262	5775.0247	5775.0229	
20	5775.0263	5775.0250	5775.0234	5775.0215	
30	5775.0249	5775.0238	5775.0224	5775.0208	
40	5775.0233	5775.0218	5775.0202	5775.0182	
50	5775.0216	5775.0204	5775.0189	5775.0162	
Max. Deviation (MHz)	0.0288	0.0276	0.0257	0.0235	
Max. Deviation (ppm)	4.99	4.78	4.45	4.07	
Result	Complies				

## 4.8. Antenna Requirements

### 4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Amplifier	Agilent	8449B	3008A02660	1GHz ~ 26.5GHz	May 25, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Feb. 10, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-I0-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%