


ATTACHMENT O – SAR TEST PLOTS (2 of 3)


G902

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Head 1900 MHz: $s = 1.41$
 $\rho_{\text{ho/m}} = 39.5$ $r = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 0.739 mW/g, SAR (10g): 0.460 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.00 dB
Comment:
MODEL : G902
Company : KBT Mobile Co.,Ltd.
Test Position: Left Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 512
Liquid Temperature: 21.4°C
Date Tested : November 16, 2004

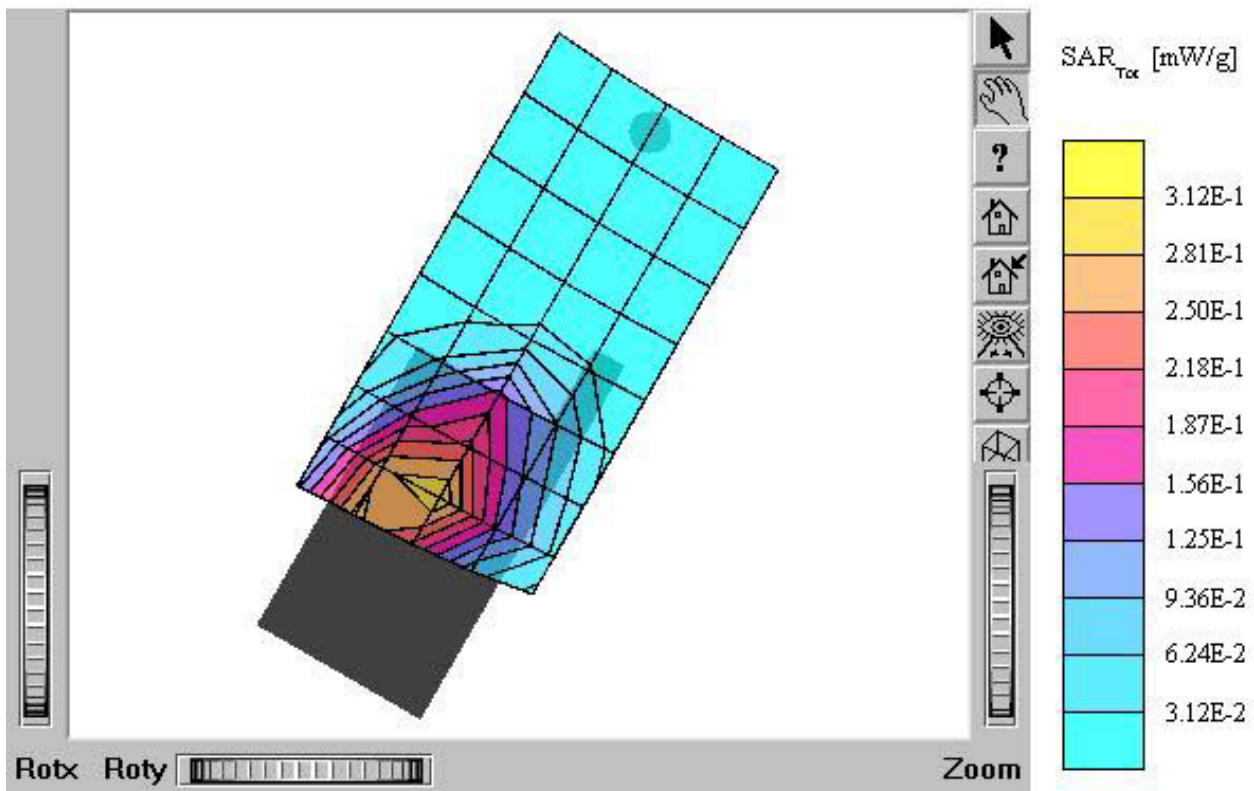


G902

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Head 1900 MHz: $s = 1.41$
 $\rho_{\text{ho/m}} = 39.5$ $r = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 1.08 mW/g, SAR (10g): 0.672 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.27 dB
Comment:
MODEL : G902
Company : KBT Mobile Co.,Ltd.
Test Position: Left Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 661
Liquid Temperature: 21.4°C
Date Tested : November 16, 2004

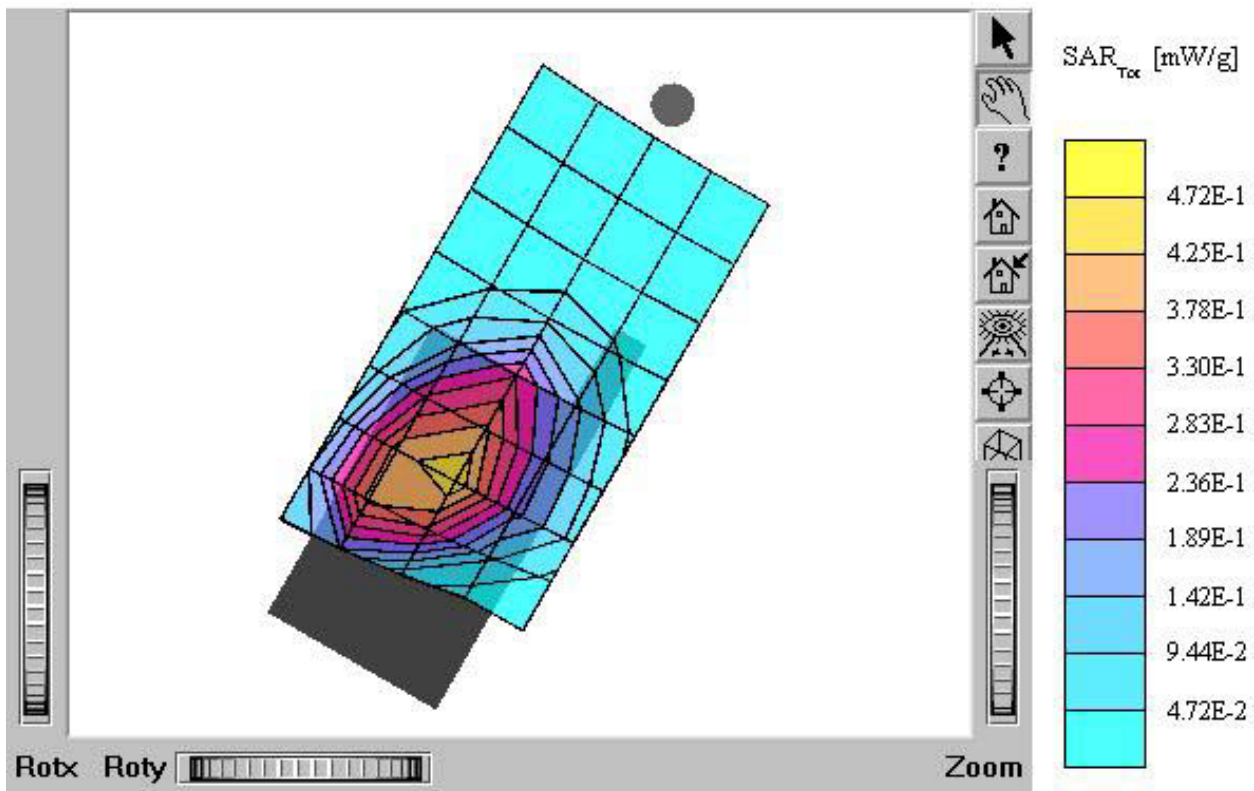


G902

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Head 1900 MHz: $s = 1.41$
 mho/m $\epsilon_r = 39.5$ $\rho = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 1.24 mW/g, SAR (10g): 0.771 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.02 dB
Comment:
MODEL : G902
Company : KBT Mobile Co.,Ltd.
Test Position: Left Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 810
Liquid Temperature: 21.4°C
Date Tested : November 16, 2004

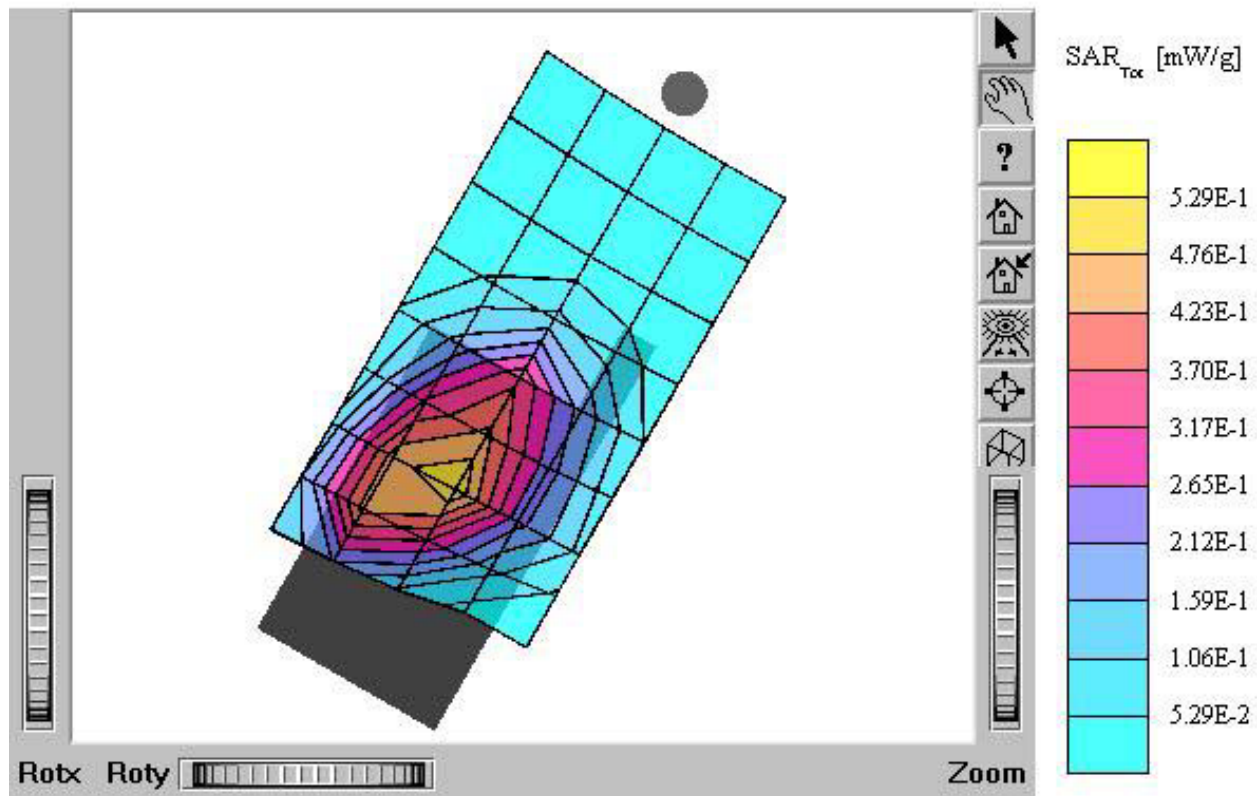


G902

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Head 1900 MHz: $s = 1.41$
 mho/m $\epsilon_r = 39.5$ $\rho = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 0.789 mW/g, SAR (10g): 0.480 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.02 dB
Comment:
MODEL : G902
Company : KBT Mobile Co.,Ltd.
Test Position: Right Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 512
Liquid Temperature: 21.4°C
Date Tested : November 16, 2004

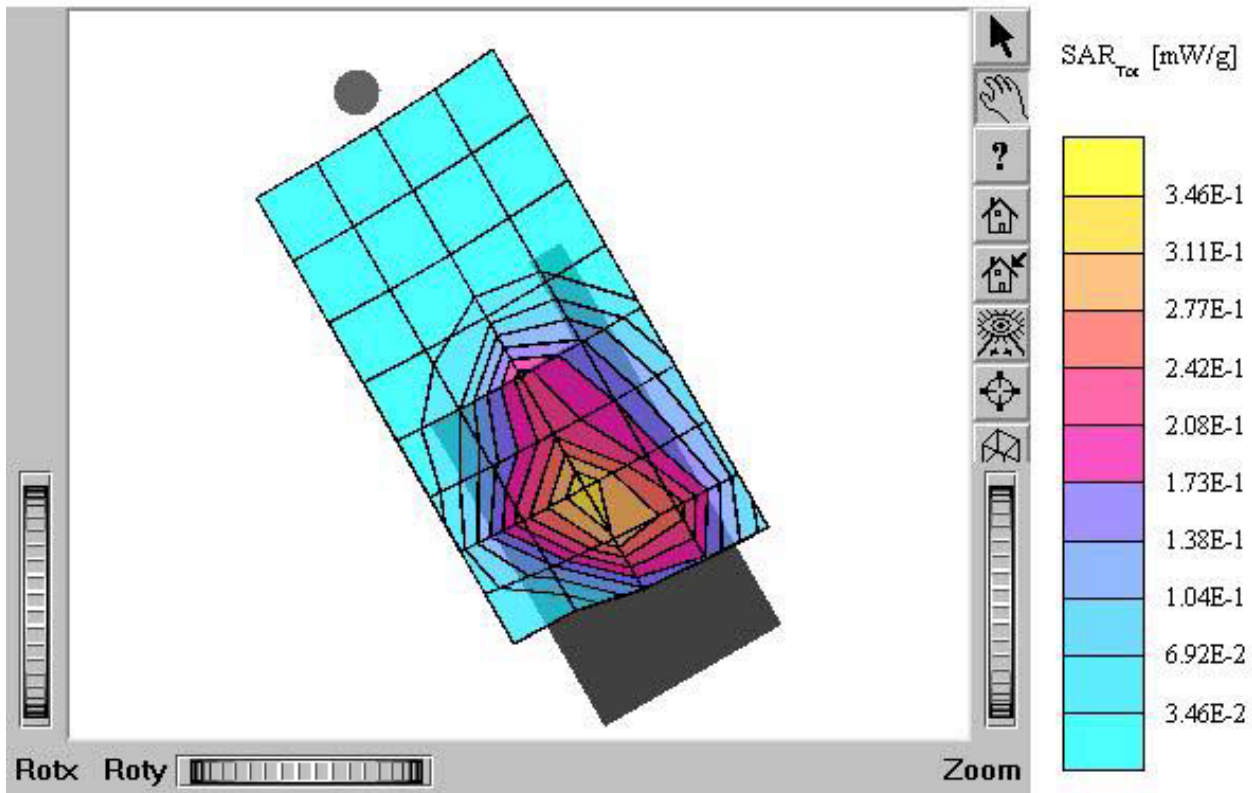


G902

SAM II Phantom: Right Hand [CRP] Section: Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Head 1900 MHz: $s = 1.41$
 $\rho_{\text{ho/m e,}} = 39.5$ $r = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.968 mW/g, SAR (10g): 0.591 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.06 dB
Comment:
MODEL : G902
Company : KBT Mobile Co.,Ltd.
Test Position: Right Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 661
Liquid Temperature: 21.4°C
Date Tested : November 16, 2004

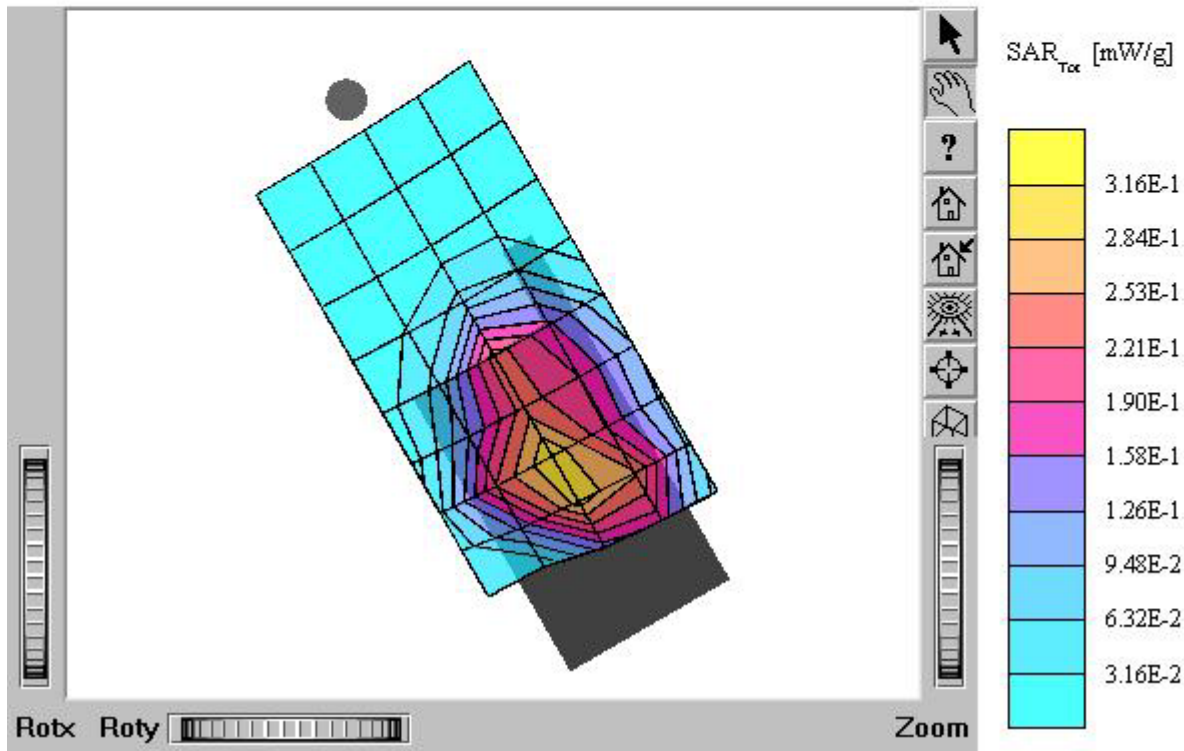


G902

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Head 1900 MHz: $s = 1.41$
 mho/m $e_r = 39.5$ $r = 1.00$ g/cm^3
Cube 5x5x7; SAR (1g): 0.999 mW/g, SAR (10g): 0.602 mW/g
Coarse: $D_x = 15.0$, $D_y = 15.0$, $D_z = 10.0$
Powerdrift: 0.33 dB
Comment:
MODEL : G902
Company : KBT Mobile Co.,Ltd.
Test Position: Right Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 810
Liquid Temperature: 21.4°C
Date Tested : November 16, 2004

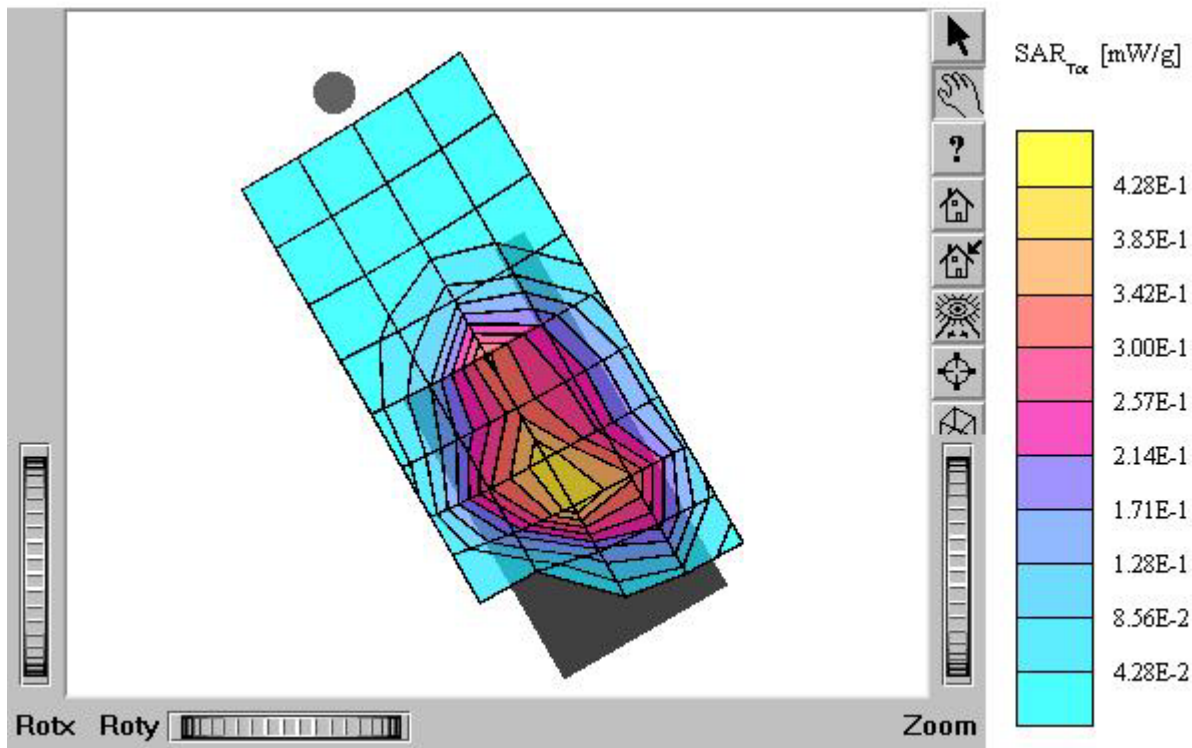

G902

SAM II Phantom: Left Hand [CRP] Section: Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Head 1900 MHz: $s = 1.41$
 $\rho_{\text{ho/m}} e_r = 39.5$ $r = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.153 mW/g, SAR (10g): 0.0998 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.13 dB
Comment:
MODEL : G902
Company : KBT Mobile Co.,Ltd.
Test Position: Left Tilt / Antenna: Fixed
Mode: GSM1900 / Channel : 661
Liquid Temperature: 21.4°C
Date Tested : November 16, 2004

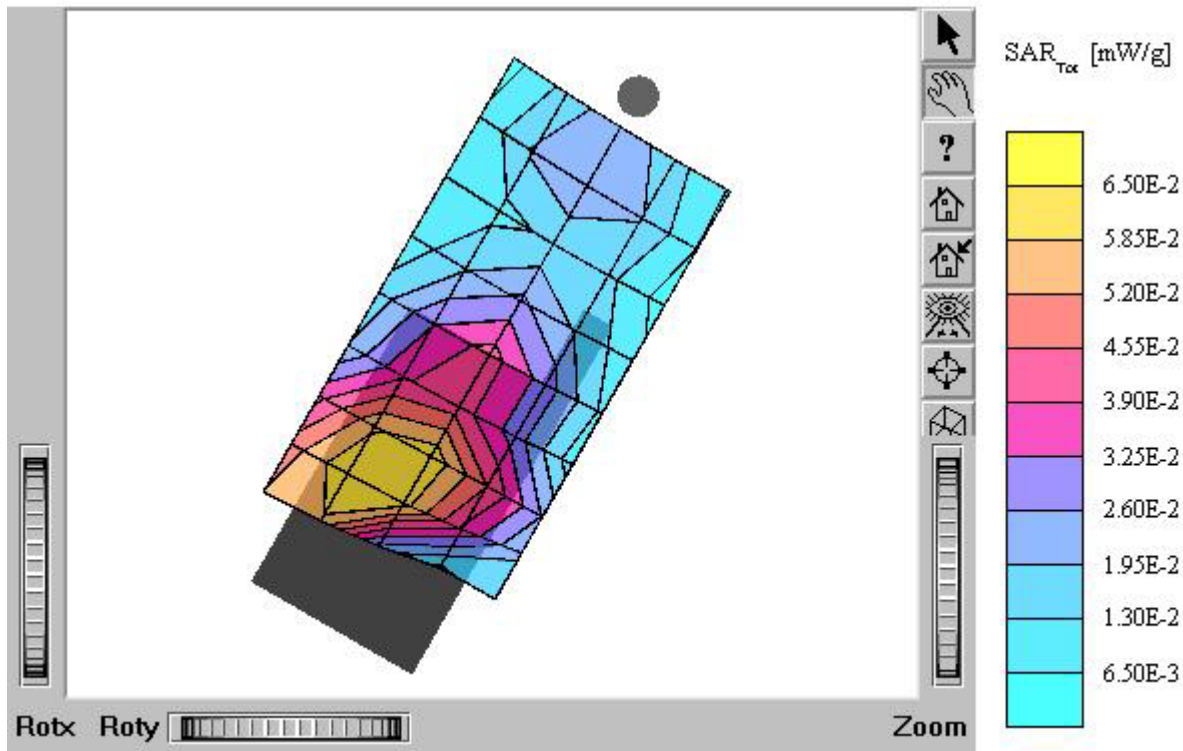

G902

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Head 1900 MHz: $s = 1.41$
 mho/m $e_r = 39.5$ $r = 1.00$ g/cm^3
Cube 5x5x7: SAR (1g): 0.128 mW/g , SAR (10g): 0.0882 mW/g
Coarse: $D_x = 15.0$, $D_y = 15.0$, $D_z = 10.0$
Powerdrift: -0.15 dB
Comment:
MODEL : G902
Company : KBT Mobile Co.,Ltd.
Test Position: Right Tilt / Antenna: Fixed
Mode: GSM1900 / Channel : 661
Liquid Temperature: 21.4°C
Date Tested : November 16, 2004

