



Excellence in Compliance Testing

Transmitter Certification

Test Report

FCC ID: SK9C1A-3

IC: 864G-C1A3

FCC Rule Part: 15.247

IC Radio Standards Specification: RSS-210

ACS Report Number: 08-0120 - 15C

Manufacturer: Itron Electricity Metering Inc.

Model: C1A-3

Test Begin Date: March 31, 2008

Test End Date: April 3, 2008

Report Issue Date: May 1, 2008



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report is not be used to claim certification, approval, or endorsement by NVLAP, NIST or any government agency.

Prepared by:

Ken Rivers
Wireless Certifications Technician
ACS, Inc.

Reviewed by:

J. Kirby Munroe
Director, Wireless Certifications
ACS, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 21 pages

Table of Contents

1.0 General	3
1.1 Purpose	3
1.2 Product Description	3
1.3 Test Methodology and Considerations	3
2.0 Test Facilities	3
2.1 Location	3
2.2 Laboratory Accreditations/Recognitions/Certifications	3
2.3 Radiated Emissions Test Site Description	4
2.3.1 Semi-Anechoic Chamber Test Site	4
2.3.2 Open Area Tests Site (OATS)	5
2.4 Conducted Emissions Test Site Description	6
3.0 Applicable Standards and References	6
4.0 List of Test Equipment	7
5.0 Support Equipment	8
6.0 EUT Setup Block Diagram	8
7.0 Summary of Tests	9
7.1 Antenna Requirement	9
7.2 Power Line Conducted Emissions	9
7.2.1 Test Methodology	9
7.2.2 Test Results	9
7.3 Radiated Emissions - Unintentional Radiation	11
7.3.1 Test Methodology	11
7.3.2 Test Results	11
7.4 Peak Output Power	12
7.4.1 Test Methodology	12
7.4.2 Test Results	12
7.5 Channel Usage	13
7.5.1 Carrier Frequency Separation	13
7.5.1.1 Test Methodology	13
7.5.1.2 Test Results	13
7.5.2 Number of Hopping Channels	14
7.5.3 Channel Dwell Time	14
7.5.3.1 Test Methodology	14
7.5.3.2 Test Results	14
7.5.4 20dB Bandwidth	15
7.5.4.1 Test Methodology	15
7.5.4.2 Test Results	15
7.6 Band-edge Compliance and Spurious Emissions	17
7.6.1 Band-edge Compliance of RF Conducted Emissions	17
7.6.1.1 Test Methodology	17
7.6.1.2 Test Results	17
7.6.2 RF Conducted Spurious Emissions	18
7.6.2.1 Test Methodology	18
7.6.2.2 Test Results	18
7.6.3 Radiated Spurious Emissions – Intentional Radiation (Restricted Bands)	20
7.6.3.1 Test Methodology	20
7.6.3.2 Duty Cycle Correction	20
7.6.3.3 Test Results	21
7.6.3.4 Sample Calculations	21
8.0 CONCLUSION	21
<u>Additional Exhibits Included In Filing</u>	
Test Setup Photographs	
BOM (Parts List)	
Schematics	

1.0 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-210. The purpose for this evaluation is the replacement of the RF ASIC chip with a manufacturer's equivalent.

1.2 Product Description

The C1A-3 is an electric watt meter for residential customers which provides automated meter reading capabilities. The C1A-3 utilizes a 900MHz frequency hopping spread spectrum radio.

Manufacturer Information:

Itron Electricity Metering, Inc.
313 North Highway 11
West Union, SC 29696

Test Sample Condition:

The test samples were provided in good working order with no visible defects.

Detailed photographs of the EUT are filed separately with this filing.

1.3 Test Methodology and Considerations

The C1A-3 was tested against the full requirements for CFR 47 Part 15.247 and IC RSS-210 per manufacturer's request although it would be expected that some characteristics would not degrade when compared to the original certification data.

The C1A-3 is available in a monophase and polyphase configuration. The monophase operates at 240VAC while the polyphase is auto-ranging and can operate at voltages between 120VAC and 480VAC. All configurations were tested and the worst case data presented in this report.

2.0 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions
5015 B.U. Bowman Drive
Buford, GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment. In addition, ACS is compliant to ISO 17025 as certified by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program. The following certification numbers have been issued in recognition of these accreditations and certifications:

FCC Registration Number: 894540
Industry Canada Lab Code: IC 4175
VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

NVLAP Lab Code: 200612-0

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

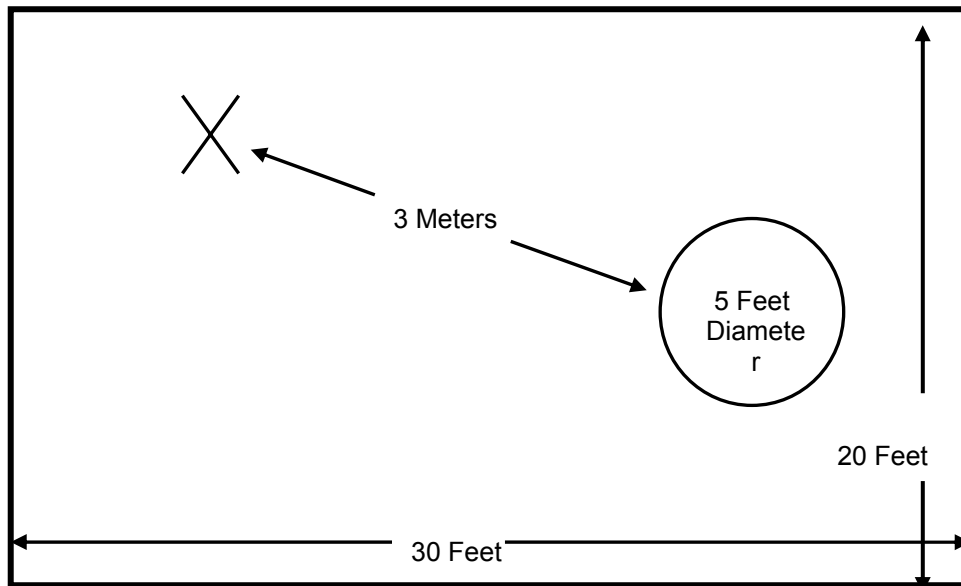


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

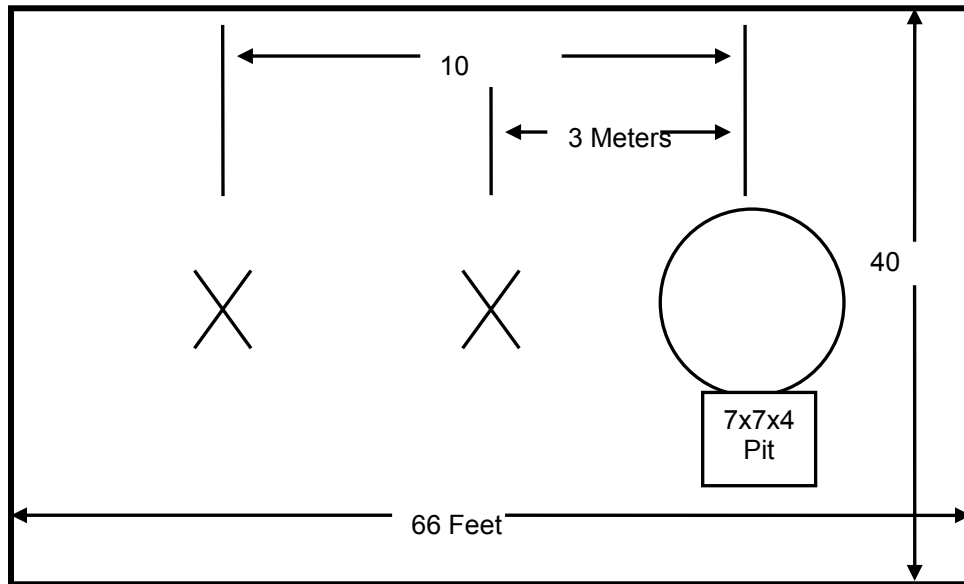


Figure 2.3-2: Open Area Test Site

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal group reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

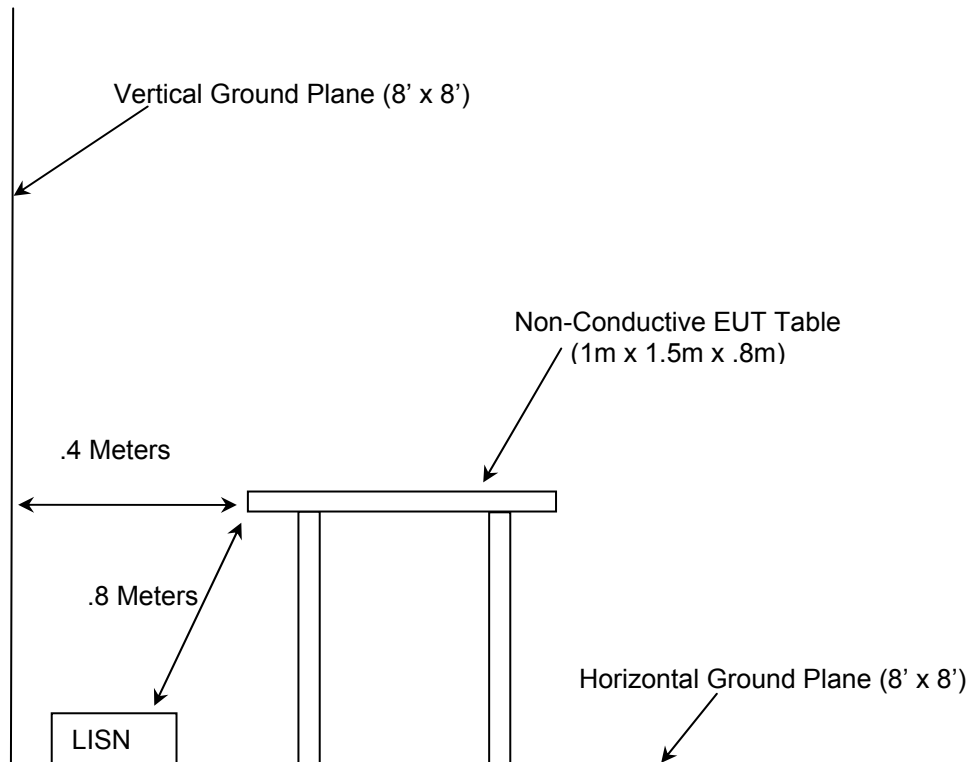


Figure 2.4-1: AC Mains Conducted EMI Site

3.0 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2007
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2007
- ❖ FCC OET Bulletin 65 Appendix C - Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, 2001
- ❖ FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems, March 30, 2000
- ❖ Industry Canada Radio Standards Specification: RSS-210 - Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Issue 7 June 2007

4.0 LIST OF TEST EQUIPMENT

All test equipment used for regulatory testing is calibrated yearly or according to manufacturer's specifications.

Table 4-1: Test Equipment

Equipment Calibration Information					
ACS#	Mfg.	Eq. type	Model	S/N	Cal. Due
1	Rohde & Schwarz	Spectrum Analyzers	ESMI - Display	833771/007	10-26-2008
2	Rohde & Schwarz	Spectrum Analyzers	ESMI-Receiver	839587/003	10-26-2008
22	Agilent	Amplifiers	8449B	3008A00526	10-25-2008
25	Chase	Antennas	CBL6111	1043	06-06-2008
30	Spectrum Technologies	Antennas	DRH-0118	970102	05-10-2008
70	Rohde & Schwarz	Spectrum Analyzers	ESH-3	879676/050	10-24-2008
73	Agilent	Amplifiers	8447D	2727A05624	12-19-2008
144	Omega	Climate Monitor	RH4111	H0103373	11-29-2008
152	EMCO	LISN	Feb-25	9111-1905	03-26-2009
153	EMCO	LISN	Feb-25	9411-2268	11-27-2008
157	ACS	Lab Accreditation	VCCI - OATS, Chamber, Conducted	R-1526, R-2019 & C-1608	12-31-2008
167	ACS	Cable Set	Chamber EMI Cable Set	167	01-04-2009
277	Emco	Antennas	93146	9904-5199	06-18-2008
283	Rohde & Schwarz	Spectrum Analyzers	FSP40	1000033	11-09-2008
321	Hewlett Packard	Amplifiers	HPC 8447D	1937A02809	07-17-2008
331	Microwave Circuits	Filters	H1G513G1	31417	08-27-2008
337	Microwave Circuits	Filters	H1G513G1	282706	08-28-2008
338	Hewlett Packard	Amplifiers	8449B	3008A01111	10-24-2008
339	Aeroflex/Weinschel	Attenuators	AS-18	7142	08-20-2008
343	Florida RF Cables	Cables	SMRE-200W-12.0- SMRE	N/A	11-21-2008
344	Florida RF Cables	Cables	SMS-290AW-480.0- SMR	N/A	01-16-2009

5.0 SUPPORT EQUIPMENT

Table 5-3: Support Equipment

Item	Equipment Type	Manufacturer	Model Number	Serial Number	FCC ID
The EUT was tested as a stand alone device and no support equipment was utilized.					

6.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

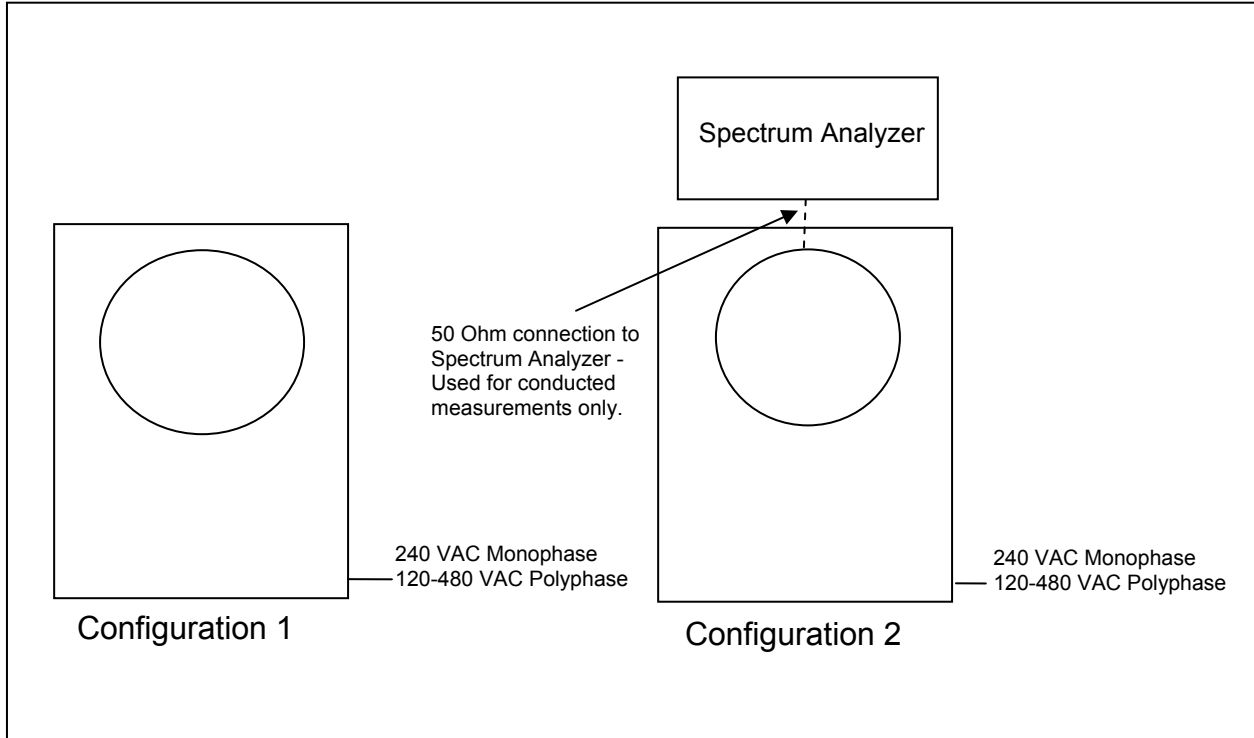


Figure 6-1: EUT Test Setup

*See Test Setup photographs for additional detail.

7.0 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement

The C1A-3 utilizes an integral antenna which can not be removed.

7.2 Power Line Conducted Emissions

7.2.1 Test Methodology

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer’s resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss

Margin = Applicable Limit - Corrected Reading

7.2.2 Test Results

Results of the test are shown below in and Table 7.2-1 to 7.2-4.

Table 7.2-1: Conducted EMI Results – Mono Phase 240 VAC

Frequency (MHz)	Uncorrected Reading (dBuV)		Total Correction Factor (dB)	Corrected Level (dBuV)		Limit (dBuV)		Margin (dB)		Line
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	
Line 1										
0.21	20.4	8.5	9.80	30.20	18.30	63.21	53.21	33.0	34.9	GND
0.24	19.2	6.5	9.80	29.00	16.30	62.10	52.10	33.1	35.8	GND
0.33	19.5	6.7	9.80	29.30	16.50	59.45	49.45	30.2	33.0	GND
0.39	18.9	5.6	9.80	28.70	15.40	58.06	48.06	29.4	32.7	GND
4.19	25.1	20.9	9.80	34.90	30.70	56.00	46.00	21.1	15.3	GND
25.17	23.8	19.5	10.20	34.00	29.70	60.00	50.00	26.0	20.3	GND
Line 2										
0.18	19.4	7.8	9.80	29.20	17.60	64.49	54.49	35.3	36.9	GND
0.21	18.6	6.2	9.80	28.40	16.00	63.21	53.21	34.8	37.2	GND
0.27	18.4	6.1	9.80	28.20	15.90	61.12	51.12	32.9	35.2	GND
0.35	16.7	7.2	9.80	26.50	17.00	58.96	48.96	32.5	32.0	GND
4.19	24.6	24.7	9.80	34.40	34.50	56.00	46.00	21.6	11.5	GND
25.17	22.3	21.2	10.20	32.50	31.40	60.00	50.00	27.5	18.6	GND

Table 7.2-2: Conducted EMI Results – Poly Phase 120 VAC

Frequency (MHz)	Uncorrected Reading (dBuV)		Total Correction Factor (dB)	Corrected Level (dBuV)		Limit (dBuV)		Margin (dB)		Line
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	
Line 1										
0.17	18.3	10.3	9.80	28.10	20.10	64.96	54.96	36.9	34.9	GND
0.26	30	19.1	9.80	39.80	28.90	61.43	51.43	21.6	22.5	GND
0.4	25.6	14.1	9.80	35.40	23.90	57.85	47.85	22.5	24.0	GND
0.53	20.2	12.9	9.80	30.00	22.70	56.00	46.00	26.0	23.3	GND
0.71	23.1	16.4	9.80	32.90	26.20	56.00	46.00	23.1	19.8	GND
8.05	14.5	8.9	9.90	24.40	18.80	60.00	50.00	35.6	31.2	GND
Line 2										
0.26	34.8	25.9	9.80	44.60	35.70	61.43	51.43	16.8	15.7	GND
0.39	3.8	22.7	9.80	13.60	32.50	58.06	48.06	44.5	15.6	GND
0.53	29.8	22.6	9.80	39.60	32.40	56.00	46.00	16.4	13.6	GND
0.72	29.7	22.3	9.80	39.50	32.10	56.00	46.00	16.5	13.9	GND
1.17	26.9	17.8	9.80	36.70	27.60	56.00	46.00	19.3	18.4	GND
3.81	16.3	9.7	9.80	26.10	19.50	56.00	46.00	29.9	26.5	GND

Table 7.2-3: Conducted EMI Results – Poly Phase 240 VAC

Frequency (MHz)	Uncorrected Reading (dBuV)		Total Correction Factor (dB)	Corrected Level (dBuV)		Limit (dBuV)		Margin (dB)		Line
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	
Line 1										
0.26	20.8	12.7	9.80	30.60	22.50	61.43	51.43	30.8	28.9	GND
0.4	19	11.6	9.80	28.80	21.40	57.85	47.85	29.1	26.5	GND
0.53	21.5	13.4	9.80	31.30	23.20	56.00	46.00	24.7	22.8	GND
0.76	22.3	15.2	9.80	32.10	25.00	56.00	46.00	23.9	21.0	GND
1.96	16.1	10.7	9.80	25.90	20.50	56.00	46.00	30.1	25.5	GND
6.17	14.4	9.6	9.80	24.20	19.40	60.00	50.00	35.8	30.6	GND
Line 2										
0.4	25.3	18.4	9.80	35.10	28.20	57.85	47.85	22.8	19.7	GND
0.53	29.3	22.1	9.80	39.10	31.90	56.00	46.00	16.9	14.1	GND
0.67	31.6	23.9	9.80	41.40	33.70	56.00	46.00	14.6	12.3	GND
0.74	32.2	25.1	9.80	42.00	34.90	56.00	46.00	14.0	11.1	GND
1.07	27.6	19.1	9.80	37.40	28.90	56.00	46.00	18.6	17.1	GND
2.25	27.2	19.8	9.80	37.00	29.60	56.00	46.00	19.0	16.4	GND

Table 7.2-4: Conducted EMI Results – Poly Phase 480 VAC

Frequency (MHz)	Uncorrected Reading (dBuV)		Total Correction Factor (dB)	Corrected Level (dBuV)		Limit (dBuV)		Margin (dB)		Line
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	
Line 1										
0.16	52.7	20.5	9.80	62.50	30.30	65.46	55.46	3.0	25.2	GND
0.22	29.7	17.4	9.80	39.50	27.20	62.82	52.82	23.3	25.6	GND
0.28	30.3	17.8	9.80	40.10	27.60	60.82	50.82	20.7	23.2	GND
0.41	27.2	15.3	9.80	37.00	25.10	57.65	47.65	20.6	22.5	GND
1.06	21.7	13.6	9.80	31.50	23.40	56.00	46.00	24.5	22.6	GND
2.72	16.3	9.7	9.80	26.10	19.50	56.00	46.00	29.9	26.5	GND
Line 2										
0.4	31	22.4	9.80	40.80	32.20	57.85	47.85	17.1	15.7	GND
0.54	29.9	22.7	9.80	39.70	32.50	56.00	46.00	16.3	13.5	GND
0.73	31.9	26.5	9.80	41.70	36.30	56.00	46.00	14.3	9.7	GND
0.8	31.1	23.9	9.80	40.90	33.70	56.00	46.00	15.1	12.3	GND
0.93	30.6	23.6	9.80	40.40	33.40	56.00	46.00	15.6	12.6	GND
1.21	27.3	20.1	9.80	37.10	29.90	56.00	46.00	18.9	16.1	GND

7.3 Radiated Emissions - Unintentional Radiation

7.3.1 Test Methodology

Radiated emissions tests were performed over the frequency range of 30MHz to 5GHz. Measurements of the radiated field strength were made at a distance of 3m from the boundary of the equipment under test (EUT) and the receiving antenna. The antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. Radiated measurements were made with the Spectrum Analyzer's resolution bandwidth set to 120 KHz for measurements above 30MHz. Average measurements are taken with the RBW and VBW were set to 1MHz and 10 Hz respectively for measurements above 1000MHz.

7.3.2 Test Results

Results of the test are given in Table 7.3-1 and 7.3-2 below:

Table 7.3-1: Radiated Emissions Tabulated Data – Mono Phase 240 VAC

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
<i>Spurious Emissions</i>										
30.005	-----	5.86	H	-7.50	-----	-1.64	-----	40.0	-----	41.64
230.47	-----	18.74	H	-14.75	-----	3.99	-----	46.0	-----	42.01
252.02	-----	19.66	H	-12.64	-----	7.02	-----	46.0	-----	38.98
476.2	-----	20.47	H	-7.21	-----	13.26	-----	46.0	-----	32.74
690.68	-----	19.96	V	-2.60	-----	17.36	-----	46.0	-----	28.64
942.88	-----	20.27	V	1.77	-----	22.04	-----	46.0	-----	23.96

* Note: All emissions above 942.88 MHz were attenuated below the permissible limit.

Table 7.3-1: Radiated Emissions Tabulated Data – Poly Phase 120 VAC

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
<i>Spurious Emissions</i>										
33.172	-----	32.20	V	-10.85	-----	21.35	-----	40.0	-----	18.65
56.649	-----	22.17	V	-20.53	-----	1.64	-----	40.0	-----	38.36
84.983	-----	39.95	V	-17.80	-----	22.15	-----	40.0	-----	17.85
107.6	-----	41.98	V	-14.40	-----	27.58	-----	43.5	-----	15.92
163.64	-----	27.58	V	-15.32	-----	12.26	-----	43.5	-----	31.24
174.428	-----	34.82	V	-15.78	-----	19.04	-----	43.5	-----	24.46
230.468	-----	20.90	V	-14.46	-----	6.44	-----	46.0	-----	39.56
337.169	-----	20.11	H	-10.78	-----	9.33	-----	46.0	-----	36.67
691.756	-----	20.27	H	-2.65	-----	17.62	-----	46.0	-----	28.38
956.889	-----	20.50	V	2.54	-----	23.04	-----	46.0	-----	22.96

* Note: All emissions above 956.889 MHz were attenuated below the permissible limit.

7.4 Peak Output Power

7.4.1 Test Methodology (Conducted Method)

The 20dB bandwidth of the EUT was within the resolution bandwidth of spectrum analyzer, therefore the power measurement was made using the spectrum analyzer method. The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The resolution and video bandwidth were set to > 20 dB bandwidth of the emission measured. The device employs ≥ 50 channels therefore the power is limited to 1 Watt.

7.4.2 Test Results

Results are shown in table 7.4-1 and figures 7.4-1 to 7.4-3 below:

Table 7.4-1: RF Output Power

Frequency [MHz]	Level [dBm]
909.564	19.90
916.176	19.84
921.700	19.90

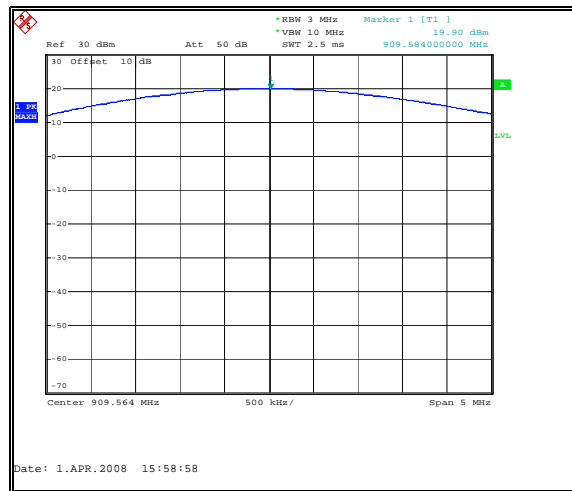


Figure 7.4-1: Output power – Low Channel

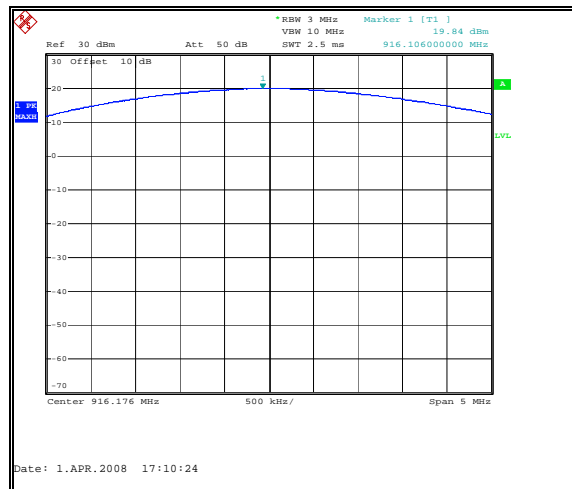


Figure 7.4-2: Output power – Mid Channel

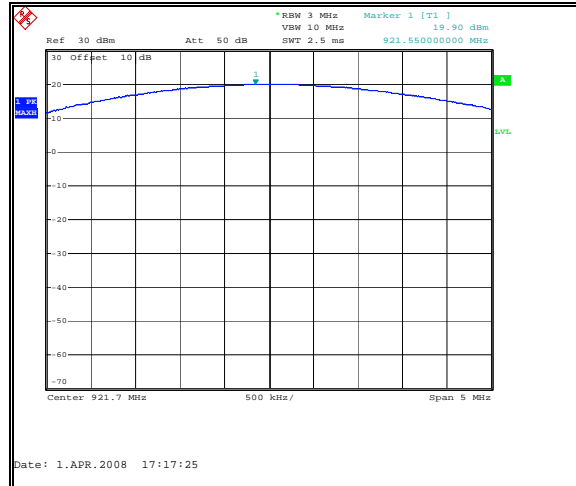


Figure 7.4-3: Output power – High Channel

7.5 Channel Usage Requirements

7.5.1 Carrier Frequency Separation

7.5.1.1 Test Methodology

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set wide enough to capture two adjacent peaks and the RBW and VBW were set to $\geq 1\%$ of the span.

7.5.1.2 Test Results

The maximum 20dB bandwidth of the hopping channel was measured to be 167.00kHz (See figure 7.5.4-1 to 7.5.4-3 below). The adjacent channel separation was measured to be 194.00kHz. Results are shown in figure 7.5.1-1 below:

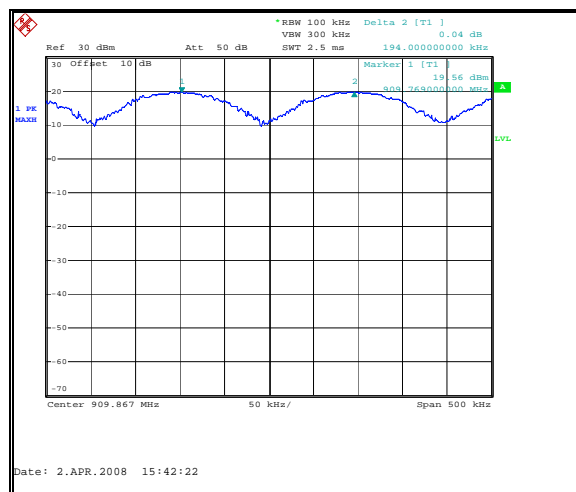


Figure 7.5.1-1: Carrier Frequency Separation

7.5.2 Number of Hopping Channels

The 20dB bandwidth of the device is less than 250 kHz. The device employs 50 hopping channels as required. Results are shown in Figure 7.5.2-1 below:

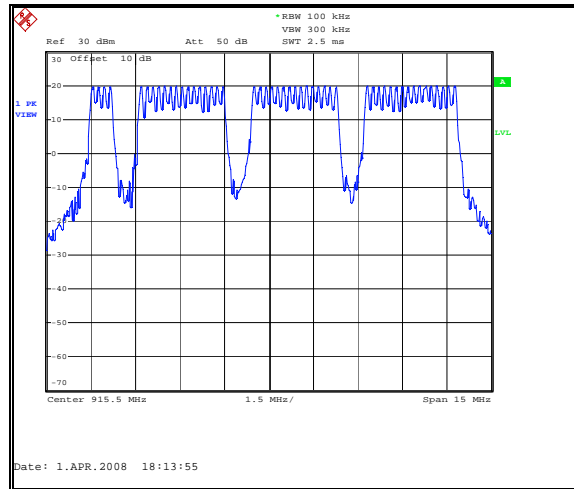


Figure 7.5.2-1: Number of Hopping Channels

7.5.3 Channel Dwell Time

7.5.3.1 Test Methodology

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The hopping channel is centered on the analyzer and the span set to 0 Hz. The RBW was set to 3 MHz and the VBW to 10 MHz. Sweep time was set to 60 ms to capture the burst duration of the emission. The marker – delta function of the analyzer was employed to measure the burst duration.

7.5.3.2 Test Results

The duration of the RF transmission is 45.06 ms. There is a minimum 2 second rest period in which the device hops to another channel according to the pseudorandom frequency table before transmitting another 45.06ms burst. Therefore the average time of occupancy on any channel in a 20 second period is 45.06ms. A single transmission is shown in figure 7.5.3-1 below:

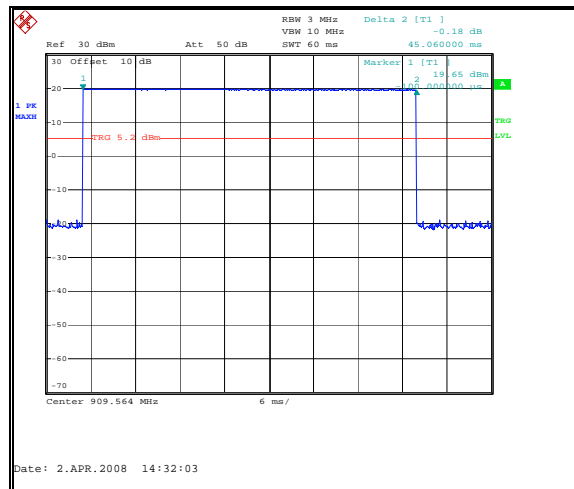


Figure 7.5.3-1: Channel Dwell Time

7.5.4 20dB Bandwidth

7.5.4.1 Test Methodology

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The spectrum analyzer span was set to 2 to 3 times the estimated 20 dB bandwidth of the emission. The RBW was to $\geq 1\%$ of the estimated 20 dB bandwidth. The trace was set to max hold with a peak detector active. The Delta function of the analyzer was utilized to determine the 20 dB bandwidth of the emission. The span and RBW were examined and re-adjusted if necessary to meet the requirements of 2 to 3 times the 20 bandwidth for the span and $\geq 1\%$ of the 20 dB bandwidth for the RBW.

7.5.4.2 Test Results

The maximum 20dB bandwidth was found to be approximately 167.00kHz. Results are shown below in Table 7.5.4-1 and Figures 7.5.4-1 through 7.5.4-3.

Table 7.5.4-1

Frequency (MHz)	20dB Bandwidth (kHz)
909.564	113.00
916.176	116.00
921.700	167.00

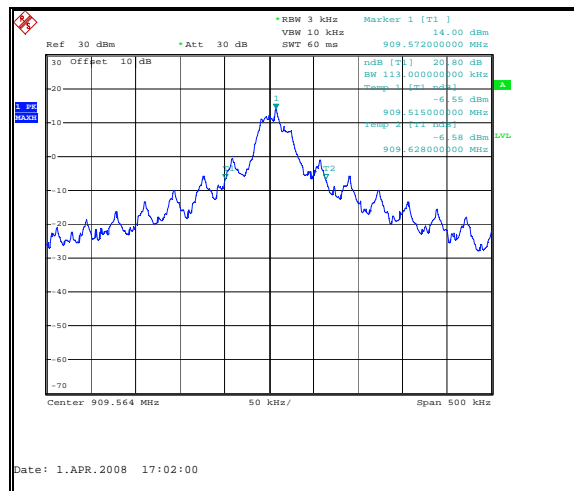


Figure 7.5.4-1: 20dB Bandwidth Low Channel

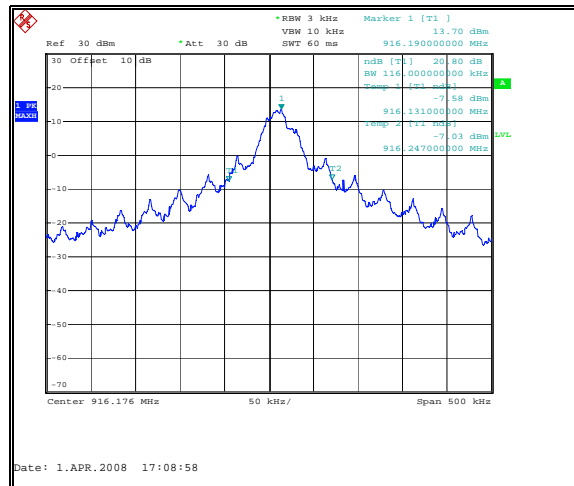


Figure 7.5.4-2: 20dB Bandwidth Mid Channel

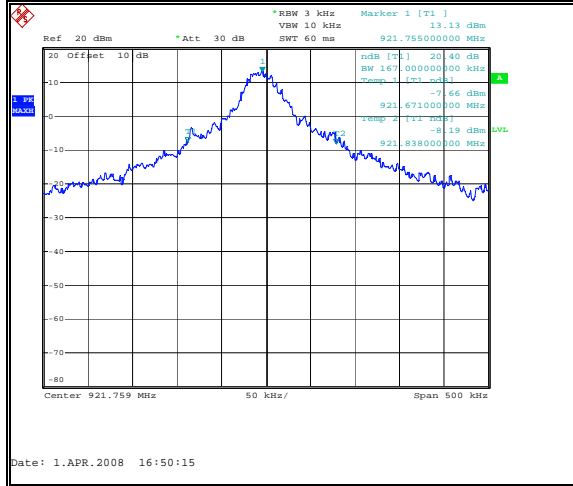


Figure 7.5.4-3: 20dB Bandwidth High Channel

7.6 Band-Edge Compliance and Spurious Emissions

7.6.1 Band-Edge Compliance of RF Conducted Emissions

7.6.1.1 Test Methodology

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement the spectrum analyzer's RBW was set to 100 kHz, which is $\geq 1\%$ of the span, and the VBW was set to 300kHz.

7.6.1.2 Test Results

In a 100 kHz bandwidth at the lower and upper band-edge, the radio frequency power that was produced by the EUT is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power. Band-edge compliance is displayed in Figures 7.6.1-1 and 7.6.2-4

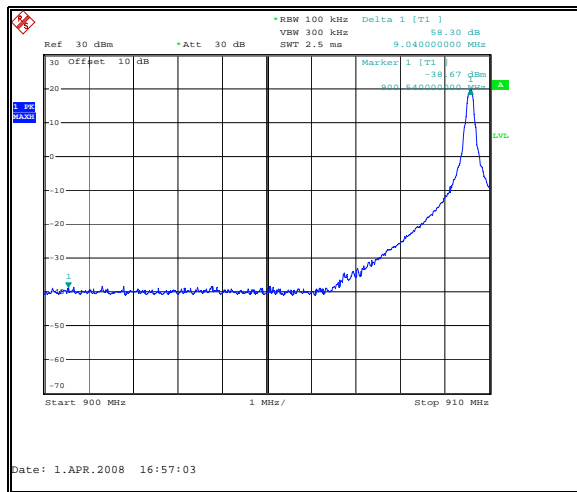


Figure 7.6.1-1: Lower Band-edge

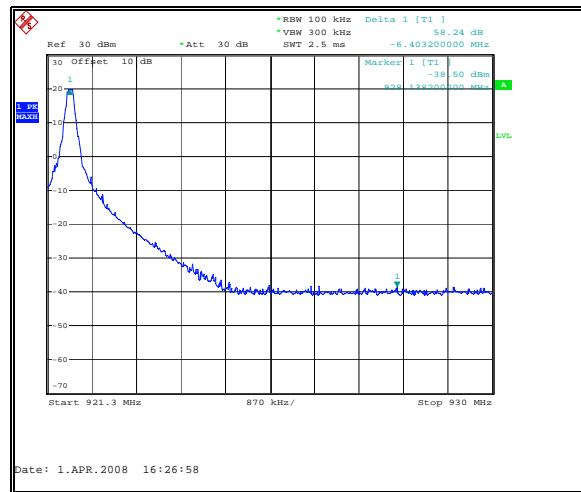


Figure 7.6.1-2: Upper Band-edge

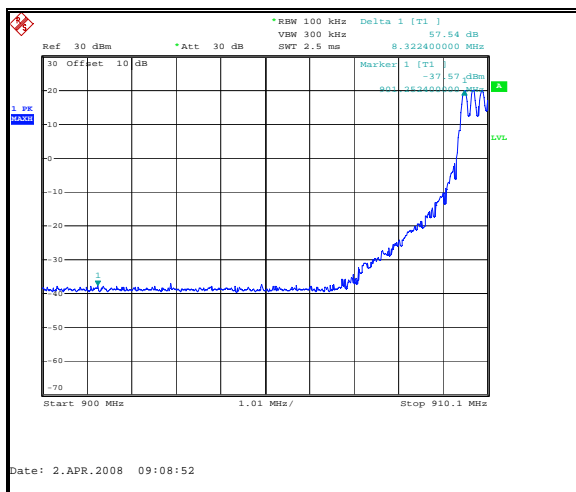


Figure 7.6.1-3: Lower Band-edge – Hopping

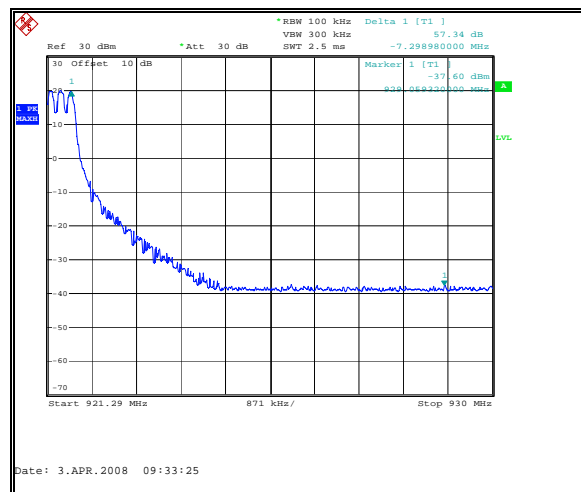


Figure 7.6.1-4: Upper Band-edge - Hopping

7.6.2 RF Conducted Spurious Emissions

7.6.2.1 Test Methodology

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The EUT was investigated for conducted spurious emissions from 30MHz to 10GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100kHz. A peak detector function was used with the trace set to max hold.

7.6.2.1 Test Results

All emissions found were greater than 20dB down from the fundamental carrier. The RF conducted spurious emissions were measured in the band of 30MHz to 10GHz. Results are shown below in Figure 7.6.2-1 through 7.6.2-6.

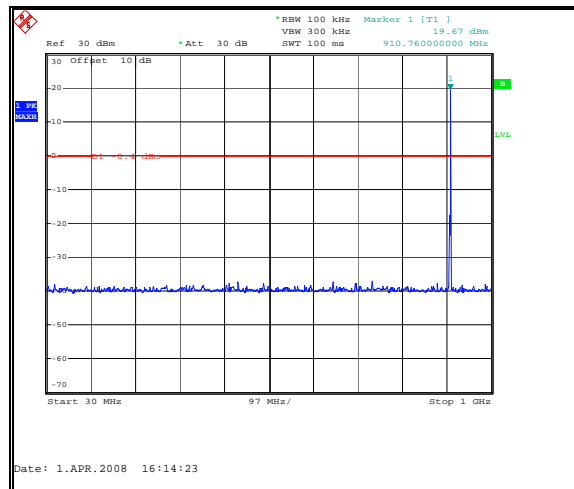


Figure 7.6.2-1 RF Conducted Spurious Emissions – Low Channel

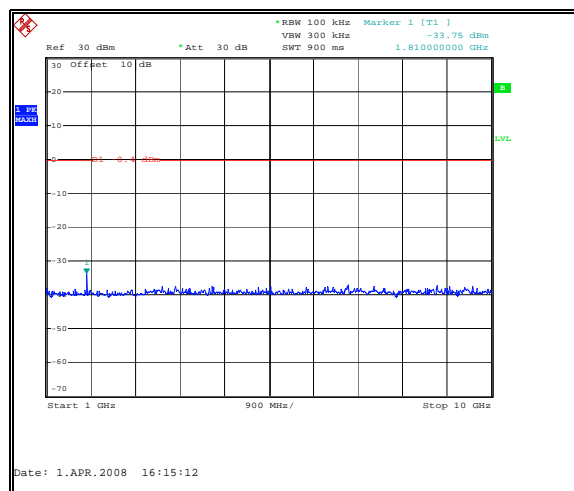


Figure 7.6.2-2 RF Conducted Spurious Emissions – Low Channel

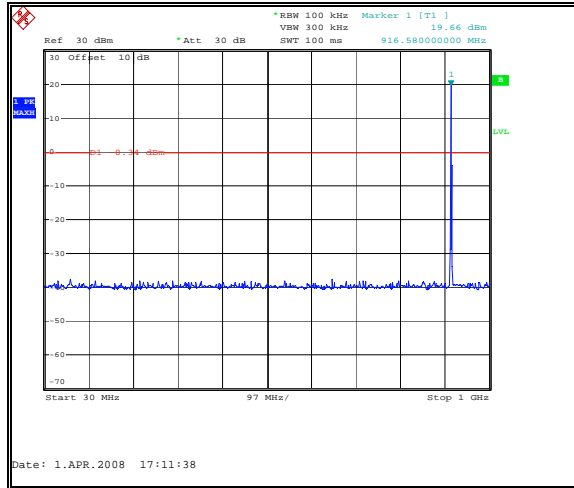


Figure 7.6.2-3 RF Conducted Spurious Emissions – Mid Channel

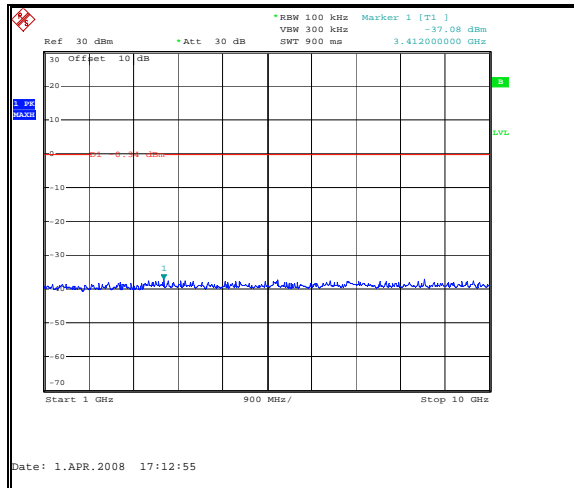


Figure 7.6.2-4 RF Conducted Spurious Emissions – Mid Channel

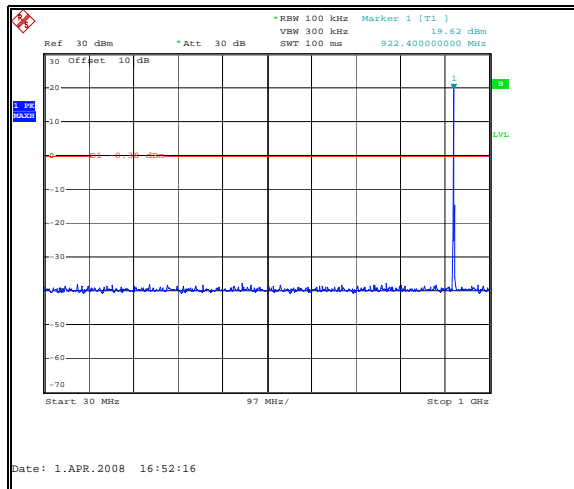


Figure 7.6.2-5 RF Conducted Spurious Emissions – High Channel

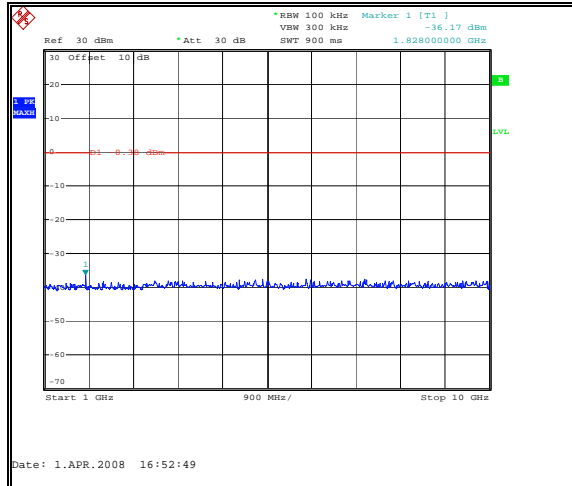


Figure 7.6.2-6 RF Conducted Spurious Emissions – High Channel

7.6.3 Radiated Spurious Emissions – Intentional Radiation (Restricted Bands)

7.6.3.1 Test Methodology

Radiated emissions tests were made over the frequency range of 30MHz to 10GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth (RBW) of 120 kHz and a video bandwidth (VBW) of 300 kHz. For frequencies above 1000MHz, average measurements were made using an RBW of 1 MHz and a VBW of 10 Hz and peak measurements were made with RBW of 1 MHz and a VBW of 1 MHz.

The EUT was caused to generate a continuous carrier signal on the hopping channel.

7.6.3.2 Duty Cycle Correction

For average radiated measurements, the measured level was reduced by a factor 6.94dB to account for the duty cycle of the EUT. Referencing the dwell time justification in section 7.5.3 above the worst case duty cycle within 100ms is 45% or 45ms. The duty cycle correction factor is determined using the formula: $20\log(0.45)=6.94\text{dB}$.

7.6.3.3 Test Results

Radiated spurious emissions found in the band of 30MHz to 10GHz are reported in Table 7.6.3-1.

Table 7.6.3-1: Radiated Spurious Emissions

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
2728.692	51.72	38.79	H	4.36	56.08	36.21	74.0	54.0	17.92	17.79
2728.692	51.16	38.27	V	4.10	55.26	35.44	74.0	54.0	18.74	18.56
3638.256	51.86	39.31	H	8.90	60.76	41.27	74.0	54.0	13.24	12.73
3638.256	51.32	38.91	V	8.93	60.25	40.90	74.0	54.0	13.75	13.10
4547.82	48.58	34.73	H	12.06	60.64	39.85	74.0	54.0	13.36	14.15
4547.82	48.66	35.02	V	11.98	60.64	40.06	74.0	54.0	13.36	13.94
5457.384	51.81	38.88	H	15.50	67.31	47.44	74.0	54.0	6.69	6.56
5457.384	54.57	41.12	V	15.69	70.26	49.87	74.0	54.0	3.74	4.13
Mid Channel										
2748.33	51.17	38.83	H	4.45	55.62	36.34	74.0	54.0	18.38	17.66
2748.33	48.96	36.47	V	4.20	53.16	33.73	74.0	54.0	20.84	20.27
3664.44	52.93	40.69	H	9.05	61.98	42.80	74.0	54.0	12.02	11.20
3664.44	52.54	40.01	V	9.08	61.62	42.15	74.0	54.0	12.38	11.85
High Channel										
2765.1	49.93	37.08	H	4.53	54.46	34.67	74.0	54.0	19.54	19.33
2765.1	62.85	43.63	V	4.28	67.13	40.98	74.0	54.0	6.87	13.02
3686.8	50.72	38.08	H	9.17	59.89	40.31	74.0	54.0	14.11	13.69
3686.8	50.12	37.98	V	9.21	59.33	40.25	74.0	54.0	14.67	13.75

* The magnitude of all emissions not reported were below the noise floor of the measurement system.

7.6.3.4 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

- CF_T = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
- R_U = Uncorrected Reading
- R_C = Corrected Level
- AF = Antenna Factor
- CA = Cable Attenuation
- AG = Amplifier Gain
- DC = Duty Cycle Correction Factor

Example Calculation

PEAK:

Corrected Level: 51.16+ 4.1= 55.26dBuV
 Margin: 74dBuV – 55.26dBuV = 18.74dB

AVERAGE:

Corrected Level: 38.27+ 4.1-6.94= 35.44dBuV
 Margin: 54dBuV – 35.44dBuV = 18.56dB

8.0 CONCLUSION

In the opinion of ACS, Inc. the C1A-3, manufactured by Itron Electricity Metering, Inc. meets the requirements of FCC Part 15 subpart C and Industry Canada’s Radio Standards Specification RSS-210.

END REPORT