

Project No.: 2407V20721E-RF

Test Mode: 11n40-5510


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

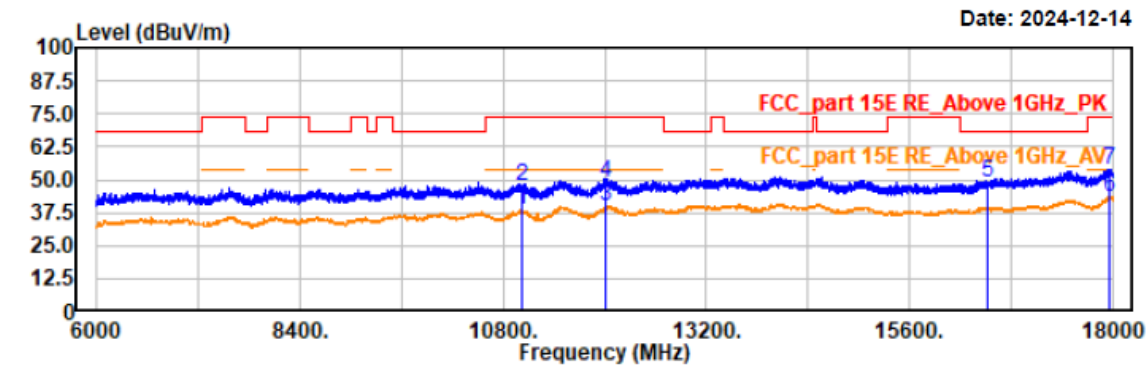

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11020.00	35.72	2.56	38.28	54.00	15.72	horizontal	Average
11020.00	45.00	2.56	47.56	74.00	26.44	horizontal	Peak
12013.20	36.00	4.22	40.22	54.00	13.78	horizontal	Average
12013.20	44.76	4.22	48.98	74.00	25.02	horizontal	Peak
16530.00	45.09	3.58	48.67	68.20	19.53	horizontal	Peak
17971.20	35.99	7.69	43.68	54.00	10.32	horizontal	Average
17971.20	46.06	7.69	53.75	74.00	20.25	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5510


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

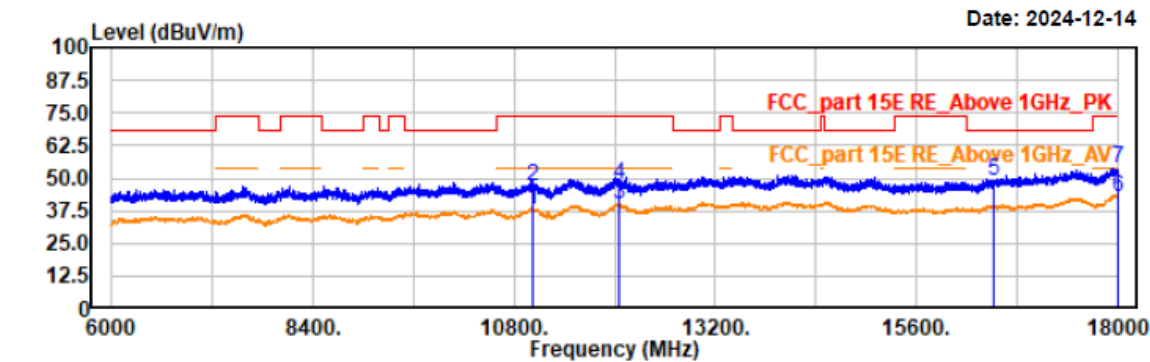

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11019.60	35.17	2.56	37.73	54.00	16.27	vertical	Average
11019.60	44.65	2.56	47.21	74.00	26.79	vertical	Peak
12051.60	35.79	4.16	39.95	54.00	14.05	vertical	Average
12051.60	43.23	4.16	47.39	74.00	26.61	vertical	Peak
16530.00	45.30	3.58	48.88	68.20	19.32	vertical	Peak
18000.00	35.24	7.74	42.98	54.00	11.02	vertical	Average
18000.00	46.02	7.74	53.76	74.00	20.24	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5550
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

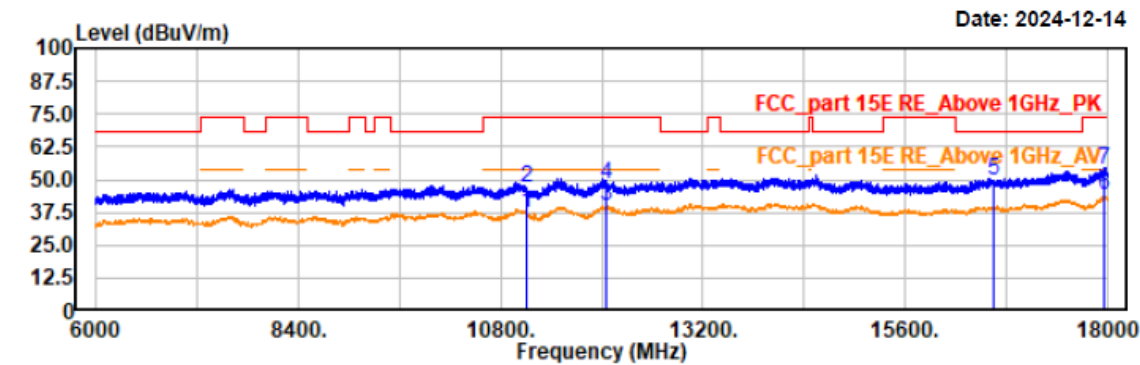

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11100.00	34.29	2.65	36.94	54.00	17.06	horizontal	Average
11100.00	44.37	2.65	47.02	74.00	26.98	horizontal	Peak
12057.60	35.88	4.15	40.03	54.00	13.97	horizontal	Average
12057.60	43.86	4.15	48.01	74.00	25.99	horizontal	Peak
16650.00	45.69	3.90	49.59	68.20	18.61	horizontal	Peak
17960.40	36.36	7.68	44.04	54.00	9.96	horizontal	Average
17960.40	46.05	7.68	53.73	74.00	20.27	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5550


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

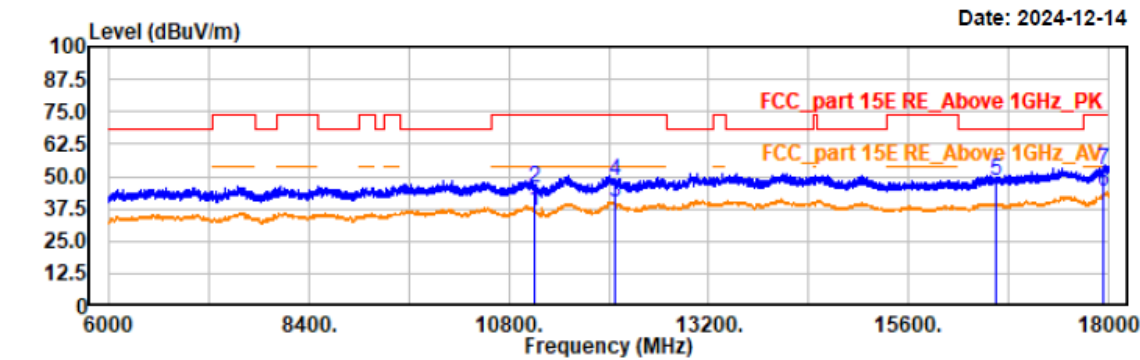

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11100.00	34.23	2.65	36.88	54.00	17.12	vertical	Average
11100.00	43.11	2.65	45.76	74.00	28.24	vertical	Peak
12066.00	36.09	4.13	40.22	54.00	13.78	vertical	Average
12066.00	43.97	4.13	48.10	74.00	25.90	vertical	Peak
16650.00	44.33	3.90	48.23	68.20	19.97	vertical	Peak
17949.60	36.18	7.67	43.85	54.00	10.15	vertical	Average
17949.60	45.07	7.67	52.74	74.00	21.26	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5670


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

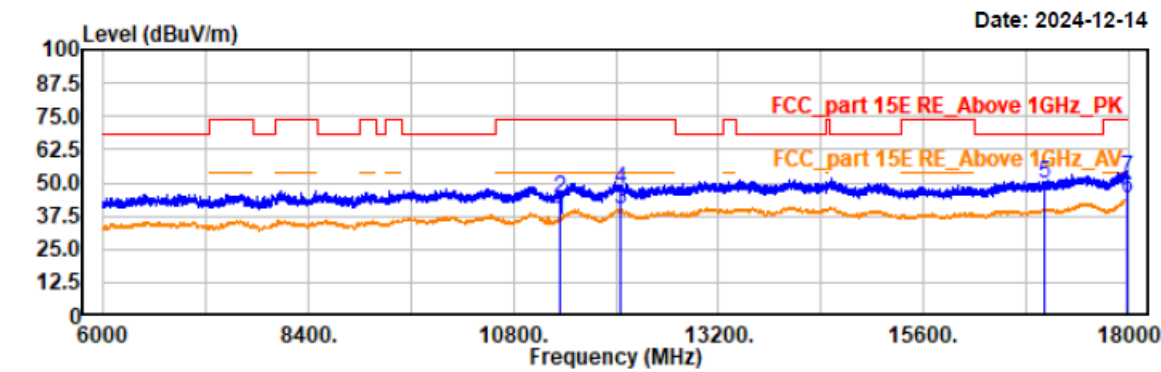

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11340.00	33.03	2.94	35.97	54.00	18.03	horizontal	Average
11340.00	41.30	2.94	44.24	74.00	29.76	horizontal	Peak
12063.60	36.08	4.13	40.21	54.00	13.79	horizontal	Average
12063.60	43.71	4.13	47.84	74.00	26.16	horizontal	Peak
17010.00	45.00	4.98	49.98	68.20	18.22	horizontal	Peak
17991.60	36.12	7.72	43.84	54.00	10.16	horizontal	Average
17991.60	44.21	7.72	51.93	74.00	22.07	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5670
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

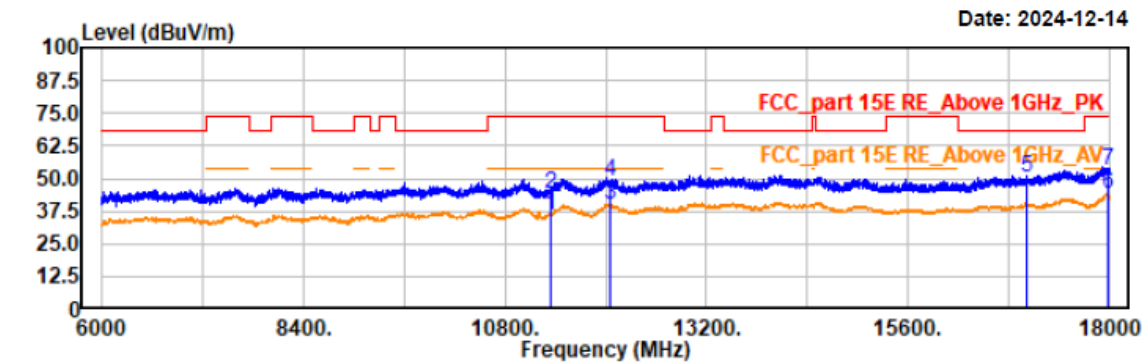

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11340.00	32.86	2.94	35.80	54.00	18.20	vertical	Average
11340.00	41.54	2.94	44.48	74.00	29.52	vertical	Peak
12062.40	35.87	4.14	40.01	54.00	13.99	vertical	Average
12062.40	44.59	4.14	48.73	74.00	25.27	vertical	Peak
17010.00	45.47	4.98	50.45	68.20	17.75	vertical	Peak
17973.60	36.39	7.70	44.09	54.00	9.91	vertical	Average
17973.60	45.69	7.70	53.39	74.00	20.61	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11ac80-5530


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

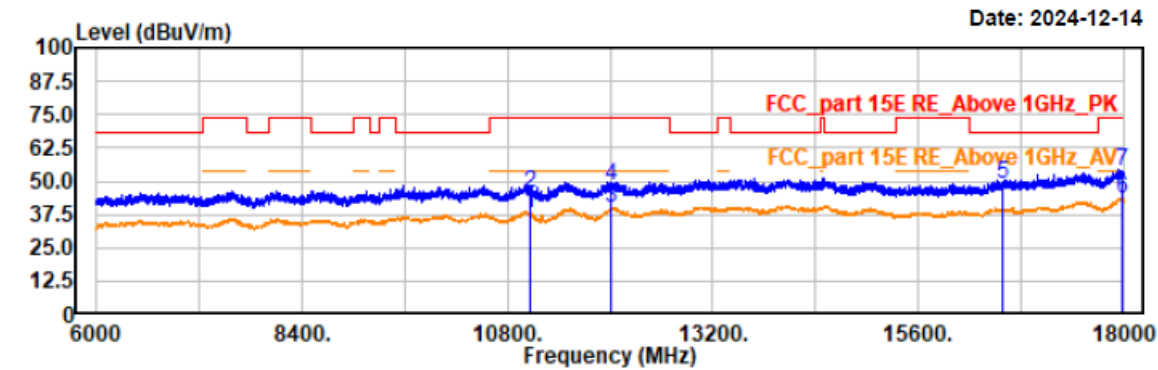


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11060.00	35.18	2.61	37.79	54.00	16.21	horizontal	Average
11060.00	42.60	2.61	45.21	74.00	28.79	horizontal	Peak
12006.00	35.87	4.24	40.11	54.00	13.89	horizontal	Average
12006.00	44.11	4.24	48.35	74.00	25.65	horizontal	Peak
16590.00	45.22	3.74	48.96	68.20	19.24	horizontal	Peak
17979.60	36.03	7.71	43.74	54.00	10.26	horizontal	Average
17979.60	46.28	7.71	53.99	74.00	20.01	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5530
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

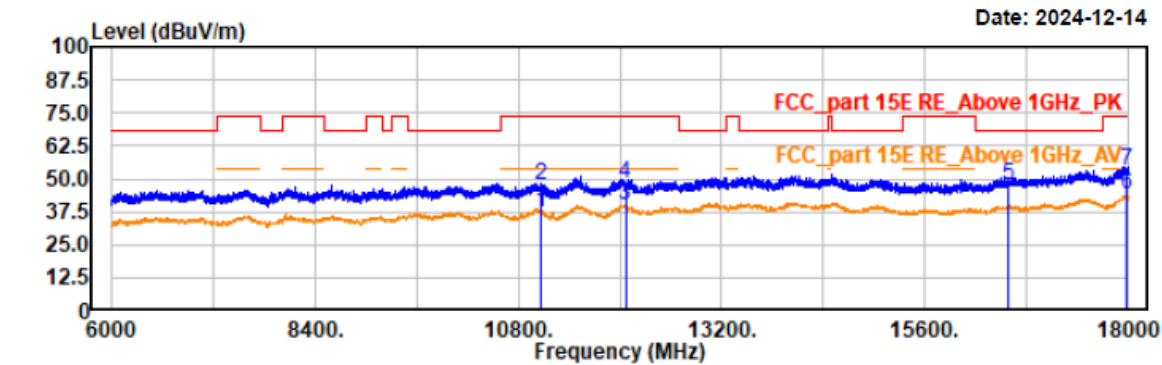


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11060.40	34.96	2.62	37.58	54.00	16.42	vertical	Average
11060.40	44.62	2.62	47.24	74.00	26.76	vertical	Peak
12064.80	35.83	4.13	39.96	54.00	14.04	vertical	Average
12064.80	44.49	4.13	48.62	74.00	25.38	vertical	Peak
16590.00	43.77	3.74	47.51	68.20	20.69	vertical	Peak
17980.80	36.18	7.71	43.89	54.00	10.11	vertical	Average
17980.80	45.47	7.71	53.18	74.00	20.82	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5610
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

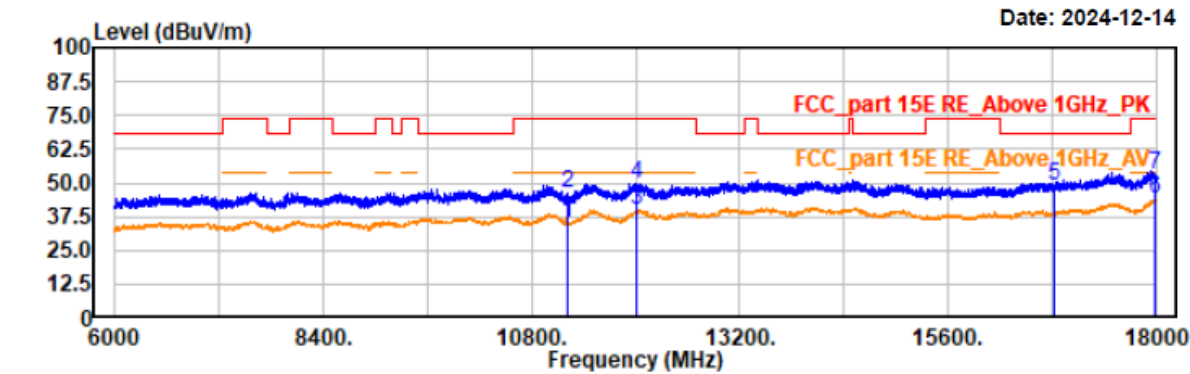


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11220.00	32.04	2.80	34.84	54.00	19.16	horizontal	Average
11220.00	43.06	2.80	45.86	74.00	28.14	horizontal	Peak
12010.80	35.66	4.23	39.89	54.00	14.11	horizontal	Average
12010.80	45.59	4.23	49.82	74.00	24.18	horizontal	Peak
16830.00	44.22	4.42	48.64	68.20	19.56	horizontal	Peak
17974.80	36.19	7.70	43.89	54.00	10.11	horizontal	Average
17974.80	45.30	7.70	53.00	74.00	21.00	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5610
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

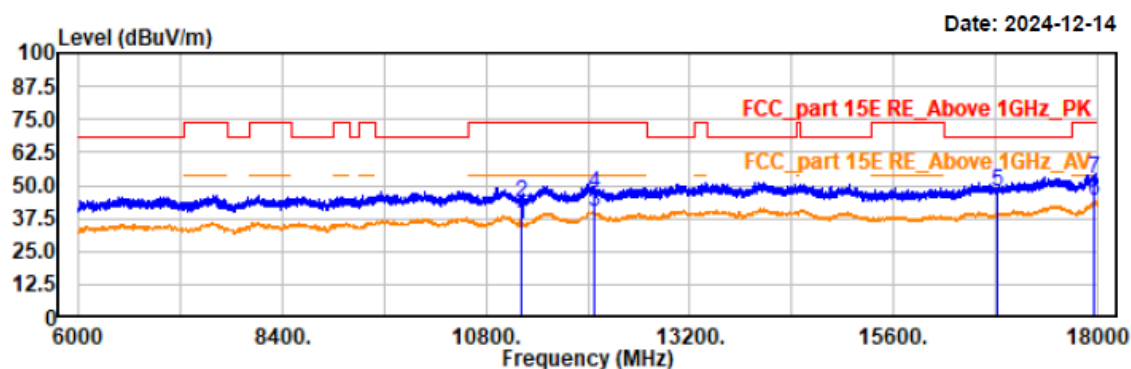

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11220.00	32.11	2.80	34.91	54.00	19.09	vertical	Average
11220.00	40.69	2.80	43.49	74.00	30.51	vertical	Peak
12069.60	35.77	4.12	39.89	54.00	14.11	vertical	Average
12069.60	43.05	4.12	47.17	74.00	26.83	vertical	Peak
16830.00	43.42	4.42	47.84	68.20	20.36	vertical	Peak
17959.20	36.47	7.67	44.14	54.00	9.86	vertical	Average
17959.20	44.49	7.67	52.16	74.00	21.84	vertical	Peak

B4

Project No.: 2407V20721E-RF

Test Mode: 11a-5745


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

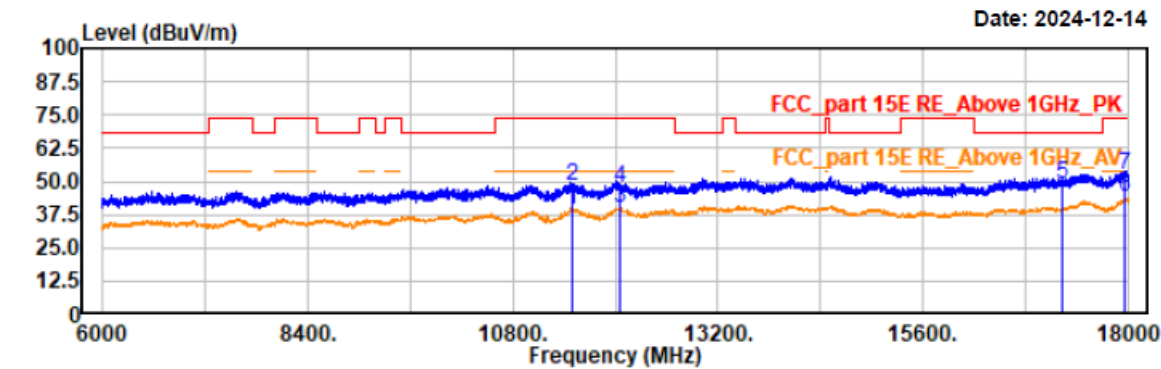


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	36.25	3.12	39.37	54.00	14.63	horizontal	Average
11490.00	45.29	3.12	48.41	74.00	25.59	horizontal	Peak
12049.20	35.91	4.16	40.07	54.00	13.93	horizontal	Average
12049.20	43.70	4.16	47.86	74.00	26.14	horizontal	Peak
17234.40	43.61	5.58	49.19	68.20	19.01	horizontal	Peak
17962.80	36.12	7.68	43.80	54.00	10.20	horizontal	Average
17962.80	44.66	7.68	52.34	74.00	21.66	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5745
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

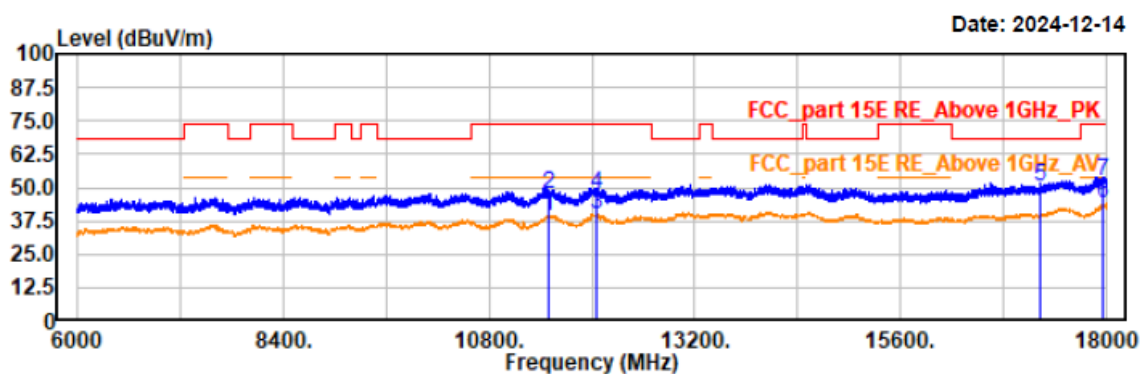


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	35.86	3.12	38.98	54.00	15.02	vertical	Average
11490.00	44.74	3.12	47.86	74.00	26.14	vertical	Peak
12052.80	36.02	4.16	40.18	54.00	13.82	vertical	Average
12052.80	43.37	4.16	47.53	74.00	26.47	vertical	Peak
17235.00	45.00	5.59	50.59	68.20	17.61	vertical	Peak
17959.20	36.36	7.67	44.03	54.00	9.97	vertical	Average
17959.20	44.94	7.67	52.61	74.00	21.39	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5785
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

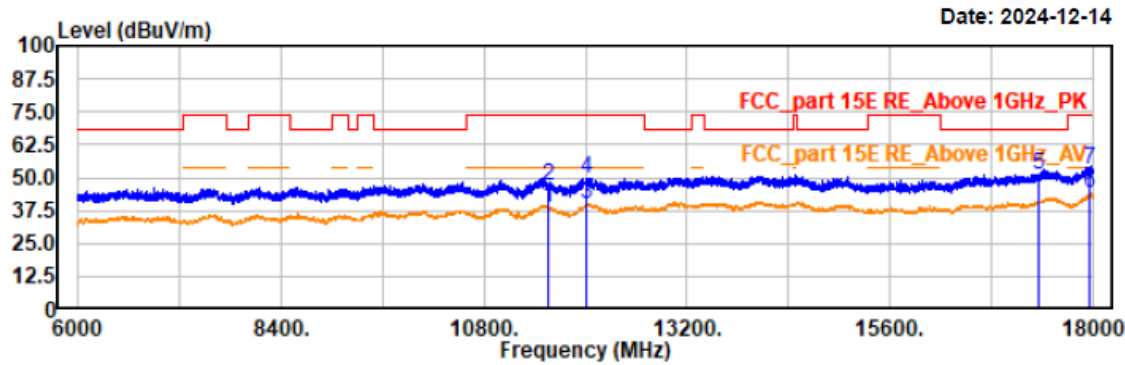


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.00	35.50	3.34	38.84	54.00	15.16	horizontal	Average
11570.00	43.61	3.34	46.95	74.00	27.05	horizontal	Peak
12001.20	35.64	4.25	39.89	54.00	14.11	horizontal	Average
12001.20	45.32	4.25	49.57	74.00	24.43	horizontal	Peak
17354.40	45.02	5.91	50.93	68.20	17.27	horizontal	Peak
17958.00	36.35	7.68	44.03	54.00	9.97	horizontal	Average
17958.00	45.18	7.68	52.86	74.00	21.14	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5785
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

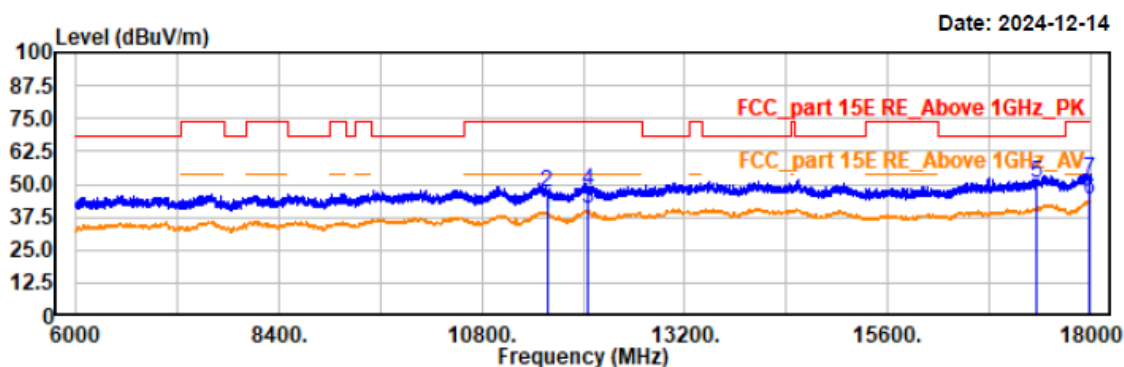

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.40	35.43	3.34	38.77	54.00	15.23	vertical	Average
11570.40	43.51	3.34	46.85	74.00	27.15	vertical	Peak
12060.00	36.45	4.14	40.59	54.00	13.41	vertical	Average
12060.00	43.71	4.14	47.85	74.00	26.15	vertical	Peak
17355.00	44.44	5.91	50.35	68.20	17.85	vertical	Peak
17991.60	36.14	7.72	43.86	54.00	10.14	vertical	Average
17991.60	44.12	7.72	51.84	74.00	22.16	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5825
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

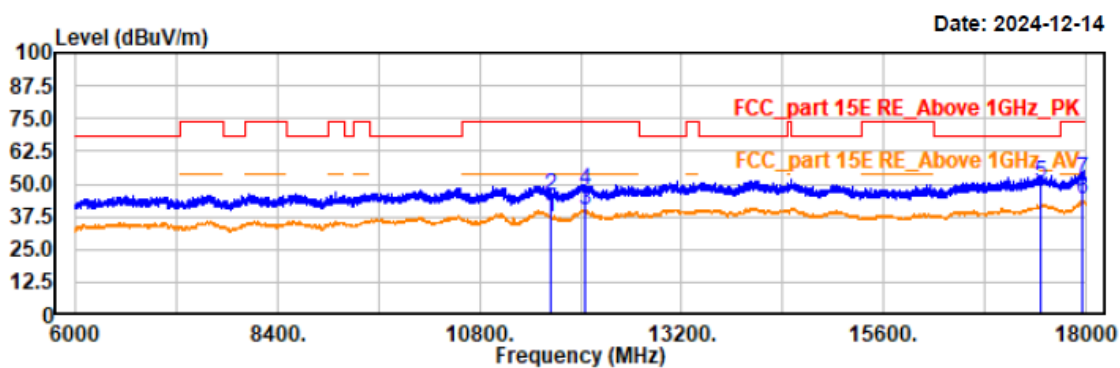

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11650.00	33.52	3.53	37.05	54.00	16.95	horizontal	Average
11650.00	41.70	3.53	45.23	74.00	28.77	horizontal	Peak
12062.40	35.83	4.14	39.97	54.00	14.03	horizontal	Average
12062.40	43.49	4.14	47.63	74.00	26.37	horizontal	Peak
17474.40	43.97	6.22	50.19	68.20	18.01	horizontal	Peak
17964.00	36.26	7.68	43.94	54.00	10.06	horizontal	Average
17964.00	44.30	7.68	51.98	74.00	22.02	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5825
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

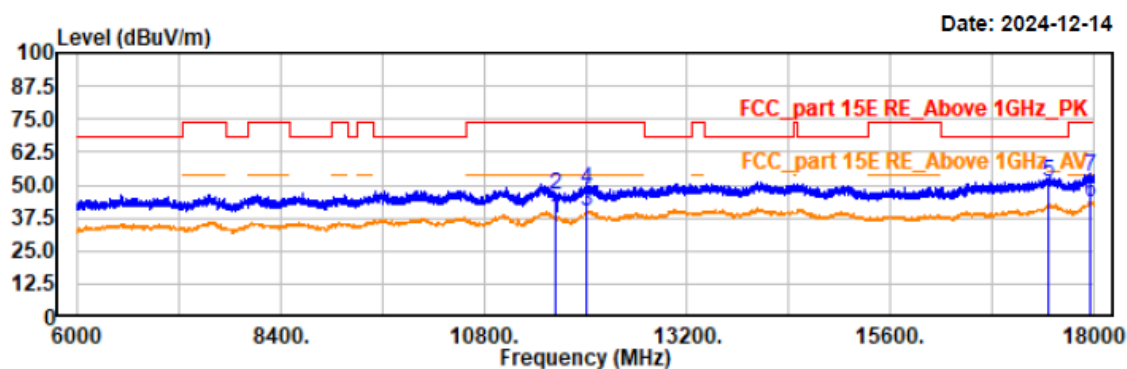

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11649.60	33.87	3.53	37.40	54.00	16.60	vertical	Average
11649.60	42.63	3.53	46.16	74.00	27.84	vertical	Peak
12002.40	36.00	4.25	40.25	54.00	13.75	vertical	Average
12002.40	43.74	4.25	47.99	74.00	26.01	vertical	Peak
17475.00	44.61	6.23	50.84	68.20	17.36	vertical	Peak
17958.00	36.04	7.68	43.72	54.00	10.28	vertical	Average
17958.00	45.37	7.68	53.05	74.00	20.95	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5745
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

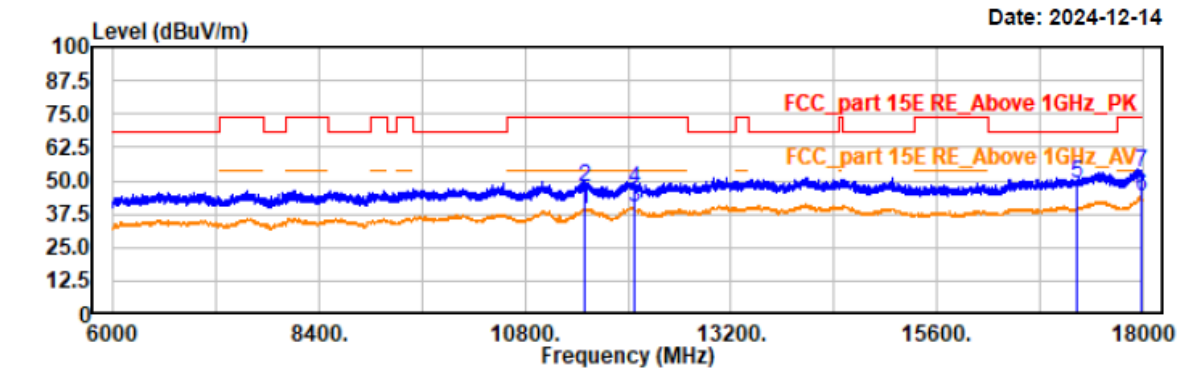


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	36.03	3.12	39.15	54.00	14.85	horizontal	Average
11490.00	44.38	3.12	47.50	74.00	26.50	horizontal	Peak
12070.80	35.80	4.12	39.92	54.00	14.08	horizontal	Average
12070.80	43.01	4.12	47.13	74.00	26.87	horizontal	Peak
17234.40	43.44	5.58	49.02	68.20	19.18	horizontal	Peak
17976.00	36.28	7.71	43.99	54.00	10.01	horizontal	Average
17976.00	45.40	7.71	53.11	74.00	20.89	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5745
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

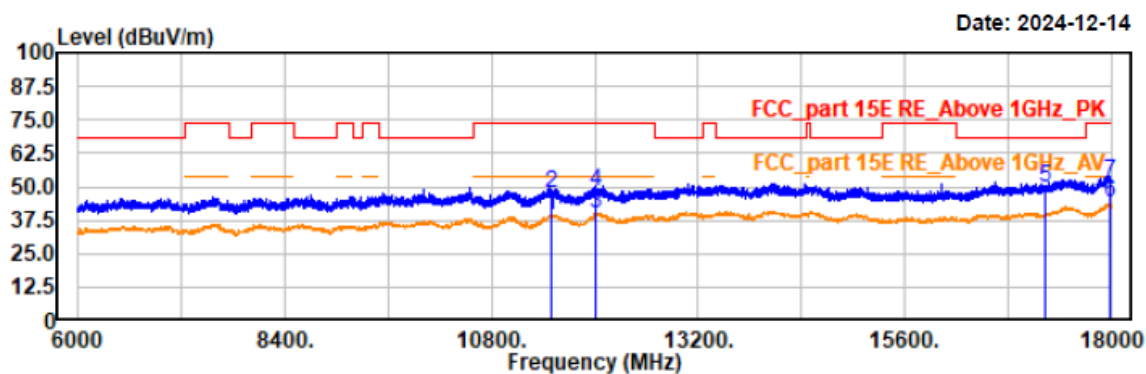

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	35.96	3.12	39.08	54.00	14.92	vertical	Average
11490.00	44.41	3.12	47.53	74.00	26.47	vertical	Peak
12006.00	35.84	4.24	40.08	54.00	13.92	vertical	Average
12006.00	44.03	4.24	48.27	74.00	25.73	vertical	Peak
17235.00	43.90	5.59	49.49	68.20	18.71	vertical	Peak
17979.60	36.48	7.71	44.19	54.00	9.81	vertical	Average
17979.60	43.82	7.71	51.53	74.00	22.47	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5785
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

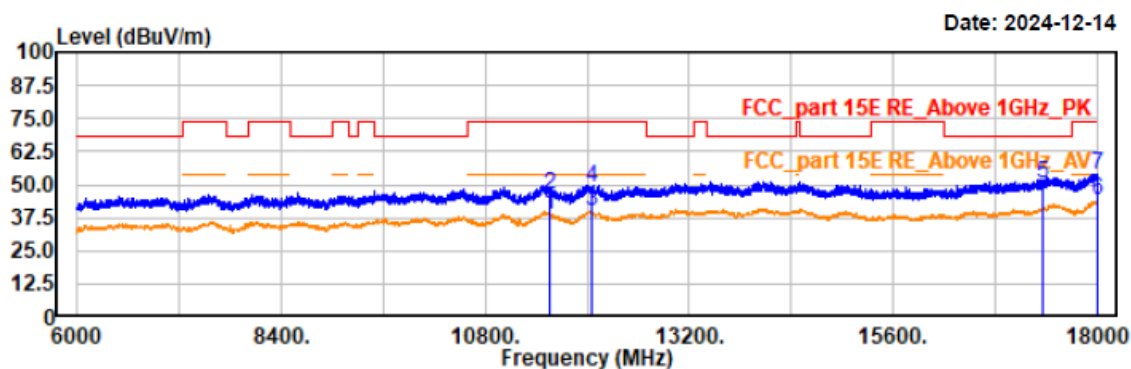

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.00	35.37	3.34	38.71	54.00	15.29	horizontal	Average
11570.00	43.10	3.34	46.44	74.00	27.56	horizontal	Peak
12060.00	35.78	4.14	39.92	54.00	14.08	horizontal	Average
12060.00	44.89	4.14	49.03	74.00	24.97	horizontal	Peak
17354.40	44.28	5.91	50.19	68.20	18.01	horizontal	Peak
17994.00	36.38	7.72	44.10	54.00	9.90	horizontal	Average
17994.00	46.12	7.72	53.84	74.00	20.16	horizontal	Peak


Project No.: 2407V20721E-RF
Test Mode: 11n20-5785
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

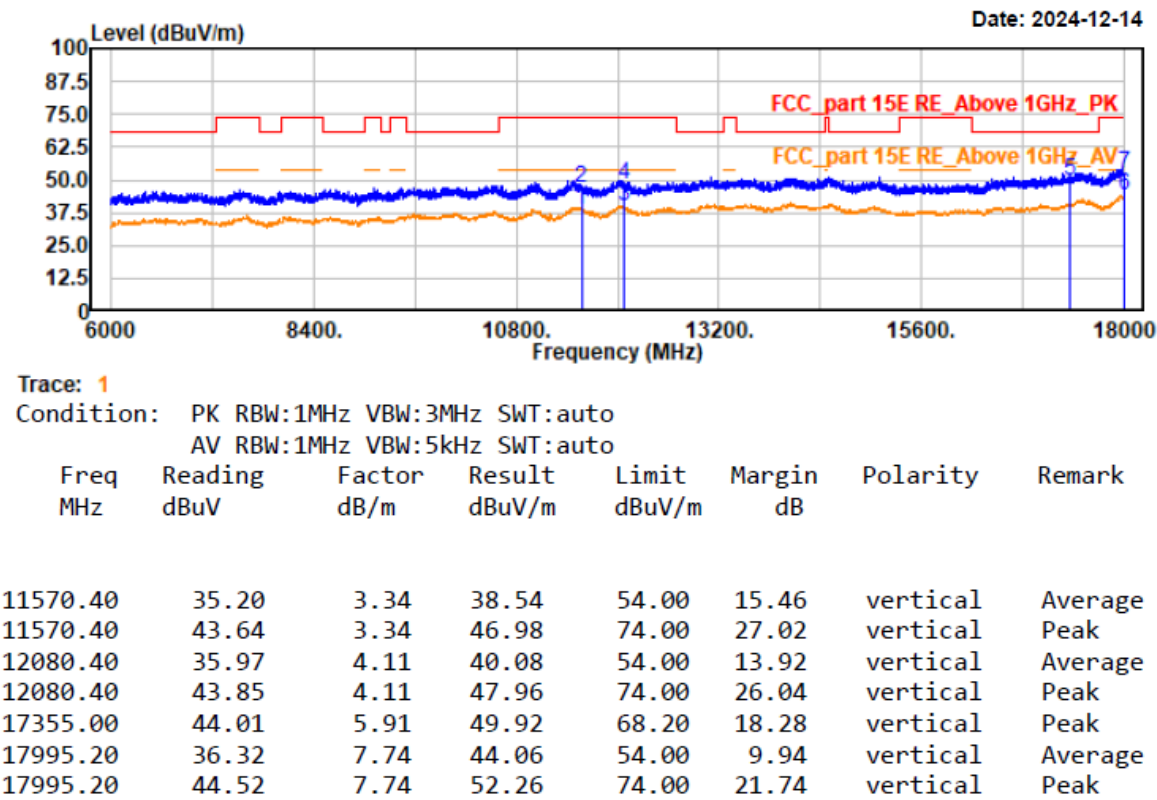

Project No.: 2407V20721E-RF
Test Mode: 11n20-5825
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

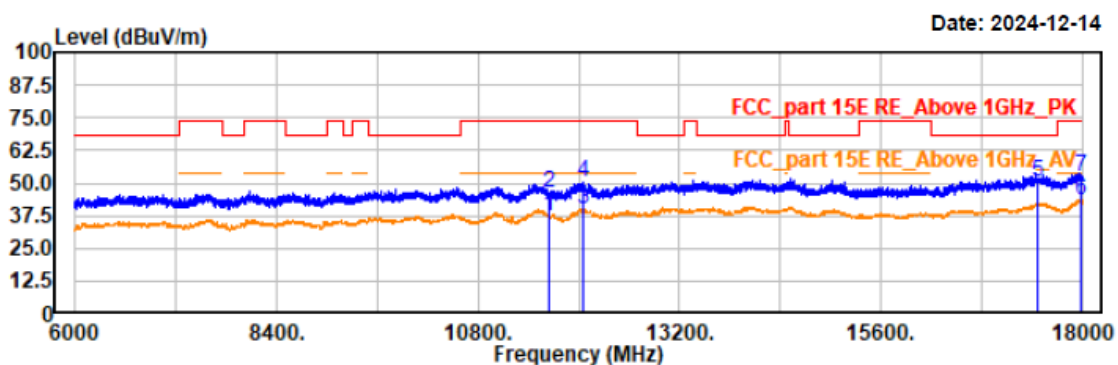

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11650.00	33.77	3.53	37.30	54.00	16.70	horizontal	Average
11650.00	42.96	3.53	46.49	74.00	27.51	horizontal	Peak
12048.00	35.83	4.16	39.99	54.00	14.01	horizontal	Average
12048.00	46.10	4.16	50.26	74.00	23.74	horizontal	Peak
17474.40	44.12	6.22	50.34	68.20	17.86	horizontal	Peak
17982.00	35.96	7.71	43.67	54.00	10.33	horizontal	Average
17982.00	44.89	7.71	52.60	74.00	21.40	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5825
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

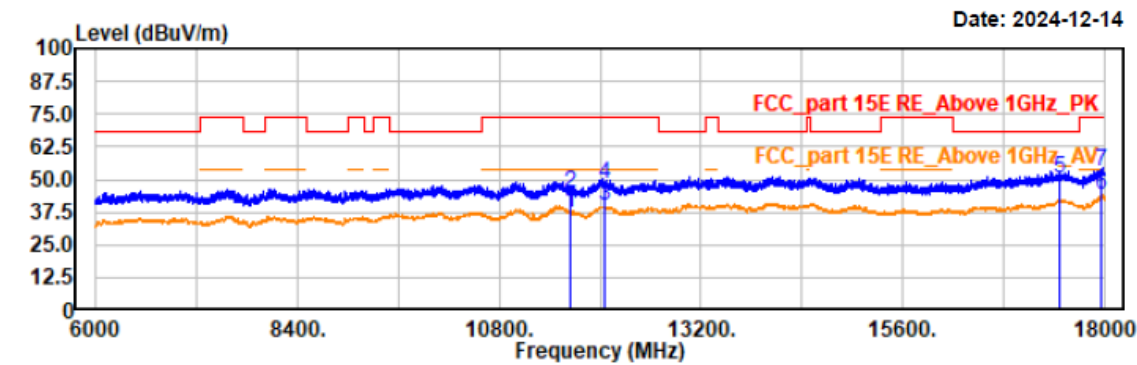

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11649.60	34.01	3.53	37.54	54.00	16.46	vertical	Average
11649.60	41.27	3.53	44.80	74.00	29.20	vertical	Peak
12044.40	35.63	4.17	39.80	54.00	14.20	vertical	Average
12044.40	44.02	4.17	48.19	74.00	25.81	vertical	Peak
17475.00	44.16	6.23	50.39	68.20	17.81	vertical	Peak
17961.60	36.28	7.68	43.96	54.00	10.04	vertical	Average
17961.60	45.29	7.68	52.97	74.00	21.03	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5755


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

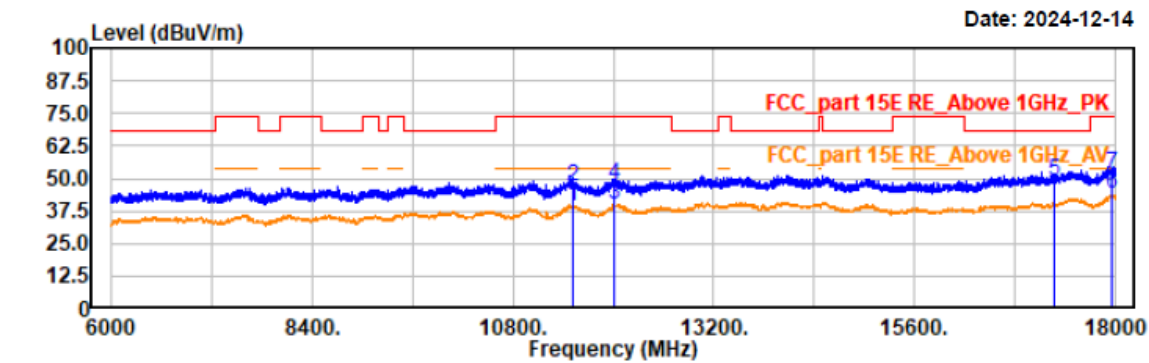

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11510.00	35.90	3.16	39.06	54.00	14.94	horizontal	Average
11510.00	43.52	3.16	46.68	74.00	27.32	horizontal	Peak
12003.60	35.52	4.24	39.76	54.00	14.24	horizontal	Average
12003.60	43.24	4.24	47.48	74.00	26.52	horizontal	Peak
17265.60	43.42	5.65	49.07	68.20	19.13	horizontal	Peak
17961.60	36.21	7.68	43.89	54.00	10.11	horizontal	Average
17961.60	44.08	7.68	51.76	74.00	22.24	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5755


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

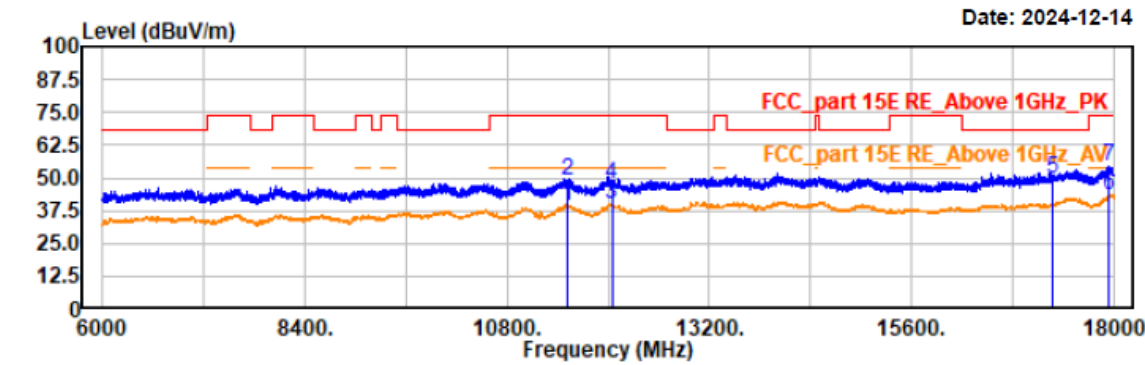

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11510.40	35.83	3.16	38.99	54.00	15.01	vertical	Average
11510.40	45.73	3.16	48.89	74.00	25.11	vertical	Peak
12043.20	35.94	4.17	40.11	54.00	13.89	vertical	Average
12043.20	43.40	4.17	47.57	74.00	26.43	vertical	Peak
17265.00	43.89	5.65	49.54	68.20	18.66	vertical	Peak
17942.40	36.14	7.65	43.79	54.00	10.21	vertical	Average
17942.40	47.00	7.65	54.65	74.00	19.35	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5795


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

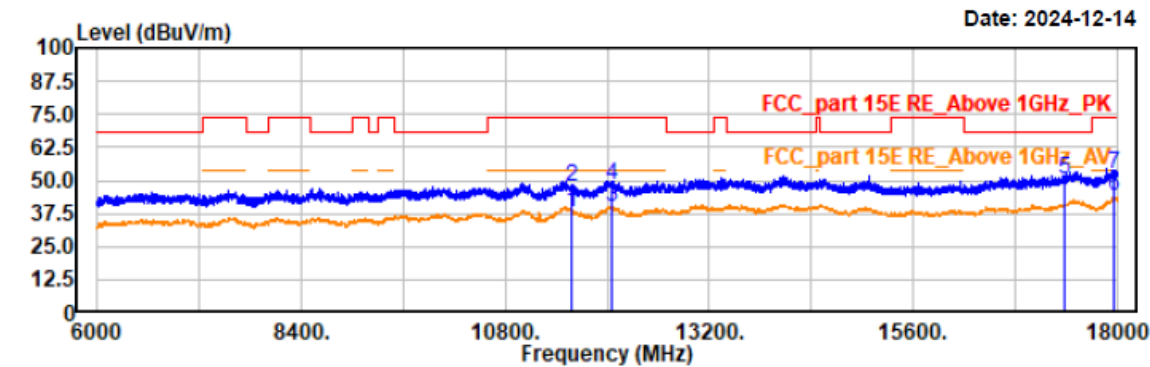

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11590.00	34.64	3.40	38.04	54.00	15.96	horizontal	Average
11590.00	43.87	3.40	47.27	74.00	26.73	horizontal	Peak
12052.80	35.79	4.16	39.95	54.00	14.05	horizontal	Average
12052.80	44.46	4.16	48.62	74.00	25.38	horizontal	Peak
17385.60	44.19	6.00	50.19	68.20	18.01	horizontal	Peak
17965.20	36.41	7.69	44.10	54.00	9.90	horizontal	Average
17965.20	44.51	7.69	52.20	74.00	21.80	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5795
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

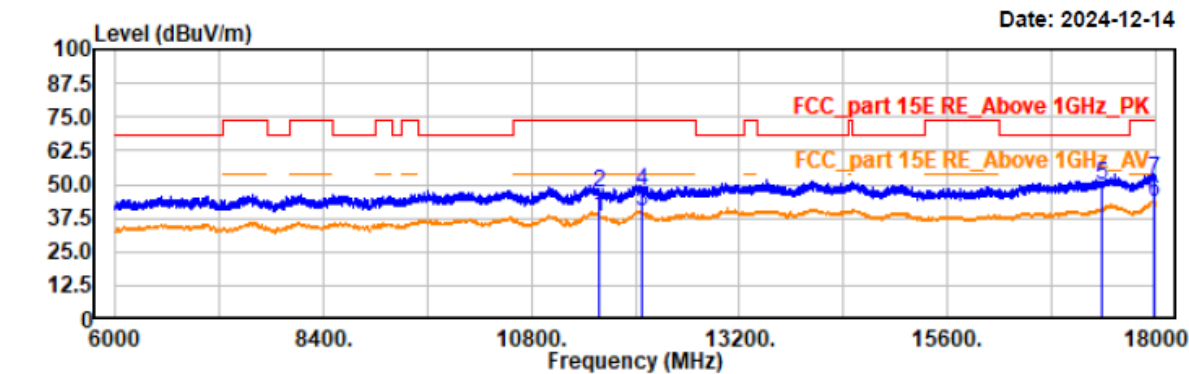


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11589.60	34.69	3.40	38.09	54.00	15.91	vertical	Average
11589.60	43.57	3.40	46.97	74.00	27.03	vertical	Peak
12070.80	35.91	4.12	40.03	54.00	13.97	vertical	Average
12070.80	43.76	4.12	47.88	74.00	26.12	vertical	Peak
17385.00	43.91	6.00	49.91	68.20	18.29	vertical	Peak
17992.80	35.90	7.72	43.62	54.00	10.38	vertical	Average
17992.80	44.12	7.72	51.84	74.00	22.16	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5775
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

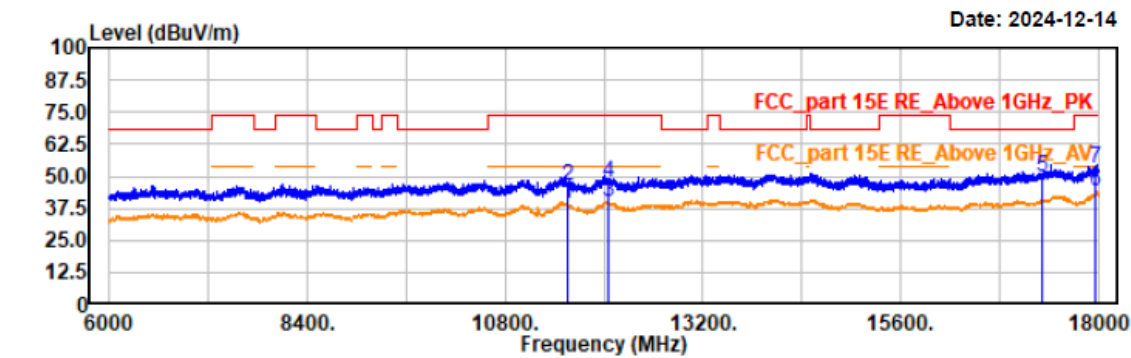

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11550.00	36.05	3.28	39.33	54.00	14.67	horizontal	Average
11550.00	43.18	3.28	46.46	74.00	27.54	horizontal	Peak
12055.20	35.87	4.15	40.02	54.00	13.98	horizontal	Average
12055.20	43.64	4.15	47.79	74.00	26.21	horizontal	Peak
17325.60	44.11	5.81	49.92	68.20	18.28	horizontal	Peak
17961.60	36.46	7.68	44.14	54.00	9.86	horizontal	Average
17961.60	45.18	7.68	52.86	74.00	21.14	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11ac80-5775


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

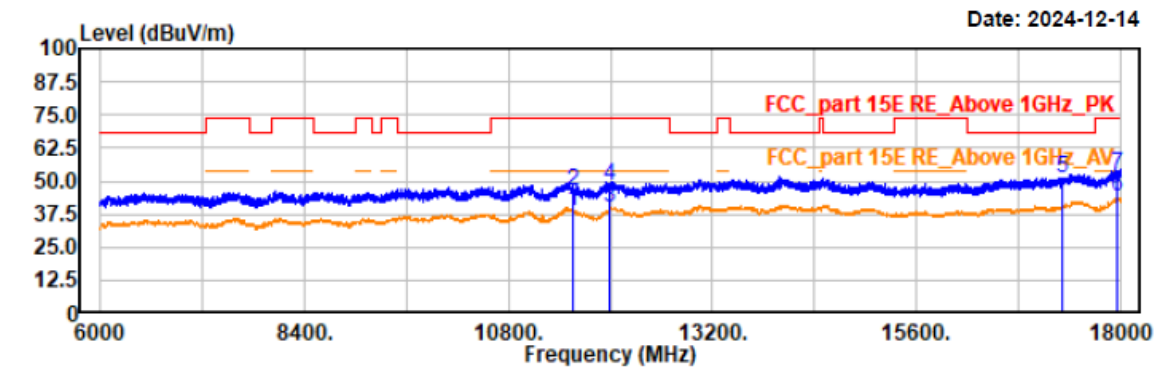

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11550.00	35.48	3.28	38.76	54.00	15.24	vertical	Average
11550.00	43.16	3.28	46.44	74.00	27.56	vertical	Peak
11998.80	35.49	4.25	39.74	54.00	14.26	vertical	Average
11998.80	44.01	4.25	48.26	74.00	25.74	vertical	Peak
17325.00	45.16	5.81	50.97	68.20	17.23	vertical	Peak
17962.80	36.25	7.68	43.93	54.00	10.07	vertical	Average
17962.80	44.78	7.68	52.46	74.00	21.54	vertical	Peak

EUT Model: NLS-NQuire1000

B1

Project No.: 2407V20721E-RF
Test Mode: 11a-5180
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

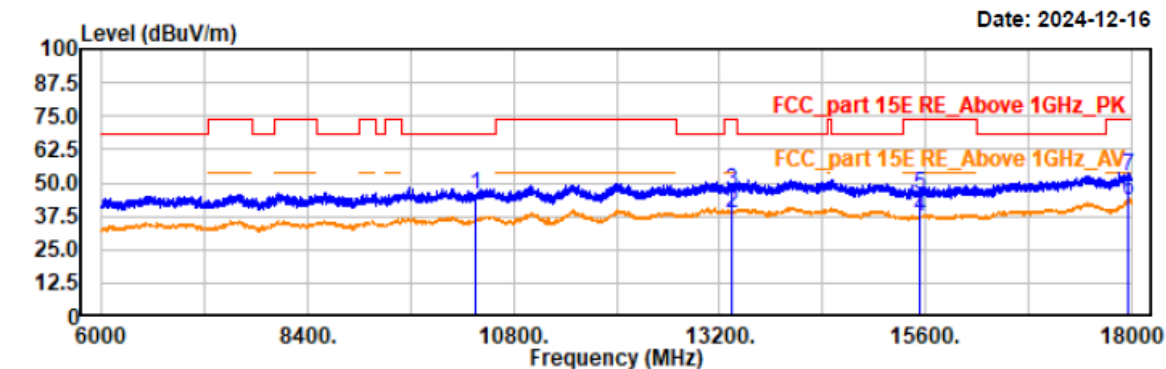


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10359.60	43.66	1.62	45.28	68.20	22.92	horizontal	Peak
13342.80	33.74	4.95	38.69	54.00	15.31	horizontal	Average
13342.80	42.08	4.95	47.03	74.00	26.97	horizontal	Peak
15540.00	34.43	2.61	37.04	54.00	16.96	horizontal	Average
15540.00	42.81	2.61	45.42	74.00	28.58	horizontal	Peak
17970.00	35.49	7.69	43.18	54.00	10.82	horizontal	Average
17970.00	44.66	7.69	52.35	74.00	21.65	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5180
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

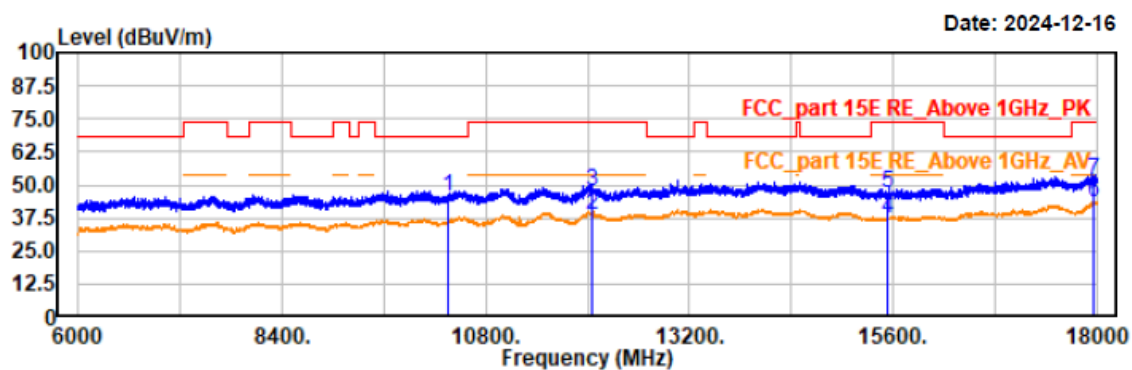

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.00	43.94	1.62	45.56	68.20	22.64	vertical	Peak
12048.00	34.54	4.16	38.70	54.00	15.30	vertical	Average
12048.00	43.42	4.16	47.58	74.00	26.42	vertical	Peak
15540.00	34.36	2.61	36.97	54.00	17.03	vertical	Average
15540.00	44.63	2.61	47.24	74.00	26.76	vertical	Peak
17959.20	35.94	7.67	43.61	54.00	10.39	vertical	Average
17959.20	43.75	7.67	51.42	74.00	22.58	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5200
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

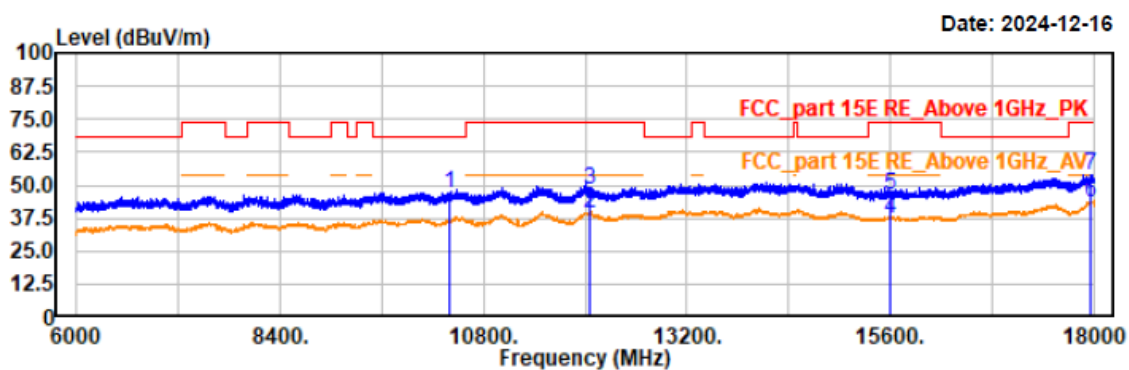

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.40	44.98	1.69	46.67	68.20	21.53	horizontal	Peak
12058.80	35.46	4.14	39.60	54.00	14.40	horizontal	Average
12058.80	44.07	4.14	48.21	74.00	25.79	horizontal	Peak
15600.00	35.07	2.51	37.58	54.00	16.42	horizontal	Average
15600.00	43.53	2.51	46.04	74.00	27.96	horizontal	Peak
17961.60	35.89	7.69	43.58	54.00	10.42	horizontal	Average
17961.60	45.87	7.69	53.56	74.00	20.44	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5200
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

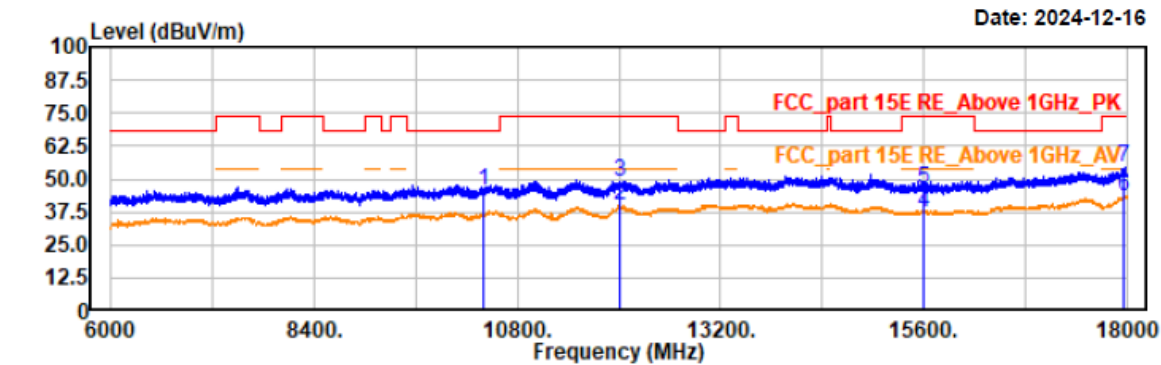

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.40	43.85	1.69	45.54	68.20	22.66	vertical	Peak
12009.60	35.82	4.24	40.06	54.00	13.94	vertical	Average
12009.60	44.70	4.24	48.94	74.00	25.06	vertical	Peak
15600.00	34.87	2.51	37.38	54.00	16.62	vertical	Average
15600.00	43.87	2.51	46.38	74.00	27.62	vertical	Peak
17961.60	36.08	7.68	43.76	54.00	10.24	vertical	Average
17961.60	46.53	7.68	54.21	74.00	19.79	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5240


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

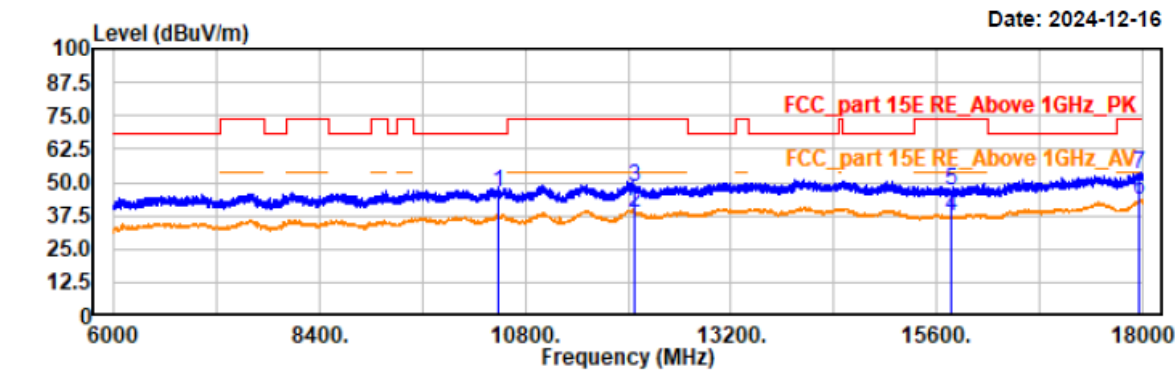

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10480.00	44.75	1.73	46.48	68.20	21.72	horizontal	Peak
12069.60	34.53	4.12	38.65	54.00	15.35	horizontal	Average
12069.60	44.10	4.12	48.22	74.00	25.78	horizontal	Peak
15780.00	34.94	2.39	37.33	54.00	16.67	horizontal	Average
15780.00	44.37	2.39	46.76	74.00	27.24	horizontal	Peak
17970.00	35.52	7.69	43.21	54.00	10.79	horizontal	Average
17970.00	45.09	7.69	52.78	74.00	21.22	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5240
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

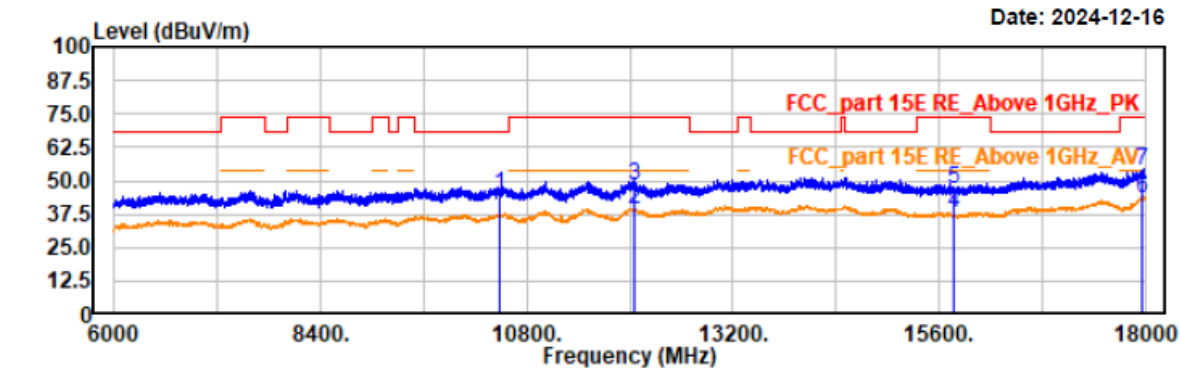


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10480.00	43.12	1.73	44.85	68.20	23.35	vertical	Peak
12058.80	35.44	4.14	39.58	54.00	14.42	vertical	Average
12058.80	44.38	4.14	48.52	74.00	25.48	vertical	Peak
15780.00	35.36	2.39	37.75	54.00	16.25	vertical	Average
15780.00	44.21	2.39	46.60	74.00	27.40	vertical	Peak
17970.00	35.88	7.69	43.57	54.00	10.43	vertical	Average
17970.00	45.84	7.69	53.53	74.00	20.47	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5180
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

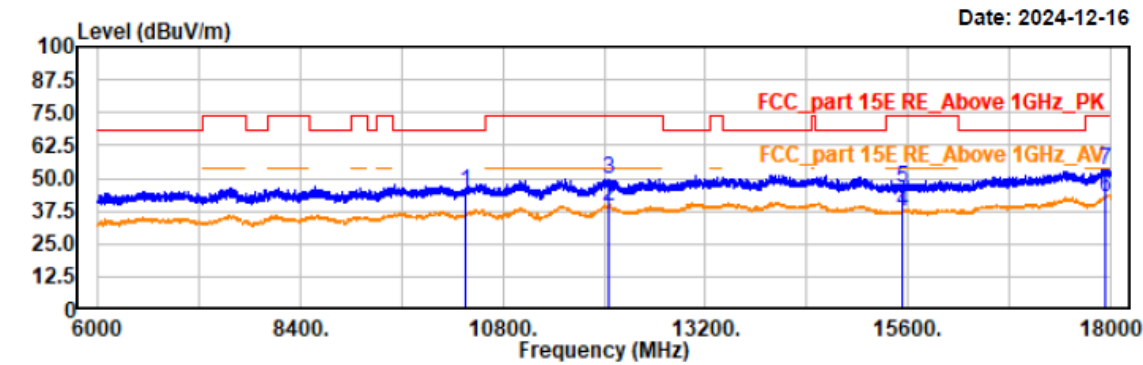


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10359.60	43.11	1.62	44.73	68.20	23.47	horizontal	Peak
12058.80	35.22	4.14	39.36	54.00	14.64	horizontal	Average
12058.80	45.69	4.14	49.83	74.00	24.17	horizontal	Peak
15540.00	34.76	2.61	37.37	54.00	16.63	horizontal	Average
15540.00	43.61	2.61	46.22	74.00	27.78	horizontal	Peak
17931.60	35.09	7.63	42.72	54.00	11.28	horizontal	Average
17931.60	45.79	7.63	53.42	74.00	20.58	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5180
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

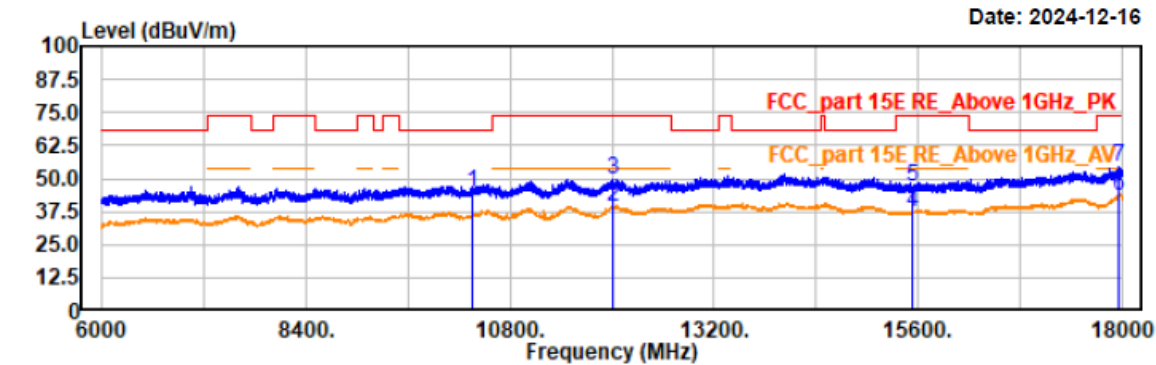


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.00	43.45	1.62	45.07	68.20	23.13	vertical	Peak
12006.00	35.17	4.24	39.41	54.00	14.59	vertical	Average
12006.00	45.52	4.24	49.76	74.00	24.24	vertical	Peak
15540.00	34.67	2.61	37.28	54.00	16.72	vertical	Average
15540.00	44.23	2.61	46.84	74.00	27.16	vertical	Peak
17961.60	35.58	7.68	43.26	54.00	10.74	vertical	Average
17961.60	46.78	7.68	54.46	74.00	19.54	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5200
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

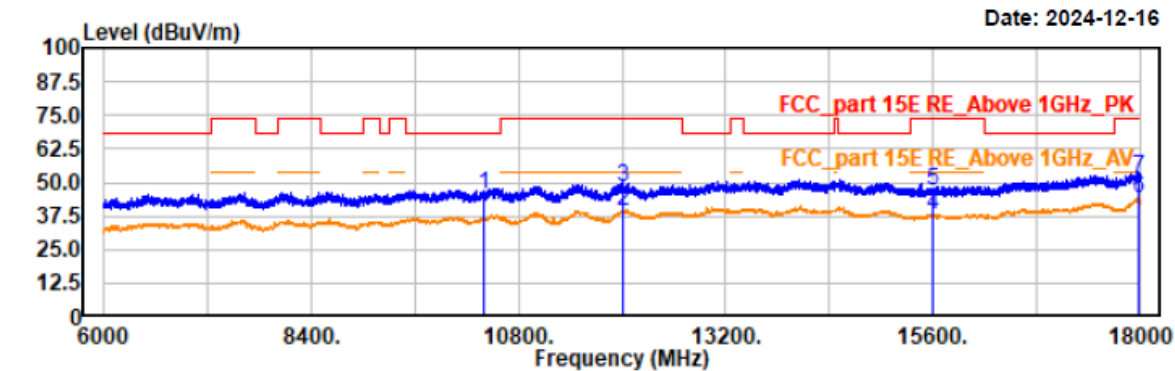

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	43.93	1.69	45.62	68.20	22.58	horizontal	Peak
12004.80	35.25	4.24	39.49	54.00	14.51	horizontal	Average
12004.80	44.30	4.24	48.54	74.00	25.46	horizontal	Peak
15600.00	35.15	2.51	37.66	54.00	16.34	horizontal	Average
15600.00	44.59	2.51	47.10	74.00	26.90	horizontal	Peak
17991.60	36.09	7.72	43.81	54.00	10.19	horizontal	Average
17991.60	44.34	7.72	52.06	74.00	21.94	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5200


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

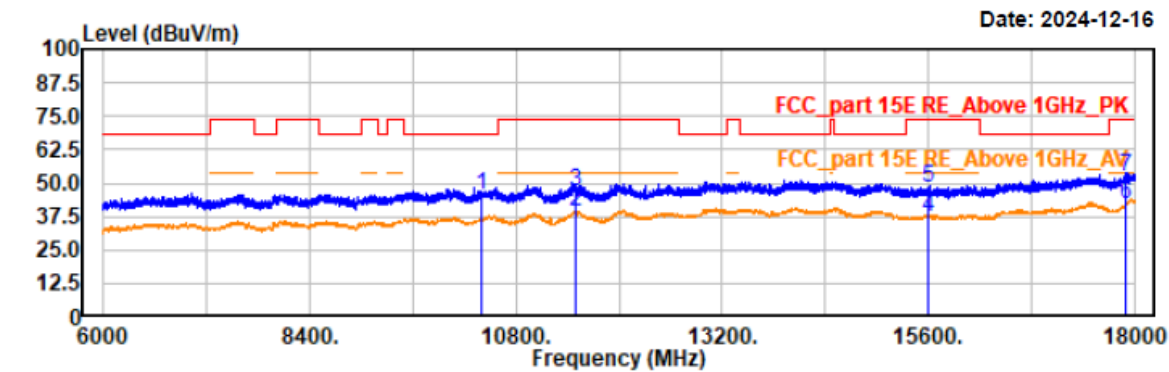

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	43.84	1.69	45.53	68.20	22.67	vertical	Peak
11487.60	36.36	3.12	39.48	54.00	14.52	vertical	Average
11487.60	43.98	3.12	47.10	74.00	26.90	vertical	Peak
15600.00	34.87	2.51	37.38	54.00	16.62	vertical	Average
15600.00	45.52	2.51	48.03	74.00	25.97	vertical	Peak
17905.20	34.23	7.60	41.83	54.00	12.17	vertical	Average
17905.20	44.64	7.60	52.24	74.00	21.76	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5240
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

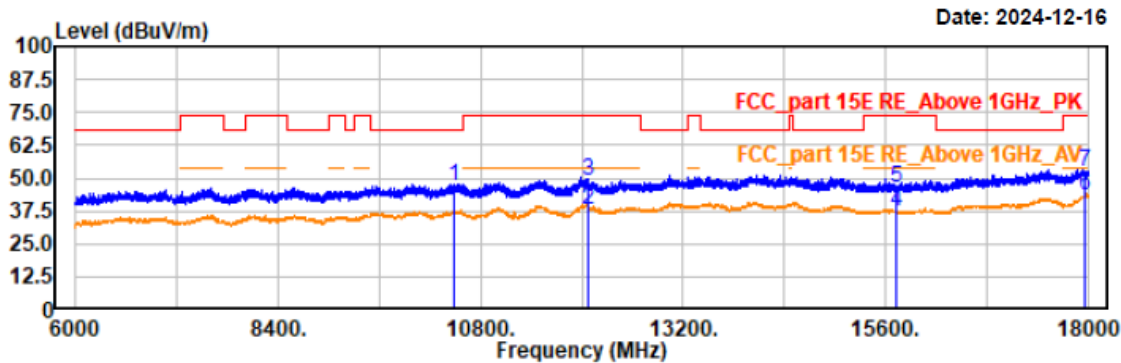


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10479.60	45.26	1.73	46.99	68.20	21.21	horizontal	Peak
12080.40	34.11	4.11	38.22	54.00	15.78	horizontal	Average
12080.40	44.66	4.11	48.77	74.00	25.23	horizontal	Peak
15720.00	34.96	2.35	37.31	54.00	16.69	horizontal	Average
15720.00	43.52	2.35	45.87	74.00	28.13	horizontal	Peak
17970.00	35.85	7.69	43.54	54.00	10.46	horizontal	Average
17970.00	44.49	7.69	52.18	74.00	21.82	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5240
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

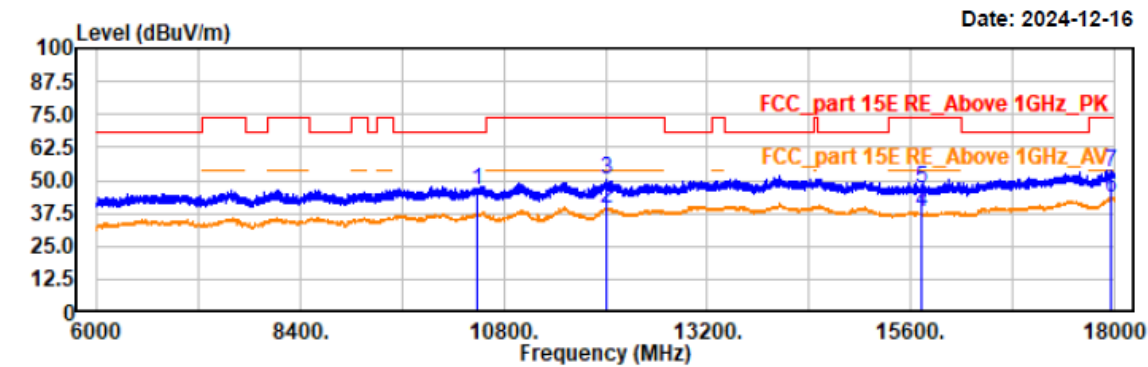


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10480.00	44.21	1.73	45.94	68.20	22.26	vertical	Peak
12004.80	35.02	4.24	39.26	54.00	14.74	vertical	Average
12004.80	45.79	4.24	50.03	74.00	23.97	vertical	Peak
15720.00	35.24	2.35	37.59	54.00	16.41	vertical	Average
15720.00	44.26	2.35	46.61	74.00	27.39	vertical	Peak
17970.00	35.73	7.69	43.42	54.00	10.58	vertical	Average
17970.00	45.40	7.69	53.09	74.00	20.91	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5190
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

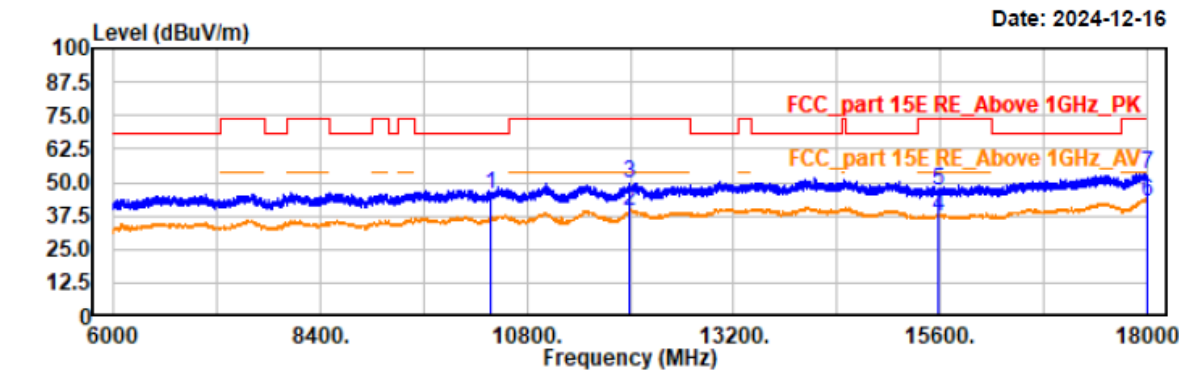

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10380.00	43.86	1.65	45.51	68.20	22.69	horizontal	Peak
11995.20	34.80	4.24	39.04	54.00	14.96	horizontal	Average
11995.20	45.61	4.24	49.85	74.00	24.15	horizontal	Peak
15570.00	34.63	2.55	37.18	54.00	16.82	horizontal	Average
15570.00	44.23	2.55	46.78	74.00	27.22	horizontal	Peak
17998.80	34.94	7.74	42.68	54.00	11.32	horizontal	Average
17998.80	45.59	7.74	53.33	74.00	20.67	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5190


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

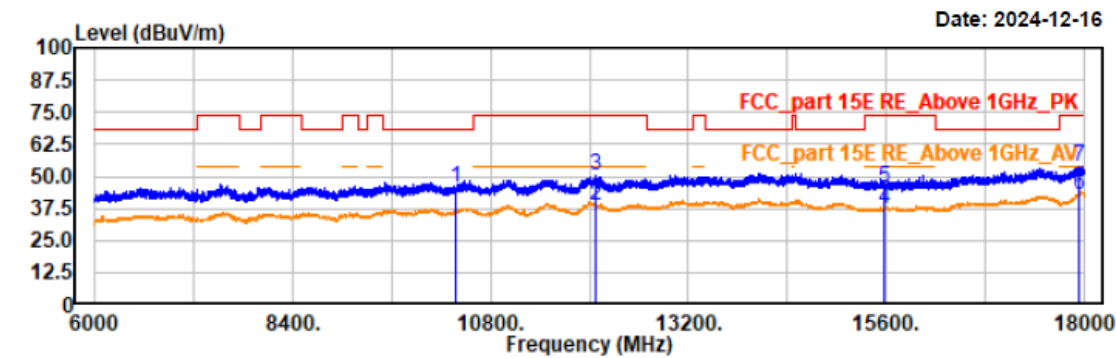


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10380.00	43.63	1.65	45.28	68.20	22.92	vertical	Peak
12069.60	34.54	4.12	38.66	54.00	15.34	vertical	Average
12069.60	45.89	4.12	50.01	74.00	23.99	vertical	Peak
15570.00	34.85	2.55	37.40	54.00	16.60	vertical	Average
15570.00	43.26	2.55	45.81	74.00	28.19	vertical	Peak
17942.40	35.45	7.65	43.10	54.00	10.90	vertical	Average
17942.40	46.13	7.65	53.78	74.00	20.22	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5230
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

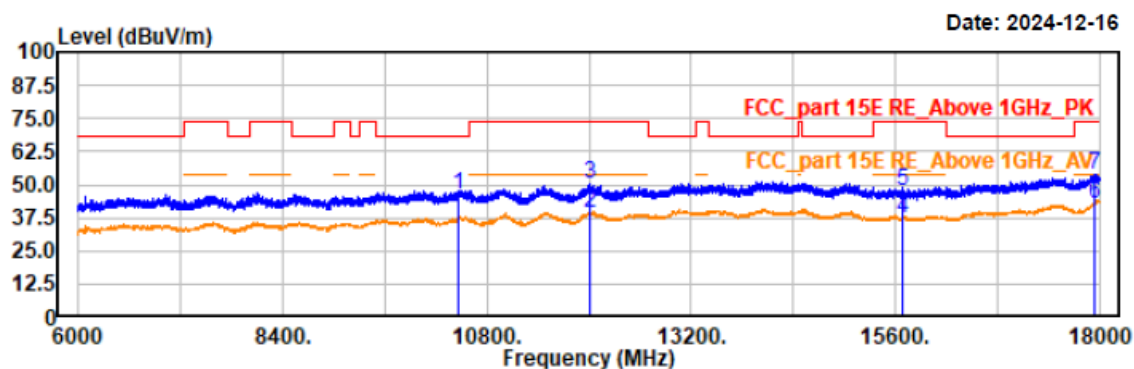

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10460.00	44.34	1.72	46.06	68.20	22.14	horizontal	Peak
12007.20	35.38	4.24	39.62	54.00	14.38	horizontal	Average
12007.20	45.94	4.24	50.18	74.00	23.82	horizontal	Peak
15690.00	34.81	2.37	37.18	54.00	16.82	horizontal	Average
15690.00	45.19	2.37	47.56	74.00	26.44	horizontal	Peak
17946.00	35.42	7.66	43.08	54.00	10.92	horizontal	Average
17946.00	46.13	7.66	53.79	74.00	20.21	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5230
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

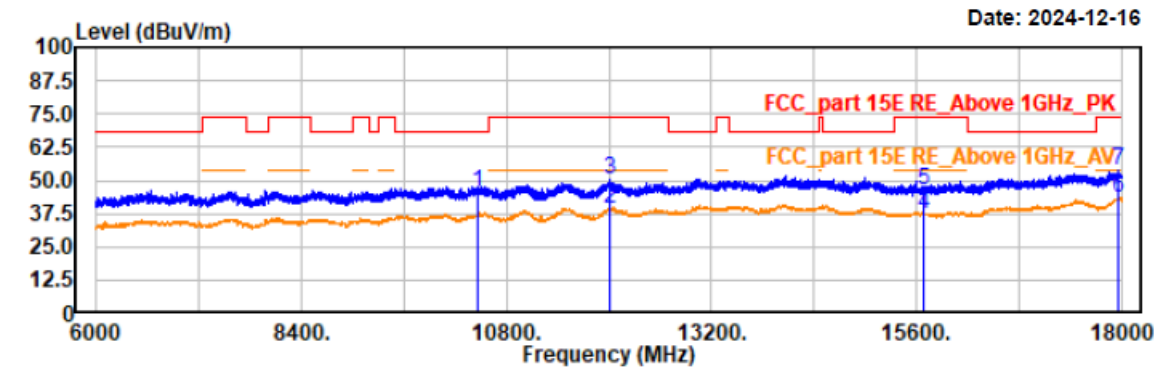


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10460.00	43.73	1.72	45.45	68.20	22.75	vertical	Peak
12018.00	35.14	4.21	39.35	54.00	14.65	vertical	Average
12018.00	46.10	4.21	50.31	74.00	23.69	vertical	Peak
15690.00	34.98	2.37	37.35	54.00	16.65	vertical	Average
15690.00	43.79	2.37	46.16	74.00	27.84	vertical	Peak
17965.20	35.79	7.69	43.48	54.00	10.52	vertical	Average
17965.20	46.00	7.69	53.69	74.00	20.31	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5210
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

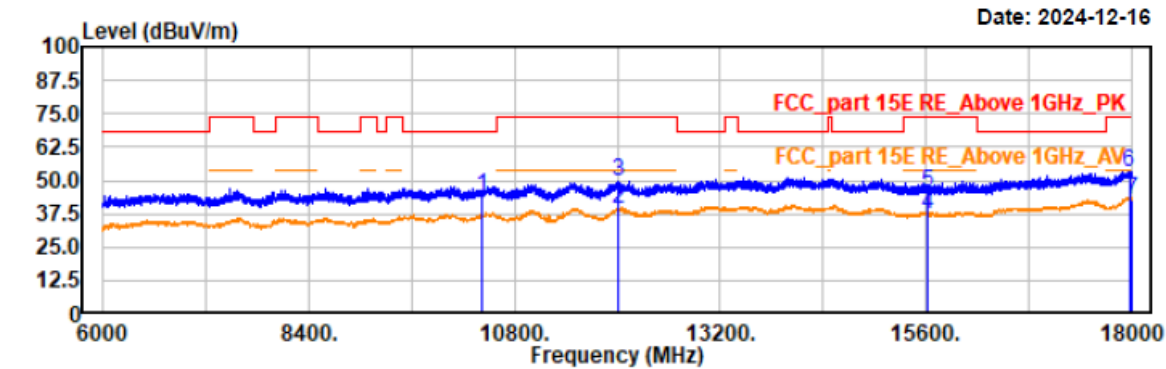


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10420.00	42.76	1.69	44.45	68.20	23.75	horizontal	Peak
12004.80	35.27	4.24	39.51	54.00	14.49	horizontal	Average
12004.80	45.73	4.24	49.97	74.00	24.03	horizontal	Peak
15630.00	34.99	2.47	37.46	54.00	16.54	horizontal	Average
15630.00	43.04	2.47	45.51	74.00	28.49	horizontal	Peak
17972.40	45.67	7.70	53.37	74.00	20.63	horizontal	Peak
17996.40	35.25	7.74	42.99	54.00	11.01	horizontal	Average

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5210
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

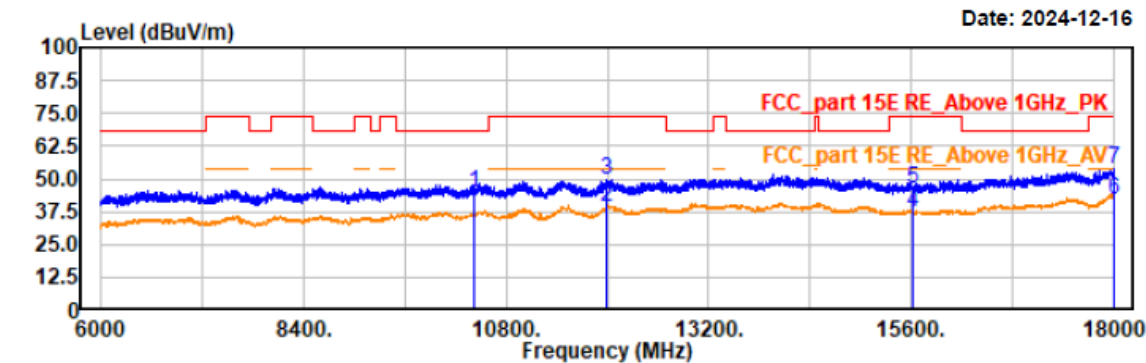

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10420.00	43.06	1.69	44.75	68.20	23.45	vertical	Peak
11988.00	34.92	4.22	39.14	54.00	14.86	vertical	Average
11988.00	45.29	4.22	49.51	74.00	24.49	vertical	Peak
15630.00	35.07	2.47	37.54	54.00	16.46	vertical	Average
15630.00	44.03	2.47	46.50	74.00	27.50	vertical	Peak
17996.40	34.64	7.74	42.38	54.00	11.62	vertical	Average
17996.40	45.96	7.74	53.70	74.00	20.30	vertical	Peak

B2

Project No.: 2407V20721E-RF

Test Mode: 11a-5260


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

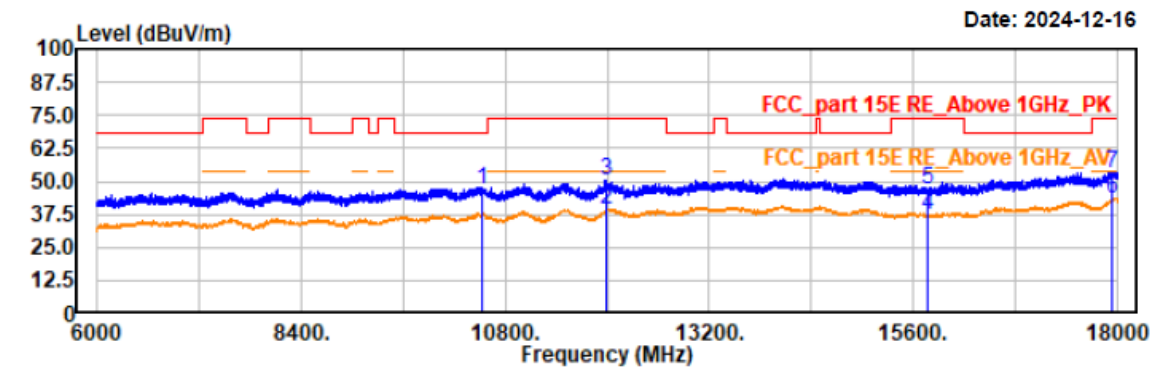

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.40	45.12	1.77	46.89	68.20	21.31	horizontal	Peak
11996.40	34.89	4.24	39.13	54.00	14.87	horizontal	Average
11996.40	46.31	4.24	50.55	74.00	23.45	horizontal	Peak
15780.00	34.52	2.39	36.91	54.00	17.09	horizontal	Average
15780.00	44.40	2.39	46.79	74.00	27.21	horizontal	Peak
17947.20	35.46	7.66	43.12	54.00	10.88	horizontal	Average
17947.20	45.49	7.66	53.15	74.00	20.85	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5260
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

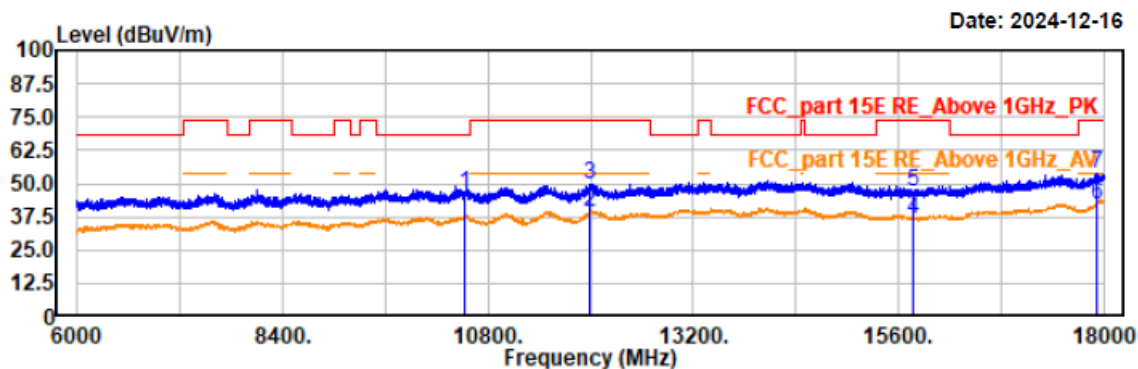

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.00	44.26	1.77	46.03	68.20	22.17	vertical	Peak
11992.80	35.19	4.23	39.42	54.00	14.58	vertical	Average
11992.80	45.29	4.23	49.52	74.00	24.48	vertical	Peak
15780.00	34.50	2.39	36.89	54.00	17.11	vertical	Average
15780.00	44.68	2.39	47.07	74.00	26.93	vertical	Peak
17926.80	34.65	7.64	42.29	54.00	11.71	vertical	Average
17926.80	45.99	7.64	53.63	74.00	20.37	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5280


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

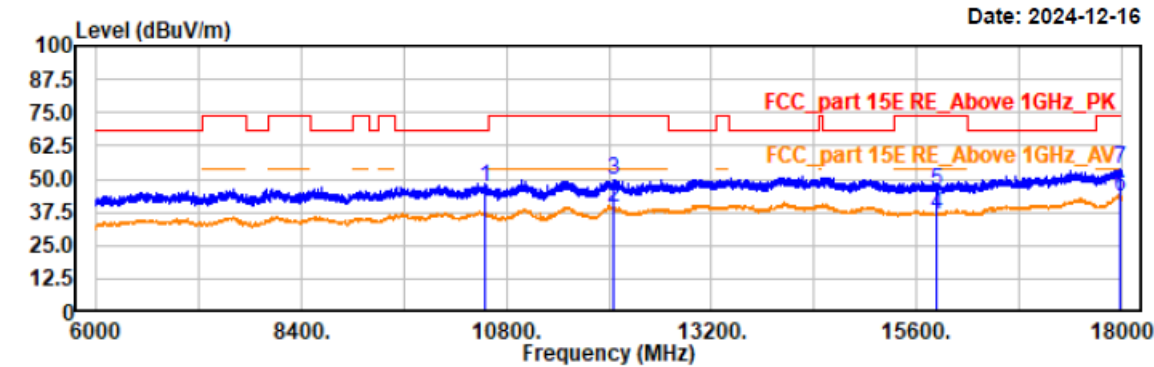

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	44.78	1.83	46.61	68.20	21.59	horizontal	Peak
12054.00	35.28	4.15	39.43	54.00	14.57	horizontal	Average
12054.00	45.70	4.15	49.85	74.00	24.15	horizontal	Peak
15840.00	34.23	2.37	36.60	54.00	17.40	horizontal	Average
15840.00	43.29	2.37	45.66	74.00	28.34	horizontal	Peak
17986.80	35.57	7.72	43.29	54.00	10.71	horizontal	Average
17986.80	46.11	7.72	53.83	74.00	20.17	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5280
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

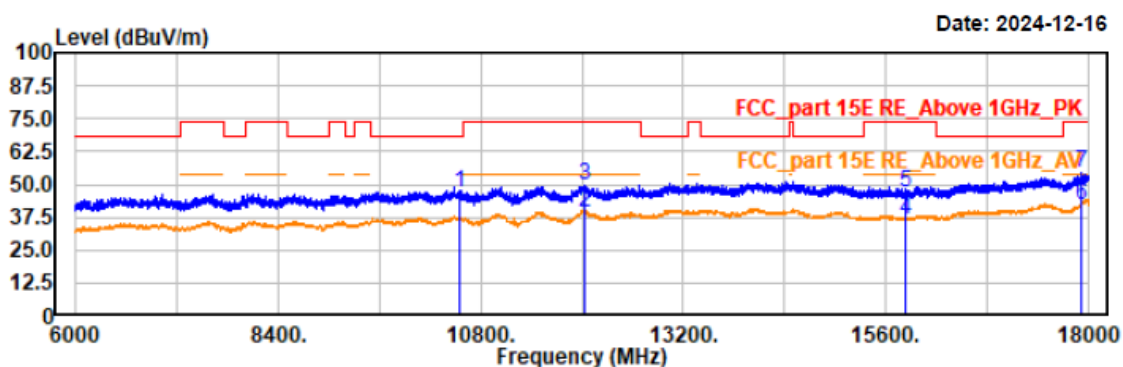

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	44.90	1.83	46.73	68.20	21.47	vertical	Peak
12024.00	35.14	4.20	39.34	54.00	14.66	vertical	Average
12024.00	45.33	4.20	49.53	74.00	24.47	vertical	Peak
15840.00	34.00	2.37	36.37	54.00	17.63	vertical	Average
15840.00	44.23	2.37	46.60	74.00	27.40	vertical	Peak
17910.00	34.74	7.60	42.34	54.00	11.66	vertical	Average
17910.00	47.03	7.60	54.63	74.00	19.37	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5320


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

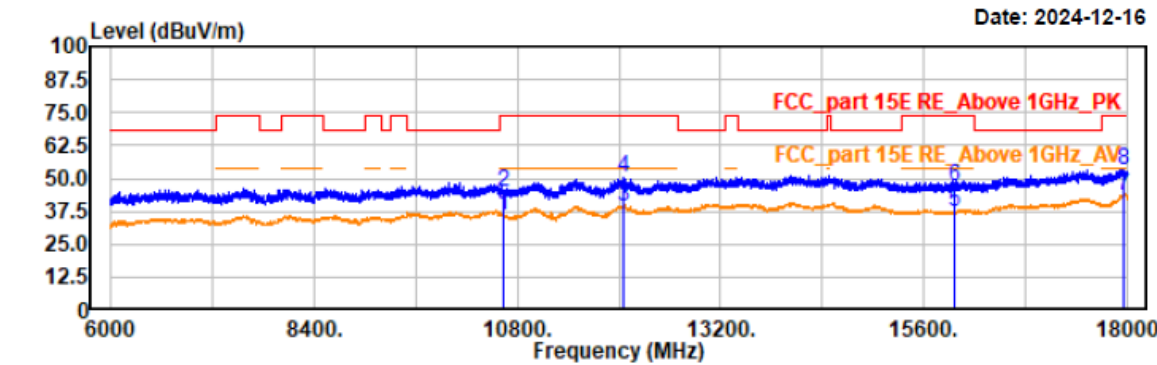

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.40	34.12	1.94	36.06	54.00	17.94	horizontal	Average
10640.40	42.65	1.94	44.59	74.00	29.41	horizontal	Peak
12063.60	35.13	4.13	39.26	54.00	14.74	horizontal	Average
12063.60	46.12	4.13	50.25	74.00	23.75	horizontal	Peak
15960.00	34.66	2.41	37.07	54.00	16.93	horizontal	Average
15960.00	44.42	2.41	46.83	74.00	27.17	horizontal	Peak
17959.20	35.91	7.67	43.58	54.00	10.42	horizontal	Average
17959.20	45.58	7.67	53.25	74.00	20.75	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5320
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

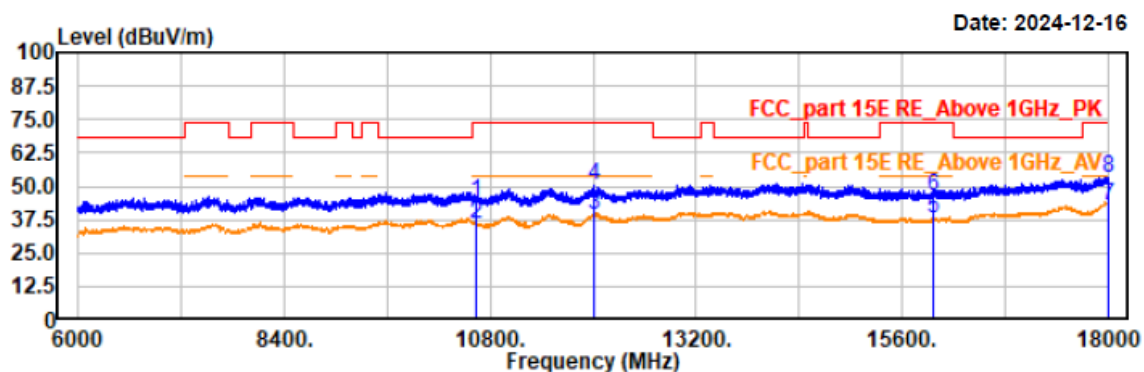


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.00	42.41	1.94	44.35	74.00	29.65	vertical	Peak
10640.40	33.67	1.94	35.61	54.00	18.39	vertical	Average
12019.20	35.43	4.21	39.64	54.00	14.36	vertical	Average
12019.20	46.17	4.21	50.38	74.00	23.62	vertical	Peak
15960.00	35.59	2.41	38.00	54.00	16.00	vertical	Average
15960.00	44.12	2.41	46.53	74.00	27.47	vertical	Peak
17998.80	34.86	7.74	42.60	54.00	11.40	vertical	Average
17998.80	45.69	7.74	53.43	74.00	20.57	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5260
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

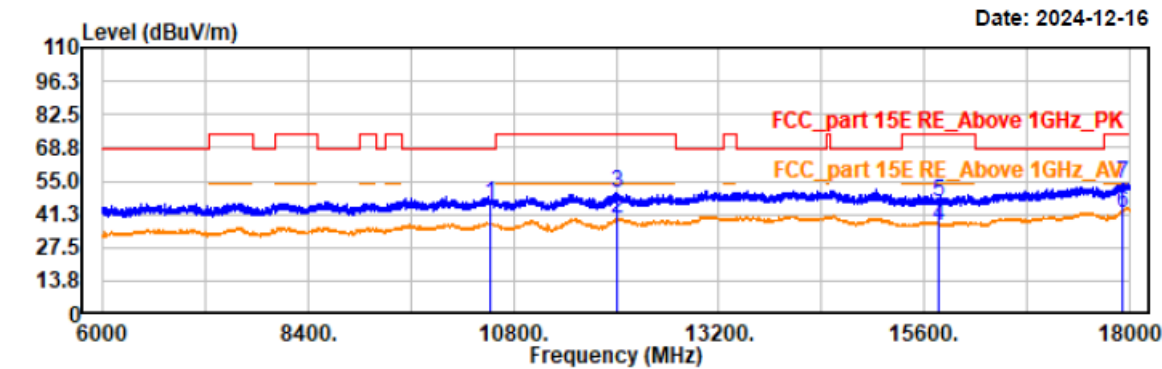


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.00	43.80	1.77	45.57	68.20	22.63	horizontal	Peak
12009.60	34.89	4.23	39.12	54.00	14.88	horizontal	Average
12009.60	45.98	4.23	50.21	74.00	23.79	horizontal	Peak
15780.00	34.38	2.39	36.77	54.00	17.23	horizontal	Average
15780.00	44.26	2.39	46.65	74.00	27.35	horizontal	Peak
17925.60	34.44	7.63	42.07	54.00	11.93	horizontal	Average
17925.60	46.26	7.63	53.89	74.00	20.11	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5260
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

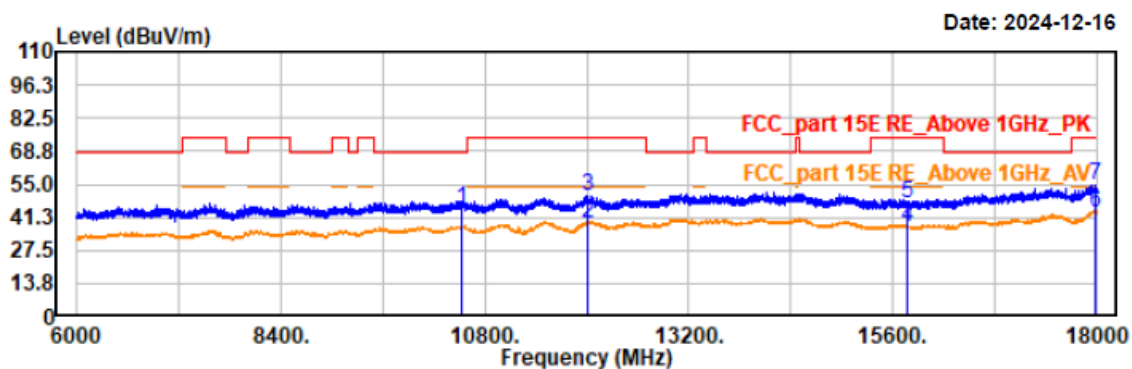

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.00	43.06	1.77	44.83	68.20	23.37	vertical	Peak
12002.40	34.66	4.25	38.91	54.00	15.09	vertical	Average
12002.40	46.18	4.25	50.43	74.00	23.57	vertical	Peak
15780.00	34.89	2.39	37.28	54.00	16.72	vertical	Average
15780.00	44.73	2.39	47.12	74.00	26.88	vertical	Peak
17991.60	35.88	7.72	43.60	54.00	10.40	vertical	Average
17991.60	46.99	7.72	54.71	74.00	19.29	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5280
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

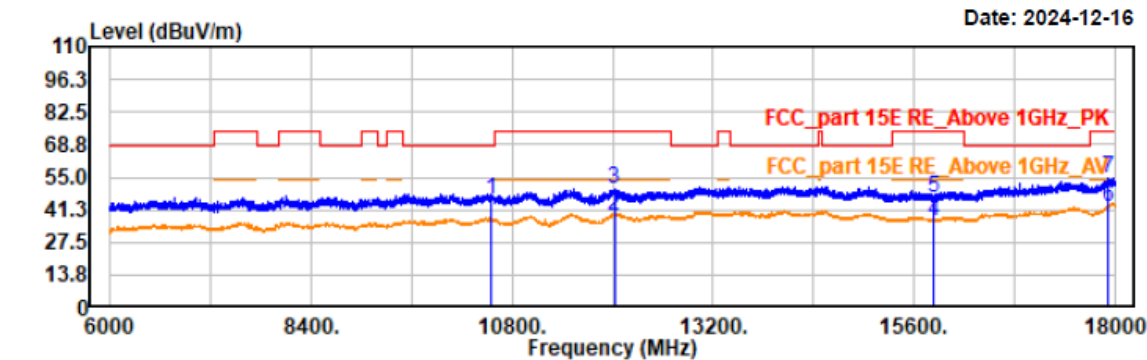

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	44.00	1.83	45.83	68.20	22.37	horizontal	Peak
12021.60	34.67	4.21	38.88	54.00	15.12	horizontal	Average
12021.60	46.00	4.21	50.21	74.00	23.79	horizontal	Peak
15840.00	34.35	2.37	36.72	54.00	17.28	horizontal	Average
15840.00	43.63	2.37	46.00	74.00	28.00	horizontal	Peak
17924.40	34.84	7.62	42.46	54.00	11.54	horizontal	Average
17924.40	46.91	7.62	54.53	74.00	19.47	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5280


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

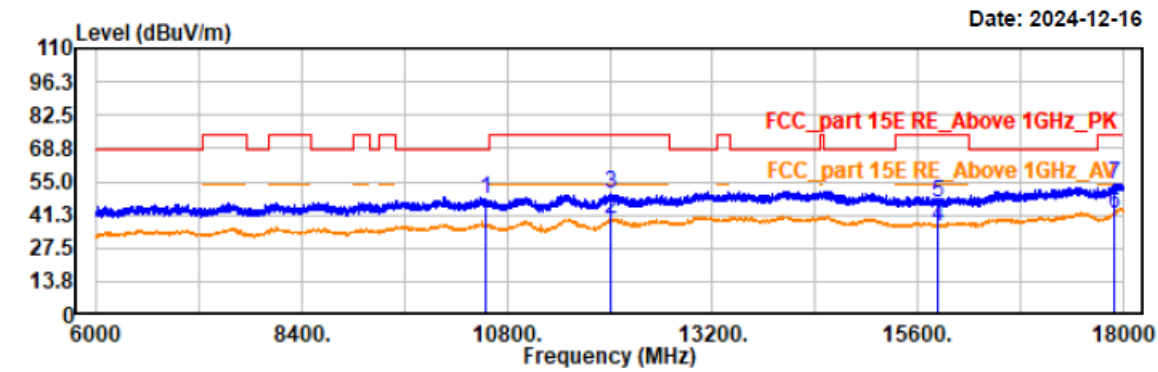

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	45.69	1.83	47.52	68.20	20.68	vertical	Peak
12012.00	34.96	4.23	39.19	54.00	14.81	vertical	Average
12012.00	46.17	4.23	50.40	74.00	23.60	vertical	Peak
15840.00	34.36	2.37	36.73	54.00	17.27	vertical	Average
15840.00	43.82	2.37	46.19	74.00	27.81	vertical	Peak
17888.40	34.30	7.55	41.85	54.00	12.15	vertical	Average
17888.40	46.56	7.55	54.11	74.00	19.89	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5320
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

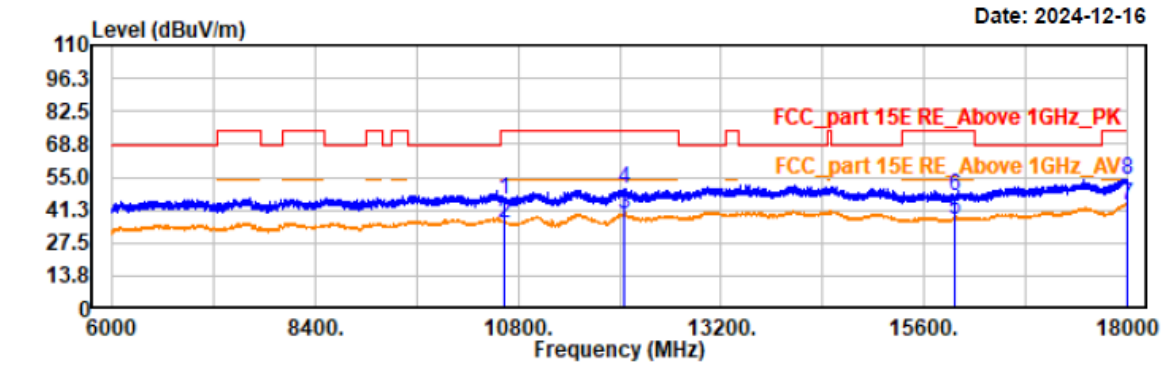


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.00	43.66	1.94	45.60	74.00	28.40	horizontal	Peak
10640.40	33.96	1.94	35.90	54.00	18.10	horizontal	Average
12055.20	35.07	4.15	39.22	54.00	14.78	horizontal	Average
12055.20	46.11	4.15	50.26	74.00	23.74	horizontal	Peak
15960.00	35.01	2.41	37.42	54.00	16.58	horizontal	Average
15960.00	44.32	2.41	46.73	74.00	27.27	horizontal	Peak
17995.20	35.35	7.74	43.09	54.00	10.91	horizontal	Average
17995.20	46.21	7.74	53.95	74.00	20.05	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5320
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

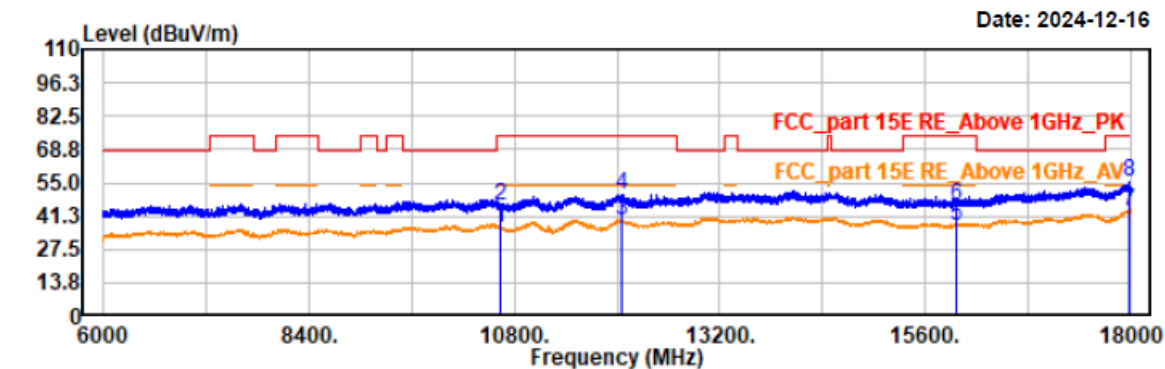


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.00	34.34	1.94	36.28	54.00	17.72	vertical	Average
10640.00	43.57	1.94	45.51	74.00	28.49	vertical	Peak
12062.40	34.95	4.14	39.09	54.00	14.91	vertical	Average
12062.40	46.09	4.14	50.23	74.00	23.77	vertical	Peak
15960.00	35.13	2.41	37.54	54.00	16.46	vertical	Average
15960.00	43.37	2.41	45.78	74.00	28.22	vertical	Peak
17990.40	35.79	7.72	43.51	54.00	10.49	vertical	Average
17990.40	47.65	7.72	55.37	74.00	18.63	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5270
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

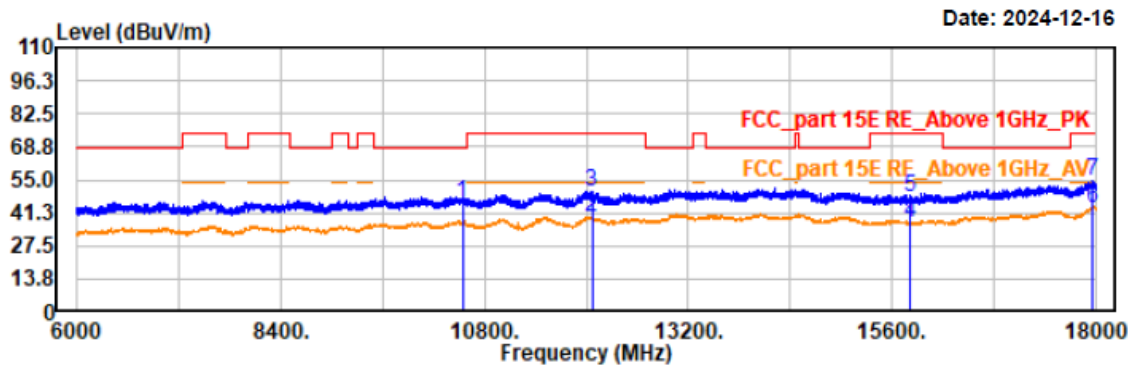


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10539.60	43.55	1.80	45.35	68.20	22.85	horizontal	Peak
12064.80	35.18	4.13	39.31	54.00	14.69	horizontal	Average
12064.80	45.99	4.13	50.12	74.00	23.88	horizontal	Peak
15810.00	34.52	2.38	36.90	54.00	17.10	horizontal	Average
15810.00	45.25	2.38	47.63	74.00	26.37	horizontal	Peak
17955.60	35.57	7.68	43.25	54.00	10.75	horizontal	Average
17955.60	46.57	7.68	54.25	74.00	19.75	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5270
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

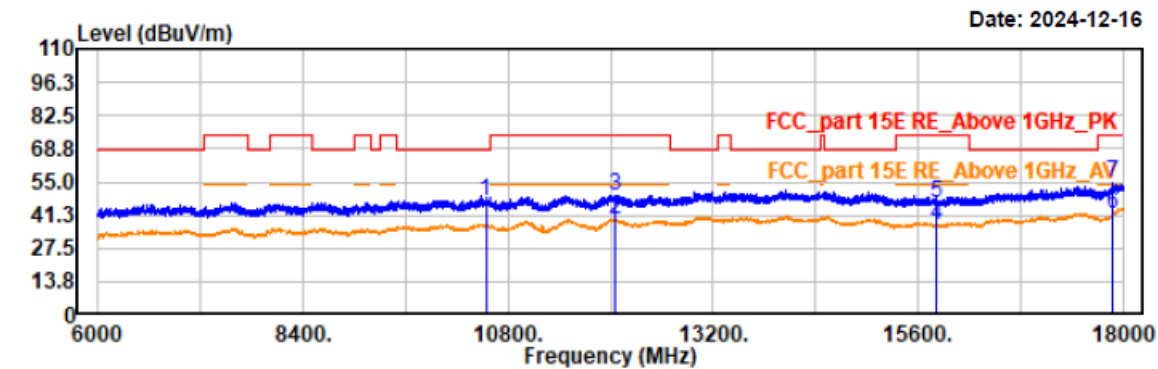


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10540.00	45.03	1.80	46.83	68.20	21.37	vertical	Peak
12062.40	34.98	4.14	39.12	54.00	14.88	vertical	Average
12062.40	45.26	4.14	49.40	74.00	24.60	vertical	Peak
15810.00	34.55	2.38	36.93	54.00	17.07	vertical	Average
15810.00	43.67	2.38	46.05	74.00	27.95	vertical	Peak
17880.00	34.22	7.51	41.73	54.00	12.27	vertical	Average
17880.00	46.85	7.51	54.36	74.00	19.64	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5310
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

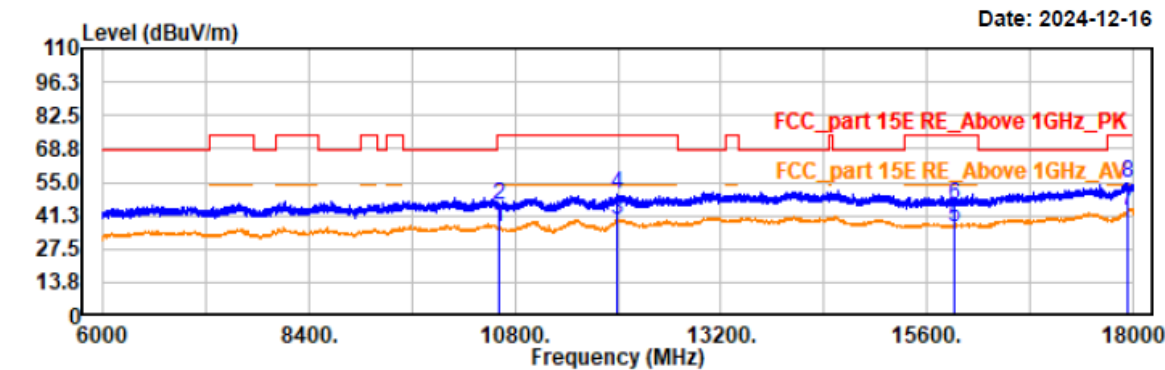


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10620.00	34.77	1.91	36.68	54.00	17.32	horizontal	Average
10620.00	43.96	1.91	45.87	74.00	28.13	horizontal	Peak
11995.20	35.06	4.24	39.30	54.00	14.70	horizontal	Average
11995.20	45.56	4.24	49.80	74.00	24.20	horizontal	Peak
15930.00	33.95	2.38	36.33	54.00	17.67	horizontal	Average
15930.00	43.37	2.38	45.75	74.00	28.25	horizontal	Peak
17948.40	35.57	7.66	43.23	54.00	10.77	horizontal	Average
17948.40	46.90	7.66	54.56	74.00	19.44	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5310
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

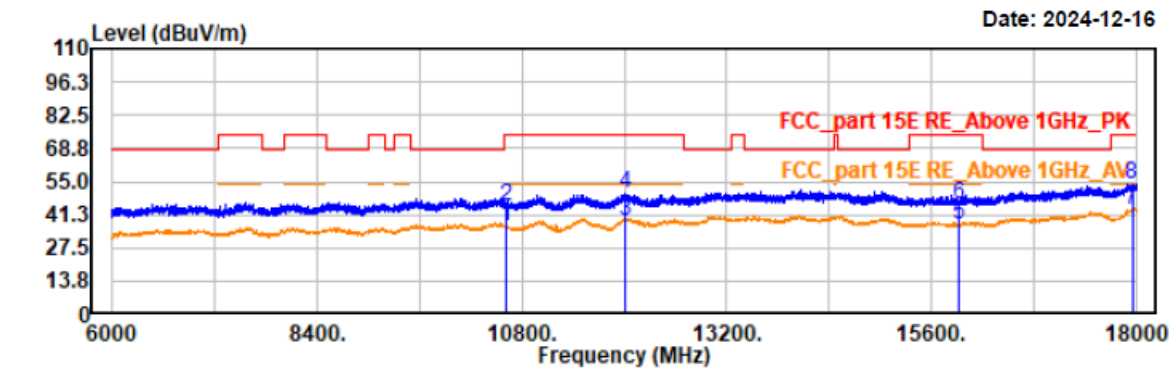


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10620.00	34.23	1.91	36.14	54.00	17.86	vertical	Average
10620.00	42.92	1.91	44.83	74.00	29.17	vertical	Peak
12004.80	34.68	4.24	38.92	54.00	15.08	vertical	Average
12004.80	45.50	4.24	49.74	74.00	24.26	vertical	Peak
15930.00	34.61	2.38	36.99	54.00	17.01	vertical	Average
15930.00	42.98	2.38	45.36	74.00	28.64	vertical	Peak
17950.80	35.47	7.67	43.14	54.00	10.86	vertical	Average
17950.80	46.13	7.67	53.80	74.00	20.20	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5290
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

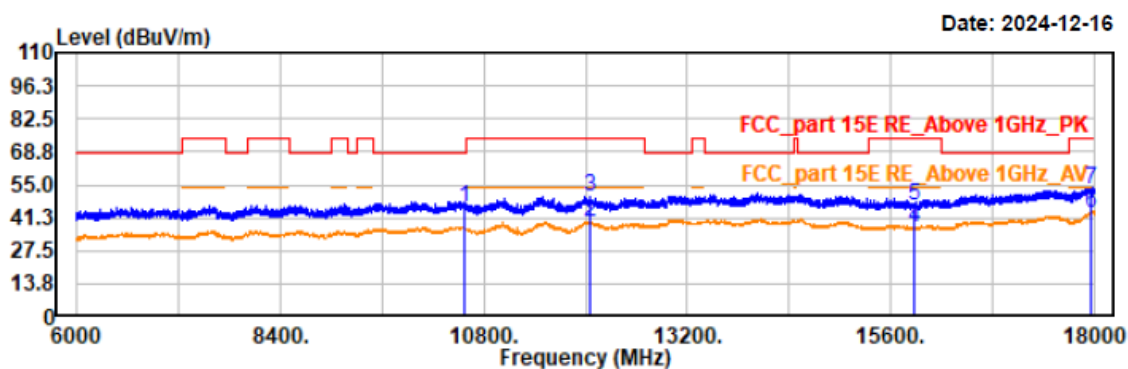

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10580.40	44.02	1.85	45.87	68.20	22.33	horizontal	Peak
12054.00	35.29	4.15	39.44	54.00	14.56	horizontal	Average
12054.00	46.02	4.15	50.17	74.00	23.83	horizontal	Peak
15870.00	34.53	2.34	36.87	54.00	17.13	horizontal	Average
15870.00	44.14	2.34	46.48	74.00	27.52	horizontal	Peak
17954.40	35.74	7.67	43.41	54.00	10.59	horizontal	Average
17954.40	45.73	7.67	53.40	74.00	20.60	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5290
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

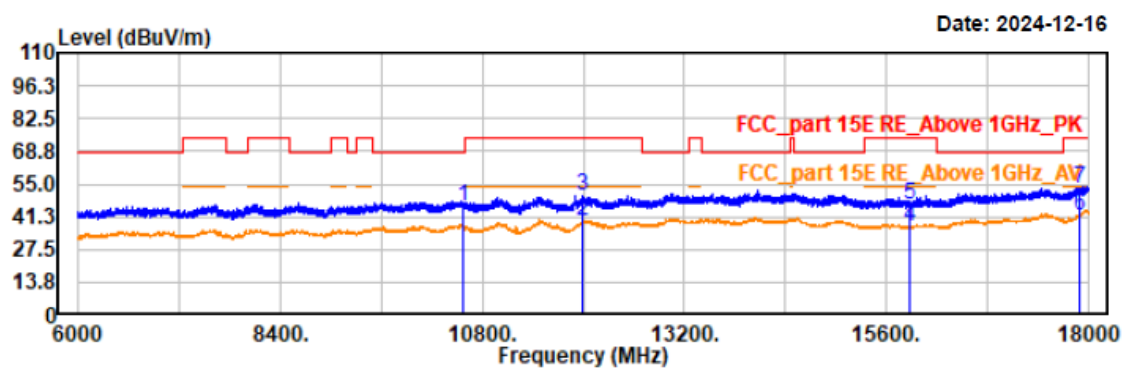

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto


AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10580.00	43.52	1.85	45.37	68.20	22.83	vertical	Peak
11998.80	35.05	4.25	39.30	54.00	14.70	vertical	Average
11998.80	46.08	4.25	50.33	74.00	23.67	vertical	Peak
15870.00	34.58	2.34	36.92	54.00	17.08	vertical	Average
15870.00	44.07	2.34	46.41	74.00	27.59	vertical	Peak
17899.20	34.36	7.59	41.95	54.00	12.05	vertical	Average
17899.20	45.69	7.59	53.28	74.00	20.72	vertical	Peak

B3

Project No.: 2407V20721E-RF
Test Mode: 11a-5500
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

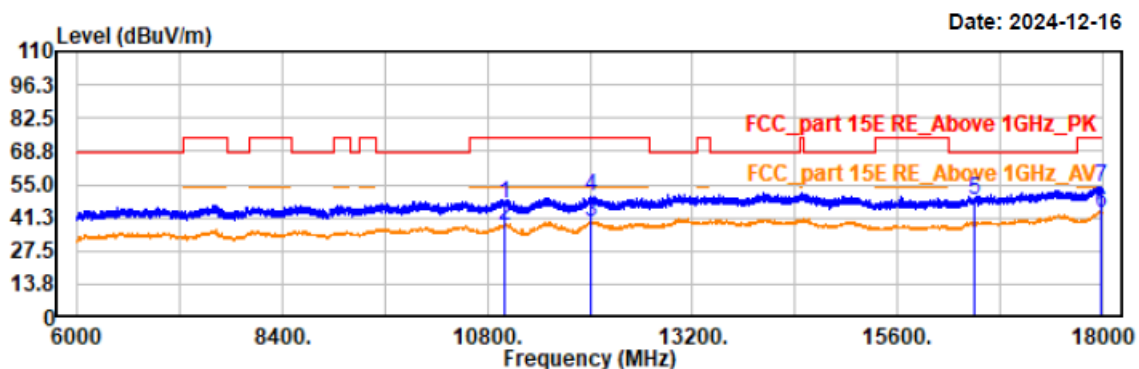

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.00	44.47	2.54	47.01	74.00	26.99	horizontal	Peak
11000.40	35.48	2.54	38.02	54.00	15.98	horizontal	Average
12003.60	35.12	4.24	39.36	54.00	14.64	horizontal	Average
12003.60	45.76	4.24	50.00	74.00	24.00	horizontal	Peak
16500.00	44.97	3.50	48.47	68.20	19.73	horizontal	Peak
17980.80	35.64	7.71	43.35	54.00	10.65	horizontal	Average
17980.80	46.44	7.71	54.15	74.00	19.85	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5500
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

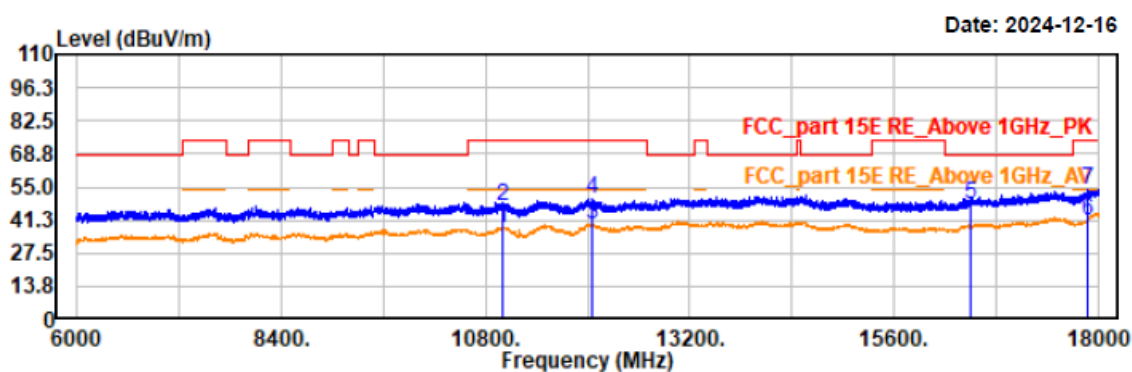

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.40	35.23	2.54	37.77	54.00	16.23	vertical	Average
11000.40	44.36	2.54	46.90	74.00	27.10	vertical	Peak
12058.80	34.98	4.14	39.12	54.00	14.88	vertical	Average
12058.80	45.97	4.14	50.11	74.00	23.89	vertical	Peak
16500.00	44.64	3.50	48.14	68.20	20.06	vertical	Peak
17866.80	33.56	7.47	41.03	54.00	12.97	vertical	Average
17866.80	46.49	7.47	53.96	74.00	20.04	vertical	Peak