


Project No.: 2407V20721E-RF
Test Mode: 11n20 5825
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

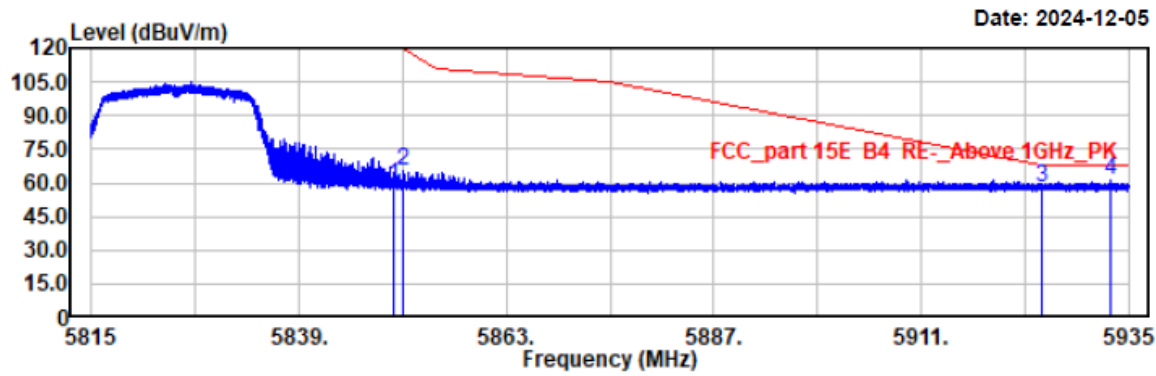


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.00	44.88	13.65	58.53	122.19	63.66	horizontal	Peak
5851.06	52.06	13.65	65.71	119.78	54.07	horizontal	Peak
5925.00	44.48	13.75	58.23	68.20	9.97	horizontal	Peak
5932.84	47.41	13.78	61.19	68.20	7.01	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5825
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

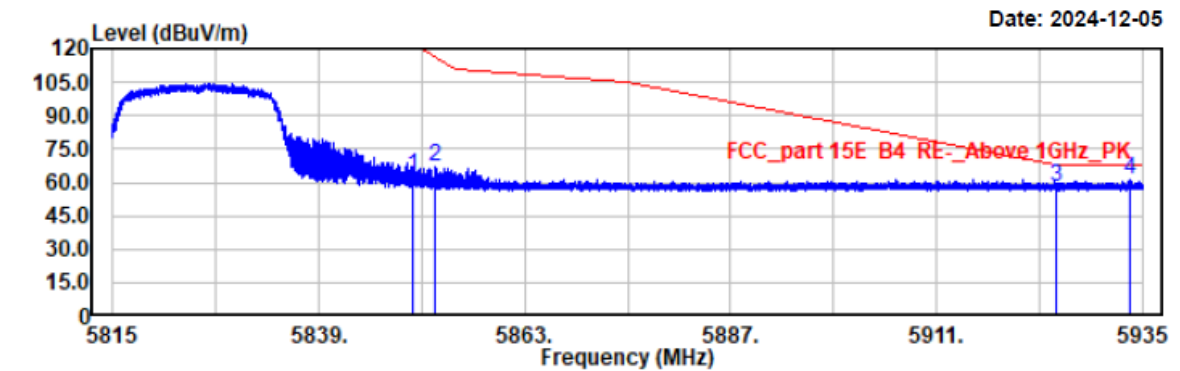


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.00	49.58	13.65	63.23	122.19	58.96	vertical	Peak
5852.62	53.10	13.65	66.75	116.23	49.48	vertical	Peak
5925.00	43.97	13.75	57.72	68.20	10.48	vertical	Peak
5933.60	47.21	13.79	61.00	68.20	7.20	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5755
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

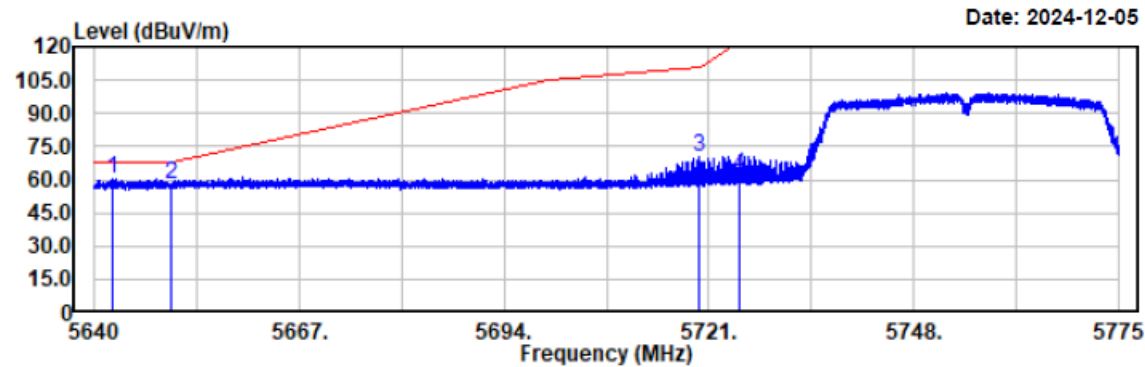


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5642.30	46.85	13.27	60.12	68.20	8.08	horizontal	Peak
5650.00	44.36	13.28	57.64	68.20	10.56	horizontal	Peak
5719.61	56.55	13.44	69.99	110.69	40.70	horizontal	Peak
5725.00	48.99	13.45	62.44	122.19	59.75	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5755
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

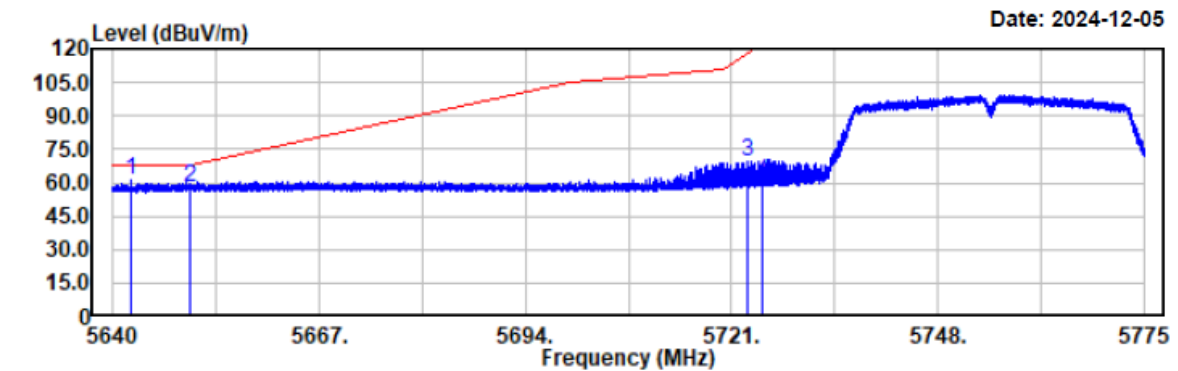


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5642.27	47.74	13.27	61.01	68.20	7.19	vertical	Peak
5650.00	45.06	13.28	58.34	68.20	9.86	vertical	Peak
5722.98	55.97	13.45	69.42	117.60	48.18	vertical	Peak
5725.00	46.67	13.45	60.12	122.19	62.07	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5795
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

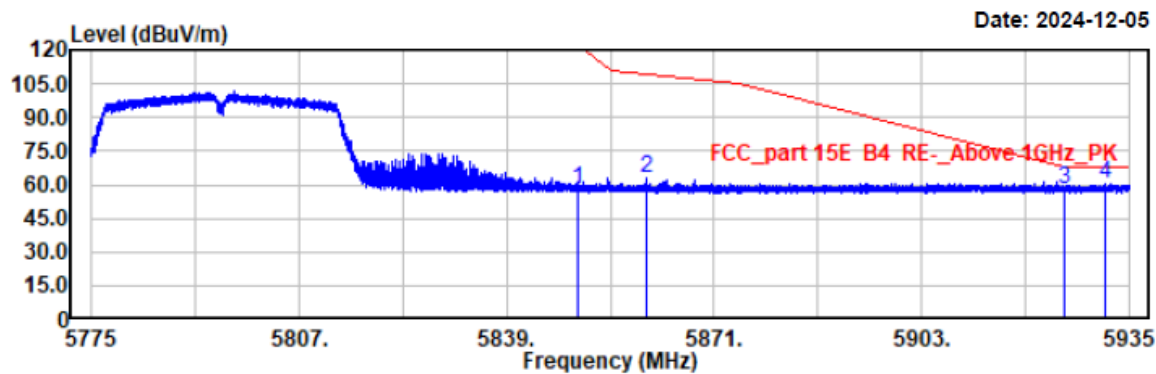


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.01	43.90	13.65	57.55	122.18	64.63	horizontal	Peak
5860.71	49.35	13.65	63.00	109.20	46.20	horizontal	Peak
5925.00	44.56	13.75	58.31	68.20	9.89	horizontal	Peak
5931.43	46.49	13.77	60.26	68.20	7.94	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5795
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

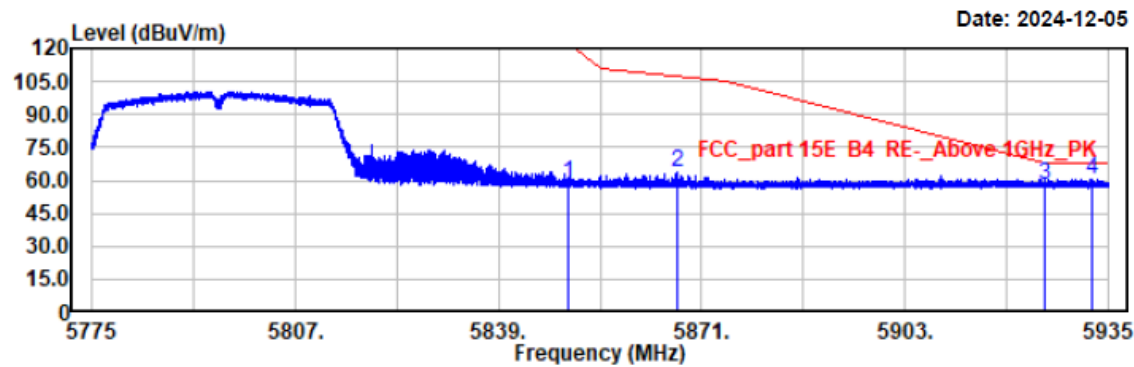


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.01	45.15	13.65	58.80	122.18	63.38	vertical	Peak
5867.16	50.36	13.66	64.02	107.40	43.38	vertical	Peak
5925.00	44.38	13.75	58.13	68.20	10.07	vertical	Peak
5932.42	46.81	13.77	60.58	68.20	7.62	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5775
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

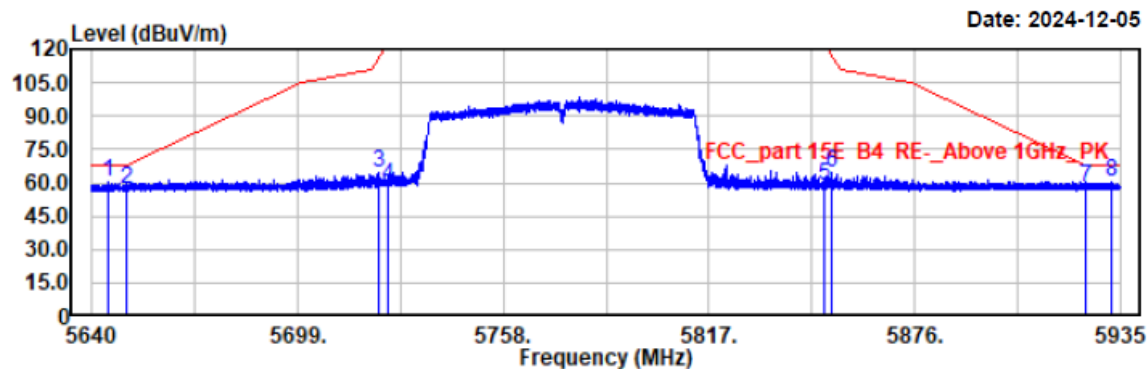


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5644.72	47.11	13.28	60.39	68.20	7.81	horizontal	Peak
5650.00	44.09	13.28	57.37	68.20	10.83	horizontal	Peak
5722.28	50.74	13.44	64.18	115.99	51.81	horizontal	Peak
5724.99	45.45	13.45	58.90	122.18	63.28	horizontal	Peak
5850.00	44.90	13.65	58.55	122.20	63.65	horizontal	Peak
5852.37	50.83	13.65	64.48	116.80	52.32	horizontal	Peak
5925.00	44.37	13.75	58.12	68.20	10.08	horizontal	Peak
5932.49	46.24	13.77	60.01	68.20	8.19	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5775
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

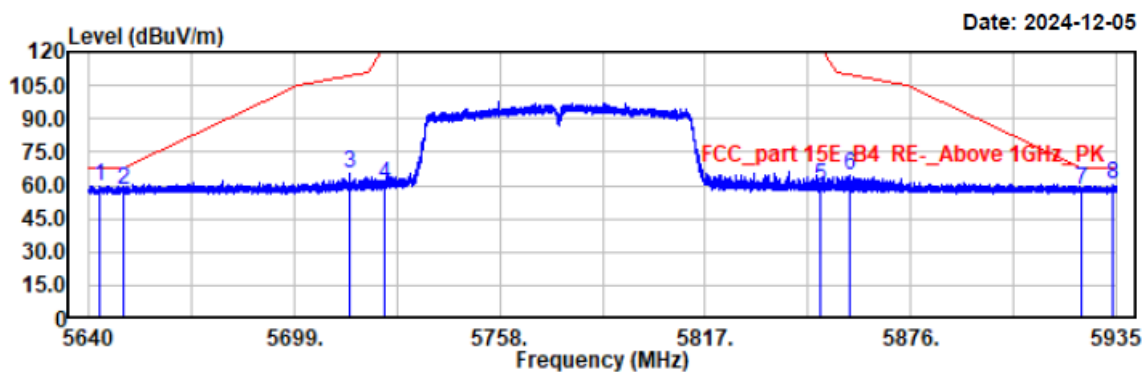

Condition: PK RBW:1MHz VBW:3MHz SWT:auto


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5643.25	46.62	13.27	59.89	68.20	8.31	vertical	Peak
5650.00	44.84	13.28	58.12	68.20	10.08	vertical	Peak
5714.75	52.02	13.43	65.45	109.33	43.88	vertical	Peak
5724.99	46.83	13.45	60.28	122.18	61.90	vertical	Peak
5850.00	45.54	13.65	59.19	122.20	63.01	vertical	Peak
5858.54	50.98	13.66	64.64	109.81	45.17	vertical	Peak
5925.00	44.57	13.75	58.32	68.20	9.88	vertical	Peak
5934.06	46.23	13.79	60.02	68.20	8.18	vertical	Peak

EUT Model: NLS-NQuire700

B1

Project No.: 2407V20721E-RF
Test Mode: 11a 5180
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

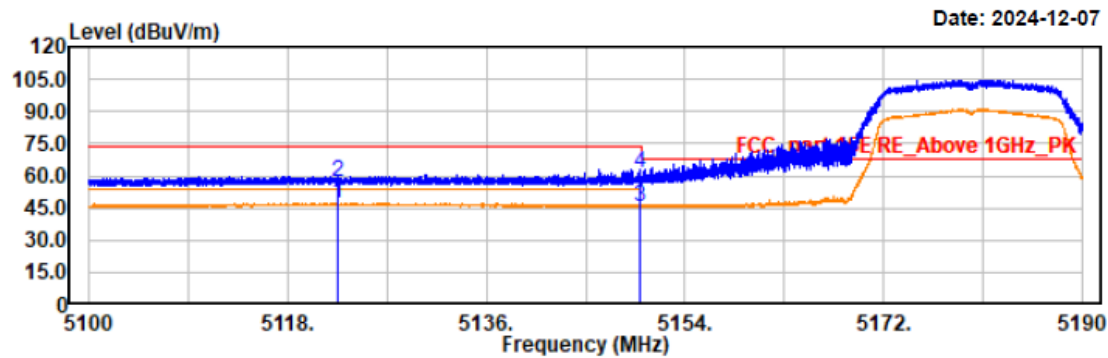


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5122.50	34.99	12.26	47.25	54.00	6.75	horizontal	Average
5122.50	44.63	12.26	56.89	74.00	17.11	horizontal	Peak
5149.99	33.56	12.32	45.88	54.00	8.12	horizontal	Average
5149.99	48.62	12.32	60.94	74.00	13.06	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5180
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

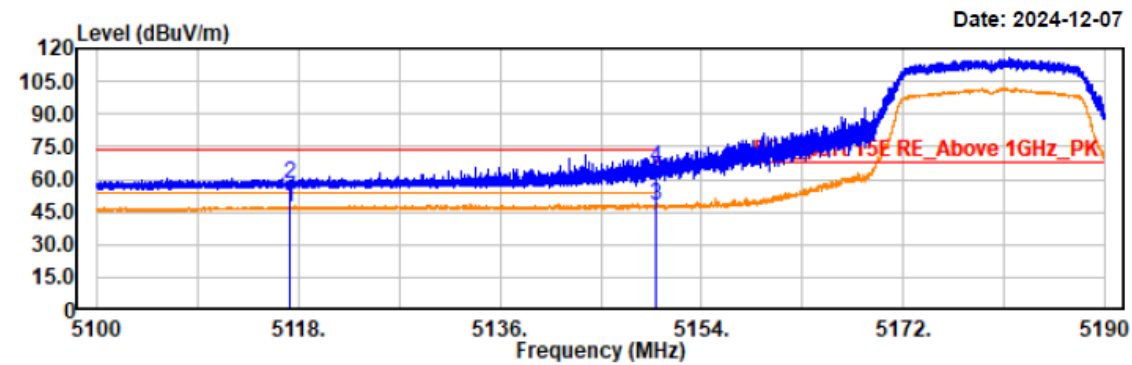

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5117.25	34.80	12.25	47.05	54.00	6.95	vertical	Average
5117.25	46.07	12.25	58.32	74.00	15.68	vertical	Peak
5149.99	35.44	12.32	47.76	54.00	6.24	vertical	Average
5149.99	53.40	12.32	65.72	74.00	8.28	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a 5240


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

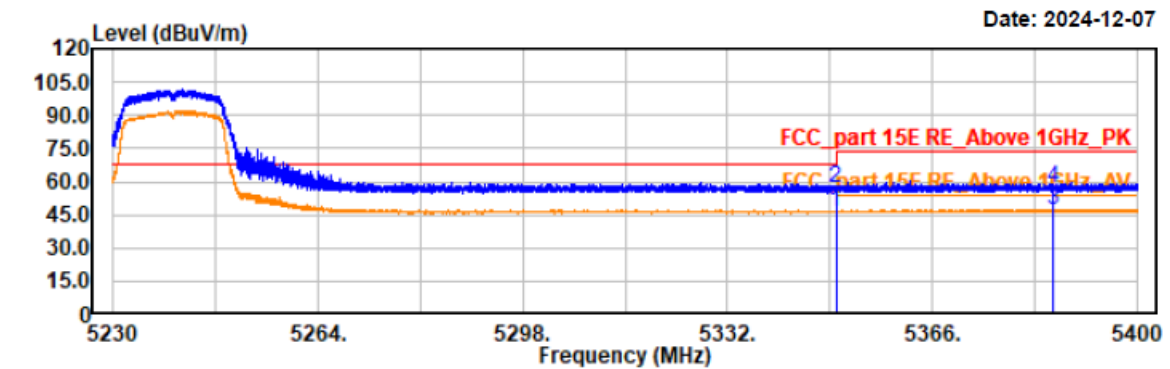

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	33.83	12.75	46.58	54.00	7.42	horizontal	Average
5350.00	44.22	12.75	56.97	74.00	17.03	horizontal	Peak
5385.94	34.44	12.82	47.26	54.00	6.74	horizontal	Average
5385.94	44.02	12.82	56.84	74.00	17.16	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5240
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

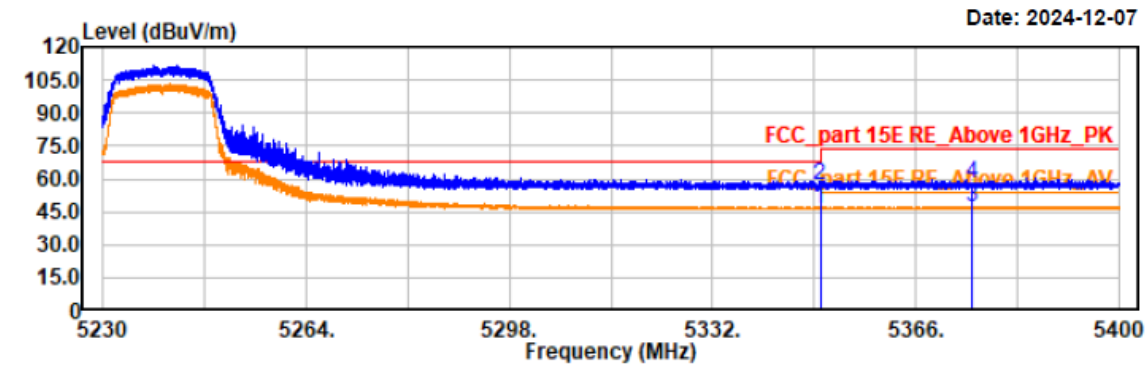


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	33.66	12.75	46.41	54.00	7.59	vertical	Average
5350.00	44.53	12.75	57.28	74.00	16.72	vertical	Peak
5375.40	34.72	12.80	47.52	54.00	6.48	vertical	Average
5375.40	44.99	12.80	57.79	74.00	16.21	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5180
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

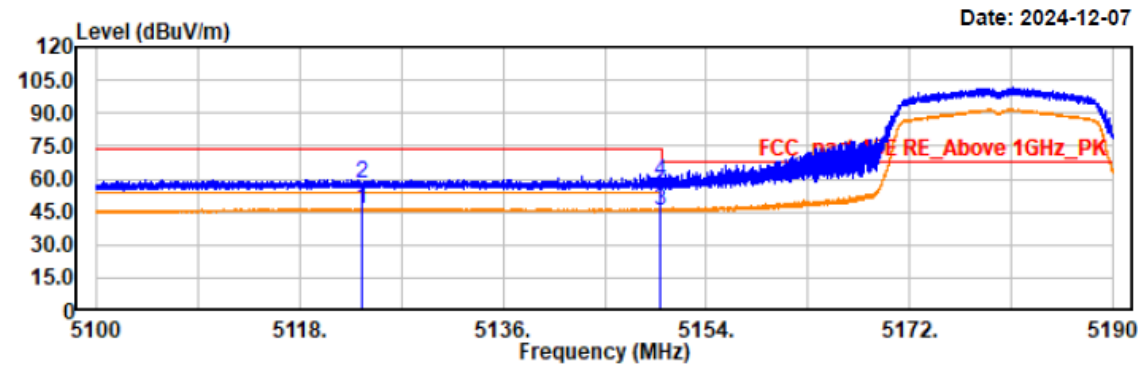

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5123.45	34.28	12.27	46.55	54.00	7.45	horizontal	Average
5123.45	45.50	12.27	57.77	74.00	16.23	horizontal	Peak
5149.99	33.50	12.32	45.82	54.00	8.18	horizontal	Average
5149.99	46.64	12.32	58.96	74.00	15.04	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20 5180


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

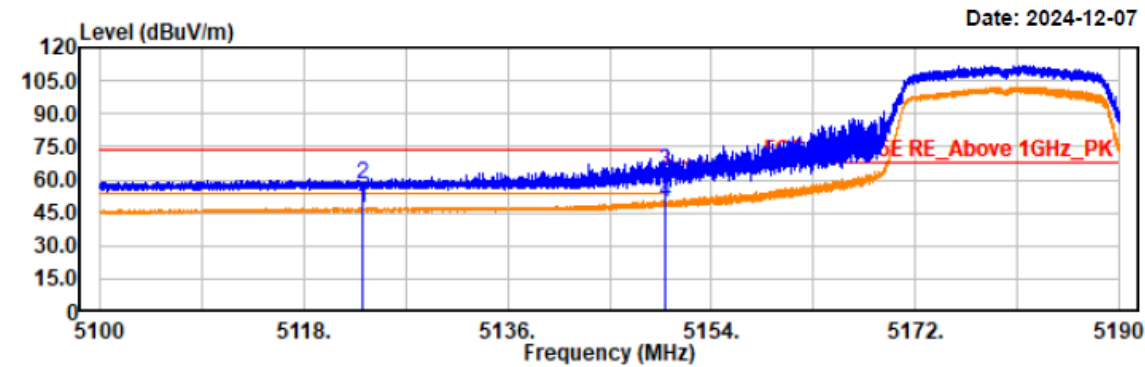


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5123.21	35.17	12.27	47.44	54.00	6.56	vertical	Average
5123.21	45.46	12.27	57.73	74.00	16.27	vertical	Peak
5149.99	51.25	12.32	63.57	74.00	10.43	vertical	Peak
5149.99	37.09	12.32	49.41	54.00	4.59	vertical	Average

Project No.: 2407V20721E-RF
Test Mode: 11n20 5240
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

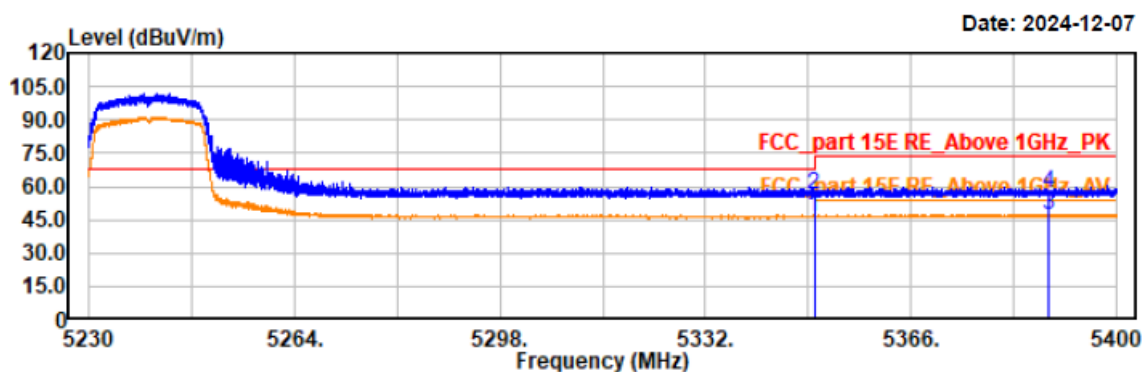

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	33.44	12.75	46.19	54.00	7.81	horizontal	Average
5350.00	43.66	12.75	56.41	74.00	17.59	horizontal	Peak
5388.75	34.50	12.83	47.33	54.00	6.67	horizontal	Average
5388.75	43.93	12.83	56.76	74.00	17.24	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20 5240


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

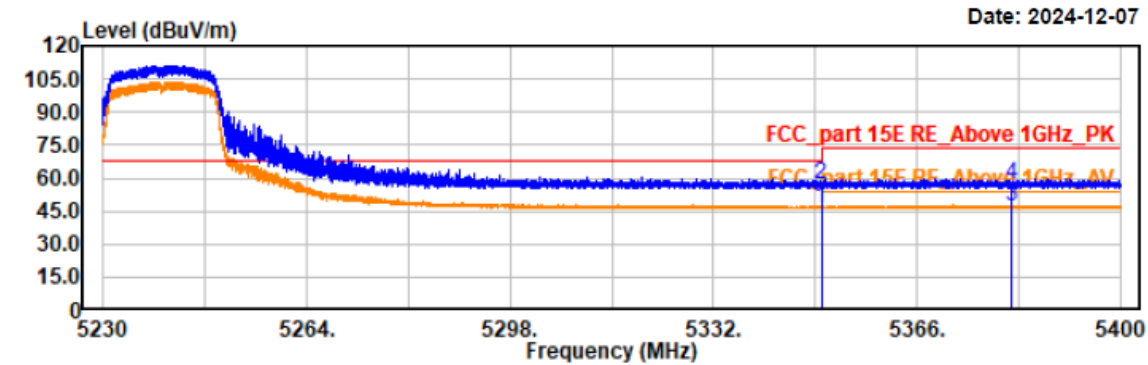

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	33.64	12.75	46.39	54.00	7.61	vertical	Average
5350.00	44.47	12.75	57.22	74.00	16.78	vertical	Peak
5381.91	34.49	12.81	47.30	54.00	6.70	vertical	Average
5381.91	44.25	12.81	57.06	74.00	16.94	vertical	Peak


Project No.: 2407V20721E-RF
Test Mode: 11n40 5190
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

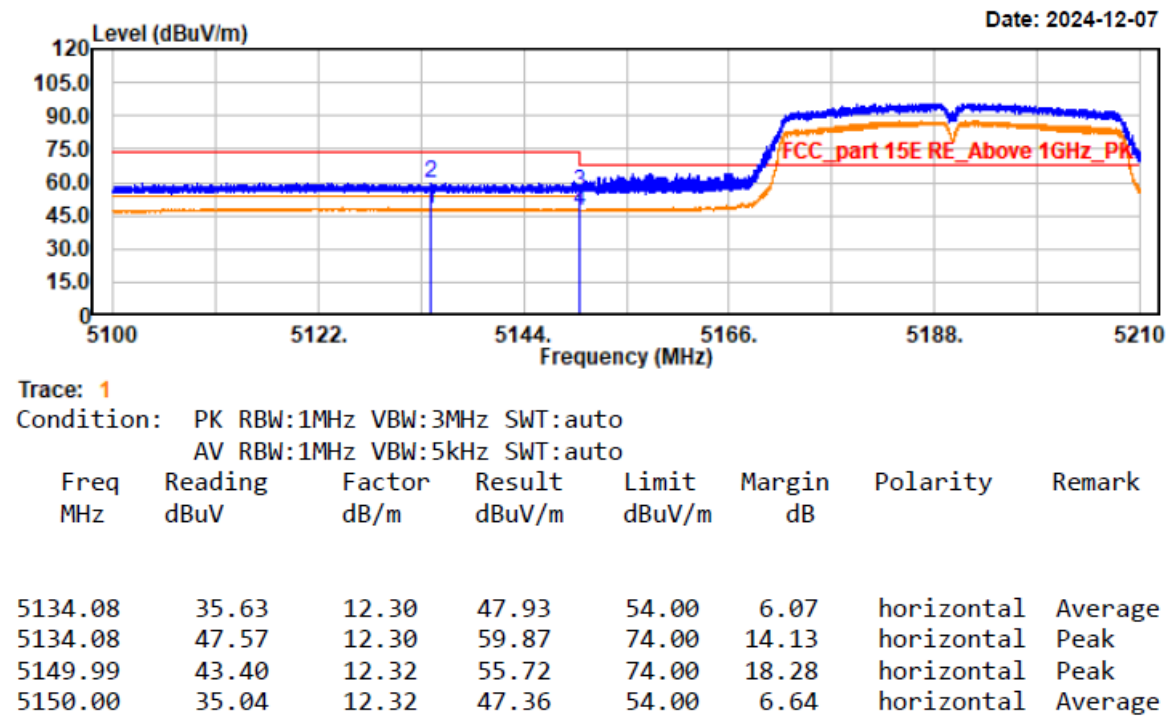

Project No.: 2407V20721E-RF
Test Mode: 11n40 5190
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

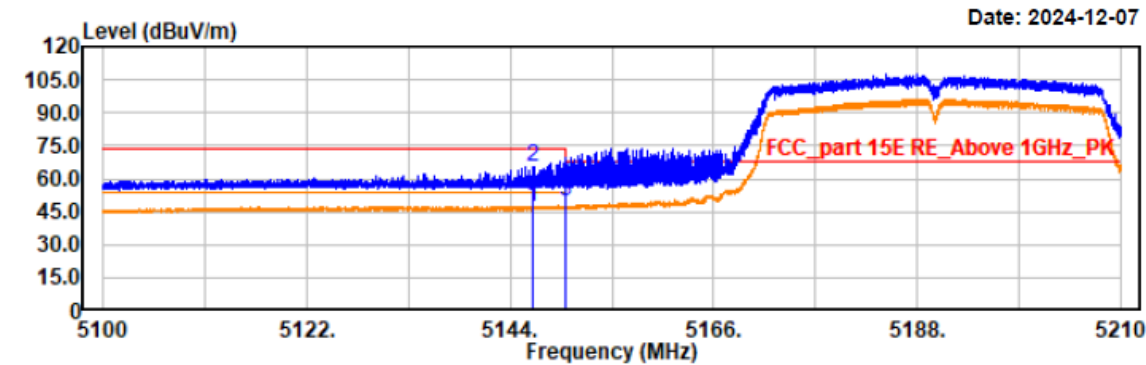


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5146.40	34.84	12.31	47.15	54.00	6.85	vertical	Average
5146.40	53.37	12.31	65.68	74.00	8.32	vertical	Peak
5150.00	37.37	12.32	49.69	54.00	4.31	vertical	Average
5150.00	44.65	12.32	56.97	74.00	17.03	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5230
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

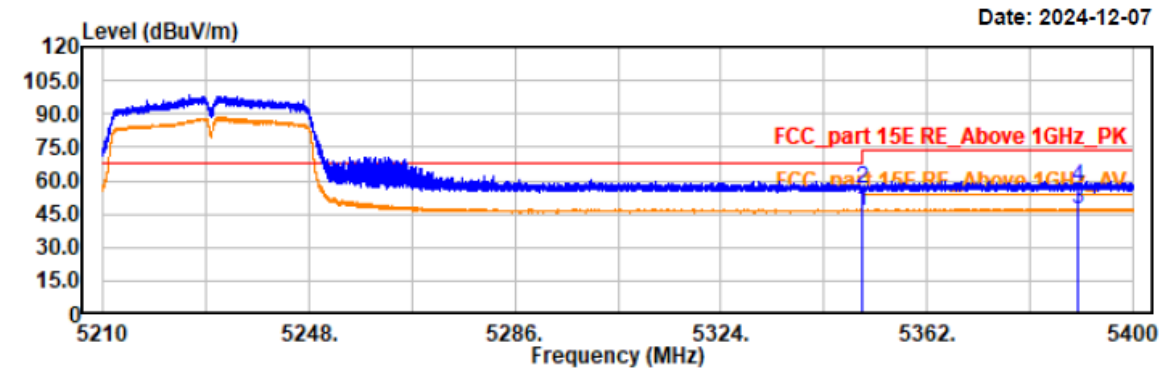

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	33.48	12.75	46.23	54.00	7.77	horizontal	Average
5350.01	43.39	12.75	56.14	74.00	17.86	horizontal	Peak
5389.91	34.42	12.83	47.25	54.00	6.75	horizontal	Average
5389.91	44.30	12.83	57.13	74.00	16.87	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40 5230


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

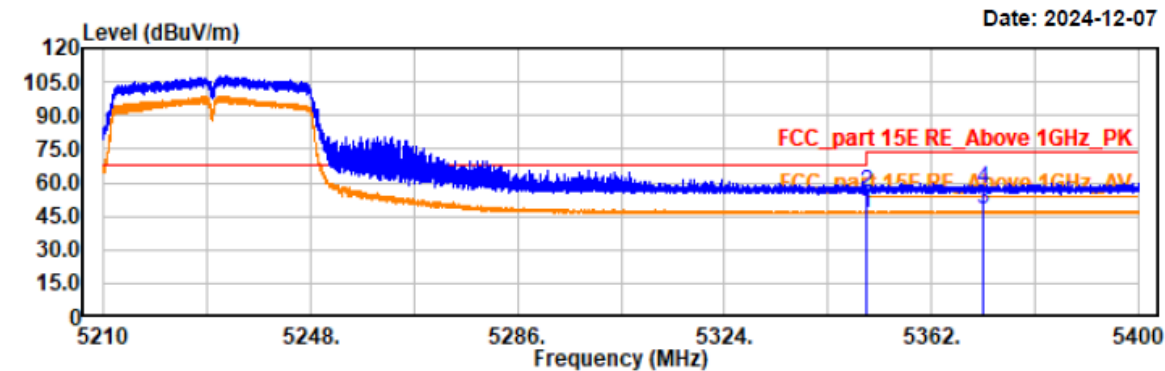

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.01	33.81	12.75	46.56	54.00	7.44	vertical	Average
5350.01	42.91	12.75	55.66	74.00	18.34	vertical	Peak
5371.58	34.81	12.79	47.60	54.00	6.40	vertical	Average
5371.58	44.35	12.79	57.14	74.00	16.86	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5210
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

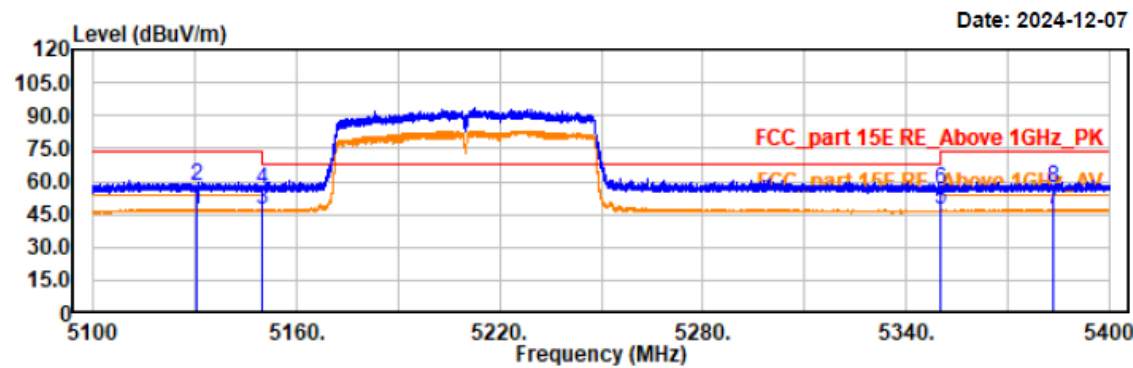

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5130.51	35.14	12.28	47.42	54.00	6.58	horizontal	Average
5130.51	45.39	12.28	57.67	74.00	16.33	horizontal	Peak
5149.99	34.46	12.32	46.78	54.00	7.22	horizontal	Average
5149.99	43.72	12.32	56.04	74.00	17.96	horizontal	Peak
5350.00	34.59	12.75	47.34	54.00	6.66	horizontal	Average
5350.00	43.60	12.75	56.35	74.00	17.65	horizontal	Peak
5383.65	34.34	12.82	47.16	54.00	6.84	horizontal	Average
5383.65	44.69	12.82	57.51	74.00	16.49	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11ac80 5210


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

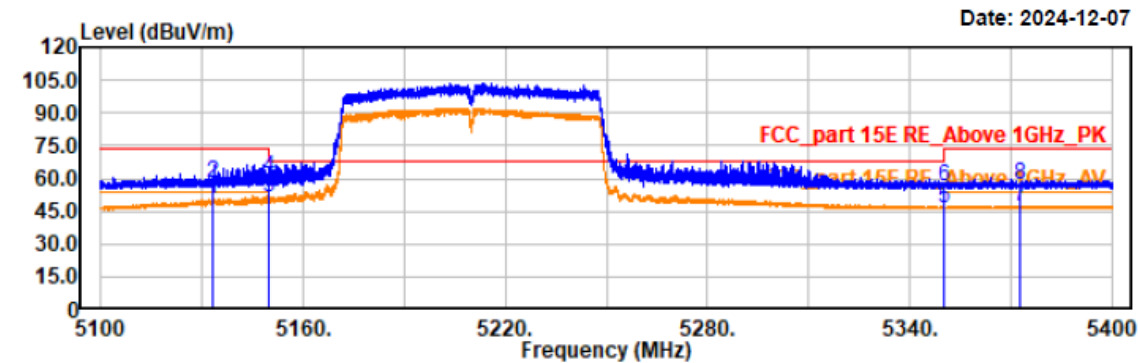

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5133.42	38.32	12.30	50.62	54.00	3.38	vertical	Average
5133.42	45.99	12.30	58.29	74.00	15.71	vertical	Peak
5149.98	38.85	12.32	51.17	54.00	2.83	vertical	Average
5149.98	47.74	12.32	60.06	74.00	13.94	vertical	Peak
5350.00	33.54	12.75	46.29	54.00	7.71	vertical	Average
5350.00	43.61	12.75	56.36	74.00	17.64	vertical	Peak
5372.58	34.59	12.80	47.39	54.00	6.61	vertical	Average
5372.58	44.49	12.80	57.29	74.00	16.71	vertical	Peak

B2

Project No.: 2407V20721E-RF
Test Mode: 11a 5260
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

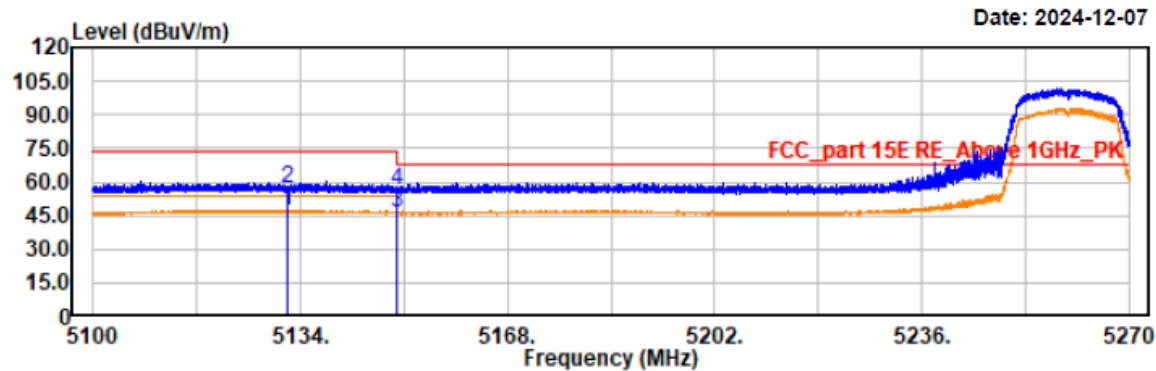


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5131.82	35.10	12.28	47.38	54.00	6.62	horizontal	Average
5131.82	44.62	12.28	56.90	74.00	17.10	horizontal	Peak
5149.99	33.88	12.32	46.20	54.00	7.80	horizontal	Average
5149.99	44.02	12.32	56.34	74.00	17.66	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5260
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

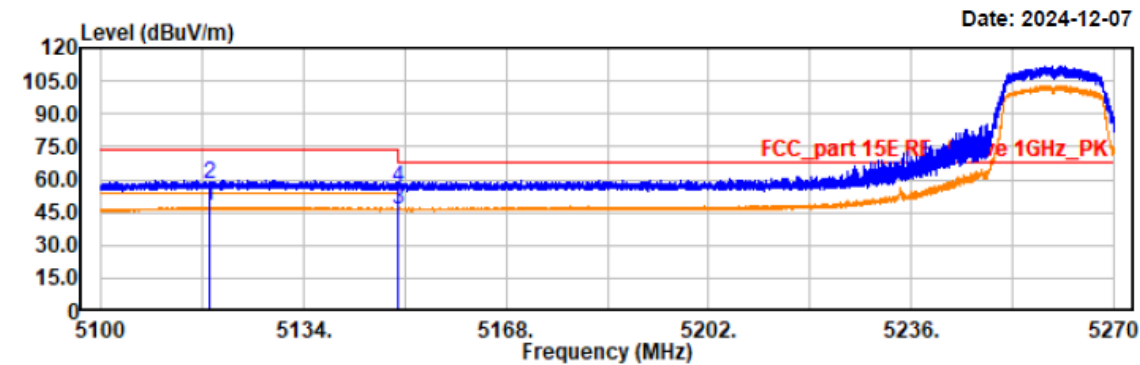


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5118.14	35.41	12.26	47.67	54.00	6.33	vertical	Average
5118.14	45.56	12.26	57.82	74.00	16.18	vertical	Peak
5150.00	33.99	12.32	46.31	54.00	7.69	vertical	Average
5150.00	43.90	12.32	56.22	74.00	17.78	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5320
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

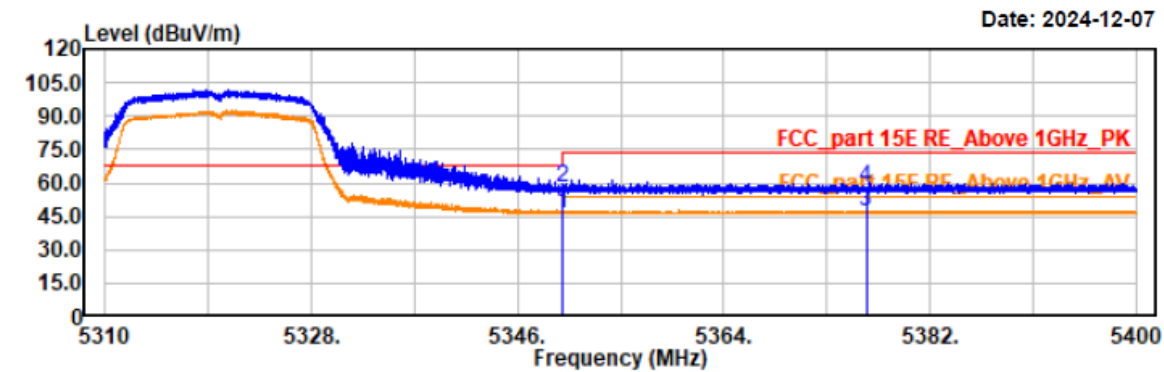


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.01	33.64	12.75	46.39	54.00	7.61	horizontal	Average
5350.01	45.27	12.75	58.02	74.00	15.98	horizontal	Peak
5376.43	34.47	12.80	47.27	54.00	6.73	horizontal	Average
5376.43	44.78	12.80	57.58	74.00	16.42	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5320
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

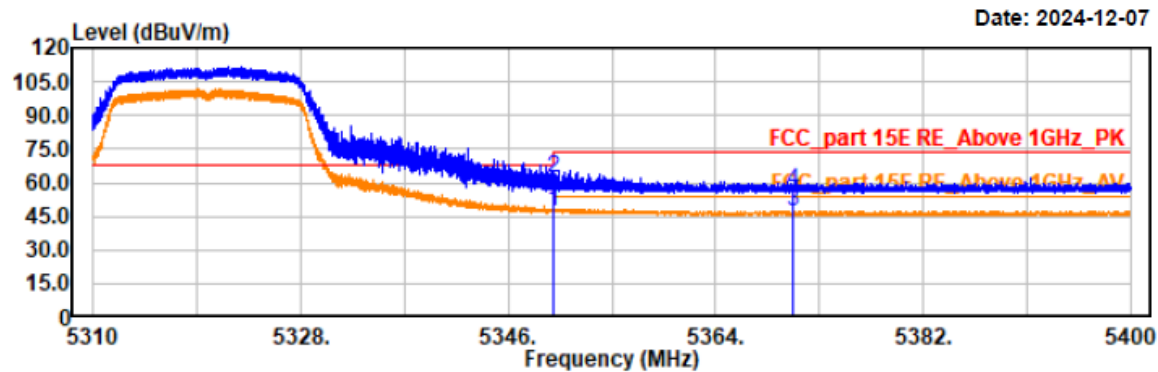


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	34.42	12.75	47.17	54.00	6.83	vertical	Average
5350.01	49.30	12.75	62.05	74.00	11.95	vertical	Peak
5370.73	34.68	12.79	47.47	54.00	6.53	vertical	Average
5370.73	43.63	12.79	56.42	74.00	17.58	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5260
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

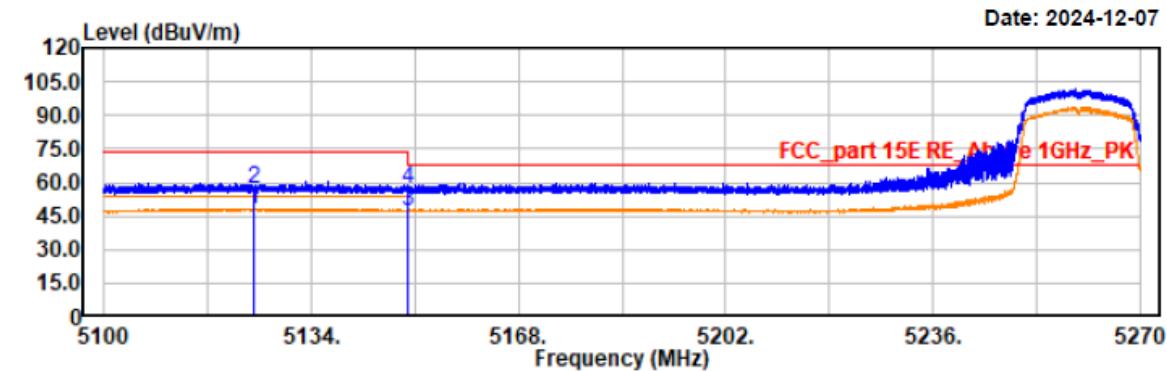


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5124.48	36.05	12.27	48.32	54.00	5.68	horizontal	Average
5124.48	45.07	12.27	57.34	74.00	16.66	horizontal	Peak
5149.99	35.10	12.32	47.42	54.00	6.58	horizontal	Average
5150.00	45.16	12.32	57.48	74.00	16.52	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5260
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

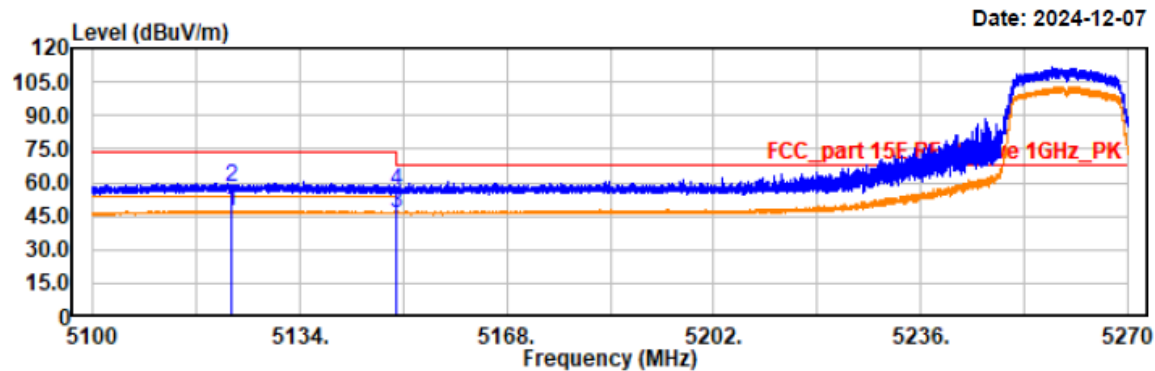


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5122.87	35.27	12.27	47.54	54.00	6.46	vertical	Average
5122.87	45.28	12.27	57.55	74.00	16.45	vertical	Peak
5149.99	34.01	12.32	46.33	54.00	7.67	vertical	Average
5150.00	43.66	12.32	55.98	74.00	18.02	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5320
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

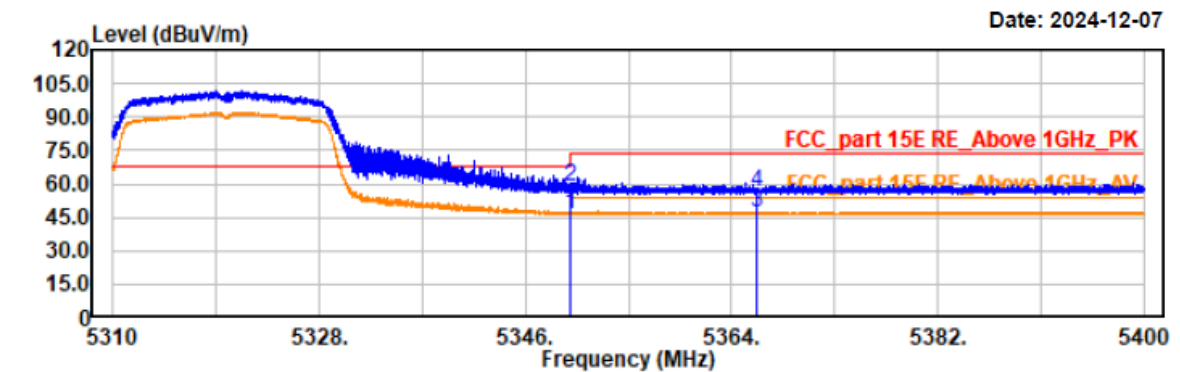


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	34.00	12.75	46.75	54.00	7.25	horizontal	Average
5350.01	45.63	12.75	58.38	74.00	15.62	horizontal	Peak
5366.27	34.59	12.77	47.36	54.00	6.64	horizontal	Average
5366.27	43.18	12.77	55.95	74.00	18.05	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5320
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

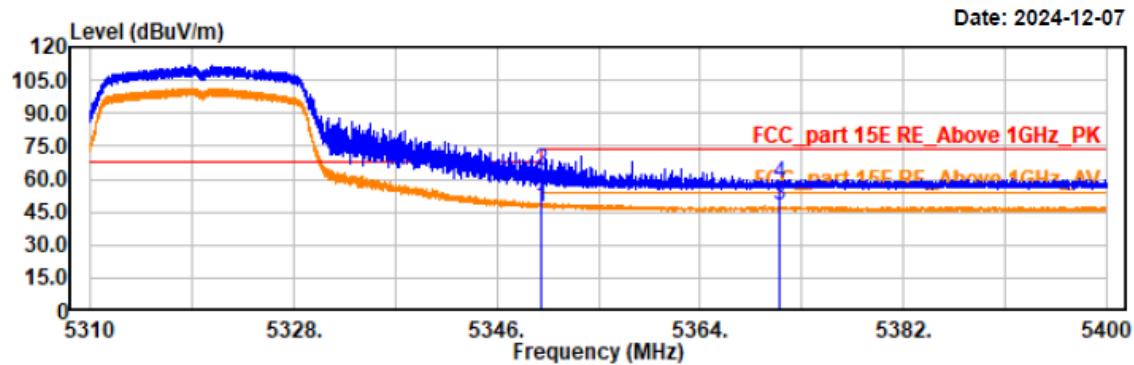


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	34.06	12.75	46.81	54.00	7.19	vertical	Average
5350.01	51.25	12.75	64.00	74.00	10.00	vertical	Peak
5371.05	35.03	12.79	47.82	54.00	6.18	vertical	Average
5371.05	45.02	12.79	57.81	74.00	16.19	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5270
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

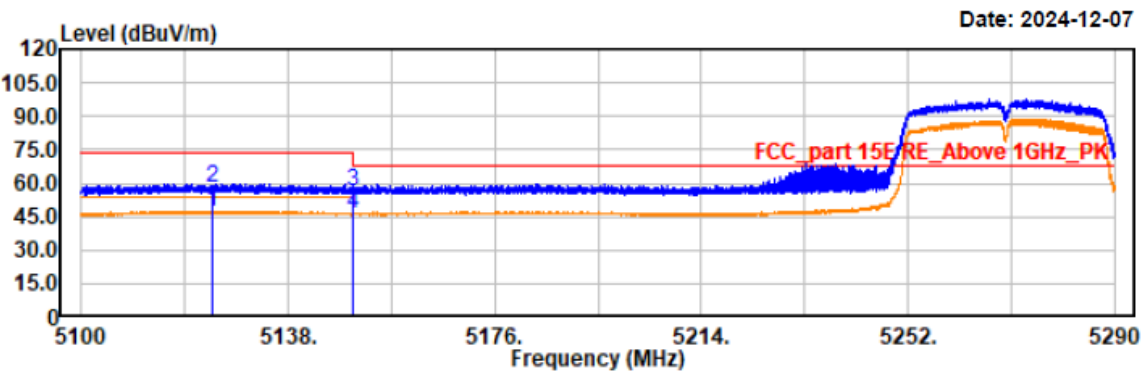


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5124.11	35.28	12.27	47.55	54.00	6.45	horizontal	Average
5124.11	45.85	12.27	58.12	74.00	15.88	horizontal	Peak
5149.99	44.34	12.32	56.66	74.00	17.34	horizontal	Peak
5149.99	34.00	12.32	46.32	54.00	7.68	horizontal	Average

Project No.: 2407V20721E-RF
Test Mode: 11n40 5270
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

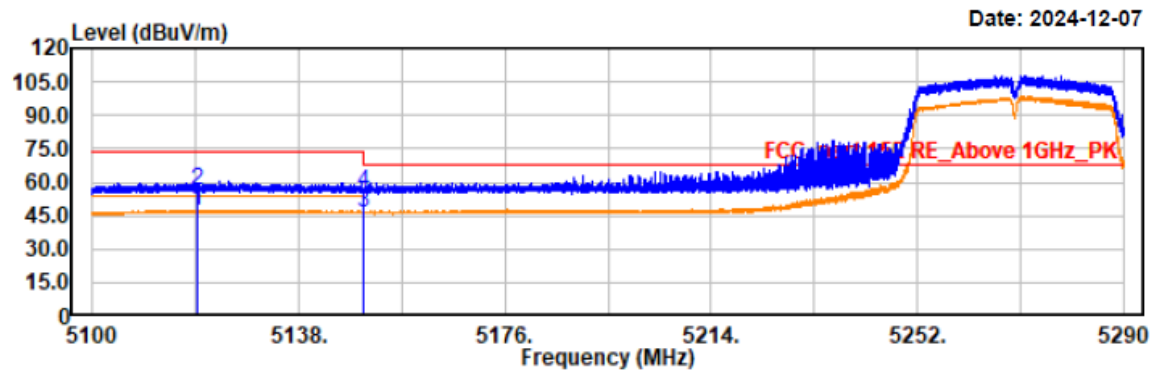


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5119.38	35.30	12.26	47.56	54.00	6.44	vertical	Average
5119.38	43.97	12.26	56.23	74.00	17.77	vertical	Peak
5149.99	34.20	12.32	46.52	54.00	7.48	vertical	Average
5149.99	43.27	12.32	55.59	74.00	18.41	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5310
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C /52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

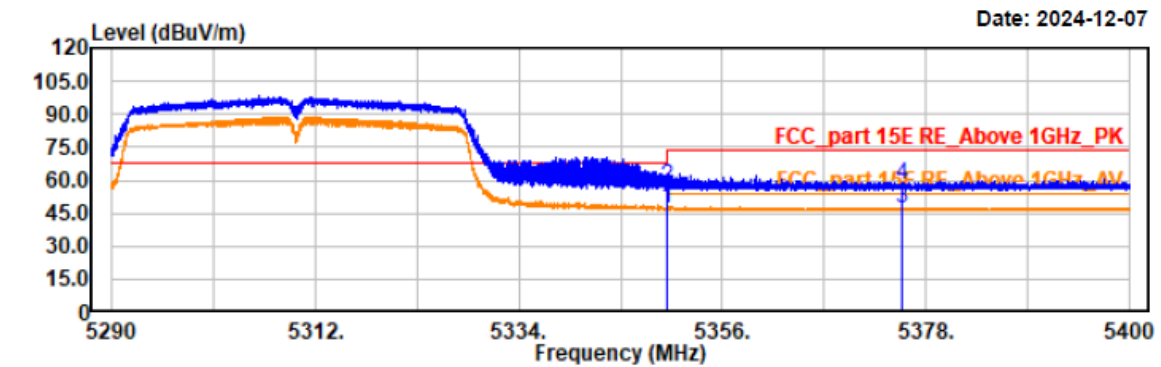

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	34.23	12.75	46.98	54.00	7.02	horizontal	Average
5350.01	44.35	12.75	57.10	74.00	16.90	horizontal	Peak
5375.36	34.53	12.80	47.33	54.00	6.67	horizontal	Average
5375.36	45.45	12.80	58.25	74.00	15.75	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40 5310


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

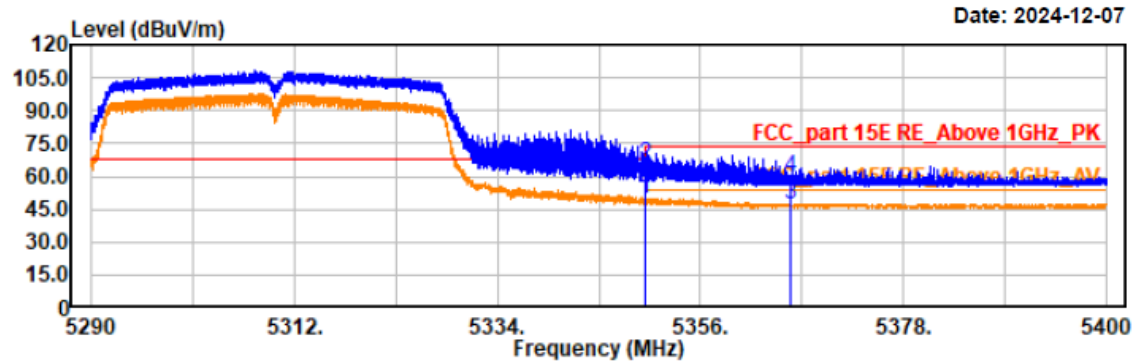

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	36.73	12.75	49.48	54.00	4.52	vertical	Average
5350.01	52.70	12.75	65.45	74.00	8.55	vertical	Peak
5365.87	34.77	12.77	47.54	54.00	6.46	vertical	Average
5365.87	46.63	12.77	59.40	74.00	14.60	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5290
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

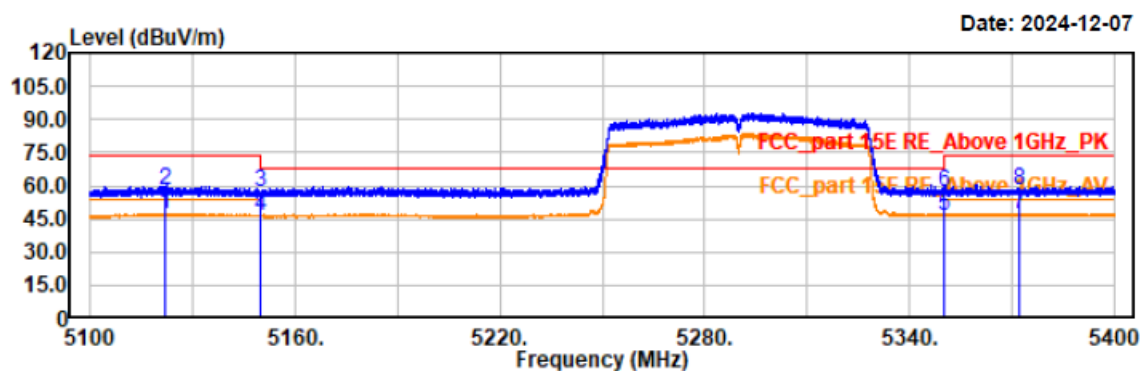


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5121.84	35.04	12.26	47.30	54.00	6.70	horizontal	Average
5121.84	45.49	12.26	57.75	74.00	16.25	horizontal	Peak
5149.98	44.52	12.32	56.84	74.00	17.16	horizontal	Peak
5149.99	33.77	12.32	46.09	54.00	7.91	horizontal	Average
5350.00	33.78	12.75	46.53	54.00	7.47	horizontal	Average
5350.00	44.06	12.75	56.81	74.00	17.19	horizontal	Peak
5371.95	34.52	12.79	47.31	54.00	6.69	horizontal	Average
5371.95	44.84	12.79	57.63	74.00	16.37	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5290
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

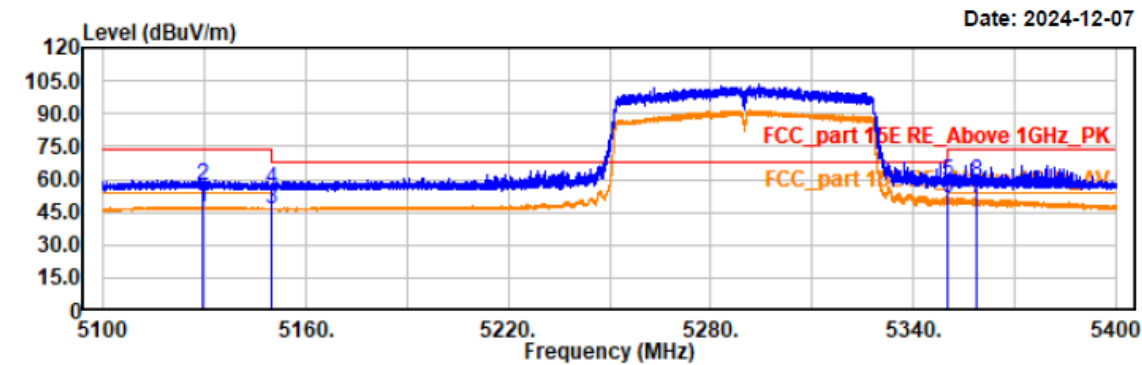

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5129.22	35.23	12.28	47.51	54.00	6.49	vertical	Average
5129.22	45.06	12.28	57.34	74.00	16.66	vertical	Peak
5149.99	33.70	12.32	46.02	54.00	7.98	vertical	Average
5149.99	43.52	12.32	55.84	74.00	18.16	vertical	Peak
5349.99	46.05	12.75	58.80	68.20	9.40	vertical	Peak
5350.00	38.76	12.75	51.51	54.00	2.49	vertical	Average
5358.60	38.46	12.76	51.22	54.00	2.78	vertical	Average
5358.60	45.59	12.76	58.35	74.00	15.65	vertical	Peak

B3

Project No.: 2407V20721E-RF

Test Mode: 11a 5500


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

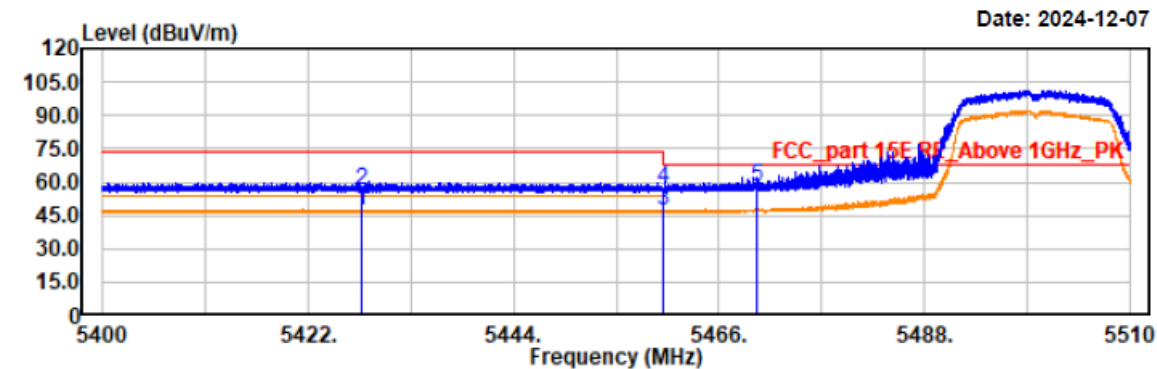


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5427.72	34.60	12.92	47.52	54.00	6.48	horizontal	Average
5427.72	43.19	12.92	56.11	74.00	17.89	horizontal	Peak
5459.99	33.92	12.96	46.88	54.00	7.12	horizontal	Average
5459.99	44.09	12.96	57.05	74.00	16.95	horizontal	Peak
5470.00	44.66	12.96	57.62	68.20	10.58	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5500
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

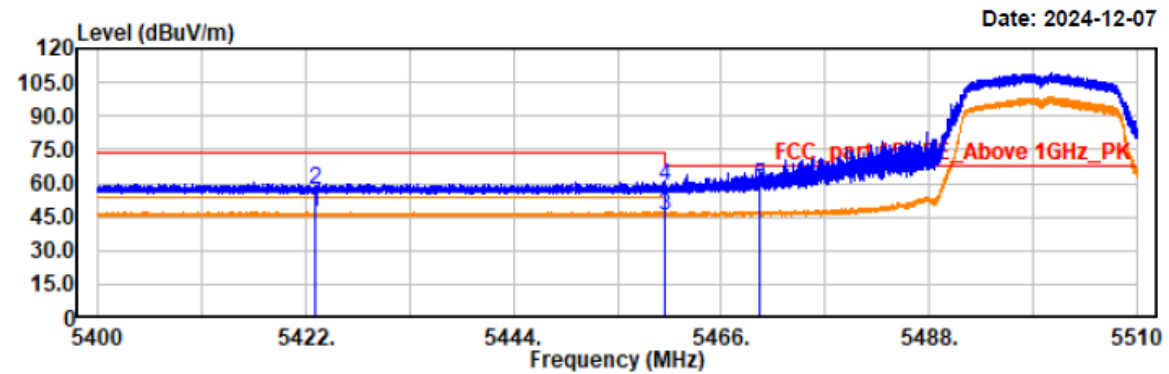

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5423.03	34.00	12.90	46.90	54.00	7.10	vertical	Average
5423.03	44.02	12.90	56.92	74.00	17.08	vertical	Peak
5459.99	32.78	12.96	45.74	54.00	8.26	vertical	Average
5459.99	45.78	12.96	58.74	74.00	15.26	vertical	Peak
5470.00	45.75	12.96	58.71	68.20	9.49	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a 5700


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

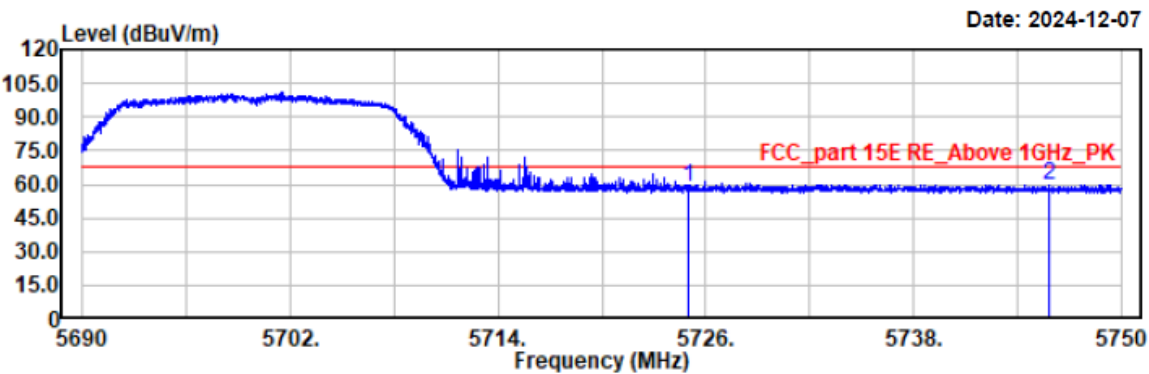


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	44.99	13.45	58.44	68.20	9.76	horizontal	Peak
5745.86	46.48	13.46	59.94	68.20	8.26	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5700
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

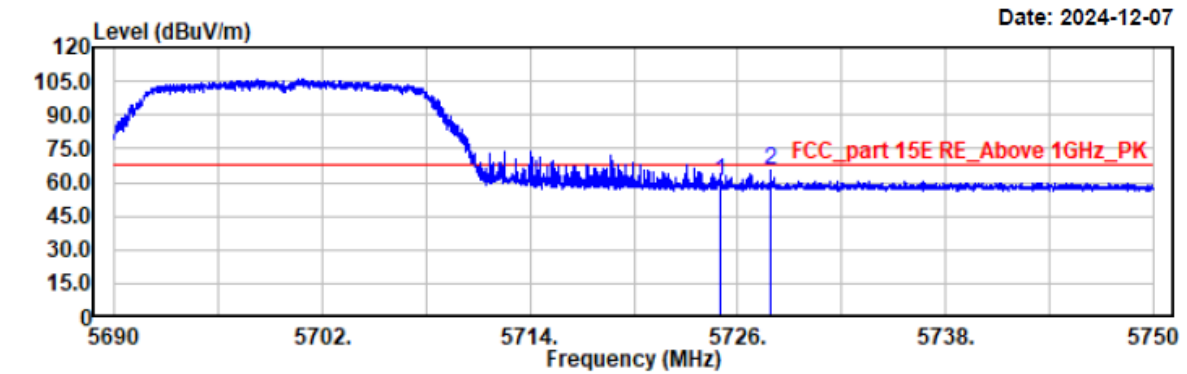


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	46.81	13.45	60.26	68.20	7.94	vertical	Peak
5727.86	52.08	13.45	65.53	68.20	2.67	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5500
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

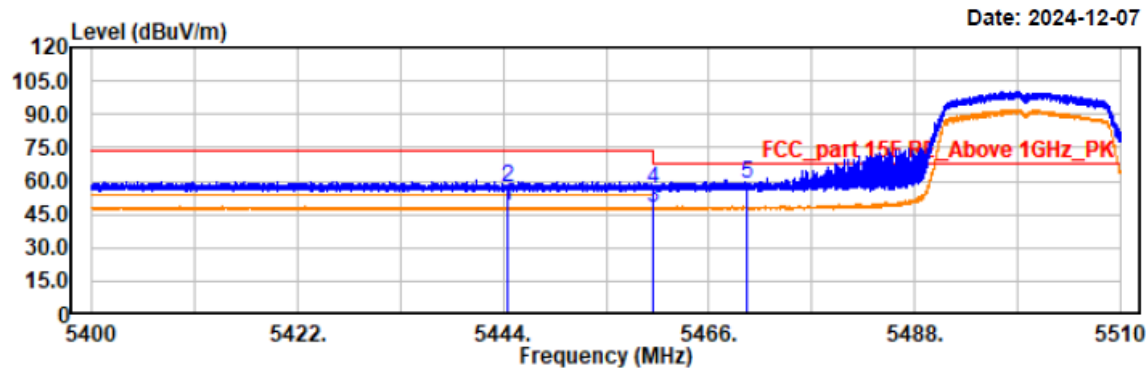

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5444.41	34.54	12.94	47.48	54.00	6.52	horizontal	Average
5444.41	43.77	12.94	56.71	74.00	17.29	horizontal	Peak
5459.99	34.82	12.96	47.78	54.00	6.22	horizontal	Average
5459.99	43.39	12.96	56.35	74.00	17.65	horizontal	Peak
5470.00	45.40	12.96	58.36	68.20	9.84	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20 5500


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

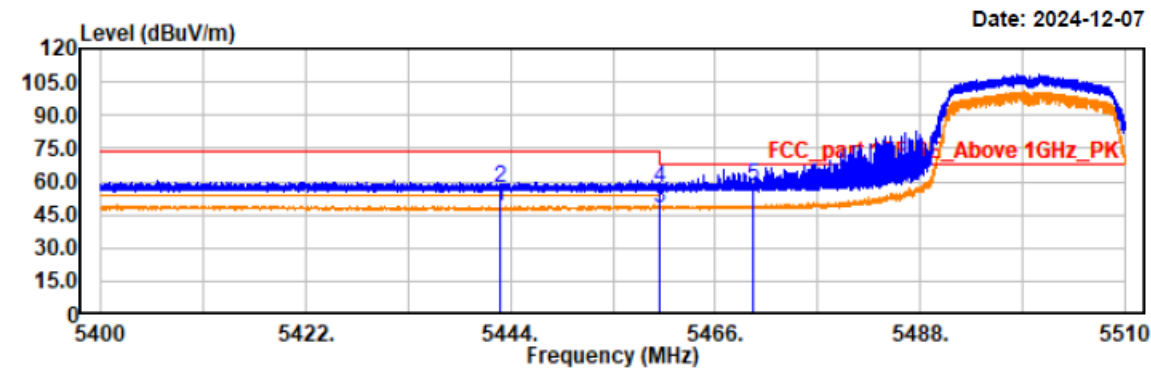


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5442.81	36.14	12.94	49.08	54.00	4.92	vertical	Average
5442.81	43.85	12.94	56.79	74.00	17.21	vertical	Peak
5459.99	34.86	12.96	47.82	54.00	6.18	vertical	Average
5459.99	44.29	12.96	57.25	74.00	16.75	vertical	Peak
5470.00	45.16	12.96	58.12	68.20	10.08	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5700
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

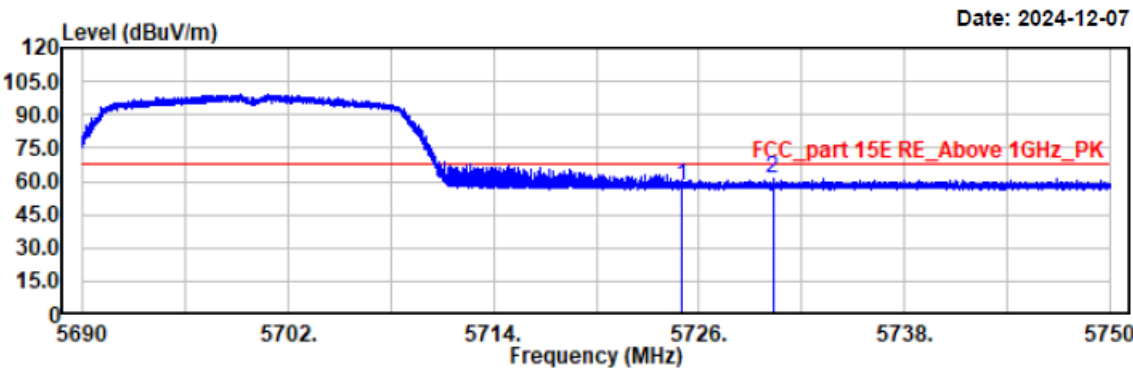


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	44.86	13.45	58.31	68.20	9.89	horizontal	Peak
5730.31	47.53	13.44	60.97	68.20	7.23	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5700
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

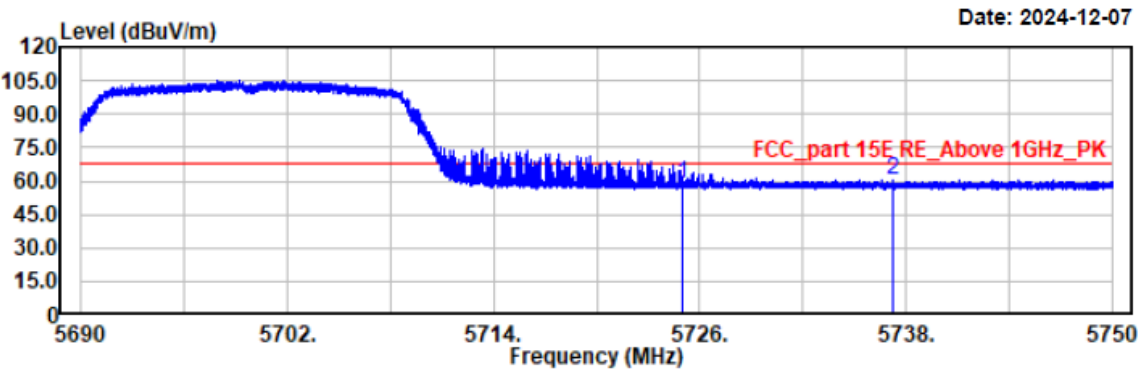


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	45.42	13.45	58.87	68.20	9.33	vertical	Peak
5737.23	47.36	13.45	60.81	68.20	7.39	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5510
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

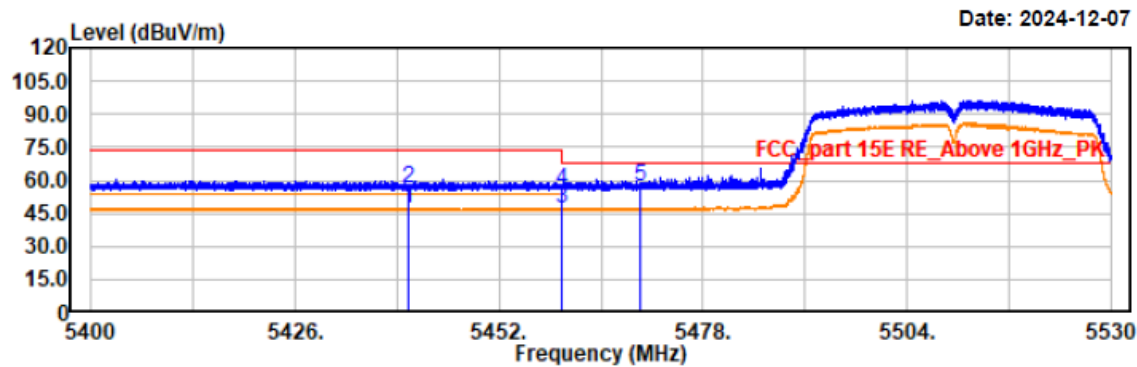

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5440.53	34.49	12.93	47.42	54.00	6.58	horizontal	Average
5440.53	42.99	12.93	55.92	74.00	18.08	horizontal	Peak
5459.99	34.04	12.96	47.00	54.00	7.00	horizontal	Average
5460.00	42.22	12.96	55.18	74.00	18.82	horizontal	Peak
5470.00	43.98	12.96	56.94	68.20	11.26	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40 5510


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

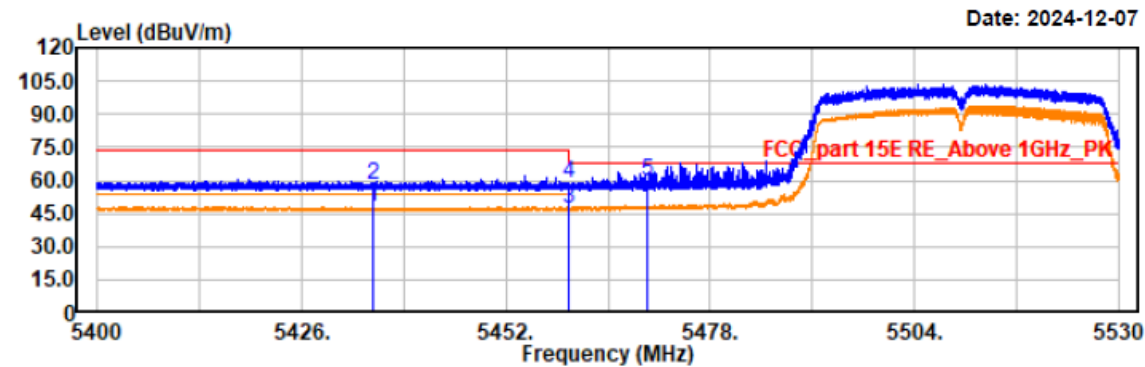

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5435.15	34.82	12.93	47.75	54.00	6.25	vertical	Average
5435.15	45.20	12.93	58.13	74.00	15.87	vertical	Peak
5459.99	33.96	12.96	46.92	54.00	7.08	vertical	Average
5459.99	45.90	12.96	58.86	74.00	15.14	vertical	Peak
5470.01	46.58	12.96	59.54	68.20	8.66	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5670
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

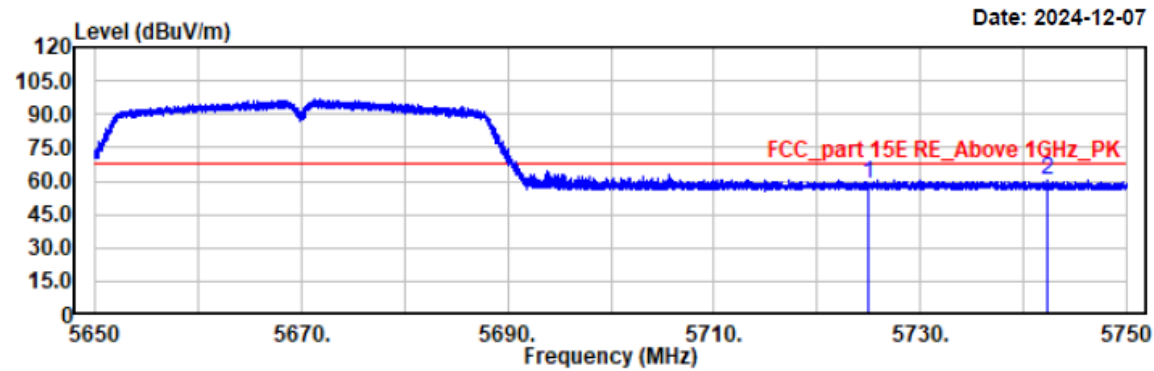

Condition: PK RBW:1MHz VBW:3MHz SWT:auto							
Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	45.12	13.45	58.57	68.20	9.63	horizontal	Peak
5742.32	46.92	13.46	60.38	68.20	7.82	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40 5670


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

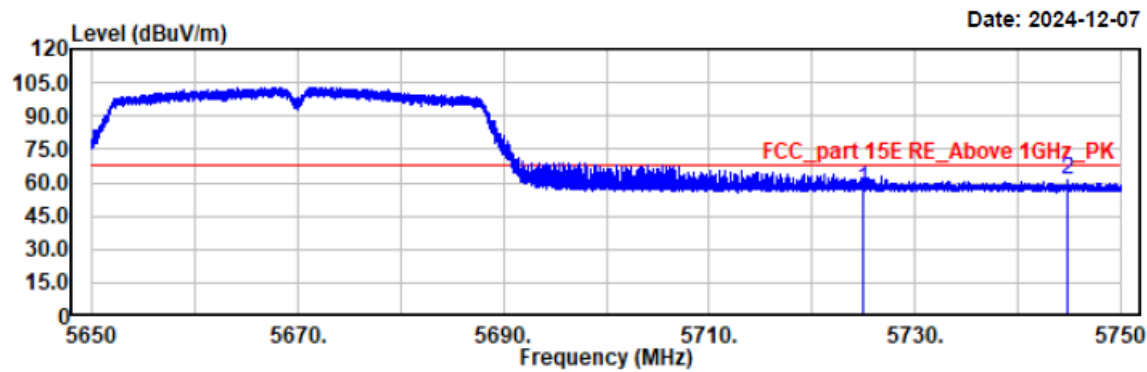

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	43.91	13.45	57.36	68.20	10.84	vertical	Peak
5744.82	47.54	13.46	61.00	68.20	7.20	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11ac80 5530


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

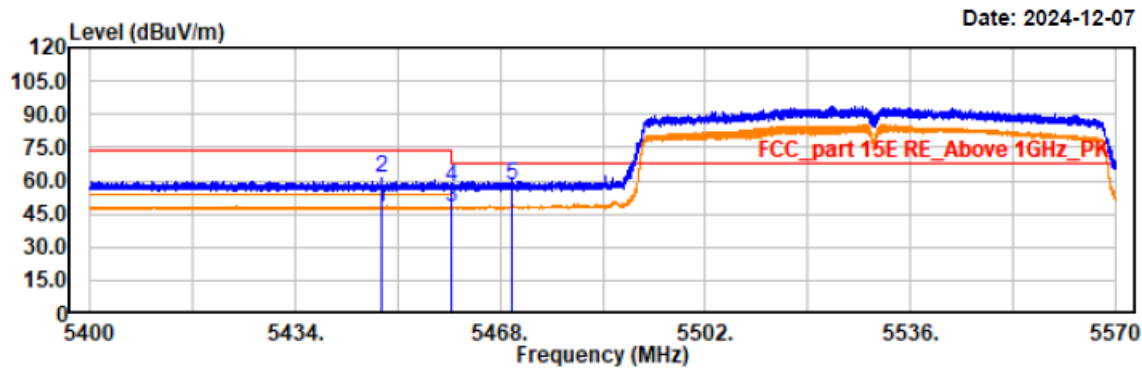


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5448.28	34.86	12.95	47.81	54.00	6.19	horizontal	Average
5448.28	48.24	12.95	61.19	74.00	12.81	horizontal	Peak
5459.99	34.82	12.96	47.78	54.00	6.22	horizontal	Average
5459.99	44.03	12.96	56.99	74.00	17.01	horizontal	Peak
5470.01	45.08	12.96	58.04	68.20	10.16	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5530
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

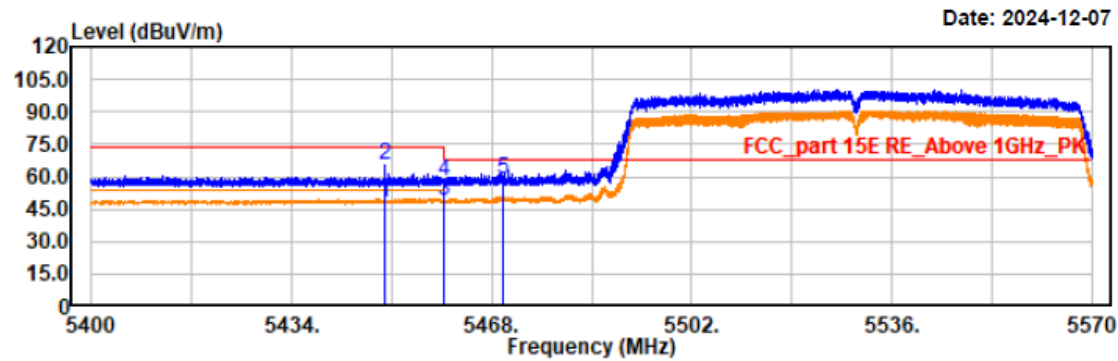


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5449.86	34.46	12.95	47.41	54.00	6.59	vertical	Average
5449.86	52.72	12.95	65.67	74.00	8.33	vertical	Peak
5459.99	34.10	12.96	47.06	54.00	9.94	vertical	Average
5459.99	45.30	12.96	58.26	74.00	15.74	vertical	Peak
5470.00	46.14	12.96	59.10	68.20	9.10	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5610
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

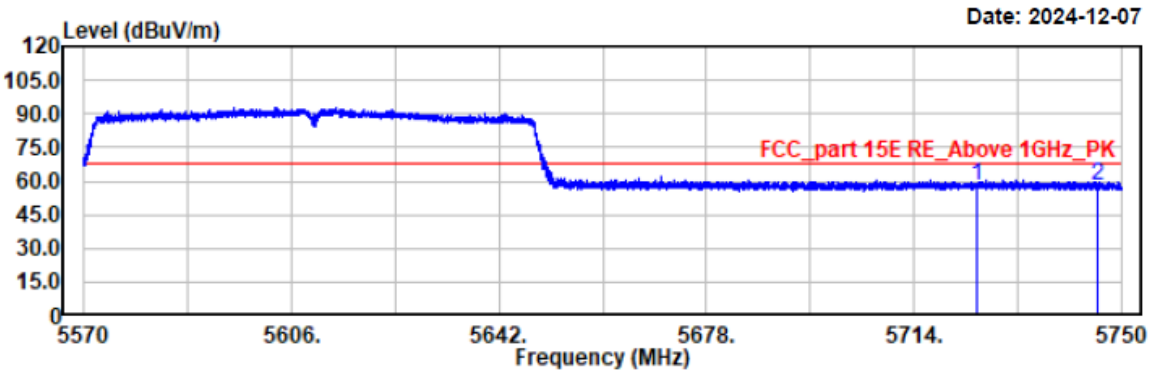


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	44.21	13.45	57.66	68.20	10.54	horizontal	Peak
5745.86	44.30	13.46	57.76	68.20	10.44	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5610
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

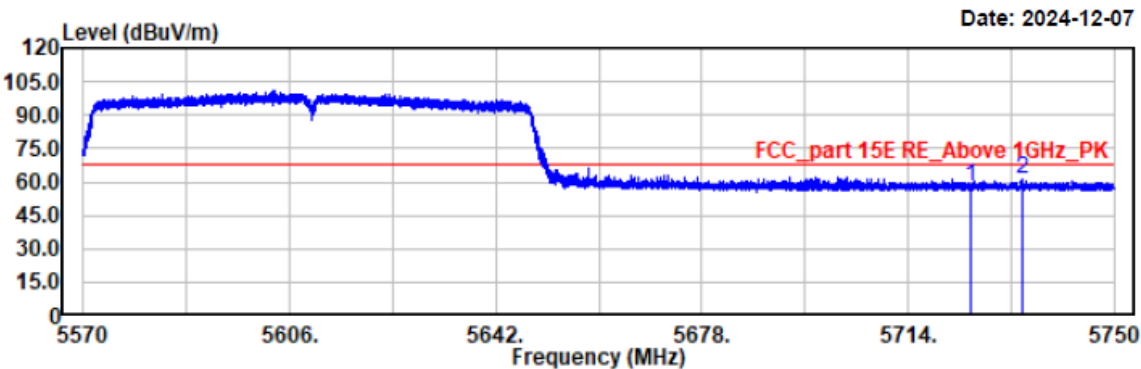

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	44.69	13.45	58.14	68.20	10.06	vertical	Peak
5733.82	47.94	13.45	61.39	68.20	6.81	vertical	Peak

B4

Project No.: 2407V20721E-RF

Test Mode: 11a 5745


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

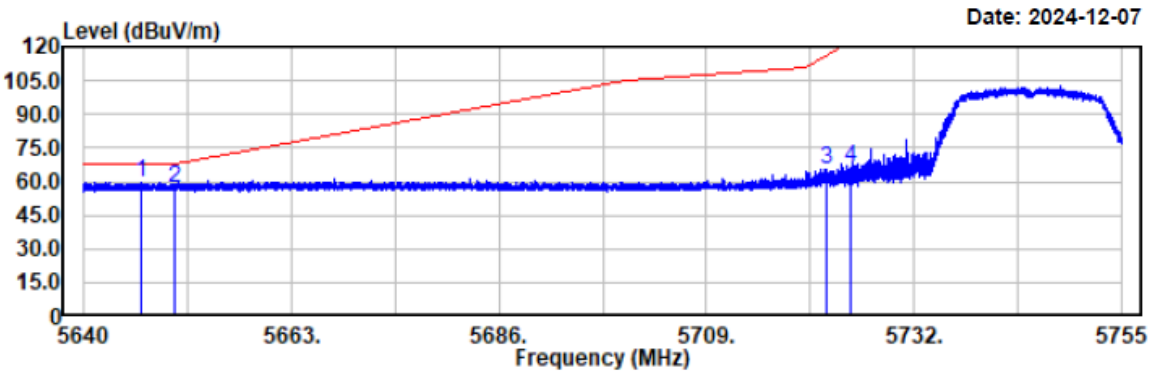


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5646.44	46.05	13.28	59.33	68.20	8.87	horizontal	Peak
5650.00	43.76	13.28	57.04	68.20	11.16	horizontal	Peak
5722.33	52.24	13.44	65.68	116.11	50.43	horizontal	Peak
5725.00	52.74	13.45	66.19	122.19	56.00	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5745
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

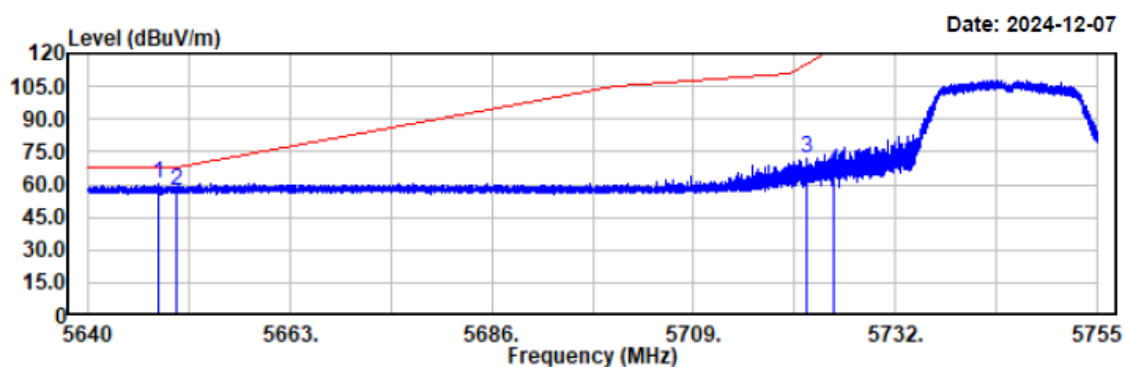


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5647.96	46.75	13.28	60.03	68.20	8.17	vertical	Peak
5650.00	44.18	13.28	57.46	68.20	10.74	vertical	Peak
5721.89	58.95	13.44	72.39	115.11	42.72	vertical	Peak
5725.00	52.40	13.45	65.85	122.19	56.34	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5825
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

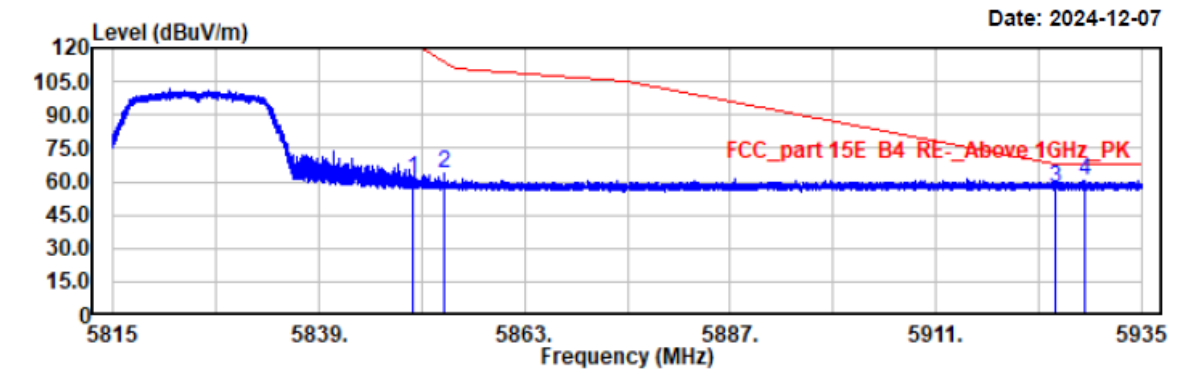


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.00	47.54	13.65	61.19	122.20	61.01	horizontal	Peak
5853.59	50.30	13.65	63.95	114.01	50.06	horizontal	Peak
5925.00	43.42	13.75	57.17	68.20	11.03	horizontal	Peak
5928.39	46.53	13.77	60.30	68.20	7.90	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5825
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

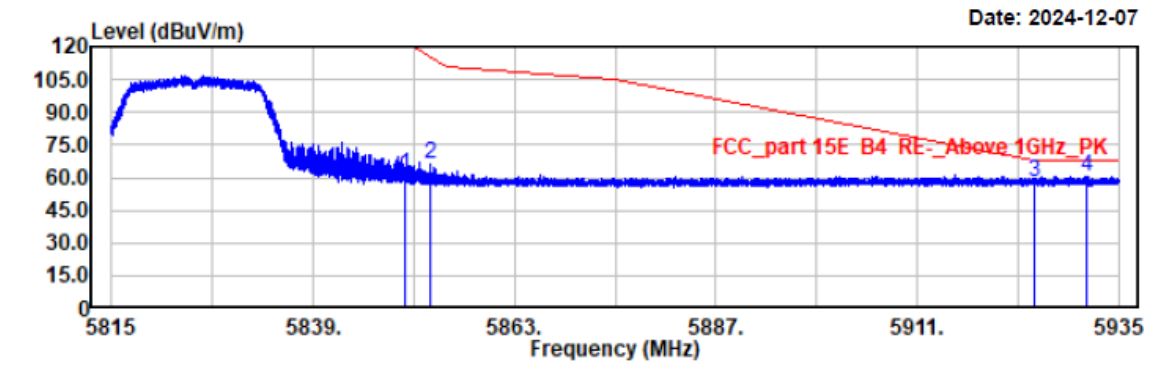


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.00	47.94	13.65	61.59	122.20	60.61	vertical	Peak
5853.08	52.90	13.65	66.55	115.19	48.64	vertical	Peak
5925.00	43.80	13.75	57.55	68.20	10.65	vertical	Peak
5931.08	46.60	13.77	60.37	68.20	7.83	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5745
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

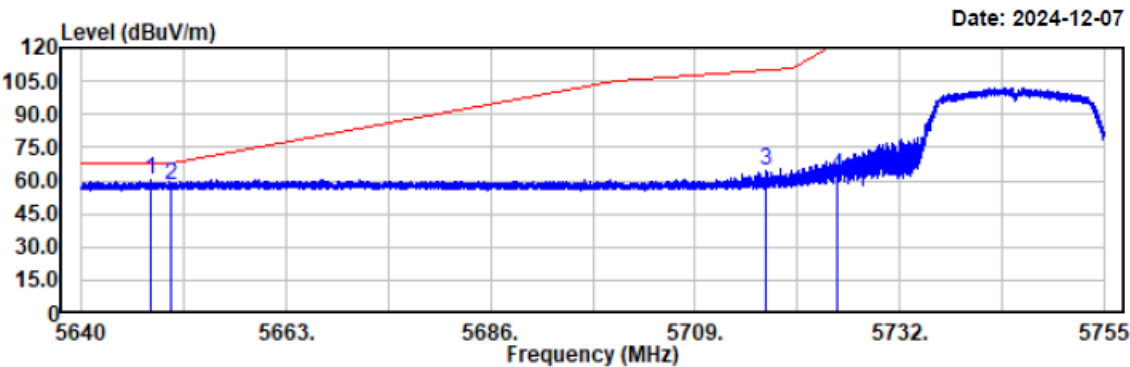


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5647.80	46.99	13.28	60.27	68.20	7.93	horizontal	Peak
5650.00	44.74	13.28	58.02	68.20	10.18	horizontal	Peak
5717.04	51.42	13.44	64.86	109.97	45.11	horizontal	Peak
5725.00	48.74	13.45	62.19	122.19	60.00	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5745
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

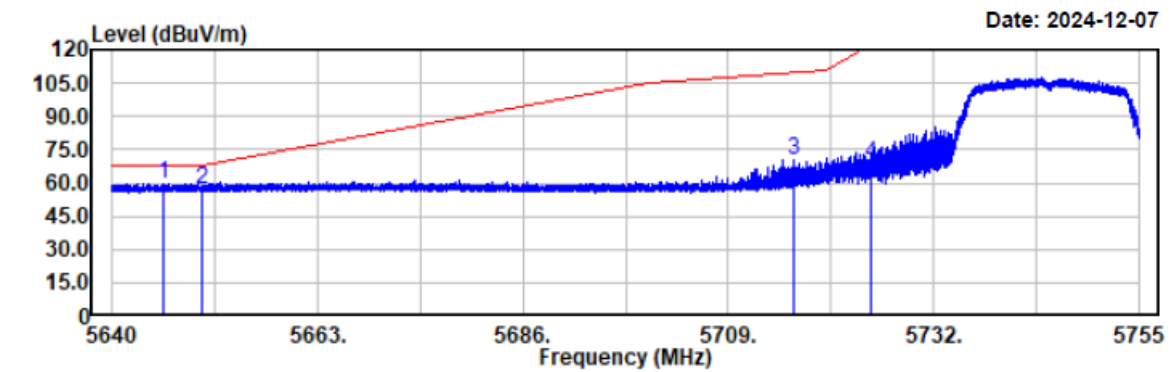


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5645.64	46.68	13.28	59.96	68.20	8.24	vertical	Peak
5650.00	44.19	13.28	57.47	68.20	10.73	vertical	Peak
5716.38	57.31	13.44	70.75	109.79	39.04	vertical	Peak
5725.00	55.62	13.45	69.07	122.19	53.12	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5825
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

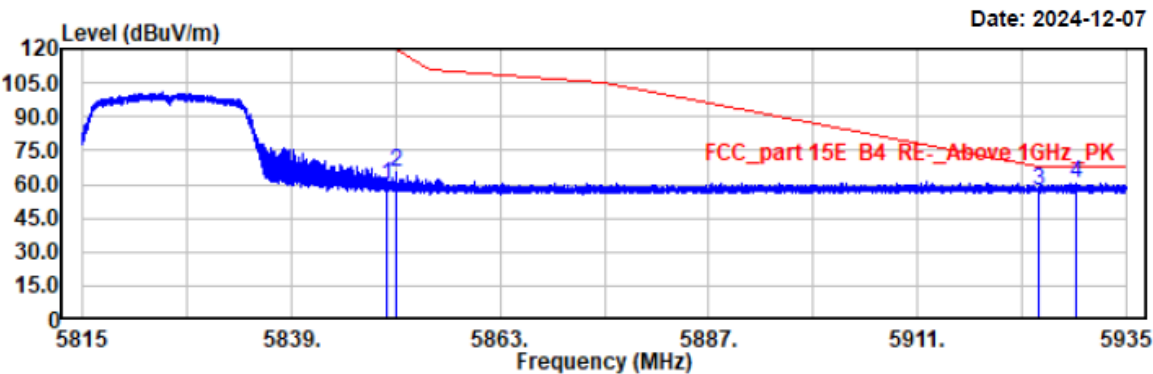


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.00	45.69	13.65	59.34	122.20	62.86	horizontal	Peak
5851.07	51.38	13.65	65.03	119.76	54.73	horizontal	Peak
5925.00	43.05	13.75	56.80	68.20	11.40	horizontal	Peak
5929.25	46.81	13.77	60.58	68.20	7.62	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5825
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

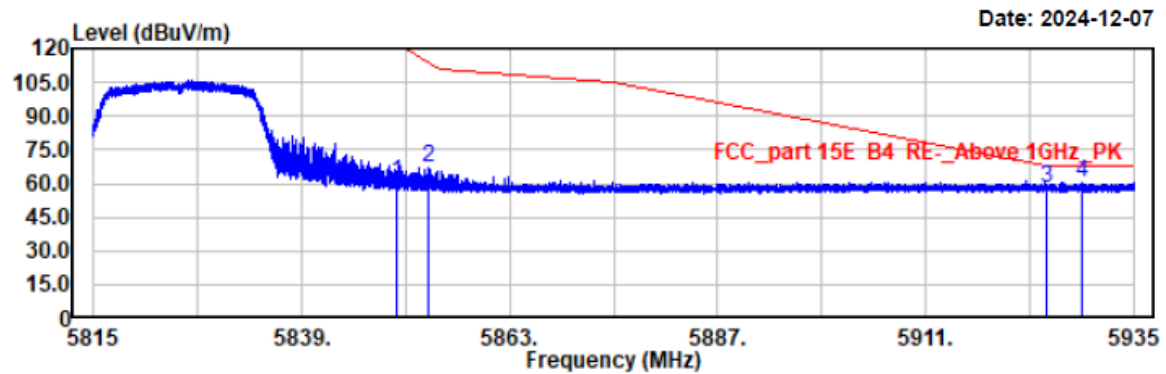


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.00	47.15	13.65	60.80	122.20	61.40	vertical	Peak
5853.62	53.27	13.65	66.92	113.96	47.04	vertical	Peak
5925.00	44.54	13.75	58.29	68.20	9.91	vertical	Peak
5928.95	46.37	13.77	60.14	68.20	8.06	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5755
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

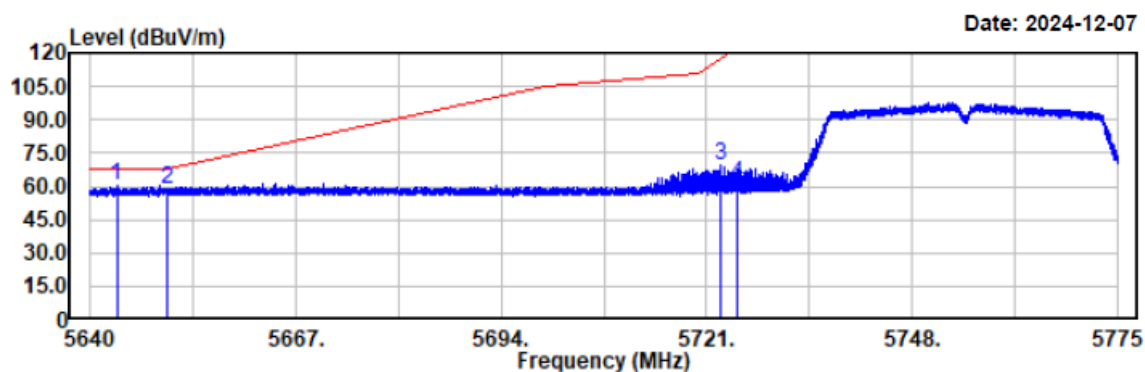


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5643.47	46.89	13.27	60.16	68.20	8.04	horizontal	Peak
5650.00	45.72	13.28	59.00	68.20	9.20	horizontal	Peak
5722.90	56.43	13.45	69.88	117.42	47.54	horizontal	Peak
5725.00	47.68	13.45	61.13	122.19	61.06	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5755
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

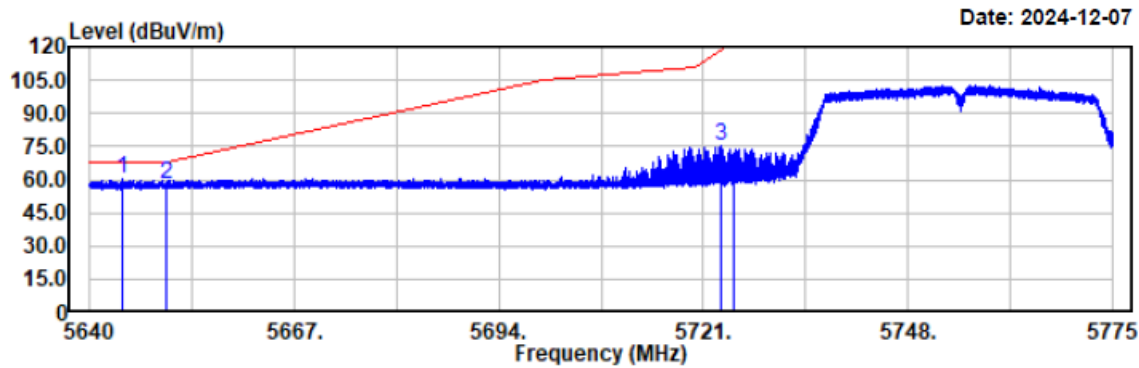


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5644.36	47.15	13.27	60.42	68.20	7.78	vertical	Peak
5650.00	44.65	13.28	57.93	68.20	10.27	vertical	Peak
5723.25	62.14	13.45	75.59	118.22	42.63	vertical	Peak
5725.00	45.71	13.45	59.16	122.19	63.03	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5795
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

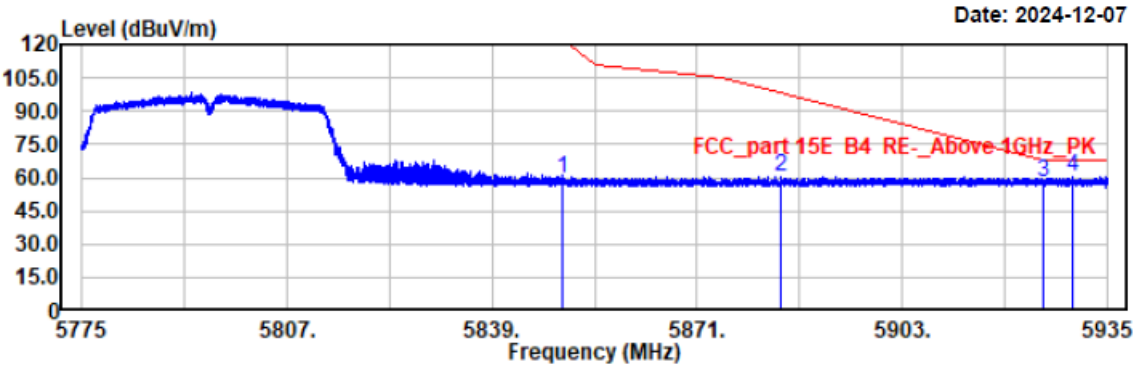


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.01	45.61	13.65	59.26	122.18	62.92	horizontal	Peak
5884.12	46.81	13.67	60.48	98.45	37.97	horizontal	Peak
5925.00	43.91	13.75	57.66	68.20	10.54	horizontal	Peak
5929.64	47.00	13.77	60.77	68.20	7.43	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5795
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

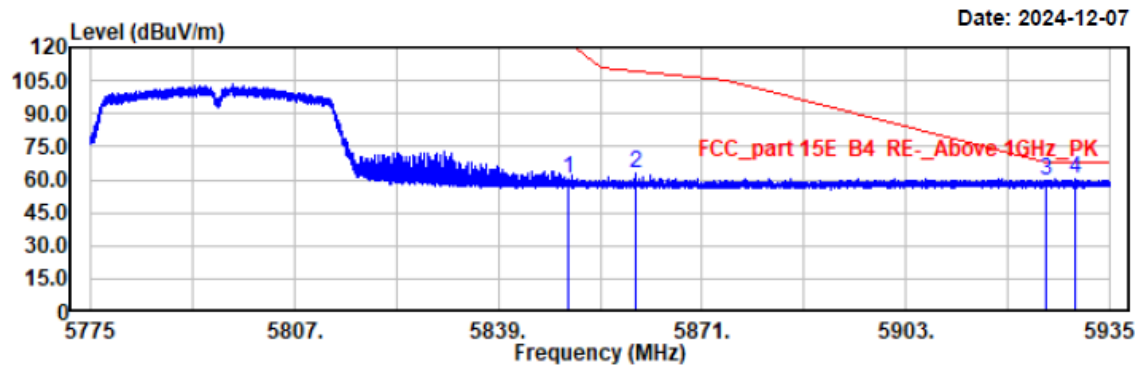


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.00	46.89	13.65	60.54	122.20	61.66	vertical	Peak
5860.71	49.60	13.65	63.25	109.20	45.95	vertical	Peak
5925.00	46.15	13.75	59.90	68.20	8.30	vertical	Peak
5929.70	46.37	13.77	60.14	68.20	8.06	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5775
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

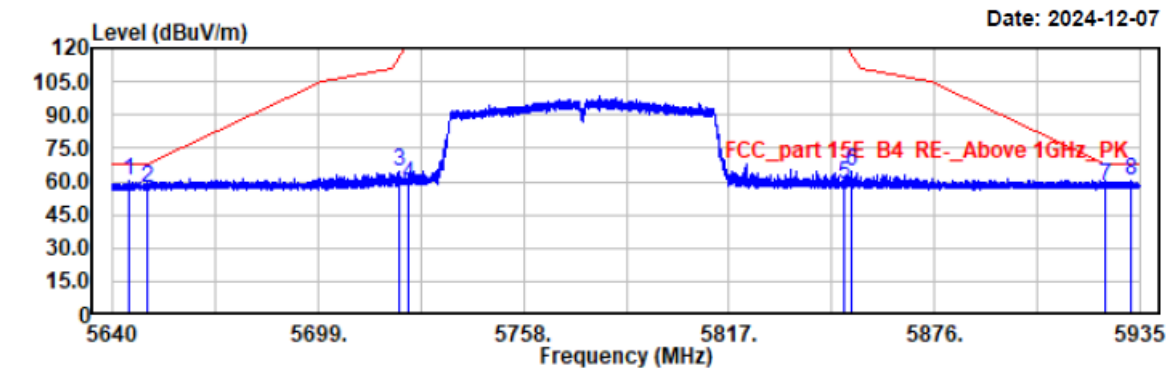

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5644.72	47.11	13.28	60.39	68.20	7.81	horizontal	Peak
5650.00	44.09	13.28	57.37	68.20	10.83	horizontal	Peak
5722.28	50.74	13.44	64.18	115.99	51.81	horizontal	Peak
5724.99	45.45	13.45	58.90	122.18	63.28	horizontal	Peak
5850.00	44.90	13.65	58.55	122.20	63.65	horizontal	Peak
5852.37	50.83	13.65	64.48	116.80	52.32	horizontal	Peak
5925.00	44.37	13.75	58.12	68.20	10.08	horizontal	Peak
5932.49	46.24	13.77	60.01	68.20	8.19	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11ac80 5775


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.5℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

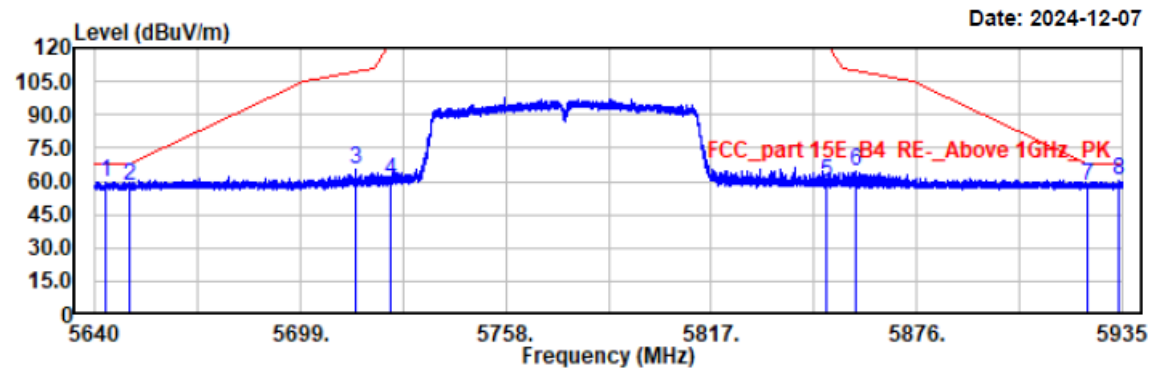

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5643.25	46.62	13.27	59.89	68.20	8.31	vertical	Peak
5650.00	44.84	13.28	58.12	68.20	10.08	vertical	Peak
5714.75	52.02	13.43	65.45	109.33	43.88	vertical	Peak
5724.99	46.83	13.45	60.28	122.18	61.90	vertical	Peak
5850.00	45.54	13.65	59.19	122.20	63.01	vertical	Peak
5858.54	50.98	13.66	64.64	109.81	45.17	vertical	Peak
5925.00	44.57	13.75	58.32	68.20	9.88	vertical	Peak
5934.06	46.23	13.79	60.02	68.20	8.18	vertical	Peak

EUT Model: NLS-NQuire1000

B1

Project No.: 2407V20721E-RF

Test Mode: 11a 5180


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 23.5°C/48%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

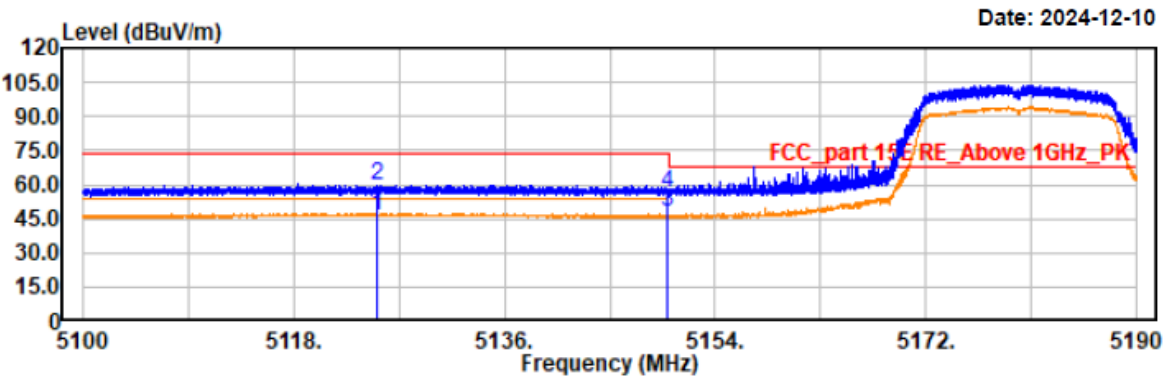

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5125.11	34.22	12.27	46.49	54.00	7.51	horizontal	Average
5125.11	47.65	12.27	59.92	74.00	14.08	horizontal	Peak
5149.99	35.41	12.32	47.73	54.00	6.27	horizontal	Average
5149.99	43.66	12.32	55.98	74.00	18.02	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5180
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.5°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

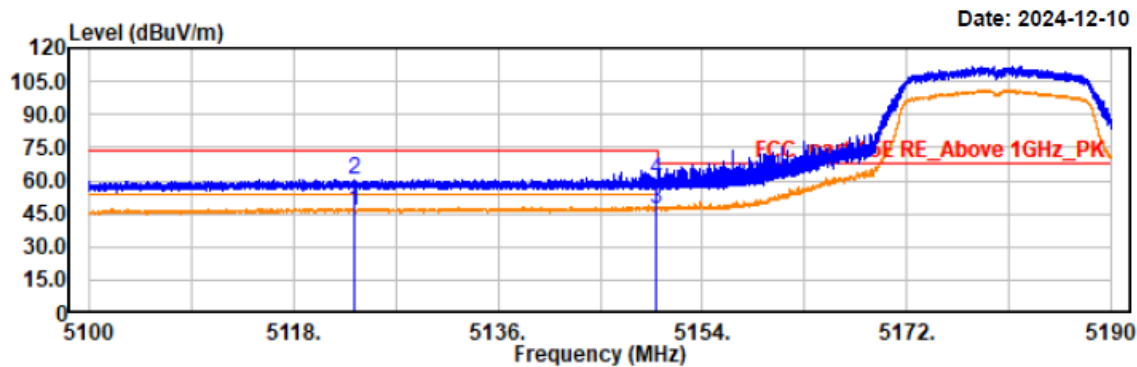


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5123.37	34.01	12.27	46.28	54.00	7.72	vertical	Average
5123.37	48.45	12.27	60.72	74.00	13.28	vertical	Peak
5149.99	35.07	12.32	47.39	54.00	6.61	vertical	Average
5149.99	48.12	12.32	60.44	74.00	13.56	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5240
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.5°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

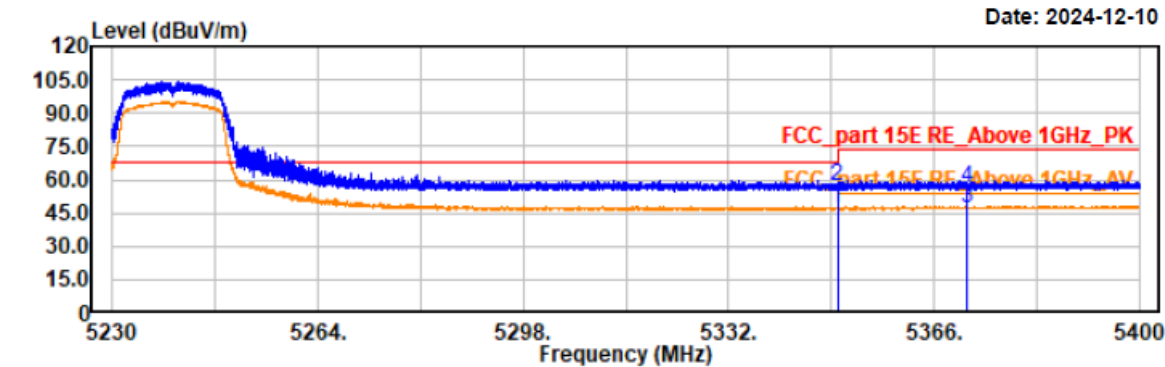

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	34.12	12.75	46.87	54.00	7.13	horizontal	Average
5350.00	44.13	12.75	56.88	74.00	17.12	horizontal	Peak
5371.51	34.29	12.79	47.08	54.00	6.92	horizontal	Average
5371.51	43.63	12.79	56.42	74.00	17.58	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a 5240


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 23.5°C/48%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

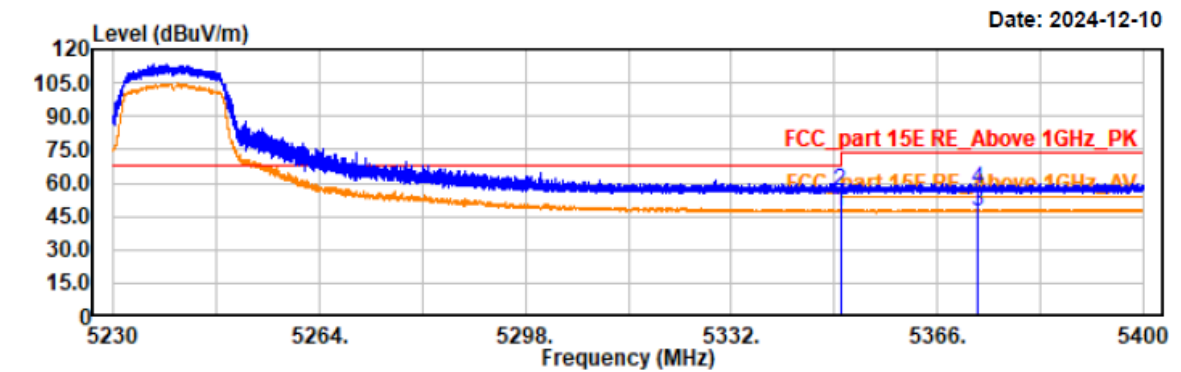

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	34.46	12.75	47.21	54.00	6.79	vertical	Average
5350.00	43.19	12.75	55.94	74.00	18.06	vertical	Peak
5372.60	34.70	12.80	47.50	54.00	6.50	vertical	Average
5372.60	44.58	12.80	57.38	74.00	16.62	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20 5180


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 23.5°C/48%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

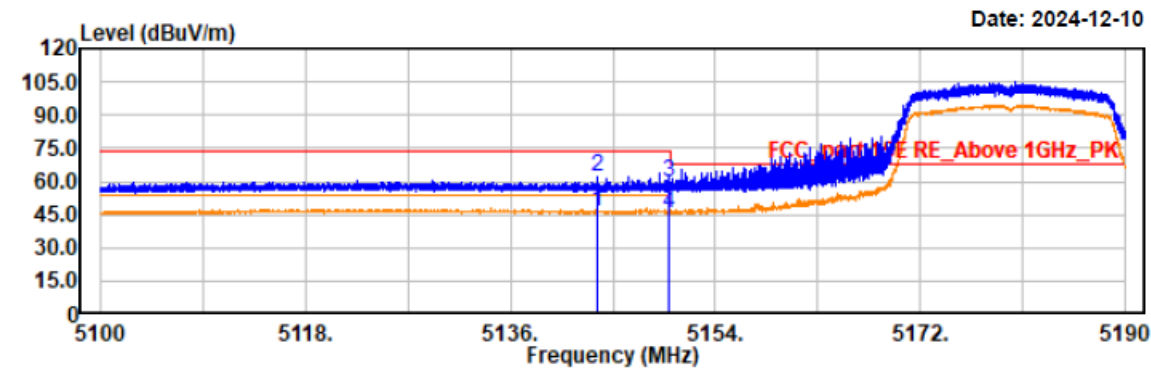


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5143.70	33.74	12.32	46.06	54.00	7.94	horizontal	Average
5143.70	49.77	12.32	62.09	74.00	11.91	horizontal	Peak
5149.99	47.49	12.32	59.81	74.00	14.19	horizontal	Peak
5149.99	33.43	12.32	45.75	54.00	8.25	horizontal	Average

Project No.: 2407V20721E-RF
Test Mode: 11n20 5180
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.5°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

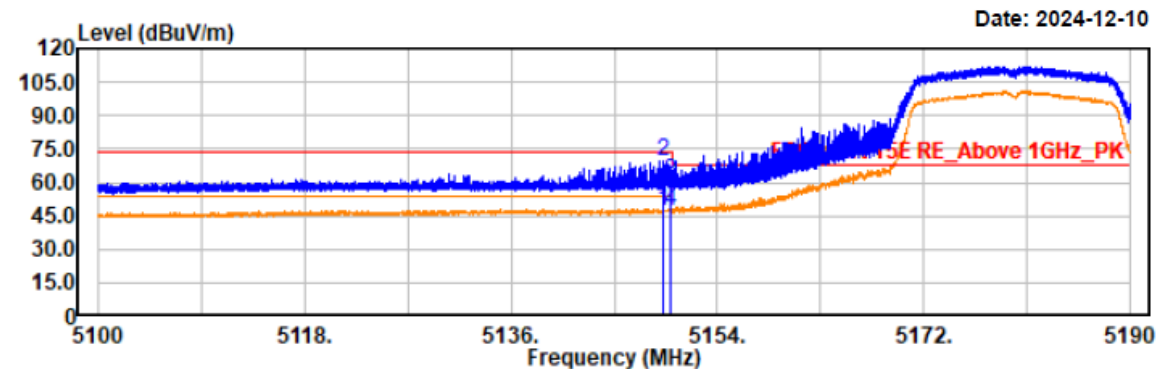

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5149.23	35.23	12.32	47.55	54.00	6.45	vertical	Average
5149.23	57.46	12.32	69.78	74.00	4.22	vertical	Peak
5149.99	47.99	12.32	60.31	74.00	13.69	vertical	Peak
5149.99	34.90	12.32	47.22	54.00	6.78	vertical	Average

Project No.: 2407V20721E-RF

Test Mode: 11n20 5240


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 23.5°C/48%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

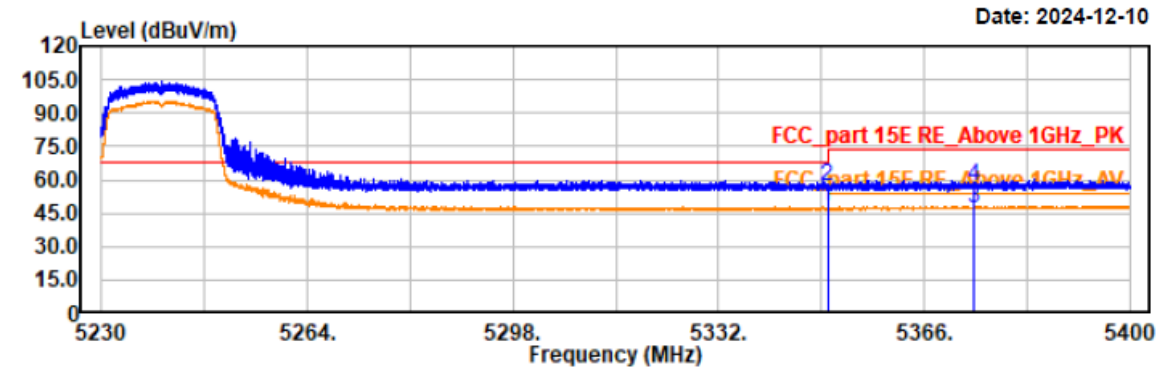

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	34.98	12.75	47.73	54.00	6.27	horizontal	Average
5350.00	44.55	12.75	57.30	74.00	16.70	horizontal	Peak
5374.28	34.54	12.80	47.34	54.00	6.66	horizontal	Average
5374.28	44.09	12.80	56.89	74.00	17.11	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5240
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.5°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

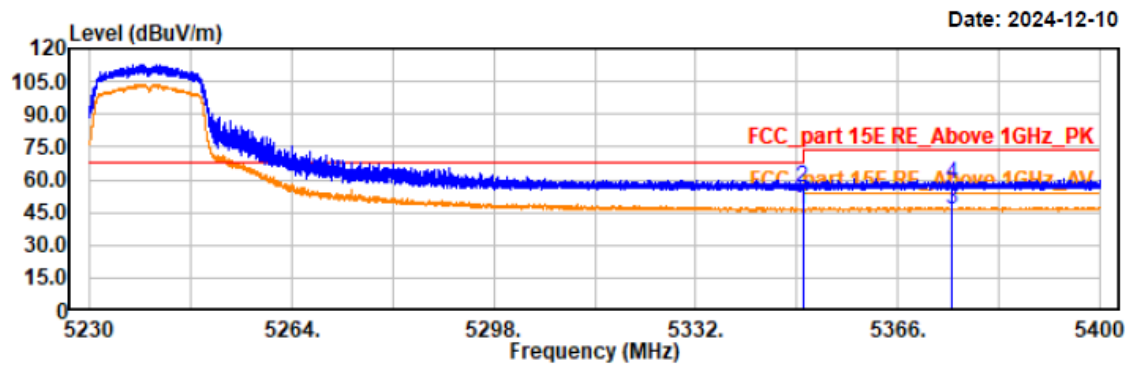


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	33.30	12.75	46.05	54.00	7.95	vertical	Average
5350.00	43.80	12.75	56.55	74.00	17.45	vertical	Peak
5374.99	33.50	12.80	46.30	54.00	7.70	vertical	Average
5374.99	45.11	12.80	57.91	74.00	16.09	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5190
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.5°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

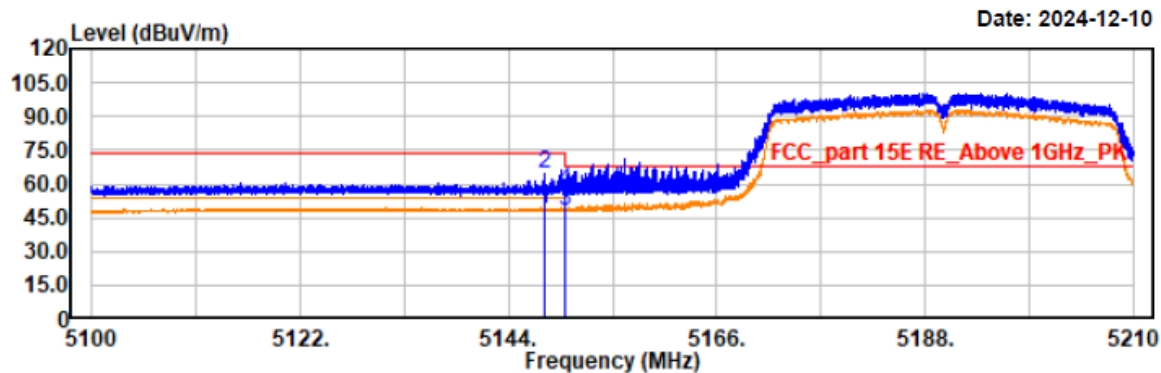

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5147.89	35.17	12.32	47.49	54.00	6.51	horizontal	Average
5147.89	52.62	12.32	64.94	74.00	9.06	horizontal	Peak
5150.00	35.09	12.32	47.41	54.00	6.59	horizontal	Average
5150.00	44.52	12.32	56.84	74.00	17.16	horizontal	Peak

Project No.: 2407V20721E-RF

Temp/Humi/ATM: 23.5°C/48%/100.1kPa


Test Mode: 11n40 5190

Tested by: Wlif Wu

EUT Model: NLS-NQuire1000

Power Source: AC120V/60Hz

Test distance: 3m

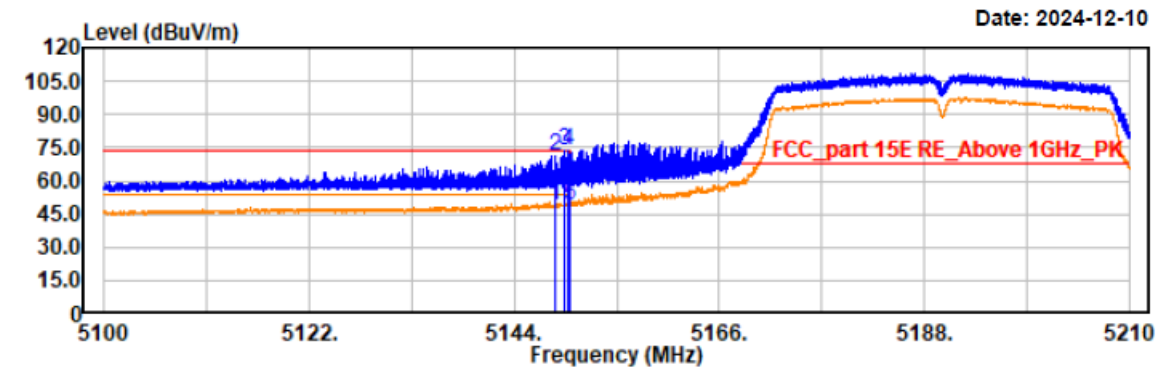


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5148.50	36.31	12.32	48.63	54.00	5.37	vertical	Average
5148.50	58.99	12.32	71.31	74.00	2.69	vertical	Peak
5149.40	61.45	12.32	73.77	74.00	0.23	vertical	Peak
5149.70	61.64	12.32	73.96	74.00	0.04	vertical	Peak
5150.00	36.76	12.32	49.08	54.00	4.92	vertical	Average
5150.00	47.23	12.32	59.55	74.00	14.45	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5230
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.5°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

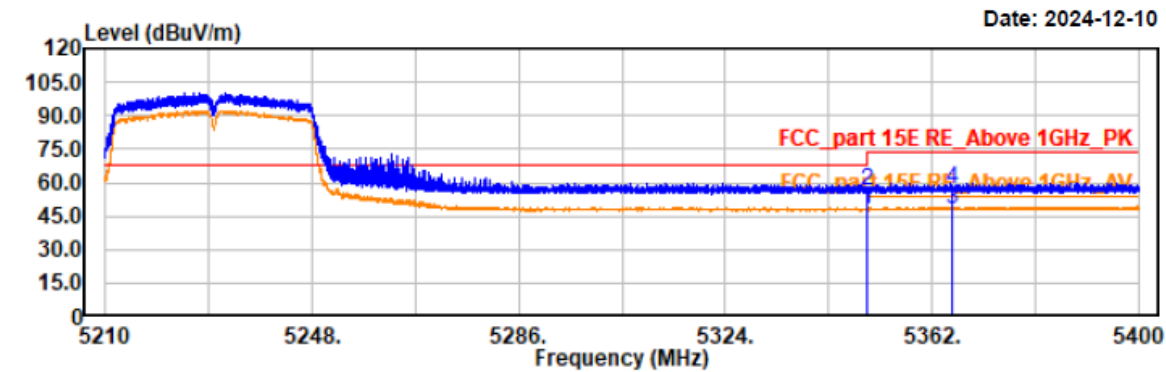

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.01	35.02	12.75	47.77	54.00	6.23	horizontal	Average
5350.01	43.81	12.75	56.56	74.00	17.44	horizontal	Peak
5365.72	35.00	12.77	47.77	54.00	6.23	horizontal	Average
5365.72	44.54	12.77	57.31	74.00	16.69	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5230
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.5°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

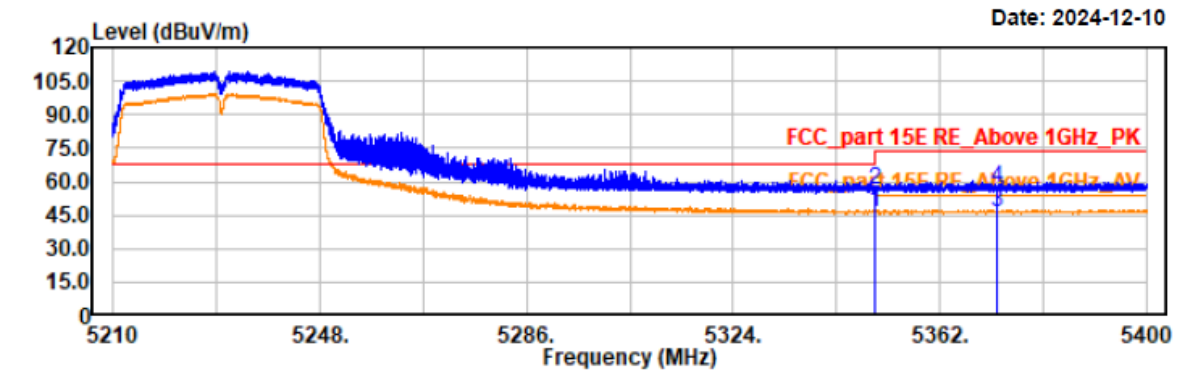


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	33.60	12.75	46.35	54.00	7.65	vertical	Average
5350.01	43.64	12.75	56.39	74.00	17.61	vertical	Peak
5372.60	33.25	12.80	46.05	54.00	7.95	vertical	Average
5372.60	44.67	12.80	57.47	74.00	16.53	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5210
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.5°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

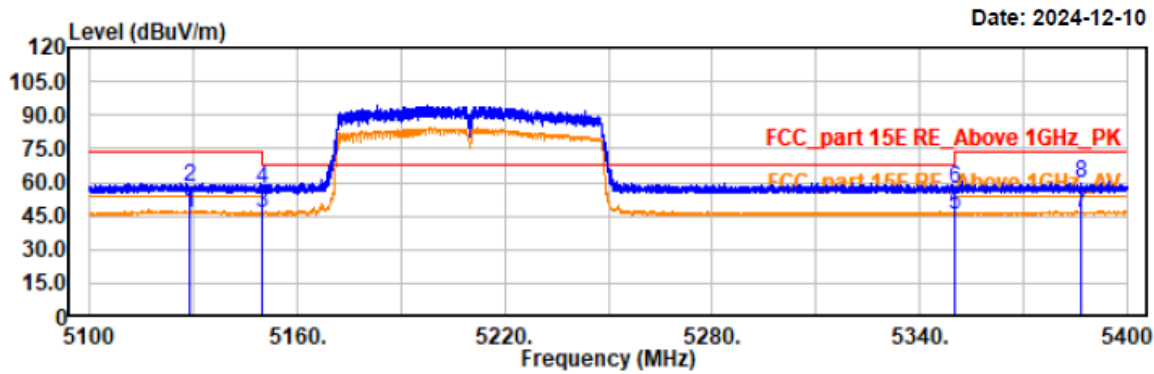


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5128.86	33.92	12.28	46.20	54.00	7.80	horizontal	Average
5128.86	45.30	12.28	57.58	74.00	16.42	horizontal	Peak
5149.98	34.00	12.32	46.32	54.00	7.68	horizontal	Average
5149.99	44.63	12.32	56.95	74.00	17.05	horizontal	Peak
5350.01	33.06	12.75	45.81	54.00	8.19	horizontal	Average
5350.01	44.40	12.75	57.15	74.00	16.85	horizontal	Peak
5386.89	33.45	12.82	46.27	54.00	7.73	horizontal	Average
5386.89	47.08	12.82	59.90	74.00	14.10	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5210
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.5°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

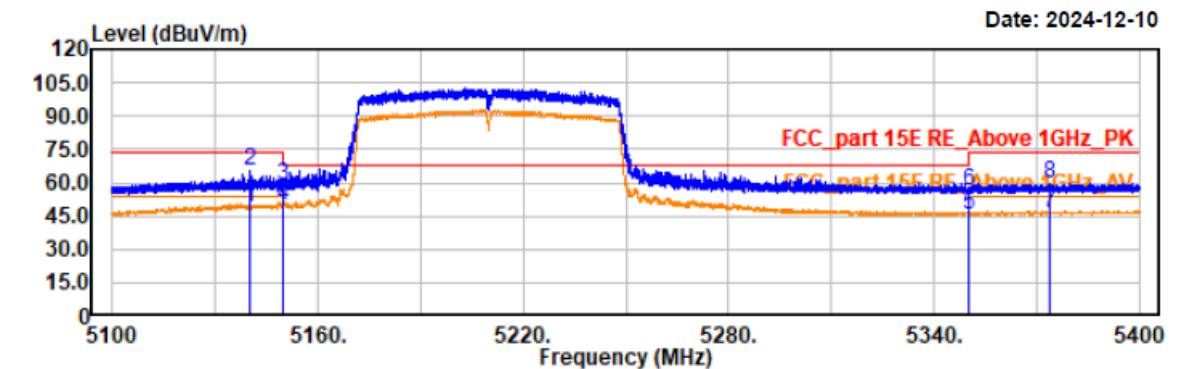

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5140.44	36.33	12.31	48.64	54.00	5.36	vertical	Average
5140.44	53.11	12.31	65.42	74.00	8.58	vertical	Peak
5149.98	46.62	12.32	58.94	74.00	15.06	vertical	Peak
5149.99	37.54	12.32	49.86	54.00	4.14	vertical	Average
5350.01	33.15	12.75	45.90	54.00	8.10	vertical	Average
5350.01	43.80	12.75	56.55	74.00	17.45	vertical	Peak
5373.63	33.49	12.80	46.29	54.00	7.71	vertical	Average
5373.63	47.14	12.80	59.94	74.00	14.06	vertical	Peak