



1. Specification & Dimension

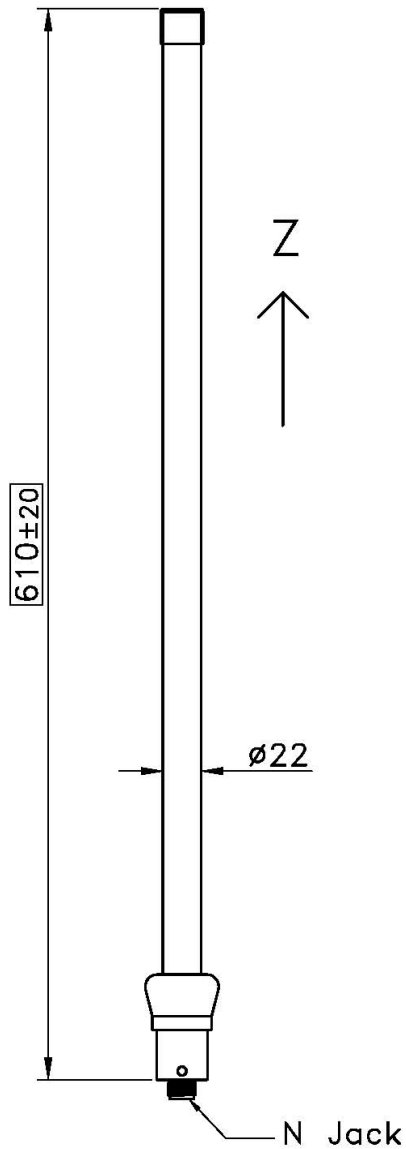

Electrical Properties	
Frequency Range	2.4~2.4835 GHz 5.15~5.85 GHz
Impedance	50Ω
V.S.W.R.	≤2.5@2.4~2.4835 GHz ≤3.0@5.15~5.85 GHz
Radiation	Omni
Gain	7±1dBi@2.4~2.4835 GHz 9±1.5dBi@5.15~5.85 GHz
Polarization	Vertical
Wave Length , type	1/2λ, Dipole Array
Test Ground Size	GP bracket
Mechanical Properties	
Radome Material	Fiberglass
Connector Type	N JACK
Connector Finish	PIN: Gold plated 1u" min. Body: Ni plate 60 u" min.
IP Level	IP-65
Power Handling	10W
Dimension	L=610mm
Weight	461 g (est)
Operating Temp.	-40℃ ~ +85℃
Storage Temp.	-40℃ ~ +85℃

2.3 3D Pattern

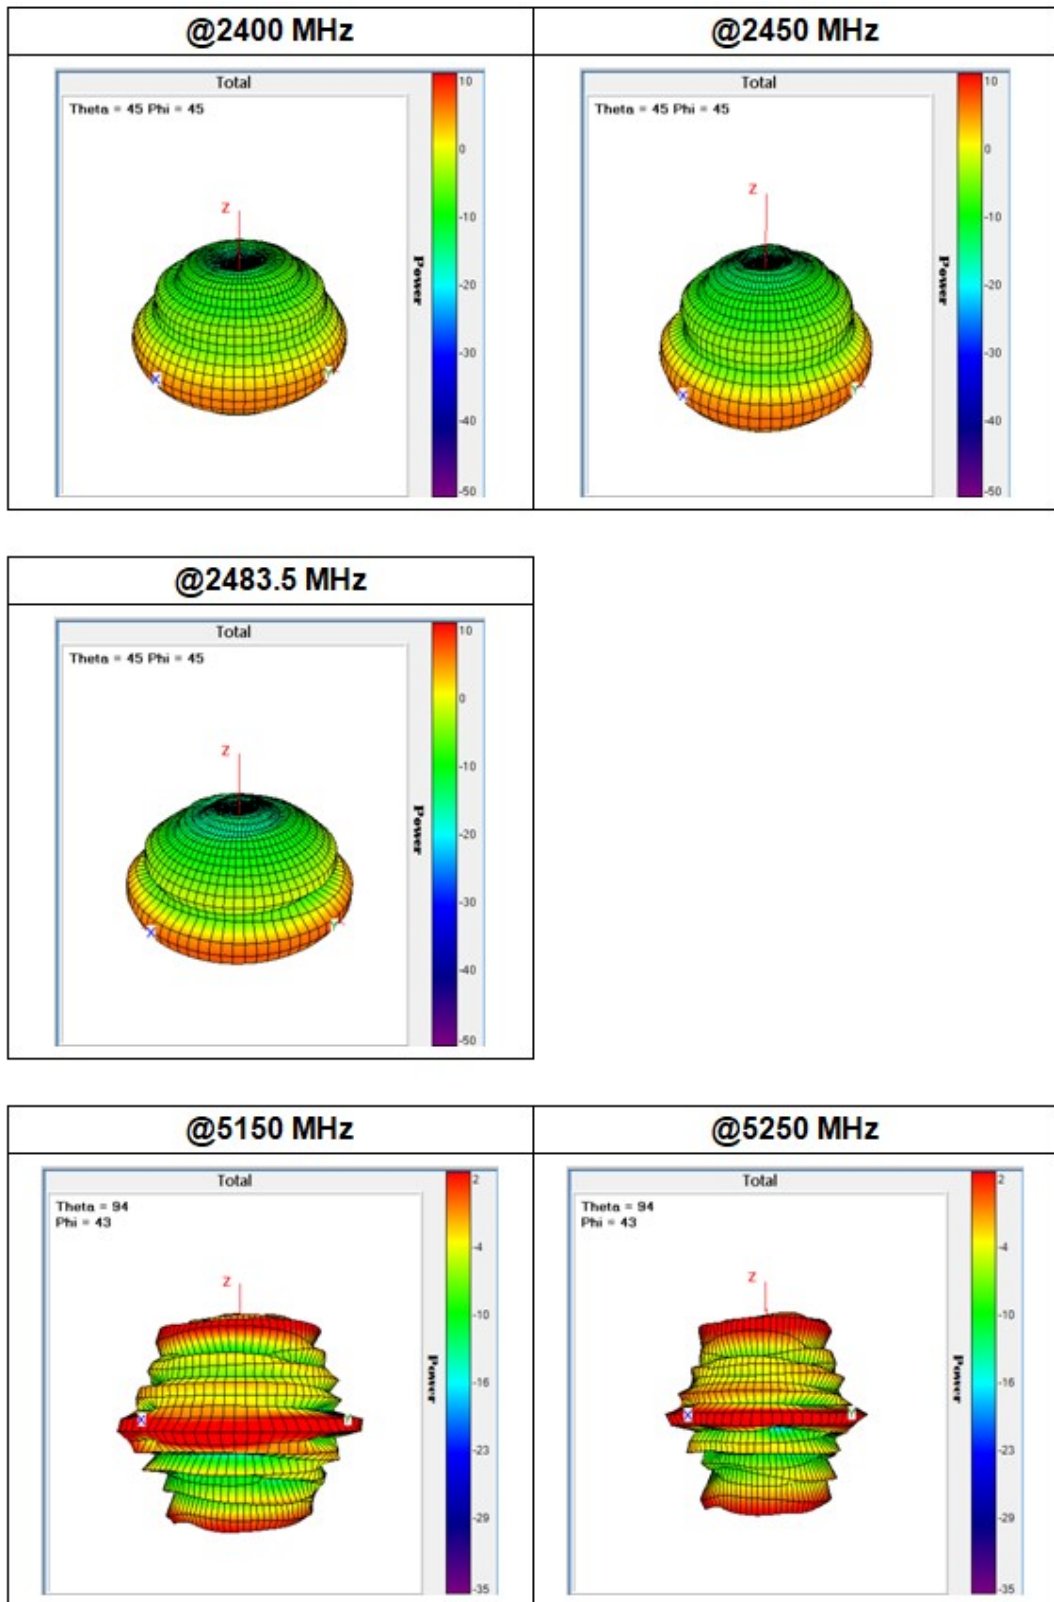

2.3 3D Pattern

