



FCC PART 15.247
TEST REPORT

For

Archos S.A

12, Rue Ampere 91430 Igny, France

FCC ID: SOVAC101XS2

Report Type: Original Report	Product Type: 10.1 inch Tablet PC
Test Engineer: Rocky Kang	<i>Rocky Kang</i>
Report Number: RSZ130628002-00B	
Report Date: 2013-08-16	
Reviewed By: Alvin Huang	<i>Alvin Huang</i>
Reviewed By: RF Leader	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION.....	6
EQUIPMENT MODIFICATIONS.....	6
EUT EXERCISE SOFTWARE.....	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP.....	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §2.1093 – RF EXPOSURE	8
APPLICABLE STANDARD.....	8
RESULT.....	8
FCC §15.203 – ANTENNA REQUIREMENT	9
APPLICABLE STANDARD.....	9
ANTENNA CONNECTOR CONSTRUCTION.....	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD.....	10
MEASUREMENT UNCERTAINTY.....	10
EUT SETUP.....	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE.....	11
TEST EQUIPMENT LIST AND DETAILS.....	11
CORRECTED FACTOR & MARGIN CALCULATION.....	11
TEST RESULTS SUMMARY.....	12
TEST DATA.....	12
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS	15
APPLICABLE STANDARD.....	15
MEASUREMENT UNCERTAINTY.....	15
EUT SETUP.....	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	16
TEST PROCEDURE.....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST RESULTS SUMMARY.....	17
TEST DATA.....	17
FCC §15.247(a) (1)-CHANNEL SEPARATION	20
APPLICABLE STANDARD.....	20
TEST PROCEDURE.....	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA.....	20

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....27
 APPLICABLE STANDARD27
 TEST PROCEDURE27
 TEST EQUIPMENT LIST AND DETAILS.....27
 TEST DATA27

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL33
 APPLICABLE STANDARD33
 TEST PROCEDURE33
 TEST EQUIPMENT LIST AND DETAILS.....33
 TEST DATA33

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....36
 APPLICABLE STANDARD36
 TEST PROCEDURE36
 TEST EQUIPMENT LIST AND DETAILS.....36
 TEST DATA36

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT52
 APPLICABLE STANDARD52
 TEST PROCEDURE52
 TEST EQUIPMENT LIST AND DETAILS.....52
 TEST DATA52

FCC §15.247(d) - BAND EDGES58
 APPLICABLE STANDARD58
 TEST PROCEDURE58
 TEST EQUIPMENT LIST AND DETAILS.....58
 TEST DATA59

DECLARATION LETTER.....63

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Archos S.A's product, model number: AC101XS2 (FCC ID: SOVAC101XS2) or the "EUT" as referred to in this report was a 10.1 inch Tablet PC, which was measured approximately: 27.0 cm (L) x 16.8 cm (W) x 0.8 cm (H), rated input voltage: DC 3.7V rechargeable Li-ion battery and DC 5.0V charging from adapter.

Adapter information:

Model: HND050200X

Input: 100-240V~50/60Hz 0.35A MAX

Output: 5.0V 2.0A

Note: The product 10.1 inch Tablet PC, model AC101XS2 has three kinds of screen, and the difference between them is just manufactured by different suppliers, and the screen size and relative specification are the same, which was explained by the applicant in the attached declaration letter.

** All measurement and test data in this report was gathered from production sample serial number: 1306106 (Assigned by the BACL, Shenzhen). The EUT supplied by the applicant was received on 2013-06-28.*

Objective

This test report is prepared on behalf of Archos S.A in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP and 15.247 DTS (Wi-Fi) submissions with FCC ID: SOVAC101XS2.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

Equipment Modifications

No modification was made to the EUT.


EUT Exercise Software

RF test tool built-in the EUT.

External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Detachable Adapter Cable	1.2	Adapter	EUT

Block Diagram of Test Setup

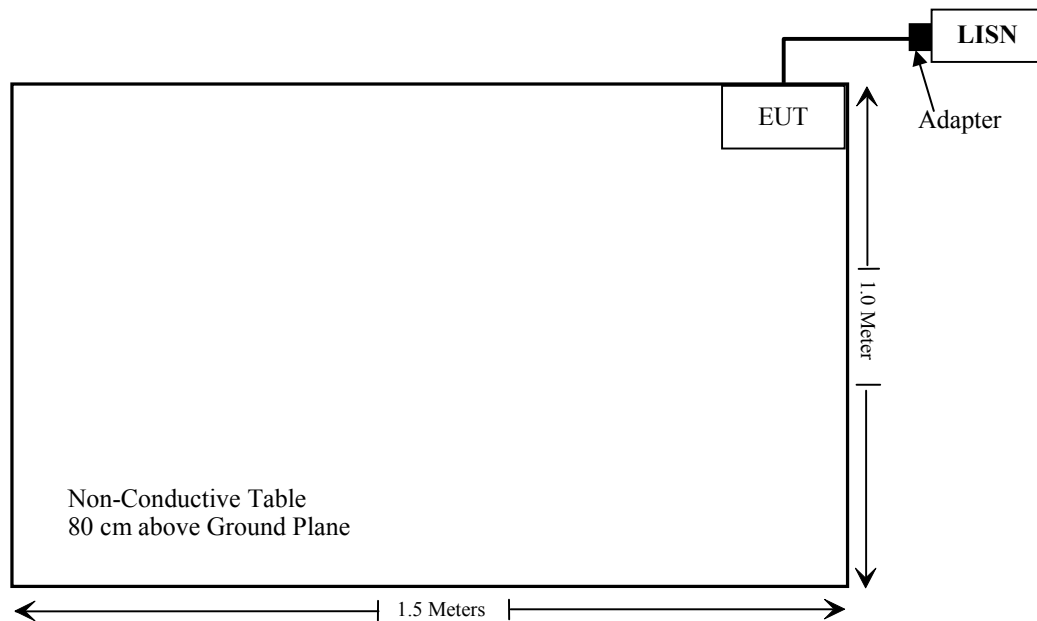

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

FCC §15.247 (i) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance v05

Result

According to FCC KDB 447498 D01 General RF Exposure Guidance v05 generic portable criteria

The Max output power: -0.86 dBm (0.82 mW)

According to the Appendix A of KDB 447498, the exclusion thresholds for 2450 MHz is 10 mW

Conclusion:

The test output power is 0.82 mW and the maximum tune-up tolerance limit is 1.26 mW < the exclusion thresholds 10 mW, so stand-alone SAR evaluation is not required.

Bluetooth and wifi can not simultaneously transmit.

Result: Compliance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a PCB antenna arrangement for bluetooth, which was permanently attached and the maximum gain was 2.0 dBi, fulfill the requirement of this section. Please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements may be receiver reading, attenuation of the connection between AMN/ISN and receiver, AMN/ISN voltage division factor, AMN/ISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report

Port	Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup

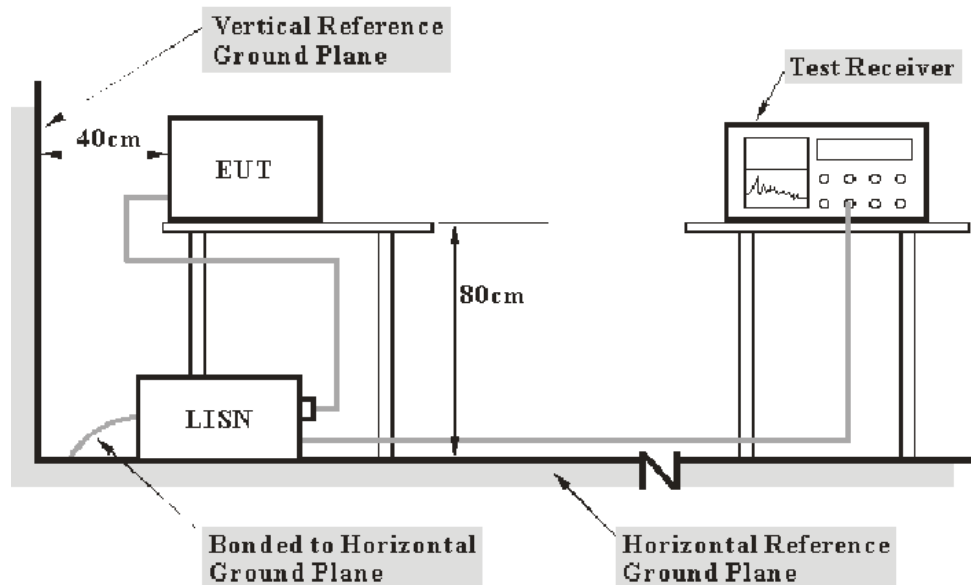

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2009. The related limit was specified in FCC Part 15.207.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2013-06-17	2014-06-17
Rohde & Schwarz	LISN	ESH2-Z5	892107/021	2012-08-22	2013-08-22
Rohde & Schwarz	Transient limiter	ESH3Z2	DE25985	2012-08-09	2013-08-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Pulse Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Pulse Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, with the worst margin reading of:

10.7 dB at 0.522000 MHz in the Line conducted mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

in our lab., $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	25 ° C
Relative Humidity:	55 %
ATM Pressure:	100.1 kPa

The testing was performed by Rocky Kang on 2013-07-01.

EUT operation mode: Charging & Transmitting (BDR mode) – worst case

AC 120 V, 60 Hz, Line:


EMI Auto Test L

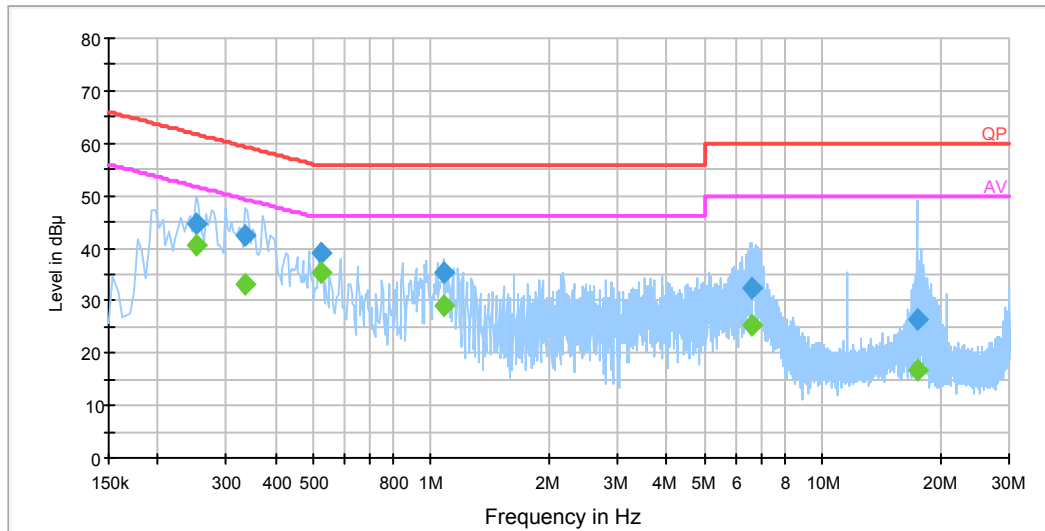

Frequency (MHz)	Corrected Amplitude (dB μ V)	Correction Factor (dB)	Limit (dB μ V)	Margin (dB)	Detector (PK/Ave./QP)
0.522000	35.3	19.5	46.0	10.7	Ave.
0.250000	40.6	19.5	51.8	11.2	Ave.
0.334000	33.1	19.5	49.4	16.3	Ave.
0.522000	39.2	19.5	56.0	16.8	QP
0.334000	42.4	19.5	59.4	17.0	QP
1.074000	29.1	19.5	46.0	16.9	Ave.
0.250000	44.5	19.5	61.8	17.3	QP
1.074000	35.5	19.5	56.0	20.5	QP
6.590000	25.2	19.7	50.0	24.8	Ave.
6.590000	32.4	19.7	60.0	27.6	QP
17.402000	16.9	20.0	50.0	33.1	Ave.
17.402000	26.5	20.0	60.0	33.5	QP

AC 120V, 60 Hz, Neutral:

EMI Auto Test N

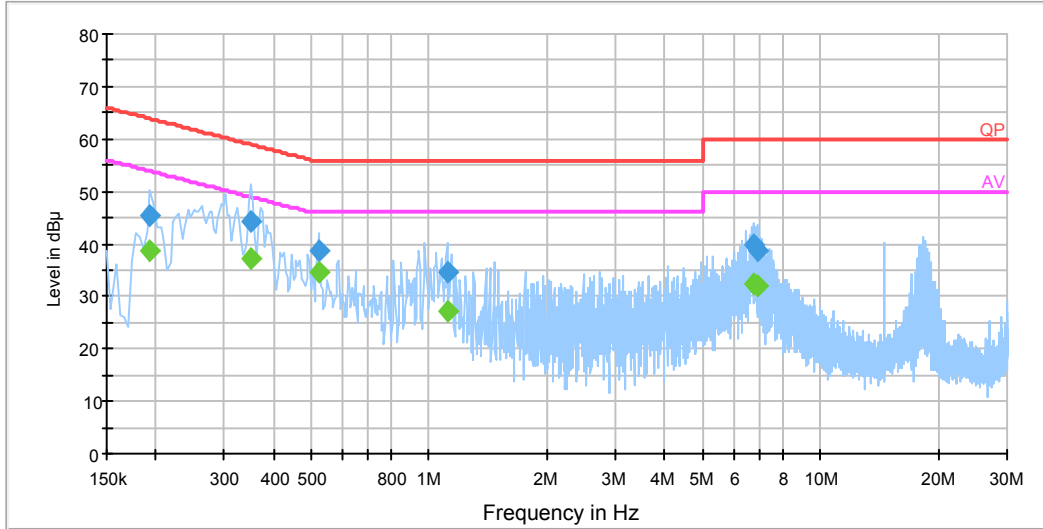

Frequency (MHz)	Corrected Amplitude (dB μ V)	Correction Factor (dB)	Limit (dB μ V)	Margin (dB)	Detector (PK/Ave./QP)
0.522000	34.6	19.5	46.0	11.4	Ave.
0.350000	37.0	19.5	49.0	11.9	Ave.
0.350000	44.1	19.5	59.0	14.9	QP
0.194000	38.7	19.5	53.9	15.2	Ave.
0.522000	38.6	19.5	56.0	17.4	QP
6.746000	32.3	19.8	50.0	17.7	Ave.
6.942000	31.9	19.8	50.0	18.1	Ave.
0.194000	45.4	19.5	63.9	18.5	QP
1.110000	27.3	19.5	46.0	18.7	Ave.
6.746000	39.9	19.8	60.0	20.1	QP
6.942000	38.7	19.8	60.0	21.3	QP
1.110000	34.6	19.5	56.0	21.4	QP

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) will not be taken into consideration for the test data recorded in the report.

EUT Setup

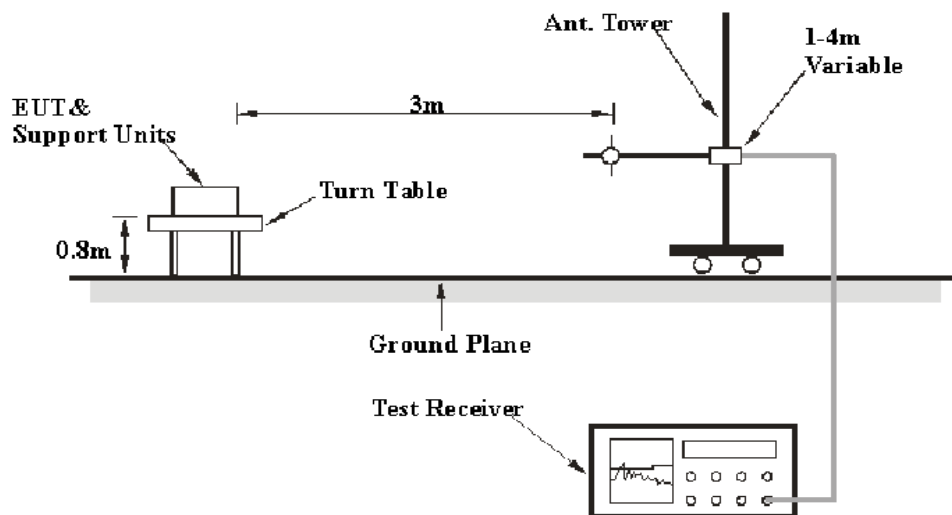

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to an AC 120V/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Corrected Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2012-08-09	2013-08-09
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-05-09	2014-05-09
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
SUPER ULTRA	Amplifier	ZVA-213+	N/A	2012-11-24	2013-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2014-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2010-10-14	2013-10-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the data in the following table, with the worst margin reading of:

10.49 dB at 176.8 MHz in the **Horizontal** polarization

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

in our lab., $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	26 ° C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Rocky Kang on 2013-07-23.

EUT operation mode: Transmitting

30 MHz ~25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK, the worst case is BDR Mode (GFSK) at adapter power supply)

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247/205/209	
	Reading (dB μ V)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Low Channel (2402 MHz)									
2402.0	89.07	PK	284	1.40	H	6.13	95.20	/	/
2402.0	76.28	Ave.	284	1.40	H	6.13	82.41	/	/
2402.0	85.63	PK	337	1.50	V	6.13	91.76	/	/
2402.0	72.34	Ave.	337	1.50	V	6.13	78.47	/	/
176.8	48.33	QP	62	1.40	H	-16.00	32.33	43.50	11.17
9608.0	21.16	Ave.	353	1.50	V	19.28	40.44	54.00	13.56
7206.0	22.50	Ave.	273	1.30	V	17.06	39.56	54.00	14.44
4804.0	23.87	Ave.	131	1.40	H	12.40	36.27	54.00	17.73
9608.0	34.36	PK	353	1.50	V	19.28	53.64	74.00	20.36
2373.9	27.29	Ave.	290	1.50	V	6.13	33.42	54.00	20.58
2386.0	27.13	Ave.	297	1.20	V	6.13	33.26	54.00	20.74
2496.2	25.93	Ave.	302	1.40	V	7.21	33.14	54.00	20.86
7206.0	34.98	PK	273	1.30	V	17.06	52.04	74.00	21.96
4804.0	36.25	PK	131	1.40	H	12.40	48.65	74.00	25.35
2373.9	41.84	PK	290	1.50	V	6.13	47.97	74.00	26.03
2496.2	40.17	PK	302	1.40	V	7.21	47.38	74.00	26.62
2386.0	40.72	PK	297	1.20	V	6.13	46.85	74.00	27.15
Middle Channel (2441 MHz)									
2441.0	87.19	PK	260	1.50	H	7.21	94.40	/	/
2441.0	74.03	Ave.	260	1.50	H	7.21	81.24	/	/
2441.0	82.61	PK	95	1.20	V	7.21	89.82	/	/
2441.0	70.58	Ave.	95	1.20	V	7.21	77.79	/	/
176.8	49.01	QP	19	1.40	H	-16.00	33.01	43.5	10.49
9764.0	21.26	Ave.	48	1.50	H	19.40	40.66	54	13.34
7323.0	22.54	Ave.	37	1.20	V	16.49	39.03	54	14.97
4882.0	23.54	Ave.	149	1.30	V	12.46	36.00	54	18.00
9764.0	34.57	PK	48	1.50	H	19.40	53.97	74	20.03
2384.4	25.94	Ave.	22	1.30	V	6.13	32.07	54	21.93
7323.0	34.76	PK	37	1.20	V	16.49	51.25	74	22.75
4882.0	36.58	PK	149	1.30	V	12.46	49.04	74	24.96
2384.4	39.72	PK	22	1.30	V	6.13	45.85	74	28.15
2496.5	25.19	Ave.	241	1.40	H	7.21	32.4	54	21.60
2468.2	26.26	Ave.	205	1.30	H	7.21	33.47	54	20.53
2496.5	38.02	PK	241	1.40	H	7.21	45.23	74	28.77
2498.2	38.62	PK	205	1.30	H	7.21	45.83	74	28.17

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
High Channel (2480 MHz)									
2480.0	88.62	PK	173	1.40	H	7.21	95.83	/	/
2480.0	74.79	Ave.	173	1.40	H	7.21	82.00	/	/
2480.0	83.24	PK	332	1.50	V	7.21	90.45	/	/
2480.0	70.95	Ave.	332	1.50	V	7.21	78.16	/	/
176.8	48.30	QP	210	1.50	H	-16.00	32.30	43.50	11.20
9920.0	23.25	Ave.	355	1.30	V	19.38	42.63	54.00	11.37
7440.0	24.39	Ave.	60	1.40	H	15.90	40.29	54.00	13.71
4960.0	26.24	Ave.	283	1.40	V	12.50	38.74	54.00	15.26
2483.7	27.90	Ave.	265	1.40	V	7.21	35.11	54.00	18.89
9920.0	35.47	PK	355	1.30	V	19.38	54.85	74.00	19.15
2492.0	26.80	Ave.	114	1.30	V	7.21	34.01	54.00	19.99
2322.8	26.68	Ave.	98	1.40	H	5.48	32.16	54.00	21.84
4960.0	36.77	PK	283	1.40	V	12.50	49.27	74.00	24.73
2483.7	41.36	PK	265	1.40	V	7.21	48.57	74.00	25.43
2492.0	39.63	PK	114	1.30	V	7.21	46.84	74.00	27.16
2322.8	40.11	PK	98	1.40	H	5.48	45.59	74.00	28.41
7440.0	25.78	PK	60	1.40	H	15.90	41.68	74.00	32.32

Note:

1. Corrected Factor=Antenna factor (RX) +cable loss – amplifier factor
2. Corrected Amplitude = Corrected Factor + Receiver Reading
3. Margin = Limit- Corrected Amplitude

FCC §15.247(a) (1)-CHANNEL SEPARATION

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace
3. Measure the channel separation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 ° C
Relative Humidity:	50 %
ATM Pressure:	100.6 kPa

The testing was performed by Rocky Kang on 2013-07-22.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	≥Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.004	0.695	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.692	Pass
	Adjacent	2442			
	High	2480	1.004	0.692	Pass
	Adjacent	2479			
EDR (π/4-DQPSK)	Low	2402	1.004	0.903	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.898	Pass
	Adjacent	2442			
	High	2480	1.010	0.901	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	1.004	0.866	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.861	Pass
	Adjacent	2442			
	High	2480	1.004	0.861	Pass
	Adjacent	2479			

Note: Limit = 20 dB bandwidth *2/3


BDR (GFSK): Low Channel

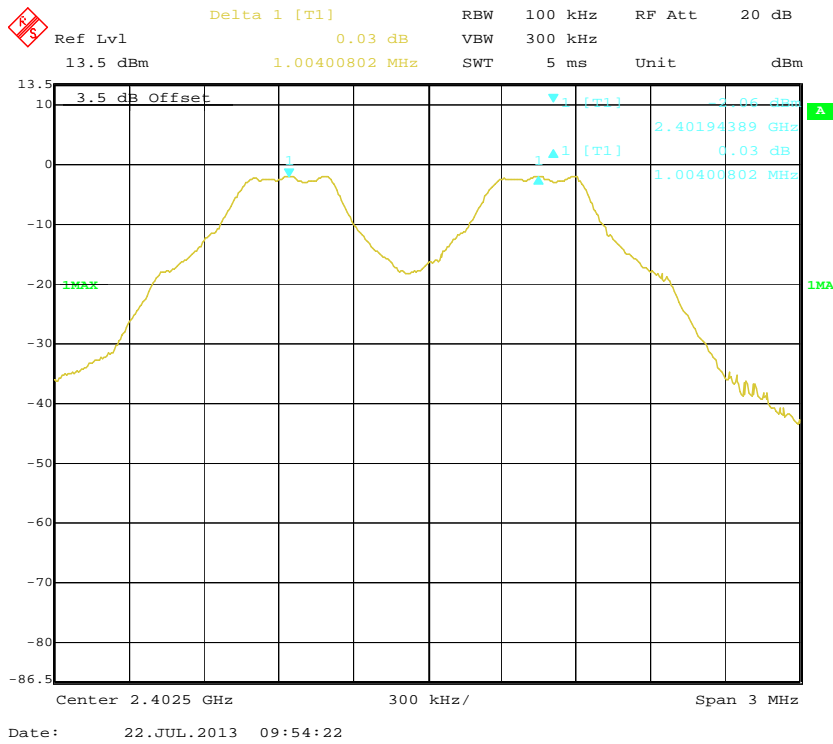


BDR (GFSK): Middle Channel

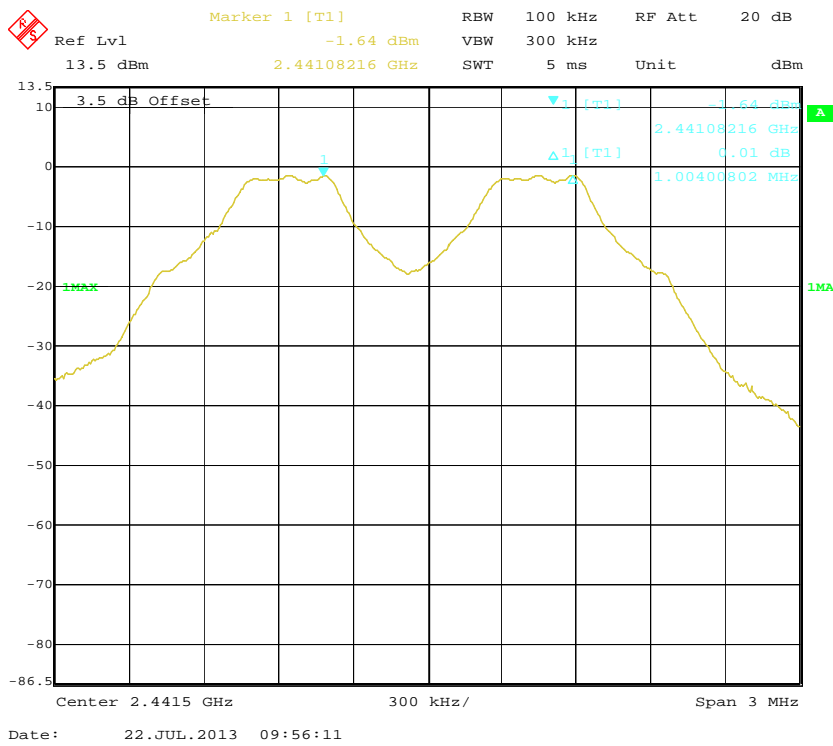


BDR (GFSK): High Channel

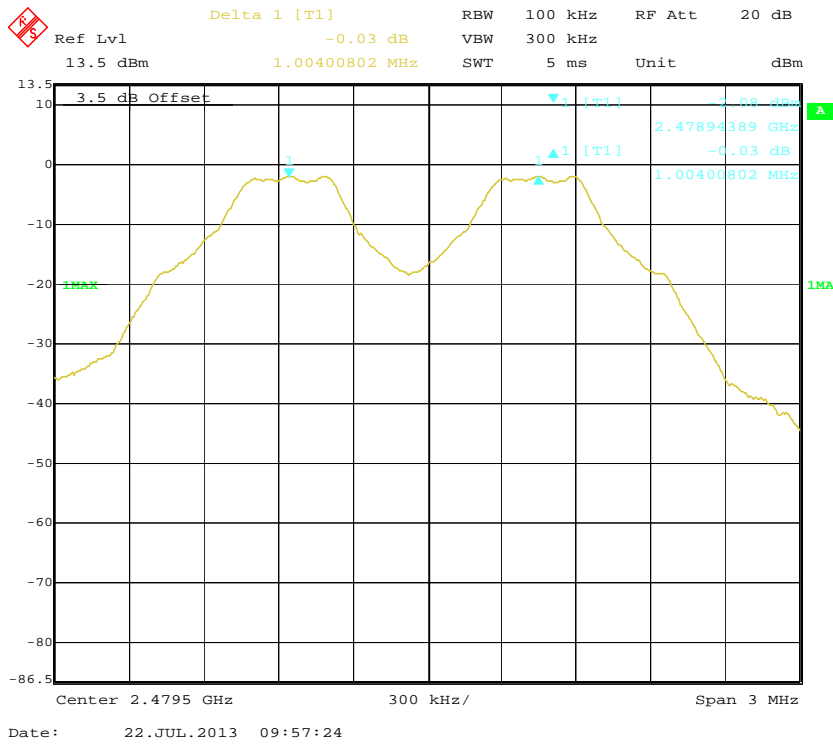


EDR ($\pi/4$ -DQPSK): Low Channel

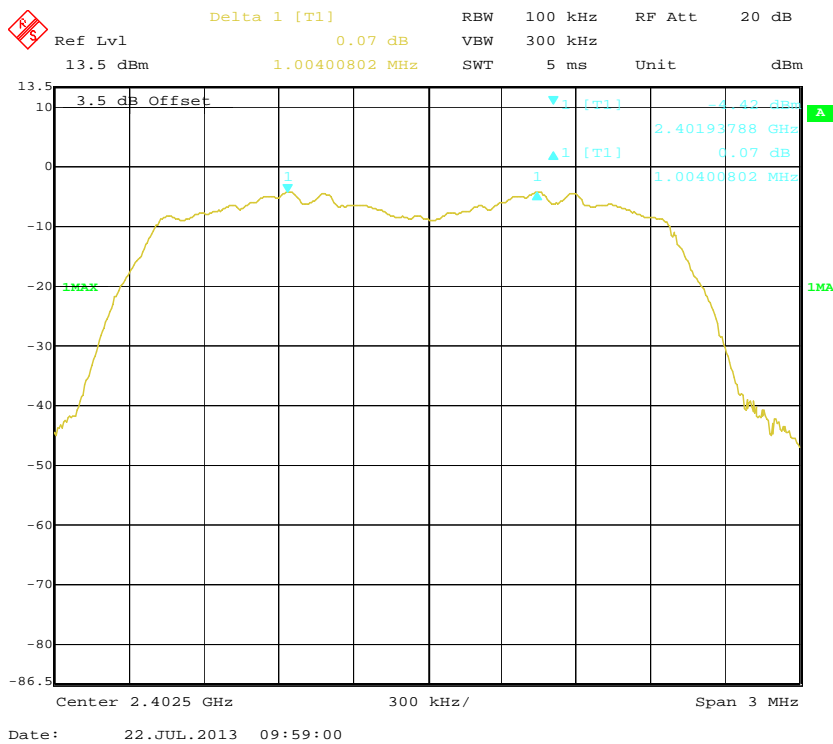


EDR ($\pi/4$ -DQPSK): Middle Channel

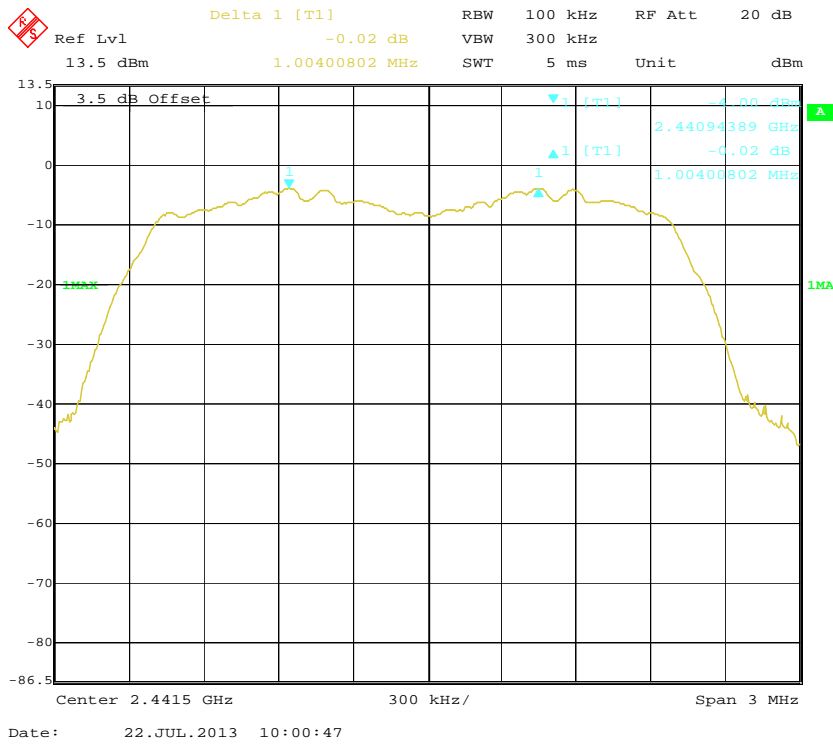


EDR ($\pi/4$ -DQPSK): High Channel

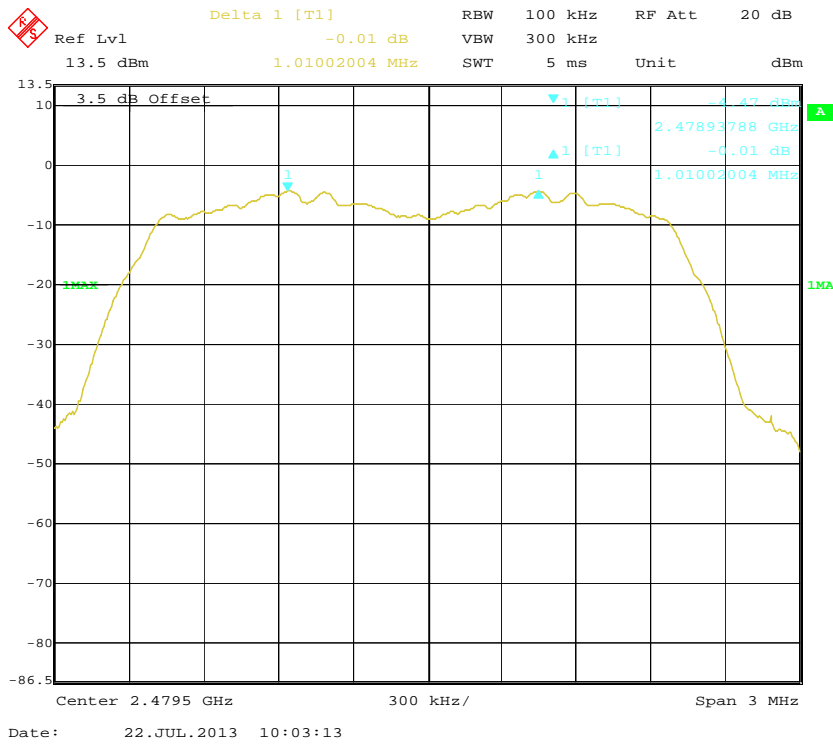


EDR (8DPSK): Low Channel

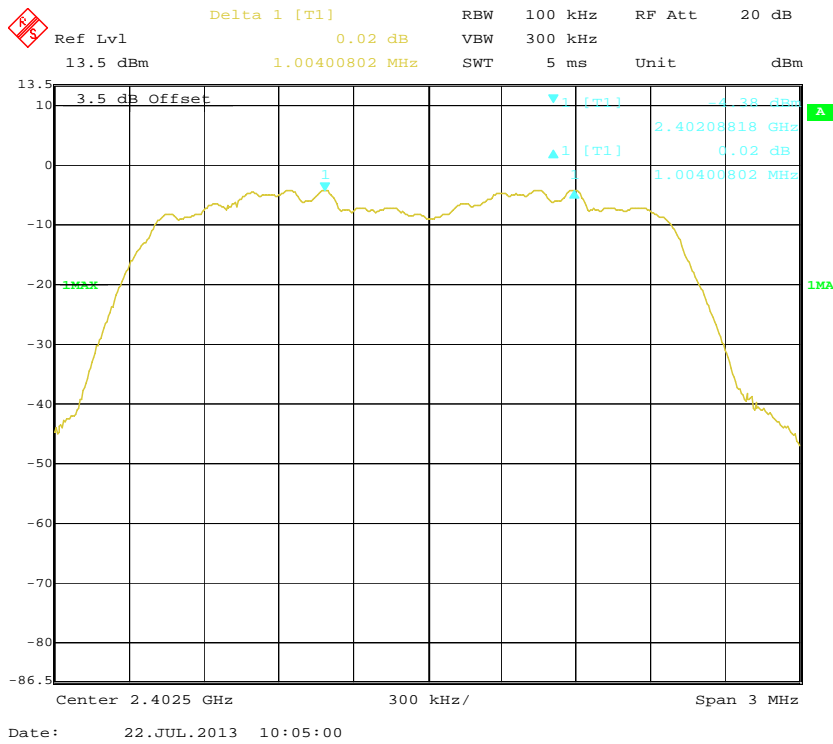

EDR (8DPSK): Middle Channel

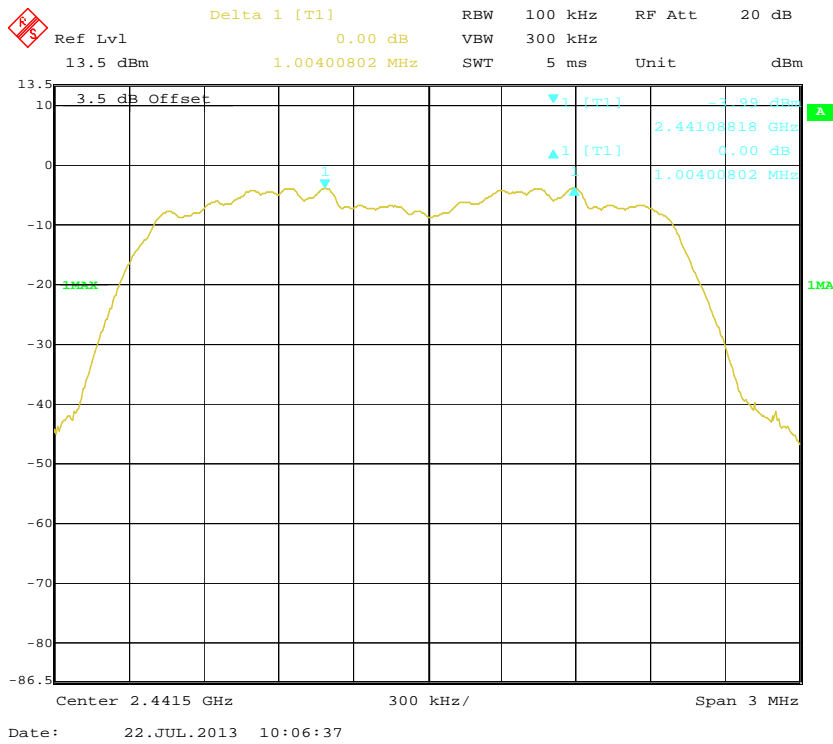

EDR (8DPSK): High Channel

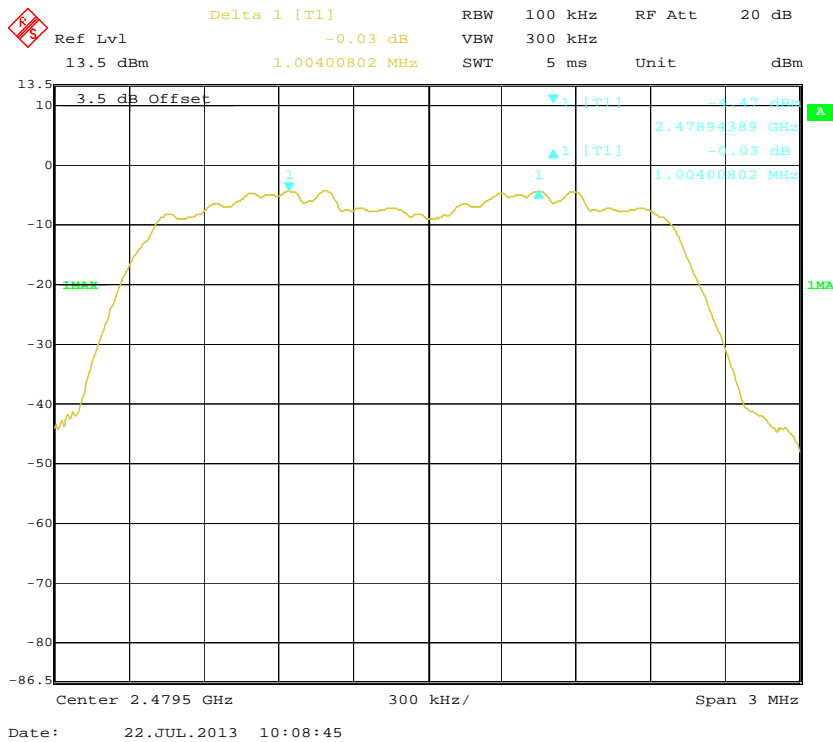

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	100.6 kPa


* The testing was performed by Rocky Kang on 2013-07-22

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	1.042
	Middle	2441	1.038
	High	2480	1.038
EDR ($\pi/4$-DQPSK)	Low	2402	1.355
	Middle	2441	1.347
	High	2480	1.351
EDR (8DPSK)	Low	2402	1.299
	Middle	2441	1.291
	High	2480	1.291


BDR (GFSK): Low Channel

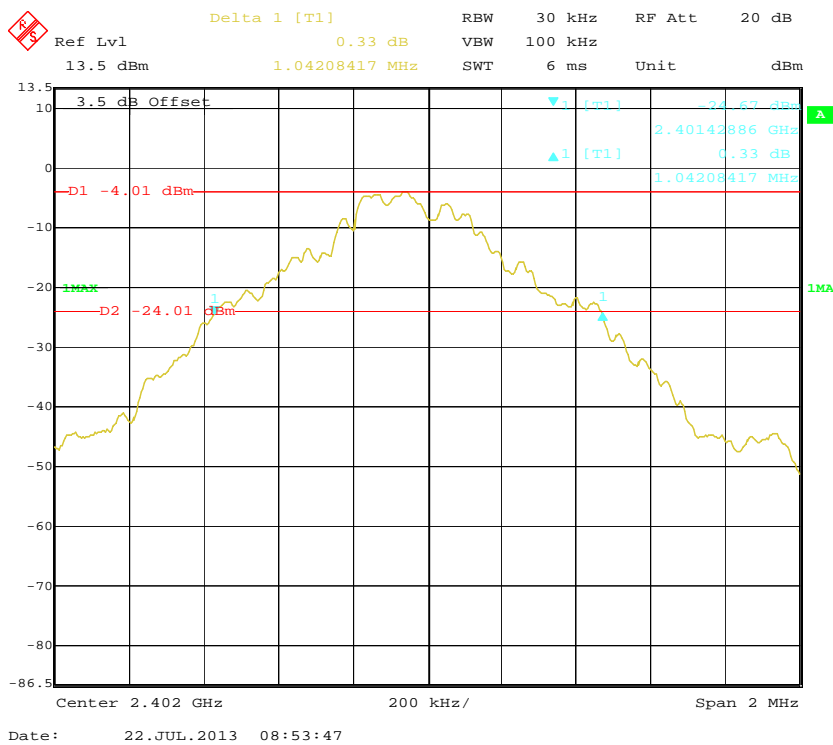


BDR (GFSK): Middle Channel

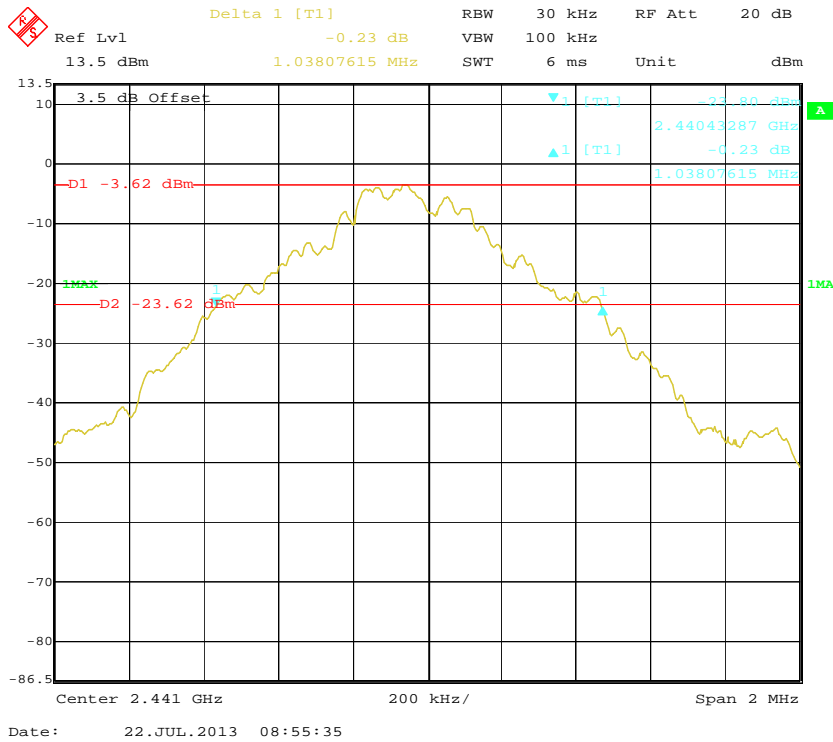


BDR (GFSK): High Channel

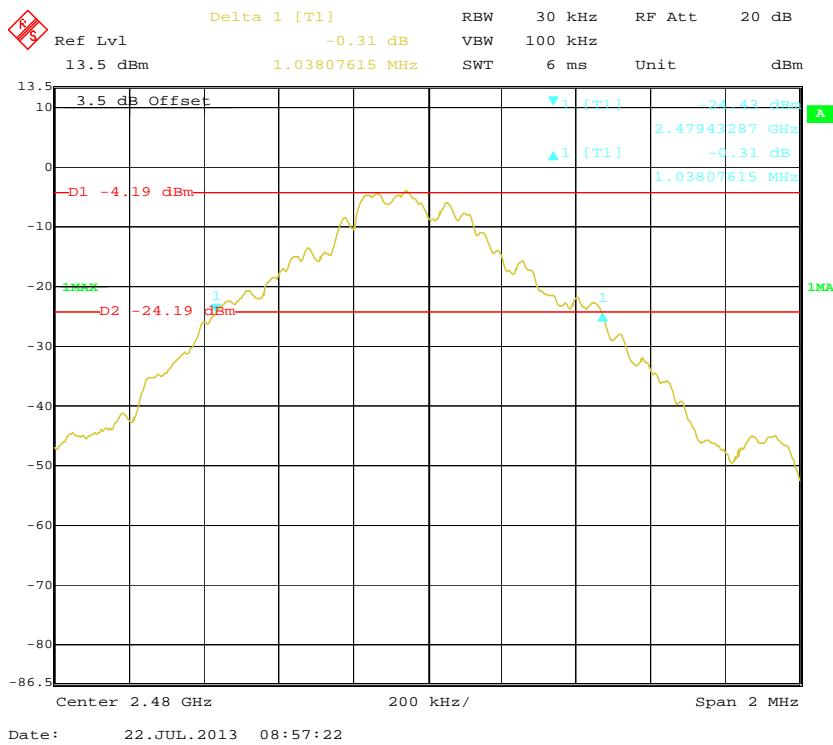


EDR ($\pi/4$ -DQPSK): Low Channel

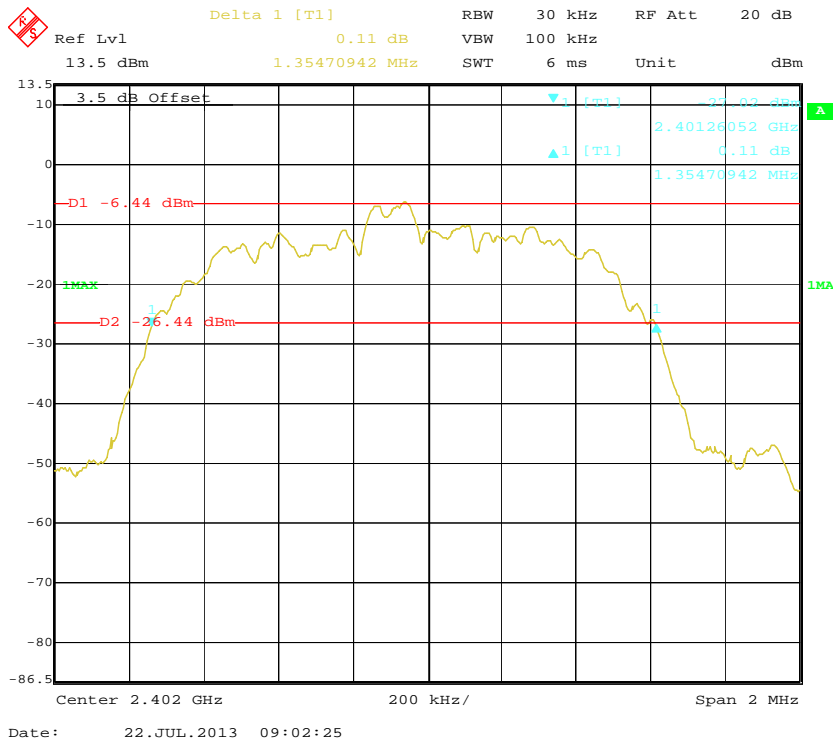


EDR ($\pi/4$ -DQPSK): Middle Channel

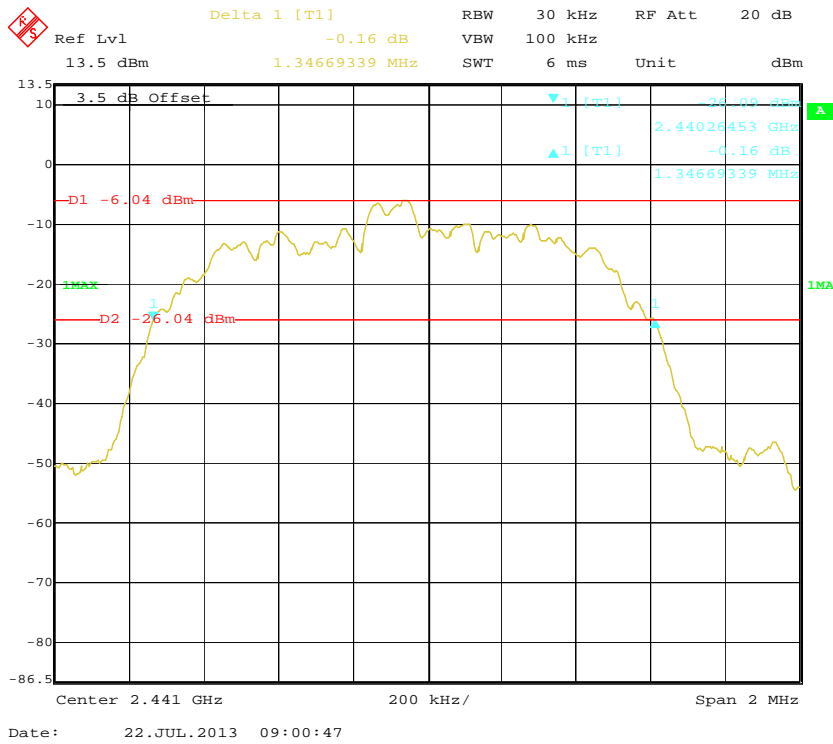


EDR ($\pi/4$ -DQPSK): High Channel

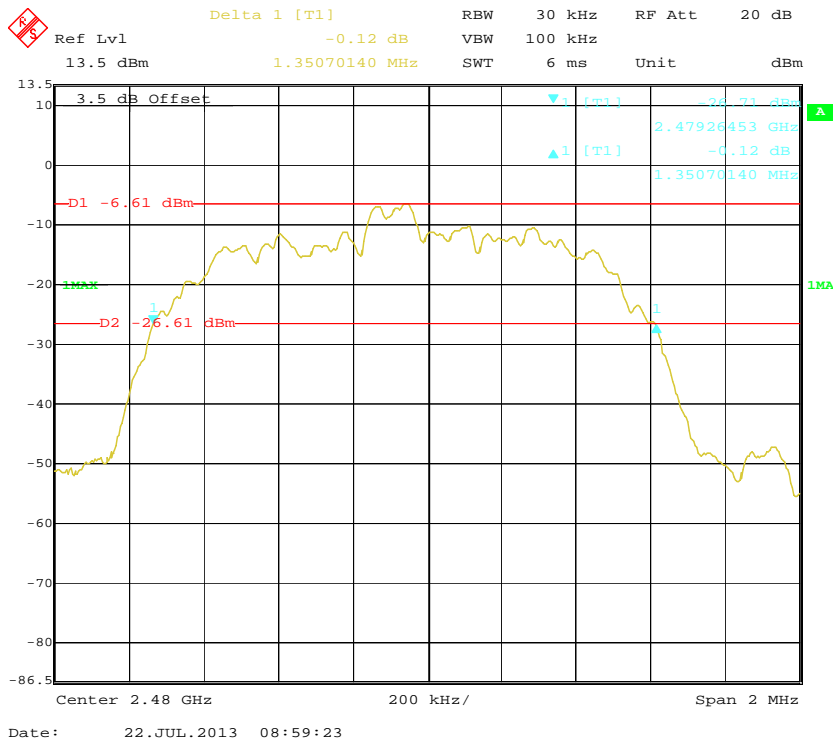


EDR (8DPSK): Low Channel

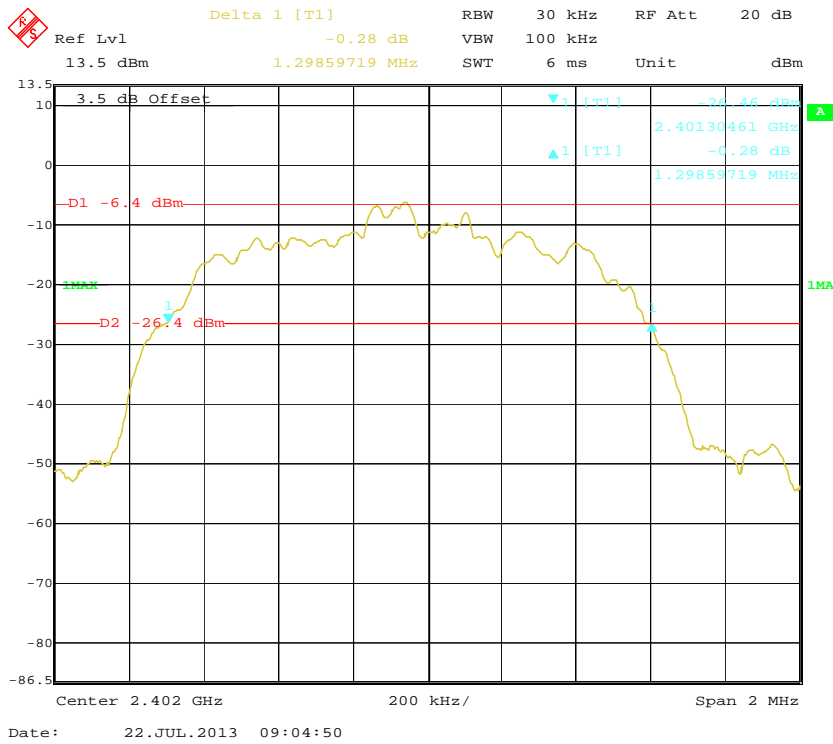

EDR (8DPSK): Middle Channel

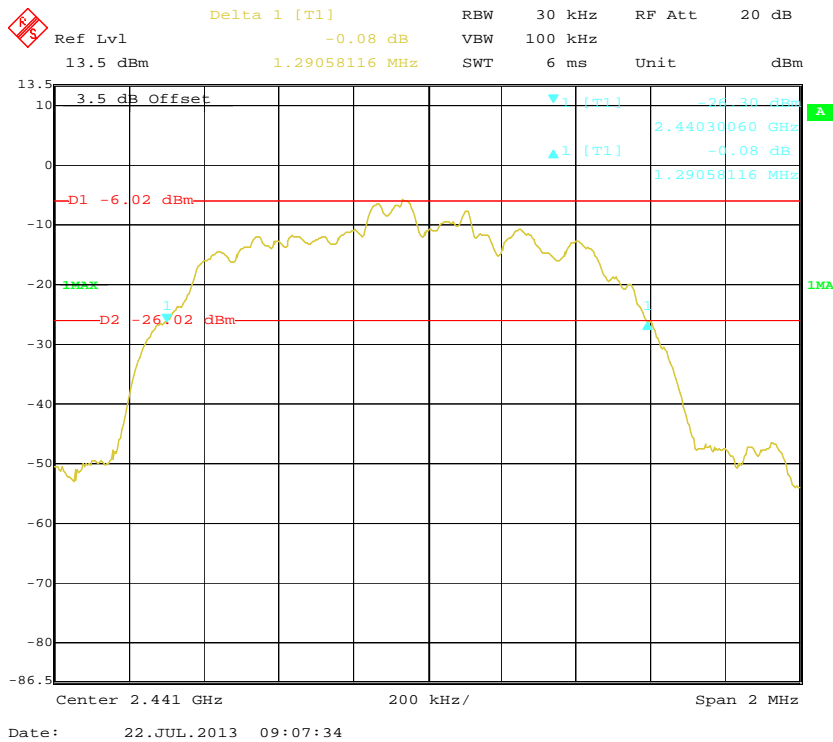

EDR (8DPSK): High Channel

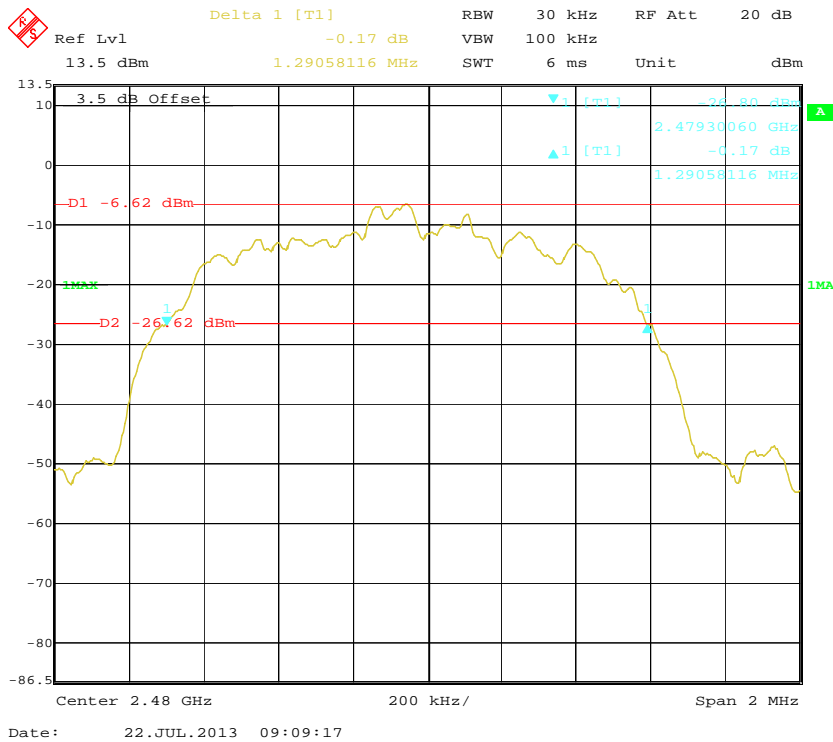

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 ° C
Relative Humidity:	50 %
ATM Pressure:	100.6 kPa


The testing was performed by Rocky Kang on 2013-07-22.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15


BDR (GFSK): Number of Hopping Channels

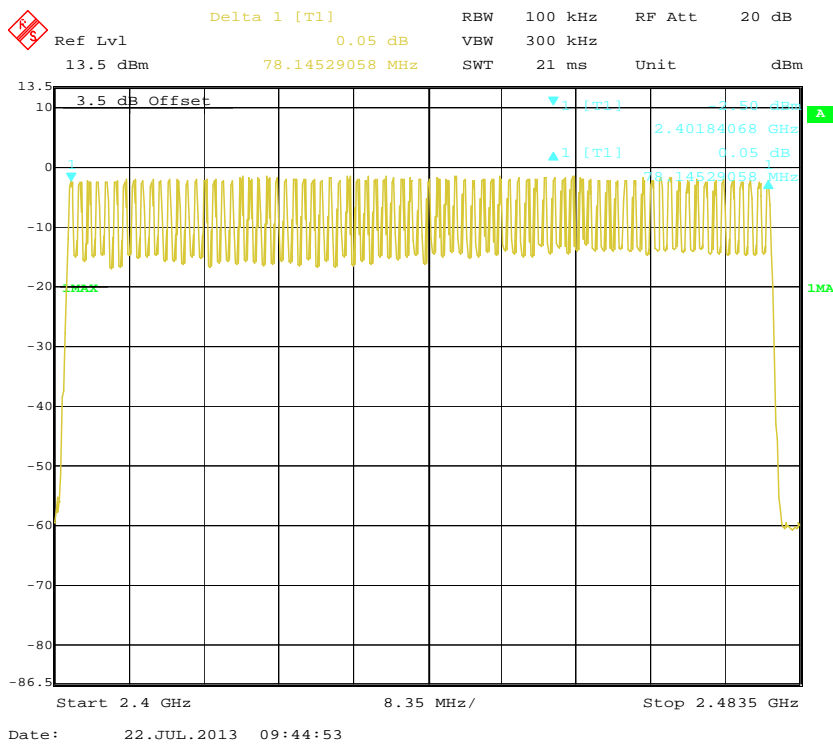

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

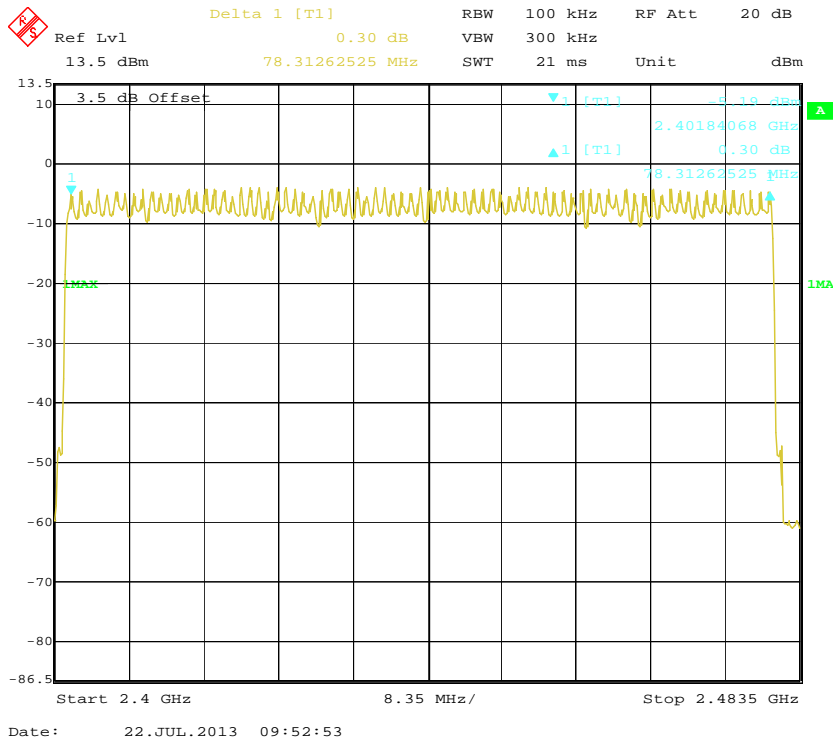

(8DPSK): Number of Hopping Channels

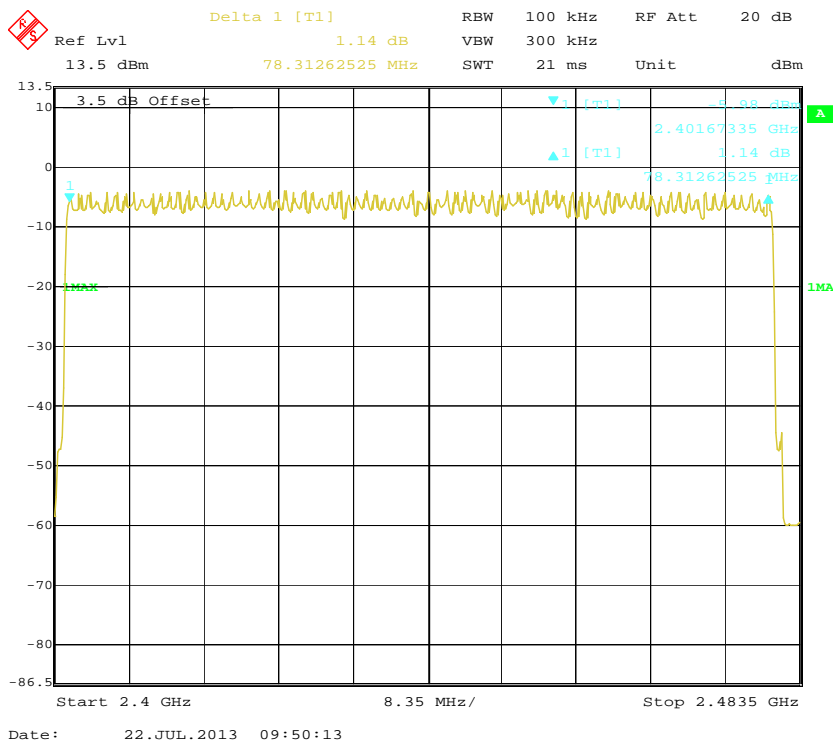

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time*hope rate/number of hopping channels*31.6S
 Hop rate=1600/S

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 ° C
Relative Humidity:	50 %
ATM Pressure:	100.6 kPa

The testing was performed by Rocky Kang on 2013-07-22.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result	
BDR (GFSK)	DH 1	Low	0.399	0.128	0.4	Pass	
		Middle	0.399	0.128	0.4	Pass	
		High	0.399	0.128	0.4	Pass	
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	DH 3	Low	1.665	0.266	0.4	Pass	
		Middle	1.665	0.266	0.4	Pass	
		High	1.665	0.266	0.4	Pass	
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	DH 5	Low	2.928	0.312	0.4	Pass	
		Middle	2.928	0.312	0.4	Pass	
		High	2.928	0.312	0.4	Pass	
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						
	EDR (π/4-DQPSK)	DH 1	Low	0.403	0.129	0.4	Pass
Middle			0.403	0.129	0.4	Pass	
High			0.403	0.129	0.4	Pass	
Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S							
DH 3		Low	1.665	0.266	0.4	Pass	
		Middle	1.665	0.266	0.4	Pass	
		High	1.665	0.266	0.4	Pass	
Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S							
DH 5		Low	2.928	0.312	0.4	Pass	
		Middle	2.928	0.312	0.4	Pass	
		High	2.928	0.312	0.4	Pass	
Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S							
EDR (8DPSK)		DH 1	Low	0.403	0.129	0.4	Pass
	Middle		0.403	0.129	0.4	Pass	
	High		0.403	0.129	0.4	Pass	
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	DH 3	Low	1.665	0.266	0.4	Pass	
		Middle	1.665	0.266	0.4	Pass	
		High	1.665	0.266	0.4	Pass	
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	DH 5	Low	2.938	0.313	0.4	Pass	
		Middle	2.928	0.312	0.4	Pass	
		High	2.928	0.312	0.4	Pass	
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						

BDR (GFSK):


Pulse time, Low Channel, DH1

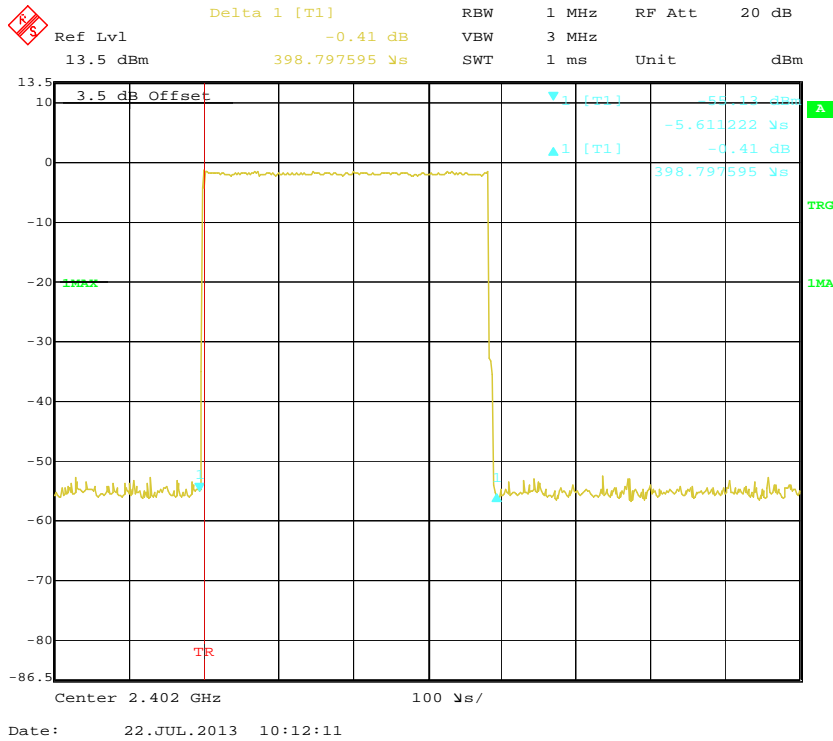


Pulse time, Middle Channel, DH1

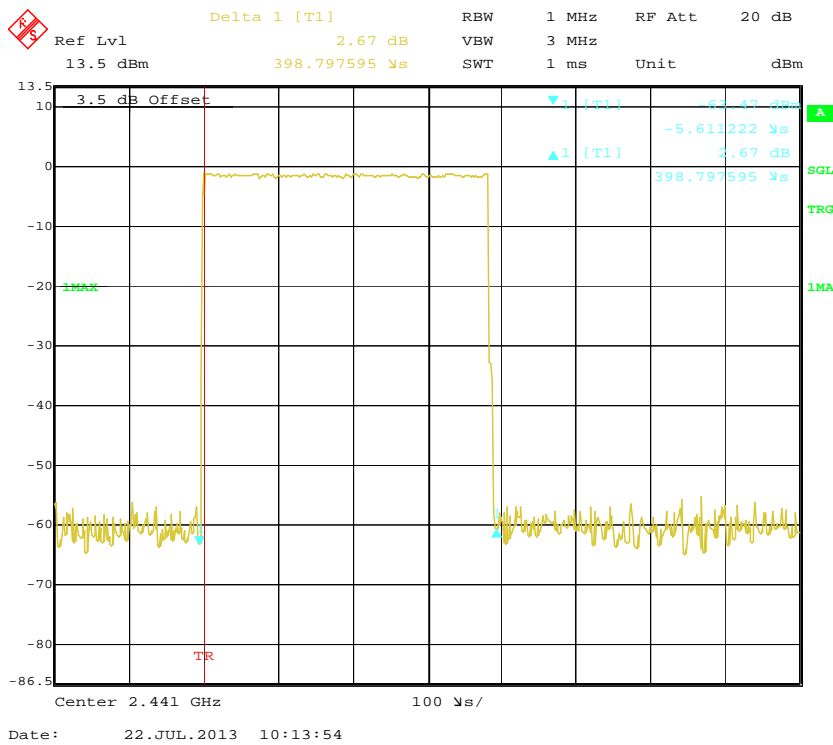


Pulse time, High Channel, DH1

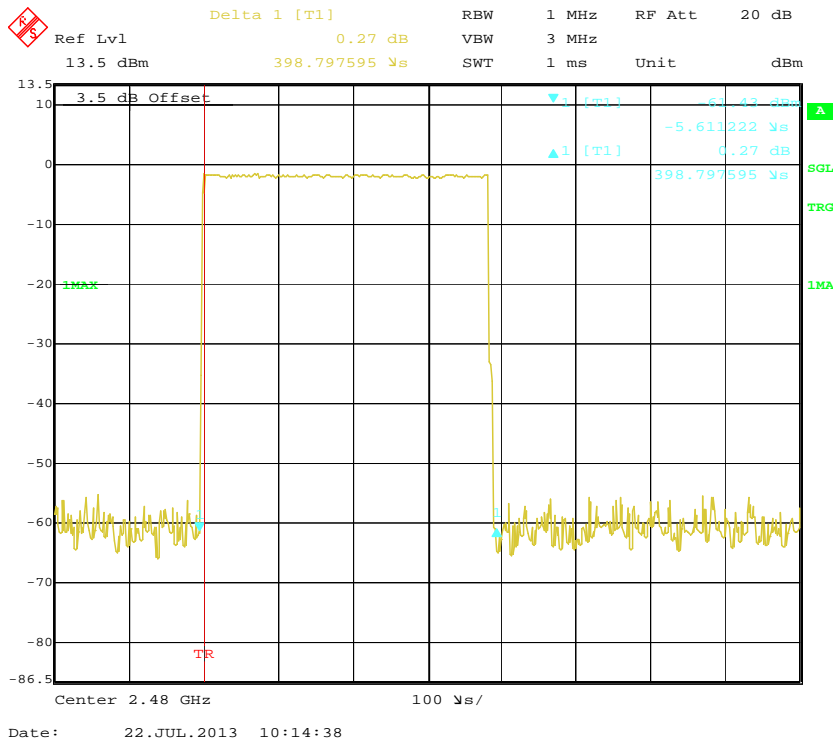


Pulse time, Low Channel, DH3

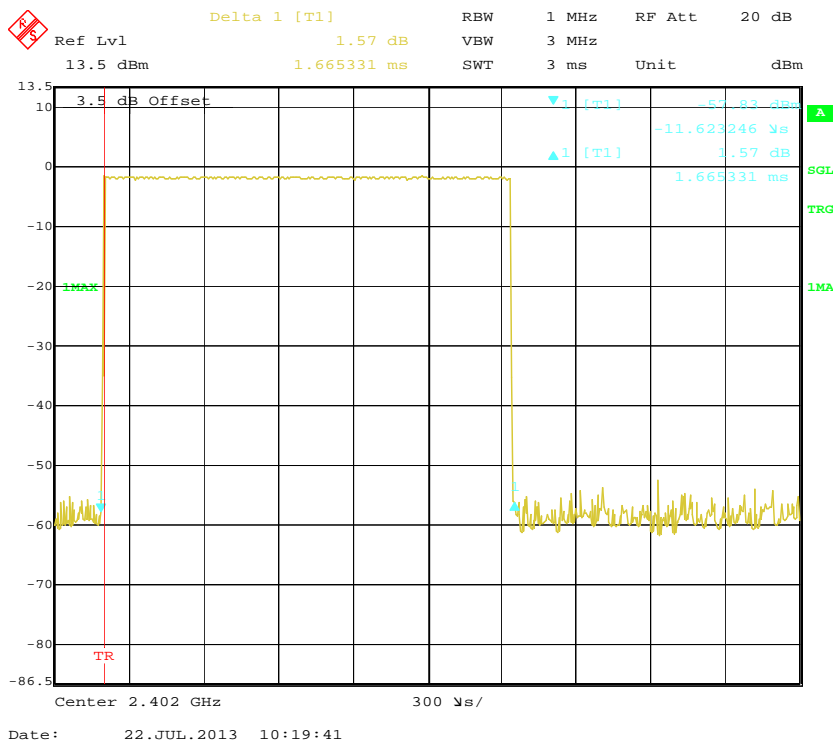


Pulse time, Middle Channel, DH3

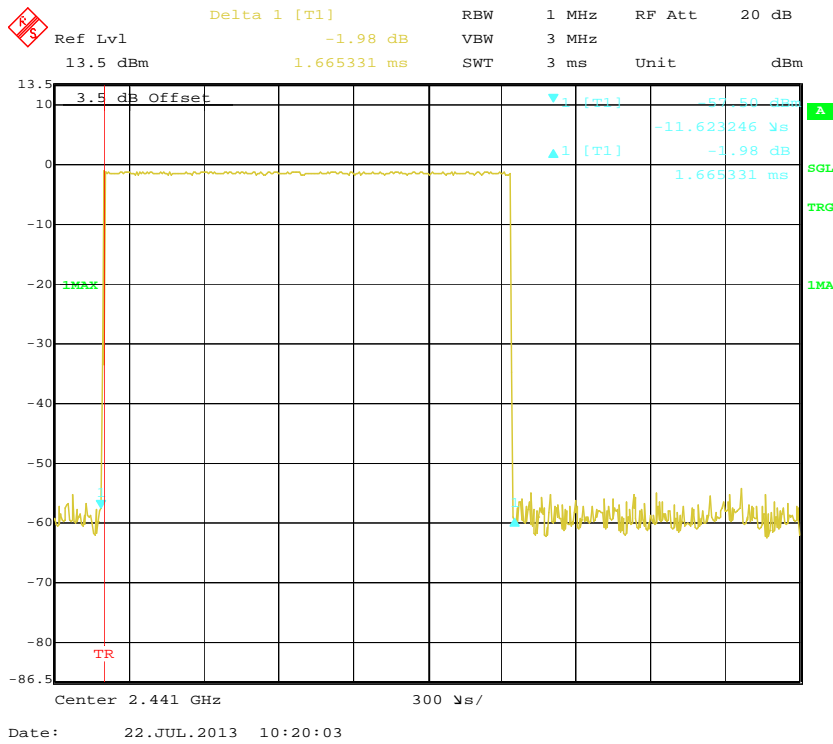


Pulse time, High Channel, DH3

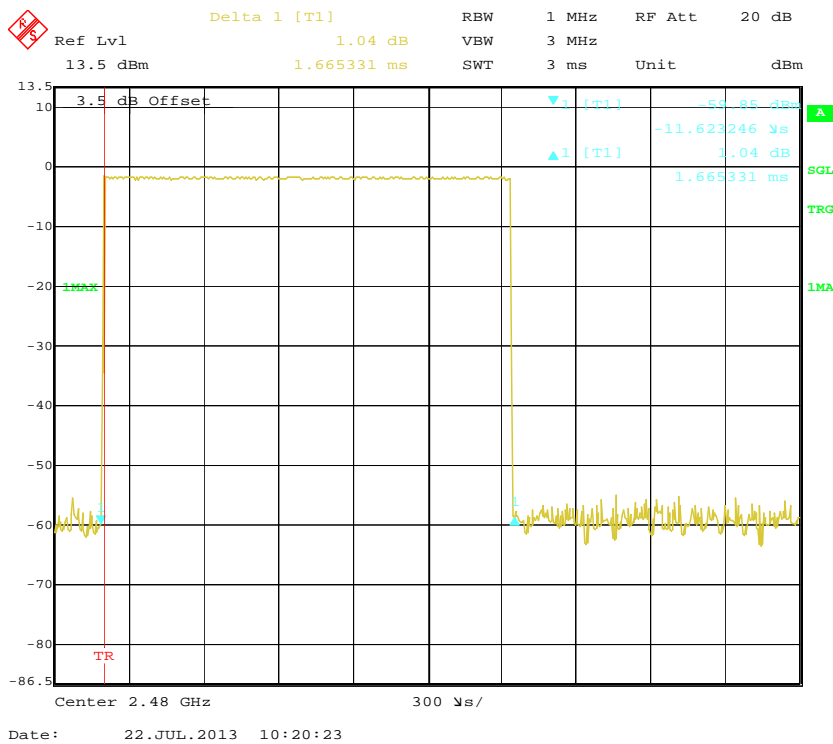


Pulse time, Low Channel, DH5

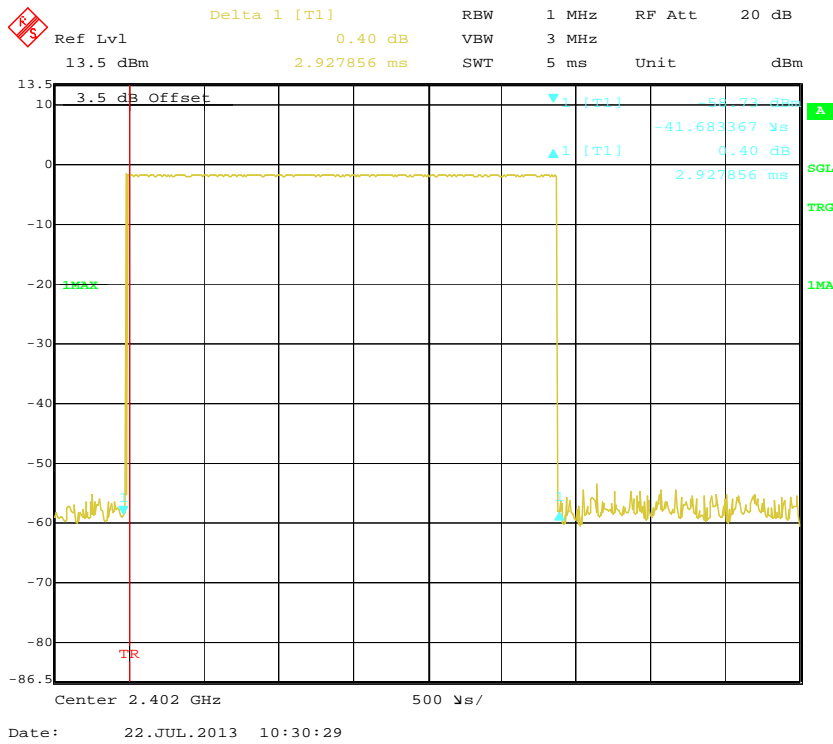

Pulse time, Middle Channel, DH5

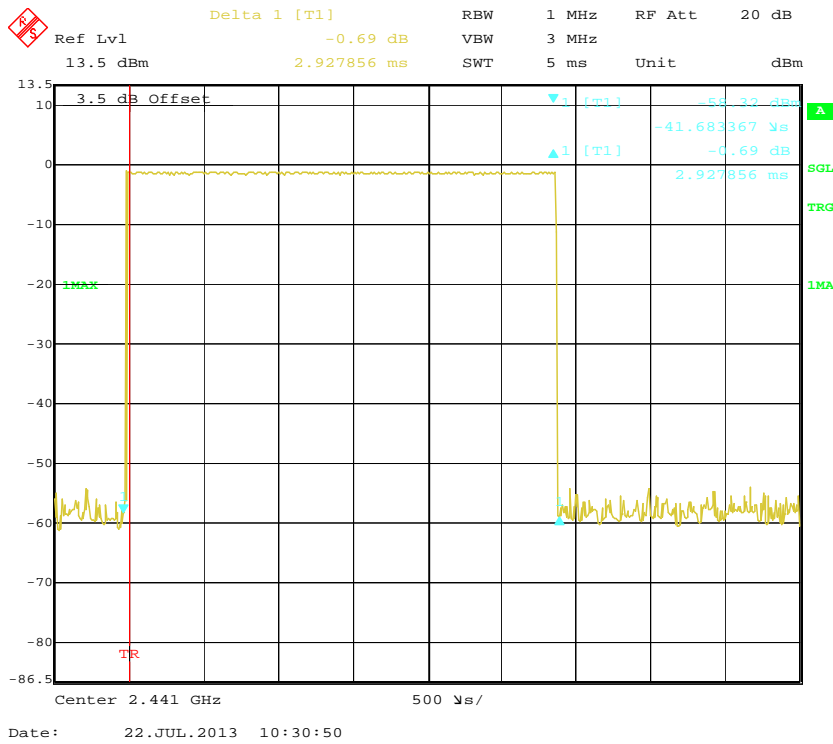


Pulse time, High Channel, DH5

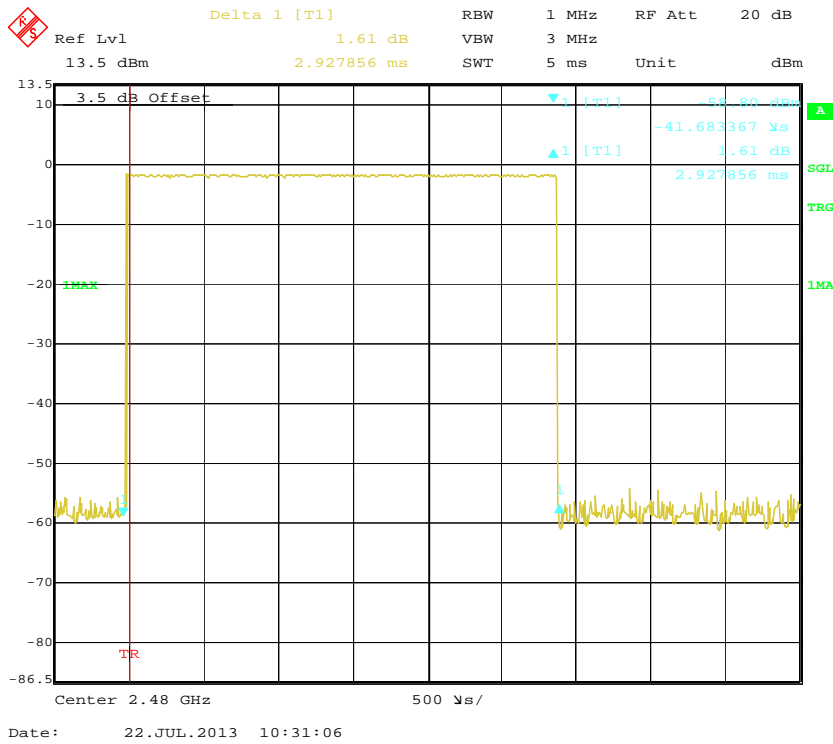


EDR ($\pi/4$ -DQPSK):


Pulse time, Low Channel, DH1

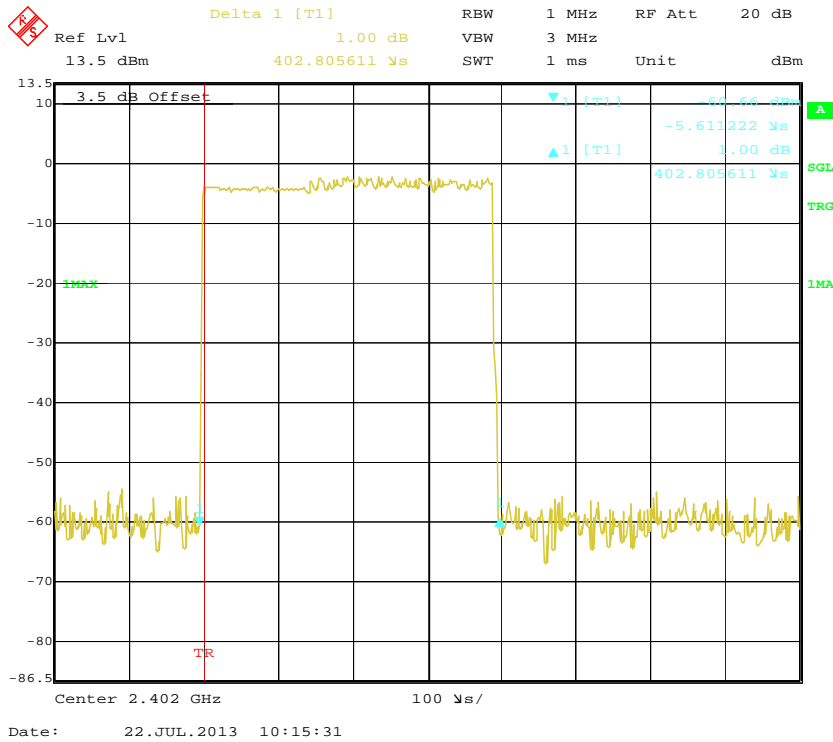


Pulse time, Middle Channel, DH1

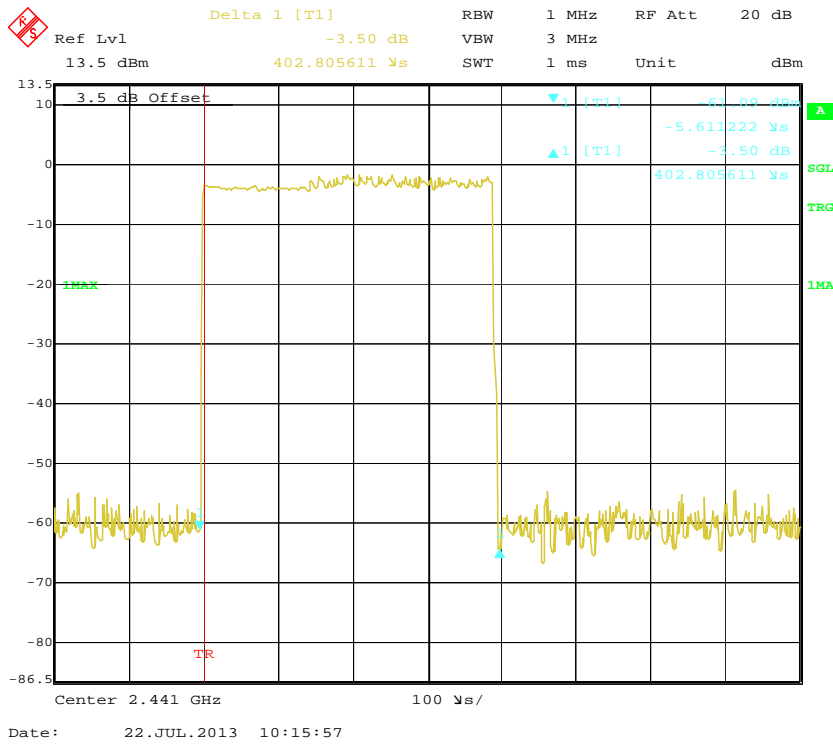


Pulse time, High Channel, DH1

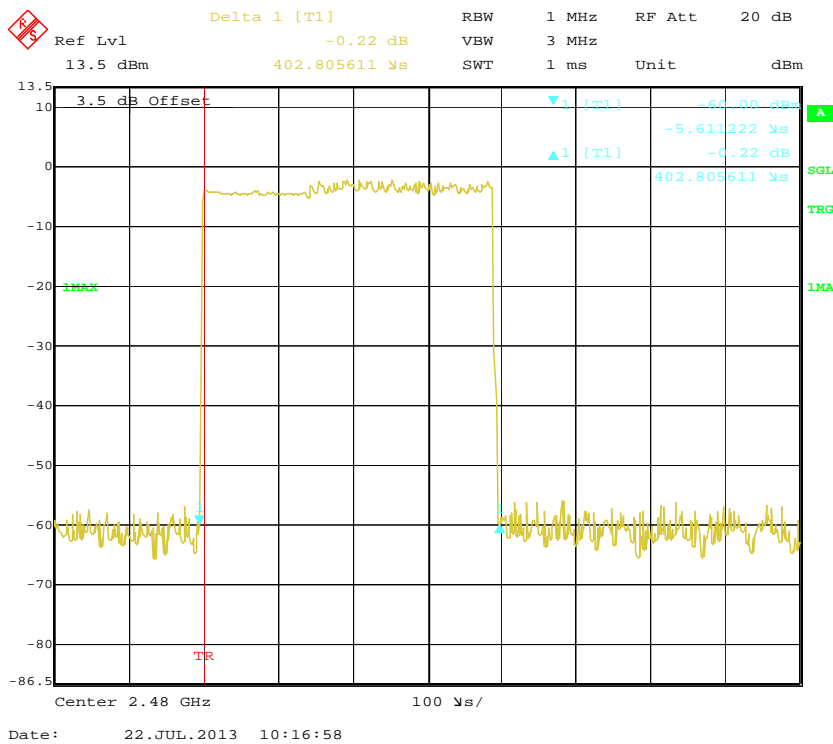


Pulse time, Low Channel, DH3

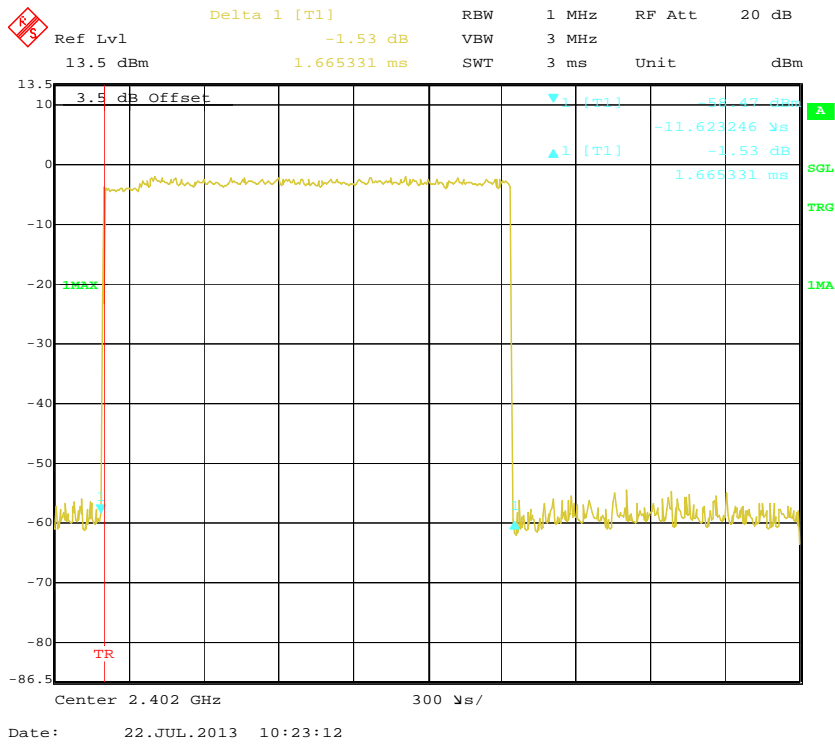


Pulse time, Middle Channel, DH3

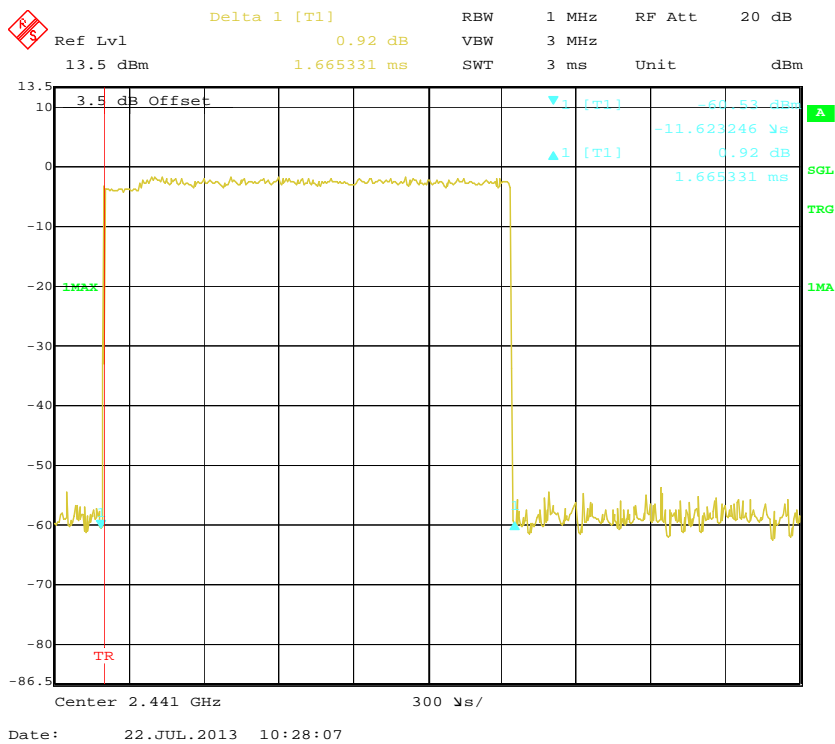


Pulse time, High Channel, DH3

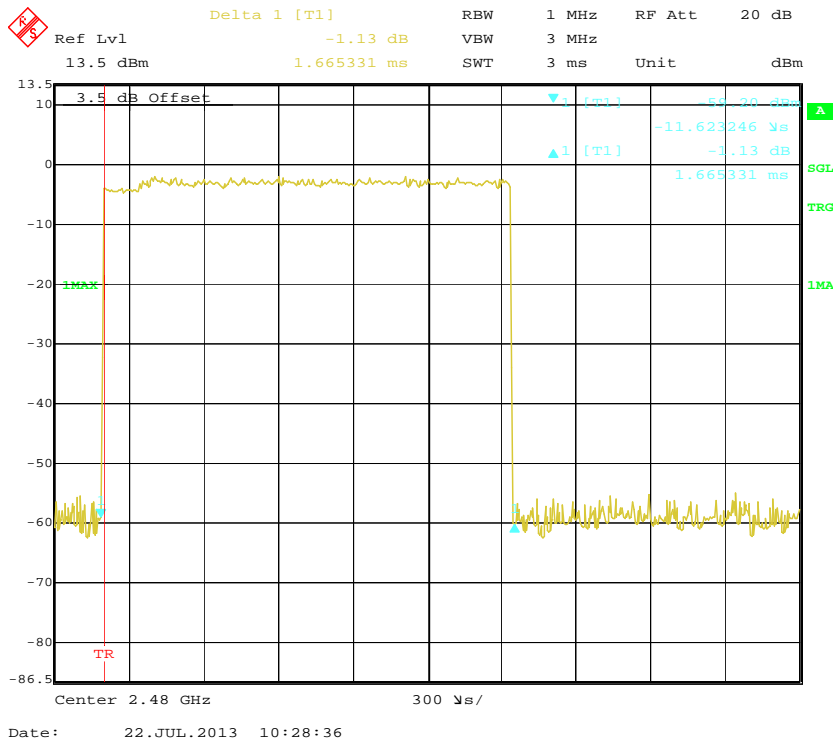


Pulse time, Low Channel, DH5

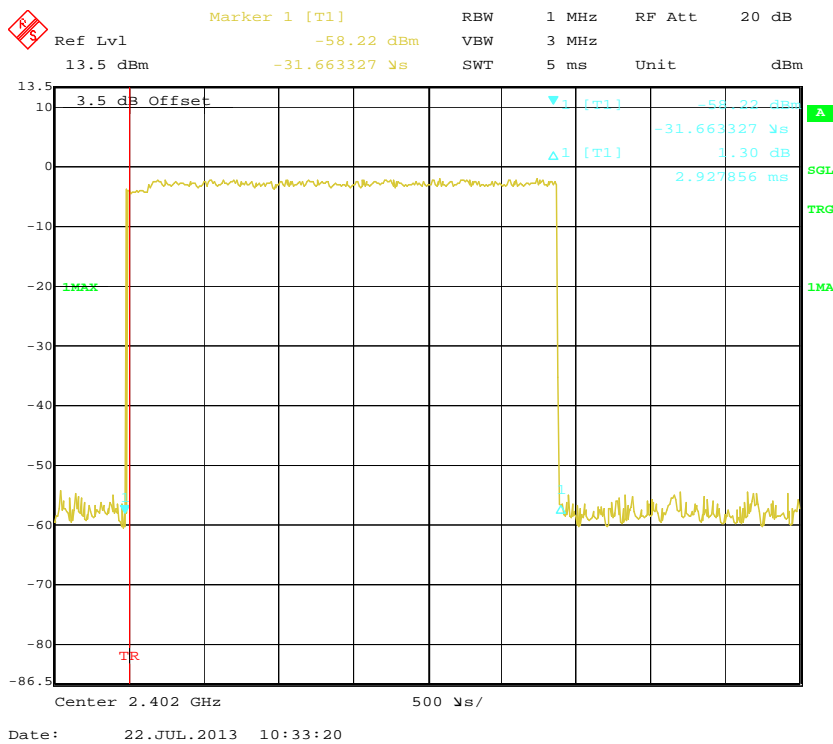

Pulse time, Middle Channel, DH5

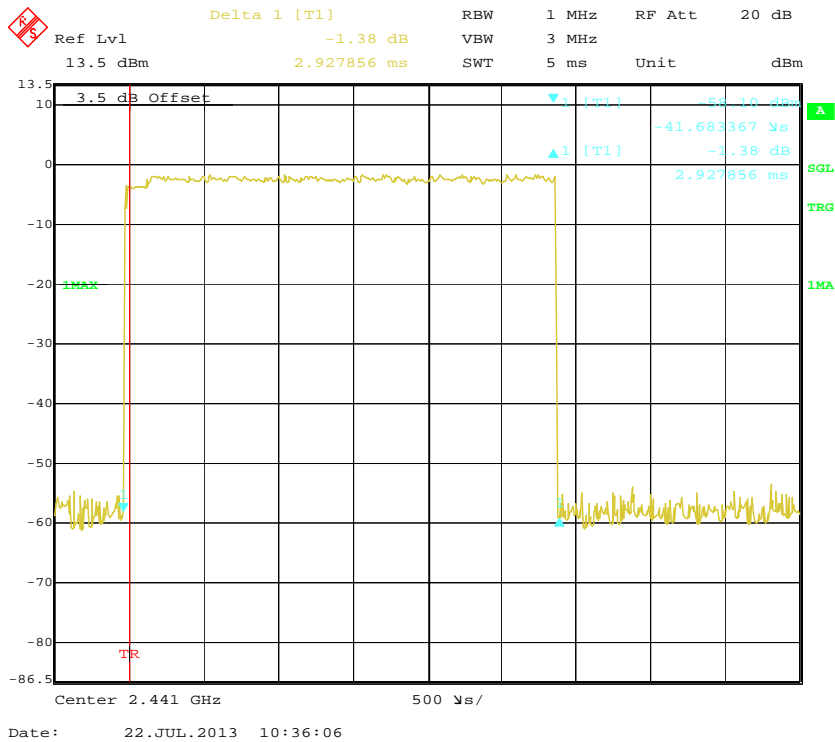


Pulse time, High Channel, DH5

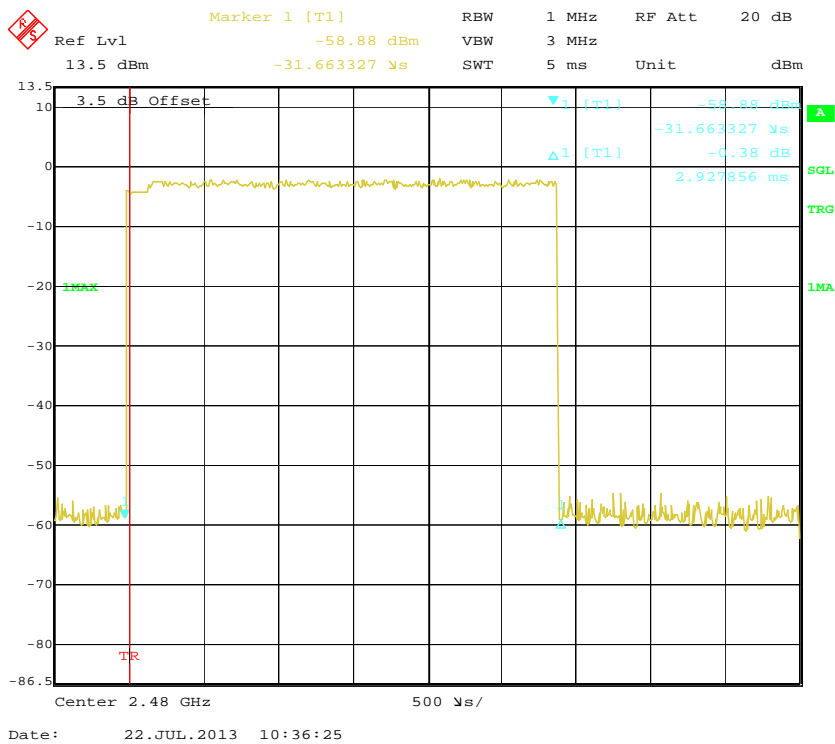


EDR (8DPSK):


Pulse time, Low Channel, DH1

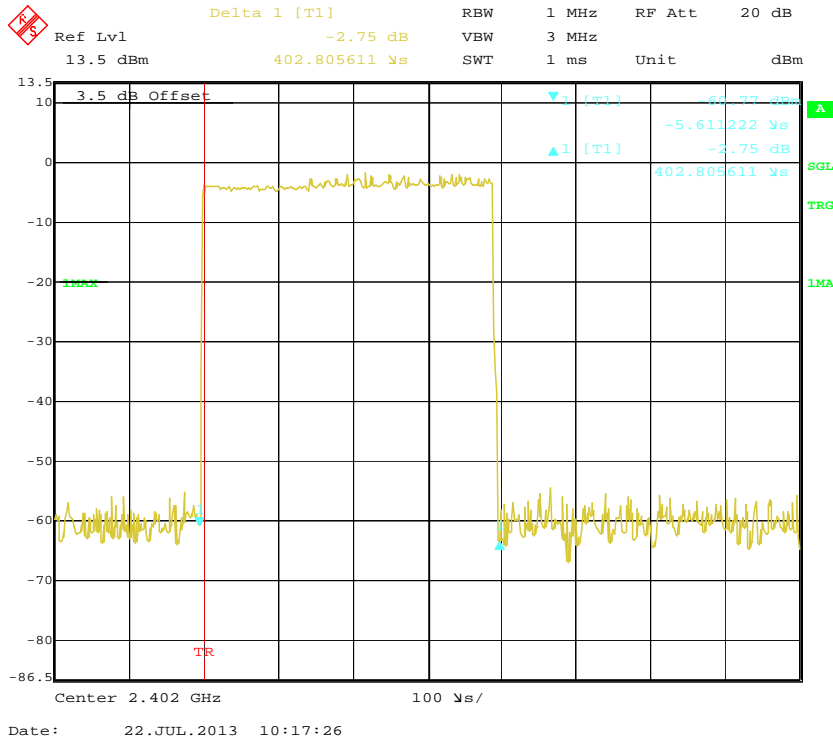


Pulse time, Middle Channel, DH1

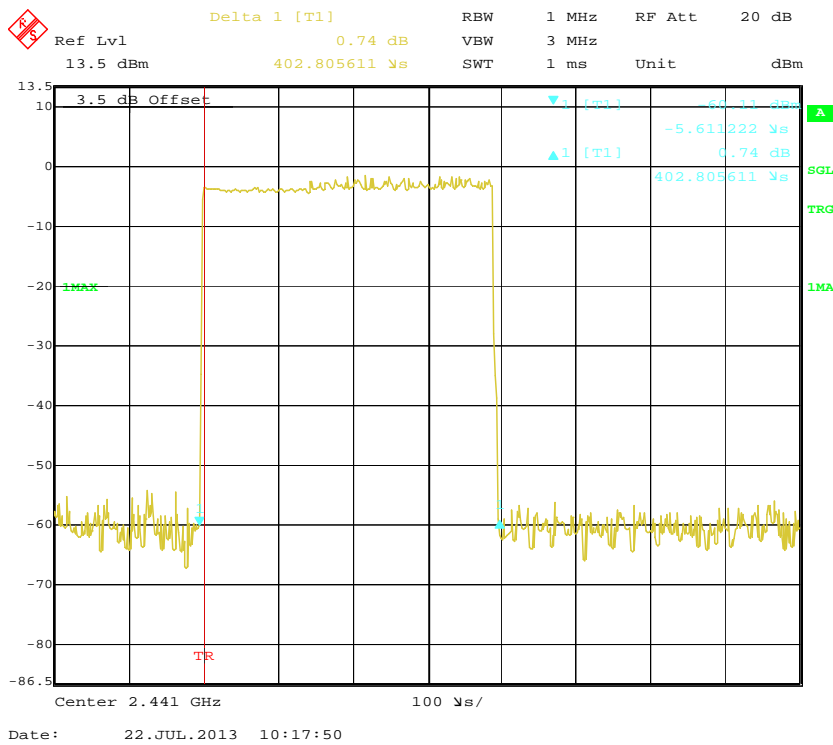


Pulse time, High Channel, DH1

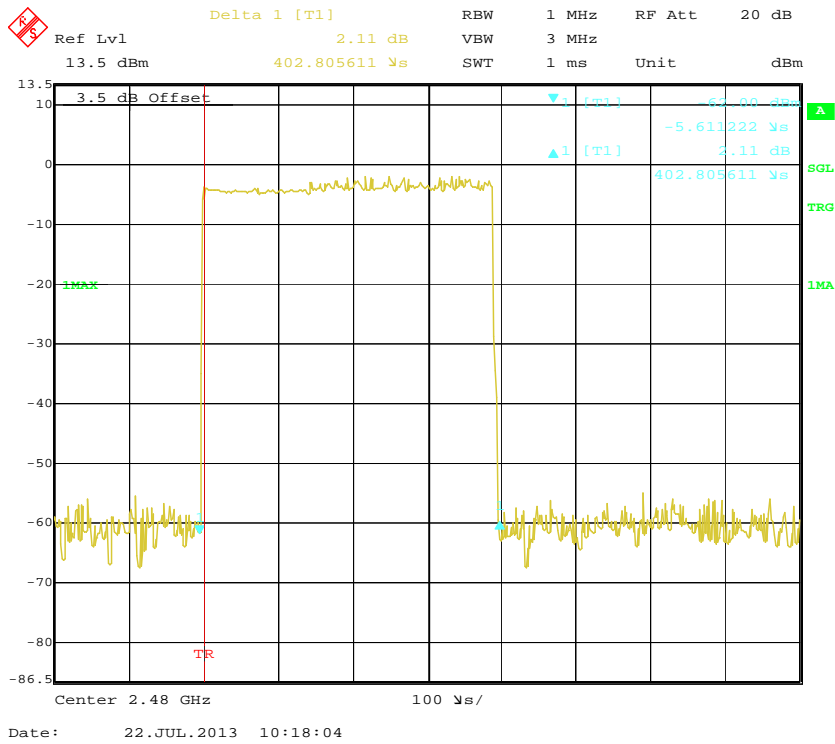


Pulse time, Low Channel, DH3

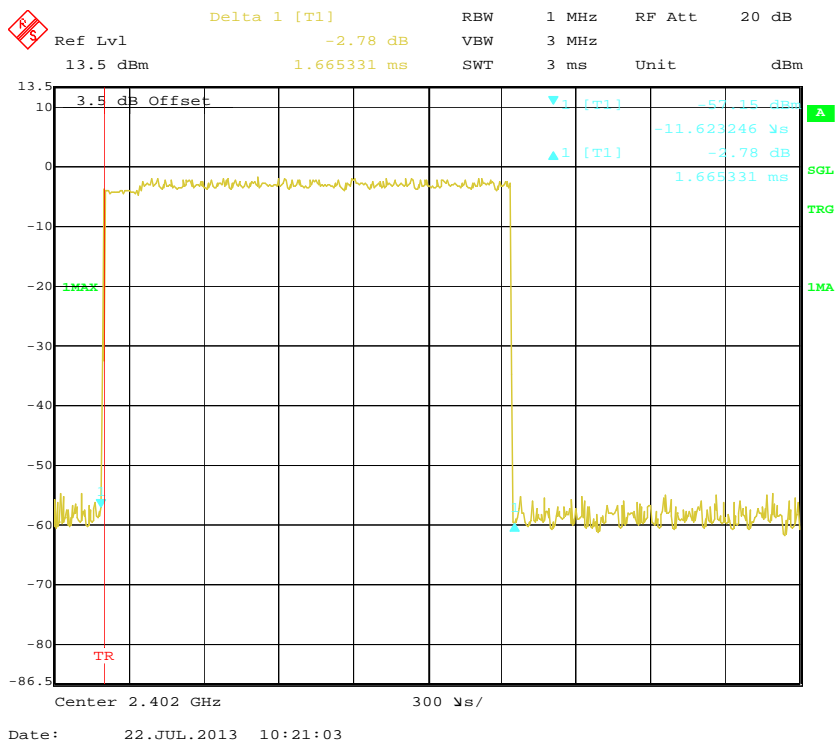


Pulse time, Middle Channel, DH3

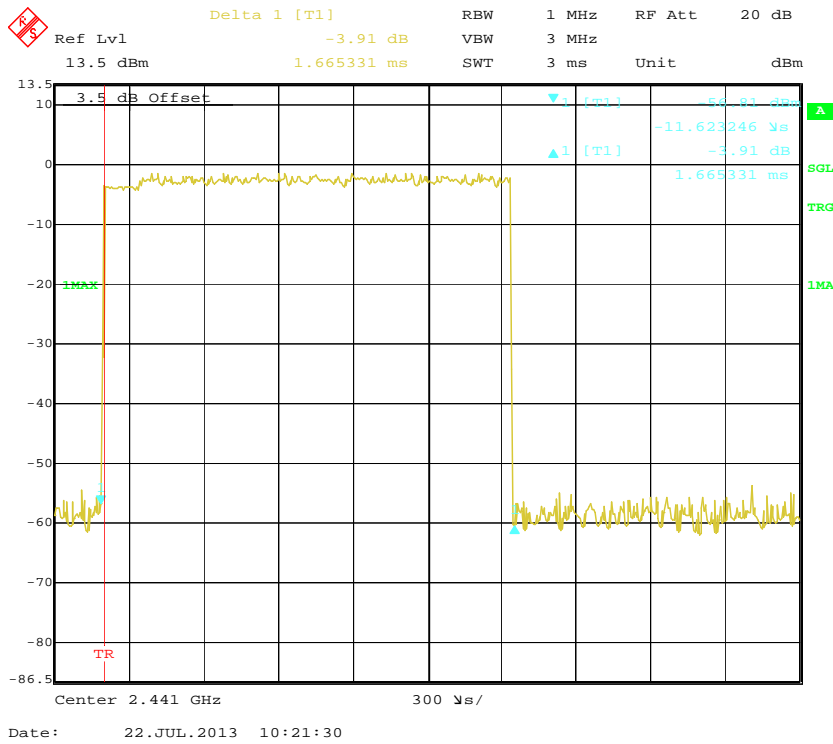


Pulse time, High Channel, DH3

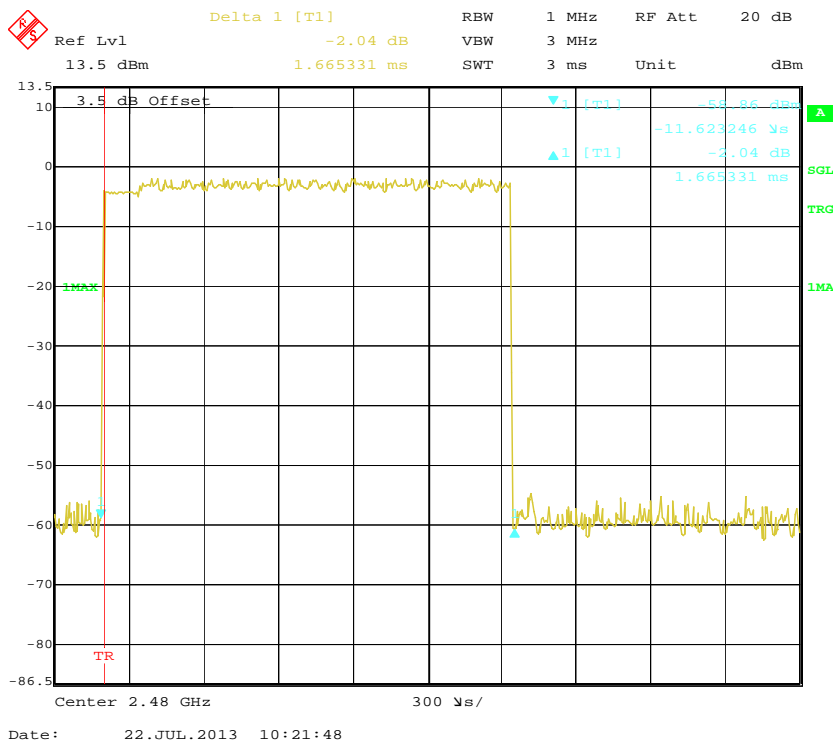


Pulse time, Low Channel, DH5

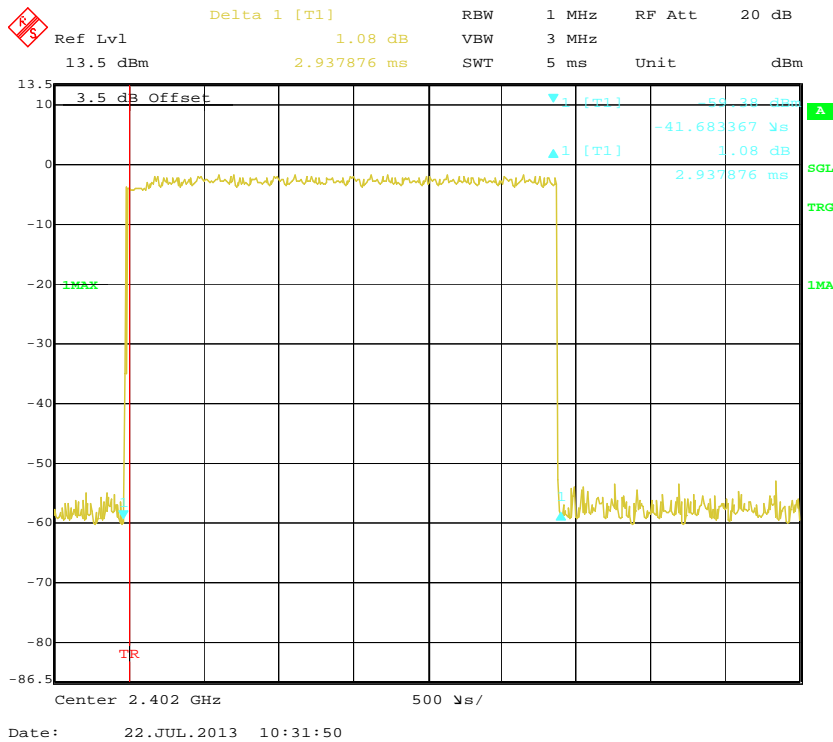

Pulse time, Middle Channel, DH5

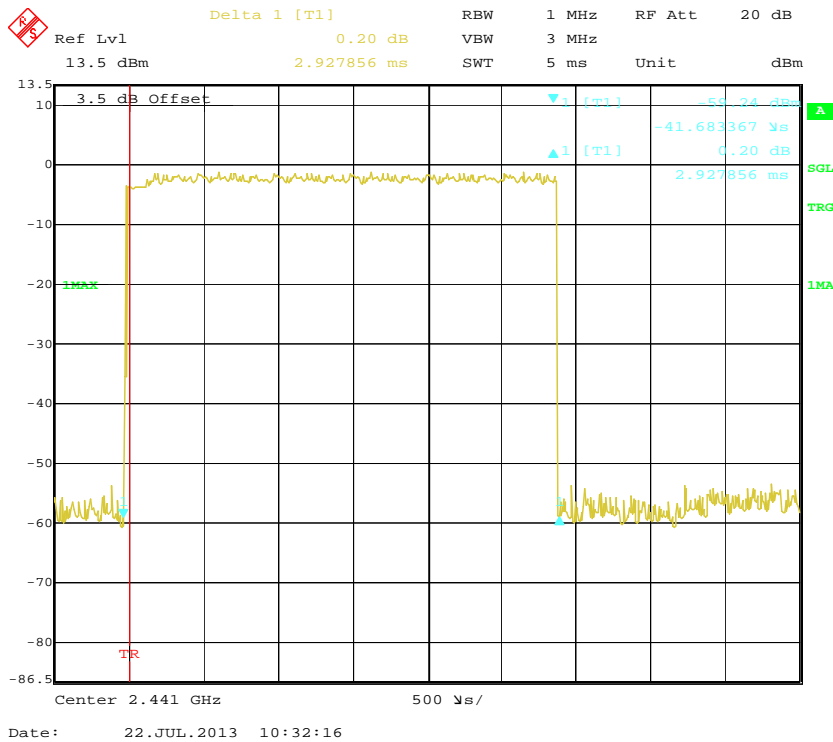

Pulse time, High Channel, DH5

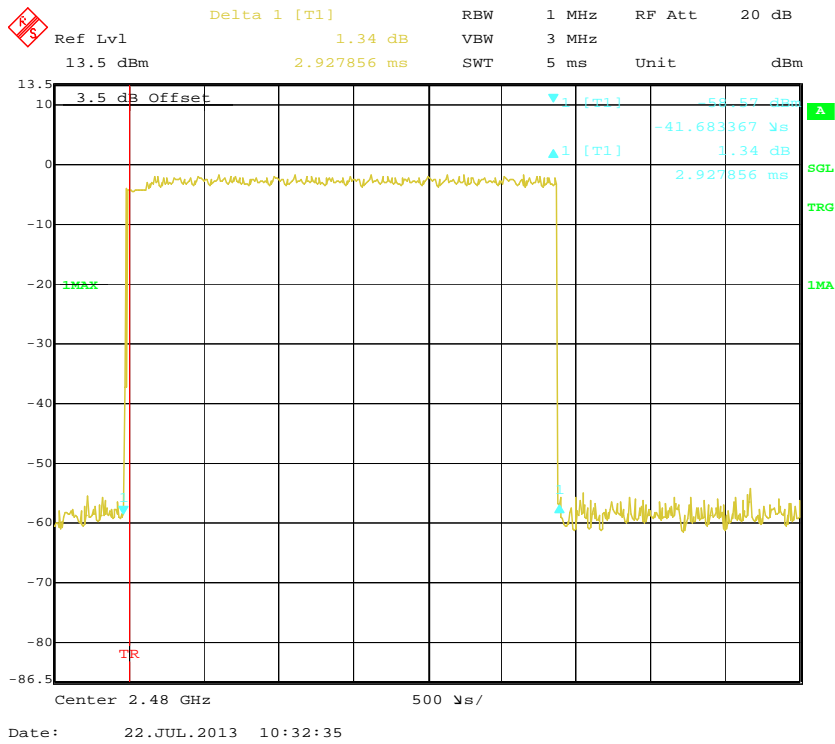


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

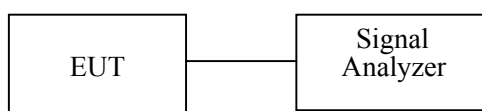

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 ° C
Relative Humidity:	50 %
ATM Pressure:	100.6 kPa


The testing was performed by Rocky Kang on 2013-07-22.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Mode	Channel	Frequency (MHz)	Conducted Output Power		Limit (mW)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	-1.33	0.736	1000
	Middle	2441	-0.86	0.820	1000
	High	2480	-1.33	0.736	1000
EDR ($\pi/4$-DQPSK)	Low	2402	-1.82	0.658	1000
	Middle	2441	-1.35	0.733	1000
	High	2480	-1.85	0.653	1000
EDR (8DPSK)	Low	2402	-1.40	0.724	1000
	Middle	2441	-0.94	0.805	1000
	High	2480	-1.46	0.714	1000


BDR (GFSK): Low Channel

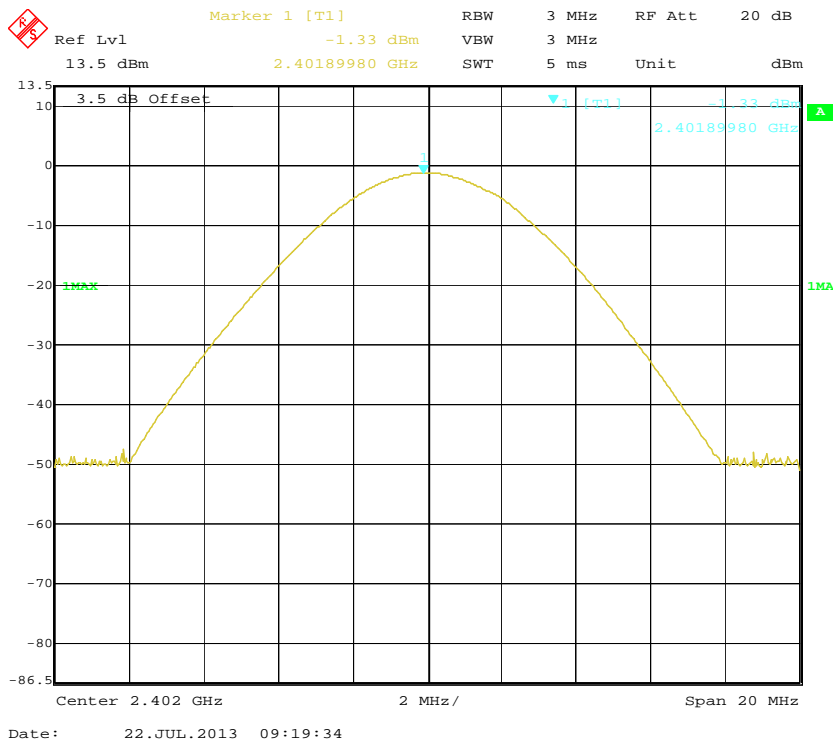


BDR (GFSK): Middle Channel

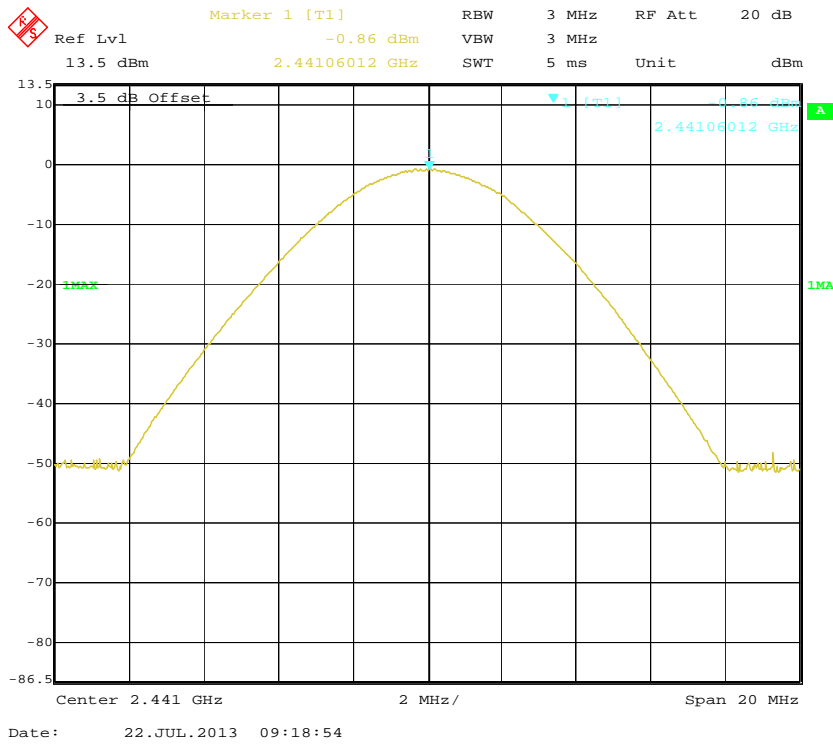


BDR (GFSK): High Chanel

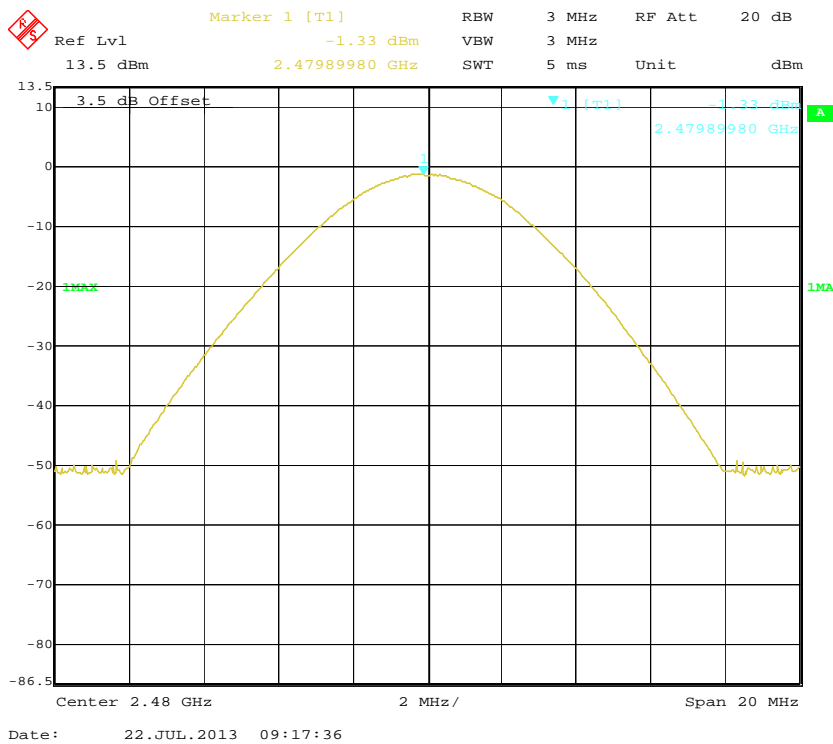


EDR($\pi/4$ -DQPSK): Low Channel

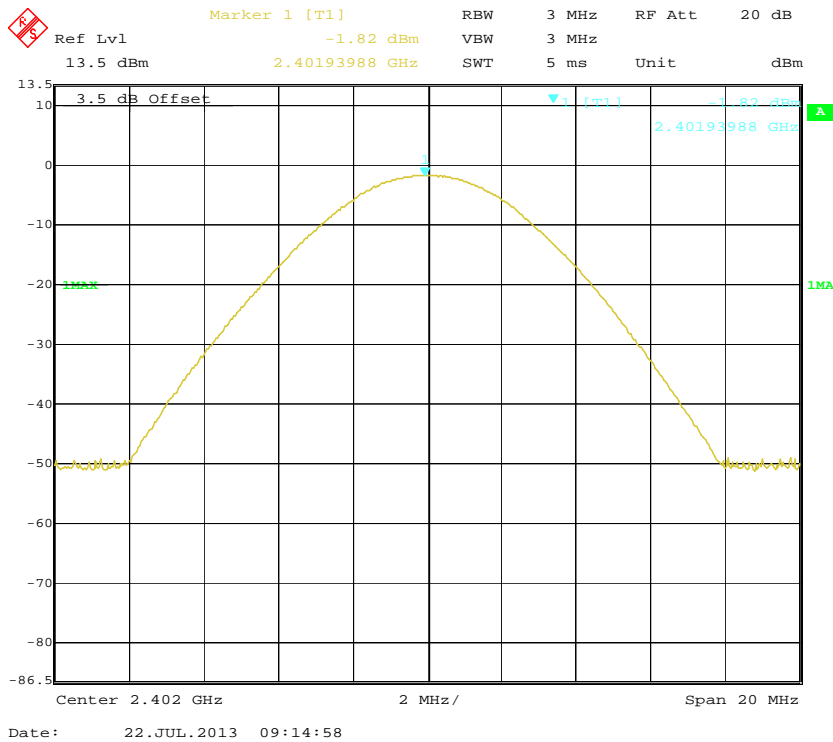


EDR($\pi/4$ -DQPSK): Middle Channel

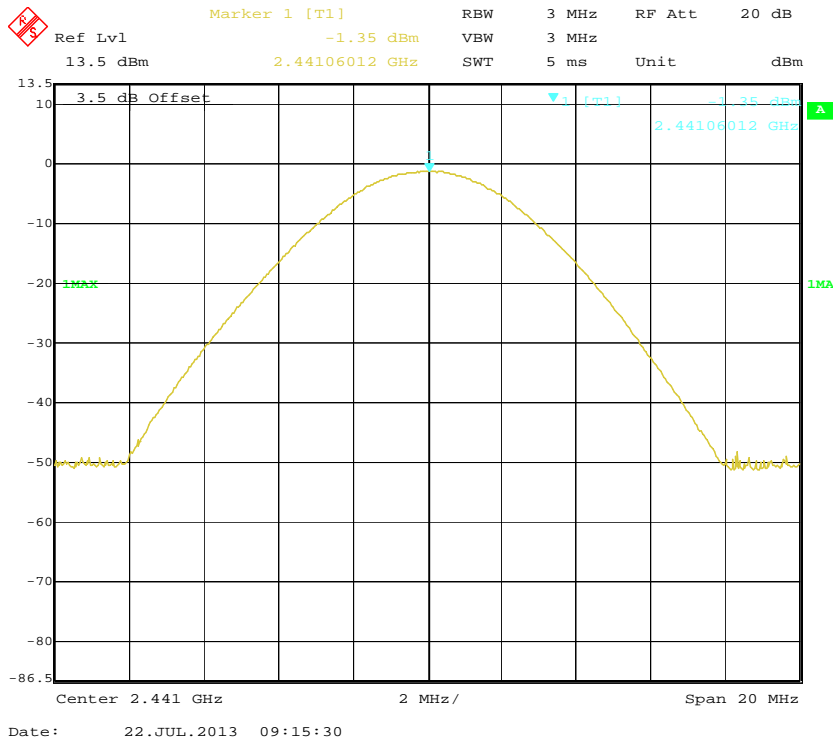


EDR($\pi/4$ -DQPSK): High Channel

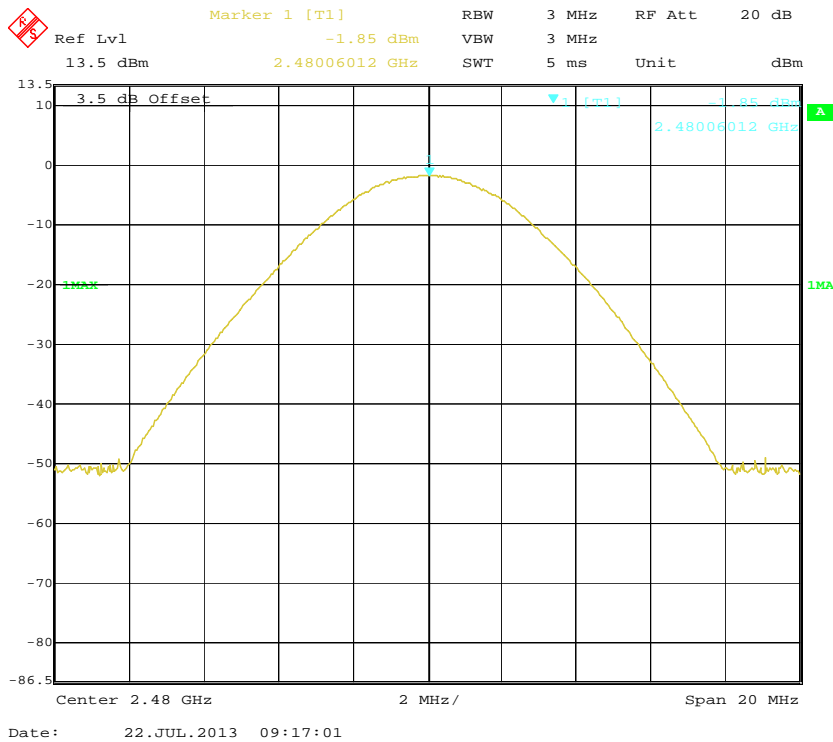


EDR(8DPSK): Low Channel

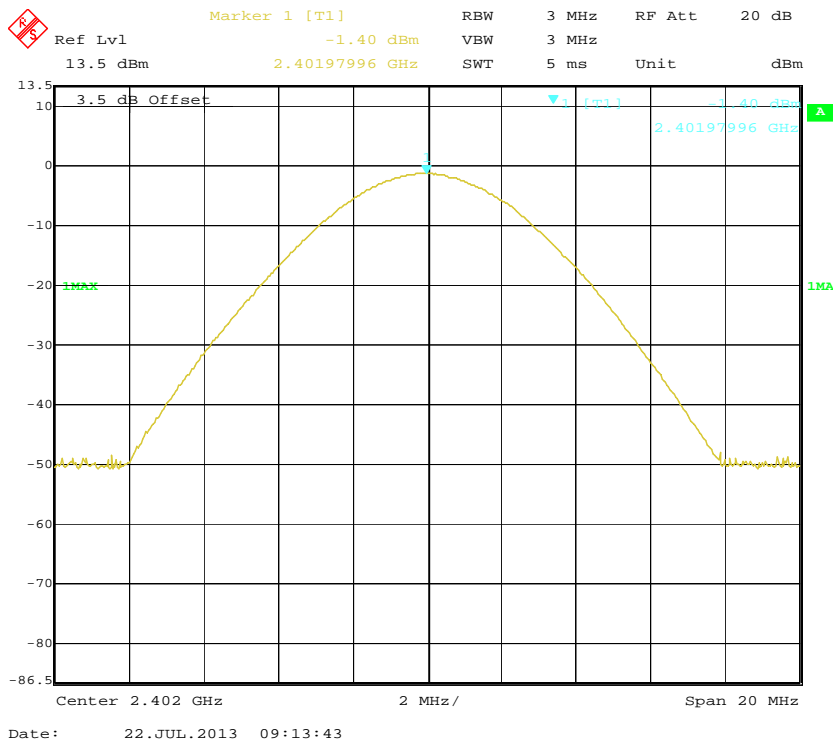

EDR(8DPSK): Middle Channel

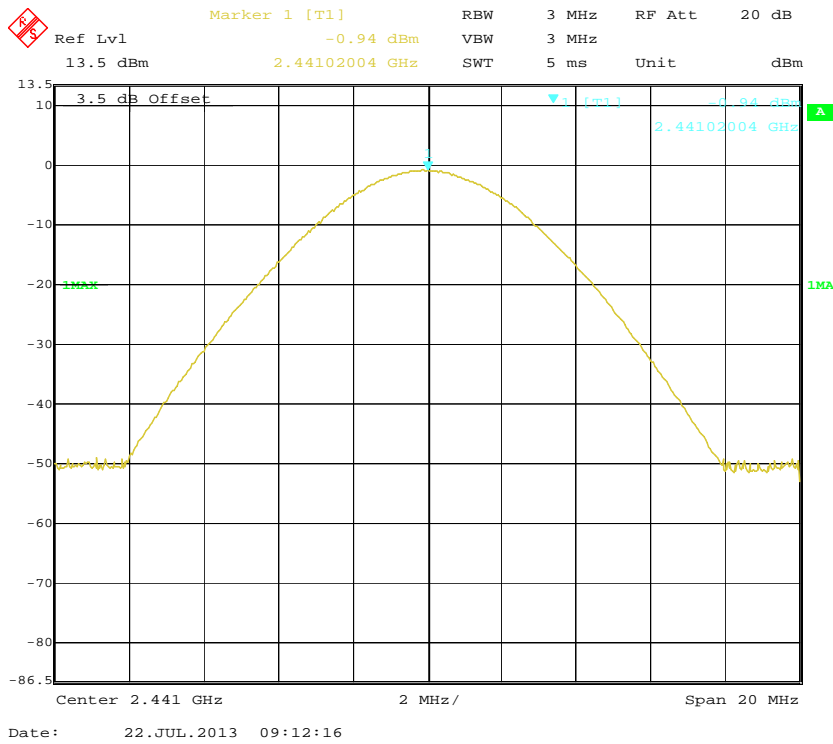

EDR(8DPSK): High Channel

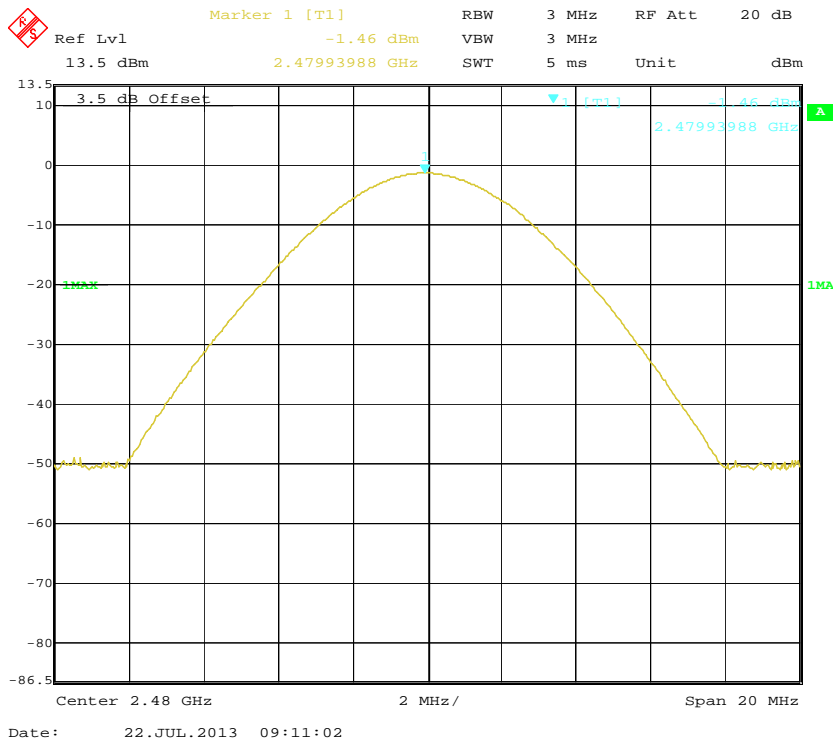

FCC §15.247(d) - BAND EDGES

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to FCC public notice DA 00-705 released on March 30, 2000.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 300 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25~26 ° C
Relative Humidity:	50~56 %
ATM Pressure:	100.6~101.0 kPa


The testing was performed by Rocky Kang on 2013-07-22 and 2013-07-25.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following plots

Mode	Frequency (MHz)	Delta Peak to band emission (dBc)	≥Limit (dBc)
BDR (GFSK)	Left band	56.17	20
	Right band	57.68	20
EDR($\pi/4$ -DQPSK)	Left band	53.59	20
	Right band	56.47	20
EDR(8DPSK)	Left band	52.97	20
	Right band	55.51	20


BDR (GFSK): Band Edge-Left Side

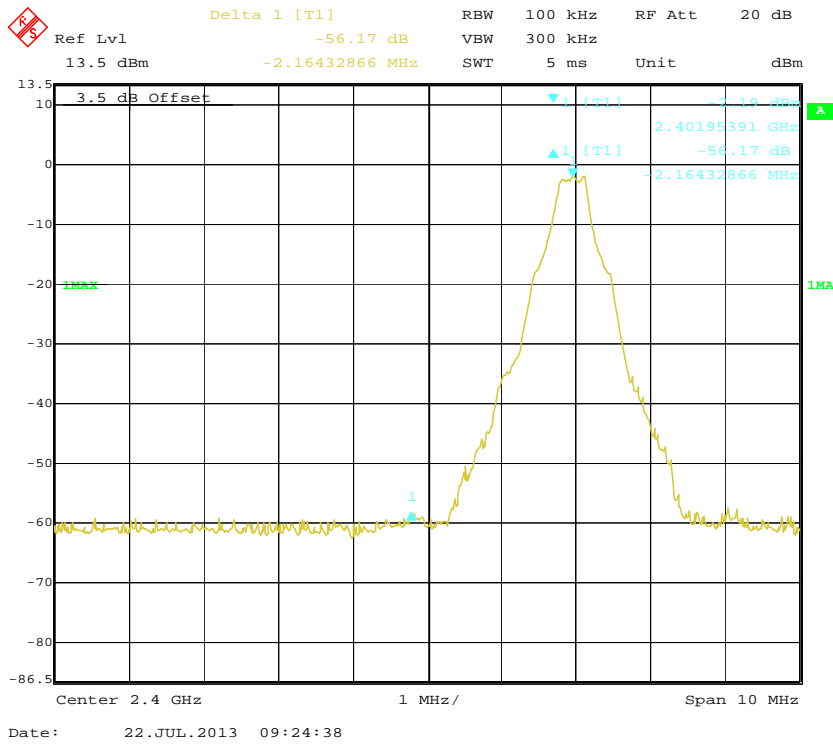


BDR (GFSK): Band Edge-Right Side

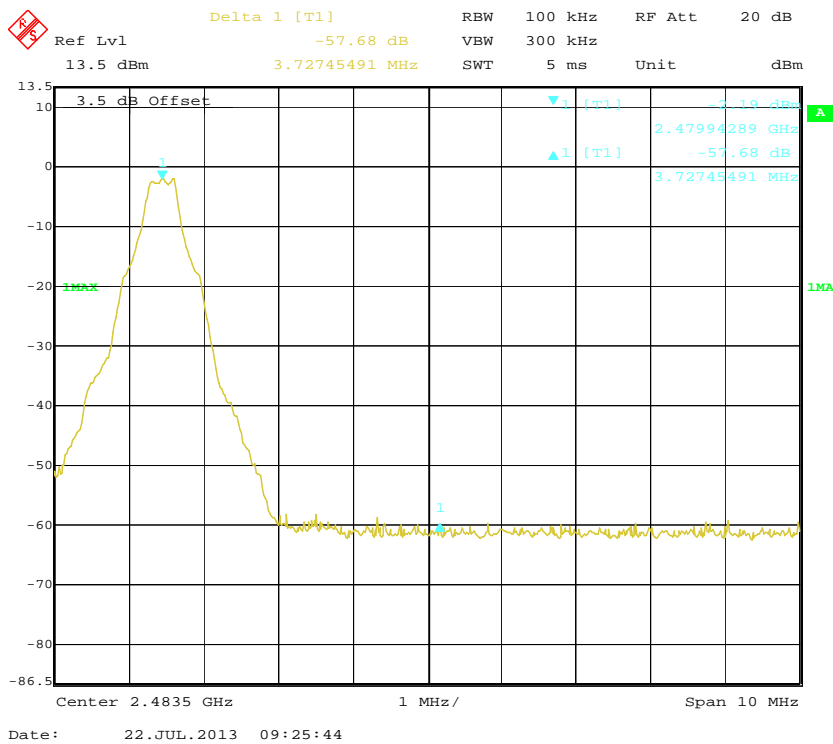


EDR ($\pi/4$ -DQPSK): Band Edge-Left Side

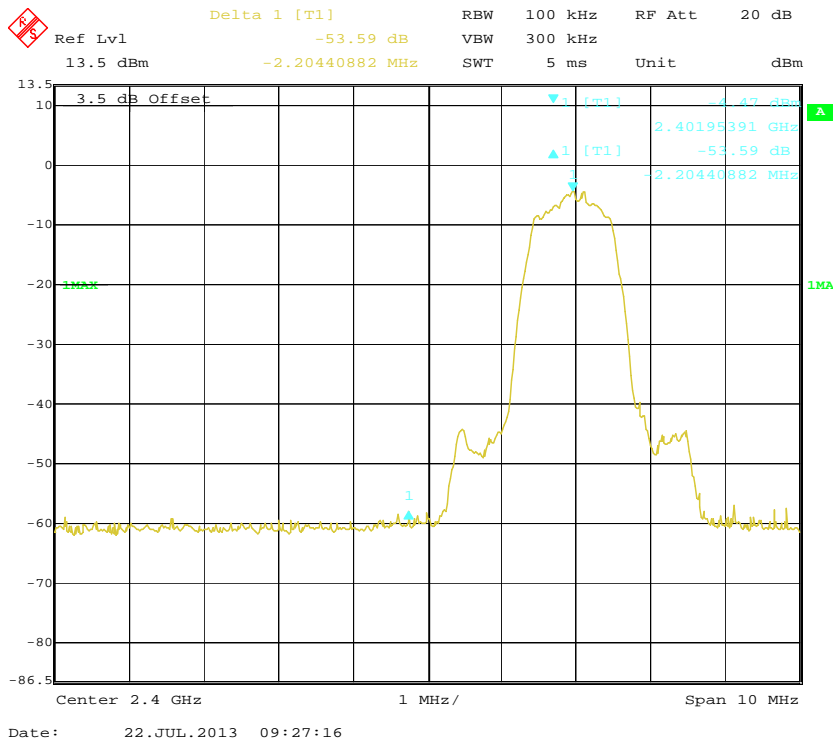


EDR ($\pi/4$ -DQPSK): Band Edge-Right Side

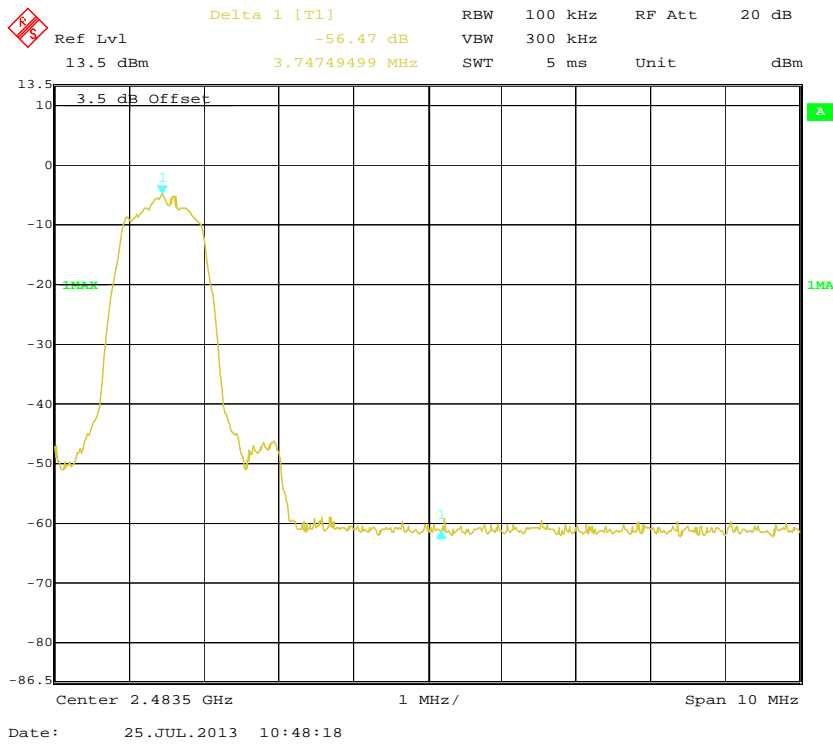

EDR (8DPSK): Band Edge-Left Side

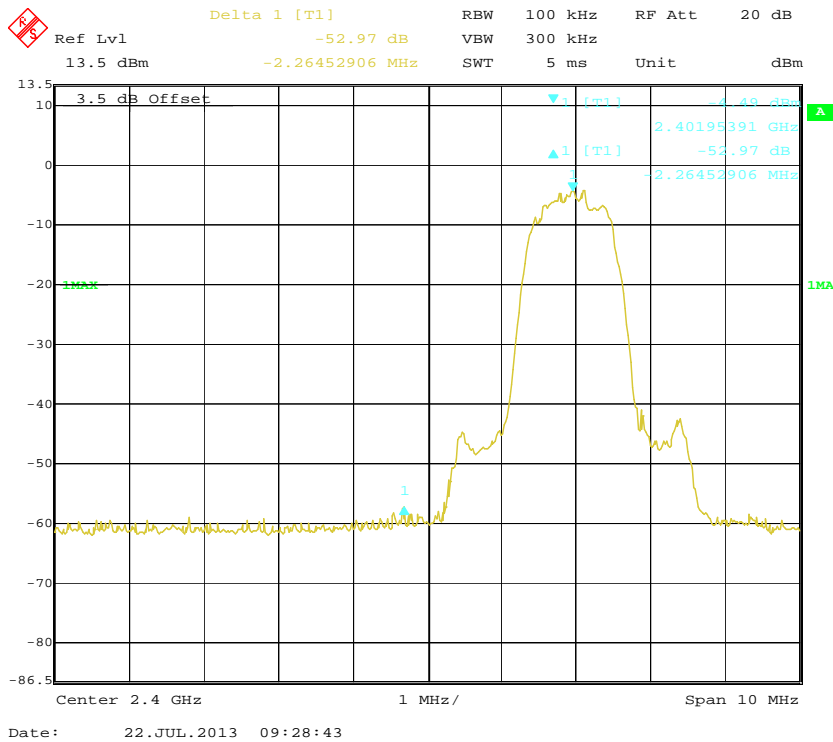

BDR (8DPSK): Band Edge-Right Side

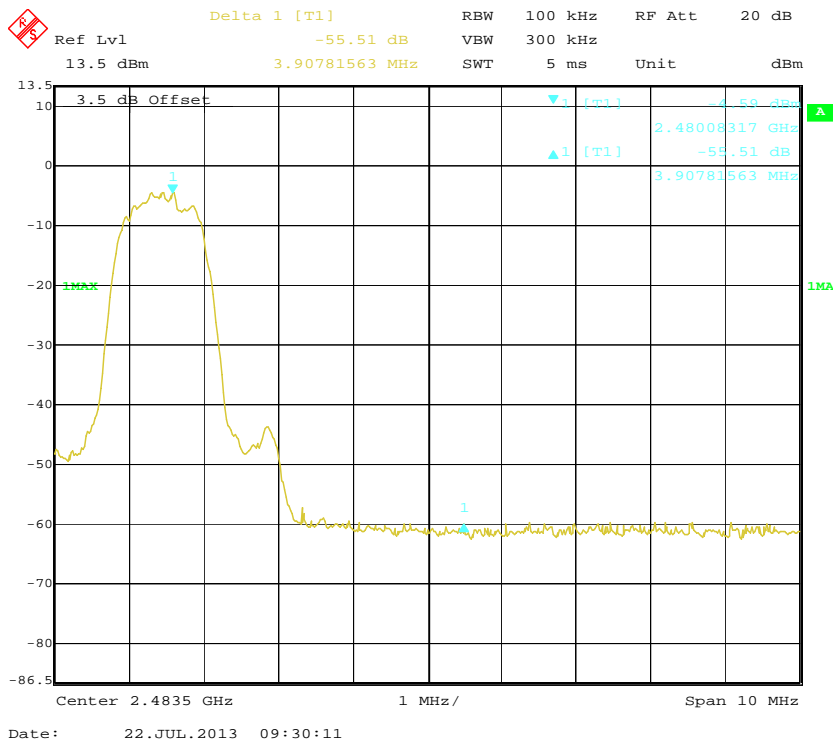

DECLARATION LETTER



Archos S.A.
12,Rue Ampere 91430 Igny France
Tel: 33(0)1 69 33 1690 Fax: 33(0)1 69 33 1699

Product Similarity Declaration

July 24, 2013

To:

Bay Area Compliance Labs Corp.(ShenZhen)
6/F, the 3rd Phase of Wan Li Industrial Bldg., Shihua Rd.,
FuTian Free Trade Zone, Shenzhen, China
Tel: +86 755 33320018
Fax: +86 755 33320008

Dear Sir or Madam:

We, Archos S.A, hereby declare that our product: 10.1inch Tablet pc, Model: AC101XS2 was tested by BACL.

Due to our marketing purpose, we would like to display the same device with different screens under one model No., the difference between three kinds of screen is just manufactured by different suppliers, and the screen size and relative specification are the same. No other changes are made to them.

Best Regards,

Signature:

Yves Gregoire
Head of Research and Development

***** END OF REPORT *****