



REPORT No. : SZ16030124S01

FCC SAR TEST REPORT

APPLICANT : ZTE Corporation
PRODUCT NAME : LTE Digital Mobile Handset
MODEL NAME : ZTE Blade A315
TRADE NAME : ZTE
BRAND NAME : ZTE
FCC ID : SRQ-A315
STANDARD(S) : 47CFR 2.1093
IEEE 1528-2013
ISSUE DATE : 2016-04-18



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION5

1.TECHNICAL INFORMATION6

1.1 IDENTIFICATION OF APPLICANT7

1.2 IDENTIFICATION OF MANUFACTURER.....7

1.3 EQUIPMENT UNDER TEST (EUT)7

 1.3.1 PHOTOGRAPHS OF THE EUT.....8

 1.3.2 IDENTIFICATION OF ALL USED EUT.....8

1.4 APPLIED REFERENCE DOCUMENTS8

1.5 DEVICE CATEGORY AND SAR LIMITS8

2. SPECIFIC ABSORPTION RATE (SAR).....10

2.1 INTRODUCTION10

2.2 SAR DEFINITION10

3. SAR MEASUREMENT SETUP.....10

3.1 THE MEASUREMENT SYSTEM11

3.2 PROBE11

3.3 PROBE CALIBRATION PROCESS.....13

 3.3.1 DOSIMETRIC ASSESSMENT PROCEDURE 13

 3.3.2 FREE SPACE ASSESSMENT PROCEDURE..... 13

 3.3.3 TEMPERATURE ASSESSMENT PROCEDURE..... 13

3.4 PHANTOM14

3.5 DEVICE HOLDER14

4. TISSUE SIMULATING LIQUIDS15

5. UNCERTAINTY ASSESSMENT17

5.1 UNCERTAINTY EVALUATION FOR EUT SAR TEST.....17

5.2 UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK18



6. SAR MEASUREMENT EVALUATION.....20

6.1 SYSTEM SETUP20

6.2 VALIDATION RESULTS20

7. OPERATIONAL CONDITIONS DURING TEST.....22

7.1 INFORMATION ON THE TESTING.....22

7.2 BODY-WORN CONFIGURATIONS23

7.3 MEASUREMENT PROCEDURE23

7.4 DESCRIPTION OF INTERPOLATION/EXTRAPOLATION SCHEME24

8. HOTSPOT MODE EVALUATION PROCEDURE25

9. INFORMATION RELATED TO LTE TEST PARAMETER(PER 941225 D05V02R03).....26

11. SAR EVALUATION PROCEDURES&POWER MEASUREMENT FOR LTE.....30

9. MEASUREMENT OF CONDUCTED OUTPUT POWER32

10. TEST RESULTS LIST64

11. REPEATED SAR MEASUREMENT81

12. MULTIPLE TRANSMITTERS EVALUATION82

13. ANNEX A GENERAL INFORMATION85

14. ANNEX B PHOTOGRAPHS OF THE EUT85

15. ANNEX C GRAPH TEST RESULTS (TEST DATA)85

16. ANNEX D SYSTEM PERFORMANCE CHECK DATAANNEX A GENERAL INFORMATION85

17. ANNEX A GENERAL INFORMATION86



REPORT No. : SZ16030124S01

Change History		
Issue	Date	Reason for change
1.0	2016-04-18	First edition

**TEST REPORT DECLARATION**

Applicant	ZTE Corporation		
Applicant Address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R. China		
Manufacturer	ZTE Corporation		
Manufacturer Address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R. China		
Product Name	LTE Digital Mobile Handset		
Model Name	ZTE Blade A315		
Brand Name	ZTE		
HW Version	A315_V1AMB_B		
SW Version	A315_Z99_MX_9S8O21k800K101		
Test Standards	47CFR 2.1093; IEEE 1528-2013		
Test Date	2016-04-06 to 2015-04-08		
The Highest Reported 1g-SAR(W/kg)	Head	0.365W/kg	Limit(W/kg): 1.6W/kg
	Body-worn	1.392W/kg	
	Hotspot	1.392W/kg	
	Simultaneous	1.499W/kg	

Tested by : Liu Jun
Liu Jun

Reviewed by : Zhu Zhan
Zhu Zhan

Approved by : Zeng Dexin
Zeng Dexin



1. SUMMARY OF MAXIMUM SAR VALUE

Mode/Band	Test Position	SAR-1g(W/kg)
GSM850	Head	0.365
	Body-worn (10mm Gap)	0.603
	Hotspot Mode (10mm Gap)	0.589
GSM1900	Head	0.137
	Body-worn (10mm Gap)	1.227
	Hotspot Mode (10mm Gap)	1.328
WCDMA V	Head	0.353
	Body-worn (10mm Gap)	0.372
	Hotspot Mode (10mm Gap)	0.425
WCDMA II	Head	0.105
	Body-worn (10mm Gap)	1.326
	Hotspot Mode (10mm Gap)	1.326
LTE Band 2	Head	0.203
	Body-worn (10mm Gap)	1.392
	Hotspot Mode (10mm Gap)	1.392
LTE Band 4	Head	0.170
	Body-worn (10mm Gap)	1.232
	Hotspot Mode (10mm Gap)	1.232
LTE Band 5	Head	0.214
	Body-worn (10mm Gap)	0.559
	Hotspot Mode (10mm Gap)	0.559
LTE Band 7	Head	0.156
	Body-worn (10mm Gap)	0.371
	Hotspot Mode (10mm Gap)	0.469
LTE Band 28	Head	0.168
	Body-worn (10mm Gap)	0.334
	Hotspot Mode (10mm Gap)	0.334
WLAN 2.4GHz	Head	0.301
	Body-worn (10mm Gap)	0.100
	Hotspot Mode (10mm Gap)	0.107

Note:

1. The SAR limit(1.6W/kg) for general population/uncontrolled exposure is specified in FCC 47 CFR part2(2.1093) and ANSI/IEEE C95.1-1991.
2. Since the Bluetooth maximum power is less than P_{Ref} and maximum SAR for others transmitter is less than 1.2W/kg,SAR testing for Bluetooth is not required.



2. TECHNICAL INFORMATION

Note: the Following data is based on the information by the applicant.

2.1 Identification of Applicant

Company Name:	ZTE Corporation
Address:	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R. China

2.2 Identification of Manufacturer

Company Name:	ZTE Corporation
Address:	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R. China

2.3 Equipment Under Test (EUT)

Model Name:	ZTE Blade A315
Trade Name:	ZTE
Brand Name:	ZTE
Hardware Version:	A315_V1AMB_B
Software Version:	A315_Z99_MX_9S8O21k800K101
Tx Frequency Bands:	GSM 850: 824-849 MHz; GSM 1900: 1850-1910 MHz; WCDMA Band II : 1850-1910MHz; WCDMA Band V: 824-849 MHz; LTE Band 2: 1850-1910MHz; LTE Band 4: 1710-1755MHz; LTE Band 5: 824-849 MHz; LTE Band 7: 2500-2570MHz; LTE Band 28: 704-746MHz; 802.11 b/g/n20: 2412-2462 MHz; Bluetooth2.1+EDR; Bluetooth4.0: 2402-2480 MHz;
Uplink Modulations:	GSM/GPRS: GSMK; EDGE: GMSK/8PSK; WCDMA/HSDPA/HSUPA/HSPA+: QPSK; FDD-LTE: QPSK/16QAM; WIFI 802.11b: DSSS; WIFI 802.11g: OFDM; WIFI 802.11n20: OFDM; Bluetooth: GFSK/ π /4-DQPSK/8-DPSK; Bluetooth4.0: GFSK
Multislot Class:	GPRS: Class 12; EDGE: Class 12;
GPRS Class:	Class B
Hotspot function:	Support
SIM cards description	SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.



2.3.1 Photographs of the EUT

Please refer to the External Photos for the Photos of the EUT

2.3.2 Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the Following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	A315_V1AMB_B	A315_Z99_MX_9S8O21k800K101

2.4 Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR§2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
2	IEEE 1528-2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
3	KDB 447498 D01v06	General RF Exposure Guidance
4	KDB 248227 D01v02r02	SAR Measurement Procedures for 802.11 Transmitters
5	KDB 941225 D01v03r01	SAR Measurement Procedures for 3G Devices
6	KDB 941225 D02v02r02	HSPA and 1x Advanced
7	KDB 941225 D03v01	SAR Test Reduction GSM GPRS EDGE
8	KDB 941225 D04v01	SAR for GSM E GPRS Dual Xfer Mode
9	KDB 941225 D06v02r01	Hotspot Mode SAR
10	KDB 941225 D05v02r05	SAR for LTE Devices
11	KDB 865664 D01v01r04	SAR Measurement 100 MHz to 6 GHz
12	KDB 865664 D02v01r02	SAR Reporting
13	KDB 648474 D04v01r03	Handset SAR



2.5 Device Category and SAR Limits

Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Note: This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.



3. SPECIFIC ABSORPTION RATE (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are Middle than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by,

$$\text{SAR} = c \left(\frac{\delta T}{\delta t} \right)$$

Where C is the specific head capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where σ is the conductivity of the tissue, ρ is the mass density of the tissue and $|E|$ is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR MEASUREMENT SETUP

4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the Following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The Following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

4.2 Probe


For the measurements the Specific Dosimetric E-Field Probe SN 37/08 EP80 with Following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter: 6.5 mm

- Distance between probe tip and sensor center: 2.5mm
- Distance between sensor center and the inner phantom surface: 4 mm
(repeatability better than +/- 1mm)
- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.25 dB
- Calibration range: 835to 2500MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with CENELEC EN 62209 and IEEE 1528 std, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 622091 annex technique using reference guide at the five frequencies.

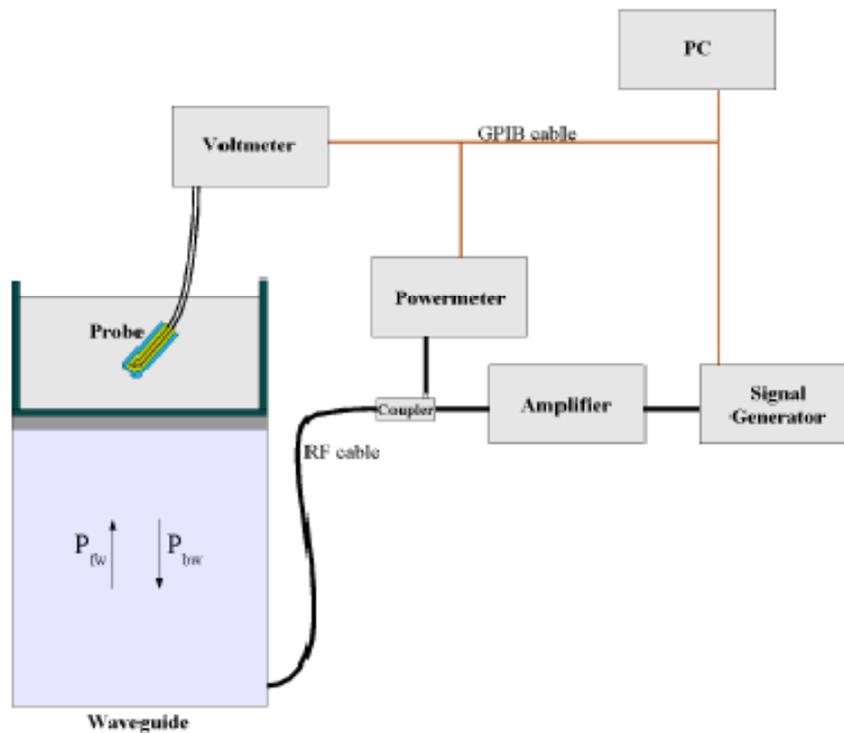

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-2z/\delta}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

l = Skin depth



Keithley configuration:

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement is performed on a validation dipole and compared with aNPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

Where DCP is the diode compression point in mV.

4.3 Probe Calibration Process

4.3.1 Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm^2) using an with CALISAR, Antenna proprietary calibration system.

4.3.2 Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm^2 .

4.3.3 Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulating head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$\delta t = \text{exposure time (30 seconds),}$$

C = heat capacity of tissue (brain or muscle),

δT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place.

The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

Where:

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is Middle than 1°.

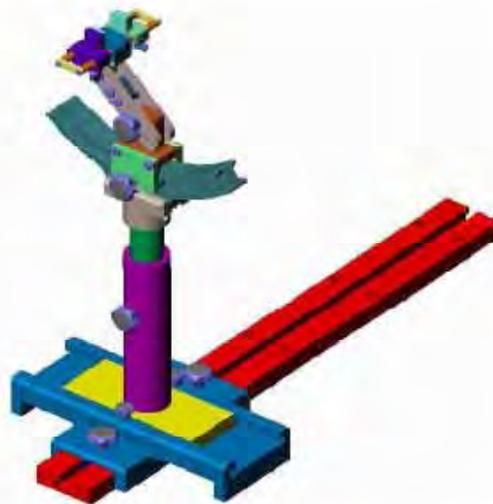

Device holder

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005



5. TISSUE SIMULATING LIQUIDS

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in below table.

The following table gives the recipes for tissue simulating liquids

Frequency Band (MHz)	750	835		1750	1900		2450	2600
Tissue Type	Body	Head	Body	Body	Head	Body	Body	Body
Ingredients(% by weight)								
DeionisedWater	50.00	50.36	50.20	68.80	54.90	40.40	73.20	68.1
Salt(NaCl)	0.80	1.25	0.90	0.20	0.18	0.50	0.10	0.10
Sugar	48.80	0.00	48.50	0.00	0.00	58.00	0.00	0.00
Tween 20	0.00	48.39	0.00	0.00	0.00	0.00	0.00	0.00
HEC	0.20	0.00	0.20	0.00	0.00	1.00	0.00	0.00
Bactericide	0.20	0.00	0.20	0.00	0.00	0.10	0.00	0.00
Triton X-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
DGBE	0.00	0.00	0.00	31.00	44.92	0.00	26.70	31.8
Diethylenglycol monohexylether	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Target dielectric parameters								
Dielectric Constant	55.50	41.50	56.10	53.40	39.90	53.30	52.70	52.5
Conductivity (S/m)	0.96	0.90	0.95	1.49	1.42	1.52	1.95	2.16

Note: Please refer to the validation results for dielectric parameters of each frequency band.

The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85033E Dielectric Probe Kit and an Agilent Network Analyzer.



Table 1: Dielectric Performance of Tissue Simulating Liquid

Temperature: 22.0~23.8°C, humidity: 54~60%.						
Date	Freq.(MHz)	Liquid Parameters	Meas.	Target	Delta(%)	Limit±(%)
2016/04/06	Head 750	Relative Permittivity(ϵ_r):	41.2	41.96	-1.81	5
		Conductivity(σ):	0.91	0.89	2.25	5
2016/04/06	Body 750	Relative Permittivity(ϵ_r):	54.48	55.55	-1.93	5
		Conductivity(σ):	0.93	0.96	-3.12	5
2016/04/06	Head 835	Relative Permittivity(ϵ_r):	41.36	41.5	-0.34	5
		Conductivity(σ):	0.91	0.90	1.11	5
2016/04/06	Body 835	Relative Permittivity(ϵ_r):	55.69	56.10	-0.73	5
		Conductivity(σ):	0.97	0.95	2.11	5
2016/04/07	Head 1750	Relative Permittivity(ϵ_r):	40.20	40.08	0.30	5
		Conductivity(σ):	1.31	1.37	-4.38	5
2016/04/07	Body 1750	Relative Permittivity(ϵ_r):	53.56	53.40	-0.30	5
		Conductivity(σ):	1.47	1.49	-1.34	5
2016/04/07	Head 1900	Relative Permittivity(ϵ_r):	39.98	39.90	0.20	5
		Conductivity(σ):	1.41	1.42	-0.70	5
2016/04/07	Body 1900	Relative Permittivity(ϵ_r):	53.10	53.3	-0.38	5
		Conductivity(σ):	1.53	1.52	0.66	5
2016/04/08	Head 2450	Relative Permittivity(ϵ_r):	39.11	39.20	-0.23	5
		Conductivity(σ):	1.79	1.80	-0.56	5
2016/04/08	Body 2450	Relative Permittivity(ϵ_r):	52.52	52.70	-0.34	5
		Conductivity(σ):	1.94	1.95	-0.51	5
2016/04/08	Head 2600	Relative Permittivity(ϵ_r):	38.53	39.01	-1.23	5
		Conductivity(σ):	1.92	1.96	-2.04	5
2016/04/08	Body 2600	Relative Permittivity(ϵ_r):	52.45	52.50	-0.10	5
		Conductivity(σ):	2.10	2.16	-2.78	5



6. UNCERTAINTY ASSESSMENT

The Following table includes the uncertainty table of the IEEE 1528. The values are determined by Antennessa.

6.1 UNCERTAINTY EVALUATION FOR EUT SAR TEST

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/ e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob . Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.7	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.0	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.6	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.8	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.0	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.1	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.1 5	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.0 3	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.8 9	∞
Test sample Related									
Test sample positioning	E.4.2. 1	0.03	N	1	1	1	0.03	0.0 3	N- 1
Device Holder Uncertainty	E.4.1.	5.00	N	1	1	1	5.00	5.0	N-



	1							0	1
Output power Power drift - SAR drift measurement	6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.3 3	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.0 3	∞
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.1 3	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.1 5	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.0 4	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.0 0	N	1	0.6	0.49	6.00	4.9 0	M
Combined Standard Uncertainty			RSS				11.55	10. 67	
Expanded Uncertainty (95% Confidence interval)			K=2				23.11	21. 33	

6.2 UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/ e	k
Uncertainty Component	Sec.	Tol (+ %)	Prob . Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+ %)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.7	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.0	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.6	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.8	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.0	∞




Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.1	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.1 5	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.0 3	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.8 9	∞
Dipole									
Dipole axis to liquid Distance	8,E.4. 2	1.00	N	$\sqrt{3}$	1	1	0.58	0.5 8	∞
Input power and SAR drift measurement	8,6.6. 2	4.04	R	$\sqrt{3}$	1	1	2.33	2.3 3	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.0 3	∞
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.1 3	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	$\sqrt{3}$	0.64	0.43	1.85	1.2 4	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.0 4	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.0 0	N	$\sqrt{3}$	0.6	0.49	3.46	2.8 3	M
Combined Standard Uncertainty			RSS				8.83	8.3 7	
Expanded Uncertainty (95% Confidence interval)			K=2				17.66	16. 73	

7. SAR MEASUREMENT EVALUATION

7.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below

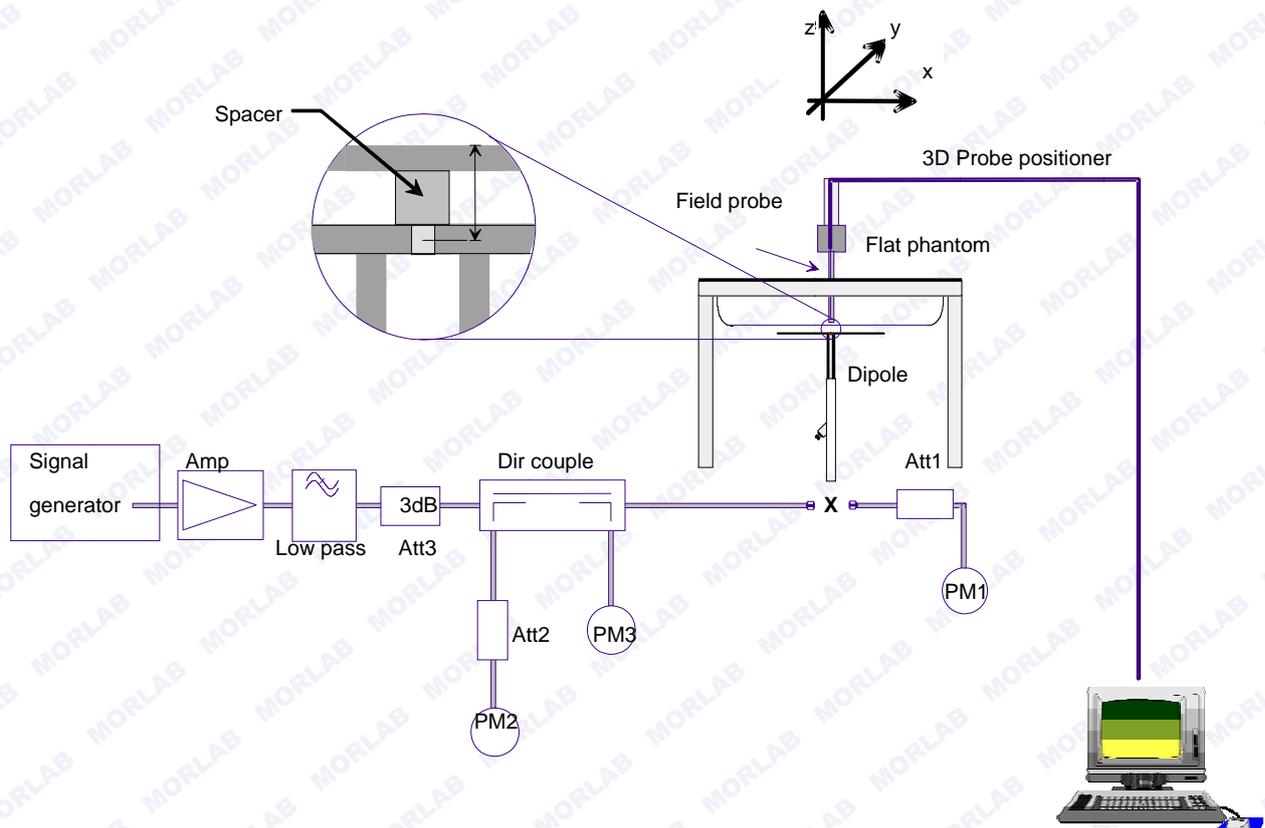

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The power meter PM1 measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to



6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter

7.2 Validation Results

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

Frequency	750MHz(H)	750MHz(b)	835MHz(H)	835MHz(B)	1750MHz(H)	1750MHz(B)
Target value 1W (1g)	8.52W/Kg	8.83W/Kg	9.68W/Kg	10.04 W/Kg	38.24W/Kg	40.14 W/Kg
Test value 1g (100 mW input power)	0.841 W/Kg (04.06)	0.852 W/Kg (04.06)	0.952W/Kg (04.06)	0.991 W/Kg (04.06)	3.808 W/Kg (04.07)	3.953 W/Kg (04.07)
Normalized to 1W value(1g)	8.41 W/Kg	8.52 W/Kg	9.52 W/Kg	9.91 W/Kg	38.08 W/Kg	39.53 W/Kg

Frequency	1900MHz(H)	1900MHz(B)	2450MHz(H)	2450MHz(B)	2600MHz(H)	2600MHz(B)
Target value 1W (1g)	39.36 W/Kg	42.36W/Kg	54.74 W/Kg	56.13 W/Kg	55.29W/Kg	57.73 W/Kg
Test value 1g (100 mW input power)	3.955 W/Kg (04.07)	4.188 W/Kg (04.07)	5.253 W/Kg (04.08)	5.508 W/Kg (04.08)	5.464 W/Kg (04.08)	5.537 W/Kg (04.08)
Normalized to 1W value(1g)	39.55 W/Kg	41.88 W/Kg	52.53 W/Kg	55.08 W/Kg	54.64 W/Kg	55.37 W/Kg

Note: System checks the specific test data please see Annex D

8. OPERATIONAL CONDITIONS DURING TEST

8.1 Information on the testing

The mobile phone antenna and battery are those specified by the manufacturer. The battery is fully charged before each measurement. The output power and frequency are controlled using a base station simulator. The mobile phone is set to transmit at its highest output peak power level.

The mobile phone is test in the “cheek” and “tilted” positions on the left and right sides of the phantom. The mobile phone is placed with the vertical centre line of the body of the mobile phone and the horizontal line crossing the centre of the earpiece in a plane parallel to the sagittal plane of the phantom.

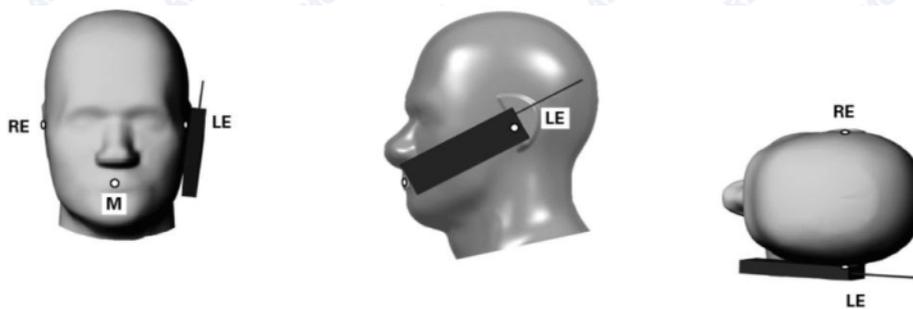


Illustration for Cheek Position

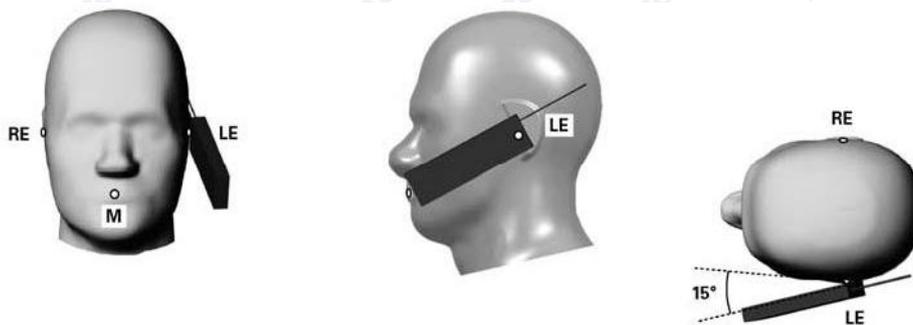


Illustration for Tilted Position

Description of the “cheek” position:

The mobile phone is well placed in the reference plane and the earpiece is in contact with the ear. Then the mobile phone is moved until any point on the front side get in contact with the cheek of the phantom or until contact with the ear is lost.

Description of the “tilted” position:


The mobile phone is well placed in the “cheek” position as described above. Then the mobile phone is moved outward away from the mouth by an angle of 15 degrees or until contact with the ear lost.

Remark: Please refer to Appendix B for the test setup photos.

8.2 Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

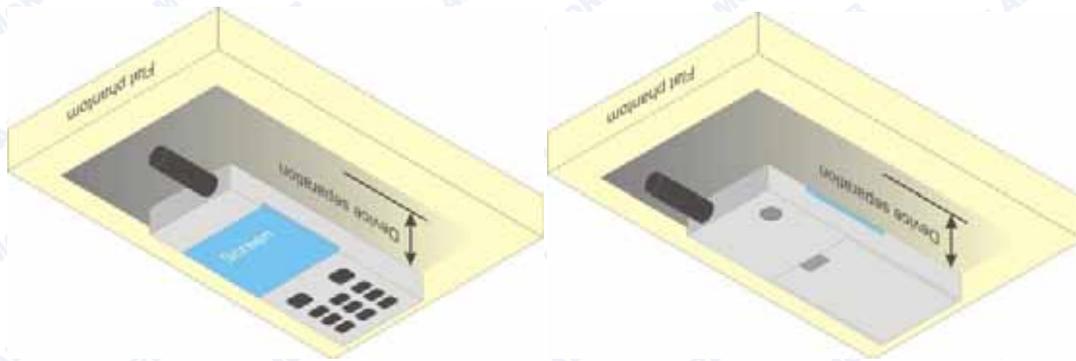

IllustrationforBodyWornPosition

8.3 Measurement procedure

The Following steps are used for each test position

1. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
2. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
3. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
4. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or



8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

8.4 Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.


The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

9. HOTSPOT MODE EVALUATION PROCEDURE

The SAR evaluation procedures for Portable Devices with Wireless Router function is according to KDB 941225 D06 Hot Spot SAR v02r01.

SAR must be tested for all surfaces and edges (side) with a transmitting antenna with in 2.5 cm from that surface or edge, at a test separation distance of 10 mm, in the wireless mode that support wireless routing.

Edge configurations:

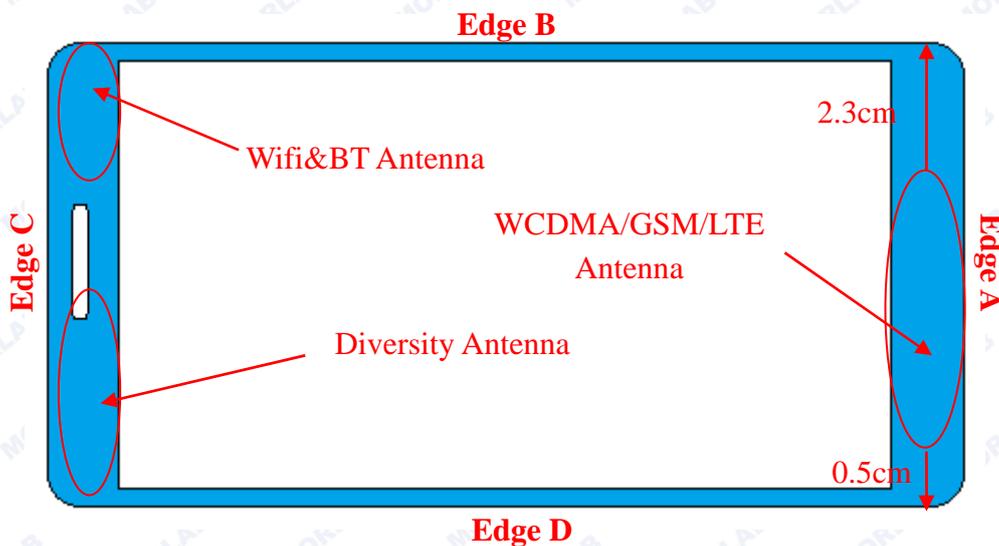

Assessment	Hotspot side for SAR					
	Test distance: 10mm					
Antennas	Back	Front	Edge A	Edge B	Edge C	Edge D
LTE/WCDMA/GSM	Yes	Yes	Yes	Yes	No	Yes
WLAN&BT	Yes	Yes	No	Yes	Yes	No



10. Information Related to LTE Test parameter(Per 941225 D05v02r04)

1	Identify the operating frequency range of each LTE transmission FCC band used by the device	Band 2 Tx:1850-1910MHz Band 4 Tx:1710-1755MHz Band 5 Tx:824-849MHz Band 7 Tx:2500-2570MHz Band 28 Tx:704-746MHz																																																																																																						
2	Identify the high, middle and low (L, M, H) channel numbers and frequencies tested in each LTE frequency band	<table border="1"> <thead> <tr> <th rowspan="2">Band2</th> <th colspan="6">Channel Bandwidth</th> </tr> <tr> <th>20MHz</th> <th>15MHz</th> <th>10MHz</th> <th>5MHz</th> <th>3MHz</th> <th>1.4MHz</th> </tr> </thead> <tbody> <tr> <td>Low</td> <td>20050/ 1720</td> <td>20025/ 1717.5</td> <td>20000/ 1715</td> <td>19975/ 1712.5</td> <td>19965/ 1711.5</td> <td>19957/ 1710.7</td> </tr> <tr> <td>Middle</td> <td>20175/ 1732.5</td> <td>20175/ 1732.5</td> <td>20175/ 1732.5</td> <td>20175/ 1732.5</td> <td>20175/ 1732.5</td> <td>20175/ 1732.5</td> </tr> <tr> <td>High</td> <td>20300/ 1745</td> <td>20325/ 1747.5</td> <td>20350/ 1750</td> <td>20375/ 1752.5</td> <td>20384/ 1753.5</td> <td>20392/ 1754.2</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th rowspan="2">Band4</th> <th colspan="6">Channel Bandwidth</th> </tr> <tr> <th>20MHz</th> <th>15MHz</th> <th>10MHz</th> <th>5MHz</th> <th>3MHz</th> <th>1.4MHz</th> </tr> </thead> <tbody> <tr> <td>Low</td> <td>20050/ 1720</td> <td>20025/ 1717.5</td> <td>20000/ 1715</td> <td>19975/ 1712.5</td> <td>19965/ 1711.5</td> <td>19957/ 1710.7</td> </tr> <tr> <td>Middle</td> <td>20175/ 1732.5</td> <td>20175/ 1732.5</td> <td>20175/ 1732.5</td> <td>20175/ 1732.5</td> <td>20175/ 1732.5</td> <td>20175/ 1732.5</td> </tr> <tr> <td>High</td> <td>20300/ 1745</td> <td>20325/ 1747.5</td> <td>20350/ 1750</td> <td>20375/ 1752.5</td> <td>20384/ 1753.5</td> <td>20392/ 1754.2</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th rowspan="2">Band7</th> <th colspan="6">Channel Bandwidth</th> </tr> <tr> <th>20MHz</th> <th>15MHz</th> <th>10MHz</th> <th>5MHz</th> <th>3MHz</th> <th>1.4MHz</th> </tr> </thead> <tbody> <tr> <td>Low</td> <td>20850/ 2510</td> <td>20825/ 2507.2</td> <td>20800/ 2505</td> <td>20775/ 2502.5</td> <td>/</td> <td>/</td> </tr> <tr> <td>Middle</td> <td>21100/ 2535</td> <td>21100/ 2535</td> <td>21100/ 2535</td> <td>21100/ 2535</td> <td>/</td> <td>/</td> </tr> <tr> <td>High</td> <td>21350/ 2560</td> <td>21375/ 2562.5</td> <td>21400/ 2565</td> <td>21425/ 2567.5</td> <td>/</td> <td>/</td> </tr> </tbody> </table>	Band2	Channel Bandwidth						20MHz	15MHz	10MHz	5MHz	3MHz	1.4MHz	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7	Middle	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20384/ 1753.5	20392/ 1754.2	Band4	Channel Bandwidth						20MHz	15MHz	10MHz	5MHz	3MHz	1.4MHz	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7	Middle	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20384/ 1753.5	20392/ 1754.2	Band7	Channel Bandwidth						20MHz	15MHz	10MHz	5MHz	3MHz	1.4MHz	Low	20850/ 2510	20825/ 2507.2	20800/ 2505	20775/ 2502.5	/	/	Middle	21100/ 2535	21100/ 2535	21100/ 2535	21100/ 2535	/	/	High	21350/ 2560	21375/ 2562.5	21400/ 2565	21425/ 2567.5	/	/
Band2	Channel Bandwidth																																																																																																							
	20MHz	15MHz	10MHz	5MHz	3MHz	1.4MHz																																																																																																		
Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7																																																																																																		
Middle	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5																																																																																																		
High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20384/ 1753.5	20392/ 1754.2																																																																																																		
Band4	Channel Bandwidth																																																																																																							
	20MHz	15MHz	10MHz	5MHz	3MHz	1.4MHz																																																																																																		
Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7																																																																																																		
Middle	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5																																																																																																		
High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20384/ 1753.5	20392/ 1754.2																																																																																																		
Band7	Channel Bandwidth																																																																																																							
	20MHz	15MHz	10MHz	5MHz	3MHz	1.4MHz																																																																																																		
Low	20850/ 2510	20825/ 2507.2	20800/ 2505	20775/ 2502.5	/	/																																																																																																		
Middle	21100/ 2535	21100/ 2535	21100/ 2535	21100/ 2535	/	/																																																																																																		
High	21350/ 2560	21375/ 2562.5	21400/ 2565	21425/ 2567.5	/	/																																																																																																		
3	Specify the UE category and uplink modulations used	The UE Category is 4 and the uplink modulations used are QPSK and 16QAM.																																																																																																						



4	<p>Descriptions of the LTE transmitter and antenna implementation & identify whether it is a standalone transmitter operating independently of other wireless transmitters in the device or sharing hardware components and/or antenna(s) with other transmitters etc.</p>	<p>The module has a primary antenna for all LTE&UMTS bands, a Wi-Fi Tx/Rx antenna.</p>																																						
5	<p>Identify the LTE Band Voice/data requirements in each operating mode and exposure condition with respect to head and body test configurations, antenna locations, handset flip-cover or slide positions, antenna diversity conditions, etc.</p>	<p>Mobile Hotspot Mode will be tested according to Section 9 of this report.</p>																																						
6	<p>Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design: only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards b) A-MPR (additional MPR) must be disabled.</p>	<p>As per 3GPP TS 36.101 v11.0.0 (2012-03) Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1" data-bbox="564 1377 1495 1688"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>A-MPR is supported by design, but disable for SAR testing.</p>	Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)																																	
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																		
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																	
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																	
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																	
7	<p>Include the maximum average conducted output</p>	<p>This is included in the section 11 of this report.</p>																																						



	<p>power measured on the required test channels for each channel bandwidth and UL modulation used in each frequency band:</p> <p>a) with 1 RB allocated at the low, centred, high end of a channel</p> <p>b) using 50% RB allocation low, centered, high end within a channel</p> <p>c) using 100% RB allocation</p>																																																
8	<p>Include the maximum average conducted output power measured for the other wireless mode and frequency bands</p>	<p>This is included in the section 13 of this report.</p>																																															
10	<p>Identify the simultaneous transmission conditions for the voice and data configurations supported by all wireless modes, device configurations and frequency bands, for the head and body exposure conditions and device operating configurations (handset flip or cover positions, antenna diversity conditions etc.)</p>	<table border="1" data-bbox="627 1124 1449 1480"> <thead> <tr> <th colspan="6">Simultaneous transmission conditions</th> </tr> <tr> <th colspan="2"></th> <th colspan="2">WWAN</th> <th colspan="2">WLAN</th> <th rowspan="2">Sum of WWAN& WLAN</th> </tr> <tr> <th>#</th> <th></th> <th>LTE Data</th> <th>UMTS</th> <th>802.11b/g/n</th> <th>BT</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>x</td> <td></td> <td></td> <td>x</td> <td></td> <td>x</td> </tr> <tr> <td>2</td> <td></td> <td></td> <td>x</td> <td>x</td> <td></td> <td>x</td> </tr> <tr> <td>3</td> <td>x</td> <td></td> <td></td> <td></td> <td>x</td> <td>x</td> </tr> <tr> <td>4</td> <td></td> <td></td> <td>x</td> <td></td> <td>x</td> <td>x</td> </tr> </tbody> </table>	Simultaneous transmission conditions								WWAN		WLAN		Sum of WWAN& WLAN	#		LTE Data	UMTS	802.11b/g/n	BT	1	x			x		x	2			x	x		x	3	x				x	x	4			x		x	x
Simultaneous transmission conditions																																																	
		WWAN		WLAN		Sum of WWAN& WLAN																																											
#		LTE Data	UMTS	802.11b/g/n	BT																																												
1	x			x		x																																											
2			x	x		x																																											
3	x				x	x																																											
4			x		x	x																																											
11	<p>When power reduction is applied to certain wireless modes to satisfy SAR compliance for simultaneous transmission conditions, other equipment certification or operating requirements, include the maximum average conducted output</p>	<p>Not applicable.</p>																																															



power measured in each power reduction mode applicable to the simultaneous voice/data transmission configurations for such wireless configurations and frequency bands; and also include details of the power reduction implementation and measurement setup



11. SAR EVALUATION PROCEDURES&POWER MEASUREMENT FOR LTE

“1. QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and *required test channel* combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each *required test channel*. When the *reported SAR* is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and *required test channels* is not required for 1 RB allocation; otherwise, SAR is required for the remaining *required test channels* and only for the RB offset configuration with the highest output power for that channel.6 When the *reported SAR* of a *required test channel* is > 1.45 W/kg, SAR is required for all three RB offset configurations for that *required test channel*.

2. QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1. are applied to measure the SAR for QPSK with 50% RB allocation.

3. QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output

power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB

allocations and the highest *reported SAR* for 1 RB and 50% RB allocation in 1. and 2. are ≤ 0.8

W/kg. Otherwise, SAR is measured for the highest output power channel and if the *reported SAR*

is > 1.45 W/kg, the remaining *required test channels* must also be tested.

Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 1. and 2.and 3. to determine the QAM configurations that may need SAR measurement.

For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the *reported SAR* for the QPSK configuration is > 1.45 W/kg.

4. Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum



outputpower of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher thanthe equivalent channel configurations in the largest channel bandwidth configuration or the*reported* SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

The equivalent channel configuration for the RB allocation, RB offset and modulation etc. Is determined for the smaller channel bandwidth according to the same number of RB allocated in Thelargest channel bandwidth. For example, 50 RB in 10 MHz channel bandwidth does not apply to5MHz channel bandwidth; therefore, this cannot be tested in the smaller channel bandwidth.

However, 50% RB allocation in 10 MHz channel bandwidthis equivalent to 100% RB allocation in 5 MHz channel bandwidth; therefore, these are theequivalent configurations to be compared to determine the specific channel and configuration inthe smaller channel bandwidth that need SAR testing.”



LTE BAND 2

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
20MHz	L 18700	1860	QPSK	1	0	22.03
				1	49	22.11
				1	99	22.06
				50	0	21.21
				50	25	21.08
				50	49	21.13
			16-QAM	100	0	21.20
				1	0	21.25
				1	49	21.31
				1	99	21.17
				50	0	20.56
				50	25	20.61
	M 18900	1880	QPSK	50	49	20.49
				100	0	20.22
				1	0	22.31
				1	49	22.26
				1	99	22.24
				50	0	21.01
			16-QAM	50	25	21.02
				50	49	20.91
				100	0	20.94
				1	0	21.43
				1	49	21.32
				1	99	21.21
	H 19100	1900	QPSK	50	0	20.56
				50	25	20.67
				50	49	20.49
				100	0	20.03
				1	0	22.04
				1	49	22.08
16-QAM			1	99	21.79	
			50	0	20.83	
			50	25	21.25	
			50	49	21.05	
			100	0	20.86	
			1	0	21.19	
			1	49	21.33	
			1	99	20.41	
			50	0	20.23	
			50	25	20.31	
			50	49	20.18	
			100	0	19.97	



LTE BAND 2 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
15MHz	L 18675	1857.5	QPSK	1	0	21.71
				1	37	21.58
				1	74	21.61
				36	0	21.01
				36	18	21.09
				36	35	20.98
				75	0	21.05
			16-QAM	1	0	21.03
				1	37	20.96
				1	74	20.95
				36	0	20.45
				36	18	20.52
				36	35	20.48
				75	0	20.14
	M 18900	1880	QPSK	1	0	22.01
				1	37	21.98
				1	74	21.56
				36	0	21.05
				36	18	20.78
				36	35	20.89
				75	0	21.10
			16-QAM	1	0	21.40
				1	37	21.34
				1	74	21.29
				36	0	20.75
				36	18	20.68
				36	35	20.86
				75	0	20.05
	H 19125	1902.5	QPSK	1	0	21.40
				1	37	21.34
1				74	21.29	
36				0	20.81	
36				18	20.75	
36				35	20.64	
75				0	20.79	
16-QAM			1	0	20.66	
			1	37	20.56	
			1	74	20.64	
			36	0	20.23	
			36	18	20.21	
			36	35	20.19	
			75	0	19.90	



LTE BAND 2 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
10MHz	L 18650	1855	QPSK	1	0	21.49
				1	24	21.38
				1	49	21.40
				25	0	20.88
				25	12	20.81
				25	24	20.72
			50	0	20.97	
			16-QAM	1	0	20.78
				1	24	20.64
				1	49	20.73
				25	0	20.21
				25	12	20.19
	25	24		20.12		
	M 18900	1880	QPSK	1	0	21.99
				1	24	21.59
				1	49	21.64
				25	0	21.03
				25	12	20.88
				25	24	20.92
			50	0	20.96	
			16-QAM	1	0	21.42
				1	24	21.38
				1	49	21.40
				25	0	20.12
				25	12	20.25
	25	24		20.17		
	H 19150	1905	QPSK	1	0	21.67
				1	24	21.58
				1	49	21.61
				25	0	20.89
25				12	20.76	
25				24	20.79	
50			0	20.69		
16-QAM			1	0	20.37	
			1	24	20.22	
			1	49	20.34	
			25	0	20.12	
			25	12	20.21	
	25	24	20.14			
50	0	19.87				



LTE BAND 2 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
1.4MHz	L 18607	1850.7	QPSK	1	0	21.90
				1	2	21.85
				1	5	21.79
				3	0	21.96
				3	1	21.87
				3	2	21.68
			6	0	21.14	
			16-QAM	1	0	21.23
				1	2	21.18
				1	5	21.09
				3	0	20.61
				3	1	20.59
	3	2		20.45		
	M 18900	1880	QPSK	6	0	20.17
				1	0	21.89
				1	2	21.93
				1	5	21.88
				3	0	21.82
				3	1	21.82
			16-QAM	3	2	21.56
				6	0	21.01
				1	0	20.66
				1	2	20.59
				1	5	20.72
				3	0	20.32
	H 19193	1909.3	QPSK	3	2	20.24
				3	5	20.18
				6	0	19.95
				1	0	20.91
				1	2	20.60
1				5	20.49	
16-QAM			3	0	20.69	
			3	1	20.59	
			3	2	20.72	
			6	0	20.04	
			1	0	20.05	
			1	2	20.02	
1	5	19.94				
3	0	19.67				
3	1	19.72				
3	2	19.81				
6	0	19.35				



LTE BAND 4

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
20MHz	L 20050	1720.0	QPSK	1	0	22.34
				1	49	22.00
				1	99	21.13
				50	0	21.41
				50	25	21.38
				50	49	20.91
			100	0	21.37	
			16-QAM	1	0	21.46
				1	49	21.45
				1	99	20.45
				50	0	20.51
				50	25	20.39
	50	49		20.45		
	M 20175	1732.5	QPSK	1	0	22.15
				1	49	21.19
				1	99	21.83
				50	0	20.69
				50	25	21.43
				50	49	20.37
			100	0	20.56	
			16-QAM	1	0	21.47
				1	49	20.62
				1	99	21.13
				50	0	20.59
				50	25	20.45
	50	49		20.51		
	H 20300	1745.0	QPSK	1	0	21.40
				1	49	22.19
				1	99	22.45
				50	0	20.73
50				25	21.40	
50				49	21.47	
100			0	21.25		
16-QAM			1	0	20.89	
			1	49	21.69	
			1	99	21.85	
			50	0	20.85	
			50	25	20.92	
	50	49	20.79			
100	0	20.45				



LTE BAND 4 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
15MHz	L 20025	1717.5	QPSK	1	0	22.53
				1	37	22.50
				1	74	21.80
				36	0	21.80
				36	18	21.75
				36	35	21.76
				75	0	21.71
			16-QAM	1	0	21.74
				1	37	21.68
				1	74	21.70
				36	0	21.01
				36	18	21.15
				36	35	21.14
				75	0	20.78
	M 20175	1732.5	QPSK	1	0	22.25
				1	37	21.50
				1	74	21.73
				36	0	20.82
				36	18	20.72
				36	35	20.64
				75	0	20.70
			16-QAM	1	0	21.40
				1	37	21.32
				1	74	21.29
				36	0	20.25
				36	18	20.32
				36	35	20.19
				75	0	19.87
	H 20325	1747.5	QPSK	1	0	21.88
				1	37	22.62
1				74	22.67	
36				0	21.26	
36				18	21.56	
36				35	21.75	
75				0	21.62	
16-QAM			1	0	20.99	
			1	37	21.08	
			1	74	21.74	
			36	0	21.12	
			36	18	21.09	
			36	35	21.16	
			75	0	20.71	



LTE BAND 4 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
10MHz	L 20000	1715.0	QPSK	1	0	22.49
				1	24	22.64
				1	49	22.02
				25	0	21.70
				25	12	21.68
				25	24	21.71
			16-QAM	50	0	21.72
				1	0	21.70
				1	24	21.65
				1	49	21.40
				25	0	21.25
				25	12	21.34
				25	24	21.36
				50	0	20.71
				M 20175	1732.5	QPSK
	1	24	21.36			
	1	49	21.15			
	25	0	20.70			
	25	12	20.64			
	25	24	20.72			
	16-QAM	50	0			20.65
		1	0			21.14
		1	24			21.15
		1	49			20.59
		25	0			20.15
		25	12			20.23
		25	24			20.19
		50	0			19.82
		H 20350	1750.0			QPSK
	1			24	22.64	
1	49			22.71		
25	0			21.61		
25	12			21.52		
25	24			21.49		
16-QAM	50			0	21.69	
	1			0	21.12	
	1			24	21.38	
	1			49	21.42	
	25			0	21.12	
	25			12	21.25	
	25			24	21.31	
	50			0	20.72	



LTE BAND 4 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
5MHz	L 19975	1712.5	QPSK	1	0	22.73
				1	12	22.78
				1	24	22.72
				12	0	21.64
				12	6	21.58
				12	11	21.49
			16-QAM	25	0	21.61
				1	0	22.15
				1	12	22.12
				1	24	22.08
				12	0	21.59
				12	6	21.42
	M 20175	1732.5	QPSK	12	11	21.38
				25	0	20.61
				1	0	21.82
				1	12	21.22
				1	24	21.74
				12	0	20.51
			16-QAM	12	6	20.49
				12	11	20.42
				25	0	20.47
				1	0	21.38
				1	12	21.28
				1	24	21.31
	H 20375	1752.5	QPSK	12	0	20.59
				12	6	20.48
				12	11	20.51
				25	0	19.69
				1	0	22.59
				1	12	22.61
16-QAM			1	24	22.48	
			12	0	21.66	
			12	6	21.62	
			12	11	21.60	
			25	0	21.64	
			1	0	21.91	
	1	12	21.89			
	1	24	21.75			
	12	0	21.29			
	12	6	21.16			
	12	11	21.18			
	25	0	20.63			



LTE BAND 4 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)	
				RB Size	RB Offset		
3MHz	L 19965	1711.5	QPSK	1	0	22.41	
				1	7	22.45	
				1	14	22.43	
				8	0	21.85	
				8	4	21.95	
				8	7	21.88	
			15	0	21.62		
			16-QAM	1	0	21.68	
				1	7	21.72	
				1	14	21.62	
				8	0	21.23	
				8	4	21.30	
				8	7	21.20	
				15	0	20.66	
				QPSK	1	0	22.22
	1	7			21.96		
	1	14	22.09				
	8	0	21.87				
	8	4	21.67				
	8	7	21.72				
	15	0	21.28				
	16-QAM	1	0		21.73		
		1	7		21.48		
		1	14	21.57			
		8	0	21.12			
		8	4	21.09			
		8	7	21.16			
		15	0	20.50			
		H 20384	1753.4	QPSK	1	0	22.53
					1	7	22.56
1	14				22.54		
8	0				21.89		
8	4				21.94		
8	7				22.08		
15	0			21.59			
16-QAM	1			0	21.34		
	1			7	21.28		
	1			14	21.19		
	8			0	20.86		
	8			4	20.73		
	8			7	20.79		
	15			0	20.56		



LTE BAND 4 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)																		
				RB Size	RB Offset																			
1.4MHz	L 19957	1710.7	QPSK	1	0	22.43																		
				1	2	22.55																		
				1	5	22.46																		
				3	0	22.62																		
				3	1	22.58																		
				3	2	22.49																		
			16-QAM	6	0	21.39																		
				1	0	21.48																		
				1	2	21.45																		
				1	5	21.41																		
				3	0	21.12																		
				3	1	21.09																		
	M 20175	1732.5	QPSK	3	2	21.19																		
				6	0	20.39																		
				1	0	22.01																		
				1	2	21.85																		
				1	5	22.00																		
				3	0	21.98																		
			16-QAM	3	1	21.86																		
				3	2	21.79																		
				6	0	21.17																		
				1	0	20.96																		
				1	2	20.91																		
				1	5	20.85																		
	H 20392	1754.2	QPSK	3	0	20.56																		
				3	2	20.61																		
				3	5	20.72																		
				6	0	20.36																		
				1	0	22.45																		
				1	2	22.54																		
			16-QAM	1	5	22.52																		
				3	0	22.40																		
				3	1	22.28																		
				3	2	22.34																		
				6	0	21.45																		
				1	0	21.19																		
<table border="1"> <tbody> <tr> <td>1</td> <td>2</td> <td>21.14</td> </tr> <tr> <td>1</td> <td>5</td> <td>21.16</td> </tr> <tr> <td>3</td> <td>0</td> <td>20.84</td> </tr> <tr> <td>3</td> <td>1</td> <td>20.79</td> </tr> <tr> <td>3</td> <td>2</td> <td>20.72</td> </tr> <tr> <td>6</td> <td>0</td> <td>20.48</td> </tr> </tbody> </table>							1	2	21.14	1	5	21.16	3	0	20.84	3	1	20.79	3	2	20.72	6	0	20.48
1	2	21.14																						
1	5	21.16																						
3	0	20.84																						
3	1	20.79																						
3	2	20.72																						
6	0	20.48																						



LTE BAND 5 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
3MHz	L 20415	825.5	QPSK	1	0	21.60
				1	7	21.56
				1	14	21.74
				8	0	21.32
				8	4	21.24
				8	7	21.15
			16-QAM	15	0	20.68
				1	0	21.04
				1	7	20.95
				1	14	20.81
				8	0	20.45
				8	4	20.39
				8	7	20.42
				15	0	19.77
				M 20525	836.5	QPSK
	1	7	21.03			
	1	14	21.11			
	8	0	20.45			
	8	4	20.41			
	8	7	20.45			
	16-QAM	15	0			20.13
		1	0			20.72
		1	7			20.50
		1	14			20.56
		8	0			20.35
		8	4			20.14
		8	7			20.22
		15	0			19.33
		H 20635	847.5			QPSK
	1			7	21.35	
1	14			21.45		
8	0			21.12		
8	4			21.21		
8	7			21.30		
16-QAM	15			0	20.69	
	1			0	20.84	
	1			7	20.76	
	1			14	20.72	
	8			0	20.45	
	8			4	20.31	
	8			7	20.22	
	15			0	19.89	



LTE BAND 7 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
1.4MHz	L 20407	824.7	QPSK	1	0	21.44
				1	2	21.38
				1	5	21.42
				3	0	21.50
				3	1	21.42
				3	2	21.38
			16-QAM	6	0	20.53
				1	0	20.71
				1	2	20.69
				1	5	20.58
				3	0	20.12
				3	1	20.26
	M 20525	836.5	QPSK	3	2	20.18
				6	0	19.63
				1	0	21.10
				1	2	20.97
				1	5	21.04
				3	0	21.06
			16-QAM	3	1	21.04
				3	2	21.09
				6	0	20.14
				1	0	20.03
				1	2	20.12
				1	5	20.06
	H 20643	848.3	QPSK	3	0	19.85
				3	2	19.92
				3	5	19.76
				6	0	19.27
				1	0	21.38
				1	2	21.29
16-QAM			1	5	21.24	
			3	0	21.28	
			3	1	20.89	
			3	2	20.91	
			6	0	20.51	
			1	0	20.43	
				1	2	20.42
				1	5	20.34
				3	0	20.12
				3	1	20.05
				3	2	20.03
				6	0	19.78



LTE BAND 7

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
20MHz	L 20850	2510	QPSK	1	0	20.52
				1	49	21.61
				1	99	22.18
				50	0	20.33
				50	25	21.12
				50	49	21.52
			16-QAM	100	0	20.88
				1	0	19.69
				1	49	20.88
				1	99	21.52
				50	0	21.42
				50	25	21.32
	M 21100	2535	QPSK	50	49	21.28
				100	0	20.10
				1	0	22.85
				1	49	21.77
				1	99	21.48
				50	0	21.44
			16-QAM	50	25	21.08
				50	49	20.59
				100	0	21.06
				1	0	21.80
				1	49	21.03
				1	99	20.74
	H 21350	2560	QPSK	50	0	20.68
				50	25	20.49
				50	49	20.46
				100	0	20.24
				1	0	21.68
				1	49	22.32
16-QAM			1	99	20.10	
			50	0	21.54	
			50	25	21.12	
			50	49	21.01	
			100	0	21.32	
			1	0	21.15	
			16-QAM	1	49	21.77
				1	99	19.72
				50	0	21.21
				50	25	21.08
				50	49	21.18
				100	0	20.47



LTE BAND 7 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
15MHz	L 20825	2507.5	QPSK	1	0	20.17
				1	37	20.98
				1	74	21.94
				36	0	19.87
				36	18	20.85
				36	35	20.99
				75	0	20.42
			16-QAM	1	0	19.54
				1	37	20.49
				1	74	21.44
				36	0	20.89
				36	18	21.12
				36	35	21.22
				75	0	19.63
	M 21100	2535	QPSK	1	0	21.98
				1	37	21.05
				1	74	20.70
				36	0	20.94
				36	18	20.85
				36	35	20.23
				75	0	20.64
			16-QAM	1	0	21.55
				1	37	20.68
				1	74	20.31
				36	0	20.12
				36	18	20.49
				36	35	20.85
				75	0	19.82
	H 21375	2562.5	QPSK	1	0	22.36
				1	37	21.98
1				74	19.77	
36				0	21.76	
36				18	21.08	
36				35	20.38	
75				0	20.99	
16-QAM			1	0	21.46	
			1	37	21.16	
			1	74	19.05	
			36	0	20.59	
			36	18	20.49	
			36	35	20.82	
			75	0	20.27	



LTE BAND 7 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
5MHz	L 20775	2502.5	QPSK	1	0	20.87
				1	12	20.68
				1	24	21.33
				12	0	19.63
				12	6	20.38
				12	11	20.00
			16-QAM	25	0	19.79
				1	0	20.44
				1	12	20.33
				1	24	20.92
				12	0	20.45
				12	6	20.38
	M 21100	2535	QPSK	12	11	20.49
				25	0	19.09
				1	0	22.15
				1	12	21.20
				1	24	21.48
				12	0	20.77
			16-QAM	12	6	20.64
				12	11	20.40
				25	0	20.62
				1	0	21.00
				1	12	20.18
				1	24	20.43
	H 21425	2567.5	QPSK	12	0	20.42
				12	6	20.31
				12	11	20.29
				25	0	19.87
				1	0	21.98
				1	12	20.47
16-QAM			1	24	19.93	
			12	0	20.46	
			12	6	20.52	
			12	11	19.33	
			25	0	19.92	
			1	0	21.31	
			1	12	19.97	
			1	24	19.44	
			12	0	20.15	
			12	6	20.15	
			12	11	20.20	
			25	0	19.09	



LTE BAND 28 (704-710)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power
				RB Size	RB Offset	(dBm)
5MHz	L 27235	705.5	QPSK	1	0	22.41
				1	12	22.00
				1	24	22.29
				12	0	21.85
				12	6	21.96
				12	11	21.86
			16-QAM	25	0	21.12
				1	0	21.77
				1	12	21.46
				1	24	21.81
				12	0	21.52
				12	6	21.49
	M 27250	707	QPSK	12	11	21.42
				25	0	20.17
				1	0	22.23
				1	12	22.14
				1	24	22.15
				12	0	21.28
			16-QAM	12	6	21.19
				12	11	21.24
				25	0	21.24
				1	0	21.06
				1	12	20.97
				1	24	21.04
	H 27265	708.5	QPSK	12	0	20.95
				12	6	20.85
				12	11	20.78
				25	0	20.35
				1	0	22.17
				1	12	22.16
			16-QAM	1	24	22.18
				12	0	21.85
				12	6	21.85
				12	11	21.79
				25	0	21.28
				1	0	21.52
16-QAM	1	12	21.59			
	1	24	21.59			
	12	0	21.49			
	12	6	21.39			
	12	11	21.45			
	25	0	20.31			



LTE BAND 28 (704-710)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power
				RB Size	RB Offset	(dBm)
3MHz	L 27225	704.5	QPSK	1	0	22.07
				1	7	21.78
				1	14	21.89
				8	0	21.51
				8	4	21.59
				8	7	21.49
			16-QAM	15	0	21.24
				1	0	21.32
				1	7	21.28
				1	14	21.19
				8	0	20.56
				8	4	20.49
				8	7	20.48
				15	0	20.27
				M 27250	707	QPSK
	1	7	22.10			
	1	14	22.06			
	8	0	21.85			
	8	4	21.74			
	8	7	21.69			
	16-QAM	15	0			21.20
		1	0			21.57
		1	7			21.58
		1	14			21.54
		8	0			21.23
		8	4			21.19
		8	7			21.20
		15	0			20.31
		H 27275	709.5			QPSK
	1			7	22.09	
	1			14	22.02	
	8			0	21.56	
	8			4	21.67	
	8			7	21.48	
	16-QAM			15	0	21.21
				1	0	20.95
1				7	20.89	
1				14	20.78	
8				0	20.56	
8				4	20.49	
8				7	20.39	
15				0	20.24	



LTE BAND 28 (710-716)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
5MHz	L 27295	711.5	QPSK	1	0	22.16
				1	12	22.16
				1	24	22.19
				12	0	21.35
				12	6	21.39
				12	11	21.35
			16-QAM	25	0	21.25
				1	0	21.60
				1	12	21.52
				1	24	21.23
				12	0	21.26
				12	6	21.56
				12	11	21.23
				25	0	20.27
				M 27310	713	QPSK
	1	12	22.15			
	1	24	22.19			
	12	0	21.56			
	12	6	21.64			
	12	11	21.78			
	16-QAM	25	0			21.24
		1	0			21.01
		1	12			20.92
		1	24			20.89
		12	0			20.45
		12	6			20.56
		12	11			20.49
		25	0			20.32
		H 27325	714.5			QPSK
	1			12	22.12	
1	24			22.09		
12	0			21.89		
12	6			21.75		
12	11			21.56		
16-QAM	25			0	21.31	
	1			0	21.02	
	1			12	21.04	
	1			24	21.09	
	12			0	20.59	
	12			6	20.64	
	12			11	20.72	
	25			0	20.35	



LTE BAND 28 (710-716)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
3MHz	L 27285	710.5	QPSK	1	0	22.02
				1	7	22.09
				1	14	22.09
				8	0	21.56
				8	4	21.61
				8	7	21.72
			16-QAM	15	0	21.24
				1	0	21.29
				1	7	21.36
				1	14	21.31
				8	0	20.85
				8	4	20.89
				8	7	20.76
				15	0	20.26
				M 27310	713	QPSK
	1	7	22.15			
	1	14	22.14			
	8	0	21.89			
	8	4	21.91			
	8	7	21.75			
	16-QAM	15	0			21.25
		1	0			21.58
		1	7			21.62
		1	14			21.57
		8	0			21.02
		8	4			20.95
		8	7			20.88
		15	0			20.31
		H 27335	715.5			QPSK
	1			7	22.26	
1	14			22.28		
8	0			21.85		
8	4			21.79		
8	7			21.81		
16-QAM	15			0	21.30	
	1			0	21.01	
	1			7	21.09	
	1			14	21.10	
	8			0	20.86	
	8			4	20.79	
	8			7	20.86	
	15			0	20.29	



LTE BAND 28 (734-740)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
5MHz	L 27535	735.5	QPSK	1	0	22.17
				1	12	21.68
				1	24	21.72
				12	0	21.25
				12	6	21.26
				12	11	20.19
			16-QAM	25	0	20.95
				1	0	21.51
				1	12	21.13
				1	24	21.23
				12	0	20.46
				12	6	20.59
				12	11	20.64
				25	0	20.07
				M 27550	737	QPSK
	1	12	21.74			
	1	24	21.84			
	12	0	21.22			
	12	6	21.26			
	12	11	21.32			
	16-QAM	25	0			20.78
		1	0			21.75
		1	12			21.23
		1	24			21.44
		12	0			21.12
		12	6			20.98
		12	11			20.95
		25	0			19.86
		H 27565	738.5			QPSK
	1			12	21.47	
1	24			21.84		
12	0			21.41		
12	6			21.61		
12	11			21.54		
16-QAM	25			0	20.63	
	1			0	21.00	
	1			12	20.34	
	1			24	20.72	
	12			0	20.25	
	12			6	20.18	
	12			11	20.09	
	25			0	19.81	



LTE BAND 28 (734-740)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
3MHz	L 27525	734.5	QPSK	1	0	22.02
				1	7	21.95
				1	14	21.99
				8	0	21.56
				8	4	21.51
				8	7	21.39
			16-QAM	15	0	21.24
				1	0	21.30
				1	7	21.28
				1	14	21.19
				8	0	20.86
				8	4	20.89
				8	7	20.91
				15	0	20.21
				M 27550	737	QPSK
	1	7	22.04			
	1	14	22.09			
	8	0	21.45			
	8	4	21.41			
	8	7	21.39			
	16-QAM	15	0			21.18
		1	0			21.53
		1	7			21.54
		1	14			21.61
		8	0			20.85
		8	4			20.45
		8	7			20.75
		15	0			20.31
		H 27575	739.5			QPSK
	1			7	22.10	
1	14			22.19		
8	0			21.85		
8	4			21.79		
8	7			21.58		
16-QAM	15			0	21.14	
	1			0	20.97	
	1			7	20.89	
	1			14	20.75	
	8			0	20.56	
	8			4	20.38	
	8			7	20.46	
	15			0	20.17	



LTE BAND 28 (740-746)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
5MHz	L 27595	741.5	QPSK	1	0	22.01
				1	12	21.89
				1	24	21.92
				12	0	21.45
				12	6	21.35
				12	11	21.56
			16-QAM	25	0	20.50
				1	0	21.47
				1	12	21.42
				1	24	21.49
				12	0	20.59
				12	6	20.62
	M 27610	743	QPSK	12	11	20.38
				25	0	19.52
				1	0	22.29
				1	12	21.80
				1	24	22.19
				12	0	21.56
			16-QAM	12	6	21.60
				12	11	21.82
				25	0	20.70
				1	0	21.80
				1	12	21.27
				1	24	21.18
	H 27625	744.5	QPSK	12	0	21.05
				12	6	21.02
				12	11	21.02
				25	0	19.74
				1	0	22.04
				1	12	22.01
16-QAM			1	24	21.92	
			12	0	21.52	
			12	6	21.48	
			12	11	21.39	
			25	0	20.63	
			1	0	21.42	
16-QAM	1	12	21.38			
	1	24	21.49			
	12	0	20.75			
	12	6	20.72			
	12	11	20.85			
	25	0	19.69			



LTE BAND 28 (740-746)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
3MHz	L 27585	741.5	QPSK	1	0	21.89
				1	7	21.75
				1	14	21.64
				8	0	21.32
				8	4	21.28
				8	7	21.45
			16-QAM	15	0	20.83
				1	0	21.17
				1	7	21.10
				1	14	21.18
				8	0	20.81
				8	4	20.75
				8	7	20.69
				15	0	19.89
				M 27610	743	QPSK
	1	7	21.91			
	1	14	21.84			
	8	0	21.21			
	8	4	21.18			
	8	7	21.19			
	16-QAM	15	0			20.90
		1	0			21.51
		1	7			21.48
		1	14			21.39
		8	0			20.85
		8	4			20.74
		8	7			20.79
		15	0			20.03
		H 27635	745.5			QPSK
	1			7	21.91	
1	14			21.82		
8	0			21.42		
8	4			21.38		
8	7			21.49		
16-QAM	15			0	21.08	
	1			0	20.87	
	1			7	20.75	
	1			14	20.73	
	8			0	20.52	
	8			4	20.49	
	8			7	20.38	
	15			0	20.13	



12. MEASUREMENT OF CONDUCTED OUTPUT POWER

1. WCDMA mode conducted output power values

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4175	4233	9262	9400	9538
	subtest	dBm			dBm		
5.2(WCDMA)	non	23.25	23.15	23.09	22.09	22.45	22.45
HSDPA	1	23.23	23.09	23.04	22.07	22.39	22.27
	2	23.21	23.07	23.06	22.05	22.37	22.24
	3	22.72	22.58	22.55	21.56	21.86	21.75
	4	22.71	22.57	22.56	21.57	21.88	21.76
HSUPA	1	23.33	23.18	23.05	22.06	22.40	22.11
	2	21.32	21.17	21.06	20.04	20.38	20.09
	3	22.30	22.16	22.07	21.05	21.39	21.10
	4	21.30	21.16	21.05	20.05	20.39	20.10
	5	23.30	23.17	23.06	22.05	22.38	22.09
HSPA+	1	20.29	20.28	20.32	21.78	22.17	22.24
Note:	The Conducted RF Output Power test of WCDMA /HSDPA /HSUPA/HSPA+ was tested by power meter.						

2. GSM Mode

Band	Channel	Frequency (MHz)	Output Power(dBm)
GSM 850	128	824.2	32.15
	190	836.6	32.13
	251	848.8	32.21
PCS 1900	512	1850.2	29.17
	661	1880.0	29.16
	810	1909.8	29.21



3. GPRS Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	31.49	30.47	29.46	28.48
	190	836.6	31.29	30.27	29.26	28.28
	251	848.8	31.19	30.17	29.16	28.18
PCS 1900	512	1850.2	28.76	27.74	26.73	25.75
	661	1880.0	28.73	27.71	26.70	25.72
	810	1909.8	28.82	27.80	26.79	25.81

GPRS Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	22.46	24.45	25.20	25.47
	190	836.6	22.26	24.25	25.00	25.27
	251	848.8	22.16	24.15	24.90	25.17
PCS 1900	512	1850.2	19.73	21.72	22.47	22.74
	661	1880.0	19.70	21.69	22.44	22.71
	810	1909.8	19.79	21.78	22.53	22.80

Timeslot consignations:

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2Up3Down	3Up2Down	4Up1Down
Duty Cycle	1:8	1:4	1:2.67	1:2
Correct Factor	-9.03dB	-6.02dB	-4.26dB	-3.01dB



3. EDGE Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	29.59	28.57	27.56	26.58
	190	836.6	29.28	28.26	27.25	26.27
	251	848.8	28.87	27.85	26.84	25.86
PCS 1900	512	1850.2	28.47	27.45	26.44	25.46
	661	1880.0	28.05	27.03	26.02	25.04
	810	1909.8	27.68	26.66	25.65	24.67

EDGE Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	20.56	22.55	23.30	23.57
	190	836.6	20.25	22.24	22.99	23.26
	251	848.8	19.84	21.83	22.58	22.85
PCS 1900	512	1850.2	19.44	21.43	22.18	22.45
	661	1880.0	19.02	21.01	21.76	22.03
	810	1909.8	18.65	20.64	21.39	21.66



4. WiFi Average output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			802.11b (DSSS)	802.11g (OFDM)	802.11n20 (OFDM)
WiFi	1	2412	17.32	14.42	13.80
	6	2437	16.84	13.92	13.93
	11	2462	16.88	13.65	14.16

Band	Channel	Frequency (MHz)	Output Power(dBm)
			802.11n40 (OFDM)
WiFi	3	2422	13.72
	6	2437	13.37
	9	2452	14.07

5. BT+EDR 2.1 peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			GFSK	$\pi/4$ -DQPSK	8-DPSK
BT	0	2402	5.38	4.21	4.29
	39	2441	6.22	5.14	5.22
	78	2480	5.68	4.37	4.51

Band	Channel	Frequency (MHz)	Output Power(dBm)
			GFSK
BT	0	2402	-2.02
	19	2441	-0.80
	39	2480	-2.13



13. TEST RESULTS LIST

Summary of Measurement Results (GSM 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.							
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g	Plot No.	
Right Side Of Head	Cheek/Touch	190	0.341	1.069	0.365	1	
	Ear/Tilt		0.170		0.182		
Left Side Of Head	Cheek/Touch		0.261		0.279		
	Ear/Tilt		0.155		0.166		
Body (10mm Separation)	GSM		Back upward		0.564	0.603	2
			Front upward		0.428	0.458	
	GPRS	Back upward	0.586	0.589	3		
		Front upward	0.451	0.453			
		Edge A	0.225	0.226			
		Edge B	0.102	0.103			
Edge D	0.098	0.098					



Summary of Measurement Results (GSM 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.

Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g	Plot No.				
Right Side Of Head	Cheek/Touch	810	0.076	1.069	0.081	4				
	Ear/Tilt		0.035		0.037					
Left Side Of Head	Cheek/Touch		0.128		0.137					
	Ear/Tilt		0.052		0.056					
Body (10mm Separation)	GSM		Back upward		0.743		0.794			
			Front upward		0.719		0.769			
	GPRS		Back upward		512		1.150	1.067	1.227	5
					661		1.145	1.067	1.222	
		810		1.172	1.045	1.225				
		Front upward	810	0.714	1.045	0.746				
		Edge A	512	1.108	1.067	1.182				
			661	1.102	1.067	1.176				
			810	1.271	1.045	1.328	6			
		Edge B	810	0.221	1.045	0.231				
Edge D	810	0.108	1.045	0.113						

Note:

- GPRS/EDGE test Scenario(Based on the Max. Time-based Average Power)

Band	Slots	Power level	Duty Cycle
GPRS850	4	5	1:2
GPRS1900	4	0	1:2

- SAR is not required for EDGE mode because its output power is less than that of GPRS mode.



Summary of Measurement Results (WCDMA 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.

Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g	Plot No.
Right Side Of Head	Cheek/Touch	4132	0.333	1.059	0.353	7
	Ear/Tilt		0.177		0.187	
Left Side Of Head	Cheek/Touch		0.255		0.270	
	Ear/Tilt		0.142		0.150	
Body (10mm Separation)	Back upward		0.242		0.256	
	Front upward		0.351		0.372	8
	Edge A		0.142		0.150	
	Edge B		0.160		0.169	
	Edge D	0.401	0.425	9		

Summary of Measurement Results (WCDMA 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.

Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g	Plot No.
Right Side Of Head	Cheek/Touch	9538	0.049	1.012	0.050	
	Ear/Tilt		0.042		0.043	
Left Side Of Head	Cheek/Touch		0.104		0.105	10
	Ear/Tilt		0.038		0.038	
Body (10mm Separation)	Back upward	9262	1.207	1.099	1.326	11
		9400	1.218	1.012	1.233	
		9538	1.225	1.012	1.240	
	Front upward	9538	0.408	1.012	0.413	
	Edge A	9262	1.137	1.099	1.250	
		9400	1.225	1.012	1.240	
		9538	1.230	1.012	1.245	
	Edge B	9538	0.064	1.012	0.065	
Edge D	9538	0.098	1.012	0.099		



Note:

1. When the 1-g SAR for the mid-band channel or the channel with the highest output power satisfy the following conditions, testing of the other channels in the band is not required. (Per KDB 447498 D01 General RF Exposure Guidance v06)
 - ≤ 0.8 W/kg and transmission band ≤ 100 MHz
 - ≤ 0.6 W/kg and, 100 MHz < transmission bandwidth ≤ 200 MHz
 - ≤ 0.4 W/kg and transmission band > 200 MHz
2. The WCDMA mode is test with 12.2kbps RMC and TPC set to all "1", if maximum SAR for 12.2kbps RMC is ≤ 75% of the SAR limit (i.e. 1.2W/Kg 1g) and maximum average output of each RF channel with HSDPA/HSUPA active is less than 1/4 dB Middle than that measured without HSDPA/HSUPA using 12.2kbps RMC, according to KDB 941225D01v03, SAR is not required for this handset with HSPA capabilities.
5. BT & WiFi SAR test is conducted according to section 12 stand-alone SAR evaluation of this report.
6. During 802.11 testing, engineering testing software installed on the EUT can provide continuous transmitting RF signal. The RF signal utilized in SAR measurement has almost 100% duty cycle, and its crest factor is 1.
7. IEEE Std 1528-2013 require the middle channel to be tested first. This generally applies to wireless devices that are designed to operate in technologies with tight tolerances for maximum output power variations across channels in the band. When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used.
8. Per KDB 447498, when the SAR procedures require multiple channels to be tested and the 1-g SAR for the highest output channel is less than 0.8 W/kg and peak SAR is less than 1.6W/kg, where the transmission band corresponding to all channels is ≤ 100 MHz, testing for the other channels is not required.
9. The WCDMA mode is test with 12.2kbps RMC and TPC set to all "1", if maximum SAR for 12.2kbps RMC is ≤ 75% of the SAR limit (i.e. 1.2W/Kg 1g) and maximum average output of each RF channel with HSDPA/HSUPA active is less than 1/4 dB higher than that measured without HSDPA/HSUPA using 12.2kbps RMC, according to KDB 941225D01v03, SAR is not required for this handset with HSPA capabilities. This module supports 3GPP release R7 HSPA+ using QPSK only without 16QAM in the uplink. So PBA is not required for HSPA+.
10. SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.



Summary of Measurement Results (WLAN 802.11b Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.

Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Duty Cycle	Scaling Factor (Duty Cycle)	Scaling Factor (Power)	Scaled SAR (W/Kg), 1g	Plot No.
Right Side Of Head	Cheek/Touch	1	0.295	99%	1.010	1.042	0.310	12
	Ear/Tilt		0.198				0.208	
Left Side Of Head	Cheek/Touch		0.235				0.247	
	Ear/Tilt		0.176				0.185	
Body (10mm Separation)	Back upward		0.095				0.100	13
	Front upward		0.073				0.077	
	Edge C		0.102				0.107	14
	Edge D		0.058				0.061	

Notes:

- SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:
 - When the reported SAR of the highest measured maximum output power channel for the exposure configuration is 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
 - When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
- 2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.
- For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is 0.8 W/kg or all test positions are



measured.

4. Justification for test configurations for WLAN per KDB Publication 248227 D02DR02-41929 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.



Summary of Measurement Results (LTE Band 2 bandwidth 20MHz with QPSK 1RB)

Temperature: 21.0~23.8°C, humidity: 50~60%.
 Power Drift limit: -5%~+5% SAR Limit: 1.6W/Kg averaged over 1gram, Spatial Peak

Phantom Configurations	Test Mode	Device Test Positions	Device Test channel	SAR (W/Kg)	Scaling Factor	Scaled SAR	Plot No.
Right Side Of Head	QPSK 20MHz 1RB	Cheek/Touch	18900	0.171	1.045	0.179	15
		Ear/Tilt		0.035		0.037	
Left Side Of Head		Cheek/Touch		0.194		0.203	
Ear/Tilt		0.084		0.088			
Body (10mm Separation)		Back upward	18700	1.272	1.094	1.392	16
			18900	1.254	1.045	1.310	
			19100	1.237	1.102	1.363	
		Front upward	18900	0.697	1.045	0.728	
	Edge A	18700	1.205	1.094	1.318		
		18900	1.189	1.045	1.243		
		19100	1.197	1.102	1.319		
	Edge B	18900	0.084	1.045	0.088		
Edge D	18900	0.097	1.045	0.101			



Summary of Measurement Results (LTE Band 2 bandwidth 20MHz with QPSK 50RB)

Temperature: 21.0~23.8°C, humidity: 50~60%.								
Power Drift limit:-5%~+5% SAR Limit: 1.6W/Kg averaged over 1gram, Spatial Peak								
Phantom Configurations	Test Mode	Device Test Positions	Device Test channel	SAR (W/Kg)	Scaling Factor	Scaled SAR	Plot No.	
Right Side Of Head	QPSK 20MHz 50RB	Cheek/Touch	18900	0.162	1.045	0.179		
		Ear/Tilt		0.034		0.037		
Left Side Of Head		Cheek/Touch		0.181		0.203		
		Ear/Tilt		0.079		0.088		
Body (10mm Separation)		Back upward		18700	1.191	1.069	1.370	
				18900	1.178	1.045	1.310	
				19100	1.145	1.059	1.310	
		Front upward		18900	0.688	1.045	0.728	
	Edge A			18700	1.188	1.069	1.288	
			18900	1.175	1.045	1.243		
			19100	1.205	1.059	1.268		
	Edge B	18900	0.076	1.045	0.088			
Edge D	18900	0.092	1.045	0.101				

Summary of Measurement Results (LTE Band 2 bandwidth 20MHz with QPSK 100RB)

Temperature: 21.0~23.8°C, humidity: 50~60%.							
Power Drift limit:-5%~+5% SAR Limit: 1.6W/Kg averaged over 1gram, Spatial Peak							
Phantom Configurations	Test Mode	Device Test Positions	Device Test channel	SAR (W/Kg)	Scaling Factor	Scaled SAR	Plot No.
Body (10mm Separation)	QPSK 20MHz 100RB	Back upward	18900	1.058	1.067	1.129	
		Edge A	18900	1.242	1.067	1.325	

Additional LTE test requirement for 16QAM

Not required.

Additional LTE test requirement for other bandwidth

Not required.



Summary of Measurement Results (LTE Band 4 bandwidth 20MHz with QPSK 1RB)

Temperature: 21.0~23.8°C, humidity: 50~60%. Power Drift limit:-5%~+5% SAR Limit: 1.6W/Kg averaged over 1gram, Spatial Peak								
Phantom Configurations	Test Mode	Device Test Positions	Device Test channel	SAR (W/Kg)	Scaling Factor	Scaled SAR	Plot No.	
Right Side Of Head	QPSK 20MHz 1RB	Cheek/Touch	20300	0.102	1.012	0.103	17	
		Ear/Tilt		0.045		0.046		
Left Side Of Head		Cheek/Touch		0.168		0.170		
		Ear/Tilt		0.050		0.051		
Body (10mm Separation)		Back upward	20050	1.187	1.038	1.232	18	
				20175	1.078	1.084		1.169
				20300	1.092	1.012		1.105
		Front upward	20300	0.685	1.012	0.693		
	Edge A	0.370		1.012	0.374			
	Edge B	0.082		1.012	0.083			
	Edge D	0.223		1.012	0.226			

Summary of Measurement Results (LTE Band 4)

Temperature: 21.0~23.8°C, humidity: 50~60%. Power Drift limit:-5%~+5% SAR Limit: 1.6W/Kg averaged over 1gram, Spatial Peak								
Phantom Configurations	Test Mode	Device Test Positions	Device Test channel	SAR (W/Kg)	Scaling Factor	Scaled SAR	Plot No.	
Right Side Of Head	QPSK 20MHz 50RB	Cheek/Touch	20300	0.097	1.007	0.103		
		Ear/Tilt		0.042		0.045		
Left Side Of Head		Cheek/Touch		0.161		0.169		
		Ear/Tilt		0.046		0.050		
Body (10mm Separation)		Back upward	20050	1.094	1.021	1.212		
				20175	1.045	1.016		1.095
				20300	1.083	1.007		1.100
		Front upward	20300	0.671	1.007	0.690		
	Edge A	0.355		0.373				
	Edge B	0.075		0.083				
	Edge D	0.189		0.225				



Summary of Measurement Results (LTE Band 4 bandwidth 20MHz with QPSK 100RB)

Temperature: 21.0~23.8°C, humidity: 50~60%.							
Power Drift limit:-5%~+5% SAR Limit: 1.6W/Kg averaged over 1gram, Spatial Peak							
Phantom Configurations	Test Mode	Device Test Positions	Device Test channel	SAR (W/Kg)	Scaling Factor	Scaled SAR	Plot No.
Body (10mm Separation)	QPSK 20MHz 100RB	Back upward	1.024	1.079	1.012	1.105	

Additional LTE test requirement for 16QAM

Not required.

Additional LTE test requirement for other bandwidth

Not required.



Summary of Measurement Results (LTE Band5 bandwidth 10MHz with QPSK 1RB)

Temperature: 21.0~23.8°C, humidity: 50~60%.
 Power Drift limit:-5%~+5% SAR Limit: 1.6W/Kg averaged over 1gram, Spatial Peak

Phantom Configurations	Test Mode	Device Test Positions	Device Test channel	SAR (W/Kg)	Scaling Factor	Scaled SAR	Plot No.
Right Side Of Head	QPSK 10MHz 1RB	Cheek/Touch	20525	0.214	1.002	0.214	19
		Ear/Tilt		0.186		0.186	
Left Side Of Head		Cheek/Touch		0.205		0.205	
		Ear/Tilt		0.110		0.110	
Body (10mm Separation)		Back upward		0.551		0.552	
		Front upward		0.302		0.303	
		Edge A		0.206		0.206	
		Edge B		0.065		0.065	
	Edge D	0.034	0.034				

Summary of Measurement Results (LTE Band5 bandwidth 10MHz with QPSK 25RB)

Temperature: 21.0~23.8°C, humidity: 50~60%.
 Power Drift limit:-5%~+5% SAR Limit: 1.6W/Kg averaged over 1gram, Spatial Peak

Phantom Configurations	Test Mode	Device Test Positions	Device Test channel	SAR (W/Kg)	Scaling Factor	Scaled SAR	Plot No.
Right Side Of Head	QPSK 10MHz 25RB	Cheek/Touch	20525	0.204	1.028	0.210	
		Ear/Tilt		0.172		0.177	
Left Side Of Head		Cheek/Touch		0.195		0.200	
		Ear/Tilt		0.101		0.104	
Body (10mm Separation)		Back upward		0.544		0.559	20
		Front upward		0.295		0.303	
		Edge A		0.197		0.203	
		Edge B		0.058		0.060	
	Edge D	0.027	0.028				



REPORT No. : SZ16030124S01

Additional LTE test requirement for bandwidth 10MHz with QPSK 50RB

Not required.

Additional LTE test requirement for 16QAM

Not required.

Additional LTE test requirement for other bandwidth

Not required.



Summary of Measurement Results (LTE Band 7 bandwidth 20MHz with QPSK 1RB)

Temperature: 21.0~23.8°C, humidity: 50~60%. Power Drift limit:-5%~+5% SAR Limit: 1.6W/Kg averaged over 1gram, Spatial Peak							
Phantom Configurations	Test Mode	Device Test Positions	Device Test channel	SAR (W/Kg)	Scaling Factor	Scaled SAR	Plot No.
Right Side Of Head	QPSK 20MHz 1RB	Cheek/Touch	21100	0.151	1.035	0.156	
		Ear/Tilt		0.111		0.115	
Left Side Of Head		Cheek/Touch		0.156		0.161	21
		Ear/Tilt		0.081		0.084	
Body (10mm Separation)		Back upward		0.358		0.371	22
		Front upward		0.161		0.167	
		Edge A		0.453		0.469	23
		Edge B		0.061		0.063	
	Edge D	0.028	0.029				

Summary of Measurement Results (LTE Band 7 bandwidth 20MHz with QPSK 50RB)

Temperature: 21.0~23.8°C, humidity: 50~60%. Power Drift limit:-5%~+5% SAR Limit: 1.6W/Kg averaged over 1gram, Spatial Peak							
Phantom Configurations	Test Mode	Device Test Positions	Device Test channel	SAR (W/Kg)	Scaling Factor	Scaled SAR	Plot No.
Right Side Of Head	QPSK 20MHz 50RB	Cheek/Touch	21100	0.138	1.014	0.140	
		Ear/Tilt		0.105		0.106	
Left Side Of Head		Cheek/Touch		0.144		0.146	
		Ear/Tilt		0.072		0.073	
Body (10mm Separation)		Back upward		0.344		0.349	
		Front upward		0.155		0.157	
		Edge A		0.461		0.467	
		Edge B		0.059		0.060	
	Edge D	0.030	0.030				



REPORT No. : SZ16030124S01

Additional LTE test requirement for bandwidth 10MHz with QPSK 50RB

Not required.

Additional LTE test requirement for 16QAM

Not required.

Additional LTE test requirement for other bandwidth

Not required.



Summary of Measurement Results (LTE Band 28 bandwidth 5MHz with QPSK 1RB)

Temperature: 21.0~23.8°C, humidity: 50~60%. Power Drift limit:-5%~+5% SAR Limit: 1.6W/Kg averaged over 1gram, Spatial Peak							
Phantom Configurations	Test Mode	Device Test Positions	Device Test channel	SAR (W/Kg)	Scaling Factor	Scaled SAR	Plot No.
Right Side Of Head	QPSK 10MHz 1RB	Cheek/Touch	27610	0.148	1.049	0.155	24
		Ear/Tilt		0.063		0.066	
Left Side Of Head		Cheek/Touch		0.160		0.168	
		Ear/Tilt		0.101		0.106	
Body (10mm Separation)		Back upward		0.318		0.334	
		Front upward		0.151		0.158	
		Edge A		0.208		0.218	
		Edge B		0.078		0.082	
	Edge D	0.046	0.048				

Summary of Measurement Results (LTE Band 28 bandwidth 5MHz with QPSK 12RB)

Temperature: 21.0~23.8°C, humidity: 50~60%. Power Drift limit:-5%~+5% SAR Limit: 1.6W/Kg averaged over 1gram, Spatial Peak							
Phantom Configurations	Test Mode	Device Test Positions	Device Test channel	SAR (W/Kg)	Scaling Factor	Scaled SAR	Plot No.
Right Side Of Head	QPSK 10MHz 25RB	Cheek/Touch	27610	0.135	1.042	0.141	
		Ear/Tilt		0.057		0.059	
Left Side Of Head		Cheek/Touch		0.151		0.157	
		Ear/Tilt		0.089		0.093	
Body (10mm Separation)		Back upward		0.295		0.307	
		Front upward		0.146		0.152	
		Edge A		0.201		0.209	
		Edge B		0.060		0.063	
	Edge D	0.041	0.043				



Additional LTE test requirement for bandwidth 10MHz with QPSK 50RB

Not required.

Additional LTE test requirement for 16QAM

Not required.

Additional LTE test requirement for other bandwidth

Not required.

Note :

1. IEEE Std 1528-2013 require the middle channel to be tested first. This generally applies to wireless devices that are designed to operate in technologies with tight tolerances for maximum output power variations across channels in the band. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
2. Per KDB 447498, when the SAR procedures require multiple channels to be tested and the 1-g SAR for the highest output channel is less than 0.8 W/kg and peak SAR is less than 1.6W/kg, where the transmission band corresponding to all channels is ≤ 100 MHz, testing for the other channels is not required.
3. The WCDMA mode is test with 12.2kbps RMC and TPC set to all "1", if maximum SAR for 12.2kbps RMC is $\leq 75\%$ of the SAR limit (i.e. 1.2W/Kg 1g) and maximum average output of each RF channel with HSDPA/HSUPA active is less than 1/4 dB higher than that measured without HSDPA/HSUPA using 12.2kbps RMC, according to KDB 941225D01v03r01, SAR is not required for this handset with HSPA capabilities. This module supports 3GPP release R7 HSPA+ using QPSK only without 16QAM in the uplink. So PBA is not required for HSPA+.



4. Scaling Factor calculation

Band	Tune-up power tolerance(dBm)	SAR test channel Power (dBm)	Scaling Factor
GSM 850	PCL = 5, PWR =32±0.5	32.21	1.069
GPRS 850	PCL = 5, PWR =28±0.5(4 slots)	28.48	1.005
GSM 1900	PCL = 0, PWR =29±0.5	29.21	1.069
GPRS1900	PCL = 0, PWR =25.5±0.5(4 slots)	25.72	1.067
		25.72	1.067
		25.81	1.045
WCDMA 850	Max output power =22.5(+1/-2)	23.25	1.059
WCDMA 1900	Max output power =21.5(+1/-2)	22.09	1.099
		22.45	1.012
		22.45	1.012
LTE BAND2 (QPSK)	Max output power =22±0.5(1RB)	22.11	1.094
		22.31	1.045
		22.08	1.102
	Max output power =21±0.5(50RB)	21.21	1.069
		21.31	1.045
		21.25	1.059
LTE BAND4 (QPSK)	Max output power =22±0.5(1RB)	22.34	1.038
		22.15	1.084
		22.45	1.012
	Max output power =21±0.5(50RB)	21.41	1.021
		21.43	1.016
		21.47	1.007
Max output power =20±0.5(50RB)	20.45	1.012	
	20.45	1.012	
	20.45	1.012	
LTE BAND5 (QPSK)	Max output power =21±0.5(1RB)	21.49	1.002
	Max output power =20±0.5(25RB)	20.38	1.028
LTE BAND7 (QPSK)	Max output power =22.5±0.5(1RB)	22.85	1.035
	Max output power =21±0.5(50RB)	21.44	1.014
LTE BAND28 (QPSK)	Max output power =22±0.5(1RB)	22.29	1.049
	Max output power =21.5±0.5(25RB)	21.82	1.042
802.11b	Max output power =17±0.5	17.32	1.042



14. REPEATED SAR MEASUREMENT

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the samehead or body tissue-equivalent medium in a frequency band. The test device should be returned to ambientconditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder forthe repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2)through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% fromthe 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kgand the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Band	Test Position	Test Channel	Meas.SAR(W/kg)		Largest to Smallest SAR Ratio
			Original	Repeated	
GSM 1900	Back upward	810	1.172	1.161	1.009
	Edge A		1.271	1.265	1.005
WCDMA 1900	Back upward	9538	1.225	1.238	1.011
	Edge A		1.230	1.218	1.010
LTE Band 2	Back upward		1.282	1.219	1.052
	Edge A		1.205	1.195	1.008
LTE Band 4	Back upward		1.187	1.172	1.013



15. MULTIPLE TRANSMITTERS EVALUATION

Stand-alone SAR

Test distance: 5mm			
Band	Highest power(mW) per tune up	1-g SAR test threshold	Test required?
WIFI(2.4G)	63.09	[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] • [\sqrt{f} (GHz)] ≤ 3.0 for 1-g SAR	Yes
BT	4.47		No

Test distance: 10mm			
Band	Highest power(mW) per tune up	1-g SAR test threshold	Test required?
WIFI(2.4G)	63.09	[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] • [\sqrt{f} (GHz)] ≤ 3.0 for 1-g SAR	Yes
BT	4.47		No

The SAR test for BT is not required.

The SAR test for 802.11b(2.4GHz) is required, 802.11g/HT20 is not required, for the maximum average output power is less than 1/4 dB Higher than measured on the corresponding 802.11b channels. As per KDB 248227

The BT stand-alone SAR is not required, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] • [\sqrt{f} (GHz)] W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

(Max power=4.47 mW; min. test separation distance= 5mm for Head; $f=2.4$ GHz)

BT estimated Head SAR =0.184W/Kg (1g)

(Max power=4.47 mW; min. test separation distance= 10mm for Body; $f=2.4$ GHz)

BT estimated Body SAR =0.092W/Kg (1g)

**Simultaneous SAR**

#	Simultaneous transmission conditions					Sum of WWAN& WLAN
	WWAN			WLAN		
	LTE Data	GSM	UMTS	802.11b/g/n	BT	
1	x			x		x
2		x		x		x
3			x	x		x
4	x				x	x
5		x			x	x
6			x		x	x

Note:

1. When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the Wi-Fi transmitter and another WWAN transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.
2. The hotspot SAR result may overlap with the body-worn accessory SAR requirements, per KDB 941225 D06, the more conservative configurations can be considered, thus excluding some unnecessary body-worn accessory SAR tests.
3. GSM supports voice and data transmission, though not simultaneously. WCDMA supports voice and data transmission simultaneously.
4. Simultaneous Transmission SAR evaluation is not required for BT and WiFi, because the software mechanism have been incorporated to guarantee that the WLAN and Bluetooth transmitters would not simultaneously operate.
5. Per KDB 447498D01v06, Simultaneous Transmission SAR Evaluation procedures is as followed:
Step 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.
Step 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.



Step 3: If the ratio of SAR to peak separation distance is ≤ 0.04 , Simultaneous SAR measurement is not required.

Step 4: If the ratio of SAR to peak separation distance is > 0.04 , Simultaneous SAR measurement is required and simultaneous transmission SAR value is calculated.

(The ratio is determined by: $(SAR1 + SAR2) \wedge 1.5/Ri \leq 0.04$,

Ri is the separation distance between the peak SAR locations for the antenna pair in mm)

6. Applicable Multiple Scenario Evaluation

Test Position	Main Ant. SARMax (W/Kg)	Bluetooth SAR(W/Kg)	WiFi SARMax(W/Kg)	Σ 1-g SARMax(W/Kg)	
				BT&Main Ant	WiFi&Main Ant
Head SAR	0.365	0.184	0.301	0.549	0.666
Body SAR	1.392	0.092	0.107	1.484	1.499

Simultaneous Transmission SAR evaluation is not required for WiFi and WCDMA&GSM<E, because the sum of 1g SARMax is **1.499** W/Kg < 1.6 W/Kg for Wifi and WCDMA&GSM<E.

Simultaneous Transmission SAR evaluation is not required for BT and WCDMA&GSM<E, because the sum of 1g SARMax is **1.484** W/Kg < 1.6 W/Kg for BT and WCDMA&GSM<E.

(According to KDB 447498D01v06, the sum of the Highest reportedSAR of each antenna does not exceed the limit, simultaneous transmission SAR evaluation is not required.)



REPORT No. : SZ16030124S01

16 ANNEX A GENERAL INFORMATION

17 ANNEX B PHOTOGRAPHS OF THE EUT

18 ANNEX C PLOTS OF HIGH SAR TEST RESULTS

19 ANNEX D SYSTEM PERFORMANCE CHECK DATA



20. ANNEX A GENERAL INFORMATION

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China



3. List of Test Equipments

No.	Instrument	Type	Cal. Date	Cal. Due
1	PC	Dell (Pentium IV 2.4GHz, SN:X10-23533)	(n.a)	(n.a)
2	Network Emulator	Aglient (8960, SN:10752)	2015-6-18	1year
3	Network Analyzer	Agilent(E5071B ,SN:MY42404762)	2015-9-26	1year
4	Voltmeter	Keithley (2000, SN:1000572)	2015-9-24	1year
5	Signal Generator	Rohde&Schwarz (SMP_02)	2015-9-24	1year
6	Power Amplifier	PRANA (Ap32 SV125AZ)	2015-9-24	1year
7	Power Meter	Agilent (E4416A, SN:MY45102093)	2015-5-07	1year
8	Power Sensor	Agilent (N8482A, SN:MY41091706)	2015-5-07	1year
9	Directional coupler	Giga-tronics(SN:1829112)	2015-9-24	1year
10	Probe	Satimo (SN:SN 37/08 EP80)	2015-8-17	1year
11	Dielectric Probe Kit	Agilent (85033E)	2015-9-24	1year
12	Phantom	Satimo (SN:SN_36_08_SAM62)	2015-9-24	1year
13	Liquid	Satimo(Last Calibration: 2016-04-06 to 2016-04-08)	N/A	N/A
14	Dipole 750MHz	Satimo (SN 30/13 DIP0G750-259)	2015-6-20	1year
15	Dipole 835MHz	Satimo (SN 20/08 DIP0G 99)	2015-6-20	1year
16	Dipole 1750MHz	Satimo (SN 30/13 DIP1G750-260)	2015-6-20	1year
17	Dipole 1900MHz	Satimo (SN 30/13 DIP1G900-261)	2015-6-20	1year
18	Dipole 2450MHz	Satimo (SN 30/13 DIP2G450-263)	2015-6-20	1year
19	Dipole 2600MHz	Satimo (SN 30/13 DIP2G600-265)	2015-6-20	1year

***** END OF REPORT *****