

FCC

EMC

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
LTE Digital Mobile Handset

ISSUED TO
ZTE Corporation

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District,
Shenzhen, Guangdong, P. R. China

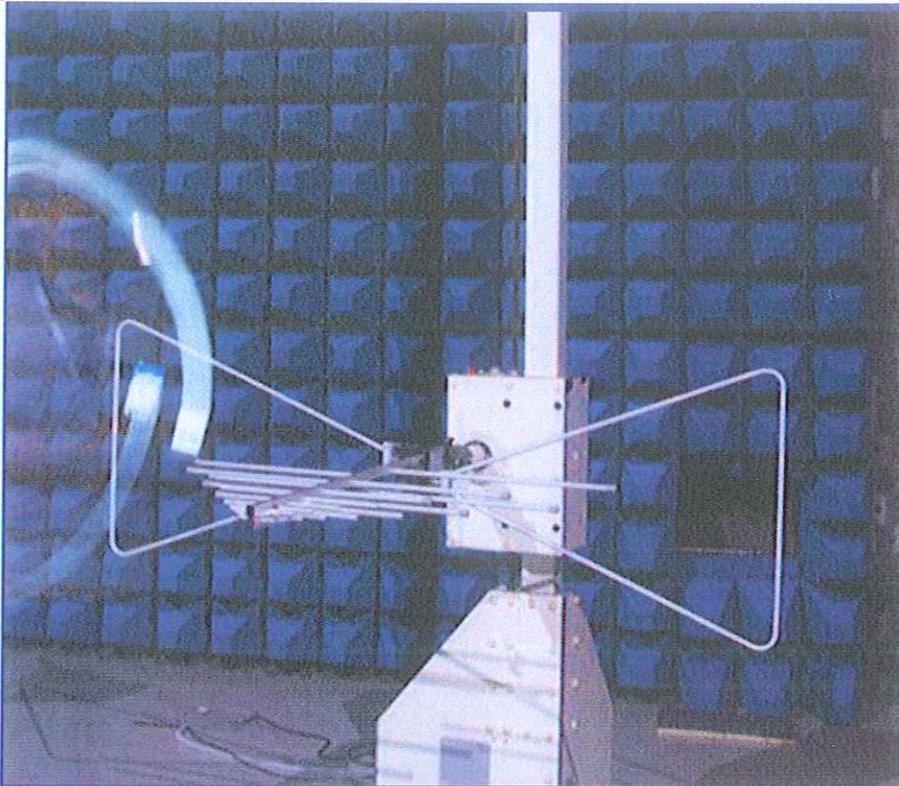

Tested by: Zhang Yanqing
Zhang Yanqing
(Engineer)

Date Aug. 11, 2016

Approved by: Wei Yanquan
Wei Yanquan
(Chief Engineer)

Date Aug. 11, 2016

Report No.: BL-SZ1670352-401

EUT Type: LTE Digital Mobile Handset

Model Name: ZTE Blade A511

Brand Name: ZTE

Test Standard: 47 CFR Part 15 Subpart B

FCC ID: SRQ-A511

Test Conclusion: Pass

Test Date: Jul. 27, 2016 ~ Aug. 03, 2016

Date of Issue: Aug. 11, 2016

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Aug. 11, 2016</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
1.3	Laboratory Condition	4
1.4	Announce	4
2	PRODUCT INFORMATION	6
2.1	Applicant Information	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Ancillary Equipment	7
2.6	Technical Information	7
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards	8
3.2	Verdict	8
3.3	Test Uncertainty	8
4	GENERAL TEST CONFIGURATIONS	9
4.1	Test Environments	9
4.2	Test Equipment List	9
4.3	Test Enclosure list	10
4.4	Test Configurations	11
4.5	Test Setups	12
4.6	Test Conditions	14
5	TEST ITEMS	15
5.1	Emission Tests	15
ANNEX A	TEST RESULTS	17

A.1 Radiated Emission 17

A.2 Conducted Emission 25

ANNEX B TEST SETUP PHOTOS 29

ANNEX C EUT EXTERNAL PHOTOS 29

ANNEX D EUT INTERNAL PHOTOS 29

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C~25°C
Ambient Relative Humidity	45% - 55%
Ambient Pressure	100 kPa - 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v4.3.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.

- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	ZTE Corporation
Address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P. R. China

2.2 Manufacturer Information

Manufacturer	ZTE Corporation
Address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P. R. China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Type	LTE Digital Mobile Handset
Model Name Under Test	ZTE Blade A511
Series Model Name	ZTE Blade A511, Blade A511
Description of Model name differentiation	The equipment model ZTE Blade A511 and Blade A511 are LTE Digital Mobile Handset, the electrical parameters and internal structure of circuit are same, only the model name is different.
Hardware Version	V1AMB_A
Software Version	A511_MXATT_1.01
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A
The Highest Speed of Processor	N/A
Network and Wireless connectivity	2G Network GSM/GPRS/EDGE 850/1900 MHz 3G Network WCDMA/HSDPA/HSUPA Band II/IV/V 4G Network FDD LTE Band 2/4/5/7/17/28 Bluetooth, WIFI, GPS, FM, GLONASS

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	ZTE
	Model No.	Li3822T43P3h786032
	Serial No.	N/A
	Capacitance	2200 mAh
	Rated Voltage	3.8 V
	Limited Voltage	4.35 V
Ancillary Equipment 2	Charger	
	Brand Name	ZTE
	Model No.	STC-A22O50I1000USBA-C
	Rated Input	100~240 V ~, 50~60 Hz, 300 mA
	Rated Output	5 V =, 1000 mA
Ancillary Equipment 3	USB Data Cable	
	Length (Approx.)	1.2 m

2.6 Technical Information

N/A

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	FCC 47 CFR Part 15 Subpart B (10-1-15 Edition)	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low- Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Result
1	Radiated Emission	15.109	Pass	Annex A .1
2	Conducted Emission, AC Ports	15.107	Pass	Annex A .2

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	4.12 dB
Radiated emissions (30 MHz-1 GHz)	4.16 dB
Radiated emissions (1 GHz-18 GHz)	5.97 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

Environment Parameter	Selected Values During Tests			
	Temperature	Voltage	Relative Humidity	Ambient Pressure
Normal Temperature, Normal Voltage (NTNV)	23°C~26°C	AC 120 V/60 Hz	50%-55%	100 to 102 kPa

4.2 Test Equipment List

Radiated Emission Test						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2016.07.05	2017.07.04	<input checked="" type="checkbox"/>
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	9163-624	2015.07.22	2017.07.21	<input checked="" type="checkbox"/>
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	9120D-1148	2015.07.22	2017.07.21	<input checked="" type="checkbox"/>
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2015.07.22	2017.07.21	<input type="checkbox"/>
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2015.02.28	2017.02.27	<input checked="" type="checkbox"/>

Conducted disturbance Test						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2016.07.05	2017.07.04	<input checked="" type="checkbox"/>
LISN	SCHWARZBECK	NSLK 8127	8127-687	2016.07.05	2017.07.04	<input checked="" type="checkbox"/>
Shielded Enclosure	ChangNing	CN-130701	130703	N/A	N/A	<input checked="" type="checkbox"/>

4.3 Test Enclosure list


Description	Manufacturer	Model	Serial No.	Length	Description	Use
PC	N/A	N/A	N/A	N/A	Special Handled	<input type="checkbox"/>
Laptop	Apple	A1465	N/A	N/A	N/A	<input checked="" type="checkbox"/>
Printer	HP	DESKJET 1000	N/A	N/A	N/A	<input type="checkbox"/>
Keyboard	Logitech	Y-BP62a	N/A	N/A	N/A	<input type="checkbox"/>
Mouse	Logitech	M100	N/A	N/A	N/A	<input type="checkbox"/>
USB disk	Kingston	N/A	N/A	N/A	N/A	<input type="checkbox"/>
TF Card	Kingston	N/A	N/A	N/A	N/A	<input checked="" type="checkbox"/>
VGA Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
HDMI Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
DVI Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
Coaxial video cable	N/A	N/A	N/A	2.0 m	Shielded with core	<input type="checkbox"/>
iPhone	Apple	A1586	N/A	N/A	N/A	<input type="checkbox"/>
Phone	MI	M4	N/A	N/A	N/A	<input type="checkbox"/>
Laptop	LENOVO	K29	N/A	N/A	N/A	<input type="checkbox"/>
Bluetooth Earphone	SAMSUNG	Gear Circle	N/A	N/A	N/A	<input type="checkbox"/>
GPS/GLONASS Vector signal generator	R&S	N5172B EXG	N/A	N/A	N/A	<input type="checkbox"/>
WIFI Router	TP-LINK	TL-WDR7500	N/A	N/A	N/A	<input type="checkbox"/>
Earphone	N/A	N/A	N/A	1.1 m	N/A	<input checked="" type="checkbox"/>
Car Battery	Camel	55530	N/A	N/A	12 V/55 Ah	<input type="checkbox"/>
Artificial load	N/A	N/A	N/A	N/A	2.5 Ω/100 W	<input type="checkbox"/>
Artificial load	N/A	N/A	N/A	N/A	5 Ω/100 W	<input type="checkbox"/>
Electronic Load	ITECH	IT8511	N/A	N/A	N/A	<input type="checkbox"/>
USB Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
DC Power Supply	ROHDE&SCHWARZ	HMP2020	18141664	N/A	N/A	<input type="checkbox"/>

4.4 Test Configurations

Test Configurations (TC) No.	Description
TC01	<u>The USB Test mode</u> EUT + Battery + laptop + Earphone + USB Cable + TF Card.
TC02	<u>The Video record test mode</u> EUT + Battery + Charger + Earphone + USB Cable + TF Card.
TC03	<u>The Video play test mode</u> EUT + Battery + Charger + Earphone + USB Cable + TF Card.
TC04	<u>The FM test mode</u> EUT + Battery + Charger + Earphone + USB Cable + TF Card.
TC05	<u>The Idle test mode</u> EUT + Battery + Charger + Earphone + USB Cable + TF Card.


4.5 Test Setups

Test Setup 1

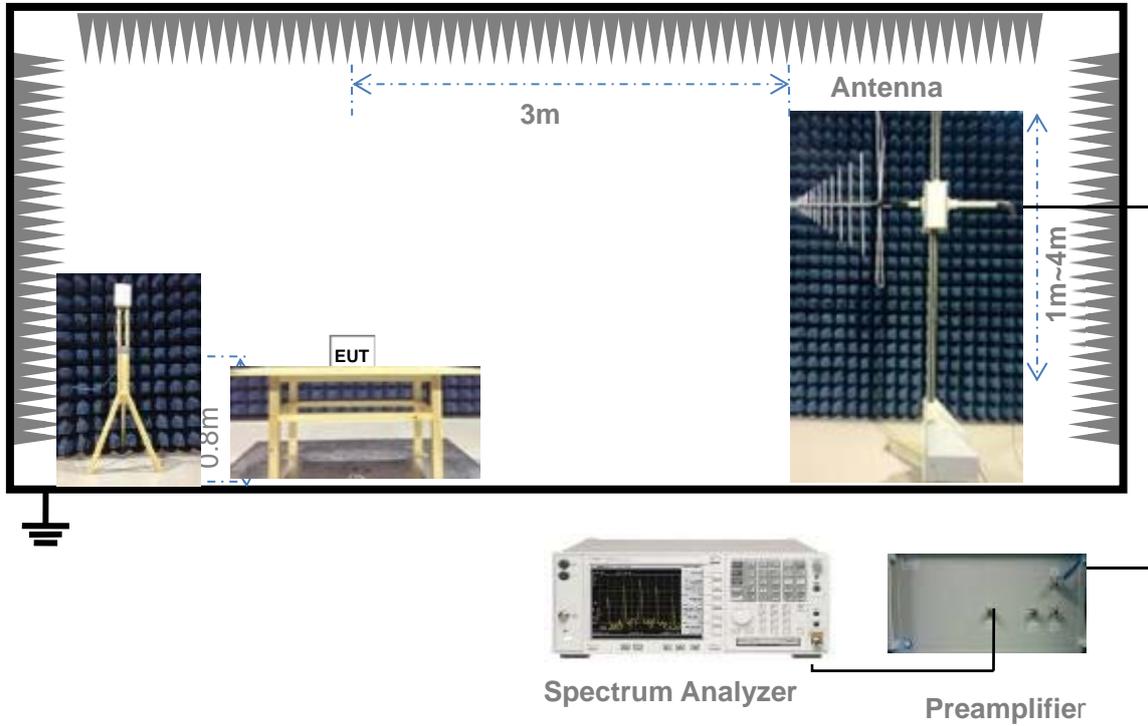

(For Radiated Emission Test (30 MHz-1 GHz))

Test Setup 2

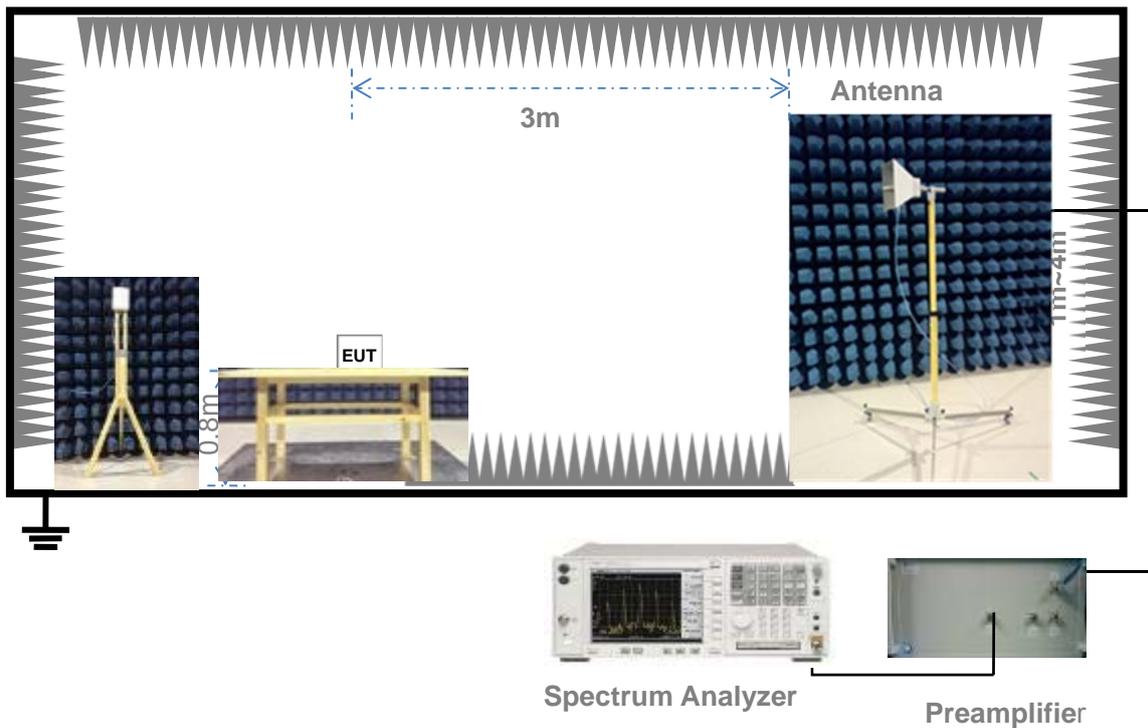

(For Radiated Emission Test (above 1 GHz))

4.6 Test Conditions

Test Case	Test Conditions	
Radiated Emission	Test Env.	NTNV
	Test Setup	Test Setup 1&2
	Test Configuration	TC01~TC05 ^{Note}
Conducted Emission, AC Ports	Test Env.	NTNV
	Test Setup	Test Setup 3
	Test Configuration	TC01~TC05 ^{Note}

Note: Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report. The Video play test mode is the worst mode in this report.

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

- 1) Field Strength ($\text{dB}\mu\text{V}/\text{m}$) = $20 \cdot \log$ [Field Strength ($\mu\text{V}/\text{m}$)].
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) For above 1000 MHz, limit field strength of harmonics: 54 $\text{dB}\mu\text{V}/\text{m}@3\text{ m}$ (AV) and 74 $\text{dB}\mu\text{V}/\text{m}@3\text{ m}$ (PK)

5.1.1.2 Test Setup

Refer to 4.5 section (test setups1 to test setups2) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

5.1.1.4 Test Result

Please refer to ANNEX A.1.

5.1.2 Conducted Emission

5.1.2.1 Test Limit

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The limit is applicable to Class B ITE.
- 2) The lower limit shall apply at the band edges.
- 3) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.5 section test (test setup 3) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.1.2.4 Test Result

Please refer to ANNEX A.2.

ANNEX A TEST RESULTS

A.1 Radiated Emission


Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Test Data and Plots


The worst test mode: Video play test mode

A.1.1 Test Antenna Vertical, 30 MHz – 1 GHz

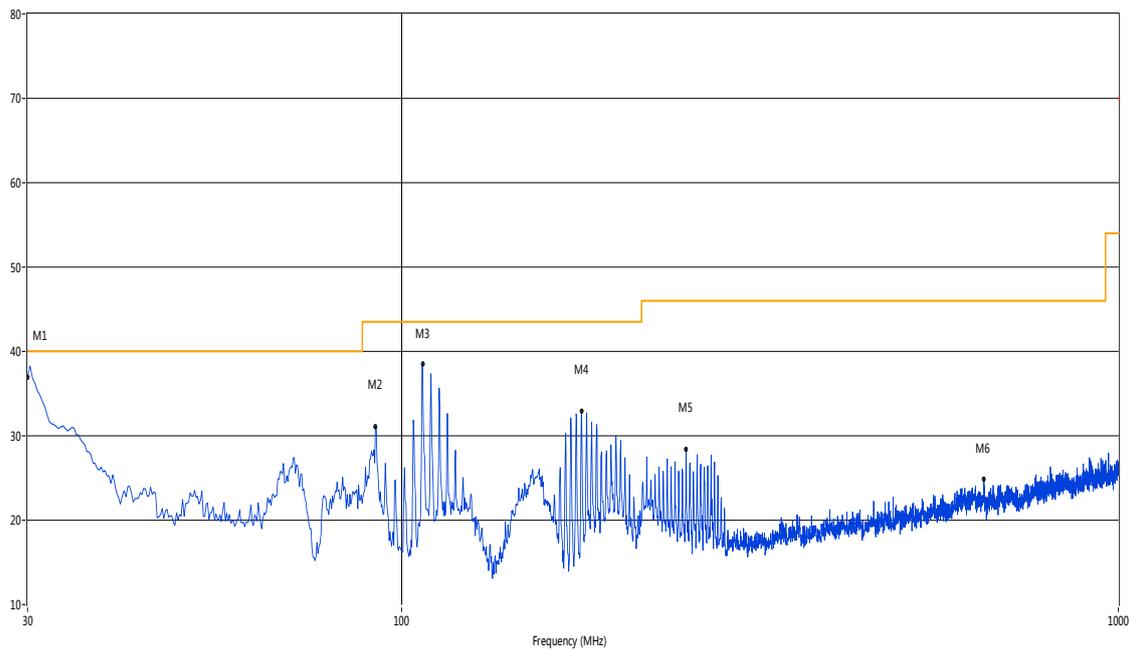


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	30.24	38.26	-22.85	40.0	1.74	Peak	0.10	100.00	Vertical	N/A
1*	30.24	35.61	-22.85	40.0	4.39	QP	0.10	100.00	Vertical	Pass
2	91.82	31.08	-23.37	43.5	12.42	Peak	84.30	100	Vertical	Pass
3	106.85	38.57	-22.31	43.5	4.93	Peak	243.20	100	Vertical	Pass
4	178.13	32.87	-24.62	43.5	10.63	Peak	288.70	100	Vertical	Pass
5	249.17	28.37	-21.76	46.0	17.63	Peak	4.10	100	Vertical	Pass
6	649.19	24.91	-14.80	46.0	21.09	Peak	47.10	100	Vertical	Pass

A.1.2 Test Antenna Horizontal, 30 MHz – 1 GHz

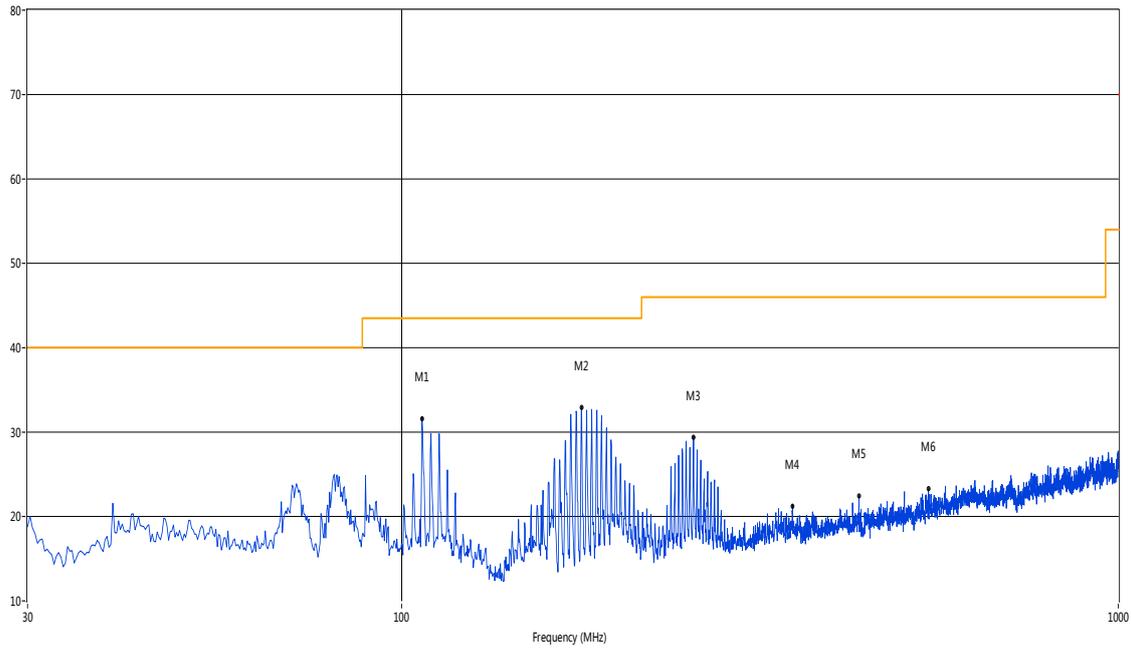


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	106.61	31.62	-22.28	43.5	11.88	Peak	330.90	100	Horizontal	Pass
2	178.13	32.90	-24.62	43.5	10.60	Peak	47.60	100	Horizontal	Pass
3	255.23	29.35	-21.68	46.0	16.65	Peak	118.10	100	Horizontal	Pass
4	350.99	21.26	-19.64	46.0	24.74	Peak	147.30	100	Horizontal	Pass
5	434.39	22.39	-18.47	46.0	23.61	Peak	263.80	100	Horizontal	Pass
6	543.24	23.26	-16.47	46.0	22.74	Peak	113.80	100	Horizontal	Pass

A.1.3 Test Antenna Vertical, 1 GHz – 6 GHz

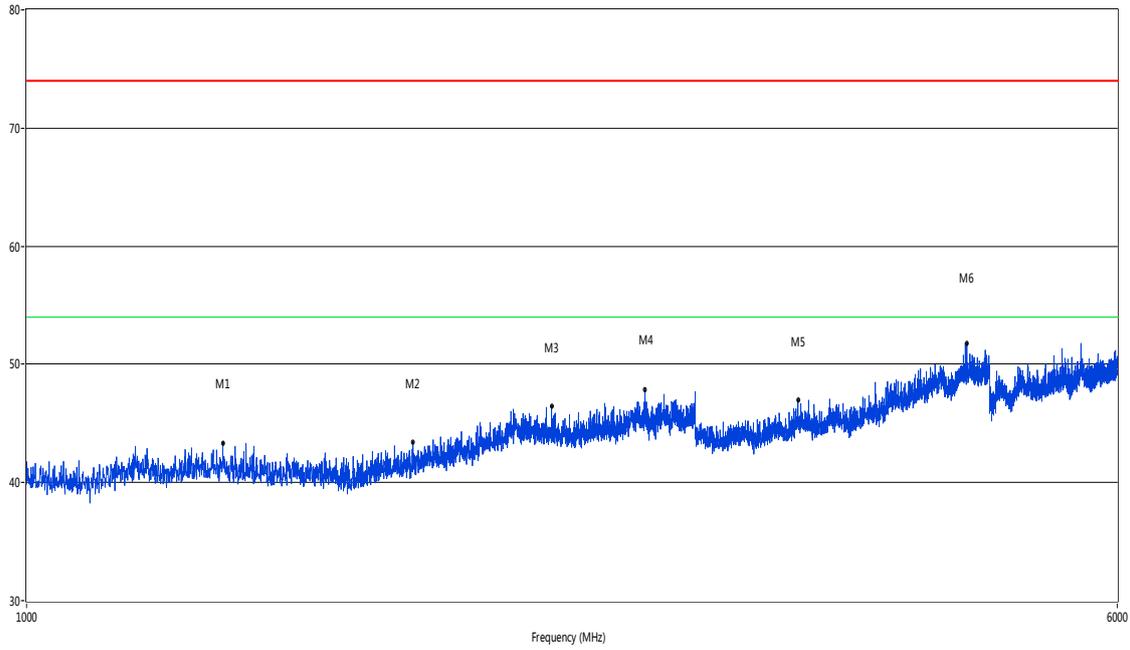

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1380.40	43.35	-4.51	74.0	30.65	Peak	170.10	100	Vertical	Pass
2	1886.28	43.42	-3.01	74.0	30.58	Peak	38.30	100	Vertical	Pass
3	2369.16	46.44	-0.72	74.0	27.56	Peak	38.30	100	Vertical	Pass
4	2762.06	47.84	1.89	74.0	26.16	Peak	275.50	100	Vertical	Pass
5	3551.11	46.98	9.82	74.0	27.02	Peak	0.90	100	Vertical	Pass
6	4686.33	51.74	13.20	74.0	22.26	Peak	294.50	100	Vertical	Pass

A.1.4 Test Antenna Horizontal, 1 GHz – 6 GHz

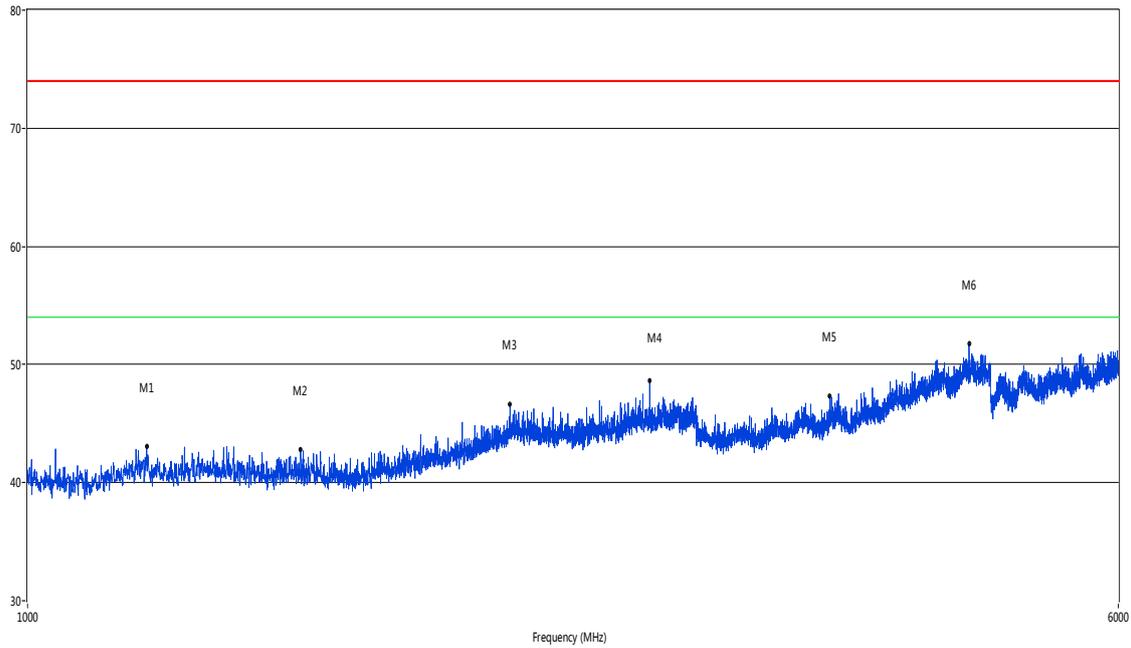


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1216.45	43.04	-5.12	74.0	30.96	Peak	281.20	100	Horizontal	Pass
2	1565.86	42.84	-3.97	74.0	31.16	Peak	333.70	100	Horizontal	Pass
3	2209.20	46.62	-0.31	74.0	27.38	Peak	16.90	100	Horizontal	Pass
4	2778.56	48.66	1.48	74.0	25.34	Peak	170.60	100	Horizontal	Pass
5	3734.82	47.33	10.58	74.0	26.67	Peak	143.00	100	Horizontal	Pass
6	4695.33	51.78	13.21	74.0	22.22	Peak	143.00	100	Horizontal	Pass

Test Data and Plots


USB test mode

A.1.5 Test Antenna Vertical, 30 MHz – 1 GHz

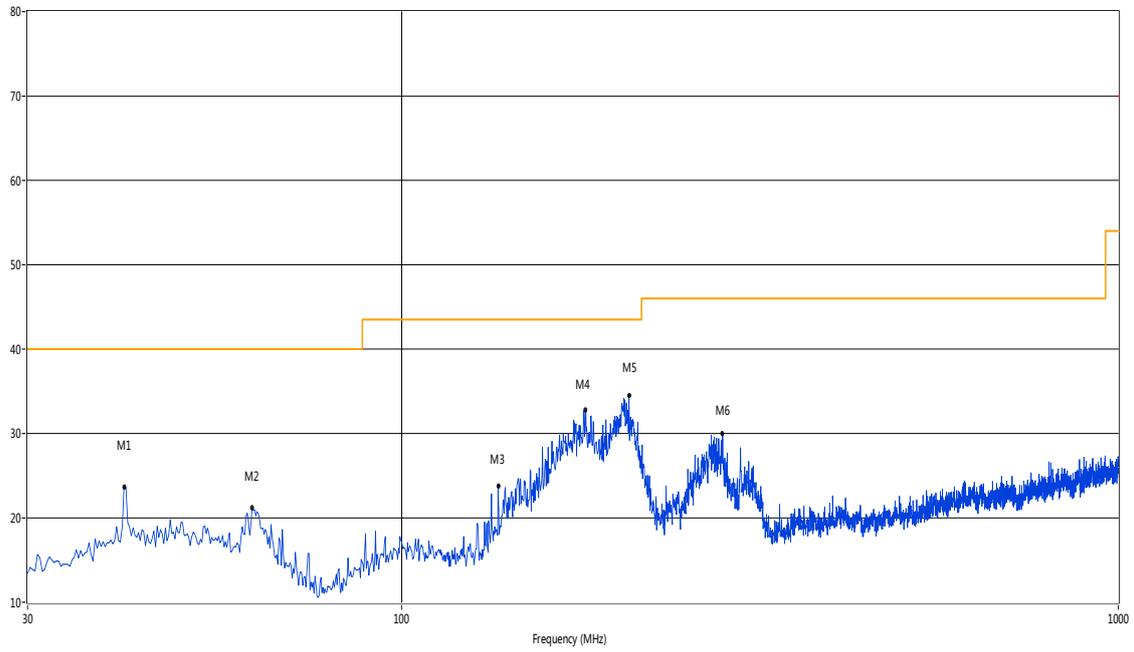


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	40.91	23.68	-20.77	40.0	16.32	Peak	66.10	100	Vertical	Pass
2	61.76	21.19	-21.86	40.0	18.81	Peak	66.10	100	Vertical	Pass
3	136.19	23.83	-25.74	43.5	19.67	Peak	0.30	100	Vertical	Pass
4	180.31	32.75	-24.58	43.5	10.75	Peak	2.10	100	Vertical	Pass
5	207.47	34.54	-22.61	43.5	8.96	Peak	145.40	100	Vertical	Pass
6	280.20	29.98	-21.43	46.0	16.02	Peak	234.10	100	Vertical	Pass

A.1.6 Test Antenna Horizontal, 30 MHz – 1 GHz

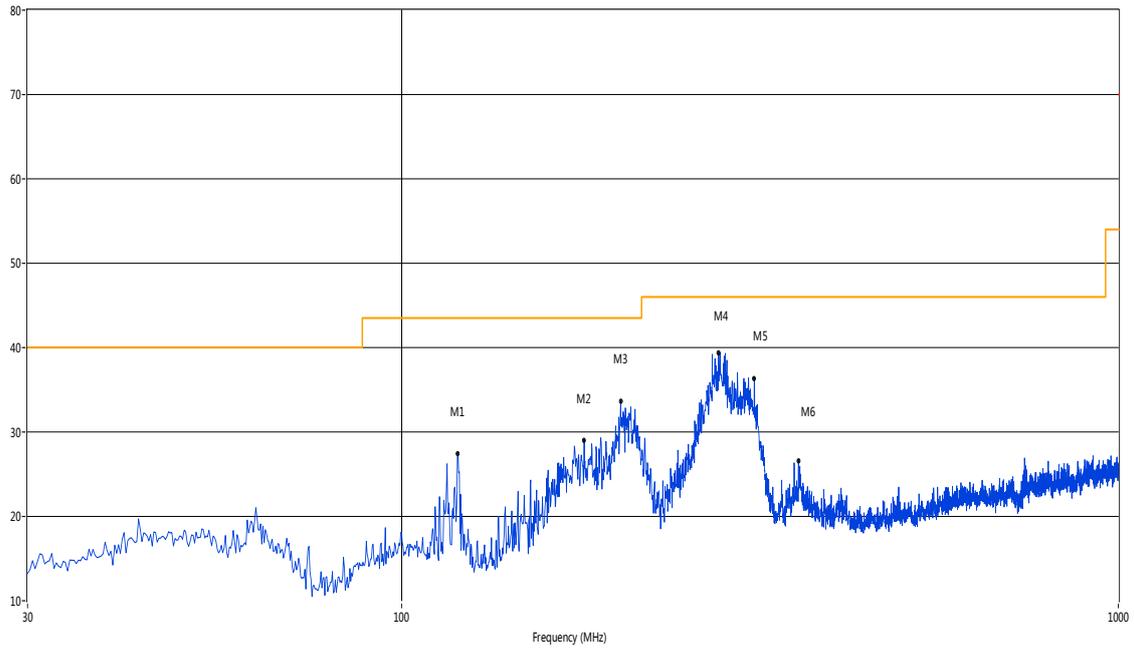


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	119.70	27.42	-23.83	43.5	16.08	Peak	162.80	100	Horizontal	Pass
2	179.59	29.08	-24.51	43.5	14.42	Peak	50.60	100	Horizontal	Pass
3	201.89	33.68	-22.69	43.5	9.82	Peak	50.60	100	Horizontal	Pass
4	276.80	39.44	-21.43	46.0	6.56	Peak	0.60	100	Horizontal	Pass
5	310.26	36.38	-20.64	46.0	9.62	Peak	359.30	100	Horizontal	Pass
6	357.78	26.65	-19.58	46.0	19.35	Peak	2.00	100	Horizontal	Pass

A.1.7 Test Antenna Vertical, 1 GHz – 6 GHz

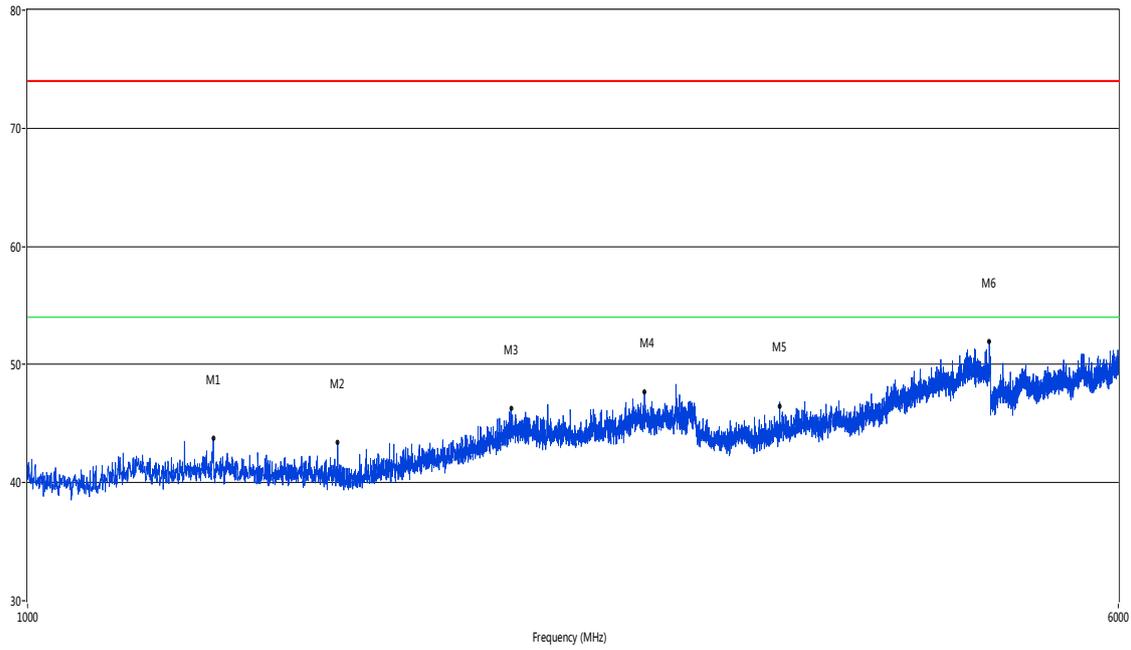

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1356.91	43.72	-4.47	74.0	30.28	Peak	27.90	100	Vertical	Pass
2	1664.33	43.39	-4.20	74.0	30.61	Peak	275.80	100	Vertical	Pass
3	2212.70	46.27	-0.17	74.0	27.73	Peak	43.90	100	Vertical	Pass
4	2755.06	47.72	1.76	74.0	26.28	Peak	185.80	100	Vertical	Pass
5	3440.14	46.50	9.37	74.0	27.50	Peak	53.80	100	Vertical	Pass
6	4854.29	51.95	13.59	74.0	22.05	Peak	219.10	100	Vertical	Pass

A.1.8 Test Antenna Horizontal, 1 GHz – 6 GHz

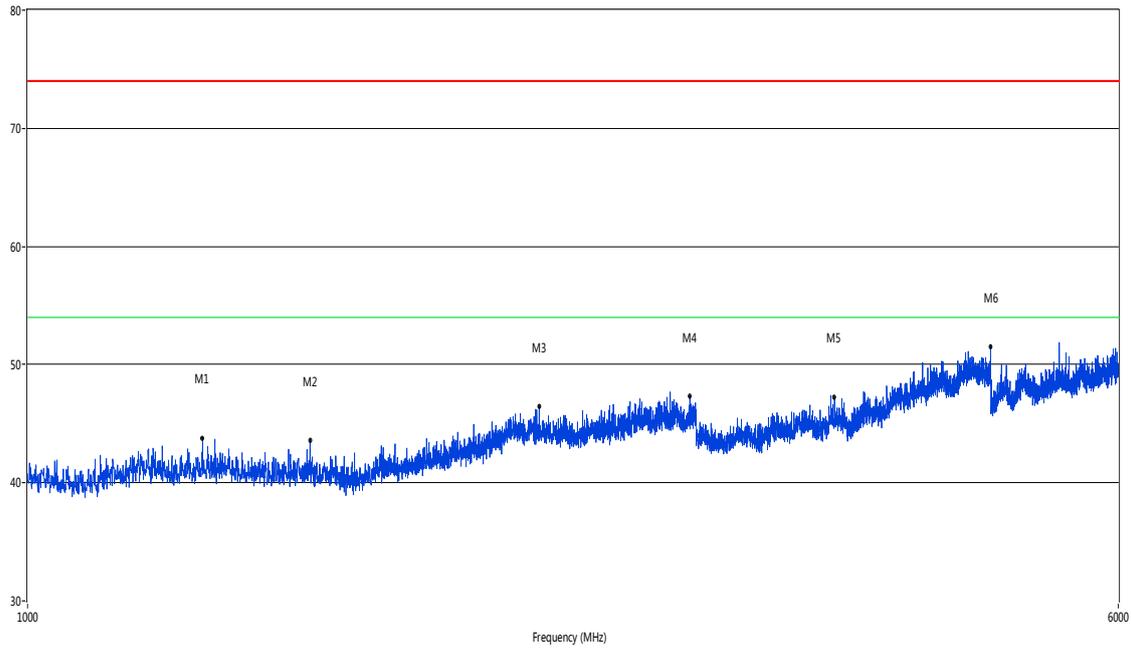

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1332.92	43.79	-4.76	74.0	30.21	Peak	-0.00	100	Horizontal	Pass
2	1590.35	43.57	-4.28	74.0	30.43	Peak	18.40	100	Horizontal	Pass
3	2317.17	46.46	-0.50	74.0	27.54	Peak	139.80	100	Horizontal	Pass
4	2968.51	47.30	2.45	74.0	26.70	Peak	223.70	100	Horizontal	Pass
5	3764.06	47.27	10.40	74.0	26.73	Peak	92.70	100	Horizontal	Pass
6	4864.78	51.53	13.57	74.0	22.47	Peak	359.30	100	Horizontal	Pass


A.2 Conducted Emission

Test Data and Plots

The worst test mode: Video play test mode


Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

A.2.1 L Phase

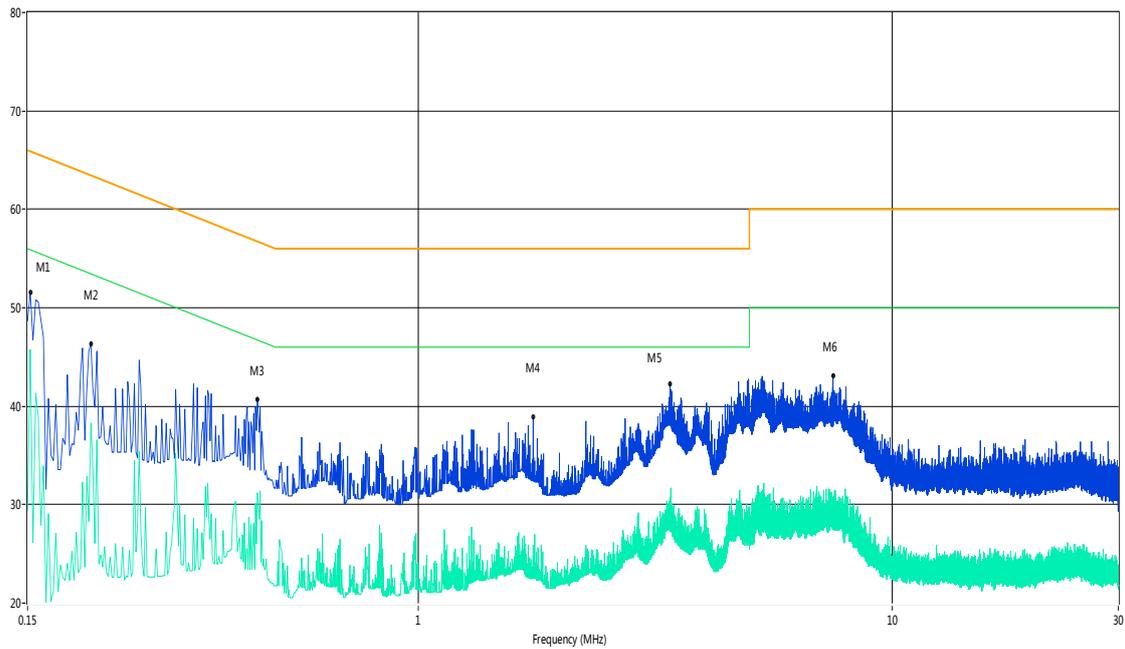

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.15	51.5	11.00	65.9	14.40	Peak	L Line	Pass
1**	0.15	45.8	11.00	55.9	10.10	AV	L Line	Pass
2	0.20	46.4	11.00	64.5	18.10	Peak	L Line	Pass
2**	0.20	38.3	11.00	54.5	16.20	AV	L Line	Pass
3	0.46	40.7	11.00	57.2	16.50	Peak	L Line	Pass
3**	0.46	31.2	11.00	47.2	16.00	AV	L Line	Pass
4	1.75	38.9	11.00	56.0	17.10	Peak	L Line	Pass
4**	1.75	25.9	11.00	46.0	20.10	AV	L Line	Pass
5	3.40	42.3	11.00	56.0	13.70	Peak	L Line	Pass
5**	3.40	30.8	11.00	46.0	15.20	AV	L Line	Pass
6	7.50	43.1	11.00	60.0	16.90	Peak	L Line	Pass
6**	7.50	30.3	11.00	50.0	19.70	AV	L Line	Pass

A.2.2 N Phase

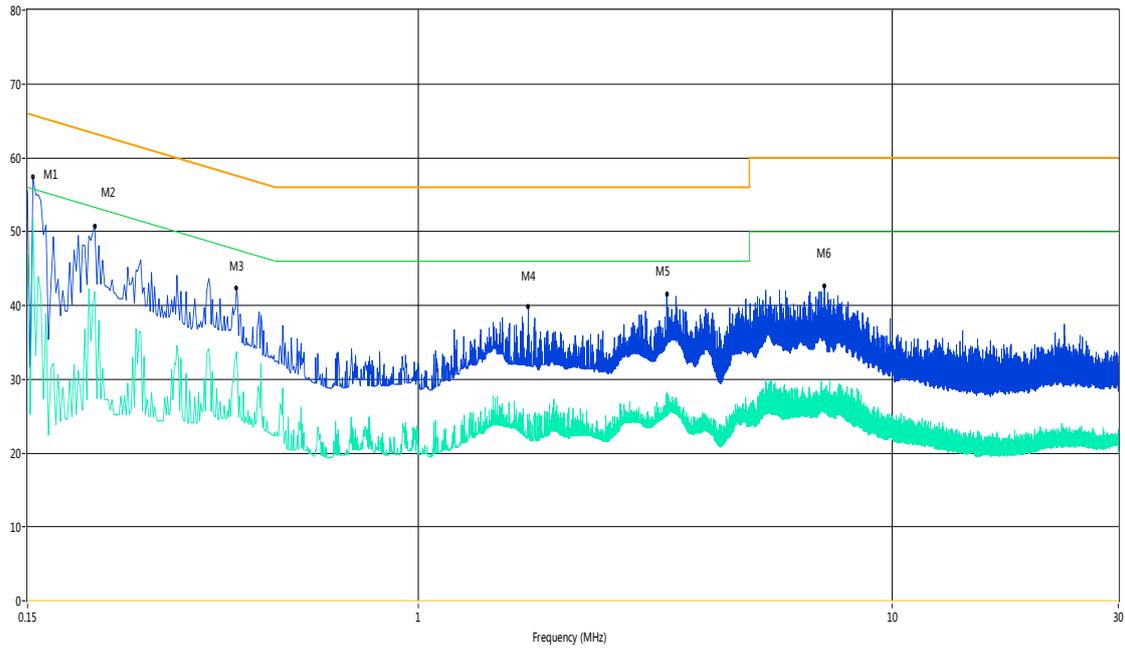


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.15	57.4	11.00	65.9	8.50	Peak	N Line	Pass
1**	0.15	51.7	11.00	55.9	4.20	AV	N Line	Pass
2	0.21	50.7	11.00	64.3	13.60	Peak	N Line	Pass
2**	0.21	41.9	11.00	54.3	12.40	AV	N Line	Pass
3	0.41	42.3	11.00	58.5	16.20	Peak	N Line	Pass
3**	0.41	33.7	11.00	48.5	14.80	AV	N Line	Pass
4	1.71	39.9	11.00	56.0	16.10	Peak	N Line	Pass
4**	1.71	24.4	11.00	46.0	21.60	AV	N Line	Pass
5	3.35	41.6	11.00	56.0	14.40	Peak	N Line	Pass
5**	3.35	28.2	11.00	46.0	17.80	AV	N Line	Pass
6	7.19	42.7	11.00	60.0	17.30	Peak	N Line	Pass
6**	7.19	28.7	11.00	50.0	21.30	AV	N Line	Pass

Test Data and Plots


USB test mode

A.2.3 L Phase

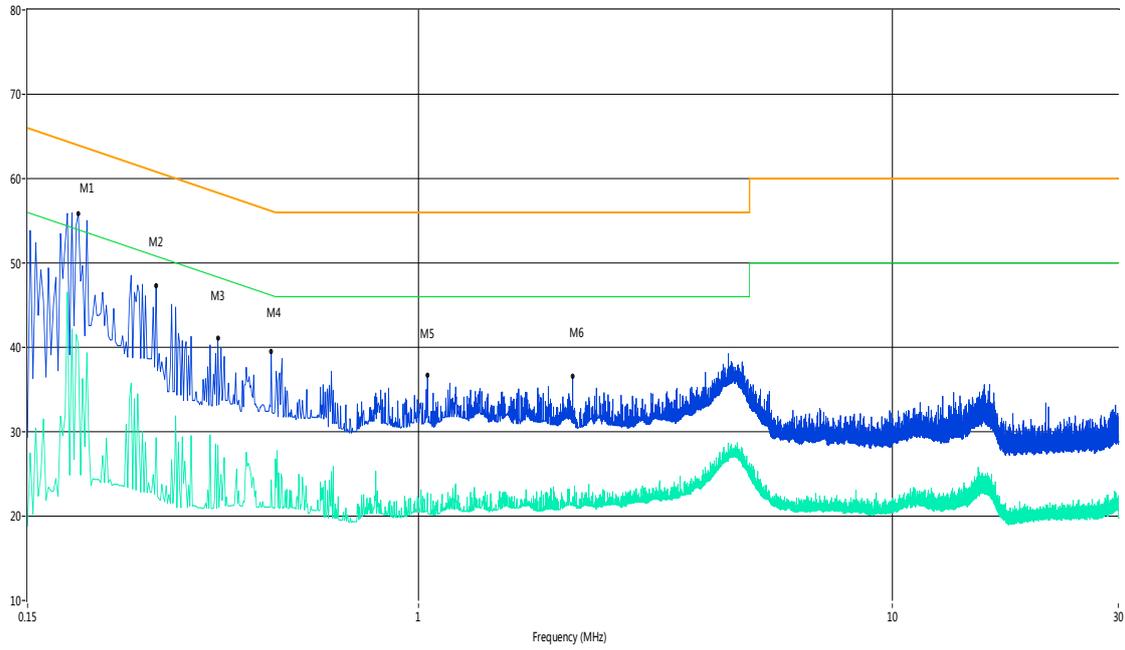

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.19	55.9	11.00	64.8	8.90	Peak	L Line	Pass
1**	0.19	40.4	11.00	54.8	14.40	AV	L Line	Pass
2	0.28	47.3	11.00	62.3	15.00	Peak	L Line	Pass
2**	0.28	29.3	11.00	52.3	23.00	AV	L Line	Pass
3	0.38	41.1	11.00	59.5	18.40	Peak	L Line	Pass
3**	0.38	28.4	11.00	49.5	21.10	AV	L Line	Pass
4	0.49	39.5	11.00	56.3	16.80	Peak	L Line	Pass
4**	0.49	24.3	11.00	46.3	22.00	AV	L Line	Pass
5	1.05	36.6	11.00	56.0	19.40	Peak	L Line	Pass
5**	1.05	22.8	11.00	46.0	23.20	AV	L Line	Pass
6	2.12	36.6	11.00	56.0	19.40	Peak	L Line	Pass
6**	2.12	22.3	11.00	46.0	23.70	AV	L Line	Pass

A.2.4 N Phase

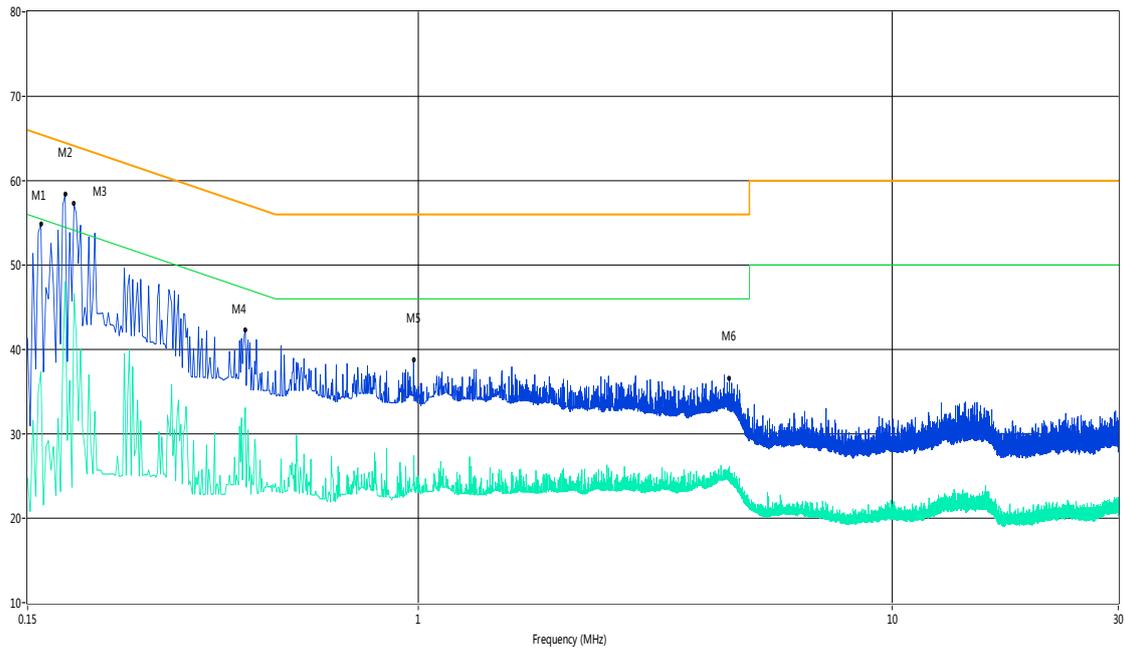

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.16	54.9	11.00	65.7	10.80	Peak	N Line	Pass
1**	0.16	37.4	11.00	55.7	18.30	AV	N Line	Pass
2	0.18	58.4	11.00	65.1	6.70	Peak	N Line	Pass
2**	0.18	48.0	11.00	55.1	7.10	AV	N Line	Pass
3	0.19	57.3	11.00	64.9	7.60	Peak	N Line	Pass
3**	0.19	46.6	11.00	54.9	8.30	AV	N Line	Pass
4	0.43	42.3	11.00	57.9	15.60	Peak	N Line	Pass
4**	0.43	33.1	11.00	47.9	14.80	AV	N Line	Pass
5	0.98	38.8	11.00	56.0	17.20	Peak	N Line	Pass
5**	0.98	23.9	11.00	46.0	22.10	AV	N Line	Pass
6	4.54	36.6	11.00	56.0	19.40	Peak	N Line	Pass
6**	4.54	26.1	11.00	46.0	19.90	AV	N Line	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ1670352-AE.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ1670352-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ1670352-AI.PDF".

--END OF REPORT--