



中国认可  
国际互认  
检测  
TESTING  
CNAS L2264

# RF TEST REPORT

**Applicant** ZTE Corporation  
**FCC ID** SRQ-BLADEA522  
**Product** LTE/WCDMA/GSM(GPRS)Multi-Mode  
Digital Mobile Phone  
**Brand** ZTE  
**Model** ZTE Blade A522  
**Report No.** RXC1705-0142RF03R1  
**Issue Date** June 22, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2016)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Xianqing Li

Approved by: Kai Xu

**TA Technology (Shanghai) Co., Ltd.**

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

## Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report.....	4
1.2	Test facility.....	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
2.1	Applied Standards.....	8
3	Information about the FHSS characteristics.....	9
3.1	Pseudorandom Frequency Hopping Sequence.....	9
3.2	Equal Hopping Frequency Use.....	10
3.3	System Receiver Input Bandwidth.....	10
4	Test Information.....	11
4.1	Test Mode.....	11
4.2	Peak Power Output –Conducted.....	12
4.3	Occupied Bandwidth (20dB).....	15
4.4	Frequency Separation.....	18
4.5	Time of Occupancy (Dwell Time).....	20
4.6	Band Edge Compliance.....	22
4.7	Spurious Radiated Emissions in the Restricted Band.....	25
4.8	Number of hopping Frequency.....	28
4.9	Spurious RF Conducted Emissions.....	30
4.10	Radiates Emission.....	34
4.11	Conducted Emission.....	61
5	Main Test Instruments.....	64
	ANNEX A: EUT Appearance and Test Setup.....	65
A.1	EUT Appearance.....	65
A.2	Test Setup.....	67

## Summary of Measurement Results

Number	Summary of measurements of results	Clause in FCC rules	Verdict
1	Peak Power Output -Conducted	15.247(b)(1)	PASS
2	Occupied Bandwidth (20dB)	15.247(a)(1)	PASS
3	Frequency Separation	15.247(a)(1)	PASS
4	Time of Occupancy (Dwell Time)	15.247(a)(1)(iii)	PASS
5	Band Edge Compliance	15.247(d)	PASS
6	Spurious Radiated Emissions in the restricted band	15.247(d),15.205,15.209	PASS
7	Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
8	Spurious RF Conducted Emissions	15.247(d)	PASS
9	Radiates Emission	15.247(d),15.205,15.209	PASS
10	AC Power Line Conducted Emission	15.207	PASS
Date of Testing: May 23, 2017 ~ June 4, 2017			

# 1 Test Laboratory

## 1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

## 1.2 Test facility

### **CNAS (accreditation number: L2264)**

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

### **FCC (recognition number is 428261)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

### **IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

### **VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2 General Description of Equipment under Test

### Client Information

<b>Applicant</b>	ZTE Corporation
<b>Applicant address</b>	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
<b>Manufacturer</b>	ZTE Corporation
<b>Manufacturer address</b>	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

### General information

EUT Description			
Model:	ZTE Blade A522		
IMEI:	SIM 1: 864938030006502 SIM 2: 864938030005298		
HW Version:	ZTE Blade A522 MP		
SW Version:	A522B01-DE-RFA01a/GEN_EU_A522_V1.0		
Power Supply:	Battery/AC adapter		
Antenna Type:	Internal Antenna (FPC antenna)		
Antenna Connector:	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)		
Test Mode(s):	Basic Rate	Enhanced Data Rate(EDR)	
Modulation Type:	Frequency Hopping Spread Spectrum (FHSS)		
	GFSK	$\pi/4$ DQPSK	8DPSK
Packet Type: (Maximum Payload)	DH5	2DH5	3DH5
Max. Conducted Power	9.820dBm		
Tested Frequency Range(s):	2400 ~ 2483.5 MHz		
EUT Accessory			
Battery	Manufacturer: HARBIN COSLIGHT POWER CO LTD Model: Li3925T44P8h786035		
Earphone	Manufacturer: GoerTek Inc Model: HA3-6		
Adapter	Manufacturer: RUIJING Model: STC-A51A-Z Input: 100-240Vac 50/60Hz 250mA Output: 5.0Vdc 1000mA		
USB Cable	100cm Cable, Shielded		
Note: 1. The information of the EUT is declared by the manufacturer. Please refer to the			



specifications or user manual for details.

Difference Configuration Statement		
Configuration	Configuration 1	Configuration 2
Software Version	A522B01-DE-RFA01a	GEN_EU_A522_V1.0
SIM Card Slot	SIM 1	SIM 1, SIM 2
Others	The same	The same

The difference between the two EUT is only the Software Version and the quantity of SIM Card Slot, however, only the Software Version of GEN\_EU\_A522\_V1.0 (with 2 SIM Card Slots) is refer to this report. SIM 1 Card supports 2G/4G, and SIM 2 Card only supports 2G.



## 2.1 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

### Test standards

- **FCC CFR47 Part 15C (2016) Radio Frequency Devices**
- **ANSI C63.10 (2013)**
- **DA00-705 Filing and Frequency Measurement Guidelines For Frequency Hopping Spread Spectrum System (2000).**


### 3 Information about the FHSS characteristics

#### 3.1 Pseudorandom Frequency Hopping Sequence

Frequency Hopping Systems. A spread spectrum system in which the carrier is modulated with the coded information in a conventional manner causing a conventional spreading of the RF energy about the frequency carrier. The frequency of the carrier is not fixed but changes at fixed intervals under the direction of a coded sequence. The wide RF bandwidth needed by such a system is not required by spreading of the RF energy about the carrier but rather to accommodate the range of frequencies to which the carrier frequency can hop. The test of a frequency hopping system is that the near term distribution of hops appears random, the long term distribution appears evenly distributed over the hop set, and sequential hops are randomly distributed in both direction and magnitude of change in the hop set.

The selection scheme chooses a segment of 32 hop frequencies spanning about 64 MHz and visits these hops in a pseudo-random order. Next, a different 32-hop segment is chosen, etc. In the page, master page response, slave page response, page scan, inquiry, inquiry response and inquiry scan hopping sequences, the same 32-hop segment is used all the time (the segment is selected by the address; different devices will have different paging segments).

When the basic channel hopping sequence is selected, the output constitutes a pseudo-random sequence that slides through the 79 hops. The principle is depicted in the figure below.

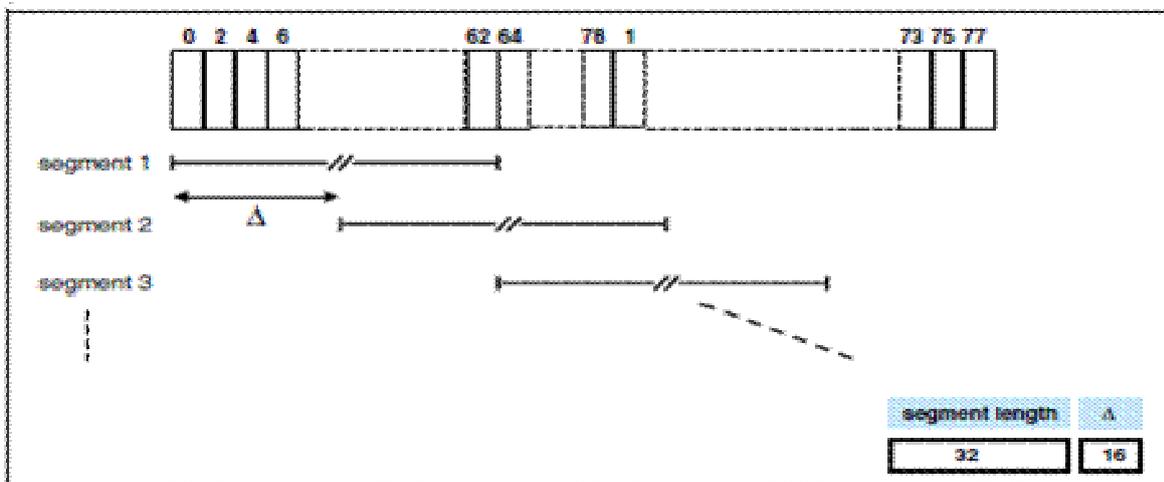

Hop selection scheme in CONNECTION state.

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 40, 56, 72, 09, 01, 09, 33, 41, 33, 41, 65, 73, 53, 69, 06, 22, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 44, 60, 76, 13, 03, 11, 35, 43, 37, 45, 69, 77, 55, 71, 08, 24, 08, 24, 40, 56, 40, 48, 72, 01, 72, 01, 25, 33, 12, 28, 44, 60, 42, 58, 74, 11, 05, 13, 37, 45, etc.

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### 3.2 Equal Hopping Frequency Use

All Bluetooth units participating in the Pico net are time and hop-synchronized to the channel. Each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event.

### 3.3 System Receiver Input Bandwidth

Each channel bandwidth is 1MHz. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

## 4 Test Information

### 4.1 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Test Modes		
Band	Radiated Test Cases	Conducted Test Cases
BT	3DH5 8DPSK (Channel 0/39/78)	DH5 GFSK(Channel 0/39/78) 2DH5 $\pi/4$ -DQPSK(Channel 0/39/78) 3DH5 8DPSK(Channel 0/39/78)

Note: The maximum RF output power levels are 3DH5 for 8DPSK modulation, For RSE and CSE, only the maximum RF output power is chosen.

## 4.2 Peak Power Output –Conducted


### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Methods of Measurement

During the process of the testing, The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The EUT is controlled by the Bluetooth test set to ensure max power transmission with proper modulation. The peak detector is used. RBW is set to 2 MHz; VBW is set to 6 MHz. These measurements have been tested at following channels: 0, 39, and 78.

### Test Setup

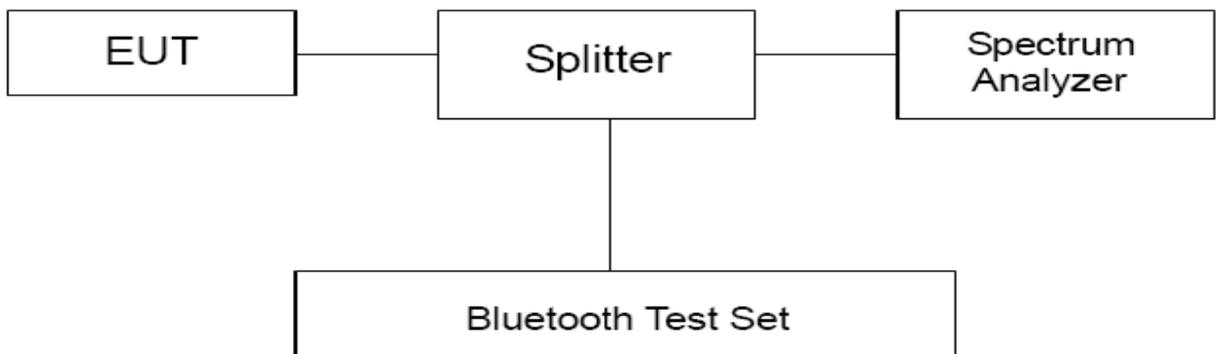

### Limits

Rule Part 15.247 (b) (1) specifies that " For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts."

Peak Output Power	≤ 0.125W (21dBm)
-------------------	------------------


### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U=0.44$  dB.

Test Results


Channel	Frequency (MHz)	Peak Output Power (dBm)			Conclusion
		DH5	2DH5	3DH5	
0	2402	8.928	8.951	9.448	PASS
39	2441	9.305	9.413	9.820	PASS
78	2480	7.478	8.399	8.967	PASS

Note: The measured power density (dBm) has the offset with cable loss already.

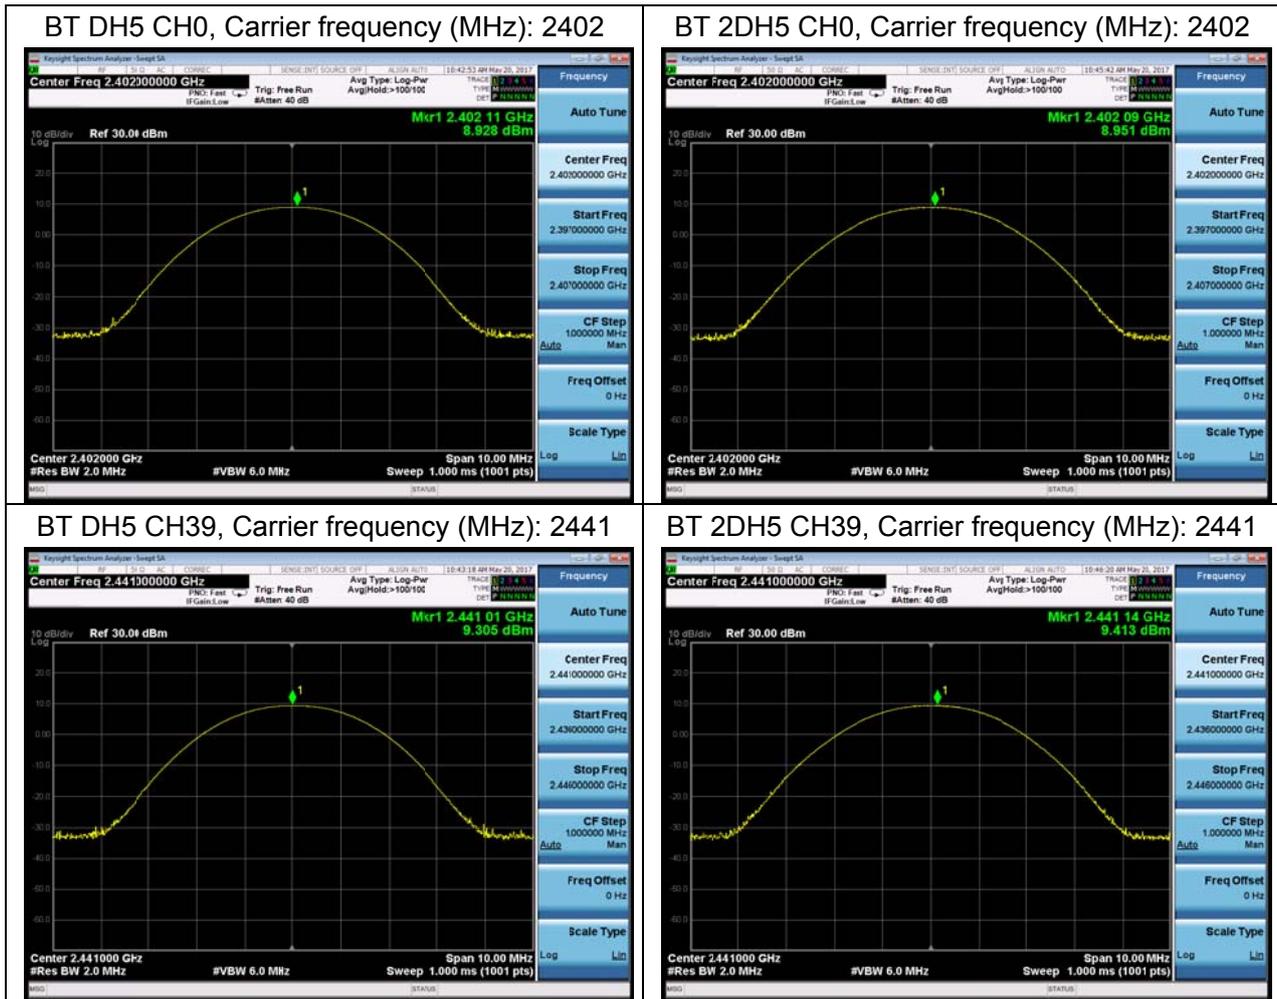




BT DH5 CH78, Carrier frequency (MHz): 2480

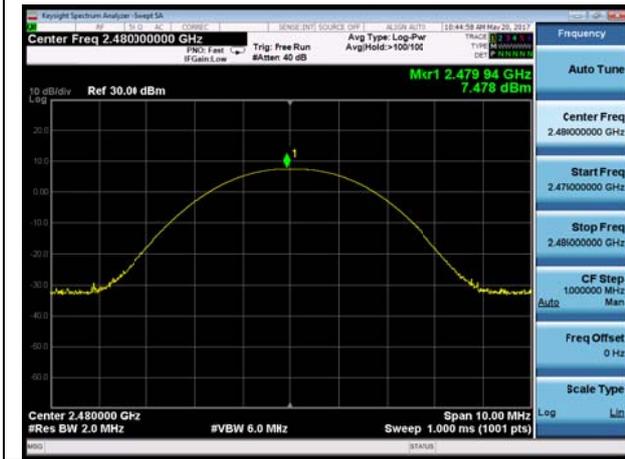


BT 2DH5 CH78, Carrier frequency (MHz): 2480




BT 3DH5 CH0, Carrier frequency (MHz): 2402

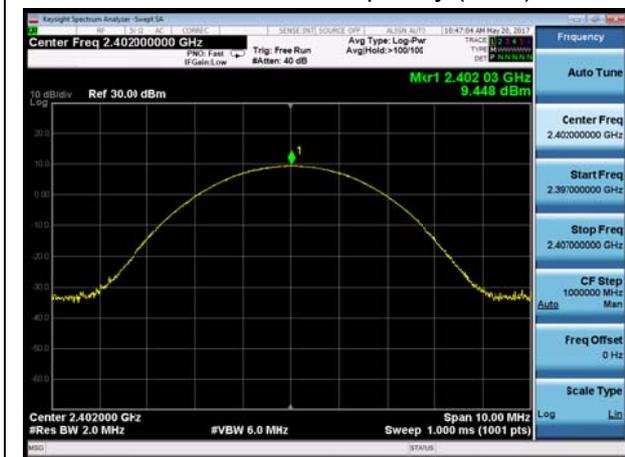

BT 3DH5 CH39, Carrier frequency (MHz): 2441

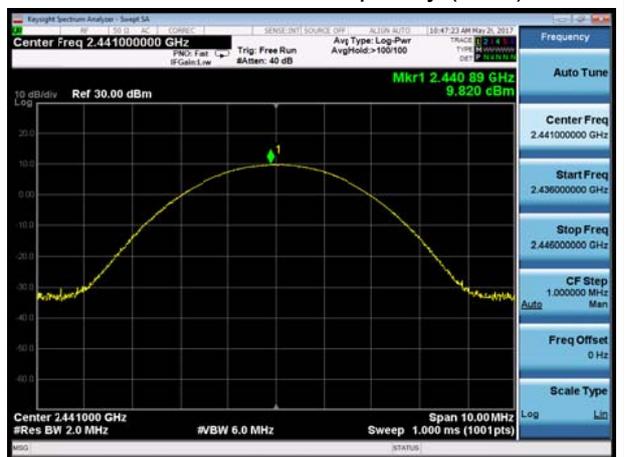

BT 3DH5 CH78, Carrier frequency (MHz): 2480

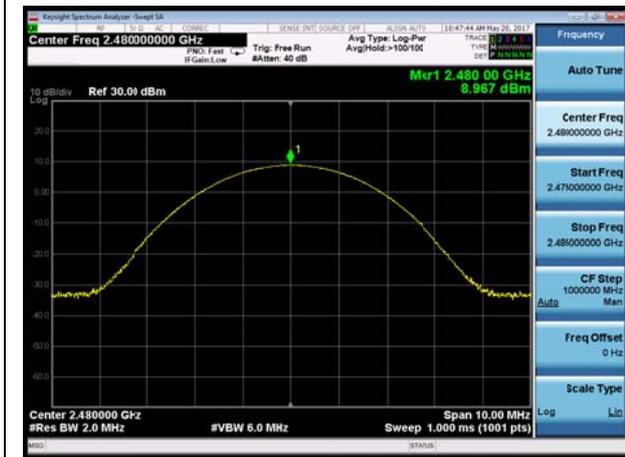

### 4.3 Occupied Bandwidth (20dB)


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 20kHz and VBW is set to 62kHz on spectrum analyzer. -20dB occupied bandwidths are recorded.

#### Test Setup

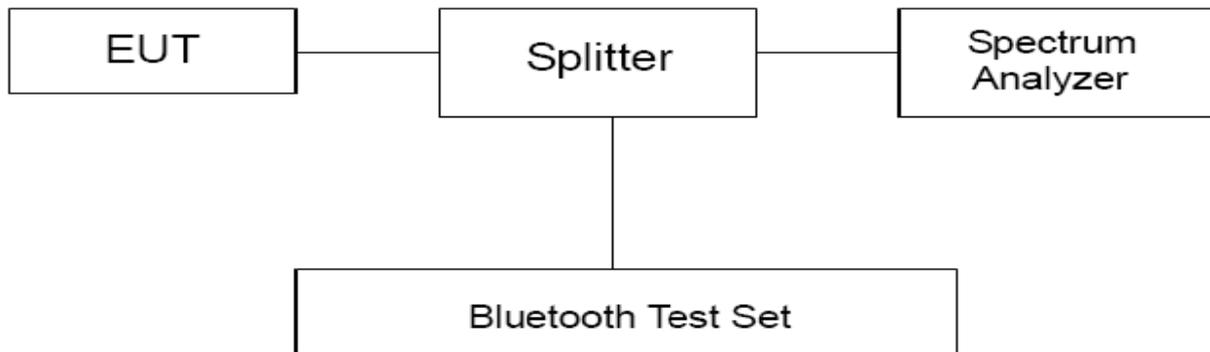

#### Limits

No specific occupied bandwidth requirements in part 15.247(a) (1).

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U=936$  Hz.


Test Results

Mode	Channel	Frequency (MHz)	20dB Bandwidth(MHz)
DH5	0	2402	1.040
DH5	39	2441	1.040
DH5	78	2480	1.040
2DH5	0	2402	1.297
2DH5	39	2441	1.282
2DH5	78	2480	1.281
3DH5	0	2402	1.288
3DH5	39	2441	1.298
3DH5	78	2480	1.280

BT DH5 CH0, Carrier frequency (MHz): 2402



BT 2DH5 CH0, Carrier frequency (MHz): 2402

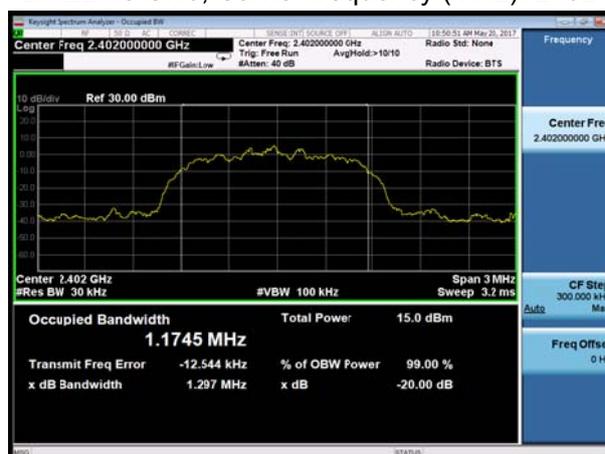

BT DH5 CH39, Carrier frequency (MHz): 2441



BT 2DH5 CH39, Carrier frequency (MHz): 2441





BT DH5 CH78, Carrier frequency (MHz): 2480



BT 2DH5 CH78, Carrier frequency (MHz): 2480



BT 3DH5 CH0, Carrier frequency (MHz): 2402



BT 3DH5 CH39, Carrier frequency (MHz): 2441



BT 3DH5 CH78, Carrier frequency (MHz): 2480



### 4.4 Frequency Separation


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 30 kHz and VBW is set to 100 kHz on spectrum analyzer. Set EUT on Hopping on mode.

#### Test setup

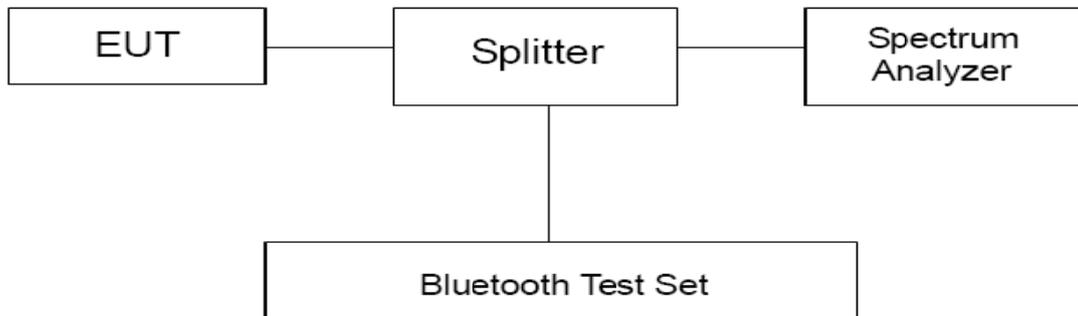

#### Limits

Rule Part 15.247(a)(1) specifies that “Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. ”

Note: The value of two-thirds of 20 dB bandwidth is always greater than 25 kHz.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U=936$  Hz.

Test Results:

Packet type	Carrier frequency (MHz)	Carrier frequency separation(kHz)	20dB Bandwidth(kHz)	Limit (kHz)	Conclusion
DH5	2441	999	1.040	0.693	PASS
2DH5	2441	999	1.282	0.854	PASS
3DH5	2441	999	1.298	0.865	PASS

Note: The limit is two-thirds of 20 dB bandwidth.

BT DH5 CH39, Carrier frequency (MHz): 2441



BT 2DH5 CH39, Carrier frequency (MHz): 2441



BT 3DH5 CH39, Carrier frequency (MHz): 2441



### 4.5 Time of Occupancy (Dwell Time)

**Ambient condition**

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


**Methods of Measurement**

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 1MHz and VBW is set to 3MHz on spectrum analyzer. The dwell time is calculated by:

Dwell time = time slot length \* hop rate \* 0.4s with:

The selected EUT Packet type uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600(ch\*hop/s) for all channels. So the final hopping rate for all channel is 1600/6=266.67(ch\*hop/s)

**Test Setup**

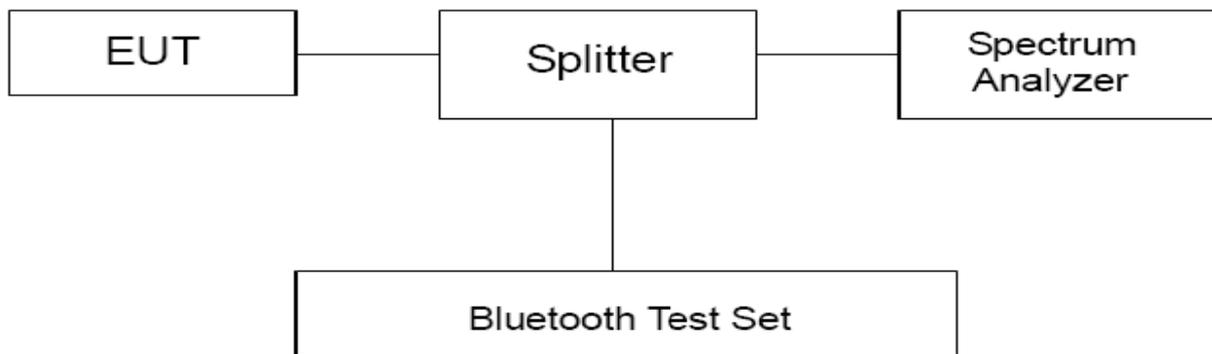

**Limits**

Rule Part 22.913(a) specifies that " Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed."

Dwell time	≤ 400ms
------------	---------

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ .


Requirements	Uncertainty					
Dwell Time	DH5	$U=0.70ms$	2DH5	$U=0.70ms$	3DH5	$U=0.70ms$

Test Results:


Channel 39					
Packet type	hop rate (1/s)	Time slot length(ms)	Dwell time (ms)	Limit (ms)	Conclusion
DH5	266.67	2.88	307.20	400	PASS
2DH5	266.67	2.88	307.20	400	PASS
3DH5	266.67	2.88	307.20	400	PASS

Note: Dwell time = time slot length \* hop rate \* 0.4s


BT DH5 CH39, Carrier frequency (MHz): 2441

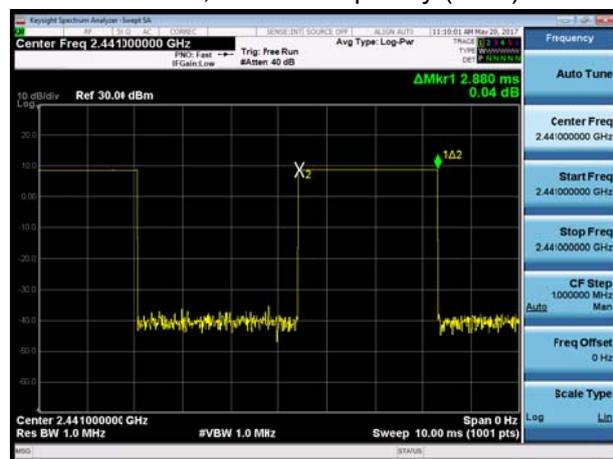

BT 2DH5 CH39, Carrier frequency (MHz): 2441

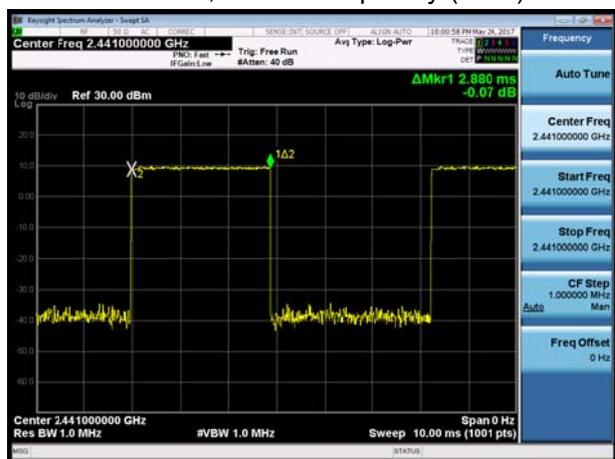

BT 3DH5 CH39, Carrier frequency (MHz): 2441

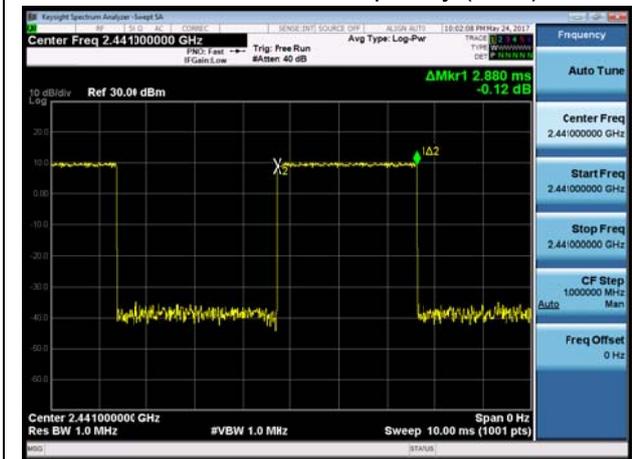

## 4.6 Band Edge Compliance


### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The lowest and highest channels were measured. The peak detector is used. RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. EUT test for Hopping On mode and Hopping Off mode.

### Test Setup

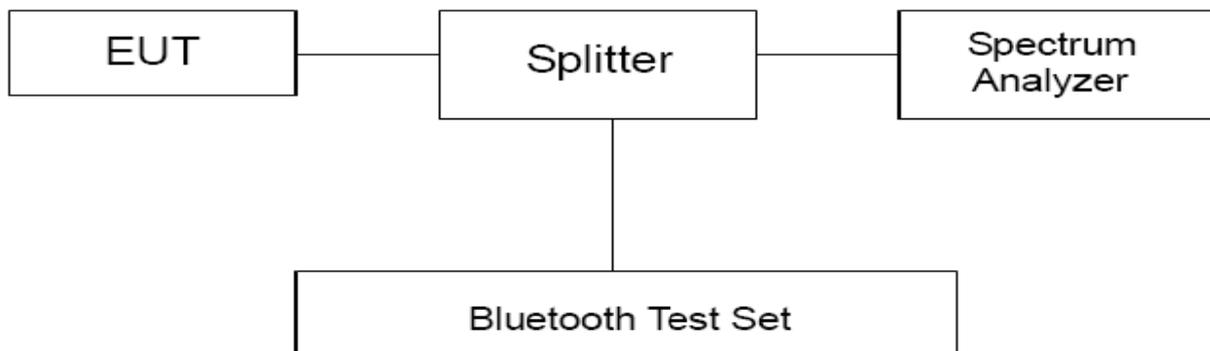

### Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.”

### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
2GHz-3GHz	1.407 dB


Test Results

Hopping On


BT DH5 CH0, Carrier frequency (MHz): 2402

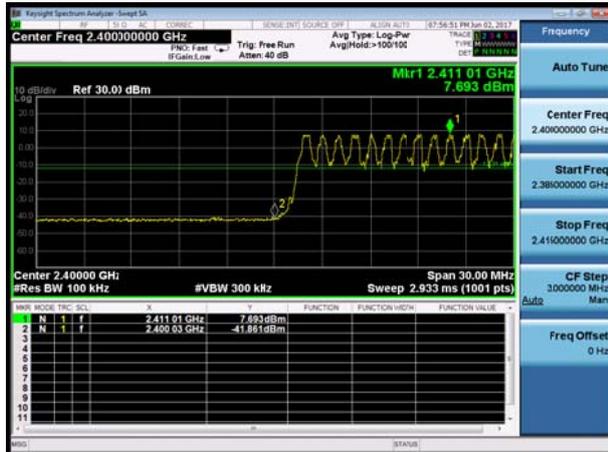


BT DH5 CH78, Carrier frequency (MHz): 2480

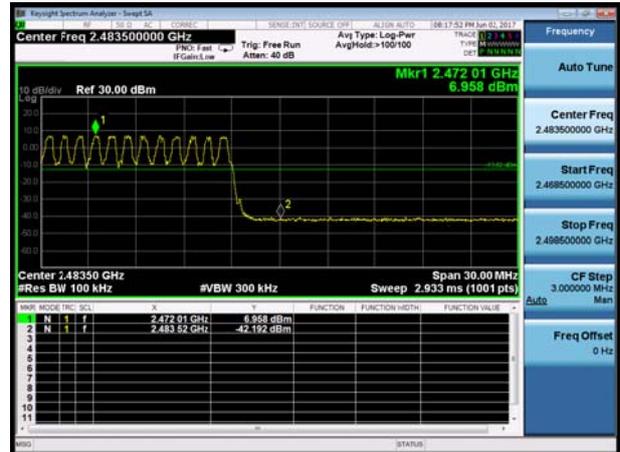


BT 2DH5 CH0, Carrier frequency (MHz): 2402

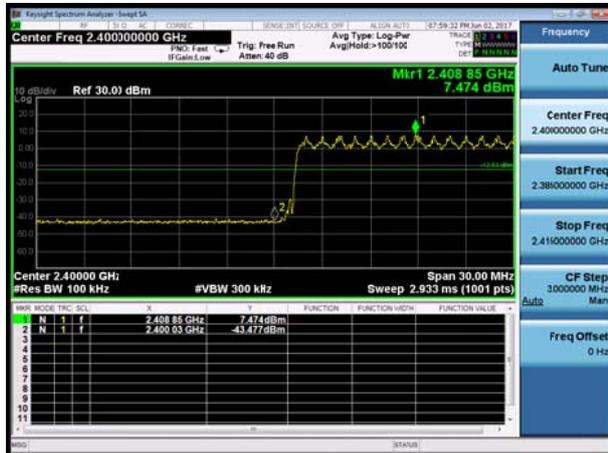


BT 2DH5 CH78, Carrier frequency (MHz): 2480

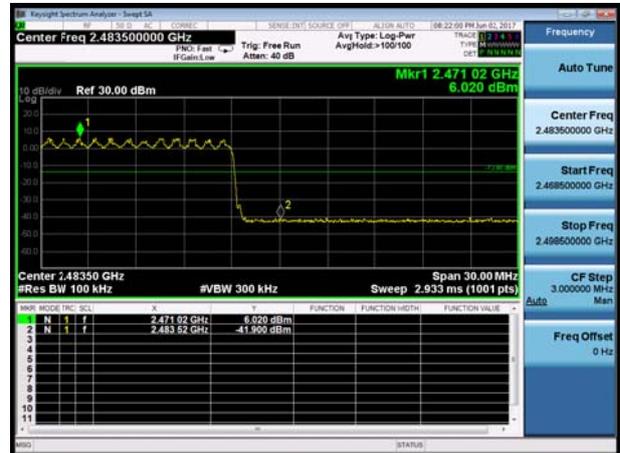

BT 3DH5 CH0, Carrier frequency (MHz): 2402

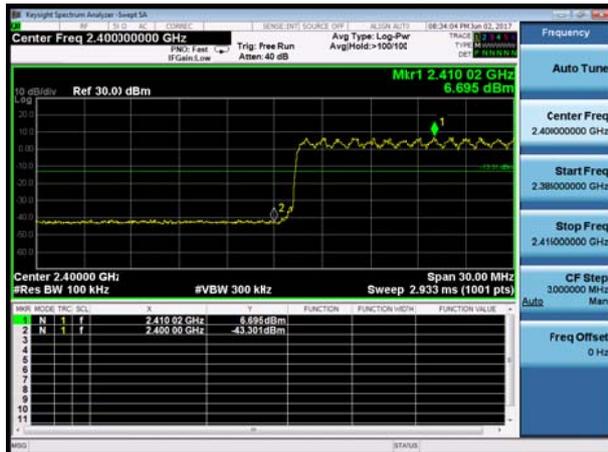


BT 3DH5 CH78, Carrier frequency (MHz): 2480

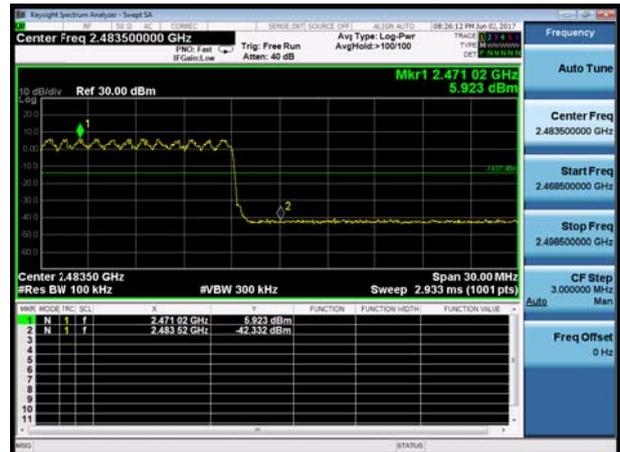


Hopping Off


BT DH5 CH0, Carrier frequency (MHz): 2402

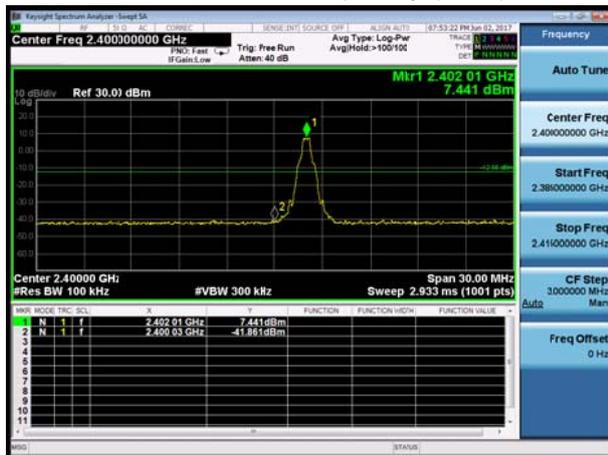


BT DH5 CH78, Carrier frequency (MHz): 2480

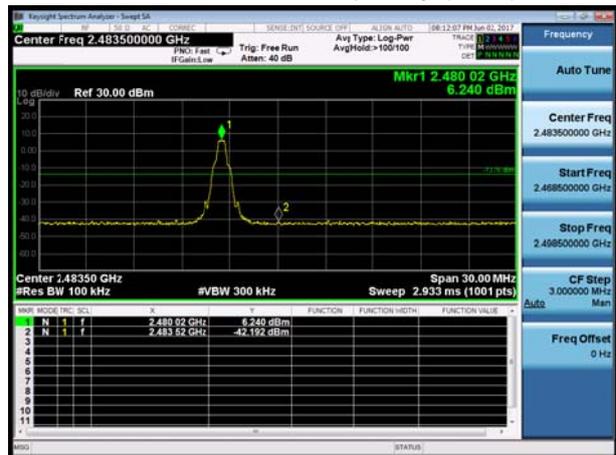


BT 2DH5 CH0, Carrier frequency (MHz): 2402

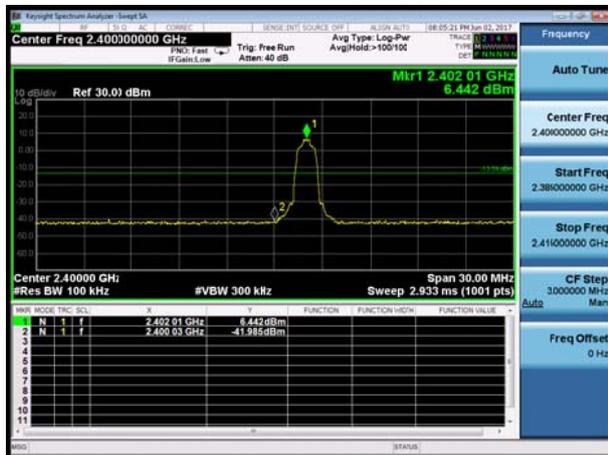


BT 2DH5 CH78, Carrier frequency (MHz): 2480

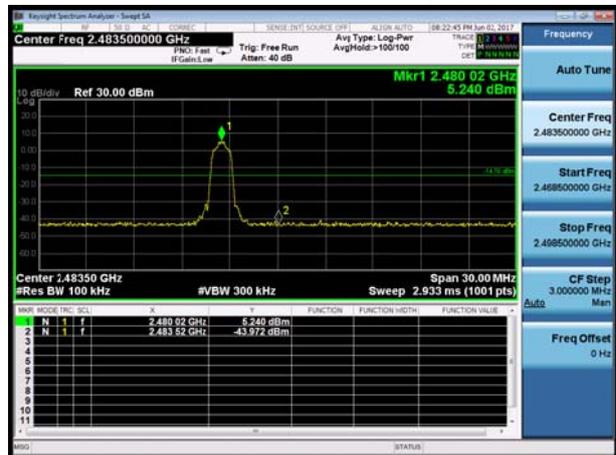

BT 3DH5 CH0, Carrier frequency (MHz): 2402

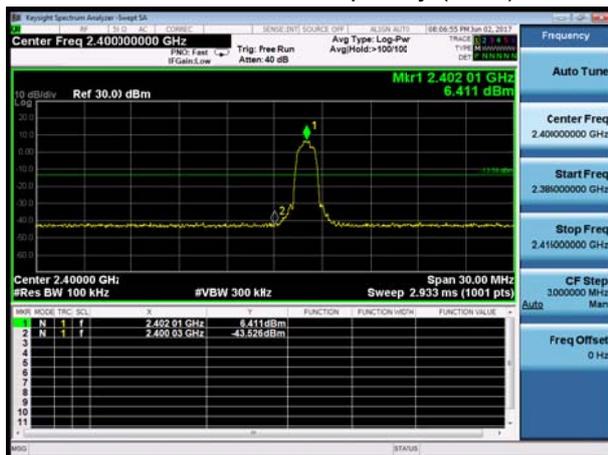

BT 3DH5 CH78, Carrier frequency (MHz): 2480

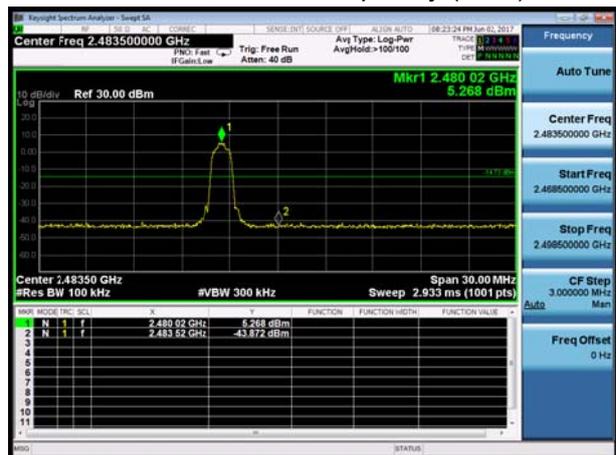

### 4.7 Spurious Radiated Emissions in the Restricted Band

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.


Set the spectrum analyzer in the following:

- (a) PEAK: RBW=1MHz; VBW=3MHz / Sweep=AUTO
- (b) The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak- average correction factor, derived from the appropriate duty cycle calculation.

This setting method can refer to **DA00-705**.

The test is in transmitting mode. The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis) and docking mode. The worst emission was found in stand-up position (Y axis) and the worst case was recorded.

#### Test setup

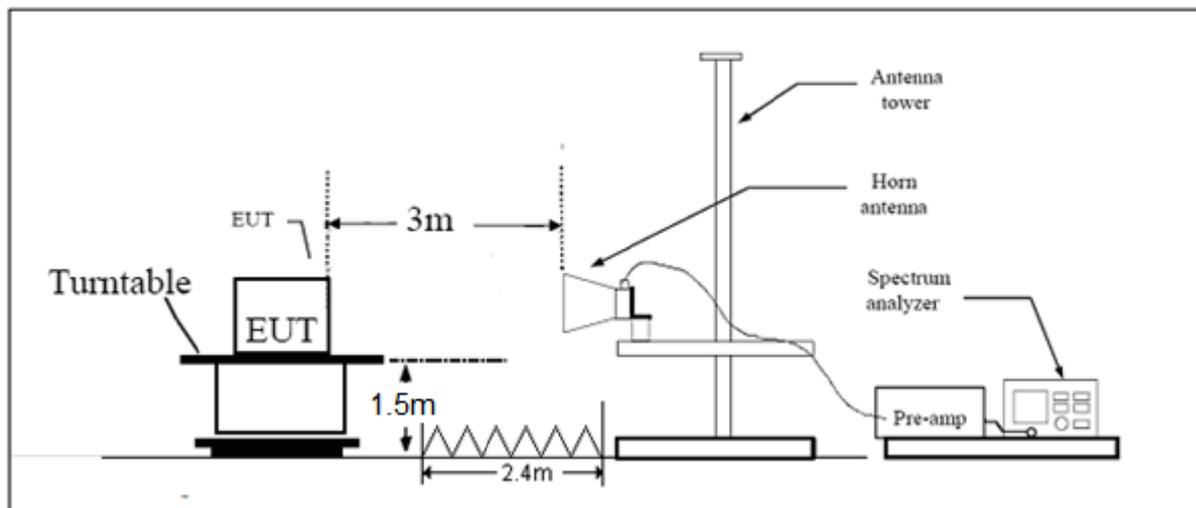

Note: Area side: 2.4mX3.6m

**Limits**

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

**§15.35(b)**

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74dBuV/m


Average Limit=54dBuV/m

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB.



Test Results:

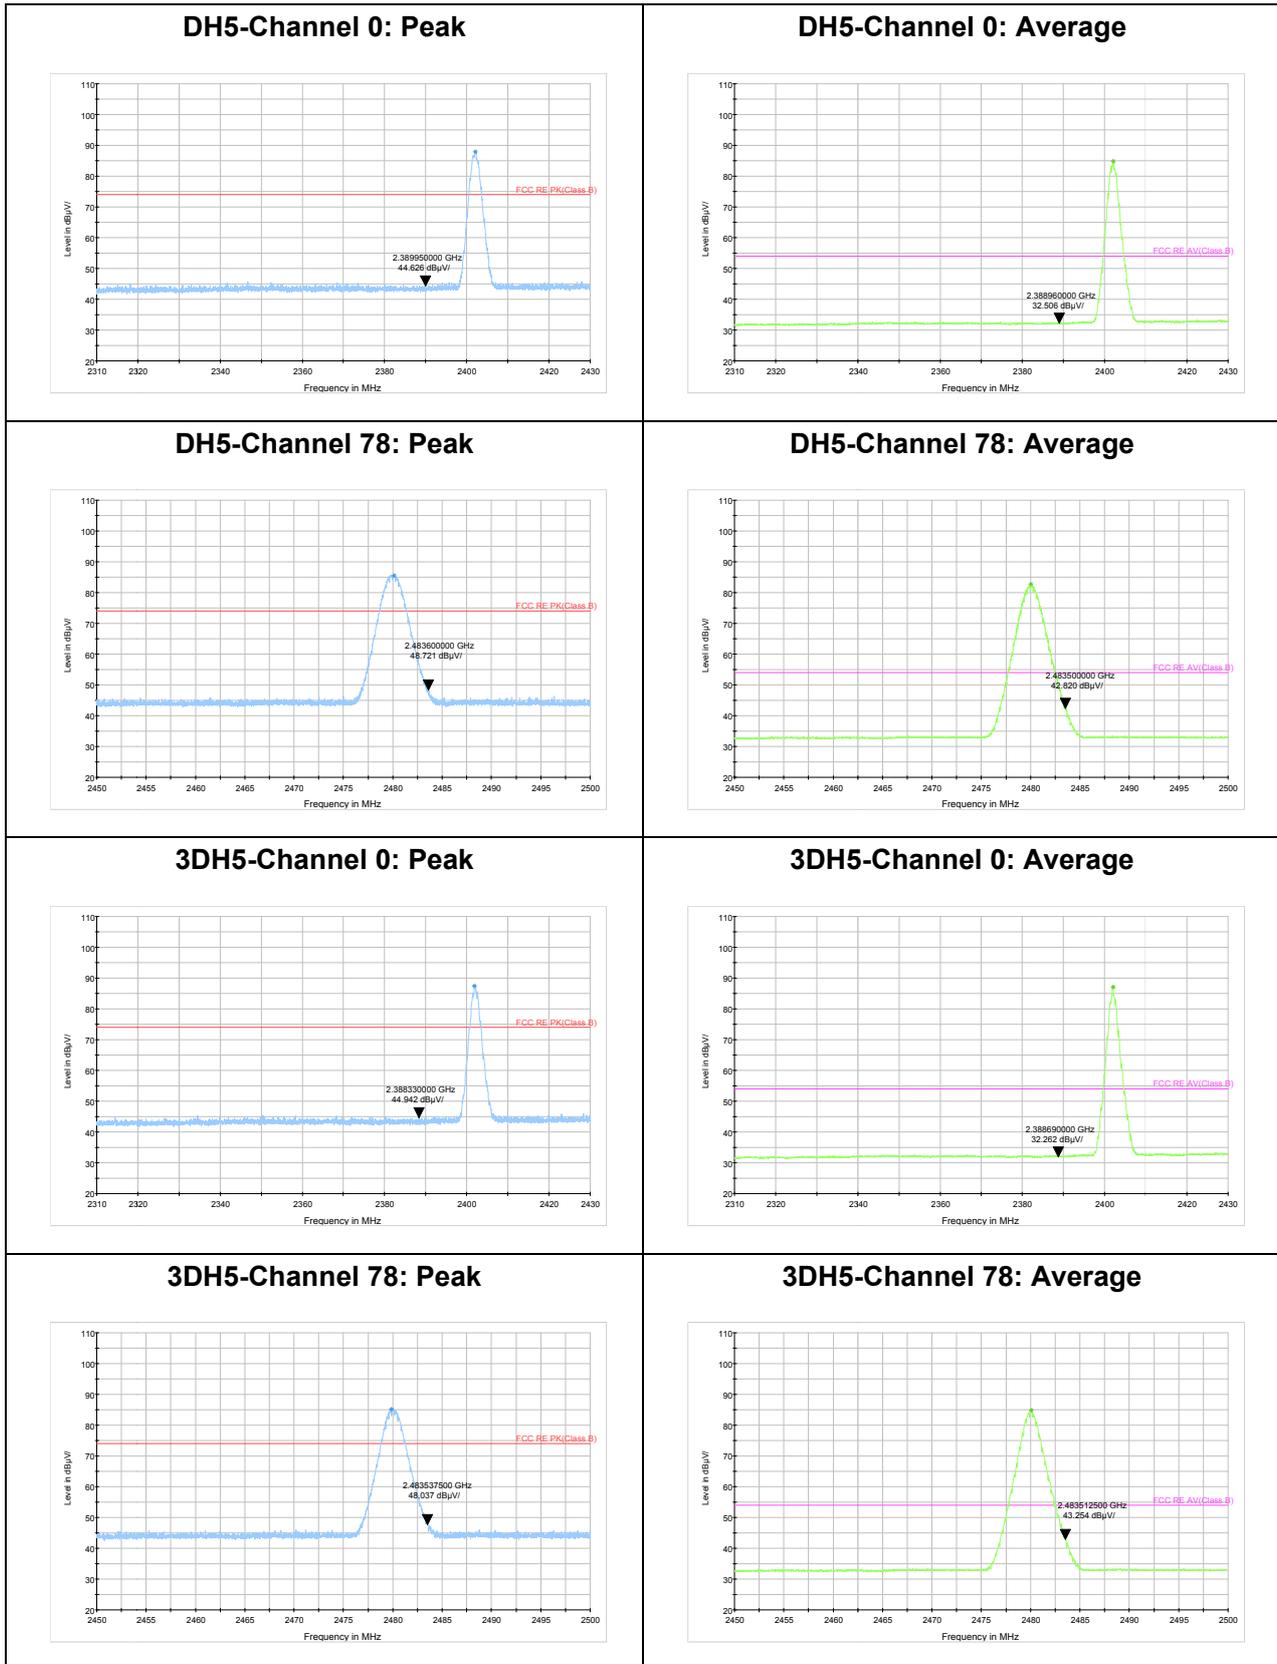

### 4.8 Number of hopping Frequency


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 1MHz and VBW is set to 1 MHz on spectrum analyzer. Set EUT on Hopping on mode.

#### Test setup

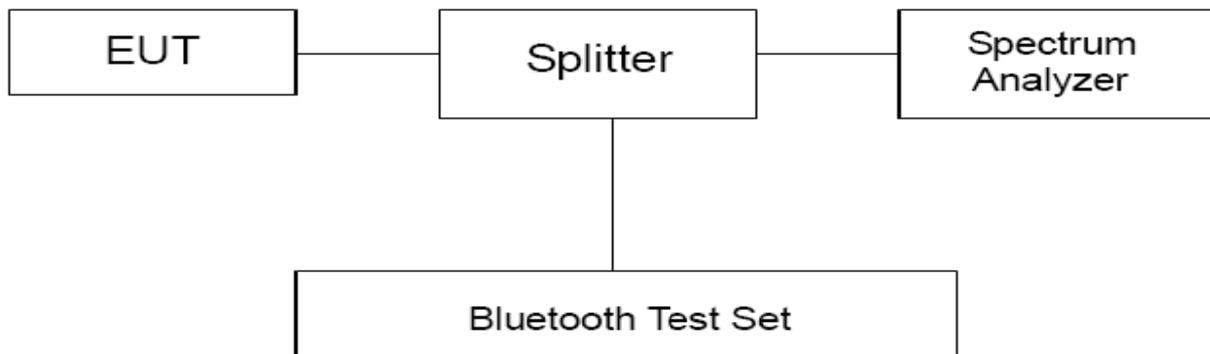

#### Limits

Rule Part 15.247(a) (1) (iii) specifies that” Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.”

Limits	≥ 15 channels
--------	---------------



Test Results:

	Number of hopping channels	conclusion
DH5	79	PASS
2DH5	79	PASS
3DH5	79	PASS


DH5 2400 MHz – 2483.5 MHz



2DH5 2400 MHz – 2483.5 MHz



3DH5 2400 MHz – 2483.5 MHz

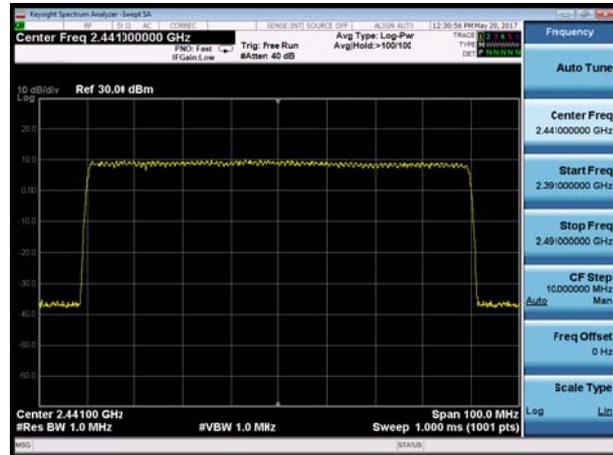

### 4.9 Spurious RF Conducted Emissions

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW 100kHz and VBW 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

#### Test setup

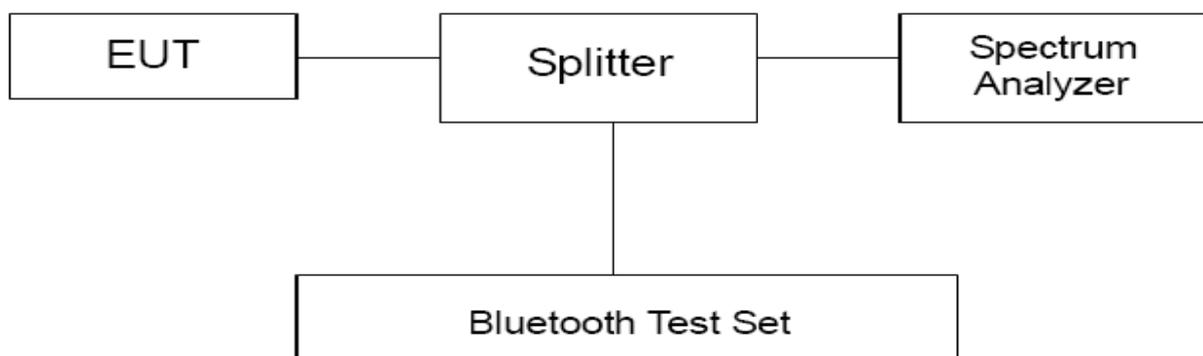

#### Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.”

Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit
DH5	2402	4.747	-15.253
	2441	1.776	-18.224
	2480	1.468	-18.532
EDR (3DH5)	2402	5.827	-14.173
	2441	6.825	-13.175
	2480	1.779	-18.221



### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB




Test Results:


GFSK-CH0 30MHz to 18GHz

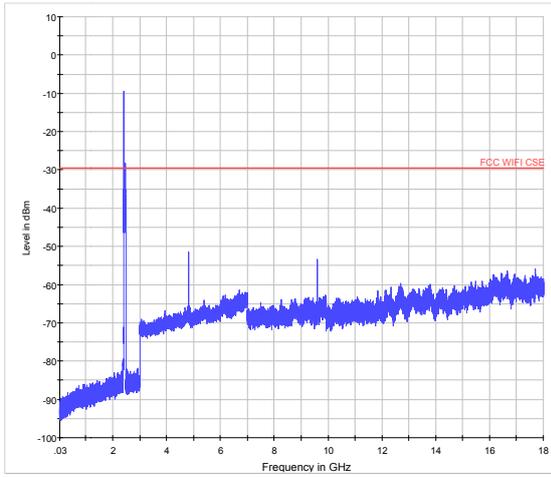


EDR-CH0 30MHz to 18GHz

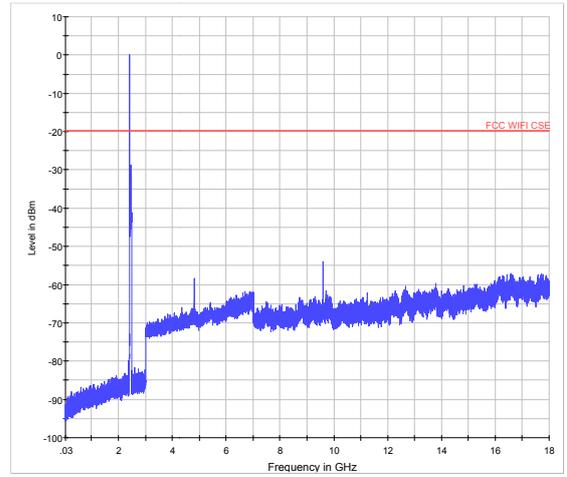


GFSK-CH0 18MHz to 26.5GHz

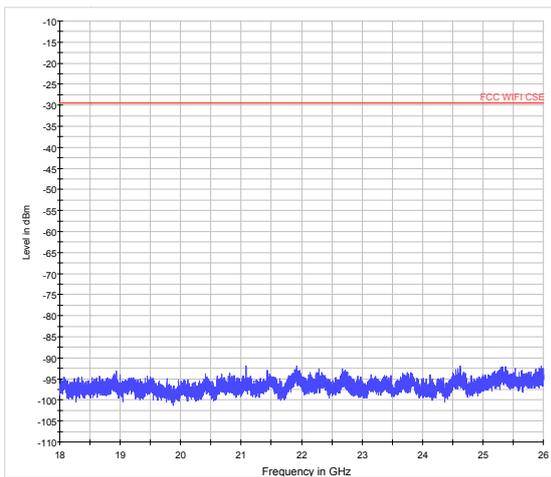


EDR-CH0 18MHz to 26.5GHz

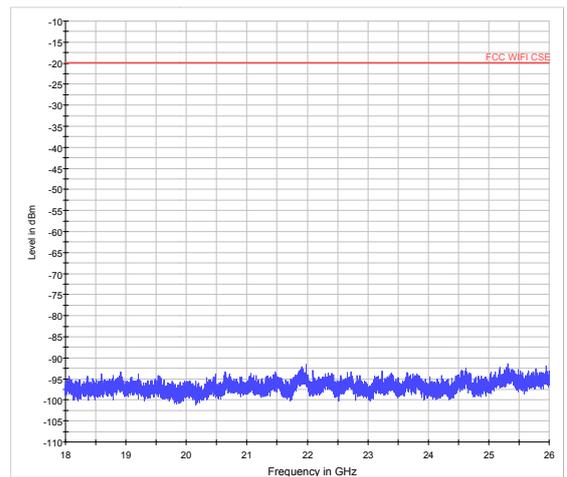

GFSK-CH39 30MHz to 18GHz

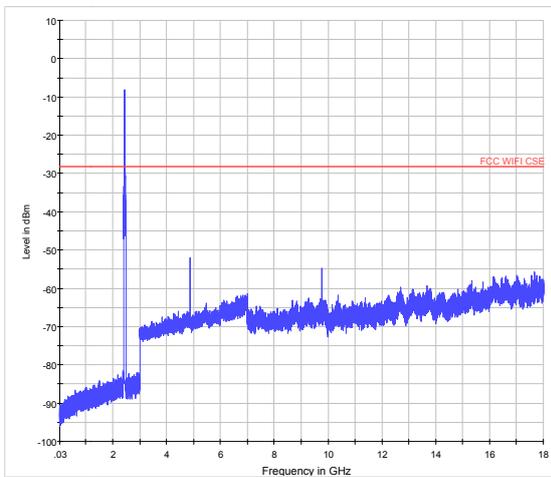


EDR-CH39 30MHz to 18GHz

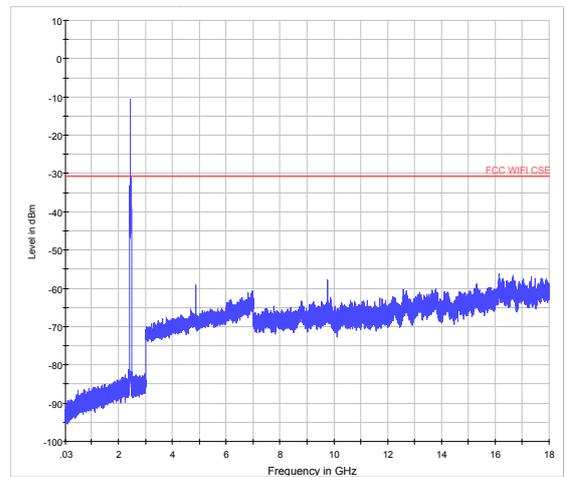





GFSK-CH39 18MHz to 26.5GHz

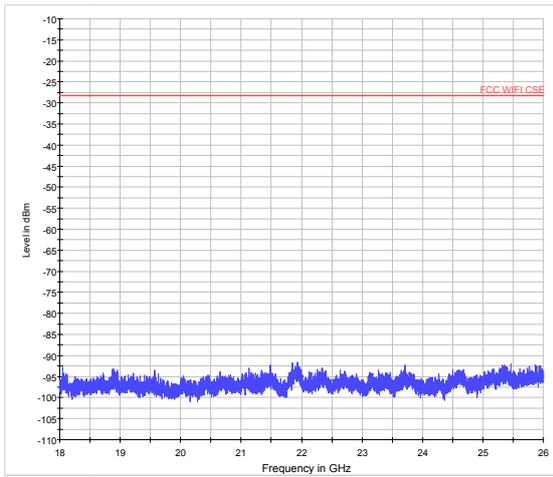


EDR-CH39 18MHz to 26.5GHz

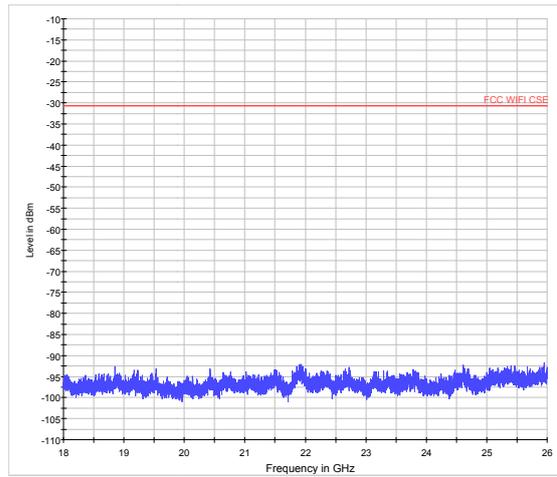


GFSK-CH78 30MHz to 18GHz

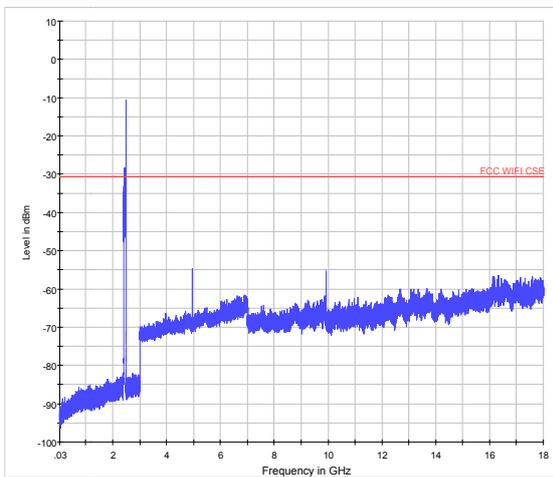


EDR-CH78 30MHz to 18GHz

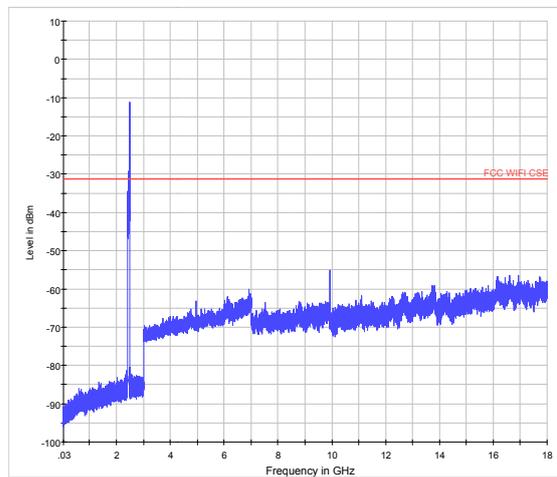

GFSK-CH78 18MHz to 26.5GHz

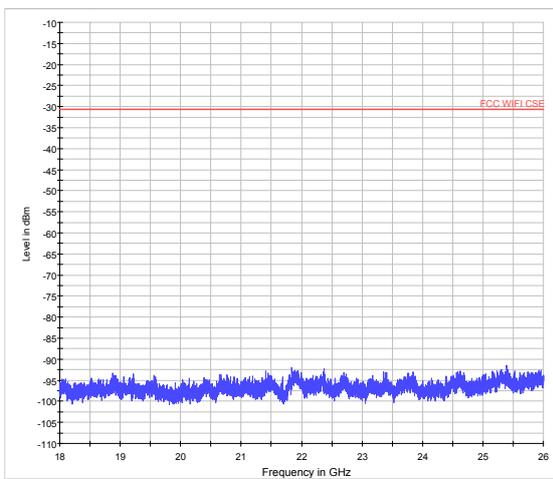

EDR-CH78 18MHz to 26.5GHz

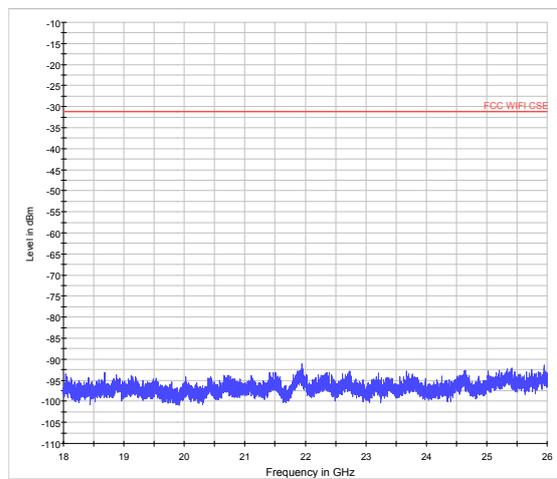

## 4.10 Radiates Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz(detector: Peak):


(a) PEAK: RBW=1MHz / BW=3MHz/ Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO


The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded. Then this mode was measured in the following mode: EUT with cradle and EUT without cradle. The worst emission was found in EUT with cradle mode and the worst case was recorded.

The test is in transmitting mode.


**Test setup**  
**9KHz ~ 30MHz**

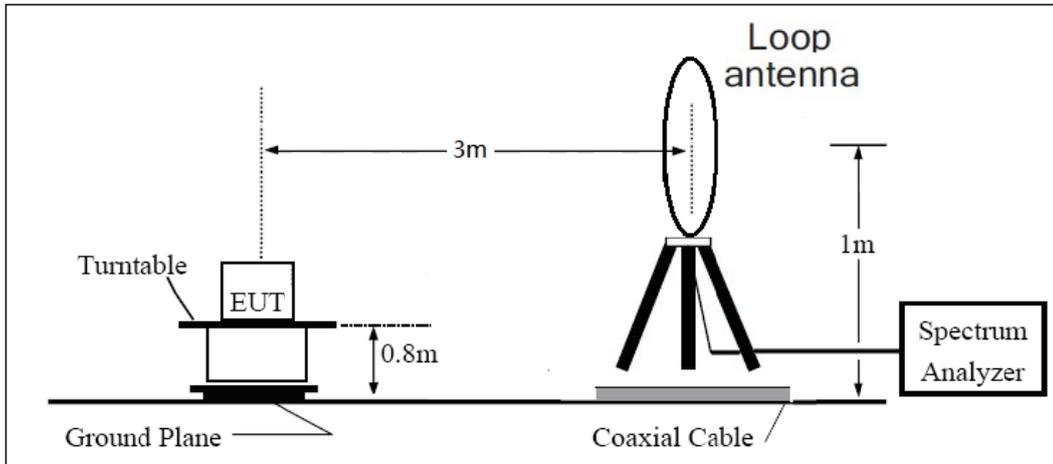

**30MHz ~ 1GHz**

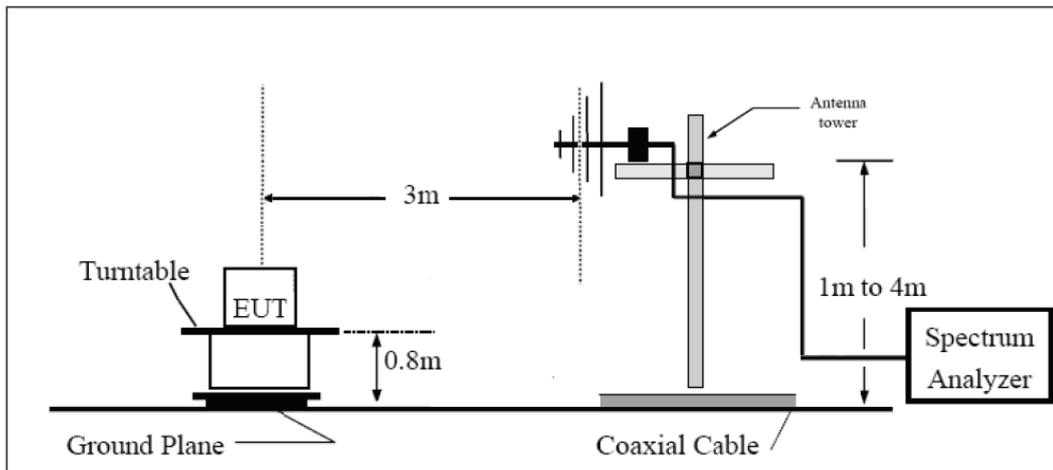

**Above 1GHz**

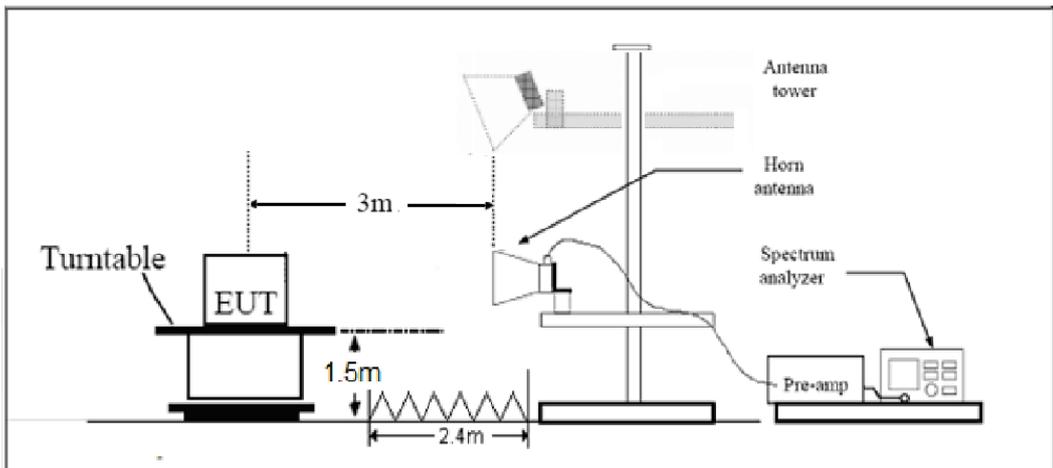

**Limits**

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

**§15.35(b)**

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB

**Test result**

Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.


The messy code( dBuV/m ) including in the following plots mean dBuV/m.

The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

GFSK-Channel 0

FCC RE 0.03-1GHz QP Class B

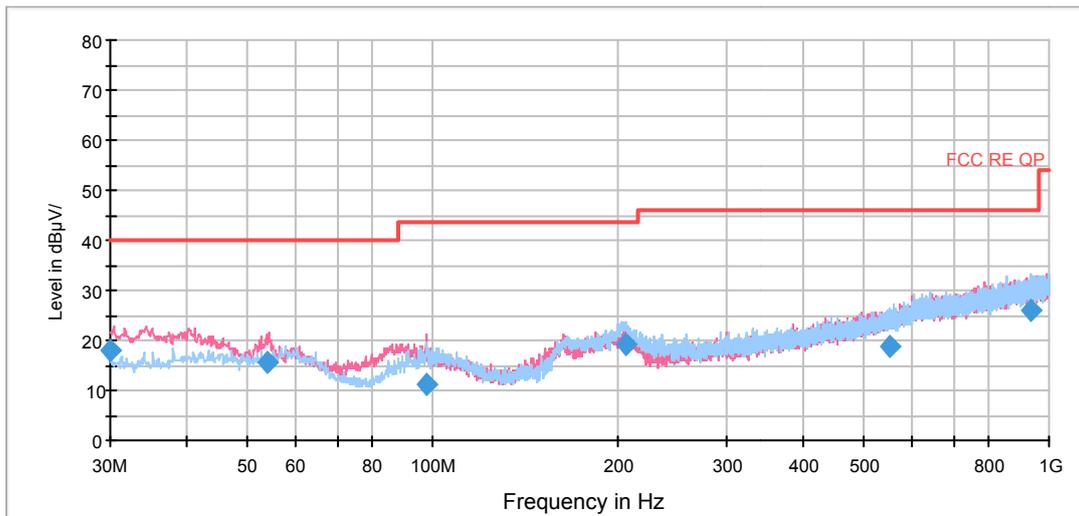


Radiates Emission from 30MHz to 1GHz

Note: This graph displays the maximum values of horizontal and vertical by software

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.000000	18.0	100.0	V	251.0	5.9	12.1	22.0	40.0
54.010000	15.8	100.0	V	252.0	2.8	13.0	24.2	40.0
98.057500	11.1	100.0	V	292.0	-1.9	13.0	32.4	43.5
205.896250	19.3	125.0	H	281.0	6.9	12.4	24.2	43.5
551.981250	18.7	100.0	H	22.0	-2.9	21.6	27.3	46.0
937.997500	25.8	125.0	H	0.0	-1.4	27.2	20.2	46.0

RE 1G-3GHz PK+AV

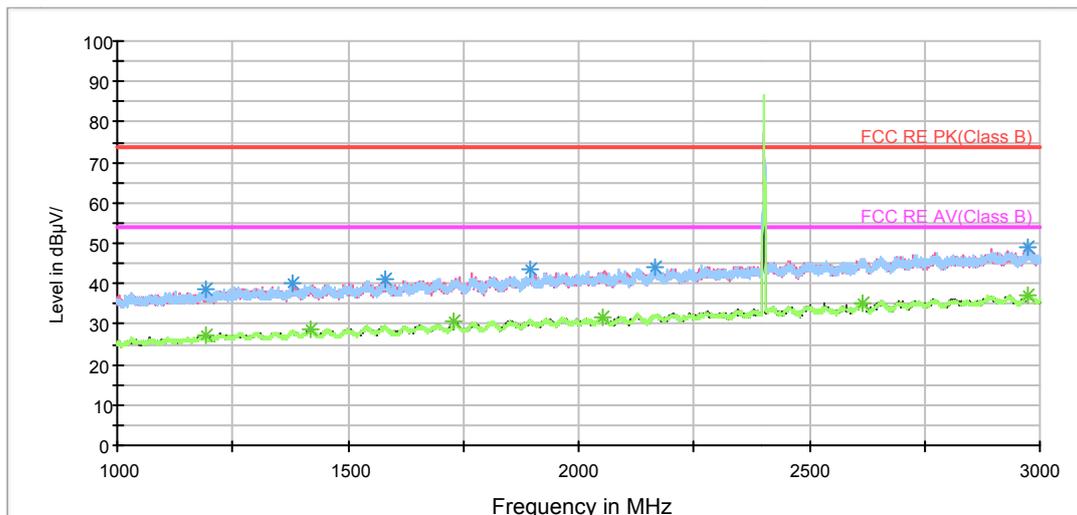


Radiates Emission from 1GHz to 3GHz  
 Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1191.750000	38.4	109.0	H	293.0	46.6	-8.2	35.6	74
1380.750000	39.9	210.0	V	215.0	46.9	-7.0	34.1	74
1578.750000	41.2	110.0	V	211.0	47.5	-6.3	32.8	74
1897.250000	43.5	109.0	H	14.0	47.4	-3.9	30.5	74
2166.000000	44.1	109.0	H	29.0	46.3	-2.2	29.9	74
2971.750000	48.8	210.0	H	238.0	46.6	2.2	25.2	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1190.250000	27.2	210.0	V	160.0	35.4	-8.2	26.8	54
1418.000000	28.7	109.0	H	239.0	35.6	-6.9	25.3	54
1730.500000	30.5	210.0	V	300.0	35.4	-4.9	23.5	54
2052.250000	31.6	210.0	H	310.0	34.8	-3.2	22.4	54
2615.500000	35.1	210.0	V	186.0	35.1	0.0	18.9	54
2972.500000	37.1	110.0	V	182.0	34.9	2.2	16.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

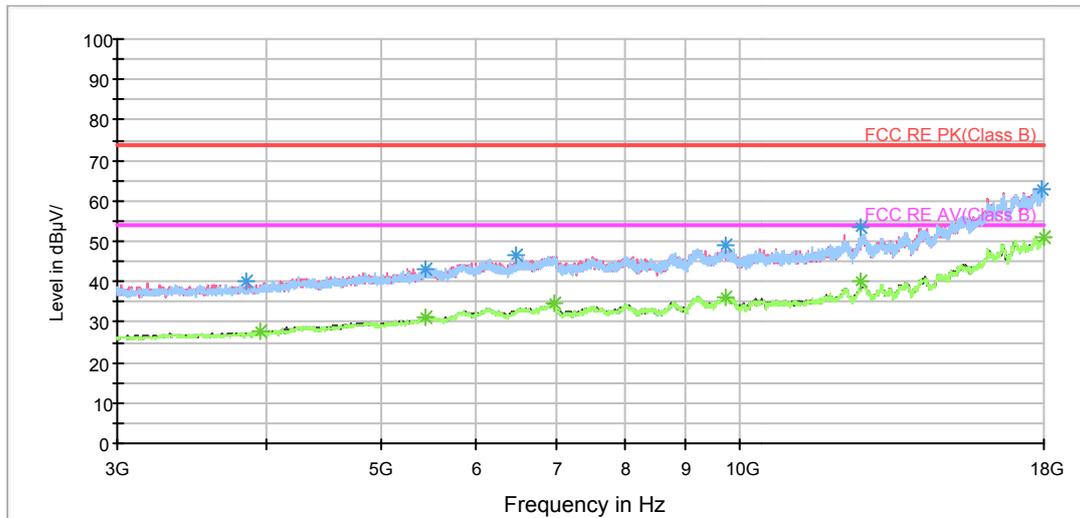


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3849.375000	39.9	110.0	H	174.0	41.5	-1.6	34.1	74
5443.125000	43.1	110.0	V	318.0	40.2	2.9	30.9	74
6493.125000	46.3	210.0	V	133.0	41.1	5.2	27.7	74
9736.875000	49.0	110.0	H	0.0	39.1	9.9	25.0	74
12646.875000	53.2	210.0	H	137.0	38.9	14.3	20.8	74
17934.375000	63.1	110.0	V	229.0	37.9	25.2	10.9	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3954.375000	27.6	210.0	V	133.0	28.6	-1.0	26.4	54
5443.125000	31.1	210.0	V	67.0	28.2	2.9	22.9	54
6993.750000	34.5	110.0	V	318.0	28.0	6.5	19.5	54
9738.750000	36.3	210.0	V	178.0	26.3	10.0	17.7	54
12641.250000	40.3	110.0	V	251.0	25.8	14.5	13.7	54
17998.125000	51.0	210.0	V	21.0	25.6	25.4	3.0	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

BELL\_RE 18-26.5GHz PK+AV

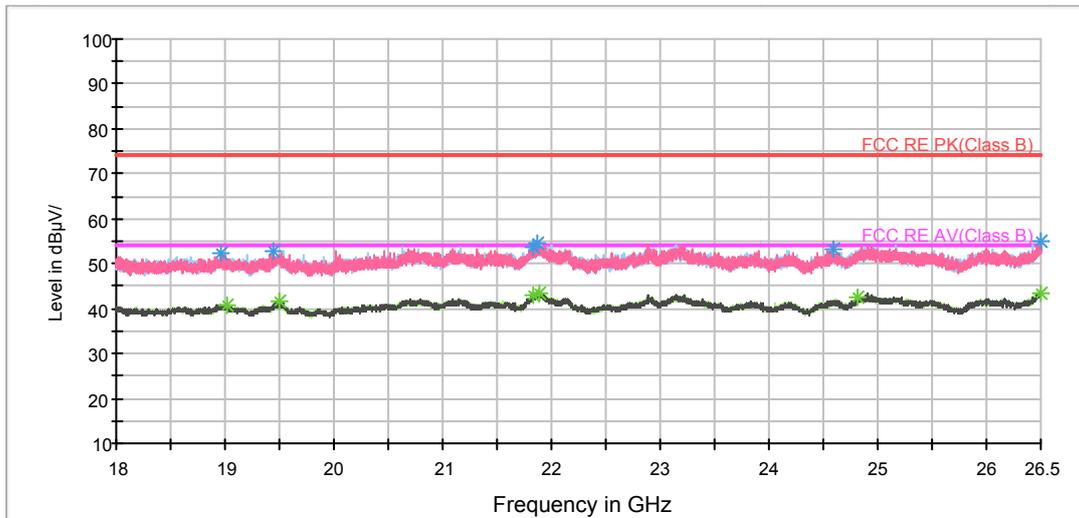

Radiates Emission from 18GHz to 26.5GHz


Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18967.937500	52.4	V	87.0	52.5	-0.1	21.6	74
19441.812500	52.9	V	53.0	52.9	0.0	21.1	74
21835.625000	53.7	V	45.0	55.6	-1.9	20.3	74
21874.937500	54.4	V	45.0	56.1	-1.7	19.6	74
24592.812500	53.4	V	179.0	53.6	-0.2	20.6	74
26497.875000	55.2	H	186.0	54.1	1.1	18.8	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
19024.250000	41.0	V	45.0	41.3	-0.3	13.0	54
19502.375000	41.7	H	225.0	41.6	0.1	12.3	54
21838.812500	43.1	V	104.0	45.0	-1.9	10.9	54
21881.312500	43.4	V	130.0	45.1	-1.7	10.6	54
24809.562500	42.4	V	45.0	42.3	0.1	11.6	54
26500.000000	43.6	H	225.0	42.5	1.1	10.4	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




FCC RE 0.03-1GHz QP Class B

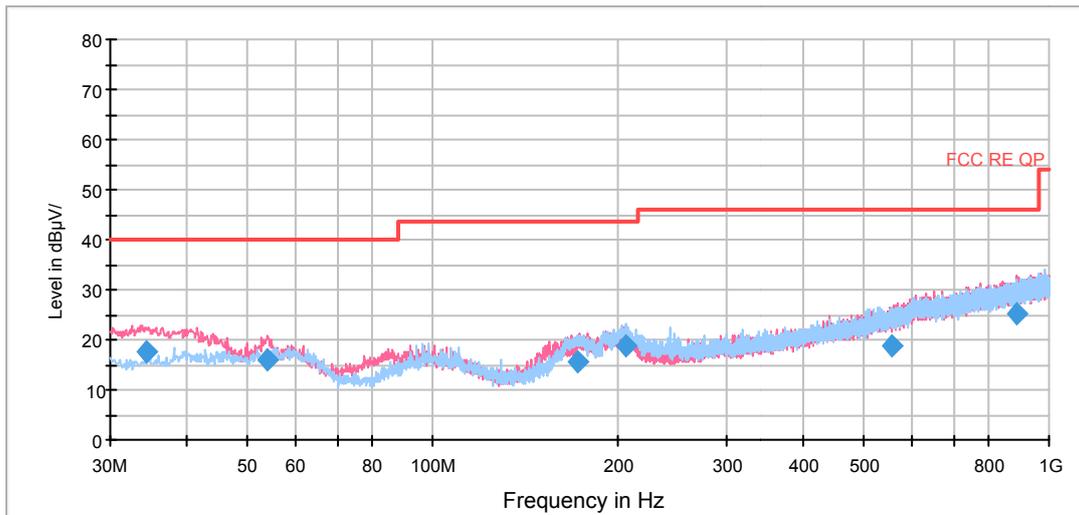

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
34.238750	17.8	100.0	V	246.0	5.8	12.0	22.2	40.0
54.048750	15.8	100.0	V	250.0	2.8	13.0	24.2	40.0
171.943750	15.6	100.0	V	206.0	5.0	10.6	27.9	43.5
206.381250	18.8	125.0	H	294.0	6.4	12.4	24.7	43.5
554.926250	18.8	100.0	H	156.0	-3.0	21.8	27.2	46.0
884.973750	25.2	114.0	V	266.0	-1.3	26.5	20.8	46.0

RE 1G-3GHz PK+AV

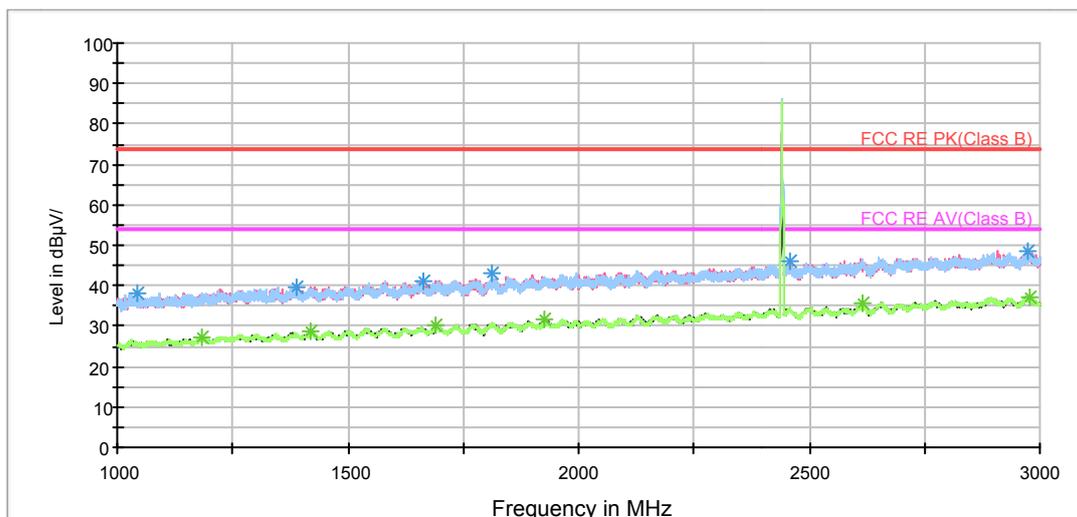


Radiates Emission from 1GHz to 3GHz  
 Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1044.750000	38.2	210.0	H	53.0	47.2	-9.0	35.8	74
1388.250000	39.8	210.0	H	114.0	46.8	-7.0	34.2	74
1664.250000	41.1	210.0	H	358.0	46.3	-5.2	32.9	74
1810.250000	43.1	110.0	H	58.0	47.3	-4.2	30.9	74
2458.500000	46.2	110.0	V	281.0	46.7	-0.5	27.8	74
2972.000000	48.6	110.0	V	195.0	46.4	2.2	25.4	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1185.000000	27.3	110.0	H	29.0	35.4	-8.1	26.7	54
1420.250000	28.7	110.0	H	0.0	35.6	-6.9	25.3	54
1692.000000	30.0	110.0	V	180.0	35.0	-5.0	24.0	54
1927.250000	31.8	110.0	V	0.0	35.5	-3.7	22.2	54
2616.500000	35.6	210.0	V	97.0	35.6	0.0	18.4	54
2977.500000	37.2	210.0	V	263.0	35.0	2.2	16.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

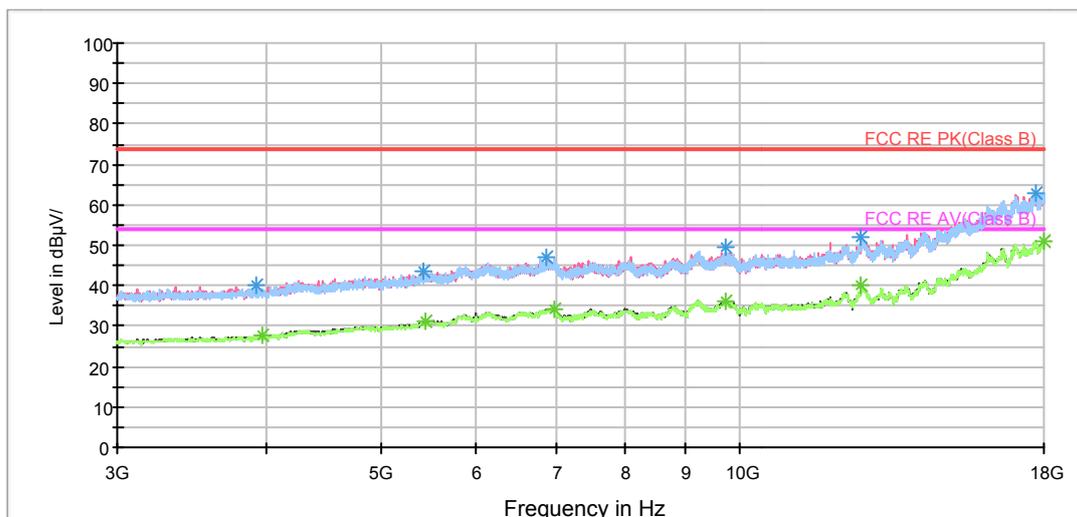


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3918.750000	40.0	110.0	H	223.0	41.2	-1.2	34.0	74
5418.750000	43.4	110.0	V	0.0	40.7	2.7	30.6	74
6877.500000	46.8	110.0	H	87.0	40.8	6.0	27.2	74
9742.500000	49.4	210.0	H	0.0	39.4	10.0	24.6	74
12637.500000	52.1	210.0	V	89.0	37.8	14.3	21.9	74
17713.125000	62.8	110.0	V	251.0	38.2	24.6	11.2	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3969.375000	27.7	210.0	V	44.0	28.6	-0.9	26.3	54
5437.500000	31.0	110.0	H	0.0	28.1	2.9	23.0	54
6997.500000	34.4	110.0	V	251.0	27.9	6.5	19.6	54
9740.625000	36.2	210.0	V	89.0	26.2	10.0	17.8	54
12641.250000	40.2	210.0	V	134.0	25.7	14.5	13.8	54
18000.000000	51.1	110.0	V	227.0	25.6	25.5	2.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

BELL\_RE 18-26.5GHz PK+AV

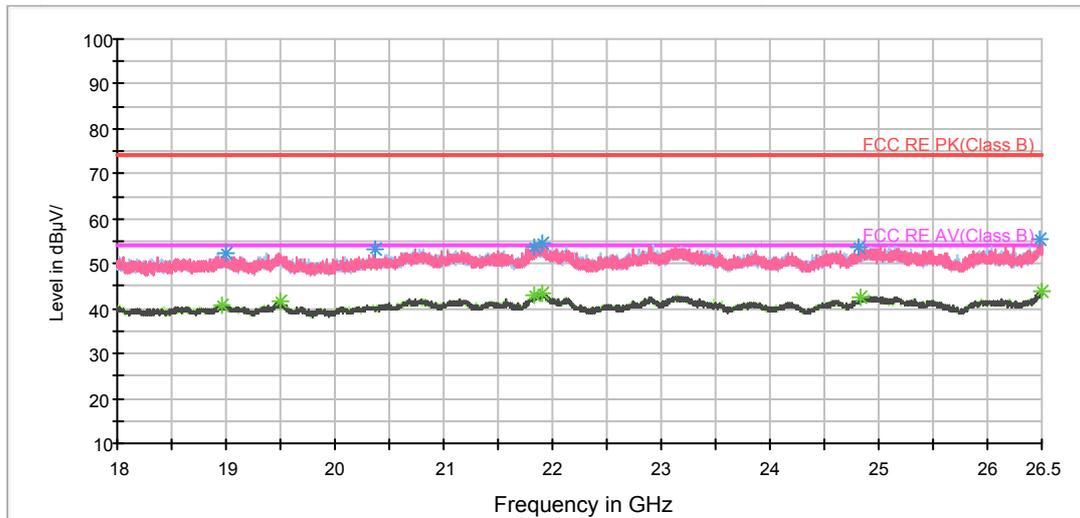


Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18995.562500	52.3	H	89.0	52.5	-0.2	21.7	74
20373.625000	53.0	H	124.0	54.0	-1.0	21.0	74
21832.437500	53.7	V	171.0	55.6	-1.9	20.3	74
21902.562500	54.7	V	143.0	56.3	-1.6	19.3	74
24814.875000	53.6	H	186.0	53.5	0.1	20.4	74
26486.187500	55.5	V	135.0	54.4	1.1	18.5	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18960.500000	40.9	H	225.0	40.9	0.0	13.1	54
19497.062500	41.6	V	190.0	41.5	0.1	12.4	54
21839.875000	42.8	H	225.0	44.7	-1.9	11.2	54
21902.562500	43.6	V	143.0	45.2	-1.6	10.4	54
24842.500000	42.5	H	160.0	42.2	0.3	11.5	54
26495.750000	44.0	H	178.0	42.9	1.1	10.0	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


FCC RE 0.03-1GHz QP Class B

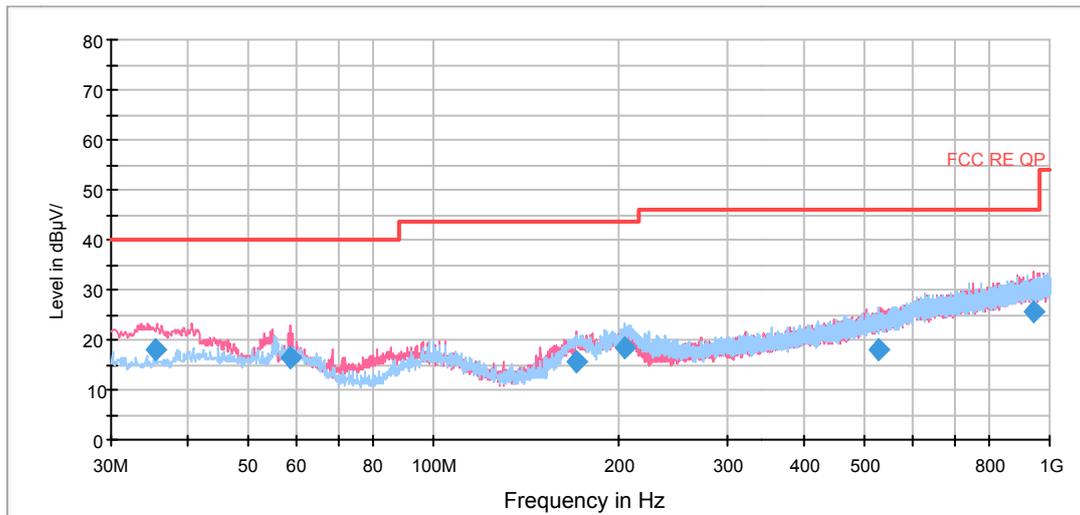

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
35.417500	18.0	100.0	V	250.0	5.8	12.2	22.0	40.0
58.815000	16.3	100.0	V	67.0	3.6	12.7	23.7	40.0
171.250000	15.5	100.0	V	210.0	5.0	10.5	28.0	43.5
203.991250	18.3	125.0	H	111.0	5.9	12.4	25.2	43.5
527.930000	18.1	114.0	H	116.0	-3.1	21.2	27.9	46.0
939.092500	25.7	125.0	V	0.0	-1.4	27.1	20.3	46.0

RE 1G-3GHz PK+AV

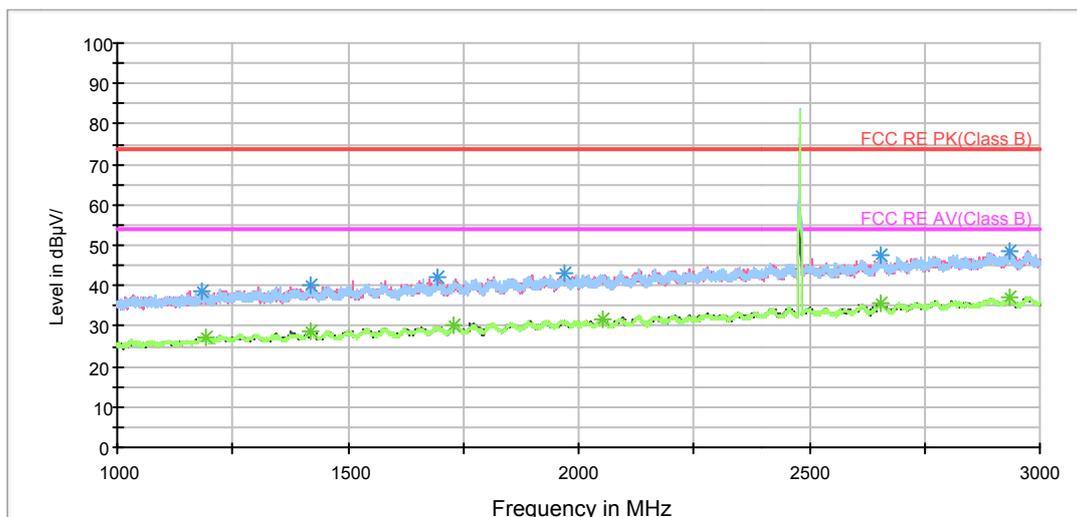


Radiates Emission from 1GHz to 3GHz  
 Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1183.750000	38.6	110.0	H	113.0	46.7	-8.1	35.4	74
1421.000000	39.9	110.0	V	359.0	46.8	-6.9	34.1	74
1693.250000	42.2	110.0	H	0.0	47.2	-5.0	31.8	74
1971.250000	42.9	210.0	H	0.0	46.5	-3.6	31.1	74
2654.750000	47.7	210.0	V	173.0	47.3	0.4	26.3	74
2932.500000	48.7	210.0	V	137.0	46.9	1.8	25.3	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1192.000000	27.0	110.0	V	98.0	35.2	-8.2	27.0	54
1419.750000	28.8	210.0	V	42.0	35.7	-6.9	25.2	54
1730.500000	30.0	210.0	V	0.0	34.9	-4.9	24.0	54
2050.500000	31.8	210.0	V	123.0	35.0	-3.2	22.2	54
2655.250000	35.4	110.0	V	326.0	35.0	0.4	18.6	54
2933.250000	37.3	110.0	H	0.0	35.5	1.8	16.7	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

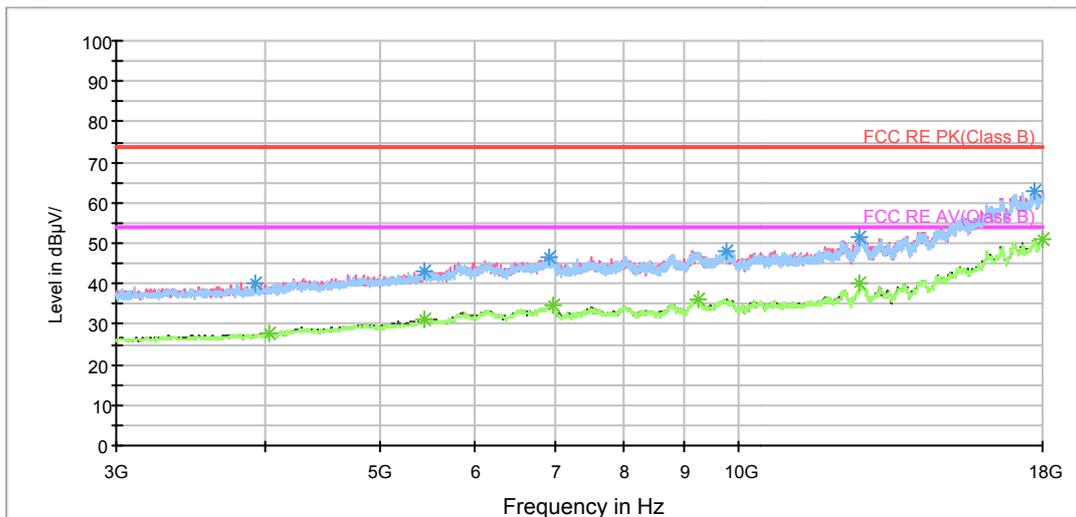


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3920.625000	40.1	210.0	H	206.0	41.3	-1.2	33.9	74
5441.250000	43.3	210.0	V	0.0	40.4	2.9	30.7	74
6924.375000	46.5	210.0	H	319.0	40.3	6.2	27.5	74
9750.000000	48.1	210.0	H	319.0	38.3	9.8	25.9	74
12639.375000	51.6	110.0	V	0.0	37.1	14.5	22.4	74
17700.000000	62.9	110.0	V	339.0	38.2	24.7	11.1	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4035.000000	27.7	210.0	V	42.0	28.7	-1.0	26.3	54
5433.750000	31.1	210.0	V	88.0	28.3	2.8	22.9	54
6995.625000	34.5	110.0	V	272.0	28.0	6.5	19.5	54
9230.625000	36.1	110.0	V	137.0	26.2	9.9	17.9	54
12641.250000	40.3	110.0	H	0.0	25.8	14.5	13.7	54
17998.125000	51.0	110.0	V	227.0	25.6	25.4	3.0	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

BELL\_RE 18-26.5GHz PK+AV

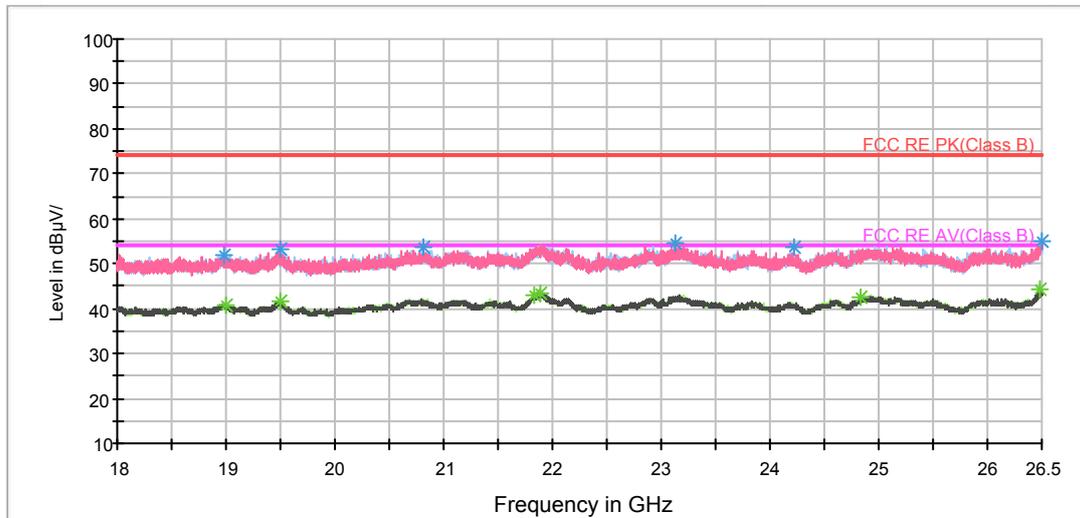


Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18987.062500	52.1	V	45.0	52.2	-0.1	21.9	74
19491.750000	53.0	V	210.0	52.9	0.1	21.0	74
20808.187500	53.5	V	45.0	55.5	-2.0	20.5	74
23136.125000	54.7	V	45.0	54.8	-0.1	19.3	74
24226.250000	53.6	H	212.0	54.4	-0.8	20.4	74
26493.625000	54.9	V	45.0	53.8	1.1	19.1	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18996.625000	40.8	V	65.0	41.0	-0.2	13.2	54
19499.187500	41.5	V	45.0	41.4	0.1	12.5	54
21837.750000	43.0	V	45.0	44.9	-1.9	11.0	54
21880.250000	43.6	H	162.0	45.3	-1.7	10.4	54
24840.375000	42.4	H	225.0	42.1	0.3	11.6	54
26487.250000	44.1	H	145.0	43.0	1.1	9.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


FCC RE 0.03-1GHz QP Class B

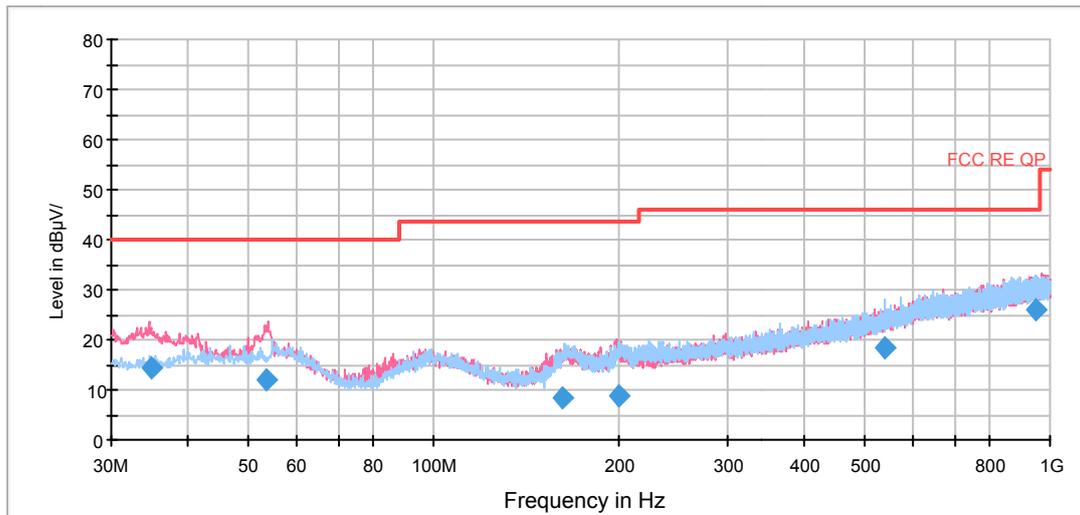

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
34.846250	14.2	100.0	V	241.0	2.3	11.9	25.8	40.0
53.727500	11.8	100.0	V	250.0	-1.0	12.8	28.2	40.0
162.408750	8.4	125.0	H	16.0	-1.5	9.9	35.1	43.5
199.181250	8.7	100.0	V	0.0	-3.3	12.0	34.8	43.5
537.956250	18.4	100.0	H	283.0	-3.0	21.4	27.6	46.0
947.216250	25.9	100.0	V	196.0	-1.3	27.2	20.1	46.0

RE 1G-3GHz PK+AV

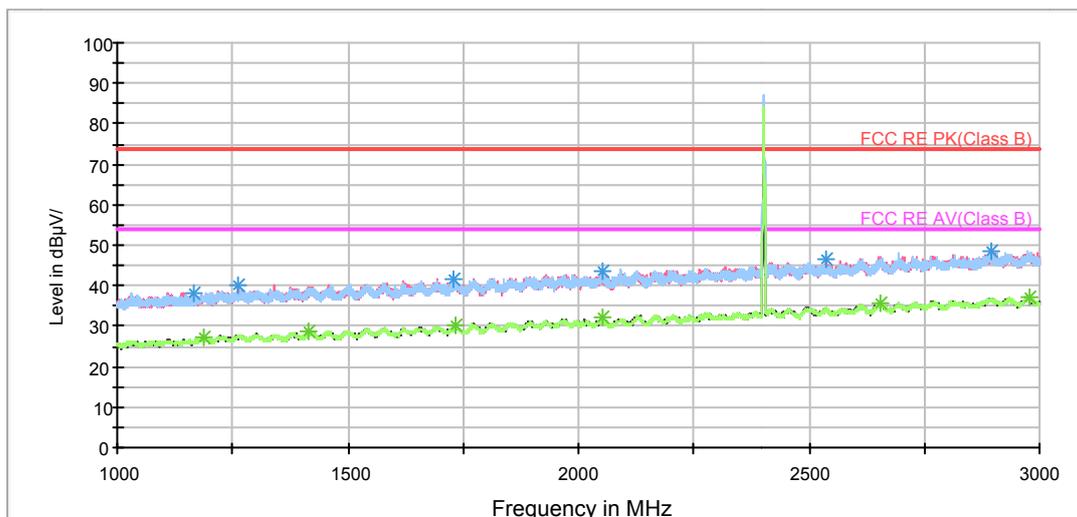


Radiates Emission from 1GHz to 3GHz  
 Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1164.250000	38.3	210.0	V	270.0	46.5	-8.2	35.7	74
1263.000000	40.0	210.0	V	45.0	47.7	-7.7	34.0	74
1731.000000	41.5	210.0	V	96.0	46.4	-4.9	32.5	74
2052.750000	43.8	110.0	V	301.0	47.0	-3.2	30.2	74
2535.500000	46.3	210.0	V	0.0	46.7	-0.4	27.7	74
2894.000000	48.6	210.0	H	355.0	46.5	2.1	25.4	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1189.750000	27.3	110.0	V	0.0	35.5	-8.2	26.7	54
1416.750000	28.7	210.0	V	2.0	35.7	-7.0	25.3	54
1732.000000	30.0	110.0	V	309.0	34.8	-4.8	24.0	54
2052.250000	32.1	110.0	V	294.0	35.3	-3.2	21.9	54
2654.250000	35.7	210.0	H	224.0	35.3	0.4	18.3	54
2979.000000	37.1	210.0	V	16.0	34.9	2.2	16.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

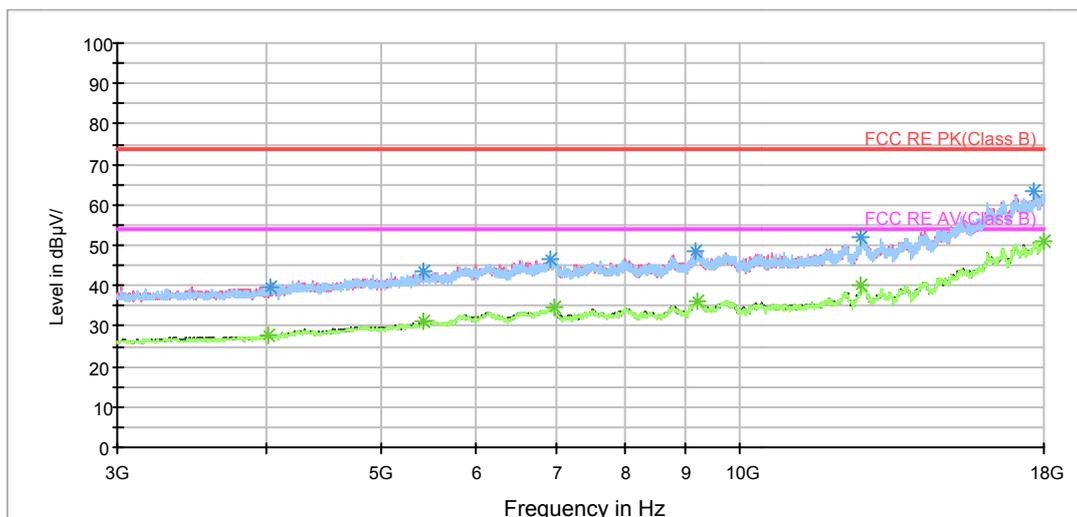


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4035.000000	39.7	110.0	V	91.0	40.7	-1.0	34.3	74
5428.125000	43.4	210.0	H	205.0	40.6	2.8	30.6	74
6924.375000	46.4	210.0	V	0.0	40.2	6.2	27.6	74
9157.500000	48.6	110.0	V	252.0	38.3	10.3	25.4	74
12648.750000	51.8	210.0	H	0.0	37.6	14.2	22.2	74
17685.000000	63.4	110.0	H	0.0	38.8	24.6	10.6	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4020.000000	27.6	210.0	V	246.0	28.8	-1.2	26.4	54
5431.875000	31.2	110.0	V	0.0	28.4	2.8	22.8	54
6997.500000	34.5	110.0	V	0.0	28.0	6.5	19.5	54
9217.500000	36.2	110.0	V	320.0	26.2	10.0	17.8	54
12639.375000	40.2	210.0	H	205.0	25.7	14.5	13.8	54
18000.000000	50.9	210.0	V	177.0	25.4	25.5	3.1	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

BELL\_RE 18-26.5GHz PK+AV

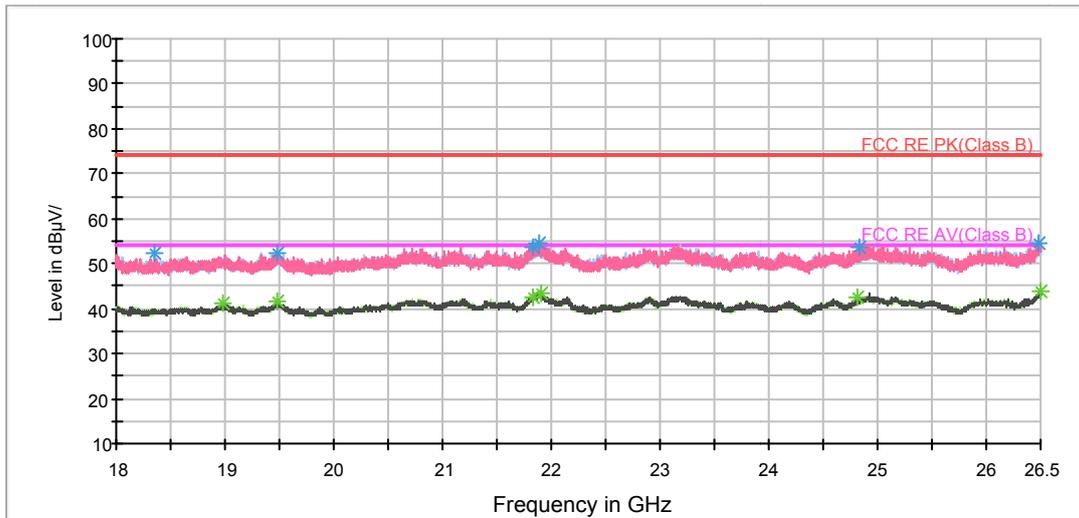

Radiates Emission from 18GHz to 26.5GHz


Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18349.562500	52.1	H	225.0	51.4	0.7	21.9	74
19487.500000	52.4	V	64.0	52.3	0.1	21.6	74
21825.000000	53.7	H	211.0	55.7	-2.0	20.3	74
21894.062500	54.5	V	55.0	56.1	-1.6	19.5	74
24836.125000	53.5	V	221.0	53.2	0.3	20.5	74
26485.125000	54.5	V	200.0	53.4	1.1	19.5	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18982.812500	41.0	H	202.0	41.1	-0.1	13.0	54
19484.312500	41.9	V	45.0	41.8	0.1	12.1	54
21827.125000	42.7	V	55.0	44.6	-1.9	11.3	54
21903.625000	43.6	H	168.0	45.2	-1.6	10.4	54
24818.062500	42.3	V	55.0	42.1	0.2	11.7	54
26498.937500	43.9	V	45.0	42.8	1.1	10.1	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




FCC RE 0.03-1GHz QP Class B

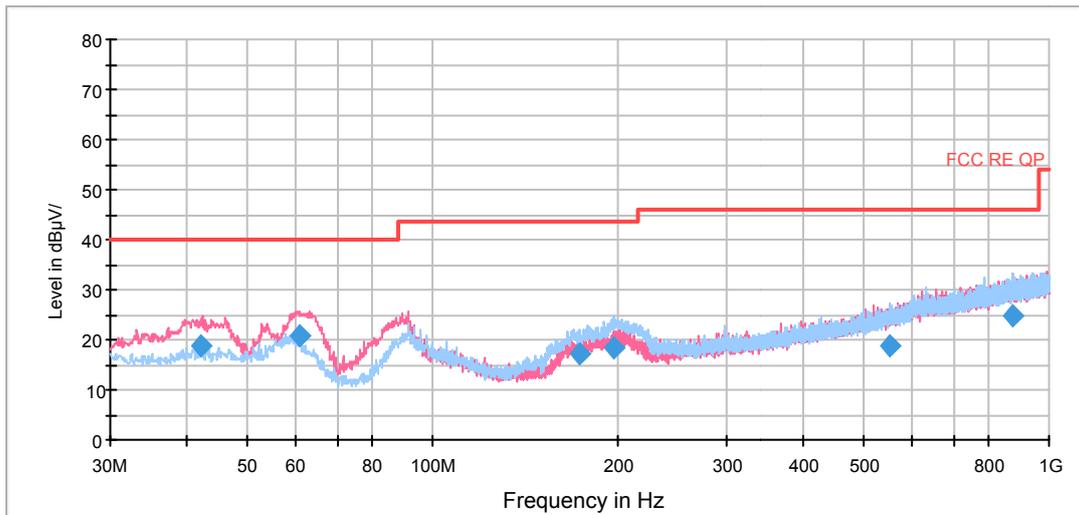

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
42.007500	18.8	100.0	V	133.0	5.5	13.3	21.2	40.0
60.872500	20.8	125.0	V	129.0	8.5	12.3	19.2	40.0
173.153750	17.2	202.0	H	97.0	6.5	10.7	26.3	43.5
196.921250	18.5	175.0	H	84.0	6.5	12.0	25.0	43.5
551.940000	18.7	125.0	H	0.0	-2.9	21.6	27.3	46.0
871.360000	25.0	213.0	H	346.0	-1.3	26.3	21.0	46.0

RE 1G-3GHz PK+AV

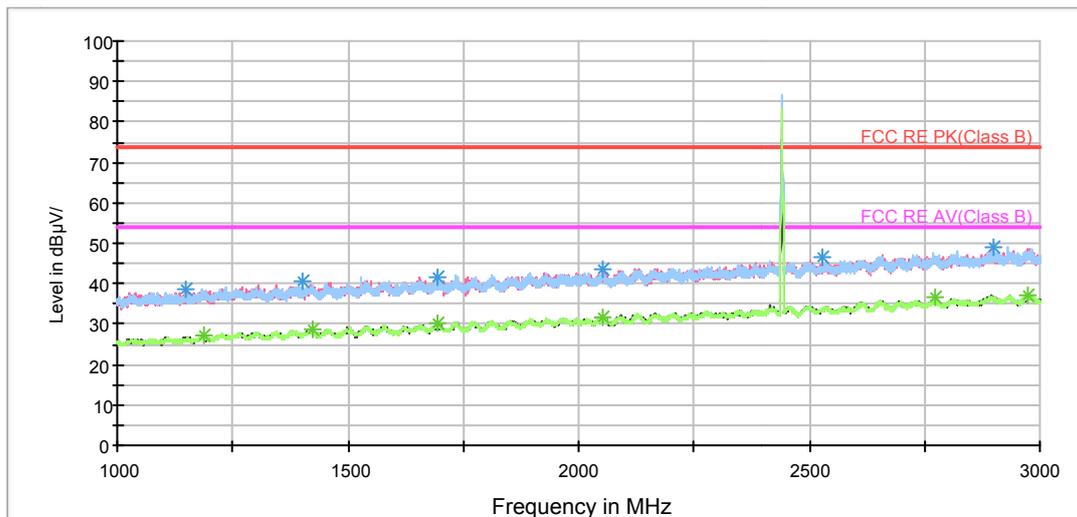


Radiates Emission from 1GHz to 3GHz  
 Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1149.500000	38.5	210.0	V	32.0	47.0	-8.5	35.5	74
1403.500000	40.6	110.0	H	15.0	47.7	-7.1	33.4	74
1696.250000	41.6	110.0	H	279.0	46.6	-5.0	32.4	74
2054.250000	43.3	210.0	H	250.0	46.5	-3.2	30.7	74
2528.750000	46.5	210.0	V	275.0	46.8	-0.3	27.5	74
2897.500000	49.1	110.0	V	0.0	47.0	2.1	24.9	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1186.250000	27.0	110.0	H	162.0	35.1	-8.1	27.0	54
1423.500000	28.8	210.0	V	46.0	35.7	-6.9	25.2	54
1695.250000	30.3	110.0	V	262.0	35.3	-5.0	23.7	54
2050.750000	31.7	210.0	H	228.0	34.9	-3.2	22.3	54
2774.250000	36.4	210.0	V	133.0	35.6	0.8	17.6	54
2972.000000	37.2	110.0	V	0.0	35.0	2.2	16.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

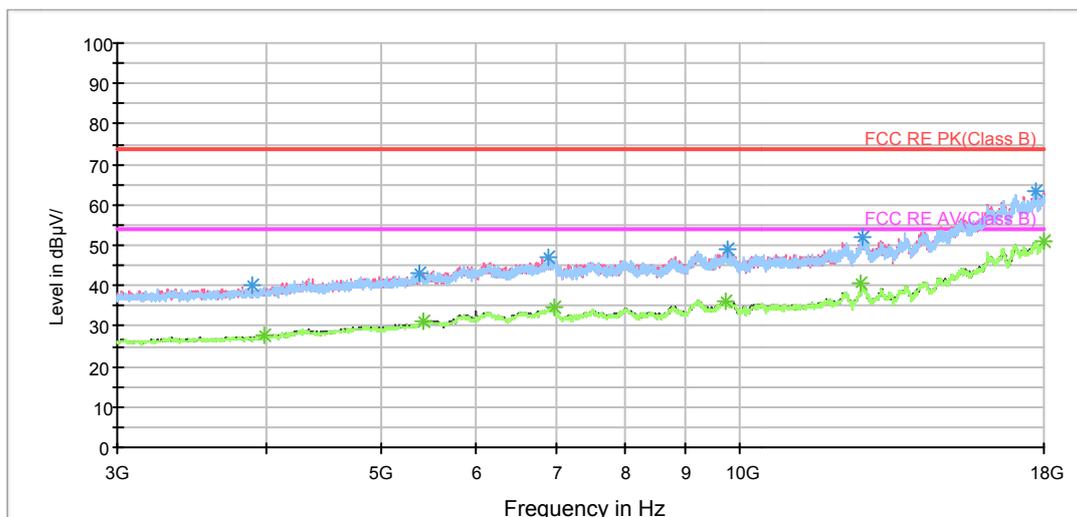


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3894.375000	39.9	110.0	H	201.0	41.2	-1.3	34.1	74
5390.625000	43.0	210.0	H	317.0	40.6	2.4	31.0	74
6900.000000	46.8	110.0	V	271.0	40.5	6.3	27.2	74
9783.750000	48.8	110.0	H	42.0	39.0	9.8	25.2	74
12673.125000	52.1	110.0	V	248.0	38.0	14.1	21.9	74
17700.000000	63.3	210.0	H	0.0	38.6	24.7	10.7	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3990.000000	27.6	210.0	V	65.0	28.6	-1.0	26.4	54
5431.875000	31.1	210.0	V	65.0	28.3	2.8	22.9	54
6997.500000	34.5	110.0	H	0.0	28.0	6.5	19.5	54
9744.375000	36.2	110.0	H	65.0	26.3	9.9	17.8	54
12639.375000	40.4	110.0	V	271.0	25.9	14.5	13.6	54
18000.000000	51.1	210.0	H	294.0	25.6	25.5	2.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

BELL\_RE 18-26.5GHz PK+AV

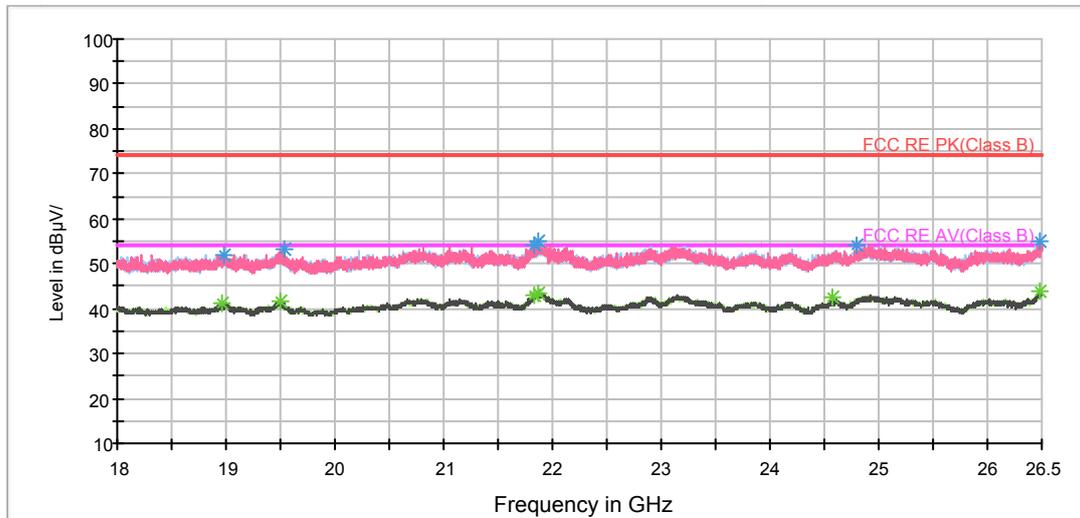

Radiates Emission from 18GHz to 26.5GHz


Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18974.312500	52.1	H	168.0	52.2	-0.1	21.9	74
19534.250000	53.2	V	237.0	53.2	0.0	20.8	74
21836.687500	53.9	H	358.0	55.8	-1.9	20.1	74
21877.062500	55.2	H	218.0	56.9	-1.7	18.8	74
24803.187500	54.1	H	218.0	54.0	0.1	19.9	74
26474.500000	55.2	V	254.0	54.1	1.1	18.8	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18970.062500	41.0	H	53.0	41.1	-0.1	13.0	54
19496.000000	41.4	H	98.0	41.3	0.1	12.6	54
21839.875000	42.9	V	3.0	44.8	-1.9	11.1	54
21872.812500	43.4	V	37.0	45.1	-1.7	10.6	54
24577.937500	42.5	V	53.0	42.7	-0.2	11.5	54
26490.437500	43.8	V	94.0	42.7	1.1	10.2	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




FCC RE 0.03-1GHz QP Class B

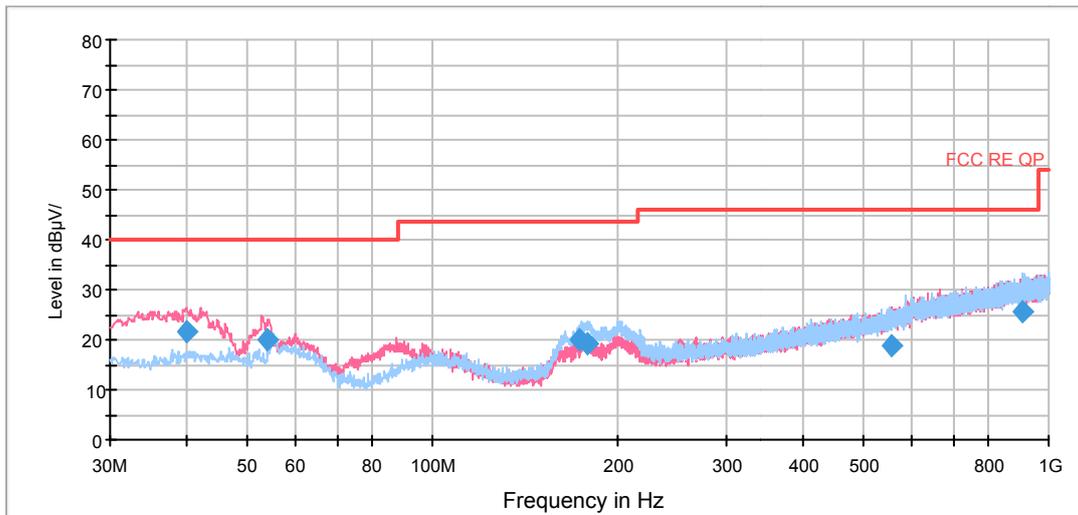

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
40.021250	21.6	100.0	V	153.0	8.3	13.3	18.4	40.0
54.010000	20.1	100.0	V	128.0	7.1	13.0	19.9	40.0
173.675000	19.9	125.0	H	118.0	9.2	10.7	23.6	43.5
179.018750	19.0	125.0	H	126.0	8.0	11.0	24.5	43.5
554.970000	18.8	114.0	V	341.0	-3.0	21.8	27.2	46.0
904.985000	25.4	125.0	H	47.0	-1.5	26.9	20.6	46.0

RE 1G-3GHz PK+AV

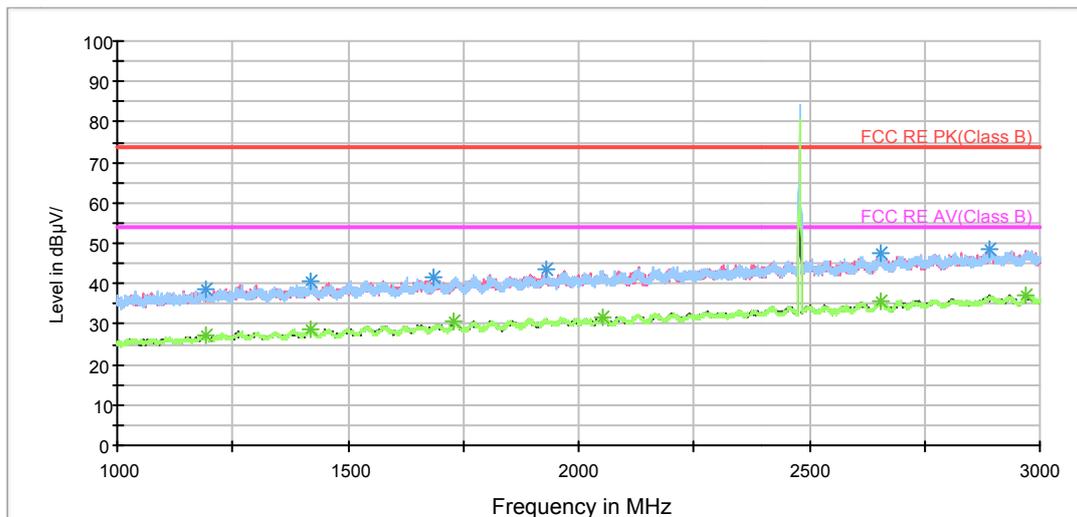


Radiates Emission from 1GHz to 3GHz  
 Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1193.000000	38.4	110.0	V	0.0	46.6	-8.2	35.6	74
1419.250000	40.4	210.0	H	323.0	47.3	-6.9	33.6	74
1683.750000	41.6	110.0	V	201.0	46.6	-5.0	32.4	74
1930.500000	43.5	210.0	V	0.0	47.2	-3.7	30.5	74
2655.750000	47.5	110.0	H	285.0	47.1	0.4	26.5	74
2890.750000	48.7	210.0	H	204.0	46.5	2.2	25.3	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1190.500000	27.4	110.0	V	259.0	35.6	-8.2	26.6	54
1418.250000	28.9	110.0	H	4.0	35.8	-6.9	25.1	54
1731.000000	30.5	110.0	V	0.0	35.4	-4.9	23.5	54
2051.750000	31.9	210.0	H	227.0	35.1	-3.2	22.1	54
2655.250000	35.8	210.0	V	0.0	35.4	0.4	18.2	54
2971.500000	37.1	210.0	V	73.0	34.9	2.2	16.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

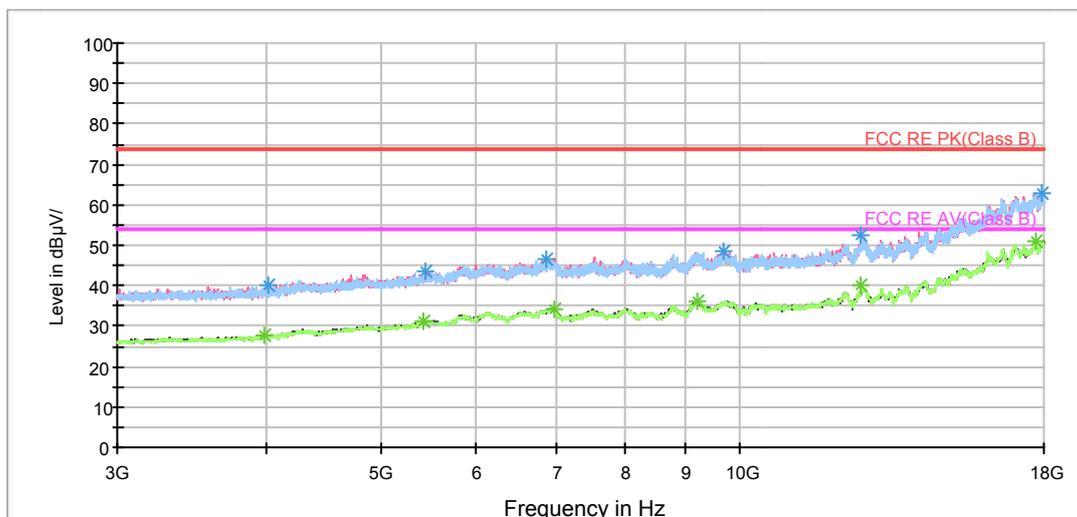


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4021.875000	40.0	210.0	H	297.0	41.1	-1.1	34.0	74
5448.750000	43.4	110.0	H	222.0	40.6	2.8	30.6	74
6866.250000	46.5	110.0	V	0.0	40.6	5.9	27.5	74
9682.500000	48.3	210.0	V	222.0	38.8	9.5	25.7	74
12648.750000	52.3	110.0	H	38.0	38.1	14.2	21.7	74
17911.875000	62.9	110.0	V	0.0	37.4	25.5	11.1	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3990.000000	27.7	210.0	V	199.0	28.7	-1.0	26.3	54
5431.875000	31.0	210.0	V	291.0	28.2	2.8	23.0	54
6993.750000	34.4	110.0	H	269.0	27.9	6.5	19.6	54
9215.625000	36.2	210.0	H	253.0	26.2	10.0	17.8	54
12641.250000	40.3	110.0	H	269.0	25.8	14.5	13.7	54
17716.875000	51.0	110.0	H	292.0	26.4	24.6	3.0	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

BELL\_RE 18-26.5GHz PK+AV

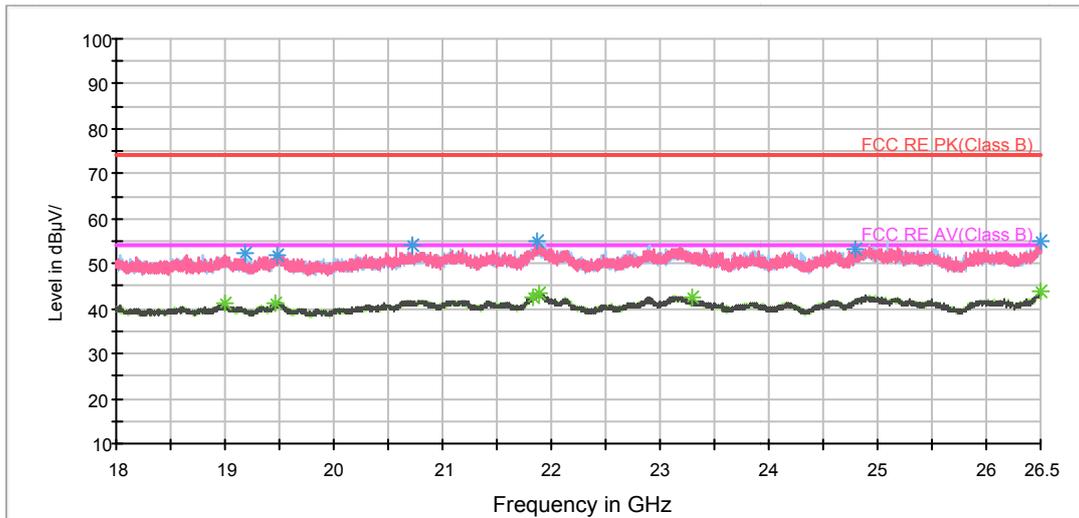

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
19190.000000	52.3	H	225.0	52.7	-0.4	21.7	74
19479.000000	52.1	V	56.0	52.0	0.1	21.9	74
20718.937500	54.0	V	56.0	55.5	-1.5	20.0	74
21873.875000	55.2	H	225.0	56.9	-1.7	18.8	74
24802.125000	53.2	V	116.0	53.1	0.1	20.8	74
26498.937500	55.0	H	91.0	53.9	1.1	19.0	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
19001.937500	41.2	V	73.0	41.4	-0.2	12.8	54
19458.812500	41.3	H	153.0	41.3	0.0	12.7	54
21839.875000	42.6	H	162.0	44.5	-1.9	11.4	54
21886.625000	43.6	V	45.0	45.2	-1.6	10.4	54
23302.937500	42.4	V	45.0	42.4	0.0	11.6	54
26497.875000	43.9	H	197.0	42.8	1.1	10.1	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

### 4.11 Conducted Emission


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line. The test is in transmitting mode.

#### Test Setup

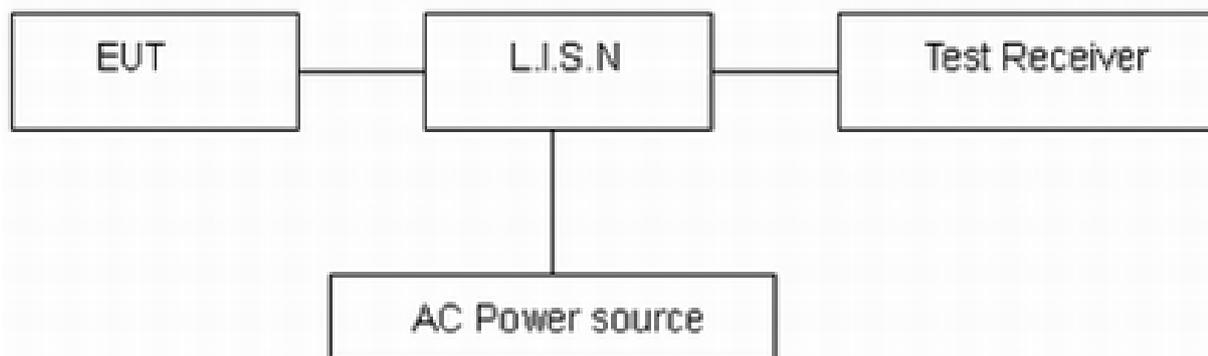

Note: AC Power source is used 120V/60Hz.

#### Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

\*: Decreases with the logarithm of the frequency.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=2.69$  dB.



Test Results:

Following plots, Blue trace uses the peak detection, Green trace uses the average detection.

Basic Rate-CH0 L Line		Final Result									
Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)		
0.429000	---	31.57	47.27	15.70	1000.0	9.000	L1	ON	19.2		
0.447000	45.74	---	56.93	11.19	1000.0	9.000	L1	ON	19.2		
0.451500	47.21	---	56.85	9.63	1000.0	9.000	L1	ON	19.2		
0.527500	---	35.39	46.00	10.61	1000.0	9.000	L1	ON	19.3		
0.590000	42.74	---	56.00	13.26	1000.0	9.000	L1	ON	19.2		
1.230000	---	33.02	46.00	12.98	1000.0	9.000	L1	ON	19.2		
2.233500	35.68	---	56.00	20.32	1000.0	9.000	L1	ON	19.1		
2.510750	---	29.51	46.00	16.49	1000.0	9.000	L1	ON	19.1		
6.339750	---	32.74	50.00	17.26	1000.0	9.000	L1	ON	19.1		
11.836500	39.93	---	60.00	20.07	1000.0	9.000	L1	ON	19.4		
12.500250	38.88	---	60.00	21.12	1000.0	9.000	L1	ON	19.4		
12.835500	---	30.41	50.00	19.59	1000.0	9.000	L1	ON	19.5		

Basic Rate-CH0 N Line		Final Result									
Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)		
0.354750	---	33.73	48.85	15.13	1000.0	9.000	N	ON	19.2		
0.447000	45.74	---	56.93	11.19	1000.0	9.000	N	ON	19.2		
0.467250	46.69	---	56.56	9.87	1000.0	9.000	N	ON	19.2		
0.537000	---	35.69	46.00	10.31	1000.0	9.000	N	ON	19.2		
0.795750	43.70	---	56.00	12.30	1000.0	9.000	N	ON	19.2		
1.126500	---	33.54	46.00	12.46	1000.0	9.000	N	ON	19.2		
2.636250	---	30.98	46.00	15.02	1000.0	9.000	N	ON	19.0		
3.421000	37.96	---	60.00	19.04	1000.0	9.000	N	ON	19.1		
6.600750	---	33.09	50.00	16.91	1000.0	9.000	N	ON	19.1		
6.751500	41.99	---	60.00	18.01	1000.0	9.000	N	ON	19.1		
12.369750	37.50	---	60.00	22.50	1000.0	9.000	N	ON	19.4		
12.527250	---	28.16	50.00	21.84	1000.0	9.000	N	ON	19.4		

Basic Rate-CH39 L Line		Final Result									
Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)		
0.426750	---	31.41	47.32	15.91	1000.0	9.000	L1	ON	19.2		
0.451500	46.38	---	56.85	10.47	1000.0	9.000	L1	ON	19.2		
0.505000	---	35.30	46.00	10.70	1000.0	9.000	L1	ON	19.3		
0.984750	43.08	---	56.00	12.52	1000.0	9.000	L1	ON	19.2		
1.221000	---	33.38	46.00	12.62	1000.0	9.000	L1	ON	19.2		
2.550750	36.92	---	56.00	19.08	1000.0	9.000	L1	ON	19.0		
2.834250	---	30.25	46.00	15.75	1000.0	9.000	L1	ON	19.0		
6.310000	41.92	---	60.00	18.08	1000.0	9.000	L1	ON	19.1		
6.571500	---	32.84	50.00	17.16	1000.0	9.000	L1	ON	19.1		
12.471000	39.62	---	60.00	20.39	1000.0	9.000	L1	ON	19.4		
12.475500	---	30.13	50.00	19.87	1000.0	9.000	L1	ON	19.4		
20.719500	36.68	---	60.00	23.32	1000.0	9.000	L1	ON	19.7		

Basic Rate-CH39 N Line		Final Result									
Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)		
0.352500	---	33.59	48.90	15.31	1000.0	9.000	N	ON	19.2		
0.366000	45.94	---	58.59	12.66	1000.0	9.000	N	ON	19.2		
0.465000	46.45	---	56.60	10.15	1000.0	9.000	N	ON	19.2		
0.537000	---	35.59	46.00	10.41	1000.0	9.000	N	ON	19.2		
0.987000	43.91	---	56.00	12.09	1000.0	9.000	N	ON	19.2		
1.349250	---	33.52	46.00	12.48	1000.0	9.000	N	ON	19.2		
2.215500	38.63	---	56.00	17.37	1000.0	9.000	N	ON	19.1		
2.937500	---	31.06	46.00	14.94	1000.0	9.000	N	ON	19.1		
6.689750	---	32.74	50.00	17.26	1000.0	9.000	N	ON	19.1		
11.148000	39.72	---	60.00	20.28	1000.0	9.000	N	ON	19.4		
12.390000	---	28.37	50.00	21.63	1000.0	9.000	N	ON	19.4		
12.426000	37.31	---	60.00	22.69	1000.0	9.000	N	ON	19.4		


Basic Rate-CH78 L Line		Final Result									
Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)		
0.424500	---	31.03	47.36	16.33	1000.0	9.000	L1	ON	19.2		
0.444750	46.25	---	56.97	10.72	1000.0	9.000	L1	ON	19.2		
0.550500	---	35.13	46.00	10.87	1000.0	9.000	L1	ON	19.3		
0.861000	42.25	---	56.00	13.75	1000.0	9.000	L1	ON	19.2		
1.176000	41.53	---	56.00	14.47	1000.0	9.000	L1	ON	19.2		
1.218750	---	33.38	46.00	12.62	1000.0	9.000	L1	ON	19.2		
2.548500	37.14	---	56.00	18.86	1000.0	9.000	L1	ON	19.0		
2.827500	---	30.48	46.00	15.52	1000.0	9.000	L1	ON	19.0		
6.843750	43.55	---	60.00	16.45	1000.0	9.000	L1	ON	19.2		
7.127250	---	32.79	50.00	17.21	1000.0	9.000	L1	ON	19.2		
12.441750	---	29.63	50.00	20.37	1000.0	9.000	L1	ON	19.4		
12.455250	38.43	---	60.00	21.57	1000.0	9.000	L1	ON	19.4		

Basic Rate-CH78 N Line		Final Result									
Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)		
0.354750	---	33.58	48.85	15.27	1000.0	9.000	N	ON	19.2		
0.447000	45.78	---	56.93	11.15	1000.0	9.000	N	ON	19.2		
0.465000	46.47	---	56.60	10.13	1000.0	9.000	N	ON	19.2		
0.537000	---	35.59	46.00	10.41	1000.0	9.000	N	ON	19.2		
0.991500	44.23	---	56.00	11.77	1000.0	9.000	N	ON	19.2		
1.688250	---	33.23	46.00	12.77	1000.0	9.000	N	ON	19.2		
2.330250	38.33	---	56.00	17.67	1000.0	9.000	N	ON	19.0		
2.636250	---	31.04	46.00	14.96	1000.0	9.000	N	ON	19.0		
6.889250	---	32.96	50.00	17.04	1000.0	9.000	N	ON	19.1		
11.154000	39.64	---	60.00	20.36	1000.0	9.000	N	ON	19.4		
12.340500	36.55	---	60.00	23.45	1000.0	9.000	N	ON	19.4		
12.392250	---	28.21	50.00	21.79	1000.0	9.000	N	ON	19.4		




### EDR-CH0 L Line

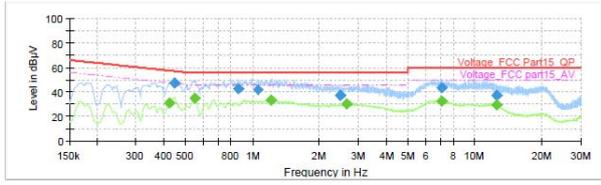

#### Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.424500	---	30.99	47.36	16.37	1000.0	9.000	L1	ON	19.2
0.447000	47.13	---	56.93	9.80	1000.0	9.000	L1	ON	19.2
0.548250	---	35.19	46.00	10.81	1000.0	9.000	L1	ON	19.3
0.861000	42.26	---	56.00	13.74	1000.0	9.000	L1	ON	19.2
1.054900	41.64	---	56.00	14.36	1000.0	9.000	L1	ON	19.2
1.216500	---	33.36	46.00	12.64	1000.0	9.000	L1	ON	19.2
2.478750	37.57	---	56.00	18.43	1000.0	9.000	L1	ON	19.0
2.654250	---	30.41	46.00	15.59	1000.0	9.000	L1	ON	19.0
7.122750	---	32.78	50.00	17.22	1000.0	9.000	L1	ON	19.2
7.125000	43.25	---	60.00	16.75	1000.0	9.000	L1	ON	19.2
12.482250	---	29.09	50.00	20.91	1000.0	9.000	L1	ON	19.4
12.502500	37.59	---	60.00	22.41	1000.0	9.000	L1	ON	19.4


### EDR-CH0 N Line

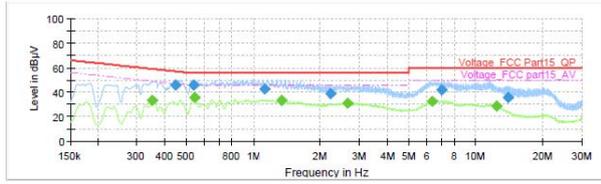

#### Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.352500	---	33.54	48.90	15.36	1000.0	9.000	N	ON	19.2
0.447000	45.79	---	56.93	11.14	1000.0	9.000	N	ON	19.2
0.537000	45.44	---	56.00	10.56	1000.0	9.000	N	ON	19.2
0.546000	---	35.57	46.00	10.43	1000.0	9.000	N	ON	19.2
1.135500	---	56.00	56.00	13.63	1000.0	9.000	N	ON	19.2
1.344750	---	33.16	46.00	12.84	1000.0	9.000	N	ON	19.2
2.217750	38.37	---	56.00	17.63	1000.0	9.000	N	ON	19.1
2.640750	---	30.91	46.00	15.09	1000.0	9.000	N	ON	19.0
6.399000	---	32.75	50.00	17.25	1000.0	9.000	N	ON	19.1
6.987750	42.18	---	60.00	17.82	1000.0	9.000	N	ON	19.2
12.387750	---	28.39	50.00	21.61	1000.0	9.000	N	ON	19.4
13.911000	35.83	---	60.00	24.17	1000.0	9.000	N	ON	19.4


### EDR-CH39 L Line

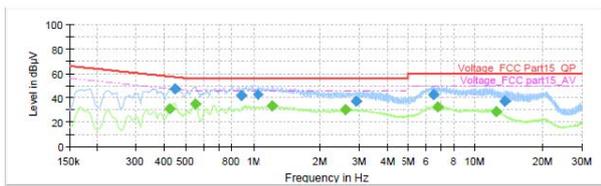

#### Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.424500	---	30.96	47.36	16.40	1000.0	9.000	L1	ON	19.2
0.447000	47.14	---	56.93	9.79	1000.0	9.000	L1	ON	19.2
0.548250	---	35.18	46.00	10.82	1000.0	9.000	L1	ON	19.3
0.883500	41.61	---	56.00	14.39	1000.0	9.000	L1	ON	19.2
1.050000	42.53	---	56.00	13.47	1000.0	9.000	L1	ON	19.2
1.218750	---	33.37	46.00	12.63	1000.0	9.000	L1	ON	19.2
2.589000	---	30.38	46.00	15.62	1000.0	9.000	L1	ON	19.0
2.901750	37.03	---	56.00	18.97	1000.0	9.000	L1	ON	19.1
6.499500	42.79	---	60.00	17.21	1000.0	9.000	L1	ON	19.1
6.789750	---	32.70	50.00	17.30	1000.0	9.000	L1	ON	19.1
12.439500	---	29.01	50.00	20.99	1000.0	9.000	L1	ON	19.4
13.555500	36.89	---	60.00	23.11	1000.0	9.000	L1	ON	19.5


### EDR-CH39 N Line

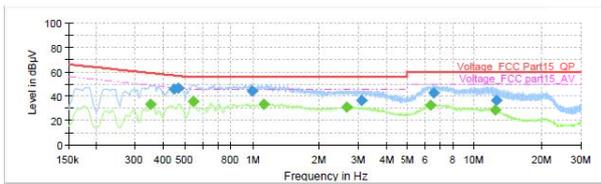

#### Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.352500	---	33.53	48.90	15.37	1000.0	9.000	N	ON	19.2
0.447000	45.81	---	56.93	11.12	1000.0	9.000	N	ON	19.2
0.467250	46.65	---	56.56	9.91	1000.0	9.000	N	ON	19.2
0.546000	---	35.58	46.00	10.42	1000.0	9.000	N	ON	19.2
0.989250	44.15	---	56.00	11.85	1000.0	9.000	N	ON	19.2
1.126500	---	33.51	46.00	12.49	1000.0	9.000	N	ON	19.2
2.640750	---	30.88	46.00	15.12	1000.0	9.000	N	ON	19.0
3.081750	36.65	---	56.00	19.35	1000.0	9.000	N	ON	19.1
6.354500	---	32.87	50.00	17.13	1000.0	9.000	N	ON	19.1
6.546750	42.71	---	60.00	17.29	1000.0	9.000	N	ON	19.1
12.369750	---	28.42	50.00	21.58	1000.0	9.000	N	ON	19.4
12.574500	36.11	---	60.00	23.89	1000.0	9.000	N	ON	19.4


### EDR-CH78 L Line

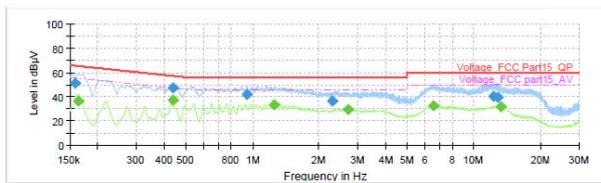

#### Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.199000	50.94	---	65.52	14.57	1000.0	9.000	L1	ON	19.1
0.163500	---	36.78	55.28	18.50	1000.0	9.000	L1	ON	19.1
0.435750	---	37.39	47.14	9.75	1000.0	9.000	L1	ON	19.2
0.438000	47.09	---	57.10	10.01	1000.0	9.000	L1	ON	19.2
0.939750	41.67	---	56.00	14.33	1000.0	9.000	L1	ON	19.2
1.257000	---	33.23	46.00	12.77	1000.0	9.000	L1	ON	19.2
2.298750	36.31	---	56.00	19.69	1000.0	9.000	L1	ON	19.0
2.703750	---	29.69	46.00	16.31	1000.0	9.000	L1	ON	19.0
6.603000	---	32.49	50.00	17.52	1000.0	9.000	L1	ON	19.1
12.313500	40.52	---	60.00	19.48	1000.0	9.000	L1	ON	19.4
12.813000	39.36	---	60.00	20.64	1000.0	9.000	L1	ON	19.5
13.285250	---	31.56	50.00	18.44	1000.0	9.000	L1	ON	19.5

### EDR-CH78 N Line

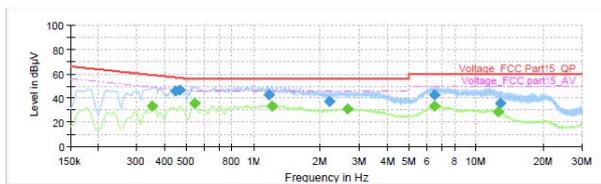

#### Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.352500	---	33.68	48.90	15.22	1000.0	9.000	N	ON	19.2
0.447000	45.72	---	56.93	11.21	1000.0	9.000	N	ON	19.2
0.465000	46.56	---	56.60	10.04	1000.0	9.000	N	ON	19.2
0.543750	---	35.62	46.00	10.38	1000.0	9.000	N	ON	19.2
1.182750	42.65	---	56.00	13.35	1000.0	9.000	N	ON	19.2
1.223250	---	33.20	46.00	12.80	1000.0	9.000	N	ON	19.2
2.206500	37.59	---	56.00	18.41	1000.0	9.000	N	ON	19.1
2.640750	---	30.75	46.00	15.25	1000.0	9.000	N	ON	19.0
6.486000	---	33.01	50.00	16.99	1000.0	9.000	N	ON	19.1
6.522000	42.99	---	60.00	17.01	1000.0	9.000	N	ON	19.1
12.468750	---	28.31	50.00	21.69	1000.0	9.000	N	ON	19.4
12.904000	35.77	---	60.00	24.23	1000.0	9.000	N	ON	19.5


## 5 Main Test Instruments

Name	Type	Manufacturer	Serial Number	Calibration Date	Expiration Time
BT Base Station Simulator	CBT	R&S	100271	2017-05-14	2018-05-13
Loop Antenna	FMZB1519	SCHWARZBEC K	1519-047	2017-02-18	2020-02-17
EMI Test Receiver	ESCS30	R&S	100138	2016-12-16	2017-12-15
Artificial main network	ENV216	R&S	101171	2016-12-16	2019-12-15
Signal Analyzer	FSV30	R&S	100815	2016-12-16	2017-12-15
EMI Test Receiver	ESCI	R&S	100948	2017-05-20	2018-05-19
TRILOG Broadband Antenna	VULB 9163	Schwarzbeck	9163-201	2014-12-06	2017-12-05
Double Ridged Waveguide Horn Antenna	HF907	R&S	100126	2014-12-06	2017-12-05
Power Splitter	SHX-GF2-2-13	Hua Xiang	10120101	NA	NA
Spectrum Analyzer	N9010A	Agilent	MY47191109	2017-05-20	2018-05-19
Standard Gain Horn	3160-09	ETS-Lindgren	00102644	2015-01-30	2018-01-29
RF Cable	SMA 15cm	Agilent	0001	2017-02-06	2017-08-05

\*\*\*\*\*END OF REPORT \*\*\*\*\*

## ANNEX A: EUT Appearance and Test Setup

### A.1 EUT Appearance

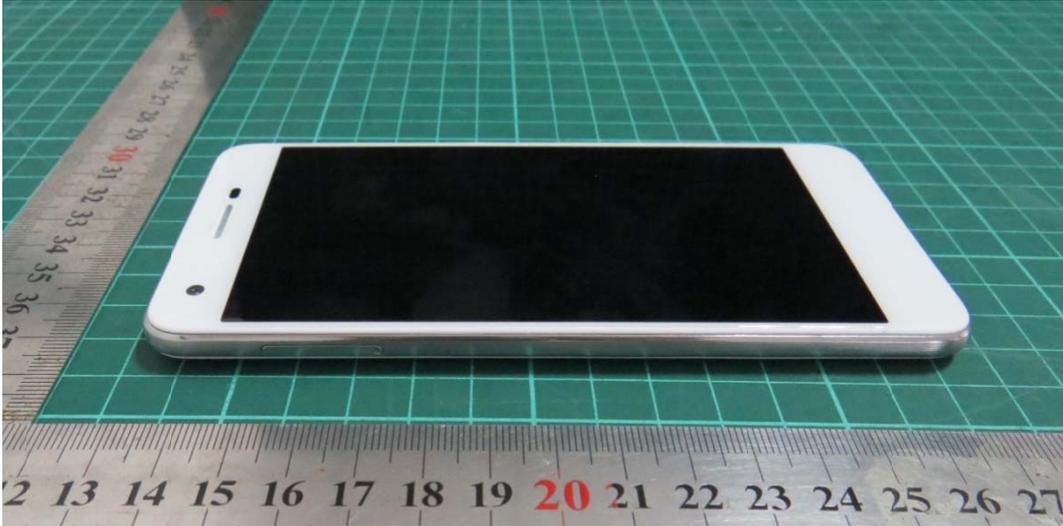

Front Side



Back Side  
a: EUT



b: Adapter




c: Earphone




d: USB Cable

Picture 1 EUT and Accessory

## A.2 Test Setup

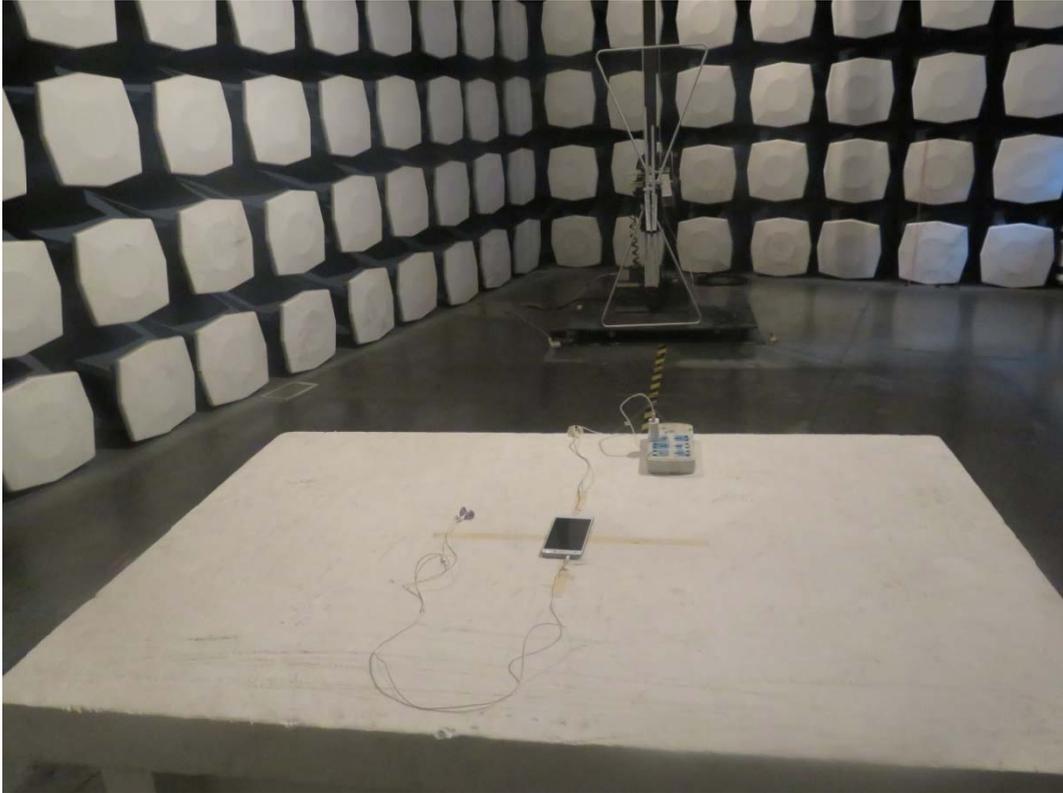

Below 1GHz

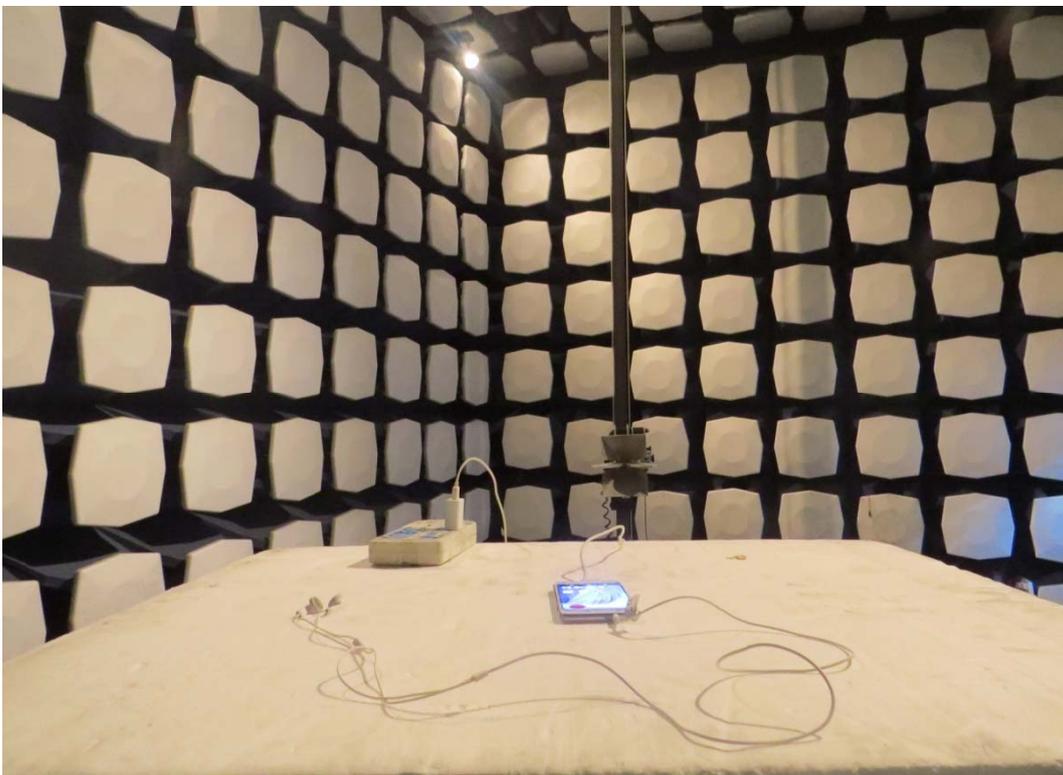

Above 1GHz

**Picture 2 Radiated Emission Test Setup**



**Picture 3 Conducted Emission Test Setup**