



EMC TEST REPORT

Report No.: SET2016-04654

Product Name: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone

FCC ID: SRQ- BLADEL110

Model No. : ZTE Blade L110, Blade L110, ZTE BLADE L110, BLADE L110

Applicant: ZTE CORPORATION

Address: ZTE Plaza, Keji Road South, Shenzhen, China

Received Date: 2016-02-25

Tested Date: 2016-02-27—2016-03-10

Issued by: CCIC-SET

Lab Location: Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055, P. R. China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **18** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name : WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone

Model No. : ZTE Blade L110, Blade L110, ZTE BLADE L110,
BLADE L110

Applicant..... : ZTE CORPORATION

Applicant Address..... : ZTE Plaza, Keji Road South, Shenzhen, China

Manufacturer..... : ZTE CORPORATION

Manufacturer Address : ZTE Plaza, Keji Road South, Shenzhen, China

Test Standards..... : 47 CFR Part 15 Subpart B: Radio Frequency Devices

Test Result : PASS

Tested by : Xiaolong Zhang 2016.03.12
Xiaolong Zhang, Test Engineer

Reviewed by..... : Shuangwen Zhang 2016.03.12
Shuangwen Zhang, Senior Engineer

Approved by : Wu Lian 2016.03.12
Wu Lian, Manager



TABLE OF CONTENTS

- 1. GENERAL INFORMATION4**
- 1.1 EUT Description4**
- 1.2 Test Standards and Results5**
- 1.3 Facilities and Accreditations6**
 - 1.3.1 Facilities6
 - 1.3.2 Test Environment Conditions6
 - 1.3.3 Measurement Uncertainty6
- 2. TEST CONDITIONS SETTING.....7**
- 2.1 Test Peripherals7**
- 2.2 Test Mode7**
- 2.3 Connection Diagram of Test System7**
- 2.4 Test Setup and Equipments List.....8**
 - 2.4.1 Conducted Emission.....8
 - 2.4.2 Radiated Emission.....8
- 3. 47 CFR PART 15B REQUIREMENTS 11**
- 3.1 Conducted Emission 11**
 - 3.1.1 Requirement 11
 - 3.1.2 Test Description 11
 - 3.1.3 Test Result 11
- 3.2 Radiated Emission14**
 - 3.2.1 Requirement 14
 - 3.2.2 Test Description 15
 - 3.2.3 Test Result 15

Change History		
Issue	Date	Reason for change
1.0	2016.03.12	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Name : WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone
 FCC ID..... : SRQ- BLADE L110
 Trade Name..... : ZTE
 Brand Name..... : ZTE
 Hardware Version..... : MBv1.0
 Software Version : CLA_GT_QB25S_P731A50V1.0.0
 Power Supply : Battery

Model No.: Li3814T43P3h634445
 Capacitance: 1400 mAh
 Rated Voltage: 3.8V
 Charge Limit: 4.35V

Ancillary Equipment..... : AC Adapter (Charger for Battery)
 Model No.: STC-A22O501500USBA-Z
 Rated Input: 100-240V, 50/60Hz ,200mA
 Rated Output: 5V=500mA
 Earphone model: /
 USB cable(Shield)

*Note1:*The EUT is a WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone, it supports the following operating frequency band:GSM850/900/1800/1900, WCDMA/850/1900, Wifi2.4G(b, g,n20M), GPS, Bluetooth3.0+EDR

*Note2:*The EUT is equipped with a T-Flash card slot; equipped with a USB port which can be connected to the ancillary equipments.

*Note 3:*The highest operation frequency or processor operate frequency is 1.3GHz.

*Note 4:*For a more detailed description, please refer to Specification or User’s Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B 2014	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2009.



1.3 Facilities and Accreditations

1.3.1 Facilities

CNAS-Lab Code: L1659

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. A 12.8*6.8*6.4 (m) fully anechoic chamber was used for the radiated spurious emissions test.

FCC-Registration No.: 406086

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 406086, valid time is until October 28, 2017.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.6 dB (k=2)
Uncertainty of Radiated Emission:	Uc = 4.5 dB (k=2)

2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
Notebook	ThinkPad	E430C	A131101550	N/A
Micro SD card	SanDisk	N/A	N/A	N/A
Mouse	Logitech	M100r	25011051	DOC
Printer	RICOH	SP200	JM175210006	N/A

Support Cable:


Description	Shield Type	Ferrite Core	Length
USB Cable	shielding	Yes	1.2m
RJ45 Cable	shielding	No	2m
Printer Power Cable	Un- shielding	No	1m
PC Power adapter Cable	Un- shielding	No	1.2m
Mouse Cable	Un- shielding	No	1m

2.2 Test Mode

The EUT configuration of the emission tests is TransFlash Card + EUT(USB Port) + Earphone+PC+Printer+Mouse.

2.3 Connection Diagram of Test System


The EUT is installed in a typical configuration . Test software exercised the EUT.

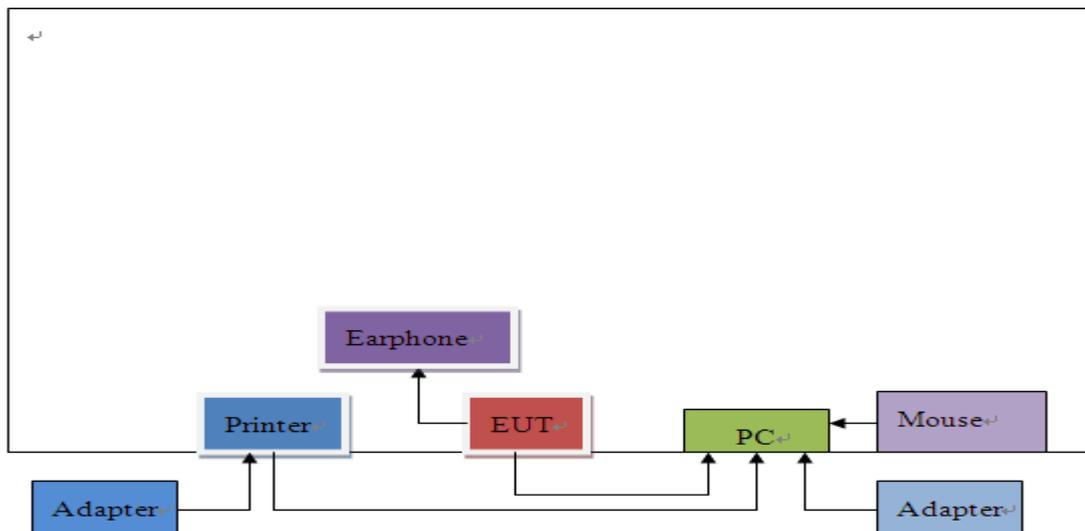

2.4 Test Setup and Equipments List

2.4.1 Conducted Emission

A. Test Setup:

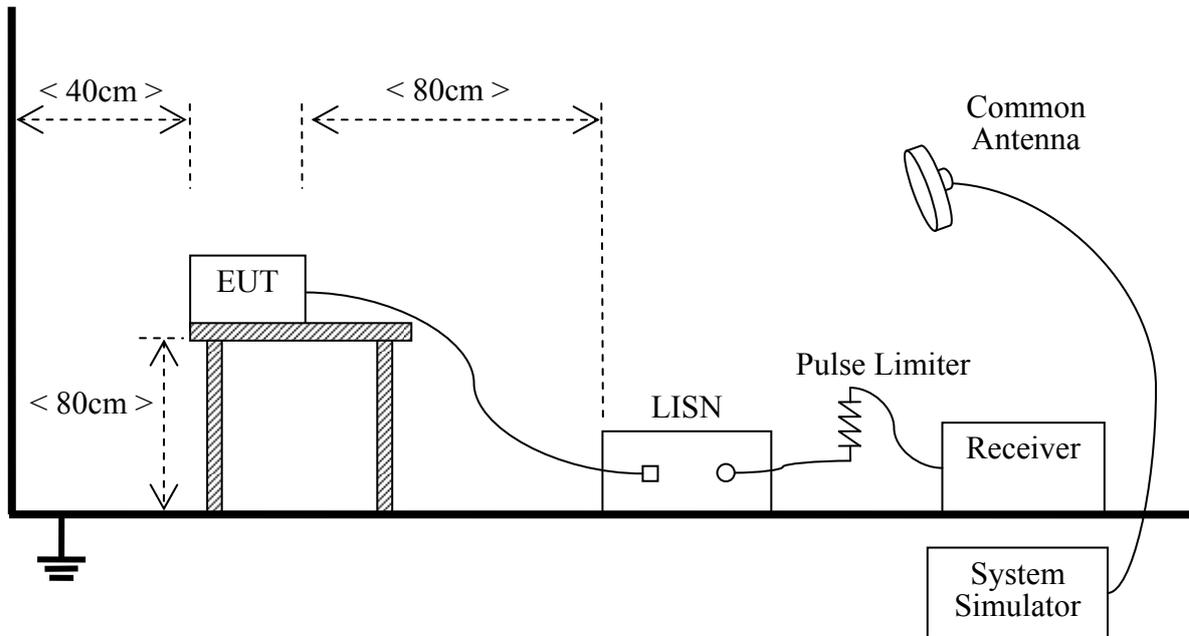

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


B. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	ROHDE&SCHWARZ	ESCI	A130901475	2015.09.09	2016.09.08
LISN	ROHDE&SCHWARZ	ENV216	/	2015.04.28	2016.04.27
Cable	MATCHING PAD	W7	/	2015.06.05	2016.06.04


2.4.2 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

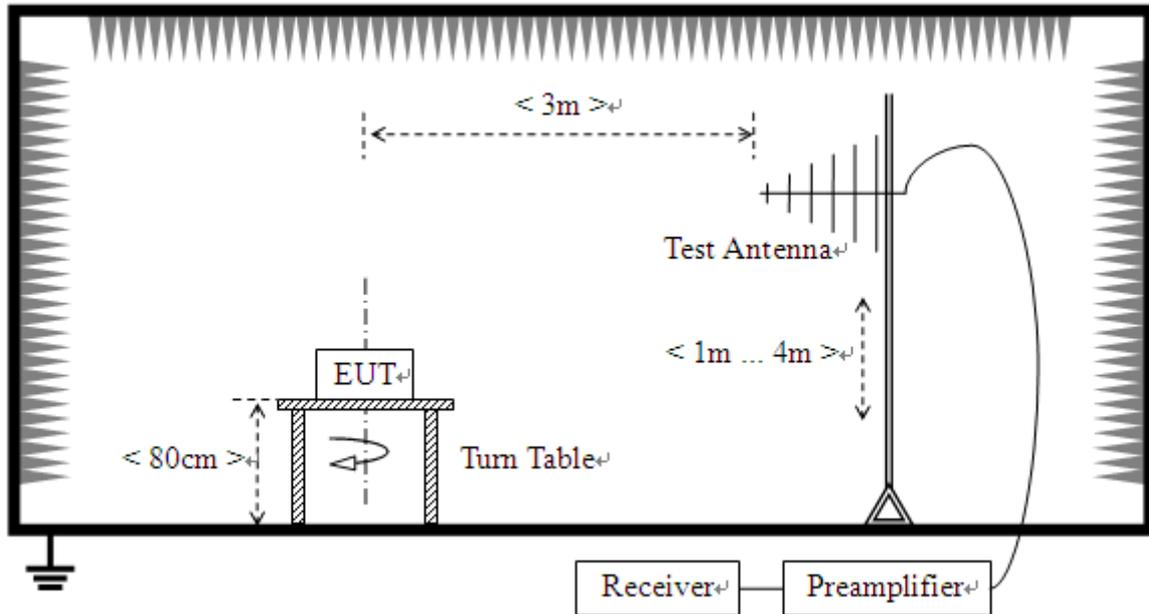

- 2) For radiated emissions above 1GHz

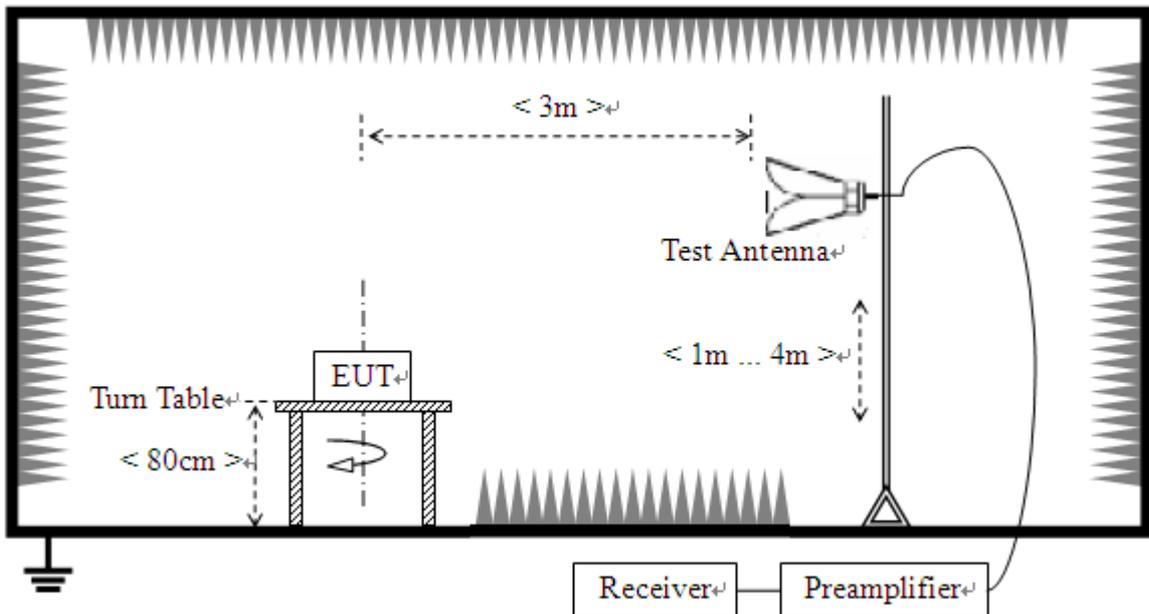

B. Test Procedure

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a



variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	ROHDE&SCHWARZ	ESIB7	A0501375	2015.06.10	2016.06.09
Test Receiver	ROHDE&SCHWARZ	ESIB26	A0304218	2015.06.10	2016.06.09
Semi-Anechoic Chamber	Albatross	9m*6m*6m	A0412372	2015.03.22	2016.03.21
Test Antenna - Bi-Log	HP	CBL6111A	A9704202	2015.06.10	2016.06.09
Test Antenna – Horn	ROHDE&SCHWARZ	HF906	A0304225	2015.06.10	2016.06.09
Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2015.03.22	2016.03.21
Amplifier 1G~18GHz	ROHDE&SCHWARZ	MITEQ AFS42-001018 00	A0509366	2015.06.10	2016.06.09
Amplifier 20M~3GHz	Compliance Direction System	PAP-0203H	A0509377	2015.06.10	2016.06.09
Cable	SUNHNER	SUCOFLEX 100	/	2015.06.10	2016.06.09
Cable	SUNHNER	SUCOFLEX 104	MY1758/4	2015.06.10	2016.06.09



3. 47 CFR PART 15B REQUIREMENTS

3.1 Conducted Emission

3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2 Test Description

See section 2.4.1 of this report.

3.1.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

Note:


Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC,50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.



Test voltage and frequency (120V AC,60Hz)

A. Test Plot and Suspicious Points:


FCC Part 15 Class B Voltage Test

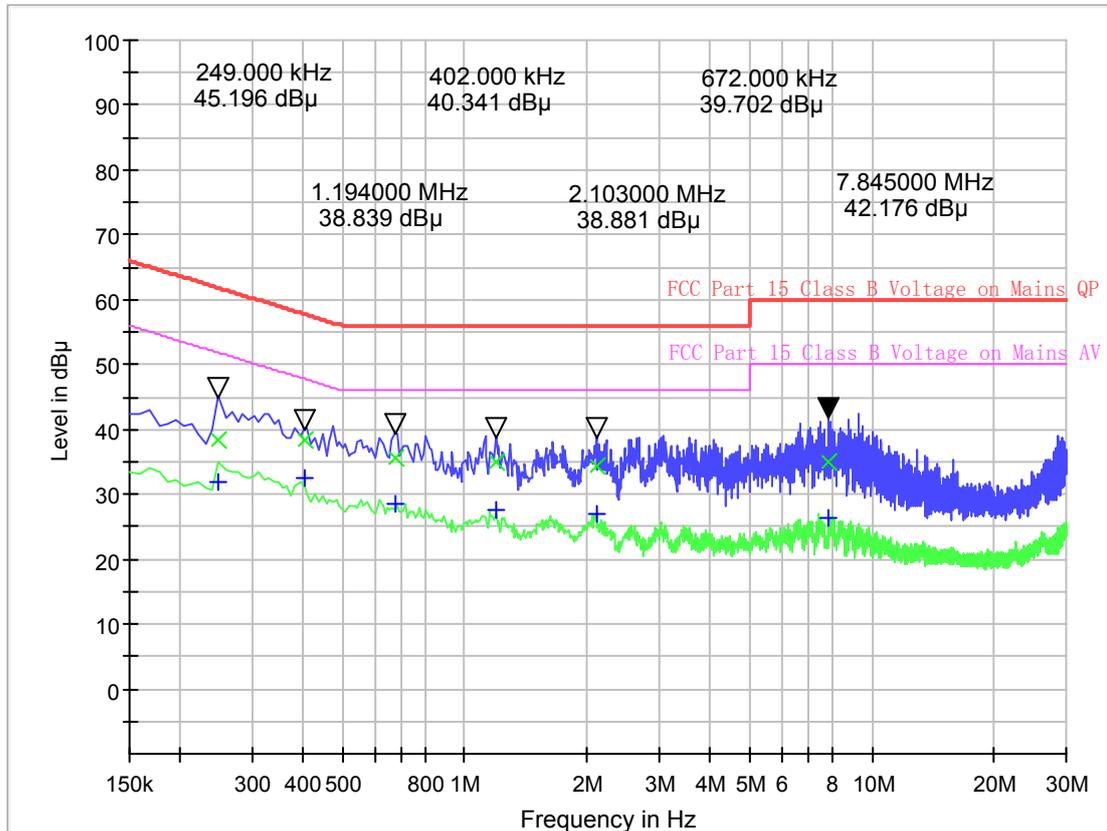

(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit - QPK (dB μ)	Limit - AVG (dB μ)	Line	Corr. (dB)	Margin - QPK (dB)	Margin - AVG
0.249000	38.24	32.04	61.8	51.8	L1	10.0	23.6	19.76
0.402000	38.35	32.49	57.8	47.8	L1	10.0	19.5	15.31
0.672000	35.70	28.57	56.0	46.0	L1	10.1	20.3	17.43
1.194000	34.95	27.65	56.0	46.0	L1	10.0	21.0	18.35
2.103000	34.31	27.05	56.0	46.0	L1	9.9	21.7	18.95
7.845000	35.05	26.32	60.0	46.0	L1	10.1	25.0	19.68

FCC Part 15 Class B Voltage Test

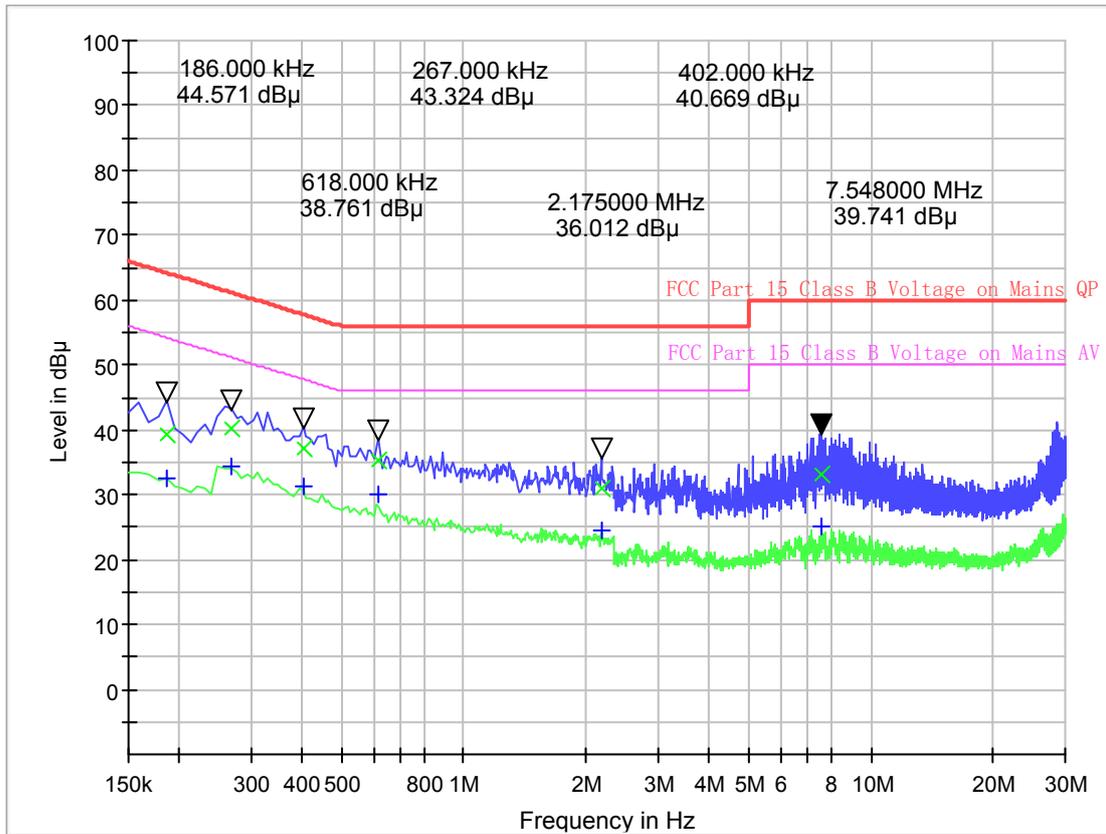

(Plot B: N Phase)

Frequency (MHz)	QuasiPeak (dB µ V)	Average (dB µ V)	Limit - QPK (dB µ)	Limit - AVG (dB µ)	Line	Corr. (dB)	Margin - QPK (dB)	Margin - AVG
0.186000	39.21	32.67	64.2	54.2	N	9.9	25.0	21.53
0.267000	40.30	34.43	61.2	51.2	N	10.0	20.9	16.77
0.402000	37.15	31.14	57.8	47.8	N	10.0	20.7	16.66
0.618000	35.23	29.92	56.0	46.0	N	10.0	20.8	16.08
2.175000	30.90	24.39	56.0	46.0	N	9.9	25.1	21.61
7.548000	33.00	25.05	60.0	46.0	N	10.1	27.0	20.95

Test Result: PASS



3.2 Radiated Emission

3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	(uV/m)	(dBuV/m)
0.009 - 0.490	2400/F(kHz)	300m	10000* 2400/F(kHz)	20log 2400/F(kHz) + 80
0.490 - 1.705	2400/F(kHz)	30m	100* 2400/F(kHz)	20log 2400/F(kHz) + 40
1.705 - 30.00	30	30m	100*30	20log 30 + 40
30.0 - 88.0	100	3m	100	20log 100
88.0 - 216.0	150	3m	150	20log 150
216.0 - 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

- a) As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- b) Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- c) For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- d) For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;AV detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dBuV/m is calculated by $20\log \text{Emission Level}(\text{uV/m})$.
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example:

F.S Limit at 30m distance is 30uV/m , then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\text{uV/m} * (10)^2 = 100 * 30\text{uV/m}.$$



3.2.2 Test Description

See section 2.3.2 of this report.


3.2.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.


Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

B. Test Plots and Suspicious Points:

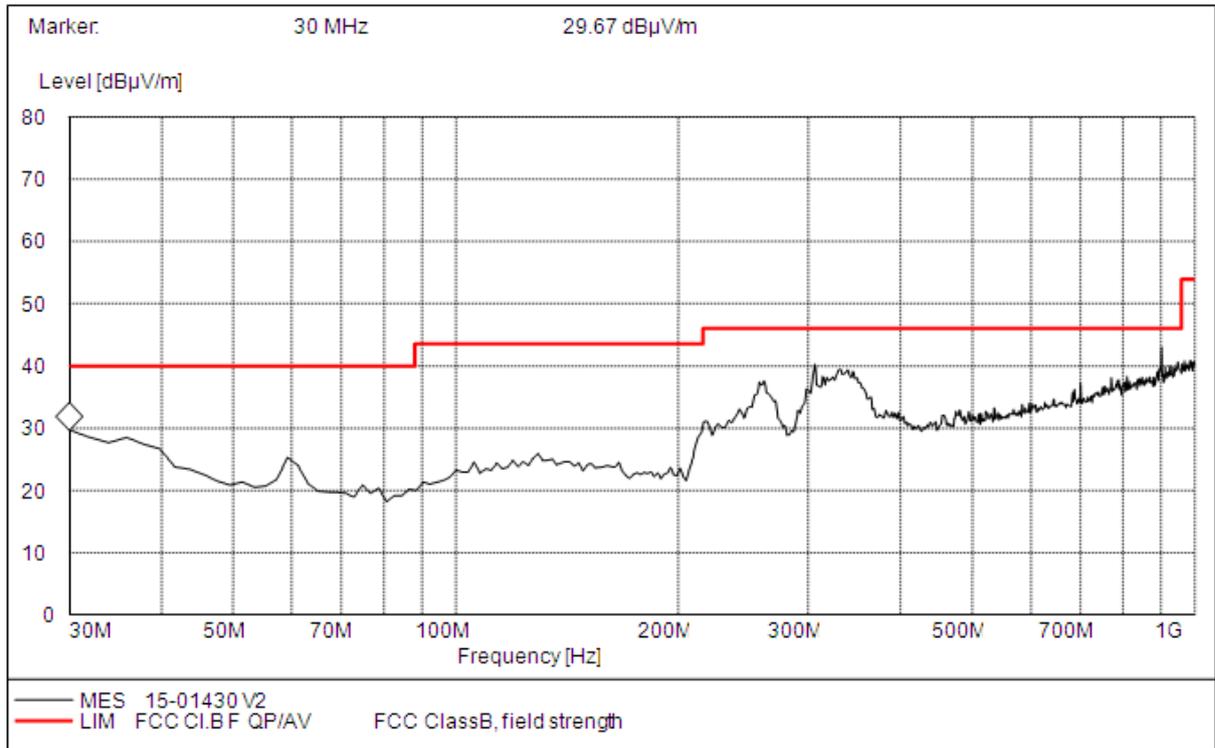

(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBµV/m)	Margin (dB)	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	30.27	120.000	118.0	40.0	13.23	0.5	28.6	Pass
99.97	38.61	120.000	118.0	43.5	7.39	0.5	28.6	Pass
144.68	34.89	120.000	118.0	43.5	11.11	0.6	28.7	Pass
261.35	36.24	120.000	118.0	46.0	9.76	0.8	28.9	Pass
306.24	38.69	120.000	118.0	46.0	7.31	0.8	28.8	Pass
330.64	37.49	120.000	118.0	46.0	8.51	0.8	28.9	Pass

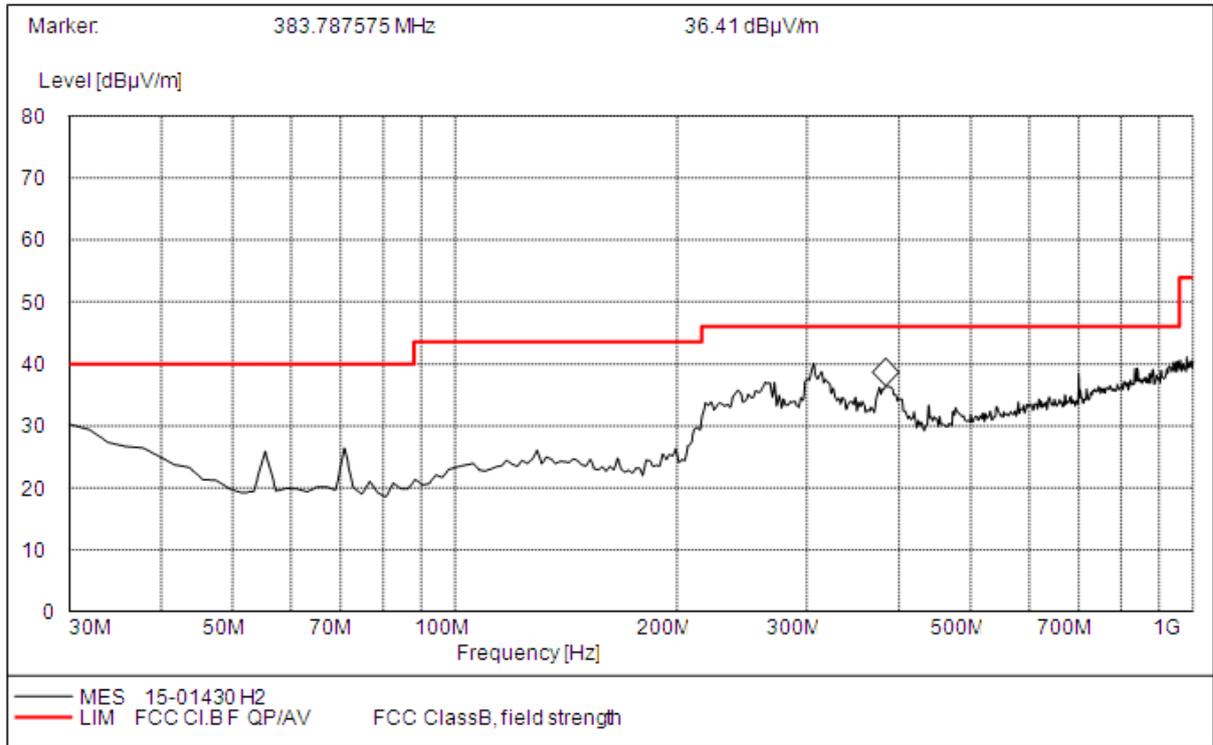

(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBµV/m)	Margin (dB)	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	28.46	120.000	118.0	40.0	11.54	0.5	28.6	Pass
90.26	21.24	120.000	118.0	43.5	22.26	0.5	28.6	Pass
113.58	21.80	120.000	118.0	43.5	21.7	0.5	28.7	Pass
262.34	35.67	120.000	118.0	46.0	10.33	0.8	28.9	Pass
306.29	38.49	120.000	118.0	46.0	7.51	0.8	28.8	Pass
383.56	34.59	120.000	118.0	46.0	11.41	1.0	28.9	Pass

**Radiated Emission above 1GHz**

Frequency (MHz)	Peak (dB μ V/m)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Cable Loss(dB)	ANT. Factor (dB)	Pre-Amp. (dB)	Verdict
1352.45	48.46	118.0	74	25.54	1.8	29.5	31.9	Pass
1556.56	49.24	118.0	74	24.76	2.0	29	32.5	Pass
1905.42	49.80	118.0	74	24.20	2.8	28.7	32.1	Pass
2386.56	47.67	118.0	74	26.33	5.2	28.6	32.5	Pass
4866.12	51.49	118.0	74	22.95	7.4	30.4	31.4	Pass
5800.3	53.59	118.0	74	20.81	9.9	35.0	32.1	Pass

(Test Antenna Horizontal 1G – 26.5G)

Frequency (MHz)	Peak (dB μ V/m)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Cable Loss(dB)	ANT. Factor (dB)	Pre-Amp. (dB)	Verdict
1362.13	48.11	118.0	74	25.89	1.8	29.5	31.9	Pass
1565.09	48.69	118.0	74	25.31	2.0	29	32.5	Pass
1992.43	48.59	118.0	74	25.41	2.8	28.7	32.1	Pass
2386.77	48.67	118.0	74	25.33	5.2	28.6	32.5	Pass
4869.64	51.53	118.0	74	22.47	7.4	30.4	31.4	Pass
5811.23	53.67	118.0	74	20.33	9.9	35.0	32.1	Pass

(Test Antenna Vertical 1G – 26.5G)

Note: Emission Level=Read Level + Antenna Factor + Cable loss-Amp Factor

The AV measurement was performed; the emission value is less more than the limited 20dB is not provide here

Test Result: PASS