



**FCC PART 15C
TEST REPORT
No. I15Z41437-SRD02**

for

ZTE CORPORATION

LTE/WCDMA/GSM (GPRS) Multi-Mode Digital Mobile Phone

Model Name: Blade S6

With

Hardware Version: wrbA

Software Version: Blade_S_EIYV1.0.0B01

FCC ID: SRQ-BLADES6

Issued Date: Jul 15th, 2015



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT.

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

[Tel:+86\(0\)10-62304633-2512](tel:+86(0)10-62304633-2512), [Fax:+86\(0\)10-62304633-2504](tel:+86(0)10-62304633-2504)

Email: ctl_terminals@catr.cn, website: www.chinattl.com

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I15Z41437-SRD02	Rev.0	1st edition	2015-07-15

CONTENTS

1. TEST LABORATORY	6
1.1. TESTING LOCATION	6
1.2. TESTING ENVIRONMENT	6
1.3. PROJECT DATA	6
1.4. SIGNATURE	6
2. CLIENT INFORMATION	7
2.1. APPLICANT INFORMATION	7
2.2. MANUFACTURER INFORMATION	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1. ABOUT EUT	8
3.2. INTERNAL IDENTIFICATION OF EUT	8
3.3. INTERNAL IDENTIFICATION OF AE	8
4. REFERENCE DOCUMENTS.....	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT	9
4.2. REFERENCE DOCUMENTS FOR TESTING	9
5. TEST RESULTS.....	10
5.1. SUMMARY OF TEST RESULTS.....	10
5.2. STATEMENTS.....	10
5.3. TERMS USED IN THE RESULT TABLE	10
5.4. LABORATORY ENVIRONMENT	11
6. TEST FACILITIES UTILIZED	12
ANNEX A: EUT PHOTOGRAPH	13
ANNEX B: MEASUREMENT RESULTS FOR RECEIVER.....	14
B.0 ANTENNA REQUIREMENT	14
B.1 MAXIMUM PEAK OUTPUT POWER	15
B.2 BAND EDGES COMPLIANCE	16
B.3 CONDUCTED EMISSION	17
B.4 OCCUPIED 20DB BANDWIDTH	18
B.6 TIME OF OCCUPANCY (DWELL TIME).....	18
B.7 NUMBER OF HOPPING CHANNELS	19
B.8 CARRIER FREQUENCY SEPARATION.....	19
ANNEX C: TEST FIGURE LIST	20
FIG. 1 MAXIMUM PEAK OUTPUT POWER(GFSK, CH 0).....	20
FIG. 2 MAXIMUM PEAK OUTPUT POWER(GFSK, CH 39).....	20
FIG. 3 MAXIMUM PEAK OUTPUT POWER(GFSK, CH 78).....	21
FIG. 4 MAXIMUM PEAK OUTPUT POWER($\pi/4$ DQPSK, CH 0)	21

FIG. 5	MAXIMUM PEAK OUTPUT POWER($\pi/4$ DQPSK, CH 39)	22
FIG. 6	MAXIMUM PEAK OUTPUT POWER($\pi/4$ DQPSK, CH 78)	22
FIG. 7	MAXIMUM PEAK OUTPUT POWER(8DPSK, CH 0)	23
FIG. 8	MAXIMUM PEAK OUTPUT POWER(8DPSK, CH 39)	23
FIG. 9	MAXIMUM PEAK OUTPUT POWER(8DPSK, CH 78)	24
FIG. 10	BAND EDGES (GFSK, CH 0, HOPPING ON)	24
FIG. 11	BAND EDGES (GFSK, CH 78, HOPPING ON)	25
FIG. 12	BAND EDGES ($\pi/4$ DQPSK, CH 0, HOPPING ON)	25
FIG. 13	BAND EDGES ($\pi/4$ DQPSK, CH 78, HOPPING ON)	26
FIG. 14	BAND EDGES (8DPSK, CH 0, HOPPING ON)	26
FIG. 15	BAND EDGES (8DPSK, CH 78, HOPPING ON)	27
FIG. 16	BAND EDGES (GFSK, CH 0, HOPPING OFF)	27
FIG. 17	BAND EDGES (GFSK, CH 78, HOPPING OFF)	28
FIG. 18	BAND EDGES ($\pi/4$ DQPSK, CH 0, HOPPING OFF)	28
FIG. 19	BAND EDGES ($\pi/4$ DQPSK, CH 78, HOPPING OFF)	29
FIG. 20	BAND EDGES (8DPSK, CH 0, HOPPING OFF)	29
FIG. 21	BAND EDGES (8DPSK, CH 78, HOPPING OFF)	30
FIG. 22	CONDUCTED SPURIOUS EMISSION (GFSK, CH0, 2.402GHz)	30
FIG. 23	CONDUCTED SPURIOUS EMISSION (GFSK, CH0, 30 MHz-3 GHz)	31
FIG. 24	CONDUCTED SPURIOUS EMISSION (GFSK, CH0, 3GHz-18 GHz)	31
FIG. 25	CONDUCTED SPURIOUS EMISSION (GFSK, CH39, 2.441GHz)	32
FIG. 26	CONDUCTED SPURIOUS EMISSION (GFSK, CH39, 30 MHz-3 GHz)	32
FIG. 27	CONDUCTED SPURIOUS EMISSION (GFSK, CH39, 3GHz-18 GHz)	33
FIG. 28	CONDUCTED SPURIOUS EMISSION (GFSK, CH78, 2.480GHz)	33
FIG. 29	CONDUCTED SPURIOUS EMISSION (GFSK, CH78, 30 MHz-3 GHz)	34
FIG. 30	CONDUCTED SPURIOUS EMISSION (GFSK, CH78, 3GHz-18 GHz)	34
FIG. 31	CONDUCTED SPURIOUS EMISSION ($\pi/4$ DQPSK, CH0, 2.402GHz)	35
FIG. 32	CONDUCTED SPURIOUS EMISSION ($\pi/4$ DQPSK, CH0, 30 MHz-3 GHz)	35
FIG. 33	CONDUCTED SPURIOUS EMISSION ($\pi/4$ DQPSK, CH0, 3GHz-18 GHz)	36
FIG. 34	CONDUCTED SPURIOUS EMISSION ($\pi/4$ DQPSK, CH39, 2.441GHz)	36
FIG. 35	CONDUCTED SPURIOUS EMISSION ($\pi/4$ DQPSK, CH39, 30 MHz-3 GHz)	37
FIG. 36	CONDUCTED SPURIOUS EMISSION ($\pi/4$ DQPSK, CH39, 3GHz-18 GHz)	37
FIG. 37	CONDUCTED SPURIOUS EMISSION ($\pi/4$ DQPSK, CH78, 2.480GHz)	38
FIG. 38	CONDUCTED SPURIOUS EMISSION ($\pi/4$ DQPSK, CH78, 30 MHz-3 GHz)	38
FIG. 39	CONDUCTED SPURIOUS EMISSION ($\pi/4$ DQPSK, CH78, 3GHz-18 GHz)	39
FIG. 40	CONDUCTED SPURIOUS EMISSION (8DPSK, CH0, 2.402GHz)	39
FIG. 41	CONDUCTED SPURIOUS EMISSION (8DPSK, CH0, 30 MHz-3 GHz)	40
FIG. 42	CONDUCTED SPURIOUS EMISSION (8DPSK, CH0, 3GHz-18 GHz)	40
FIG. 43	CONDUCTED SPURIOUS EMISSION (8DPSK, CH39, 2.441GHz)	41
FIG. 44	CONDUCTED SPURIOUS EMISSION (8DPSK, CH39, 30 MHz-3 GHz)	41
FIG. 45	CONDUCTED SPURIOUS EMISSION (8DPSK, CH39, 3GHz-18 GHz)	42
FIG. 46	CONDUCTED SPURIOUS EMISSION (8DPSK, CH78, 2.480GHz)	42
FIG. 47	CONDUCTED SPURIOUS EMISSION (8DPSK, CH78, 30 MHz-3 GHz)	43
FIG. 48	CONDUCTED SPURIOUS EMISSION (8DPSK, CH78, 3GHz-18 GHz)	43

FIG. 49	CONDUCTED SPURIOUS EMISSION (ALL CHANNEL, 18 GHz-26 GHz).....	44
FIG. 50	OCCUPIED 20dB BANDWIDTH (GFSK, CH 0)	44
FIG. 51	OCCUPIED 20dB BANDWIDTH (GFSK, CH 39)	45
FIG. 52	OCCUPIED 20dB BANDWIDTH (GFSK, CH 78)	45
FIG. 53	OCCUPIED 20dB BANDWIDTH ($\pi/4$ DQPSK, CH 0).....	46
FIG. 54	OCCUPIED 20dB BANDWIDTH ($\pi/4$ DQPSK, CH 39).....	46
FIG. 55	OCCUPIED 20dB BANDWIDTH ($\pi/4$ DQPSK, CH 78).....	47
FIG. 56	OCCUPIED 20dB BANDWIDTH (8DPSK, CH 0)	47
FIG. 57	OCCUPIED 20dB BANDWIDTH (8DPSK, CH 39)	48
FIG. 58	OCCUPIED 20dB BANDWIDTH (8DPSK, CH 78)	48
FIG. 59	TIME OF OCCUPANCY(DWELL TIME) (GFSK, CH39)	49
FIG. 60	NUMBER OF TRANSMISSIONS (GFSK, CH39)	49
FIG. 61	TIME OF OCCUPANCY(DWELL TIME) ($\pi/4$ DQPSK, CH39)	50
FIG. 62	NUMBER OF TRANSMISSIONS ($\pi/4$ DQPSK, CH39)	50
FIG. 63	TIME OF OCCUPANCY(DWELL TIME) (8DPSK, CH39)	51
FIG. 64	NUMBER OF TRANSMISSIONS (8DPSK, CH39).....	51
FIG. 65	HOPPING CHANNEL CH0~39 (GFSK, CH39).....	52
FIG. 66	HOPPING CHANNEL CH39~78 (GFSK, CH39).....	52
FIG. 67	HOPPING CHANNEL CH0~39 ($\pi/4$ DQPSK, CH39).....	53
FIG. 68	HOPPING CHANNEL CH39~78 ($\pi/4$ DQPSK, CH39).....	53
FIG. 69	HOPPING CHANNEL CH0~39 (8DPSK, CH39).....	54
FIG. 70	HOPPING CHANNEL CH39~78 (8DPSK, CH39).....	54
FIG. 71	CARRIER FREQUENCY SEPARATION (GFSK, CH39).....	55
FIG. 72	CARRIER FREQUENCY SEPARATION ($\pi/4$ DQPSK, CH39).....	55
FIG. 73	CARRIER FREQUENCY SEPARATION (8DPSK, CH39)	56
ANNEX D: PERSONS INVOLVED IN THIS TESTING		57
ANNEX E: ACCREDITATION CERTIFICATE		58

1. Test Laboratory

1.1. Testing Location

Location 1:CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Location 2:CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,
Haidian District, Beijing, P. R. China100191

1.2. Testing Environment

Normal Temperature: 15-35°C
Extreme Temperature: -20/+55°C
Relative Humidity: 20-75%


1.3. Project data

Testing Start Date: 2015-06-01
Testing End Date: 2015-07-13


1.4. Signature



Xu Zhongfei
(Prepared this test report)



Li Zhibin
(Reviewed this test report)



Lv Songdong
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: ZTE CORPORATION
Address: ZTE Plaza, Keji Road South, Shenzhen, China
City: Shenzhen
Postal Code: /
Country: China
Telephone: +86 18616587757
Fax: +86 021 50801070

2.2. Manufacturer Information

Company Name: ZTE CORPORATION
Address: ZTE Plaza, Keji Road South, Shenzhen, China
City: Shenzhen
Postal Code: /
Country: China
Telephone: +86 18616587757
Fax: +86 021 50801070

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	LTE/WCDMA/GSM(GPRS) Multi-Mode Digital Mobile Phone
Model Name	Blade S6
Market Name	ZTE
Frequency Band	2402MHz~2480MHz
Type of Modulation	GFSK/π/4 DQPSK/8DPSK
Number of Channels	79
FCC ID	SRQ-BLADES6

*Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT

EUT ID*	IMEI	HW Version	SW Version
EUT1	/	wrbA	Blade_S_EIYV1.0.0B01

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description	Type	SN
AE1	Charger	/	/

*AE ID: is used to identify the test sample in the lab internally.



4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	Oct,2014
ANSI C63.10	American National Standard for Testing Unlicensed Wireless Devices	June,2013

5. Test Results

5.1. Summary of Test Results

No	Test cases	Sub-clause of Part15C	Verdict
0	Antenna Requirement	15.203	P
1	Maximum Peak Output Power	15.247 (b)	P
2	Band Edges Compliance	15.247 (d)	P
3	Conducted Spurious Emission	15.247 (d)	P
4	Occupied 20dB bandwidth	15.247(a)	/
5	Time of Occupancy(Dwell Time)	15.247(a)	P
6	Number of Hopping Channel	15.247(a)	P
7	Carrier Frequency Separation	15.247(a)	P

See **ANNEX B** and **ANNEX C** for details.

5.2. Statements

CTTL has evaluated the test cases requested by the applicant/manufacturer as listed in section 5.1 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2

5.3. Terms used in the result table

Terms used in Verdict column

P	Pass
NA	Not Available
F	Fail

Abbreviations

AC	Alternating Current
AFH	Adaptive Frequency Hopping
BW	Band Width
E.I.R.P.	equivalent isotropical radiated power
ISM	Industrial, Scientific and Medical
R&TTE	Radio and Telecommunications Terminal Equipment
RF	Radio Frequency
Tx	Transmitter

5.4. Laboratory Environment

Semi-anechoic chamber (23 metersx17 metersx10 meters) did not exceed following limits:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 M
Ground system resistance	< 4
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 M
Ground system resistance	< 4



6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	200136	Rohde & Schwarz	1 year	2016-01-06
2	Bluetooth Tester	CBT32	100649	Rohde & Schwarz	1 year	2016-02-09
3	Shielding Room	S81	/	ETS-Lindgren	/	/

ANNEX A: EUT photograph



Picture A-1: Mobile Phone



Picture A-2: Mobile Phone



ANNEX B: MEASUREMENT RESULTS FOR RECEIVER

B.0 Antenna requirement

Measurement Limit:

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, § 15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Conclusion: The Directional gains of antenna used for transmitting is 1.23 dBi.

The RF transmitter uses an integrate antenna without connector.



B.1 Maximum Peak Output Power

Measurement Limit:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)(1)	< 30

Measurement Results:

Mode	Test Result (dBm)					
	2402MHz (Ch0)		2441MHz (Ch39)		2480 MHz (Ch78)	
GFSK	Fig.1	5.33	Fig.2	6.21	Fig.3	6.03
$\pi/4$ DQPSK	Fig.4	5.36	Fig.5	6.10	Fig.6	5.85
8DPSK	Fig.7	5.48	Fig.8	6.19	Fig.9	6.02

Conclusion: Pass

B.2 Band Edges Compliance

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

Measurement Result:

Mode	Channel	Hopping	Test Results	Conclusion
GFSK	0	ON	Fig.10	P
	78	ON	Fig.11	P
$\pi/4$ DQPSK	0	ON	Fig.12	P
	78	ON	Fig.13	P
8DPSK	0	ON	Fig.14	P
	78	ON	Fig.15	P

Mode	Channel	Hopping	Test Results	Conclusion
GFSK	0	OFF	Fig.16	P
	78	OFF	Fig.17	P
$\pi/4$ DQPSK	0	OFF	Fig.18	P
	78	OFF	Fig.19	P
8DPSK	0	OFF	Fig.20	P
	78	OFF	Fig.21	P

See ANNEX C for test graphs.

Conclusion: Pass

B.3 Conducted Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:

MODE	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.402 GHz	Fig.22	P
		30 MHz-3GHz	Fig.23	P
		3GHz-18GHz	Fig.24	P
	39	2.441 GHz	Fig.25	P
		30 MHz-3 GHz	Fig.26	P
		3GHz-18GHz	Fig.27	P
	78	2.480 GHz	Fig.28	P
		30 MHz-3GHz	Fig.29	P
		3GHz-18GHz	Fig.30	P
$\pi/4$ DQPSK	0	2.402 GHz	Fig.31	P
		30 MHz-3 GHz	Fig.32	P
		3GHz-18GHz	Fig.33	P
	39	2.441 GHz	Fig.34	P
		30 MHz-3GHz	Fig.35	P
		3GHz-18Ghz	Fig.36	P
	78	2.480 GHz	Fig.37	P
		30 MHz-3GHz	Fig.38	P
		3GHz-18Ghz	Fig.39	P
8DPSK	0	2.402 GHz	Fig.40	P
		30 MHz-3GHz	Fig.41	P
		3GHz-18GHz	Fig.42	P
	39	2.441 GHz	Fig.43	P
		30 MHz-3GHz	Fig.44	P
		3GHz-18GHz	Fig.45	P
	78	2.480 GHz	Fig.46	P
		30 MHz-3GHz	Fig.47	P
		3GHz-18GHz	Fig.48	P
/	All channel	18GHz-26GHz	Fig.49	P

See ANNEX C for test graphs.

Conclusion: Pass

B.4 Occupied 20dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	/

Measurement Result:

Mode	Channel	Occupied 20dB Bandwidth (MHz)		conclusion
		Fig.	Value	
GFSK	0	Fig.50	1.136	/
	39	Fig.51	1.128	
	78	Fig.52	1.129	
$\pi/4$ DQPSK	0	Fig.53	1.382	/
	39	Fig.54	1.382	
	78	Fig.55	1.382	
8DPSK	0	Fig.56	1.397	/
	39	Fig.57	1.382	
	78	Fig.58	1.382	

See ANNEX C for test graphs.

Conclusion: PASS

B.6 Time of Occupancy (Dwell Time)

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)	< 400 ms

Measurement Results:

Mode	Channel	Packet	Dwell Time(ms)		Conclusion
GFSK	39	DH5	Fig.59	207.7	P
			Fig.60		
$\pi/4$ DQPSK	39	2-DH5	Fig.61	197.1	P
			Fig.62		
8DPSK	39	3-DH5	Fig.63	191.3	P
			Fig.64		

See ANNEX C for test graphs.

Conclusion: Pass

B.7 Number of Hopping Channels

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)	At least 15 non-overlapping channels

Measurement Results:

Mode	Channel	Packet	Number of hopping channels		Test result	Conclusion
GFSK	39	DH5	Fig.65	Fig.66	79	P
$\pi/4$ DQPSK	39	2-DH5	Fig.67	Fig.68	79	P
8DPSK	39	3-DH5	Fig.69	Fig.70	79	P

See ANNEX C for test graphs.

Conclusion: Pass

B.8 Carrier Frequency Separation

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)	By a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater


Measurement Results:

Mode	Channel	Packet	Separation of hopping channels	Test result (MHz)	Conclusion
GFSK	39	DH5	Fig.71	1.006	P
$\pi/4$ DQPSK	39	2-DH5	Fig.72	1.006	P
8DPSK	39	3-DH5	Fig.73	1.006	P

See ANNEX C for test graphs.


Conclusion: Pass

ANNEX C: TEST FIGURE LIST

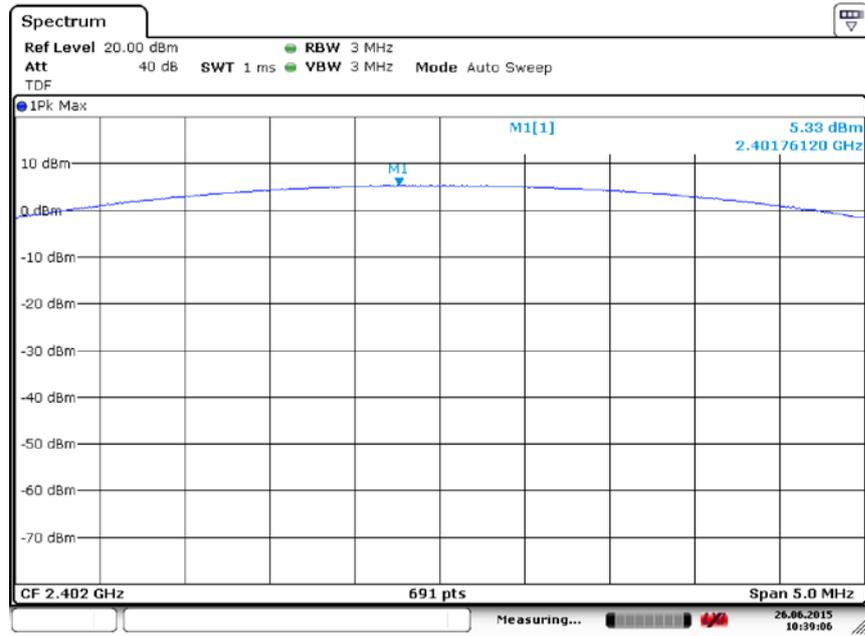


Date: 26.JUN.2015 10:39:06

Fig. 1 Maximum Peak Output Power(GFSK, Ch 0)

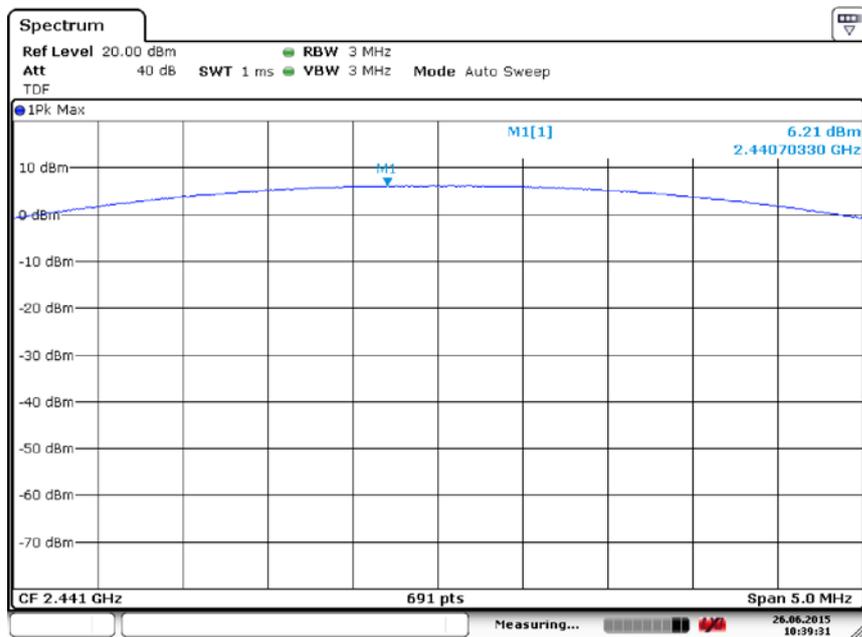


Date: 26.JUN.2015 10:39:31

Fig. 2 Maximum Peak Output Power(GFSK, Ch 39)

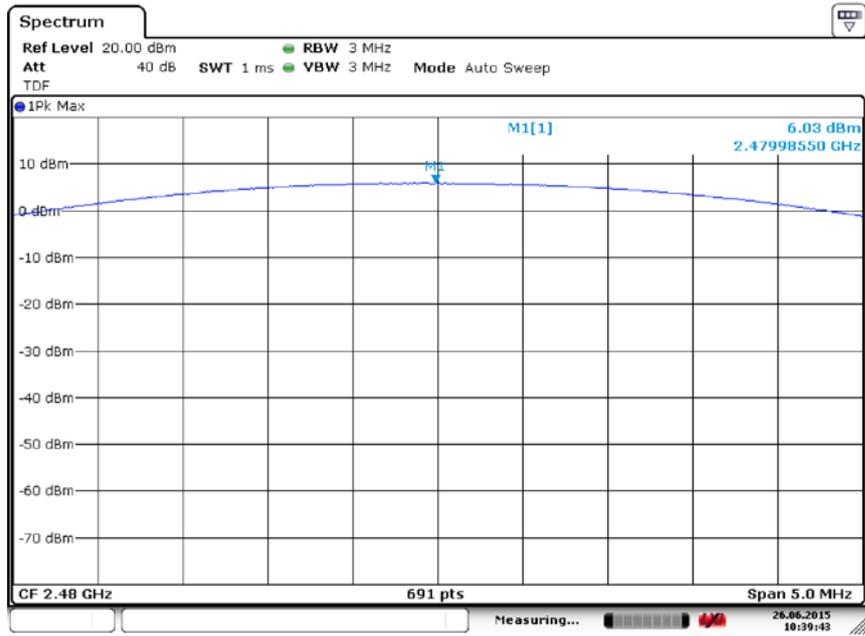


Date: 26.JUN.2015 10:39:43

Fig. 3 Maximum Peak Output Power(GFSK, Ch 78)

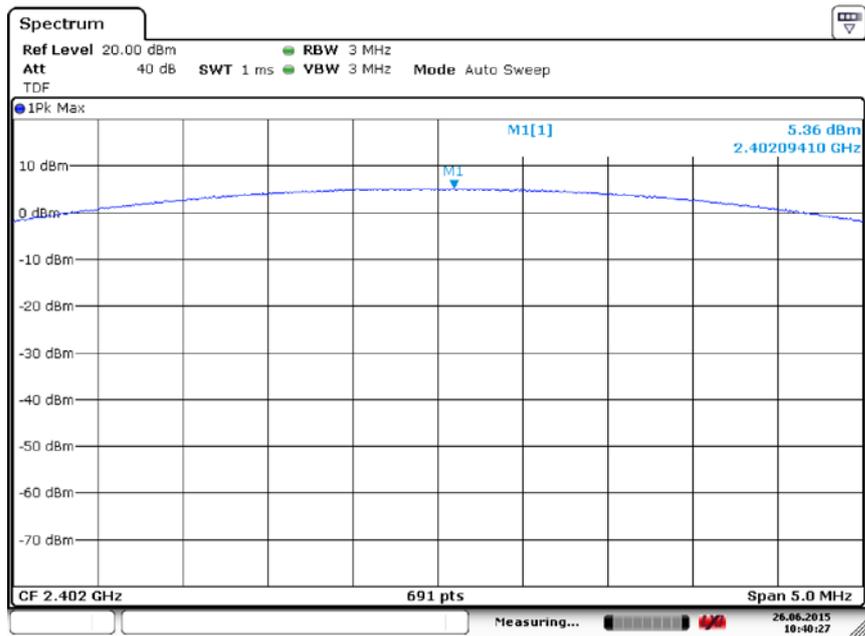


Date: 26.JUN.2015 10:40:27

Fig. 4 Maximum Peak Output Power($\pi/4$ DQPSK, Ch 0)

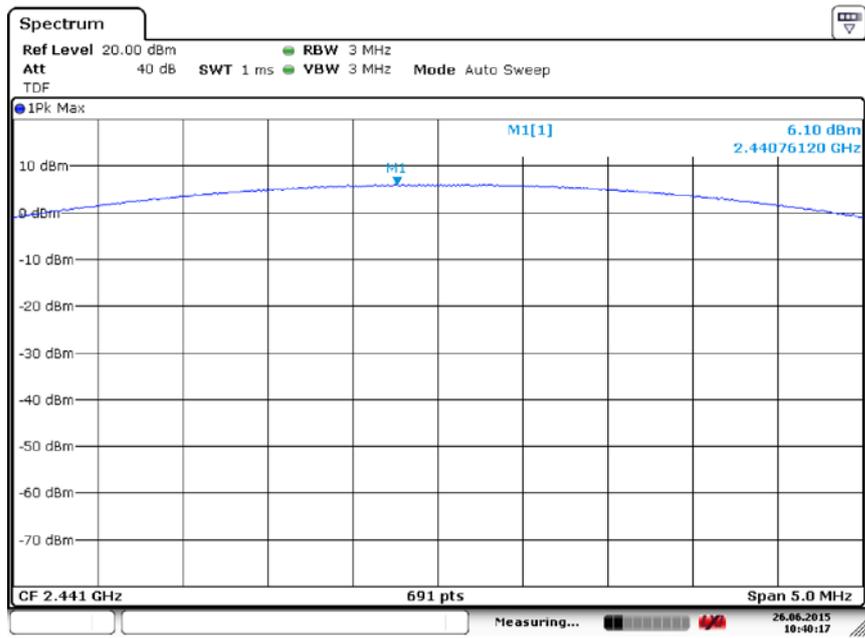


Date: 26.JUN.2015 10:40:17

Fig. 5 Maximum Peak Output Power($\pi/4$ DQPSK, Ch 39)

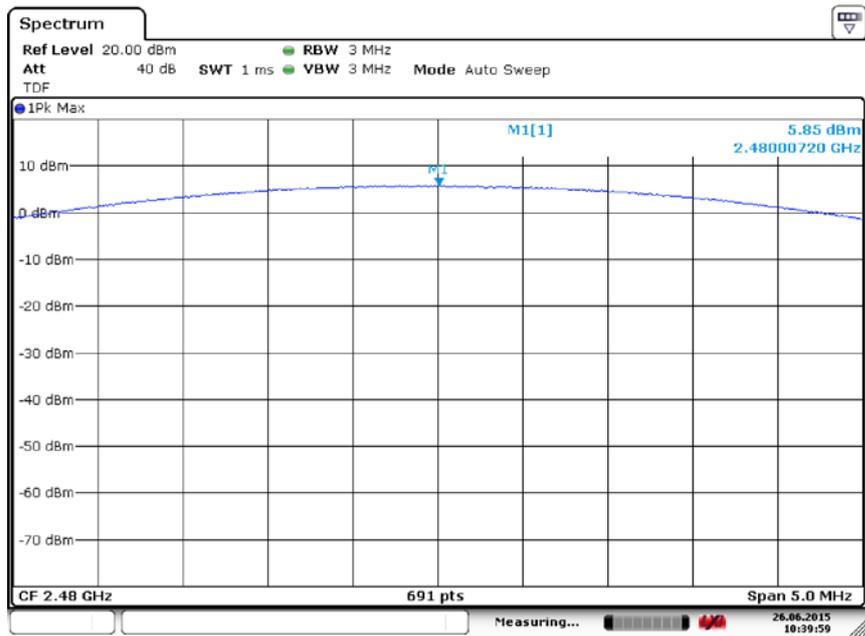


Date: 26.JUN.2015 10:39:59

Fig. 6 Maximum Peak Output Power($\pi/4$ DQPSK, Ch 78)

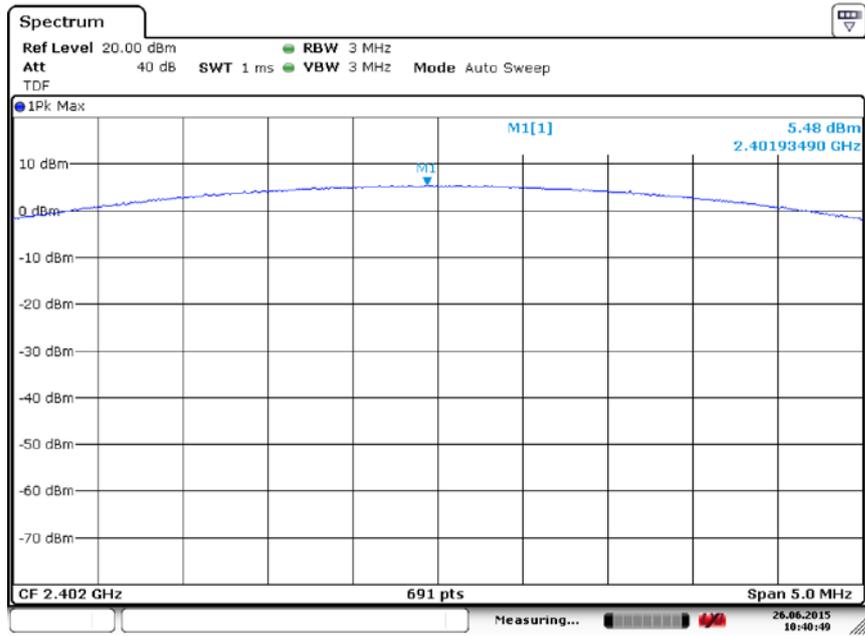


Date: 26.JUN.2015 10:40:49

Fig. 7 Maximum Peak Output Power(8DPSK, Ch 0)

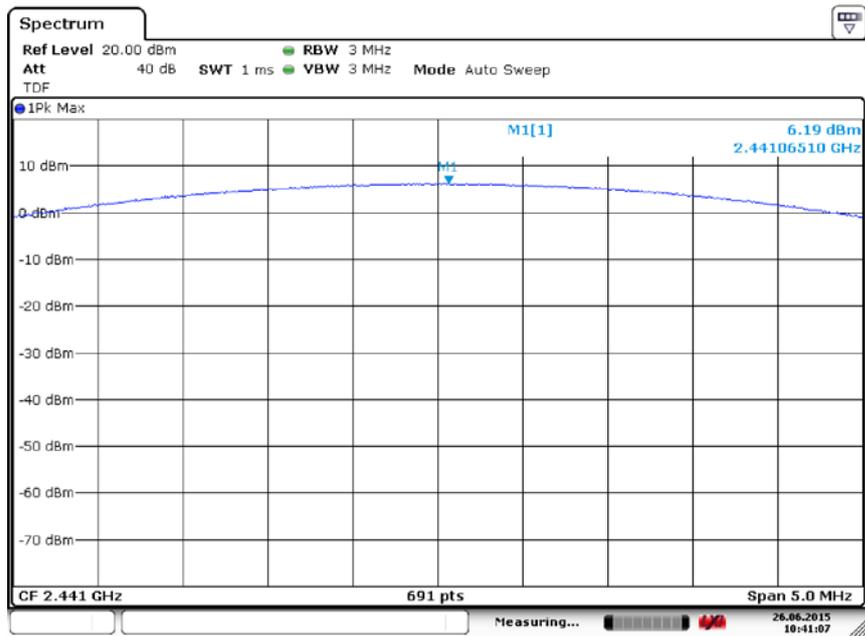


Date: 26.JUN.2015 10:41:07

Fig. 8 Maximum Peak Output Power(8DPSK, Ch 39)

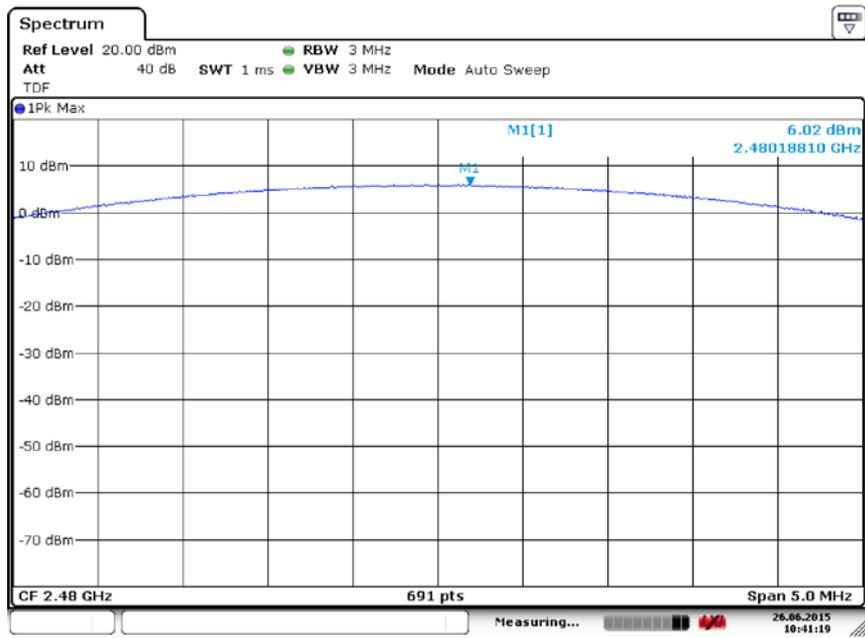


Date: 26.JUN.2015 10:41:19

Fig. 9 Maximum Peak Output Power(8DPSK, Ch 78)

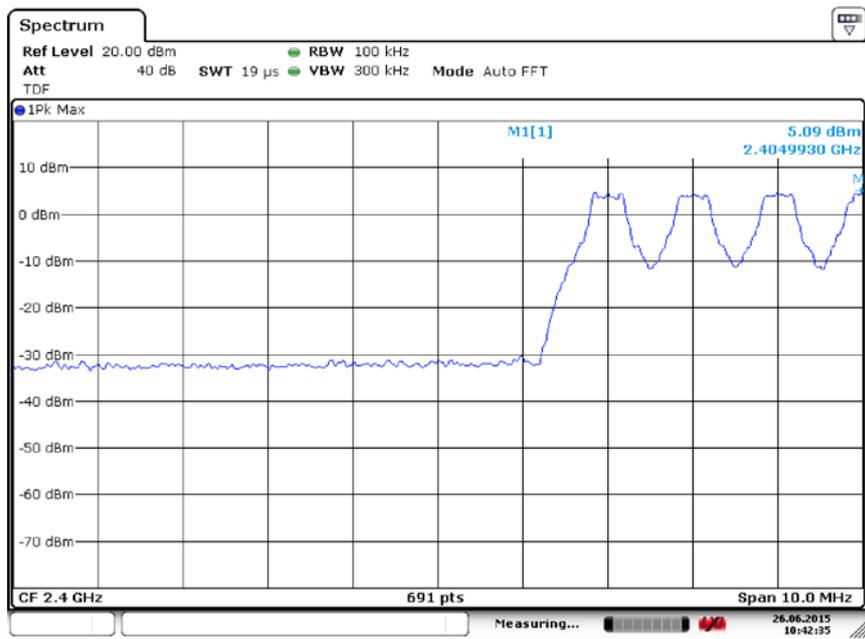


Date: 26.JUN.2015 10:42:35

Fig. 10 Band Edges (GFSK, Ch 0, Hopping ON)

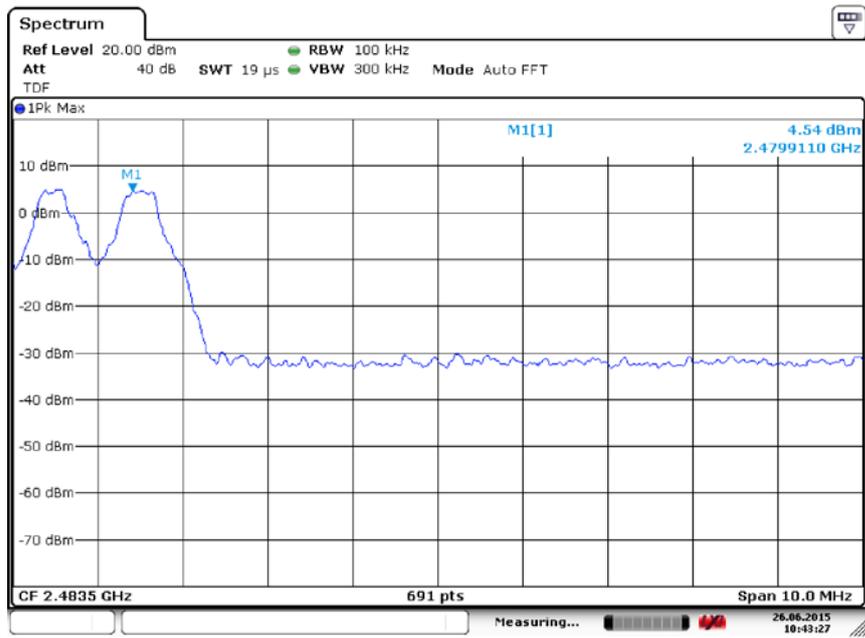

Date: 26.JUN.2015 10:43:27

Fig. 11 Band Edges (GFSK, Ch 78, Hopping ON)

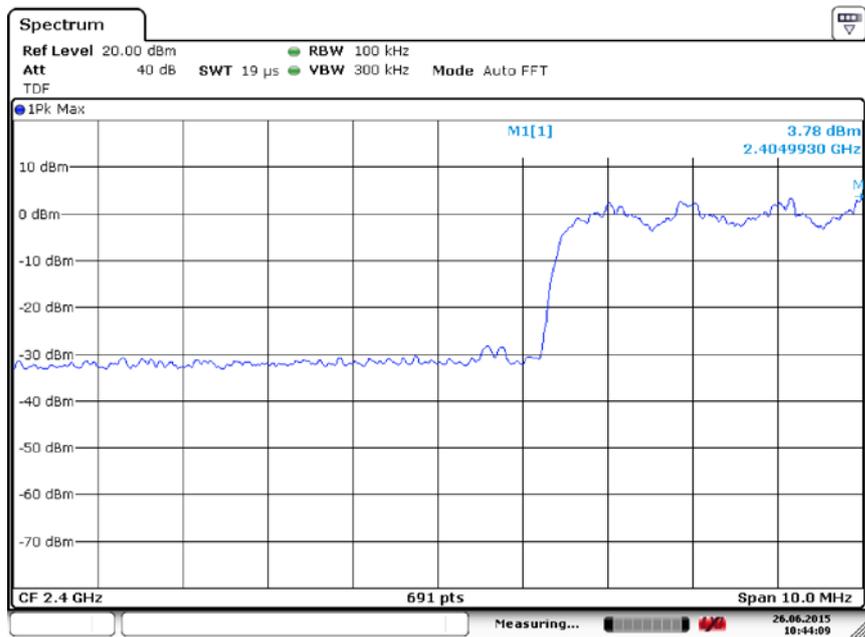

Date: 26.JUN.2015 10:44:09

Fig. 12 Band Edges ($\pi/4$ DQPSK, Ch 0, Hopping ON)

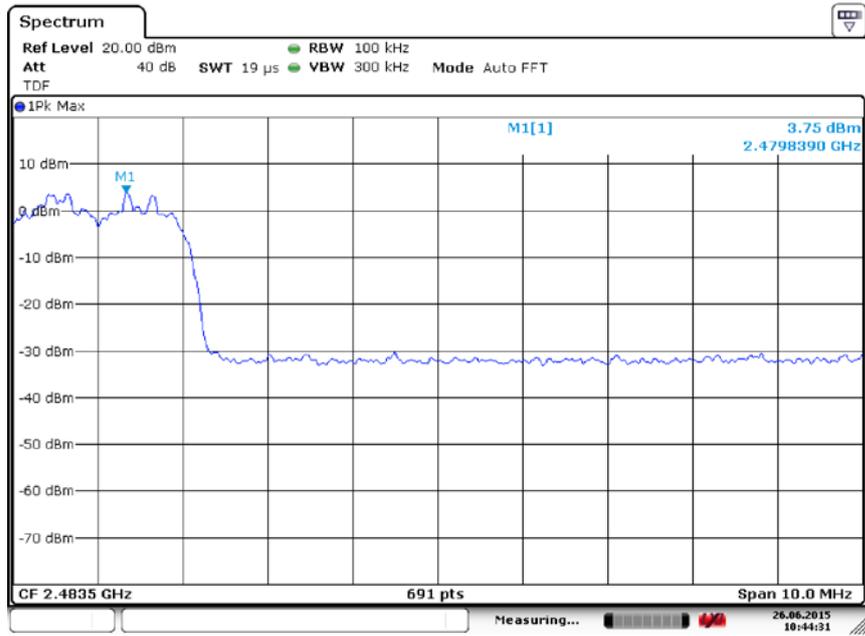


Fig. 13 Band Edges ($\pi/4$ DQPSK, Ch 78, Hopping ON)

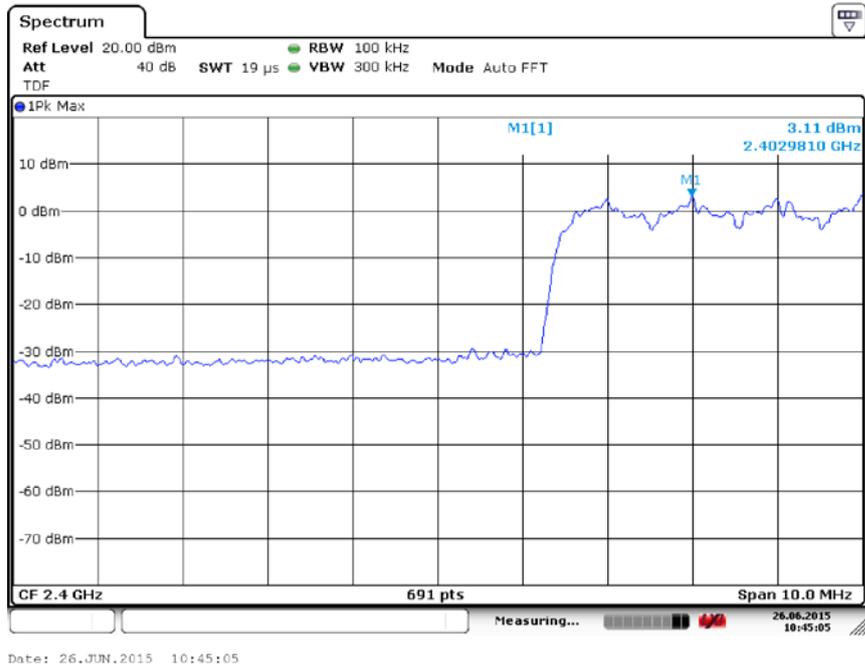


Fig. 14 Band Edges (8DPSK, Ch 0, Hopping ON)

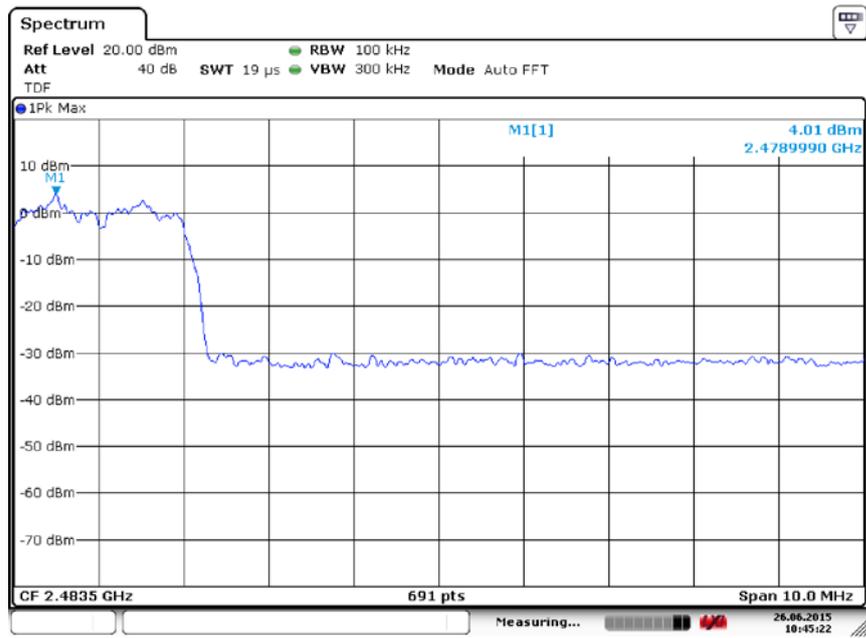


Fig. 15 Band Edges (8DPSK, Ch 78, Hopping ON)



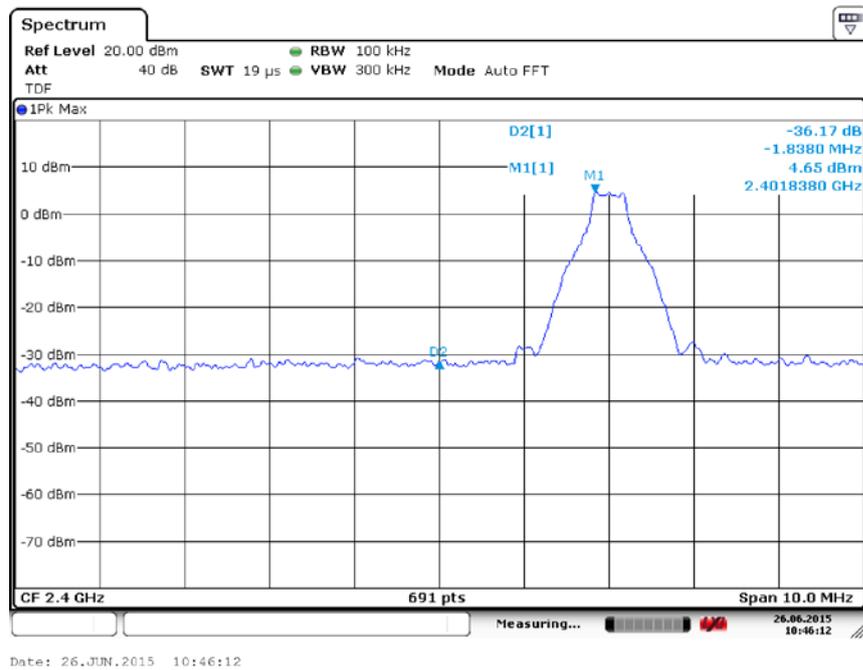


Fig. 16 Band Edges (GFSK, Ch 0, Hopping OFF)

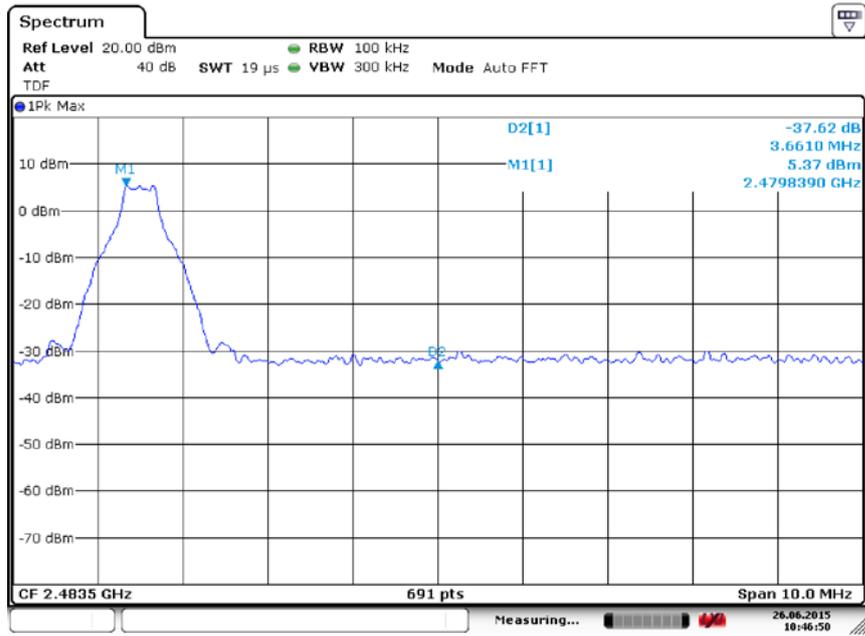

Date: 26.JUN.2015 10:46:50

Fig. 17 Band Edges (GFSK, Ch 78, Hopping OFF)

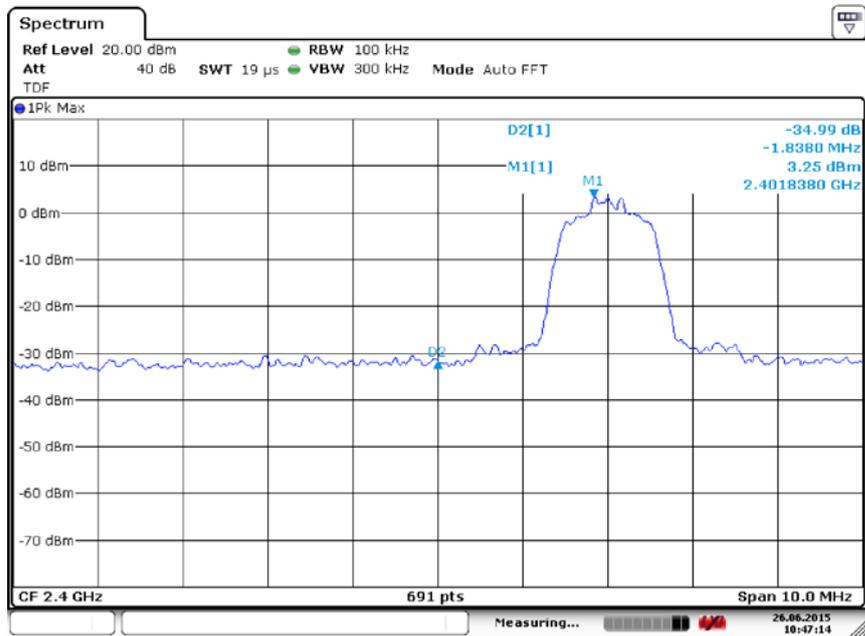

Date: 26.JUN.2015 10:47:14

Fig. 18 Band Edges ($\pi/4$ DQPSK, Ch 0, Hopping OFF)



Fig. 19 Band Edges ($\pi/4$ DQPSK, Ch 78, Hopping OFF)



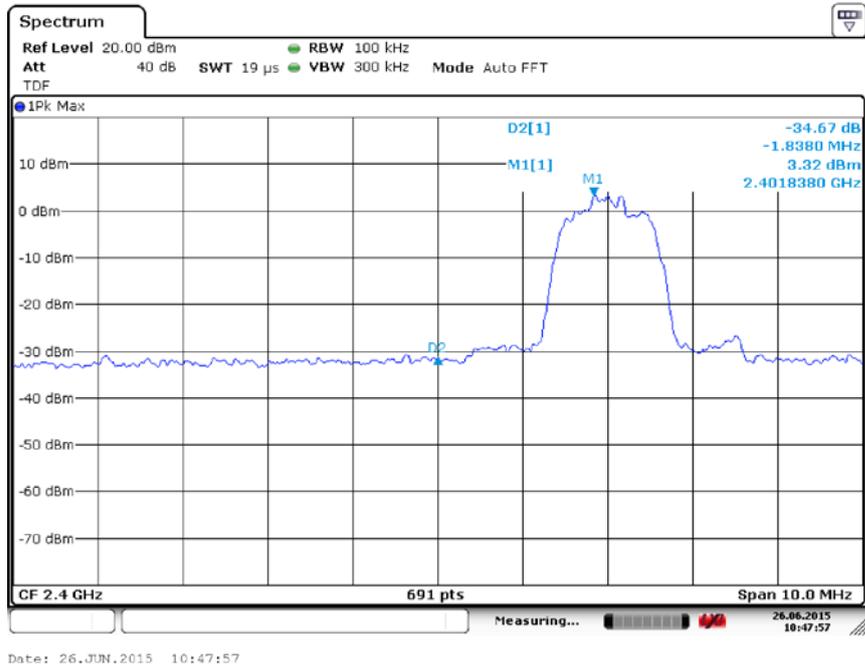


Fig. 20 Band Edges (8DPSK, Ch 0, Hopping OFF)

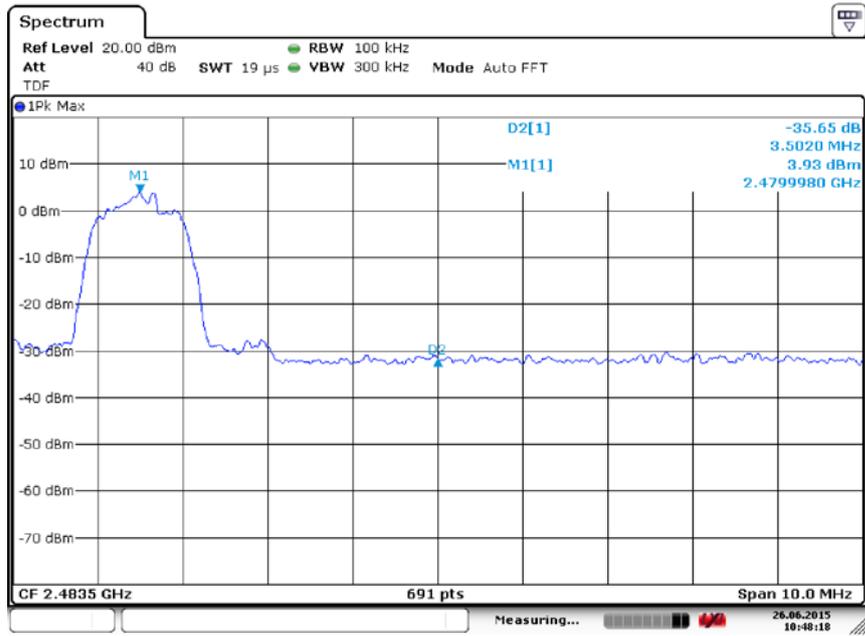

Date: 26.JUN.2015 10:48:18

Fig. 21 Band Edges (8DPSK, Ch 78, Hopping OFF)

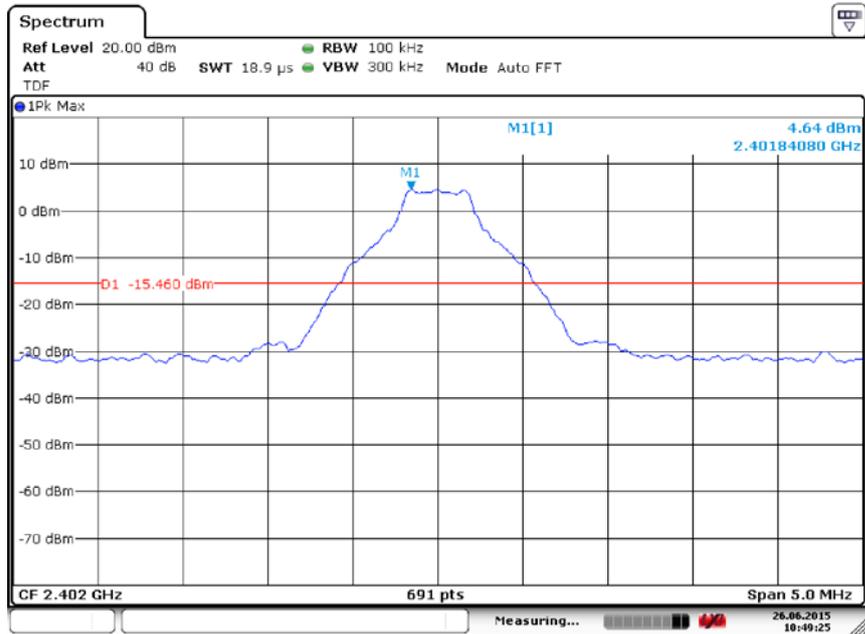

Date: 26.JUN.2015 10:49:25

Fig. 22 Conducted Spurious Emission (GFSK, Ch0, 2.402GHz)

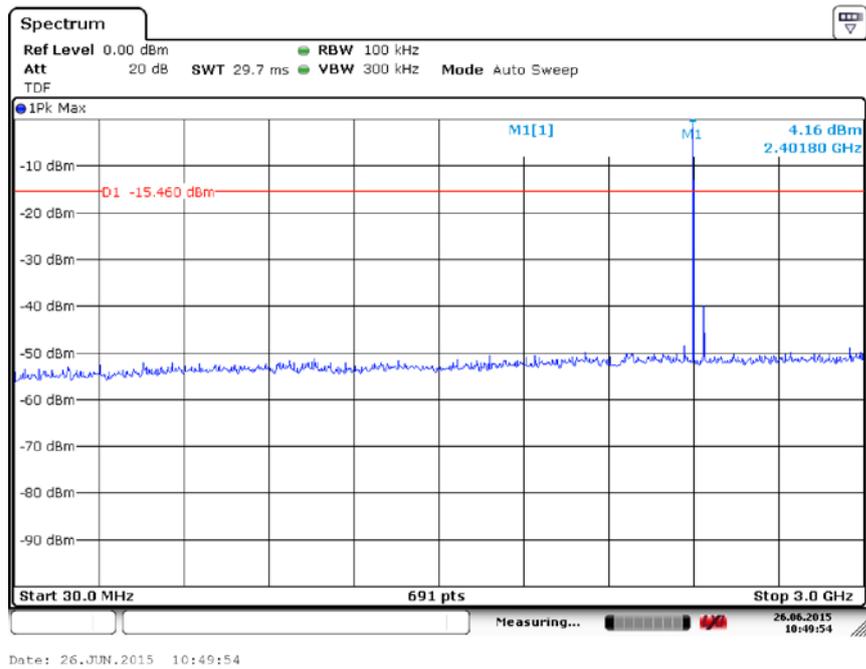


Fig. 23 Conducted Spurious Emission (GFSK, Ch0, 30 MHz-3 GHz)

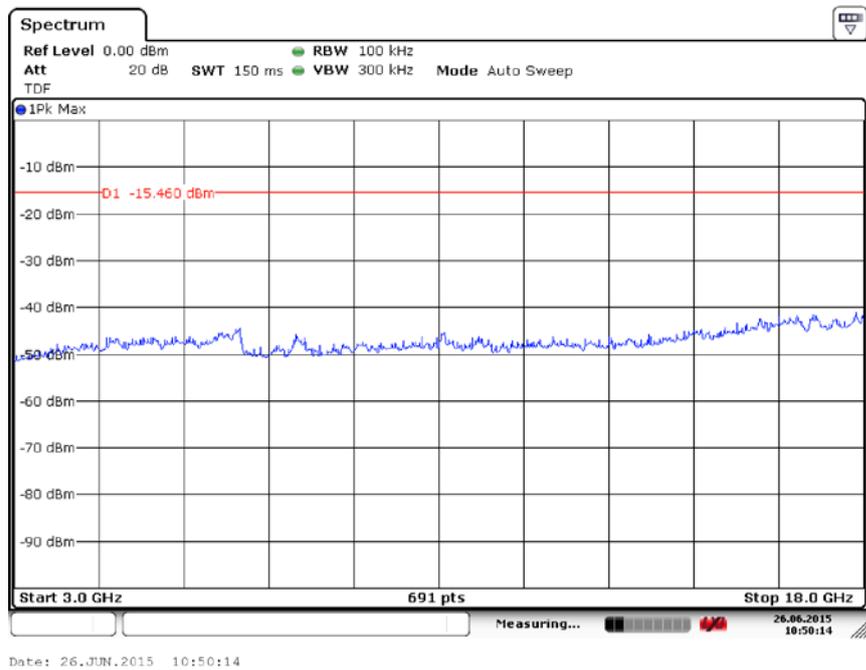


Fig. 24 Conducted Spurious Emission (GFSK, Ch0, 3GHz-18 GHz)

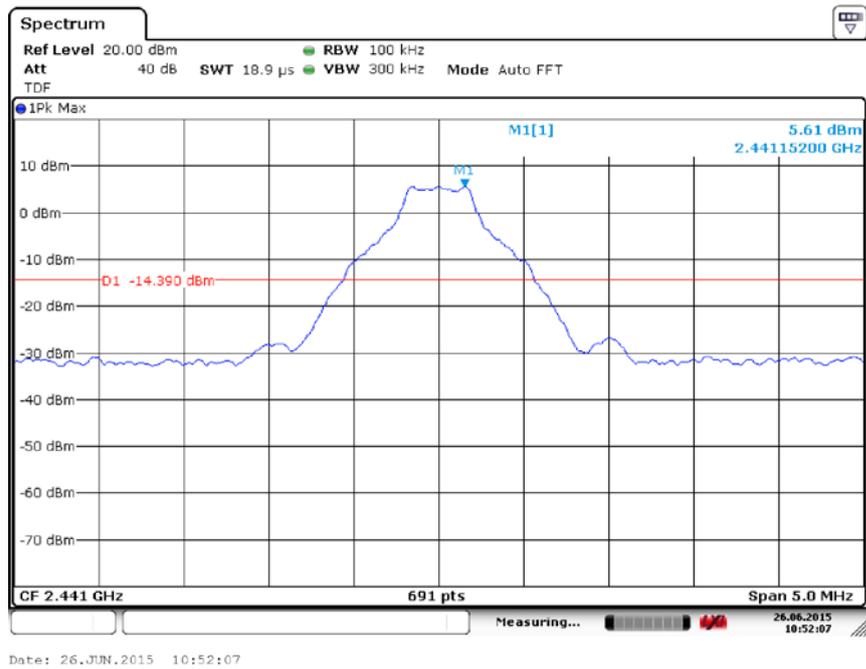


Fig. 25 Conducted Spurious Emission (GFSK, Ch39, 2.441GHz)

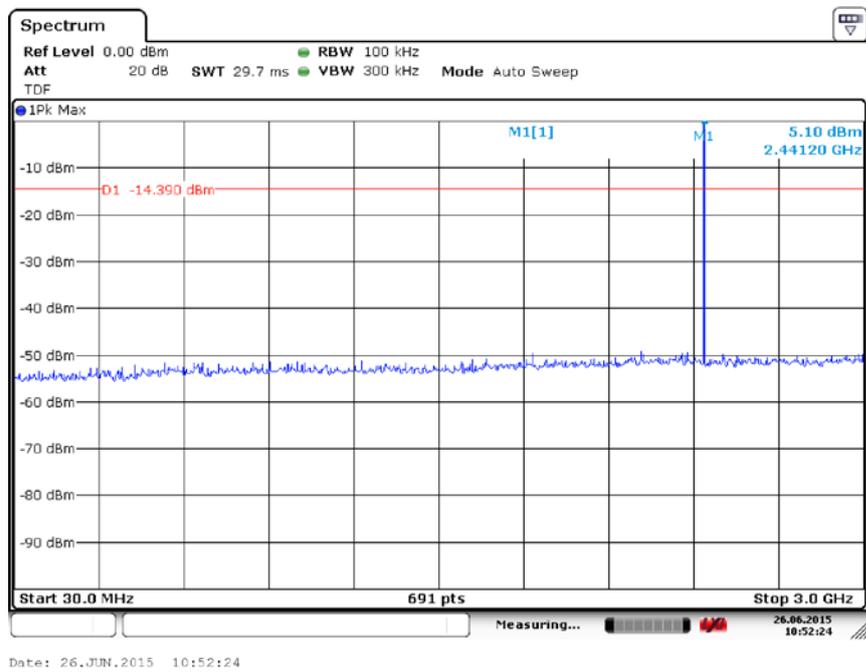


Fig. 26 Conducted Spurious Emission (GFSK, Ch39, 30 MHz-3 GHz)

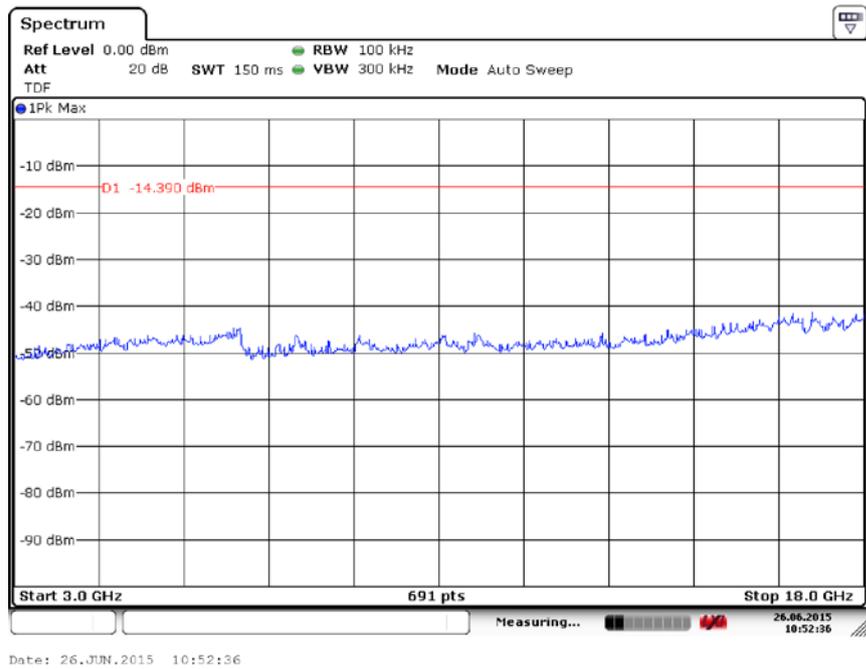


Fig. 27 Conducted Spurious Emission (GFSK, Ch39, 3GHz-18 GHz)

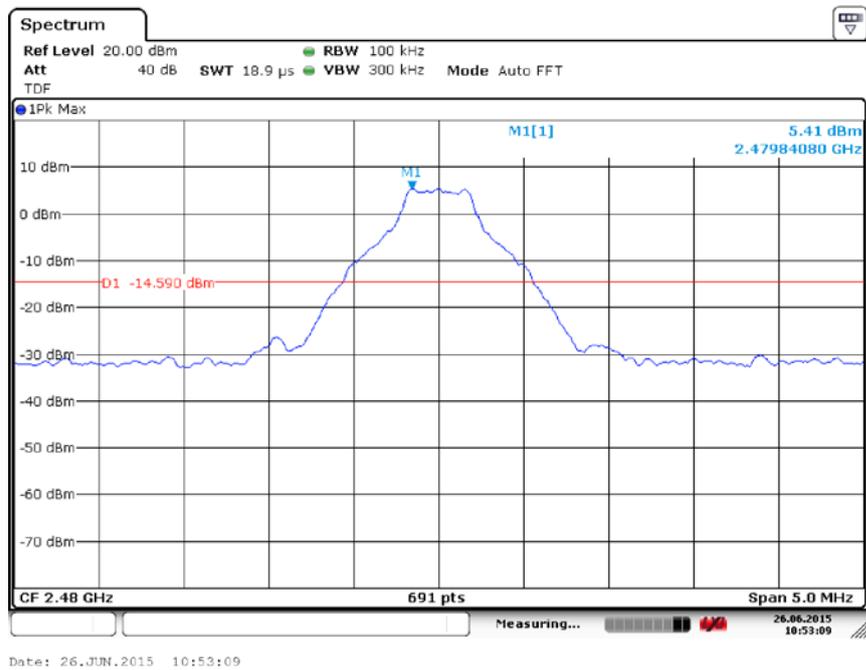


Fig. 28 Conducted Spurious Emission (GFSK, Ch78, 2.480GHz)

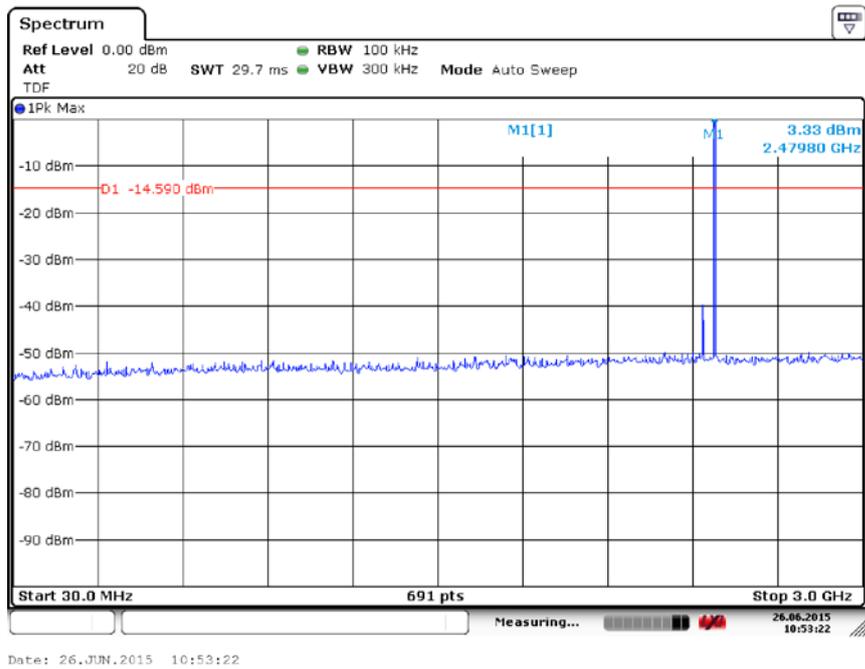


Fig. 29 Conducted Spurious Emission (GFSK, Ch78, 30 MHz-3 GHz)

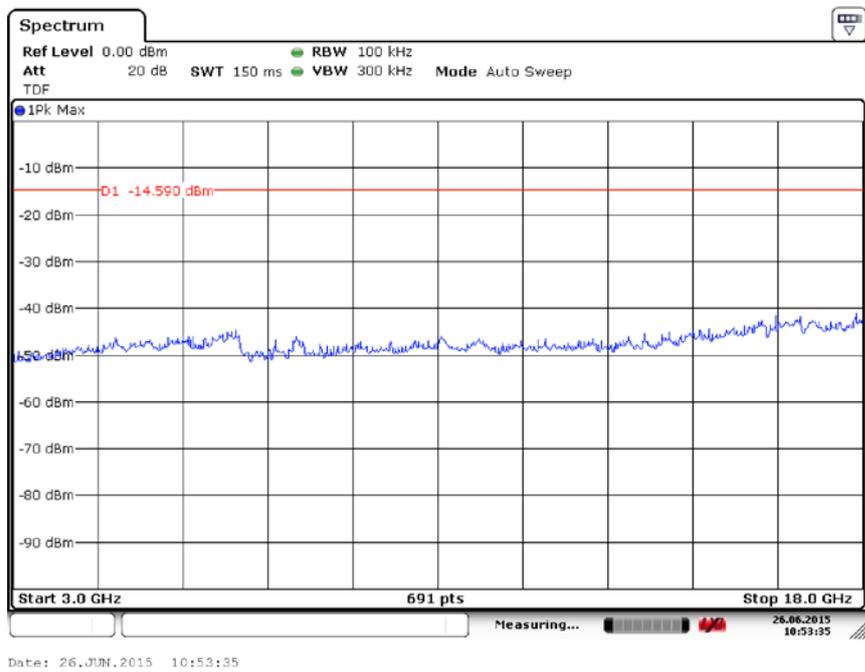


Fig. 30 Conducted Spurious Emission (GFSK, Ch78, 3GHz-18 GHz)

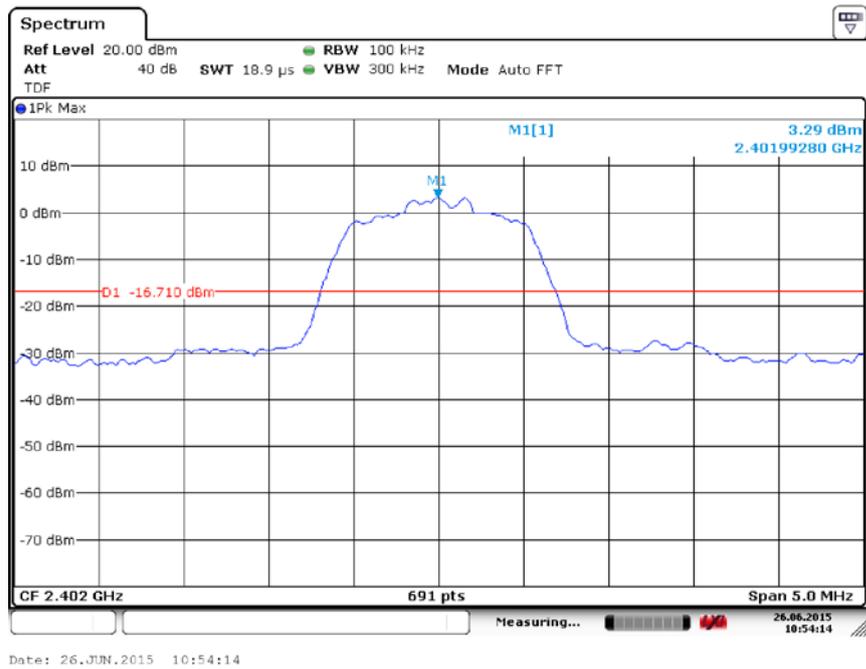


Fig. 31 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch0, 2.402GHz)

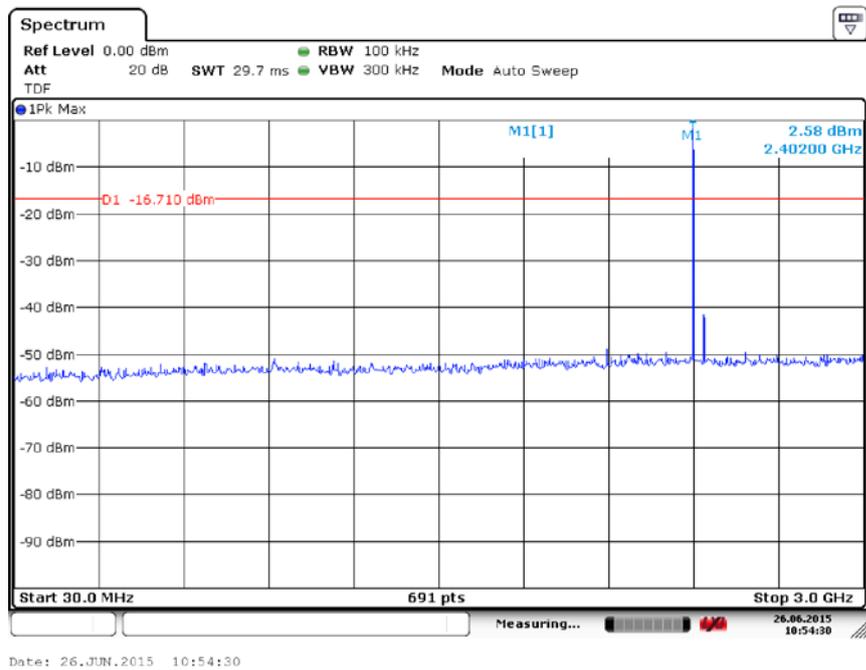


Fig. 32 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch0, 30 MHz-3 GHz)

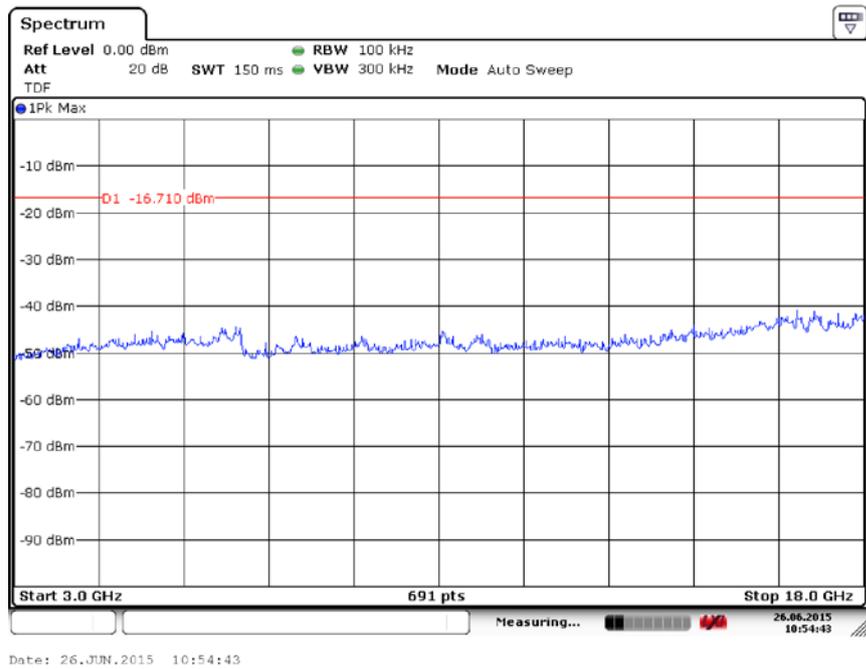


Fig. 33 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch0, 3GHz-18 GHz)

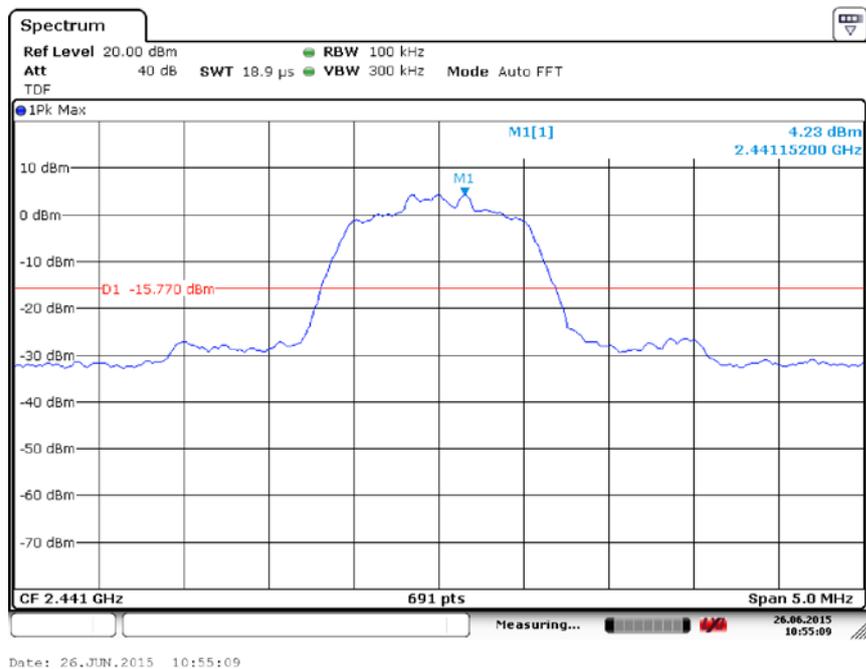


Fig. 34 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch39, 2.441GHz)

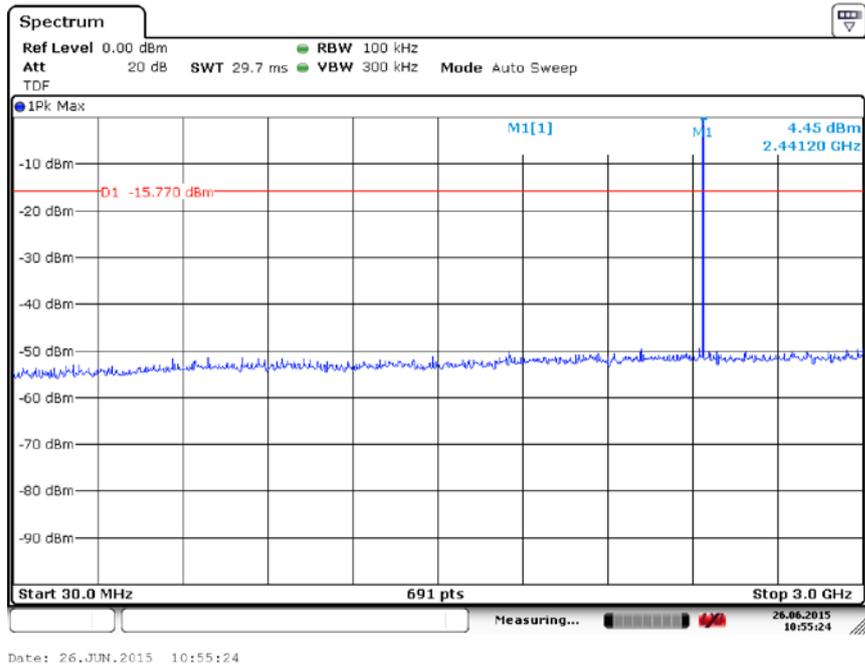


Fig. 35 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch39, 30 MHz-3 GHz)

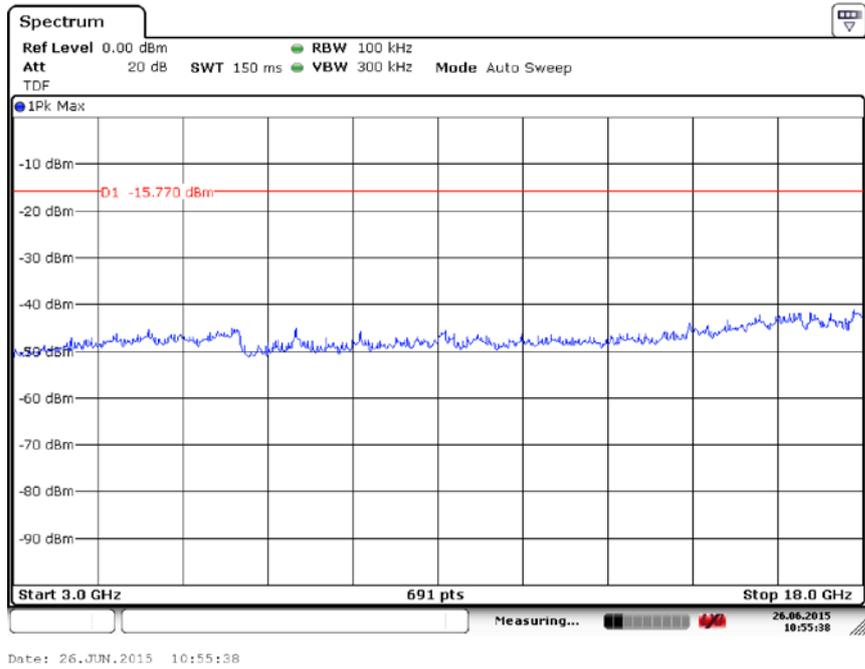


Fig. 36 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch39, 3GHz-18 GHz)

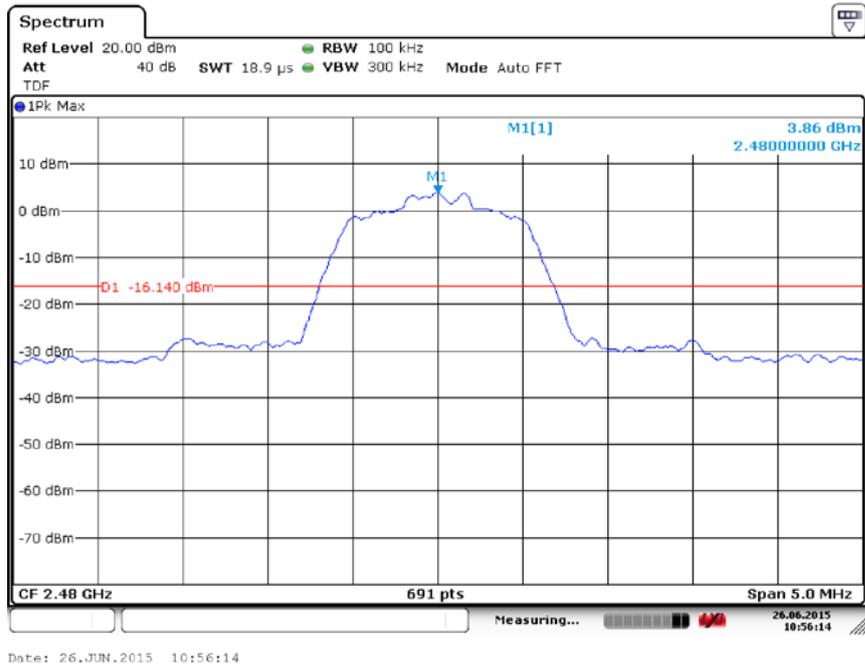


Fig. 37 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch78, 2.480GHz)

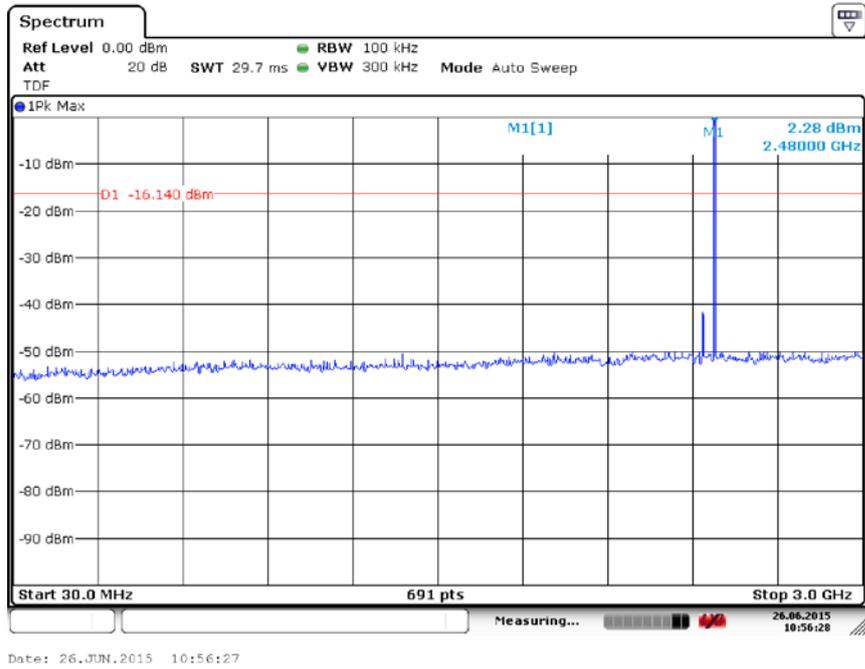


Fig. 38 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch78, 30 MHz-3 GHz)

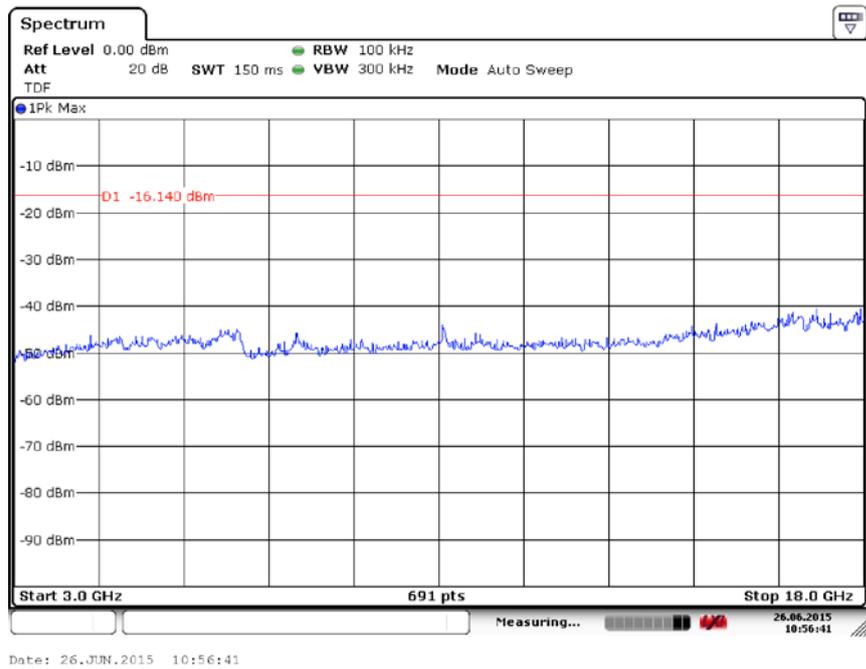


Fig. 39 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch78, 3GHz-18 GHz)

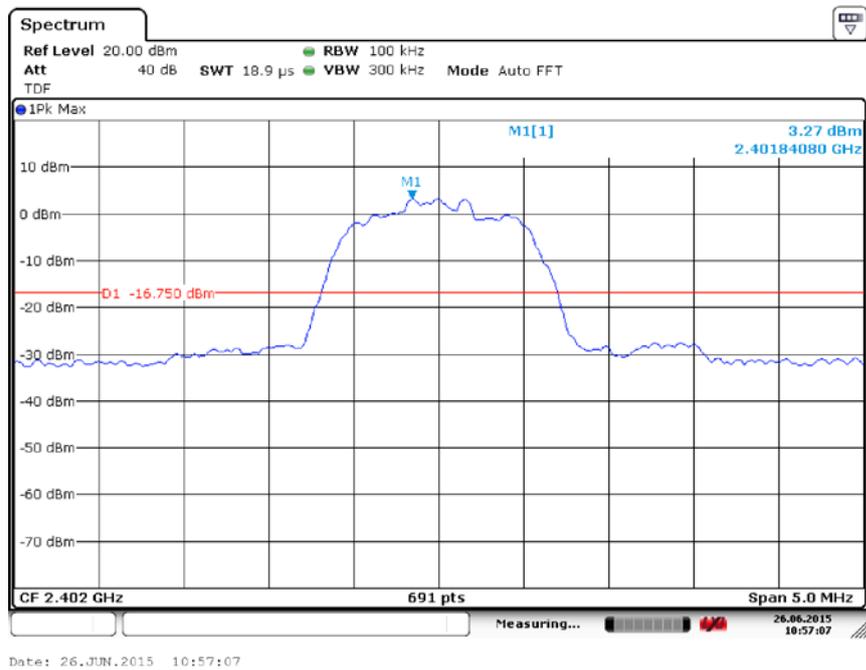


Fig. 40 Conducted Spurious Emission (8DPSK, Ch0, 2.402GHz)

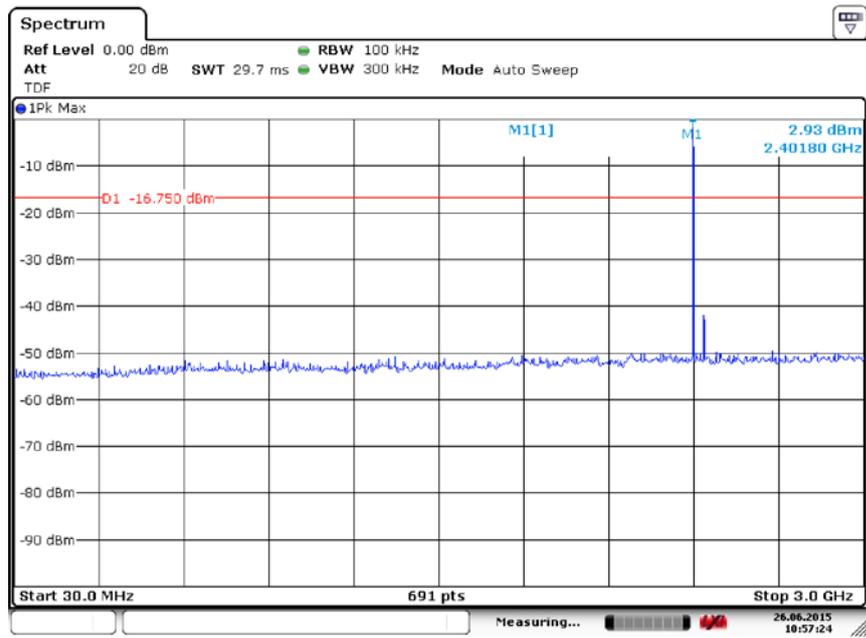


Fig. 41 Conducted Spurious Emission (8DPSK, Ch0, 30 MHz-3 GHz)

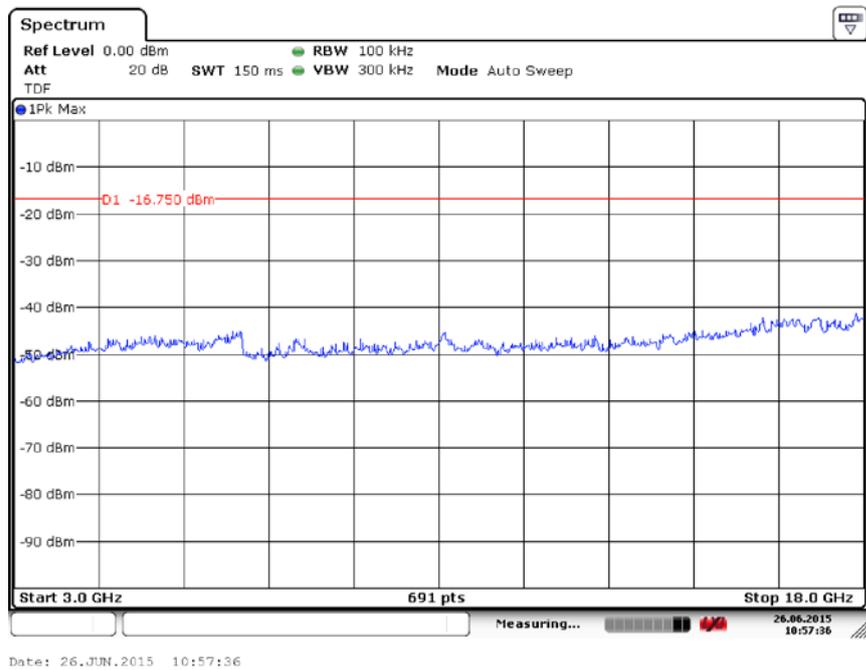


Fig. 42 Conducted Spurious Emission (8DPSK, Ch0, 3GHz-18 GHz)

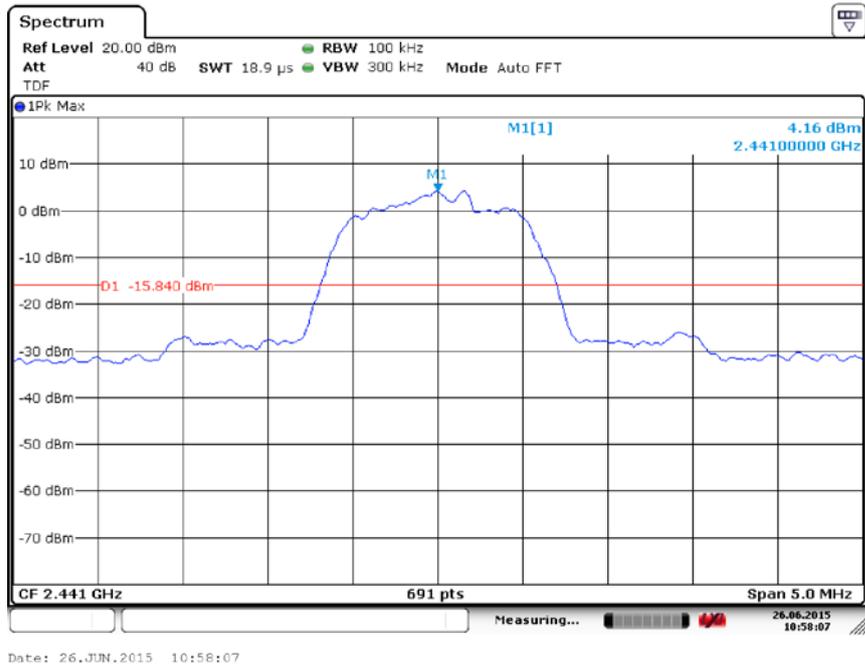


Fig. 43 Conducted Spurious Emission (8DPSK, Ch39, 2.441GHz)

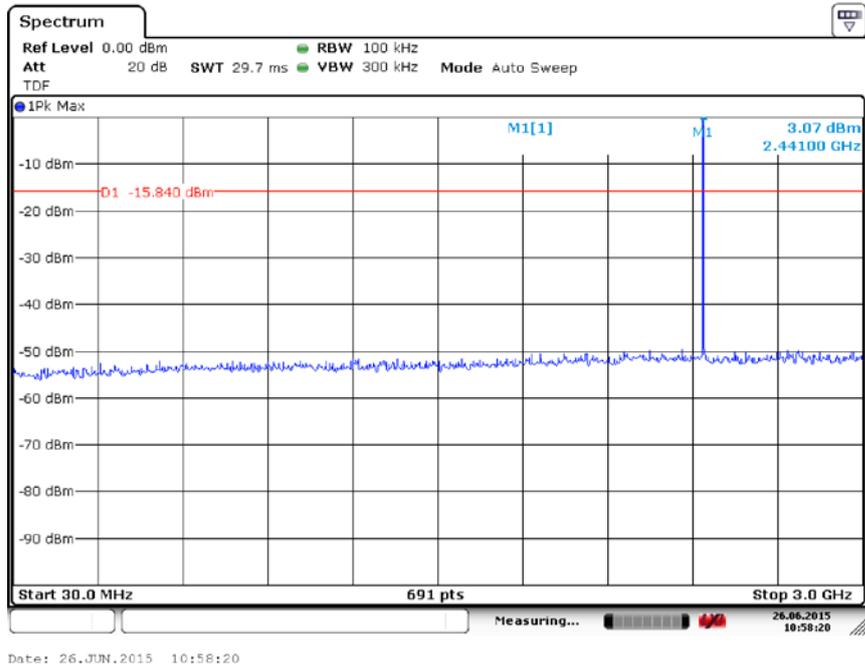


Fig. 44 Conducted Spurious Emission (8DPSK, Ch39, 30 MHz-3 GHz)

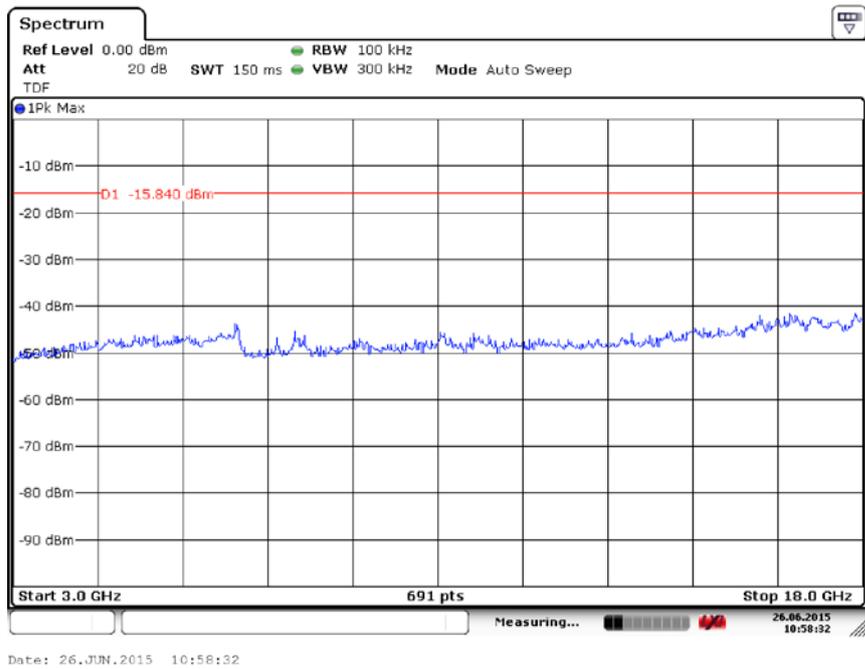


Fig. 45 Conducted Spurious Emission (8DPSK, Ch39, 3GHz-18 GHz)

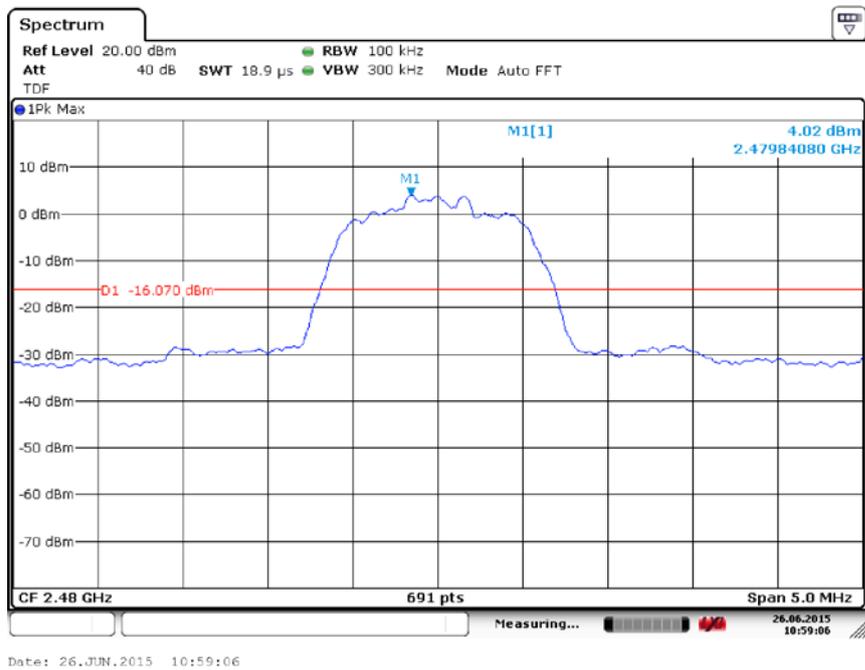


Fig. 46 Conducted Spurious Emission (8DPSK, Ch78, 2.480GHz)

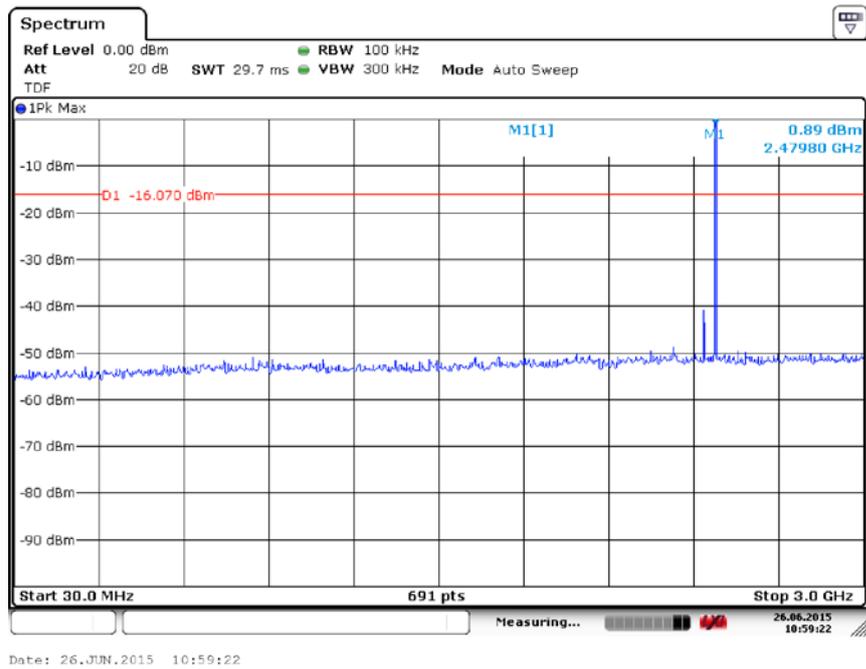


Fig. 47 Conducted Spurious Emission (8DPSK, Ch78, 30 MHz-3 GHz)



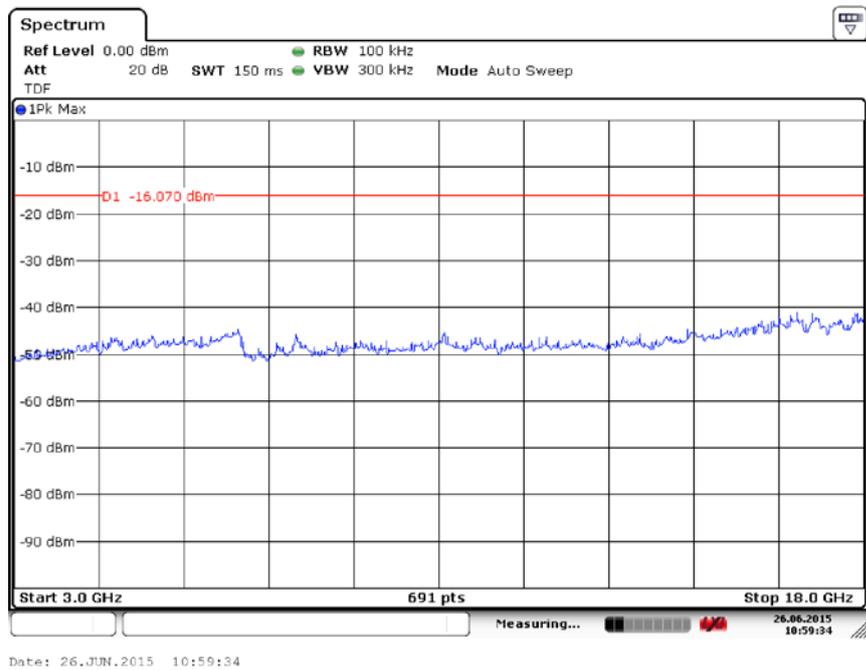


Fig. 48 Conducted Spurious Emission (8DPSK, Ch78, 3GHz-18 GHz)

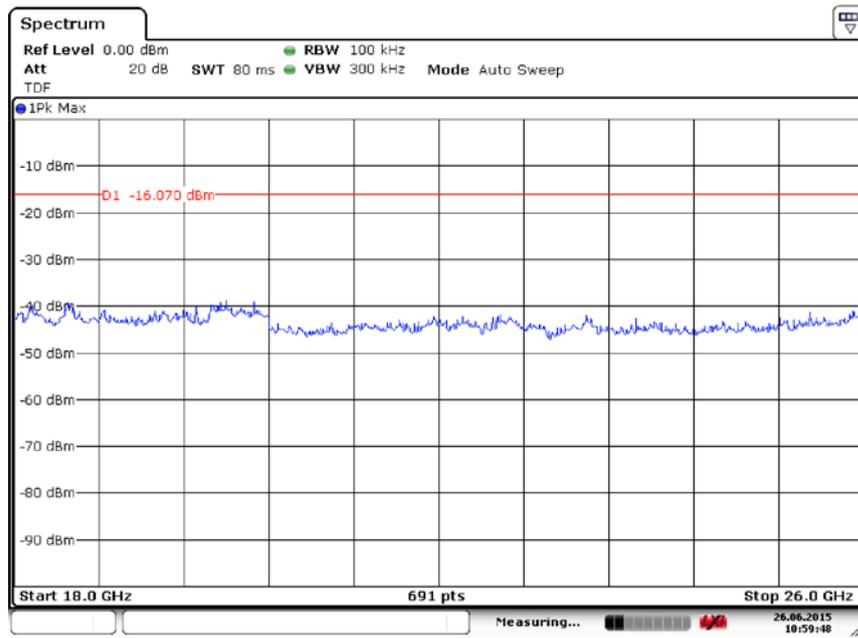


Date: 26.JUN.2015 10:59:48

Fig. 49 Conducted Spurious Emission (All channel, 18 GHz-26 GHz)

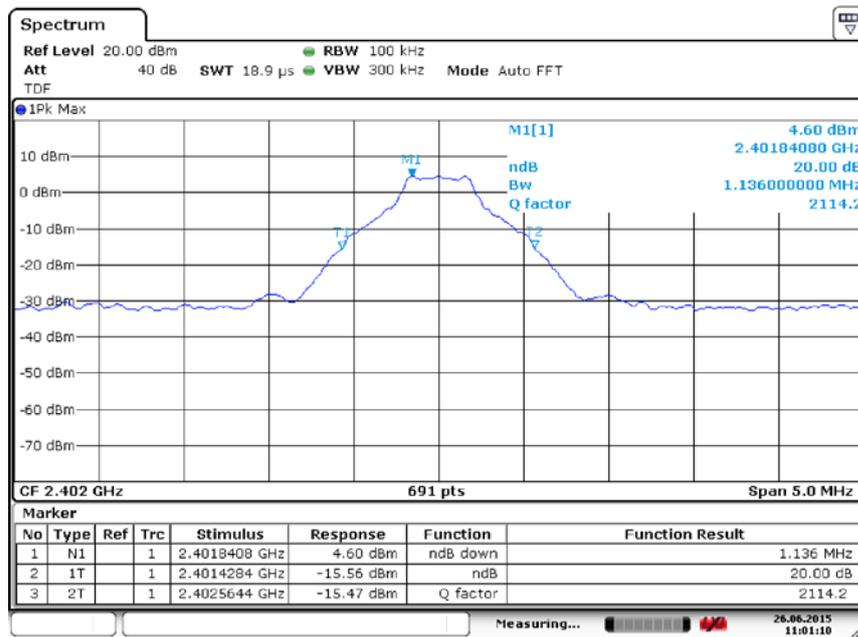


Date: 26.JUN.2015 11:01:10

Fig. 50 Occupied 20dB Bandwidth (GFSK, Ch 0)

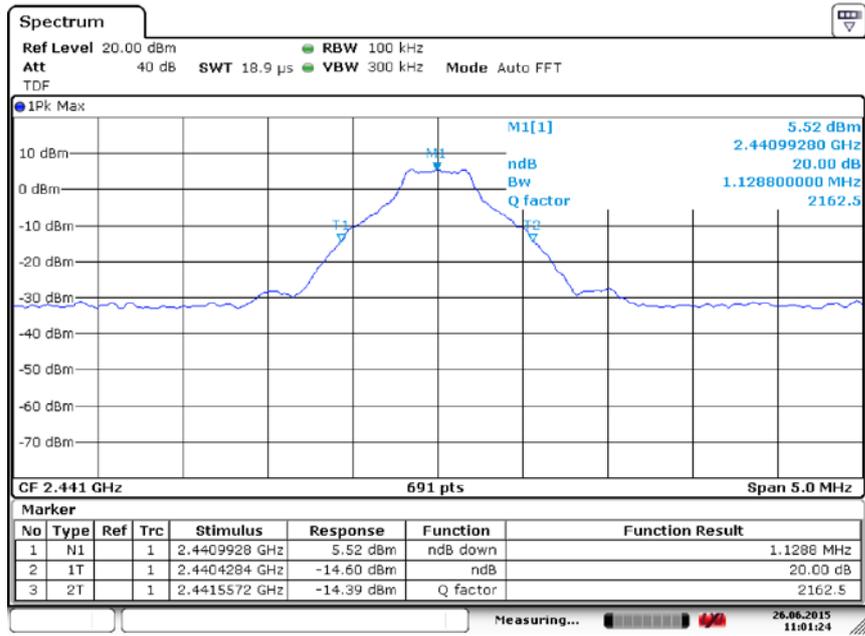


Date: 26.JUN.2015 11:01:24

Fig. 51 Occupied 20dB Bandwidth (GFSK, Ch 39)

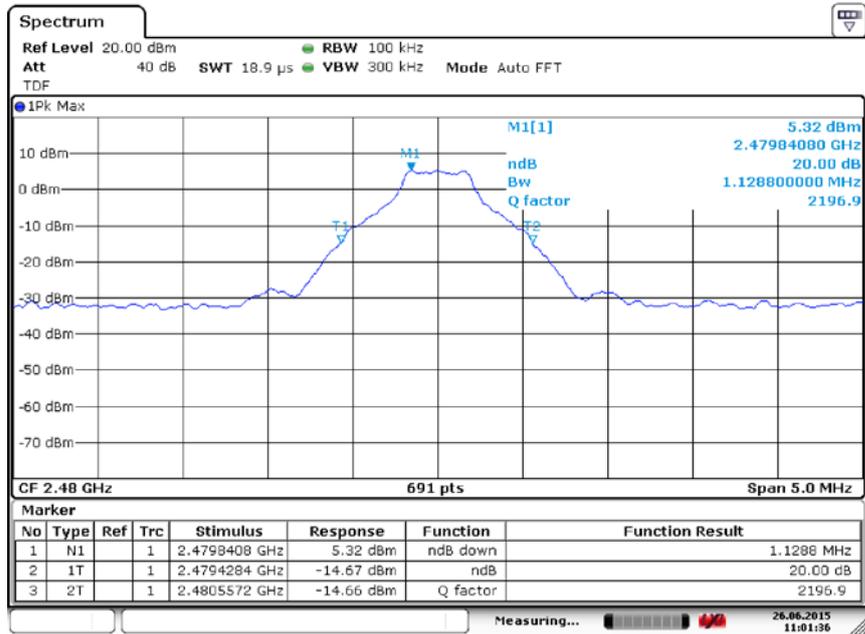


Date: 26.JUN.2015 11:01:36

Fig. 52 Occupied 20dB Bandwidth (GFSK, Ch 78)

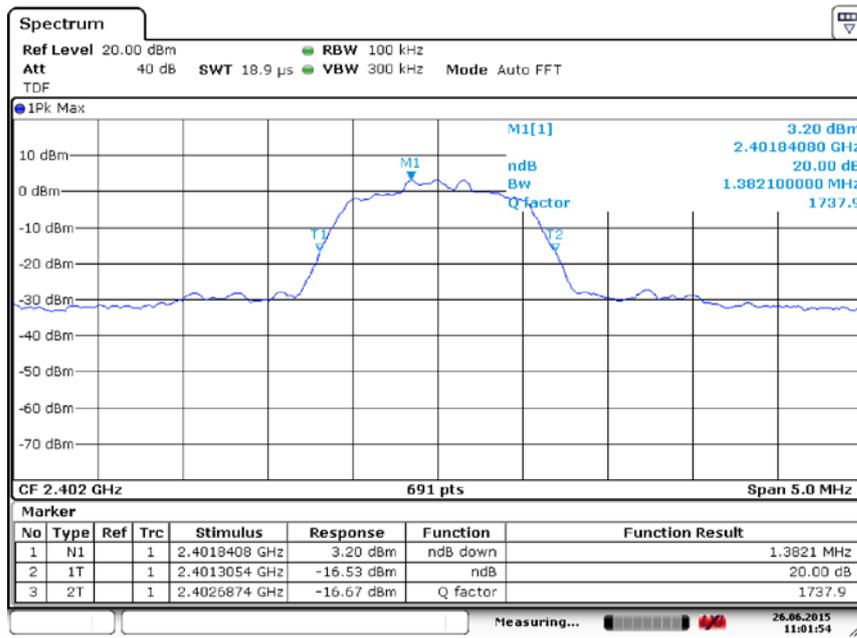

Date: 26.JUN.2015 11:01:54

Fig. 53 Occupied 20dB Bandwidth ($\pi/4$ DQPSK, Ch 0)

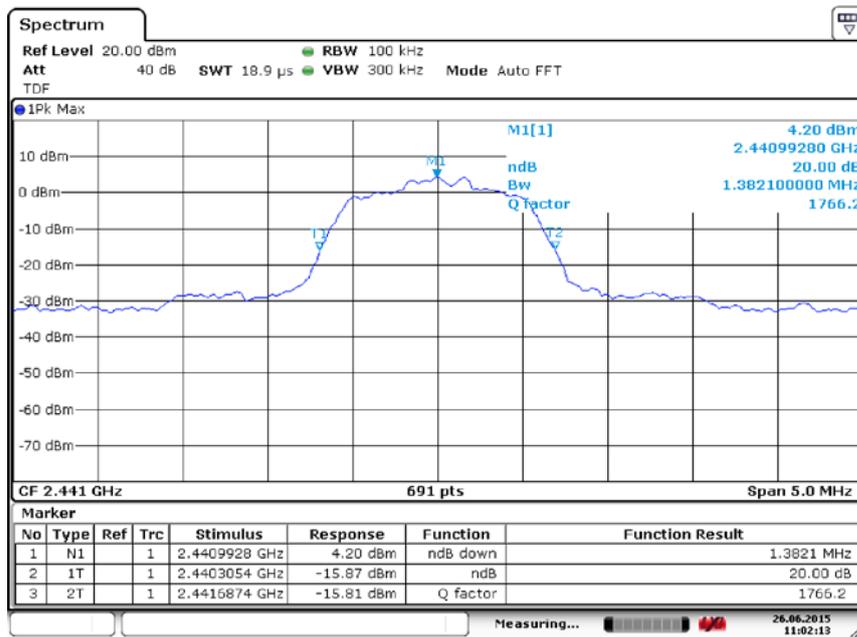

Date: 26.JUN.2015 11:02:12

Fig. 54 Occupied 20dB Bandwidth ($\pi/4$ DQPSK, Ch 39)

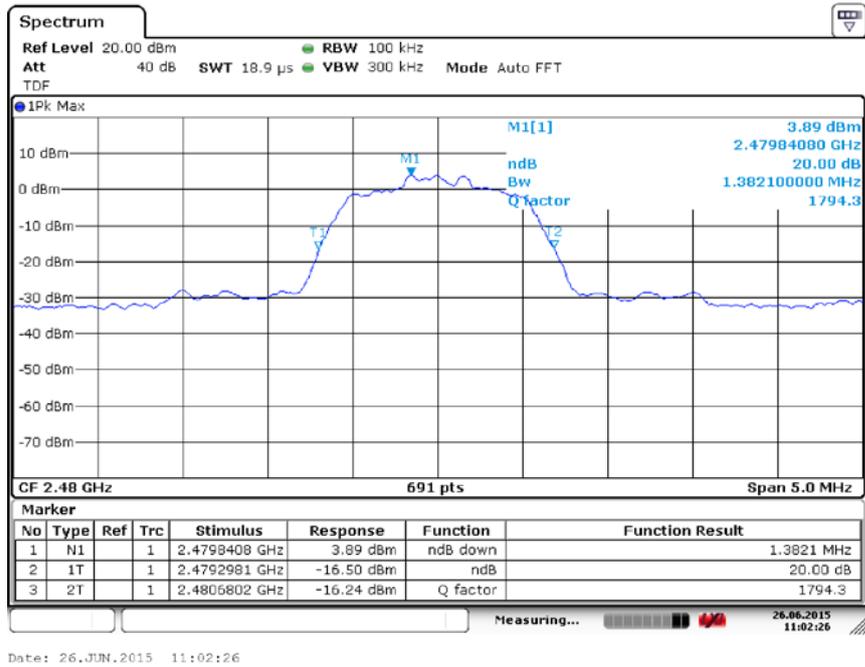


Fig. 55 Occupied 20dB Bandwidth ($\pi/4$ DQPSK, Ch 78)



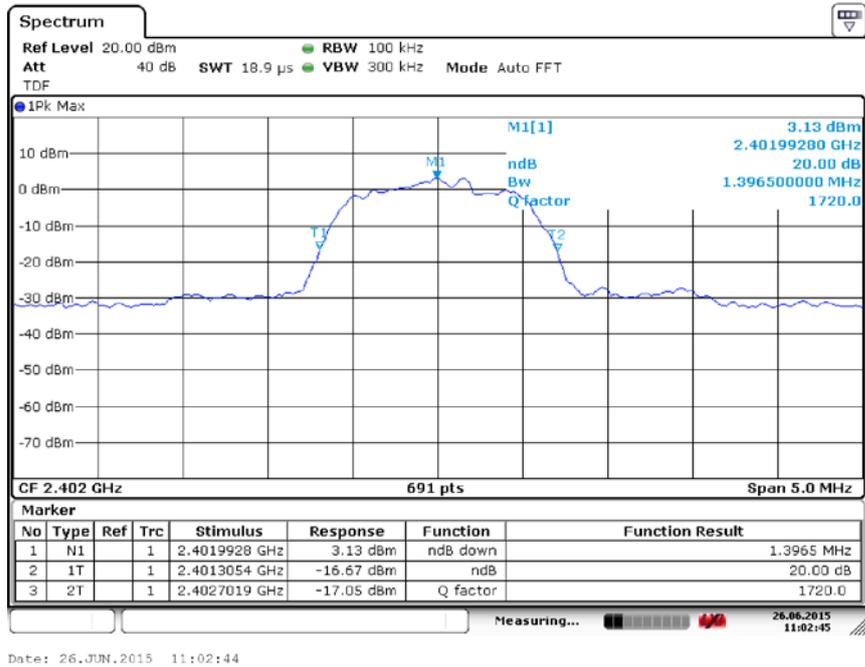


Fig. 56 Occupied 20dB Bandwidth (8DPSK, Ch 0)

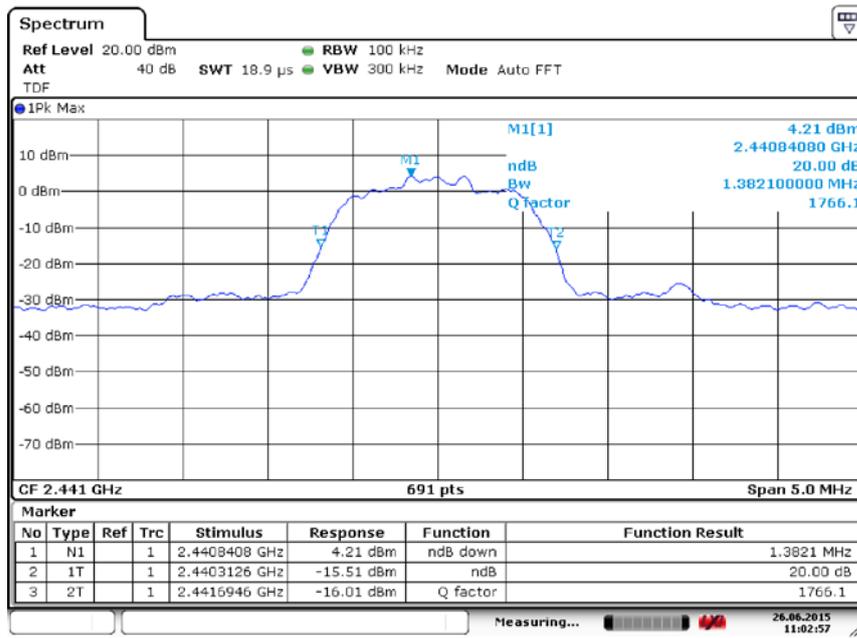

Date: 26.JUN.2015 11:02:56

Fig. 57 Occupied 20dB Bandwidth (8DPSK, Ch 39)

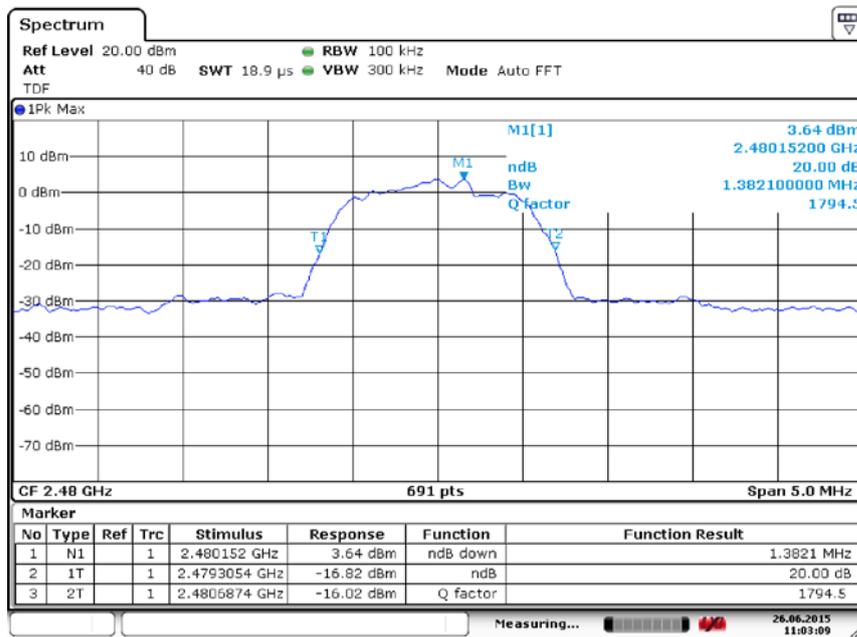

Date: 26.JUN.2015 11:03:09

Fig. 58 Occupied 20dB Bandwidth (8DPSK, Ch 78)

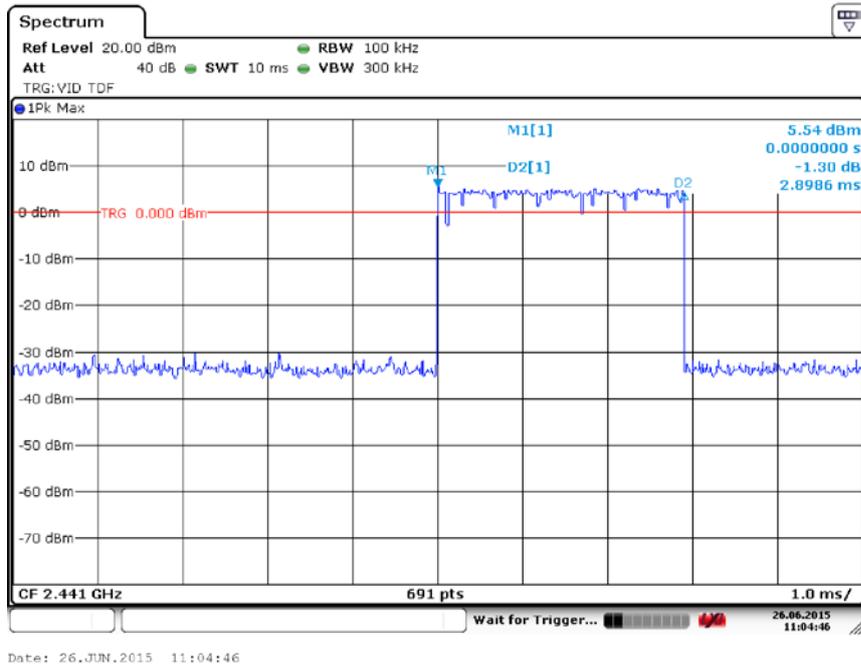


Fig. 59 Time of Occupancy(Dwell Time) (GFSK, Ch39)

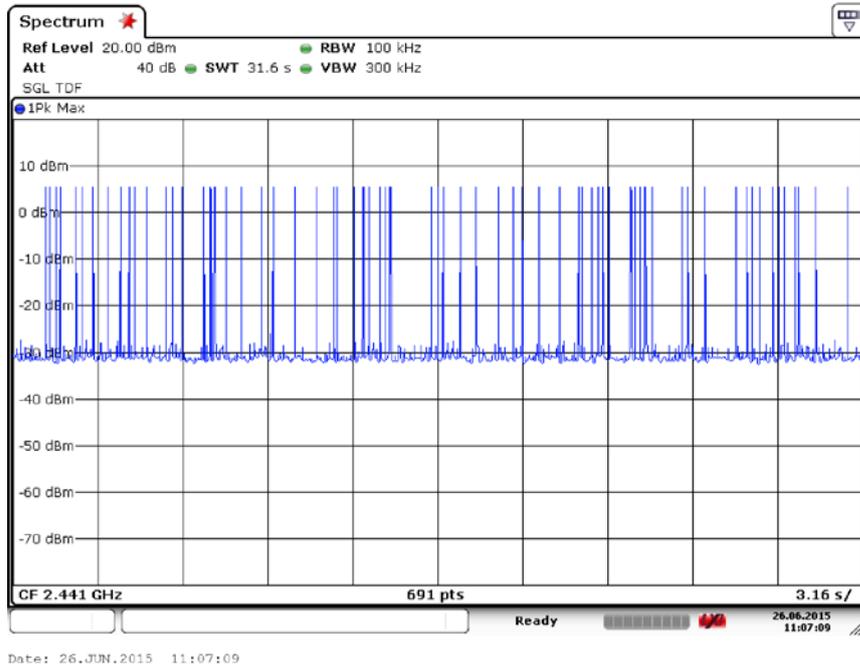


Fig. 60 Number of Transmissions (GFSK, Ch39)

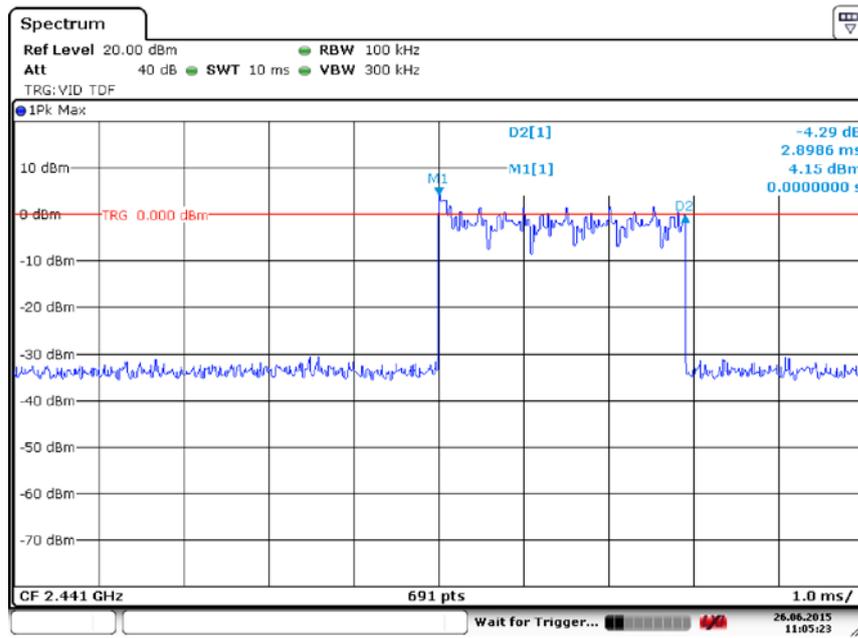


Fig. 61 Time of Occupancy(Dwell Time) ($\pi/4$ DQPSK, Ch39)



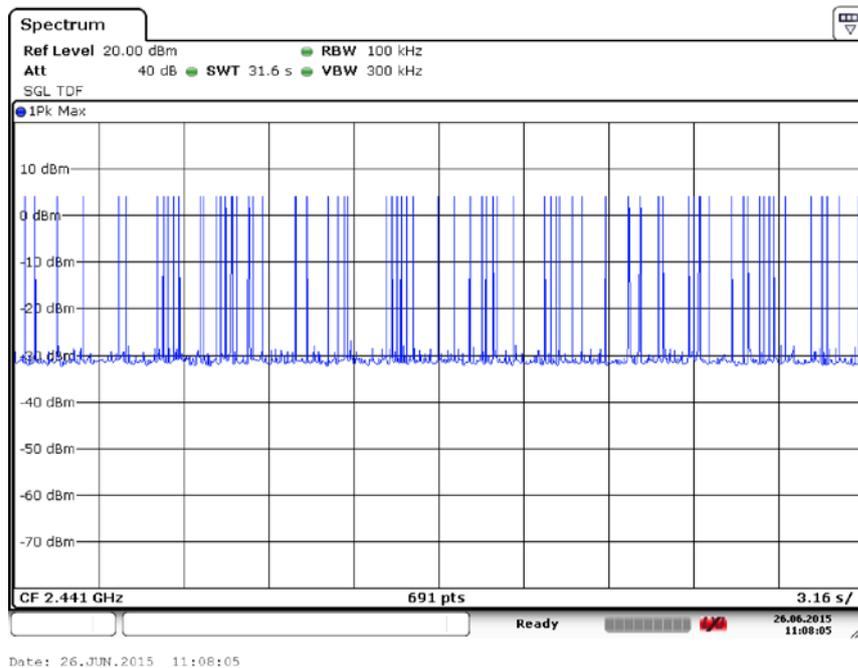


Fig. 62 Number of Transmissions ($\pi/4$ DQPSK, Ch39)

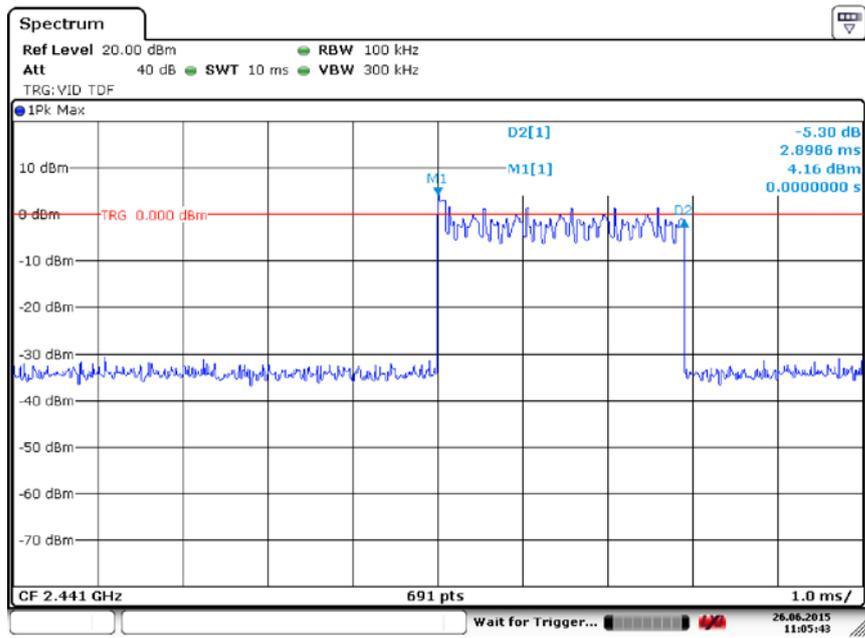

Date: 26.JUN.2015 11:05:43

Fig. 63 Time of Occupancy(Dwell Time) (8DPSK, Ch39)

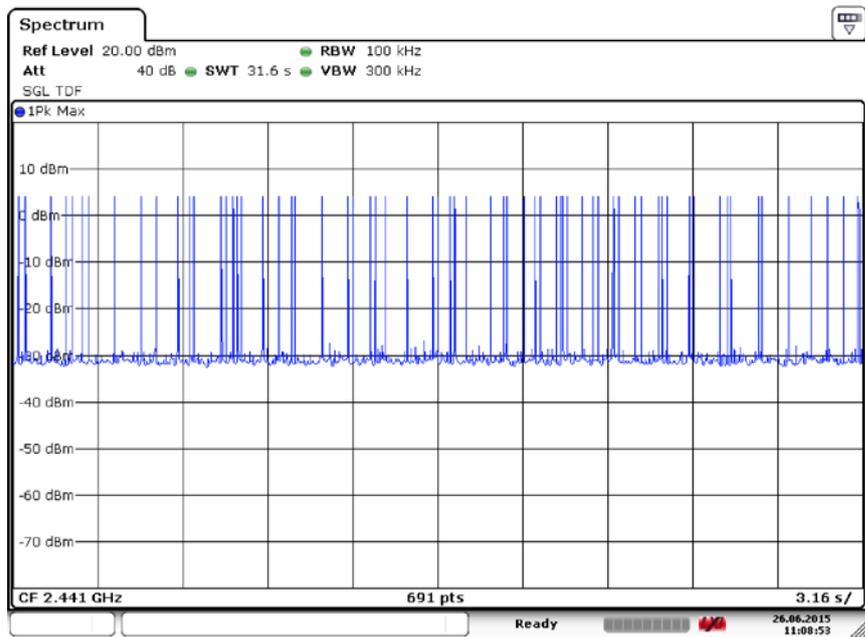

Date: 26.JUN.2015 11:08:53

Fig. 64 Number of Transmissions (8DPSK, Ch39)

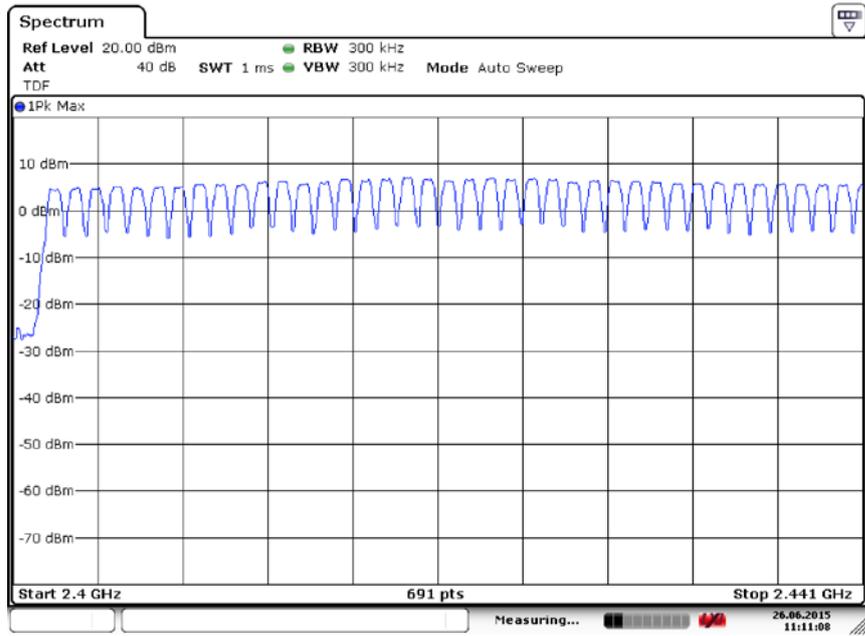


Fig. 65 Hopping channel ch0~39 (GFSK, Ch39)

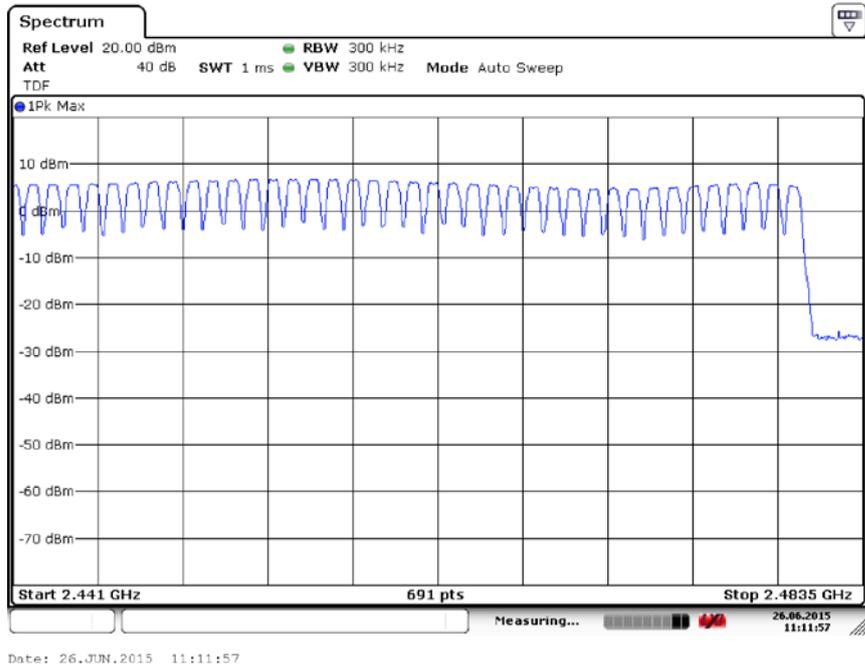


Fig. 66 Hopping channel ch39~78 (GFSK, Ch39)

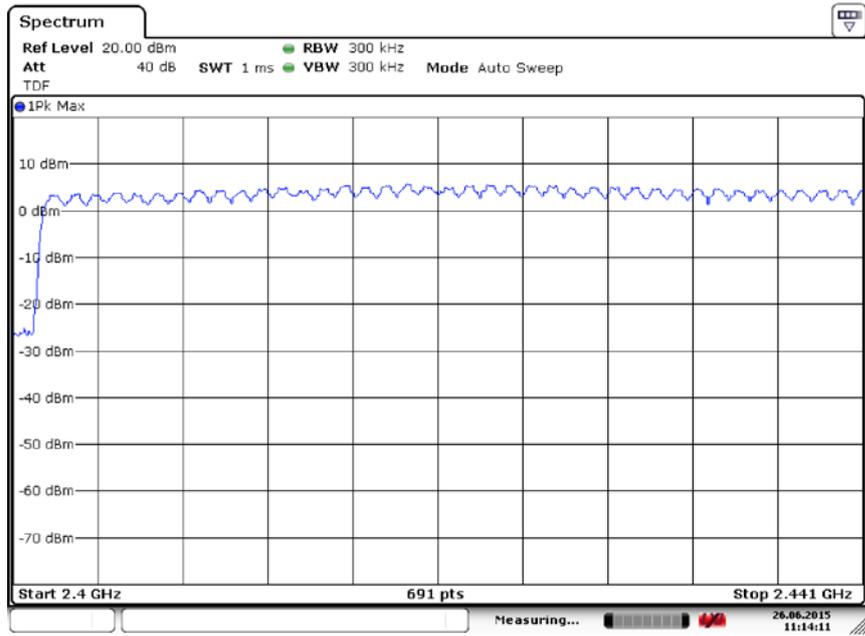


Fig. 67 Hopping channel ch0~39 ($\pi/4$ DQPSK, Ch39)

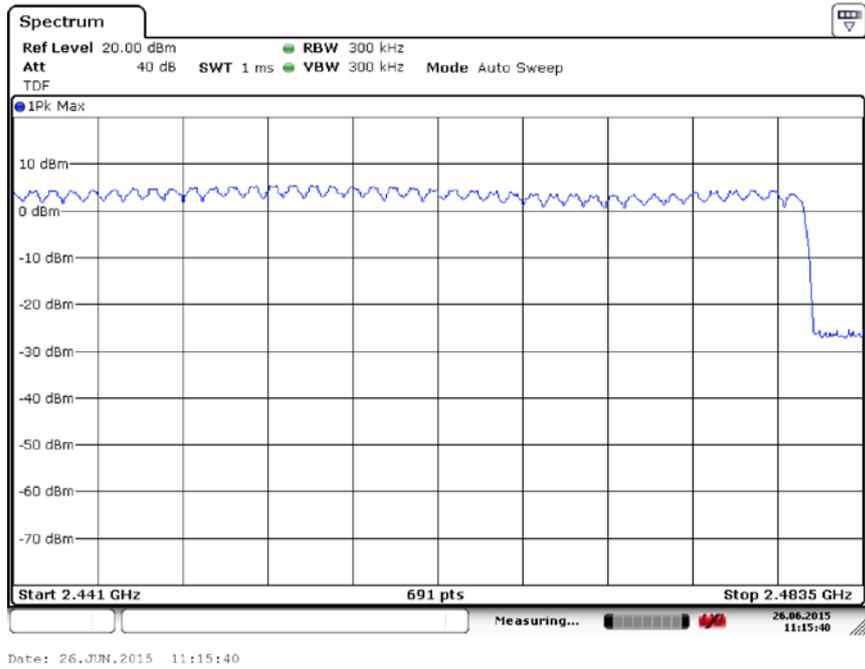


Fig. 68 Hopping channel ch39~78 ($\pi/4$ DQPSK, Ch39)

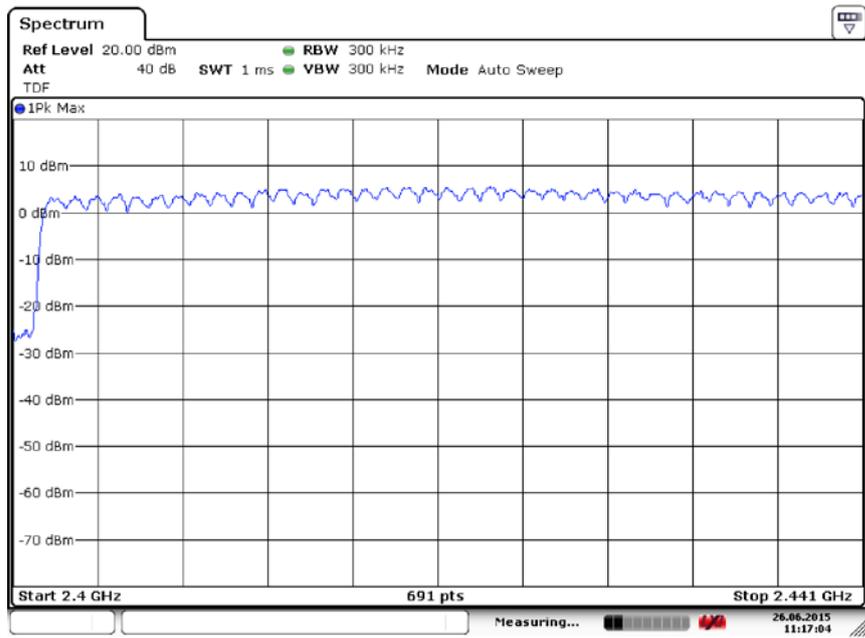


Fig. 69 Hopping channel ch0~39 (8DPSK, Ch39)



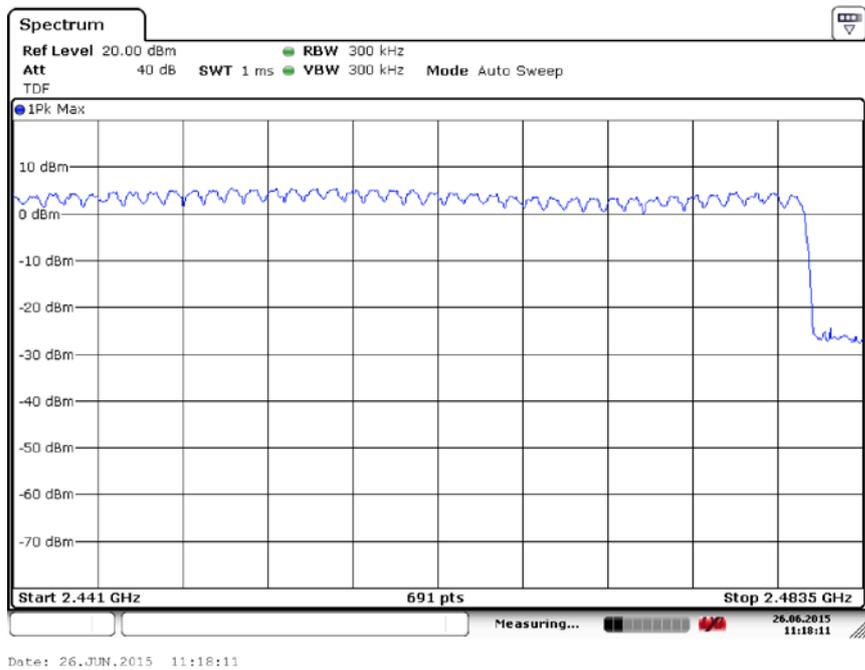


Fig. 70 Hopping channel ch39~78 (8DPSK, Ch39)

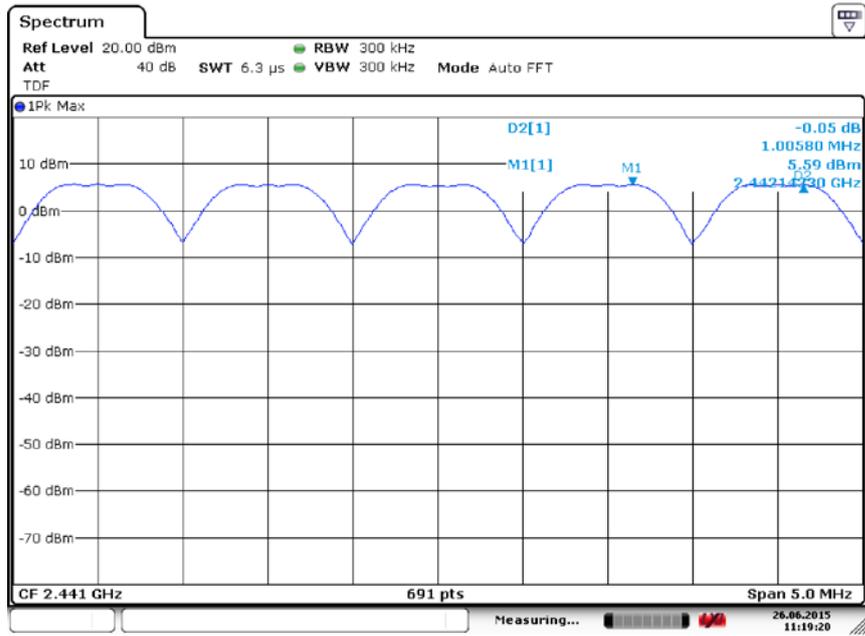

Date: 26.JUN.2015 11:19:20

Fig. 71 Carrier Frequency Separation (GFSK, Ch39)

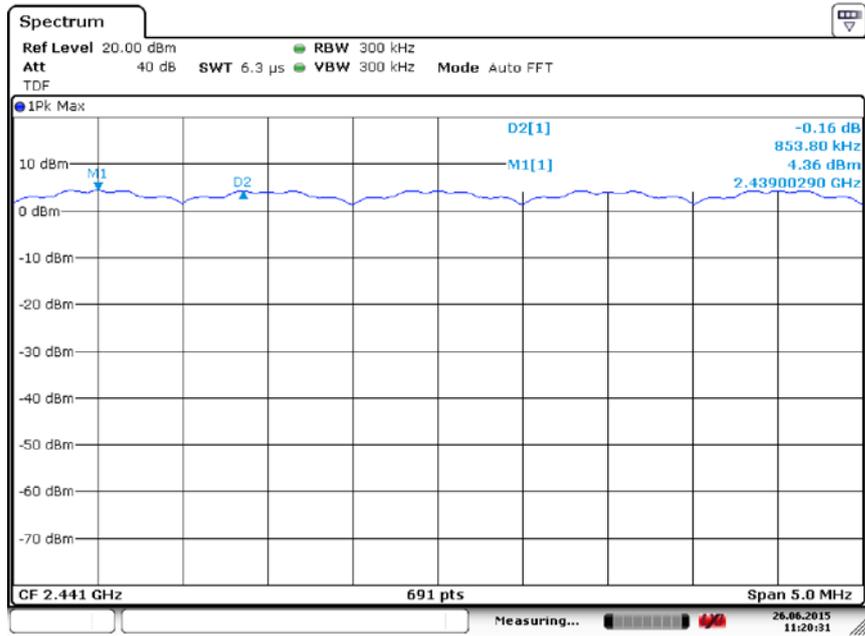

Date: 26.JUN.2015 11:20:31

Fig. 72 Carrier Frequency Separation ($\pi/4$ DQPSK, Ch39)

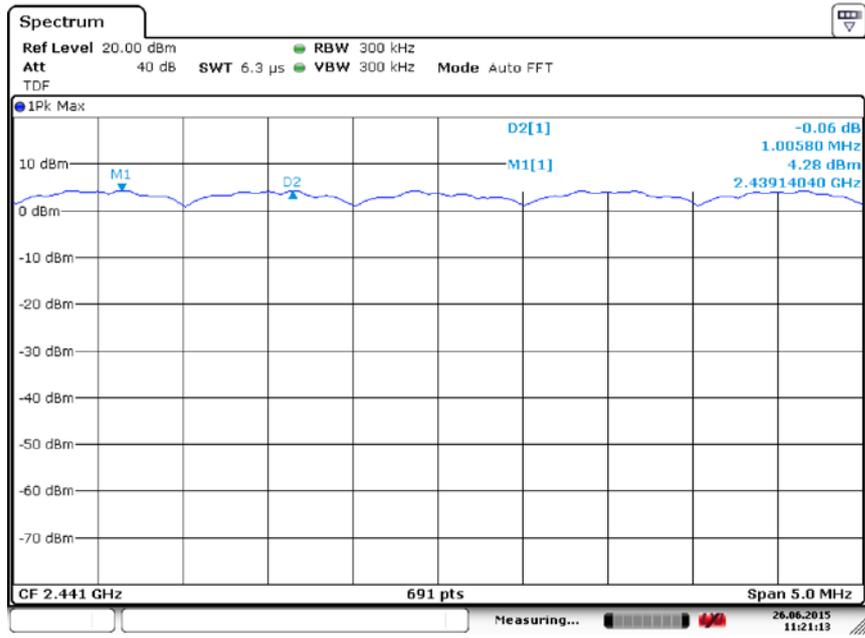



Fig. 73 Carrier Frequency Separation (8DPSK, Ch39)



ANNEX D: Persons involved in this testing

Test Name	Tester
Maximum Peak Output Power	Xu Zhongfei, Li Zhibin
Peak Power Spectral Density	Xu Zhongfei, Li Zhibin
Occupied 6dB Bandwidth	Xu Zhongfei, Li Zhibin
Band Edges Compliance	Xu Zhongfei, Li Zhibin
Transmitter Spurious Emission - Conducted	Xu Zhongfei, Li Zhibin

ANNEX E: Accreditation Certificate

 
China National Accreditation Service for Conformity Assessment
LABORATORY ACCREDITATION CERTIFICATE
(Registration No. CNAS L0570)
China Academy of Telecommunication Research of MIIT <u>No.52, Huayuan North Road, Haidian District, Beijing, China</u>
<i>is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence of testing and calibration.</i>
<i>The scope of accreditation is detailed in the attached appendices bearing the same registration number as above. The appendices form an integral part of this certificate.</i>
Date of Issue: 2014-06-20 Date of Expiry: 2017-06-19 Date of Initial Accreditation: 1998-07-03 Date of Update: 2014-06-20

Signed on behalf of China National Accreditation Service for Conformity Assessment
<small>China National Accreditation Service for Conformity Assessment (CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation schemes for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA) and Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).</small>
No.CNAS AL 2 0010037

END OF REPORT