



Shenzhen GTI Technology Co., Ltd.

1F,2 Block, Jiaquan Building, Guanlan High-tech Park Baoan District,
Shenzhen, Guangdong, China.

Tel: +86-755-27559792

Fax: +86-755-86116468

Report No.: GTI20161071F-2

Page 1 of 52

TEST REPORT

Product Name.....: LTE/WCDMA/GSM(GPRS) Mutil-Mode Digital Mobile Phone

Trademark.....: /

Model Name.....: ZTE BLADE V8 SE, ZTE BLADE V0820,
ZTE BLADE V8 LITE, BLADE V8 SE

FCC ID.....: SRQ-BLADEV8SE

Test Standards.....: FCC CFR Title 47 Part 15 Subpart C section 15.247

Applicant.....: ZTE CORPORATION

Address of applicant.....: ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park,
Nanshan District, Shenzhen, Guangdong, 518057, P.R. China
Shenzhen

Date of Receipt.....: Dec. 26, 2016

Date of Test Date.....: Dec. 27, 2016 - Dec. 30, 2016

Data of issue.....: Jan. 02, 2017

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above



GENERAL DESCRIPTION OF EUT	
Equipment:	LTE/WCDMA/GSM(GPRS) Mutil-Mode Digital Mobile Phone
Model Name:	ZTE BLADE V8 SE, ZTE BLADE V0820, ZTE BLADE V8 LITE, BLADE V8 SE
Model Difference	All models are the Circuit Design identical, only different on model number, the test is performed on model: ZTE BLADE V8 SE
Manufacturer:	ZTE CORPORATION
Manufacturer Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China Shenzhen
Power Rating:	DC 3.85V form 2500mAh by Rechargeable Li-ion Battery
Adapter:	Model: STC-A515A-Z Input: AC 100-240V, 50Hz/60Hz, 300mA Output: DC 5V, 1500mA

Compiled By:

(Vicky Shi)

Reviewed By:

(Winner Zhang)

Approved By:

(Walter Chen)

This test report consists of 52 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by GTI. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of compiler, reviewer and approver. Any objections must be raised to GTI within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Table of Contents

Page

1. SUMMARY.....	4
1.1. TEST STANDARDS.....	4
1.2. TEST DESCRIPTION.....	4
1.3. TEST FACILITY.....	5
1.4. MEASUREMENT UNCERTAINTY.....	5
2. GENERAL INFORMATION.....	6
2.1. ENVIRONMENTAL CONDITIONS.....	6
2.2. GENERAL DESCRIPTION OF EUT.....	6
2.3. DESCRIPTION OF TEST MODES.....	7
2.4. MEASUREMENT INSTRUMENTS LIST.....	9
3. TEST CONDITIONS AND RESULTS.....	10
3.1. CONDUCTED EMISSION (AC MAIN).....	10
3.2. RADIATED EMISSION.....	15
3.3. MAXIMUM CONDUCTED OUTPUT POWER.....	24
3.4. POWER SPECTRAL DENSITY.....	27
3.5. 6DB BANDWIDTH.....	32
3.6. BAND EDGE COMPLIANCE OF RF EMISSION.....	40
3.7. SPURIOUS RF CONDUCTED EMISSION.....	46
3.8. ANTENNA REQUIREMENT.....	50
4. EUT TEST PHOTO.....	51
5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL.....	52

1. SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V03r05](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

1.2. Test Description

FCC PART 15 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (c)	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen General Testing & Inspection Technology Co., Ltd.

Add: 1F, 2 Block, Jiaquan Building, Guanlan High-tech Park Baoan District, Shenzhen, Guangdong, China

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9783A

The 3m alternate test site of Shenzhen GTI Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Aug, 2011.

FCC-Registration No.: 214666

Shenzhen GTI Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 214666, Sep 19, 2011

1.4. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements and is documented in the Shenzhen General Testing & Inspection Technology Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for General Testing & Inspection laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-40 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

2.2. General Description of EUT

Product Name:	LTE/WCDMA/GSM(GPRS) Mutil-Mode Digital Mobile Phone
Model/Type reference:	LeBHP401
Power supply:	DC 3.85V form 2500mAh by Rechargeable Li-ion Battery
Adapter:	Model: STC-A515A-Z Input: AC 100-240V, 50Hz/60Hz, 300mA Output: DC 5V, 1500mA
WIFI	
Supported type:	802.11b/802.11g/802.11n(H20)
Modulation:	802.11b: DSSS 802.11g/802.11n(H20): OFDM
Operation frequency:	802.11b/802.11g/802.11n(H20): 2412MHz~2462MHz
Operation bandwidth:	802.11b/802.11g/802.11n(H20): 20MHz
Channel number:	802.11b/802.11g/802.11n(H20): 11
Channel separation:	5MHz
Antenna type:	Internal Antenna
Antenna gain:	0.4 dBi
BLE:	
Supported type:	Version 4.0 for low Energy
Modulation:	GFSK
Operation frequency:	2402MHz to 2480MHz
Channel number:	40
Channel separation:	2 MHz
Antenna type:	Internal Antenna
Antenna gain:	0.4 dBi

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.3. Description of Test Modes

WIFI Operation Frequency:

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) mode for testing. Channel 01/06/11 was selected to test

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	08	2447
02	2417	09	2452
03	2422	10	2457
04	2427	11	2462
05	2432		
06	2437		
07	2442		

Operation Frequency List for BLE:

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing. Channel 00/20/39 was selected to test.

Channel	Frequency (MHz)
00	2402
02	2404
03	2406
:	:
20	2442
:	:
37	2476
38	2478
39	2480

Data Rate Used:

Pre-scan all data rate, find the data rate shown in the table below is the worst-case rate, the report shows only the worst rate the data.

Mode	Data Rate
802.11b/DSSS	1 Mbps
802.11g/OFDM	6 Mbps
802.11n(20MHz)/OFDM	6.5Mbps
BLE/GFSK	1 Mbps

2.4. Measurement Instruments List

Maximum Conducted Output Power/Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2487B	110553	July 10,2017
2	Power Sensor	Anritsu	MA2411B	100345	July 10,2017
3	Spectrum Analyzer	R&S	FSU26	100105	Jan 07,2017
4	Temporary Antenna connector	Schwarzbeck	SMA24D	ED1201	Jan 04,2017

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Conducted Emission

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrate until
1	LISN	R&S	ENV216	101112	Jan. 07, 2017
2	LISN	R&S	ENV216	101113	Jan. 07, 2017
3	EMI Test Receiver	R&S	ESCI	100920	Jan. 07, 2017
4	Cable	Schwarzbeck	AK9515E	33156	Jan. 07, 2017

Radiated Emission

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100658	Jan. 07, 2017
2	High pass filter	micro-tranics	HPM50111	34202	Jan. 07, 2017
3	Log-Bicon Antenna	Schwarzbeck	CBL6141A	4180	Jan. 07, 2017
4	Ultra-Broadband Antenna	ShwarzBeck	BBHA9170	25841	Jan. 10, 2017
5	Loop Antenna	LAPLAC	RF300	9138	Jan. 10, 2017
6	Spectrum Analyzer	Rohde & Schwarz	FSU26	100105	Jan. 07, 2017
7	Horn Antenna	Schwarzbeck	BBHA 9120D	648	Jan. 07, 2017
8	Pre-Amplifier	HP	8447D	1937A03050	Jan. 07, 2017
9	Pre-Amplifier	EMCI	EMC051835	980075	Jan. 07, 2017
10	Antenna Mast	UC	UC3000	N/A	N/A
11	Turn Table	UC	UC3000	N/A	N/A
12	Cable Below 1GHz	Schwarzbeck	AK9515E	33155	Jan. 07, 2017
13	Cable Above 1GHz	Hubersuhner	SUCOFLEX102	DA1580	Jan. 07, 2017

Note: 1. The Cal. Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emission (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

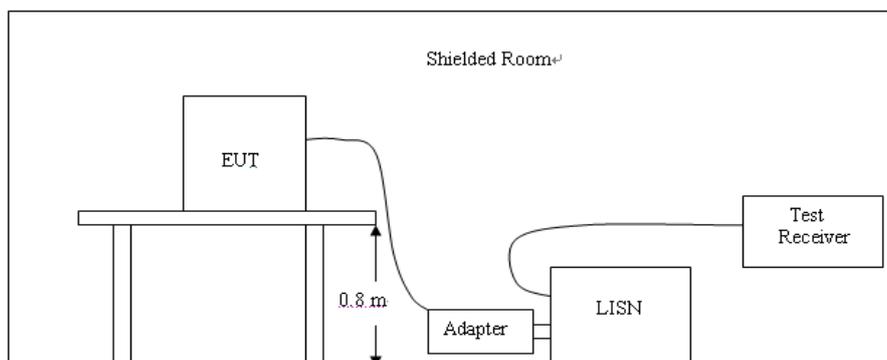


TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
2. Support equipment, if needed, was placed as per ANSI C63.10-2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
4. The EUT received DC5V power from the PC, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Note: Pre-scan all mode of WiFi and BLE, find the 802.11b and BLE the worst case for lowest channel of data.

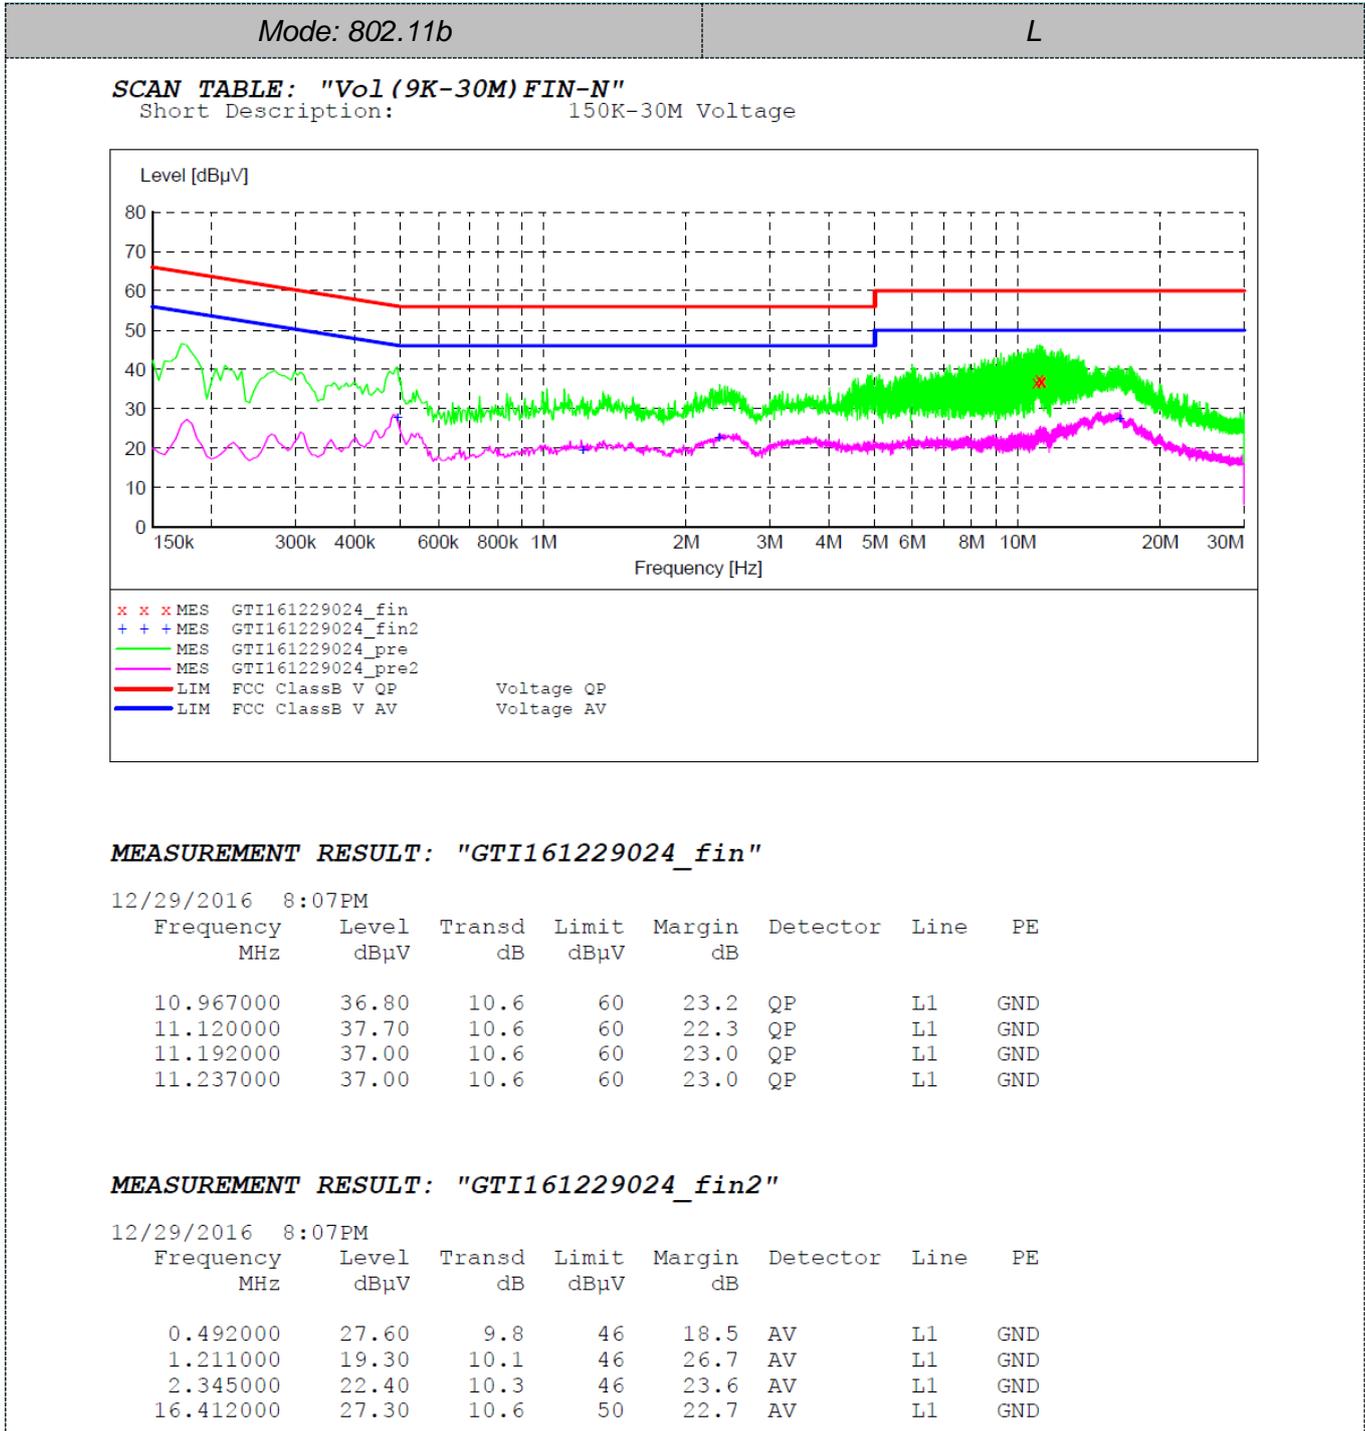


Mode: 802.11b

N

SCAN TABLE: "Vol (9K-30M) FIN-N"

Short Description: 150K-30M Voltage

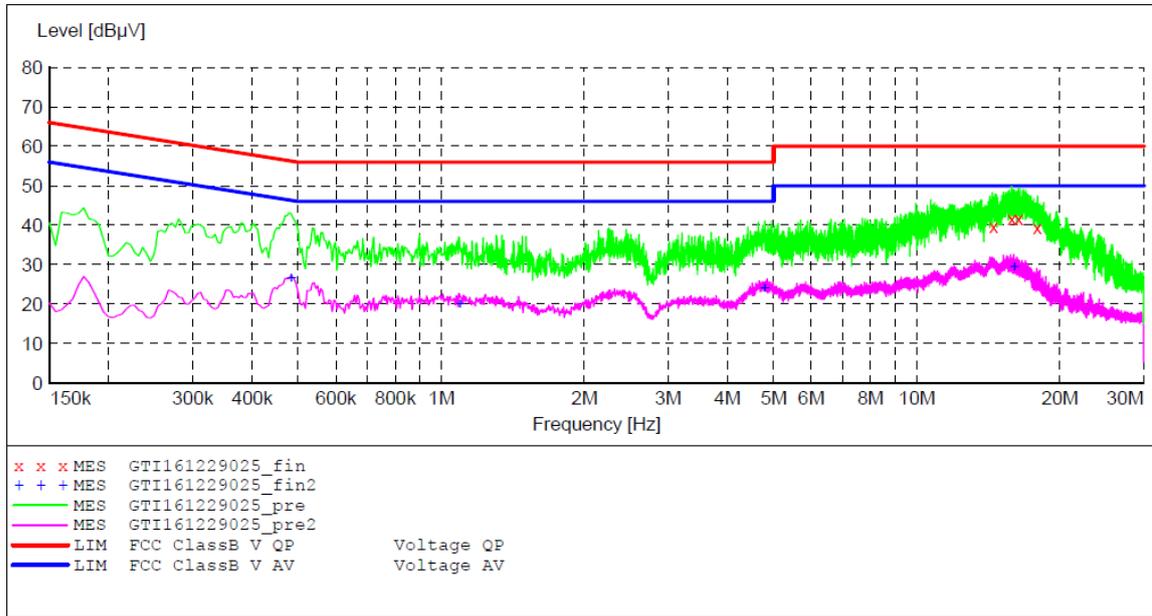

MEASUREMENT RESULT: "GTI161229025_fin"

12/29/2016 8:10PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
14.486000	39.60	10.3	60	20.4	QP	N	GND
15.845000	41.60	10.4	60	18.4	QP	N	GND
16.385000	41.60	10.4	60	18.4	QP	N	GND
17.906000	39.40	10.4	60	20.6	QP	N	GND


MEASUREMENT RESULT: "GTI161229025_fin2"

12/29/2016 8:10PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.483000	26.60	9.5	46	19.7	AV	N	GND
1.094000	19.90	9.8	46	26.1	AV	N	GND
4.784000	24.00	10.2	46	22.0	AV	N	GND
16.034000	29.30	10.4	50	20.7	AV	N	GND

Mode: BLE L

SCAN TABLE: "Vol (9K-30M) FIN-N"
 Short Description: 150K-30M Voltage

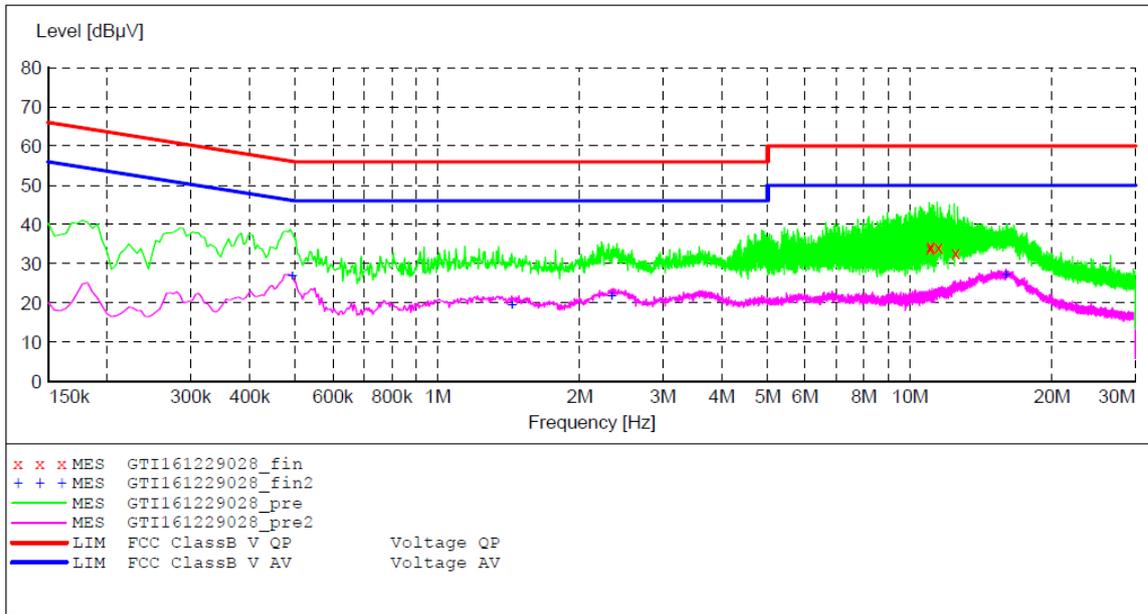

MEASUREMENT RESULT: "GTI161229028_fin"

12/29/2016 8:20PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
11.039000	33.90	10.6	60	26.1	QP	L1	GND
11.075000	34.40	10.6	60	25.6	QP	L1	GND
11.489000	34.30	10.6	60	25.7	QP	L1	GND
12.479000	32.90	10.6	60	27.1	QP	L1	GND

MEASUREMENT RESULT: "GTI161229028_fin2"

12/29/2016 8:20PM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.492000	26.70	9.8	46	19.4	AV	L1	GND
1.436000	19.20	10.1	46	26.8	AV	L1	GND
2.336000	21.70	10.3	46	24.3	AV	L1	GND
15.971000	27.00	10.6	50	23.0	AV	L1	GND

Mode: BLE

N

SCAN TABLE: "Vol (9K-30M) FIN-N"

Short Description: 150K-30M Voltage

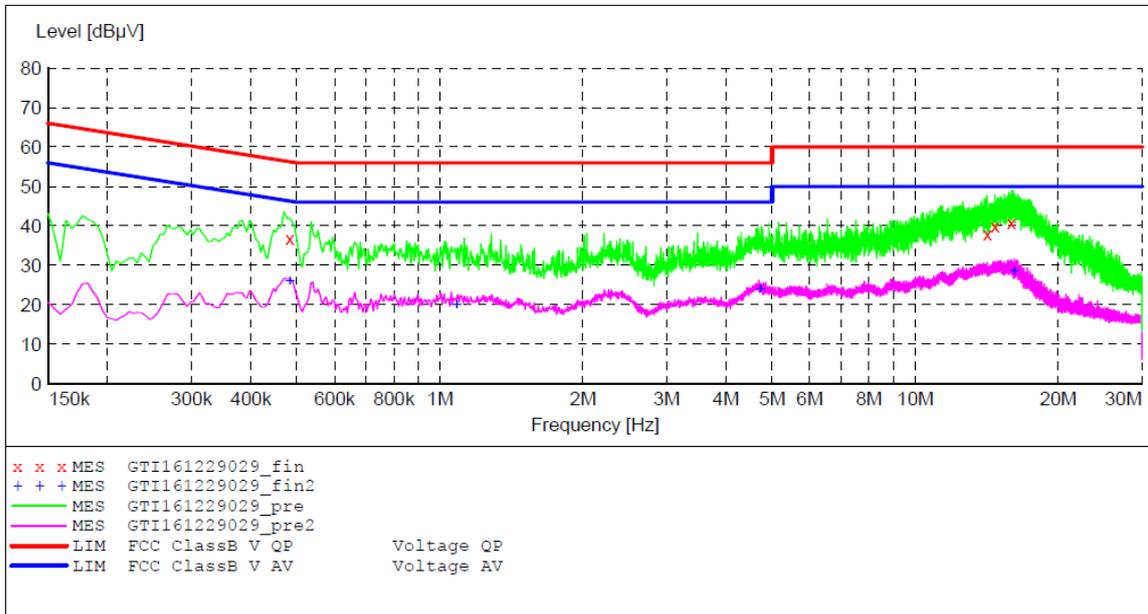

MEASUREMENT RESULT: "GTI161229029_fin"

12/29/2016 8:23PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.483000	36.70	9.5	56	19.6	QP	N	GND
14.180000	38.00	10.3	60	22.0	QP	N	GND
14.711000	39.80	10.3	60	20.2	QP	N	GND
15.917000	40.70	10.4	60	19.3	QP	N	GND

MEASUREMENT RESULT: "GTI161229029_fin2"

12/29/2016 8:23PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.483000	25.90	9.5	46	20.4	AV	N	GND
1.085000	20.00	9.8	46	26.0	AV	N	GND
4.721000	23.80	10.2	46	22.2	AV	N	GND
16.142000	28.50	10.4	50	21.5	AV	N	GND

3.2. Radiated Emission

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The frequency spectrum above 1 GHz for Transmitter was investigated. All emission not reported are much lower than the prescribed limits. Set the RBW=1MHz, VBW=3MHz for Peak Detector while the RBW=1MHz, VBW=10Hz for Average Detector, Readings are both peak and average values. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBuV/m)	Radiated (μ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	2400/F(KHz)
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	24000/F(KHz)
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

Test Procedure

1. The EUT was placed on a turn table which is 0.8m(below 1GHz)/1.5m(above 1GHz) above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0 to 360 degree to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

Note: For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example


Frequency (MHz)	FS (dBμV/m)	RA (dBμV/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
150.00	40	58.1	12.2	1.6	31.90	-18.1

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$


Test Configuration


For the actual test configuration, please refer to the related Item –EUT Test Photos.

Frequency range 9 KHz – 30MHz

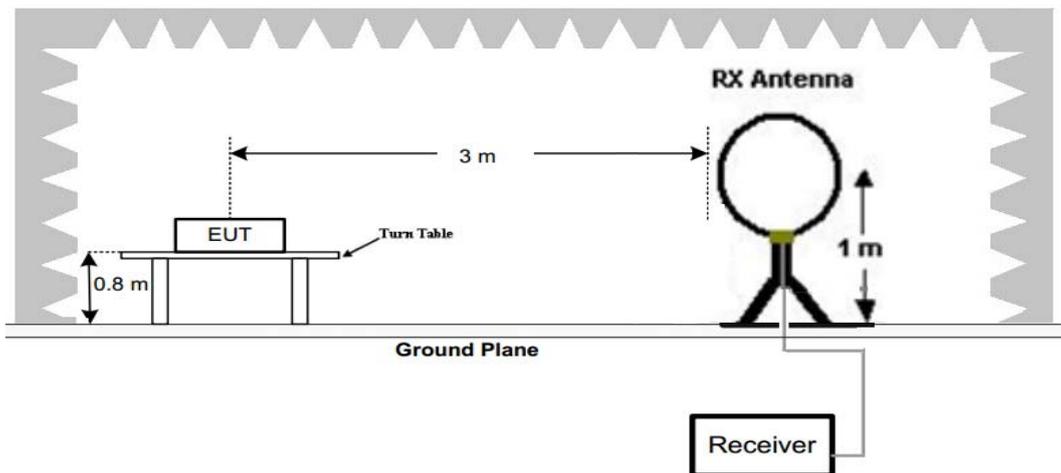

Frequency range 30MHz – 1000MHz

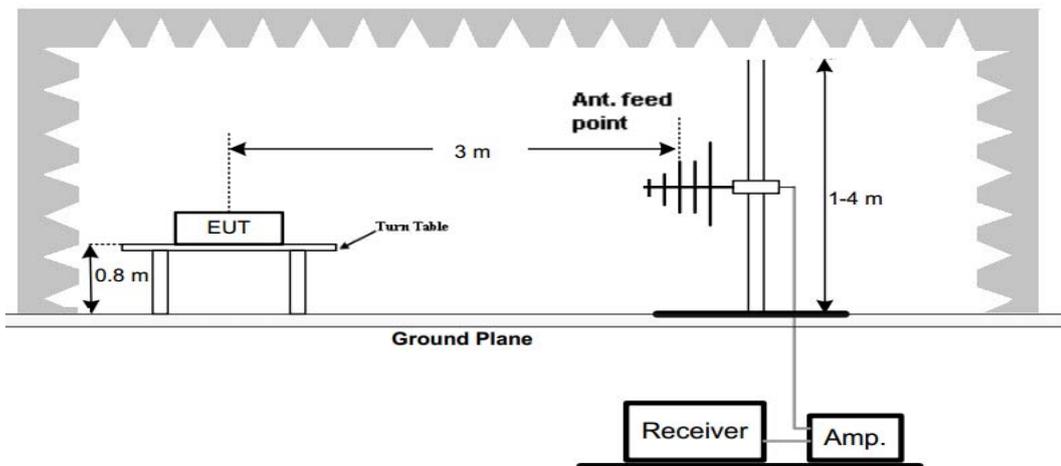

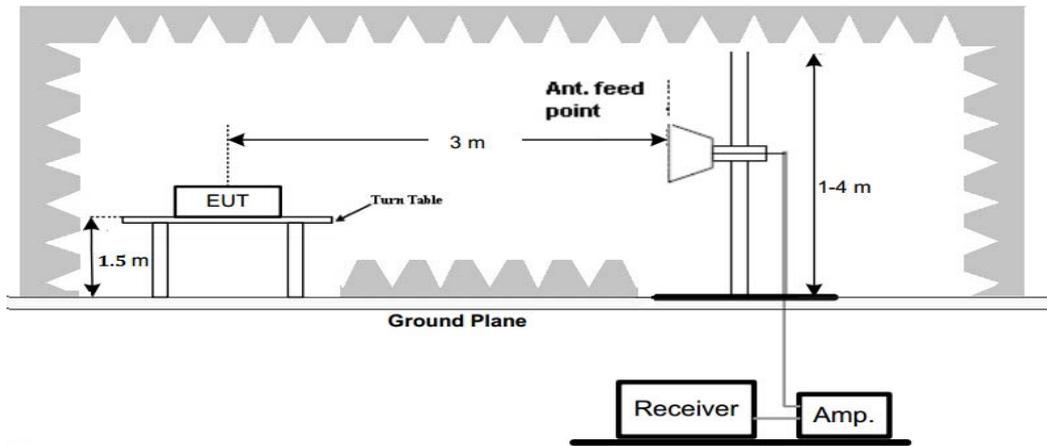Frequency range above 1GHz-25GHz**Test Results**

Remark:


1. Pre-scan all mode of WiFi and BLE, find the 802.11b and BLE the worst case for lowest channel from 30MHz to 1GHz of data.
2. 9 kHz to 30MHz is 10dB below the limit, so only shows the data of above 30MHz in this report.

Below 1GHz:

Mode: 802.11b


Test channel: Low channel(worst case)

Horizontal

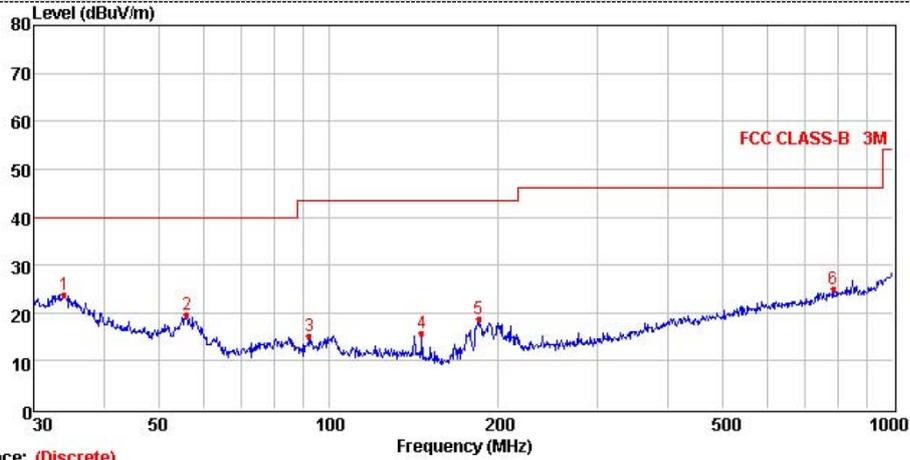

Mark	Frequency MHz	Level dBuV	Factor dB	Reading dBuV	Limit dB	Margin dB	Polarization	Detector
1	34.04	23.88	-6.15	30.03	40.00	16.12	HORIZONTAL	QP
2	56.00	19.58	-13.74	33.32	40.00	20.42	HORIZONTAL	QP
3	92.46	15.29	-16.01	31.30	43.50	28.21	HORIZONTAL	QP
4	146.37	15.64	-15.38	31.02	43.50	27.86	HORIZONTAL	QP
5	184.49	18.59	-15.10	33.69	43.50	24.91	HORIZONTAL	QP
6	785.09	25.10	-4.12	29.22	46.00	20.90	HORIZONTAL	QP

Vertical

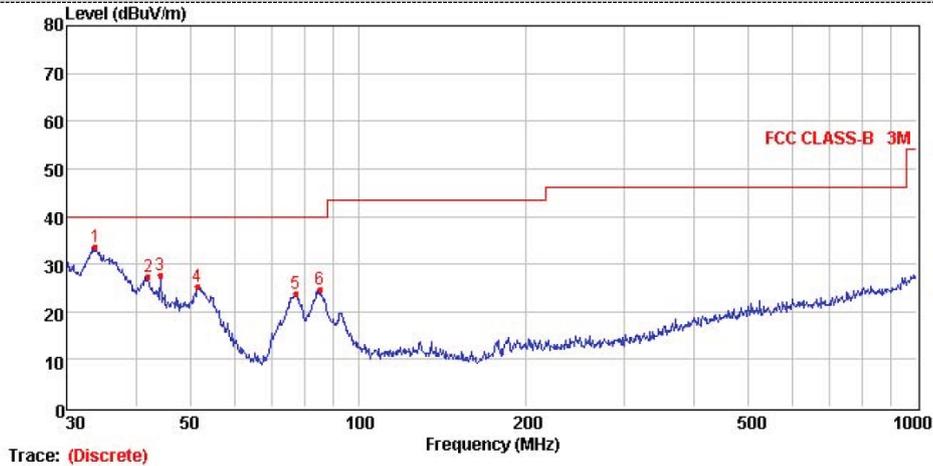


Mark	Frequency MHz	Level dBuV	Factor dB	Reading dBuV	Limit dB	Margin dB	Polarization	Detector
1	33.80	33.66	-6.15	39.81	40.00	6.34	VERTICAL	QP
2	42.01	27.46	-9.05	36.51	40.00	12.54	VERTICAL	QP
3	44.12	27.59	-9.83	37.42	40.00	12.41	VERTICAL	QP
4	51.48	25.38	-11.80	37.18	40.00	14.62	VERTICAL	QP
5	77.32	23.90	-18.07	41.97	40.00	16.10	VERTICAL	QP
6	85.30	24.72	-16.90	41.62	40.00	15.28	VERTICAL	QP

Mode: BLE


Test channel: Low channel(worst case)

Horizontal

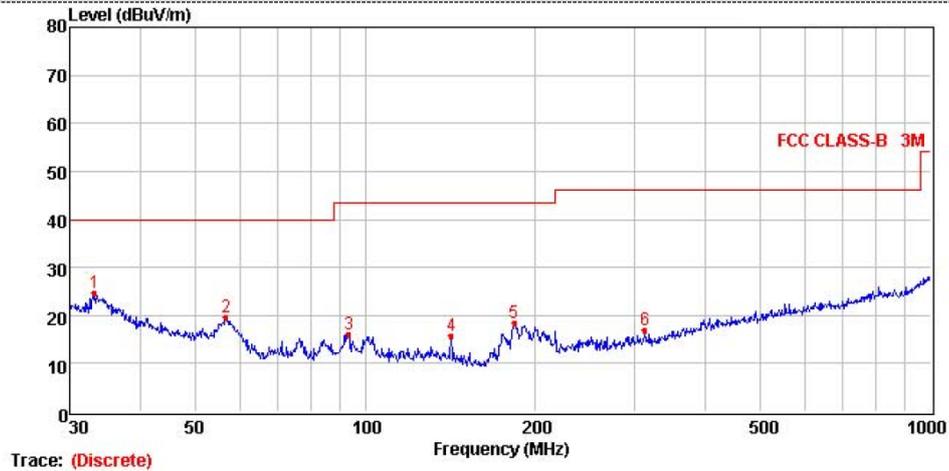

Mark	Frequency MHz	Level dBuV	Factor dB	Reading dBuV	Limit dB	Margin dB	Polarization	Detector
1	33.21	24.70	-5.76	30.46	40.00	15.30	HORIZONTAL	QP
2	56.79	19.49	-14.13	33.62	40.00	20.51	HORIZONTAL	QP
3	93.44	15.97	-15.93	31.90	43.50	27.53	HORIZONTAL	QP
4	141.83	15.72	-14.96	30.68	43.50	27.78	HORIZONTAL	QP
5	183.20	18.53	-15.20	33.73	43.50	24.97	HORIZONTAL	QP
6	312.18	16.85	-12.25	29.10	46.00	29.15	HORIZONTAL	QP

Vertical

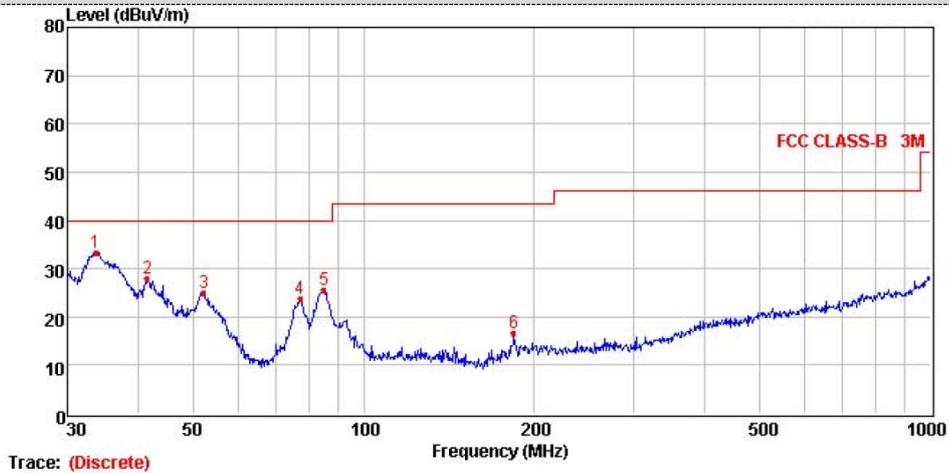

Mark	Frequency MHz	Level dBuV	Factor dB	Reading dBuV	Limit dB	Margin dB	Polarization	Detector
1	33.68	33.40	-6.15	39.55	40.00	6.60	VERTICAL	QP
2	41.57	27.84	-9.05	36.89	40.00	12.16	VERTICAL	QP
3	52.21	24.88	-12.19	37.07	40.00	15.12	VERTICAL	QP
4	77.32	23.89	-18.07	41.96	40.00	16.11	VERTICAL	QP
5	85.00	25.51	-16.90	42.41	40.00	14.49	VERTICAL	QP
6	183.84	16.72	-15.11	31.83	43.50	26.78	VERTICAL	QP

**Above 1GHz:
For WiFi:**

802.11b								
Test channel: Lowest channel								
No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB/m)	Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Polarization	Detector
1	4824.00	59.36	-4.58	54.78	74.00	19.22	Vertical	Peak
2	4824.00	46.85	-4.58	42.27	54.00	11.73	Vertical	Average
1	4824.00	59.21	-4.58	54.63	74.00	19.37	Horizontal	Peak
2	4824.00	45.69	-4.58	41.11	54.00	12.89	Horizontal	Average
Test channel: Middle channel								
No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB/m)	Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Polarization	Detector
1	4874.00	60.25	-4.49	55.76	74.00	18.24	Vertical	Peak
2	4874.00	47.25	-4.49	42.76	54.00	11.24	Vertical	Average
1	4874.00	60.41	-4.49	55.92	74.00	18.08	Horizontal	Peak
2	4874.00	47.58	-4.49	43.09	54.00	10.91	Horizontal	Average
Test channel: Highest channel								
No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB/m)	Level (dBuV)	Reading (dBuV/m)	Margin (dB)	Polarization	Detector
1	4924.00	60.25	-4.38	55.87	74.00	18.13	Vertical	Peak
2	4924.00	47.25	-4.38	42.87	54.00	11.13	Vertical	Average
1	4924.00	60.25	-4.38	55.87	74.00	18.13	Horizontal	Peak
2	4924.00	47.58	-4.38	43.20	54.00	10.80	Horizontal	Average



802.11g								
Test channel: Lowest channel								
No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB/m)	Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Polarization	Detector
1	4824.00	58.23	-4.58	53.65	74.00	20.35	Vertical	Peak
2	4824.00	45.36	-4.58	40.78	54.00	13.22	Vertical	Average
1	4824.00	58.68	-4.58	54.10	74.00	19.90	Horizontal	Peak
2	4824.00	45.36	-4.58	40.78	54.00	13.22	Horizontal	Average
Test channel: Middle channel								
No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB/m)	Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Polarization	Detector
1	4874.00	57.25	-4.49	52.76	74.00	21.24	Vertical	Peak
2	4874.00	46.39	-4.49	41.9	54.00	12.10	Vertical	Average
1	4874.00	57.41	-4.49	52.92	74.00	21.08	Horizontal	Peak
2	4874.00	46.85	-4.49	42.36	54.00	11.64	Horizontal	Average
Test channel: Highest channel								
No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB/m)	Level (dBuV)	Reading (dBuV/m)	Margin (dB)	Polarization	Detector
1	4924.00	57.25	-4.38	52.87	74.00	21.13	Vertical	Peak
2	4924.00	46.85	-4.38	42.47	54.00	11.53	Vertical	Average
1	4924.00	57.42	-4.38	53.04	74.00	20.96	Horizontal	Peak
2	4924.00	46.85	-4.38	42.47	54.00	11.53	Horizontal	Average



802.11n(H20)								
Test channel: Lowest channel								
No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB/m)	Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Polarization	Detector
1	4824.00	57.56	-4.58	52.98	74.00	21.02	Vertical	Peak
2	4824.00	44.25	-4.58	39.67	54.00	14.33	Vertical	Average
1	4824.00	57.68	-4.58	53.10	74.00	20.90	Horizontal	Peak
2	4824.00	44.25	-4.58	39.67	54.00	14.33	Horizontal	Average
Test channel: Middle channel								
No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB/m)	Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Polarization	Detector
1	4874.00	56.39	-4.49	51.90	74.00	22.10	Vertical	Peak
2	4874.00	44.52	-4.49	40.03	54.00	13.97	Vertical	Average
1	4874.00	56.36	-4.49	51.87	74.00	22.13	Horizontal	Peak
2	4874.00	44.74	-4.49	40.25	54.00	13.75	Horizontal	Average
Test channel: Highest channel								
No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB/m)	Level (dBuV)	Reading (dBuV/m)	Margin (dB)	Polarization	Detector
1	4924.00	56.85	-4.38	52.47	74.00	21.53	Vertical	Peak
2	4924.00	44.25	-4.38	39.87	54.00	14.13	Vertical	Average
1	4924.00	56.74	-4.38	52.36	74.00	21.64	Horizontal	Peak
2	4924.00	44.78	-4.38	40.40	54.00	13.60	Horizontal	Average

BLE								
Test channel: Lowest channel								
No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB/m)	Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Polarization	Detector
1	4804.00	50.25	-3.03	47.22	74.00	26.78	Vertical	Peak
2	4804.00	40.24	-3.03	37.21	54.00	16.79	Vertical	Average
1	4804.00	49.25	-3.03	46.22	74.00	27.78	Horizontal	Peak
2	4804.00	40.36	-3.03	37.33	54.00	16.67	Horizontal	Average
Test channel: Middle channel								
No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB/m)	Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Polarization	Detector
1	4884.00	50.36	-2.81	47.55	74.00	26.45	Vertical	Peak
2	4884.00	40.20	-2.81	37.39	54.00	16.61	Vertical	Average
1	4884.00	50.63	-2.81	47.82	74.00	26.18	Horizontal	Peak
2	4884.00	39.54	-2.81	36.73	54.00	17.27	Horizontal	Average
Test channel: Highest channel								
No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB/m)	Level (dBuV)	Reading (dBuV/m)	Margin (dB)	Polarization	Detector
1	4960.00	50.74	-0.82	49.92	74.00	24.08	Vertical	Peak
2	4960.00	40.87	-0.82	40.05	54.00	13.95	Vertical	Average
1	4960.00	50.95	-0.82	50.13	74.00	23.87	Horizontal	Peak
2	4960.00	40.65	-0.82	39.83	54.00	14.17	Horizontal	Average

REMARKS:

1. Emission level (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. The other emission levels were very low against the limit, so not show in test report.

3.3. Maximum Conducted Output Power

Limit

30dBm for digital modulation systems.

Test Procedure

- For WiFi Test
 1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power Meter.
 2. Ensure EUT transmitting with a duty cycle $\geq 98\%$.
 3. Record the value of Power Meter.
- For BLE Test
 1. Set the RBW $\geq DTS$ bandwidth
 2. Set VBW $\geq 3 \times$ RBW.
 3. Set span $\geq 3 \times$ RBW
 4. Sweep time = auto couple.
 5. Detector = peak.
 6. Trace mode = max hold.
 7. Allow trace to fully stabilize.
 8. Use peak marker function to determine the peak amplitude level

Test Configuration

- For WiFi Test



- For BLE Test



Test Results

For WiFi test data:


Type	Channel	Output peak power (dBm)	Limit (dBm)	Result
802.11b	01	19.28	30.00	Pass
	06	19.31		
	11	18.52		
Type	Channel	Output peak power (dBm)	Limit (dBm)	Result
802.11g	01	17.33	30.00	Pass
	06	16.71		
	11	16.23		
Type	Channel	Output peak power (dBm)	Limit (dBm)	Result
802.11n(H20)	01	16.70	30.00	Pass
	06	16.49		
	11	16.42		

For BLE test data:


Type	Channel	Output peak power (dBm) (dBm)	Limit (dBm)	Result
BLE	00	-2.09	30.00	Pass
	20	-2.22		
	39	-3.69		

Note: The test results including the cable loss.

For BLE

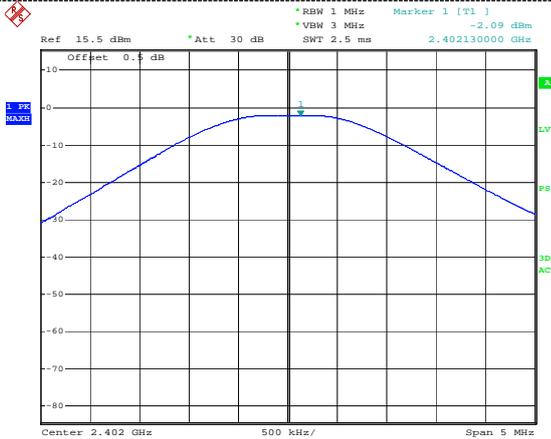

E370VT PC MODE VER
Date: 27.DEC.2016 11:02:32

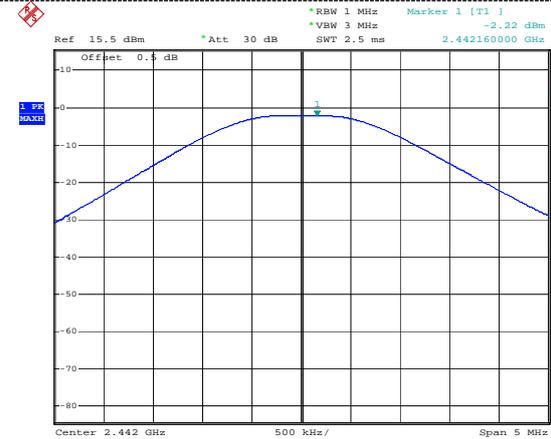

E370VT PC MODE VER
Date: 27.DEC.2016 11:03:24

CH 00



E370VT PC MODE VER
Date: 27.DEC.2016 11:04:01

CH 20

CH 39

3.4. Power Spectral Density

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance to the output power limit.
 - a) Set analyzer center frequency to DTS channel center frequency.
 - b) Set the span to 1.5 times the DTS bandwidth.
 - c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
 - d) Set the VBW $\geq 3 \times \text{RBW}$.
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum amplitude level within the RBW.
 - j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat

Test Configuration



Test Results


For WiFi test data:

Type	Channel	Power Spectral Density (dBm/100KHz)	Limit (dBm/3KHz)	Result
802.11b	01	6.23	8.00	Pass
	06	5.97		
	11	5.84		
Type	Channel	Power Spectral Density (dBm/100KHz)	Limit (dBm/3KHz)	Result
802.11g	01	2.36	8.00	Pass
	06	2.53		
	11	1.62		
Type	Channel	Power Spectral Density (dBm/100KHz)	Limit (dBm/3KHz)	Result
802.11n(H20)	01	2.81	8.00	Pass
	06	2.46		
	11	1.61		


For BLE test data:

Type	Channel	Power Spectral Density (dBm/100KHz)	Limit (dBm/3KHz)	Result
BLE	00	-3.42	8.00	Pass
	20	-3.46		
	39	-4.89		


Test plot as follows:

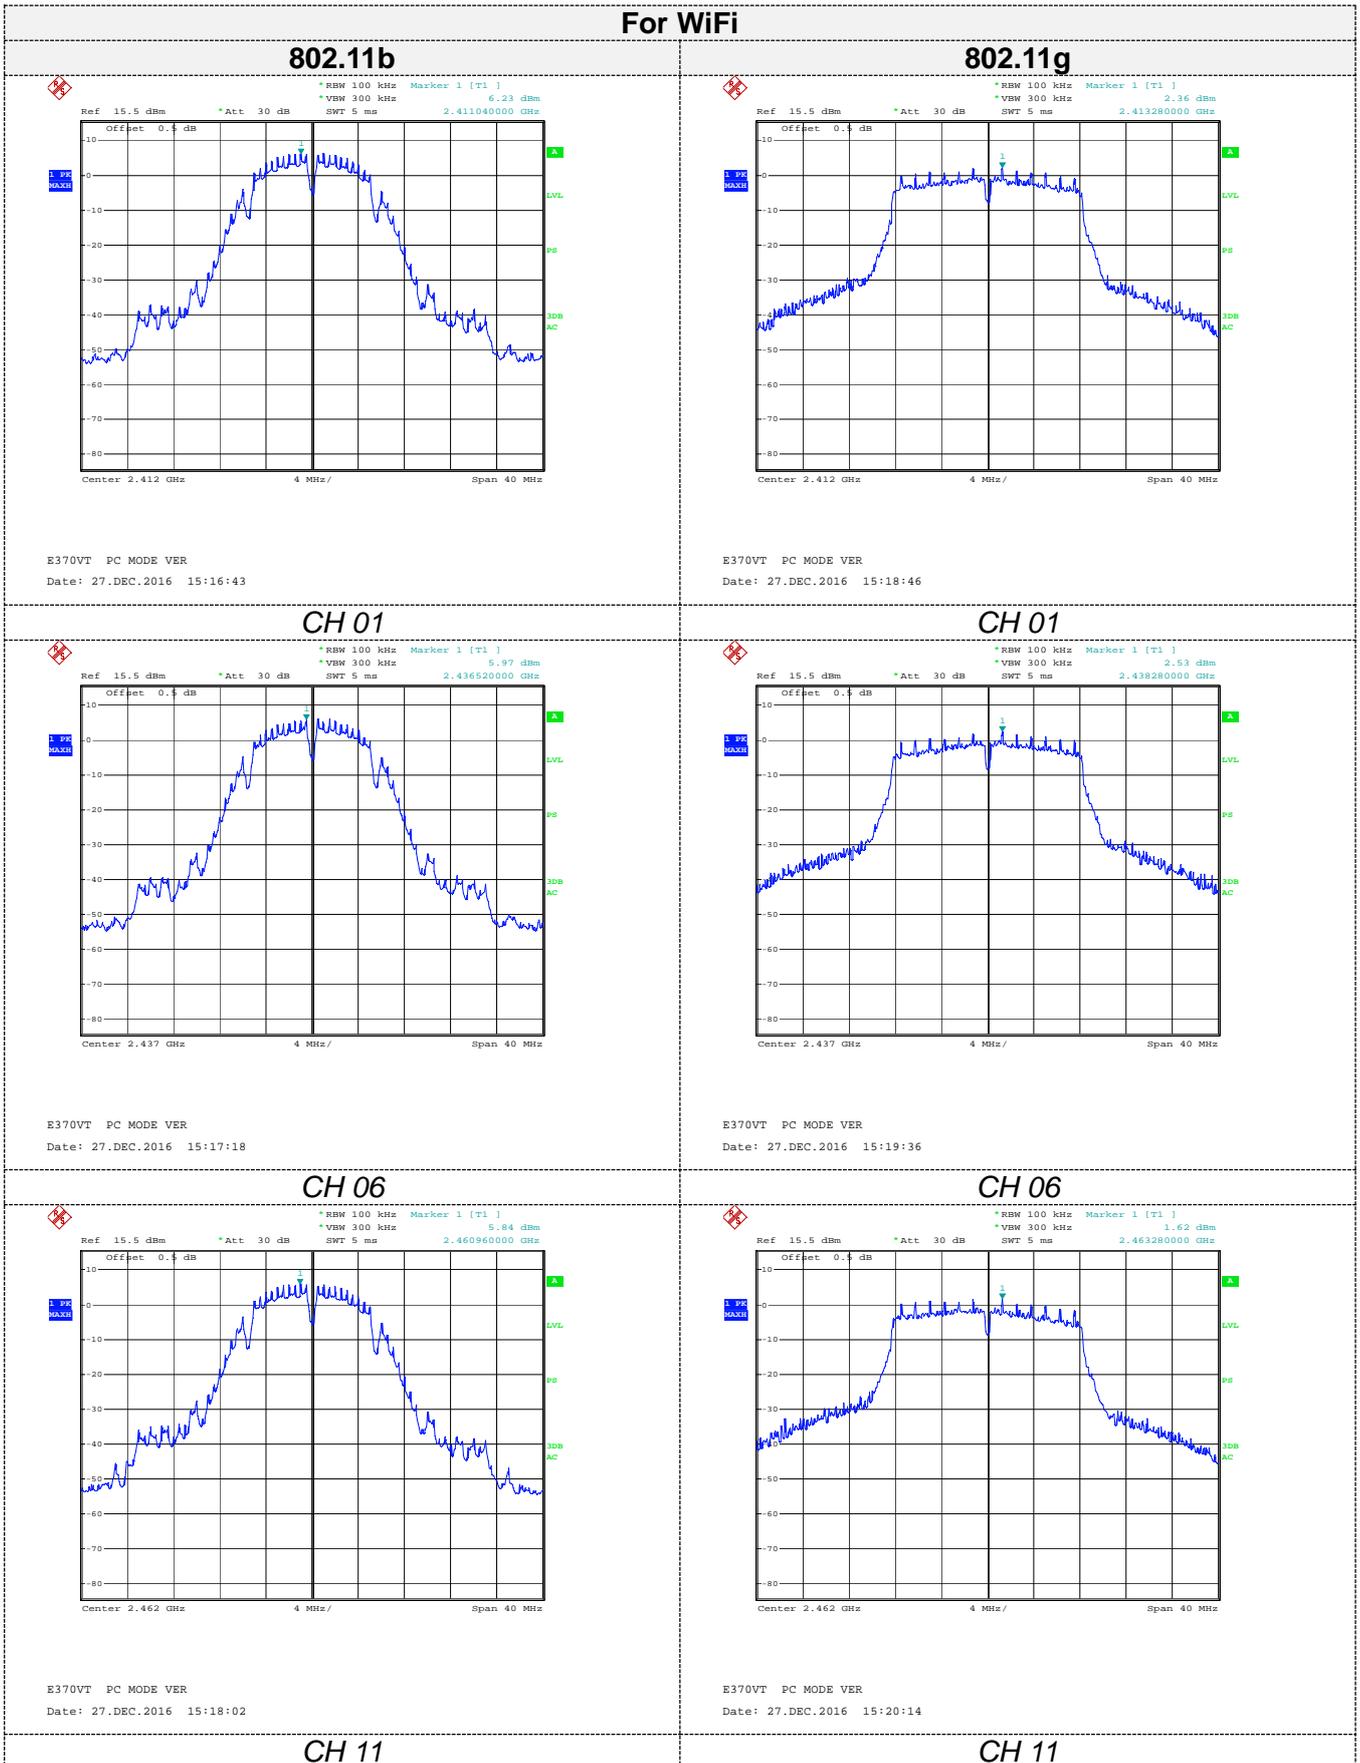

**For WiFi
802.11n(H20)**

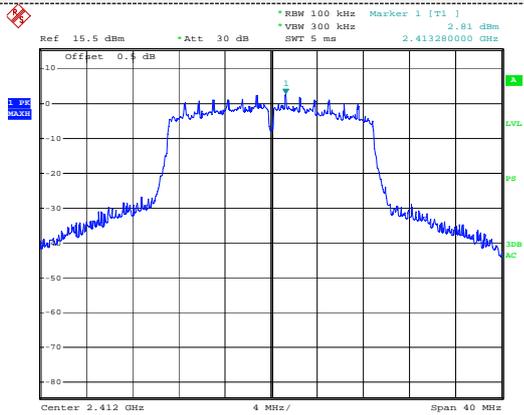


E370VT PC MODE VER
Date: 27.DEC.2016 15:20:59

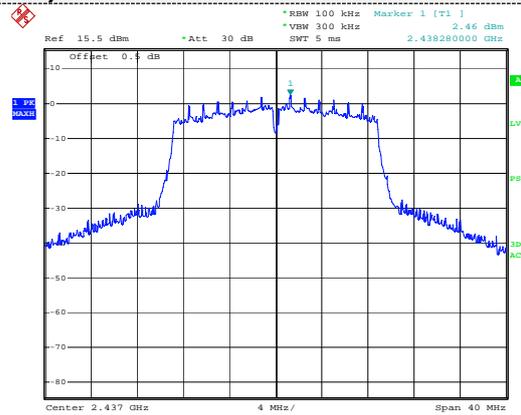

E370VT PC MODE VER
Date: 27.DEC.2016 15:21:42

CH 01

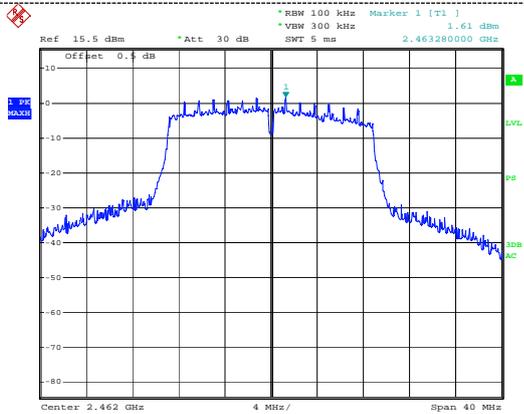


E370VT PC MODE VER
Date: 27.DEC.2016 15:22:35


CH 06

CH 11

For BLE

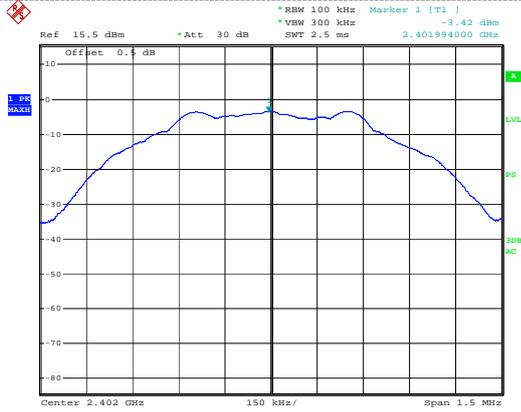


E370VT PC MODE VER
 Date: 27.DEC.2016 11:19:36

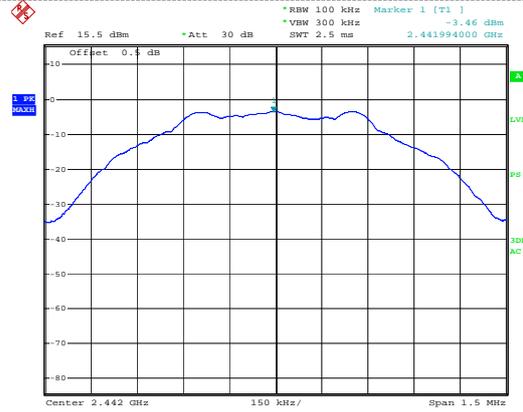

E370VT PC MODE VER
 Date: 27.DEC.2016 11:18:51

CH 00

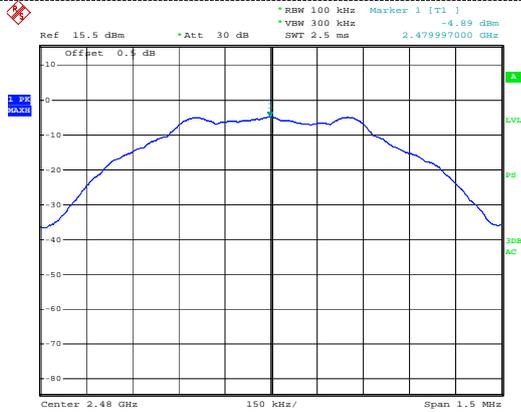

E370VT PC MODE VER
 Date: 27.DEC.2016 11:18:04

CH 39

CH 20

3.5. 6dB Bandwidth

Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

1. The transmitter output was connected to the spectrum analyzer.
2. Set SA as follow:
 - a) RBW: 100 kHz.
 - b) VBW: $\geq 3 \times$ RBW.
 - c) Detector: Peak.
 - d) Trace mode: max hold.
 - e) Sweep: auto couple.
3. Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration



Test Results


Type	Channel	6dB Bandwidth (MHz)	99% OBW (MHz)	Limit (KHz)	Result
802.11b	01	9.36	12.48	≥500	Pass
	06	9.44	12.48		
	11	9.68	12.64		
Type	Channel	6dB Bandwidth (MHz)	99% OBW (MHz)	Limit (KHz)	Result
802.11g	01	15.84	16.48	≥500	Pass
	06	15.52	16.48		
	11	16.24	16.48		
Type	Channel	6dB Bandwidth (MHz)	99% OBW (MHz)	Limit (KHz)	Result
802.11n(H20)	01	16.72	17.60	≥500	Pass
	06	16.08	17.60		
	11	16.56	17.68		

Type	Channel	6dB Bandwidth (MHz)	99% OBW (MHz)	Limit (KHz)	Result
BLE	00	0.744	1.056	≥500	Pass
	20	0.732	1.050		
	39	0.744	1.050		

Test plot as follows:


For WiFi-6dB Bandwidth

802.11b

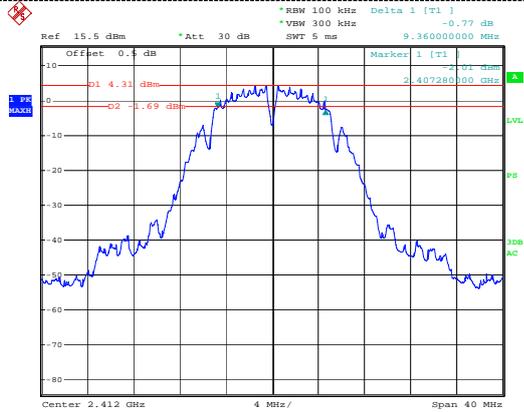


E370VT PC MODE VER
 Date: 27.DEC.2016 14:32:41

802.11g

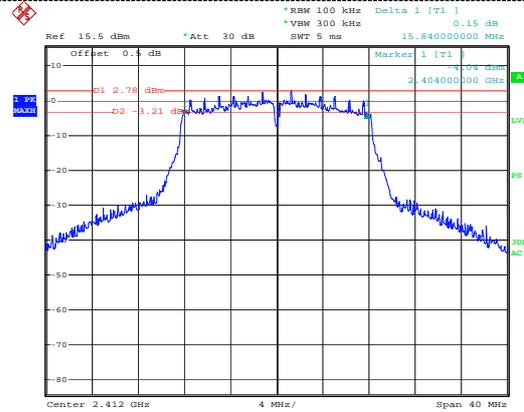


E370VT PC MODE VER
 Date: 27.DEC.2016 14:40:34

CH 01

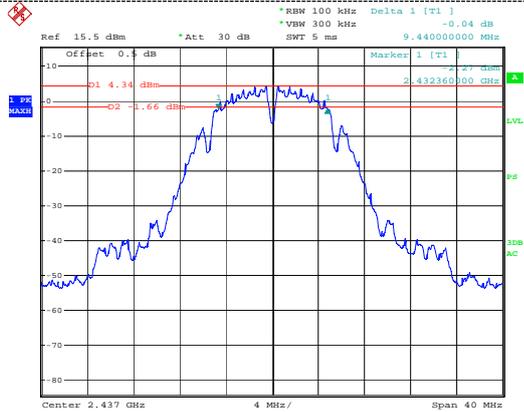


E370VT PC MODE VER
 Date: 27.DEC.2016 14:35:12

CH 01

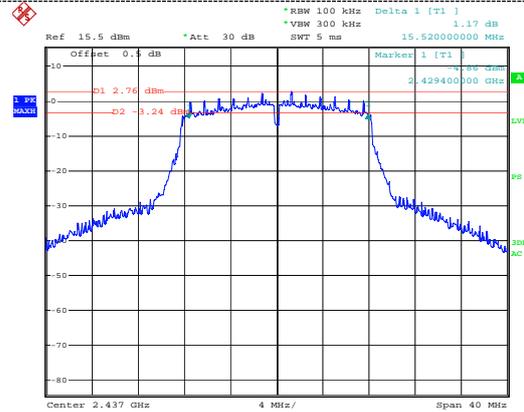


E370VT PC MODE VER
 Date: 27.DEC.2016 14:42:46

CH 06

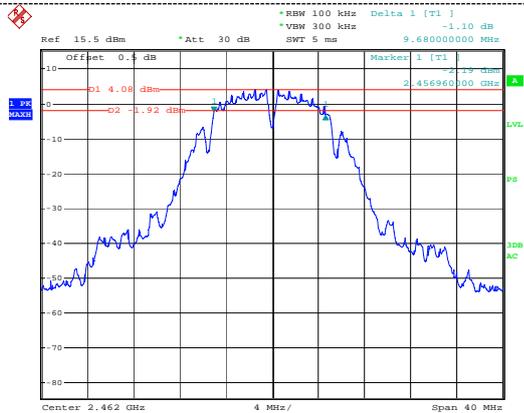

E370VT PC MODE VER
 Date: 27.DEC.2016 14:36:46

CH 06

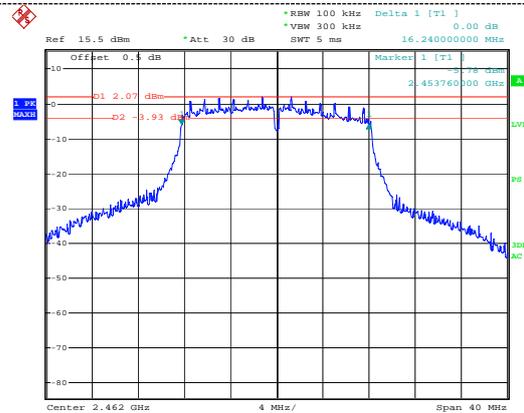


E370VT PC MODE VER
 Date: 27.DEC.2016 15:03:08

CH 11


CH 11

**For WiFi-6dB Bandwidth
802.11n(H20)**

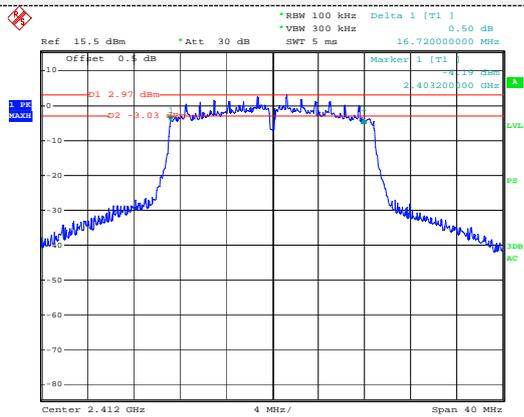


E370VT PC MODE VER
Date: 27.DEC.2016 14:54:57

CH 01

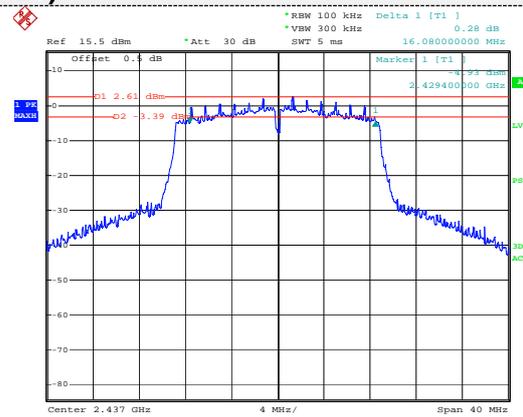

E370VT PC MODE VER
Date: 27.DEC.2016 14:57:21


CH 06

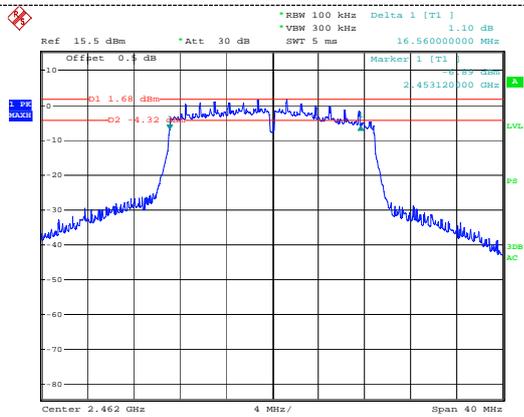


E370VT PC MODE VER
Date: 27.DEC.2016 14:59:52

CH 11

For BLE-6dB Bandwidth

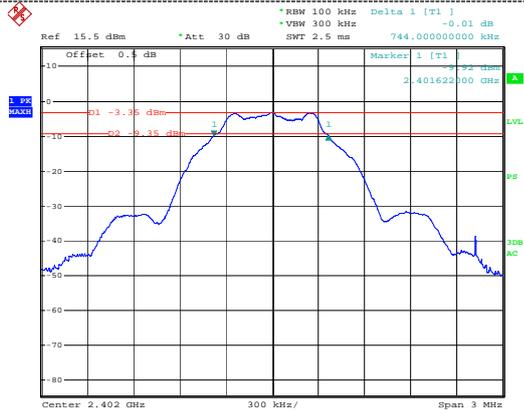


E370VT PC MODE VER
 Date: 27.DEC.2016 11:11:02

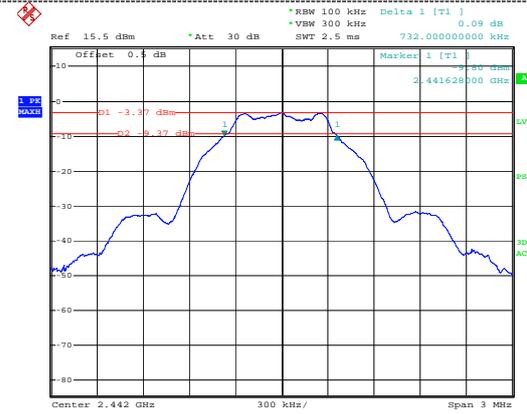

E370VT PC MODE VER
 Date: 27.DEC.2016 11:09:32

CH 01

CH 20

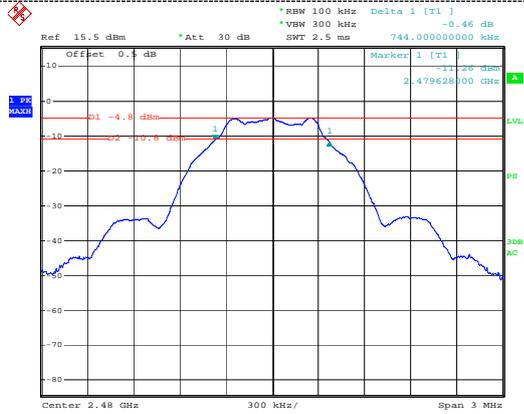


E370VT PC MODE VER
 Date: 27.DEC.2016 11:07:37

CH 39


For WiFi-99% OBW

802.11b

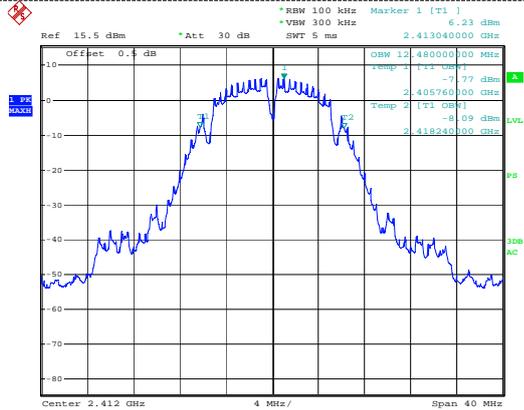


E370VT PC MODE VER
 Date: 27.DEC.2016 15:06:23

802.11g

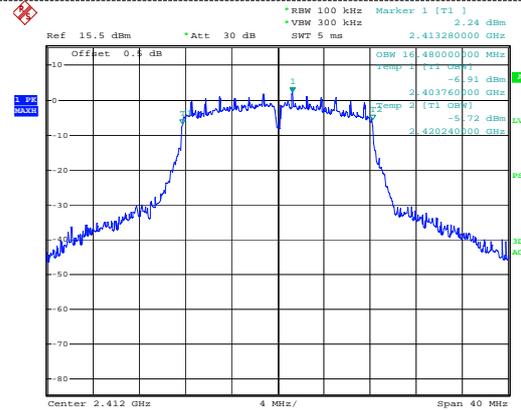


E370VT PC MODE VER
 Date: 27.DEC.2016 15:08:46

CH 01

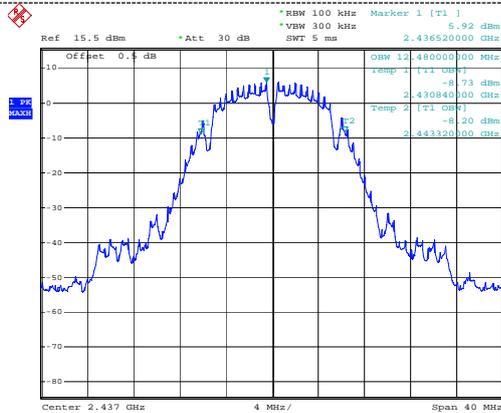


E370VT PC MODE VER
 Date: 27.DEC.2016 15:07:36

CH 01

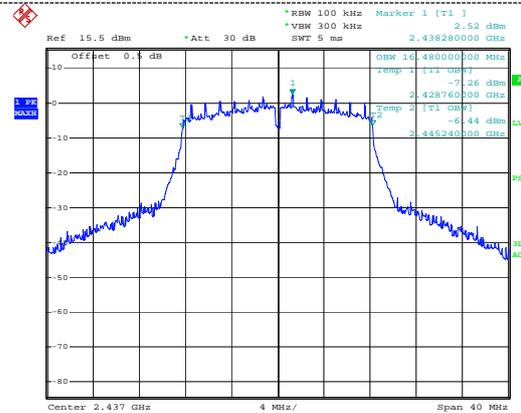


E370VT PC MODE VER
 Date: 27.DEC.2016 15:09:40

CH 06

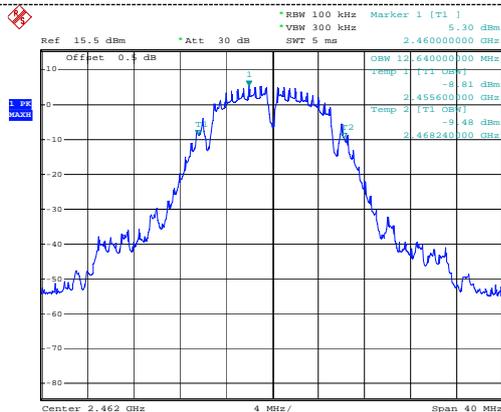

E370VT PC MODE VER
 Date: 27.DEC.2016 15:08:14

CH 06

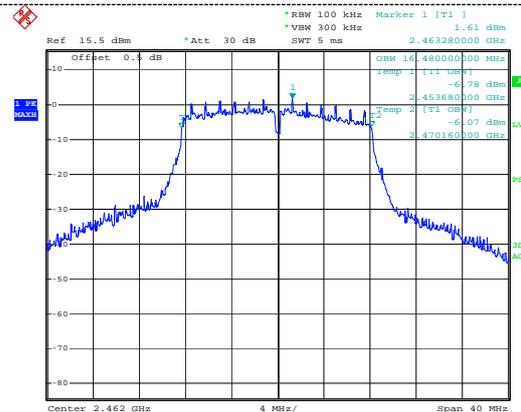


E370VT PC MODE VER
 Date: 27.DEC.2016 15:10:38


CH 11

CH 11

**For WiFi-99% OBW
802.11n(H20)**

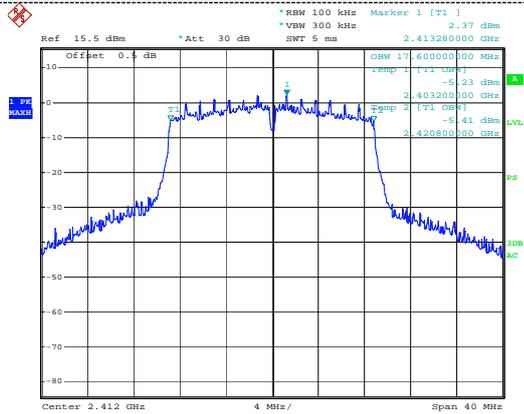


E370VT PC MODE VER
Date: 27.DEC.2016 15:11:23

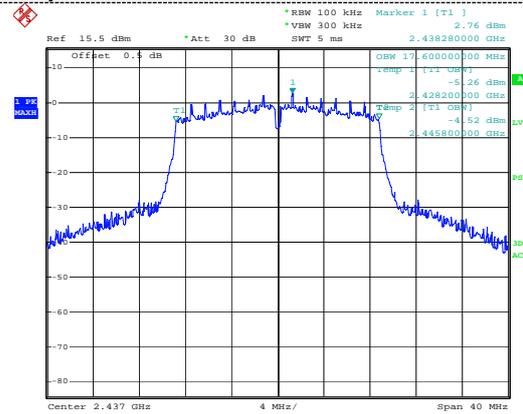

E370VT PC MODE VER
Date: 27.DEC.2016 15:12:43

CH 01

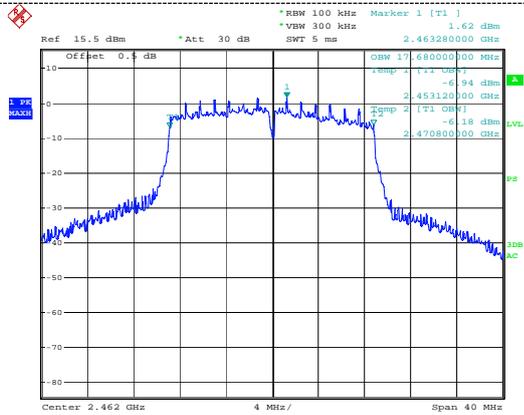

E370VT PC MODE VER
Date: 27.DEC.2016 15:13:17

CH 06

CH 11

For BLE-99% OBW




E370VT PC MODE VER
Date: 27.DEC.2016 11:13:11



E370VT PC MODE VER
Date: 27.DEC.2016 11:13:48

CH 01

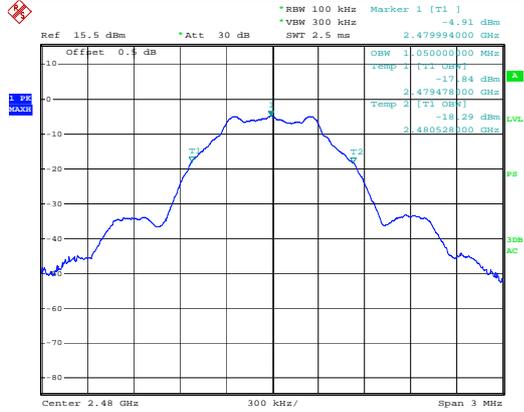

E370VT PC MODE VER
Date: 27.DEC.2016 11:14:44

CH 20

CH 39

3.6. Band Edge Compliance of RF Emission

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

Test Procedure

Test Procedure for conducted method

- This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance to the output power limit.
 1. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a spectrum analyzer
 2. Turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
 3. Set spectrum analyzer RBW =100 kHz, VBW=300 kHz, Detector=peak, Sweep time=Auto, trace=maxhold
 4. Marker the highest point which fall into restricted frequency bands
 5. Repeat above procedures until all measured frequencies were complete.



Test Procedure for radiated method

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
7. Test the EUT in the lowest channel, the highest channel
8. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
9. Repeat above procedures until all frequencies measured was complete.



Test Results

A. Conducted measurements

For WiFi-802.11b			
Frequency (MHz)	Read Level (dBm)	Limit (dBm)	Result
2399.552	-37.64	-23.77	PASS
2484.064	-52.15	-24.16	PASS

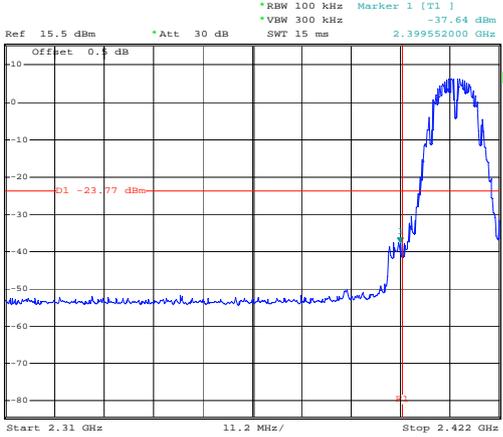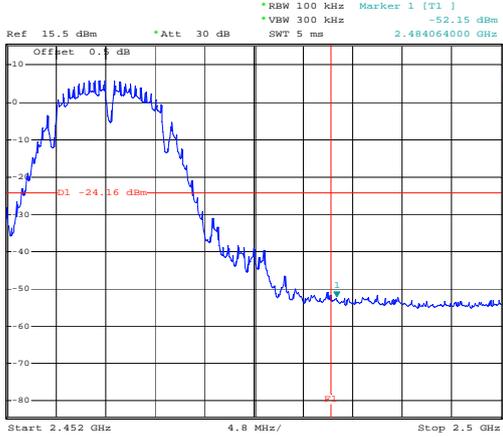 <p>E370VT PC MODE VER Date: 27.DEC.2016 15:34:16</p>	 <p>E370VT PC MODE VER Date: 27.DEC.2016 15:40:58</p>
2412	2462

For WiFi-802.11g			
Frequency (MHz)	Read Level (dBm)	Limit (dBm)	Result
2399.776	-28.95	-27.64	PASS
2483.680	-46.46	-28.38	PASS

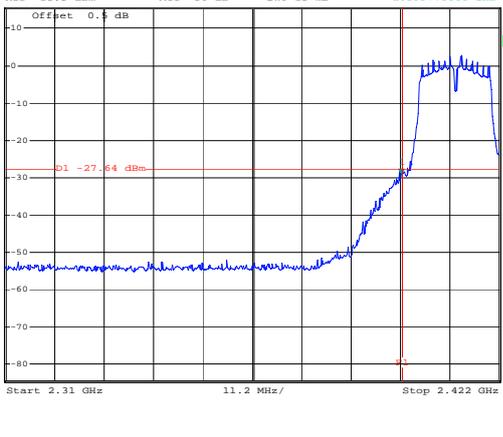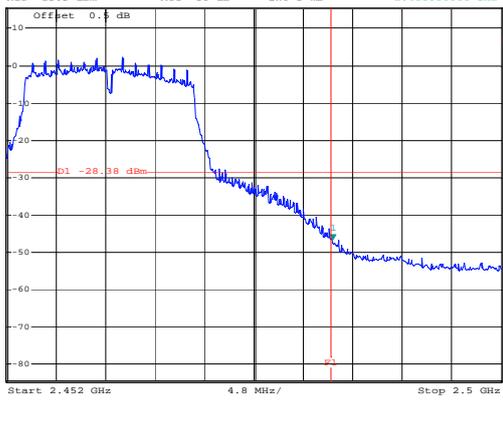 <p>E370VT PC MODE VER Date: 27.DEC.2016 15:36:24</p>	 <p>E370VT PC MODE VER Date: 27.DEC.2016 15:43:20</p>
2412	2462

For WiFi-802.11n(H20)			
Frequency (MHz)	Read Level (dBm)	Limit (dBm)	Result
2400.000	-29.51	-27.19	PASS
2483.680	-43.97	-28.39	PASS
E370VT PC MODE VER Date: 27.DEC.2016 15:37:56		E370VT PC MODE VER Date: 27.DEC.2016 15:44:42	
2412		2462	

For BLE			
Frequency (MHz)	Read Level (dBm)	Limit (dBm)	Result
2399.812	-48.15	-23.42	PASS
2483.764	-52.39	-24.89	PASS
E370VT PC MODE VER Date: 27.DEC.2016 11:33:38		E370VT PC MODE VER Date: 27.DEC.2016 11:36:49	
2402		2480	

**Radiated measurements
For WiFi:**

802.11b				Test channel: Lowest channel				
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarization	Detector
1	2390.00	20.69	32.41	53.10	74.00	20.90	Vertical	Peak
2	2390.00	10.25	32.41	42.66	54.00	11.34	Vertical	Average
1	2390.00	20.42	32.41	52.83	74.00	21.17	Horizontal	Peak
2	2390.00	10.20	32.41	42.61	54.00	11.39	Horizontal	Average
802.11b				Test channel: Highest channel				
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarization	Detector
1	2483.50	22.98	32.84	55.82	74.00	18.18	Vertical	Peak
2	2483.50	11.95	32.84	44.79	54.00	9.21	Vertical	Average
1	2483.50	22.36	32.84	55.20	74.00	18.80	Horizontal	Peak
2	2483.50	11.07	32.84	43.91	54.00	10.09	Horizontal	Average

802.11g				Test channel: Lowest channel				
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarization	Detector
1	2390.00	21.65	32.41	54.06	74.00	19.94	Vertical	Peak
2	2390.00	11.25	32.41	43.66	54.00	10.34	Vertical	Average
1	2390.00	21.87	32.41	54.28	74.00	19.72	Horizontal	Peak
2	2390.00	11.78	32.41	44.19	54.00	9.81	Horizontal	Average
802.11g				Test channel: Highest channel				
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarization	Detector
1	2483.50	23.65	32.84	56.49	74.00	17.51	Vertical	Peak
2	2483.50	12.08	32.84	44.92	54.00	9.08	Vertical	Average
1	2483.50	23.84	32.84	56.68	74.00	17.32	Horizontal	Peak
2	2483.50	12.41	32.84	45.25	54.00	8.75	Horizontal	Average

802.11n(H20)				Test channel: Lowest channel				
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarization	Detector
1	2390.00	21.85	32.41	54.26	74.00	19.74	Vertical	Peak
2	2390.00	12.02	32.41	44.43	54.00	9.57	Vertical	Average
1	2390.00	21.78	32.41	54.19	74.00	19.81	Horizontal	Peak
2	2390.00	12.10	32.41	44.51	54.00	9.49	Horizontal	Average
802.11n(H20)				Test channel: Highest channel				
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarization	Detector
1	2483.50	23.87	32.84	56.71	74.00	17.29	Vertical	Peak
2	2483.50	12.58	32.84	45.42	54.00	8.58	Vertical	Average
1	2483.50	23.81	32.84	56.65	74.00	17.35	Horizontal	Peak
2	2483.50	12.36	32.84	45.20	54.00	8.80	Horizontal	Average

For BLE:

Type: BLE				Test channel: Lowest channel				
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarization	Detector
1	2390.00	19.25	32.41	51.66	74.00	22.34	Vertical	Peak
2	2390.00	9.36	32.41	41.77	54.00	12.23	Vertical	Average
1	2390.00	19.52	32.41	51.93	74.00	22.07	Horizontal	Peak
2	2390.00	9.41	32.41	41.82	54.00	12.18	Horizontal	Average

Type: BLE				Test channel: Highest channel				
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarization	Detector
1	2483.50	18.36	32.84	51.2	74.00	22.8	Vertical	Peak
2	2483.50	8.57	32.84	41.41	54.00	12.59	Vertical	Average
1	2483.50	18.32	32.84	51.16	74.00	22.84	Horizontal	Peak
2	2483.50	8.47	32.84	41.31	54.00	12.69	Horizontal	Average

REMARKS:

1. Emission level (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. The other emission levels were very low against the limit, so not show in test report.

3.7. Spurious RF Conducted Emission

Limit

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

Test Procedure

The transmitter output was connected to the spectrum analyzer through a low loss RF cable. Spurious RF Conducted Emission was measured by spectrum analyzer with 100 KHz RBW and 300KHz VBW, measurement frequency range from 30MHz to 26.5GHz.


Test Configuration



Test Results


Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

Test plot as follows:
For WiFi:

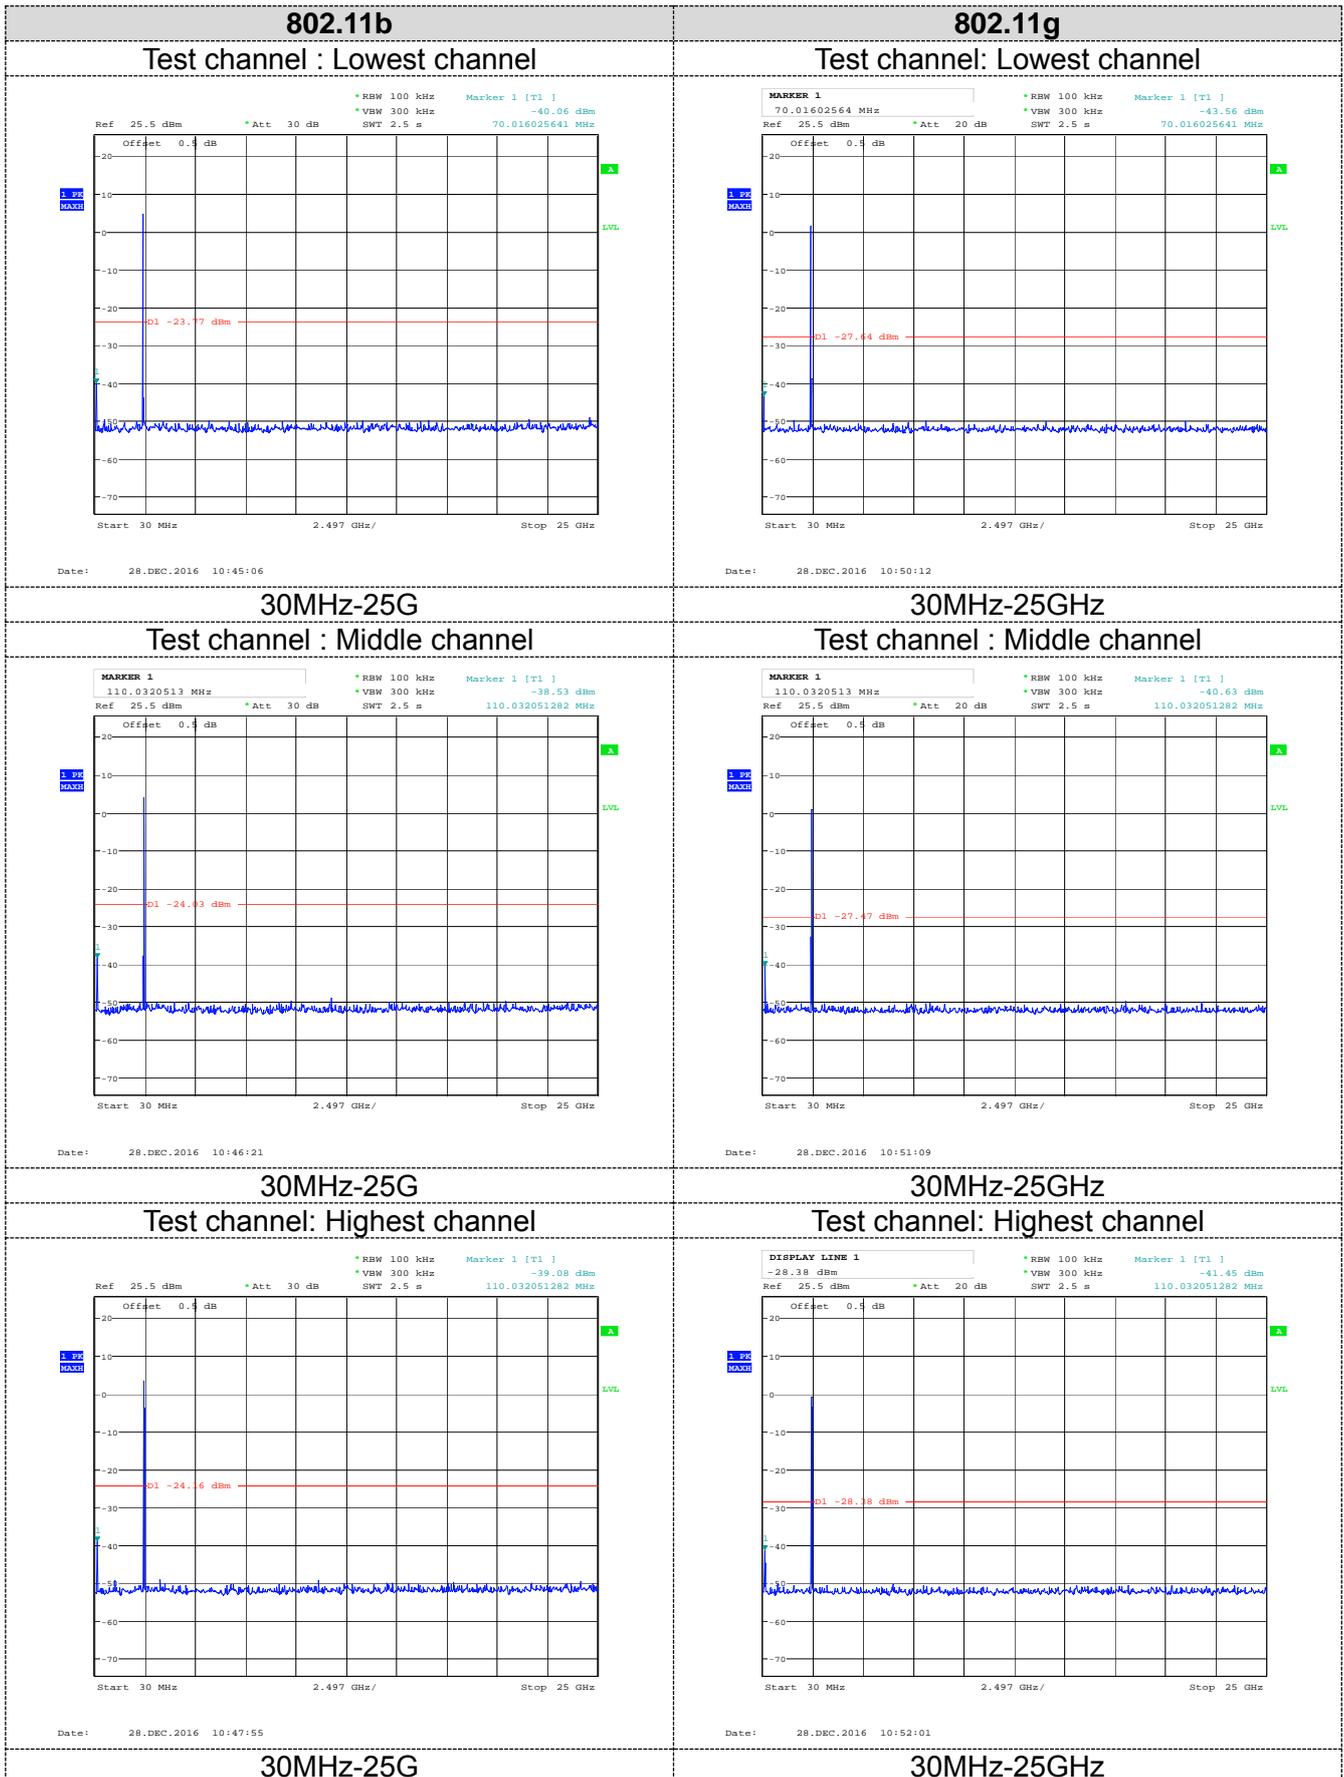


802.11n(H20)

Test channel: Lowest channel

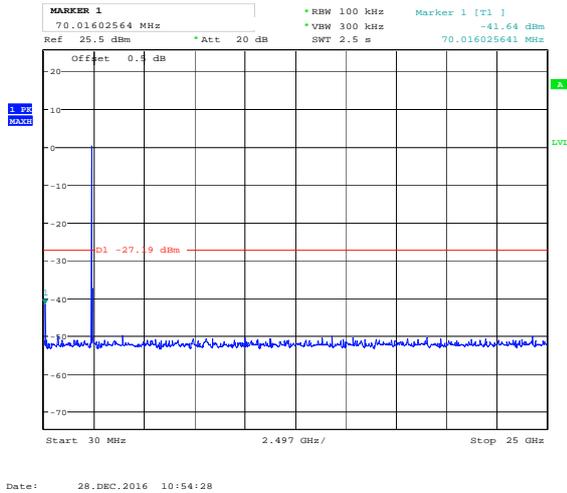


Test channel: Middle channel

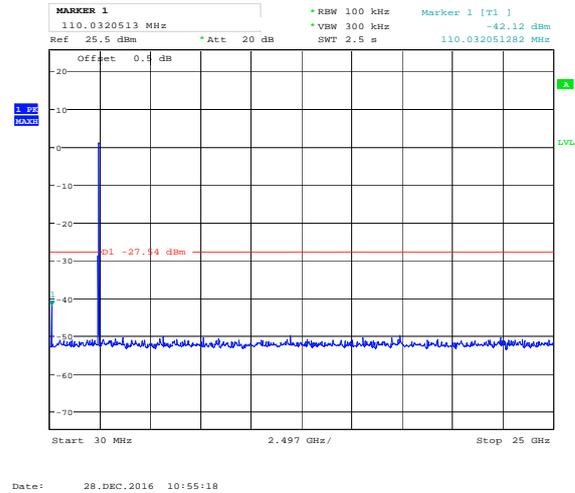

30MHz-25GHz


Test channel: Highest channel

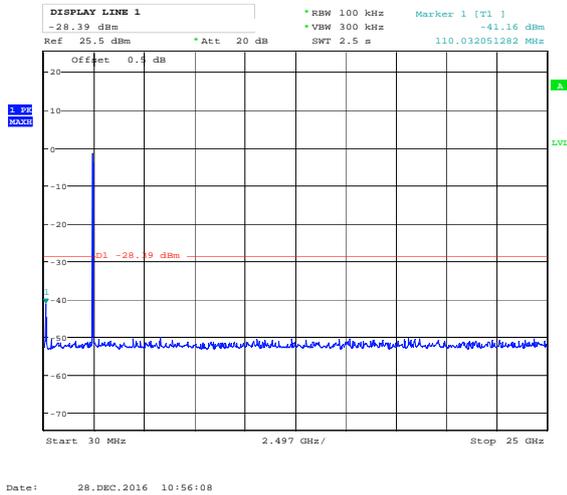

30MHz-25GHz

30MHz-25GHz

For BLE:

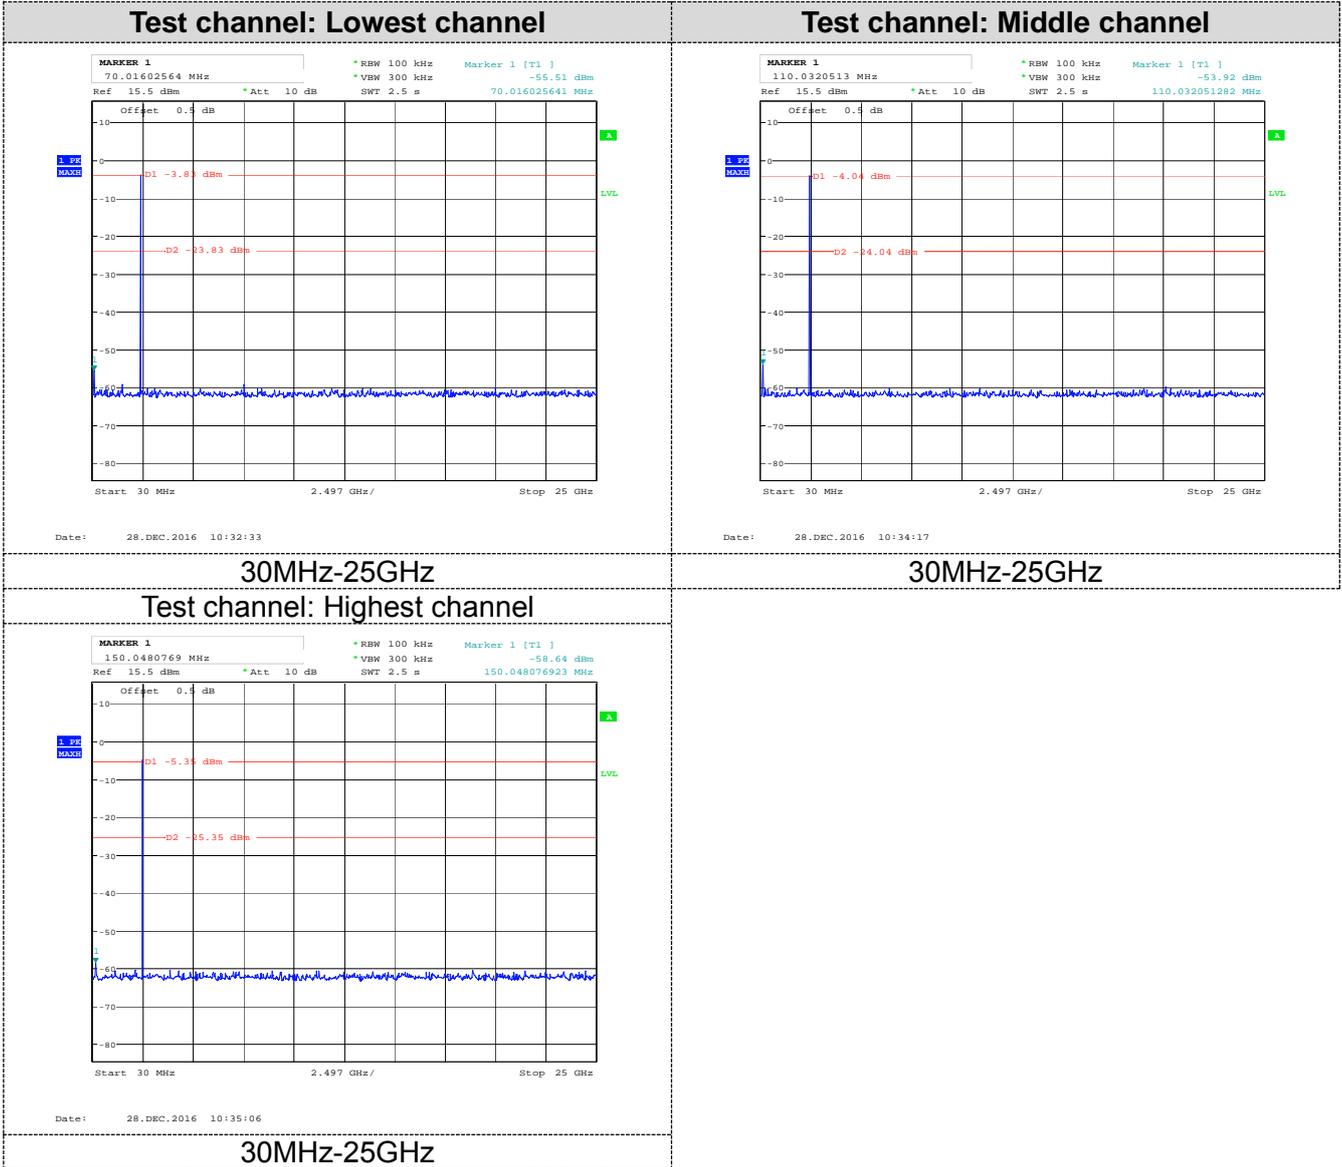

3.8. Antenna Requirement

Standard Applicable


For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.


Test Result:

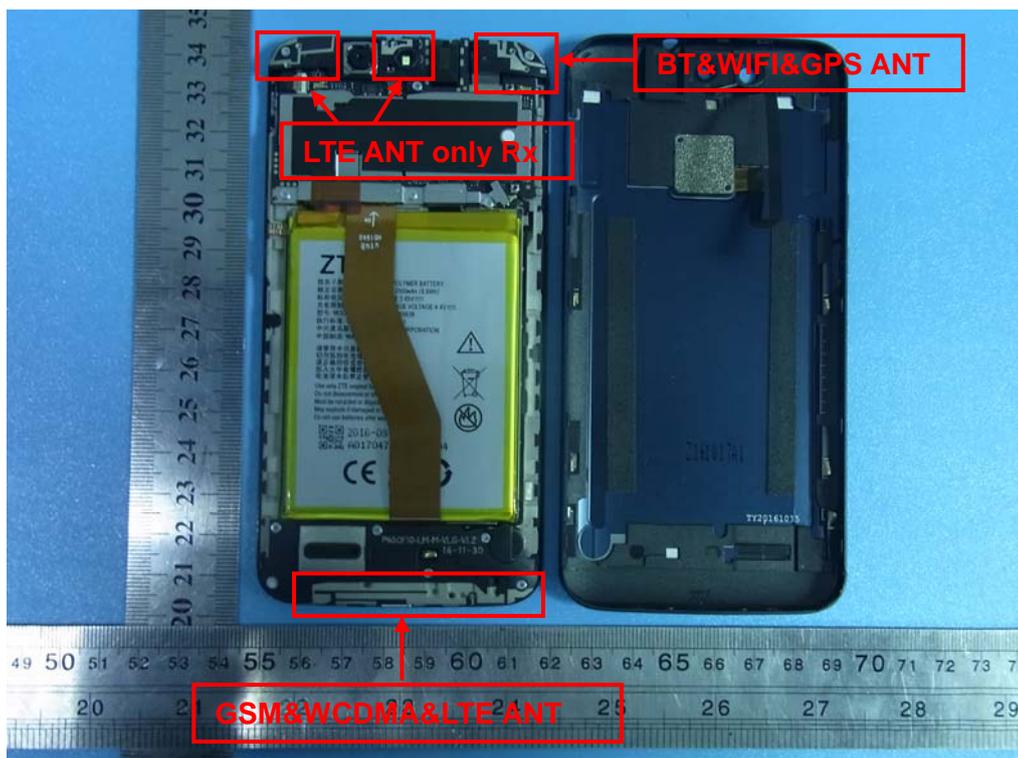


Remark: The WiFi and BLE antenna is an internal antenna which cannot replace by end-user, the best case gain of the antenna is 0.4 dBi.

4. EUT TEST PHOTO

Radiated Emission (Below 1GHz)

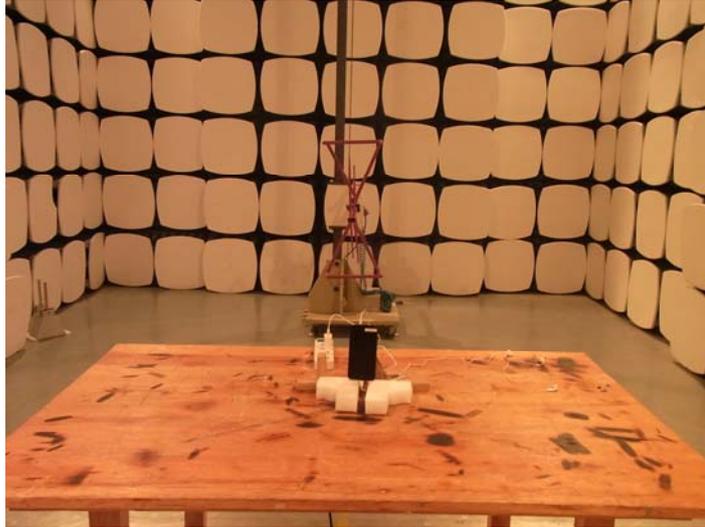

Radiated Emission (Above 1GHz)

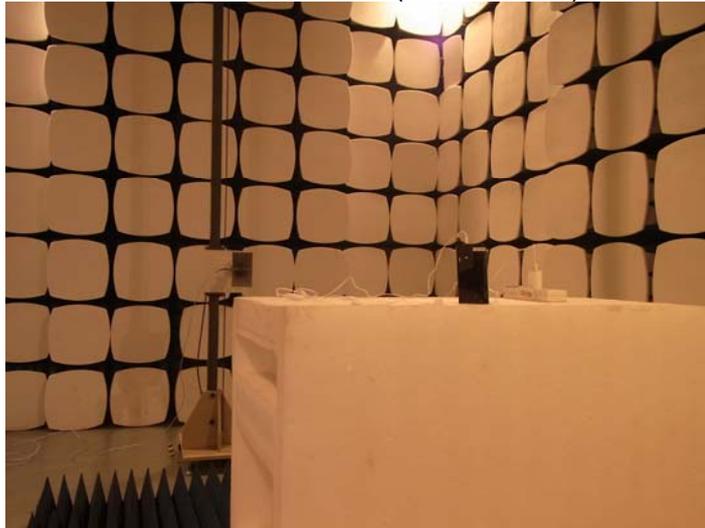

Conducted Emission





5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL

Please reference to the test report No.:GTI20161071F-1.

*****THE END*****