



FCC RF Test Report

APPLICANT : ZTE Corporation
EQUIPMENT : Tablet
BRAND NAME : ZTE
MODEL NAME : K81
MARKETING NAME : K81
FCC ID : SRQ-K81
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Mar. 24, 2017 and testing was completed on Apr. 28, 2017. We, SPORTON International (ShenZhen) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON International (ShenZhen) INC., the test report shall not be reproduced except in full.

Prepared by: Eric Shih / Manager

Approved by: Jones Tsai / Manager



Testing Laboratory

2353

SPORTON International (ShenZhen) INC.

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan District, Shenzhen City, Guangdong Province, China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 7

 1.6 Testing Location 7

 1.7 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode..... 9

 2.3 Connection Diagram of Test System..... 10

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 11

 2.6 Measurement Results Explanation Example..... 11

3 TEST RESULT 12

 3.1 6dB and 99% Bandwidth Measurement 12

 3.2 Output Power Measurement..... 14

 3.3 Power Spectral Density Measurement 15

 3.4 Conducted Band Edges and Spurious Emission Measurement 17

 3.5 Radiated Band Edges and Spurious Emission Measurement 30

 3.6 AC Conducted Emission Measurement..... 34

 3.7 Antenna Requirements 38

4 LIST OF MEASURING EQUIPMENT 39

5 UNCERTAINTY OF EVALUATION 40

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED SPURIOUS EMISSION

APPENDIX C. DUTY CYCLE PLOTS

APPENDIX D. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-247 5.2(a)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	RSS-Gen 6.6	99% Bandwidth	-	Pass	-
3.2	15.247(b)	RSS-247 5.4(d)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	RSS-247 5.2(b)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	RSS-247 5.5	Conducted Band Edges	≤ 20dBc	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	RSS-247 5.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.01 dB at 2389.920 MHz
3.6	15.207	RSS-GEN 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 12.71 dB at 0.570 MHz
3.7	15.203 & 15.247(b)	N/A	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

ZTE Corporation

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China

1.2 Manufacturer

ZTE Corporation

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet
Brand Name	ZTE
Model Name	K81
Marketing Name	K81
FCC ID	SRQ-K81
EUT supports Radios application	WCDMA/HSPA/HSPA+(16QAM uplink is not supported)/ LTE/WLAN 2.4GHz 802.11b/g/n HT20/HT40 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE/ Bluetooth v4.1 LE/Bluetooth v4.2 LE
IMEI Code	Conducted: 864855030002390 Radiation: 864855030001509 Conduction: 864855030001574
HW Version	K81MB_A
SW Version	PV_ZTE_P890R81_ROGERSV1.0.0B01
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 15.71 dBm (0.0372 W) 802.11g : 22.43 dBm (0.1750 W) 802.11n HT20 : 21.93 dBm (0.1560 W) 802.11n HT40 : 21.45 dBm (0.1396 W)
99% Occupied Bandwidth	802.11b : 14.49MHz 802.11g : 20.23MHz 802.11n HT20 : 19.88MHz 802.11n HT40 : 37.06MHz
Antenna Type / Gain	PIFA Antenna with gain -0.50 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON International (ShenZhen) INC.	
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan District, Shenzhen City, Guangdong Province, China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	
	TH01-SZ	CO01-SZ

Test Site	SPORTON International (ShenZhen) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
Test Site No.	Sporton Site No.	FCC/IC Registration No.
	03CH03-SZ	565805/4086F

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Test Mode


Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


Test Cases	
AC Conducted Emission	Mode 1: WCDMA Band II Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + USB Cable (Charging from Adapter 1) Mode 2: WCDMA Band II Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + USB Cable (Charging from Adapter 2) Mode 3: WCDMA Band II Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + USB Cable (Charging from Adapter 3)
Remark: 1. The worst case of conducted emission is mode 3; only the test data of it was reported. 2. For Radiated TCs, The tests were performed with Adapter 1, Earphone, and USB Cable. The adapter 2, adapter 3 was verified worse case of the adapter 1.	

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

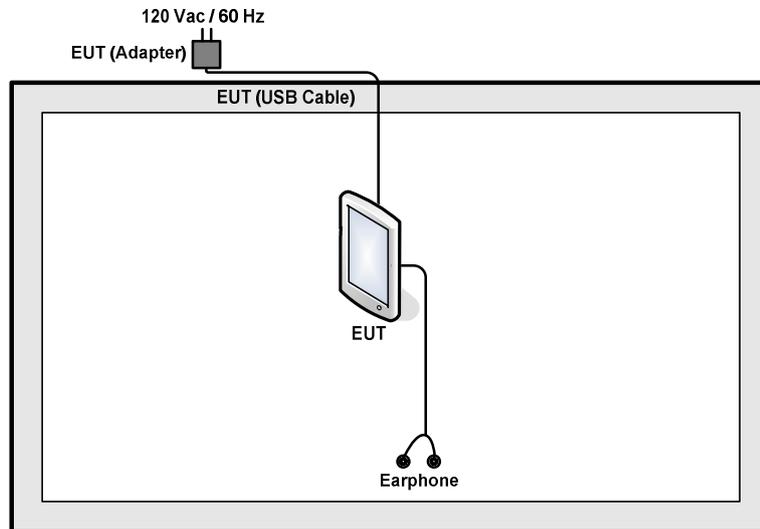

<AC Conducted Emission Mode>

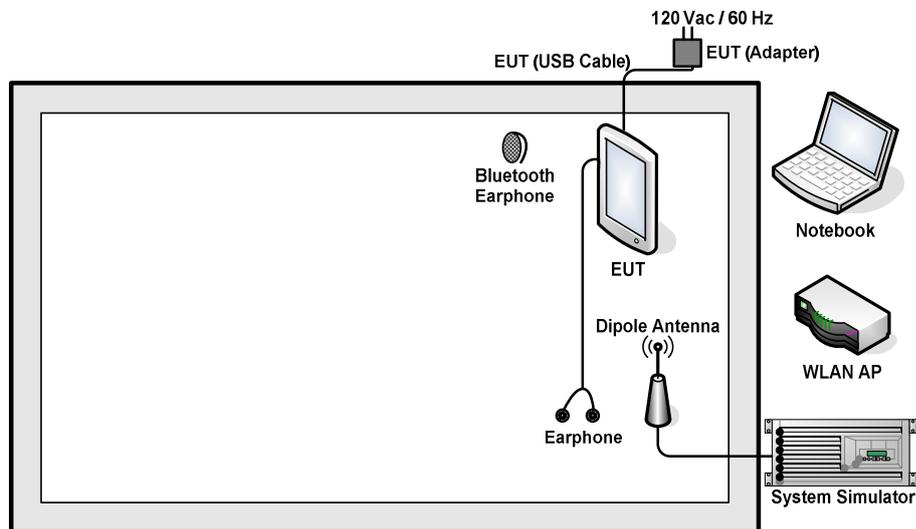



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
3.	Notebook	Lenovo	E540	N/A	N/A	AC I/P: Unshielded, 1.8m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-108	PYAHS-107W	N/A	N/A
5.	Earphone	Apple	MC690ZP/A	FCC DoC	Shielded,1.0m	N/A

2.5 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.0 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.0 + 10 = 15.0 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup

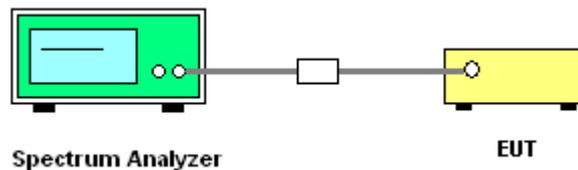



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

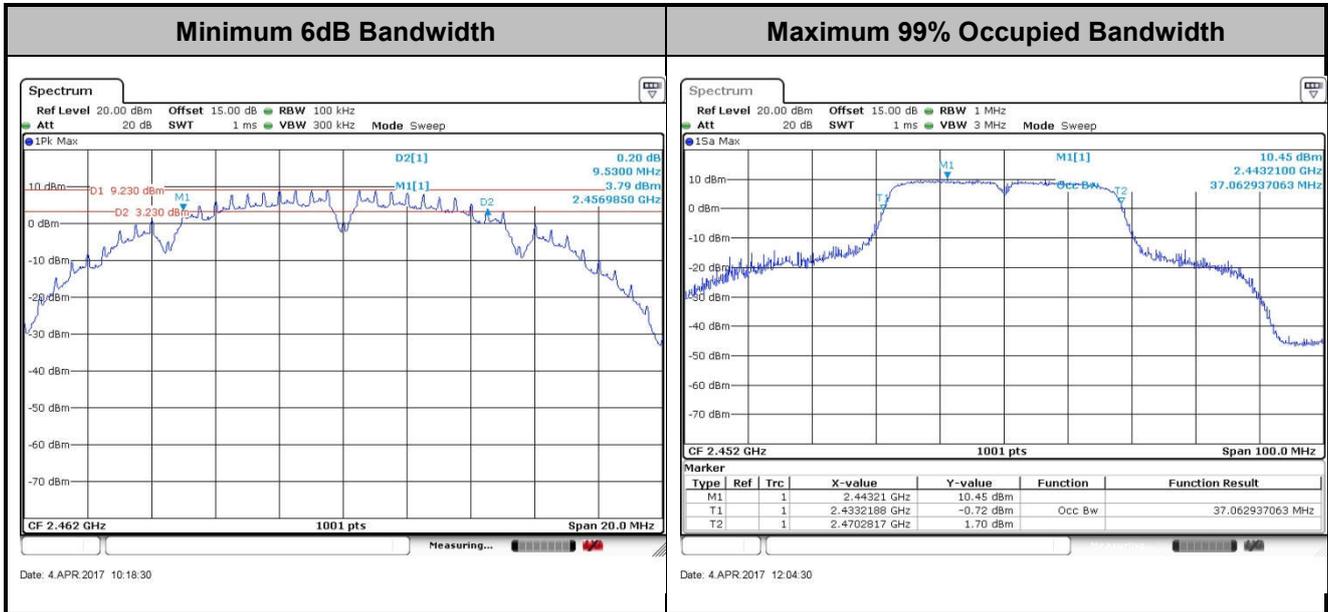

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

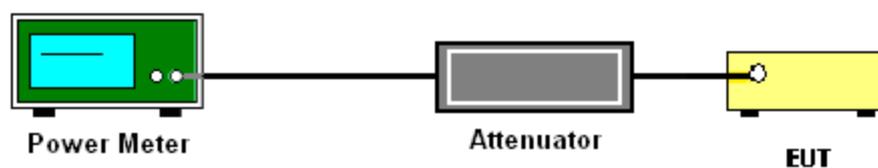

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup

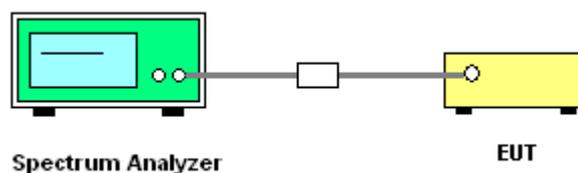



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

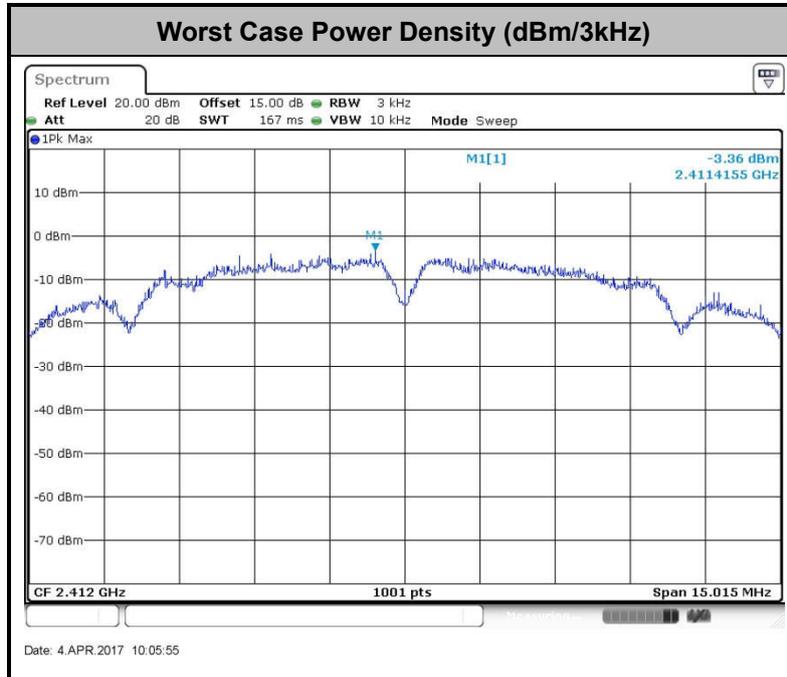

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

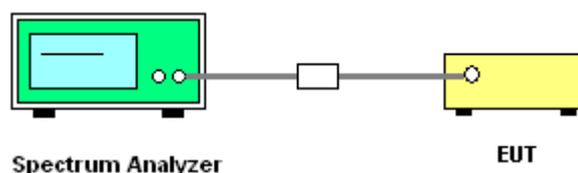



3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Sam Zheng

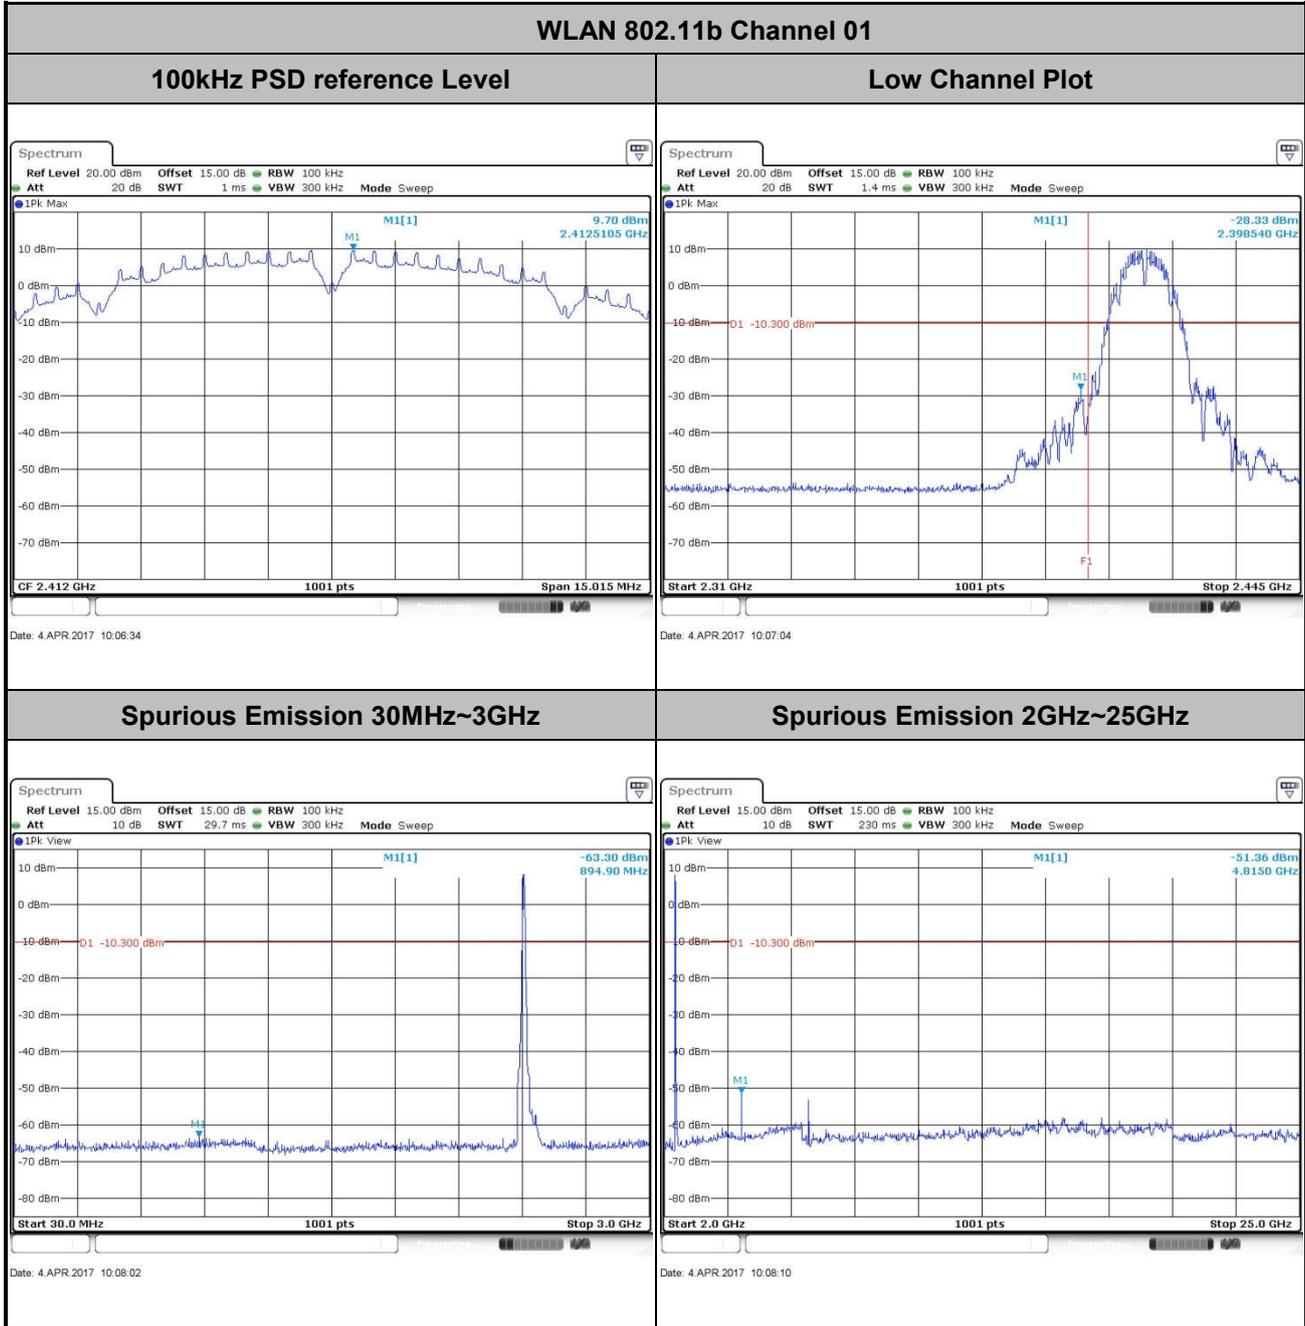




Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Sam Zheng


WLAN 802.11b Channel 06

100kHz PSD reference Level

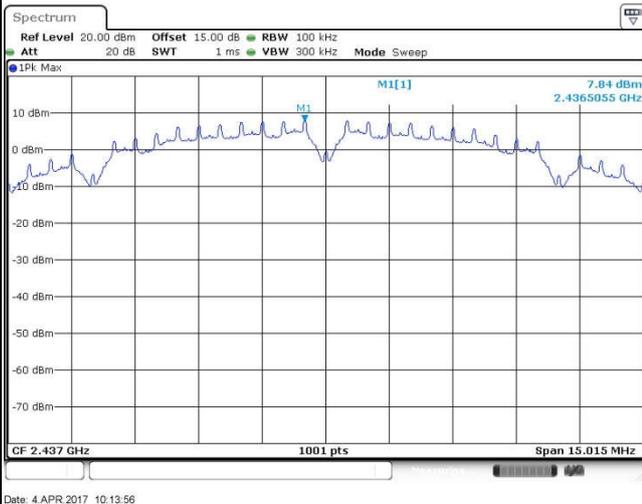


Date: 4 APR 2017 10:13:56

Spurious Emission 30MHz~3GHz

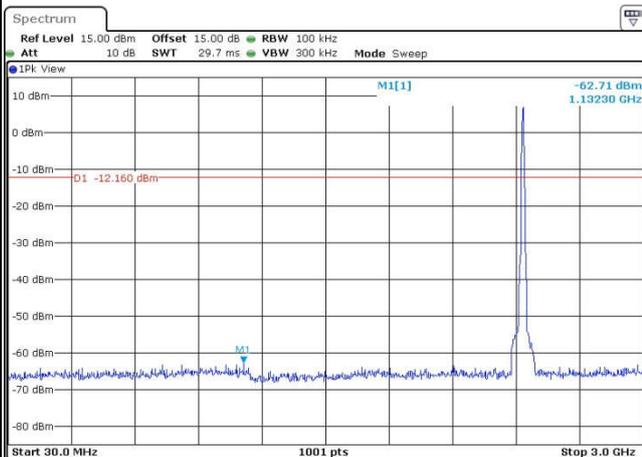

Date: 4 APR 2017 10:14:50

Spurious Emission 2GHz~25GHz

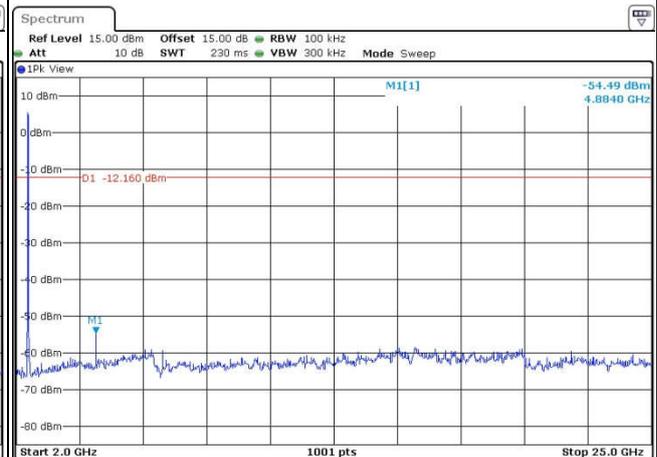


Date: 4 APR 2017 10:14:58



Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Sam Zheng


WLAN 802.11b Channel 11

100kHz PSD reference Level

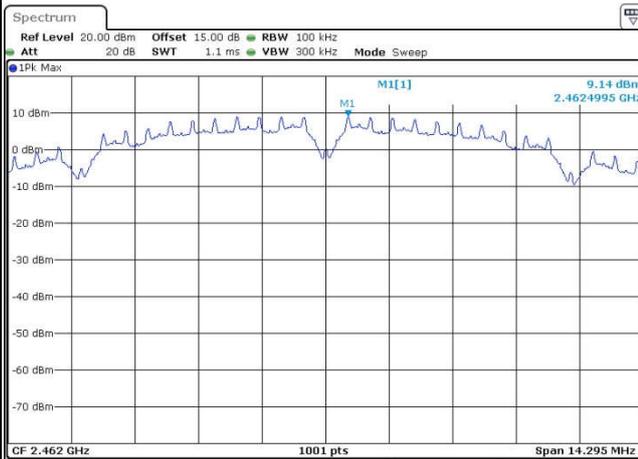


Date: 4 APR 2017 10:20:13

High Channel Plot

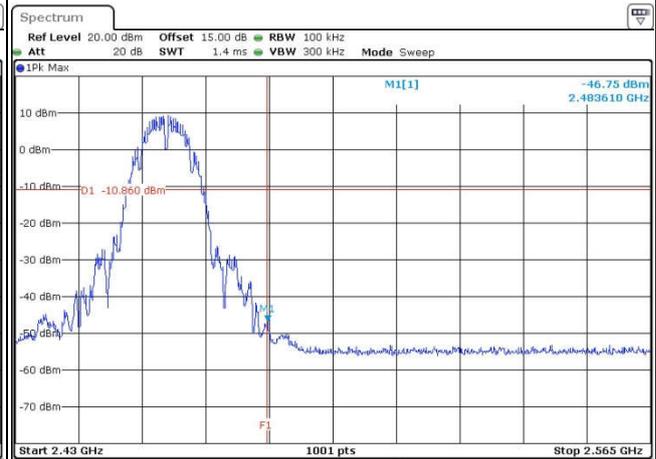


Date: 4 APR 2017 10:20:52

Spurious Emission 30MHz~3GHz

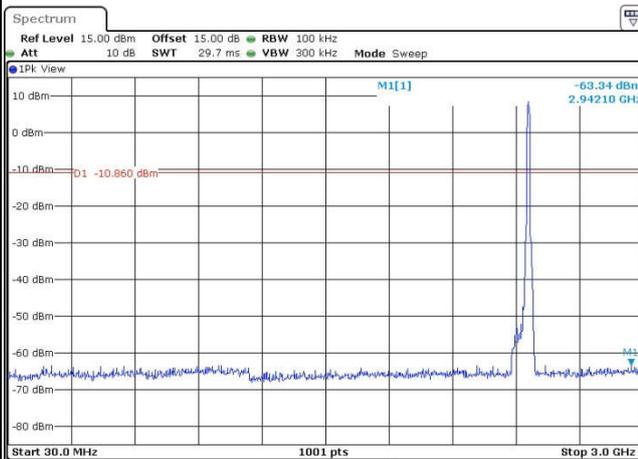

Date: 4 APR 2017 10:42:12

Spurious Emission 2GHz~25GHz

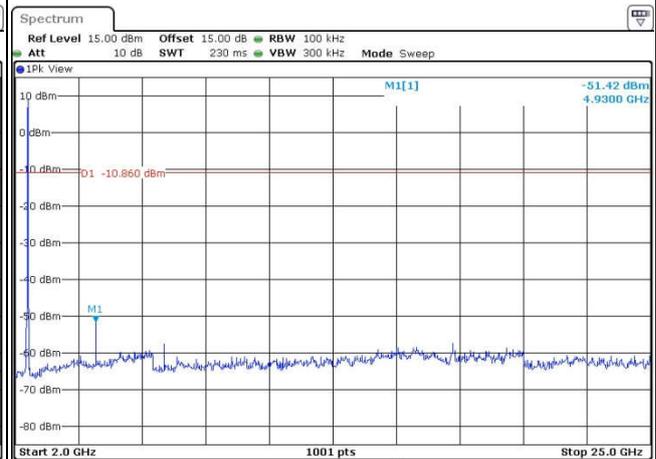


Date: 4 APR 2017 10:41:34



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Sam Zheng


WLAN 802.11g Channel 01

100kHz PSD reference Level

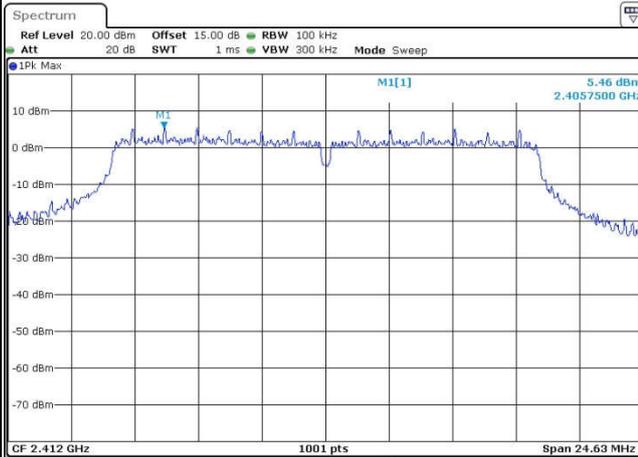


Date: 4 APR 2017 10:58:23

Low Channel Plot

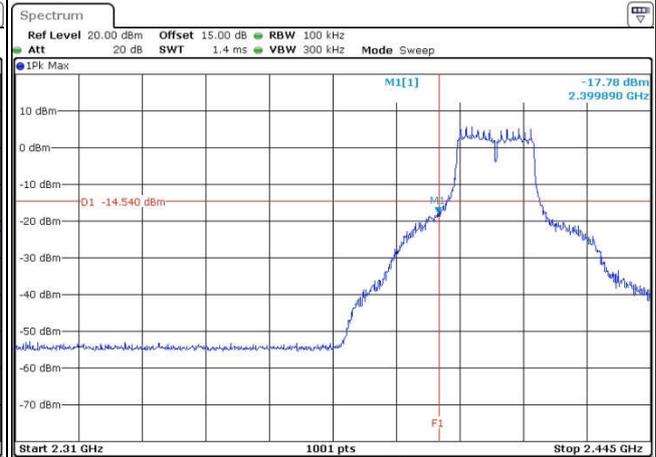


Date: 4 APR 2017 11:01:30

Spurious Emission 30MHz~3GHz

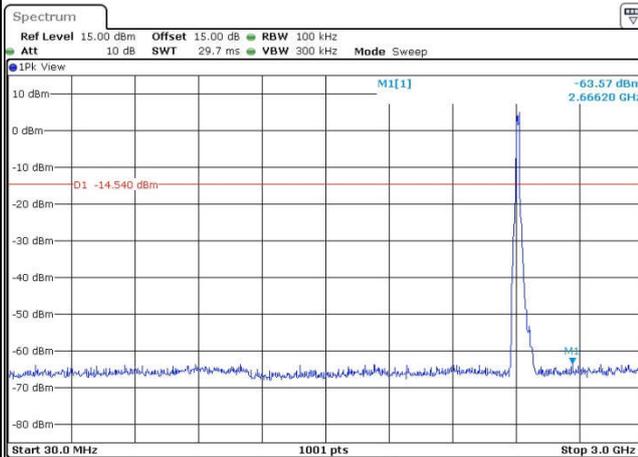

Date: 4 APR 2017 11:02:05

Spurious Emission 2GHz~25GHz

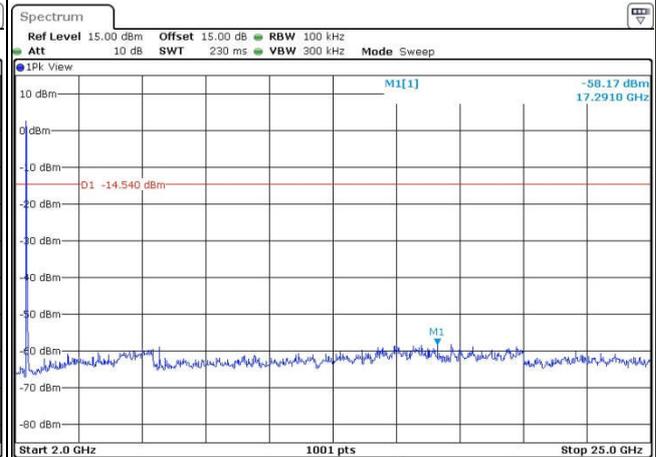


Date: 4 APR 2017 11:02:13




Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Sam Zheng

WLAN 802.11g Channel 06


100kHz PSD reference Level

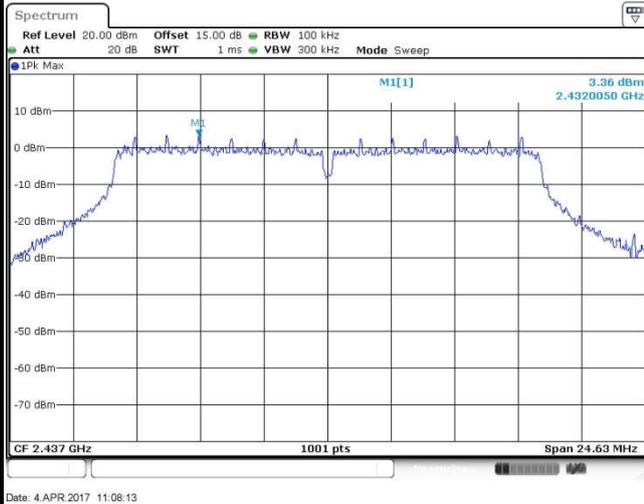

Spurious Emission 30MHz~3GHz

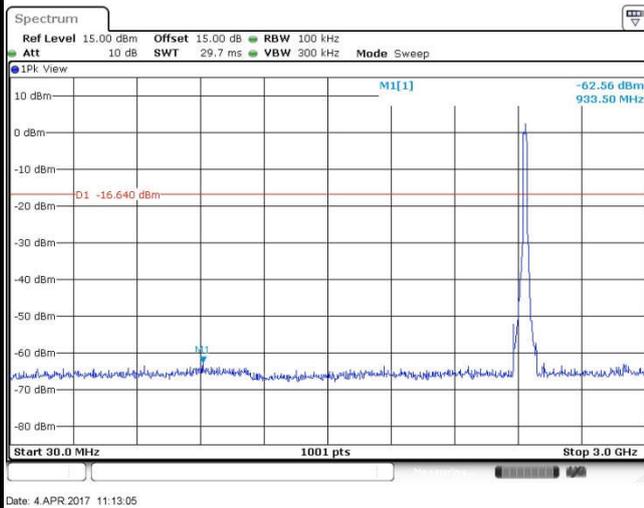

Spurious Emission 2GHz~25GHz

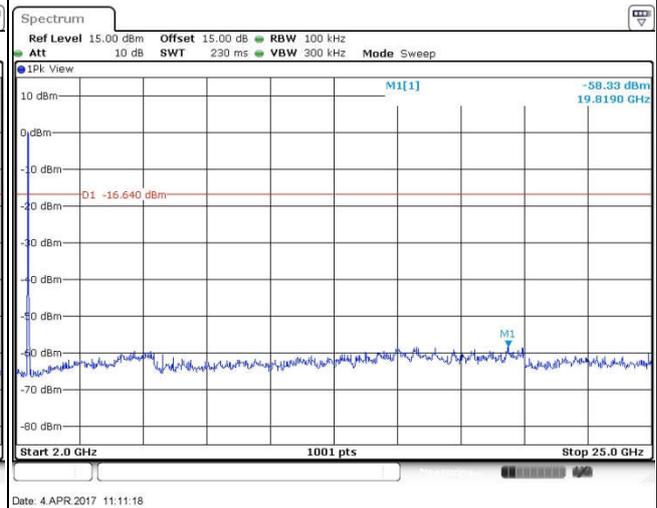




Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Sam Zheng


WLAN 802.11g Channel 11

100kHz PSD reference Level

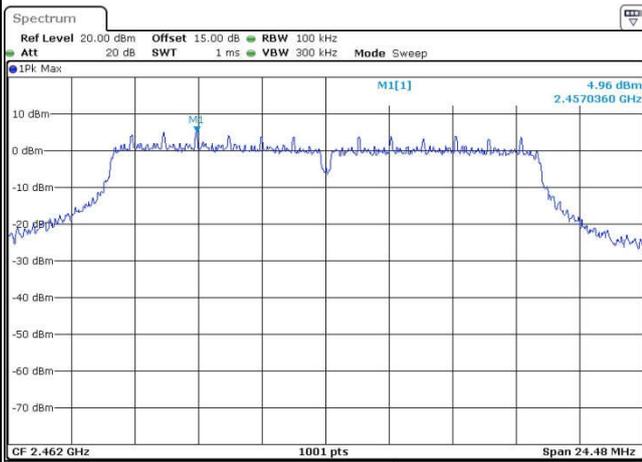


Date: 4.APR.2017 11:16:28

High Channel Plot

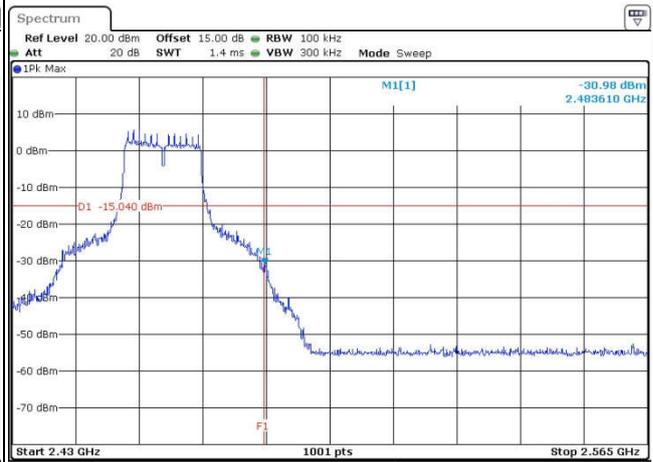


Date: 28.APR.2017 09:45:49

Spurious Emission 30MHz~3GHz

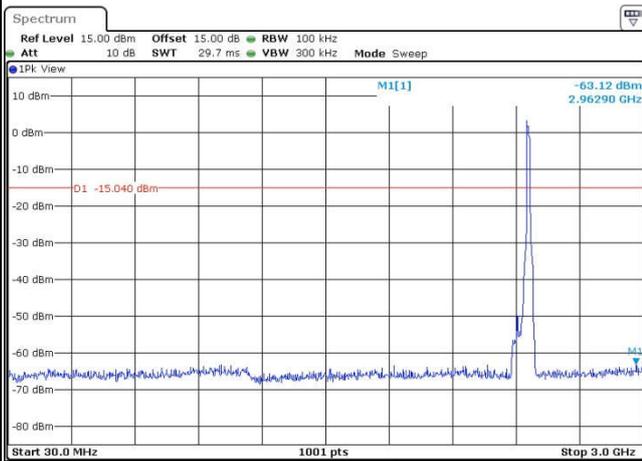

Date: 28.APR.2017 09:49:05

Spurious Emission 2GHz~25GHz

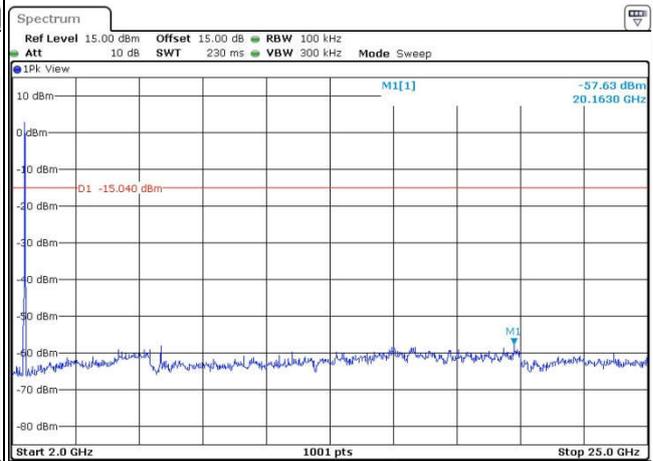


Date: 28.APR.2017 09:47:59




Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Sam Zheng

WLAN 802.11n HT20 Channel 01


100kHz PSD reference Level

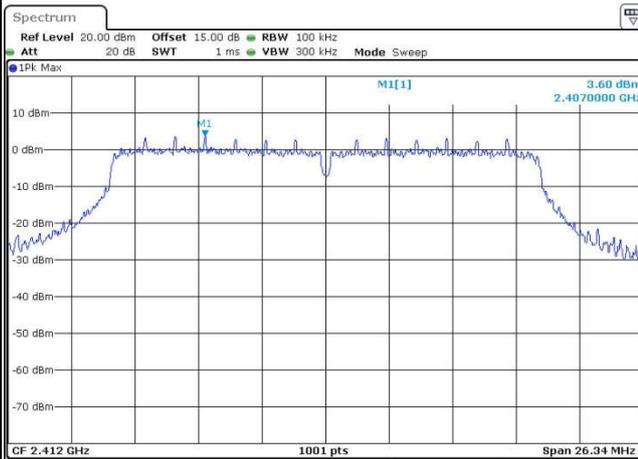


Low Channel Plot

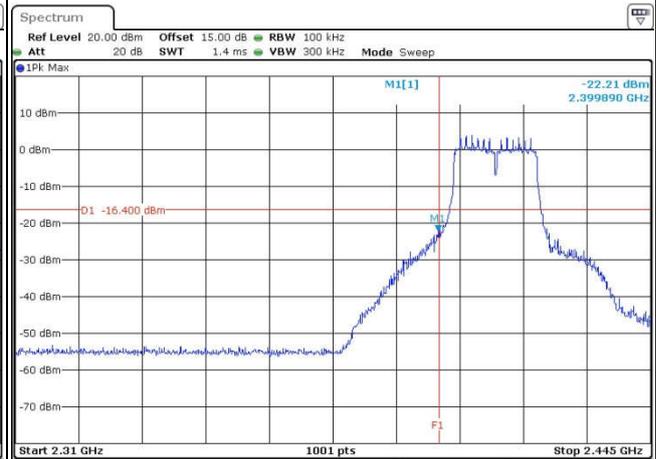

Spurious Emission 30MHz~3GHz

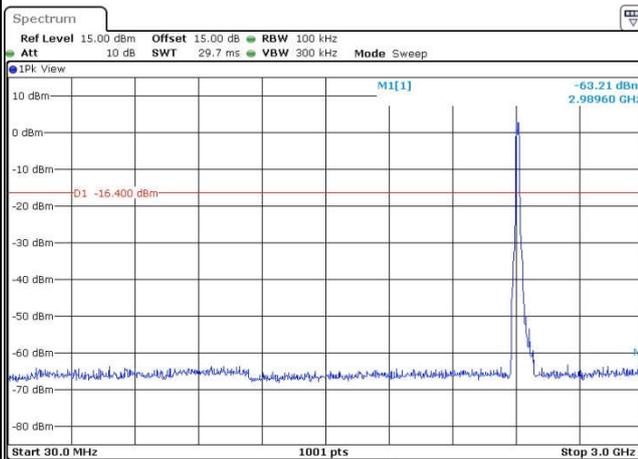

Spurious Emission 2GHz~25GHz

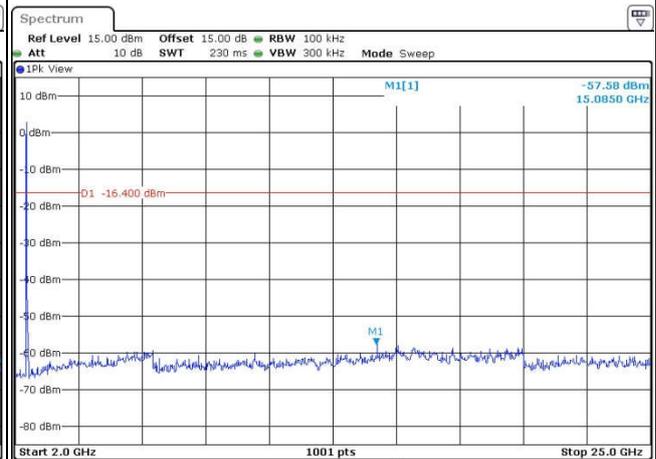





Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Sam Zheng

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level

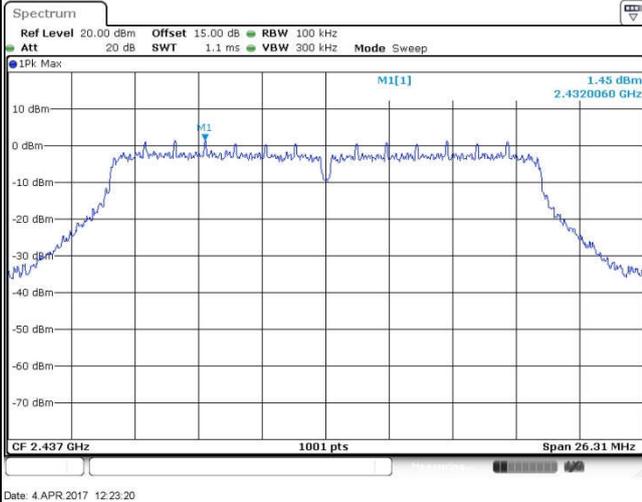

Spurious Emission 30MHz~3GHz

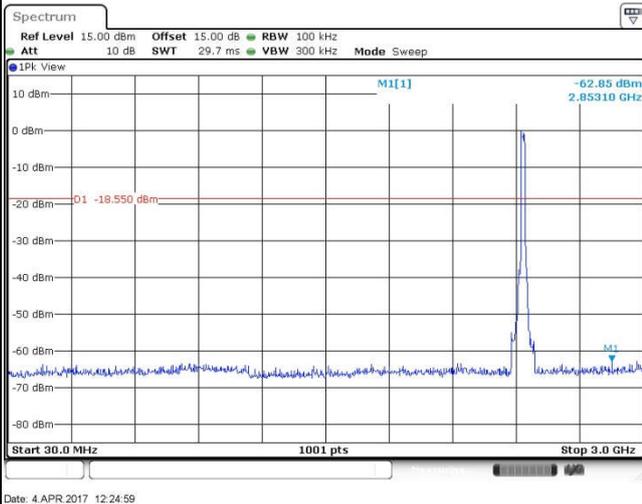

Spurious Emission 2GHz~25GHz

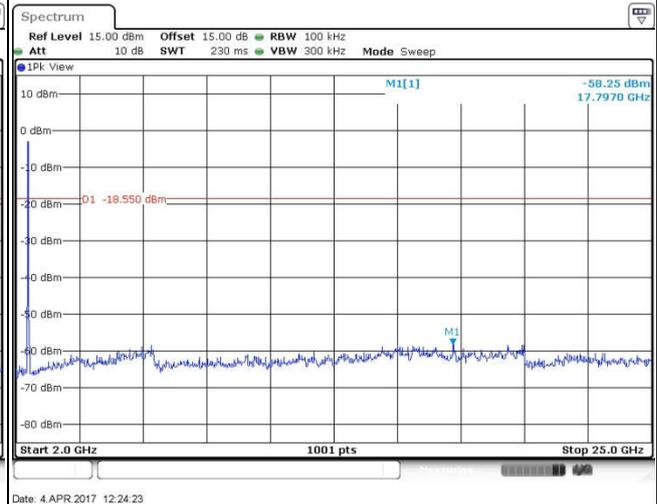




Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Sam Zheng


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

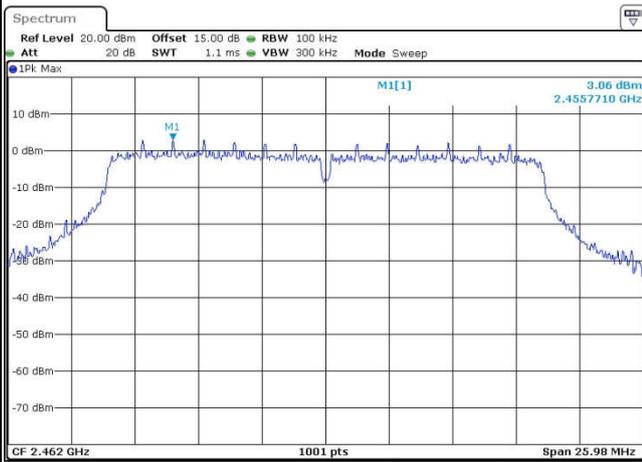


Date: 4 APR 2017 12:30:40

High Channel Plot

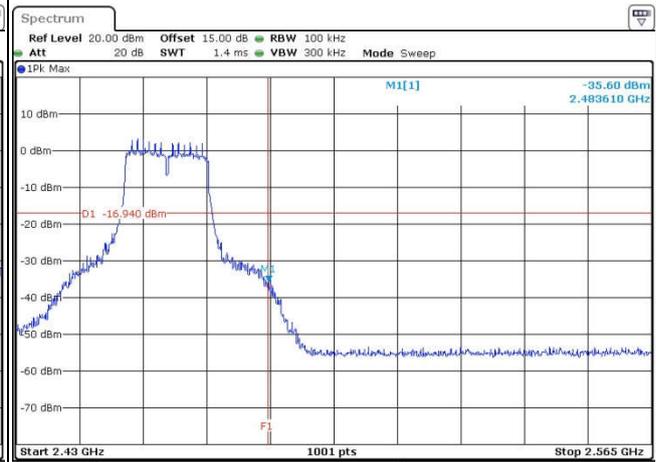


Date: 4 APR 2017 12:31:22

Spurious Emission 30MHz~3GHz

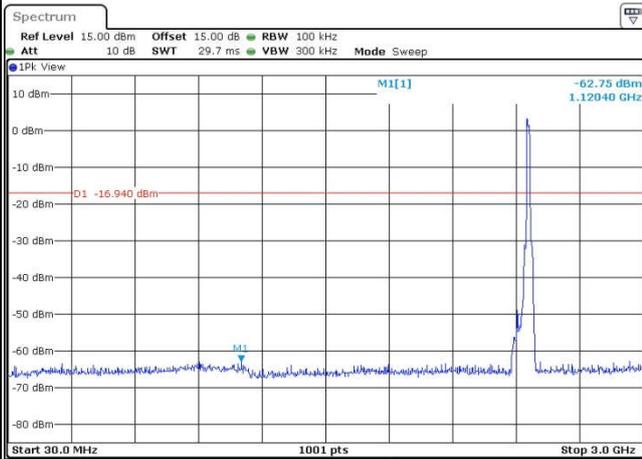

Date: 4 APR 2017 12:32:14


Spurious Emission 2GHz~25GHz

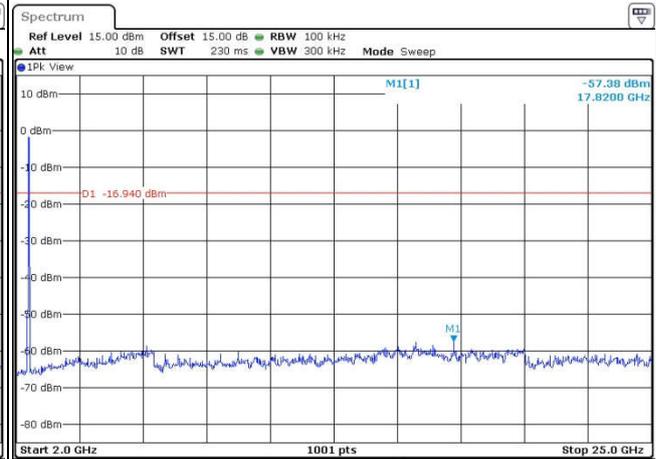

Date: 4 APR 2017 12:31:41



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	03	Test Engineer :	Sam Zheng

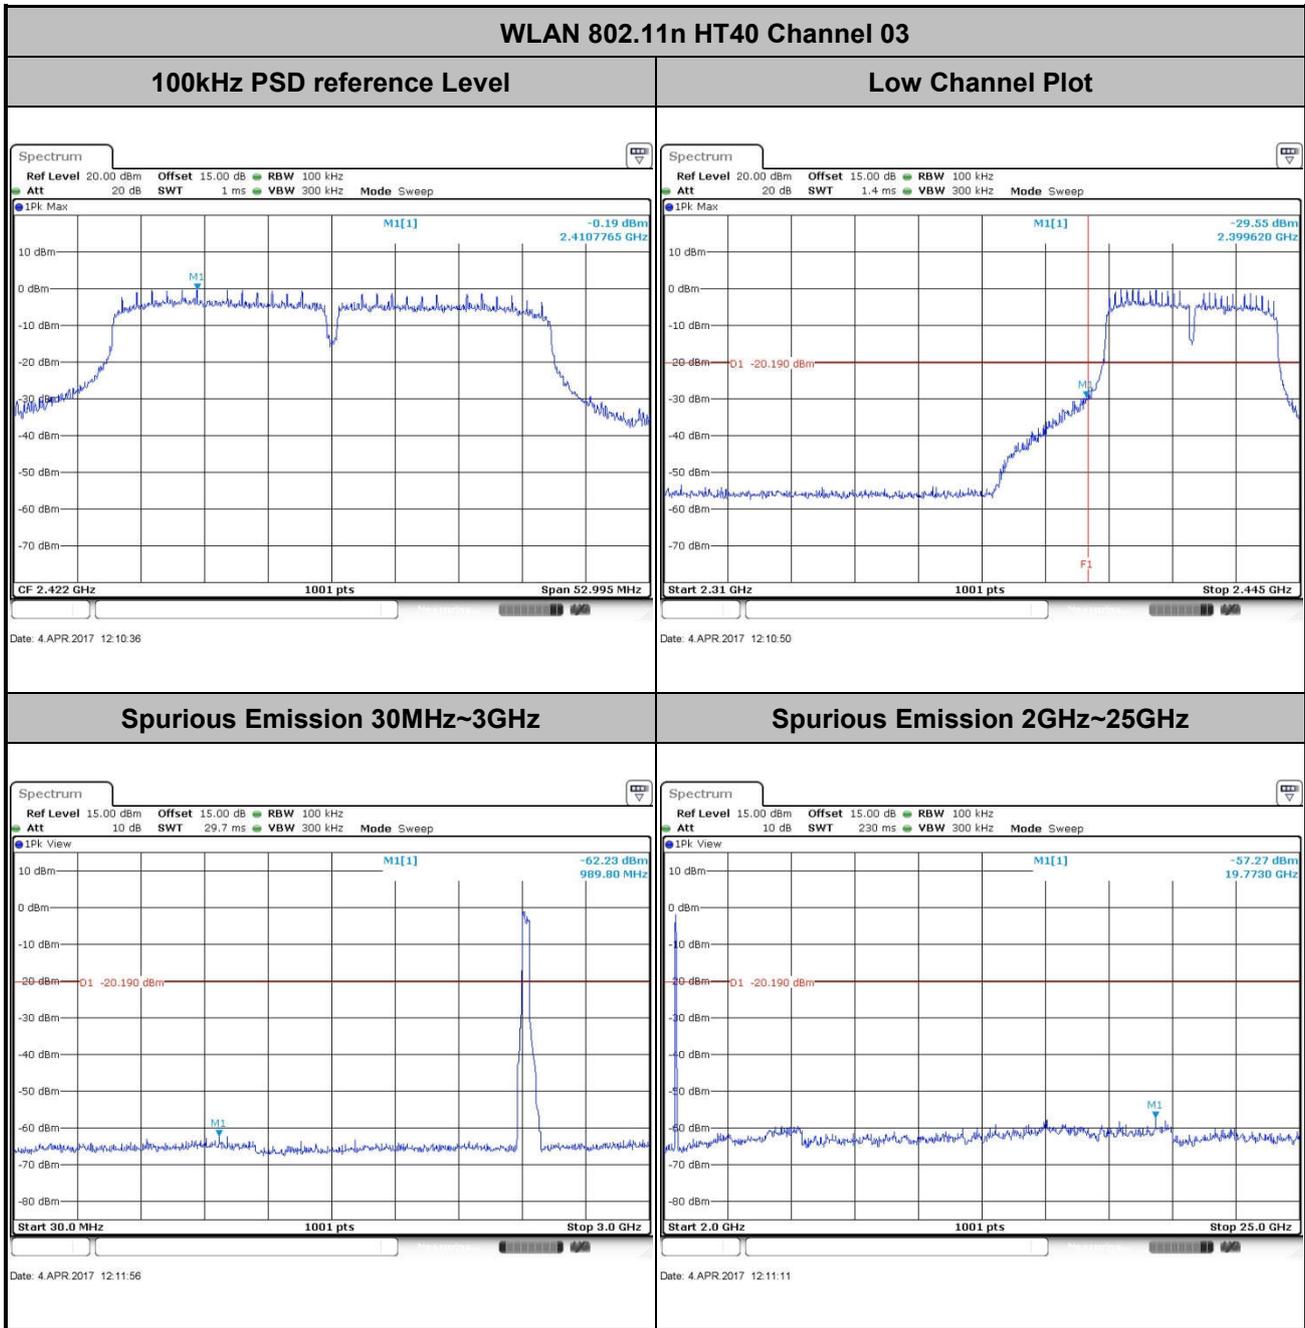




Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Sam Zheng


WLAN 802.11n HT40 Channel 06

100kHz PSD reference Level

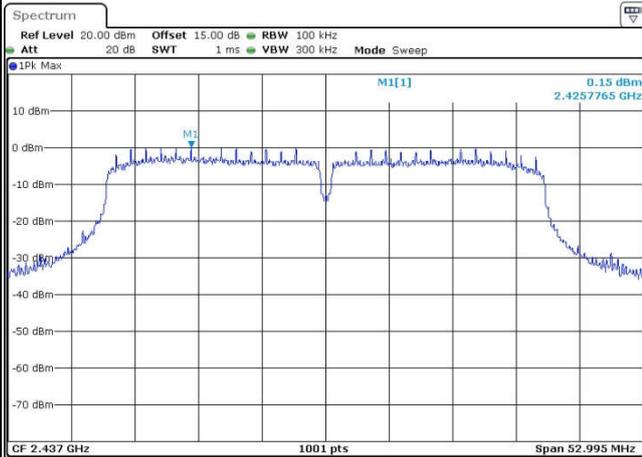


Date: 4 APR 2017 11:55:54

Spurious Emission 30MHz~3GHz

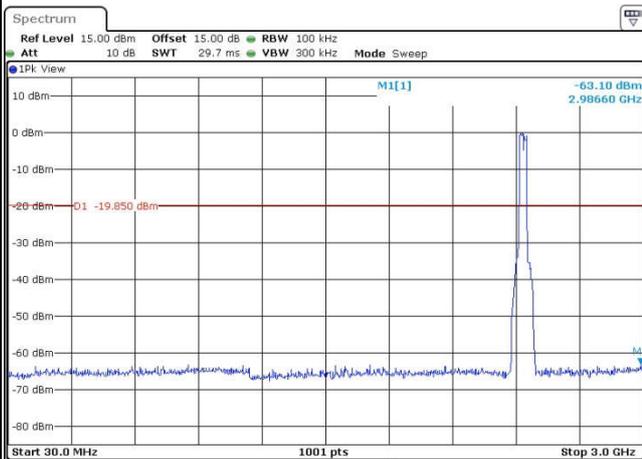

Date: 4 APR 2017 11:57:24

Spurious Emission 2GHz~25GHz

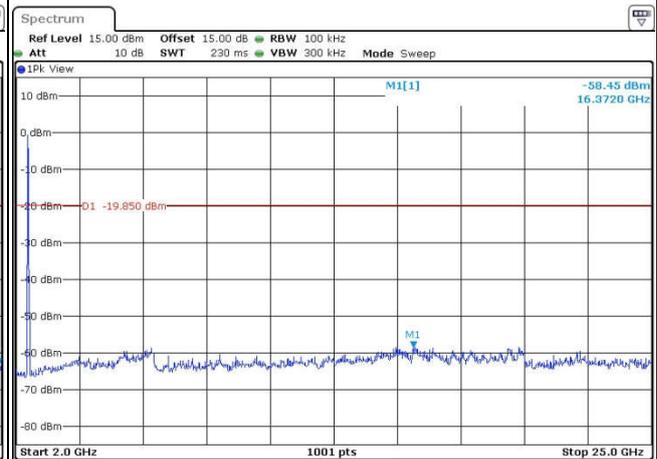


Date: 4 APR 2017 11:56:19



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	09	Test Engineer :	Sam Zheng


WLAN 802.11n HT40 Channel 09

100kHz PSD reference Level

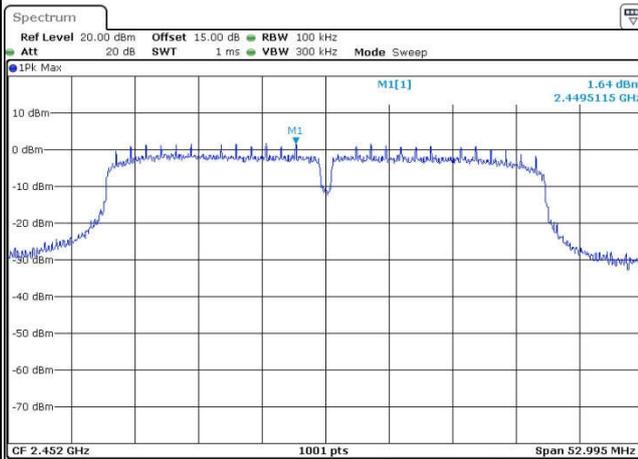


Date: 4 APR 2017 12:01:27

High Channel Plot

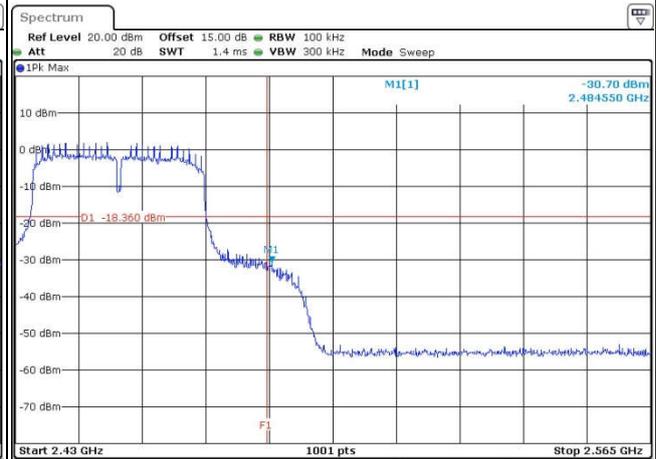


Date: 4 APR 2017 12:02:10

Spurious Emission 30MHz~3GHz

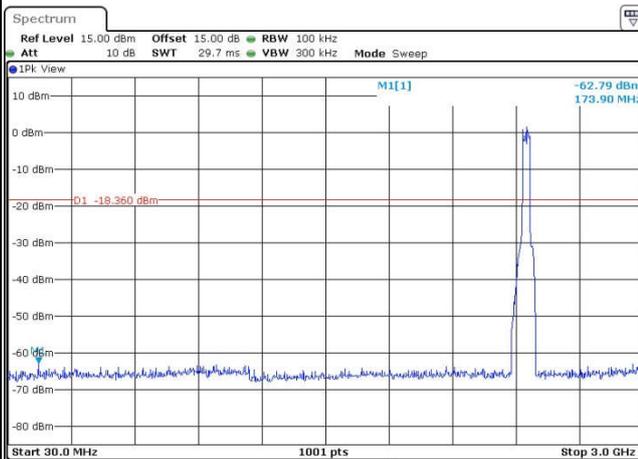

Date: 4 APR 2017 12:04:05

Spurious Emission 2GHz~25GHz

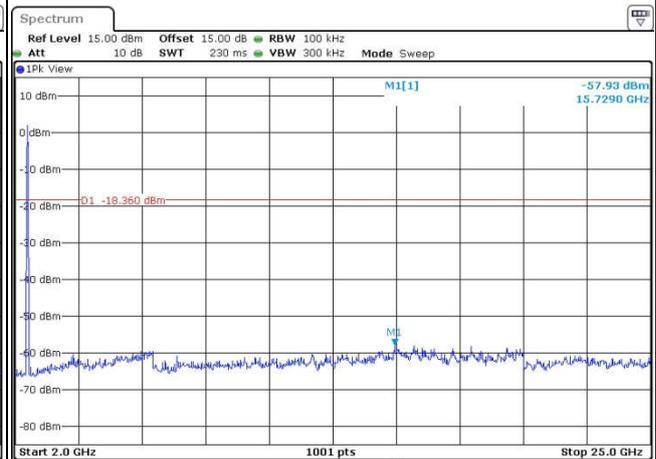

Date: 4 APR 2017 12:03:20



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

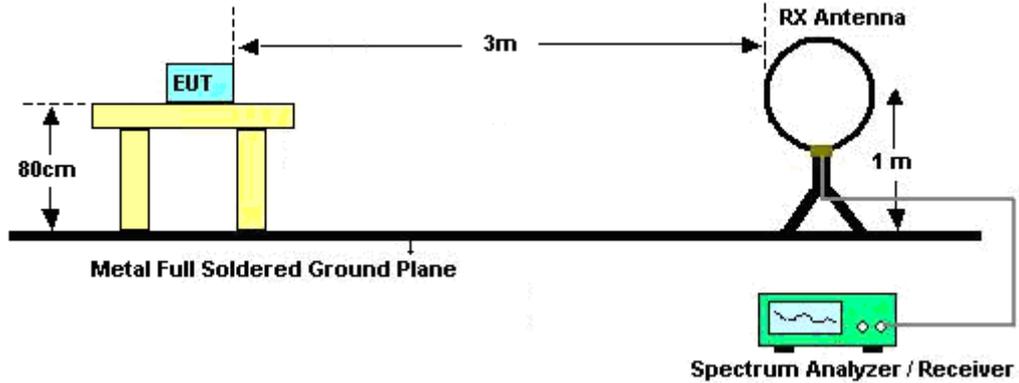

For radiated emissions from 30MHz to 1GHz

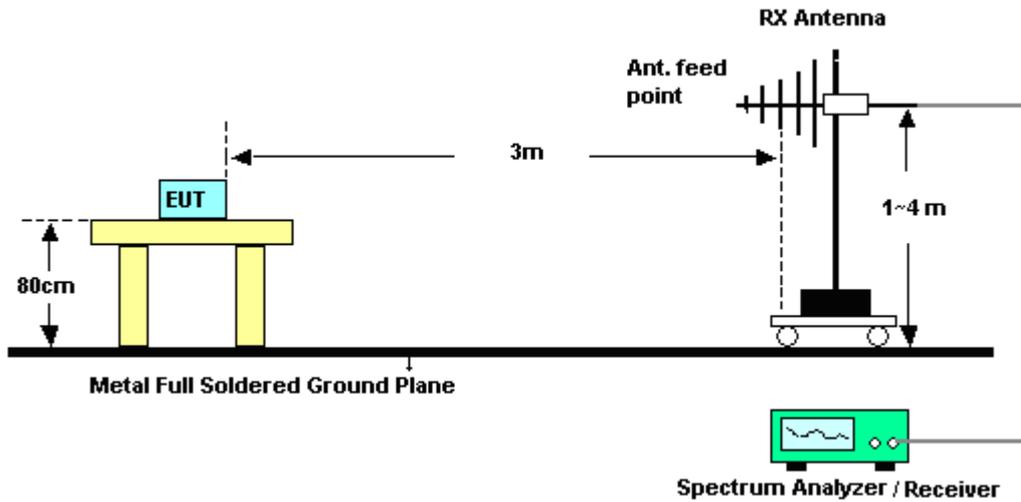

For radiated emissions above 1GHz

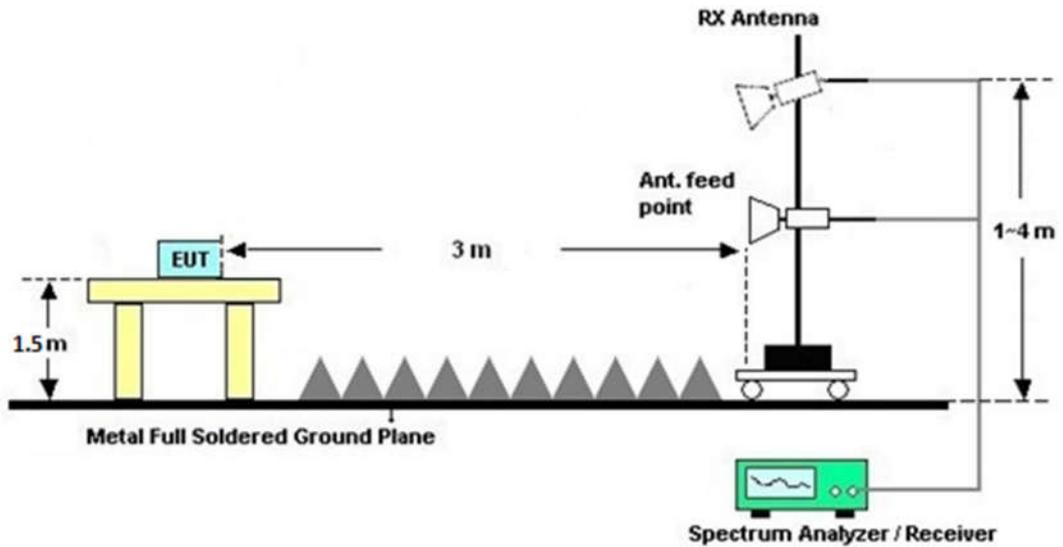

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.6.4 Test Setup

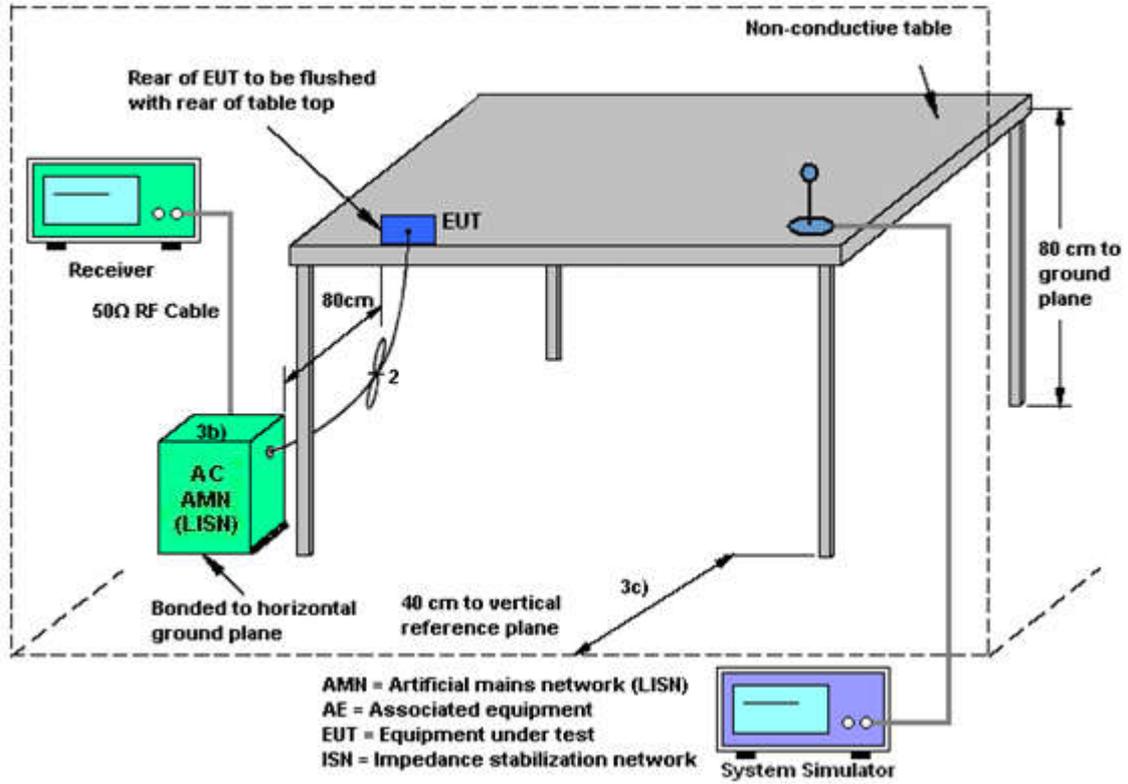



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 3	Temperature :	21~23°C
Test Engineer :	Tao Cheng	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band II Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + USB Cable (Charging from Adapter 3)		

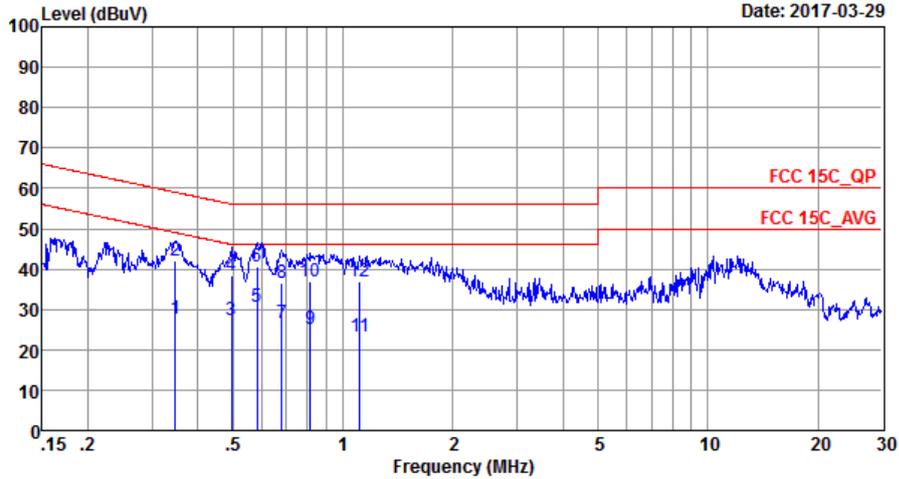


Site : CO01-SZ
 Condition: FCC 15C_QP LISN_20170301_L LINE

Mode : Mode 3
 IMEI : 864855030001574

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.35	27.64	-21.41	49.05	17.41	0.03	10.20	Average
2	0.35	42.13	-16.92	59.05	31.90	0.03	10.20	QP
3	0.49	27.30	-18.80	46.10	17.10	0.02	10.18	Average
4	0.49	38.30	-17.80	56.10	28.10	0.02	10.18	QP
5 *	0.58	30.59	-15.41	46.00	20.40	0.02	10.17	Average
6	0.58	40.59	-15.41	56.00	30.40	0.02	10.17	QP
7	0.68	26.39	-19.61	46.00	16.20	0.02	10.17	Average
8	0.68	36.69	-19.31	56.00	26.50	0.02	10.17	QP
9	0.81	25.20	-20.80	46.00	15.00	0.04	10.16	Average
10	0.81	36.80	-19.20	56.00	26.60	0.04	10.16	QP
11	1.11	23.43	-22.57	46.00	13.20	0.08	10.15	Average
12	1.11	36.93	-19.07	56.00	26.70	0.08	10.15	QP



Test Mode :	Mode 3	Temperature :	21~23°C
Test Engineer :	Tao Cheng	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA Band II Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + USB Cable (Charging from Adapter 3)		

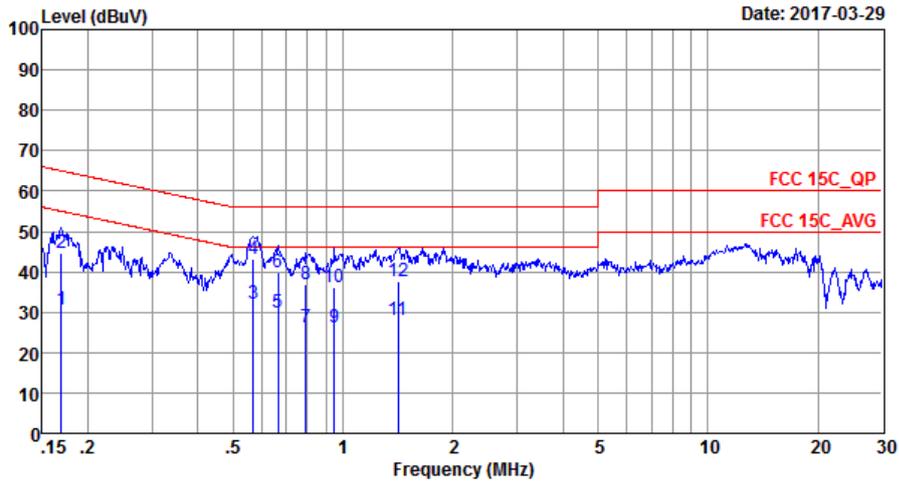

Site : CO01-SZ
 Condition: FCC 15C_QP LISN_20170301_N NEUTRAL

Mode : Mode 3
 IMEI : 864855030001574

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17	30.66	-24.33	54.99	20.30	0.03	10.33	Average
2	0.17	44.76	-20.23	64.99	34.40	0.03	10.33	QP
3	0.57	31.99	-14.01	46.00	21.80	0.02	10.17	Average
4 *	0.57	43.29	-12.71	56.00	33.10	0.02	10.17	QP
5	0.66	29.79	-16.21	46.00	19.60	0.02	10.17	Average
6	0.66	39.89	-16.11	56.00	29.70	0.02	10.17	QP
7	0.79	26.09	-19.91	46.00	15.90	0.03	10.16	Average
8	0.79	36.79	-19.21	56.00	26.60	0.03	10.16	QP
9	0.95	26.20	-19.80	46.00	16.00	0.05	10.15	Average
10	0.95	36.10	-19.90	56.00	25.90	0.05	10.15	QP
11	1.42	28.01	-17.99	46.00	17.80	0.05	10.16	Average
12	1.42	37.61	-18.39	56.00	27.40	0.05	10.16	QP



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	May 07, 2016	Mar. 30, 2017~ Apr. 28, 2017	May 06, 2017	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Jan. 06, 2017	Mar. 30, 2017~ Apr. 28, 2017	Jan. 05, 2018	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Jan. 06, 2017	Mar. 30, 2017~ Apr. 28, 2017	Jan. 05, 2018	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY544500 83	20Hz~8.4GHz	May 07, 2016	Mar. 30, 2017~ Apr. 22, 2017	May 06, 2017	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 46	10Hz~44GHz	May 07, 2016	Mar. 30, 2017~ Apr. 22, 2017	May 06, 2017	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 07, 2016	Mar. 30, 2017~ Apr. 22, 2017	May 06, 2017	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	May 21, 2016	Mar. 30, 2017~ Apr. 22, 2017	May 20, 2017	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-135 5	1GHz~18GHz	May 07, 2016	Mar. 30, 2017~ Apr. 22, 2017	May 06, 2017	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Aug. 10, 2016	Mar. 30, 2017~ Apr. 22, 2017	Aug. 09, 2017	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102210	0.01Hz ~3000MHz	Oct. 11, 2016	Mar. 30, 2017~ Apr. 22, 2017	Oct. 10, 2017	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY395013 02	500MHz~26.5G Hz	Jan. 06, 2017	Mar. 30, 2017~ Apr. 22, 2017	Jan. 05, 2018	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010001 985	N/A	NCR	Mar. 30, 2017~ Apr. 22, 2017	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Mar. 30, 2017~ Apr. 22, 2017	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Mar. 30, 2017~ Apr. 22, 2017	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jan. 06, 2017	Mar. 29, 2017	Jan. 05, 2018	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103892	9kHz~30MHz	Jan. 05, 2017	Mar. 29, 2017	Jan. 04, 2018	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	MessTec	3816/2SH	00103912	9kHz~30MHz	Jan. 05, 2017	Mar. 29, 2017	Jan. 04, 2018	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000 891	100Vac~250Vac	Jul. 16, 2016	Mar. 29, 2017	Jul. 15, 2017	Conduction (CO01-SZ)
Pulse Limiter	COM-POWER	LIT-153 Transient Limiter	53139	150kHz~30MHz	Oct. 11, 2016	Mar. 29, 2017	Oct. 10, 2017	Conduction (CO01-SZ)
RF Cable	Woken	B0720#0001	CO01SZ00 07	150kHz~30MHz	Oct. 08, 2016	Mar. 29, 2017	Oct. 07, 2017	Conduction (CO01-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Sam Zheng	Temperature:	24~26	°C
Test Date:	2017/3/30~2017/4/4	Relative Humidity:	50~53	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	14.39	10.01	0.50	Pass
11b	1Mbps	1	6	2437	14.29	10.01	0.50	Pass
11b	1Mbps	1	11	2462	14.49	9.53	0.50	Pass
11g	6Mbps	1	1	2412	20.23	16.42	0.50	Pass
11g	6Mbps	1	6	2437	19.03	16.42	0.50	Pass
11g	6Mbps	1	11	2462	19.28	16.32	0.50	Pass
HT20	MCS0	1	1	2412	19.88	17.56	0.50	Pass
HT20	MCS0	1	6	2437	19.43	17.54	0.50	Pass
HT20	MCS0	1	11	2462	19.58	17.32	0.50	Pass
HT40	MCS0	1	3	2422	36.66	35.33	0.50	Pass
HT40	MCS0	1	6	2437	36.96	35.33	0.50	Pass
HT40	MCS0	1	9	2452	37.06	35.33	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	15.71	30.00	-0.50	15.21	36.00	Pass
11b	1Mbps	1	6	2437	14.15	30.00	-0.50	13.65	36.00	Pass
11b	1Mbps	1	11	2462	15.56	30.00	-0.50	15.06	36.00	Pass
11g	6Mbps	1	1	2412	21.68	30.00	-0.50	21.18	36.00	Pass
11g	6Mbps	1	6	2437	22.43	30.00	-0.50	21.93	36.00	Pass
11g	6Mbps	1	11	2462	21.03	30.00	-0.50	20.53	36.00	Pass
HT20	MCS0	1	1	2412	21.93	30.00	-0.50	21.43	36.00	Pass
HT20	MCS0	1	6	2437	21.53	30.00	-0.50	21.03	36.00	Pass
HT20	MCS0	1	11	2462	20.95	30.00	-0.50	20.45	36.00	Pass
HT40	MCS0	1	3	2422	20.68	30.00	-0.50	20.18	36.00	Pass
HT40	MCS0	1	6	2437	21.14	30.00	-0.50	20.64	36.00	Pass
HT40	MCS0	1	9	2452	21.45	30.00	-0.50	20.95	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.09	13.16
11b	1Mbps	1	6	2437	0.09	11.51
11b	1Mbps	1	11	2462	0.09	12.85
11g	6Mbps	1	1	2412	0.58	13.09
11g	6Mbps	1	6	2437	0.58	12.54
11g	6Mbps	1	11	2462	0.58	12.13
HT20	MCS0	1	1	2412	0.62	12.88
HT20	MCS0	1	6	2437	0.62	11.48
HT20	MCS0	1	11	2462	0.62	11.86
HT40	MCS0	1	3	2422	1.19	11.36
HT40	MCS0	1	6	2437	1.19	11.72
HT40	MCS0	1	9	2452	1.19	12.86

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-3.36	-0.50	8.00	Pass
11b	1Mbps	1	6	2437	-6.39	-0.50	8.00	Pass
11b	1Mbps	1	11	2462	-4.85	-0.50	8.00	Pass
11g	6Mbps	1	1	2412	-7.90	-0.50	8.00	Pass
11g	6Mbps	1	6	2437	-10.20	-0.50	8.00	Pass
11g	6Mbps	1	11	2462	-9.75	-0.50	8.00	Pass
HT20	MCS0	1	1	2412	-9.81	-0.50	8.00	Pass
HT20	MCS0	1	6	2437	-12.27	-0.50	8.00	Pass
HT20	MCS0	1	11	2462	-10.24	-0.50	8.00	Pass
HT40	MCS0	1	3	2422	-14.97	-0.50	8.00	Pass
HT40	MCS0	1	6	2437	-12.71	-0.50	8.00	Pass
HT40	MCS0	1	9	2452	-12.79	-0.50	8.00	Pass



Appendix B. Radiated Spurious Emission

For Adapter 1

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2385.51	53.47	-20.53	74	48.49	31.38	6.81	33.21	150	57	P	H
		2385.96	47.13	-6.87	54	42.15	31.38	6.81	33.21	150	57	A	H
	*	2412	107.65	-	-	102.53	31.5	6.81	33.19	150	57	P	H
	*	2412	105.65	-	-	100.53	31.5	6.81	33.19	150	57	A	H
		2386.14	52.09	-21.91	74	47.11	31.38	6.81	33.21	150	97	P	V
		2385.96	44.85	-9.15	54	39.87	31.38	6.81	33.21	150	97	A	V
	*	2412	106.62	-	-	101.5	31.5	6.81	33.19	150	97	P	V
	*	2412	104.69	-	-	99.57	31.5	6.81	33.19	150	97	A	V
802.11b CH 06 2437MHz		2383.8	48.17	-25.83	74	43.41	31.26	6.73	33.23	153	45	P	H
		2383.71	39.3	-14.70	54	34.54	31.26	6.73	33.23	153	45	A	H
	*	2437	108.32	-	-	102.87	31.74	6.86	33.15	153	45	P	H
	*	2437	105.93	-	-	100.48	31.74	6.86	33.15	153	45	A	H
		2484.92	48.02	-25.98	74	42.25	31.98	6.91	33.12	153	45	P	H
		2483.52	36.91	-17.09	54	31.14	31.98	6.91	33.12	153	45	A	H
		2385.6	48.04	-25.96	74	43.06	31.38	6.81	33.21	150	97	P	V
		2389.92	37.2	-16.80	54	32.22	31.38	6.81	33.21	150	97	A	V
	*	2437	106.01	-	-	100.56	31.74	6.86	33.15	150	97	P	V
	*	2437	104.38	-	-	98.93	31.74	6.86	33.15	150	97	A	V
		2484.04	47.21	-26.79	74	41.44	31.98	6.91	33.12	150	97	P	V
		2483.52	36.73	-17.27	54	30.96	31.98	6.91	33.12	150	97	A	V



802.11b CH 11 2462MHz	*	2462	107.4	-	-	101.82	31.86	6.86	33.14	150	62	P	H
	*	2462	105.33	-	-	99.75	31.86	6.86	33.14	150	62	A	H
		2483.64	51.73	-22.27	74	45.96	31.98	6.91	33.12	150	62	P	H
		2487.64	42.11	-11.89	54	36.2	32.1	6.91	33.1	150	62	A	H
	*	2462	105.33	-	-	99.75	31.86	6.86	33.14	150	97	P	V
	*	2462	103.21	-	-	97.63	31.86	6.86	33.14	150	97	A	V
		2484.28	51.12	-22.88	74	45.35	31.98	6.91	33.12	150	97	P	V
		2483.76	41.63	-12.37	54	35.86	31.98	6.91	33.12	150	97	A	V

Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												
--------	---	--	--	--	--	--	--	--	--	--	--	--	--



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		4824	45.86	-28.14	74	58.27	33.3	10.89	56.6	185	255	P	H
		4824	46.74	-27.26	74	59.15	33.3	10.89	56.6	185	255	P	V
802.11b CH 06 2437MHz		4874	45.04	-28.96	74	57.7	33.33	10.92	56.91	165	106	P	H
		7311	48.97	-25.03	74	58.28	35.4	13.29	58	174	100	P	H
		4874	45.21	-28.79	74	57.87	33.33	10.92	56.91	165	106	P	V
		7311	49.7	-24.30	74	59.01	35.4	13.29	58	174	100	P	V
802.11b CH 11 2462MHz		4924	46.54	-27.46	74	58.27	33.36	10.99	56.08	150	285	P	H
		7386	48.82	-25.18	74	58.44	35.27	13.12	58.01	155	274	P	H
		4924	46.57	-27.43	74	58.3	33.36	10.99	56.08	150	285	P	V
		7386	47.73	-26.27	74	57.35	35.27	13.12	58.01	155	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

Table with 14 columns: WIFI, Note, Frequency, Level, Over, Limit, Read, Antenna, Cable, Preamp, Ant, Table, Peak, Pol. It contains two main sections of data for 802.11g CH 01 (2412MHz) and 802.11g CH 06 (2437MHz).



802.11g CH 11 2462MHz	*	2462	104.56	-	-	98.98	31.86	6.86	33.14	178	49	P	H
	*	2462	96.7	-	-	91.12	31.86	6.86	33.14	178	49	A	H
		2484.44	64.13	-9.87	74	58.36	31.98	6.91	33.12	178	49	P	H
		2483.52	48.9	-5.10	54	43.13	31.98	6.91	33.12	178	49	A	H
	*	2462	102.19	-	-	96.61	31.86	6.86	33.14	181	83	P	V
	*	2462	94.42	-	-	88.84	31.86	6.86	33.14	181	83	A	V
		2483.72	63.86	-10.14	74	58.09	31.98	6.91	33.12	181	83	P	V
		2483.56	46.55	-7.45	54	40.78	31.98	6.91	33.12	181	83	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

Table with 14 columns: WIFI, Note, Frequency, Level, Over, Limit, Read, Antenna, Cable, Preamp, Ant, Table, Peak, Pol. It contains test data for three channels (CH 01, CH 06, CH 11) and a Remark section.



**15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2388.3	65.97	-8.03	74	60.99	31.38	6.81	33.21	179	48	P	H
		2389.92	50.99	-3.01	54	46.01	31.38	6.81	33.21	179	48	A	H
	*	2412	105.62	-	-	100.5	31.5	6.81	33.19	179	48	P	H
	*	2412	97.34	-	-	92.22	31.5	6.81	33.19	179	48	A	H
		2389.47	66.86	-7.14	74	61.88	31.38	6.81	33.21	182	79	P	V
		2389.74	48.89	-5.11	54	43.91	31.38	6.81	33.21	182	79	A	V
	*	2412	103.43	-	-	98.31	31.5	6.81	33.19	182	79	P	V
	*	2412	95.95	-	-	90.83	31.5	6.81	33.19	182	79	A	V
802.11n HT20 CH 06 2437MHz		2385.42	50.94	-23.06	74	46.1	31.26	6.81	33.23	177	47	P	H
		2385.51	41.86	-12.14	54	36.88	31.38	6.81	33.21	177	47	A	H
	*	2437	101.39	-	-	95.94	31.74	6.86	33.15	177	47	P	H
	*	2437	93.49	-	-	88.04	31.74	6.86	33.15	177	47	A	H
		2488.88	48.47	-25.53	74	42.56	32.1	6.91	33.1	177	47	P	H
		2488.76	39.53	-14.47	54	33.62	32.1	6.91	33.1	177	47	A	H
		2385.42	48.3	-25.7	74	43.46	31.26	6.81	33.23	182	79	P	V
		2385.51	39	-15.00	54	34.02	31.38	6.81	33.21	182	79	A	V
	*	2437	98.21	-	-	92.76	31.74	6.86	33.15	182	79	P	V
	*	2437	90.86	-	-	85.41	31.74	6.86	33.15	182	79	A	V
		2488.44	47.63	-26.37	74	41.72	32.1	6.91	33.1	182	79	P	V
	2488.6	38.18	-15.82	54	32.27	32.1	6.91	33.1	182	79	A	V	



802.11n HT20 CH 11 2462MHz	*	2462	103.18	-	-	97.6	31.86	6.86	33.14	177	48	P	H
	*	2462	95.27	-	-	89.69	31.86	6.86	33.14	177	48	A	H
		2483.92	65.94	-8.06	74	60.17	31.98	6.91	33.12	177	48	P	H
		2483.52	48.65	-5.35	54	42.88	31.98	6.91	33.12	177	48	A	H
	*	2462	100.36	-	-	94.78	31.86	6.86	33.14	182	79	P	V
	*	2462	93.06	-	-	87.48	31.86	6.86	33.14	182	79	A	V
		2484	64.29	-9.71	74	58.52	31.98	6.91	33.12	182	79	P	V
		2483.72	45.31	-8.69	54	39.54	31.98	6.91	33.12	182	79	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	46.06	-27.94	74	58.47	33.3	10.89	56.6	185	255	P	H
		4824	46.47	-27.53	74	58.88	33.3	10.89	56.6	185	255	P	V
802.11n HT20 CH 06 2437MHz		4874	45.07	-28.93	74	57.73	33.33	10.92	56.91	165	106	P	H
		7311	48.12	-25.88	74	57.43	35.4	13.29	58	174	100	P	H
		4874	45.5	-28.50	74	58.16	33.33	10.92	56.91	165	106	P	V
		7311	49.12	-24.88	74	58.43	35.4	13.29	58	174	100	P	V
802.11n HT20 CH 11 2462MHz		4924	45.66	-28.34	74	57.39	33.36	10.99	56.08	150	285	P	H
		7386	47.67	-26.33	74	57.29	35.27	13.12	58.01	155	274	P	H
		4924	45.43	-28.57	74	57.16	33.36	10.99	56.08	150	285	P	V
		7386	47.53	-26.47	74	57.15	35.27	13.12	58.01	155	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		2389.92	56.89	-17.11	74	51.91	31.38	6.81	33.21	150	142	P	H
		2389.92	41.4	-12.60	54	36.42	31.38	6.81	33.21	150	142	A	H
	*	2422	102.92	-	-	97.66	31.62	6.81	33.17	150	142	P	H
	*	2422	95.37	-	-	90.11	31.62	6.81	33.17	150	142	A	H
		2484	46.73	-27.27	74	40.96	31.98	6.91	33.12	150	142	P	H
		2485.84	37.07	-16.93	54	31.3	31.98	6.91	33.12	150	142	A	H
		2389.83	59.45	-14.55	74	54.47	31.38	6.81	33.21	157	96	P	V
		2389.92	44.8	-9.20	54	39.82	31.38	6.81	33.21	157	96	A	V
	*	2422	103.43	-	-	98.17	31.62	6.81	33.17	157	96	P	V
	*	2422	96.48	-	-	91.22	31.62	6.81	33.17	157	96	A	V
		2487.08	47.12	-26.88	74	41.35	31.98	6.91	33.12	157	96	P	V
		2484.72	36.78	-17.22	54	31.01	31.98	6.91	33.12	157	96	A	V
802.11n HT40 CH 06 2437MHz		2384.97	53.09	-20.91	74	48.25	31.26	6.81	33.23	155	48	P	H
		2385.42	45.22	-8.78	54	40.38	31.26	6.81	33.23	155	48	A	H
	*	2437	107.66	-	-	102.21	31.74	6.86	33.15	155	48	P	H
	*	2437	100.25	-	-	94.8	31.74	6.86	33.15	155	48	A	H
		2488.24	50.4	-23.60	74	44.49	32.1	6.91	33.1	155	48	P	H
		2488.48	41.66	-12.34	54	35.75	32.1	6.91	33.1	155	48	A	H
		2388.75	52.78	-21.22	74	47.8	31.38	6.81	33.21	157	97	P	V
		2385.42	43.91	-10.09	54	39.07	31.26	6.81	33.23	157	97	A	V
	*	2437	105.13	-	-	99.68	31.74	6.86	33.15	157	97	P	V
	*	2437	97.4	-	-	91.95	31.74	6.86	33.15	157	97	A	V
		2488.32	49.02	-24.98	74	43.11	32.1	6.91	33.1	157	97	P	V
		2488.64	40.3	-13.70	54	34.39	32.1	6.91	33.1	157	97	A	V



802.11n HT40 CH 09 2452MHz		2390.0	48.19	-25.81	74	43.21	31.38	6.81	33.21	159	48	P	H
		2389.74	38.84	-15.16	54	33.86	31.38	6.81	33.21	159	48	A	H
	*	2452	107.6	-	-	102.15	31.74	6.86	33.15	159	48	P	H
	*	2452	100.2	-	-	94.75	31.74	6.86	33.15	159	48	A	H
		2484	55.95	-18.05	74	50.18	31.98	6.91	33.12	159	48	P	H
		2483.52	41.45	-12.55	54	35.68	31.98	6.91	33.12	159	48	A	H
		2387.58	48.28	-25.72	74	43.3	31.38	6.81	33.21	157	97	P	V
		2389.83	38.36	-15.64	54	33.38	31.38	6.81	33.21	157	97	A	V
	*	2452	104.98	-	-	99.53	31.74	6.86	33.15	157	97	P	V
	*	2452	97.71	-	-	92.26	31.74	6.86	33.15	157	97	A	V
		2483.68	52.1	-21.90	74	46.33	31.98	6.91	33.12	157	97	P	V
		2483.52	39.98	-14.02	54	34.21	31.98	6.91	33.12	157	97	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



**15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n		4844	46.26	-27.74	74	58.61	33.31	10.92	56.58	150	350	P	H
HT40		7266	49.67	-24.33	74	59.1	35.46	13.38	58.27	200	360	P	H
CH 03		4844	46.27	-27.73	74	58.62	33.31	10.92	56.58	150	350	P	V
2422MHz		7266	48.25	-25.75	74	57.68	35.46	13.38	58.27	200	360	P	V
802.11n		4874	44.88	-29.12	74	57.54	33.33	10.92	56.91	165	230	P	H
HT40		7311	48.69	-25.31	74	58	35.4	13.29	58	186	323	P	H
CH 06		4874	45.92	-28.08	74	58.58	33.33	10.92	56.91	165	230	P	V
2437MHz		7311	48.75	-25.25	74	58.06	35.4	13.29	58	186	323	P	V
802.11n		4904	46.49	-27.51	74	58.54	33.35	10.95	56.35	150	360	P	H
HT40		7356	49.25	-24.75	74	58.68	35.32	13.21	57.96	165	335	P	H
CH 09		4904	46.54	-27.46	74	58.59	33.35	10.95	56.35	150	360	P	V
2452MHz		7356	48.43	-25.57	74	57.86	35.32	13.21	57.96	165	335	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C Emission below 1GHz
2.4GHz WIFI 802.11n HT20 (LF)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT20 LF		30	26.05	-13.95	40	30.92	26.6	0.23	31.7	-	-	P	H
		164.83	29.51	-13.99	43.5	41.94	17.51	1.4	31.34	-	-	P	H
		328.76	30.11	-15.89	46	39.67	19.6	2.14	31.3	-	-	P	H
		442.25	28.54	-17.46	46	32.89	24.41	2.54	31.3	-	-	P	H
		618.79	29.37	-16.63	46	32.59	25.22	3.06	31.5	-	-	P	H
		947.62	32.3	-13.70	46	30.21	29.65	3.94	31.5	100	200	P	H
		30.97	28.97	-11.03	40	34.12	26.3	0.25	31.7	100	0	P	V
		40.67	28.58	-11.42	40	37.62	22.02	0.39	31.45	-	-	P	V
		169.68	25.32	-18.18	43.5	37.89	17.32	1.43	31.32	-	-	P	V
		549.92	26.52	-19.48	46	30.78	24.3	2.84	31.4	-	-	P	V
		778.84	31.41	-14.59	46	31.3	28.06	3.55	31.5	-	-	P	V
	947.62	32.63	-13.37	46	30.54	29.65	3.94	31.5	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



For Adapter 2

15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2389.905	68.47	-5.53	74	63.49	31.38	6.81	33.21	192	43	P	H
		2389.905	50.13	-3.87	54	45.15	31.38	6.81	33.21	192	43	A	H
	*	2412	104.92	-	-	99.8	31.5	6.81	33.19	192	43	P	H
	*	2412	96.52	-	-	91.4	31.5	6.81	33.19	192	43	A	H
		2389.905	63.73	-10.27	74	58.75	31.38	6.81	33.21	162	74	P	V
		2389.905	47.83	-6.17	54	42.85	31.38	6.81	33.21	162	74	A	V
	*	2412	104.22	-	-	99.1	31.5	6.81	33.19	162	74	P	V
*	2412	94.02	-	-	88.9	31.5	6.81	33.19	162	74	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	45.42	-28.58	74	57.83	33.3	10.89	56.6	150	360	P	H
		4824	46.26	-27.74	74	58.67	33.3	10.89	56.6	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



For Adapter 3

15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2388.33	63.58	-10.42	74	58.6	31.38	6.81	33.21	192	30	P	H
		2389.8	49.86	-4.14	54	44.88	31.38	6.81	33.21	192	30	A	H
	*	2412	103.86	-	-	98.74	31.5	6.81	33.19	192	30	P	H
	*	2412	97.07	-	-	91.95	31.5	6.81	33.19	192	30	A	H
		2389.275	65.88	-8.12	74	60.9	31.38	6.81	33.21	156	74	P	V
		2389.695	50.25	-3.75	54	45.27	31.38	6.81	33.21	156	74	A	V
	*	2412	103.91	-	-	98.79	31.5	6.81	33.19	156	74	P	V
*	2412	95.41	-	-	90.29	31.5	6.81	33.19	156	74	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	45.65	-28.35	74	58.06	33.3	10.89	56.6	150	360	P	H
		4824	45.98	-28.02	74	58.39	33.3	10.89	56.6	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:


- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.85	8.261	0.121	300Hz
802.11g	87.50	1.370	0.730	1kHz
802.11n HT20	86.76	1.283	0.780	1kHz
802.11n HT40	76.04	0.635	1.575	3kHz

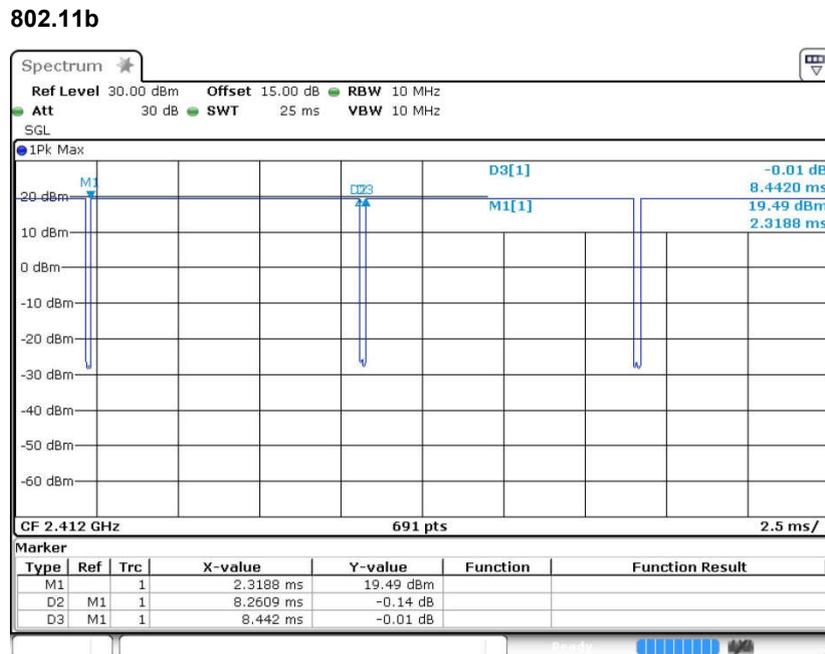

Date: 30.MAR.2017 11:23:10




802.11g

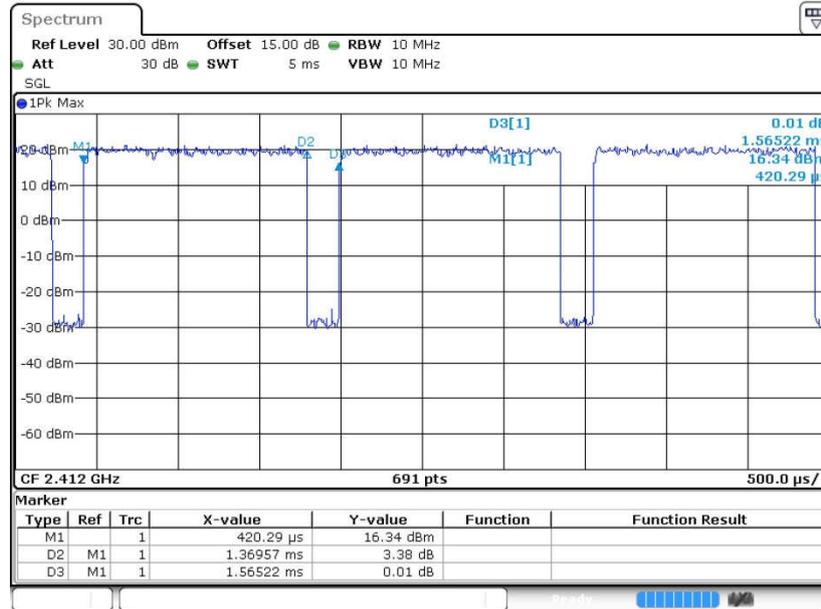

Date: 30.MAR.2017 11:26:44


802.11n20

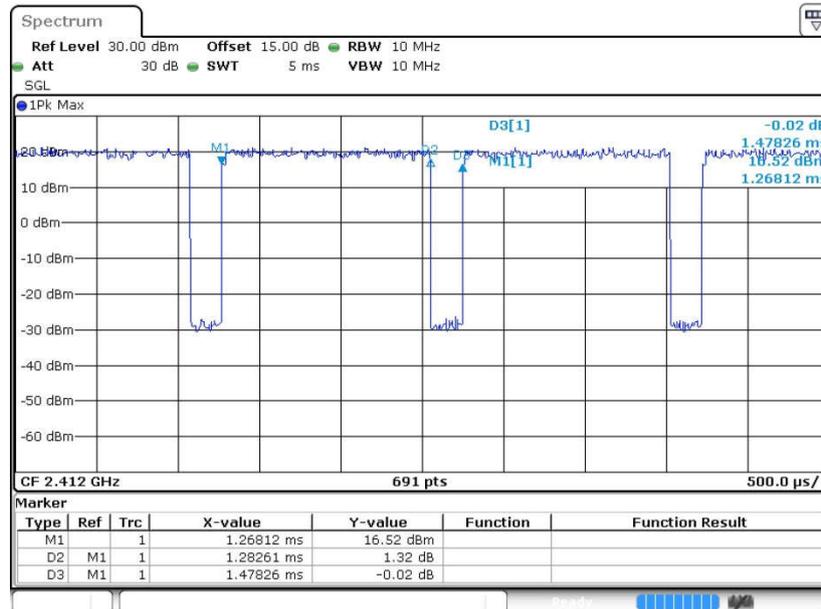

Date: 30.MAR.2017 11:31:38



802.11n40

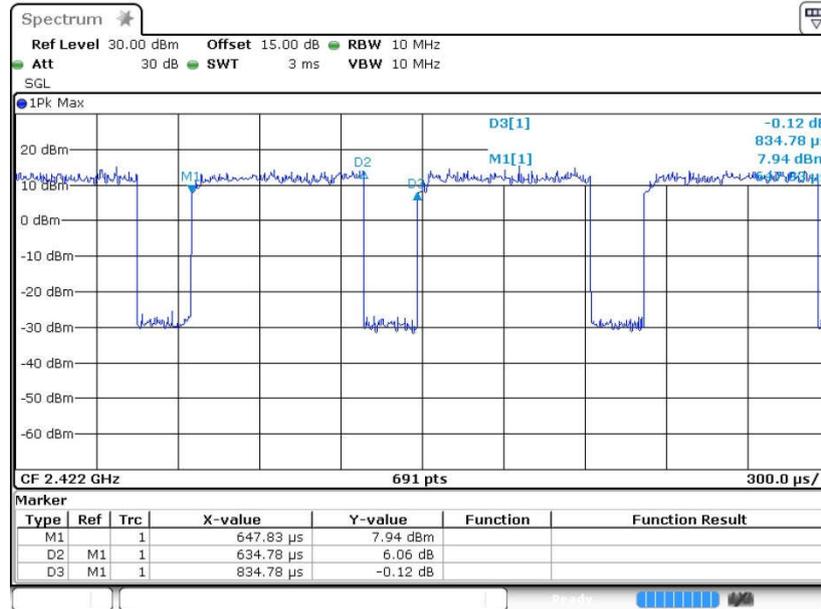

Date: 30.MAR.2017 11:43:06