



Test Report No.: RF160418W001-8



# FCC TEST REPORT (WIFI 5G)

**Product:** Mobile Broadband Internet Device

**Model No.:** K88

**FCC ID:** SRQ-K88

**Applicant:** ZTE Corporation

**Address:** ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park,  
Nanshan District

**Manufacturer:** ZTE Corporation

**Address:** ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park,  
Nanshan District

**Prepared by:** Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch

**Lab Location:** No. 34, Chenwulu Section, Guantai Rd., Houjie Town,  
Dongguan City, Guangdong 523942, China

**TEL:** +86 769 8593 5656

**FAX:** +86 769 8593 1080

**E-MAIL:** [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)

**Report No.:** RF160418W001-8

**Received Date:** Apr. 18, 2016

**Test Date:** Apr. 19, 2016 ~ May 02, 2016

**Issued Date:** May 03, 2016

This report should not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or **representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted.** Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



# TABLE OF CONTENTS

**RELEASE CONTROL RECORD ..... 4**

**1 CERTIFICATION ..... 5**

**2 SUMMARY OF TEST RESULTS..... 6**

2.1 MEASUREMENT UNCERTAINTY ..... 6

**3 GENERAL INFORMATION..... 7**

3.1 GENERAL DESCRIPTION OF EUT ..... 7

3.2 DESCRIPTION OF TEST MODES ..... 9

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 10

3.3 DUTY CYCLE OF TEST SIGNAL ..... 13

3.4 DESCRIPTION OF SUPPORT UNITS ..... 14

3.4.1 CONFIGURATION OF SYSTEM UNDER TEST ..... 15

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS ..... 15

**4 TEST TYPES AND RESULTS..... 16**

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT..... 16

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT..... 16

4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS ..... 16

4.1.3 TEST INSTRUMENTS..... 17

4.1.4 TEST PROCEDURES ..... 18

4.1.5 DEVIATION FROM TEST STANDARD ..... 18

4.1.6 TEST SETUP..... 19

4.1.7 EUT OPERATING CONDITION ..... 19

4.1.8 TEST RESULTS ..... 20

4.2 CONDUCTED EMISSION MEASUREMENT ..... 40

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT ..... 40

4.2.2 TEST INSTRUMENTS..... 40

4.2.3 TEST PROCEDURES ..... 40

4.2.4 DEVIATION FROM TEST STANDARD ..... 41

4.2.5 TEST SETUP..... 41

4.2.6 EUT OPERATING CONDITIONS ..... 41

4.2.7 TEST RESULTS ..... 42

4.3 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT ..... 44

4.3.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT ..... 44



4.3.2	TEST SETUP .....	44
4.3.3	TEST INSTRUMENTS.....	45
4.3.4	TEST PROCEDURE.....	45
4.3.5	DEVIATION FROM TEST STANDARD .....	46
4.3.6	EUT OPERATING CONDITIONS .....	46
4.3.7	TEST RESULTS .....	47
4.4	PEAK POWER SPECTRAL DENSITY MEASUREMENT .....	55
4.4.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT .....	55
4.4.2	TEST SETUP.....	55
4.4.3	TEST INSTRUMENTS.....	55
4.4.4	TEST PROCEDURES .....	55
4.4.5	DEVIATION FROM TEST STANDARD .....	56
4.4.6	EUT OPERATING CONDITIONS .....	56
4.4.7	TEST RESULTS .....	57
4.5	FREQUENCY STABILITY .....	61
4.5.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT .....	61
4.5.2	TEST SETUP.....	61
4.5.3	TEST INSTRUMENTS.....	61
4.5.4	TEST PROCEDURE.....	62
4.5.5	DEVIATION FROM TEST STANDARD .....	62
4.5.6	EUT OPERATING CONDITION .....	62
4.5.7	TEST RESULTS .....	63
4.6	OUT OF BAND EMISSION MEASUREMENT.....	65
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT.....	65
4.6.2	TEST SETUP.....	65
4.6.3	TEST INSTRUMENTS.....	65
4.6.4	TEST PROCEDURE.....	65
4.6.5	DEVIATION FROM TEST STANDARD .....	66
4.6.6	EUT OPERATING CONDITION .....	66
4.6.7	TEST RESULTS .....	66
4.6.8	TEST RESULTS .....	67
<b>5</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION.....</b>	<b>71</b>
<b>6</b>	<b>APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....</b>	<b>72</b>



**BUREAU  
VERITAS**

Test Report No.: RF160418W001-8

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF160418W001-8	Original release	May 03, 2016



# 1 CERTIFICATION

**PRODUCT:** Mobile Broadband Internet Device  
**BRAND NAME:** ZTE  
**MODEL NO.:** K88  
**APPLICANT:** ZTE Corporation  
**TESTED:** Apr. 19, 2016 ~ May 02, 2016  
**TEST SAMPLE:** Identical Prototype  
**STANDARDS:** **FCC Part 15, Subpart E (15.407), Section 15.407**  
ANSI C63.10-2013  
**FCC 15.247 (d)**

The above equipment has been tested by **Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch** and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :**  , **DATE:** May 03, 2016  
(Amyee Qian / Engineer)

**APPROVED BY :**  , **DATE:** May 03, 2016  
(William Chung / Manager)



## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -12.06dB at 15.760000MHz.
15.407(b/1/2/3)(b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit. Minimum passing margin is -3.8dB at 46.49MHz.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Maximum conducted output Power	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.66dB
Radiated emissions	9KHz ~ 30MHz	2.74dB
	30MHz ~ 1GMHz	3.55dB
	1GHz ~ 18GHz	4.84dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>EUT</b>	Mobile Broadband Internet Device
<b>MODEL NO.</b>	K88
<b>POWER SUPPLY</b>	5.0Vdc (adapter or host equipment) 3.8Vdc (battery)
<b>MODULATION TYPE</b>	256QAM, 128QAM, 64QAM, 16QAM, QPSK, BPSK
<b>MODULATION TECHNOLOGY</b>	OFDM
<b>TRANSFER RATE</b>	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to MCS7 802.11ac: up to 390.0Mbps
<b>OPERATING FREQUENCY</b>	5180 ~ 5240MHz, 5745 ~ 5825MHz
<b>NUMBER OF CHANNEL</b>	5180 ~ 5240MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 1 for 802.11ac (80MHz) 5745 ~ 5825MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 1 for 802.11ac (80MHz)
<b>OUTPUT POWER</b>	16.634mW for 5180 ~ 5240MHz 16.218mW for 5745 ~ 5825MHz
<b>ANTENNA TYPE</b>	5180 ~ 5240MHz: PIFA Antenna with 2dBi gain 5745 ~ 5825MHz: PIFA Antenna with 0.8dBi gain
<b>HW Version</b>	u91B
<b>SW Version</b>	K88V1.0.0B05
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	USB Cable: Shielded, Detachable, 1.0m

**NOTE:**

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT was powered by the following adapter:

<b>ADAPTER</b>	
<b>BRAND:</b>	Salcomp
<b>MODEL:</b>	STC-A521A-Z
<b>INPUT:</b>	AC 100-240V, 400mA
<b>OUTPUT:</b>	DC 5V, 2100mA

- The EUT matched the following USB cable :



<b>USB CABLE</b>	
<b>BRAND:</b>	ZTE
<b>MODEL:</b>	USB-TC20-W-100-M
<b>SIGNAL LINE:</b>	1.0 METER

4. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitters and one receiver.

<b>MODULATION MODE</b>	<b>TX FUNCTION</b>
<b>802.11a</b>	1TX/1RX
<b>802.11n (20MHz)</b>	1TX/1RX
<b>802.11n (40MHz)</b>	1TX/1RX
<b>802.11ac (80MHz)</b>	1TX/1RX

5. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



### 3.2 DESCRIPTION OF TEST MODES

#### FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190 MHz	46	5230 MHz

1 channels are provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
42	5210MHz		

#### FOR 5745 ~ 5825MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	165	5825MHz
153	5765MHz		
157	5785MHz		

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz

1 channels are provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
155	5775MHz		



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	-	Powered by Adapter with wifi(5G) link
B	-	-	-	√	Powered by Battery with wifi(5G) link
C	-	-	-	-	Powered by USB with wifi(5G) link

Where **RE≥1G**: Radiated Emission above 1GHz      **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:**  
The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.  
**NOTE:** "-" means no effect.

**RADIATED EMISSION TEST (ABOVE 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
A	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	MCS0
A	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		42	42	OFDM	BPSK	V0
A	802.11a	5725-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	BPSK	MCS0
A	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		155	155	OFDM	BPSK	V0

**RADIATED EMISSION TEST (BELOW 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11n (40MHz)	5180-5320	38 to 46	38	OFDM	BPSK	MCS0



**POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11n (40MHz)	5180-5320	38 to 46	38	OFDM	BPSK	MCS0

**BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 48	OFDM	BPSK	6.0
A	802.11n (20MHz)		36 to 48	36, 48	OFDM	BPSK	MCS0
A	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		42	42	OFDM	BPSK	V0
A	802.11a	5725-5825	149 to 165	149, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)		149 to 165	149, 165	OFDM	BPSK	MCS0
A	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		155	155	OFDM	BPSK	V0



**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
B	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	MCS0
B	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
B	802.11ac (80MHz)		42	42	OFDM	BPSK	V0
B	802.11a	5725-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.0
B	802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	BPSK	MCS0
B	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	MCS0
B	802.11ac (80MHz)		155	155	OFDM	BPSK	V0

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	23deg. C, 62%RH	DC 5V By Adapter	Alex Chen
RE≥1G	23deg. C, 62%RH	DC 5V By Adapter	Alex Chen
PLC	24deg. C, 61%RH	DC 5V By Adapter	Yuqiang Yin
APCM	23.5deg. C, 60%RH	DC 3.8V By battery	Yuqiang Yin



### 3.3 DUTY CYCLE OF TEST SIGNAL


Duty cycle of test signal is < 98%, duty factor shall be considered.

**802.11a:** Duty cycle = 1.359/1.563 = 0.869, Duty factor = 10 \* log( 1/0.869) = 0.61

**802.11n (20MHz):** Duty cycle = 1.273/1.476 = 0.862, Duty factor = 10 \* log( 1/0.933) = 0.64

**802.11n (40MHz):** Duty cycle = 0.633/0.838 = 0.755, Duty factor = 10 \* log( 1/0.879) = 1.22

**802.11ac (80MHz):** Duty cycle = 0.243/0.447 = 0.544, Duty factor = 10 \* log( 1/0.780) = 2.64

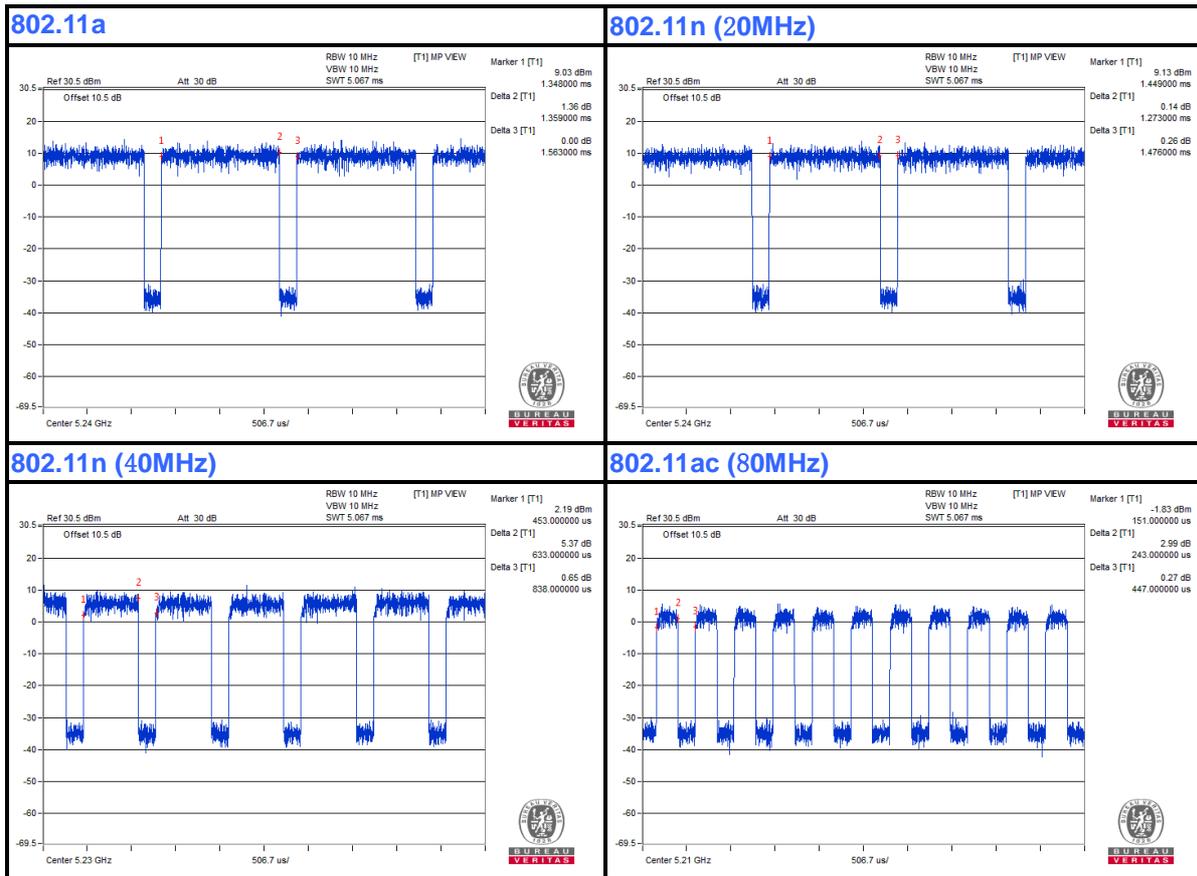



### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A


NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m

**NOTE:**

1. All power cords of the above support units are non shielded (1.8m).



### 3.4.1 CONFIGURATION OF SYSTEM UNDER TEST

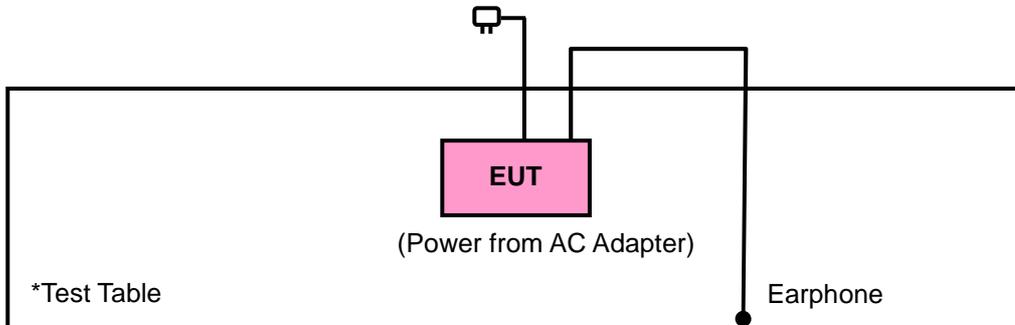

### 3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 16-24**

**FCC Part 15, Subpart E (15.407)**

**FCC 15.247 (d)**

**KDB 789033 D02\_v01\_General UNII Test Procedures New Rules**

**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (verification). The test report has been issued separately.



## 4 TEST TYPES AND RESULTS

### 4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
	FIELD STRENGTH AT 3m (dBµV/m)	
	PK	AV
	74	54
√	EIRP LIMIT (dBm)	
	EQUIVALENT FIELD STRENGTH AT 3m (dBµV/m)	
	PK	PK
	-27	68.3

**NOTE:** The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$



#### 4.1.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 05,16	Apr. 04,17
Bilog Antenna	Teseq	CBL 6111D	30643	Jul. 16, 15	Jul. 15, 16
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 30, 14	May 29, 16
Amplifier	Burgeon	BPA-530	100220	Apr. 05,16	Apr. 04,17
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 20,15	Nov. 19,17
Pre-Amplifier	HP	8449B	3008A00409	Apr. 25,15	Apr. 24,17
GPS Generator+ Antenna	TOJOIN	GNSS-5000A	E1-010119	Aug. 08, 14	Aug. 07, 16
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Mar. 12,16	Mar. 11,18
Test Software	ADT	ADT_Radiated _V7.6.15.9.2	N/A	N/A	N/A

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 966 Chamber.
3. The FCC Site Registration No. is 502831.



#### 4.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**NOTE:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.5 DEVIATION FROM TEST STANDARD

No deviation.



#### 4.1.6 TEST SETUP

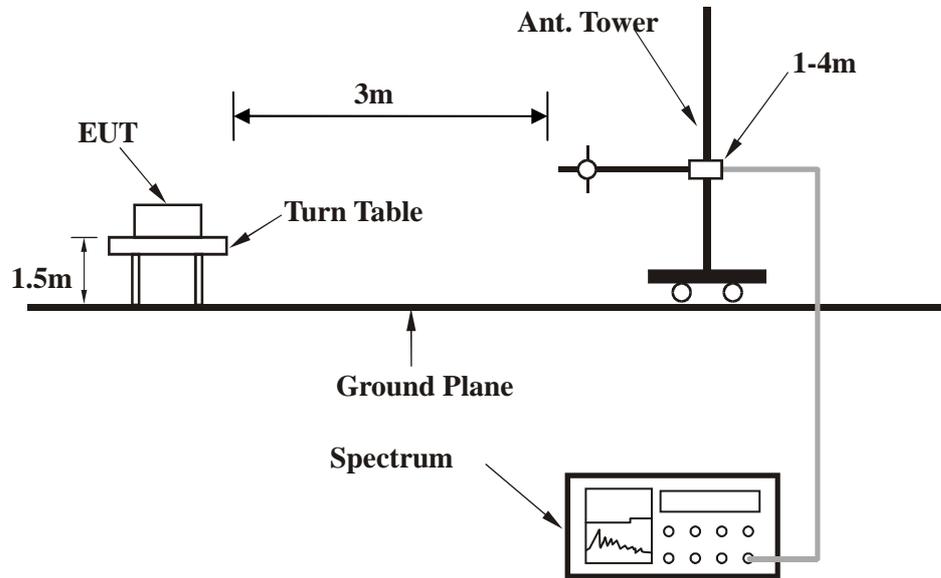

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.7 EUT OPERATING CONDITION

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



### 4.1.8 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA:


#### 802.11n (40MHz)

CHANNEL	Channel 38	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBUV/m)	LIMIT (dBUV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBUV)	CORRECTION FACTOR (dB/m)
1	46.49	23.9 QP	40.0	-16.1	1.00 H	0	51.23	-27.33
2	76.56	27.3 QP	40.0	-12.7	1.00 H	0	55.37	-28.03
3	234.67	16.3 QP	46.0	-29.7	1.00 H	0	38.35	-22.04
4	457.77	17.7 QP	46.0	-28.4	1.00 H	0	32.98	-15.33
5	634.31	21.3 QP	46.0	-24.7	1.00 H	0	32.98	-11.68
6	768.17	23.7 QP	46.0	-22.3	1.00 H	0	33.49	-9.75

#### REMARKS:

1. Emission level (dBUV/m) = Raw Value (dBUV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

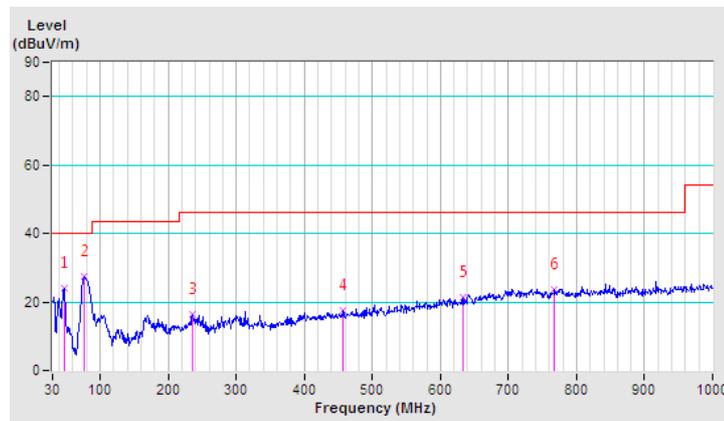




<b>CHANNEL</b>	Channel 38	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
<b>NO.</b>	<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA HEIGHT (m)</b>	<b>TABLE ANGLE (Degree)</b>	<b>RAW VALUE (dBuV)</b>	<b>CORRECTION FACTOR (dB/m)</b>
1	46.49	36.2 QP	40.0	-3.8	1.00 V	0	69.79	-33.59
2	73.65	30.2 QP	40.0	-9.8	1.00 V	0	64.30	-34.11
3	230.79	4.1 QP	46.0	-41.9	1.00 V	0	31.74	-27.67
4	399.57	11.9 QP	46.0	-34.1	1.00 V	0	33.26	-21.39
5	600.36	14.2 QP	46.0	-31.8	1.00 V	0	32.09	-17.93
6	808.91	19.7 QP	46.0	-26.3	1.00 V	0	34.57	-14.91

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

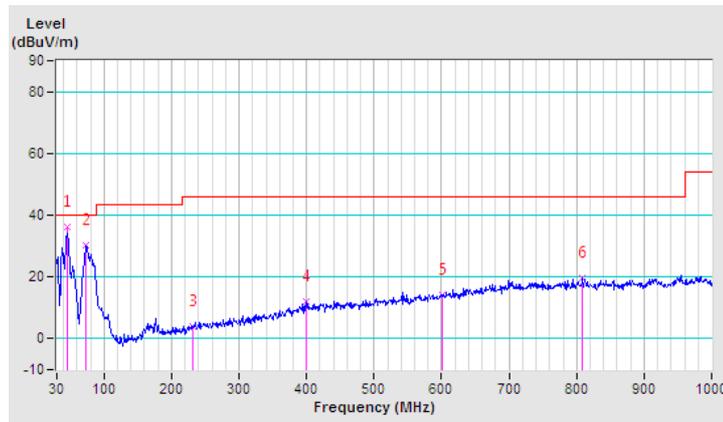



ABOVE 1GHz WORST-CASE DATA: Band 1

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.2 PK	74.0	-16.8	1.00 H	288	58.00	-0.83
2	5150.00	47.3 AV	54.0	-6.7	1.00 H	288	48.16	-0.83
3	*5180.00	109.9 PK			1.00 H	288	110.56	-0.71
4	*5180.00	93.1 AV			1.00 H	288	93.78	-0.71
5	#10360.00	59.6 PK	89.9	-30.3	1.00 H	187	50.88	8.69
6	#10360.00	47.2 AV	73.1	-25.9	1.00 H	187	38.46	8.69
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	53.7 PK	74.0	-20.3	1.00 V	275	54.55	-0.83
2	5150.00	44.5 AV	54.0	-9.5	1.00 V	275	45.37	-0.83
3	*5180.00	107.6 PK			1.00 V	275	108.32	-0.71
4	*5180.00	91.4 AV			1.00 V	275	92.13	-0.71
5	#10360.00	61.0 PK	87.6	-26.6	1.00 V	223	52.34	8.69
6	#10360.00	47.2 AV	71.4	-24.2	1.00 V	223	38.53	8.69

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	109.4 PK			1.00 H	290	109.98	-0.57
2	*5200.00	93.1 AV			1.00 H	290	93.64	-0.57
3	#10400.00	60.8 PK	89.4	-28.6	1.00 H	302	51.94	8.83
4	#10400.00	47.3 AV	73.1	-25.8	1.00 H	302	38.50	8.83

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	108.3 PK			1.00 V	278	108.88	-0.57
2	*5200.00	91.8 AV			1.00 V	278	92.34	-0.57
3	#10400.00	59.1 PK	88.3	-29.2	1.00 V	247	50.28	8.83
4	#10400.00	47.2 AV	71.8	-24.6	1.00 V	247	38.36	8.83

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	109.4 PK			1.00 H	285	109.87	-0.48
2	*5240.00	92.8 AV			1.00 H	285	93.32	-0.48
3	5350.00	52.9 PK	74.0	-21.1	1.00 H	128	52.99	-0.07
4	5350.00	42.5 AV	54.0	-11.5	1.00 H	128	42.53	-0.07
5	#10480.00	60.7 PK	89.4	-28.7	1.00 H	86	51.76	8.89
6	#10480.00	47.6 AV	72.8	-25.2	1.00 H	86	38.72	8.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	107.4 PK			1.00 V	270	107.84	-0.48
2	*5240.00	90.9 AV			1.00 V	270	91.41	-0.48
3	5350.00	52.2 PK	74.0	-21.8	1.00 V	270	52.30	-0.07
4	5350.00	41.7 AV	54.0	-12.3	1.00 V	270	41.74	-0.07
5	#10480.00	59.9 PK	87.4	-27.5	1.00 V	158	50.96	8.89
6	#10480.00	47.7 AV	70.9	-23.2	1.00 V	158	38.82	8.89

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



802.11n (20MHz)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	52.3 PK	74.0	-21.7	1.00 H	290	53.17	-0.83
2	5150.00	44.2 AV	54.0	-9.8	1.00 H	290	45.05	-0.83
3	*5180.00	109.4 PK			1.00 H	258	110.08	-0.71
4	*5180.00	92.7 AV			1.00 H	258	93.36	-0.71
5	#10360.00	60.3 PK	89.4	-29.1	1.00 H	147	51.57	8.69
6	#10360.00	47.3 AV	72.7	-25.4	1.00 H	147	38.56	8.69
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	53.2 PK	74.0	-20.9	1.00 V	275	53.98	-0.83
2	5150.00	42.6 AV	54.0	-11.4	1.00 V	275	43.42	-0.83
3	*5180.00	107.2 PK			1.00 V	275	107.94	-0.71
4	*5180.00	90.4 AV			1.00 V	275	91.15	-0.71
5	#10360.00	60.1 PK	87.2	-27.1	1.00 V	214	51.43	8.69
6	#10360.00	46.8 AV	70.4	-23.6	1.00 V	214	38.12	8.69

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	109.2 PK			1.00 H	285	109.78	-0.57
2	*5200.00	92.3 AV			1.00 H	285	92.88	-0.57
3	#10400.00	59.8 PK	89.2	-29.4	1.00 H	202	50.98	8.83
4	#10400.00	47.4 AV	72.3	-24.9	1.00 H	202	38.61	8.83
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	106.9 PK			1.00 V	272	107.43	-0.57
2	*5200.00	90.4 AV			1.00 V	272	90.99	-0.57
3	#10400.00	60.2 PK	86.9	-26.7	1.00 V	123	51.39	8.83
4	#10400.00	47.3 AV	70.4	-23.1	1.00 V	123	38.51	8.83

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	108.3 PK			1.00 H	290	108.77	-0.48
2	*5240.00	91.5 AV			1.00 H	290	91.96	-0.48
3	5350.00	54.1 PK	74.0	-19.9	1.00 H	290	54.19	-0.07
4	5350.00	43.4 AV	54.0	-10.6	1.00 H	290	43.51	-0.07
5	#10480.00	60.4 PK	88.3	-27.9	1.00 H	92	51.54	8.89
6	#10480.00	47.7 AV	71.5	-23.8	1.00 H	92	38.84	8.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	106.8 PK			1.00 V	275	107.32	-0.48
2	*5240.00	90.1 AV			1.00 V	275	90.59	-0.48
3	5350.00	53.1 PK	74.0	-20.9	1.00 V	275	53.19	-0.07
4	5350.00	42.4 AV	54.0	-11.6	1.00 V	275	42.43	-0.07
5	#10480.00	60.3 PK	86.8	-26.5	1.00 V	310	51.44	8.89
6	#10480.00	47.6 AV	70.1	-22.5	1.00 V	310	38.70	8.89

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



802.11n (40MHz)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.8 PK	74.0	-8.2	1.00 H	285	66.64	-0.83
2	5150.00	49.4 AV	54.0	-4.7	1.00 H	285	50.18	-0.83
3	*5190.00	106.9 PK			1.00 H	285	107.59	-0.68
4	*5190.00	83.5 AV			1.00 H	285	84.15	-0.68
5	#10380.00	60.8 PK	86.9	-26.1	1.00 H	172	52.06	8.72
6	#10380.00	47.6 AV	63.5	-15.9	1.00 H	172	38.92	8.72
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.1 PK	74.0	-14.9	1.00 V	270	59.95	-0.83
2	5150.00	45.6 AV	54.0	-8.4	1.00 V	270	46.39	-0.83
3	*5190.00	105.1 PK			1.00 V	270	105.77	-0.68
4	*5190.00	81.5 AV			1.00 V	270	82.13	-0.68
5	#10380.00	60.9 PK	85.1	-24.2	1.00 V	78	52.14	8.72
6	#10380.00	47.7 AV	61.5	-13.8	1.00 V	78	38.94	8.72

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	106.5 PK			1.00 H	290	107.06	-0.52
2	*5230.00	83.9 AV			1.00 H	290	84.43	-0.52
3	5350.00	55.5 PK	74.0	-18.5	1.00 H	290	55.53	-0.07
4	5350.00	43.6 AV	54.0	-10.4	1.00 H	290	43.64	-0.07
5	#10460.00	59.8 PK	86.5	-26.7	1.00 H	55	50.90	8.86
6	#10460.00	47.6 AV	63.9	-16.3	1.00 H	55	38.71	8.86

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	103.9 PK			1.00 V	278	104.39	-0.52
2	*5230.00	81.7 AV			1.00 V	278	82.23	-0.52
3	5350.00	52.7 PK	74.0	-21.3	1.00 V	125	52.75	-0.07
4	5350.00	42.8 AV	54.0	-11.2	1.00 V	125	42.88	-0.07
5	#10460.00	60.4 PK	83.9	-23.5	1.00 V	213	51.49	8.86
6	#10460.00	47.9 AV	61.7	-13.8	1.00 V	213	39.00	8.86

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



802.11ac (80MHz)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.6 PK	74.0	-16.4	1.00 H	280	58.45	-0.83
2	5150.00	46.9 AV	54.0	-7.1	1.00 H	280	47.72	-0.83
3	*5210.00	108.7 PK			1.00 H	280	109.29	-0.60
4	*5210.00	92.9 AV			1.00 H	280	93.45	-0.60
5	5350.00	53.8 PK	74.0	-20.2	1.00 H	134	53.91	-0.07
6	5350.00	42.1 AV	54.0	-11.9	1.00 H	134	42.21	-0.07
7	#10420.00	60.4 PK	88.7	-28.3	1.00 H	240	51.56	8.79
8	#10420.00	48.1 AV	72.9	-24.8	1.00 H	240	39.33	8.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.0 PK	74.0	-15.0	1.00 V	248	59.79	-0.83
2	5150.00	46.3 AV	54.0	-7.7	1.00 V	248	47.15	-0.83
3	*5210.00	105.6 PK			1.00 V	248	106.22	-0.60
4	*5210.00	82.4 AV			1.00 V	248	82.96	-0.60
5	5350.00	53.2 PK	74.0	-20.8	1.00 V	127	53.29	-0.07
6	5350.00	42.5 AV	54.0	-11.5	1.00 V	127	42.61	-0.07
7	#10420.00	61.7 PK	85.6	-23.9	1.00 V	200	52.95	8.79
8	#10420.00	48.6 AV	62.4	-13.8	1.00 V	200	39.83	8.79

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



ABOVE 1GHz WORST-CASE DATA: Band 4

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	103.4 PK			1.58 H	280	62.15	41.25
2	*5745.00	84.7 AV			1.58 H	280	43.45	41.25
3	11490.00	52.4 PK	74.0	-21.6	1.00 H	210	4.73	47.67
4	11490.00	38.1 AV	54.0	-15.9	1.00 H	210	-9.57	47.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	106.2 PK			1.06 V	292	64.95	41.25
2	*5745.00	85.2 AV			1.06 V	292	43.95	41.25
3	11490.00	52.6 PK	74.0	-21.4	1.00 V	262	4.93	47.67
4	11490.00	38.4 AV	54.0	-15.6	1.00 V	262	-9.27	47.67

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	101.8 PK			1.55 H	280	60.45	41.35
2	*5785.00	85.1 AV			1.55 H	280	43.75	41.35
3	11570.00	51.3 PK	74.0	-22.7	1.00 H	304	3.55	47.75
4	11570.00	37.8 AV	54.0	-16.2	1.00 H	304	-9.95	47.75
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	103.3 PK			1.16 V	292	61.95	41.35
2	*5785.00	84.6 AV			1.16 V	292	43.25	41.35
3	11570.00	51.7 PK	74.0	-22.3	1.00 V	254	3.95	47.75
4	11570.00	38.0 AV	54.0	-16.0	1.00 V	254	-9.75	47.75

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	97.2 PK			1.53 H	280	55.79	41.41
2	*5825.00	78.3 AV			1.53 H	280	36.89	41.41
3	11650.00	52.3 PK	74.0	-21.7	1.00 H	194	4.51	47.79
4	11650.00	38.4 AV	54.0	-15.6	1.00 H	194	-9.39	47.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	101.7 PK			1.18 V	300	60.29	41.41
2	*5825.00	84.0 AV			1.18 V	300	42.59	41.41
3	11650.00	51.7 PK	74.0	-22.3	1.00 V	125	3.91	47.79
4	11650.00	38.2 AV	54.0	-15.8	1.00 V	125	-9.59	47.79

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



802.11n (20MHz)

<b>CHANNEL</b>	TX Channel 149	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	92.6 PK			1.01 H	280	51.35	41.25
2	*5745.00	75.4 AV			1.01 H	280	34.15	41.25
3	11490.00	52.4 PK	74.0	-21.6	1.00 H	355	4.73	47.67
4	11490.00	37.2 AV	54.0	-16.8	1.00 H	355	-10.47	47.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	94.2 PK			1.07 V	291	52.95	41.25
2	*5745.00	76.7 AV			1.07 V	291	35.45	41.25
3	11490.00	53.1 PK	74.0	-20.9	1.00 V	192	5.43	47.67
4	11490.00	37.8 AV	54.0	-16.2	1.00 V	192	-9.87	47.67

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	93.9 PK			1.53 H	283	52.55	41.35
2	*5785.00	76.2 AV			1.53 H	283	34.85	41.35
3	11570.00	50.9 PK	74.0	-23.1	1.00 H	340	3.15	47.75
4	11570.00	37.6 AV	54.0	-16.4	1.00 H	340	-10.15	47.75
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	94.9 PK			1.17 V	300	53.55	41.35
2	*5785.00	76.7 AV			1.17 V	300	35.35	41.35
3	11570.00	53.0 PK	74.0	-21.0	1.00 V	264	5.25	47.75
4	11570.00	38.1 AV	54.0	-15.9	1.00 V	264	-9.65	47.75

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	95.2 PK			1.53 H	281	53.79	41.41
2	*5825.00	76.5 AV			1.53 H	281	35.09	41.41
3	11650.00	52.8 PK	74.0	-21.2	1.00 H	339	5.01	47.79
4	11650.00	37.7 AV	54.0	-16.3	1.00 H	339	-10.09	47.79

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	95.6 PK			1.15 V	300	54.19	41.41
2	*5825.00	76.0 AV			1.15 V	300	34.59	41.41
3	11650.00	52.6 PK	74.0	-21.4	1.00 V	225	4.81	47.79
4	11650.00	37.6 AV	54.0	-16.4	1.00 V	225	-10.19	47.79

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



**802.11n (40MHz)**

<b>CHANNEL</b>	TX Channel 151	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
<b>NO.</b>	<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA HEIGHT (m)</b>	<b>TABLE ANGLE (Degree)</b>	<b>RAW VALUE (dBuV)</b>	<b>CORRECTION FACTOR (dB/m)</b>
1	*5755.00	94.1 PK			1.54 H	278	52.83	41.27
2	*5755.00	82.0 AV			1.54 H	278	40.73	41.27
3	11510.00	52.6 PK	74.0	-21.4	1.00 H	186	4.91	47.69
4	11510.00	37.5 AV	54.0	-16.5	1.00 H	186	-10.19	47.69
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
<b>NO.</b>	<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA HEIGHT (m)</b>	<b>TABLE ANGLE (Degree)</b>	<b>RAW VALUE (dBuV)</b>	<b>CORRECTION FACTOR (dB/m)</b>
1	*5755.00	95.2 PK			1.07 V	308	53.93	41.27
2	*5755.00	82.6 AV			1.07 V	308	41.33	41.27
3	11510.00	51.9 PK	74.0	-22.1	1.00 V	94	4.21	47.69
4	11510.00	36.2 AV	54.0	-17.8	1.00 V	94	-11.49	47.69

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	93.4 PK			1.01 H	277	52.02	41.38
2	*5795.00	81.8 AV			1.01 H	277	40.42	41.38
3	11590.00	52.2 PK	74.0	-21.8	1.00 H	201	4.43	47.77
4	11590.00	36.9 AV	54.0	-17.1	1.00 H	201	-10.87	47.77
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	96.8 PK			1.15 V	297	55.42	41.38
2	*5795.00	84.7 AV			1.15 V	297	43.32	41.38
3	11590.00	52.4 PK	74.0	-21.6	1.00 V	114	4.63	47.77
4	11590.00	36.7 AV	54.0	-17.3	1.00 V	114	-11.07	47.77

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



802.11ac (80MHz)

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	86.7 PK			1.17 H	68	45.37	41.33
2	*5775.00	66.5 AV			1.17 H	68	25.17	41.33
3	11550.00	38.8 PK	74.0	-35.2	1.00 H	360	-8.93	47.73
4	11550.00	27.6 AV	54.0	-26.4	1.00 H	360	-20.13	47.73

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	85.1 PK			1.16 V	90	43.77	41.33
2	*5775.00	65.3 AV			1.16 V	90	23.97	41.33
3	11550.00	39.1 PK	74.0	-34.9	1.00 V	0	-8.63	47.73
4	11550.00	28.2 AV	54.0	-25.8	1.00 V	0	-19.53	47.73

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



## 4.2 CONDUCTED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

**NOTE:** 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCS30	100340	May 11,15	May 10,17
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 04,16	Mar. 03,17
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Apr. 05,16	Apr. 04,17
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jan. 08,16	Jan. 07,17
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

**NOTE:**

1. The test was performed in shielded room 553.

2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

### 4.2.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.



#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.2.5 TEST SETUP

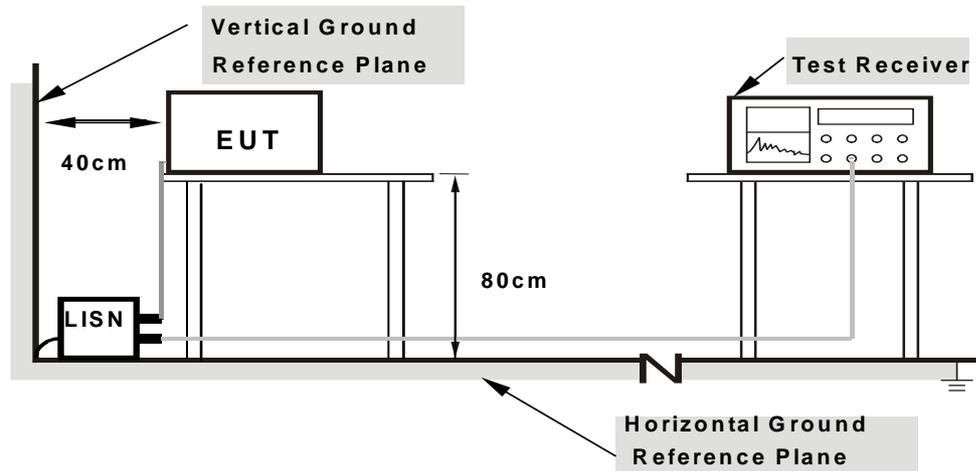

- Note:**
- 1.Support units were connected to second LISN.
  - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.



### 4.2.7 TEST RESULTS


#### CONDUCTED WORST-CASE DATA : 802.11a

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	CAverage (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Line	Filter	Corr. (dB)
0.684000	---	31.90	46.00	-14.10	L	ON	9.6
0.684000	38.60	---	56.00	-17.40	L	ON	9.6
0.964000	---	20.27	46.00	-25.73	L	ON	9.7
0.964000	27.30	---	56.00	-28.70	L	ON	9.7
2.052000	---	20.20	46.00	-25.80	L	ON	9.7
2.052000	29.26	---	56.00	-26.74	L	ON	9.7
2.664000	---	21.44	46.00	-24.56	L	ON	9.7
2.664000	27.23	---	56.00	-28.77	L	ON	9.7
15.588000	---	34.23	50.00	-15.77	L	ON	9.9
15.588000	45.19	---	60.00	-14.81	L	ON	9.9
17.660000	---	28.93	50.00	-21.07	L	ON	9.9
17.660000	36.16	---	60.00	-23.84	L	ON	9.9

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

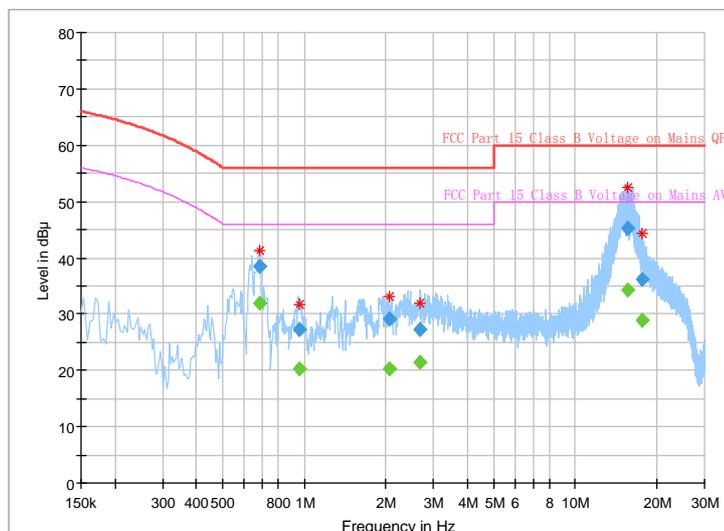




<b>Phase</b>	Neutral (N)	<b>Detector Function</b>	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.688000	---	31.50	46.00	-14.50	N	ON	10.0
0.688000	40.02	---	56.00	-15.98	N	ON	10.0
0.968000	---	23.81	46.00	-22.19	N	ON	9.9
0.968000	34.38	---	56.00	-21.62	N	ON	9.9
1.320000	---	23.90	46.00	-22.10	N	ON	9.9
1.320000	34.73	---	56.00	-21.27	N	ON	9.9
2.260000	---	23.24	46.00	-22.76	N	ON	9.8
2.260000	31.48	---	56.00	-24.52	N	ON	9.8
<b>15.760000</b>	---	<b>37.94</b>	<b>50.00</b>	<b>-12.06</b>	<b>N</b>	<b>ON</b>	<b>9.9</b>
15.760000	46.90	---	60.00	-13.10	N	ON	9.9
17.684000	---	31.35	50.00	-18.65	N	ON	10.0
17.684000	39.69	---	60.00	-20.31	N	ON	10.0

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

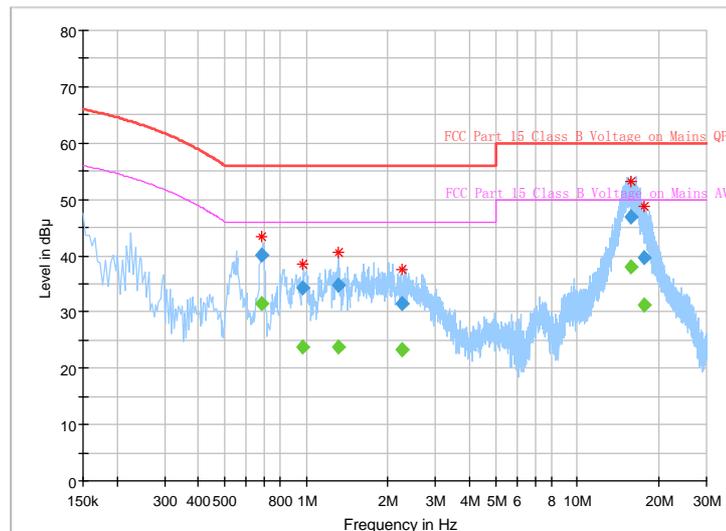



### 4.3 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT


#### 4.3.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
	√	Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	--		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	--		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)


NOTE: Where B is the 26dB emission bandwidth in MHz.

#### 4.3.2 TEST SETUP

##### FOR POWER OUTPUT MEASUREMENT

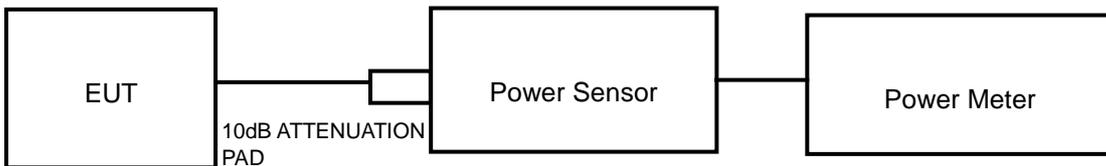

##### FOR 26dB BANDWIDTH

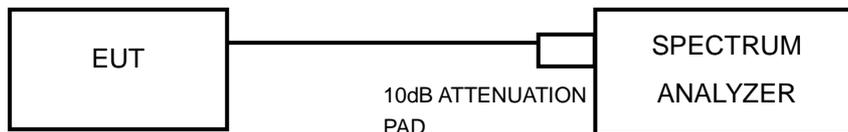



### 4.3.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

### 4.3.4 TEST PROCEDURE

#### **FOR POWER MEASUREMENT**

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

#### **FOR 99 PERCENT OCCUPIED BANDWIDTH**

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW  $\geq 3 \cdot$  RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.



#### FOR 26dB BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### FOR 6dB BANDWIDTH

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



### 4.3.7 TEST RESULTS

#### OUTPUT POWER:

##### 802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	14.588	11.64	17.00	PASS
40	5200	15.417	11.88	17.00	PASS
48	5240	16.218	12.10	17.00	PASS
149	5745	14.191	11.52	30.00	PASS
157	5785	15.311	11.85	30.00	PASS
165	5825	<b>16.218</b>	<b>12.10</b>	30.00	PASS

##### 802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	14.622	11.65	17.00	PASS
40	5200	14.997	11.76	17.00	PASS
48	5240	15.171	11.81	17.00	PASS
149	5745	13.709	11.37	30.00	PASS
157	5785	14.521	11.62	30.00	PASS
165	5825	14.093	11.49	30.00	PASS

##### 802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
38	5190	15.346	11.86	17.00	PASS
46	5230	<b>16.634</b>	<b>12.21</b>	17.00	PASS
151	5755	14.588	11.64	30.00	PASS
159	5795	14.028	11.47	30.00	PASS



802.11ac (80MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	MAX. OUTPUT POWER (mW)	MAX. OUTPUT POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
42	5210	12.882	11.10	17.00	PASS
155	5775	13.583	11.33	30.00	PASS



**99% OCCUPIED BANDWIDTH & 26dB BANDWIDTH/6dB BANDWIDTH:**

**802.11a**

CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
36	5180	16.86	22.51	PASS
40	5200	16.74	22.08	PASS
48	5240	16.74	21.95	PASS
CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	6dB BANDWIDTH (MHz)	PASS/FAIL
149	5745	16.68	16.37	PASS
157	5785	16.74	16.36	PASS
165	5825	16.62	16.36	PASS

**802.11n (20MHz)**

CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
36	5180	17.82	22.32	PASS
40	5200	17.88	22.64	PASS
48	5240	17.94	22.58	PASS
CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	6dB BANDWIDTH (MHz)	PASS/FAIL
149	5745	17.88	17.57	PASS
157	5785	17.82	17.59	PASS
165	5825	17.82	17.60	PASS



802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
38	5190	36.18	44.46	PASS
46	5230	36.12	45.50	PASS
CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	6dB BANDWIDTH (MHz)	PASS/FAIL
151	5755	36.36	35.14	PASS
159	5795	36.12	35.16	PASS

802.11ac (80MHz)


CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
42	5210	68.76	84.62	PASS
CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	6dB BANDWIDTH (MHz)	PASS/FAIL
155	5775	75.00	75.06	PASS



**BUREAU  
VERITAS**

Test Report No.: RF160418W001-8

For U-NII-1

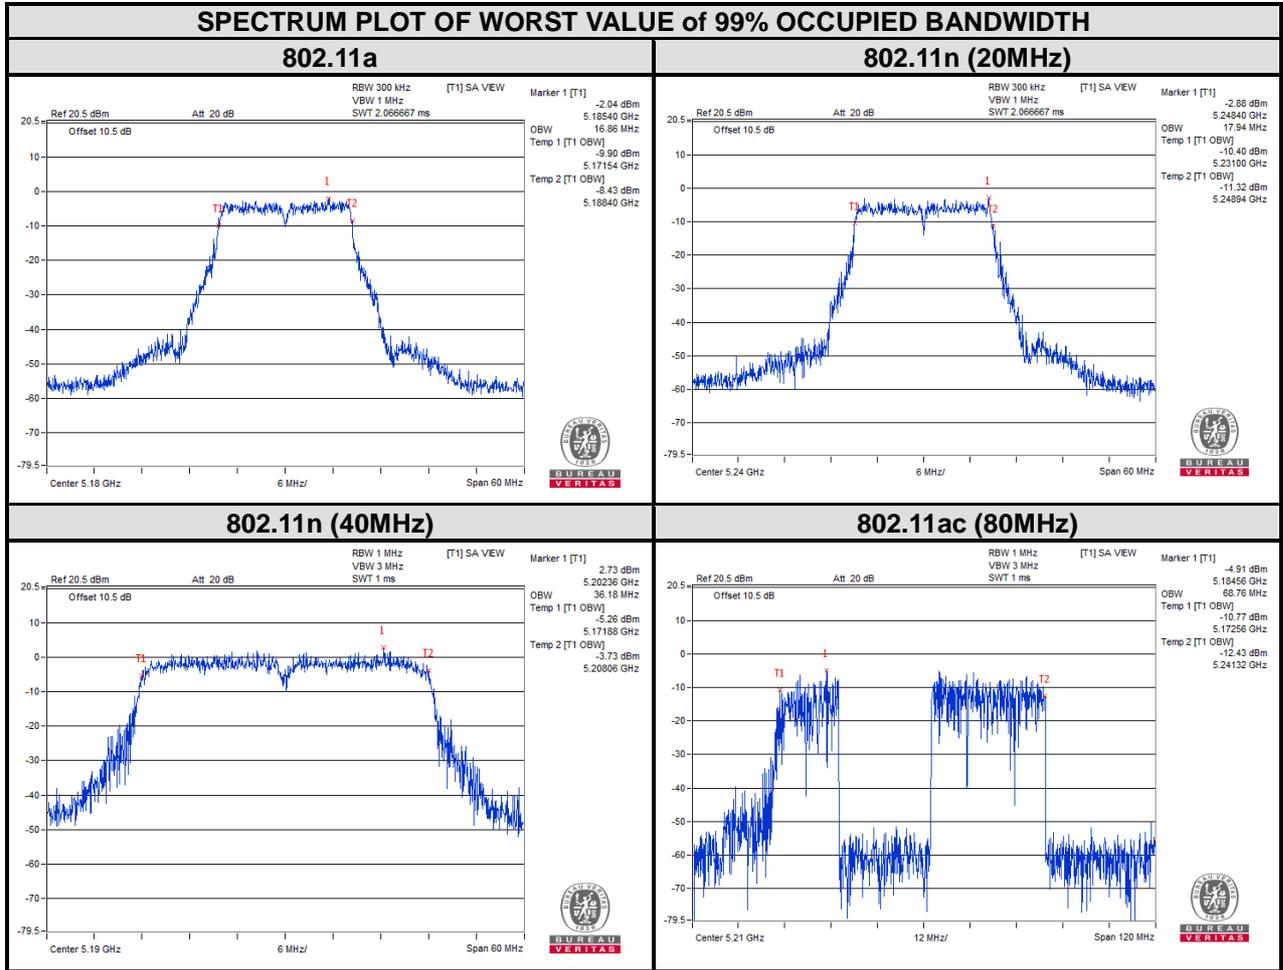







BUREAU VERITAS

Test Report No.: RF160418W001-8

For U-NII-3:

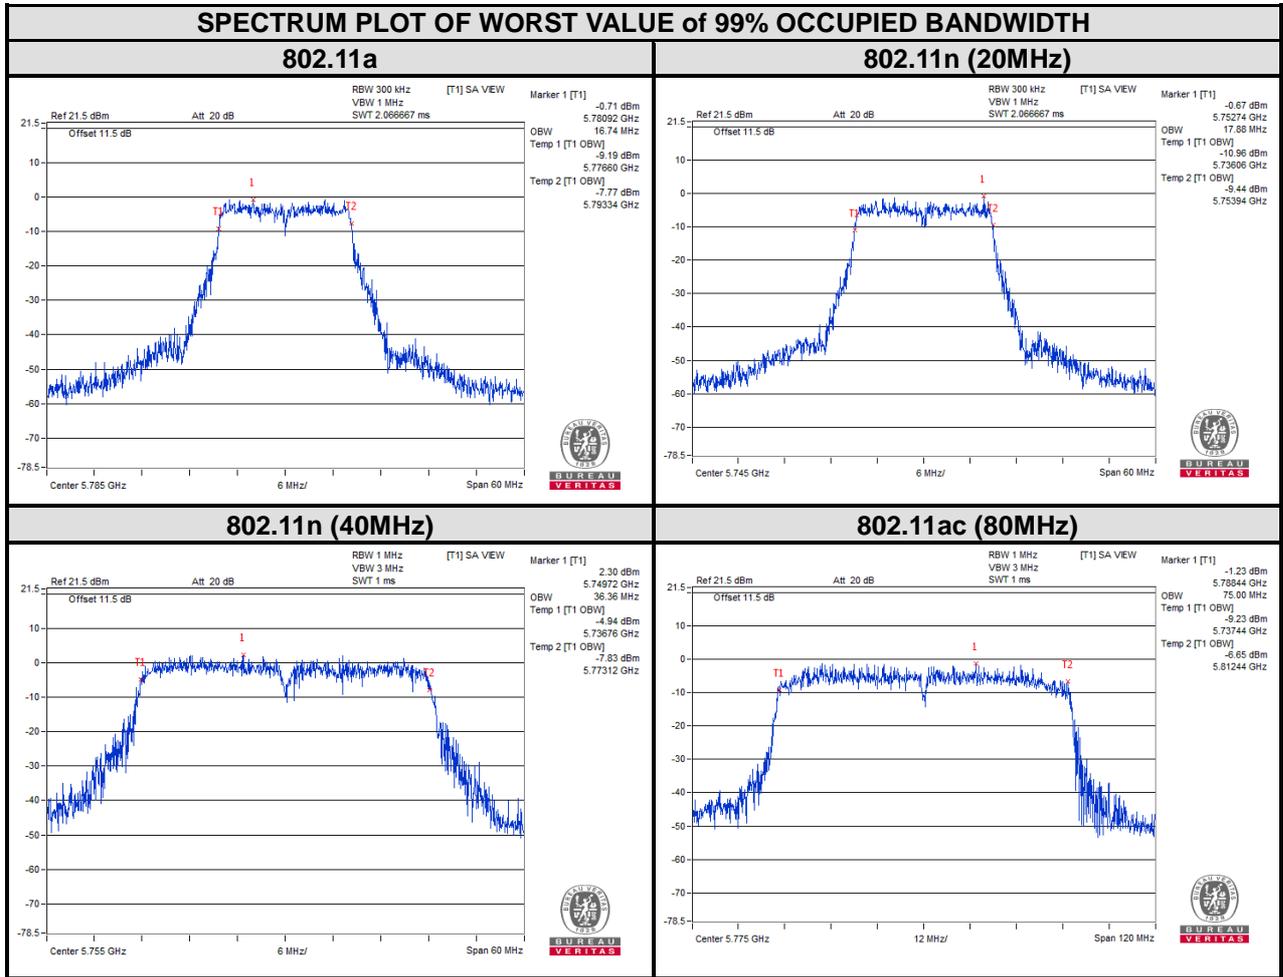

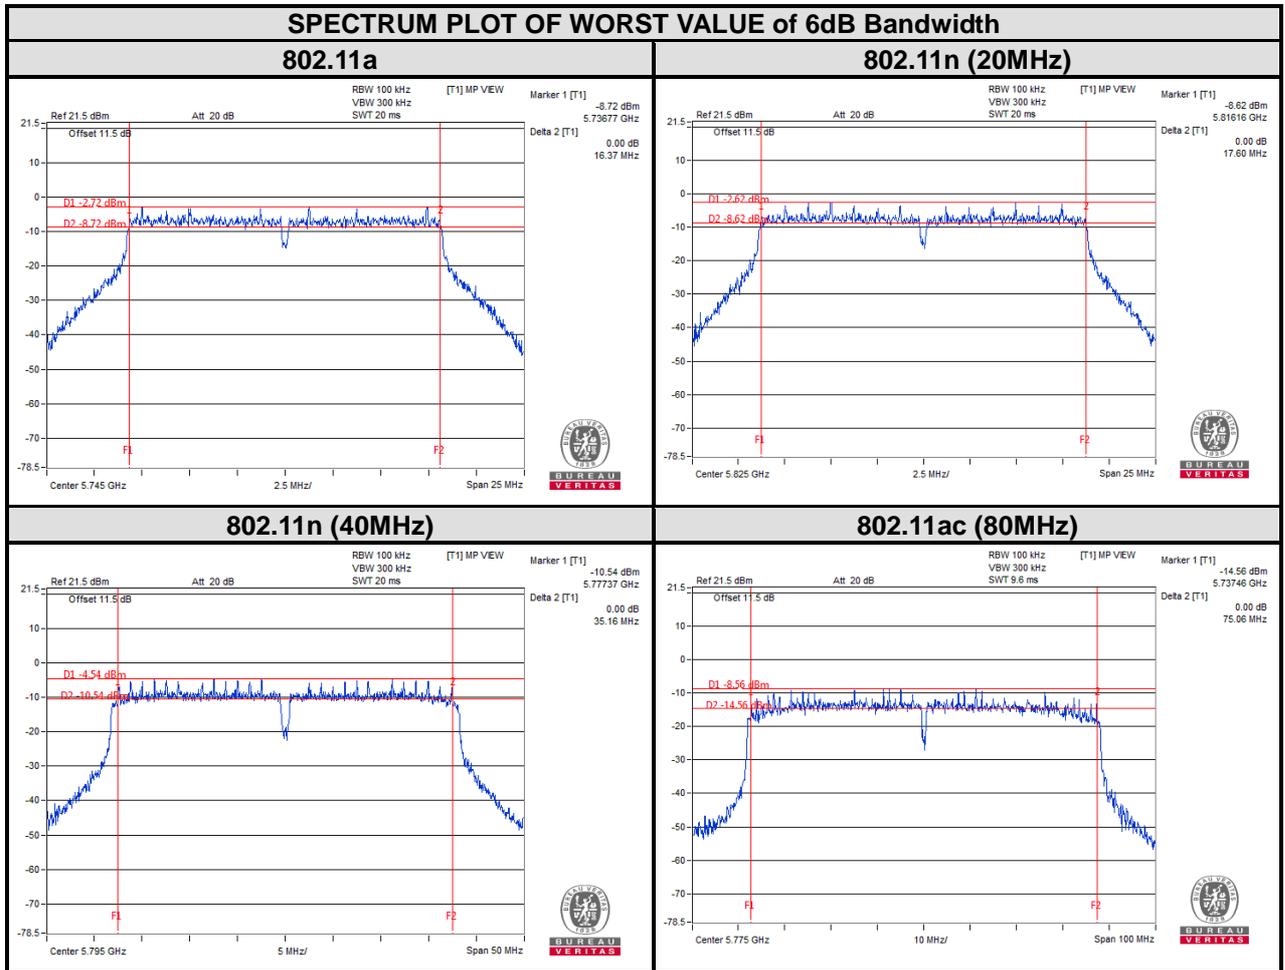



#### 4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

##### 4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
	√	Mobile and Portable client device	11dBm/ MHz
U-NII-2A	--		11dBm/ MHz
U-NII-2C	--		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

##### 4.4.2 TEST SETUP



##### 4.4.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

##### 4.4.4 TEST PROCEDURES

Using method SA-1

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 30 KHz, Set VBW ≥ 1 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to “free run”.
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value



**BUREAU** Test Report No.: RF160418W001-8  
**VERITAS**

#### 4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4.6 EUT OPERATING CONDITIONS

Same as 4.1.6.



#### 4.4.7 TEST RESULTS

For U-NII-1:

##### 802.11a

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
36	5180	1.10	0.61	1.71	11	PASS
40	5200	0.48	0.61	1.09	11	PASS
48	5240	-0.01	0.61	0.60	11	PASS

##### 802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
36	5180	0.53	0.64	1.17	11	PASS
40	5200	-0.20	0.64	0.44	11	PASS
48	5240	0.12	0.64	0.76	11	PASS

##### 802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
38	5190	-1.51	1.22	0.29	11	PASS
46	5230	-1.68	1.22	0.46	11	PASS

##### 802.11ac (80MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
42	5210	-5.58	2.64	-2.94	11	PASS



**For U-NII-3:**

**802.11a**

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/1MHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
149	5745	6.94	3.93	0.61	4.54	30	PASS
157	5785	6.88	3.87	0.61	4.48	30	PASS
165	5825	6.88	3.87	0.61	4.48	30	PASS

**802.11n (20MHz)**

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/1MHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
149	5745	5.88	2.87	0.64	3.51	30	PASS
157	5785	6.24	3.23	0.64	3.87	30	PASS
165	5825	6.23	3.22	0.64	3.86	30	PASS

**802.11n (40MHz)**

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/1MHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
151	5755	4.26	1.25	1.22	2.47	30	PASS
159	5795	4.30	1.29	1.22	2.51	30	PASS

**802.11ac (80MHz)**


CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/1MHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
155	5775	-0.10	3.11	2.64	0.47	30	PASS



BUREAU VERITAS


Test Report No.: RF160418W001-8

For 5180~5240MHz

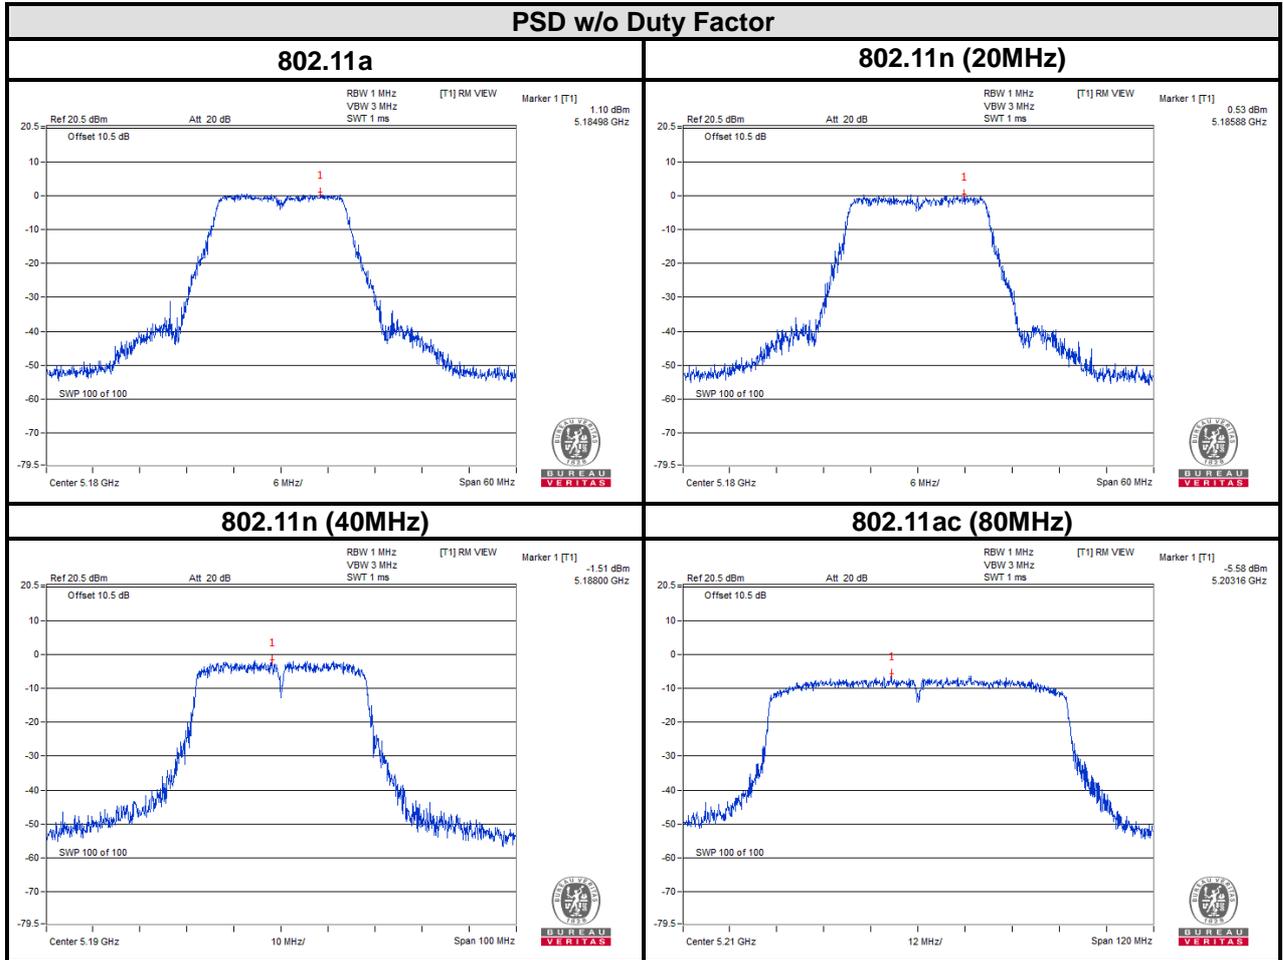



For 5745~5825MHz

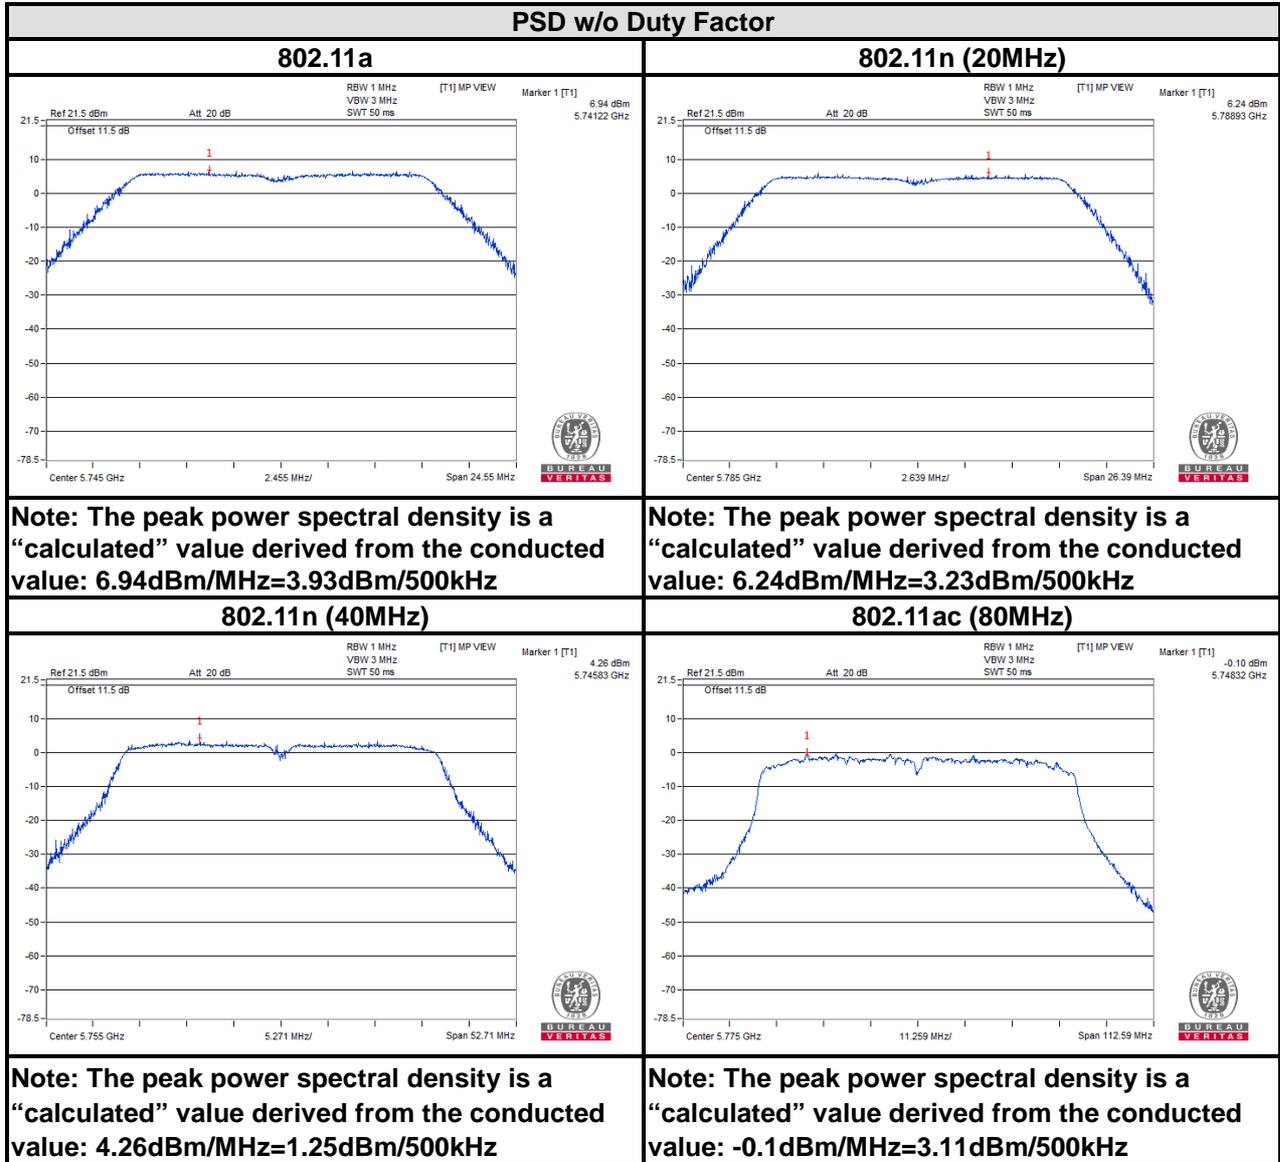




## 4.5 FREQUENCY STABILITY

### 4.5.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

### 4.5.2 TEST SETUP

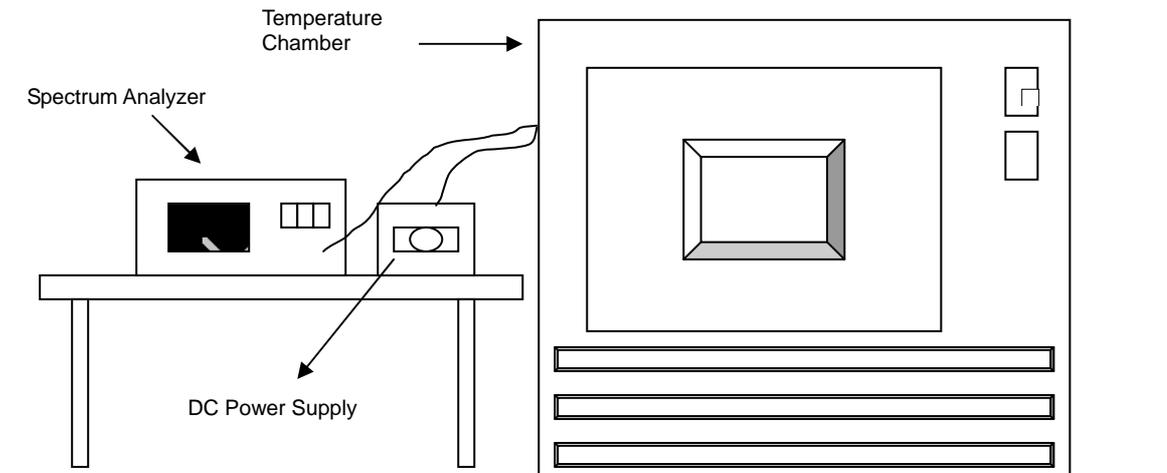

### 4.5.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.



#### 4.5.4 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

#### 4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.5.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



**4.5.7 TEST RESULTS**

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5180MHz									
TEMP. (°C)	POWER SUPPLY (Vdc)	0 MINUTE		2 MINUTES		5 MINUTES		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	3.8	5179.9751	-4.807	5179.9775	-4.344	5179.9737	-5.077	5179.9739	-5.039
40	3.8	5179.9748	-4.865	5179.9711	-5.579	5179.974	-5.019	5179.9704	-5.714
30	3.8	5180.017	3.282	5180.0182	3.514	5180.0231	4.459	5180.02	3.861
20	3.8	5179.9802	-3.822	5179.9765	-4.537	5179.9867	-2.568	5179.9802	-3.822
10	3.8	5180.0143	2.761	5180.0144	2.780	5180.0197	3.803	5180.0208	4.015
0	3.8	5179.9976	-0.463	5179.9965	-0.676	5179.9934	-1.274	5179.9934	-1.274
-10	3.8	5179.981	-3.668	5179.9837	-3.147	5179.9795	-3.958	5179.9822	-3.436
-20	3.8	5179.9858	-2.741	5179.9871	-2.490	5179.9932	-1.313	5179.9848	-2.934
-30	3.8	5180.006	1.158	5180.0127	2.452	5180.0118	2.278	5180.0074	1.429

FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5180MHz									
TEMP. (°C)	POWER SUPPLY (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	4.35	5179.9809	-3.687	5179.9778	-4.286	5179.9868	-2.548	5179.979	-4.054
	3.8	5179.9802	-3.822	5179.9765	-4.537	5179.9867	-2.568	5179.9802	-3.822
	3.6	5179.9801	-3.842	5179.9784	-4.170	5179.9869	-2.529	5179.9803	-3.803



FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5825MHz									
TEMP. (°C)	POWER SUPPLY (Vdc)	0 MINUTE		2 MINUTES		5 MINUTES		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	3.8	5825.028	4.807	5825.0239	4.103	5825.0234	4.017	5825.0219	3.760
40	3.8	5825.0277	4.755	5825.0226	3.880	5825.0226	3.880	5825.0205	3.519
30	3.8	5825.029	4.979	5825.0225	3.863	5825.0217	3.725	5825.0215	3.691
20	3.8	5825.0125	2.146	5825.0238	4.086	5825.0226	3.880	5825.0188	3.227
10	3.8	5824.9818	-3.124	5824.9842	-2.712	5824.9787	-3.657	5824.9762	-4.086
0	3.8	5824.9814	-3.193	5824.9852	-2.541	5824.978	-3.777	5824.9765	-4.034
-10	3.8	5825.0007	0.120	5824.999	-0.172	5824.9984	-0.275	5824.9983	-0.292
-20	3.8	5824.9985	-0.258	5824.9985	-0.258	5824.9971	-0.498	5824.9977	-0.395
-30	3.8	5825.0005	0.086	5824.9987	-0.223	5824.9977	-0.395	5824.9984	-0.275

FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5825MHz									
TEMP. (°C)	POWER SUPPLY (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	4.35	5825.0128	2.197	5825.0246	4.223	5825.0208	3.571	5825.0182	3.124
	3.8	5825.0125	2.146	5825.0238	4.086	5825.0226	3.880	5825.0188	3.227
	3.6	5825.0122	2.094	5825.0226	3.880	5825.0208	3.571	5825.0178	3.056




## 4.6 OUT OF BAND EMISSION MEASUREMENT

### 4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below  $-30\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST SETUP

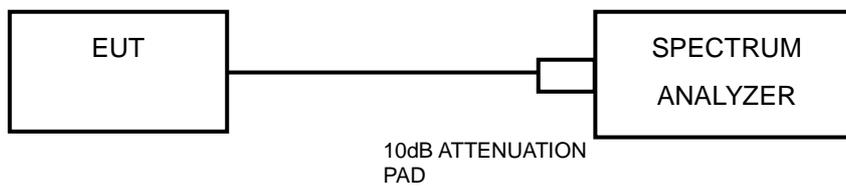

### 4.6.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

### 4.6.4 TEST PROCEDURE

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = RMS.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



## MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = RMS.
5. Trace Mode = max hold.
6. Sweep = auto couple.

### 4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


### 4.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.



### 4.6.8 TEST RESULTS

FOR U-NII-3  
802.11a


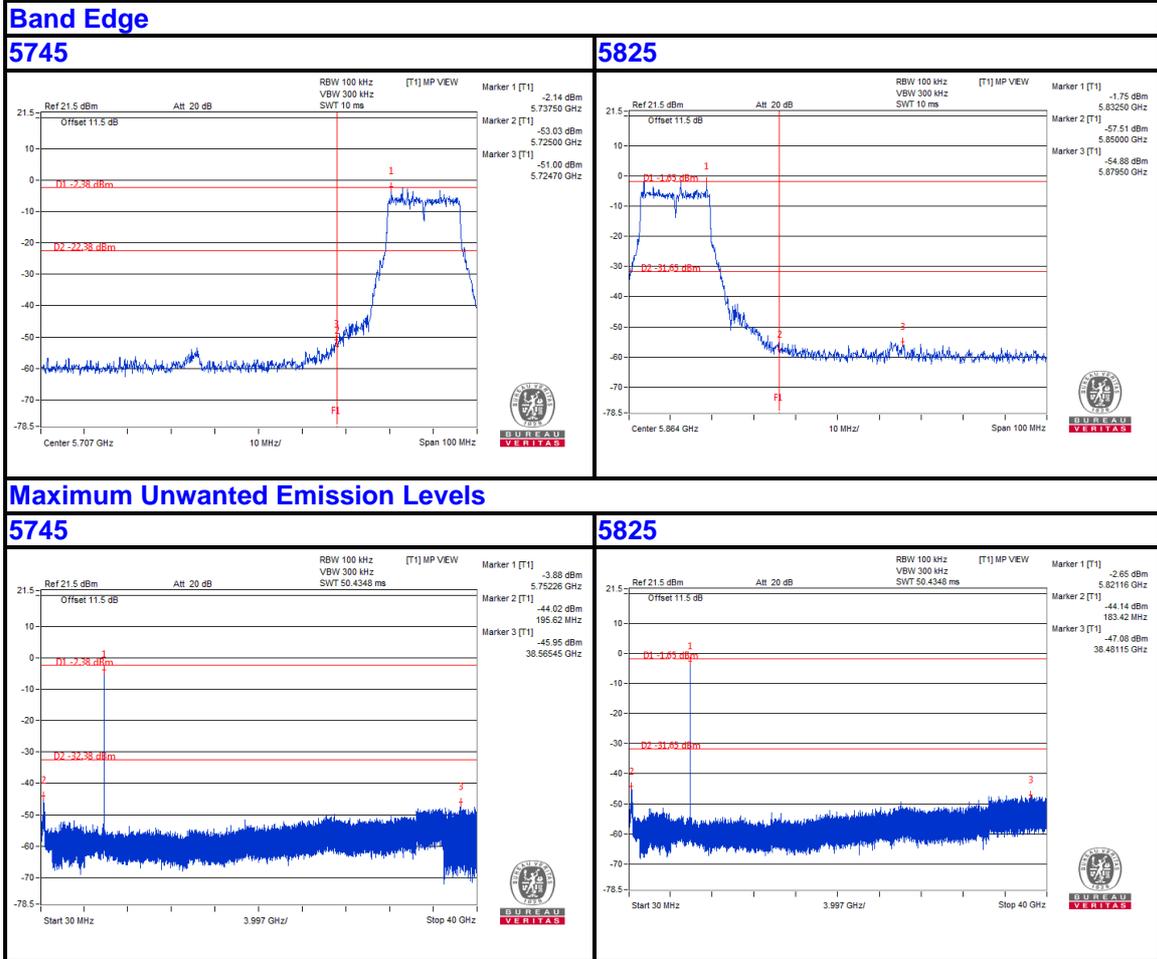




BUREAU VERITAS

Test Report No.: RF160418W001-8

### 802.11n (20MHz)

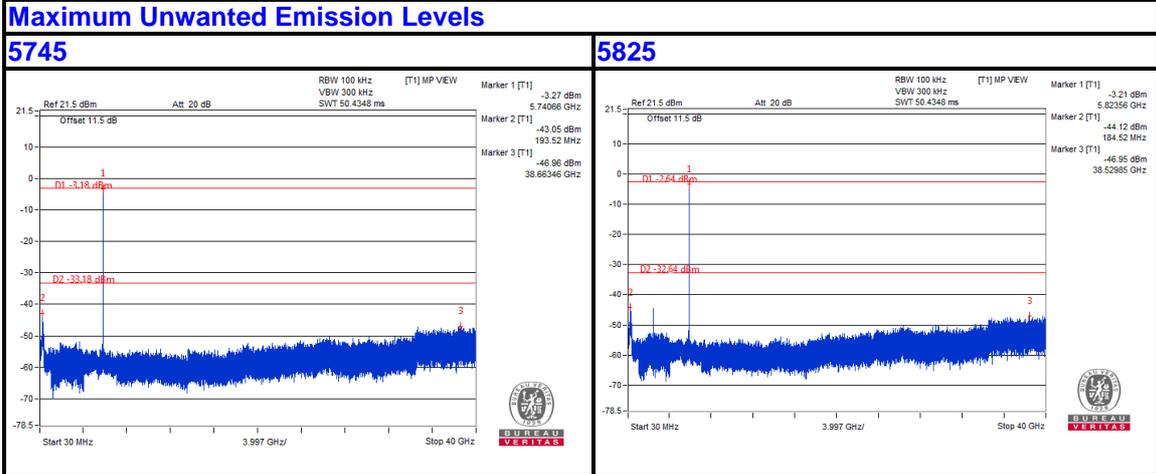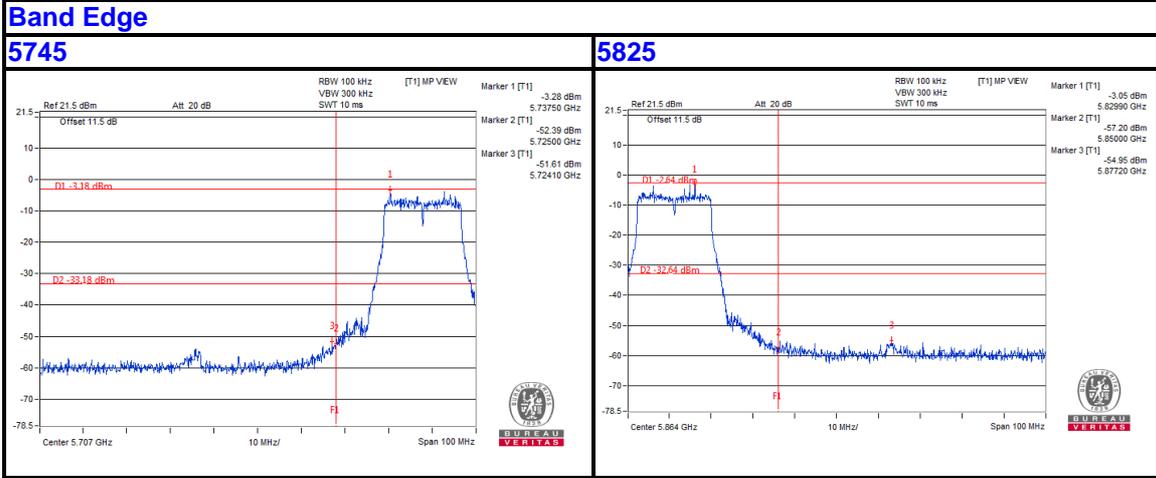





BUREAU VERITAS

Test Report No.: RF160418W001-8

### 802.11n (40MHz)

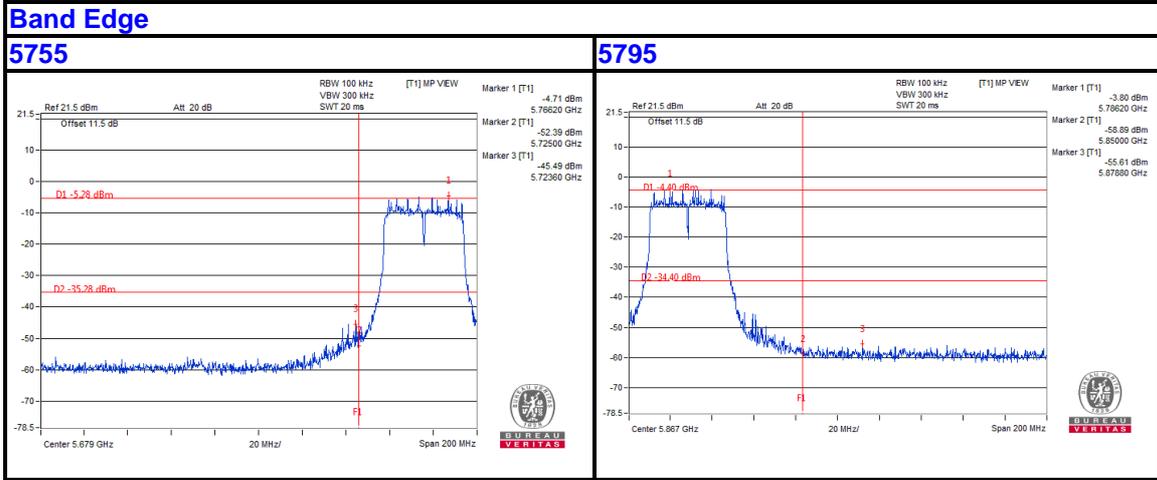

### Maximum Unwanted Emission Levels

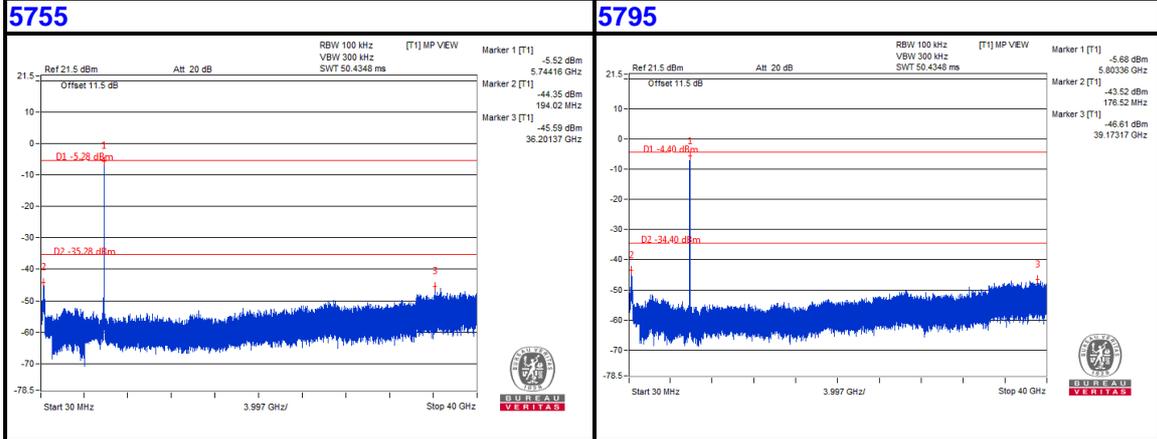




BUREAU VERITAS

Test Report No.: RF160418W001-8


### 802.11ac (80MHz)

#### Band Edge

5775

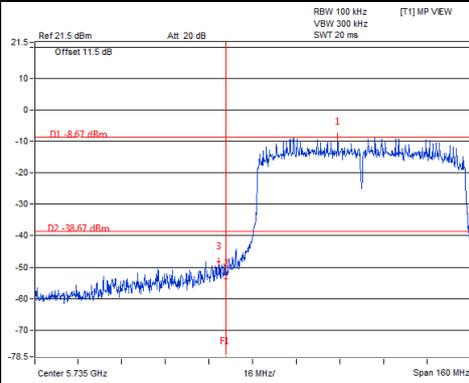


5775

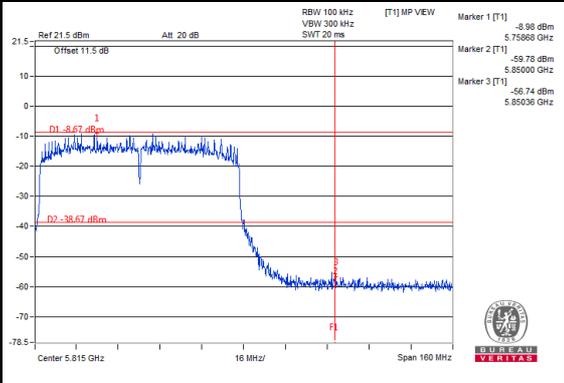

#### Maximum Unwanted Emission Levels

5775

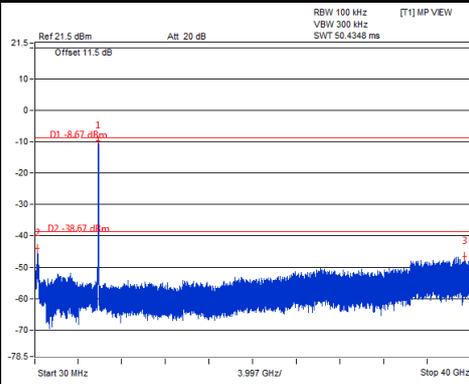



Test Report No.: RF160418W001-8

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF160418W001-8

## 6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---