



Variant FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : HSPA/LTE CPE
BRAND NAME : ZTE
MODEL NAME : MF275R
FCC ID : SRQ-MF275R
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

This is a variant report which is only valid together with the original test report. The product was received on Jul. 18, 2016 and testing was completed on Aug. 10, 2016. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Prepared by: Ken Chen / Manager

Approved by: Jones Tsai / Manager



Testing Laboratory
2353

SPORTON INTERNATIONAL (SHENZHEN) INC.

**1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,
Nanshan District, Shenzhen, Guangdong, P. R. China**



TABLE OF CONTENTS

1 GENERAL DESCRIPTION 5

1.1 Applicant..... 5

1.2 Manufacturer 5

1.3 Product Feature of Equipment Under Test 5

1.4 Product Specification of Equipment Under Test 6

1.5 Modification of EUT 6

1.6 Testing Location 7

1.7 Applicable Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

2.1 Test Mode..... 8

2.2 Connection Diagram of Test System 9

2.3 Support Unit used in test configuration 9

3 RADIATED TEST ITEMS 10

3.1 Measuring Instruments..... 10

3.2 Test Setup 10

3.3 Test Result of Radiated Test..... 10

3.4 Field Strength of Spurious Radiation Measurement 11

4 LIST OF MEASURING EQUIPMENT 12

5 UNCERTAINTY OF EVALUATION 13

APPENDIX A. TEST RESULTS OF RADIATED TEST

APPENDIX B. TEST SETUP PHOTOGRAPHS

APPENDIX C. PRODUCT EQUALITY DECLARATION



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 17.00 dB at 3815.200 MHz



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	HSPA/LTE CPE
Brand Name	ZTE
Model Name	MF275R
FCC ID	SRQ-MF275R
EUT supports Radios application	WCDMA/HSPA/HSPA+(16QAM uplink is not supported)/DC-HSDPA/LTE/ WLAN 2.4GHz 802.11b/g/n HT20/HT40/ WLAN 5GHz 802.11a/n HT20/HT40/
IMEI Code	Radiation: 862425030001065
HW Version	dgpB
SW Version	MF275R1.2.3
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz
Rx Frequency	WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz
Antenna Type	Monopole Antenna
Type of Modulation	WCDMA : QPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM uplink is not supported DC-HSDPA : 64QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
Test Site No.	Sporton Site No.	FCC/IC Registration No.
	03CH03-SZ	565805/4086F

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

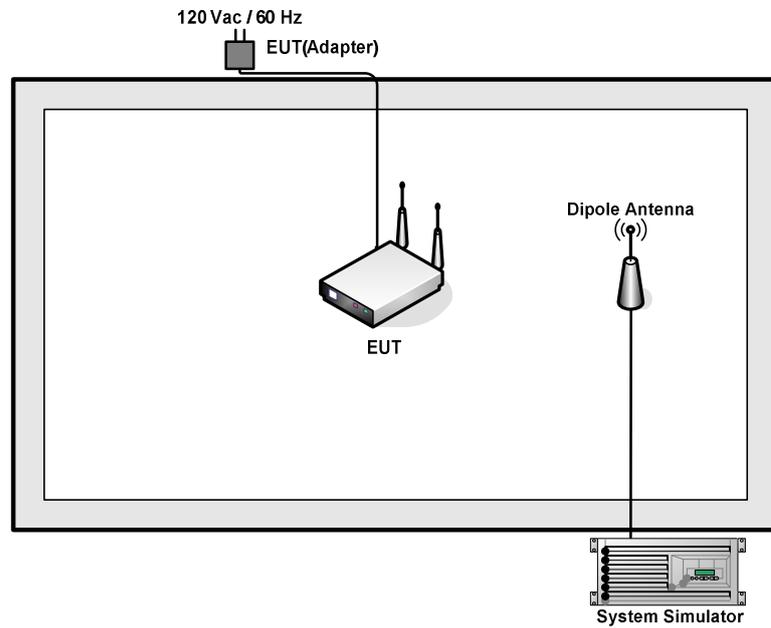
1. 30 MHz to 10th harmonic for WCDMA Band V.
2. 30 MHz to 10th harmonic for WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes	
Band	Radiated TCs
WCDMA Band V	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System



2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

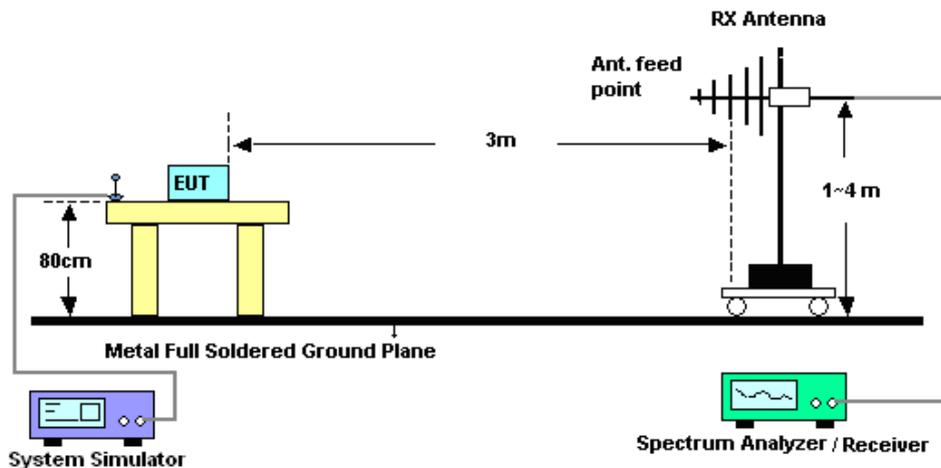
3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 For radiated test from 30MHz to 1GHz



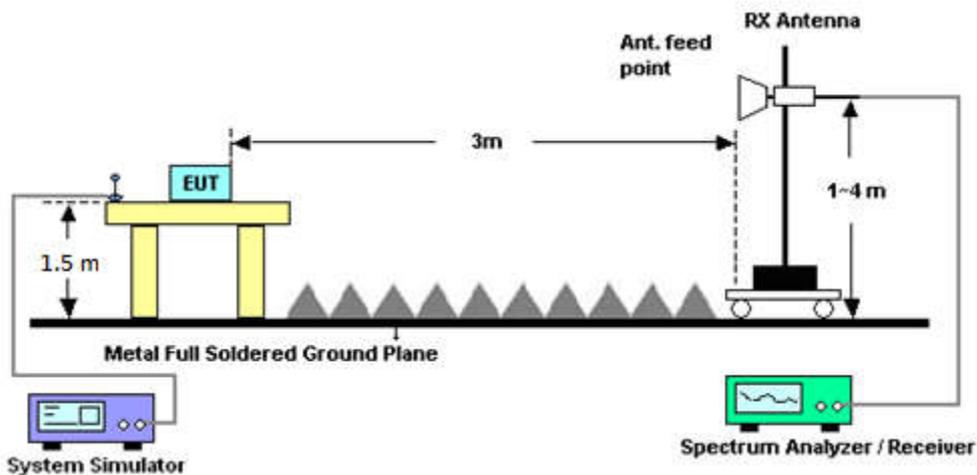3.2.2 For radiated test above 1GHz



3.3 Test Result of Radiated Test

Please refer to Appendix A.



3.4 Field Strength of Spurious Radiation Measurement

3.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.4.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)] \text{ (dB)}$
= $[30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
= -13dBm.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	May 07, 2016	Aug. 10, 2016	May 06, 2017	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz	May 07, 2016	Aug. 10, 2016	May 06, 2017	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	May 21, 2016	Aug. 10, 2016	May 20, 2017	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	May 07, 2016	Aug. 10, 2016	May 06, 2017	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Aug.19, 2015	Aug. 10, 2016	Aug. 18, 2016	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102210	0.01Hz ~3000MHz	Oct. 20, 2015	Aug. 10, 2016	Oct. 19, 2016	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Jan. 12, 2016	Aug. 10, 2016	Jan. 11, 2017	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Aug. 10, 2016	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Aug. 10, 2016	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Aug. 10, 2016	NCR	Radiation (03CH03-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.8 dB
---	--------



Appendix A. Test Results of Radiated Test

Radiated Spurious Emission

WCDMA Band V(RMC 12.2Kbps)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1652.8	-56.15	-13	-43.15	-58.98	-62.84	0.56	9.40	H
	2479.2	-55.54	-13	-42.54	-61.28	-63.25	0.74	10.60	H
	3305.6	-53.34	-13	-40.34	-62.15	-62.94	0.85	12.60	H
	1652.8	-61.69	-13	-48.69	-63.35	-68.38	0.56	9.40	V
	2479.2	-57.06	-13	-44.06	-62.64	-64.77	0.74	10.60	V
	3305.6	-54.17	-13	-41.17	-62.31	-63.77	0.85	12.60	V
Middle	1672	-57.09	-13	-44.09	-59.92	-63.78	0.56	9.40	H
	2510	-57.97	-13	-44.97	-63.71	-65.68	0.74	10.60	H
	3346	-53.16	-13	-40.16	-61.97	-62.76	0.85	12.60	H
	1672	-59.31	-13	-46.31	-60.97	-66.00	0.56	9.40	V
	2510	-57.41	-13	-44.41	-62.99	-65.12	0.74	10.60	V
	3346	-54.18	-13	-41.18	-62.32	-63.78	0.85	12.60	V
Highest	1693.2	-57.65	-13	-44.65	-60.48	-64.34	0.56	9.40	H
	2539.8	-55.08	-13	-42.08	-60.82	-62.79	0.74	10.60	H
	3386.4	-53.05	-13	-40.05	-61.86	-62.65	0.85	12.60	H
	1693.2	-59.98	-13	-46.98	-61.64	-66.67	0.56	9.40	V
	2539.8	-58.61	-13	-45.61	-64.19	-66.32	0.74	10.60	V
	3386.4	-54.24	-13	-41.24	-62.38	-63.84	0.85	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band II(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3704.8	-35.83	-13	-22.83	-50.92	-41.87	6.56	12.60	H
	5557.2	-51.09	-13	-38.09	-67.03	-56.19	8	13.10	H
	7409.6	-45.86	-13	-32.86	-64.60	-47.59	9.57	11.30	H
	3704.8	-35.42	-13	-22.42	-50.71	-41.46	6.56	12.6	V
	5557.2	-49.87	-13	-36.87	-67.22	-54.97	8	13.1	V
	7409.6	-47.54	-13	-34.54	-65.94	-49.27	9.57	11.3	V
Middle	3760	-32.12	-13	-19.12	-47.80	-38.16	6.56	12.60	H
	5640	-50.80	-13	-37.80	-66.74	-55.90	8	13.10	H
	7520	-45.47	-13	-32.47	-64.21	-47.20	9.57	11.30	H
	3760	-33.98	-13	-20.98	-49.63	-40.02	6.56	12.6	V
	5640	-49.38	-13	-36.38	-66.73	-54.48	8	13.1	V
	7520	-47.27	-13	-34.27	-65.67	-49.00	9.57	11.3	V
Highest	3815.2	-31.03	-13	-18.03	-46.70	-37.07	6.56	12.60	H
	5722.8	-50.36	-13	-37.36	-66.30	-55.46	8	13.10	H
	7630.4	-45.67	-13	-32.67	-64.41	-47.40	9.57	11.30	H
	3815.2	-30.00	-13	-17.00	-46.00	-36.04	6.56	12.6	V
	5722.8	-48.63	-13	-35.63	-65.98	-53.73	8	13.1	V
	7630.4	-46.39	-13	-33.39	-64.79	-48.12	9.57	11.3	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Appendix C. Product Equality Declaration

ZTE CORPORATION

Product Change Description

As the applicant of the below model, [ZTE Corporation] declares that the product,

[MF275R]

[ZTE Corporation]

is the variant of the initial certified product,

[MF275R]

[ZTE Corporation]

SOFTWARE MODIFICATIONS:

Protocol Stack changes: NO

MMS/STK changes: NO

JAVA changes: NO

Other changes detailed: 1)change SSID name

2)change APN

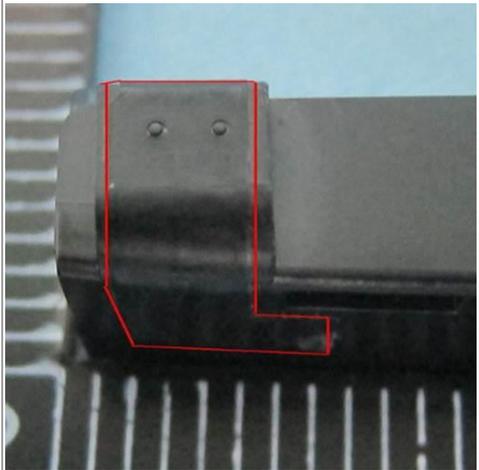
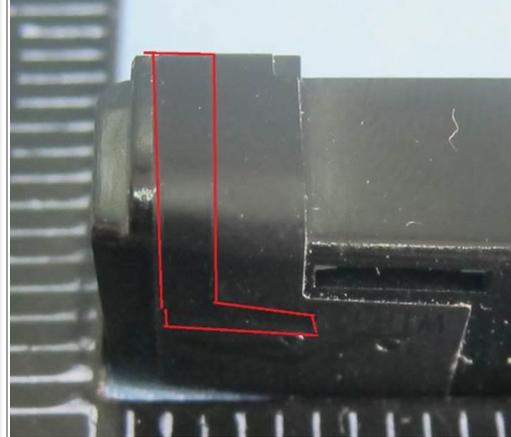
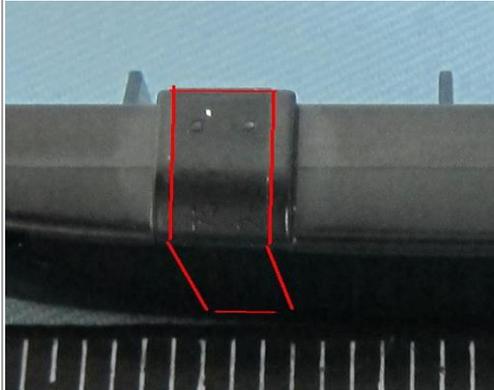
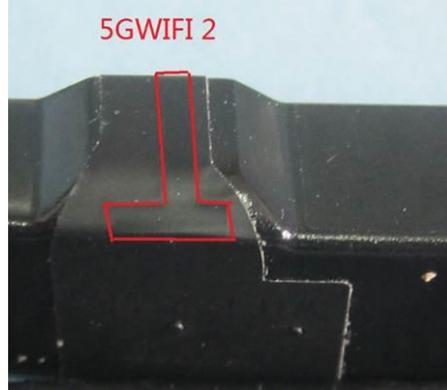
3)added the LTE Band V(Changed the VN)



HARDWARE MODIFICATION:

Band changes: NO

Power Amplifier changes: NO

Antenna changes: yes, Wifi and GPS antenna change

Original Wifi 2 Ant	Variant
 A close-up photograph of a black antenna component. A red L-shaped outline highlights the top and right side of the component.	 A close-up photograph of a black antenna component, similar to the original but with a different top profile. A red L-shaped outline highlights the top and right side.
Original 5G Wifi 2	Variant
 A close-up photograph of a black antenna component. A red L-shaped outline highlights the top and right side.	 A close-up photograph of a black antenna component. A red L-shaped outline highlights the top and right side. The text "5GWIFI 2" is printed in red above the component.
Original 5G Wifi main	Variant
 A close-up photograph of a black antenna component. A red rectangular outline highlights the top surface.	 A close-up photograph of a black antenna component. A red outline highlights the top surface. The text "5G WIFI 1" is printed in red above the component.

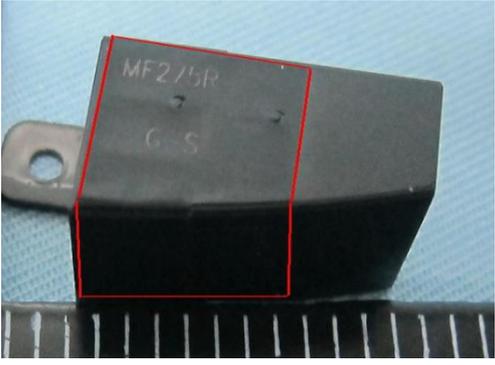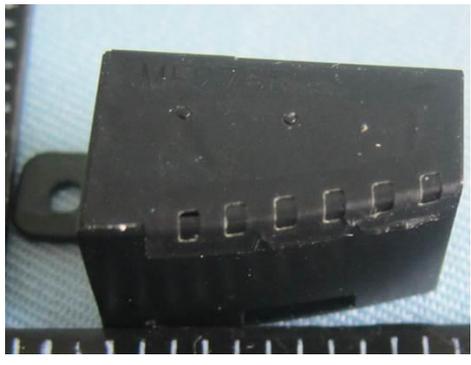Original GPS Ant	Variant
	

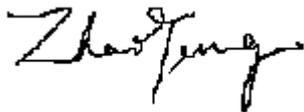
PCB Layout changes: NO
Components on PCB changes: NO
LCD changes: NO
Speaker changes: NO
Camera changes: NO
Vibrator changes: NO
Bluetooth changes: NO
FM changes: NO
Other changes:

MECHANICAL MODIFICATIONS:

Use new metal front/back cover or keypad: NO
Mechanical shell changes: NO
Other changes detailed: NO

ACCESSORY MODIFICATIONS:

Battery changes: NO
AC Adaptor changes: NO
Earphone changes: NO



APPROVED BY: zhaoyang

Project Manager:

Date:2016-7-21

Company: ZTE Corporation

Address: B109, #889, Bibo Rd, Zhangjiang Hi-Tech Park, Shanghai,China

Tel:+86-21-68896840

Fax: +86-21-68896835